



TEST REPORT

Report No.....: CHTEW20120117 Report Verification: 
Project No.....: SHT2011082303EW
FCC ID.....: Q5EDP81002
Applicant's name.....: Kirisun Communication Co., Ltd.
Address.....: 3rd Floor, Building A, Tongfang Information Harbour, No.11
Langshan Road, Nanshan District, Shenzhen 518057, P.R.China
Test item description.....: I.S.Digital Radio
Trade Mark.....: KIRISUN
Model/Type reference.....: DP810
Listed Model(s).....: -
Standard.....: FCC CFR Title 47 Part 15 Subpart B
Date of receipt of test sample.....: Nov.27, 2020
Date of testing.....: Nov.27, 2020- Dec.16, 2020
Date of issue.....: Dec.17, 2020
Result.....: PASS

Compiled by
(position+printed name+signature)...: File administrators Echo Wei

Echo Wei

Supervised by
(position+printed name+signature)...: Project Engineer Hans Hu

Hans Hu

Approved by
(position+printed name+signature)...: RF Manager Hans Hu

Hans Hu

Testing Laboratory Name: Shenzhen Huatongwei International Inspection Co., Ltd.

Address.....: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao,
Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely corresponds to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION.....</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
<u>4.</u>	<u>TEST CONFIGURATION</u>	<u>7</u>
4.1.	EUT operation mode	7
4.2.	Support unit used in test configuration	7
4.3.	Environmental conditions	7
4.4.	Statement of the measurement uncertainty	7
4.5.	Equipments Used during the Test	8
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>9</u>
5.1.	Conducted Emissions	9
5.2.	Radiated Emissions	12
<u>6.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>18</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>19</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[FCC CFR Title 47 Part 15 Subpart B](#) - Unintentional Radiators

[ANSI C63.4: 2014](#) – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

1.2. Report version

Revision No.	Date of issue	Description
N/A	2020-12-17	Original

2. TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Conducted Emissions	15.107(a)	Pass	Quanhai Deng
Radiated Emissions	15.109(a)	Pass	Haoxin Luo

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	Kirisun Communication Co., Ltd.
Address:	3rd Floor, Building A, Tongfang Information Harbour, No.11 Langshan Road, Nanshan District, Shenzhen 518057, P.R.China
Manufacturer:	Kirisun Communication Co., Ltd.
Address:	3rd Floor, Building A, Tongfang Information Harbour, No.11 Langshan Road, Nanshan District, Shenzhen 518057, P.R.China

3.2. Product Description

Main unit	
Name of EUT:	I.S.Digital Radio
Trade Mark:	KIRISUN
Model/Type reference:	DP810
Listed Model(s)	-
Power supply:	DC 7.4V
Hardware version:	V1.0
Software version:	R5.24.216
Ancillary unit	
Battery information:	Model: KDC-810-Ex DC 7.4V 2100mAh/15.5Wh
Adapter information:	Model: FJ-SW126K1201000DU Input: 100-240Va.c.,50/60Hz 0.4A Max Output: 12Vd.c.,1000mA

3.3. Radio Specification Description

Support Frequency Range:	400MHz~480MHz	
Permitted frequency range: * ¹	400MHz~406MHz, 406.1MHz~480MHz	
Rated Output Power:	☒ High Power: 2W	☒ Low Power: 1W
Modulation Type:	Analog:	FM
	Digital :	4FSK
Supported Digital Protocol: * ²	DMR	
Channel Separation:	Analog:	☒ 12.5kHz
	Digital :	☐ 6.25kHz ☒ 12.5kHz
Emission Designator: * ³	Analog:	11K0F3E
	Digital:	7K60FXW, 7K60FXD
Support data rate:	9.6kbps	
Antenna Type:	External antenna	

Antenna Gain:	2dBi
---------------	------

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Qualifications	Type	Accreditation Number
	CNAS	L1225
	A2LA	3902.01
	FCC	762235
	Canada	5377A

4. TEST CONFIGURATION

4.1. EUT operation mode

Test mode	Describe
Charging mode	Keep the EUT in charging mode, but the EUT shut down.
Receive mode	Keep the EUT in receiving mode, but don't charging.

Receive frequency: 440.000MHz.

Test item	Pretest mode	Worse case mode
Conducted emissions	Charging mode, receive mode	Charging mode
Radiated emissions	Charging mode, receive mode	Charging mode, receive mode

Only show the test data for worse case mode on the test report.

4.2. Support unit used in test configuration

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?					
✓ No					
Item	Equipment	Trade Name	Model No.	FCC ID	Power cord
1					
2					

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

Test	Frequency range	Measurement uncertainty
Radiated Emission	30~1000MHz	4.90 dB
Radiated Emission	1~18GHz	4.96 dB
Conducted Disturbance	0.15~30MHz	3.02 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.5. Equipments Used during the Test

● Conducted Emission

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2020/10/19	2021/10/18
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2020/10/15	2021/10/14
●	Pulse Limiter	R&S	HTWE0033	ESH3-Z2	100499	2020/10/15	2021/10/14
●	RF Connection Cable	HUBER+SUHNER	HTWE0113-02	ENVIROFLEX_142	EF-NM-BNCM-2M	2020/10/15	2021/10/14
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated Emission-6th test site

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2020/10/19	2021/10/18
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0119	VULB9163	546	2020/04/28	2023/04/27
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2020/11/13	2021/11/12
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-01	N/A	N/A	2020/05/27	2021/05/26
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-02	SUCOFLEX104	501184/4	2020/05/27	2021/05/26
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-7th test site

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2021/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2020/10/20	2021/10/19
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2020/04/01	2023/03/31
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2020/05/23	2021/05/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	RE-7-FH	N/A	2020/05/10	2021/05/09
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Conducted Emissions


LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.107:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

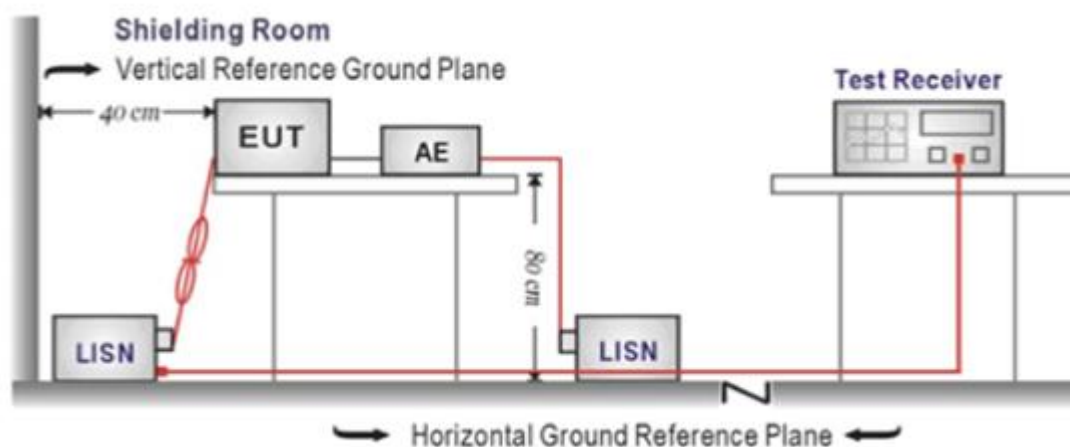

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.4:2014
2. The EUT was placed on a plat form of nominal size, 1 m by 1.5 m, raised 10 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 10 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50ohm / 50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:


Please refer to the clause 4.1

TEST RESULTS

☒ Passed ☐ Not Applicable

Test Line:

L

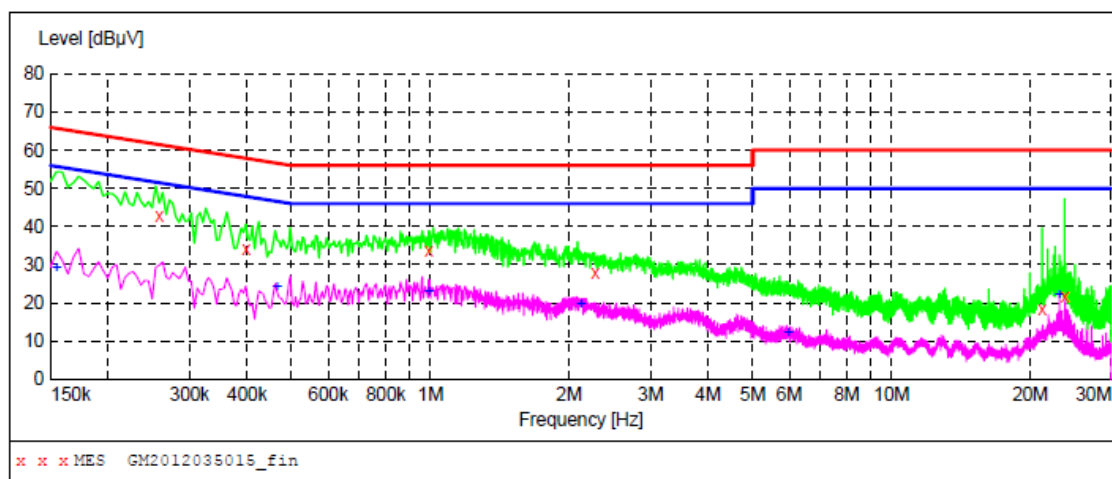**MEASUREMENT RESULT: "GM2012035015_fin"**

12/3/2020 11:34AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.258000	43.00	10.3	62	18.5	QP	L1	GND
0.397500	34.00	10.3	58	23.9	QP	L1	GND
0.991500	33.70	10.3	56	22.3	QP	L1	GND
2.278500	27.90	10.4	56	28.1	QP	L1	GND
21.241500	18.40	10.6	60	41.6	QP	L1	GND
23.757000	21.80	10.7	60	38.2	QP	L1	GND


MEASUREMENT RESULT: "GM2012035015_fin2"

12/3/2020 11:34AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154500	29.10	10.3	56	26.7	AV	L1	GND
0.465000	24.30	10.3	47	22.3	AV	L1	GND
0.991500	23.00	10.3	46	23.0	AV	L1	GND
2.121000	19.60	10.4	46	26.4	AV	L1	GND
5.973000	12.10	10.4	50	37.9	AV	L1	GND
23.127000	22.20	10.6	50	27.8	AV	L1	GND

Test Line:

N

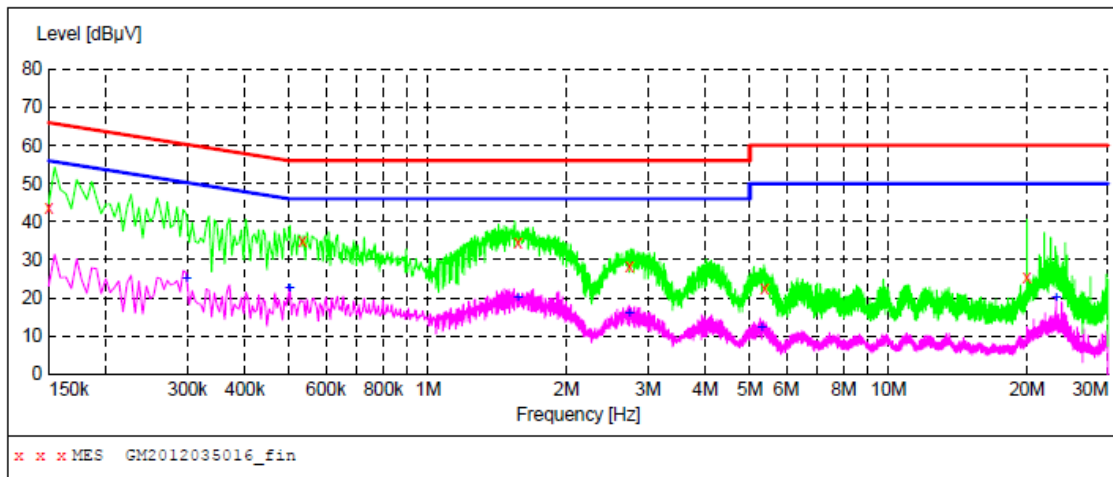**MEASUREMENT RESULT: "GM2012035016_fin"**

12/3/2020 11:37AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	43.70	10.3	66	22.3	QP	N	GND
0.532500	35.00	10.3	56	21.0	QP	N	GND
1.567500	34.60	10.4	56	21.4	QP	N	GND
2.733000	28.20	10.4	56	27.8	QP	N	GND
5.374500	22.50	10.4	60	37.5	QP	N	GND
19.990500	25.20	10.6	60	34.8	QP	N	GND

MEASUREMENT RESULT: "GM2012035016_fin2"

12/3/2020 11:37AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.298500	25.00	10.3	50	25.3	AV	N	GND
0.501000	22.60	10.3	46	23.4	AV	N	GND
1.567500	20.10	10.4	46	25.9	AV	N	GND
2.737500	15.90	10.4	46	30.1	AV	N	GND
5.307000	12.20	10.4	50	37.8	AV	N	GND
23.127000	20.00	10.6	50	30.0	AV	N	GND

5.2. Radiated Emissions


LIMIT

FCC CFR Title 47 Part 15 Subpart B Section 15.109


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION

➤ 30MHz ~ 1GHz

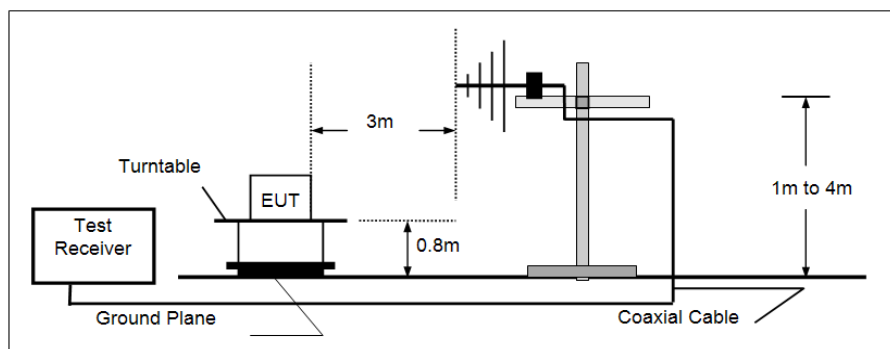

➤ Above 1GHz

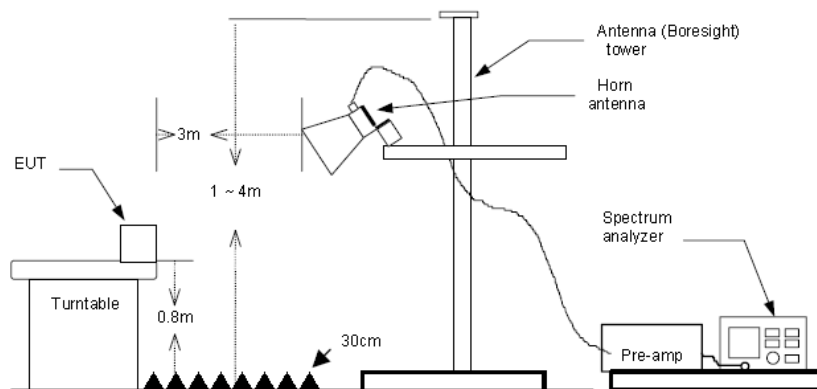

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.4:2014.
2. The EUT is placed on a turn table which is 0.8 meter above ground.
3. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
4. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
5. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1GHz,
RBW=120KHz, VBW=300KHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1GHz to 5th harmonic, RBW=1MHz, VBW=3MHz

TEST MODE:

Please refer to the clause 4.1

TEST RESULTS


☒ **Passed** ☐ **Not Applicable**

Note: Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
The emission levels of frequency above 6GHz are very lower than limit and not show in test report.

RX


Polarization:

Horizontal

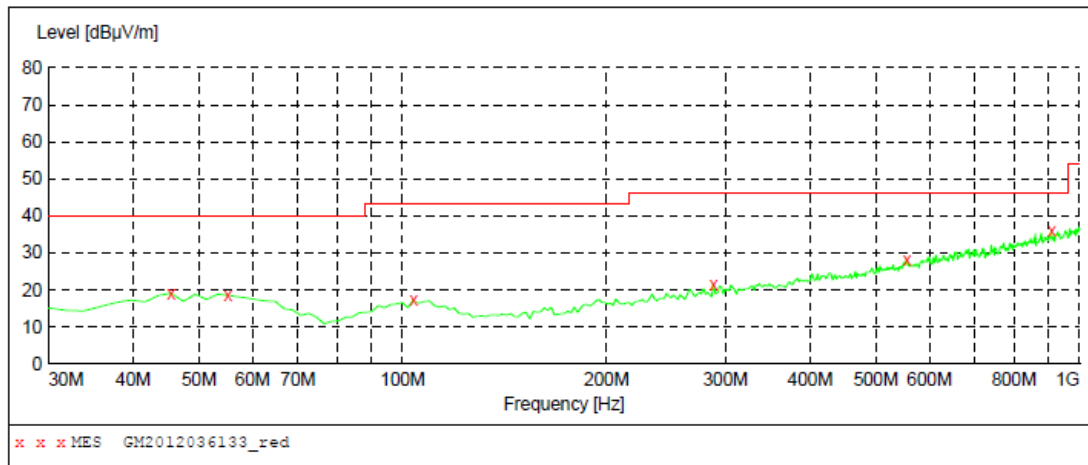**MEASUREMENT RESULT: "GM2012036133_red"**

12/3/2020 9:56PM


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
45.520000	19.20	-8.2	40.0	20.8	QP	100.0	167.00	HORIZONTAL
55.220000	18.60	-8.1	40.0	21.4	QP	100.0	255.00	HORIZONTAL
103.720000	17.20	-9.9	43.5	26.3	QP	100.0	178.00	HORIZONTAL
288.020000	21.50	-6.6	46.0	24.5	QP	100.0	89.00	HORIZONTAL
555.740000	28.30	0.7	46.0	17.7	QP	100.0	89.00	HORIZONTAL
908.820000	36.10	7.8	46.0	9.9	QP	100.0	155.00	HORIZONTAL

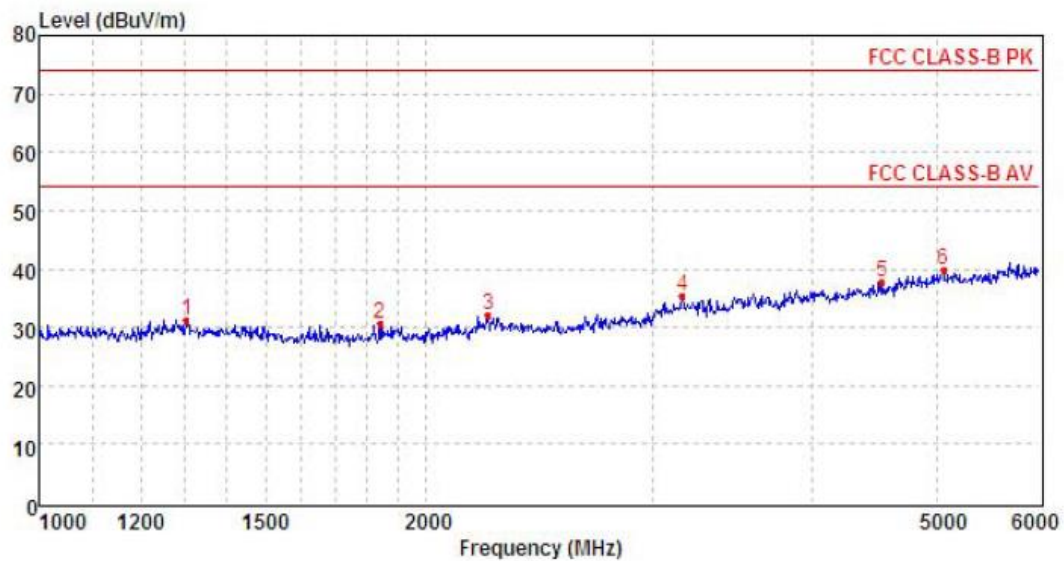

Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1303.67	36.07	26.02	5.42	36.30	31.21	74.00	-42.79	Peak
2	1842.25	35.65	25.57	6.57	37.02	30.77	74.00	-43.23	Peak
3	2235.58	34.25	28.13	7.22	37.41	32.19	74.00	-41.81	Peak
4	3164.84	34.99	28.97	8.69	37.13	35.52	74.00	-38.48	Peak
5	4528.78	32.55	30.86	10.72	36.28	37.85	74.00	-36.15	Peak
6	5051.83	31.49	32.20	11.50	35.39	39.80	74.00	-34.20	Peak


Polarization:

Vertical

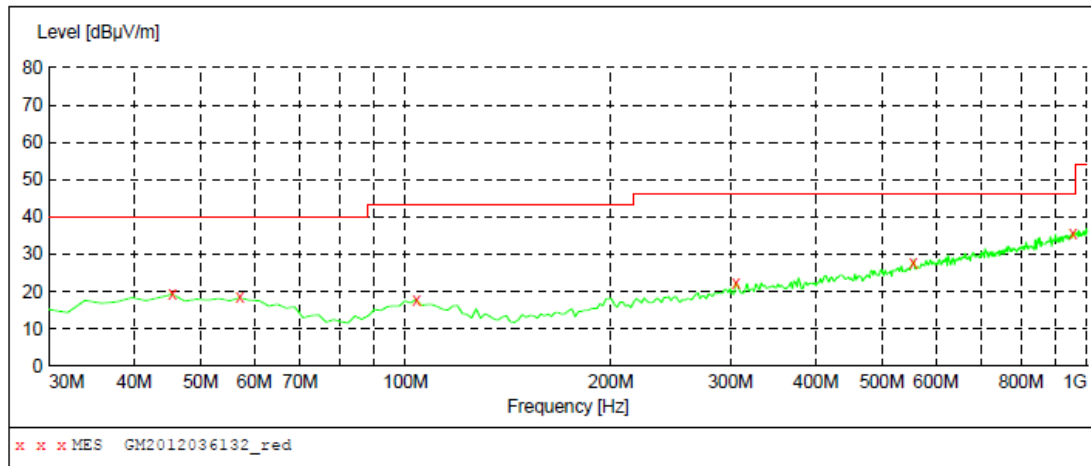**MEASUREMENT RESULT: "GM2012036132_red"**

12/3/2020 9:54PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
45.520000	19.30	-8.2	40.0	20.7	QP	100.0	216.00	VERTICAL
57.160000	18.40	-8.5	40.0	21.6	QP	100.0	27.00	VERTICAL
103.720000	17.90	-9.9	43.5	25.6	QP	100.0	140.00	VERTICAL
305.480000	22.40	-6.2	46.0	23.6	QP	100.0	90.00	VERTICAL
555.740000	27.60	0.7	46.0	18.4	QP	100.0	0.00	VERTICAL
953.440000	35.60	8.8	46.0	10.4	QP	100.0	244.00	VERTICAL

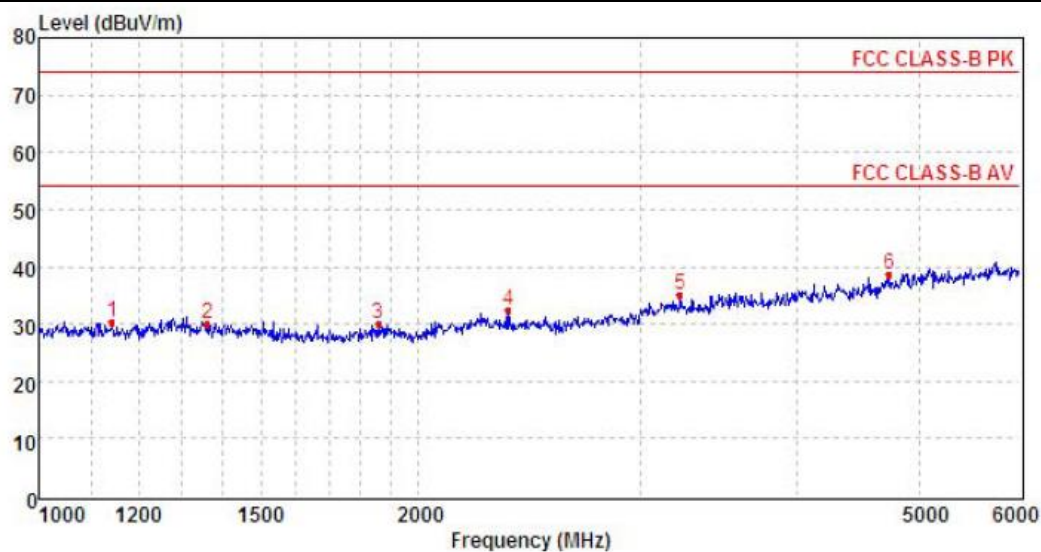


Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1143.83	36.80	25.40	5.02	36.80	30.42	74.00	-43.58	Peak
2	1360.95	34.81	26.26	5.49	36.45	30.11	74.00	-43.89	Peak
3	1858.83	34.88	25.64	6.56	36.97	30.11	74.00	-43.89	Peak
4	2359.04	34.53	27.78	7.56	37.51	32.36	74.00	-41.64	Peak
5	3227.83	34.38	28.79	8.81	36.88	35.10	74.00	-38.90	Peak
6	4727.78	31.69	31.40	11.23	35.61	38.71	74.00	-35.29	Peak

Charging


Polarization:

Horizontal

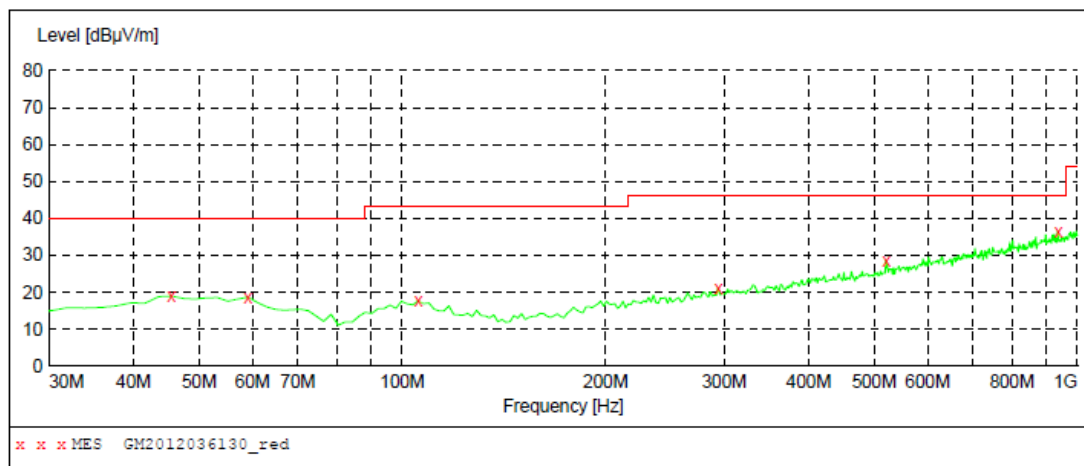**MEASUREMENT RESULT: "GM2012036130_red"**

12/3/2020 9:46PM


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
45.520000	19.00	-8.2	40.0	21.0	QP	100.0	204.00	HORIZONTAL
59.100000	18.70	-8.9	40.0	21.3	QP	100.0	179.00	HORIZONTAL
105.660000	17.70	-10.1	43.5	25.8	QP	100.0	282.00	HORIZONTAL
293.840000	21.10	-6.4	46.0	24.9	QP	100.0	179.00	HORIZONTAL
520.820000	28.50	-0.6	46.0	17.5	QP	100.0	78.00	HORIZONTAL
935.980000	36.50	8.4	46.0	9.5	QP	100.0	294.00	HORIZONTAL

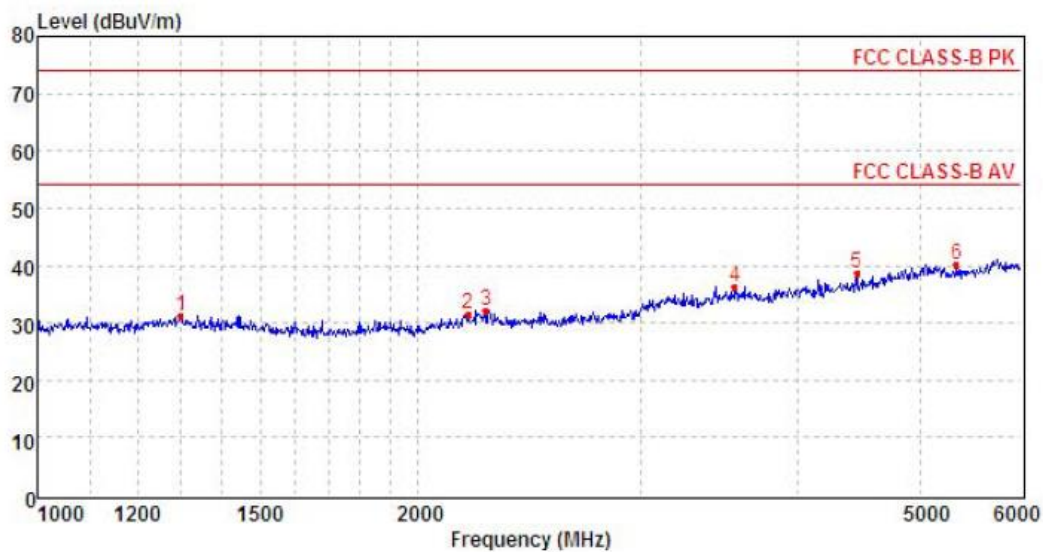

Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1299.00	36.07	26.00	5.42	36.29	31.20	74.00	-42.80	Peak
2	2191.95	33.74	28.12	7.18	37.41	31.63	74.00	-42.37	Peak
3	2263.79	34.32	28.07	7.23	37.43	32.19	74.00	-41.81	Peak
4	3562.13	34.05	29.32	9.87	36.83	36.41	74.00	-37.59	Peak
5	4448.36	33.48	30.79	10.65	36.18	38.74	74.00	-35.26	Peak
6	5340.37	32.15	31.48	12.05	35.41	40.27	74.00	-33.73	Peak


Polarization:

Vertical

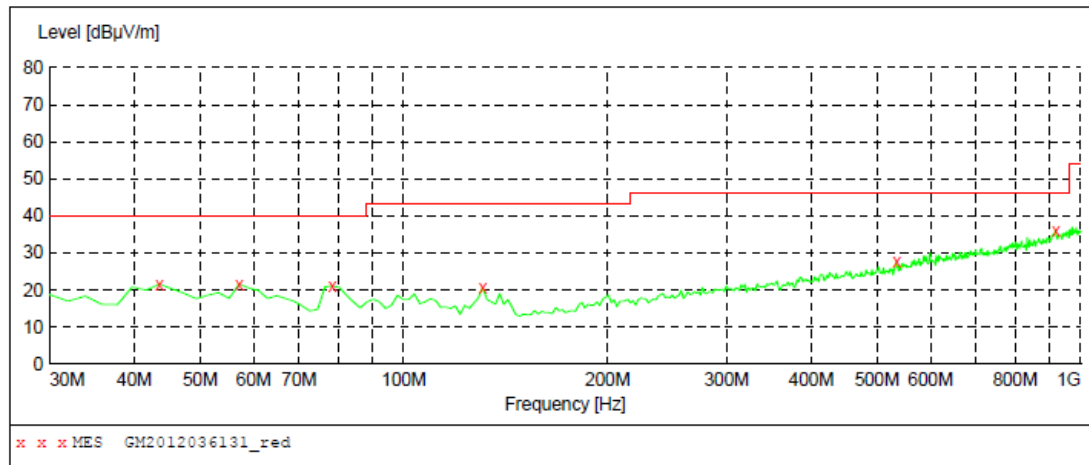**MEASUREMENT RESULT: "GM2012036131_red"**

12/3/2020 9:48PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
43.580000	21.60	-8.6	40.0	18.4	QP	100.0	350.00	VERTICAL
57.160000	21.70	-8.5	40.0	18.3	QP	100.0	350.00	VERTICAL
78.500000	21.10	-14.9	40.0	18.9	QP	100.0	261.00	VERTICAL
130.880000	20.60	-13.0	43.5	22.9	QP	100.0	190.00	VERTICAL
534.400000	27.50	-0.2	46.0	18.5	QP	100.0	238.00	VERTICAL
918.520000	36.20	8.2	46.0	9.8	QP	100.0	201.00	VERTICAL

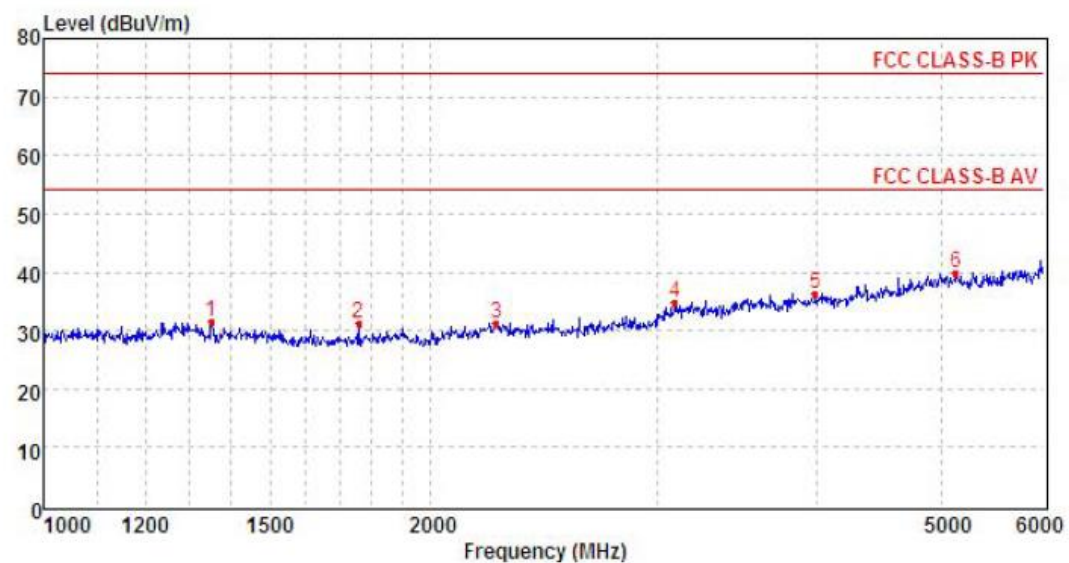

Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Level dBuV/m	Limit dBuV/m	Over limit	Remark
1	1351.23	36.18	26.29	5.48	36.43	31.52	74.00	-42.48	Peak
2	1758.40	36.73	25.23	6.40	37.12	31.24	74.00	-42.76	Peak
3	2251.66	33.46	28.10	7.23	37.42	31.37	74.00	-42.63	Peak
4	3097.52	34.62	28.99	8.62	37.44	34.79	74.00	-39.21	Peak
5	3987.79	32.63	29.90	10.15	36.39	36.29	74.00	-37.71	Peak
6	5124.77	31.77	32.10	11.45	35.46	39.86	74.00	-34.14	Peak


6. TEST SETUP PHOTOS OF THE EUT

Conducted Emissions (AC Mains)



Radiated Emissions



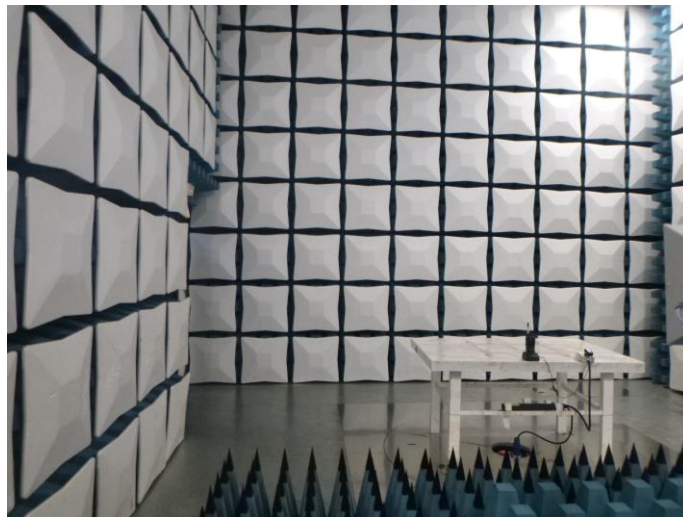

7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Reference to the test report No.: CHTEW20120116.

-----End of Report-----