



FCC REPORT

Report Reference No. : CHTEW19030141 Report verification: 

Project No. : SHT1902018202EW

FCC ID. : Q5EM50-4G

Applicant's name : Kirusun Communication Co., Ltd.

Address : 3rd Floor, Building A, Tongfang Information Harbour, No.11
Langshan Road, Nanshan District, Shenzhen 518057, P.R.China

Manufacturer : Kirusun Communication Co., Ltd.

Address : 3rd Floor, Building A, Tongfang Information Harbour, No.11
Langshan Road, Nanshan District, Shenzhen 518057, P.R.China

Test item description : PoC Trunked Mobile Radio

Trade Mark : KIRISUN

Model/Type reference : M50

Listed Model(s) : iTALK 450

Standard : FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22

Date of receipt of test sample : Feb 25, 2019

Date of testing : Feb 26, 2019- Mar 20, 2019

Date of issue : Mar 21, 2019

Result : Pass

Compiled by
(position+printedname+signature).... : File administrators Silvia Li

Supervised by
(position+printedname+signature)..... : Project Engineer Aaron Fang

Approved by
(position+printedname+signature)..... : Manager Hans Hu

Silvia Li

Aaron Fang

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao,
Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Applicable Standards	3
1.2.	Report version information	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<u>4.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Equipments Used during the Test	8
4.4.	Environmental conditions	9
4.5.	Statement of the measurement uncertainty	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
5.1.	Conducted Output Power	10
5.2.	Peak-to-Average Ratio	11
5.3.	99% Occupied Bandwidth & 26 dB Bandwidth	12
5.4.	Band Edge	13
5.5.	Conducted Spurious Emissions	14
5.6.	Frequency stability VS Temperature measurement	15
5.7.	Frequency stability VS Voltage measurement	16
5.8.	ERP and EIRP	17
5.9.	Radiated Spurious Emission	19
<u>6.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>22</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>23</u>
<u>8.</u>	<u>APPENDIX REPORT</u>	<u>29</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Applicable Standards

The tests were performed according to following standards:

[FCC Rules Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[FCC Rules Part 22](#): PUBLIC MOBILE SERVICES

[TIA/EIA 603 E March 2016](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[ANSI C63.26-2015](#): American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[KDB 971168 D01 Power Meas License Digital Systems v03](#): MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

1.2. Report version information

Revision No.	Date of issue	Description
N/A	2019-03-21	Original

2. Test Description

Test Item	Section in CFR 47	Result	Test Engineer
Conducted Output Power	Part 2.1046 Part 22.913(a)	Pass	Jiongsheng Feng
Peak-to-Average Ratio	Part 24.232	Pass	Jiongsheng Feng
99% Occupied Bandwidth & 26 dB Bandwidth	Part 2.1049 Part 22.917(b)	Pass	Jiongsheng Feng
Band Edge	Part 2.1051 Part 22.917	Pass	Jiongsheng Feng
Conducted Spurious Emissions	Part 2.1051 Part 22.917	Pass	Jiongsheng Feng
Frequency stability VS Temperature	Part 2.1055(a)(1)(b) Part 22.355	Pass	Jiongsheng Feng
Frequency stability VS Voltage	Part 2.1055(d)(1)(2) Part 22.355	Pass	Jiongsheng Feng
ERP and EIRP	Part 22.913(a)	Pass	Shower Dai
Radiated Spurious Emissions	Part 2.1053 Part 22.917	Pass	Shower Dai

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	Kirisun Communication Co.,Ltd.
Address:	3rd Floor, Building A, Tongfang Information Harbour, No.11 Langshan Road, Nanshan District, Shenzhen 518057, P.R.China
Manufacturer:	Kirisun Communication Co.,Ltd.
Address:	3rd Floor, Building A, Tongfang Information Harbour, No.11 Langshan Road, Nanshan District, Shenzhen 518057, P.R.China

3.2. Product Description

Name of EUT:	PoC Trunked Mobile Radio
Trade Mark:	KIRISUN
Model No.:	M50
Listed Model(s):	iTALK 450
Power supply:	DC 12V
Hardware version:	V1.2
Software version:	M50-AU-V4.4
2G:	
Support Network:	GSM, GPRS
Support Band:	GSM850
Modulation:	GSM/GPRS
Transmit Frequency:	GSM850: 824.20MHz-848.80MHz
Receive Frequency:	GSM850: 869.20MHz-893.80MHz
GPRS Multislot Class:	12
EGPRS Multislot Class:	-
Antenna type:	PIFA Antenna
Antenna gain:	GSM850:0.5dBi

3.3. Operation state

➤ Test frequency list

GSM850	
Channel	Frequency (MHz)
128	824.20
190	836.60
251	848.80

➤ Test mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03 and ANSI C63.26-2015 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

30 MHz to 10th harmonic for GSM850.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test modes		
Band	Radiated	Conducted
GSM 850	■ GSM link ■ GPRS Class 8 link	■ GSM link ■ GPRS Class 8 link

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	/	Manufacturer:	/
		Model No.:	/
○	/	Manufacturer:	/
		Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Equipments Used during the Test

Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	FSV40	100048	2018/10/28	2019/10/27
●	Spectrum Analyzer	Agilent	N9020A	MY50510187	2018/09/29	2019/09/28
●	Radio communication tester	R&S	CMW500	137688-Lv	2018/09/29	2019/09/28
●	Test software	Tonscend	JS1120-1(LTE)	N/A	N/A	N/A
●	Test software	Tonscend	JS1120-2(WIFI)	N/A	N/A	N/A
●	Test software	Tonscend	JS1120-3(WCDMA)	N/A	N/A	N/A
●	Test software	Tonscend	JS1120-4(GSM)	N/A	N/A	N/A

● Radiated Spurious Emission

Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	SAC-3m-01	N/A	2018/09/30	2021/09/29
●	Spectrum Analyzer	R&S	FSP40	100597	2018/10/27	2019/10/26
●	Loop Antenna	R&S	HFH2-Z2	100020	2017/11/20	2020/11/19
●	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	538	2017/04/05	2020/04/04
●	Horn Antenna	SCHWARZBECK	9120D	1011	2017/04/01	2020/03/31
○	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2017/03/27	2020/03/26
○	Pre-amplifier	BONN	BLWA0160-2M	1811887	2018/11/14	2019/11/13
●	Pre-amplifier	CD	PAP-0102	12004	2018/11/14	2019/11/13
●	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-248	2018/04/28	2019/04/27
●	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	2018/11/15	2019/11/14
●	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	2018/11/15	2019/11/14
●	EMI Test Software	Audix	E3	N/A	N/A	N/A
●	Turntable	MATURO	TT2.0	N/A	N/A	N/A
●	Antenna Mast	MATURO	TAM-4.0-P	N/A	N/A	N/A

4.4. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Voltage	VN=Nominal Voltage	DC 12.00V
	VL=Lower Voltage	DC 10.80V
	VH=Higher Voltage	DC 26.00V
Temperature	TN=Normal Temperature	25 °C
	Extreme Temperature	From -30° to + 50° centigrade
Humidity	30~60 %	
Air Pressure	950-1050 hPa	

4.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.63 dB	(1)
Transmitter power Radiated	2.38dB for <1GHz 3.45dB for >1GHz	(1)
Conducted spurious emissions 9kHz~40GHz	0.63 dB	(1)
Radiated spurious emissions	2.38dB for <1GHz 3.45dB for >1GHz	(1)
Occupied Bandwidth	18Hz for <1GHz 69Hz for >1GHz	(1)
Frequency error	18Hz for <1GHz 69Hz for >1GHz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.


5. TEST CONDITIONS AND RESULTS

5.1. Conducted Output Power

LIMIT

N/A

TEST CONFIGURATION

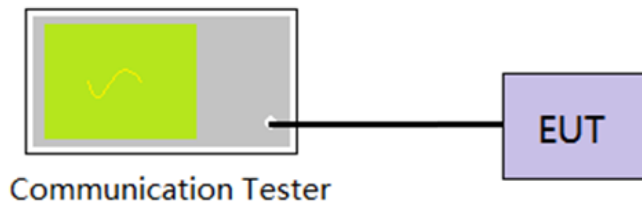

TEST PROCEDURE

1. The EUT output port was connected to communication tester.
2. Set EUT at maximum power through communication tester.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable


Refer to appendix A on the section 8 appendix report

5.2. Peak-to-Average Ratio

LIMIT

13dB

TEST CONFIGURATION

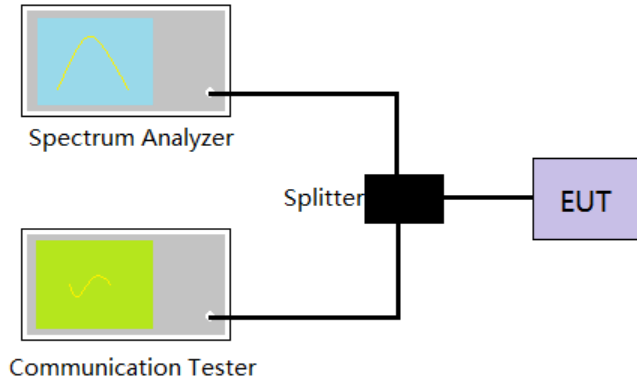

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. Center Frequency = Carrier frequency, RBW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed.
 - i. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.
 - ii. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power
6. Record the maximum PAPR level associated with a probability of 0.1%.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS


☒ Passed ☐ Not Applicable

Refer to appendix B on the section 8 appendix report

5.3. 99% Occupied Bandwidth & 26 dB Bandwidth

LIMIT

N/A

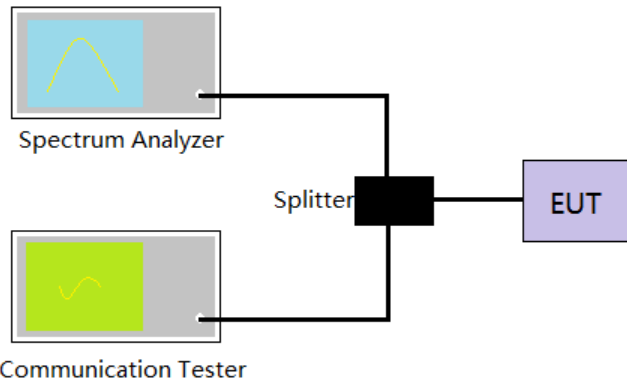TEST CONFIGURATION**TEST PROCEDURE**

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:
Center Frequency= Carrier frequency, RBW=1% to 5% of anticipated OBW, VBW= 3 * RBW,
Detector=Peak,
Trace maximum hold.
4. Record the value of 99% Occupied bandwidth and -26dB bandwidth.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS☒ **Passed** ☐ **Not Applicable**

Refer to appendix C on the section 8 appendix report


5.4. Band Edge

LIMIT

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST CONFIGURATION

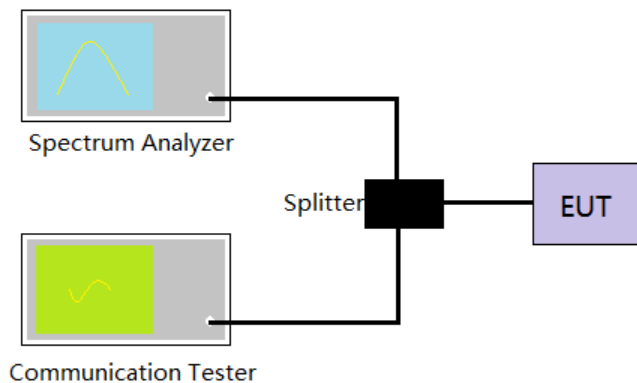

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. The band edges of low and high channels were measured.
4. Spectrum analyzer setting as follow:
RBW=3KHz, VBW = 10KHz, Sweep time= Auto
5. Record the test plot.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Refer to appendix D on the section 8 appendix report


5.5. Conducted Spurious Emissions

LIMIT

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

TEST CONFIGURATION

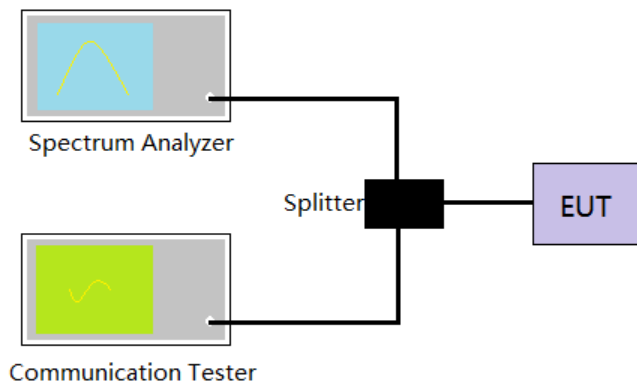

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:
Below 1GHz, RBW=100KHz, VBW = 300KHz, Detector=Peak, Sweep time= Auto
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peak, Sweep time= Auto
Scan frequency range up to 10th harmonic.
4. Record the test plot.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable


Refer to appendix E on the section 8 appendix report

5.6. Frequency stability VS Temperature measurement

LIMIT

2.5ppm

TEST CONFIGURATION

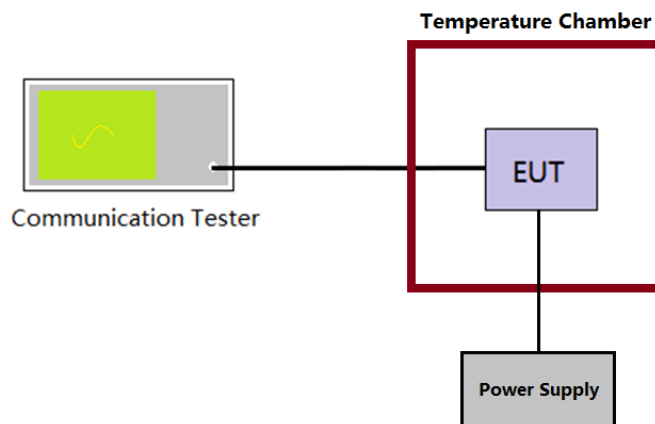

TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber.
4. Turn EUT off and set the chamber temperature to -30°C . After the temperature stabilized for approximately 30 minutes recorded the frequency.
5. Repeat step 4 measure with 10°C increased per stage until the highest temperature of $+50^{\circ}\text{C}$ reached.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable


Refer to appendix F on the section 8 appendix report

5.7. Frequency stability VS Voltage measurement

LIMIT

2.5ppm

TEST CONFIGURATION

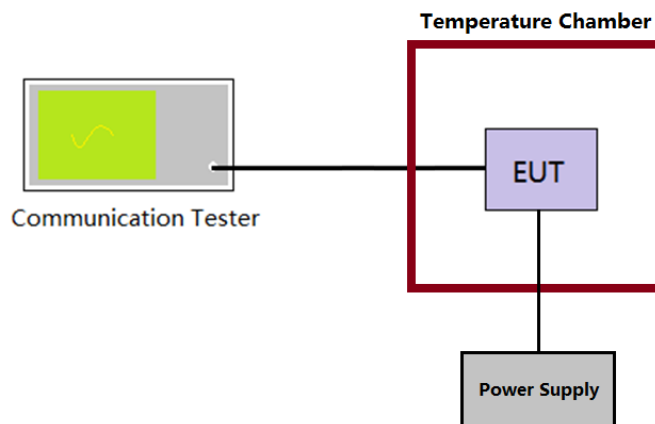

TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber at 25°C
4. The power supply voltage to the EUT was varied $\pm 15\%$ of the nominal value measured at the input to the EUT
5. Record the maximum frequency change.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable


Refer to appendix F on the section 8 appendix report

5.8. ERP and EIRP

LIMIT

GSM850: 7W (38.45dBm) ERP

TEST CONFIGURATION

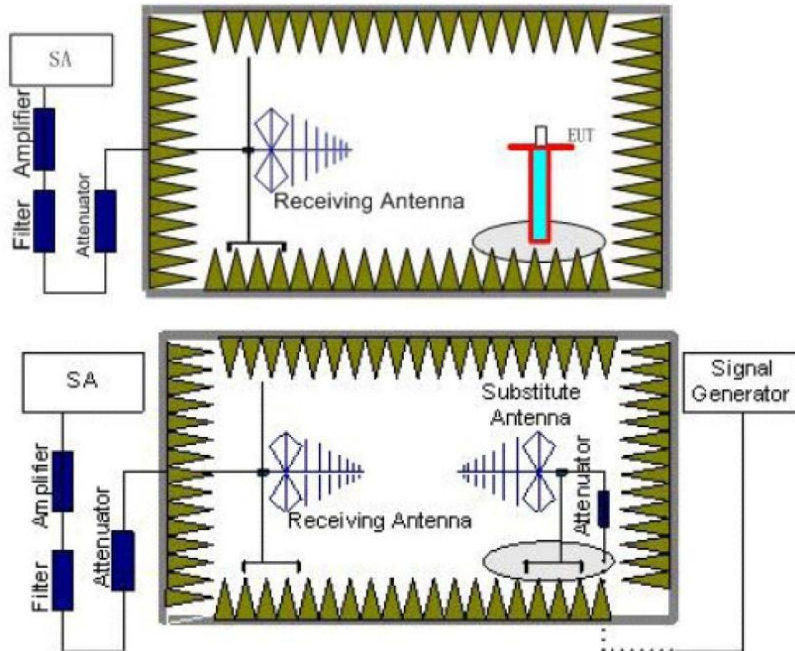

TEST PROCEDURE

1. EUT was placed on a 0.8 meter for below 1GHz and 1.5 meter for above 1GHz high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.0m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.

6. The measurement results are obtained as described below:

Power(EIRP)=PMea- PAg - Pcl + Ga

We used SMF100A microwave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:

Power(EIRP)=PMea- Pcl + Ga

7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable


Mode	Channel	Antenna Pol.	ERP	Limit (dBm)	Result
GSM850	128	V	29.24	<38.45	Pass
		H	30.50		
	190	V	30.02		
		H	31.10		
	251	V	29.30		
		H	29.64		
GPRS850	128	V	29.18	<38.45	Pass
		H	31.03		
	190	V	30.15		
		H	31.07		
	251	V	29.19		
		H	29.56		

5.9. Radiated Spurious Emission

LIMIT

-13dBm

TEST CONFIGURATION

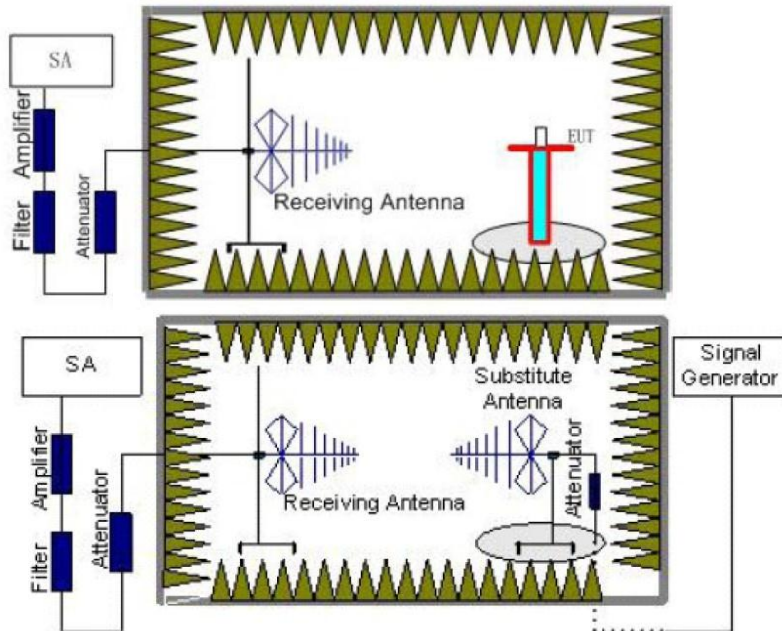

TEST PROCEDURE

1. EUT was placed on a 0.8 meter for below 1GHz and 1.5 meter for above 1GHz high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.0m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.

6. The measurement results are obtained as described below:

Power(EIRP)=PMea- PAg - Pcl + Ga

We used SMF100A microwave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:

Power(EIRP)=PMea- Pcl + Ga

7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Note: Worst case at GSM850



GSM850					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
128	34.05	Vertical	-50.73	<-13.00	Pass
	165.71	V	-49.37		
	1648.51	V	-50.44		
	2472.57	V	-48.68		
	4988.90	V	-50.71		
	9595.37	V	-44.61		
	172.85	Horizontal	-51.46	<-13.00	Pass
	538.21	H	-50.42		
	1648.51	H	-49.14		
	2472.57	H	-51.25		
	4996.14	H	-49.17		
	6648.33	H	-49.93		
190	30.97	Vertical	-51.60	<-13.00	Pass
	164.55	V	-47.98		
	1132.18	V	-53.75		
	2510.89	V	-46.00		
	4988.90	V	-52.24		
	6246.40	V	-51.93		
	38.10	Horizontal	-54.79	<-13.00	Pass
	172.85	H	-45.62		
	1200.06	H	-50.47		
	1674.06	H	-50.09		
	4981.67	H	-50.37		
	7520.54	H	-48.63		
251	34.65	Vertical	-53.27	<-13.00	Pass
	163.97	V	-50.13		
	1132.18	V	-53.25		
	2547.01	V	-47.59		
	4988.90	V	-54.26		
	7509.64	V	-48.06		
	172.85	Horizontal	-45.75	<-13.00	Pass
	508.77	H	-51.26		
	1698.14	H	-51.36		
	2547.01	H	-49.19		
	4981.67	H	-53.52		
	9665.20	H	-45.48		

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. The emission levels of not record in the report are very lower than the limit and not show in test report.

6. TEST SETUP PHOTOS OF THE EUT


Radiated emission:

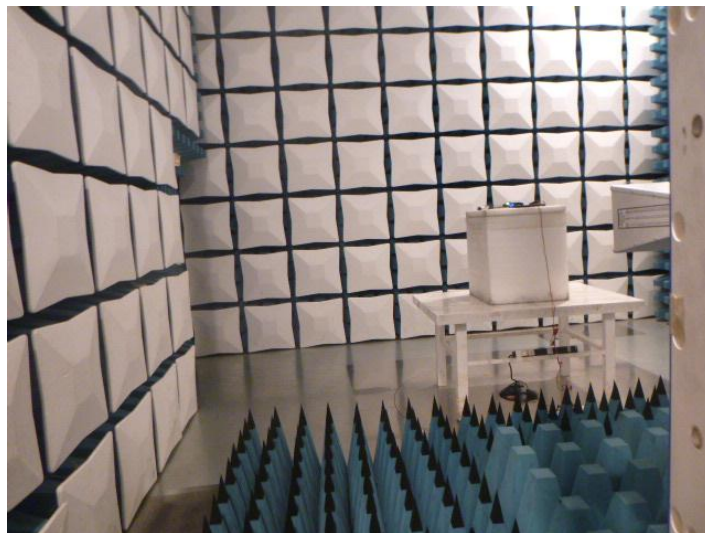
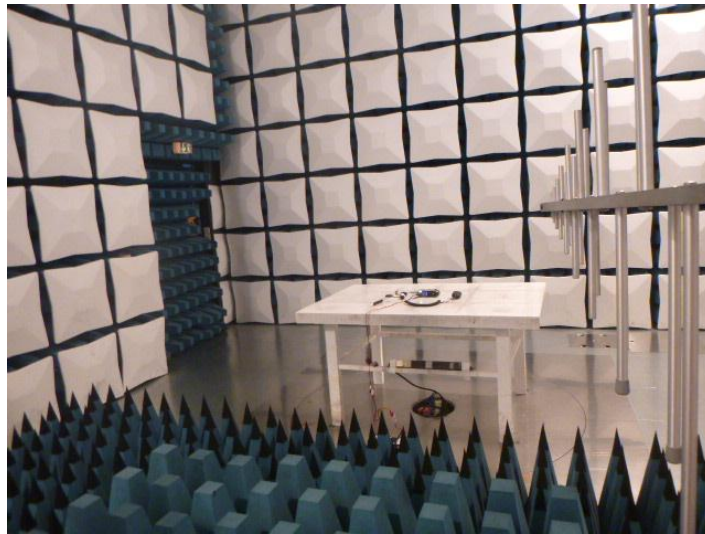




7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT



External photos of the EUT







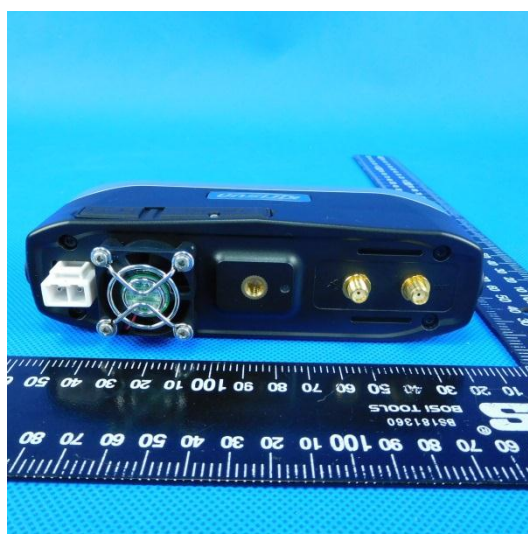


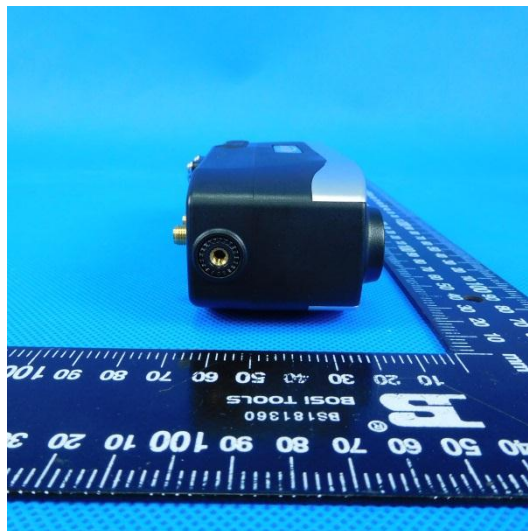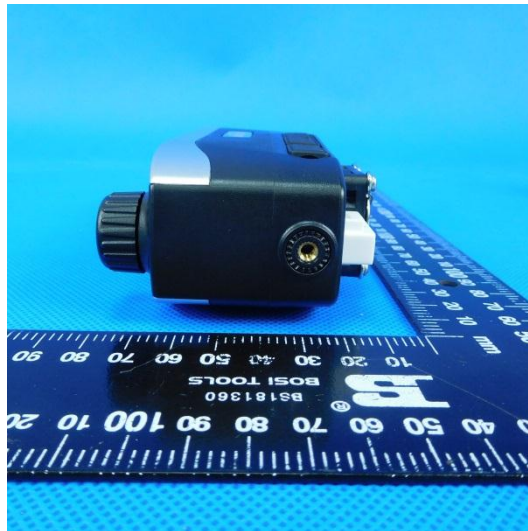

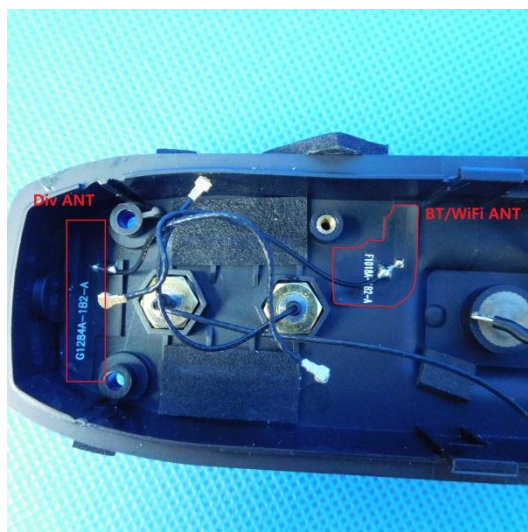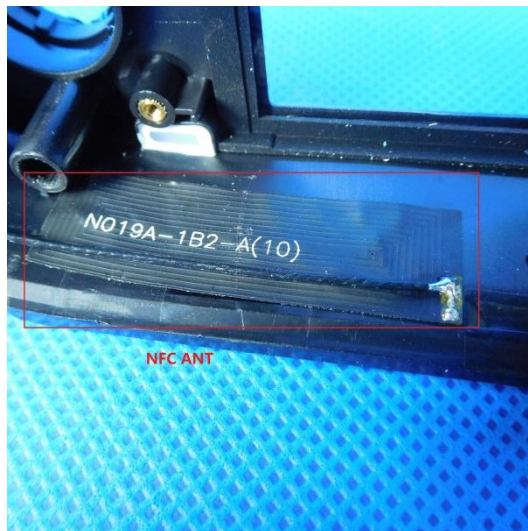Internal photos of the EUT

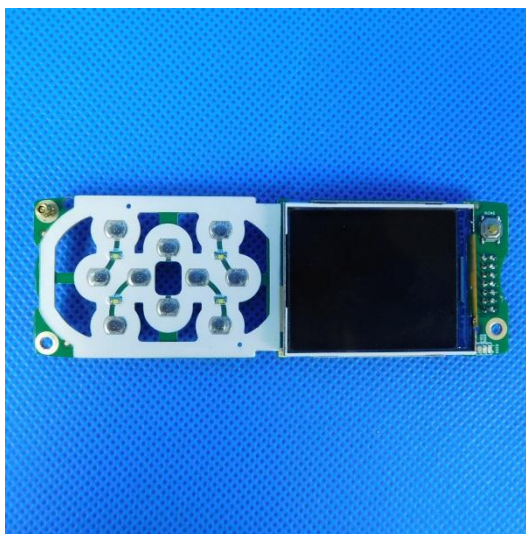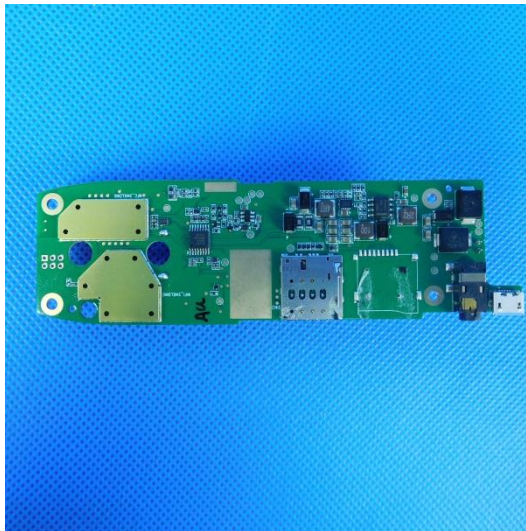

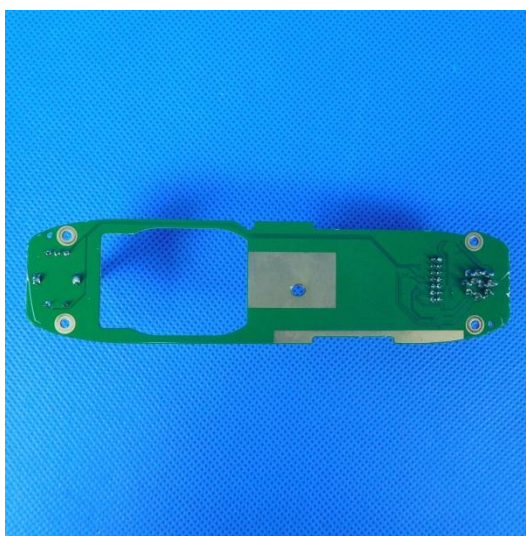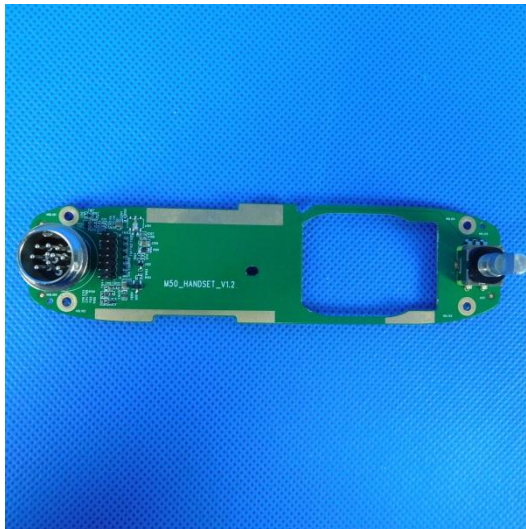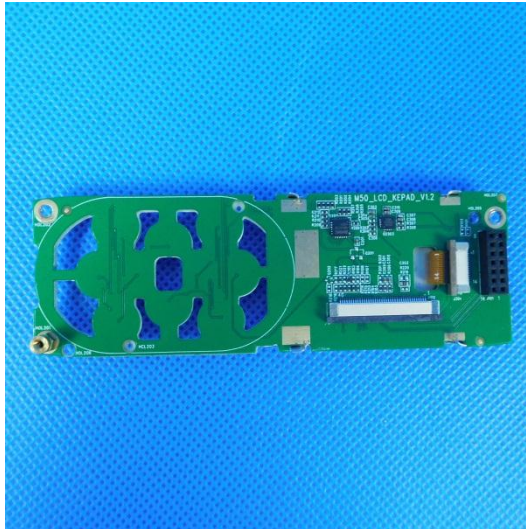

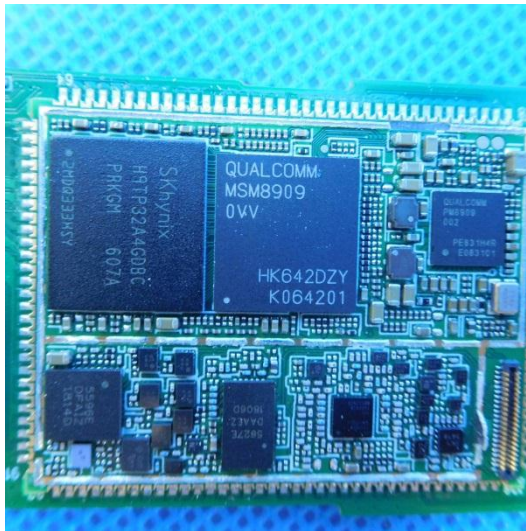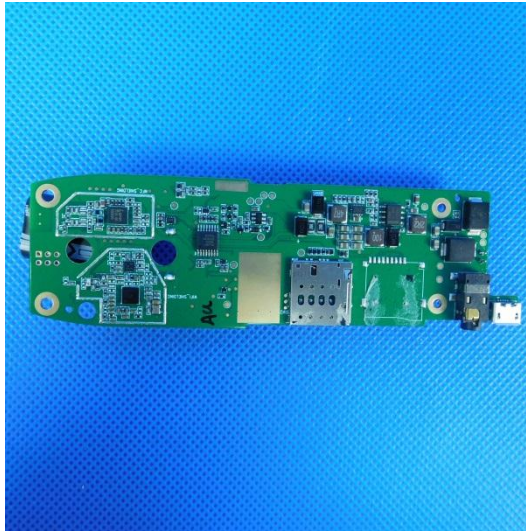

8. APPENDIX REPORT

**8.1 Appendix A: Conducted Output Power**

Test Result

Band	Channel	PCL	Power(dBm)	Limit(dBm)	Verdict
GSM850	128	5	34.13	38.5	PASS
GSM850	190	5	34.51	38.5	PASS
GSM850	251	5	34.42	38.5	PASS



Band	Channel	PCL	Slot	Power(dBm)	Limit(dBm)	Verdict
GPRS850	128	5	1	33.83	38.5	PASS
GPRS850	128	5	2	33.89	38.5	PASS
GPRS850	128	5	3	33.54	38.5	PASS
GPRS850	128	5	4	33.38	38.5	PASS
GPRS850	190	5	1	34.16	38.5	PASS
GPRS850	190	5	2	34.21	38.5	PASS
GPRS850	190	5	3	33.87	38.5	PASS
GPRS850	190	5	4	33.69	38.5	PASS
GPRS850	251	5	1	33.99	38.5	PASS
GPRS850	251	5	2	33.92	38.5	PASS
GPRS850	251	5	3	33.65	38.5	PASS
GPRS850	251	5	4	33.57	38.5	PASS




8.2 Appendix B: Peak-to-Average Ratio

Test Result


Band	Channel	Peak-to-Average Ratio(dB)	Limit(dB)	Verdict
GSM850	128	2.85	13	PASS
GSM850	190	2.86	13	PASS
GSM850	251	2.87	13	PASS
GPRS850	128	2.82	13	PASS
GPRS850	190	2.83	13	PASS
GPRS850	251	2.85	13	PASS




Test Graphs

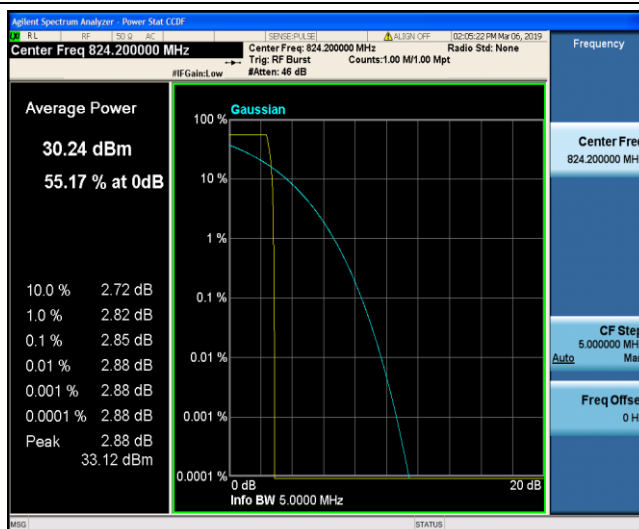


GSM850_128

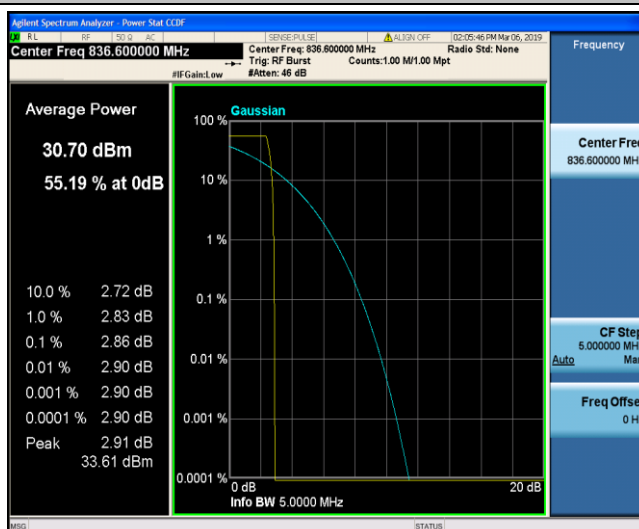


GSM850_190

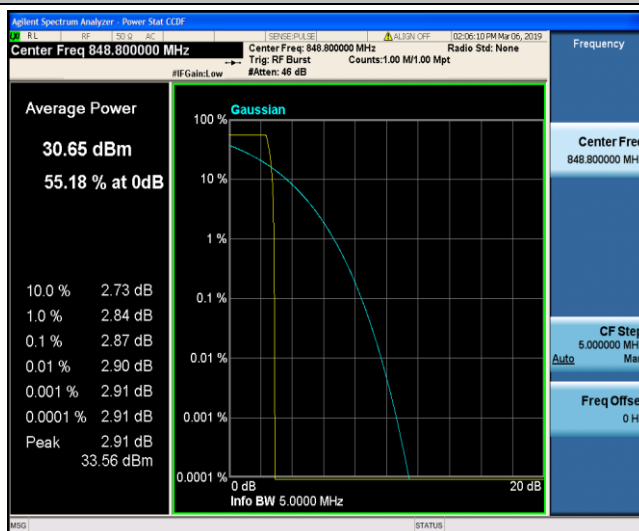


GSM850_251

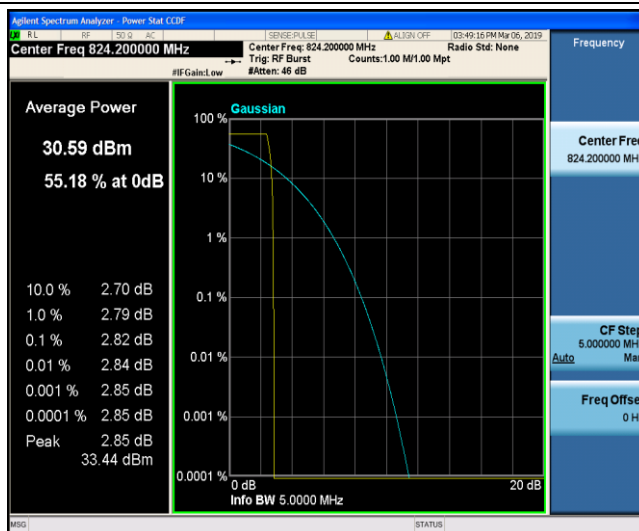

GPRS850_128

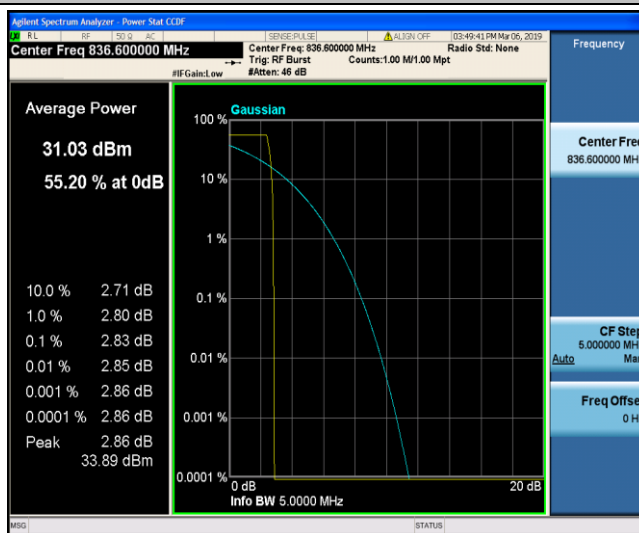

GPRS850_190

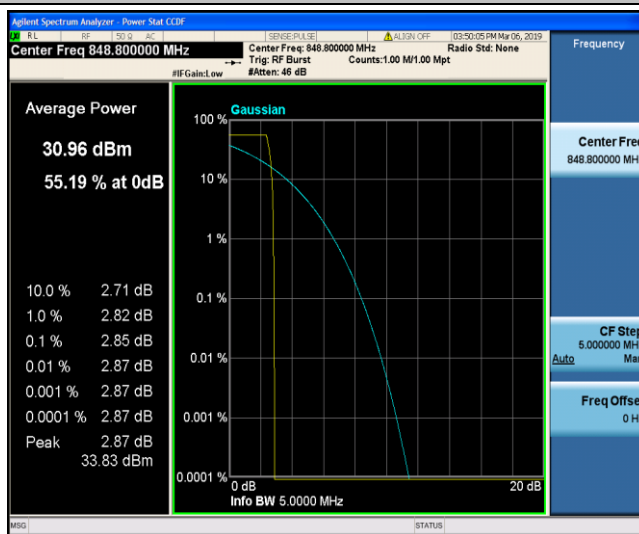

GPRS850_251




8.3 Appendix C: 26dB Bandwidth and Occupied Bandwidth

Test Result


Band	Channel	Occupied Bandwidth (kHz)	26dB Bandwidth (kHz)	Limit(kHz)	Verdict
GSM850	128	243.39	314.2	---	PASS
GSM850	190	245.45	306.8	---	PASS
GSM850	251	247.16	317.1	---	PASS
GPRS850	128	243.35	318.5	---	PASS
GPRS850	190	244.48	307.3	---	PASS
GPRS850	251	245.31	312.1	---	PASS




Test Graphs

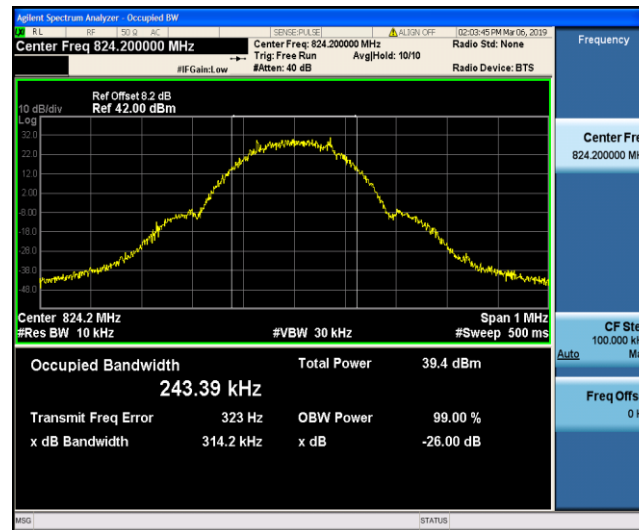


GSM850_128

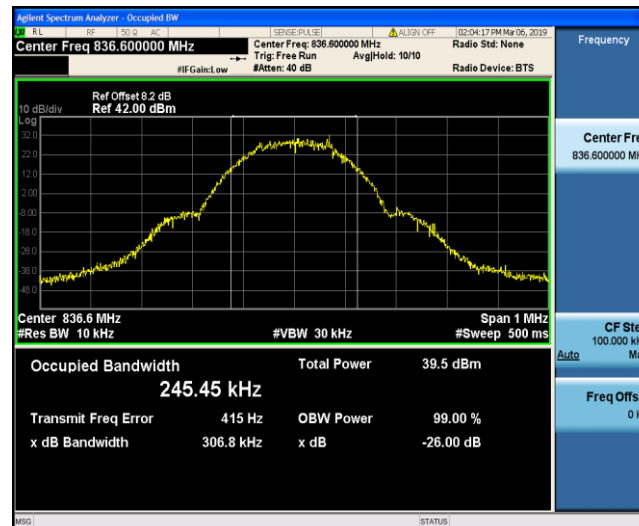


GSM850_190

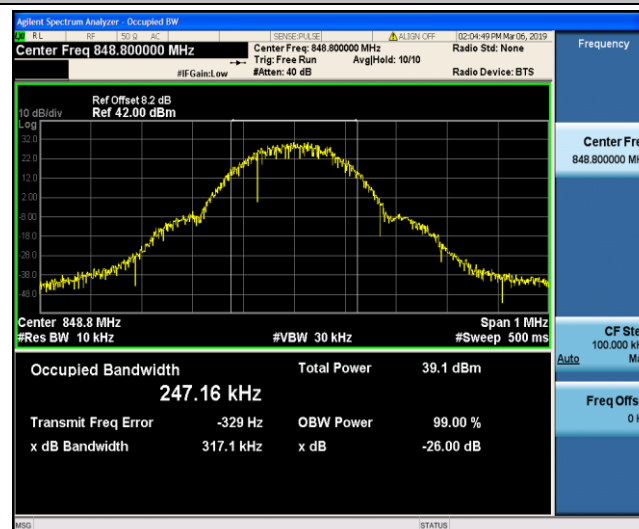


GSM850_251

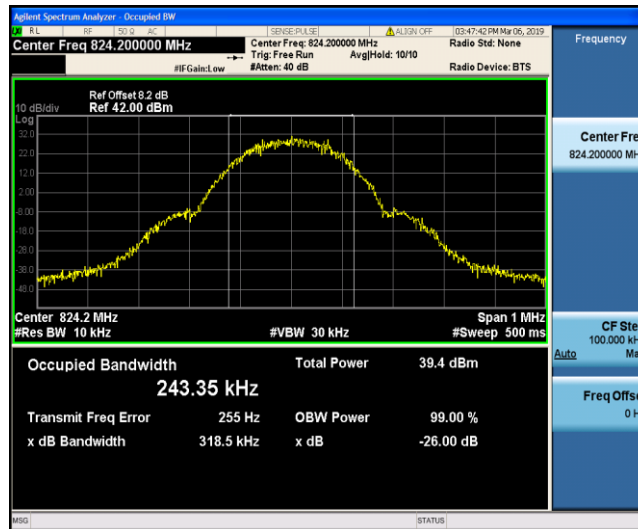

GPRS850_128

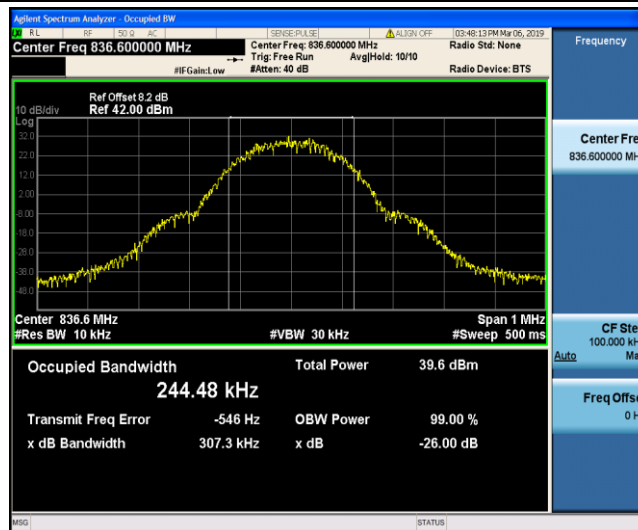

GPRS850_190

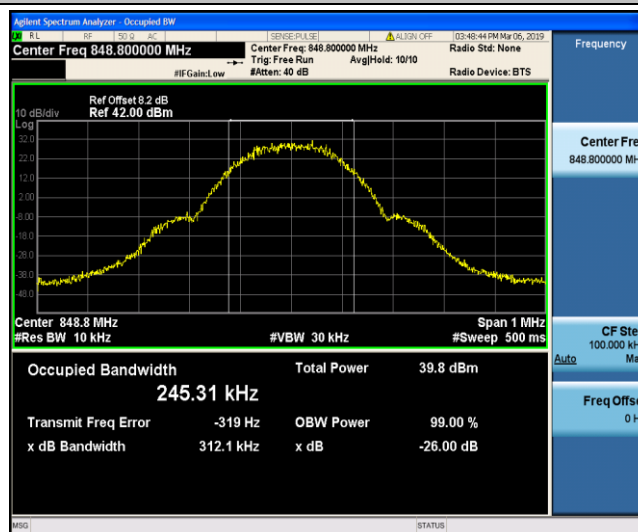

GPRS850_251



8.4 Appendix D: Band Edge

Test Result

Band	Channel	Value(dBm)	Limit(dBm)	Verdict
GSM850	128	-27.17	-13	PASS
GSM850	251	-25.23	-13	PASS
GPRS850	128	-26.74	-13	PASS
GPRS850	251	-26.00	-13	PASS




Test Graphs




GSM850_128



GSM850_251

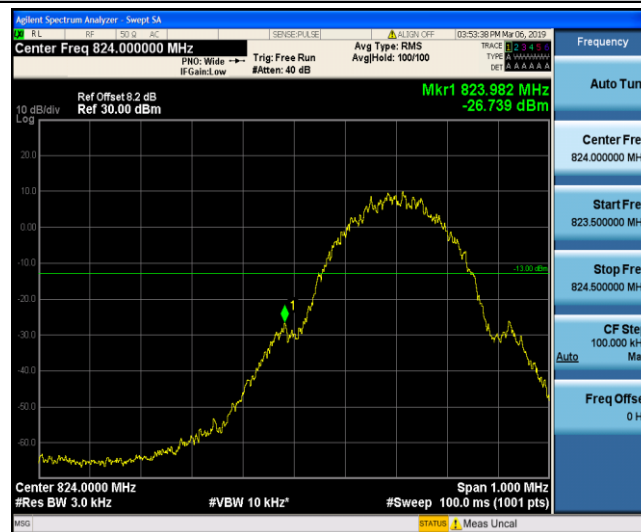

GPRS850_128

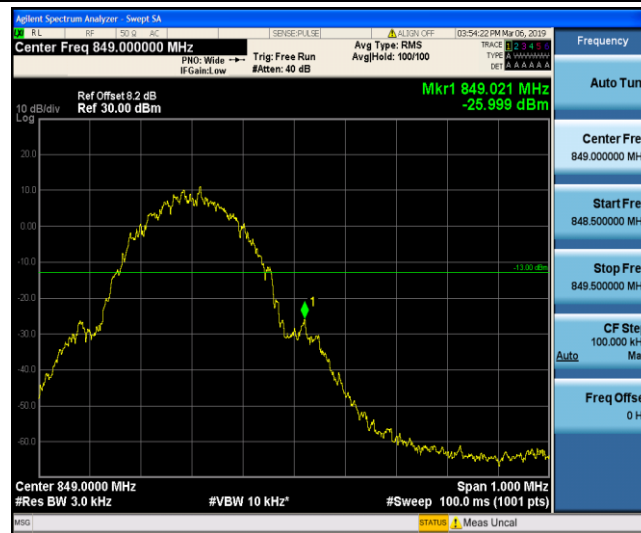

GPRS850_251




8.5 Appendix E: Conducted Spurious Emission

Test Result


Band	Channel	Frequency Rang(Mhz)	Value(dBm)	Limit(dBm)	Verdict
GSM850	128	30~1000	-37.90	-13	PASS
GSM850	128	1000~10000	-37.08	-13	PASS
GSM850	190	30~1000	-34.78	-13	PASS
GSM850	190	1000~10000	-36.95	-13	PASS
GSM850	251	30~1000	-37.06	-13	PASS
GSM850	251	1000~10000	-37.07	-13	PASS
GPRS850	128	30~1000	-38.18	-13	PASS
GPRS850	128	1000~10000	-37.04	-13	PASS
GPRS850	190	30~1000	-36.78	-13	PASS
GPRS850	190	1000~10000	-37.07	-13	PASS
GPRS850	251	30~1000	-39.04	-13	PASS
GPRS850	251	1000~10000	-37.14	-13	PASS




Test Graphs

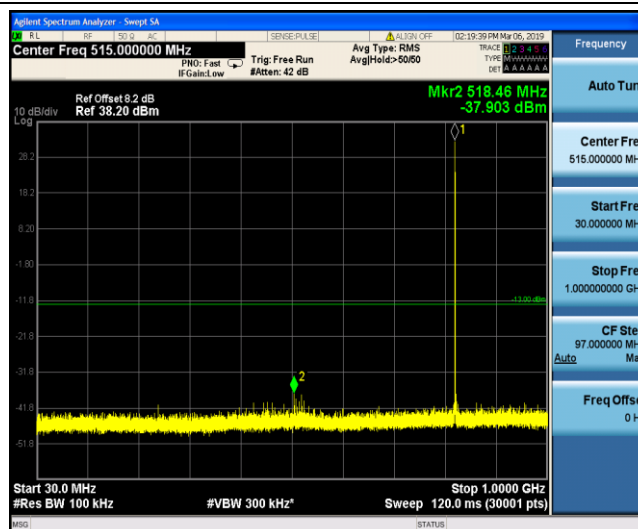


GSM850_128

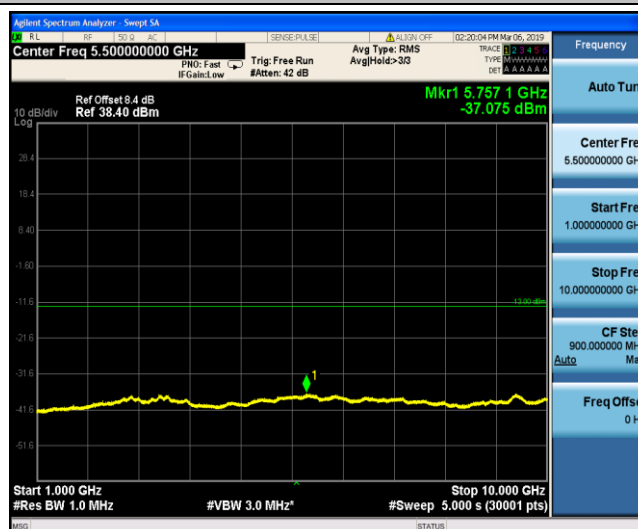


GSM850_128

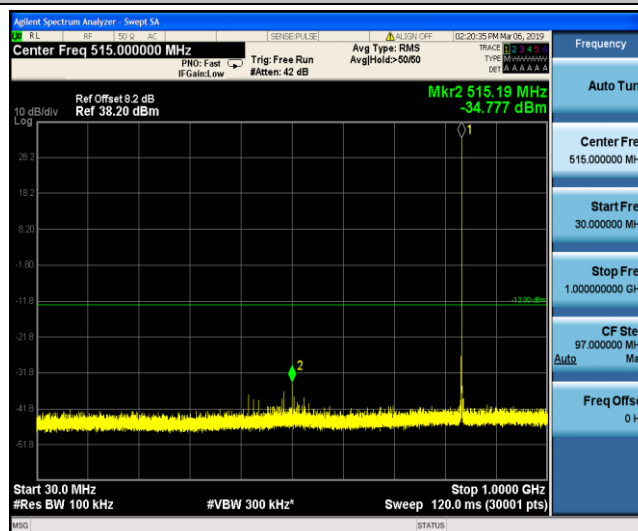


GSM850_190

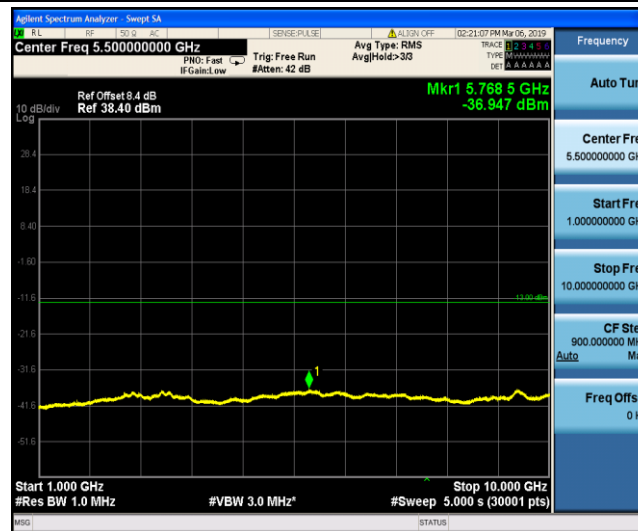


GSM850_190

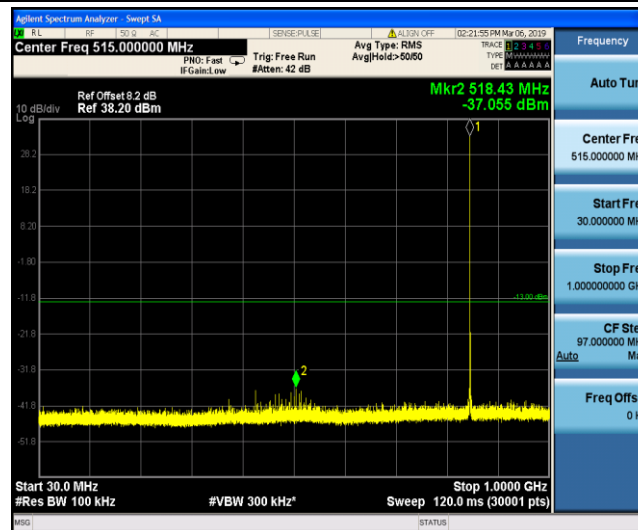

GSM850_251

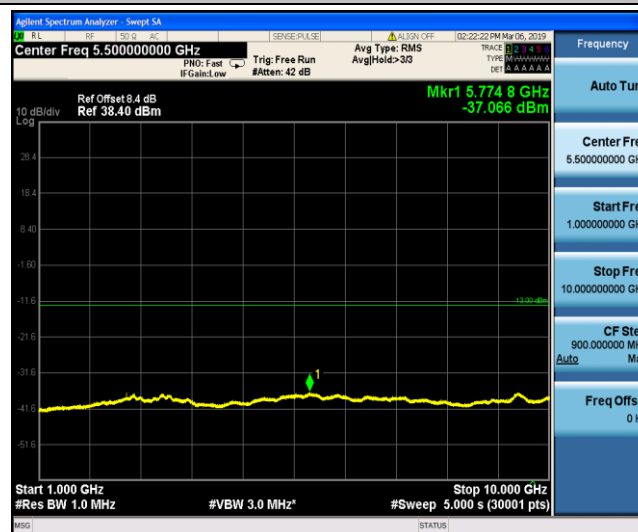


GSM850_251

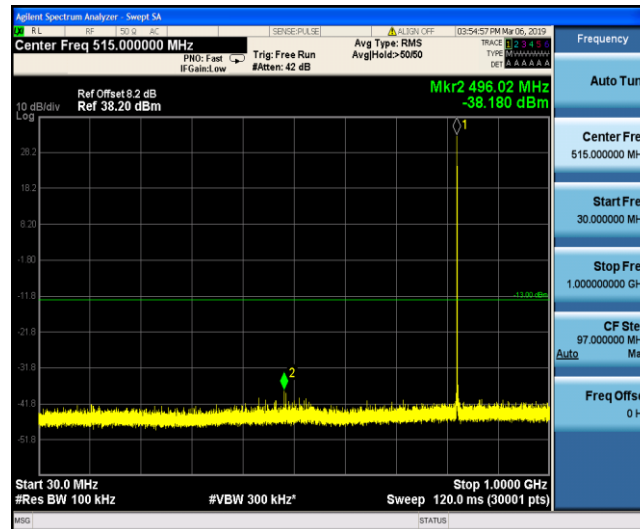

GPRS850_128




GPRS850_128

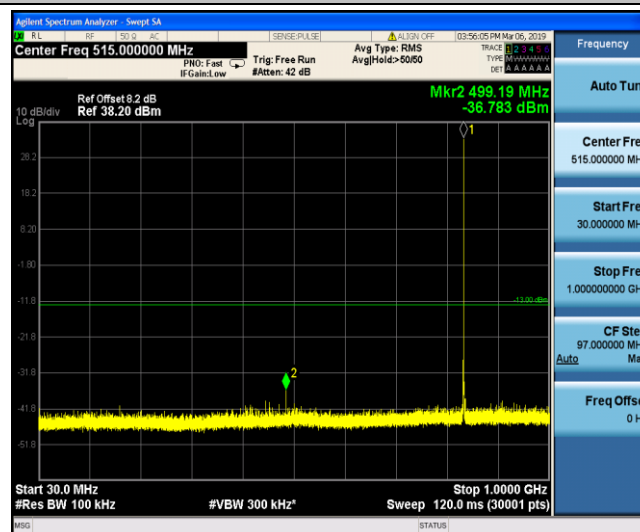

GPRS850_190



GPRS850_190

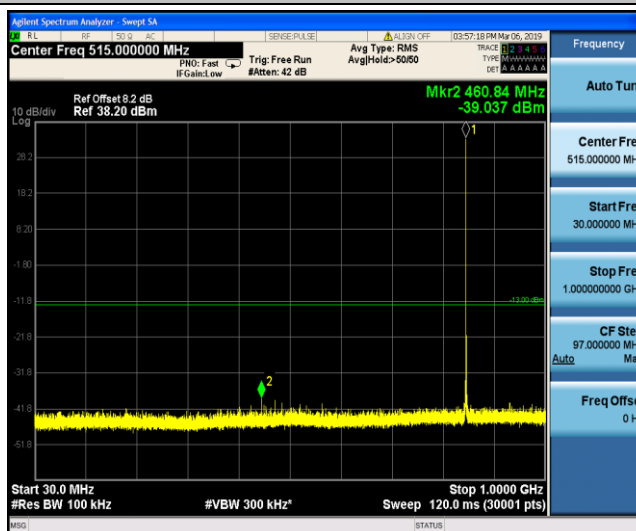

GPRS850_251



GPRS850_251



8.6 Appendix F: Frequency Stability

Test Result

Voltage							
Band	Channel	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
GSM850	128	VL	TN	2.39	0.002899	2.5	PASS
GSM850	128	VN	TN	-4.78	-0.005798	2.5	PASS
GSM850	128	VH	TN	-4.39	-0.005327	2.5	PASS
GSM850	190	VL	TN	0.81	0.000965	2.5	PASS
GSM850	190	VN	TN	-1.29	-0.001544	2.5	PASS
GSM850	190	VH	TN	0.19	0.000232	2.5	PASS
GSM850	251	VL	TN	2.68	0.003157	2.5	PASS
GSM850	251	VN	TN	5.36	0.006314	2.5	PASS
GSM850	251	VH	TN	7.33	0.008634	2.5	PASS
GPRS850	128	VL	TN	1.65	0.001998	2.5	PASS
GPRS850	128	VN	TN	7.46	0.009049	2.5	PASS
GPRS850	128	VH	TN	6.72	0.008148	2.5	PASS
GPRS850	190	VL	TN	12.75	0.015244	2.5	PASS
GPRS850	190	VN	TN	13.30	0.015900	2.5	PASS
GPRS850	190	VH	TN	12.72	0.015205	2.5	PASS
GPRS850	251	VL	TN	11.69	0.013769	2.5	PASS
GPRS850	251	VN	TN	11.69	0.013769	2.5	PASS
GPRS850	251	VH	TN	12.37	0.014568	2.5	PASS



Temperature							
Band	Channel	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
GSM850	128	VN	-30	-3.52	-0.004270	2.5	PASS
GSM850	128	VN	-20	-1.49	-0.001802	2.5	PASS
GSM850	128	VN	-10	-0.58	-0.000705	2.5	PASS
GSM850	128	VN	0	-6.94	-0.008422	2.5	PASS
GSM850	128	VN	10	-3.78	-0.004583	2.5	PASS
GSM850	128	VN	20	-2.68	-0.003251	2.5	PASS
GSM850	128	VN	30	-5.94	-0.007208	2.5	PASS
GSM850	128	VN	40	-7.17	-0.008696	2.5	PASS
GSM850	128	VN	50	-1.78	-0.002154	2.5	PASS
GSM850	190	VN	-30	0.00	0.000000	2.5	PASS
GSM850	190	VN	-20	-1.42	-0.001698	2.5	PASS
GSM850	190	VN	-10	-0.90	-0.001081	2.5	PASS
GSM850	190	VN	0	-5.65	-0.006754	2.5	PASS
GSM850	190	VN	10	-3.71	-0.004438	2.5	PASS
GSM850	190	VN	20	-3.36	-0.004014	2.5	PASS
GSM850	190	VN	30	1.07	0.001274	2.5	PASS
GSM850	190	VN	40	-1.84	-0.002200	2.5	PASS
GSM850	190	VN	50	-0.10	-0.000116	2.5	PASS
GSM850	251	VN	-30	3.91	0.004602	2.5	PASS
GSM850	251	VN	-20	2.65	0.003119	2.5	PASS
GSM850	251	VN	-10	-3.39	-0.003994	2.5	PASS
GSM850	251	VN	0	1.10	0.001293	2.5	PASS
GSM850	251	VN	10	-9.52	-0.011221	2.5	PASS
GSM850	251	VN	20	-4.20	-0.004945	2.5	PASS
GSM850	251	VN	30	-2.65	-0.003119	2.5	PASS
GSM850	251	VN	40	-3.55	-0.004184	2.5	PASS
GSM850	251	VN	50	-0.23	-0.000266	2.5	PASS
GPRS850	128	VN	-30	11.07	0.013436	2.5	PASS
GPRS850	128	VN	-20	10.40	0.012613	2.5	PASS
GPRS850	128	VN	-10	9.04	0.010968	2.5	PASS
GPRS850	128	VN	0	11.59	0.014063	2.5	PASS
GPRS850	128	VN	10	13.27	0.016100	2.5	PASS
GPRS850	128	VN	20	12.40	0.015042	2.5	PASS
GPRS850	128	VN	30	13.59	0.016492	2.5	PASS
GPRS850	128	VN	40	11.04	0.013397	2.5	PASS
GPRS850	128	VN	50	10.40	0.012613	2.5	PASS
GPRS850	190	VN	-30	11.75	0.014047	2.5	PASS
GPRS850	190	VN	-20	13.14	0.015707	2.5	PASS
GPRS850	190	VN	-10	9.20	0.010999	2.5	PASS
GPRS850	190	VN	0	12.04	0.014395	2.5	PASS
GPRS850	190	VN	10	11.98	0.014318	2.5	PASS
GPRS850	190	VN	20	12.56	0.015012	2.5	PASS
GPRS850	190	VN	30	14.37	0.017173	2.5	PASS
GPRS850	190	VN	40	13.92	0.016633	2.5	PASS
GPRS850	190	VN	50	13.01	0.015552	2.5	PASS
GPRS850	251	VN	-30	10.82	0.012742	2.5	PASS
GPRS850	251	VN	-20	13.66	0.016090	2.5	PASS
GPRS850	251	VN	-10	8.65	0.010194	2.5	PASS
GPRS850	251	VN	0	12.01	0.014150	2.5	PASS
GPRS850	251	VN	10	10.65	0.012552	2.5	PASS
GPRS850	251	VN	20	11.27	0.013275	2.5	PASS



Report No.: CHTEW19030141

Issued: 2019-03-21

GPRS850	251	VN	30	12.43	0.014644	2.5	PASS
GPRS850	251	VN	40	11.30	0.013313	2.5	PASS
GPRS850	251	VN	50	10.56	0.012438	2.5	PASS

-----End of the Report -----