

# FCC PART 90

## EMI MEASUREMENT AND TEST REPORT

For

### Kirisun Electronics (Shenzhen) Co., Ltd.

Bldg, H-2, East Industrial Zone of Overseas  
Chinese Town, Nanshan Dist.  
Shenzhen, 518053, China

**FCC ID: Q5EPT320802**

2003-06-26

<b>This Report Concerns:</b> <input checked="" type="checkbox"/> Original Report	<b>Equipment Type:</b> FM Handheld Transceiver
<b>Test Engineer:</b> Ming Jing / 	
<b>Report Number:</b> R0304284	
<b>Test Date:</b> 2003-06-26	
<b>Reviewed By:</b> Ling Zhang 	
<b>Prepared By:</b> Bay Area Compliance Laboratory Corporation 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732 9164	

**Note:** This test report is specially limited to the above client company and product model. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

**TABLE OF CONTENTS**

<b>1 - GENERAL INFORMATION</b> .....	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 OBJECTIVE .....	4
1.3 RELATED GRANT/SUBMISSION.....	4
1.4 TEST METHODOLOGY .....	4
1.5 TEST FACILITY .....	4
1.6 TEST EQUIPMENT LIST .....	5
<b>2 - SYSTEM TEST CONFIGURATION</b> .....	<b>6</b>
2.1 JUSTIFICATION .....	6
2.2 EUT TEST CONFIGURATION.....	6
2.3 SPECIAL ACCESSORIES.....	6
2.4 SCHEMATICS / BLOCK DIAGRAM .....	6
2.5 EQUIPMENT MODIFICATIONS.....	6
2.6 CONFIGURATION OF TEST SYSTEM.....	7
2.7 TEST SETUP BLOCK DIAGRAM .....	7
<b>3 - REQUIREMENTS OF PROVISIONS</b> .....	<b>8</b>
3.1 REQUIREMENTS AND TEST SUMMARY .....	8
3.2 LABELING REQUIREMENT .....	8
<b>4 - CONDUCTED OUTPUT POWER</b> .....	<b>9</b>
4.1 PROVISION APPLICABLE.....	9
4.2 TEST PROCEDURE .....	9
4.3 TEST EQUIPMENT .....	9
4.4 TEST RESULTS.....	9
<b>5 - MODULATION CHARACTERISTICS</b> .....	<b>11</b>
5.1 PROVISION APPLICABLE.....	11
5.2 TEST PROCEDURE .....	11
5.3 TEST EQUIPMENT .....	11
5.4 TEST RESULTS.....	11
<b>6 - OCCUPIED BANDWIDTH OF EMISSION</b> .....	<b>14</b>
6.1 PROVISION APPLICABLE.....	14
6.2 TEST PROCEDURE .....	14
6.3 TEST EQUIPMENT .....	14
6.4 TEST RESULTS.....	14
6.5 EMISSION DESIGNATOR.....	14
<b>7 - RADIATED SPURIOUS EMISSION</b> .....	<b>17</b>
7.1 PROVISION APPLICABLE.....	17
7.2 TEST PROCEDURE .....	17
7.3 TEST EQUIPMENT .....	17
7.4 TEST RESULT .....	17
<b>8 - SPURIOUS EMISSION AT ANTENNA TERMINAL</b> .....	<b>19</b>
8.1 STANDARD APPLICABLE.....	19
8.2 MEASUREMENT PROCEDURE .....	19
8.3 TEST RESULT .....	19
<b>9 - AC LINE CONDUCTED EMISSIONS</b> .....	<b>21</b>
<b>10 - FREQUENCY STABILITY MEASUREMENT</b> .....	<b>22</b>
10.1 PROVISION APPLICABLE .....	22
10.2 TEST PROCEDURE .....	22
10.3 TEST EQUIPMENT .....	22
10.4 TEST RESULTS.....	23
<b>11 – TRANSIENT FREQUENCY BEHAVIOUR OF THE TRANSMITTER</b> .....	<b>24</b>

11.1 STANDARD APPLICABLE.....	24
11.2 TEST MEASUREMENT .....	24
11.3 TEST RESULTS.....	24

## 1 - GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

The *Kirisun Electronics (Shenzhen) Co., Ltd.*'s Model: PT3208(2) or the "EUT" as referred to in this report is an FM Handheld Transceiver, which measures approximately 8.5" L x 1.1" W x 2.3" H.

\* *The test data gathered are from typical production samples provided by the manufacturer.*

### 1.2 Objective

This report is prepared on behalf of *Kirisun Electronics (Shenzhen) Co., Ltd.* in accordance with Part 90 Subpart A, and Subpart I of the Federal Communication Commissions rules.

The objective of the manufacturer is to demonstrate compliance with FCC rules for effective radiated power, modulation characteristics, occupied bandwidth, radiated spurious emissions, and frequency stability.

### 1.3 Related Grant/Submission

No Related Submittals.

### 1.4 Test Methodology

Measurements contained in this report were also conducted with TIA/EIA Standard 603, Telecommunications Industry Association Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### 1.5 Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-1992.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, CISPR 22: 1997, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

## 1.6 Test Equipment List

Manufacturer	Description	Model	Serial Number	Cal. Due Date
HP	Spectrum Analyzer	8568B	2517A01610	2003-10-30
HP	Spectrum Analyzer	8593A	29190A00242	2004-05-01
HP	Amplifier	8447E	1937A01054	2004-05-01
HP	Quasi-Peak Adapter	85650A	2521A00718	2004-05-01
Com-Power	Biconical Antenna	AB-100	14012	2004-05-01
Com-Power	LISN	LI-200	12005	2004-03-28
Com-Power	LISN	LI-200	12008	2004-03-28
Com-Power	Log Periodic Antenna	AL-100	16091	2004-05-01
Com-Power	Log Periodic Antenna	AB-900	15049	2004-05-01
Rohde & Schwarz	EMI Test Receiver	ESPI	1147 8007 07	2003-12-03
HP	Spectrum Analyzer (9KHz – 40GHz)	8564E	08303	2003-08-01
HP	Spectrum Analyzer (9KHz – 50GHz)	8565EC	06042	2004-05-03
HP	Amplifier (1-26.5GHz)	8449B	3147A00400	2004-03-14
A.H.System	Horn Antenna (700MHz-18GHz)	SAS-200/571	261	2004-05-31
KIKUSUI	Voltmeter	PL2303W	N/A	2003-07-28
Electro Impulse	1000W Attenuator	AX-1000-30	N/A	2003-07-29
Rohde & Schwarz	Generator	SMIQ03	N/A	2003-07-05
Terfronix	Storage Scope	TDS7104	N/A	2003-10-31
Versa	Temperature Chamber	DPSG-PI	124318	2004-04-23
HP	Plotter	7470A	N/A	Not Required

**\* Statement of Traceability:** Bay Area Compliance Laboratory Corp. certifies that all calibration has been performed using suitable standards traceable to NATIONAL INSTITUTE of STANDARDS and TECHNOLOGY. (NIST)

## **2 - SYSTEM TEST CONFIGURATION**

---

### **2.1 Justification**

The EUT was tested under typical operating modes to represent the worst-case results during the final qualification test.

### **2.2 EUT Test Configuration**

The EUT was powered and fully operated by pushing PTT (Push To Talk) button and then change the channel to Low, Middle, and High by selecting the keypad on the EUT.

### **2.3 Special Accessories**

As shown in section 2.7, interface cable used for compliance testing is shielded as normally supplied by customer and its respective support equipment manufacturers.


### **2.4 Schematics / Block Diagram**

Please refer to Appendix D.


### **2.5 Equipment Modifications**

No modification was made by BACL Corp. to make sure the EUT to comply with the applicable limits.

## 2.6 Configuration of Test System

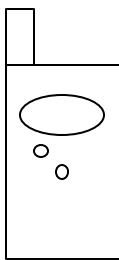

## 2.7 Test Setup Block Diagram

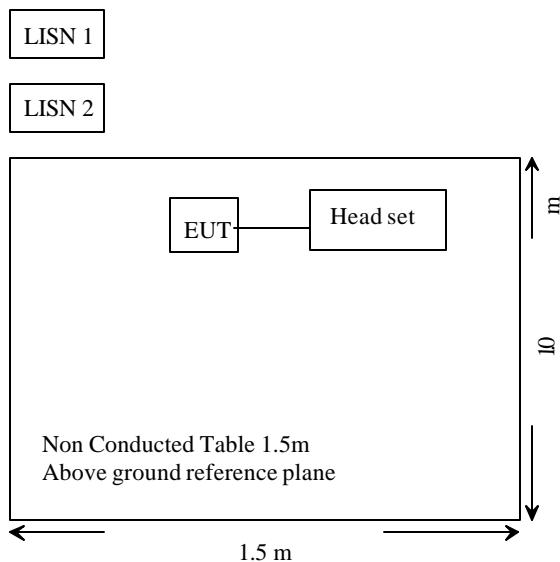

## 3 - REQUIREMENTS OF PROVISIONS

### 3.1 Requirements and Test Summary

FCC Rules	Rules Description	Result
2.1046 90.205 (h)	RF Output Power	Complied
2.1047 90.207 90.210 (b)	Modulation Characteristics	Complied
2.1049 90.209 (b)(5) 90.210 (b)	Occupied Bandwidth	Complied
2.1053 90.210 (b)	Radiated Spurious Emission	Complied
2.1051 90.210 (b)	Spurious Emission at Antenna Port	Complied
2.1055 90.213	Frequency Stability Vs. Temperature Vs. Voltage	Complied
15.107	AC Line Conducted Emission	N/A

### 3.2 Labeling Requirement

Each equipment for which a type acceptance applications is filed on or after May 1, 1981, shall bear an identification plate or label pursuant to §2.295 (Identification of Equipment) and §2.926 (FCC identifier)

In August 1996 the Federal Communications Commissions (FCC) adopted RF exposure guidelines with safety levels for hand-held wireless devices.

Generally users manual contains a RF exposure statement to indicate compliance with FCC requirements.

The users manual should also contain required information and instruction pursuant to 95.653.

## 4 – CONDUCTED OUTPUT POWER

### 4.1 Provision Applicable

Per FCC §2.1046, §90.205(h)((q) and §90.309: the maximum transmitter output power depends on HAAT and service area radius.

### 4.2 Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuator.




### 4.3 Test Equipment

Hewlett Packard HP8564E Spectrum Analyzer, Calibration Due Date: 2003-08-01  
Electro Impulse AX-1000-30 1000W Attenuator, Calibration Due Date: 2003-07-29

### 4.4 Test Results

Channel	Frequency	Output Power in dBm	Output Power in W
Low	450.125	35.67	3.690
Middle	460.050	36.00	3.981
High	469.973	36.00	3.981

Please refer to the following plots.

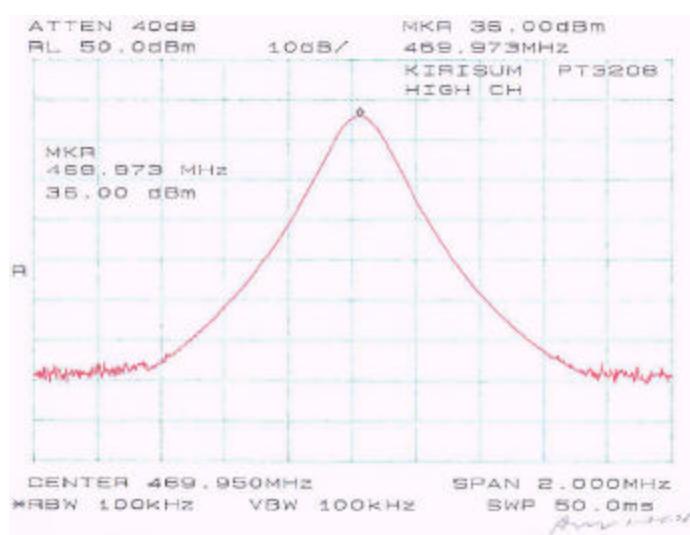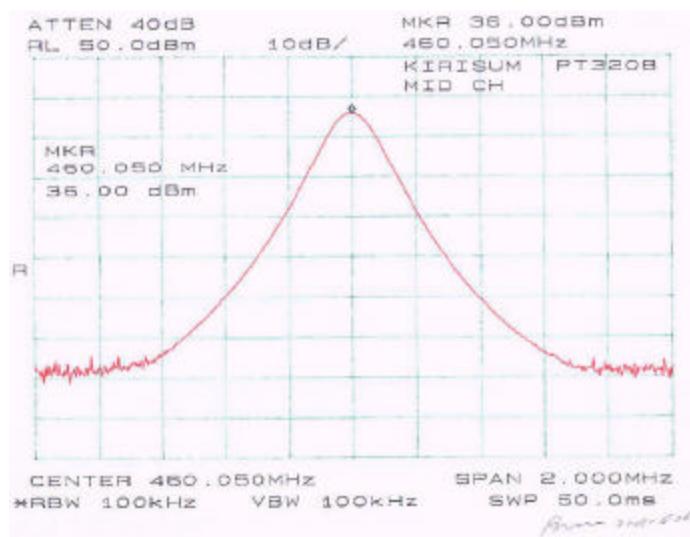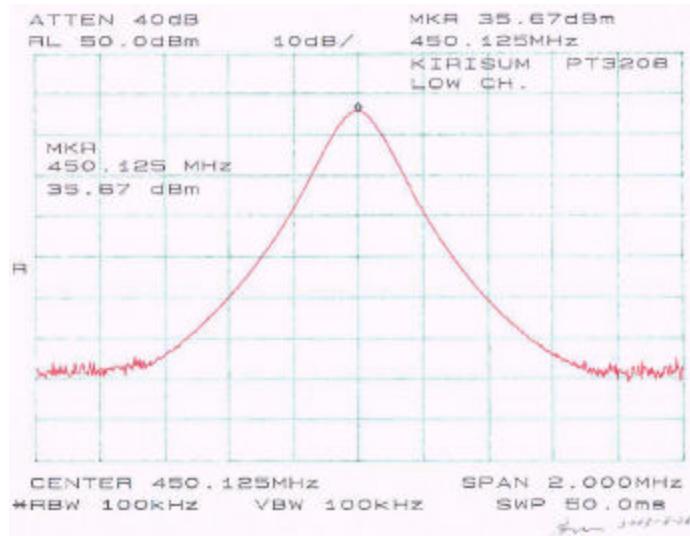

## 5 - MODULATION CHARACTERISTICS

### 5.1 Provision Applicable

Per FCC § 2.1047, § 90.207, and §90.210(b), modulation is required to report.

### 5.2 Test Procedure

#### 5.2.1 Audio Frequency Response

The RF output of the transceiver was connected to the input of a FM deviation meter through sufficient attenuation so as not to overload the meter or distort the reading. An audio signal generator was coupled into the external microphone jack of the transceiver, or alternatively, the microphone element was removed the generator output was connected to the microphone connectors.

The audio signal input level was adjusted to obtain 20% of the maximum rated system deviation at 1 kHz, and recorded as DEV<sub>REF</sub>. With the audio signal generator level unchanged, set the generator frequency between 100 Hz to 5000 Hz. The transmitter deviations (DEV<sub>FREQ</sub>) were measured and the audio frequency response was calculated as

$$20\log_{10} [\text{DEV}_{\text{FREQ}} / \text{DEV}_{\text{REF}}]$$

#### 5.2.2 Audio Low-Pass Filter Response

An audio signal generator and an audio spectrum analyzer were connected to the input and output of the post limiter low pass filter respectively. The audio signal generator frequency was set between 1000 Hz and the upper low pass filter limit. The audio frequency response at test frequency was calculated as

$$\text{LEV}_{\text{FREQ}} - \text{LEV}_{\text{REF}}$$

#### 5.2.3 Modulation Limiting

With the same setup as section 5.2.1 above, at three different modulating frequencies, the output level of the audio generator was varied and the FM deviation level was recorded.

### 5.3 Test Equipment

Hewlett Packard HP8564E Spectrum Analyzer, Cal. Due Date: 2003-08-01

Hewlett Packard HP 7470A Plotter, Cal. Due Date: Not Required



Hewlett Packard HP8901A Modulation Analyzer, Cal. Due Date: 2003-10-18



Tertronix TDS7104 Storage Scope, Cal. Due Date: 2003-10-31

Nan Yan NY2201 Audio Generator

### 5.4 Test Results

The plot(s) of modulation characteristic is presented hereinafter as reference.

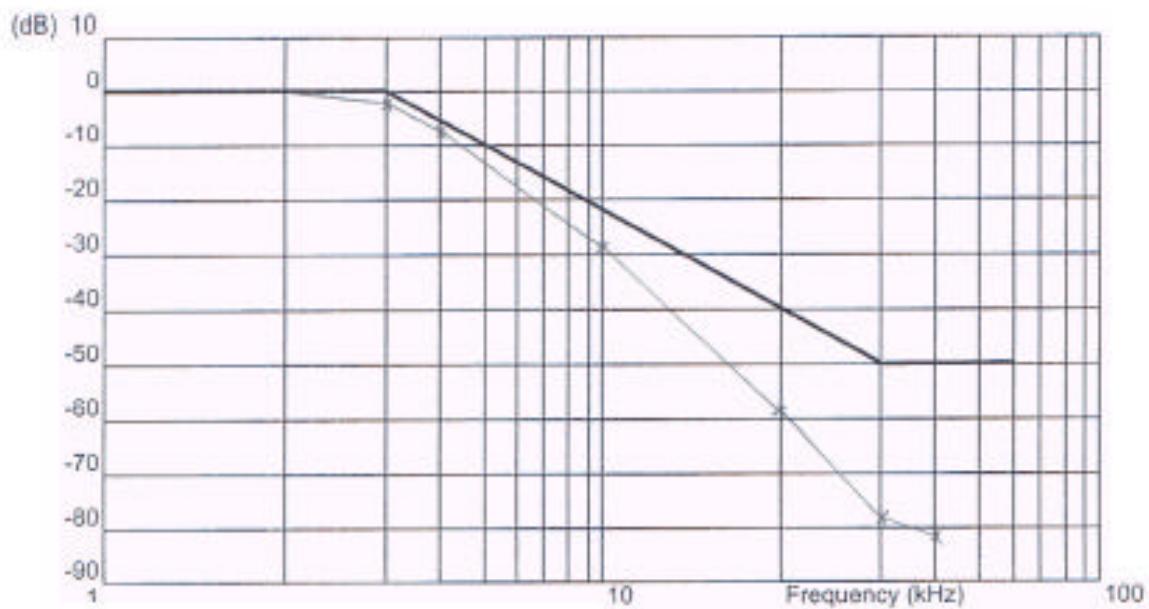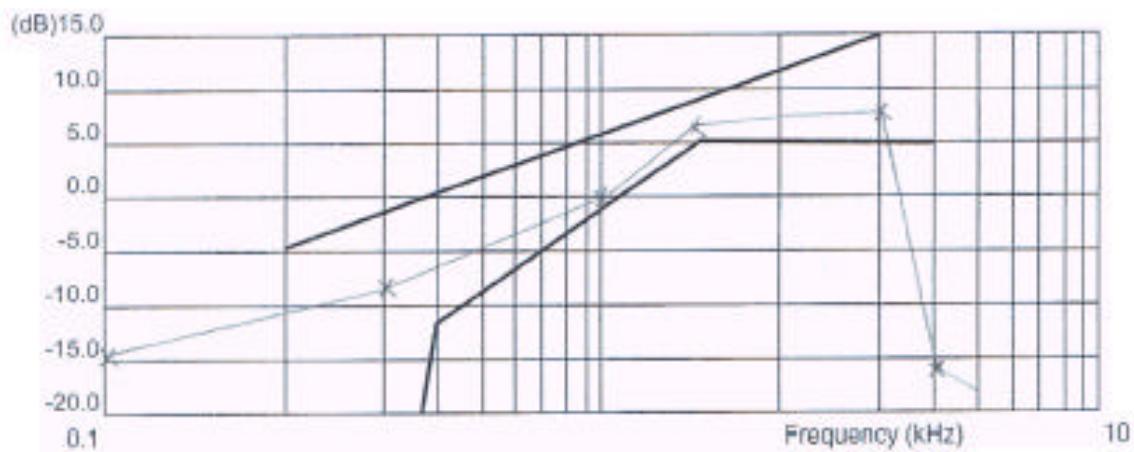

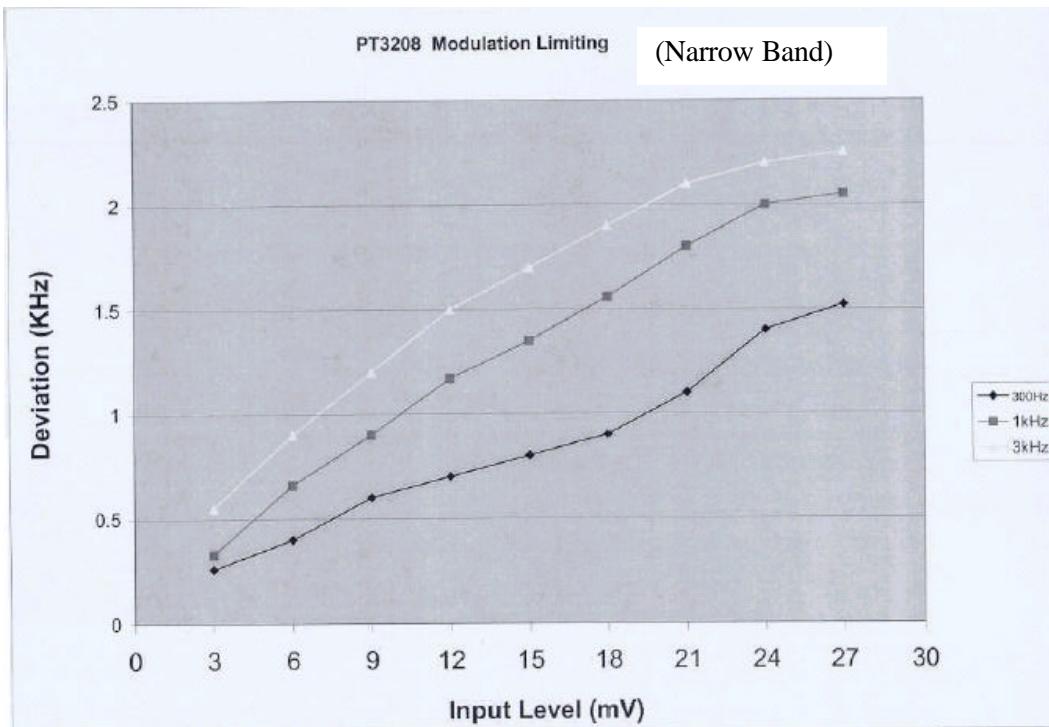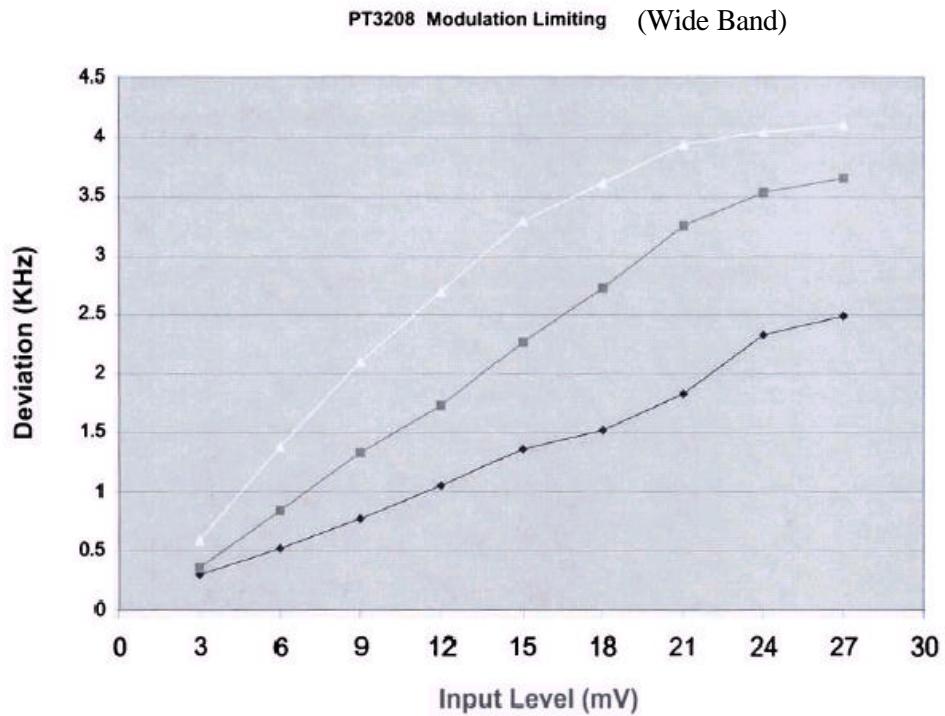

## 6 - OCCUPIED BANDWIDTH OF EMISSION

### 6.1 Provision Applicable

Per FCC §2.1049, §90.209(b)(5), and §90.210 (b), the authorized bandwidth is 20kHz for operating band within 25-50 MHz.

For any frequency removed from the center of the assigned channel by more than 50 percent up to and including 100 percent of the authorized bandwidth, at least 25 dB.

On any frequency removed from the center of the assigned channel by more than 100 percent up to and including 250 percent, at least 35 dB.

On any frequency removed from the center of the assigned channel by more than 250 percent at least:

$$43 + 10 \log(P) \text{ dB}$$

### 6.2 Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. The RBW of the spectrum analyzer was set at 300Hz, and the spectrum was recorded in  $\pm$  50KHz from the carrier Frequency.

### 6.3 Test Equipment

Hewlett Packard HP8564E Spectrum Analyzer, Cal. Due Date: 2003-08-01

Nan Yan NY2201 Audio Generator

Hewlett Packard HP8901A Modulation Analyzer, Cal. Due Date: 2003-10-18

### 6.4 Test Results



Test Result: Pass



Please refer the following curve and plots.

### 6.5 Emission Designator

Narrow Band:  $2M + 2D = (2 \times 3 \text{ kHz}) + (2 \times 2.5 \text{ kHz}) = 11\text{K0F3E}$

Wide Band:  $2M + 2D = (2 \times 3 \text{ kHz}) + (2 \times 4.5 \text{ kHz}) = 15\text{K0F3E}$

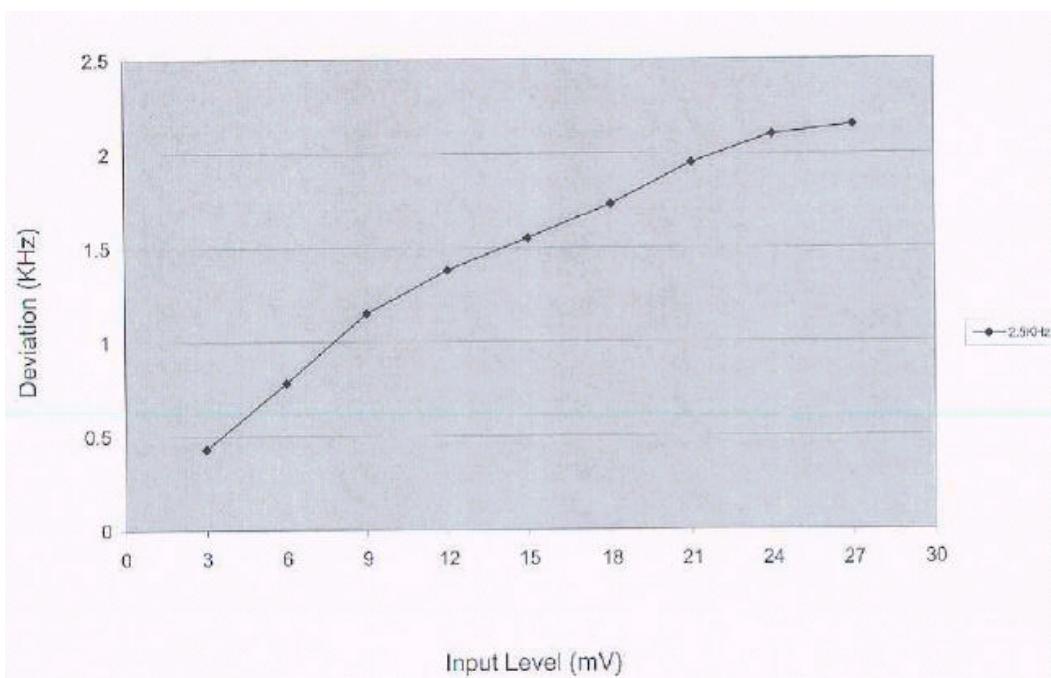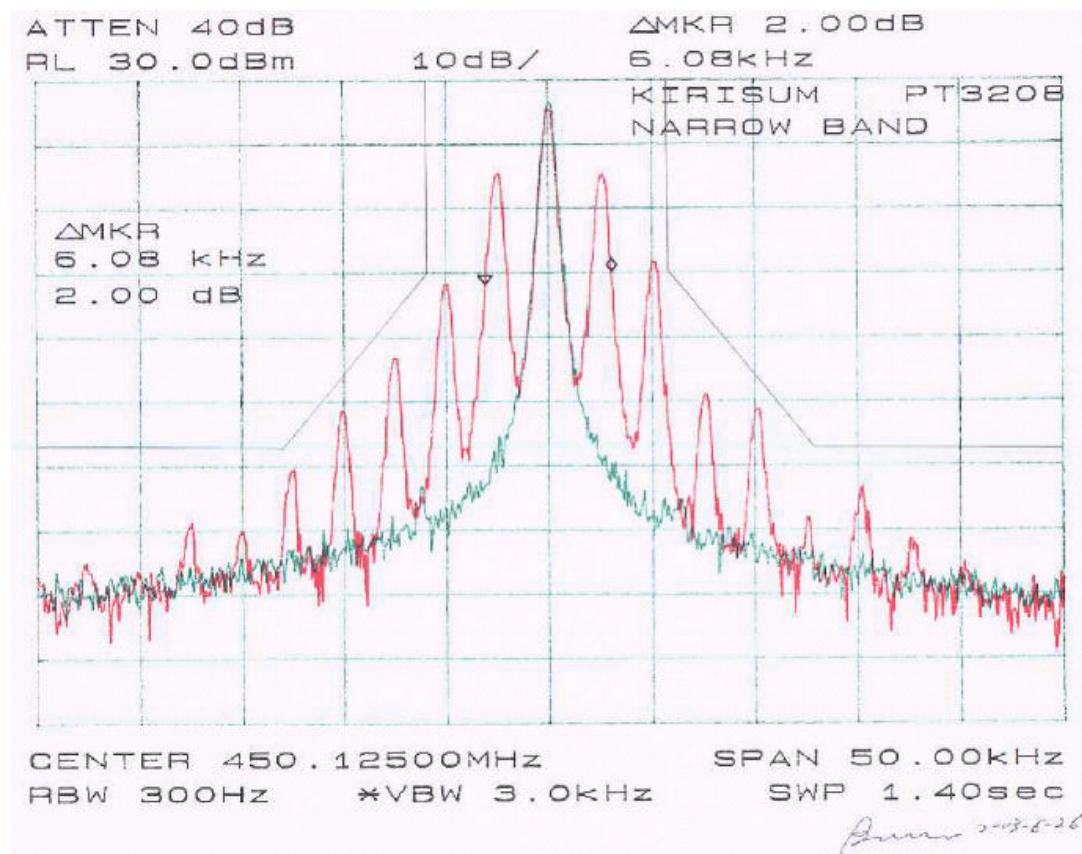

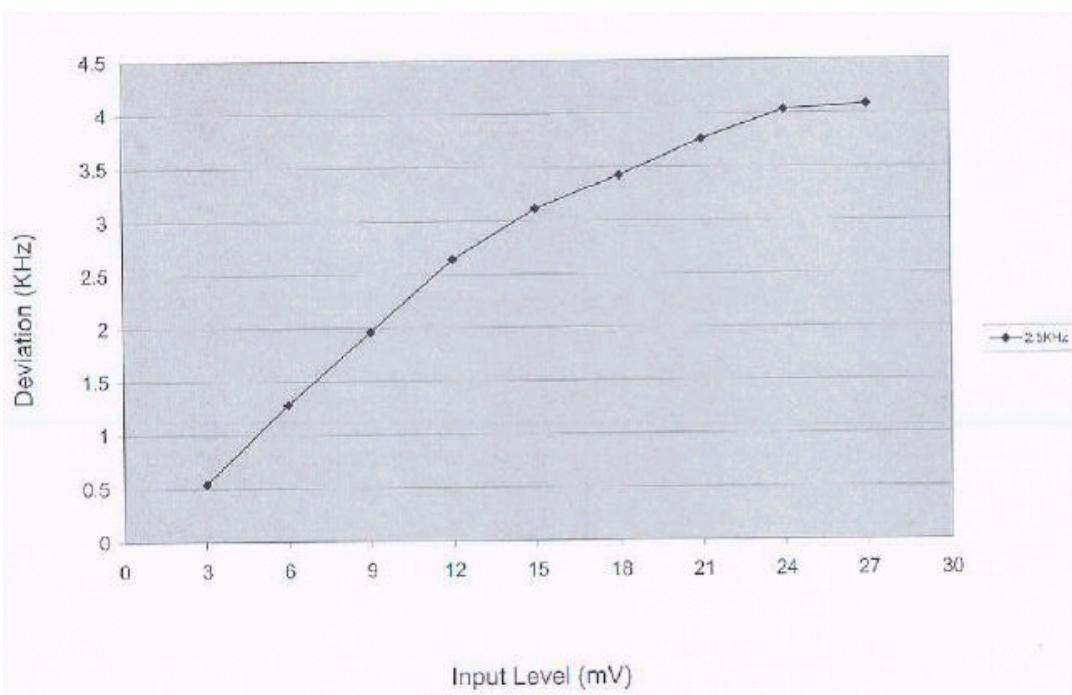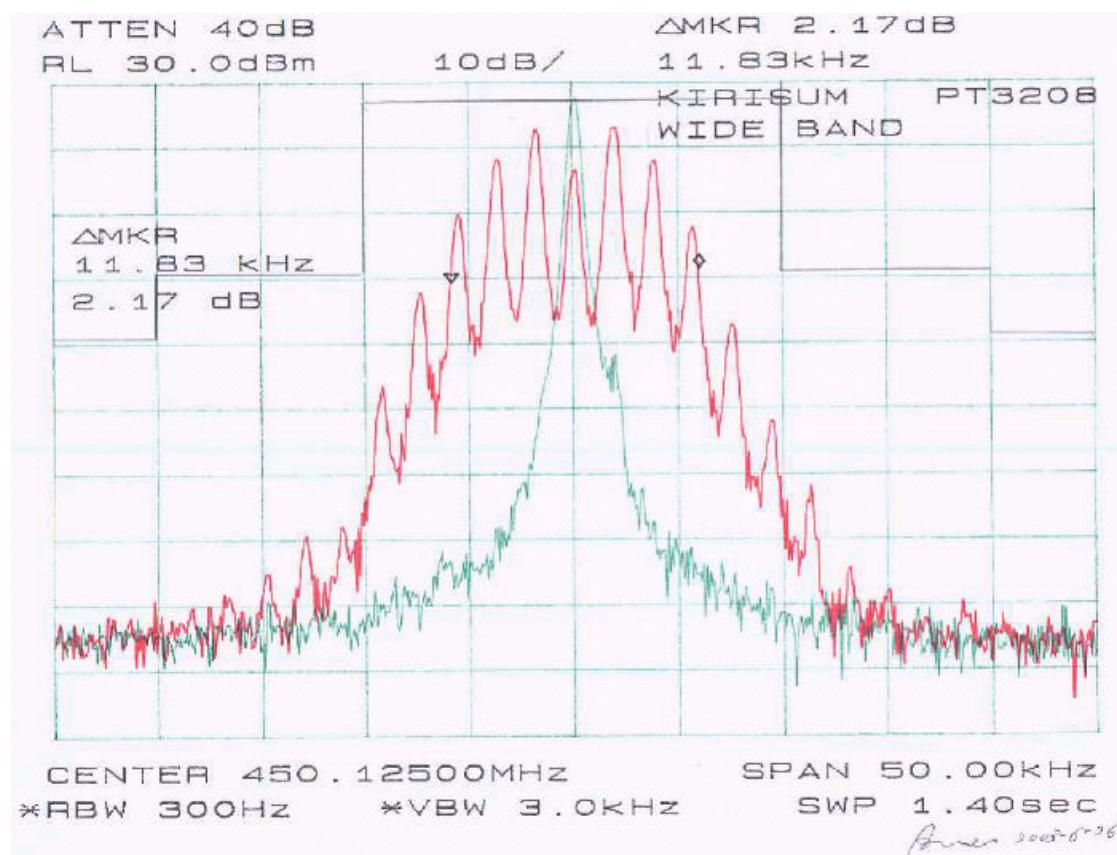

## 7 - RADIATED SPURIOUS EMISSION

### 7.1 Provision Applicable

Per FCC §2.1051 and FCC §90.210(b)

On any frequency removed from the center of the assigned channel by more than 250 percent at least:

$$43 + 10 \log(P) \text{ dB}$$

### 7.2 Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =  $10 \lg (\text{TXpwr in Watts}/0.001)$  – the absolute level

Spurious attenuation limit in dB =  $43 + 10 \log_{10} (\text{power out in Watts})$

### 7.3 Test Equipment

Com-Power AL-100 Antenna, Cal. Due Date: 2004-05-01

Com-Power AB-100 Antenna, Cal. Due Date: 2004-05-01

Com-Power AB-900 Antenna, Cal. Due Date: 2004-05-01

HP 8564E Spectrum Analyzer, Cal. Due Date: 2003-08-01

A.H.System SAS-200 Antenna, Cal. Due Date: 2004-05-31

HP 8449B Preamplifiers, Cal. Due Date: 2004-03-14

Rohde & Schwarz SICQ03 Generator, Cal. Due Date: 2003-07-05

### 7.4 Test Result

Low Frequency: -19.4 dB at 900.24 MHz

Middle Frequency: -19.7 dB 920.1 MHz

High Frequency: -19.5 dB at 939.9 MHz

Indicated		EUT			Generator						Standard	
Frequency MHz	Ampl. dBuV/m	Table Degree	Test Antenna Height Meter	Polar H/V	Substitution		Antenna Polar H/V	Gain Corrected	Cable Loss dB	Absolute Level dBm	FCC Limit dBm	FCC Margin DB
Low Frequency												
450.12	117.7	15	1.2	v	450.12	27.7	v	0	0.1	27.6		
450.12	104.9	30	1.5	h	450.12	20.4	h	0	0.1	20.3		
900.24	38.5	0	1.2	v	900.24	-32.1	v	0	0.3	-32.4	-13	-19.4
900.24	35.6	90	1.5	h	900.24	-35.6	h	0	0.3	-35.9	-13	-22.9
1350.36	33.4	130	1.2	v	1350.36	-39.7	v	0	0.5	-40.2	-13	-27.2
1350.36	31.2	150	1.5	h	1350.36	-40.5	h	0	0.5	-41	-13	-28
Middle Frequency												
460.05	116.5	30	1.5	v	460.05	25.6	v	0	0.1	25.5		
460.05	102.3	15	1.5	h	460.05	19.4	h	0	0.1	19.3		
920.1	38.2	90	1.8	v	920.1	-32.4	v	0	0.3	-32.7	-13	-19.7
920.1	35.1	110	1.5	h	920.1	-35.8	h	0	0.3	-36.1	-13	-23.1
1380.15	33.2	180	1.5	v	1380.15	-40.1	v	0	0.5	-40.6	-13	-27.6
1380.15	30.9	230	1.2	h	1380.15	-41.2	h	0	0.5	-41.7	-13	-28.7
High Frequency												
469.95	117.5	15	1.5	v	469.95	27.7	v	0	0.1	27.6		
469.95	104.1	30	1.5	h	469.95	20.4	h	0	0.1	20.3		
939.9	38.4	60	1.2	v	939.9	-32.2	v	0	0.3	-32.5	-13	-19.5
939.9	35.5	150	1.5	h	939.9	-35.7	h	0	0.3	-36	-13	-23
1409.85	33.4	90	2	v	1409.85	-39.8	v	0	0.5	-40.3	-13	-27.3
1409.85	31.1	220	1.5	h	1409.85	-40.9	h	0	0.5	-41.4	-13	-28.4

**Result:** Pass

## **8 - SPURIOUS EMISSION AT ANTENNA TERMINAL**

---

### **8.1 Standard Applicable**

Per FCC §2.1051 and FCC §90.210(b)

On any frequency removed from the center of the assigned channel by more than 250 percent at least:




$43 + 10 \log(P) \text{ dB}$

### **8.2 Measurement Procedure**

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

### **8.3 Test Result**

Please refer to following plots.

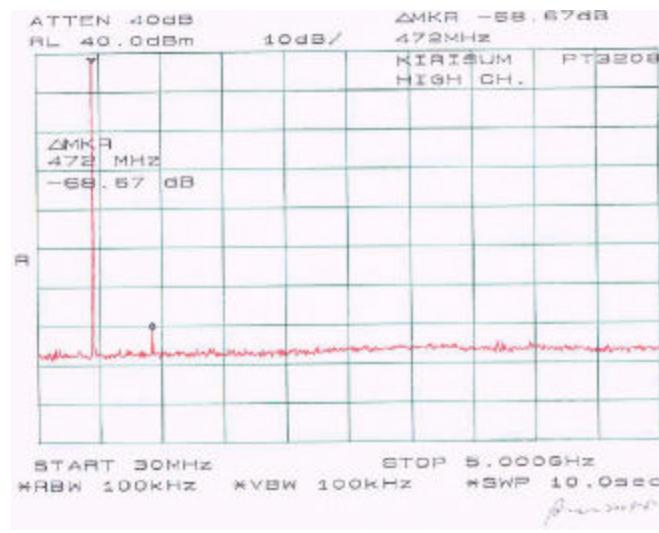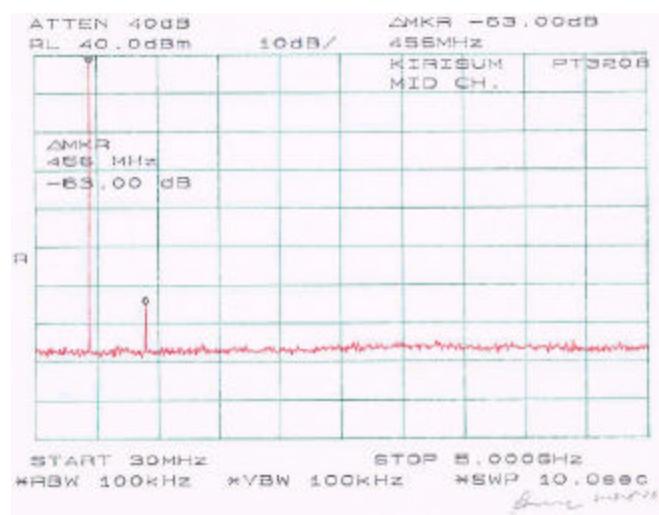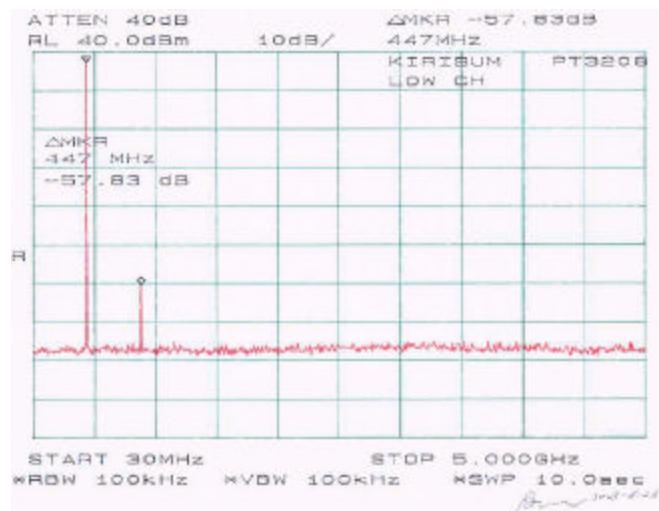

---

## **9 - AC LINE CONDUCTED EMISSIONS**

---

Not applicable because of battery power supply.

## 10 - FREQUENCY STABILITY MEASUREMENT

### 10.1 Provision Applicable

According to §90.213, for operating band within 421-512MHz and output power > 2 watts, the frequency stability limit is 2.5 ppm.

### 10.2 Test Procedure

#### 10.2.1 Frequency stability versus environmental temperature

The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feedthrough attenuators. The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency of the output signal was recorded from the counter.

#### 10.2.2 Frequency Stability versus Input Voltage

At room temperature ( $25\pm5^{\circ}\text{C}$ ), an external variable DC power supply was connected to the EUT. The frequency of the transmitter was measured for 115%, 100% and 85% of the nominal operating input voltage.

### 10.3 Test Equipment

Temperature Chamber,  $-50^{\circ}\text{C}$  to  $+100^{\circ}\text{C}$   
Hewlett Packard HP8568B Spectrum Analyzer, Cal. Due Date: 2003-10-30  
Hewlett Packard HP 7470A Plotter, Cal. Due Date: Not Required

## 10.4 Test Results

Reference Frequency: 445.0000 MHz, Limit: 2.5 ppm			
Environment Temperature (°C)	Power Supplied (Vdc)	Frequency Measure with Time Elapsed	
		MCF (MHz)	PPM Error
60	7.5	450.1257	1.6
50	7.5	450.1257	1.6
40	7.5	450.1255	1.1
30	7.5	450.1253	0.7
20	7.5	450.1250	0
10	7.5	450.1250	0
0	7.5	450.1250	0
-10	7.5	450.1248	-0.4
-20	7.5	450.1248	-0.4
-30	7.5	450.1248	-0.4

### Frequency Stability Versus Input Voltage

Reference Frequency: 450.1250 MHz, Limit: 25 ppm						
Power Supplied (Vdc)	Frequency Measure with Time Elapsed					
	2 Minutes		5 Minutes		10 Minutes	
MHz	ppm	MHz	ppm	MHz	ppm	
5.8	450.1250	0	450.1248	-0.4	450.1248	-0.4

Battery end point: 5.8V

Conclusion: The EUT complied with the applicable Frequency Stability Limits.

## 11 – TRANSIENT FREQUENCY BEHAVIOUR OF THE TRANSMITTER


### 11.1 Standard Applicable

The transient periods are given in following table:

Frequency Range	30 MHz to 300 MHz	Above 300 MHz to 500 MHz	Above 500 MHz to 1000MHz
$t_1(\text{ms})$	5.0	10.0	20.0
$t_2(\text{ms})$	20.0	25.0	50.0
$t_3(\text{ms})$	5.0	10.0	10.0

### 11.2 Test Measurement

The transmitter shall be placed in the test fixture and the measurement shown in following figure shall be used.

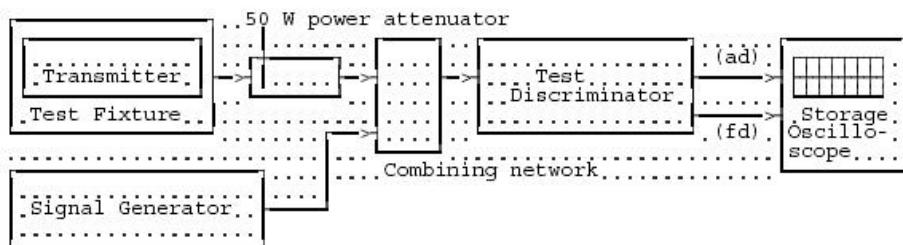

Two signals shall be connected to the test discriminator via a combining network.

The transmitter output from the test fixture shall be connected a to a 50  $\Omega$  power anteuator.

The output of the power attenuator shall be connected to the test discriminator via one input of the combining network.

A test signal generator shall be connected to the second input of the combining network.

The test signal shall be adjusted to the nominal frequency of the transmitter.

The test signal shall be modulated by a frequency of 1 kHz with a deviation equal to  $\pm$  the value of the relevant channel separation.

**The test signal level shall be adjusted to correspond to 0.1% of the power of the transmitter under test measured at the input of the test discriminator. This level shall be maintained throughout the measurement.**

The amplitude difference (ad) and the frequency difference (fd) output of the test discriminator shall be connected to a storage oscilloscope.

### 11.3 Test Results

Please refer to the following plots.

