

FCC REPORT

Applicant: J.Y.M. DIGITAL TECHNOLOGY LIMITED

Address of Applicant: NO.98 ZHEN TOU ROAD, XIN QIAO, SHA JING TOWN,
BAO'AN DISTRICT, SHENZHEN CITY GUANG DONG
PROVINCE. CHINA 518104

Equipment Under Test (EUT)

Product Name: Bluetooth Speaker

Model No.: A102C, A102X(X=0~9)

FCC ID: Q62JYMA102C1023ZY

Applicable standards: FCC CFR Title 47 Part 15:2011

Date of sample receipt: 20 Sep., 2012

Date of Test: 22 to 28 Sep., 2012

Date of report issued: 28 Sep., 2012

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Version

Version No.	Date	Description
00	28 Sep., 2012	Original

Prepared By:

Joe. Zhou

Date:

28 Sep., 2012

Project Engineer

Check By:

Bruce Zhang

Date:

28 Sep., 2012

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.	5
5.3 TEST MODE.....	7
5.4 TEST FACILITY	7
5.5 TEST LOCATION	7
5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	7
5.7 TEST INSTRUMENTS LIST	8
6 TEST RESULTS AND MEASUREMENT DATA.....	9
6.1 ANTENNA REQUIREMENT:	9
6.2 CONDUCTED EMISSIONS.....	10
6.3 CONDUCTED OUTPUT POWER	13
6.4 20dB OCCUPY BANDWIDTH.....	17
6.5 CARRIER FREQUENCIES SEPARATION.....	21
6.6 HOPPING CHANNEL NUMBER	26
6.7 DWELL TIME	28
6.8 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	30
6.9 BAND EDGE	31
6.9.1 Conducted Emission Method	31
6.9.2 Radiated Emission Method.....	35
6.10 SPURIOUS EMISSION	37
6.10.1 Conducted Emission Method.....	37
6.10.2 Radiated Emission Method.....	41
7 TEST SETUP PHOTO.....	47
8 EUT CONSTRUCTIONAL DETAILS	49

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.107	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass
Radiated Emission	15.205/15.209/15.109	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	J.Y.M. DIGITAL TECHNOLOGY LIMITED
Address of Applicant:	NO.98 ZHEN TOU ROAD, XIN QIAO, SHA JING TOWN, BAO'AN DISTRICT, SHENZHEN CITY GUANG DONG PROVINCE. CHINA 518104
Manufacturer/ Factory:	J.Y.M. DIGITAL TECHNOLOGY LIMITED
Address of Manufacturer/ Factory:	NO.98 ZHEN TOU ROAD, XIN QIAO, SHA JING TOWN, BAO'AN DISTRICT, SHENZHEN CITY GUANG DONG PROVINCE. CHINA 518104

5.2 General Description of E.U.T.

Product Name:	Bluetooth Speaker
Model No.:	A102C, A102X(X=0~9)
Operation Frequency:	2402MHz~2480MHz
Transfer rate:	1/2/3 Mbits/s
Number of channel:	79
Modulation type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Modulation technology:	FHSS
Antenna Type:	PCB Antenna
Antenna gain:	0 dBi
Power supply:	Rechargeable Li-ion Battery DC 3.6~4.2V
Remark:	A102C, A102X(X=0~9) were identical inside, since the electrical circuit design, layout, components used and internal wiring were identical for the above items, with only difference being the model name for marketing requirement. So we selected A102C for full test.

Operation Frequency each of channel for GFSK, $\pi/4$ -DQPSK, 8DPSK							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		
Remark: Channel 0, 39 & 78 selected for GFSK, $\pi/4$ -DQPSK and 8DPSK.							

5.3 Test mode

Transmitting mode:	Keep the EUT in transmitting mode with worse case data rate.
Remark	8DPSK with DH5 were the worst case mode.

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 817957**

China Certification & Inspection Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 817957, February 27, 2012

- **Industry Canada (IC)**

The 3m Semi-anechoic chamber of China Certification & Inspection Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
LENOVO	Notebook	ThinkPad SL510	LR-7Y97D	DoC

5.5 Test Location

All tests were performed at:

China Certification & Inspection Services Co., Ltd.

Address: 1st Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

Tel: 0755-23118282

Fax: 0755-23116366

5.6 Other Information Requested by the Customer

None.


5.7 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	3m Semi- Anechoic Chamber	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	June 09 2012	June 09 2013
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	CCIS0002	N/A	N/A
3	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	CCIS0005	June 04 2012	June 04 2013
4	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	CCIS0006	May 30 2012	May 30 2013
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
6	Coaxial Cable	CCIS	N/A	CCIS0016	Apr. 01 2012	Apr. 01 2013
7	Coaxial Cable	CCIS	N/A	CCIS0017	Apr. 01 2012	Apr. 01 2013
8	Coaxial cable	CCIS	N/A	CCIS0018	Apr. 01 2012	Apr. 01 2013
9	Coaxial Cable	CCIS	N/A	CCIS0019	Apr. 01 2012	Apr. 01 2013
10	Coaxial Cable	CCIS	N/A	CCIS0087	Apr. 01 2012	Apr. 01 2013
11	Amplifier(10kHz-1.3GHz)	HP	8447D	CCIS0003	Apr. 01 2012	Apr. 01 2013
12	Amplifier(1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	June 09 2012	June 09 2013
13	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	Apr. 01 2012	Mar. 31 2013
14	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 30 2012	Mar. 29 2013
15	Printer	HP	HP LaserJet P1007	N/A	N/A	N/A
16	Positioning Controller	UC	UC3000	CCIS0015	N/A	N/A

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (dd-mm-yy)	Cal. Due date (dd-mm-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	Oct. 10 2011	Oct. 10 2012
2	EMI Test Receiver	Rohde & Schwarz	ESPI	CCIS0022	Mar. 16 2012	Mar. 16 2013
4	LISN	CHASE	MN2050D	CCIS0074	Apr. 14 2012	Apr. 14 2013
5	Coaxial Cable	CCIS	N/A	CCIS0086	Mar. 01 2012	Mar. 01 2013
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

6 Test results and Measurement Data

6.1 Antenna requirement:

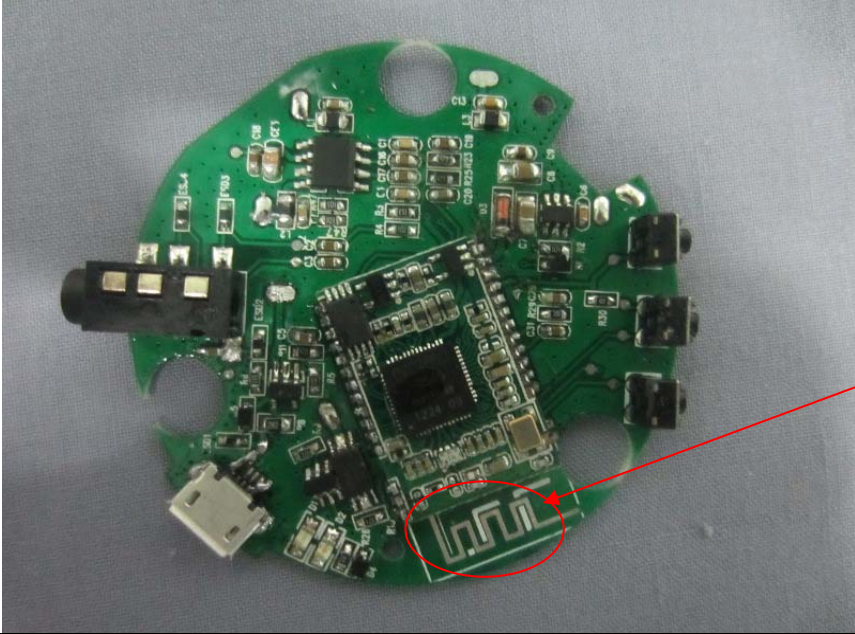
Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<i>15.203 requirement:</i> <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i> <i>15.247(c) (1)(i) requirement:</i> <i>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</i>	
E.U.T Antenna:	
The antenna port is a PCB Antenna; the best case gain of the antenna is 0 dBi.	
	

6.2 Conducted Emissions

Test Requirement:	FCC Part15 B Section 15.107														
Test Method:	ANSI C63.4:2003														
Test Frequency Range:	150kHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9kHz, VBW=30kHz, Sweep time=auto														
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * Decreases with the logarithm of the frequency.	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	Reference Plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.														
Test Instruments:	Refer to section 5.7 for details														
Test mode:	Charging mode														
Test results:	Pass														

Measurement Data:


Line:

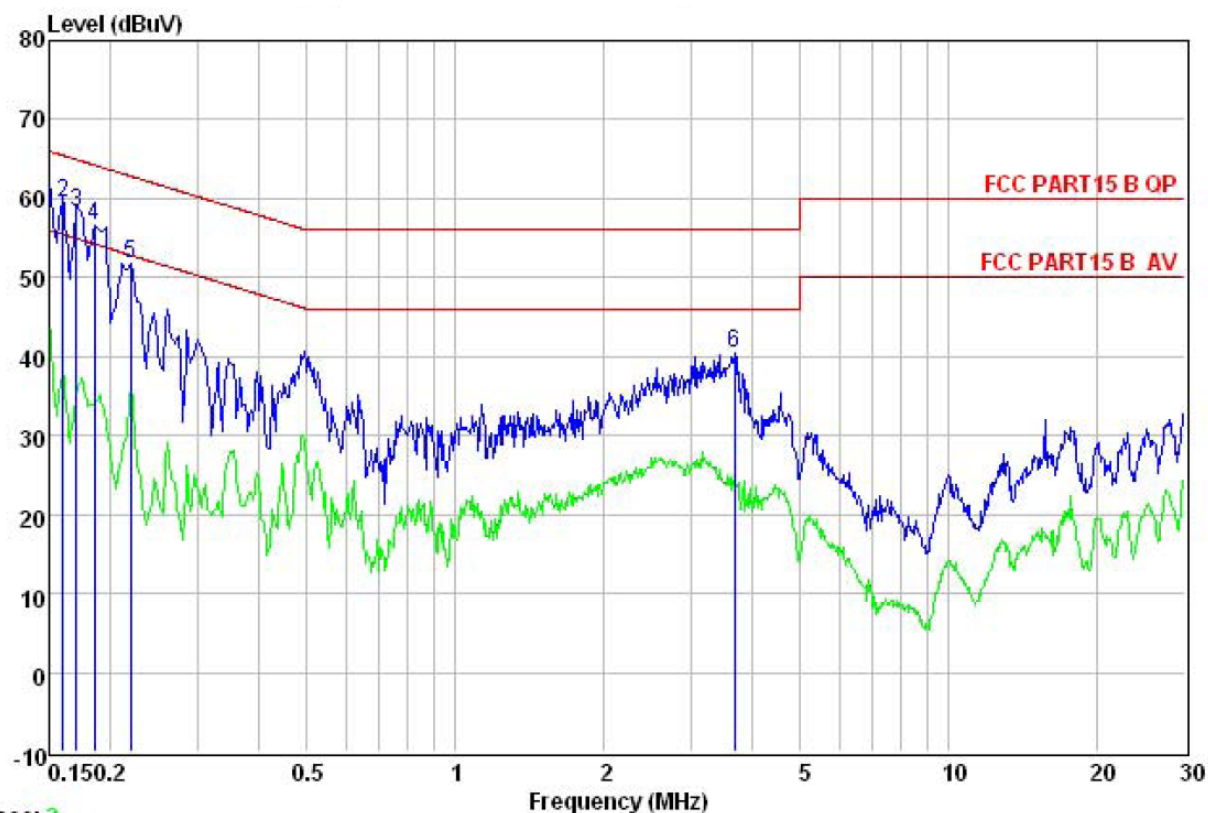

Site : CCIS Conducted Test Site
 Condition : FCC PART15 B QP LISN LINE
 Job NO. : 180RF
 Test Mode : Charging mode
 Test engineer: Joe

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.150	49.89	10.25	0.79	60.93	66.00	-5.07	QP
2	0.160	48.46	10.24	0.78	59.48	65.47	-5.99	QP
3	0.170	47.16	10.23	0.78	58.17	64.94	-6.77	QP
4	0.185	45.69	10.22	0.77	56.68	64.24	-7.56	QP
5	0.220	40.76	10.22	0.76	51.74	62.83	-11.09	QP
6	3.681	29.26	10.29	0.89	40.44	56.00	-15.56	QP

Neutral:

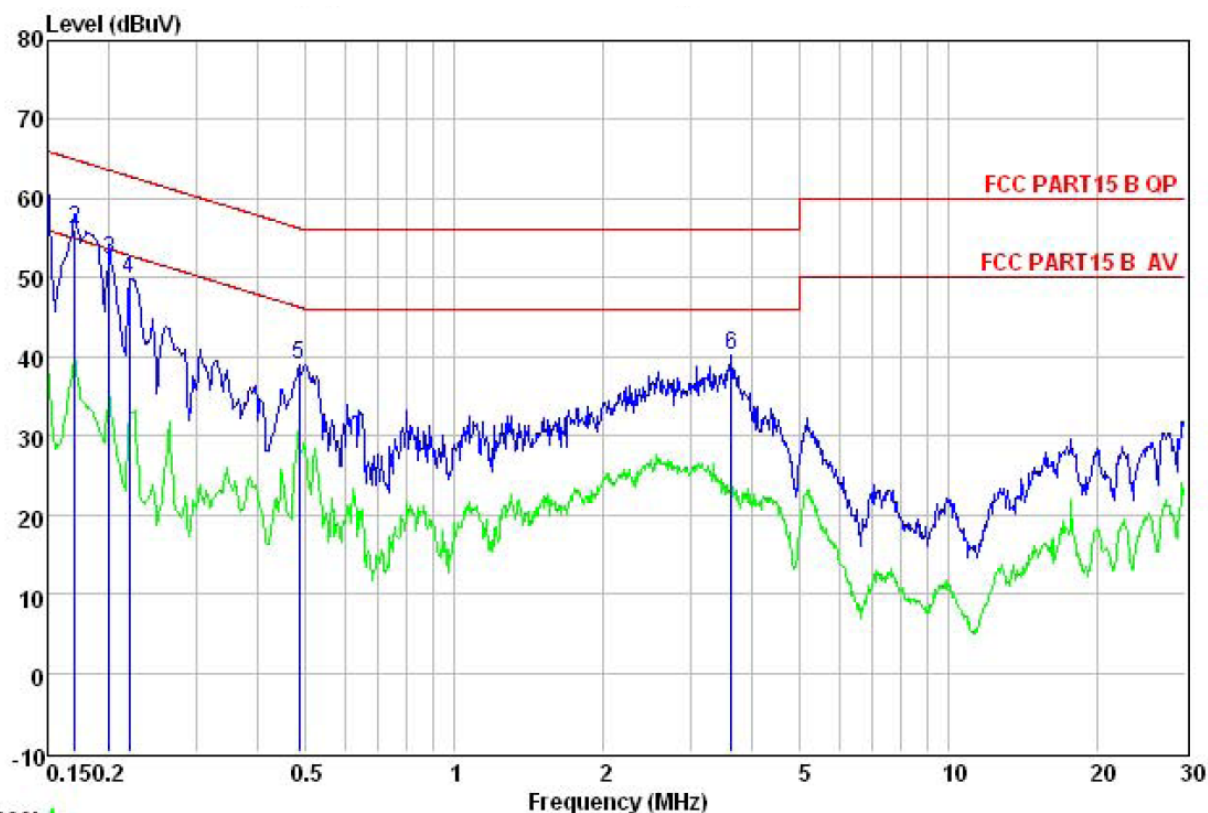

Trace: 4


Site : CCIS Conducted Test Site
Condition : FCC PART15 B QP LISN NEUTRAL
Job NO. : 180RF
Test Mode : Charging mode
Test engineer: Joe

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.150	49.04	10.27	0.79	60.10	66.00	-5.90	QP
2	0.170	45.00	10.25	0.78	56.03	64.94	-8.91	QP
3	0.200	41.19	10.23	0.76	52.18	63.62	-11.44	QP
4	0.220	38.88	10.23	0.76	49.87	62.83	-12.96	QP
5	0.484	28.00	10.28	0.76	39.04	56.27	-17.23	QP
6	3.623	29.00	10.28	0.90	40.18	56.00	-15.82	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

6.3 Conducted Output Power

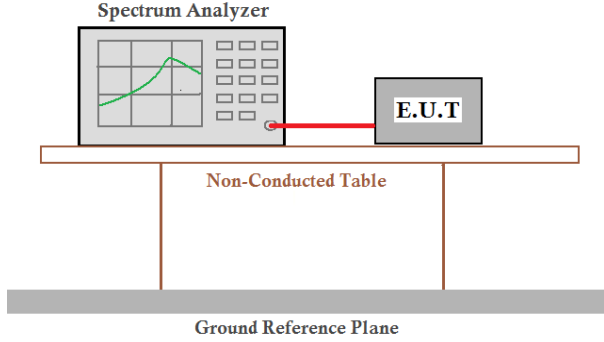
Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2003 and DA00-705
Receiver setup:	RBW=1MHz, VBW=3MHz, Detector=Peak
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass

Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-3.84	30.00	Pass
Middle	-1.42	30.00	Pass
Highest	-0.56	30.00	Pass
$\pi/4$ -DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-2.33	30.00	Pass
Middle	0.23	30.00	Pass
Highest	1.18	30.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-1.60	30.00	Pass
Middle	-1.60	30.00	Pass
Highest	-0.68	30.00	Pass


Test plot as follows:

Modulation mode:	GFSK
------------------	------

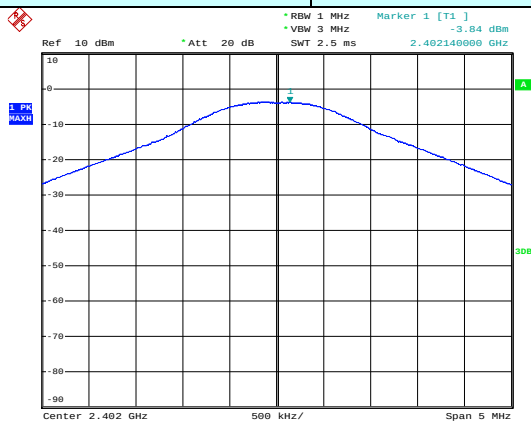


Date: 25.SEP.2012 04:33:56

Lowest channel

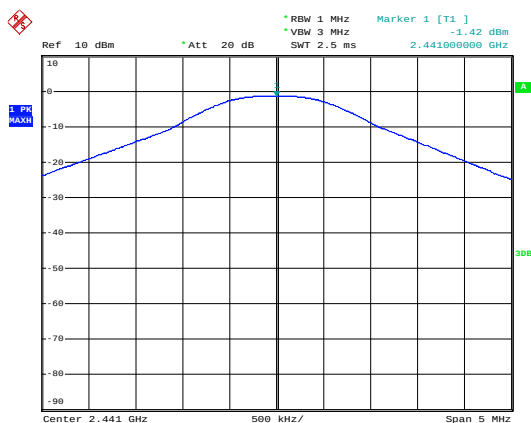

Date: 25.SEP.2012 04:42:03

Middle channel

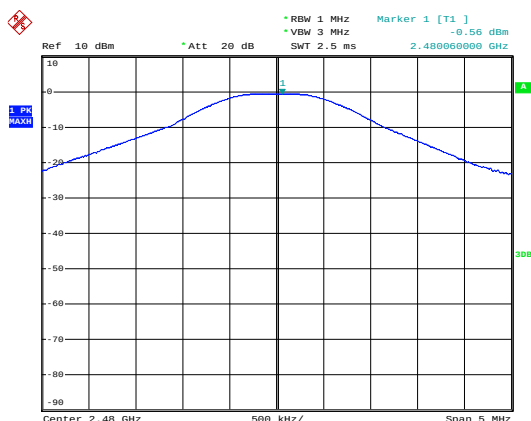


Date: 25.SEP.2012 04:50:13

Highest channel


Modulation mode:

$\pi/4$ -DQPSK

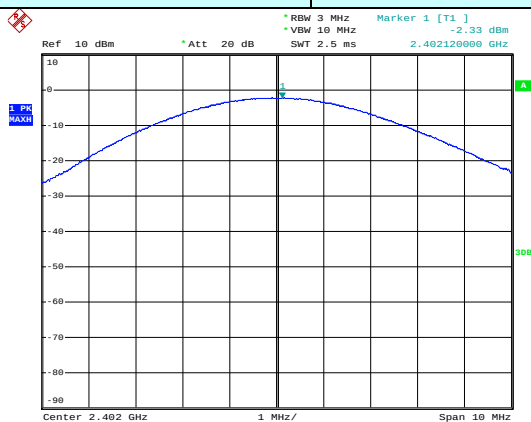


Date: 25.SEP.2012 05:04:00

Lowest channel

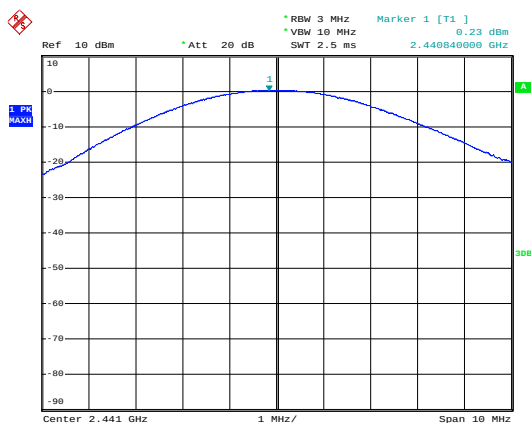

Date: 25.SEP.2012 05:10:48

Middle channel

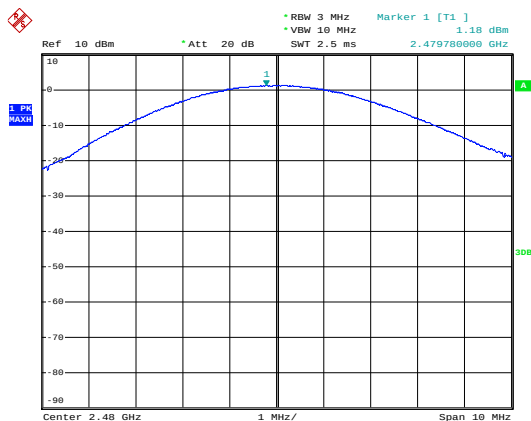


Date: 25.SEP.2012 05:21:47

Highest channel


Modulation mode:

8DPSK

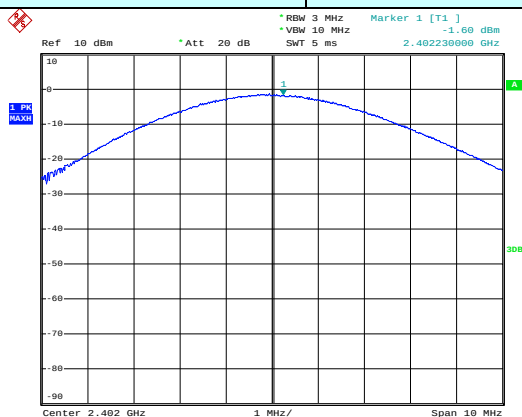


Date: 26.SEP.2012 11:50:09

Lowest channel

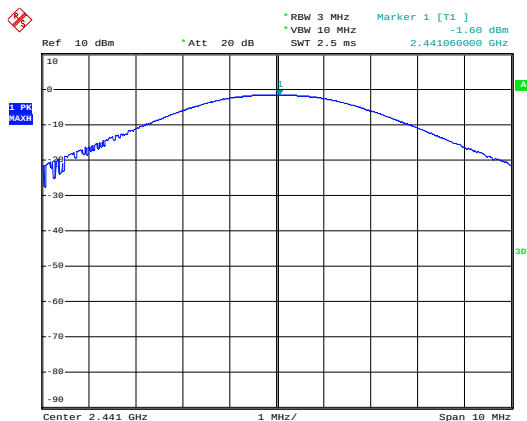

Date: 25.SEP.2012 05:44:18


Middle channel

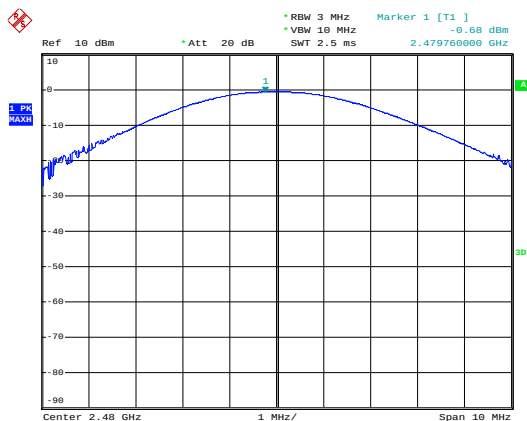

Date: 25.SEP.2012 05:53:18

Highest channel

6.420dB Occupy Bandwidth

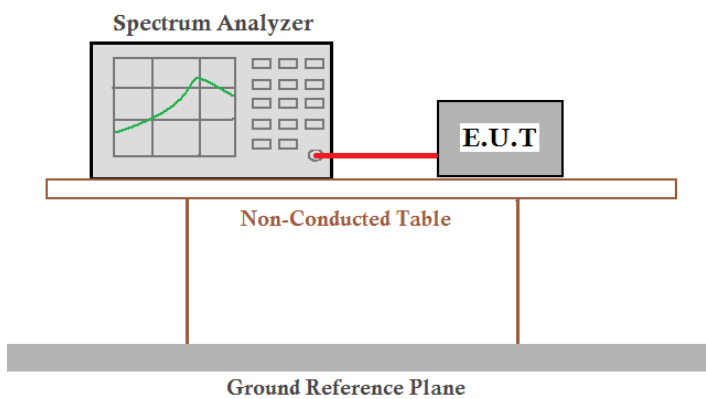Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and DA00-705
Receiver setup:	RBW=30kHz, VBW=100kHz,detector=Peak
Limit:	NA
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass


Measurement Data

Test channel	20dB Occupy Bandwidth (kHz)		
	GFSK	$\pi/4$ -DQPSK	8DPSK
Lowest	932	1296	1278
Middle	936	1300	1294
Highest	928	1300	1278

Test plot as follows:


Modulation mode:

GFSK

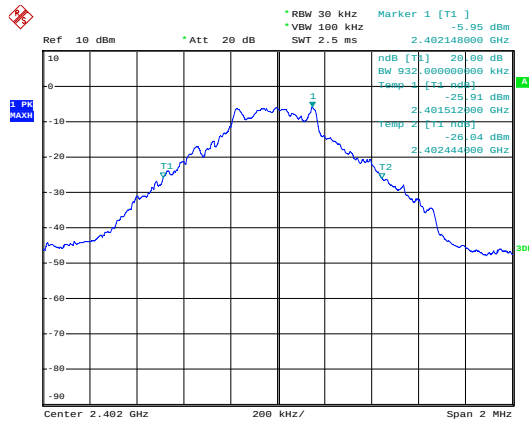


Date: 25.SEP.2012 04:35:07

Lowest channel

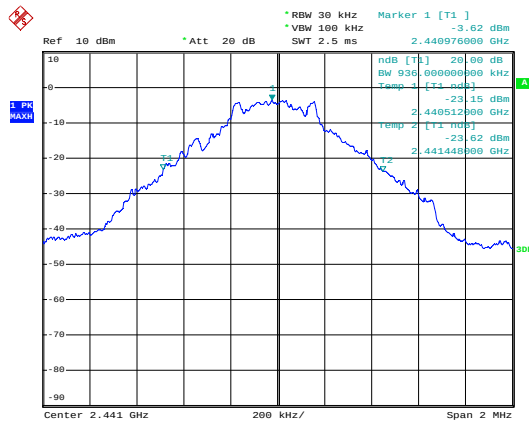

Date: 25.SEP.2012 04:42:45

Middle channel

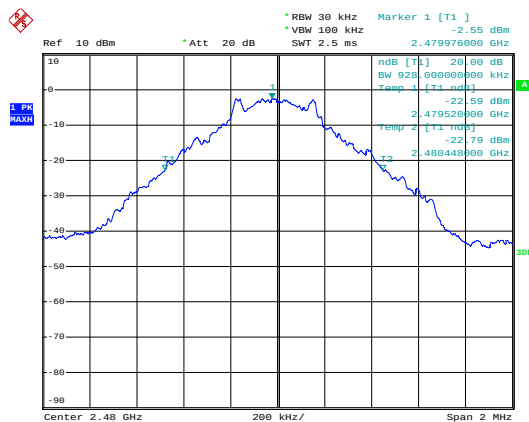


Date: 25.SEP.2012 04:51:13

Highest channel


Modulation mode:

$\pi/4$ -DQPSK

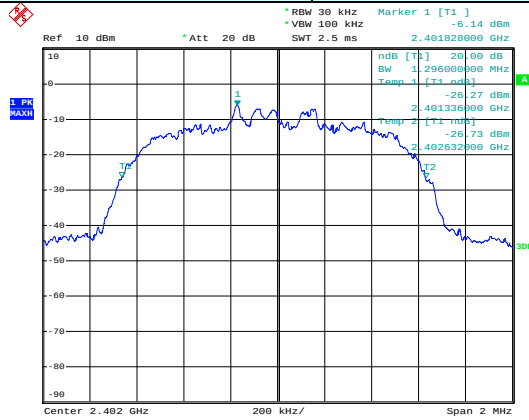


Date: 25.SEP.2012 05:04:51

Lowest channel

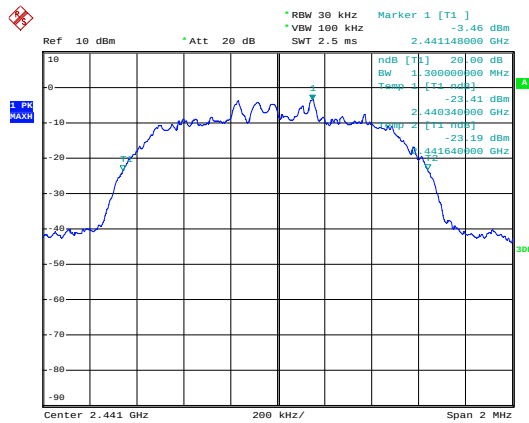

Date: 25.SEP.2012 05:11:29

Middle channel

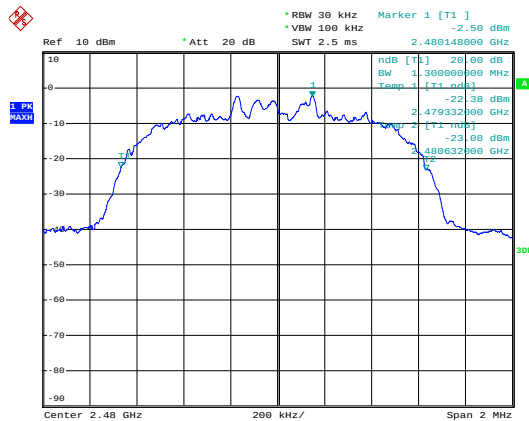


Date: 25.SEP.2012 05:22:47

Highest channel


Modulation mode:

8DPSK

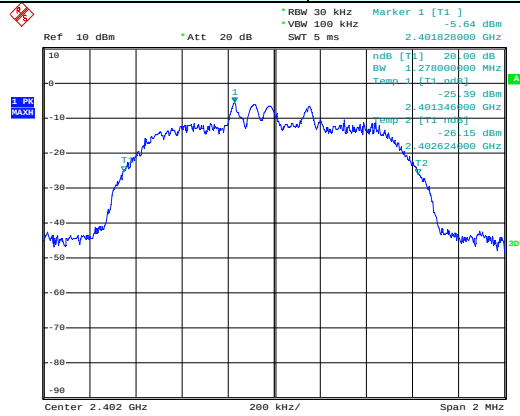


Date: 26.SEP.2012 11:50:45

Lowest channel

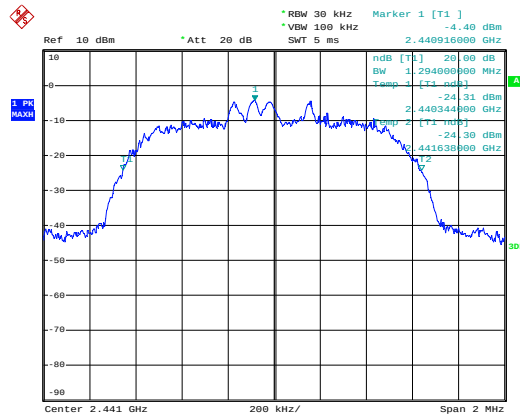

Date: 26.SEP.2012 11:56:35


Middle channel

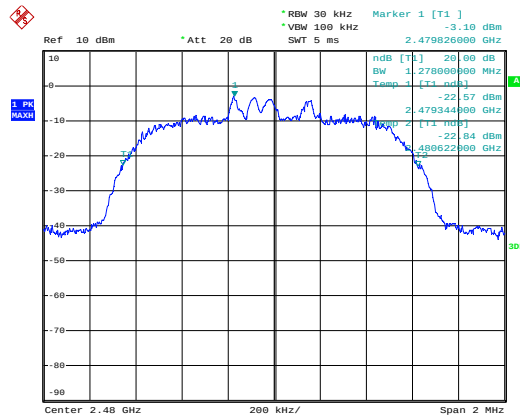

Date: 26.SEP.2012 11:57:28

Highest channel

6.5 Carrier Frequencies Separation

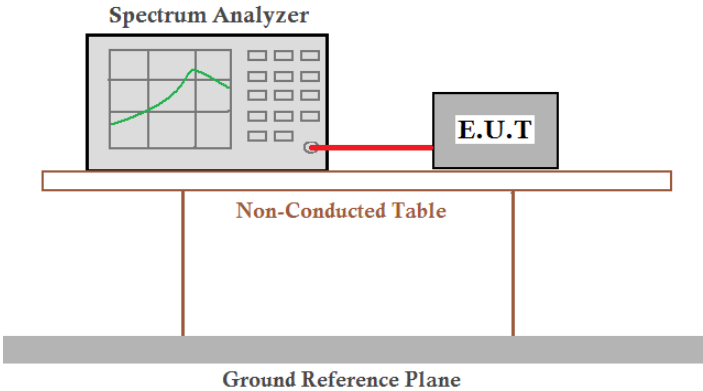Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and DA00-705
Receiver setup:	RBW=100kHz, VBW=300kHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
Test results:	Pass

Measurement Data

GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1316	624.000	Pass
Middle	1008	624.000	Pass
Highest	1008	624.000	Pass
$\pi/4$ -DQPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1008	866.667	Pass
Middle	1000	866.667	Pass
Highest	1160	866.667	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1016	862.667	Pass
Middle	1168	862.667	Pass
Highest	1008	862.667	Pass


Note: According to section 5.4

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	936	624.000
$\pi/4$ -DQPSK	1300	866.667
8DPSK	1294	862.667

Test plot as follows:


Modulation mode:

GFSK

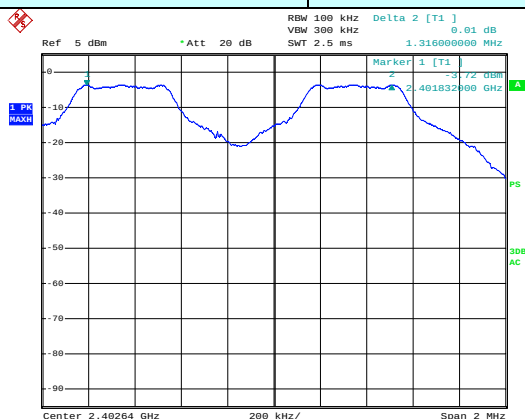


Date: 28.SEP.2012 03:46:23

Lowest channel

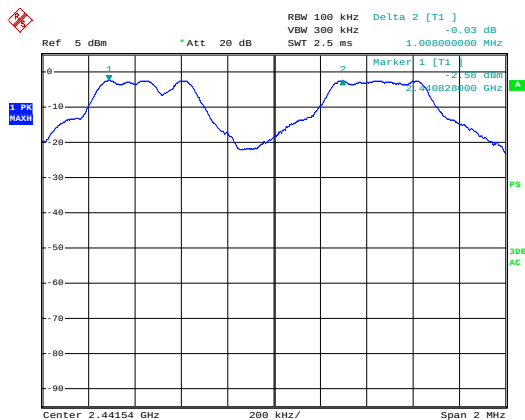

Date: 28.SEP.2012 03:47:41

Middle channel

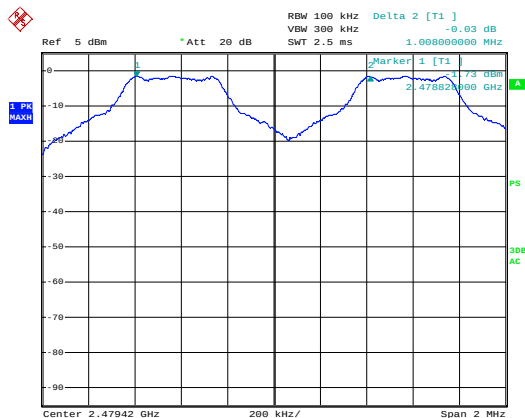


Date: 28.SEP.2012 03:48:40

Highest channel


Modulation mode:

π /4-DQPSK

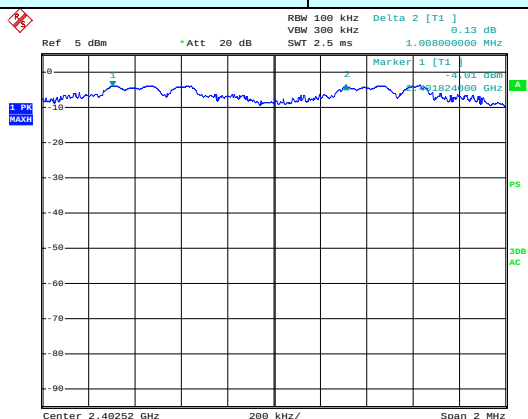


Date: 28.SEP.2012 03:50:50

Lowest channel

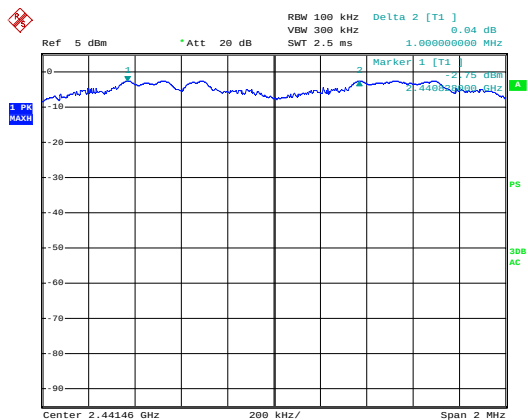

Date: 28.SEP.2012 03:52:58

Middle channel

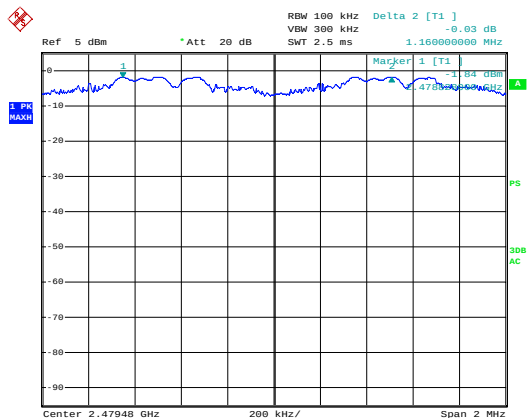


Date: 28.SEP.2012 03:53:51

Highest channel


Modulation mode:

8DPSK

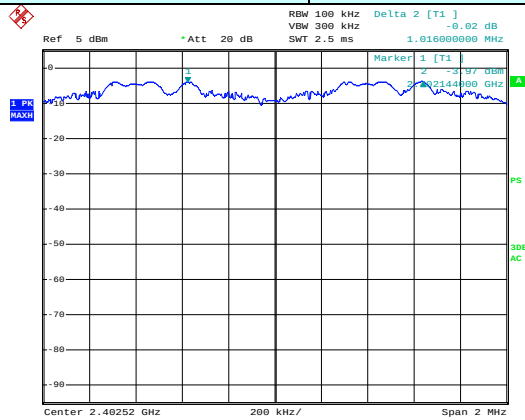


Date: 28.SEP.2012 03:55:00

Lowest channel

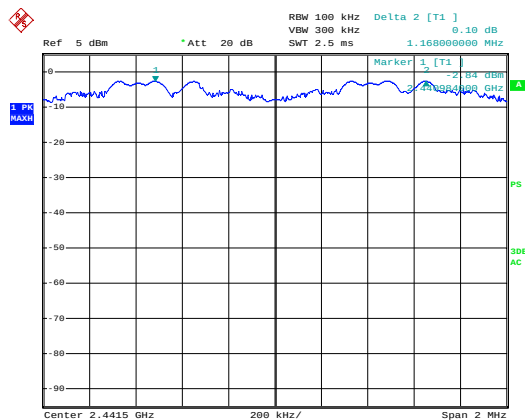

Date: 28.SEP.2012 03:56:07


Middle channel

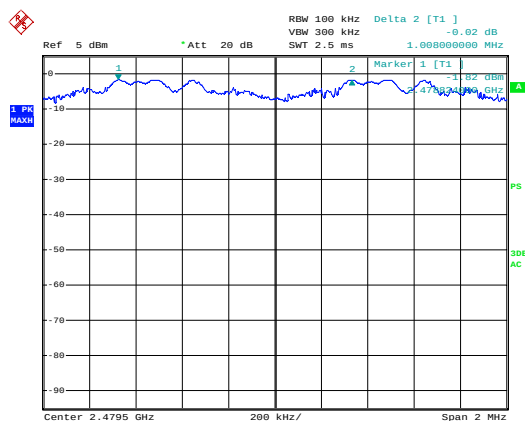

Date: 28.SEP.2012 03:56:52


Highest channel

6.6 Hopping Channel Number

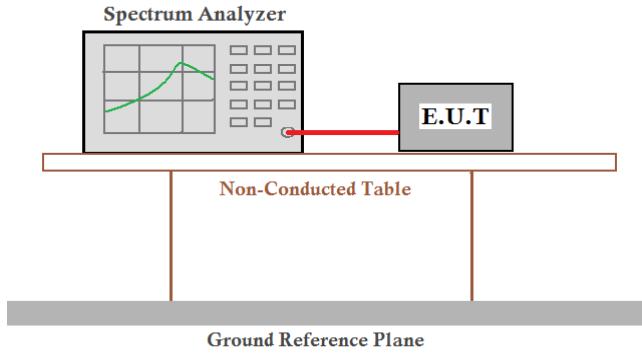Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and DA00-705
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
Test results:	Pass


Measurement Data:

Mode	Hopping channel numbers	Limit	Result
GFSK, π /4-DQPSK, 8DPSK	79	15	Pass

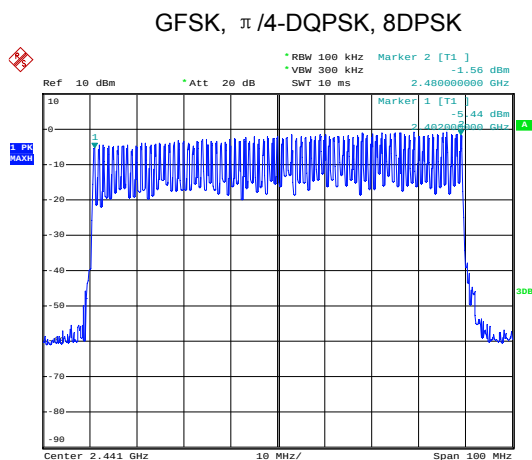

Date: 25.SEP.2012 05:00:21

6.7 Dwell Time

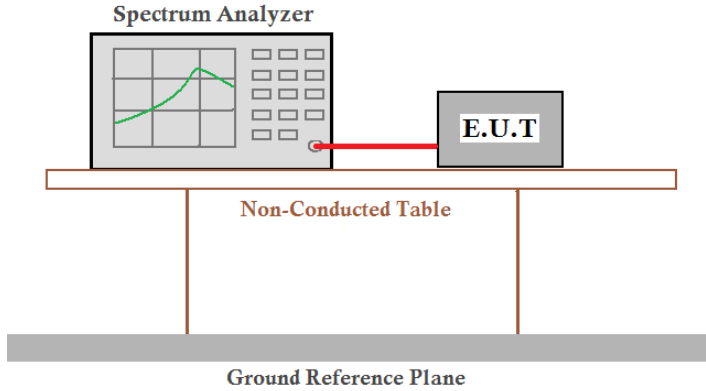Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and DA 00-705
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Hopping mode
Test results:	Pass

Measurement Data (Worse case)

Mode	Packet	Dwell time (second)	Limit (second)	Result
GFSK	DH1	0.12800	0.4	Pass
	DH3	0.26560		
	DH5	0.31021		
$\pi/4$ -DQPSK	2-DH1	0.12800	0.4	Pass
	2-DH3	0.26560		
	2-DH5	0.31021		
8DPSK	3-DH1	0.12800	0.4	Pass
	3-DH3	0.26560		
	3-DH5	0.31021		

For GFSK, $\pi/4$ -DQPSK and 8DPSK:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as below

DH1 time slot = $0.400(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 128.000\text{ms}$


DH3 time slot = $1.660(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 265.600\text{ms}$

DH5 time slot = $2.910(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 310.206\text{ms}$

Test plot as follows:


Modulation mode:

GFSK, $\pi/4$ -DQPSK, 8DPSK

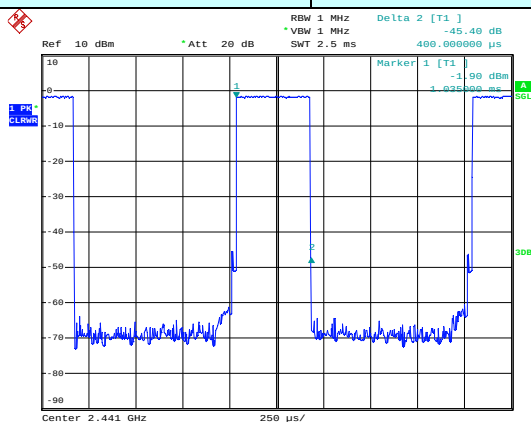


Date: 25.SEP.2012 04:57:00

DH1, 2-DH1, 3-DH1

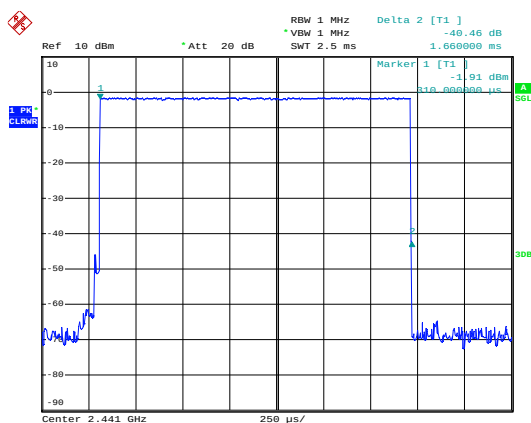

Date: 25.SEP.2012 04:57:55



DH3, 2-DH3, 3-DH3

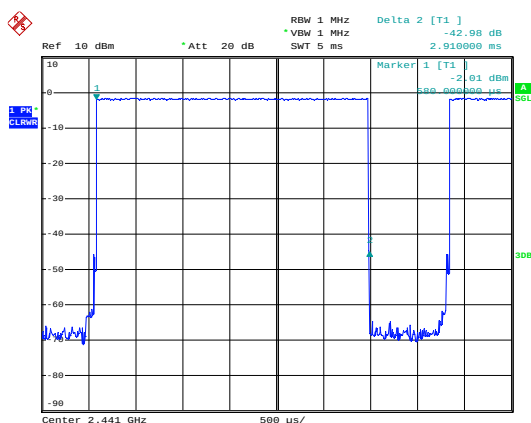

Date: 25.SEP.2012 04:58:41


DH5, 2-DH5, 3-DH5

6.8 Pseudorandom Frequency Hopping Sequence

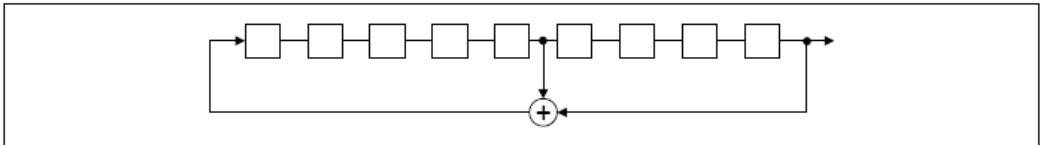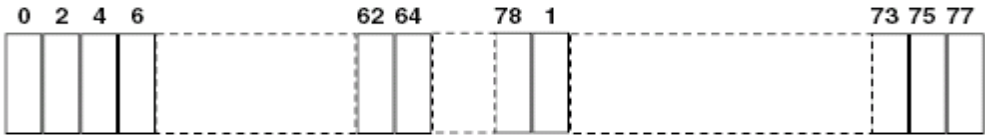Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:
Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.	
EUT Pseudorandom Frequency Hopping Sequence	
The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal)	
	
<i>Linear Feedback Shift Register for Generation of the PRBS sequence</i> An example of Pseudorandom Frequency Hopping Sequence as follow:	
	
Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.	

6.9 Band Edge


6.9.1 Conducted Emission Method

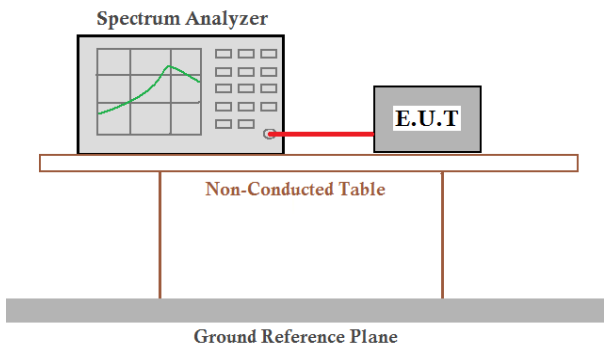Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and DA00-705
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by two legs and sits on a Ground Reference Plane.
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode and hopping mode
Test results:	Pass

Test plot as follows:


GFSK

Test channel:	Lowest channel
---------------	----------------

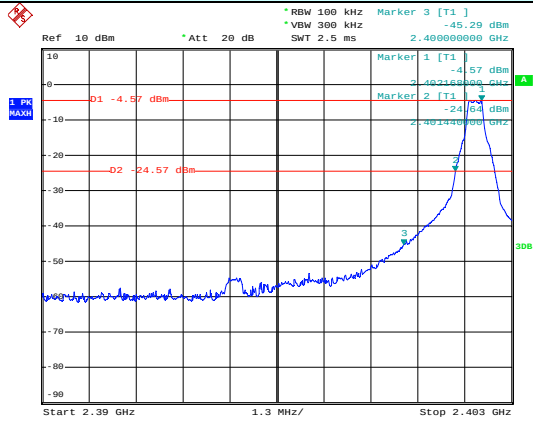

Date: 25.SEP.2012 04:36:14


No-hopping mode

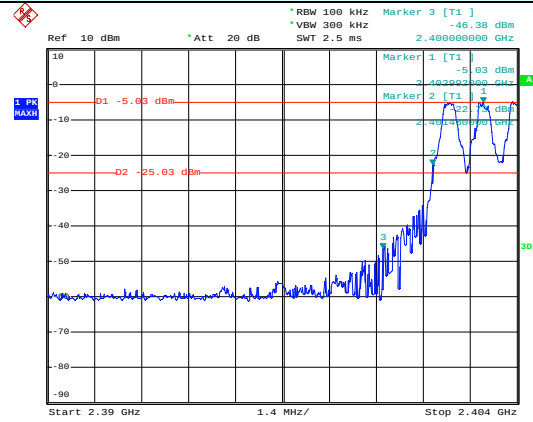

Date: 25.SEP.2012 08:15:16


Hopping mode

Test channel:	Highest channel
---------------	-----------------

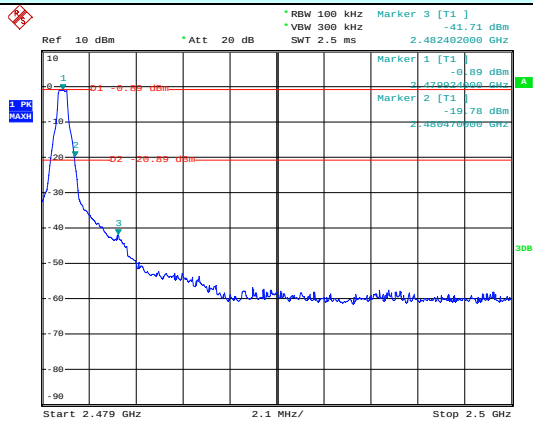

Date: 25.SEP.2012 04:52:30

No-hopping mode

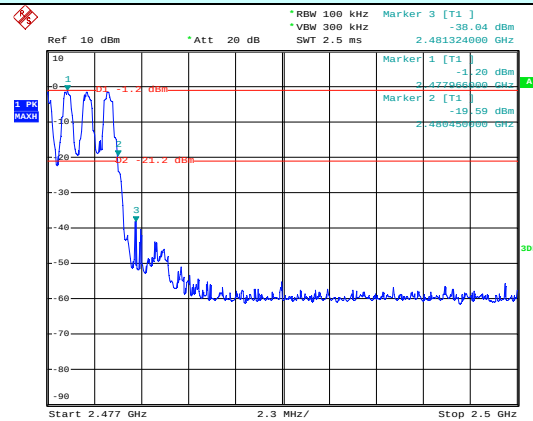


Date: 25.SEP.2012 08:13:46


Hopping mode

π /4-DQPSK

Test channel:	Lowest channel
---------------	----------------

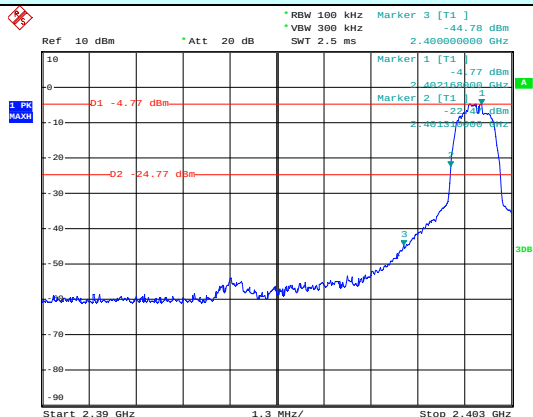


No-hopping mode

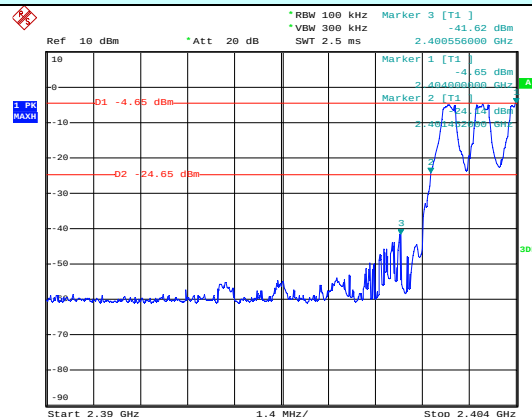


Hopping mode

Test channel:	Highest channel
---------------	-----------------

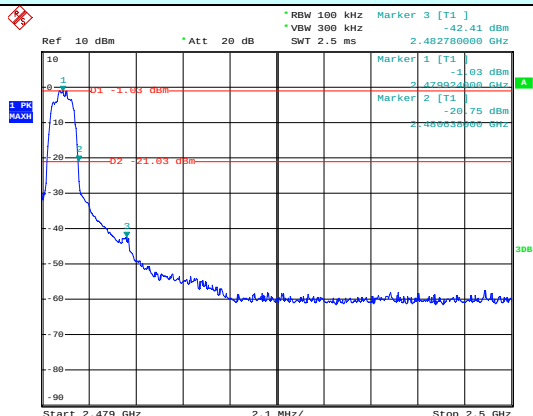

No-hopping mode

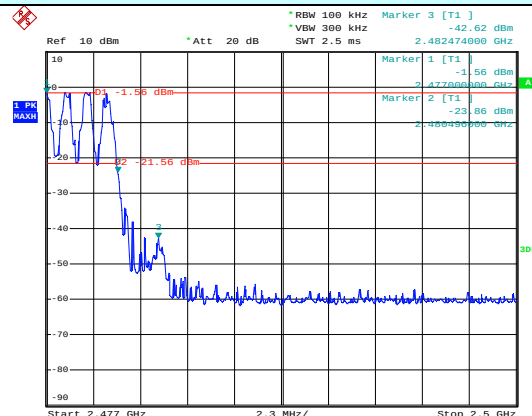


Hopping mode

8DPSK


Test channel:

Lowest channel

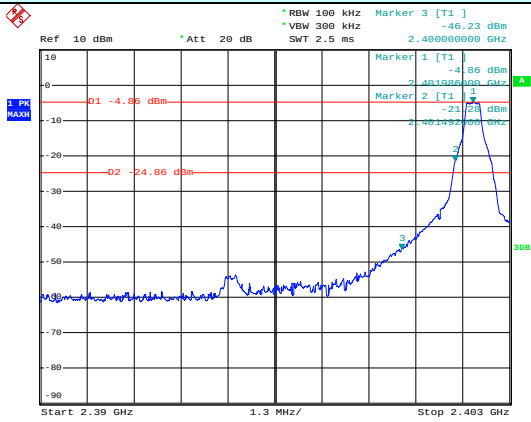

Date: 25.SEP.2012 05:39:18

No-hopping mode

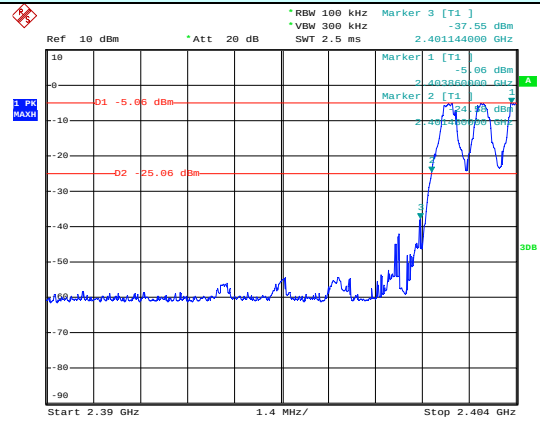


Date: 25.SEP.2012 05:55:28

Hopping mode


Test channel:

Highest channel

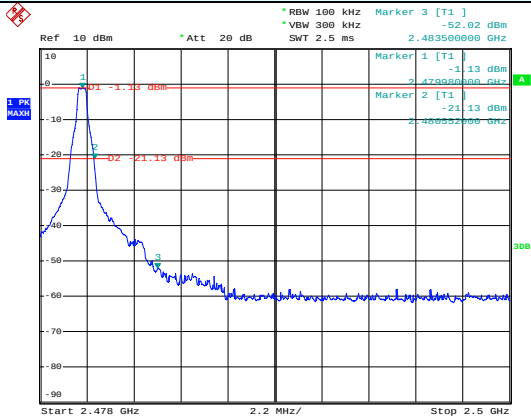

Date: 25.SEP.2012 05:49:36


No-hopping mode

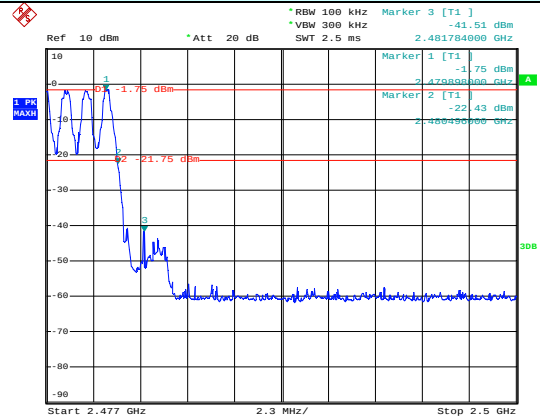

Date: 25.SEP.2012 05:56:33

Hopping mode

6.9.2 Radiated Emission Method

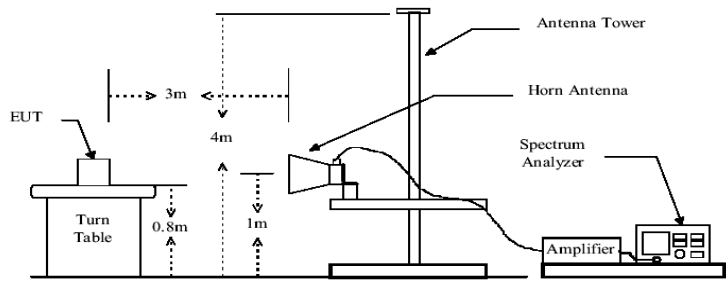Test Requirement:	FCC Part15 C Section 15.209 and15.205				
Test Method:	ANSI C63.4: 2003				
Test Frequency Range:	2.3GHz to 2.5GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Test setup:					
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test Instruments:	Refer to section 5.7 for details				
Test mode:	Non-hopping mode				
Test results:	Passed				

Remark:

1. During the test, pre-scan the GFSK, π /4-DQPSK, 8DPSK, and found the 8DPSK modulation is the worst case.
2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.

Test channel:		Lowest			Level:		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	57.86	27.58	3.81	30.10	59.15	74.00	-14.85	Horizontal
2390.00	58.62	27.58	3.81	30.10	59.91	74.00	-14.09	Vertical

Test channel:		Lowest			Level:		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	41.65	27.58	3.81	30.10	42.94	54.00	-11.06	Horizontal
2390.00	46.58	27.58	3.81	30.10	47.87	54.00	-6.13	Vertical

Test channel:		Highest			Level:		Peak	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	54.32	27.52	3.89	30.60	55.13	74.00	-18.87	Horizontal
2483.50	58.63	27.52	3.89	30.60	59.44	74.00	-14.56	Vertical


Test channel:		Highest			Level:		Average	
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	43.62	27.52	3.89	30.60	44.43	54.00	-9.57	Horizontal
2483.50	42.62	27.52	3.89	30.60	43.43	54.00	-10.57	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.10 Spurious Emission


6.10.1 Conducted Emission Method

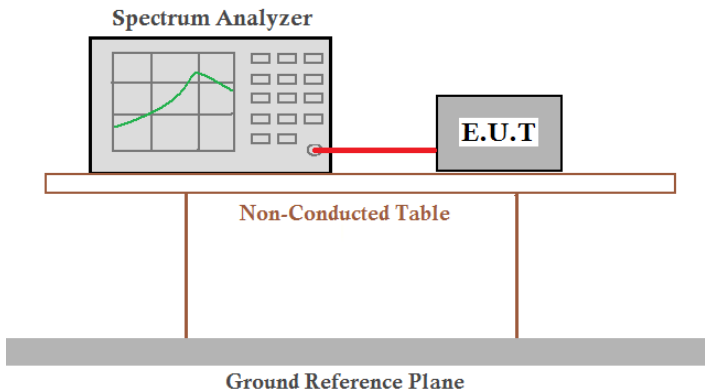Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and DA00-705
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass


Test plot as follows:

GFSK

Lowest channel

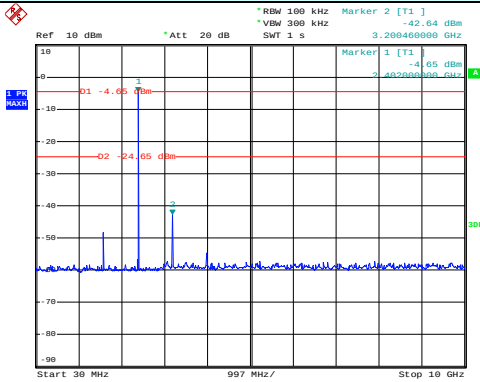

Date: 25.SEP.2012 04:37:50

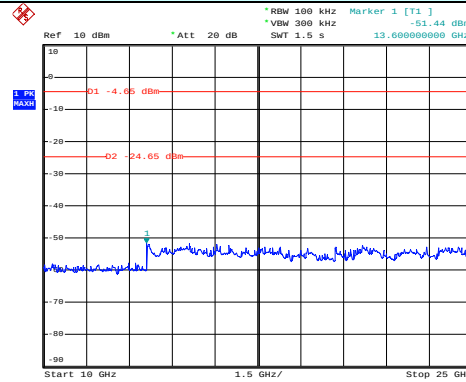


Date: 25.SEP.2012 04:38:07


30MHz~10GHz

10GHz~25GHz

Middle channel

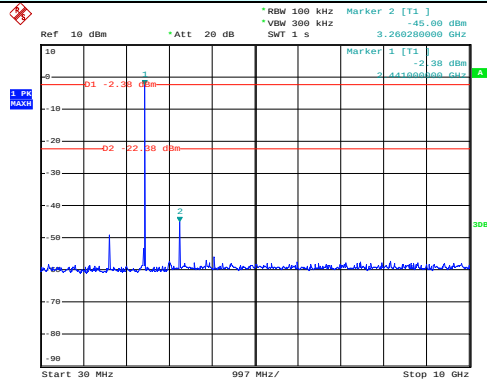

Date: 25.SEP.2012 04:43:53

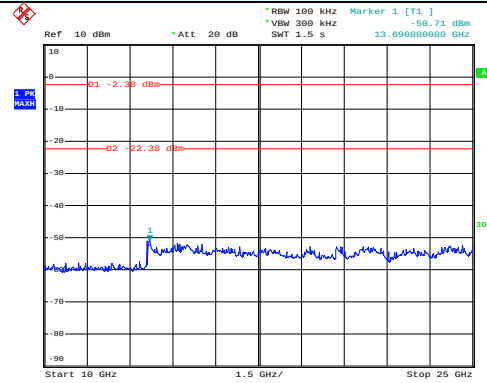


Date: 25.SEP.2012 04:44:13


30MHz~10GHz

10GHz~25GHz

Highest channel

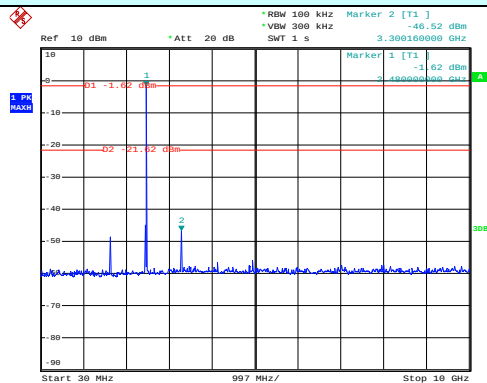

Date: 25.SEP.2012 04:53:36

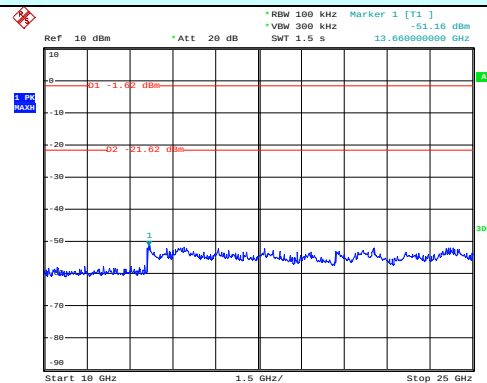


Date: 25.SEP.2012 04:53:51

30MHz~10GHz


10GHz~25GHz

$\pi/4$ -DQPSK

Lowest channel

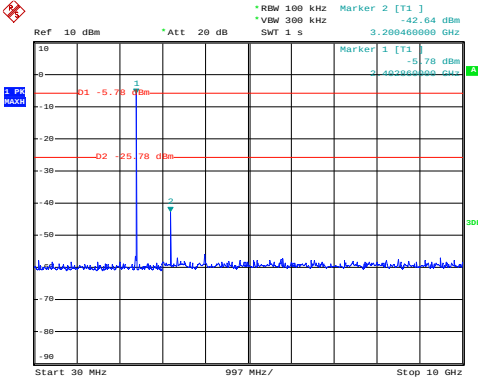

Date: 25.SEP.2012 05:06:43

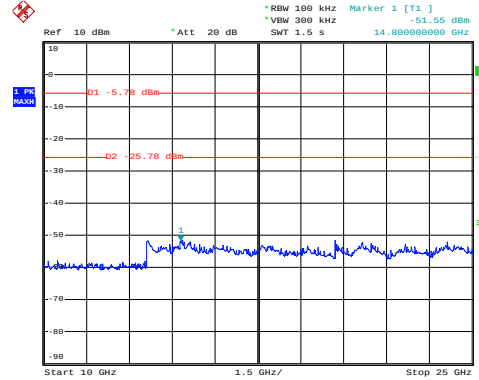


Date: 25.SEP.2012 05:07:00


30MHz~10GHz

10GHz~25GHz

Middle channel

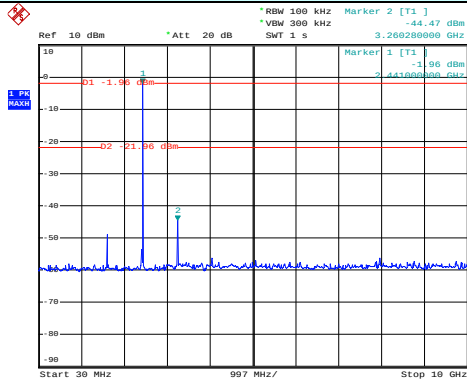

Date: 25.SEP.2012 05:15:43

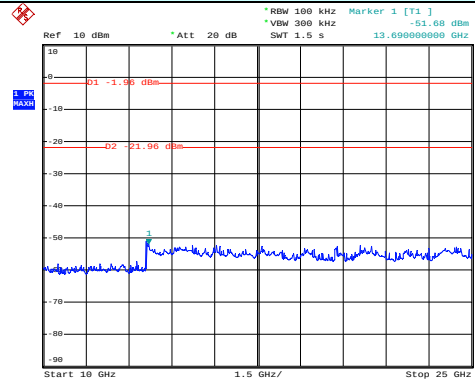


Date: 25.SEP.2012 05:16:02


30MHz~10GHz

10GHz~25GHz

Highest channel

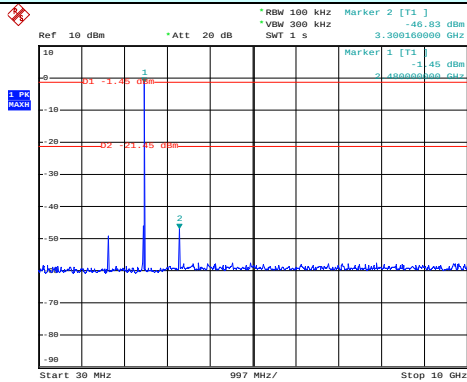

Date: 25.SEP.2012 05:26:20

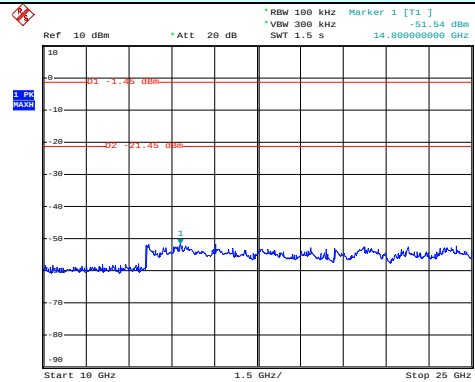


Date: 25.SEP.2012 05:26:39

30MHz~10GHz


10GHz~25GHz

8DPSK

Lowest channel

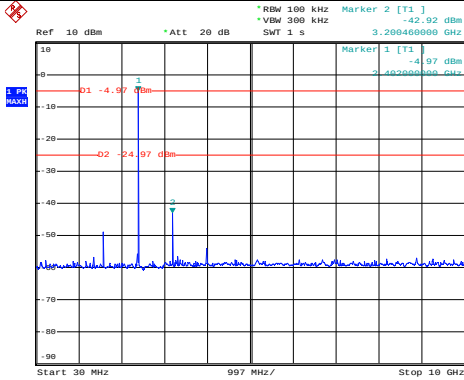

Date: 25.SEP.2012 05:41:15

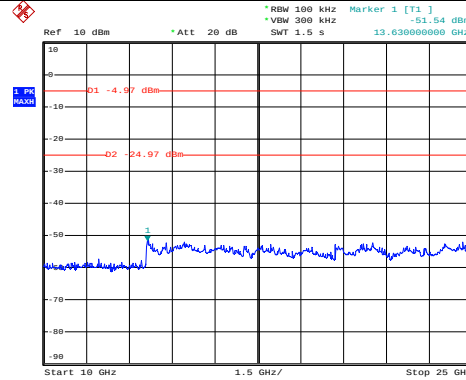


Date: 25.SEP.2012 05:41:36


30MHz~10GHz

10GHz~25GHz

Middle channel

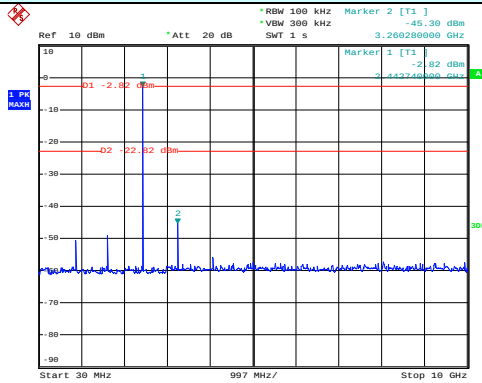

Date: 25.SEP.2012 05:47:25

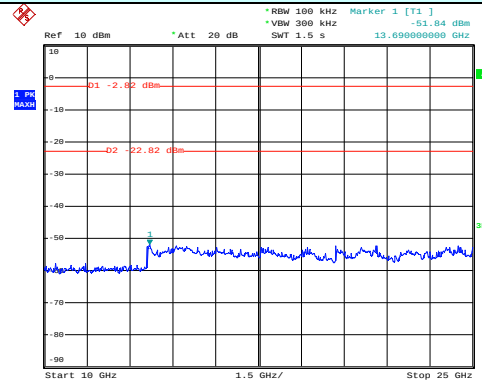


Date: 25.SEP.2012 05:47:41


30MHz~10GHz

10GHz~25GHz

Highest channel

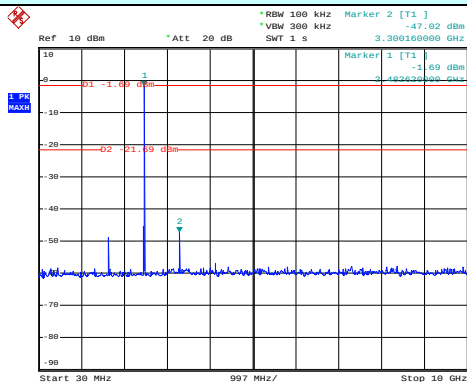

Date: 25.SEP.2012 05:48:26


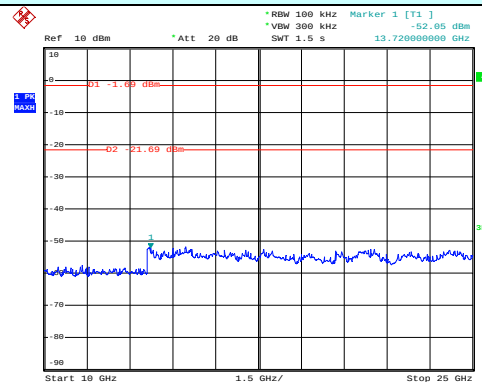


Date: 25.SEP.2012 05:48:42

30MHz~10GHz

10GHz~25GHz

6.10.2 Radiated Emission Method

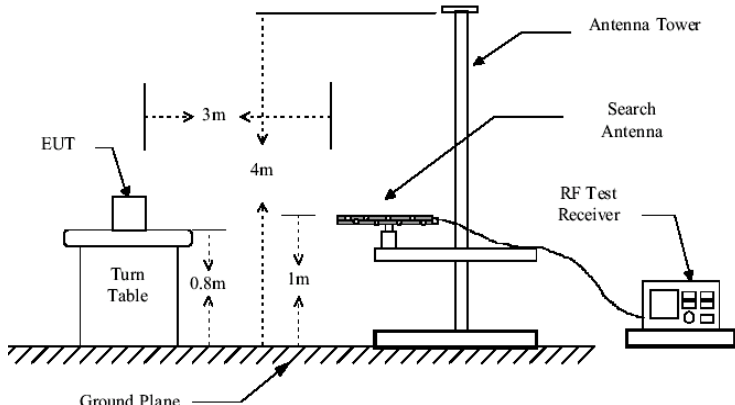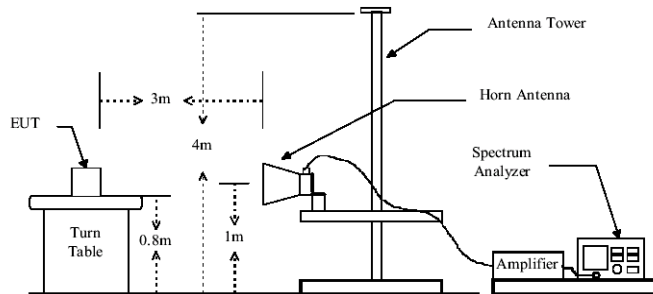Test Requirement:	FCC Part15 C Section 15.209 FCC Part15 B Section 15.109				
Test Method:	ANSI C63.4: 2003				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		54.0		Average Value
			74.0		Peak Value
Test setup:	Below 1GHz				
					
	Above 1GHz				
					

Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 5.7 for details
Test mode:	Non-hopping mode
Test results:	Pass

Remark:

1. During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8DPSK modulation, and found the 8DPSK modulation is the worst case.

Measurement data:

Bluetooth mode:

Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
180.02	51.81	9.68	2.73	26.51	37.71	43.50	-5.79	Vertical
312.18	48.42	13.22	2.98	29.49	35.13	46.00	-10.87	Vertical
383.93	50.10	14.68	3.09	29.83	38.04	46.00	-7.96	Vertical
408.95	52.24	15.27	3.10	30.00	40.61	46.00	-5.39	Vertical
599.32	43.33	18.45	3.94	30.55	35.17	46.00	-10.83	Vertical
180.02	54.15	9.68	2.73	26.51	40.05	43.50	-3.45	Horizontal
204.24	54.02	10.70	2.87	29.79	37.80	43.50	-5.70	Horizontal
312.18	52.29	13.22	2.98	29.49	39.00	46.00	-7.00	Horizontal
336.04	54.05	13.99	3.05	29.61	41.48	46.00	-4.52	Horizontal
360.45	53.69	14.43	3.10	29.73	41.49	46.00	-4.51	Horizontal

Above 1GHz

Test channel:	Lowest	Level:	Peak
---------------	--------	--------	------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	44.56	31.78	5.32	24.09	57.57	74.00	-16.43	Vertical
7206.00	40.45	36.15	6.87	26.38	57.09	74.00	-16.91	Vertical
9608.00	35.66	37.95	8.94	25.40	57.15	74.00	-16.85	Vertical
4804.00	42.46	31.78	5.32	24.09	55.47	74.00	-18.53	Horizontal
7206.00	35.32	36.15	6.87	26.38	51.96	74.00	-22.04	Horizontal
9608.00	26.55	37.95	8.94	25.40	48.04	74.00	-25.96	Horizontal

Test channel:	Lowest	Level:	Average
---------------	--------	--------	---------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	30.25	31.78	5.32	24.09	43.26	54.00	-10.74	Vertical
7206.00	28.13	36.15	6.87	26.38	44.77	54.00	-9.23	Vertical
9608.00	20.25	37.95	8.94	25.40	41.74	54.00	-12.26	Vertical
4804.00	34.14	31.78	5.32	24.09	47.15	54.00	-6.85	Horizontal
7206.00	16.25	36.15	6.87	26.38	32.89	54.00	-21.11	Horizontal
9608.00	14.26	37.95	8.94	25.40	35.75	54.00	-18.25	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means average level is not recorded when its peak level is less than average limit.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel:	Middle	Level:	Peak
---------------	--------	--------	------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	46.66	31.85	5.40	24.01	59.90	74.00	-14.10	Vertical
7323.00	42.55	36.37	6.91	26.62	59.21	74.00	-14.79	Vertical
9764.00	37.76	38.35	9.01	25.29	59.83	74.00	-14.17	Vertical
4882.00	44.56	31.85	5.40	24.01	57.80	74.00	-16.20	Horizontal
7323.00	37.42	36.37	6.91	26.62	54.08	74.00	-19.92	Horizontal
9764.00	28.65	38.35	9.01	25.29	50.72	74.00	-23.28	Horizontal

Test channel:	Middle	Level:	Average
---------------	--------	--------	---------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	31.80	31.85	5.40	24.01	45.04	54.00	-8.96	Vertical
7323.00	26.83	36.37	6.91	26.62	43.49	54.00	-10.51	Vertical
9764.00	18.83	38.35	9.01	25.29	40.90	54.00	-13.10	Vertical
4882.00	33.71	31.85	5.40	24.01	46.95	54.00	-7.05	Horizontal
7323.00	28.83	36.37	6.91	26.62	45.49	54.00	-8.51	Horizontal
9764.00	22.17	38.35	9.01	25.29	44.24	54.00	-9.76	Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *"*", means average level is not recorded when its peak level is less than average limit.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

Test channel:	Highest	Level:	Peak
---------------	---------	--------	------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	42.32	31.93	5.47	23.93	55.79	74.00	-18.21	Vertical
7440.00	38.28	36.59	6.95	26.95	54.87	74.00	-19.13	Vertical
9920.00	33.48	38.81	9.07	25.22	56.14	74.00	-17.86	Vertical
4960.00	41.26	31.93	5.47	23.93	54.73	74.00	-19.27	Horizontal
7440.00	34.25	36.59	6.95	26.95	50.84	74.00	-23.16	Horizontal
9920.00	27.36	38.81	9.07	25.22	50.02	74.00	-23.98	Horizontal

Test channel:	Highest	Level:	Average
---------------	---------	--------	---------

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	30.68	31.93	5.47	23.93	44.15	54.00	-9.85	Vertical
7440.00	25.71	36.59	6.95	26.95	42.30	54.00	-11.70	Vertical
9920.00	17.71	38.81	9.07	25.22	40.37	54.00	-13.63	Vertical
4960.00	32.59	31.93	5.47	23.93	46.06	54.00	-7.94	Horizontal
7440.00	27.71	36.59	6.95	26.95	44.30	54.00	-9.70	Horizontal
9920.00	21.05	38.81	9.07	25.22	43.71	54.00	-10.29	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means average level is not recorded when its peak level is less than average limit.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

AUX in mode:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
32.75	33.25	12.31	0.91	26.57	19.90	40.00	-20.10	Vertical
41.13	31.82	13.57	1.24	27.38	19.25	40.00	-20.75	Vertical
105.64	31.15	12.63	2.00	29.97	15.81	43.50	-27.69	Vertical
191.07	32.65	10.56	2.81	29.83	16.19	43.50	-27.31	Vertical
338.40	30.82	14.05	3.06	29.62	18.31	46.00	-27.69	Vertical
53.13	30.14	13.12	1.32	28.60	15.98	40.00	-24.02	Horizontal
132.69	41.44	8.72	2.32	29.49	22.99	43.50	-20.51	Horizontal
180.65	29.45	9.76	2.73	26.77	15.17	43.50	-28.33	Horizontal
228.49	32.03	11.57	2.84	29.68	16.76	46.00	-29.24	Horizontal
480.53	37.36	16.07	3.46	30.52	26.37	46.00	-19.63	Horizontal

Charging mode:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
129.47	47.32	9.03	2.28	29.54	29.09	43.50	-14.41	Vertical
167.82	40.31	8.90	2.64	29.01	22.84	43.50	-20.66	Vertical
216.02	36.67	11.07	2.85	29.74	20.85	46.00	-25.15	Vertical
287.99	37.27	12.84	2.91	29.47	23.55	46.00	-22.45	Vertical
383.93	45.37	14.68	3.09	29.83	33.31	46.00	-12.69	Vertical
85.00	35.95	10.31	1.83	30.10	17.99	40.00	-22.01	Horizontal
143.83	43.51	8.22	2.44	29.32	24.85	43.50	-18.65	Horizontal
167.82	53.87	8.90	2.64	29.01	36.40	43.50	-7.10	Horizontal
287.99	43.28	12.84	2.91	29.47	29.56	46.00	-16.44	Horizontal
365.54	40.52	14.48	3.09	29.75	28.34	46.00	-17.66	Horizontal