


FCC Radio Test Report

FCC ID : Q6G-AP340
Equipment : Access Point
Brand Name : WatchGuard
Model Name : AP340, AP140
Applicant : WatchGuard Technologies, Inc.
255 S. King Street, Suite 1100 Seattle,
WA 98104, USA
Manufacturer : WatchGuard Technologies, Inc.
255 S. King Street, Suite 1100 Seattle,
WA 98104, USA
Standard : 47 CFR FCC Part 15.407

The product was received on Feb. 24, 2025, and testing was started from Mar. 13, 2025 and completed on Apr. 22, 2025. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.



Approved by: Jackson Tsai

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Testing Applied Standards	11
1.3 Testing Location Information	11
1.4 Measurement Uncertainty	11
2 TEST CONFIGURATION OF EUT.....	12
2.1 Test Channel Mode	12
2.2 The Worst Case Measurement Configuration.....	15
2.3 Accessories	16
2.4 Support Equipment.....	16
2.5 Test Setup Diagram	17
3 TRANSMITTER TEST RESULT	18
3.1 AC Power-line Conducted Emissions	18
3.2 Emission Bandwidth	20
3.3 Maximum Conducted Output Power	21
3.4 Peak Power Spectral Density.....	23
3.5 Unwanted Emissions.....	25
4 TEST EQUIPMENT AND CALIBRATION DATA.....	29
APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS	
APPENDIX B. TEST RESULTS OF EMISSION BANDWIDTH	
APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	
APPENDIX D. TEST RESULTS OF PEAK POWER SPECTRAL DENSITY	
APPENDIX E. TEST RESULTS OF UNWANTED EMISSIONS	
APPENDIX F. TEST RESULTS OF RADIATED EMISSION CO-LOCATION	
APPENDIX G. TEST PHOTOS	
PHOTOGRAPHS OF EUT V01	



TEL : 886-3-3273456
FAX : 886-3-3270973
Report Template No.: HE1-D1 Ver4.5
FCC ID: Q6G-AP340

Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Conducted Output Power	PASS	-
3.4	15.407(a)	Peak Power Spectral Density	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and explanations:

The EUT supports beamforming and CDD modes, and the CDD mode is the worst case. Therefore, all test items are evaluated in the report. The beamforming mode only evaluates the output power.

Reviewed by: Barry Hsiao

Report Producer: Michelle Tsai



1 General Description

1.1 Information

Radio 3 (Scan radio) is only RX function.

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20), ax (HEW20), be (EHT20)	5180-5240	36-48 [4]
5250-5350		5260-5320	52-64 [4]
5470-5725		5500-5700	100-140 [11]
Straddle 5720		5720	144 [1]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40), ax (HEW40), be (EHT40)	5190-5230	38-46 [2]
5250-5350		5270-5310	54-62 [2]
5470-5725		5510-5670	102-134 [5]
Straddle 5710		5710	142 [1]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80), ax (HEW80) , be (EHT80)	5210	42 [1]
5250-5350		5290	58 [1]
5470-5725		5530-5610	106-122 [2]
Straddle 5690		5690	138 [1]
5725-5850		5775	155 [1]
5150-5350	ac (VHT160), ax (HEW160), be (EHT160)	5250	50 [1]
5470-5725		5570	114 [1]

Non-Beamforming

Band	Mode	BWch	Nant
5.15-5.25GHz	802.11a	20	2TX
5.25-5.35GHz	802.11a	20	2TX
5.47-5.725GHz	802.11a	20	2TX
5.725-5.85GHz	802.11a	20	2TX
5.15-5.25GHz	802.11be EHT20	20	2TX
5.25-5.35GHz	802.11be EHT20	20	2TX
5.47-5.725GHz	802.11be EHT20	20	2TX
5.725-5.85GHz	802.11be EHT20	20	2TX
5.15-5.25GHz	802.11be EHT40	40	2TX
5.25-5.35GHz	802.11be EHT40	40	2TX
5.47-5.725GHz	802.11be EHT40	40	2TX
5.725-5.85GHz	802.11be EHT40	40	2TX

5.15-5.25GHz	802.11be EHT80	80	2TX
5.25-5.35GHz	802.11be EHT80	80	2TX
5.47-5.725GHz	802.11be EHT80	80	2TX
5.725-5.85GHz	802.11be EHT80	80	2TX
5.15-5.25GHz	802.11be EHT160	160	2TX
5.25-5.35GHz	802.11be EHT160	160	2TX
5.47-5.725GHz	802.11be EHT160	160	2TX

Beamforming

Band	Mode	BWch	Nant
5.15-5.25GHz	802.11be EHT20-BF	20	2TX
5.25-5.35GHz	802.11be EHT20-BF	20	2TX
5.47-5.725GHz	802.11be EHT20-BF	20	2TX
5.725-5.85GHz	802.11be EHT20-BF	20	2TX
5.15-5.25GHz	802.11be EHT40-BF	40	2TX
5.25-5.35GHz	802.11be EHT40-BF	40	2TX
5.47-5.725GHz	802.11be EHT40-BF	40	2TX
5.725-5.85GHz	802.11be EHT40-BF	40	2TX
5.15-5.25GHz	802.11be EHT80-BF	80	2TX
5.25-5.35GHz	802.11be EHT80-BF	80	2TX
5.47-5.725GHz	802.11be EHT80-BF	80	2TX
5.725-5.85GHz	802.11be EHT80-BF	80	2TX
5.15-5.25GHz	802.11be EHT160-BF	160	2TX
5.25-5.35GHz	802.11be EHT160-BF	160	2TX
5.47-5.725GHz	802.11be EHT160-BF	160	2TX

Note:

- 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- VHT20, VHT40, VHT80 and VHT160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- EHT20, EHT40, EHT80 and EHT160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- BWch is the nominal channel bandwidth.
- Evaluated EHT20/EHT40/EHT80/EHT160 mode only due to the similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80/VHT160/HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.

**1.1.2 Antenna Information****Model Name : AP140**

Ant.	Brand	Model Name	Antenna Type	Connector	Support	Radio
1	Enrack	7102A1222000	PIFA	I-Pex	2.4G	Radio 1
2	Enrack	7102A1223000	PIFA	I-Pex	2.4G	
3	Enrack	7102A1224000	PIFA	I-Pex	5G	Radio 2
4	Enrack	7102A1225000	PIFA	I-Pex	5G	
5	AWAN	7102A0952000	Alford Loop	I-Pex	6G	
6	AWAN	7102A0951000	Alford Loop	I-Pex	6G	

Ant.	Port	Gain (dBi)		
		2.4G	5G	6G
1	1	4.4	-	-
2	2	4.0	-	-
3	1	-	5.6	-
4	2	-	4.6	-
5	1	-	-	5.0
6	2	-	-	5.5

Model Name : AP340

Ant.	Brand	Model Name	Antenna Type	Connector	Support	Radio
1	Enrack	7102A1222000	PIFA	I-Pex	2.4G	Radio 1
2	Enrack	7102A1223000	PIFA	I-Pex	2.4G	
3	Enrack	7102A1224000	PIFA	I-Pex	5G	Radio 2
4	Enrack	7102A1225000	PIFA	I-Pex	5G	
5	AWAN	7102A0952000	Alford Loop	I-Pex	6G	
6	AWAN	7102A0951000	Alford Loop	I-Pex	6G	
7	Enrack	7102A1355000	PIFA	I-Pex	2.4G/5G/6G	Scan Radio 3 (RX)
8	Enrack	7102A1356000	PIFA	I-Pex	2.4G/5G/6G	

Ant.	Port	Gain (dBi)		
		2.4G	5G	6G
1	1	4.4	-	-
2	2	4.4	-	-
3	1	-	5.6	-
4	2	-	5.1	-
5	1	-	-	5.0
6	2	-	-	5.5
7	1	4.2	5.2	5.3
8	2	4.2	5.1	4.9

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax/be mode (2TX/2RX) < **Radio 1** >

Ant. 1 (port 1) and Ant. 2 (port 2) could receive simultaneously.

For IEEE 802.11 b/g/n/VHT/ax mode (2RX) < **Radio 3** >

Ant. 7 (port 1) and Ant. 8 (port 2) could receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be mode(2TX/2RX) < **Radio 2** >

Ant. 3 (port 1) and Ant. 4 (port 2) could receive simultaneously.

For IEEE 802.11 a/n/ac/ax mode (2RX) < **Radio 3** >

Ant. 7 (port 1) and Ant. 8 (port 2) could receive simultaneously.

For 6GHz function:

For IEEE 802.11 ax/be mode(2TX/2RX) < **Radio 2** >

Ant. 5 (port 1) and Ant. 6 (port 2) could receive simultaneously.

For IEEE 802.11 ax mode (2RX) < **Radio 3** >

Ant. 7 (port 1) and Ant. 8 (port 2) could receive simultaneously.

Note 1: Directional gain information

	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} \mathcal{E}_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} \mathcal{E}_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} \mathcal{E}_{j,k} \right\}^2}{N_{ANT}} \right]$

**1.1.3 Table for Multiple Listing**

Model Name	Description
AP340	The difference between AP340 and 140 is that AP340 have a RX scanning radio.
AP140	

Note: The model AP340 was measured during the test.

1.1.4 EUT Information

Operational Condition			
EUT Power Type	From AC Adapter / PoE		
EUT Function	☐	Outdoor AP	☒ Indoor AP
	☐	Fixed P2P AP	☐ Client
Beamforming Function	☒	With beamforming	☐ Without beamforming
TPC Function	☒	With TPC Function	☐ Without TPC Function
Weather Band	☒	With 5600~5650MHz	☐ Without 5600~5650MHz
Resource Unit	☒	Full RU	☐ Partial RU
	☐	MRU(static preamble puncturing)	☐ MRU(dynamic preamble puncturing)
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.:	...	
☐	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.:		
☐	Other:		

1.1.5 Mode Test Duty Cycle

Non-Beamforming

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss1,(6Mbps)_2TX	0.993	0.03	1.981m	10Hz (DC>=0.98)
802.11be EHT20_Nss1,(MCS0)_2TX	0.998	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT40_Nss1,(MCS0)_2TX	0.998	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT80_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT160_Nss1,(MCS0)_2TX	0.998	0.01	5.456m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Beamforming

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20-BF_Nss1,(MCS0)_2TX	0.998	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT40-BF_Nss1,(MCS0)_2TX	0.998	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT80-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT160-BF_Nss1,(MCS0)_2TX	0.998	0.01	5.456m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF:

- ♦ KDB 662911 D01 v02r01
- ♦ KDB 414788 D01 v01r01

1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
☒ Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)			
	TEL: 886-3-327-3456		FAX: 886-3-327-0973	
Test site Designation No. TW3785 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CON04-HY	Daniel Lin	22.5~25.4℃ / 52~55%	28/Mar/2025
RF Conducted	TH07-HY	Raven Chien	22.4~22.9℃ / 47~52%	20/Mar/2025~15/Apr/2025
Radiated (Below 1GHz)	03CH02-HY	Daniel Lin	22.0~21.6℃ / 52~56%	15/Mar/2025
Radiated (Above 1GHz)	03CH02-HY	Daniel Lin	20.6~22.7℃ / 53~62%	13/Mar/2025~22/Apr/2025
Radiated (Co-location)	03CH03-HY	Simon Cheng	21.1~24.2℃ / 55~59%	15/Mar/2025
☐ Wenhua 3rd. (TAF: 3785)	ADD: No. 58, Aly. 75, Ln. 564, Wenhua 3rd Rd., Guishan Dist. Taoyuan City 333, Taiwan (R.O.C.)			
	TEL: 886-3-327-0868			

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
AC Power-line Conducted Emissions	4.53 dB	Confidence levels of 95%
Emission Bandwidth	3 MHz	Confidence levels of 95%
Maximum Conducted Output Power	2 dB	Confidence levels of 95%
Power Spectral Density	2 dB	Confidence levels of 95%
Unwanted Emissions	4.8 dB	Confidence levels of 95%
Temperature	0.41 °C	Confidence levels of 95%
Humidity	3.4 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Test Software Version	qdart_conn.win.1.0_installer_00099
-----------------------	------------------------------------

Non-Beamforming

Mode	Power Setting
802.11a_Nss1,(6Mbps)_2TX	-
5180MHz	19
5200MHz	20.5
5240MHz	20.5
5260MHz	19
5300MHz	19
5320MHz	19
5500MHz	19.5
5580MHz	20
5700MHz	19
5720MHz Straddle 5.47-5.725GHz	19
5720MHz Straddle 5.725-5.85GHz	19
5745MHz	21
5785MHz	20
5825MHz	19
802.11be EHT20_Nss1,(MCS0)_2TX	-
5180MHz	19.5
5200MHz	21
5240MHz	21.5
5260MHz	20
5300MHz	19.5
5320MHz	19.5
5500MHz	20
5580MHz	20.5
5700MHz	19
5720MHz Straddle 5.47-5.725GHz	19.5
5720MHz Straddle 5.725-5.85GHz	19.5
5745MHz	21.5
5785MHz	21.5
5825MHz	22
802.11be EHT40_Nss1,(MCS0)_2TX	-
5190MHz	16.5
5230MHz	21.5
5270MHz	21
5310MHz	16



5510MHz	18.5
5550MHz	21
5670MHz	21
5710MHz Straddle 5.47-5.725GHz	22
5710MHz Straddle 5.725-5.85GHz	22
5755MHz	23
5795MHz	21.5
802.11be EHT80_Nss1,(MCS0)_2TX	-
5210MHz	18
5290MHz	15.5
5530MHz	18
5610MHz	20.5
5690MHz Straddle 5.47-5.725GHz	21.5
5690MHz Straddle 5.725-5.85GHz	21.5
5775MHz	21
802.11be EHT160_Nss1,(MCS0)_2TX	-
5250MHz Straddle 5.15-5.25GHz	14.5
5250MHz Straddle 5.25-5.35GHz	14.5
5570MHz	16

Beamforming

Mode	Power Setting
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-
5180MHz	19.5
5200MHz	21
5240MHz	21.5
5260MHz	18.5
5300MHz	18
5320MHz	18
5500MHz	18.5
5580MHz	19
5700MHz	18.5
5720MHz Straddle 5.47-5.725GHz	18.5
5720MHz Straddle 5.725-5.85GHz	19.5
5745MHz	21.5
5785MHz	21.5
5825MHz	22
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-
5190MHz	16.5
5230MHz	21.5
5270MHz	18
5310MHz	16
5510MHz	18.5



5550MHz	18.5
5670MHz	18.5
5710MHz Straddle 5.47-5.725GHz	19
5710MHz Straddle 5.725-5.85GHz	22
5755MHz	23
5795MHz	21.5
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-
5210MHz	18
5290MHz	15.5
5530MHz	18
5610MHz	18
5690MHz Straddle 5.47-5.725GHz	18.5
5690MHz Straddle 5.725-5.85GHz	21.5
5775MHz	21
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-
5250MHz Straddle 5.15-5.25GHz	14.5
5250MHz Straddle 5.25-5.35GHz	14.5
5570MHz	16

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	Adapter Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Conducted Output Power Peak Power Spectral Density
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Unwanted Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	Adapter Mode		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT			V

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis
Test Condition	Radiated measurement
Operating Mode	CTX
1	Radio 1(2.4G) + Radio 2(5G) + Radio 2(6G)
Refer to Sporton Test Report No.: FA421504-01 for Co-location RF Exposure Evaluation and Appendix F for Radiated Emission Co-location.	



2.3 Accessories

Accessories				
Bracket	Brand Name	Dragonjet	Part Number	6301A6543000

Reminder: Regarding to more detail and other information, please refer to user manual.


2.4 Support Equipment

Support Equipment – AC Conduction and Radiated					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	AC adapter	ASIAN	WA-30P12R	-	Provided by Customer

Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-
3	AC Adapter	ASIAN	WA-30P12R	-	Provided by Customer


2.5 Test Setup Diagram

Test Setup Diagram – AC Line Conducted Emission Test

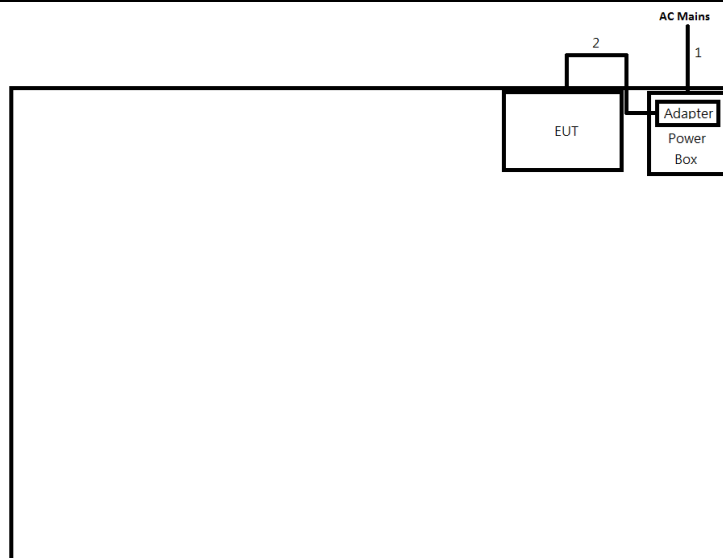

Item	Connection	Shielded	Length(m)	Remark
1	AC Power cable	No	1.8	-
2	DC Power cable	No	1.5	-

Test Setup Diagram - Radiated Test

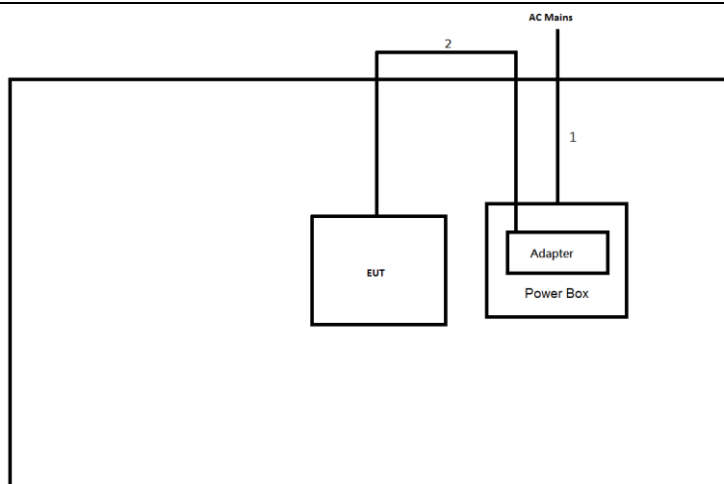

Item	Connection	Shielded	Length(m)	Remark
1	AC Power Cable	No	1.8	-
2	DC Power Cable	No	1.5	-

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

3.1.5 Test Setup

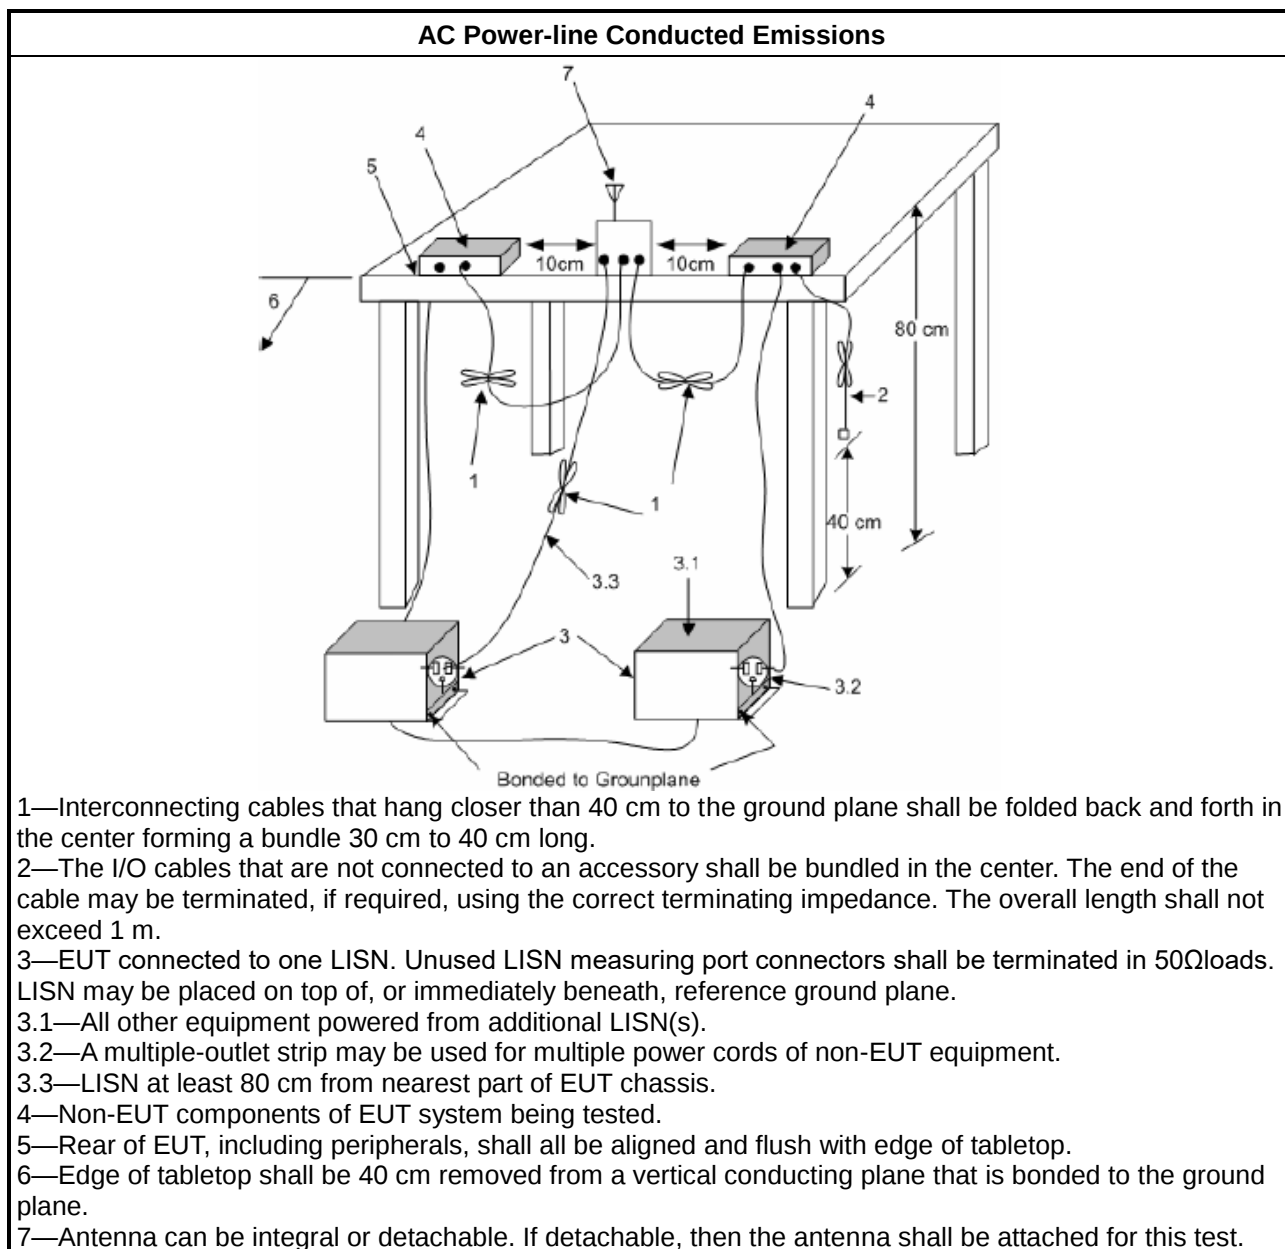

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, N/A
☒	For the 5.25-5.35 GHz band, N/A
☒	For the 5.47-5.725 GHz band, N/A
☒	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as KDB 789033, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 6.7 for bandwidth testing.

3.2.4 Test Setup

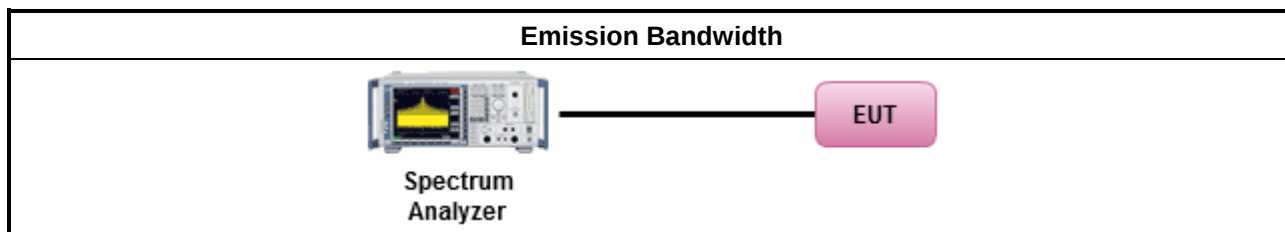

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band:
☐	Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm]
☐	Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$
☐	Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$.
☐	Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒	For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒	For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☒	For the 5.725-5.85 GHz band:
☐	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$.
☐	Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method	
Maximum Conducted Output Power	
	Duty cycle $\geq 98\%$
☒	Refer as KDB 789033, clause E Method SA-2 (spectral trace averaging).
	Duty cycle $< 98\%$
☐	Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
☒	Refer as KDB 789033, clause E Method PM (using an RF average power meter).
For conducted measurement.	
	If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	If multiple transmit chains, EIRP calculation could be following as methods: $P_{\text{total}} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}$

3.3.4 Test Setup

For Straddle channel

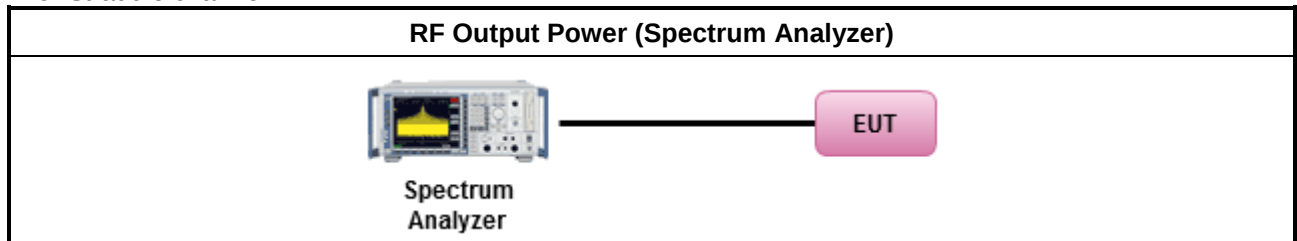

For Other channel

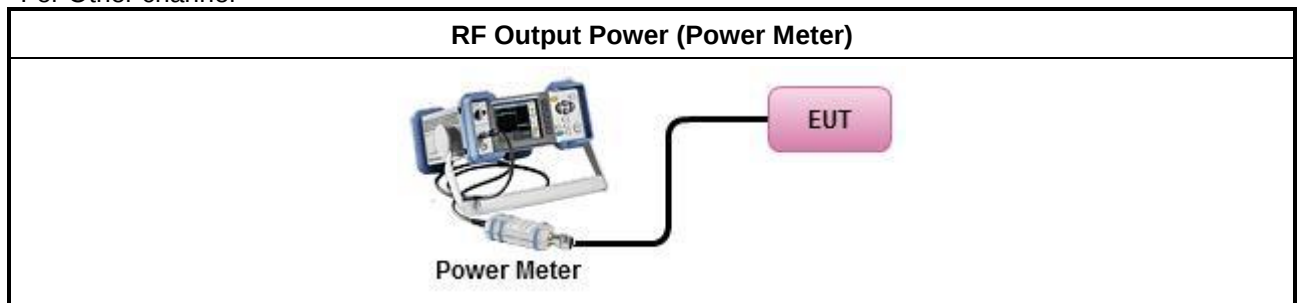

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Peak Power Spectral Density

3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
	Outdoor AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
	Indoor AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
	Point-to-point AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$.
	Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☒ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☒ For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
	Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$.
	Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐ Refer as KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth	Duty cycle ≥ 98%
☒ Refer as KDB 789033, clause E Method SA-2 (spectral trace averaging).	Duty cycle < 98%
☐ Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)	
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.	
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	

3.4.4 Test Setup

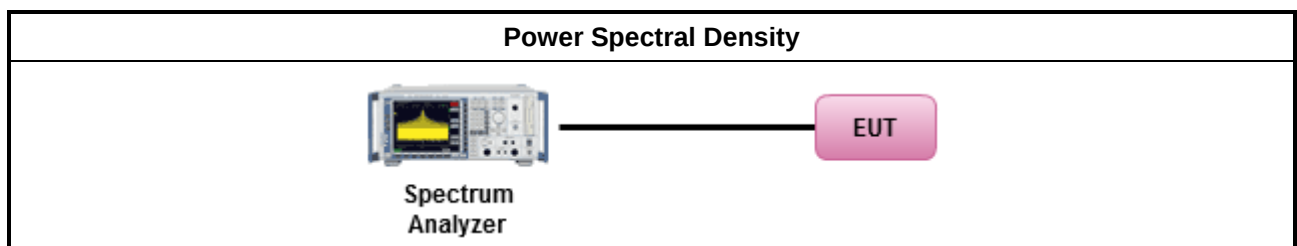

3.4.5 Test Result of Peak Power Spectral Density

Refer as Appendix D

3.5 Unwanted Emissions

3.5.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.85 GHz	5.650-5700 GHz: e.i.r.p. -27 ~ 10 dBm [68.2 ~ 105.2 dBuV/m@3m] 5.700-5720 GHz: e.i.r.p. 10 ~ 15.6 dBm [105.2 ~ 110.8 dBuV/m@3m] 5.720-5725 GHz: e.i.r.p. 15.6 ~ 27 dBm [110.8 ~ 122.2 dBuV/m@3m] 5.850-5.855 GHz: e.i.r.p. 27 ~ 15.6 dBm [122.2 ~ 110.8 dBuV/m@3m] 5.855-5.875 GHz: e.i.r.p. 15.6 ~ 10 dBm [110.8 ~ 105.2 dBuV/m@3m] 5.875-5.925 GHz: e.i.r.p. 10 ~ -27 dBm [105.2 ~ 68.2dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures


Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as KDB 789033, clause G)1) for unwanted emissions into restricted bands.
☒	Refer as KDB 789033, G)6) Method VB (ANSI C63.10, clause 4.1.4.2.3), Reduced VBW.
☒	Refer as KDB 789033, clause G)5) (ANSI C63.10, clause 4.1.4.2.2), measurement procedure peak limit.
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	
Use the following spectrum analyzer settings:	
	Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.
	Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.
KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.	
	Based on FCC 15.31(f)(2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
	Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


3.5.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamp Factor)

3.5.5 Test Setup

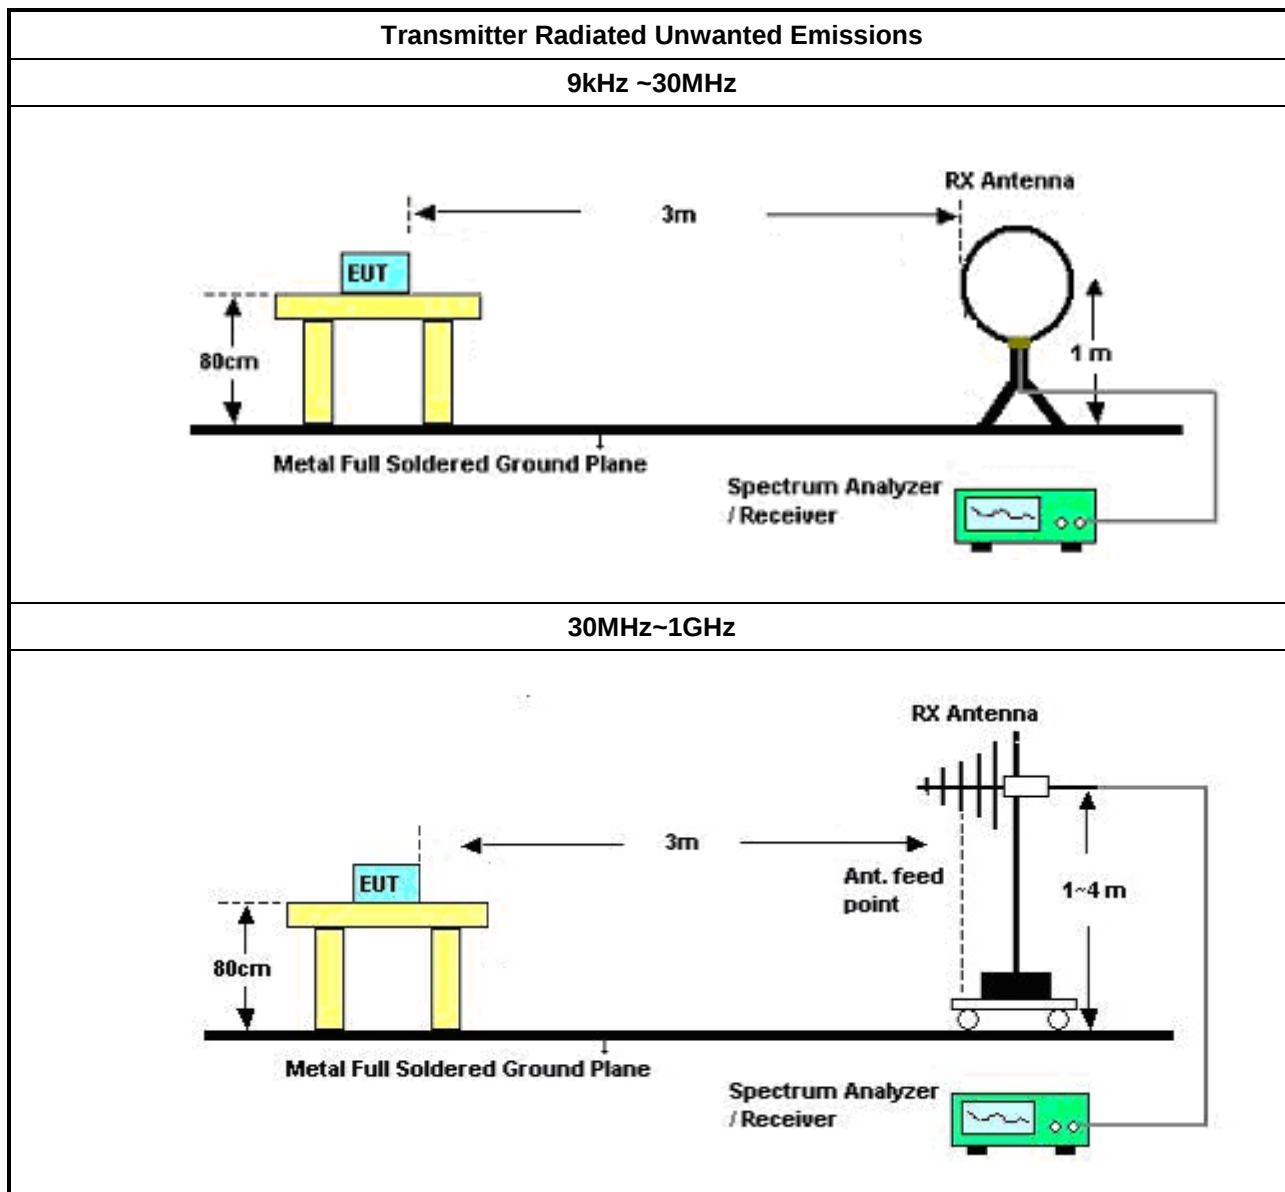

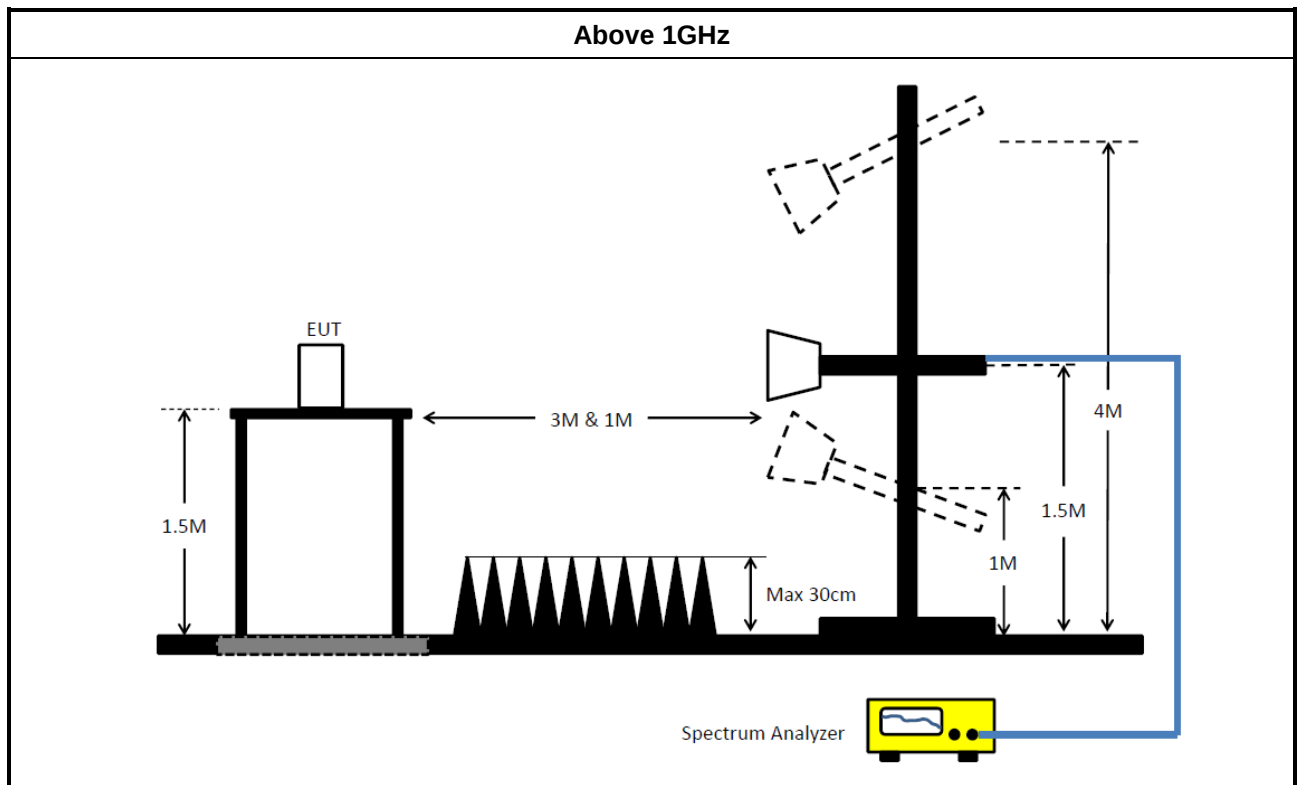

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESR3	102051	9kHz ~ 3.6GHz	17/May/2024	16/May/2025
Two-Line V-Network	ROHDE & SCHWARZ	ENV 216	101578	9kHz ~ 30MHz	11/Oct/2024	10/Oct/2025
RF Cable 5m	TITAN	TITAN	CO04-cable-01	9 kHz~200MHz	26/Feb/2025	25/Feb/2026
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9kHz ~ 30MHz	17/Oct/2024	16/Oct/2025
Software	Sporton	SENSE-EMI	V5.11.3	-	NCR	NCR

NCR: No Calibration Required

Instrument for Radiated Test (03CH02-HY)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
N.S.A. Measurement	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz~1GHz 3M	14/Jul/2024	13/Jul/2025
Site V.S.W.R	SIDT FRANKONIA	SAC-3M	03CH02-HY	1GHz~18GHz 3M	14/Jul/2024	13/Jul/2025
EMI Test Receiver	R&S	ESR	102052	9kHz~3.6GHz	03/May/2024	02/May/2025
Signal Analyzer	R&S	FSV 40	101500	10Hz~40GHz	01/Nov/2024	31/Oct/2025
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	19/Mar/2024	18/Mar/2025
Bilog Antenna & 5dB Attenuator	SCHAFFNER / MTJ	CBL 6112B / MTJ6102-05	2723/2	30MHz~1GHz	26/Aug/2024	25/Aug/2025
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02268	1GHz~18GHz	23/Sep/2024	22/Sep/2025
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170154	18GHz~40GHz	04/Jun/2024	03/Jun/2025
RF Cable	MVE	400LL+SN 200207	03CH02-cable-02	9kHz~30MHz	26/Nov/2024	25/Nov/2025
RF Cable	MVE	400LL+SN 200207	03CH02-cable-02	30MHz~1GHz	26/Nov/2024	25/Nov/2025
RF Cable-R03m	HUBER+ SUHNER	SUCOFLEX 104	03CH02-cable-01	1GHz~40GHz	13/Feb/2025	12/Feb/2026
Amplifier	Agilent	8447D	2944A11149	100kHz~1.3GHz	29/Jun/2024	28/Jun/2025
Microwave Preamplifier	Agilent	8449B	3008A02373	1GHz~26.5GHz	01/Oct/2024	30/Sep/2025
Microwave Preamplifier	EMC INSTRUMENTS	EM18G40G	060604	18GHz ~40GHz	19/Apr/2024	18/Apr/2025
Amplifier	EM	EM18G40GA	060874	18GHz ~40GHz	18/Apr/2025	17/Apr/2026
SENSE-15407-NII	Sporton	V5.11.23	N/A	N/A	N/A	N/A

**Instrument for Radiated Test (03CH03-HY)**

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	1GHz~18GHz 3m	14/Jul/2024	13/Jul/2025
Signal Analyzer	R&S	FSV40	101500	10Hz~40GHz	01/Nov/2024	31/Oct/2025
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02267	1GHz~18GHz	18/Oct/2024	17/Oct/2025
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170154	18GHz ~ 40GHz	04/Jun/2024	03/Jun/2025
RF CABLE 5+8m	HUBER+SUHNER	SUOFLEX_104	03CH03-cable-03	1GHz~40GHz	19/Feb/2025	20/Feb/2026
Microwave Premplifier	Agilent	8449B	3008A02326	1GHz~26.5GHz	25/Jul/2024	24/Jul/2025
Microwave Premplifier	EMC INSTRUMENTS	EM18G40G	060604	18GHz ~ 40GHz	19/Apr/2024	18/Apr/2025
SENSE-EMI	Sporton	V5.11.9	NA	NA	NA	NA

Instrument for Conducted Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101515	10Hz~40GHz	23/Jan/2025	22/Jan/2026
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	16/Oct/2024	15/Oct/2025
Power Meter	Anritsu	ML2495A	1517010	300MHz~40GHz	18/Dec/2024	17/Dec/2025
Pulse Sensor	Anritsu	MA2411B	1339407	300MHz~40GHz	18/Dec/2024	17/Dec/2025
SENSE-15407_NII	Sporton	V5.11.23	N/A	N/A	N/A	N/A



Conducted Emissions at Powerline

Appendix A


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	154.868k	53.01	65.73	-12.72	Neutral


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	153.024k	52.48	65.83	-13.35	Line
Mode 1	Pass	AV	153.024k	37.36	55.83	-18.47	Line
Mode 1	Pass	QP	195.216k	41.66	63.80	-22.14	Line
Mode 1	Pass	AV	195.216k	28.98	53.80	-24.82	Line
Mode 1	Pass	QP	246.077k	40.23	61.89	-21.66	Line
Mode 1	Pass	AV	246.077k	33.11	51.89	-18.78	Line
Mode 1	Pass	QP	529.596k	27.58	56.00	-28.42	Line
Mode 1	Pass	AV	529.596k	22.96	46.00	-23.04	Line
Mode 1	Pass	QP	1.191M	19.76	56.00	-36.24	Line
Mode 1	Pass	AV	1.191M	15.20	46.00	-30.80	Line
Mode 1	Pass	QP	19.244M	21.21	60.00	-38.79	Line
Mode 1	Pass	AV	19.244M	17.68	50.00	-32.32	Line
Mode 1	Pass	QP	154.868k	53.01	65.73	-12.72	Neutral
Mode 1	Pass	AV	154.868k	36.39	55.73	-19.34	Neutral
Mode 1	Pass	QP	217.434k	42.24	62.92	-20.68	Neutral
Mode 1	Pass	AV	217.434k	31.53	52.92	-21.39	Neutral
Mode 1	Pass	QP	369.752k	36.18	58.50	-22.32	Neutral
Mode 1	Pass	AV	369.752k	32.62	48.50	-15.88	Neutral
Mode 1	Pass	QP	780.036k	20.53	56.00	-35.47	Neutral
Mode 1	Pass	AV	780.036k	16.63	46.00	-29.37	Neutral
Mode 1	Pass	QP	2.473M	15.52	56.00	-40.48	Neutral
Mode 1	Pass	AV	2.473M	13.58	46.00	-32.42	Neutral
Mode 1	Pass	QP	18.939M	25.91	60.00	-34.09	Neutral
Mode 1	Pass	AV	18.939M	21.76	50.00	-28.24	Neutral

Conducted Emissions at Powerline_Mode 1

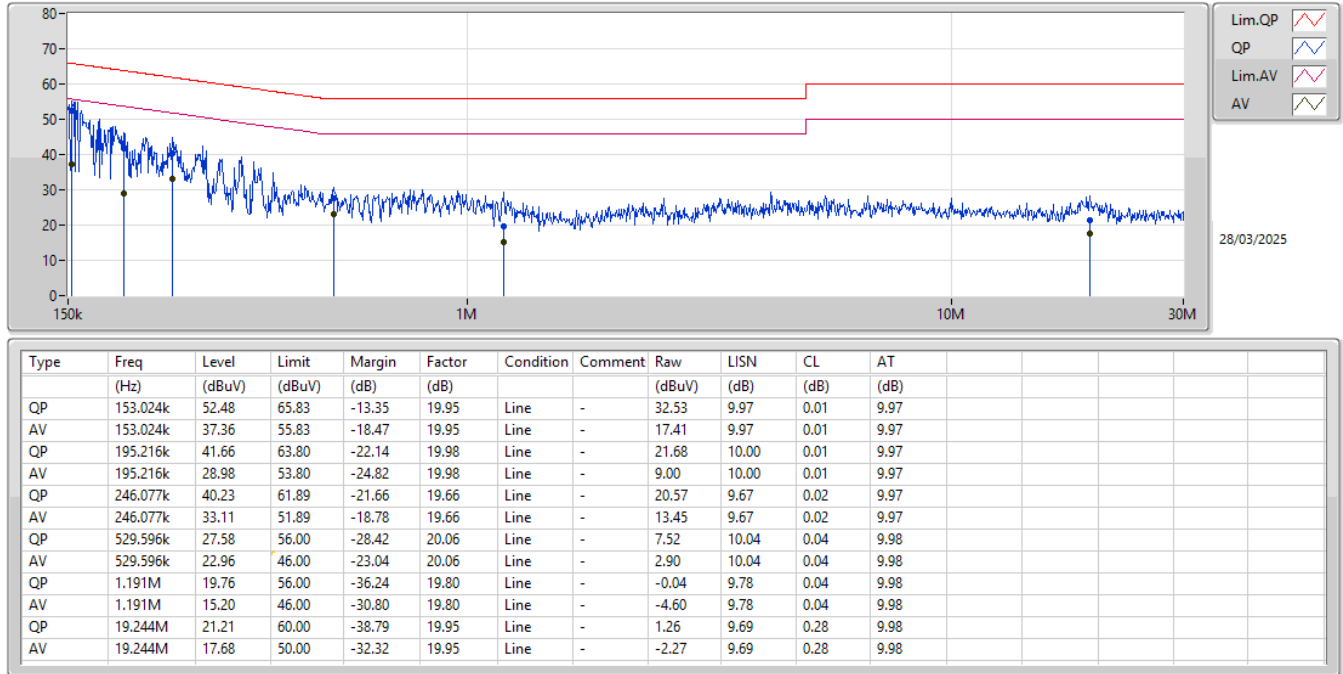

Conducted Emissions at Powerline_Mode 1

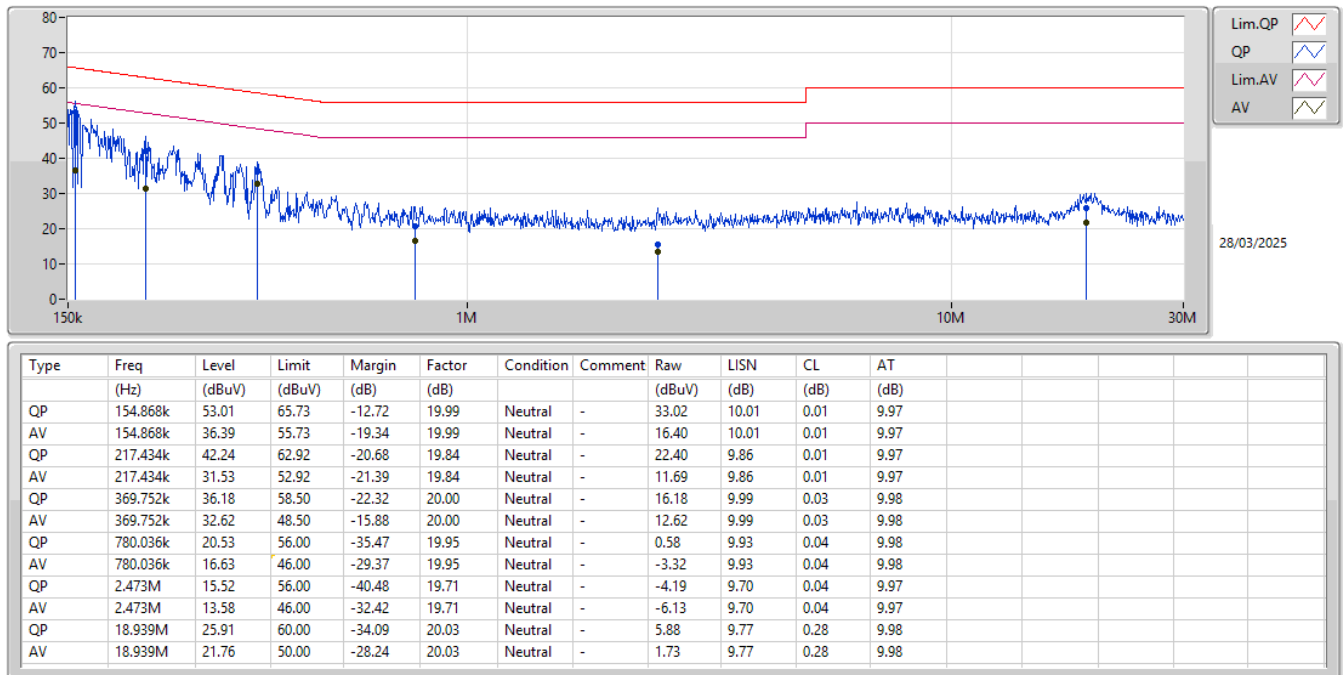

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.99M	16.734M	16M7D1D	21.34M	16.602M
802.11be EHT20_Nss1,(MCS0)_2TX	22.165M	19.165M	19M2D1D	20.845M	18.966M
802.11be EHT40_Nss1,(MCS0)_2TX	43.45M	37.931M	37M9D1D	40.92M	37.781M
802.11be EHT80_Nss1,(MCS0)_2TX	84.7M	77.561M	77M6D1D	84.04M	77.461M
802.11be EHT160_Nss1,(MCS0)_2TX	80.48M	77.481M	77M5D1D	79.76M	77.481M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.22M	16.8M	16M8D1D	21.725M	16.58M
802.11be EHT20_Nss1,(MCS0)_2TX	22.055M	19.065M	19M1D1D	21.23M	18.991M
802.11be EHT40_Nss1,(MCS0)_2TX	43.67M	37.931M	37M9D1D	40.59M	37.881M
802.11be EHT80_Nss1,(MCS0)_2TX	84.04M	77.561M	77M6D1D	84.04M	77.561M
802.11be EHT160_Nss1,(MCS0)_2TX	80.24M	77.721M	77M7D1D	79.92M	77.481M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.44M	16.822M	16M8D1D	15.885M	13.283M
802.11be EHT20_Nss1,(MCS0)_2TX	21.835M	19.09M	19M1D1D	15.345M	14.438M
802.11be EHT40_Nss1,(MCS0)_2TX	43.23M	37.931M	37M9D1D	34.895M	33.793M
802.11be EHT80_Nss1,(MCS0)_2TX	86.24M	77.661M	77M7D1D	76.575M	73.463M
802.11be EHT160_Nss1,(MCS0)_2TX	161.48M	157.121M	157MD1D	160.6M	157.121M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	16.555M	16.822M	16M8D1D	3.26M	4.138M
802.11be EHT20_Nss1,(MCS0)_2TX	19.195M	19.09M	19M1D1D	4.54M	4.598M
802.11be EHT40_Nss1,(MCS0)_2TX	38.17M	37.931M	37M9D1D	4.06M	4.258M
802.11be EHT80_Nss1,(MCS0)_2TX	78.32M	77.561M	77M6D1D	4.08M	6.677M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	21.505M	16.668M	22.99M	16.712M
5200MHz	Pass	Inf	21.34M	16.734M	22.055M	16.646M
5240MHz	Pass	Inf	22.33M	16.668M	22.55M	16.602M
5260MHz	Pass	Inf	21.725M	16.8M	22.22M	16.69M
5300MHz	Pass	Inf	21.725M	16.58M	21.78M	16.712M
5320MHz	Pass	Inf	21.78M	16.624M	22.11M	16.712M
5500MHz	Pass	Inf	20.845M	16.646M	22.44M	16.69M
5580MHz	Pass	Inf	21.23M	16.822M	21.34M	16.558M
5700MHz	Pass	Inf	21.615M	16.536M	21.285M	16.756M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.885M	13.283M	15.99M	13.328M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.26M	4.138M	3.26M	4.178M
5745MHz	Pass	500k	16.555M	16.646M	16.555M	16.624M
5785MHz	Pass	500k	16.555M	16.756M	16.445M	16.624M
5825MHz	Pass	500k	16.555M	16.822M	16.555M	16.756M
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	21.725M	19.14M	21.67M	18.966M
5200MHz	Pass	Inf	20.845M	19.04M	22.165M	19.015M
5240MHz	Pass	Inf	21.395M	19.165M	21.505M	19.115M
5260MHz	Pass	Inf	21.505M	19.015M	21.45M	19.065M
5300MHz	Pass	Inf	21.23M	18.991M	21.395M	19.04M
5320MHz	Pass	Inf	22.055M	19.04M	22M	19.015M
5500MHz	Pass	Inf	21.395M	19.015M	21.835M	18.991M
5580MHz	Pass	Inf	21.78M	19.015M	21.505M	19.09M
5700MHz	Pass	Inf	21.45M	19.04M	21.395M	18.966M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.345M	14.438M	15.645M	14.438M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.54M	4.638M	4.56M	4.598M
5745MHz	Pass	500k	19.14M	18.966M	19.14M	19.09M
5785MHz	Pass	500k	19.195M	18.966M	18.7M	19.015M
5825MHz	Pass	500k	19.14M	19.065M	19.085M	18.991M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	41.25M	37.781M	40.92M	37.931M
5230MHz	Pass	Inf	43.45M	37.931M	42.24M	37.831M
5270MHz	Pass	Inf	42.68M	37.881M	41.58M	37.931M
5310MHz	Pass	Inf	43.67M	37.881M	40.59M	37.881M
5510MHz	Pass	Inf	43.23M	37.931M	40.92M	37.881M
5550MHz	Pass	Inf	40.37M	37.881M	40.26M	37.881M
5670MHz	Pass	Inf	41.03M	37.831M	40.92M	37.881M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	34.895M	33.828M	35.595M	33.793M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	4.16M	4.618M	4.06M	4.258M
5755MHz	Pass	500k	38.17M	37.881M	38.17M	37.931M
5795MHz	Pass	500k	38.06M	37.831M	38.17M	37.931M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
5210MHz	Pass	Inf	84.04M	77.561M	84.7M	77.461M
5290MHz	Pass	Inf	84.04M	77.561M	84.04M	77.561M
5530MHz	Pass	Inf	86.02M	77.661M	83.38M	77.561M
5610MHz	Pass	Inf	83.38M	77.561M	86.24M	77.361M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	76.575M	73.538M	76.65M	73.463M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	4.1M	6.697M	4.08M	6.677M
5775MHz	Pass	500k	78.32M	77.461M	77.88M	77.561M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	79.76M	77.481M	80.48M	77.481M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	80.24M	77.721M	79.92M	77.481M
5570MHz	Pass	Inf	161.48M	157.121M	160.6M	157.121M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5180MHz

20/03/2025

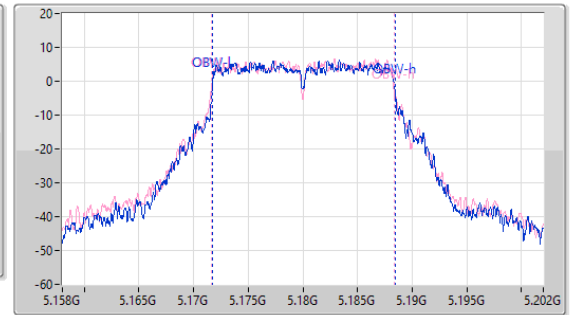
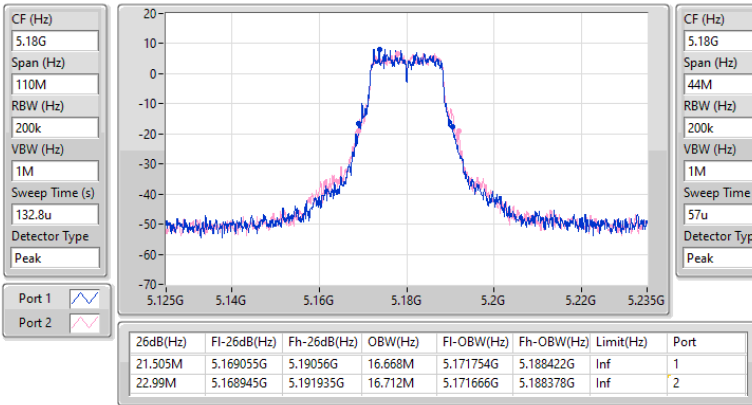


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW


5200MHz

20/03/2025

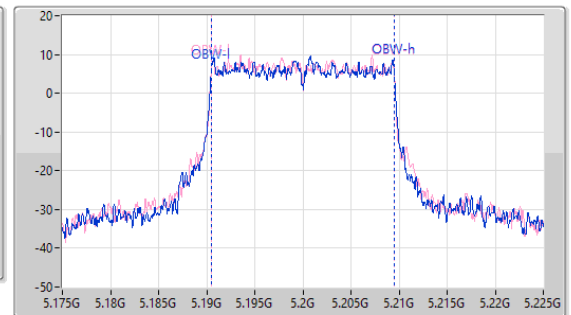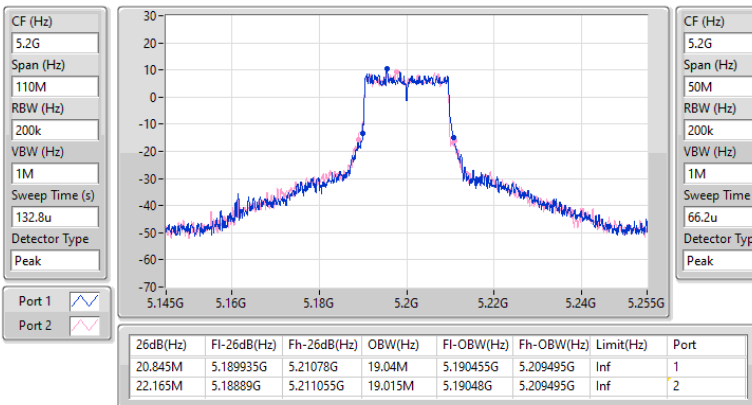


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5230MHz

20/03/2025

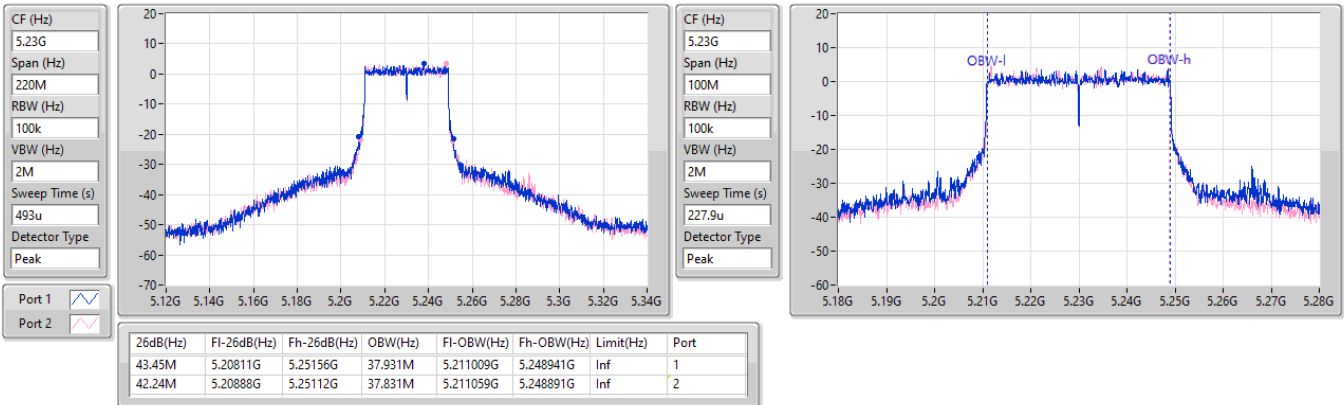
5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5210MHz

20/03/2025

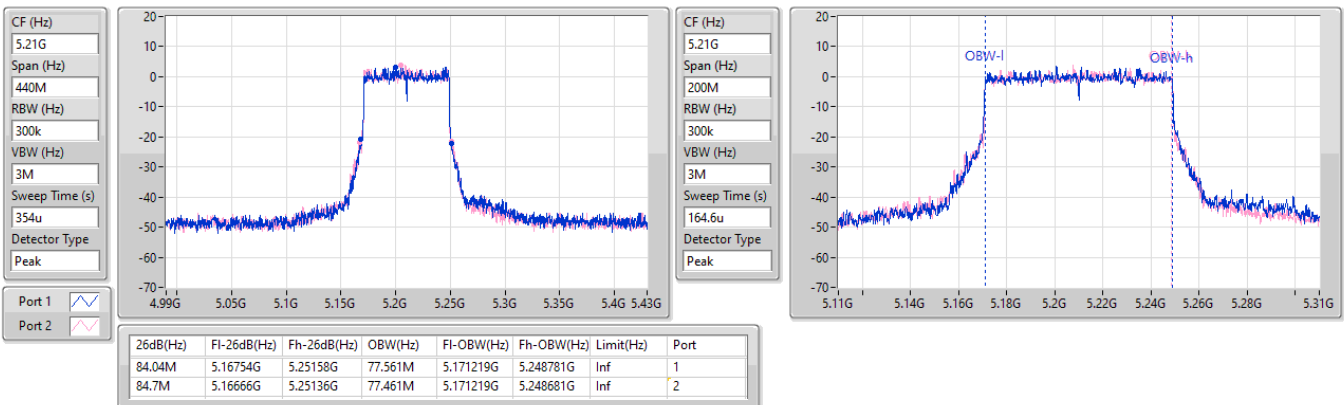


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5250MHz Straddle 5.15-5.25GHz

20/03/2025

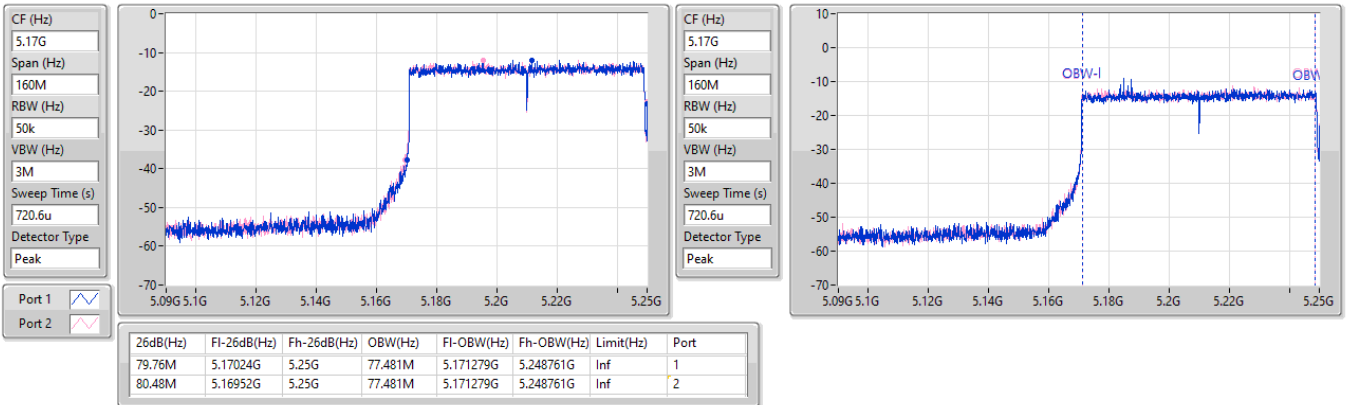


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

EBW


5260MHz

15/04/2025

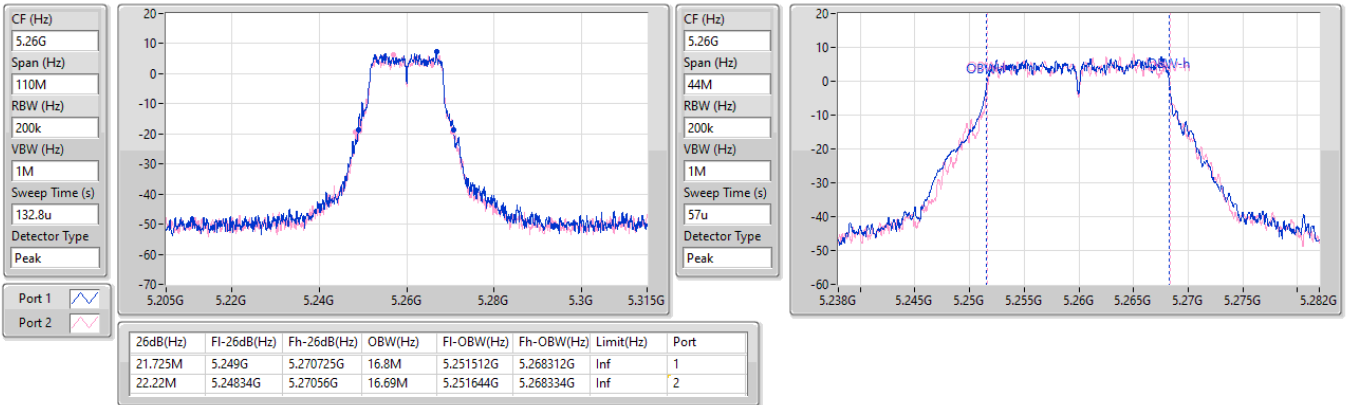


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5320MHz

21/03/2025

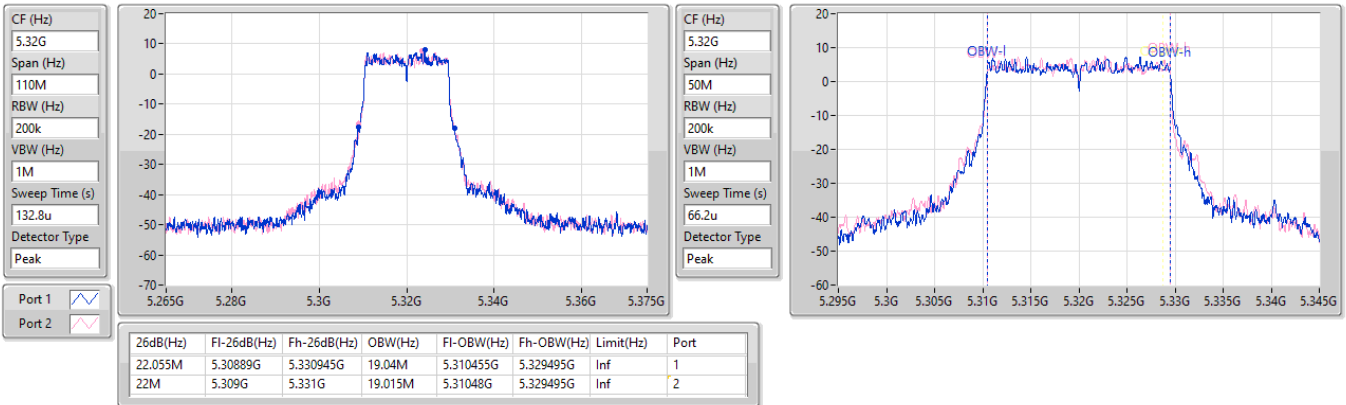
5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5310MHz

20/03/2025

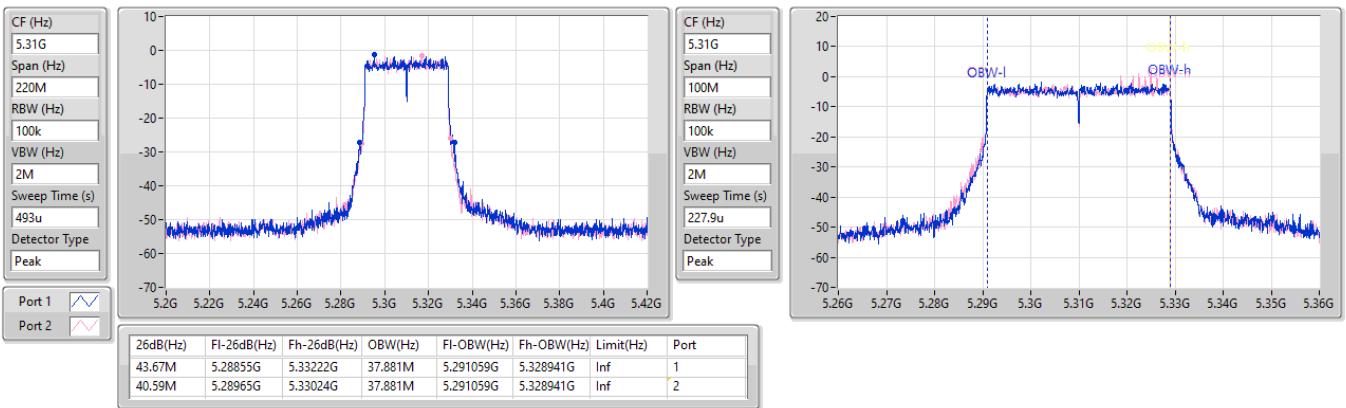


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5290MHz

20/03/2025

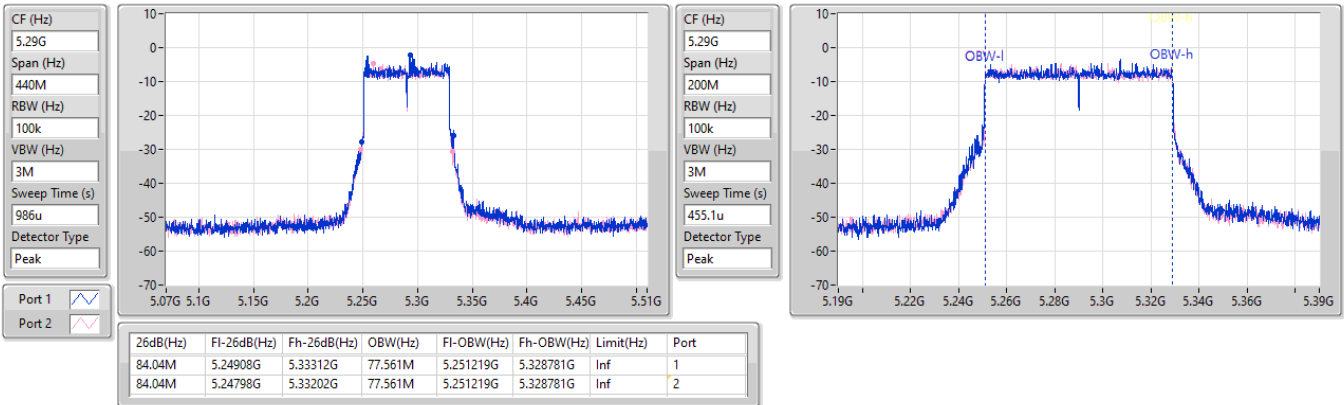


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5250MHz Straddle 5.25-5.35GHz

20/03/2025

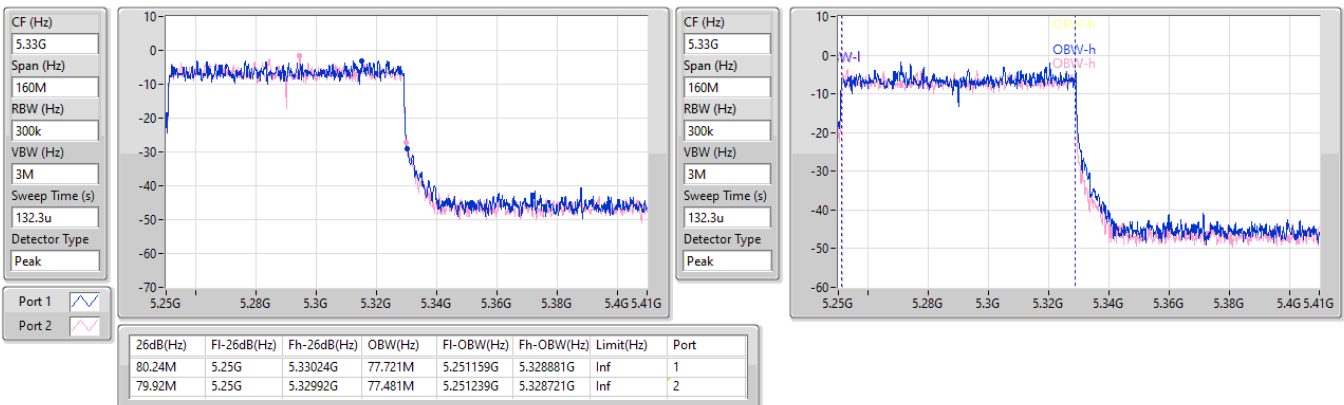


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5500MHz

15/04/2025

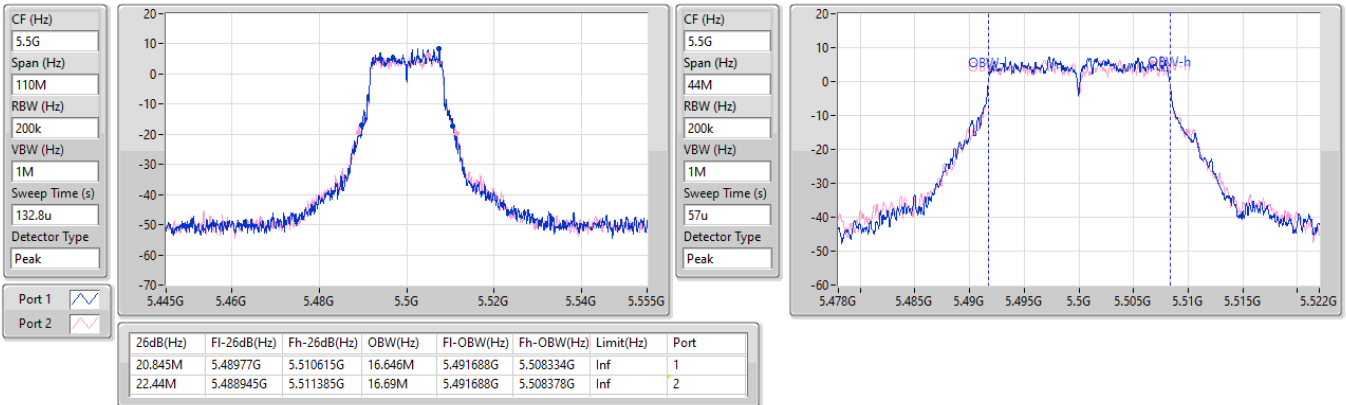


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5500MHz

15/04/2025

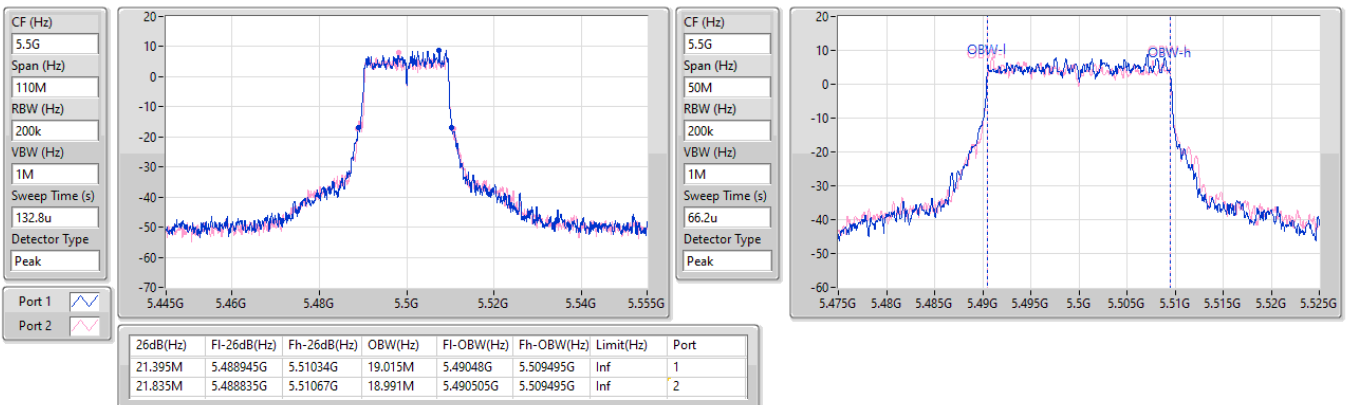


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5510MHz

20/03/2025

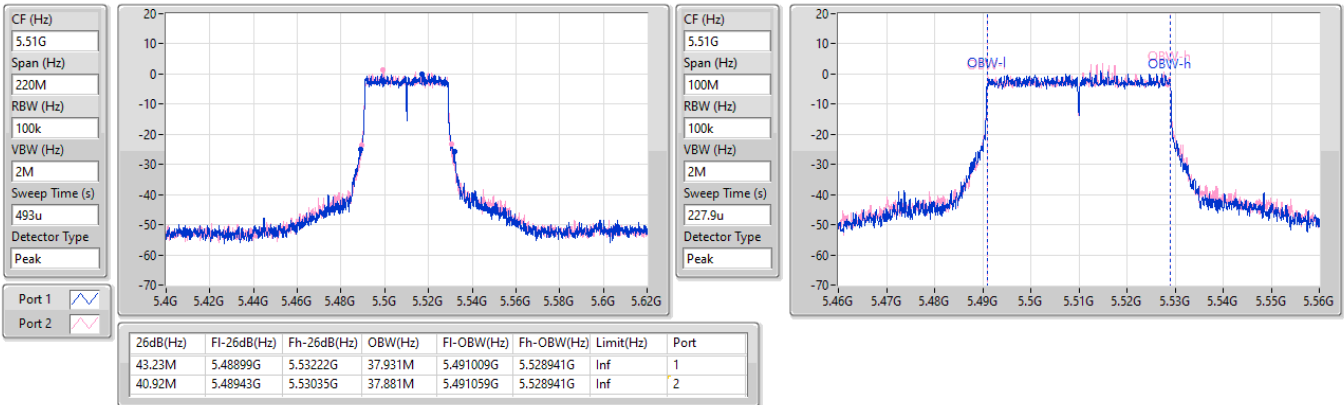


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5610MHz

20/03/2025

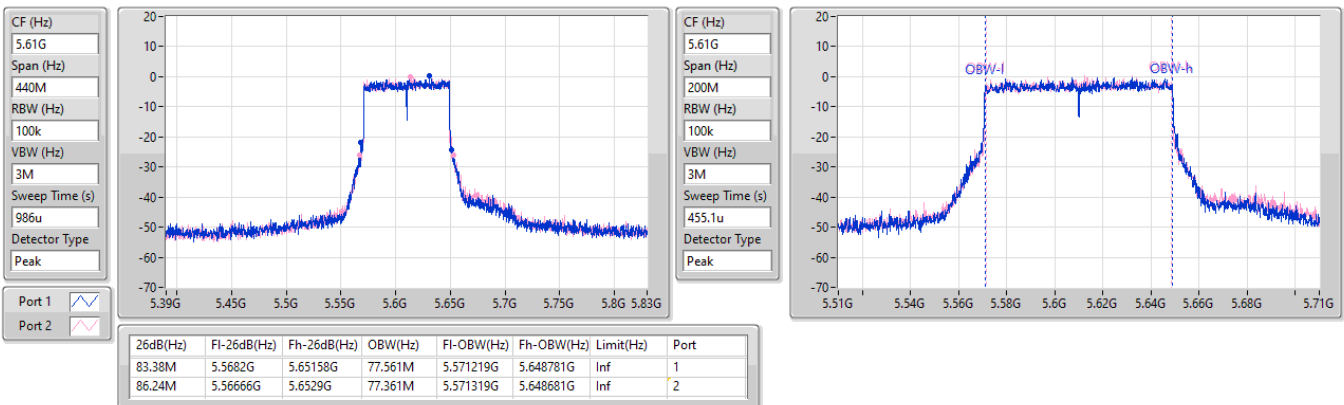


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5570MHz

22/04/2025

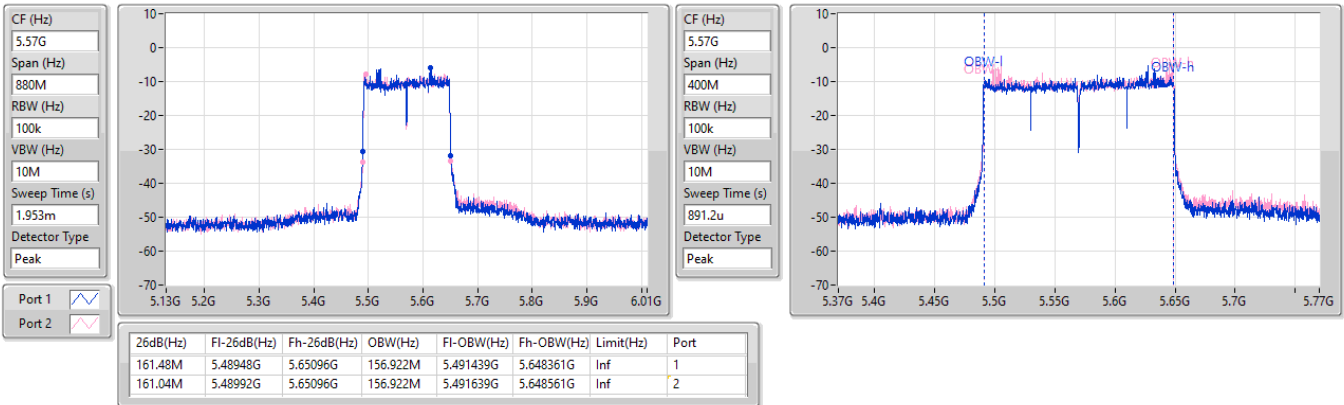


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5745MHz

20/03/2025

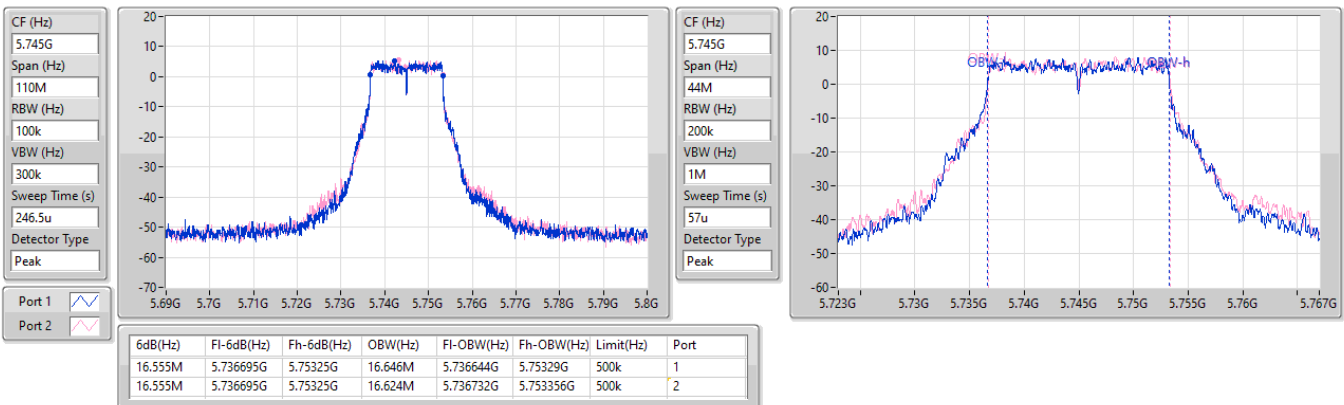


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5745MHz

20/03/2025

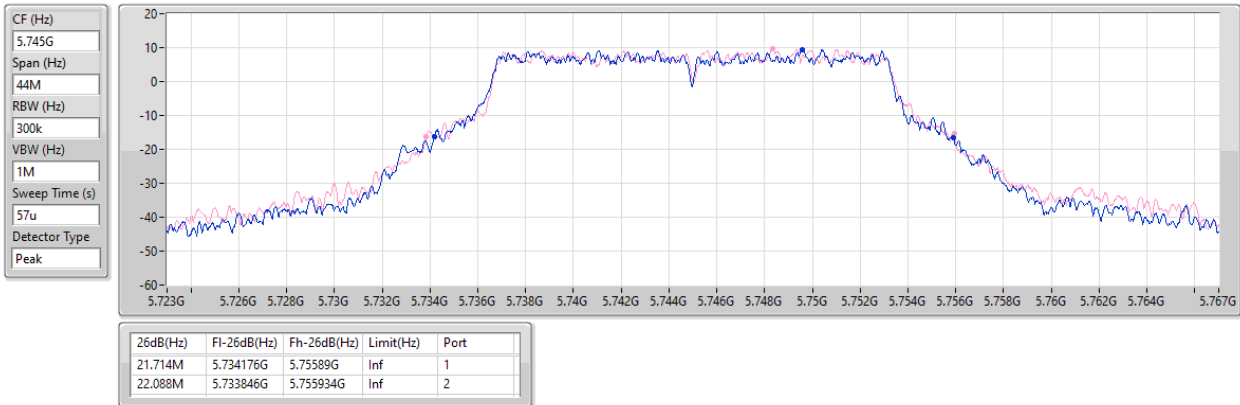


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW


5785MHz

20/03/2025

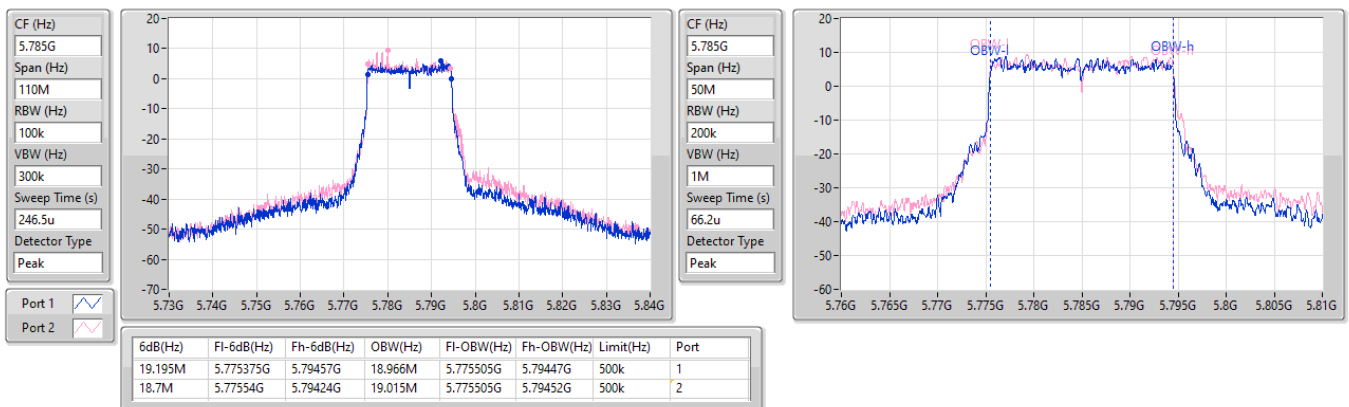


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5785MHz

20/03/2025

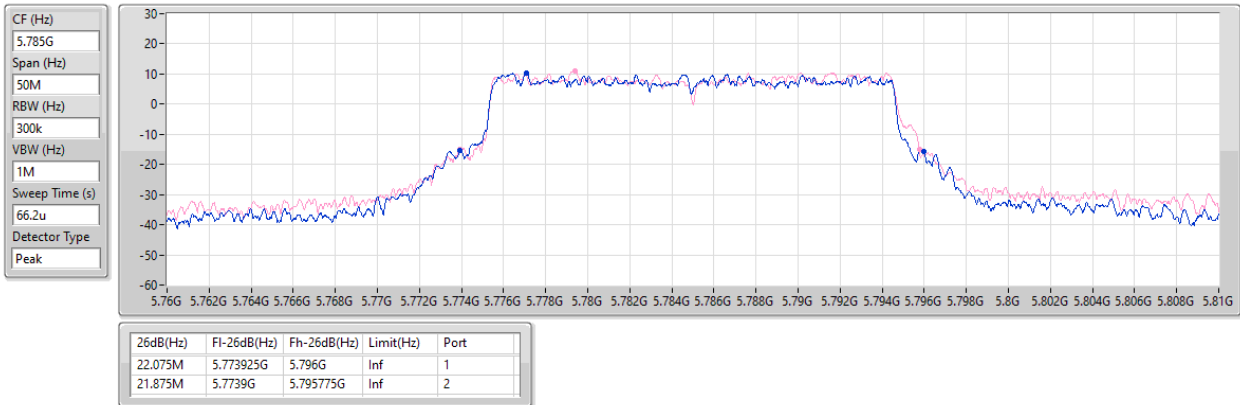
5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5755MHz

20/03/2025

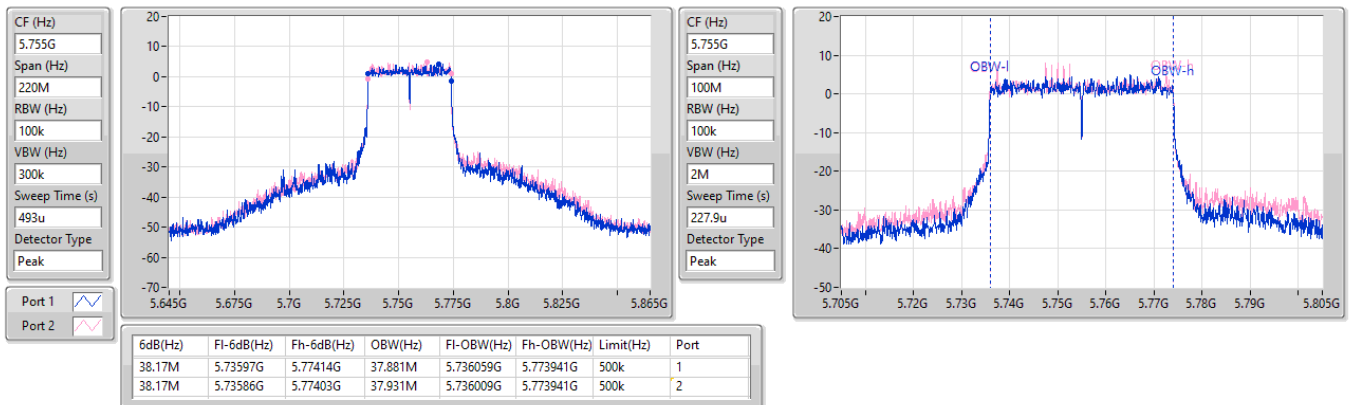


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5755MHz

20/03/2025

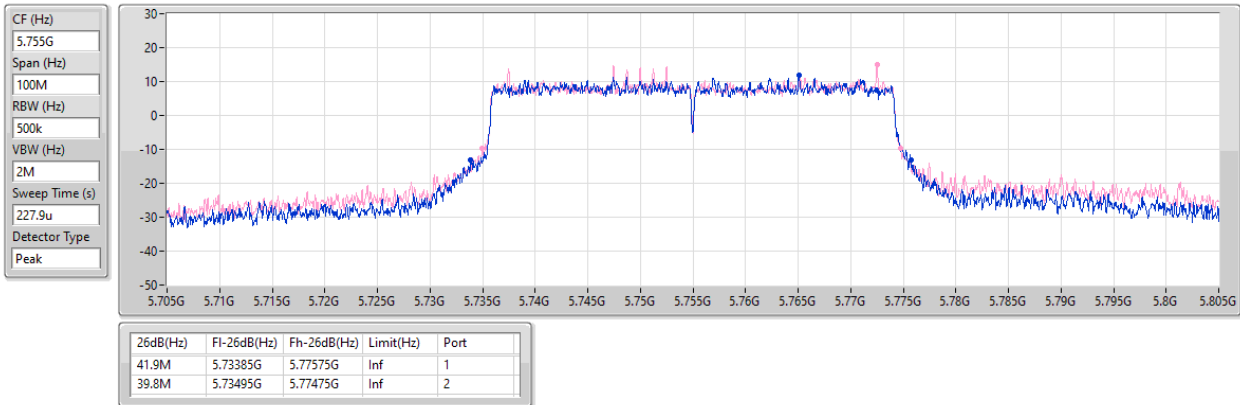


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5775MHz

20/03/2025

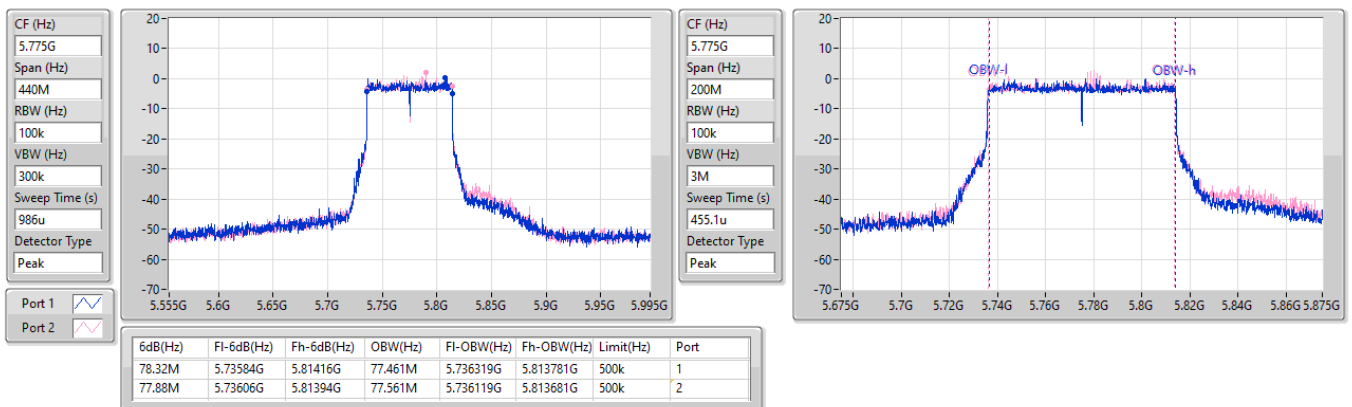


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5775MHz

20/03/2025

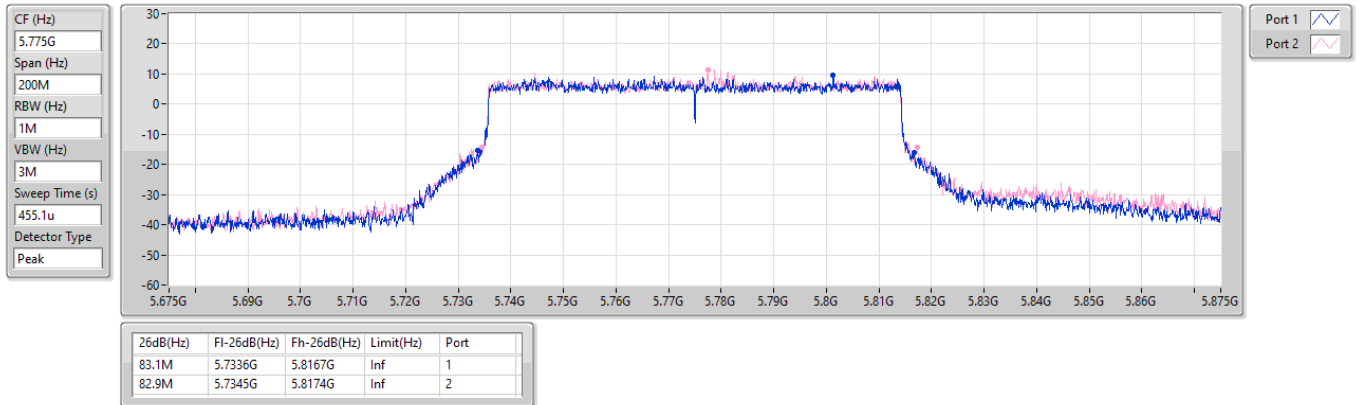

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	23.36	0.21677	28.96	0.78705
802.11be EHT20_Nss1,(MCS0)_2TX	24.33	0.27102	29.93	0.98401
802.11be EHT40_Nss1,(MCS0)_2TX	24.50	0.28184	30.10	1.02329
802.11be EHT80_Nss1,(MCS0)_2TX	21.18	0.13122	26.78	0.47643
802.11be EHT160_Nss1,(MCS0)_2TX	14.82	0.03034	20.42	0.11015
5.25-5.35GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	21.83	0.15241	27.43	0.55335
802.11be EHT20_Nss1,(MCS0)_2TX	22.74	0.18793	28.34	0.68234
802.11be EHT40_Nss1,(MCS0)_2TX	23.87	0.24378	29.47	0.88512
802.11be EHT80_Nss1,(MCS0)_2TX	18.64	0.07311	24.24	0.26546
802.11be EHT160_Nss1,(MCS0)_2TX	14.79	0.03013	20.39	0.10940
5.47-5.725GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	21.77	0.15031	27.37	0.54576
802.11be EHT20_Nss1,(MCS0)_2TX	22.65	0.18408	28.25	0.66834
802.11be EHT40_Nss1,(MCS0)_2TX	23.87	0.24378	29.47	0.88512
802.11be EHT80_Nss1,(MCS0)_2TX	23.84	0.24210	29.44	0.87902
802.11be EHT160_Nss1,(MCS0)_2TX	18.40	0.06918	24.00	0.25119
5.725-5.85GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	23.21	0.20941	28.81	0.76033
802.11be EHT20_Nss1,(MCS0)_2TX	24.28	0.26792	29.88	0.97275
802.11be EHT40_Nss1,(MCS0)_2TX	25.50	0.35481	31.10	1.28825
802.11be EHT80_Nss1,(MCS0)_2TX	23.59	0.22856	29.19	0.82985

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	5.60	18.52	18.92	21.73	30.00	27.33	Inf
5200MHz	Pass	5.60	20.21	20.48	23.36	30.00	28.96	Inf
5240MHz	Pass	5.60	20.26	20.29	23.29	30.00	28.89	Inf
5260MHz	Pass	5.60	18.68	18.14	21.43	23.98	27.03	Inf
5300MHz	Pass	5.60	18.87	18.77	21.83	23.98	27.43	Inf
5320MHz	Pass	5.60	18.74	18.51	21.64	23.98	27.24	Inf
5500MHz	Pass	5.60	18.85	18.41	21.65	23.98	27.25	Inf
5580MHz	Pass	5.60	18.88	18.64	21.77	23.98	27.37	Inf
5700MHz	Pass	5.60	18.39	18.37	21.39	23.98	26.99	Inf
5720MHz Straddle 5.47-5.725GHz	Pass	5.60	17.60	17.47	20.55	23.01	26.15	Inf
5720MHz Straddle 5.725-5.85GHz	Pass	5.60	11.72	11.59	14.67	30.00	20.27	Inf
5745MHz	Pass	5.60	20.19	20.21	23.21	30.00	28.81	Inf
5785MHz	Pass	5.60	19.56	19.61	22.60	30.00	28.20	Inf
5825MHz	Pass	5.60	18.54	18.32	21.44	30.00	27.04	Inf
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	5.60	19.14	19.55	22.36	30.00	27.96	Inf
5200MHz	Pass	5.60	20.84	20.96	23.91	30.00	29.51	Inf
5240MHz	Pass	5.60	21.28	21.35	24.33	30.00	29.93	Inf
5260MHz	Pass	5.60	19.73	19.72	22.74	23.98	28.34	Inf
5300MHz	Pass	5.60	19.52	19.57	22.56	23.98	28.16	Inf
5320MHz	Pass	5.60	19.26	19.33	22.31	23.98	27.91	Inf
5500MHz	Pass	5.60	19.56	18.90	22.25	23.98	27.85	Inf
5580MHz	Pass	5.60	19.60	19.67	22.65	23.98	28.25	Inf
5700MHz	Pass	5.60	18.21	18.44	21.34	23.98	26.94	Inf
5720MHz Straddle 5.47-5.725GHz	Pass	5.60	17.88	17.80	20.85	22.86	26.45	Inf
5720MHz Straddle 5.725-5.85GHz	Pass	5.60	13.12	12.82	15.98	30.00	21.58	Inf
5745MHz	Pass	5.60	20.81	20.77	23.80	30.00	29.40	Inf
5785MHz	Pass	5.60	21.06	21.27	24.18	30.00	29.78	Inf
5825MHz	Pass	5.60	21.36	21.18	24.28	30.00	29.88	Inf
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	5.60	16.38	16.72	19.56	30.00	25.16	Inf
5230MHz	Pass	5.60	21.42	21.55	24.50	30.00	30.10	Inf
5270MHz	Pass	5.60	20.86	20.85	23.87	23.98	29.47	Inf
5310MHz	Pass	5.60	16.24	16.09	19.18	23.98	24.78	Inf
5510MHz	Pass	5.60	18.11	18.15	21.14	23.98	26.74	Inf
5550MHz	Pass	5.60	20.24	20.83	23.56	23.98	29.16	Inf
5670MHz	Pass	5.60	20.43	20.30	23.38	23.98	28.98	Inf
5710MHz Straddle 5.47-5.725GHz	Pass	5.60	20.77	20.94	23.87	23.98	29.47	Inf
5710MHz Straddle 5.725-5.85GHz	Pass	5.60	11.79	11.88	14.85	30.00	20.45	Inf
5755MHz	Pass	5.60	22.39	22.58	25.50	30.00	31.10	Inf
5795MHz	Pass	5.60	20.75	21.03	23.90	30.00	29.50	Inf
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-



Average Power_Non-Beamforming

Appendix C.1

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
5210MHz	Pass	5.60	18.11	18.23	21.18	30.00	26.78	Inf
5290MHz	Pass	5.60	15.70	15.55	18.64	23.98	24.24	Inf
5530MHz	Pass	5.60	17.80	18.35	21.09	23.98	26.69	Inf
5610MHz	Pass	5.60	20.27	20.23	23.26	23.98	28.86	Inf
5690MHz Straddle 5.47-5.725GHz	Pass	5.60	20.91	20.75	23.84	23.98	29.44	Inf
5690MHz Straddle 5.725-5.85GHz	Pass	5.60	8.40	8.16	11.29	30.00	16.89	Inf
5775MHz	Pass	5.60	20.56	20.60	23.59	30.00	29.19	Inf
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	5.60	11.77	11.84	14.82	30.00	20.42	Inf
5250MHz Straddle 5.25-5.35GHz	Pass	5.60	11.95	11.60	14.79	23.98	20.39	Inf
5570MHz	Pass	5.60	15.24	15.54	18.40	23.98	24.00	Inf


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

20/03/2025

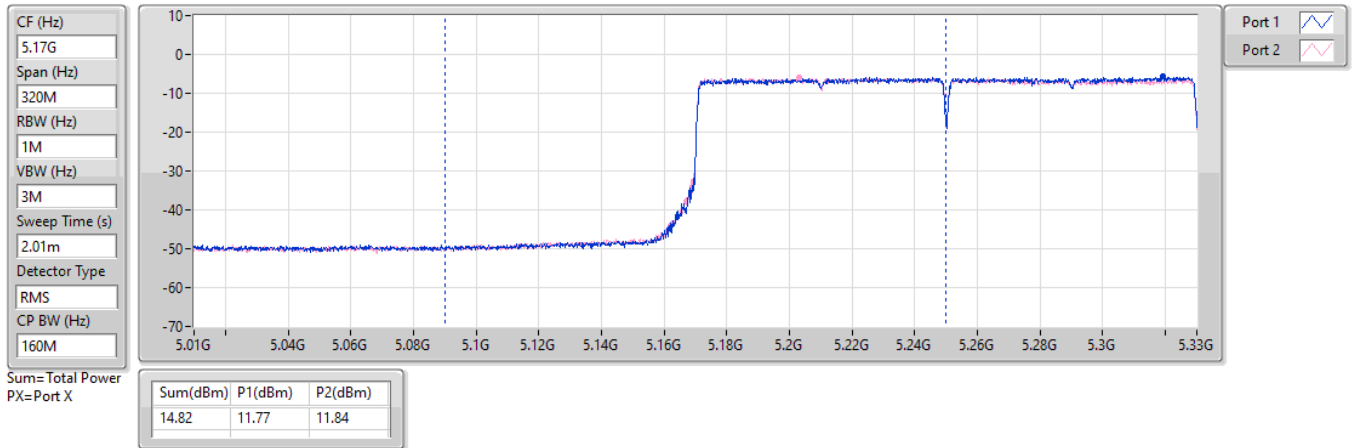


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

20/03/2025

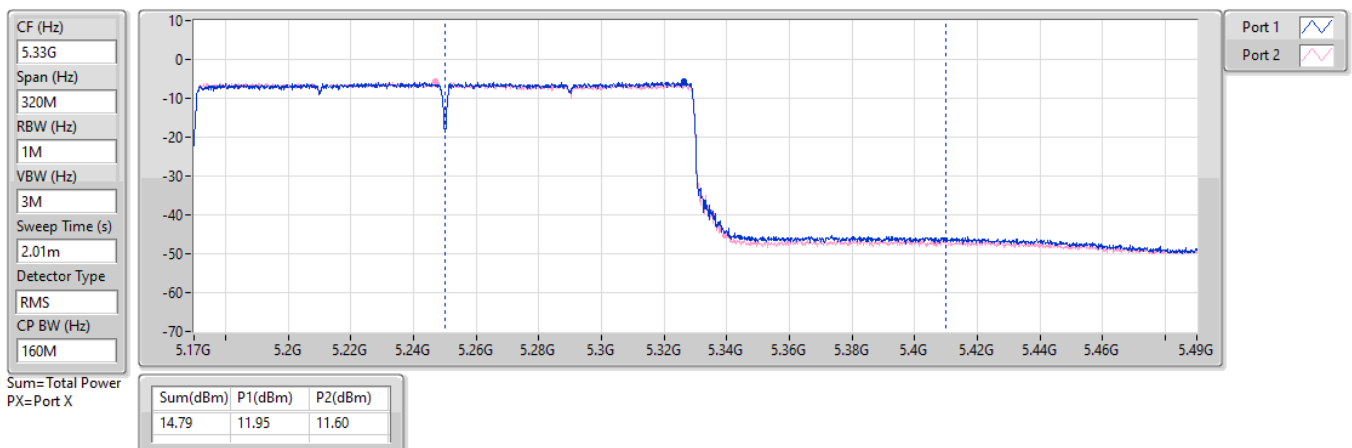


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

AV Power

5710MHz Straddle 5.47-5.725GHz_TX

21/03/2025

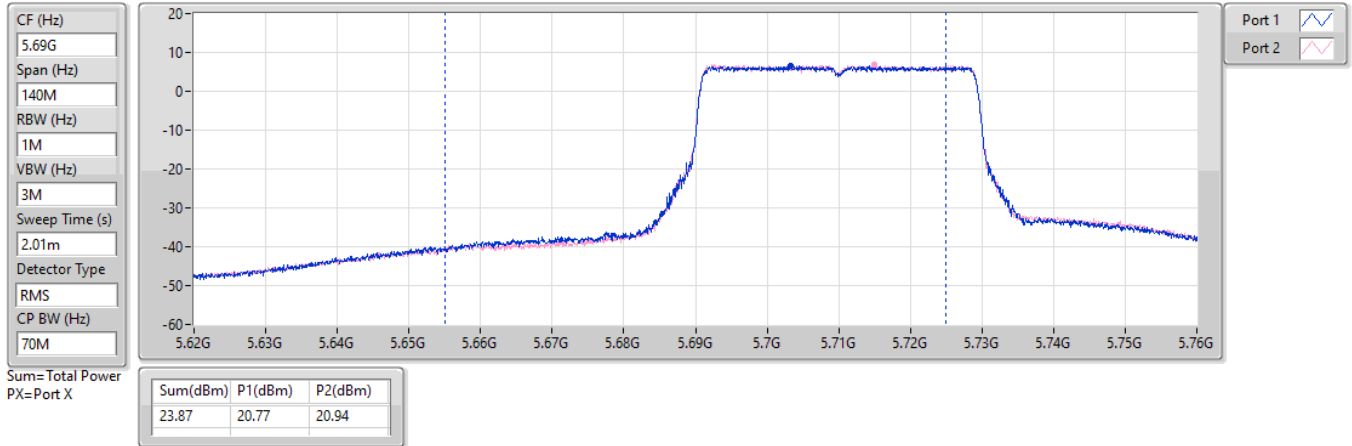


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

AV Power

5690MHz Straddle 5.47-5.725GHz_TX

20/03/2025

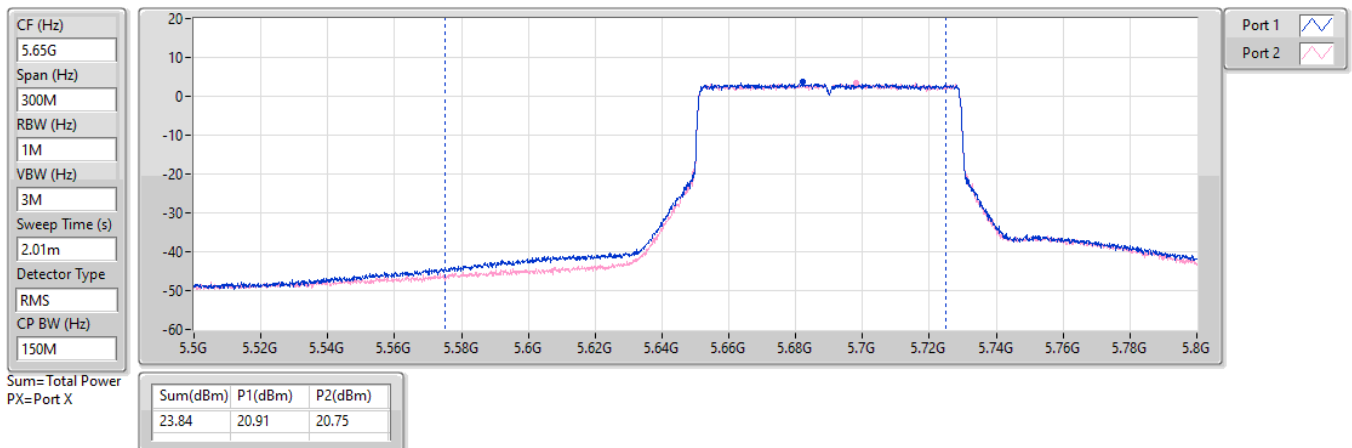

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	24.33	0.27102	32.69	1.85780
802.11be EHT40-BF_Nss1,(MCS0)_2TX	24.50	0.28184	32.86	1.93197
802.11be EHT80-BF_Nss1,(MCS0)_2TX	21.18	0.13122	29.54	0.89950
802.11be EHT160-BF_Nss1,(MCS0)_2TX	14.82	0.03034	23.18	0.20797
5.25-5.35GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	20.93	0.12388	29.29	0.84918
802.11be EHT40-BF_Nss1,(MCS0)_2TX	20.98	0.12531	29.34	0.85901
802.11be EHT80-BF_Nss1,(MCS0)_2TX	18.64	0.07311	27.00	0.50119
802.11be EHT160-BF_Nss1,(MCS0)_2TX	14.79	0.03013	23.15	0.20654
5.47-5.725GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.02	0.12647	29.38	0.86696
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.13	0.12972	29.49	0.88920
802.11be EHT80-BF_Nss1,(MCS0)_2TX	21.09	0.12853	29.45	0.88105
802.11be EHT160-BF_Nss1,(MCS0)_2TX	18.40	0.06918	26.76	0.47424
5.725-5.85GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	24.28	0.26792	32.64	1.83654
802.11be EHT40-BF_Nss1,(MCS0)_2TX	25.50	0.35481	33.86	2.43220
802.11be EHT80-BF_Nss1,(MCS0)_2TX	23.59	0.22856	31.95	1.56675

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	8.36	19.14	19.55	22.36	27.64	30.72	Inf
5200MHz	Pass	8.36	20.84	20.96	23.91	27.64	32.27	Inf
5240MHz	Pass	8.36	21.28	21.35	24.33	27.64	32.69	Inf
5260MHz	Pass	8.36	17.88	17.87	20.89	21.62	29.25	Inf
5300MHz	Pass	8.36	17.87	17.95	20.92	21.62	29.28	Inf
5320MHz	Pass	8.36	17.86	17.97	20.93	21.62	29.29	Inf
5500MHz	Pass	8.36	18.20	17.54	20.89	21.62	29.25	Inf
5580MHz	Pass	8.36	17.95	18.06	21.02	21.62	29.38	Inf
5700MHz	Pass	8.36	17.71	17.94	20.84	21.62	29.20	Inf
5720MHz Straddle 5.47-5.725GHz	Pass	8.36	17.01	16.95	19.99	20.50	28.35	Inf
5720MHz Straddle 5.725-5.85GHz	Pass	8.36	11.78	11.60	14.70	27.64	23.06	Inf
5745MHz	Pass	8.36	20.81	20.77	23.80	27.64	32.16	Inf
5785MHz	Pass	8.36	21.06	21.27	24.18	27.64	32.54	Inf
5825MHz	Pass	8.36	21.36	21.18	24.28	27.64	32.64	Inf
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	8.36	16.38	16.72	19.56	27.64	27.92	Inf
5230MHz	Pass	8.36	21.42	21.55	24.50	27.64	32.86	Inf
5270MHz	Pass	8.36	17.99	17.95	20.98	21.62	29.34	Inf
5310MHz	Pass	8.36	16.24	16.09	19.18	21.62	27.54	Inf
5510MHz	Pass	8.36	18.11	18.13	21.13	21.62	29.49	Inf
5550MHz	Pass	8.36	17.59	18.18	20.91	21.62	29.27	Inf
5670MHz	Pass	8.36	18.07	17.95	21.02	21.62	29.38	Inf
5710MHz Straddle 5.47-5.725GHz	Pass	8.36	18.01	18.06	21.05	21.62	29.41	Inf
5710MHz Straddle 5.725-5.85GHz	Pass	8.36	8.93	9.02	11.99	27.64	20.35	Inf
5755MHz	Pass	8.36	22.39	22.58	25.50	27.64	33.86	Inf
5795MHz	Pass	8.36	20.75	21.03	23.90	27.64	32.26	Inf
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	8.36	18.11	18.23	21.18	27.64	29.54	Inf
5290MHz	Pass	8.36	15.70	15.55	18.64	21.62	27.00	Inf
5530MHz	Pass	8.36	17.80	18.35	21.09	21.62	29.45	Inf
5610MHz	Pass	8.36	17.92	17.88	20.91	21.62	29.27	Inf
5690MHz Straddle 5.47-5.725GHz	Pass	8.36	17.82	17.89	20.87	21.62	29.23	Inf
5690MHz Straddle 5.725-5.85GHz	Pass	8.36	5.28	5.42	8.36	27.64	16.72	Inf
5775MHz	Pass	8.36	20.56	20.60	23.59	27.64	31.95	Inf
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	8.36	11.77	11.84	14.82	27.64	23.18	Inf
5250MHz Straddle 5.25-5.35GHz	Pass	8.36	11.95	11.60	14.79	21.62	23.15	Inf
5570MHz	Pass	8.36	15.24	15.54	18.40	21.62	26.76	Inf


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.15-5.25GHz_TX

20/03/2025

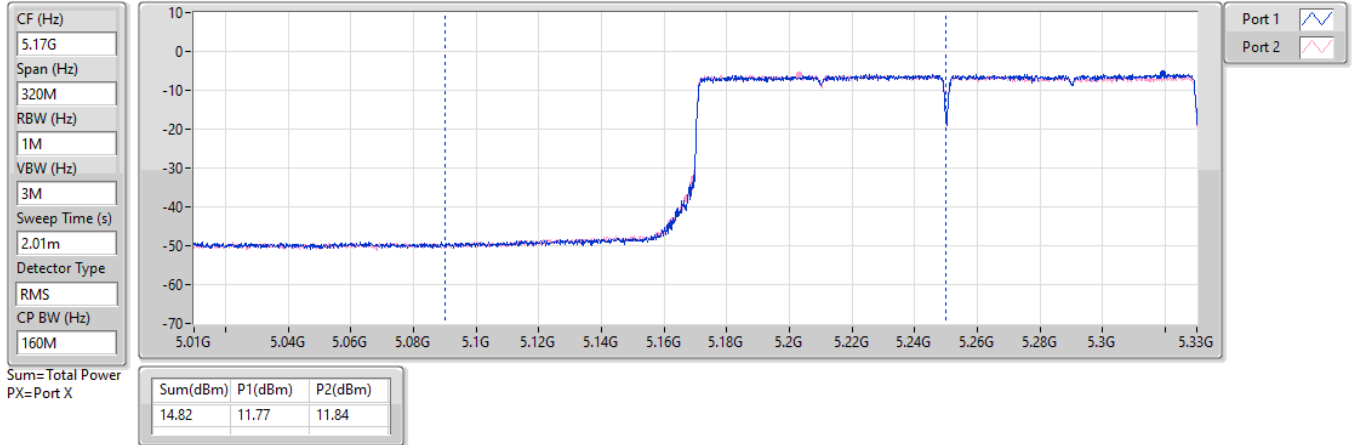


5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

AV Power

5250MHz Straddle 5.25-5.35GHz_TX

20/03/2025

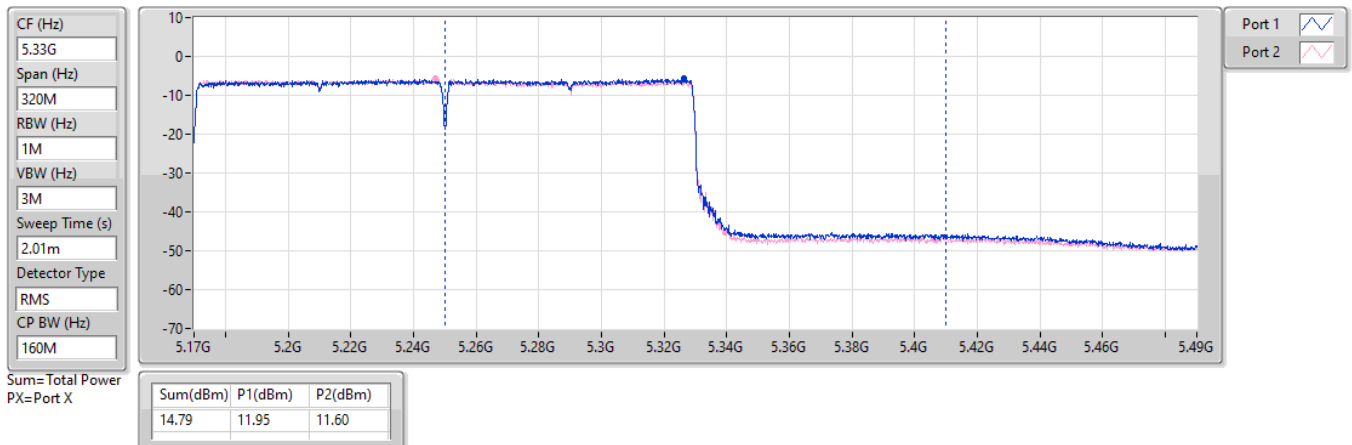

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	10.13	18.49
802.11be EHT20_Nss1,(MCS0)_2TX	10.44	18.80
802.11be EHT40_Nss1,(MCS0)_2TX	7.70	16.06
802.11be EHT80_Nss1,(MCS0)_2TX	1.33	9.69
802.11be EHT160_Nss1,(MCS0)_2TX	-5.04	3.32
5.25-5.35GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	8.49	16.85
802.11be EHT20_Nss1,(MCS0)_2TX	8.63	16.99
802.11be EHT40_Nss1,(MCS0)_2TX	7.08	15.44
802.11be EHT80_Nss1,(MCS0)_2TX	-1.15	7.21
802.11be EHT160_Nss1,(MCS0)_2TX	-5.11	3.25
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	8.56	16.92
802.11be EHT20_Nss1,(MCS0)_2TX	8.62	16.98
802.11be EHT40_Nss1,(MCS0)_2TX	7.92	16.28
802.11be EHT80_Nss1,(MCS0)_2TX	4.24	12.60
802.11be EHT160_Nss1,(MCS0)_2TX	-4.50	3.86
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	8.44	16.80
802.11be EHT20_Nss1,(MCS0)_2TX	8.81	17.17
802.11be EHT40_Nss1,(MCS0)_2TX	7.06	15.42
802.11be EHT80_Nss1,(MCS0)_2TX	2.43	10.79

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	8.36	5.42	5.83	8.60	14.64	16.96	Inf
5200MHz	Pass	8.36	7.10	7.21	10.13	14.64	18.49	Inf
5240MHz	Pass	8.36	7.17	7.09	10.10	14.64	18.46	Inf
5260MHz	Pass	8.36	5.52	5.17	8.32	8.64	16.68	Inf
5300MHz	Pass	8.36	5.61	5.34	8.49	8.64	16.85	Inf
5320MHz	Pass	8.36	5.61	5.44	8.48	8.64	16.84	Inf
5500MHz	Pass	8.36	5.82	5.37	8.56	8.64	16.92	Inf
5580MHz	Pass	8.36	5.47	5.53	8.47	8.64	16.83	Inf
5700MHz	Pass	8.36	5.38	5.28	8.30	8.64	16.66	Inf
5720MHz Straddle 5.47-5.725GHz	Pass	8.36	5.50	5.09	8.28	8.64	16.64	Inf
5720MHz Straddle 5.725-5.85GHz	Pass	8.36	3.86	3.73	6.77	27.64	15.13	Inf
5745MHz	Pass	8.36	5.50	5.43	8.44	27.64	16.80	Inf
5785MHz	Pass	8.36	4.97	4.88	7.86	27.64	16.22	Inf
5825MHz	Pass	8.36	3.86	3.36	6.58	27.64	14.94	Inf
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	8.36	5.46	5.72	8.60	14.64	16.96	Inf
5200MHz	Pass	8.36	7.11	7.16	10.11	14.64	18.47	Inf
5240MHz	Pass	8.36	7.52	7.41	10.44	14.64	18.80	Inf
5260MHz	Pass	8.36	5.84	5.50	8.63	8.64	16.99	Inf
5300MHz	Pass	8.36	5.61	5.53	8.50	8.64	16.86	Inf
5320MHz	Pass	8.36	5.40	5.44	8.33	8.64	16.69	Inf
5500MHz	Pass	8.36	5.78	5.13	8.47	8.64	16.83	Inf
5580MHz	Pass	8.36	5.73	5.53	8.62	8.64	16.98	Inf
5700MHz	Pass	8.36	2.55	2.59	5.56	8.64	13.92	Inf
5720MHz Straddle 5.47-5.725GHz	Pass	8.36	5.45	5.20	8.29	8.64	16.65	Inf
5720MHz Straddle 5.725-5.85GHz	Pass	8.36	3.92	3.66	6.78	27.64	15.14	Inf
5745MHz	Pass	8.36	5.50	5.43	8.47	27.64	16.83	Inf
5785MHz	Pass	8.36	5.90	5.70	8.81	27.64	17.17	Inf
5825MHz	Pass	8.36	5.92	5.69	8.80	27.64	17.16	Inf
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5190MHz	Pass	8.36	-0.20	0.04	2.92	14.64	11.28	Inf
5230MHz	Pass	8.36	4.71	4.74	7.70	14.64	16.06	Inf
5270MHz	Pass	8.36	4.14	4.04	7.08	8.64	15.44	Inf
5310MHz	Pass	8.36	-0.49	-0.62	2.44	8.64	10.80	Inf
5510MHz	Pass	8.36	1.21	1.26	4.18	8.64	12.54	Inf
5550MHz	Pass	8.36	3.16	3.55	6.34	8.64	14.70	Inf
5670MHz	Pass	8.36	3.65	3.73	6.68	8.64	15.04	Inf
5710MHz Straddle 5.47-5.725GHz	Pass	8.36	4.77	5.11	7.92	8.64	16.28	Inf
5710MHz Straddle 5.725-5.85GHz	Pass	8.36	3.00	2.97	5.97	27.64	14.33	Inf
5755MHz	Pass	8.36	3.96	4.28	7.06	27.64	15.42	Inf
5795MHz	Pass	8.36	2.36	2.69	5.50	27.64	13.86	Inf
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
5210MHz	Pass	8.36	-1.56	-1.74	1.33	14.64	9.69	Inf
5290MHz	Pass	8.36	-3.95	-4.29	-1.15	8.64	7.21	Inf
5530MHz	Pass	8.36	-2.08	-1.55	1.13	8.64	9.49	Inf
5610MHz	Pass	8.36	0.63	0.75	3.67	8.64	12.03	Inf
5690MHz Straddle 5.47-5.725GHz	Pass	8.36	1.33	1.32	4.24	8.64	12.60	Inf
5690MHz Straddle 5.725-5.85GHz	Pass	8.36	-0.52	-0.61	2.43	27.64	10.79	Inf
5775MHz	Pass	8.36	-0.93	-0.79	2.06	27.64	10.42	Inf
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	8.36	-8.01	-8.04	-5.04	14.64	3.32	Inf
5250MHz Straddle 5.25-5.35GHz	Pass	8.36	-7.76	-8.33	-5.11	8.64	3.25	Inf
5570MHz	Pass	8.36	-7.58	-7.40	-4.50	8.64	3.86	Inf


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5200MHz

20/03/2025

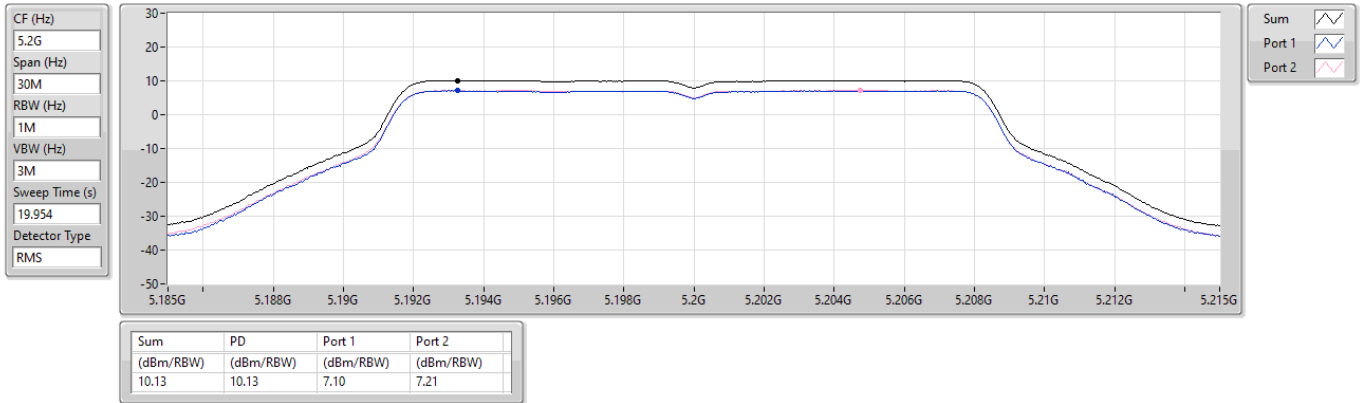


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5240MHz

20/03/2025

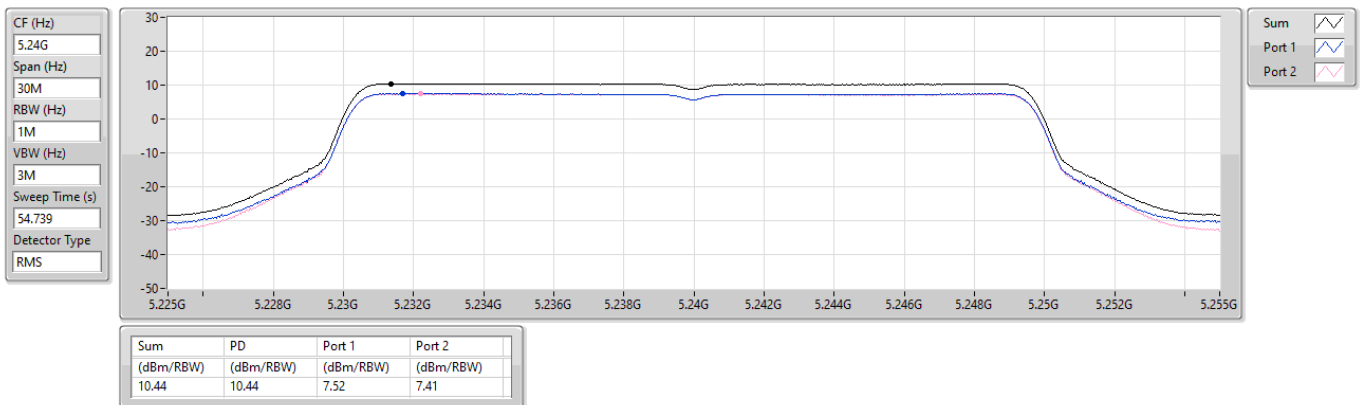


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5230MHz

20/03/2025

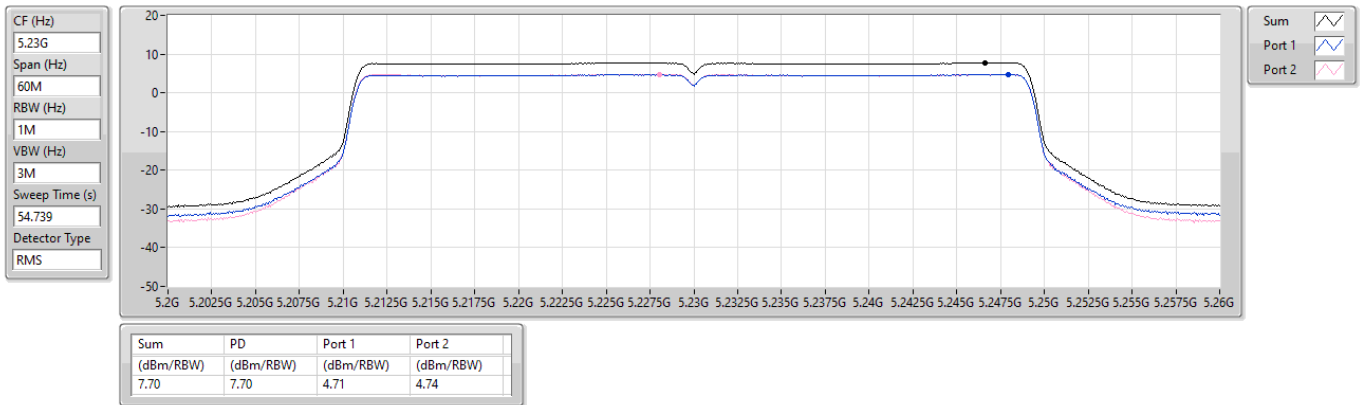


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5210MHz

20/03/2025

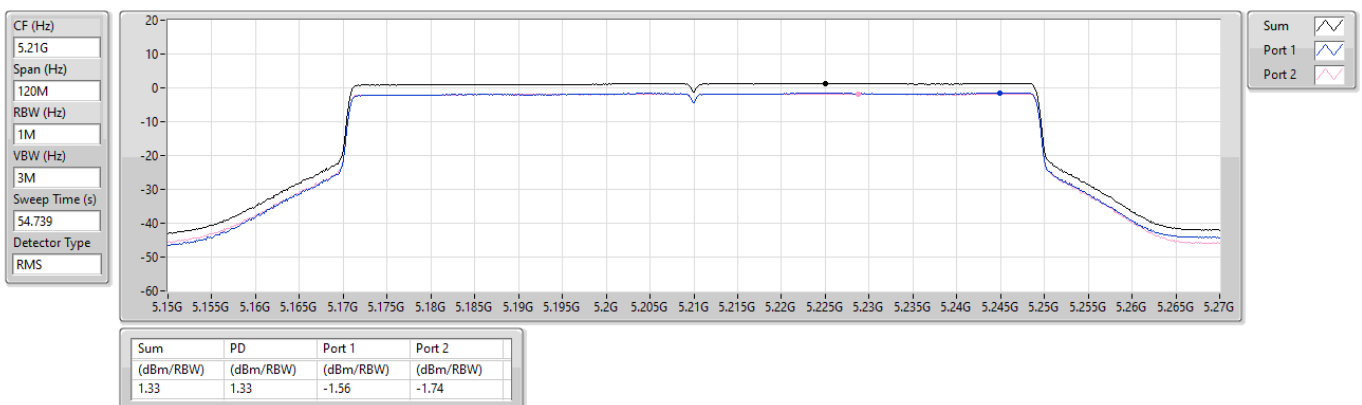


5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5250MHz Straddle 5.15-5.25GHz

20/03/2025

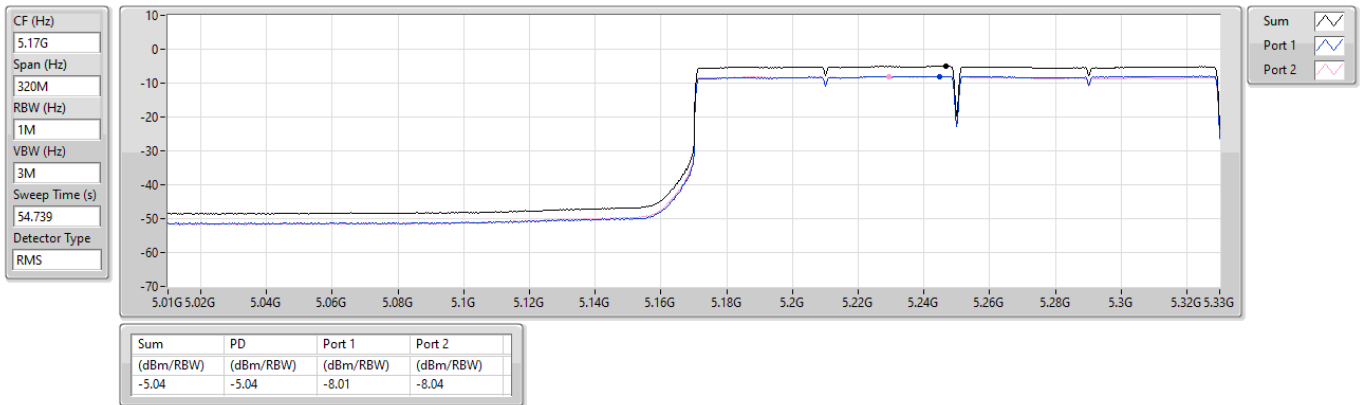


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5300MHz

21/03/2025

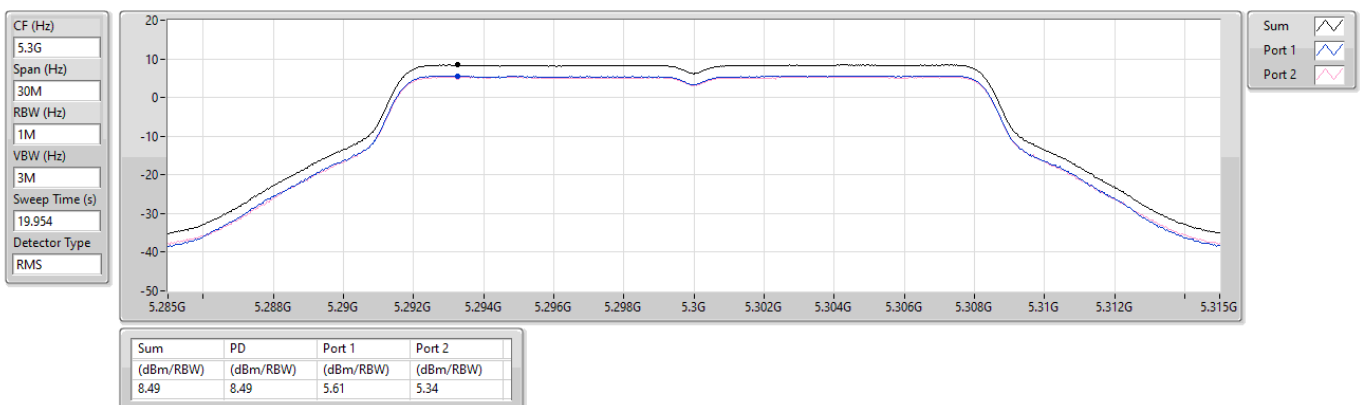


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5260MHz

15/04/2025

CF (Hz)
5.26G
Span (Hz)
30M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.739
Detector Type
RMS

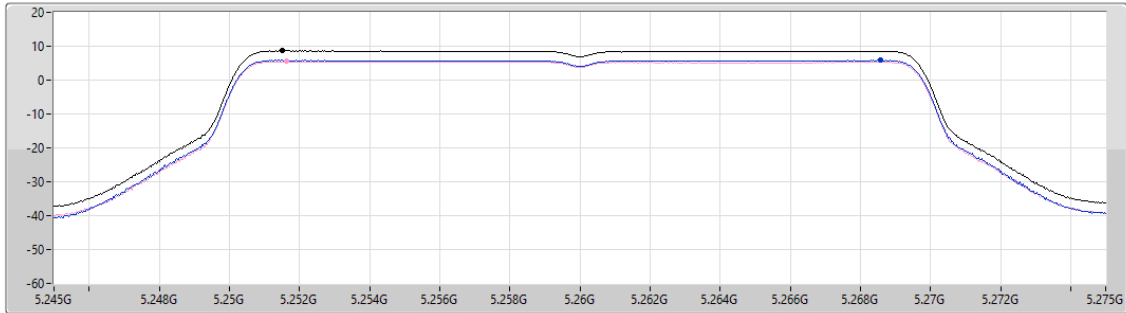

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.63	8.63	5.84	5.50

Sum
Port 1
Port 2


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5270MHz

20/03/2025

CF (Hz)
5.27G
Span (Hz)
60M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.739
Detector Type
RMS

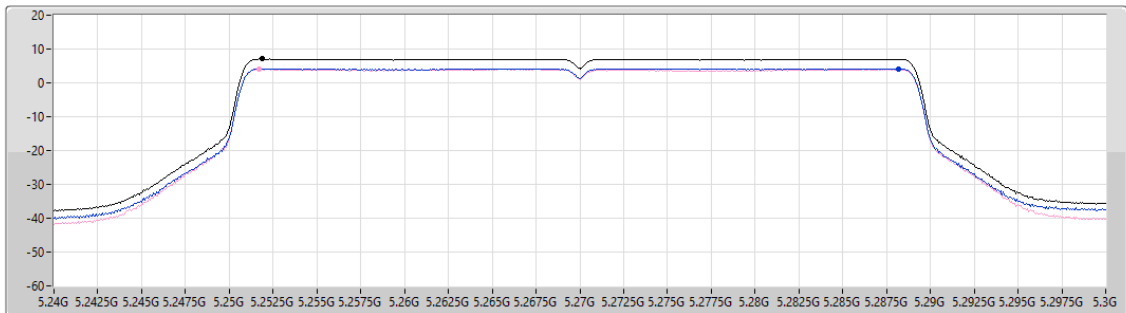

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.08	7.08	4.14	4.04

Sum
Port 1
Port 2


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5290MHz

20/03/2025

CF (Hz)
5.29G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.739
Detector Type
RMS

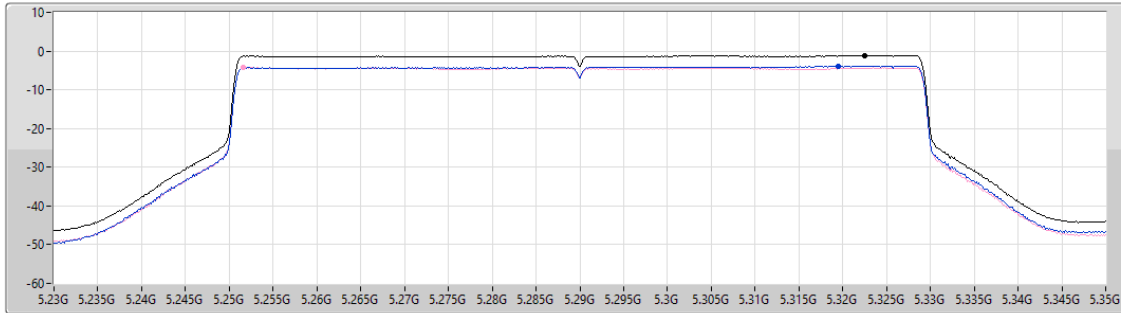

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.15	-1.15	-3.95	-4.29


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5250MHz Straddle 5.25-5.35GHz

20/03/2025

CF (Hz)
5.33G
Span (Hz)
320M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.739
Detector Type
RMS

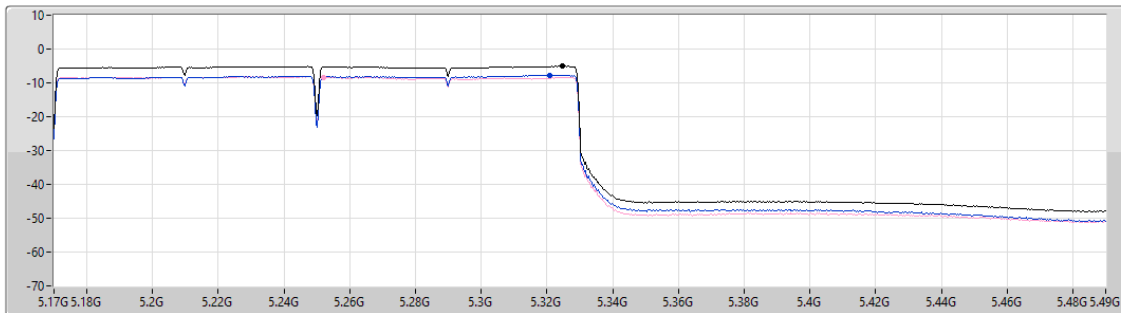

Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.11	-5.11	-7.76	-8.33

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5500MHz

15/04/2025

CF (Hz)
5.5G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.954

Detector Type
RMS

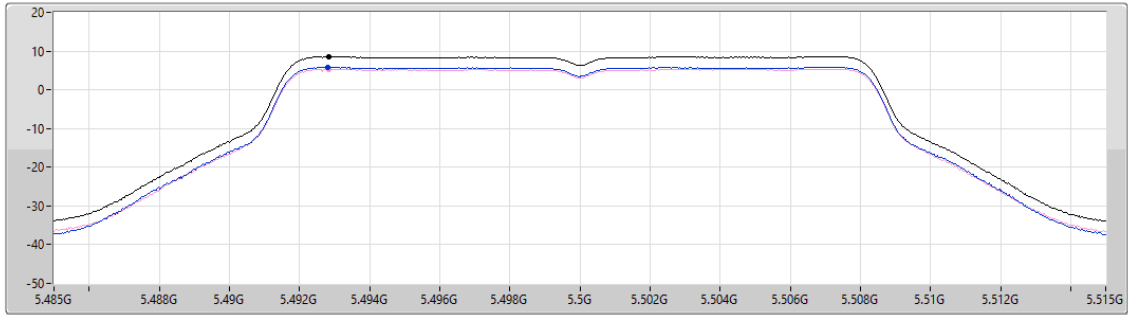

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.56	8.56	5.82	5.37

Sum 

Port 1 

Port 2 

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5580MHz

21/03/2025

CF (Hz)
5.58G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

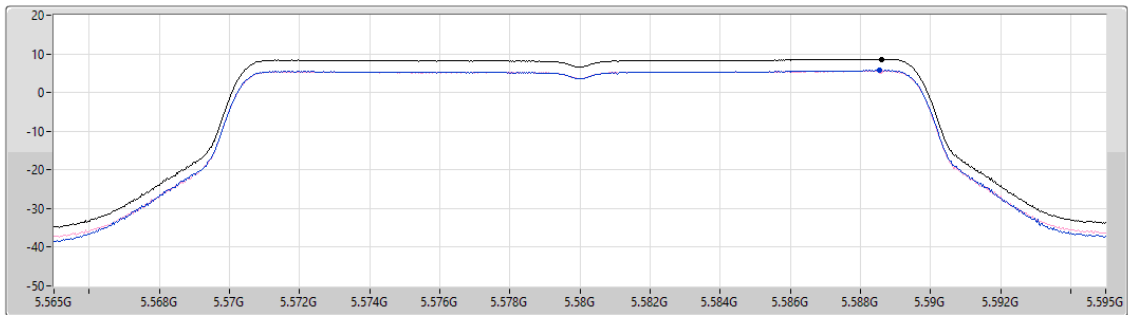

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.62	8.62	5.73	5.53

Sum 

Port 1 


Port 2 

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

20/03/2025

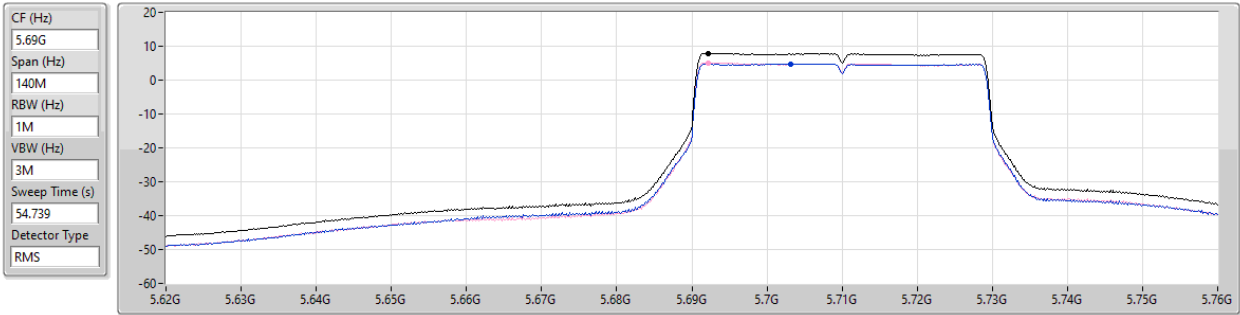


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.92	7.92	4.77	5.11

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

20/03/2025

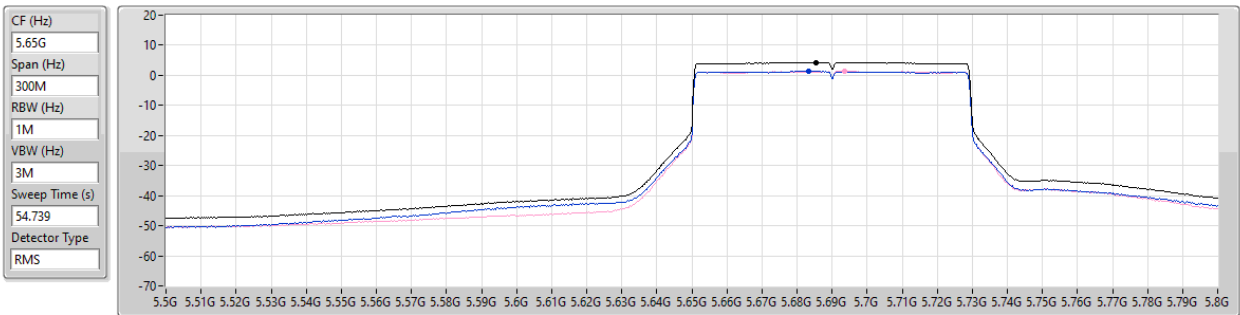

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.24	4.24	1.33	1.32

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5570MHz

22/04/2025

CF (Hz)
5.57G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

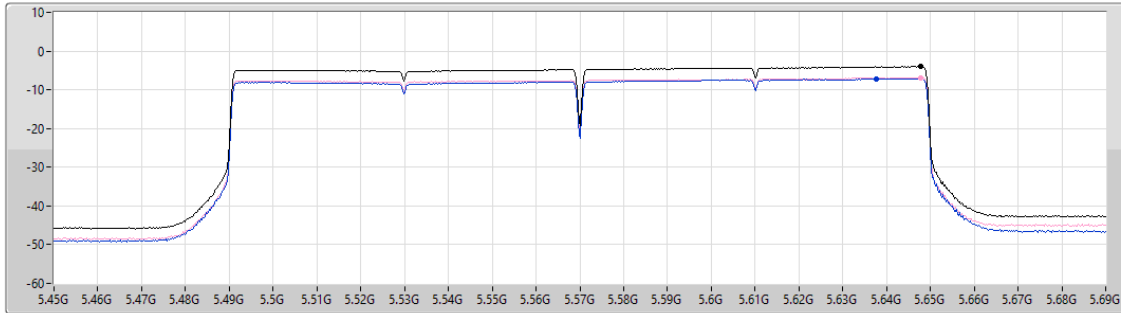

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.04	-4.04	-7.17	-6.82

Sum 

Port 1 

Port 2 

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5745MHz

20/03/2025

CF (Hz)
5.745G


Span (Hz)
30M

RBW (Hz)
500k

VBW (Hz)
3M

Sweep Time (s)
19.954

Detector Type
RMS

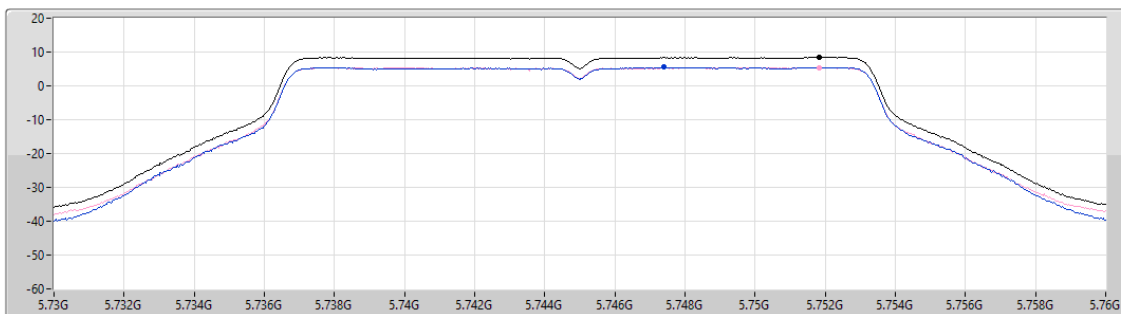

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.44	8.44	5.50	5.43

Sum 

Port 1 


Port 2 

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5785MHz

20/03/2025

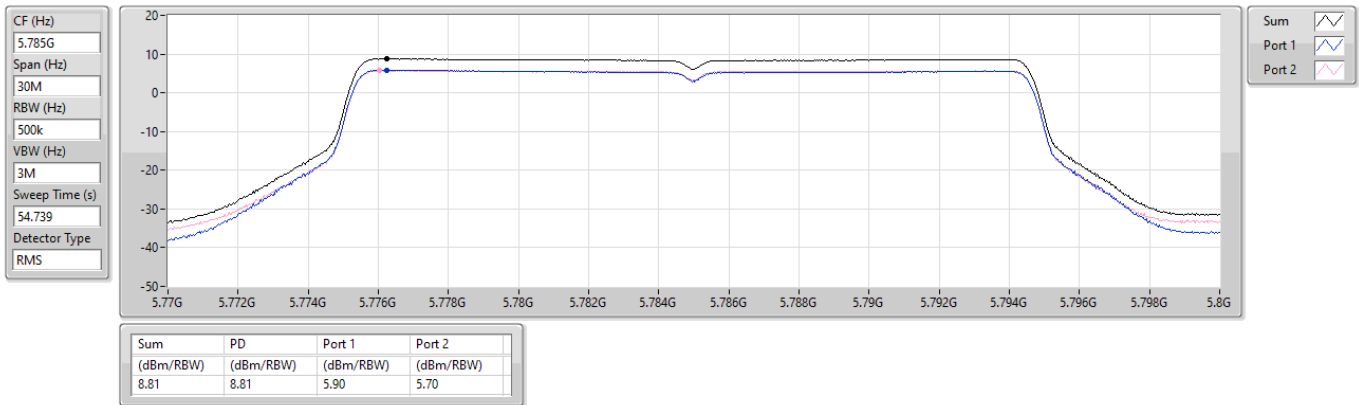


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5755MHz

20/03/2025

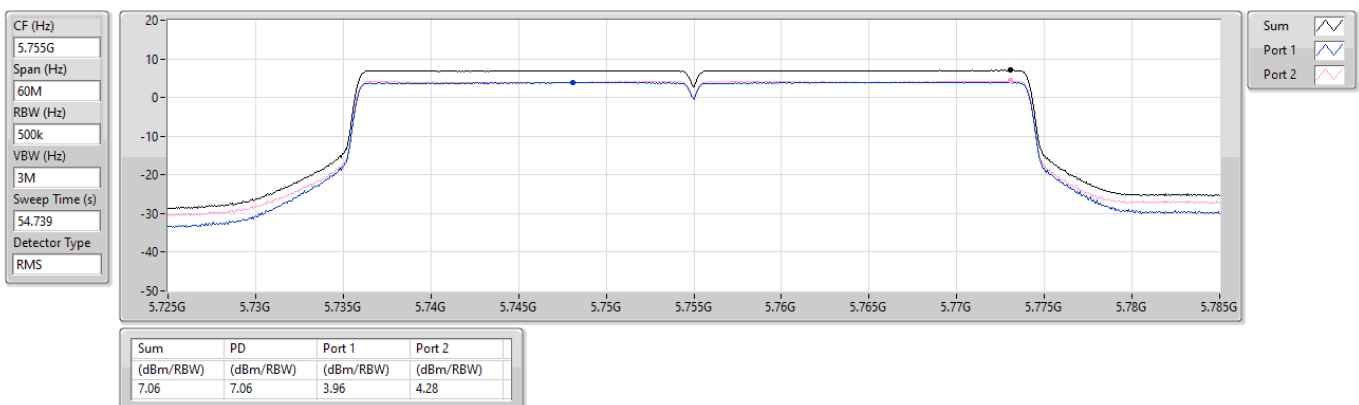


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

20/03/2025

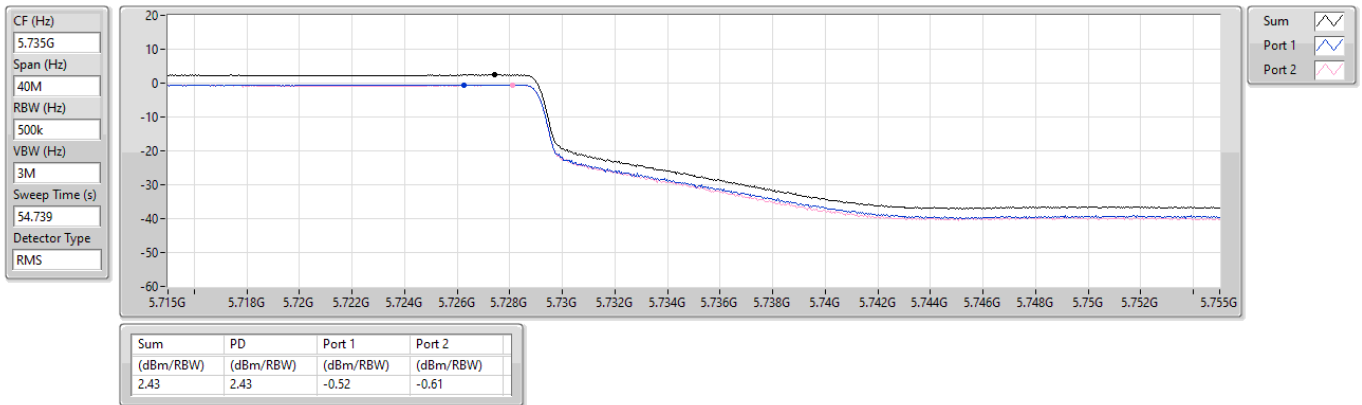



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	PK	38.73M	36.75	40.00	-3.25	3	Vertical	360	1.00

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1.(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5775MHz_Adapter	Pass	PK	38.73M	36.75	40.00	-3.25	3	Vertical	360	1.00
5775MHz_Adapter	Pass	PK	40.67M	34.58	40.00	-5.42	3	Vertical	360	1.00
5775MHz_Adapter	Pass	PK	56.19M	32.35	40.00	-7.65	3	Vertical	360	1.00
5775MHz_Adapter	Pass	PK	119.24M	27.00	43.50	-16.50	3	Vertical	360	1.00
5775MHz_Adapter	Pass	PK	185.2M	31.44	43.50	-12.06	3	Vertical	360	1.00
5775MHz_Adapter	Pass	PK	917.55M	37.73	46.00	-8.27	3	Vertical	360	1.00
5775MHz_Adapter	Pass	PK	38.73M	27.88	40.00	-12.12	3	Horizontal	0	1.00
5775MHz_Adapter	Pass	PK	40.67M	24.96	40.00	-15.04	3	Horizontal	0	1.00
5775MHz_Adapter	Pass	PK	118.27M	28.59	43.50	-14.91	3	Horizontal	0	1.00
5775MHz_Adapter	Pass	PK	185.2M	36.71	43.50	-6.79	3	Horizontal	0	1.00
5775MHz_Adapter	Pass	PK	278.32M	35.06	46.00	-10.94	3	Horizontal	0	1.00
5775MHz_Adapter	Pass	PK	357.86M	35.32	46.00	-10.68	3	Horizontal	0	1.00


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_Adapter

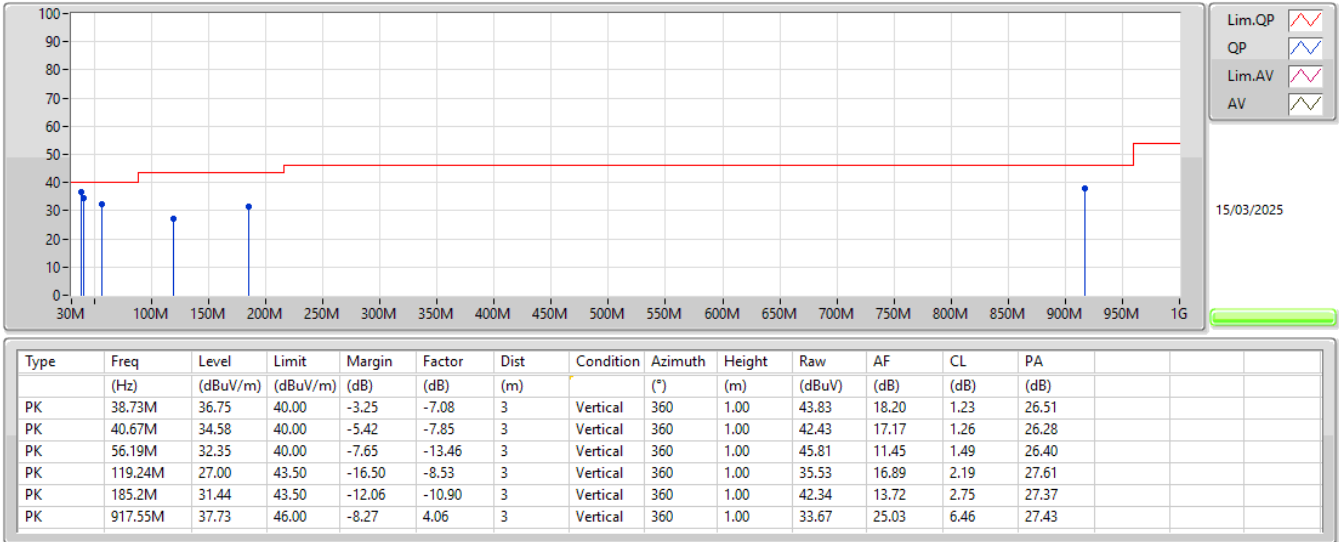

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_Adapter

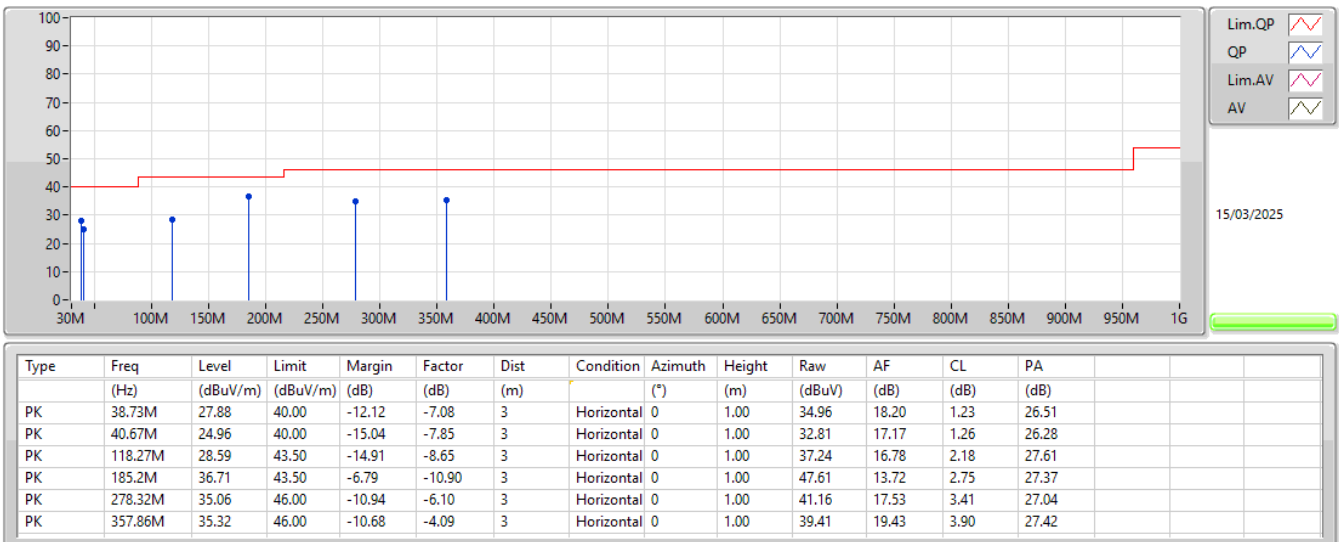

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	PK	10.36054G	68.05	68.20	-0.15	3	Vertical	107	2.83
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	PK	10.40516G	67.98	68.20	-0.22	3	Vertical	9	1.97
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	AV	5.15G	53.72	54.00	-0.28	3	Vertical	145	2.66
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	AV	5.149G	53.61	54.00	-0.39	3	Vertical	148	2.90
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	AV	10.60024G	53.34	54.00	-0.66	3	Vertical	43	2.12
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	PK	10.52492G	67.58	68.20	-0.62	3	Vertical	11	2.18
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	AV	5.35G	53.80	54.00	-0.20	3	Vertical	145	2.66
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	AV	5.35G	53.80	54.00	-0.20	3	Vertical	147	2.68
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	AV	5.35G	53.57	54.00	-0.43	3	Vertical	149	2.89
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	AV	11.15778G	53.60	54.00	-0.40	3	Vertical	3	2.19
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	AV	11.44006G	53.40	54.00	-0.60	3	Vertical	359	2.03
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	PK	5.4696G	67.95	68.20	-0.25	3	Vertical	146	2.71
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	AV	5.45G	53.70	54.00	-0.30	3	Vertical	146	2.72
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	PK	5.7272G	67.28	68.20	-0.92	3	Vertical	136	2.61
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	AV	11.64796G	53.61	54.00	-0.39	3	Vertical	152	2.07
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	AV	11.6464G	53.59	54.00	-0.41	3	Vertical	25	3.00
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	AV	11.50064G	53.90	54.00	-0.10	3	Vertical	153	2.16
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	PK	5.649G	66.25	68.20	-1.95	3	Vertical	147	2.70

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	AV	5.15G	49.82	54.00	-4.18	3	Vertical	145	2.75
5180MHz	Pass	AV	5.1844G	108.94	Inf	-Inf	3	Vertical	145	2.75
5180MHz	Pass	PK	5.1494G	61.81	74.00	-12.19	3	Vertical	145	2.75
5180MHz	Pass	PK	5.1846G	117.75	Inf	-Inf	3	Vertical	145	2.75
5180MHz	Pass	PK	10.36054G	68.05	68.20	-0.15	3	Vertical	107	2.83
5180MHz	Pass	PK	10.35964G	58.40	68.20	-9.80	3	Horizontal	194	1.41
5200MHz	Pass	AV	5.1496G	47.76	54.00	-6.24	3	Vertical	142	2.62
5200MHz	Pass	AV	5.1944G	109.80	Inf	-Inf	3	Vertical	142	2.62
5200MHz	Pass	PK	5.1392G	59.80	74.00	-14.20	3	Vertical	142	2.62
5200MHz	Pass	PK	5.1936G	118.52	Inf	-Inf	3	Vertical	142	2.62
5200MHz	Pass	PK	10.40048G	67.51	68.20	-0.69	3	Vertical	119	2.57
5200MHz	Pass	PK	10.39832G	58.92	68.20	-9.28	3	Horizontal	197	2.23
5240MHz	Pass	AV	5.1482G	46.37	54.00	-7.63	3	Vertical	147	2.85
5240MHz	Pass	AV	5.2346G	109.96	Inf	-Inf	3	Vertical	147	2.85
5240MHz	Pass	AV	5.3504G	47.65	54.00	-6.35	3	Vertical	147	2.85
5240MHz	Pass	PK	5.1482G	58.45	74.00	-15.55	3	Vertical	147	2.85
5240MHz	Pass	PK	5.2448G	118.57	Inf	-Inf	3	Vertical	147	2.85
5240MHz	Pass	PK	5.3528G	59.88	74.00	-14.12	3	Vertical	147	2.85
5240MHz	Pass	PK	10.4806G	67.33	68.20	-0.87	3	Vertical	106	2.70
5240MHz	Pass	PK	10.47454G	56.80	68.20	-11.40	3	Horizontal	194	1.33
5260MHz	Pass	AV	5.1496G	46.19	54.00	-7.81	3	Vertical	146	2.68
5260MHz	Pass	AV	5.2546G	111.05	Inf	-Inf	3	Vertical	146	2.68
5260MHz	Pass	AV	5.3542G	47.51	54.00	-6.49	3	Vertical	146	2.68
5260MHz	Pass	PK	5.1376G	58.68	74.00	-15.32	3	Vertical	146	2.68
5260MHz	Pass	PK	5.2654G	119.93	Inf	-Inf	3	Vertical	146	2.68
5260MHz	Pass	PK	5.3704G	59.74	74.00	-14.26	3	Vertical	146	2.68
5260MHz	Pass	PK	10.52066G	67.30	68.20	-0.90	3	Vertical	106	2.63
5260MHz	Pass	PK	10.5143G	58.21	68.20	-9.99	3	Horizontal	194	1.82
5300MHz	Pass	AV	5.2924G	105.28	Inf	-Inf	3	Vertical	90	3.00
5300MHz	Pass	AV	5.352G	46.55	54.00	-7.45	3	Vertical	90	3.00
5300MHz	Pass	PK	5.2976G	114.40	Inf	-Inf	3	Vertical	90	3.00
5300MHz	Pass	PK	5.3544G	59.08	74.00	-14.92	3	Vertical	90	3.00
5300MHz	Pass	AV	10.60024G	53.34	54.00	-0.66	3	Vertical	43	2.12
5300MHz	Pass	PK	10.60054G	65.27	74.00	-8.73	3	Vertical	43	2.12
5300MHz	Pass	AV	10.60224G	43.28	54.00	-10.72	3	Horizontal	183	1.31
5300MHz	Pass	PK	10.60242G	55.71	74.00	-18.29	3	Horizontal	183	1.31
5320MHz	Pass	AV	5.325G	110.06	Inf	-Inf	3	Vertical	147	2.51
5320MHz	Pass	AV	5.35G	52.80	54.00	-1.20	3	Vertical	147	2.51
5320MHz	Pass	PK	5.3256G	119.15	Inf	-Inf	3	Vertical	147	2.51
5320MHz	Pass	PK	5.3548G	65.19	74.00	-8.81	3	Vertical	147	2.51
5320MHz	Pass	AV	10.64072G	52.22	54.00	-1.78	3	Vertical	107	2.73
5320MHz	Pass	PK	10.64066G	65.54	74.00	-8.46	3	Vertical	107	2.73
5320MHz	Pass	AV	10.64G	45.12	54.00	-8.88	3	Horizontal	196	2.13
5320MHz	Pass	PK	10.64G	57.75	74.00	-16.25	3	Horizontal	196	2.13
5500MHz	Pass	AV	5.4584G	48.28	54.00	-5.72	3	Vertical	196	2.61
5500MHz	Pass	AV	5.4982G	109.19	Inf	-Inf	3	Vertical	196	2.61
5500MHz	Pass	PK	5.4568G	68.90	74.00	-5.10	3	Vertical	196	2.61
5500MHz	Pass	PK	5.4686G	64.95	68.20	-3.25	3	Vertical	196	2.61
5500MHz	Pass	PK	5.4986G	118.01	Inf	-Inf	3	Vertical	196	2.61
5500MHz	Pass	AV	11.00012G	50.91	54.00	-3.09	3	Vertical	119	2.46
5500MHz	Pass	PK	11.00048G	63.00	74.00	-11.00	3	Vertical	119	2.46
5500MHz	Pass	AV	11.00174G	44.91	54.00	-9.09	3	Horizontal	150	2.25
5500MHz	Pass	PK	11.00114G	57.58	74.00	-16.42	3	Horizontal	150	2.25
5580MHz	Pass	AV	5.457G	46.03	54.00	-7.97	3	Vertical	172	2.68
5580MHz	Pass	AV	5.5752G	110.73	Inf	-Inf	3	Vertical	172	2.68
5580MHz	Pass	PK	5.46G	59.08	74.00	-14.92	3	Vertical	172	2.68
5580MHz	Pass	PK	5.466G	58.32	68.20	-9.88	3	Vertical	172	2.68
5580MHz	Pass	PK	5.5764G	119.21	Inf	-Inf	3	Vertical	172	2.68
5580MHz	Pass	PK	5.7294G	59.95	68.20	-8.25	3	Vertical	172	2.68
5580MHz	Pass	AV	11.15778G	53.60	54.00	-0.40	3	Vertical	3	2.19

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5580MHz	Pass	PK	11.16258G	64.98	74.00	-9.02	3	Vertical	3	2.19
5580MHz	Pass	AV	11.16G	43.43	54.00	-10.57	3	Horizontal	183	1.94
5580MHz	Pass	PK	11.15982G	54.91	74.00	-19.09	3	Horizontal	183	1.94
5700MHz	Pass	AV	5.7052G	109.77	Inf	-Inf	3	Vertical	149	2.82
5700MHz	Pass	PK	5.7052G	118.24	Inf	-Inf	3	Vertical	149	2.82
5700MHz	Pass	PK	5.7256G	64.96	68.20	-3.24	3	Vertical	149	2.82
5700MHz	Pass	AV	11.40006G	51.60	54.00	-2.40	3	Vertical	355	2.03
5700MHz	Pass	PK	11.4006G	63.66	74.00	-10.34	3	Vertical	355	2.03
5700MHz	Pass	AV	11.4G	41.91	54.00	-12.09	3	Horizontal	205	1.97
5700MHz	Pass	PK	11.40012G	53.89	74.00	-20.11	3	Horizontal	205	1.97
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.4524G	46.15	54.00	-7.85	3	Vertical	148	2.48
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.7152G	111.56	Inf	-Inf	3	Vertical	148	2.48
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4356G	58.24	74.00	-15.76	3	Vertical	148	2.48
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4668G	59.11	68.20	-9.09	3	Vertical	148	2.48
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.7152G	120.29	Inf	-Inf	3	Vertical	148	2.48
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.8628G	59.80	68.20	-8.40	3	Vertical	148	2.48
5720MHz Straddle 5.47-5.725GHz	Pass	AV	11.44G	53.16	54.00	-0.84	3	Vertical	148	2.70
5720MHz Straddle 5.47-5.725GHz	Pass	PK	11.4394G	65.07	74.00	-8.93	3	Vertical	148	2.70
5720MHz Straddle 5.47-5.725GHz	Pass	AV	11.44204G	46.37	54.00	-7.63	3	Horizontal	151	2.16
5720MHz Straddle 5.47-5.725GHz	Pass	PK	11.4412G	58.09	74.00	-15.91	3	Horizontal	151	2.16
5745MHz	Pass	AV	5.4474G	45.75	54.00	-8.25	3	Vertical	146	2.32
5745MHz	Pass	AV	5.7402G	108.63	Inf	-Inf	3	Vertical	146	2.32
5745MHz	Pass	PK	5.6298G	58.68	68.20	-9.52	3	Vertical	146	2.32
5745MHz	Pass	PK	5.7402G	117.36	Inf	-Inf	3	Vertical	146	2.32
5745MHz	Pass	PK	5.985G	60.40	68.20	-7.80	3	Vertical	146	2.32
5745MHz	Pass	AV	11.4921G	53.06	54.00	-0.94	3	Vertical	153	2.13
5745MHz	Pass	PK	11.49162G	64.95	74.00	-9.05	3	Vertical	153	2.13
5745MHz	Pass	AV	11.4918G	45.31	54.00	-8.69	3	Horizontal	146	2.20
5745MHz	Pass	PK	11.4918G	57.51	74.00	-16.49	3	Horizontal	146	2.20
5785MHz	Pass	AV	5.78129G	107.35	Inf	-Inf	3	Vertical	147	2.07
5785MHz	Pass	PK	5.5284G	58.60	68.20	-9.60	3	Vertical	147	2.07
5785MHz	Pass	PK	5.78129G	116.34	Inf	-Inf	3	Vertical	147	2.07
5785MHz	Pass	PK	6.07048G	59.88	68.20	-8.32	3	Vertical	147	2.07
5785MHz	Pass	AV	11.57222G	53.56	54.00	-0.44	3	Vertical	151	2.06
5785MHz	Pass	PK	11.57174G	65.66	74.00	-8.34	3	Vertical	151	2.06
5785MHz	Pass	AV	11.57012G	42.14	54.00	-11.86	3	Horizontal	0	2.18
5785MHz	Pass	PK	11.57048G	54.52	74.00	-19.48	3	Horizontal	0	2.18
5825MHz	Pass	AV	5.819G	101.56	Inf	-Inf	3	Vertical	97	2.12
5825MHz	Pass	PK	5.6126G	58.13	68.20	-10.07	3	Vertical	97	2.12
5825MHz	Pass	PK	5.819G	110.32	Inf	-Inf	3	Vertical	97	2.12
5825MHz	Pass	PK	5.9366G	59.80	68.20	-8.40	3	Vertical	97	2.12
5825MHz	Pass	AV	11.64796G	53.61	54.00	-0.39	3	Vertical	152	2.07
5825MHz	Pass	PK	11.6485G	66.02	74.00	-7.98	3	Vertical	152	2.07
5825MHz	Pass	AV	11.65012G	44.13	54.00	-9.87	3	Horizontal	194	1.24
5825MHz	Pass	PK	11.65078G	56.80	74.00	-17.20	3	Horizontal	194	1.24
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	AV	5.144G	51.77	54.00	-2.23	3	Vertical	150	2.53
5180MHz	Pass	AV	5.181G	108.04	Inf	-Inf	3	Vertical	150	2.53
5180MHz	Pass	PK	5.143G	67.05	74.00	-6.95	3	Vertical	150	2.53
5180MHz	Pass	PK	5.1792G	120.87	Inf	-Inf	3	Vertical	150	2.53
5180MHz	Pass	PK	10.35994G	65.62	68.20	-2.58	3	Vertical	17	2.97
5180MHz	Pass	PK	10.35286G	60.74	68.20	-7.46	3	Horizontal	285	1.96
5200MHz	Pass	AV	5.15G	49.01	54.00	-4.99	3	Vertical	143	2.91
5200MHz	Pass	AV	5.196G	110.40	Inf	-Inf	3	Vertical	143	2.91
5200MHz	Pass	PK	5.1488G	62.53	74.00	-11.47	3	Vertical	143	2.91
5200MHz	Pass	PK	5.196G	122.05	Inf	-Inf	3	Vertical	143	2.91
5200MHz	Pass	PK	10.40516G	67.98	68.20	-0.22	3	Vertical	9	1.97
5200MHz	Pass	PK	10.39628G	62.16	68.20	-6.04	3	Horizontal	194	1.89
5240MHz	Pass	AV	5.1494G	46.77	54.00	-7.23	3	Vertical	145	2.85
5240MHz	Pass	AV	5.237G	110.79	Inf	-Inf	3	Vertical	145	2.85
5240MHz	Pass	AV	5.3612G	48.05	54.00	-5.95	3	Vertical	145	2.85
5240MHz	Pass	PK	5.1386G	59.68	74.00	-14.32	3	Vertical	145	2.85

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5240MHz	Pass	PK	5.237G	122.40	Inf	-Inf	3	Vertical	145	2.85
5240MHz	Pass	PK	5.3732G	60.31	74.00	-13.69	3	Vertical	145	2.85
5240MHz	Pass	PK	10.4809G	67.54	68.20	-0.66	3	Vertical	10	2.02
5240MHz	Pass	PK	10.47916G	60.81	68.20	-7.39	3	Horizontal	194	2.19
5260MHz	Pass	AV	5.149G	46.51	54.00	-7.49	3	Vertical	148	2.69
5260MHz	Pass	AV	5.2582G	112.29	Inf	-Inf	3	Vertical	148	2.69
5260MHz	Pass	AV	5.3596G	48.03	54.00	-5.97	3	Vertical	148	2.69
5260MHz	Pass	PK	5.1334G	58.41	74.00	-15.59	3	Vertical	148	2.69
5260MHz	Pass	PK	5.2576G	123.69	Inf	-Inf	3	Vertical	148	2.69
5260MHz	Pass	PK	5.365G	60.77	74.00	-13.23	3	Vertical	148	2.69
5260MHz	Pass	PK	10.52492G	67.58	68.20	-0.62	3	Vertical	11	2.18
5260MHz	Pass	PK	10.51694G	63.77	68.20	-4.43	3	Horizontal	195	2.04
5300MHz	Pass	AV	5.298G	110.75	Inf	-Inf	3	Vertical	144	2.79
5300MHz	Pass	AV	5.3544G	49.63	54.00	-4.37	3	Vertical	144	2.79
5300MHz	Pass	PK	5.2988G	122.81	Inf	-Inf	3	Vertical	144	2.79
5300MHz	Pass	PK	5.3536G	65.24	74.00	-8.76	3	Vertical	144	2.79
5300MHz	Pass	PK	10.59946G	67.09	68.20	-1.11	3	Vertical	193	2.24
5300MHz	Pass	PK	10.59766G	60.36	68.20	-7.84	3	Horizontal	195	2.02
5320MHz	Pass	AV	5.3282G	107.25	Inf	-Inf	3	Vertical	38	3.00
5320MHz	Pass	AV	5.35G	51.16	54.00	-2.84	3	Vertical	38	3.00
5320MHz	Pass	PK	5.3282G	118.96	Inf	-Inf	3	Vertical	38	3.00
5320MHz	Pass	PK	5.35G	64.40	74.00	-9.60	3	Vertical	38	3.00
5320MHz	Pass	AV	10.64012G	53.25	54.00	-0.75	3	Vertical	42	2.26
5320MHz	Pass	PK	10.63988G	66.45	74.00	-7.55	3	Vertical	42	2.26
5320MHz	Pass	AV	10.64558G	42.77	54.00	-11.23	3	Horizontal	329	1.04
5320MHz	Pass	PK	10.64456G	55.31	74.00	-18.69	3	Horizontal	329	1.04
5500MHz	Pass	AV	5.46G	48.82	54.00	-5.18	3	Vertical	22	2.86
5500MHz	Pass	AV	5.4976G	104.41	Inf	-Inf	3	Vertical	22	2.86
5500MHz	Pass	PK	5.459G	62.25	74.00	-11.75	3	Vertical	22	2.86
5500MHz	Pass	PK	5.4674G	64.88	68.20	-3.32	3	Vertical	22	2.86
5500MHz	Pass	PK	5.4974G	117.10	Inf	-Inf	3	Vertical	22	2.86
5500MHz	Pass	AV	11.00024G	47.05	54.00	-6.95	3	Vertical	188	2.00
5500MHz	Pass	PK	11.00318G	60.80	74.00	-13.20	3	Vertical	188	2.00
5500MHz	Pass	AV	11.0051G	43.57	54.00	-10.43	3	Horizontal	151	2.34
5500MHz	Pass	PK	11.0033G	57.25	74.00	-16.75	3	Horizontal	151	2.34
5580MHz	Pass	AV	5.451G	46.24	54.00	-7.76	3	Vertical	179	2.46
5580MHz	Pass	AV	5.5812G	110.50	Inf	-Inf	3	Vertical	179	2.46
5580MHz	Pass	PK	5.454G	58.58	74.00	-15.42	3	Vertical	179	2.46
5580MHz	Pass	PK	5.4672G	58.17	68.20	-10.03	3	Vertical	179	2.46
5580MHz	Pass	PK	5.5806G	121.94	Inf	-Inf	3	Vertical	179	2.46
5580MHz	Pass	PK	5.73G	58.69	68.20	-9.51	3	Vertical	179	2.46
5580MHz	Pass	AV	11.15628G	51.96	54.00	-2.04	3	Vertical	3	2.49
5580MHz	Pass	PK	11.15622G	64.87	74.00	-9.13	3	Vertical	3	2.49
5580MHz	Pass	AV	11.1582G	43.26	54.00	-10.74	3	Horizontal	166	1.86
5580MHz	Pass	PK	11.1585G	55.95	74.00	-18.05	3	Horizontal	166	1.86
5700MHz	Pass	AV	5.6988G	106.12	Inf	-Inf	3	Vertical	151	2.99
5700MHz	Pass	PK	5.6992G	119.07	Inf	-Inf	3	Vertical	151	2.99
5700MHz	Pass	PK	5.7252G	67.50	68.20	-0.70	3	Vertical	151	2.99
5700MHz	Pass	PK	11.40256G	59.14	74.00	-14.86	3	Vertical	0	2.08
5700MHz	Pass	AV	11.4016G	45.07	54.00	-8.93	3	Vertical	0	2.08
5700MHz	Pass	PK	11.40048G	50.74	74.00	-23.26	3	Horizontal	32	1.00
5700MHz	Pass	AV	11.39904G	37.54	54.00	-16.46	3	Horizontal	32	1.00
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.4524G	46.15	54.00	-7.85	3	Vertical	148	2.49
5720MHz Straddle 5.47-5.725GHz	Pass	AV	5.7224G	111.36	Inf	-Inf	3	Vertical	148	2.49
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.456G	58.70	74.00	-15.30	3	Vertical	148	2.49
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.4644G	58.19	68.20	-10.01	3	Vertical	148	2.49
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.7188G	122.48	Inf	-Inf	3	Vertical	148	2.49
5720MHz Straddle 5.47-5.725GHz	Pass	PK	5.852G	60.16	68.20	-8.04	3	Vertical	148	2.49
5720MHz Straddle 5.47-5.725GHz	Pass	AV	11.44006G	53.40	54.00	-0.60	3	Vertical	359	2.03
5720MHz Straddle 5.47-5.725GHz	Pass	PK	11.4415G	66.04	74.00	-7.96	3	Vertical	359	2.03
5720MHz Straddle 5.47-5.725GHz	Pass	AV	11.44372G	44.68	54.00	-9.32	3	Horizontal	358	1.84
5720MHz Straddle 5.47-5.725GHz	Pass	PK	11.44168G	57.77	74.00	-16.23	3	Horizontal	358	1.84


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5745MHz	Pass	AV	5.4546G	45.99	54.00	-8.01	3	Vertical	146	2.68
5745MHz	Pass	AV	5.7462G	109.88	Inf	-Inf	3	Vertical	146	2.68
5745MHz	Pass	PK	5.6214G	59.58	68.20	-8.62	3	Vertical	146	2.68
5745MHz	Pass	PK	5.7462G	121.63	Inf	-Inf	3	Vertical	146	2.68
5745MHz	Pass	PK	5.949G	60.06	68.20	-8.14	3	Vertical	146	2.68
5745MHz	Pass	AV	11.49006G	53.24	54.00	-0.76	3	Vertical	358	2.19
5745MHz	Pass	PK	11.49234G	66.81	74.00	-7.19	3	Vertical	358	2.19
5745MHz	Pass	AV	11.49126G	43.27	54.00	-10.73	3	Horizontal	357	2.08
5745MHz	Pass	PK	11.49252G	56.00	74.00	-18.00	3	Horizontal	357	2.08
5785MHz	Pass	AV	5.78734G	109.27	Inf	-Inf	3	Vertical	150	2.65
5785MHz	Pass	PK	5.62883G	58.78	68.20	-9.42	3	Vertical	150	2.65
5785MHz	Pass	PK	5.78734G	120.49	Inf	-Inf	3	Vertical	150	2.65
5785MHz	Pass	PK	6.00998G	59.53	68.20	-8.67	3	Vertical	150	2.65
5785MHz	Pass	AV	11.5709G	53.23	54.00	-0.77	3	Vertical	22	2.17
5785MHz	Pass	PK	11.57402G	66.06	74.00	-7.94	3	Vertical	22	2.17
5785MHz	Pass	AV	11.57G	44.44	54.00	-9.56	3	Horizontal	0	2.56
5785MHz	Pass	PK	11.5712G	57.04	74.00	-16.96	3	Horizontal	0	2.56
5825MHz	Pass	AV	5.8286G	109.59	Inf	-Inf	3	Vertical	163	2.62
5825MHz	Pass	PK	5.525G	58.82	68.20	-9.38	3	Vertical	163	2.62
5825MHz	Pass	PK	5.8286G	120.71	Inf	-Inf	3	Vertical	163	2.62
5825MHz	Pass	PK	6.0758G	60.62	68.20	-7.58	3	Vertical	163	2.62
5825MHz	Pass	AV	11.6464G	53.59	54.00	-0.41	3	Vertical	25	3.00
5825MHz	Pass	PK	11.6455G	67.93	74.00	-6.07	3	Vertical	25	3.00
5825MHz	Pass	AV	11.64496G	46.93	54.00	-7.07	3	Horizontal	153	1.97
5825MHz	Pass	PK	11.64316G	60.42	74.00	-13.58	3	Horizontal	153	1.97
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	AV	5.15G	53.72	54.00	-0.28	3	Vertical	145	2.66
5190MHz	Pass	AV	5.2076G	103.39	Inf	-Inf	3	Vertical	145	2.66
5190MHz	Pass	PK	5.1496G	67.59	74.00	-6.41	3	Vertical	145	2.66
5190MHz	Pass	PK	5.206G	114.92	Inf	-Inf	3	Vertical	145	2.66
5190MHz	Pass	PK	10.38456G	58.42	68.20	-9.78	3	Vertical	180	2.25
5190MHz	Pass	PK	10.37676G	51.35	68.20	-16.85	3	Horizontal	195	1.87
5230MHz	Pass	AV	5.15G	53.06	54.00	-0.94	3	Vertical	146	2.65
5230MHz	Pass	AV	5.248G	107.66	Inf	-Inf	3	Vertical	146	2.65
5230MHz	Pass	PK	5.1488G	69.75	74.00	-4.25	3	Vertical	146	2.65
5230MHz	Pass	PK	5.248G	119.66	Inf	-Inf	3	Vertical	146	2.65
5230MHz	Pass	PK	10.46804G	64.29	68.20	-3.91	3	Vertical	10	1.99
5230MHz	Pass	PK	10.4546G	60.18	68.20	-8.02	3	Horizontal	195	2.16
5270MHz	Pass	AV	5.288G	108.05	Inf	-Inf	3	Vertical	145	2.83
5270MHz	Pass	AV	5.3504G	52.85	54.00	-1.15	3	Vertical	145	2.83
5270MHz	Pass	PK	5.2876G	119.98	Inf	-Inf	3	Vertical	145	2.83
5270MHz	Pass	PK	5.3512G	68.46	74.00	-5.54	3	Vertical	145	2.83
5270MHz	Pass	PK	10.54396G	63.17	68.20	-5.03	3	Vertical	42	2.17
5270MHz	Pass	PK	10.5382G	55.77	68.20	-12.43	3	Horizontal	196	2.15
5310MHz	Pass	AV	5.3284G	103.17	Inf	-Inf	3	Vertical	145	2.66
5310MHz	Pass	AV	5.35G	53.80	54.00	-0.20	3	Vertical	145	2.66
5310MHz	Pass	PK	5.3112G	115.18	Inf	-Inf	3	Vertical	145	2.66
5310MHz	Pass	PK	5.3504G	69.56	74.00	-4.44	3	Vertical	145	2.66
5310MHz	Pass	AV	10.63056G	41.31	54.00	-12.69	3	Vertical	18	2.01
5310MHz	Pass	PK	10.62828G	54.20	74.00	-19.80	3	Vertical	18	2.01
5310MHz	Pass	AV	10.60824G	37.64	54.00	-16.36	3	Horizontal	329	1.00
5310MHz	Pass	PK	10.64748G	49.12	74.00	-24.88	3	Horizontal	329	1.00
5510MHz	Pass	AV	5.46G	50.70	54.00	-3.30	3	Vertical	66	2.92
5510MHz	Pass	AV	5.5212G	102.34	Inf	-Inf	3	Vertical	66	2.92
5510MHz	Pass	PK	5.4596G	64.92	74.00	-9.08	3	Vertical	66	2.92
5510MHz	Pass	PK	5.4636G	67.77	68.20	-0.43	3	Vertical	66	2.92
5510MHz	Pass	PK	5.5204G	114.24	Inf	-Inf	3	Vertical	66	2.92
5510MHz	Pass	AV	11.00758G	42.14	54.00	-11.86	3	Vertical	155	2.26
5510MHz	Pass	PK	11.00734G	54.17	74.00	-19.83	3	Vertical	155	2.26
5510MHz	Pass	AV	11.0164G	37.83	54.00	-16.17	3	Horizontal	329	1.10
5510MHz	Pass	PK	11.01748G	50.32	74.00	-23.68	3	Horizontal	329	1.10
5550MHz	Pass	AV	5.4524G	48.35	54.00	-5.65	3	Vertical	146	2.71

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5550MHz	Pass	AV	5.5508G	108.21	Inf	-Inf	3	Vertical	146	2.71
5550MHz	Pass	PK	5.45G	63.03	74.00	-10.97	3	Vertical	146	2.71
5550MHz	Pass	PK	5.4696G	67.95	68.20	-0.25	3	Vertical	146	2.71
5550MHz	Pass	PK	5.5524G	119.61	Inf	-Inf	3	Vertical	146	2.71
5550MHz	Pass	AV	11.09364G	46.10	54.00	-7.90	3	Vertical	357	2.50
5550MHz	Pass	PK	11.11152G	57.19	74.00	-16.81	3	Vertical	357	2.50
5550MHz	Pass	AV	11.09856G	40.67	54.00	-13.33	3	Horizontal	236	1.01
5550MHz	Pass	PK	11.09952G	52.45	74.00	-21.55	3	Horizontal	236	1.01
5670MHz	Pass	AV	5.6712G	106.51	Inf	-Inf	3	Vertical	149	2.86
5670MHz	Pass	PK	5.6712G	118.70	Inf	-Inf	3	Vertical	149	2.86
5670MHz	Pass	PK	5.7354G	66.98	68.20	-1.22	3	Vertical	149	2.86
5670MHz	Pass	AV	11.3424G	46.10	54.00	-7.90	3	Vertical	357	2.09
5670MHz	Pass	PK	11.33652G	58.06	74.00	-15.94	3	Vertical	357	2.09
5670MHz	Pass	AV	11.34336G	38.61	54.00	-15.39	3	Horizontal	343	1.03
5670MHz	Pass	PK	11.33532G	49.77	74.00	-24.23	3	Horizontal	343	1.03
5710MHz Straddle 5.47-5.725GHz	Pass	AV	5.4508G	46.84	54.00	-7.16	3	Vertical	151	2.60
5710MHz Straddle 5.47-5.725GHz	Pass	AV	5.692G	109.88	Inf	-Inf	3	Vertical	151	2.60
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.4556G	59.76	74.00	-14.24	3	Vertical	151	2.60
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.464G	58.50	68.20	-9.70	3	Vertical	151	2.60
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.692G	121.11	Inf	-Inf	3	Vertical	151	2.60
5710MHz Straddle 5.47-5.725GHz	Pass	PK	5.854G	64.57	68.20	-3.63	3	Vertical	151	2.60
5710MHz Straddle 5.47-5.725GHz	Pass	AV	11.40356G	52.26	54.00	-1.74	3	Vertical	360	2.18
5710MHz Straddle 5.47-5.725GHz	Pass	PK	11.40332G	64.48	74.00	-9.52	3	Vertical	360	2.18
5710MHz Straddle 5.47-5.725GHz	Pass	AV	11.4242G	43.32	54.00	-10.68	3	Horizontal	358	1.89
5710MHz Straddle 5.47-5.725GHz	Pass	PK	11.40692G	55.24	74.00	-18.76	3	Horizontal	358	1.89
5755MHz	Pass	AV	5.4598G	44.73	54.00	-9.27	3	Vertical	146	2.82
5755MHz	Pass	AV	5.737G	108.90	Inf	-Inf	3	Vertical	146	2.82
5755MHz	Pass	PK	5.6314G	61.93	68.20	-6.27	3	Vertical	146	2.82
5755MHz	Pass	PK	5.737G	119.76	Inf	-Inf	3	Vertical	146	2.82
5755MHz	Pass	PK	5.9926G	56.99	68.20	-11.21	3	Vertical	146	2.82
5755MHz	Pass	AV	11.50064G	53.90	54.00	-0.10	3	Vertical	153	2.16
5755MHz	Pass	PK	11.49704G	64.76	74.00	-9.24	3	Vertical	153	2.16
5755MHz	Pass	AV	11.51048G	43.26	54.00	-10.74	3	Horizontal	0	2.31
5755MHz	Pass	PK	11.51108G	55.45	74.00	-18.55	3	Horizontal	0	2.31
5795MHz	Pass	AV	5.777G	107.20	Inf	-Inf	3	Vertical	148	2.55
5795MHz	Pass	PK	5.591G	57.53	68.20	-10.67	3	Vertical	148	2.55
5795MHz	Pass	PK	5.7794G	117.57	Inf	-Inf	3	Vertical	148	2.55
5795MHz	Pass	PK	6.0242G	57.28	68.20	-10.92	3	Vertical	148	2.55
5795MHz	Pass	AV	11.60044G	53.84	54.00	-0.16	3	Vertical	151	2.06
5795MHz	Pass	PK	11.59756G	65.50	74.00	-8.50	3	Vertical	151	2.06
5795MHz	Pass	AV	11.60248G	44.27	54.00	-9.73	3	Horizontal	155	2.01
5795MHz	Pass	PK	11.5852G	58.57	74.00	-15.43	3	Horizontal	155	2.01
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	AV	5.149G	53.61	54.00	-0.39	3	Vertical	148	2.90
5210MHz	Pass	AV	5.228G	101.18	Inf	-Inf	3	Vertical	148	2.90
5210MHz	Pass	AV	5.35G	48.30	54.00	-5.70	3	Vertical	148	2.90
5210MHz	Pass	PK	5.149G	65.56	74.00	-8.44	3	Vertical	148	2.90
5210MHz	Pass	PK	5.227G	113.03	Inf	-Inf	3	Vertical	148	2.90
5210MHz	Pass	PK	5.379G	61.70	74.00	-12.30	3	Vertical	148	2.90
5210MHz	Pass	PK	10.42432G	55.93	68.20	-12.27	3	Vertical	10	1.82
5210MHz	Pass	PK	10.42624G	50.68	68.20	-17.52	3	Horizontal	351	1.14
5290MHz	Pass	AV	5.15G	46.26	54.00	-7.74	3	Vertical	147	2.68
5290MHz	Pass	AV	5.289G	99.82	Inf	-Inf	3	Vertical	147	2.68
5290MHz	Pass	AV	5.35G	53.80	54.00	-0.20	3	Vertical	147	2.68
5290MHz	Pass	PK	5.148G	58.39	74.00	-15.61	3	Vertical	147	2.68
5290MHz	Pass	PK	5.292G	111.72	Inf	-Inf	3	Vertical	147	2.68
5290MHz	Pass	PK	5.354G	66.32	74.00	-7.68	3	Vertical	147	2.68
5290MHz	Pass	PK	5.518G	59.53	68.20	-8.67	3	Vertical	147	2.68
5290MHz	Pass	PK	10.58144G	53.64	68.20	-14.56	3	Vertical	40	2.61
5290MHz	Pass	PK	10.57976G	49.88	68.20	-18.32	3	Horizontal	194	1.96
5530MHz	Pass	AV	5.35G	45.76	54.00	-8.24	3	Vertical	146	2.72
5530MHz	Pass	AV	5.45G	53.70	54.00	-0.30	3	Vertical	146	2.72

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5530MHz	Pass	AV	5.55G	102.25	Inf	-Inf	3	Vertical	146	2.72
5530MHz	Pass	PK	5.305G	56.86	68.20	-11.34	3	Vertical	146	2.72
5530MHz	Pass	PK	5.453G	64.37	74.00	-9.63	3	Vertical	146	2.72
5530MHz	Pass	PK	5.47G	67.81	68.20	-0.39	3	Vertical	146	2.72
5530MHz	Pass	PK	5.529G	113.40	Inf	-Inf	3	Vertical	146	2.72
5530MHz	Pass	PK	5.736G	58.87	68.20	-9.33	3	Vertical	146	2.72
5530MHz	Pass	AV	11.07224G	39.79	54.00	-14.21	3	Vertical	3	2.12
5530MHz	Pass	PK	11.07056G	51.15	74.00	-22.85	3	Vertical	3	2.12
5530MHz	Pass	AV	11.05976G	37.31	54.00	-16.69	3	Horizontal	185	2.55
5530MHz	Pass	PK	11.00024G	48.66	74.00	-25.34	3	Horizontal	185	2.55
5610MHz	Pass	AV	5.452G	48.62	54.00	-5.38	3	Vertical	148	2.48
5610MHz	Pass	AV	5.591G	103.44	Inf	-Inf	3	Vertical	148	2.48
5610MHz	Pass	PK	5.451G	61.81	74.00	-12.19	3	Vertical	148	2.48
5610MHz	Pass	PK	5.469G	62.64	68.20	-5.56	3	Vertical	148	2.48
5610MHz	Pass	PK	5.632G	115.93	Inf	-Inf	3	Vertical	148	2.48
5610MHz	Pass	PK	5.732G	67.37	68.20	-0.83	3	Vertical	148	2.48
5610MHz	Pass	AV	11.2236G	43.20	54.00	-10.80	3	Vertical	356	2.01
5610MHz	Pass	PK	11.22336G	55.03	74.00	-18.97	3	Vertical	356	2.01
5610MHz	Pass	AV	11.22792G	40.01	54.00	-13.99	3	Horizontal	150	2.36
5610MHz	Pass	PK	11.23032G	50.57	74.00	-23.43	3	Horizontal	150	2.36
5690MHz Straddle 5.47-5.725GHz	Pass	AV	5.4464G	46.56	54.00	-7.44	3	Vertical	70	2.92
5690MHz Straddle 5.47-5.725GHz	Pass	AV	5.6636G	103.99	Inf	-Inf	3	Vertical	70	2.92
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.42G	58.87	74.00	-15.13	3	Vertical	70	2.92
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.462G	58.56	68.20	-9.64	3	Vertical	70	2.92
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.6636G	115.52	Inf	-Inf	3	Vertical	70	2.92
5690MHz Straddle 5.47-5.725GHz	Pass	PK	5.8628G	67.83	68.20	-0.37	3	Vertical	70	2.92
5690MHz Straddle 5.47-5.725GHz	Pass	AV	11.3836G	49.45	54.00	-4.55	3	Vertical	0	2.09
5690MHz Straddle 5.47-5.725GHz	Pass	PK	11.38624G	60.86	74.00	-13.14	3	Vertical	0	2.09
5690MHz Straddle 5.47-5.725GHz	Pass	AV	11.38408G	39.01	54.00	-14.99	3	Horizontal	346	1.50
5690MHz Straddle 5.47-5.725GHz	Pass	PK	11.4016G	50.02	74.00	-23.98	3	Horizontal	346	1.50
5775MHz	Pass	AV	5.7366G	104.18	Inf	-Inf	3	Vertical	147	2.70
5775MHz	Pass	PK	5.649G	66.25	68.20	-1.95	3	Vertical	147	2.70
5775MHz	Pass	PK	5.7378G	115.58	Inf	-Inf	3	Vertical	147	2.70
5775MHz	Pass	PK	6.075G	59.74	68.20	-8.46	3	Vertical	147	2.70
5775MHz	Pass	AV	11.56032G	48.68	54.00	-5.32	3	Vertical	152	2.13
5775MHz	Pass	PK	11.59704G	60.44	74.00	-13.56	3	Vertical	152	2.13
5775MHz	Pass	AV	11.55G	39.38	54.00	-14.62	3	Horizontal	0	2.27
5775MHz	Pass	PK	11.56752G	51.43	74.00	-22.57	3	Horizontal	0	2.27
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	AV	5.1468G	49.10	54.00	-4.90	3	Vertical	149	2.89
5250MHz Straddle 5.25-5.35GHz	Pass	AV	5.328G	94.98	Inf	-Inf	3	Vertical	149	2.89
5250MHz Straddle 5.25-5.35GHz	Pass	AV	5.35G	53.57	54.00	-0.43	3	Vertical	149	2.89
5250MHz Straddle 5.25-5.35GHz	Pass	PK	5.1468G	60.89	74.00	-13.11	3	Vertical	149	2.89
5250MHz Straddle 5.25-5.35GHz	Pass	PK	5.3088G	107.22	Inf	-Inf	3	Vertical	149	2.89
5250MHz Straddle 5.25-5.35GHz	Pass	PK	5.3508G	65.70	74.00	-8.30	3	Vertical	149	2.89
5250MHz Straddle 5.25-5.35GHz	Pass	PK	5.4672G	62.10	68.20	-6.10	3	Vertical	149	2.89
5250MHz Straddle 5.25-5.35GHz	Pass	PK	10.39632G	49.98	68.20	-18.22	3	Vertical	195	1.93
5250MHz Straddle 5.25-5.35GHz	Pass	PK	10.47504G	48.18	68.20	-20.02	3	Horizontal	191	1.50
5570MHz	Pass	AV	5.426G	50.47	54.00	-3.53	3	Vertical	136	2.61
5570MHz	Pass	AV	5.6468G	92.91	Inf	-Inf	3	Vertical	136	2.61
5570MHz	Pass	PK	5.35G	61.03	74.00	-12.97	3	Vertical	136	2.61
5570MHz	Pass	PK	5.4332G	65.37	74.00	-8.63	3	Vertical	136	2.61
5570MHz	Pass	PK	5.4668G	63.33	68.20	-4.87	3	Vertical	136	2.61
5570MHz	Pass	PK	5.648G	105.69	Inf	-Inf	3	Vertical	136	2.61
5570MHz	Pass	PK	5.7272G	67.28	68.20	-0.92	3	Vertical	136	2.61
5570MHz	Pass	PK	11.14238G	48.56	74.00	-25.44	3	Vertical	142	1.31
5570MHz	Pass	AV	11.14016G	35.09	54.00	-18.91	3	Vertical	142	1.31
5570MHz	Pass	PK	11.13946G	48.27	74.00	-25.73	3	Horizontal	49	2.54
5570MHz	Pass	AV	11.13992G	34.82	54.00	-19.18	3	Horizontal	49	2.54


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

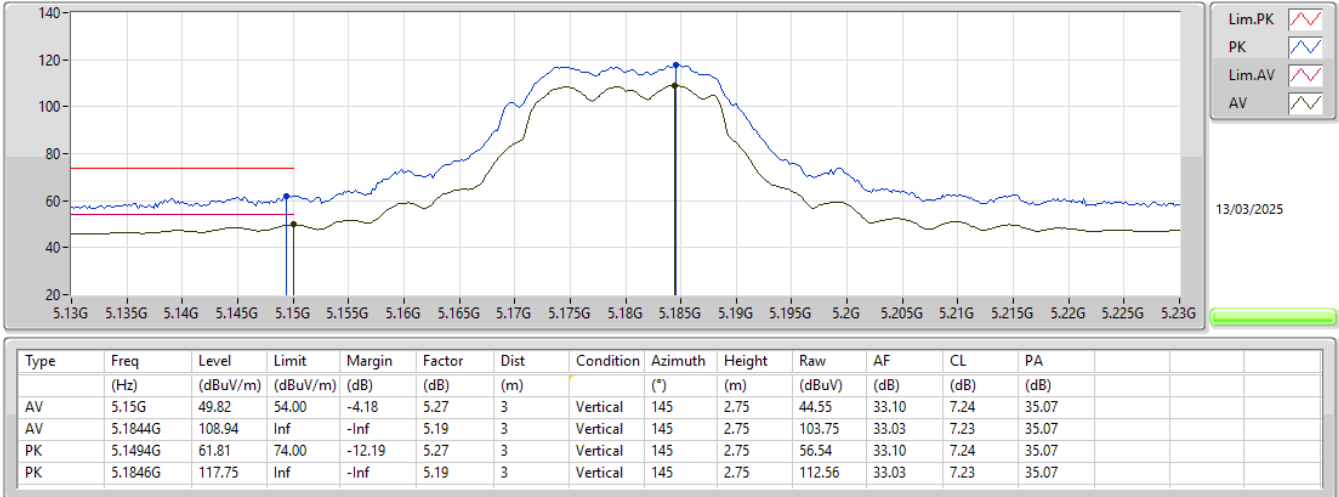


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

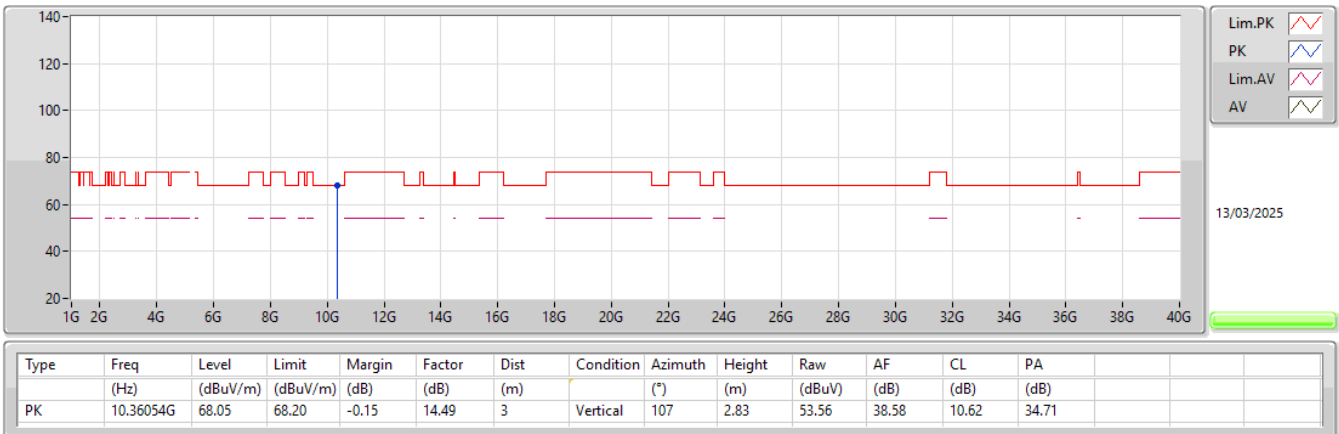


5.15-5.25GHz_802.11a_Nss1,(6Mbps)_2TX

5180MHz_TX

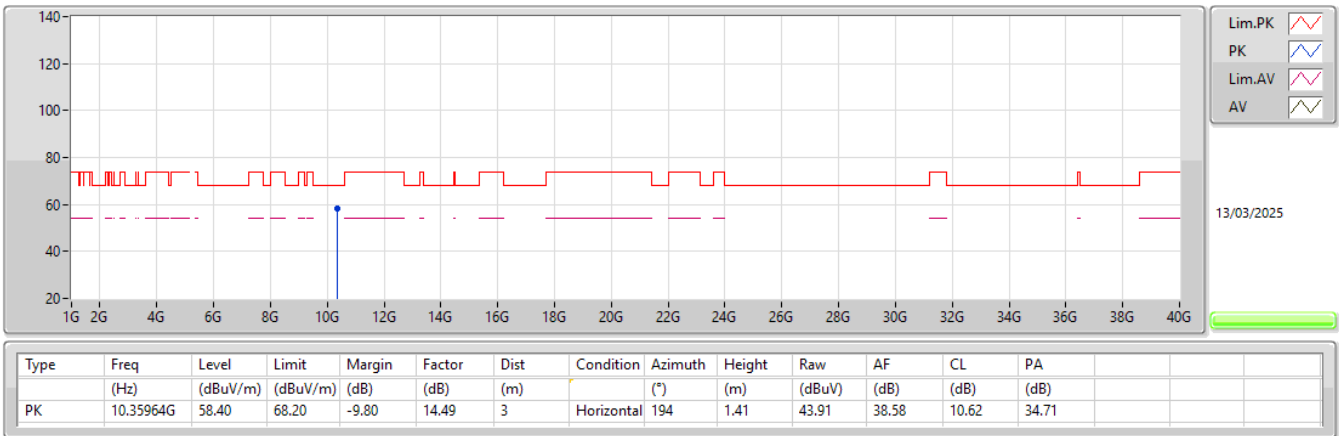


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5200MHz_TX

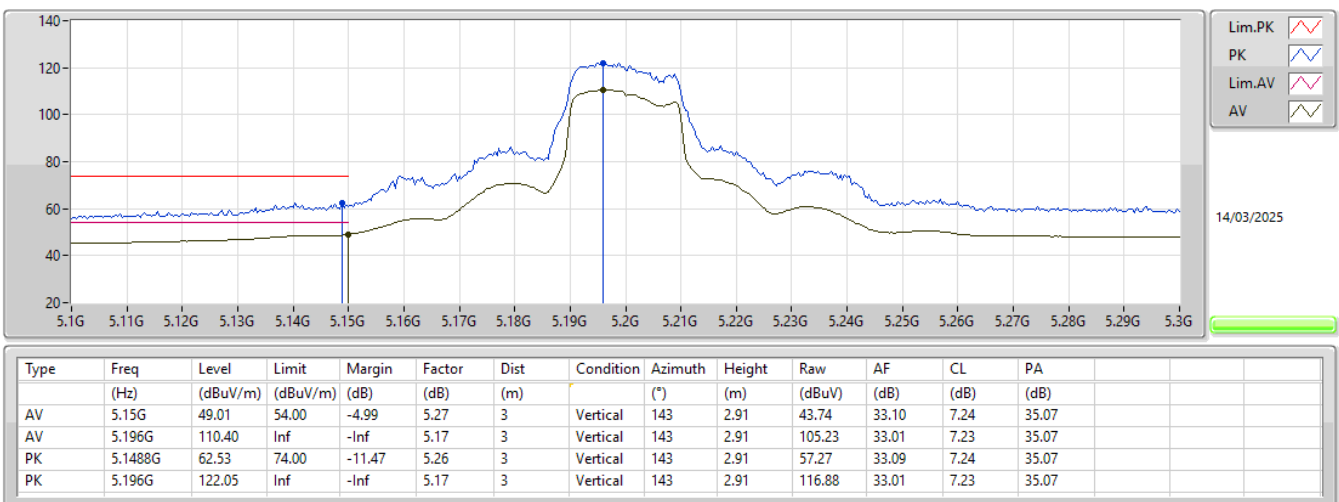


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5200MHz_TX

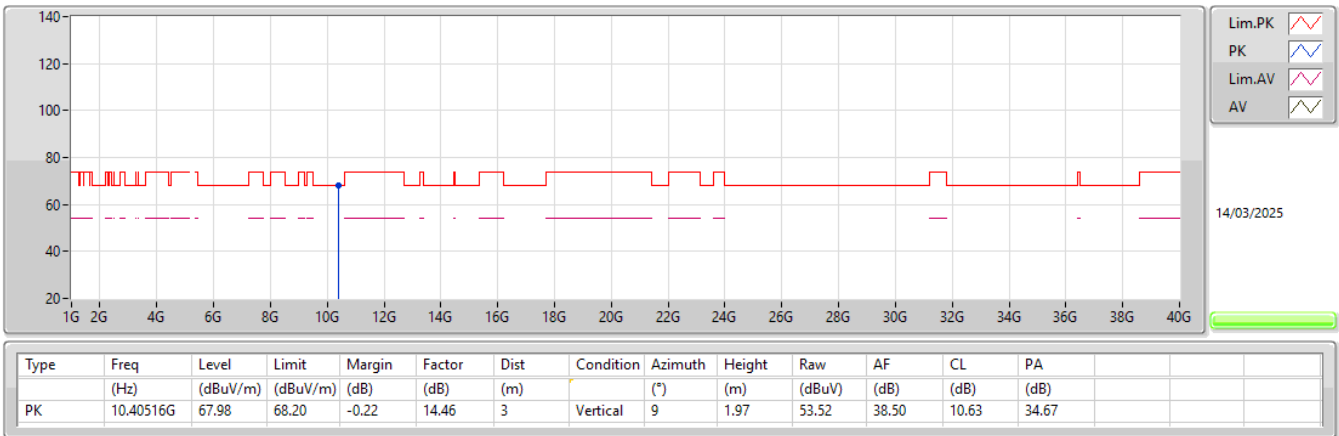


5.15-5.25GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5200MHz_TX

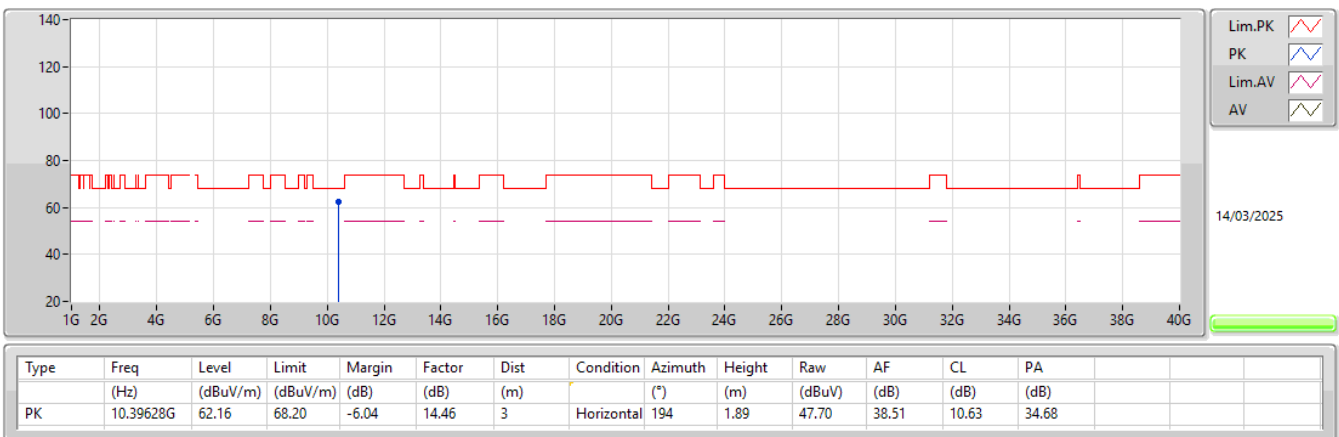

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5190MHz_TX

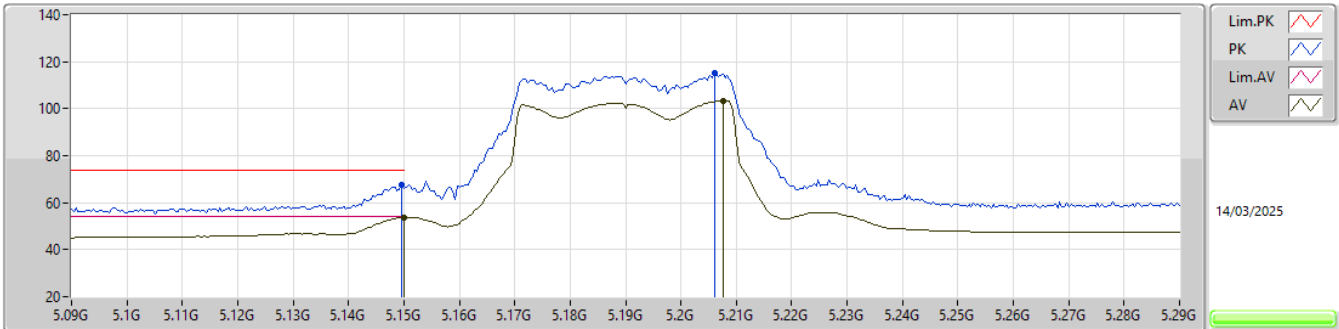

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	53.72	54.00	-0.28	5.27	3	Vertical	145	2.66	48.45	33.10	7.24	35.07
AV	5.2076G	103.39	Inf	-Inf	5.15	3	Vertical	145	2.66	98.24	32.98	7.24	35.07
PK	5.1496G	67.59	74.00	-6.41	5.27	3	Vertical	145	2.66	62.32	33.10	7.24	35.07
PK	5.206G	114.92	Inf	-Inf	5.16	3	Vertical	145	2.66	109.76	32.99	7.24	35.07

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5190MHz_TX

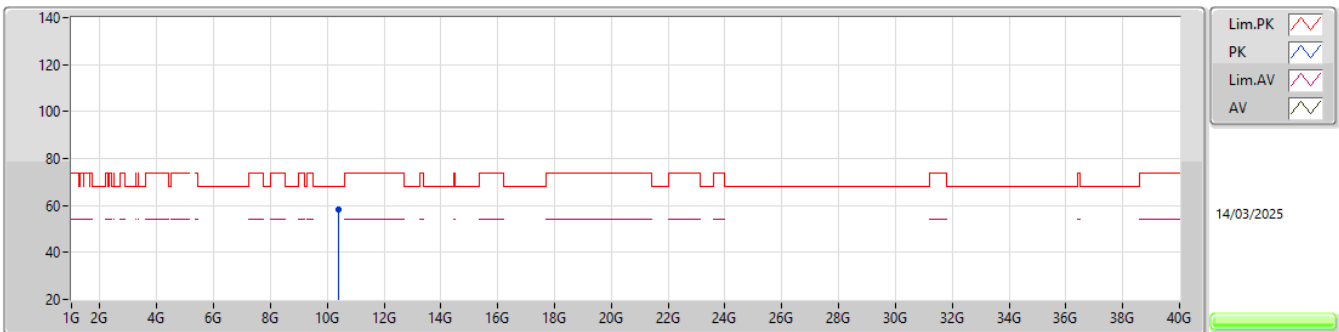

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	10.38456G	58.42	68.20	-9.78	14.47	3	Vertical	180	2.25	43.95	38.53	10.63	34.69


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5190MHz_TX

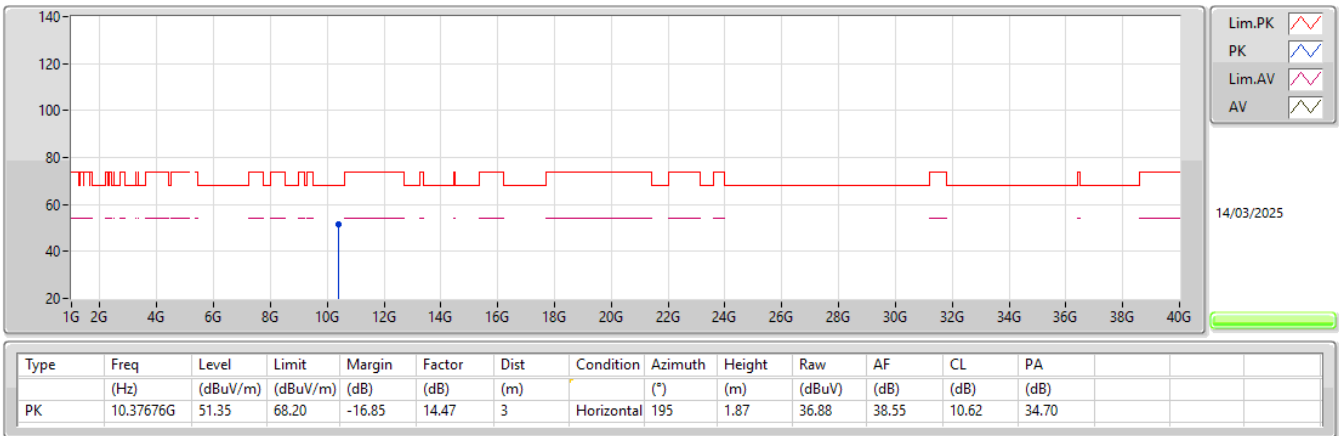


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5210MHz_TX

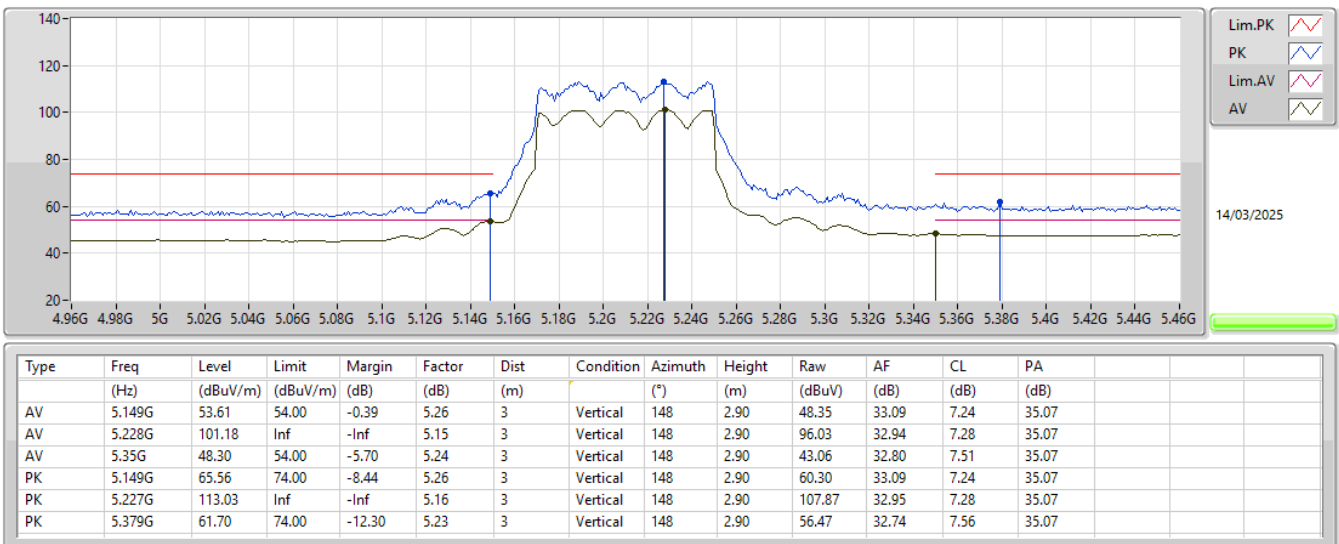


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5210MHz_TX

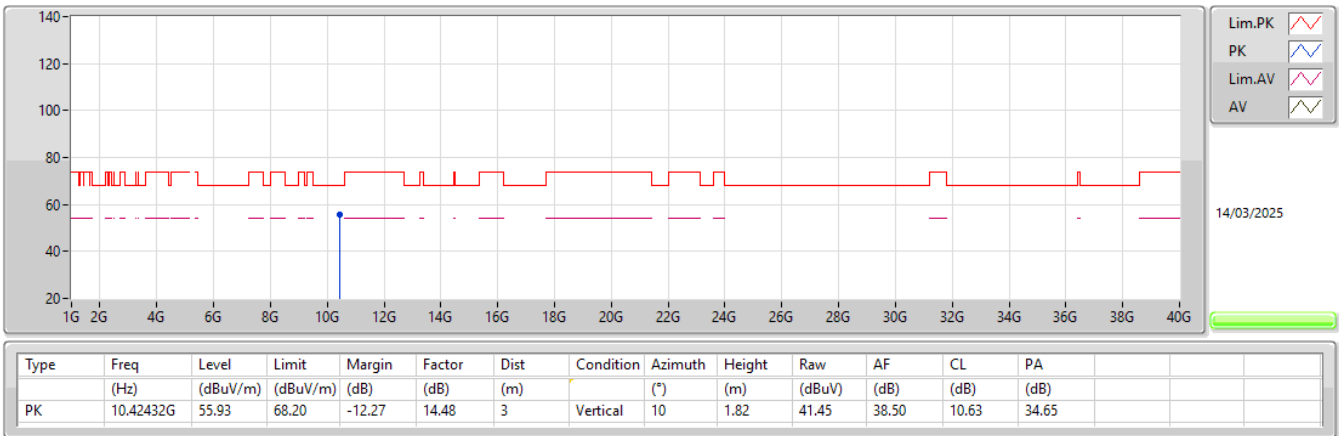


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5210MHz_TX

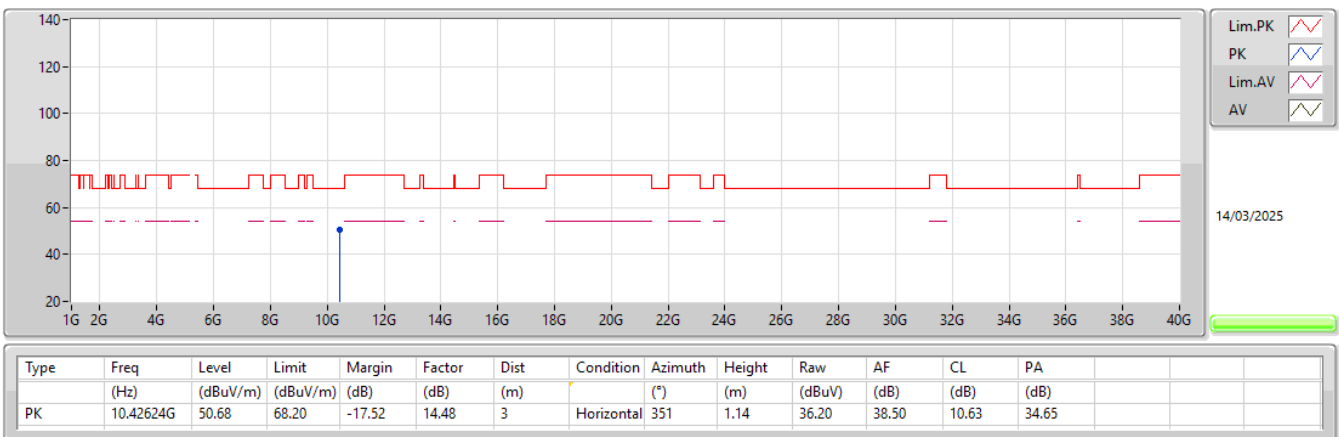


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

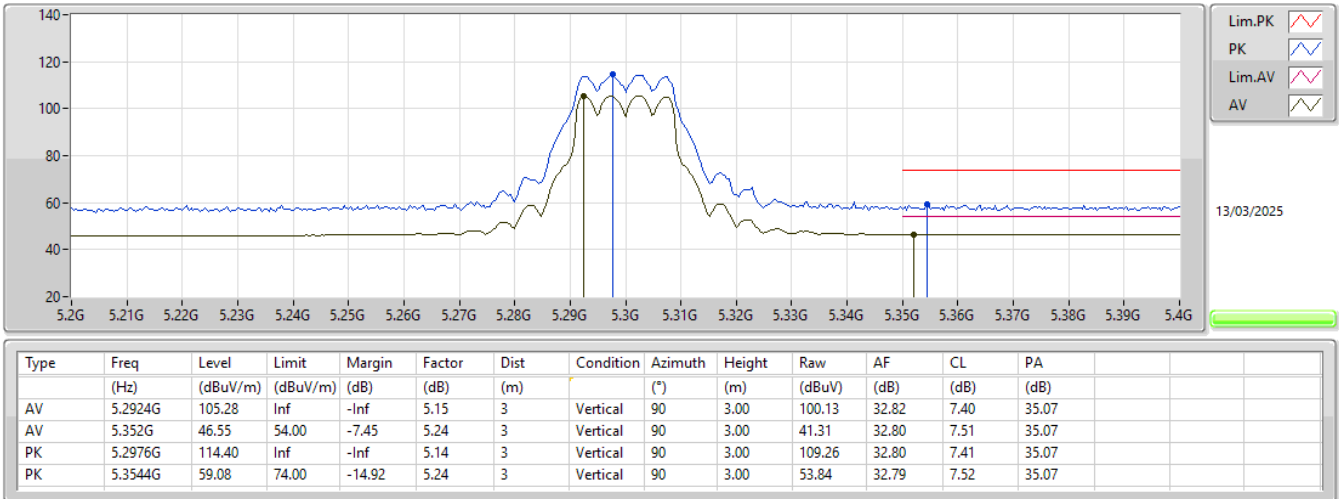


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

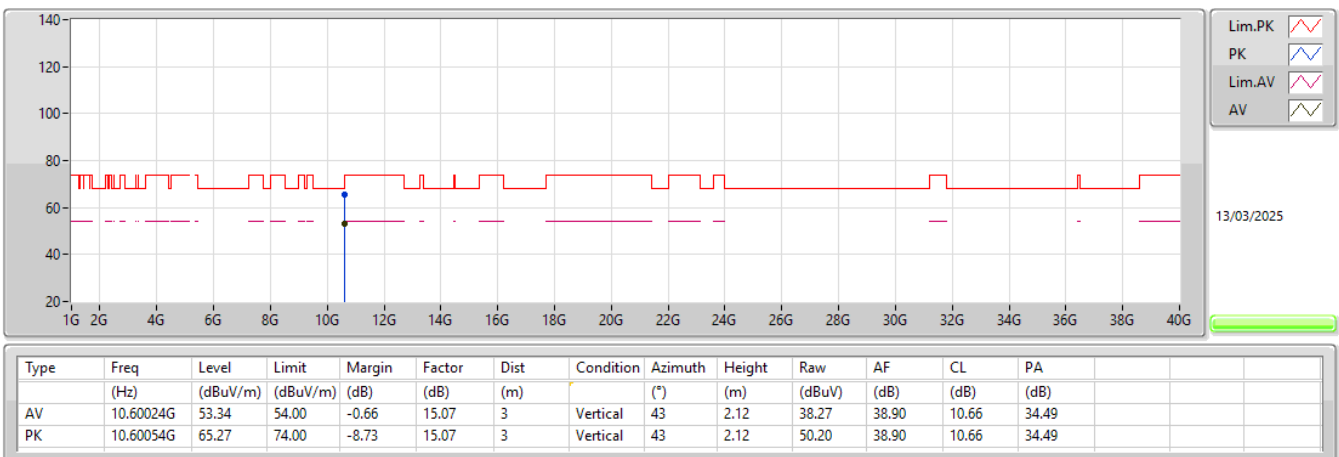


5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

5300MHz_TX

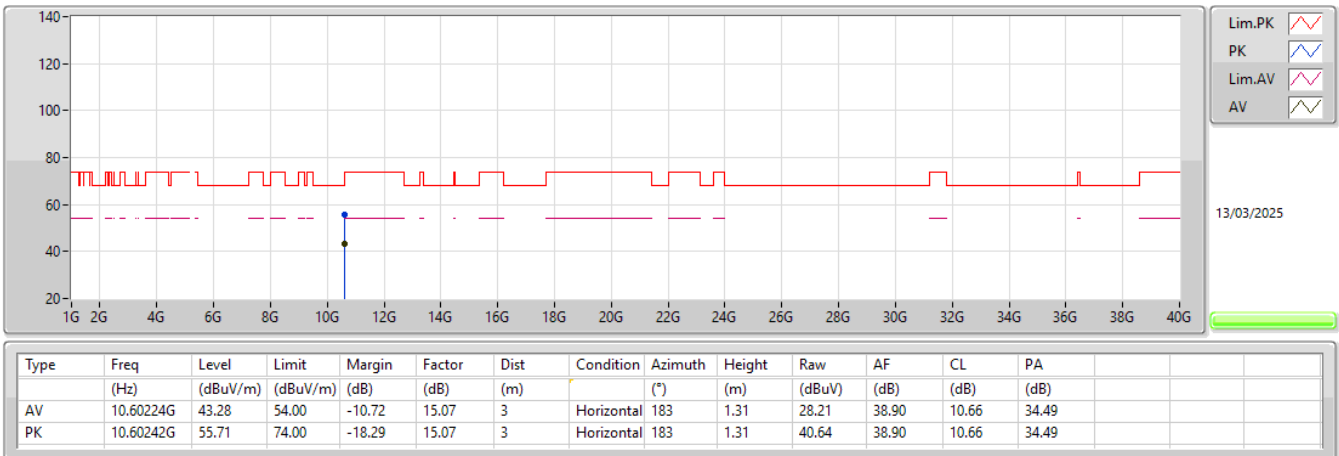


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5260MHz_TX

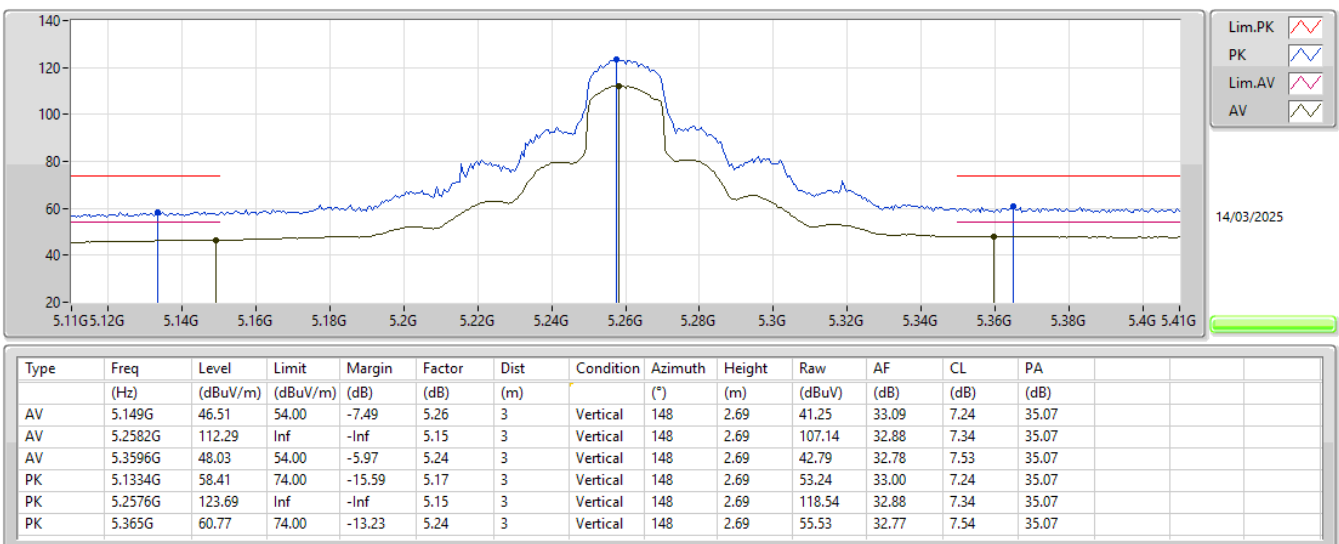


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5260MHz_TX

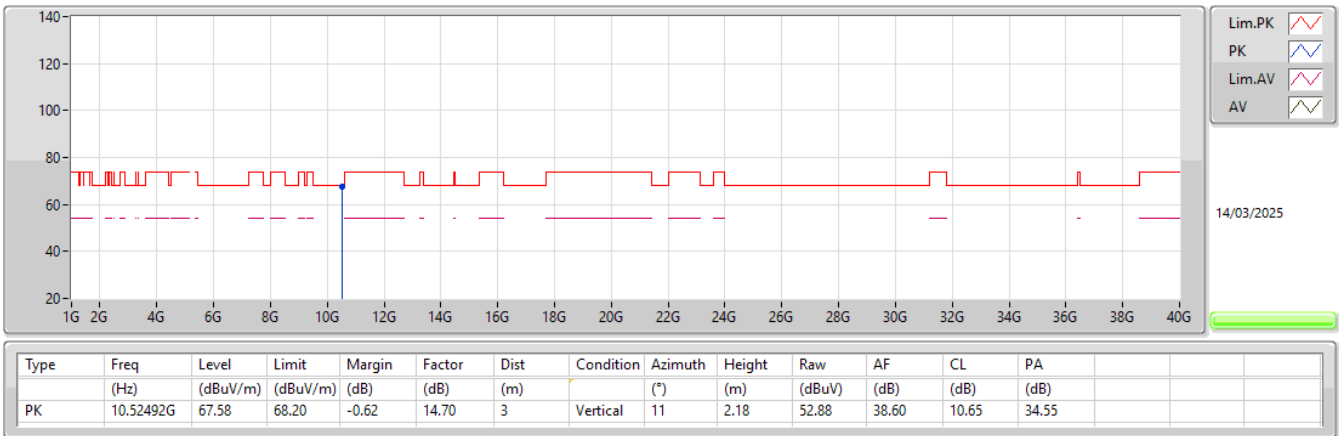


5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5260MHz_TX

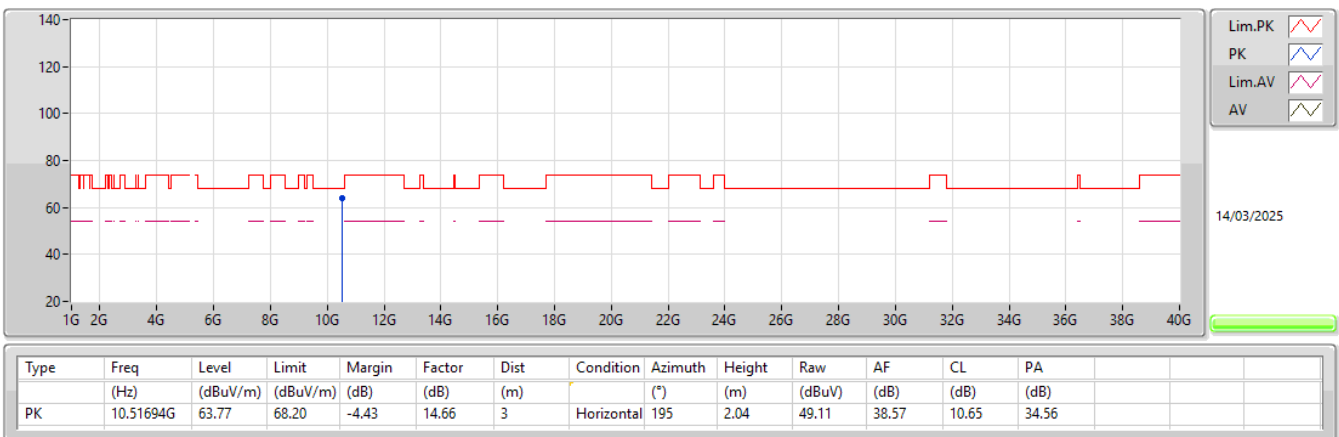


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

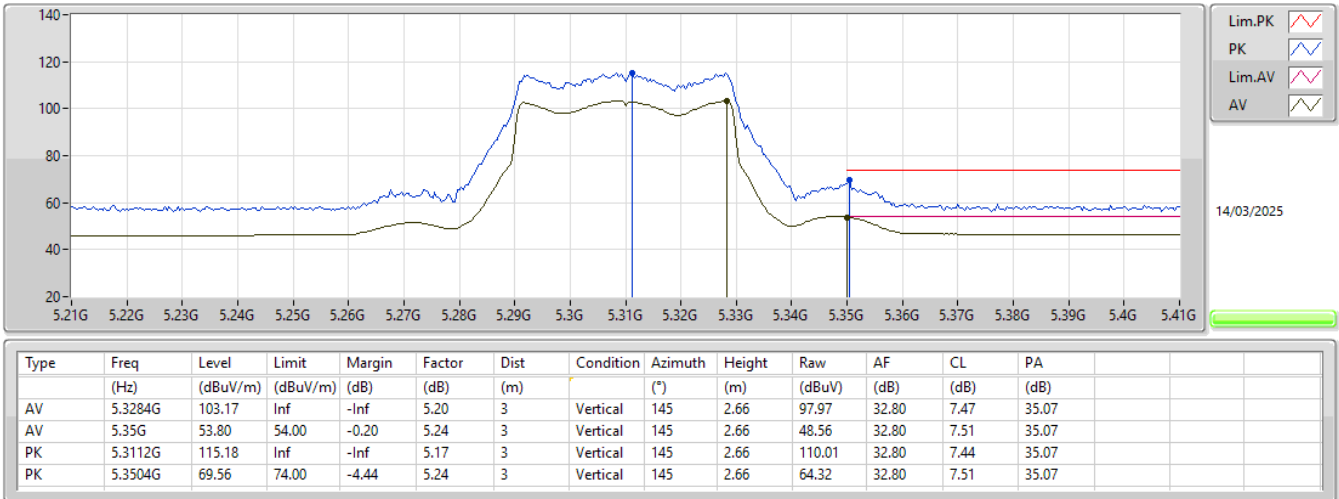


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

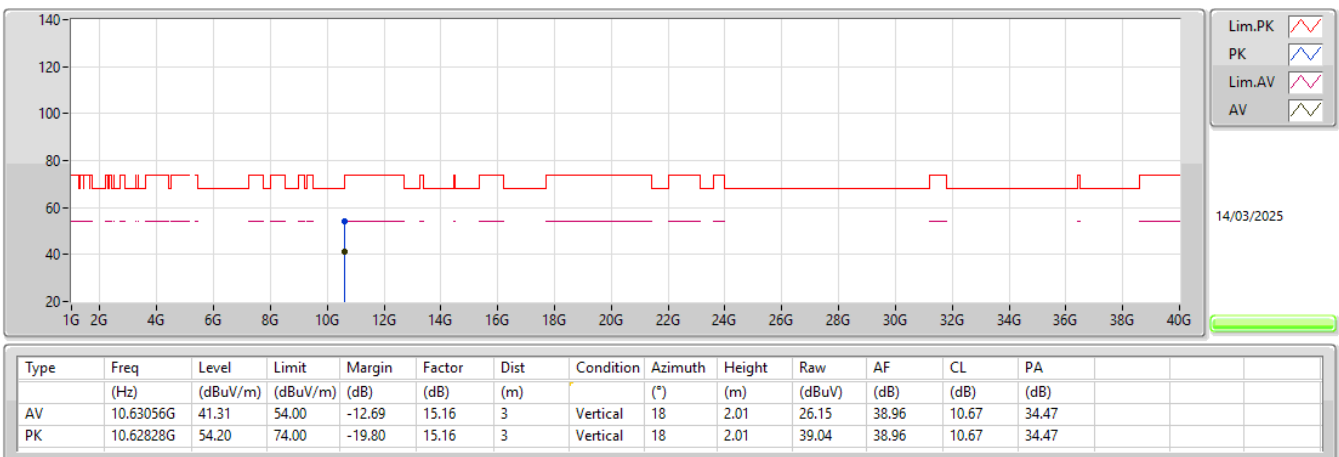


5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5310MHz_TX

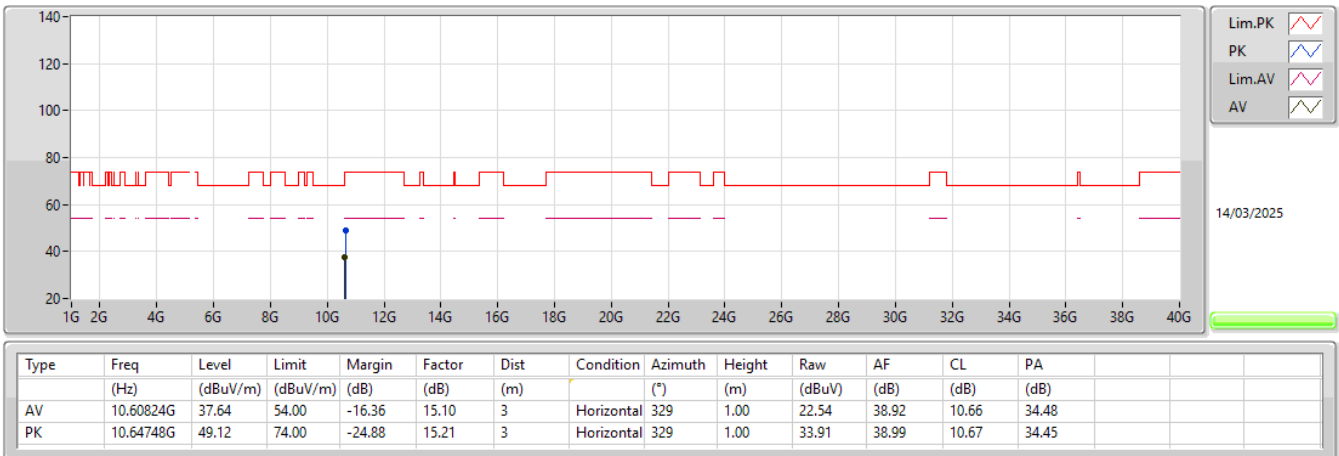


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

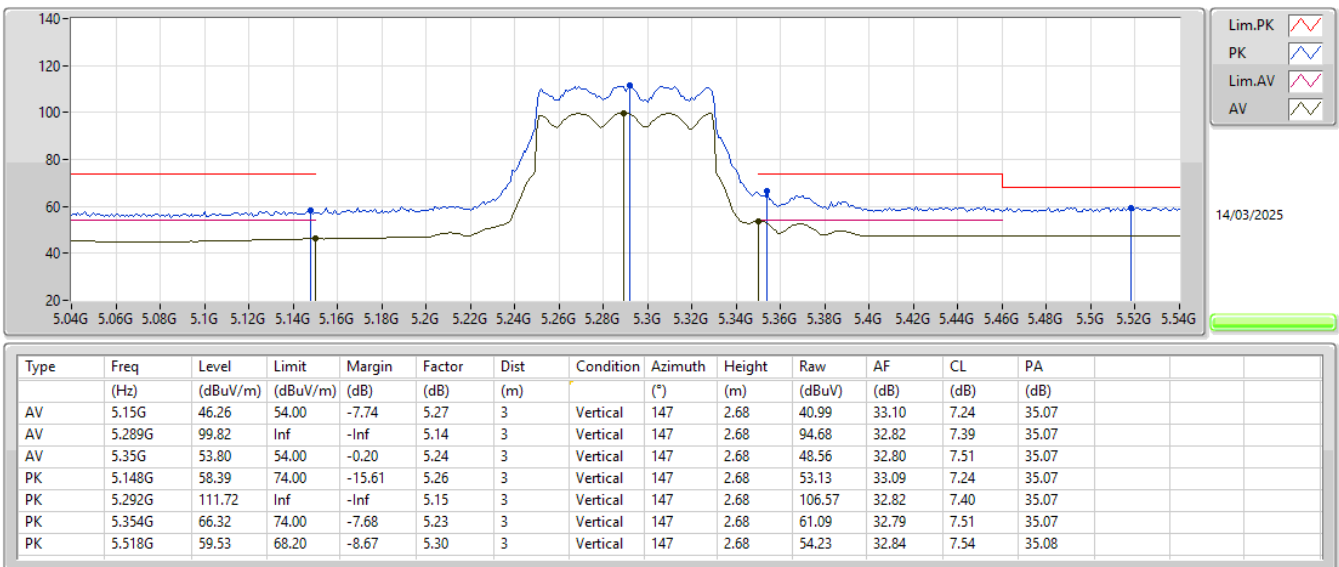


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

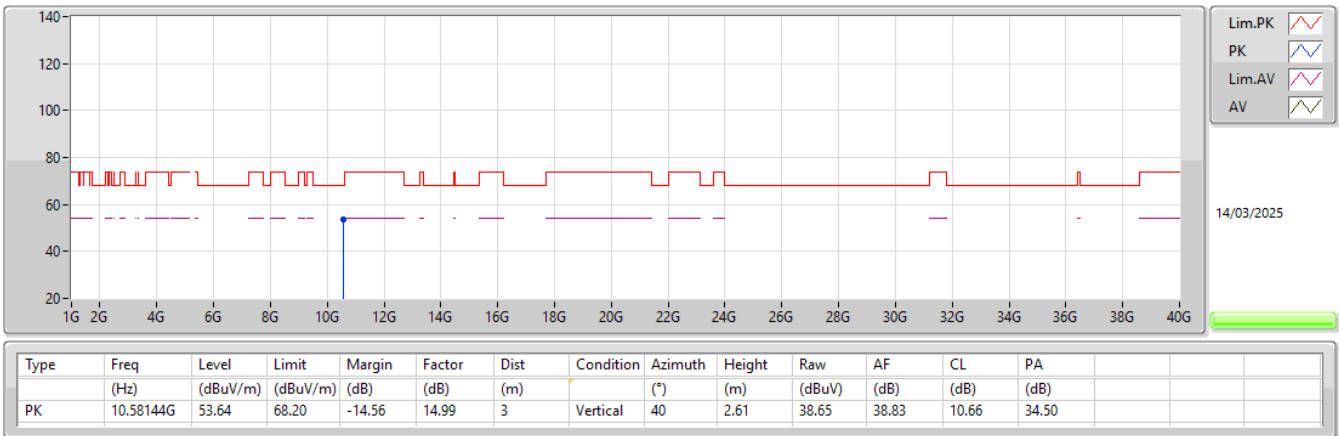


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5290MHz_TX

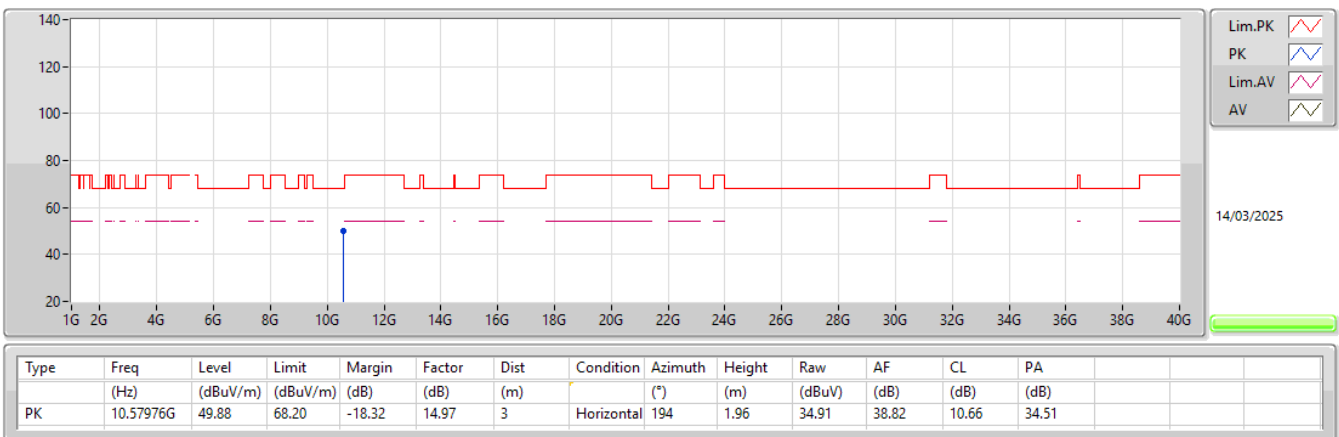


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TX

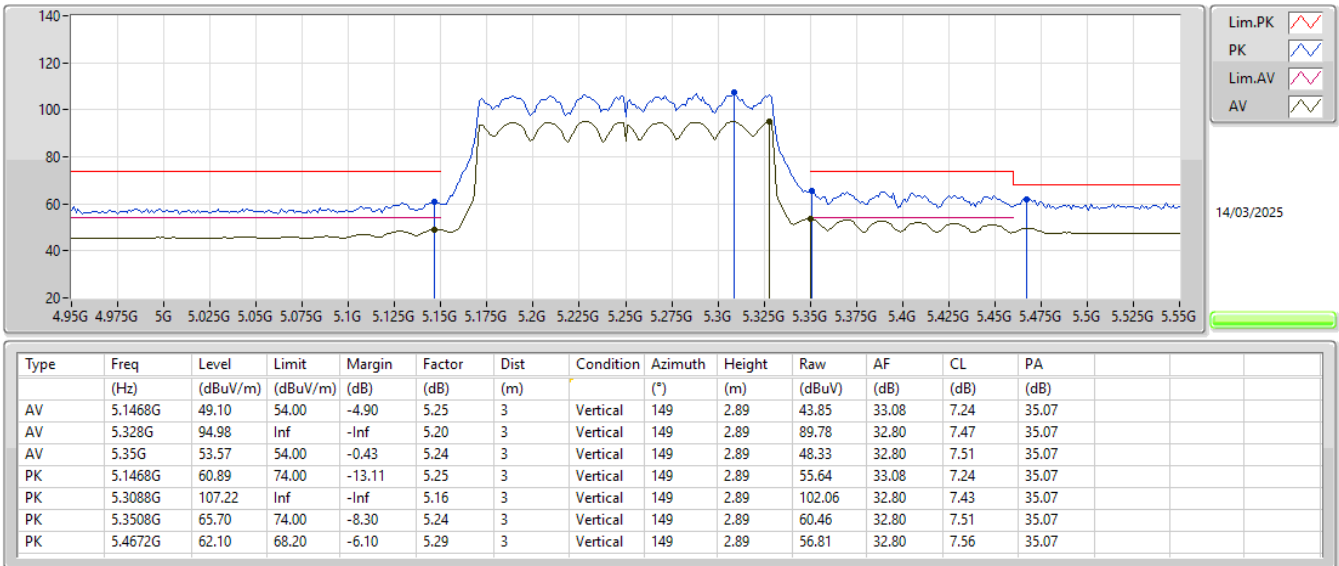


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TX

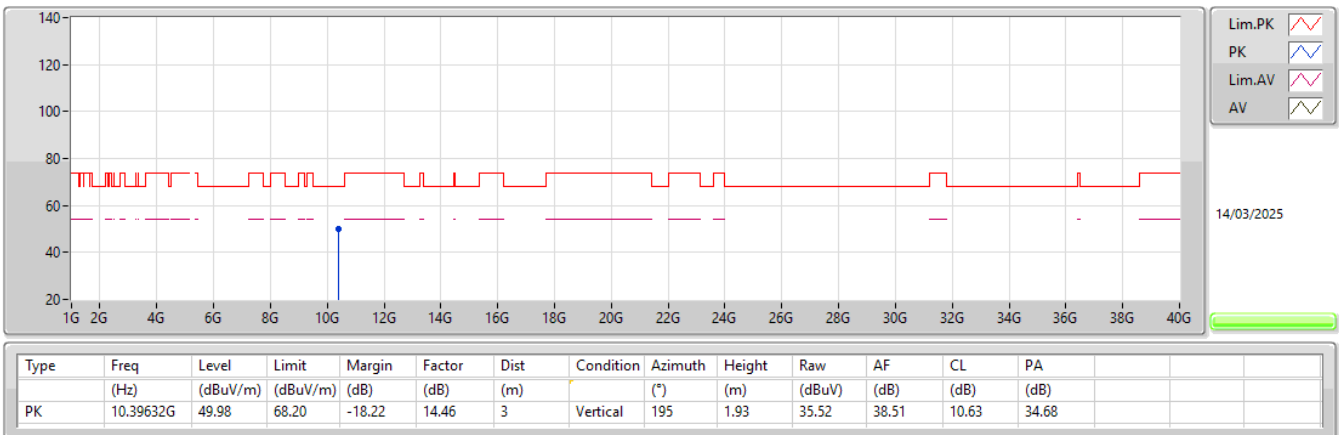


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TX

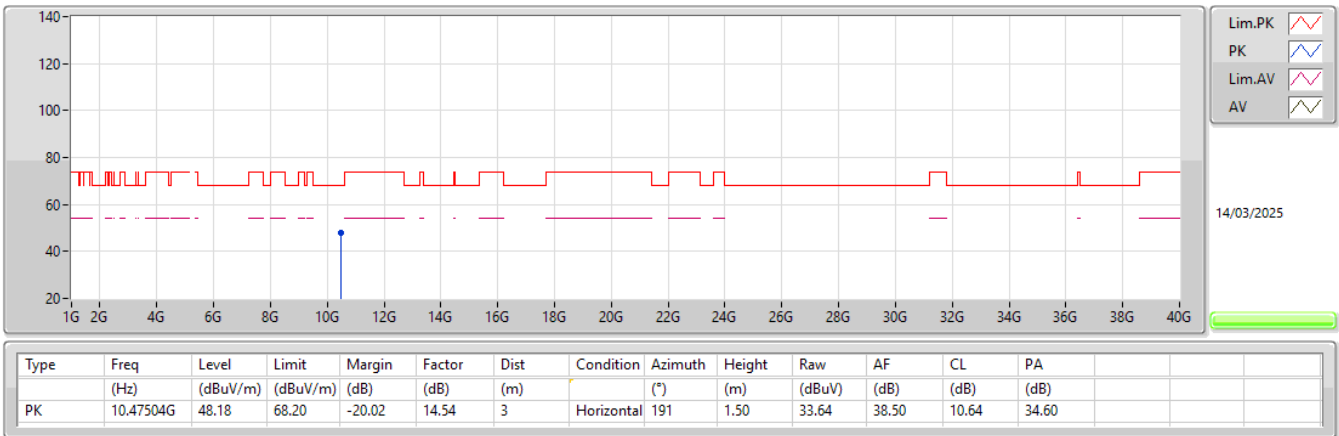


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5580MHz_TX

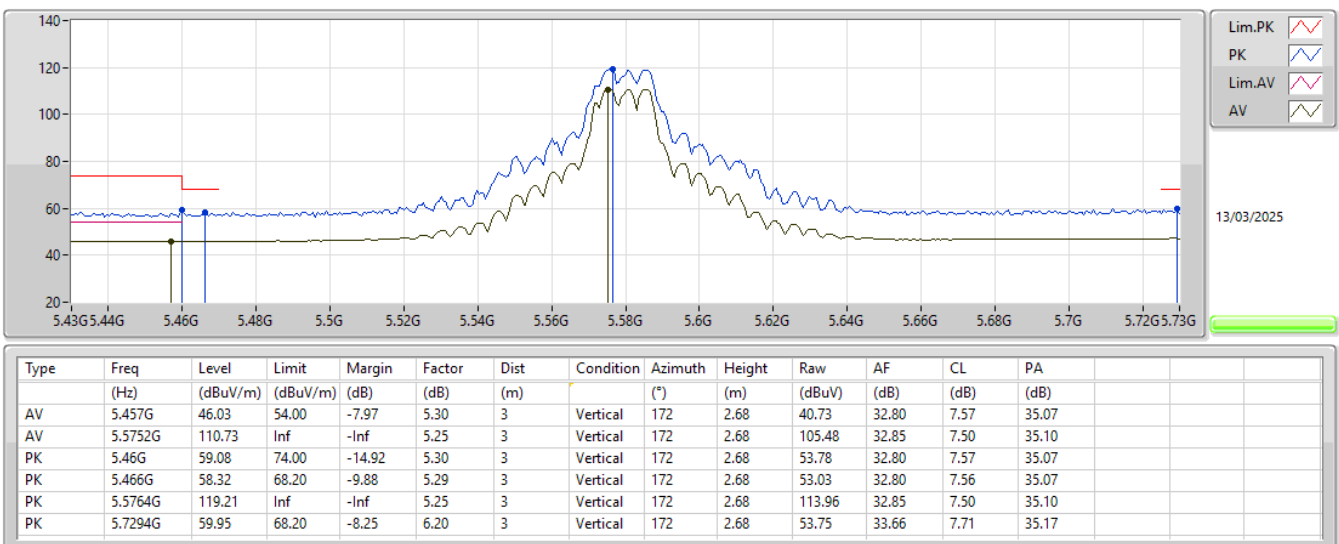


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5580MHz_TX

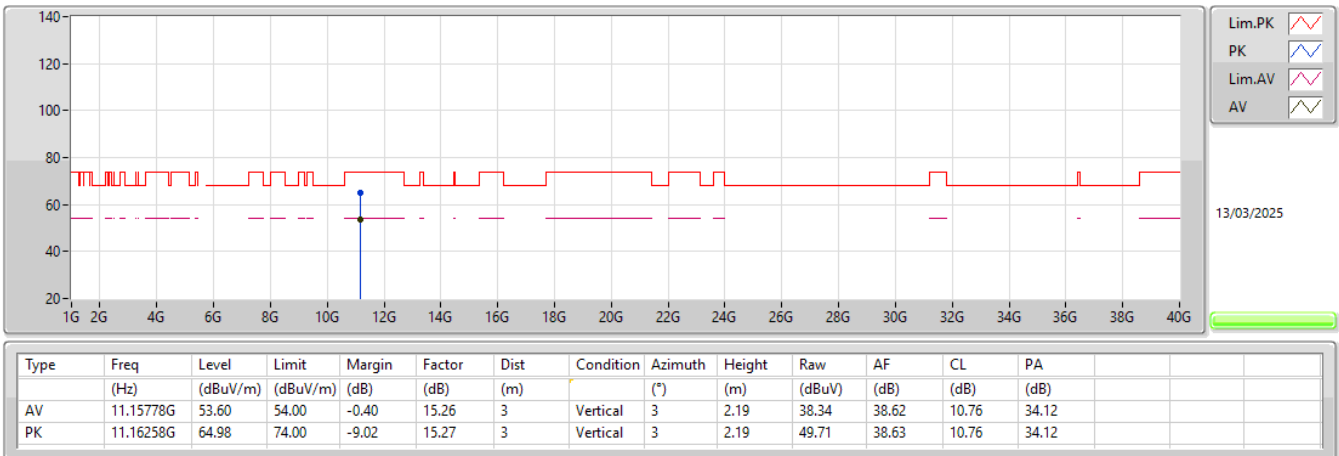


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

5580MHz_TX

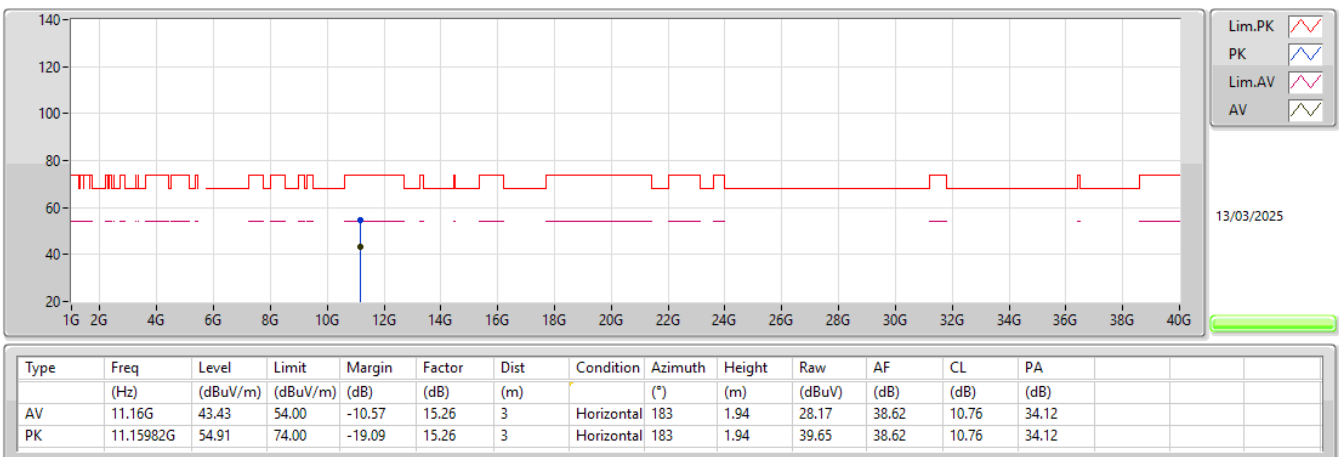


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

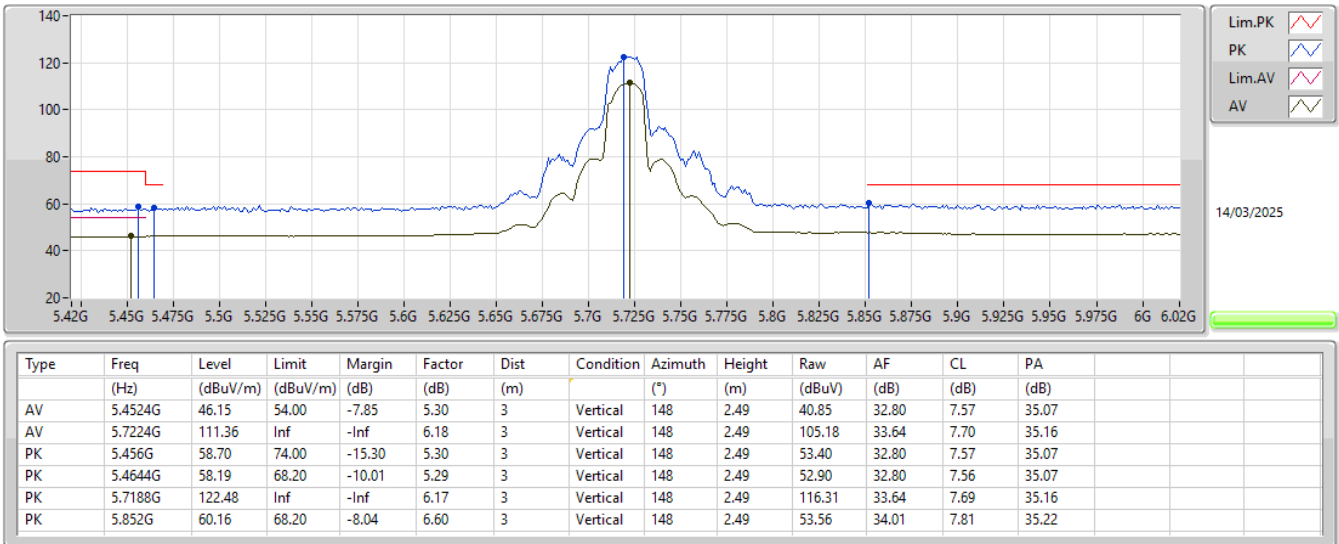


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

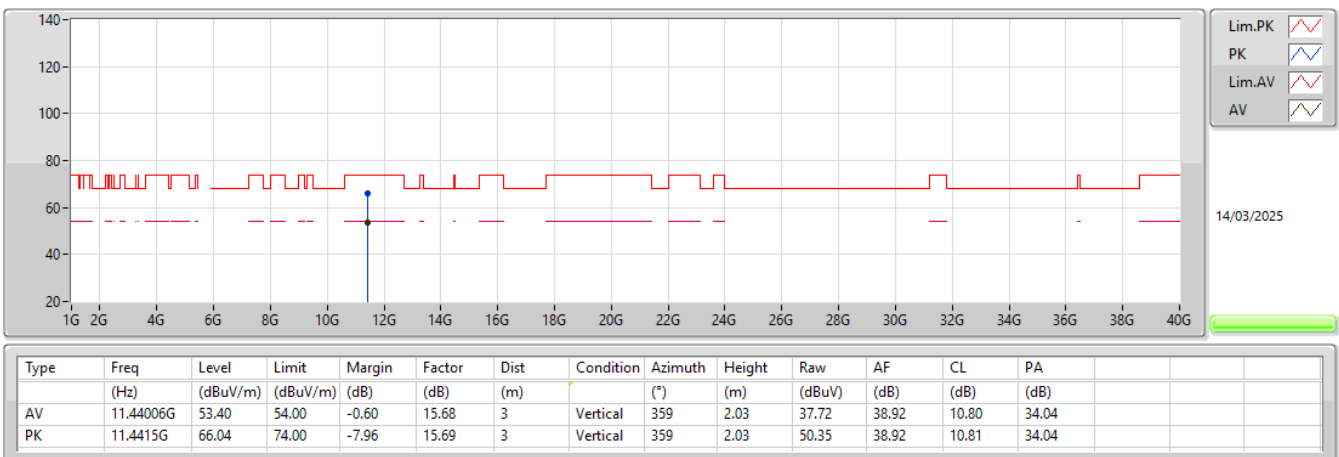


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TX

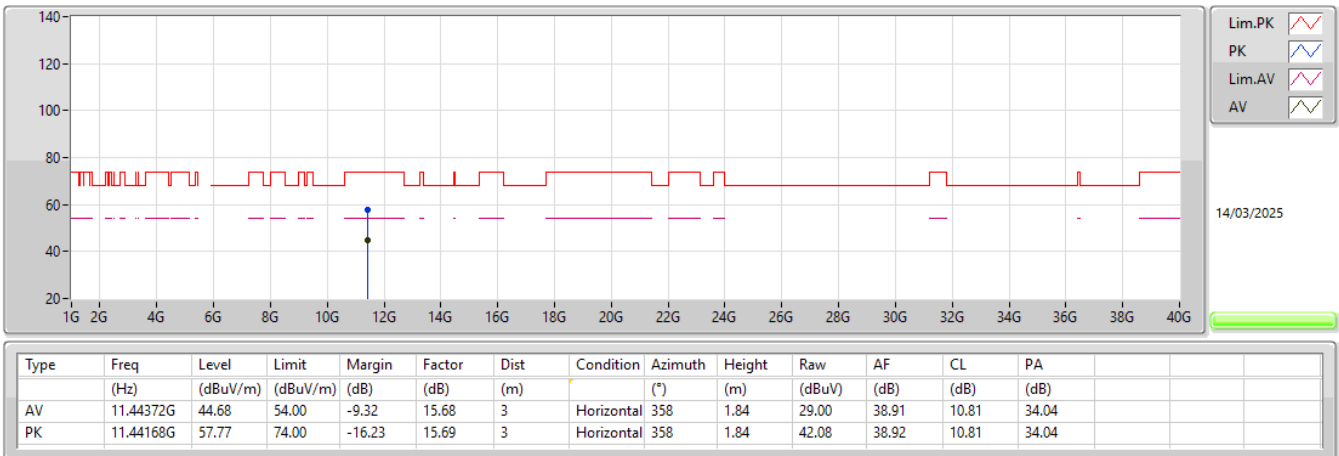


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5550MHz_TX

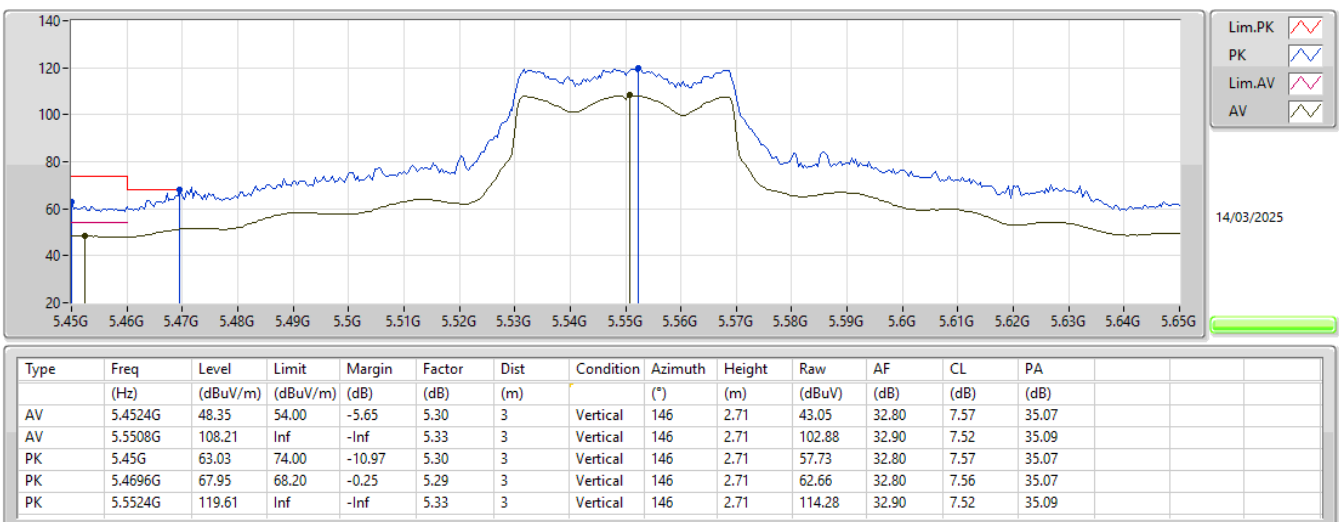


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5550MHz_TX

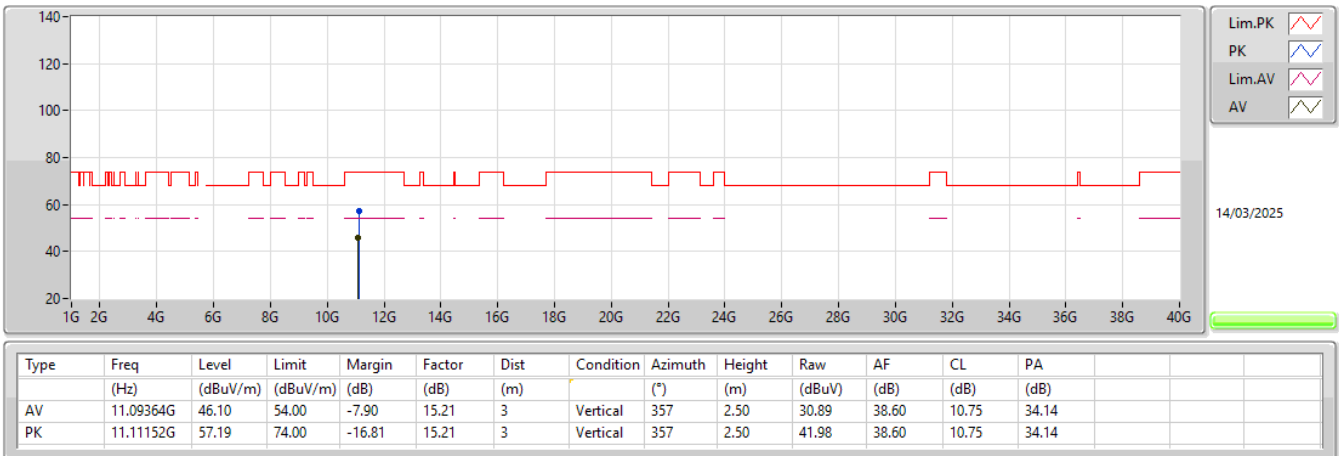


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5550MHz_TX

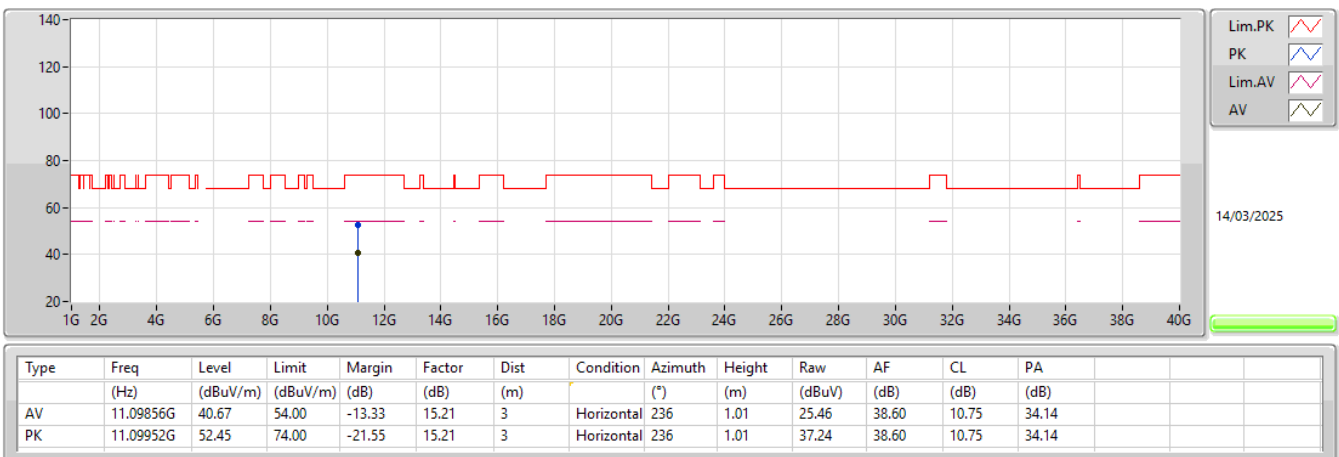

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5530MHz_TX

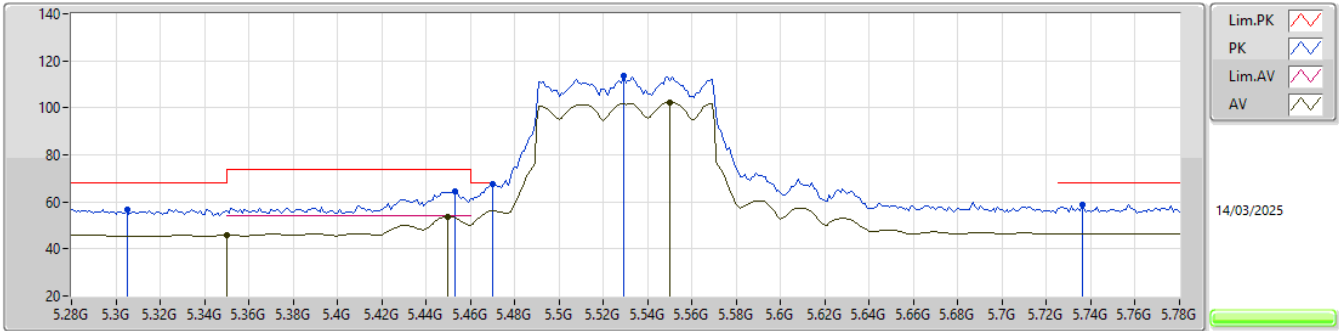

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.35G	45.76	54.00	-8.24	5.24	3	Vertical	146	2.72	40.52	32.80	7.51	35.07
AV	5.45G	53.70	54.00	-0.30	5.30	3	Vertical	146	2.72	48.40	32.80	7.57	35.07
AV	5.55G	102.25	Inf	-Inf	5.33	3	Vertical	146	2.72	96.92	32.90	7.52	35.09
PK	5.305G	56.86	68.20	-11.34	5.15	3	Vertical	146	2.72	51.71	32.80	7.42	35.07
PK	5.453G	64.37	74.00	-9.63	5.30	3	Vertical	146	2.72	59.07	32.80	7.57	35.07
PK	5.47G	67.81	68.20	-0.39	5.29	3	Vertical	146	2.72	62.52	32.80	7.56	35.07
PK	5.529G	113.40	Inf	-Inf	5.31	3	Vertical	146	2.72	108.09	32.86	7.53	35.08
PK	5.736G	58.87	68.20	-9.33	6.22	3	Vertical	146	2.72	52.65	33.67	7.72	35.17

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX


5530MHz_TX

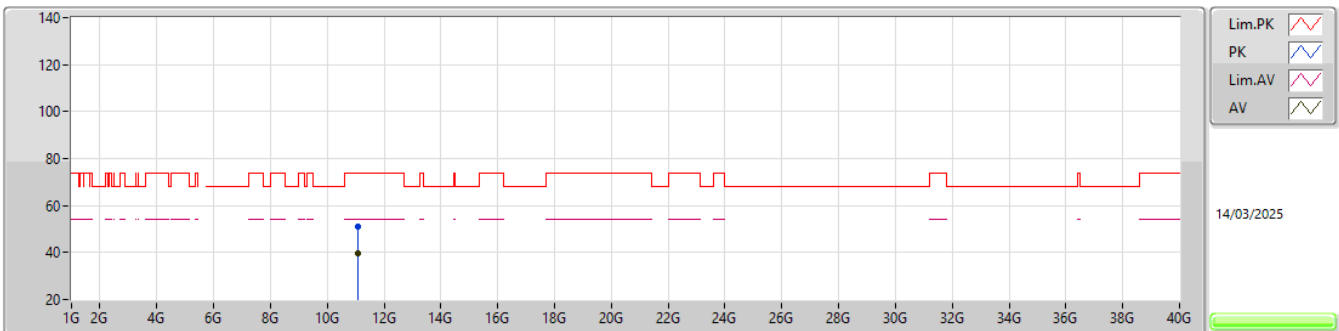

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.07224G	39.79	54.00	-14.21	15.19	3	Vertical	3	2.12	24.60	38.60	10.74	34.15
PK	11.07056G	51.15	74.00	-22.85	15.19	3	Vertical	3	2.12	35.96	38.60	10.74	34.15


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5530MHz_TX

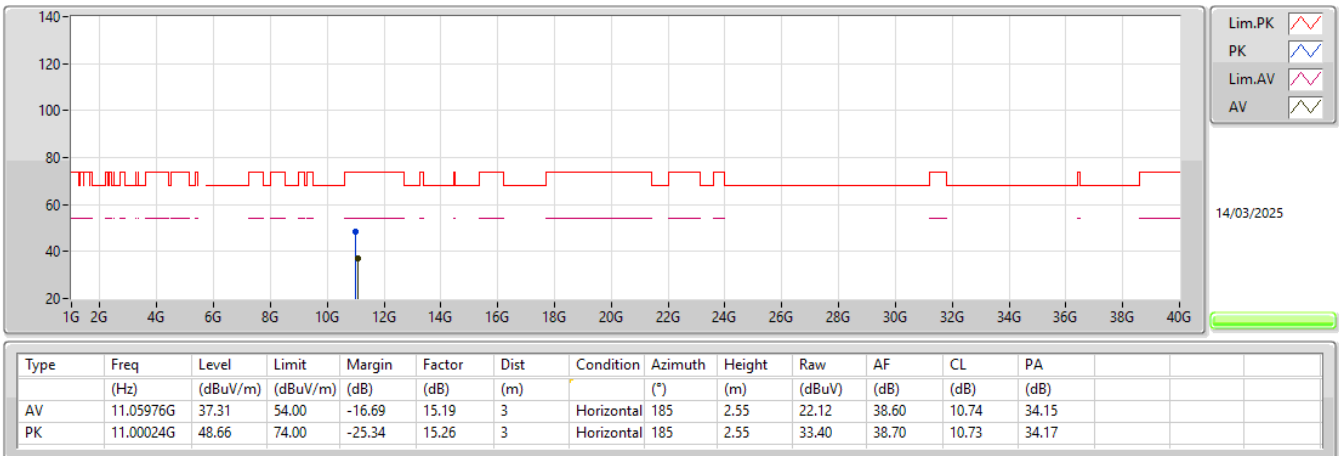


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5570MHz_TX

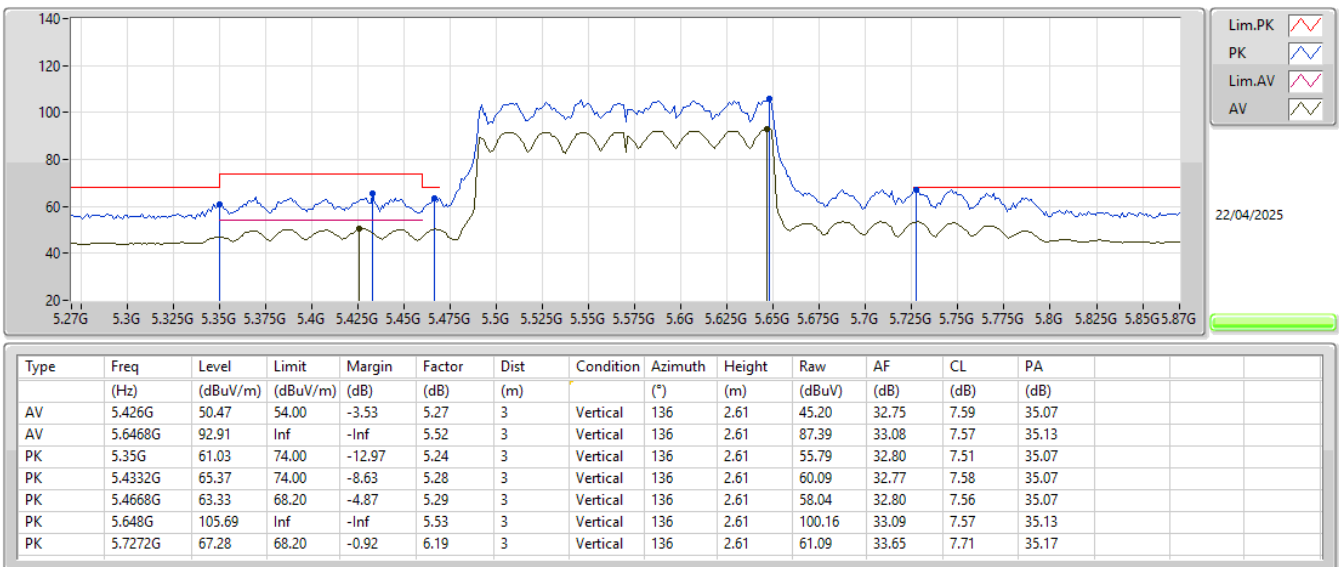


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5570MHz_TX

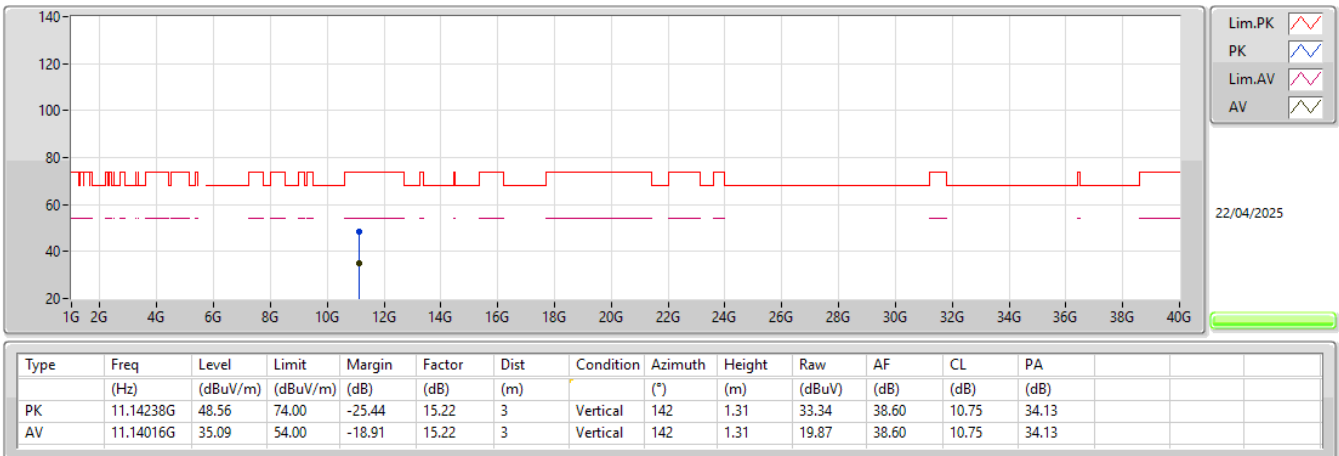


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

5570MHz_TX

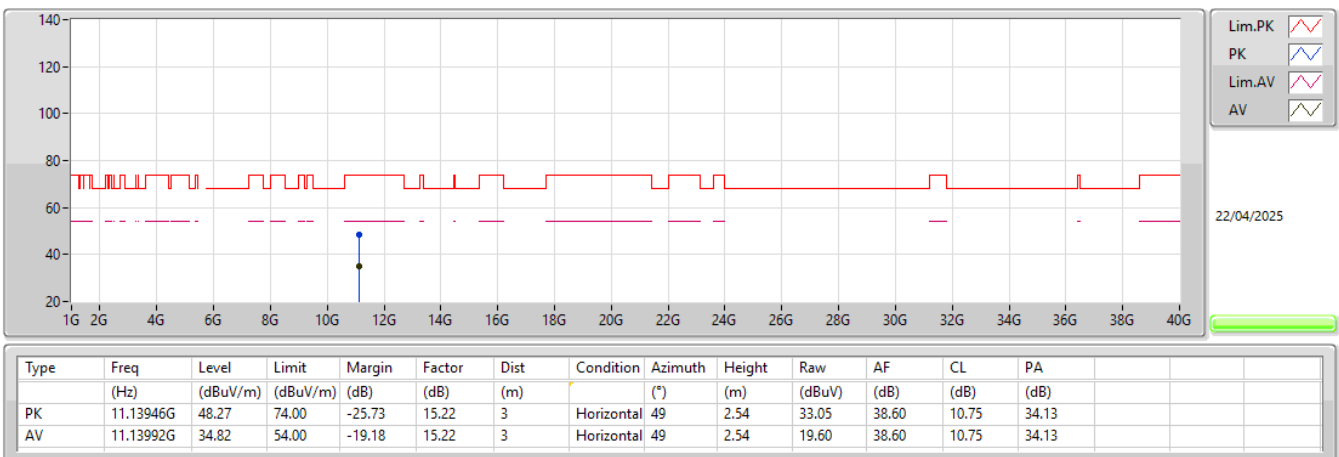

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX


5825MHz_TX

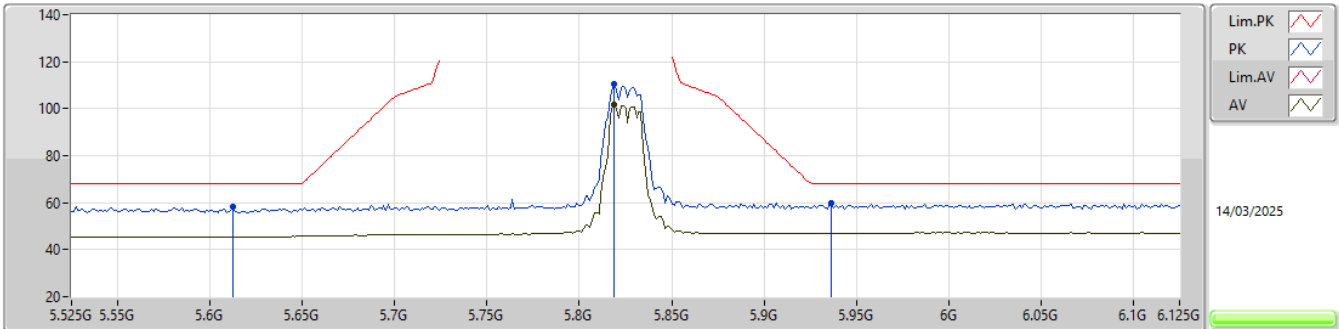

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.819G	101.56	Inf	-Inf	6.56	3	Vertical	97	2.12	95.00	33.94	7.82	35.20
PK	5.6126G	58.13	68.20	-10.07	5.27	3	Vertical	97	2.12	52.86	32.88	7.51	35.12
PK	5.819G	110.32	Inf	-Inf	6.56	3	Vertical	97	2.12	103.76	33.94	7.82	35.20
PK	5.9366G	59.80	68.20	-8.40	6.58	3	Vertical	97	2.12	53.22	34.05	7.78	35.25

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX


5825MHz_TX

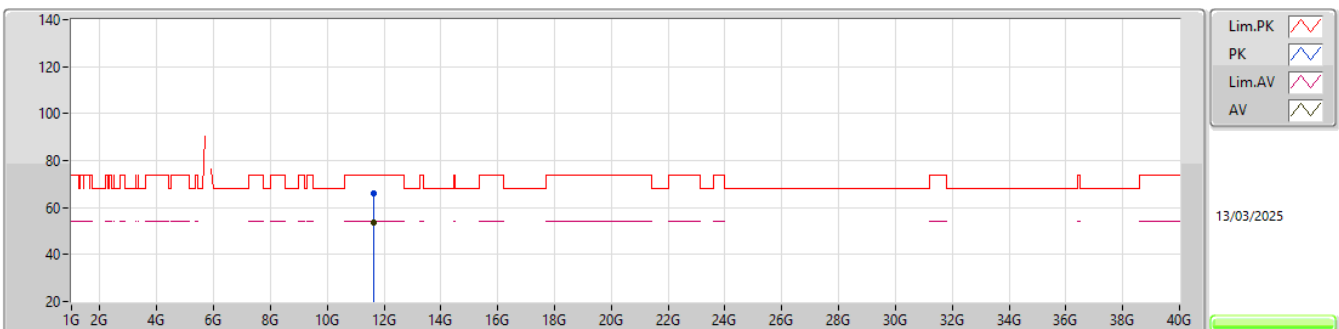

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.64796G	53.61	54.00	-0.39	15.34	3	Vertical	152	2.07	38.27	38.50	10.84	34.00
PK	11.6485G	66.02	74.00	-7.98	15.34	3	Vertical	152	2.07	50.68	38.50	10.84	34.00


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

5825MHz_TX

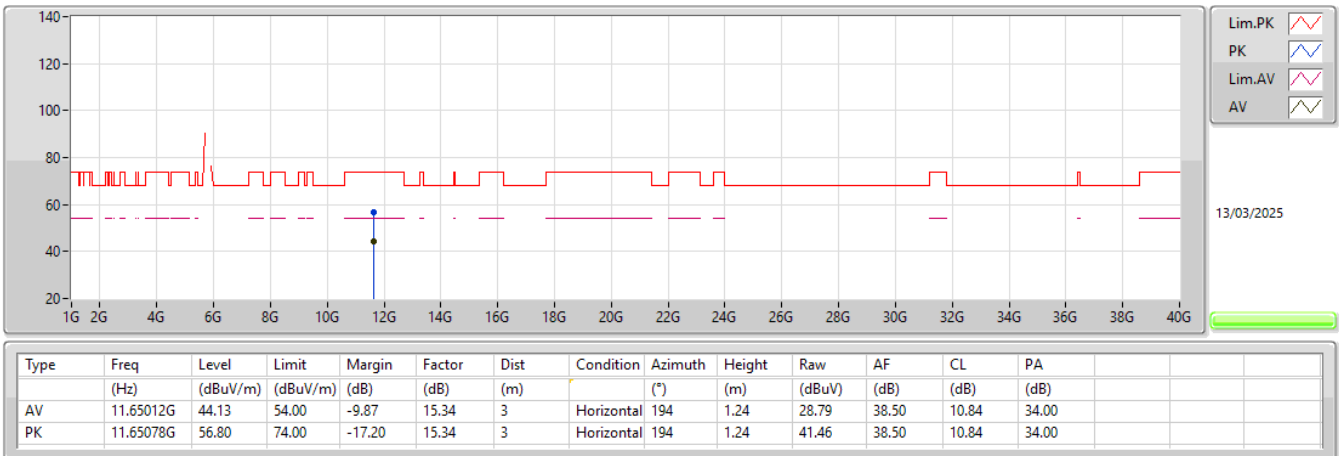


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5825MHz_TX

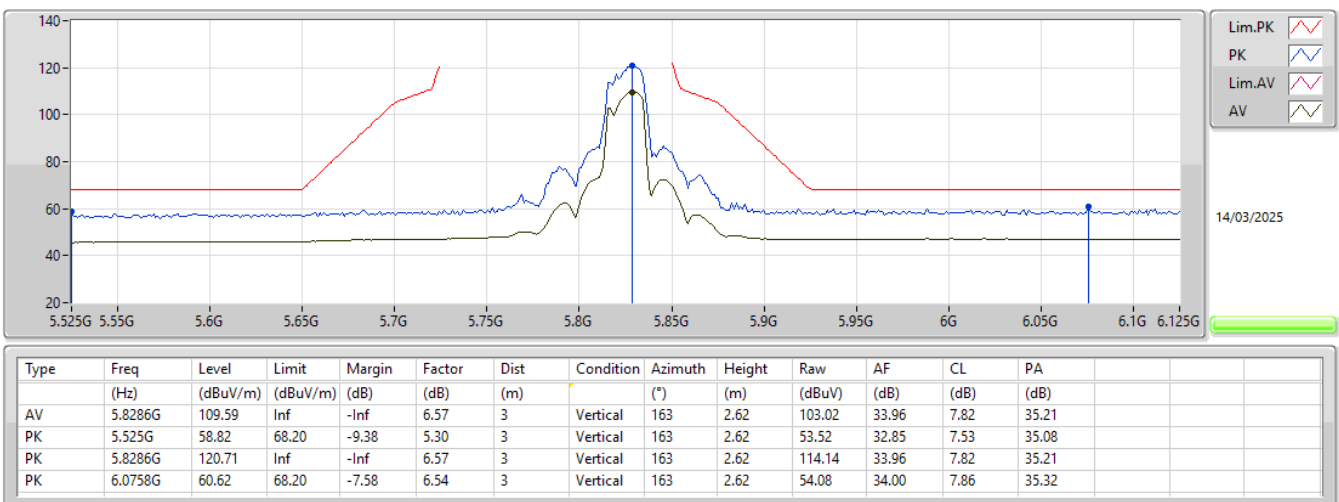


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5825MHz_TX

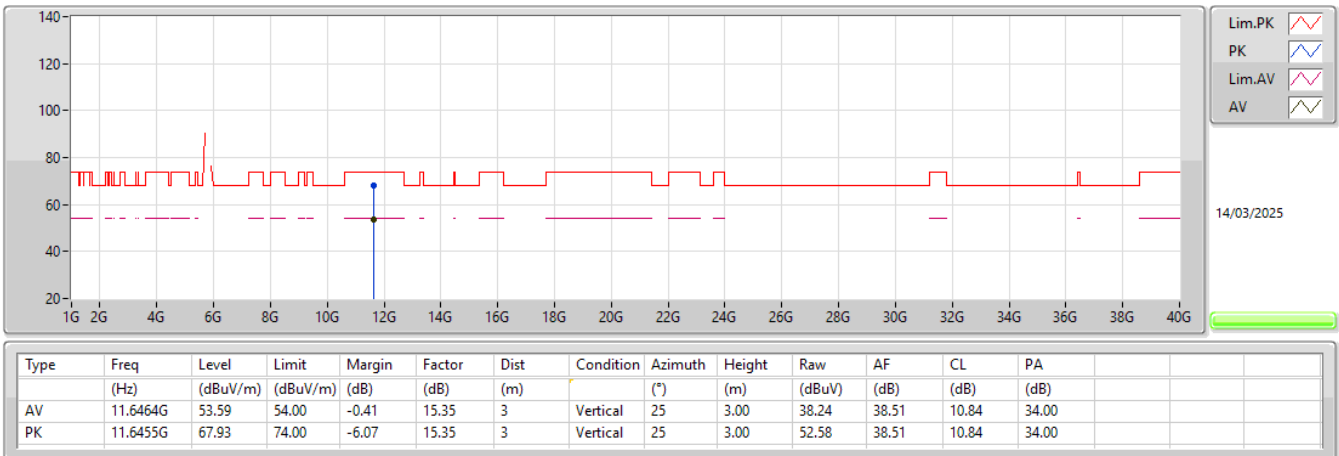


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

5825MHz_TX

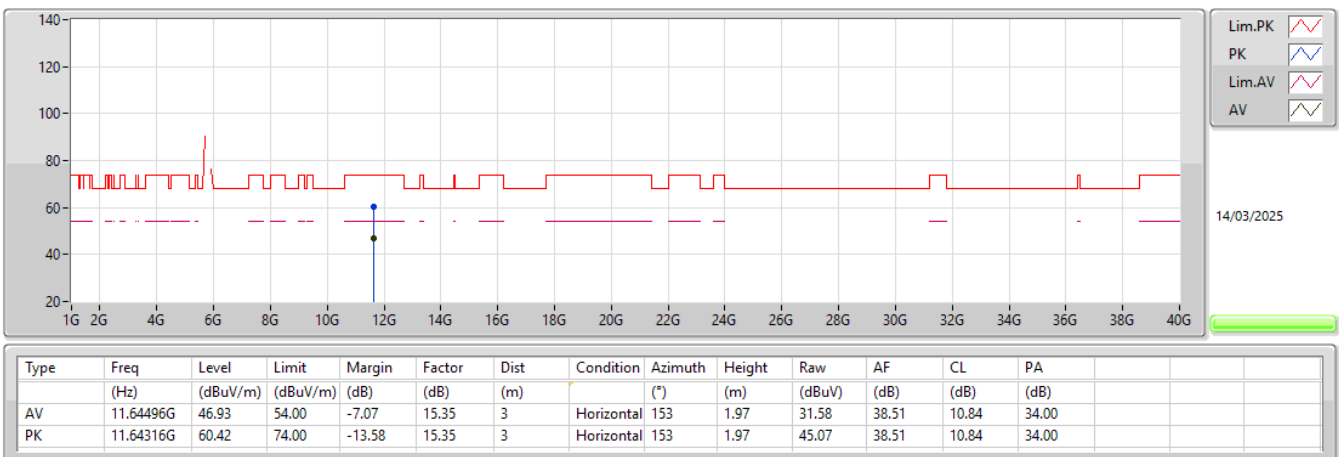

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5755MHz_TX

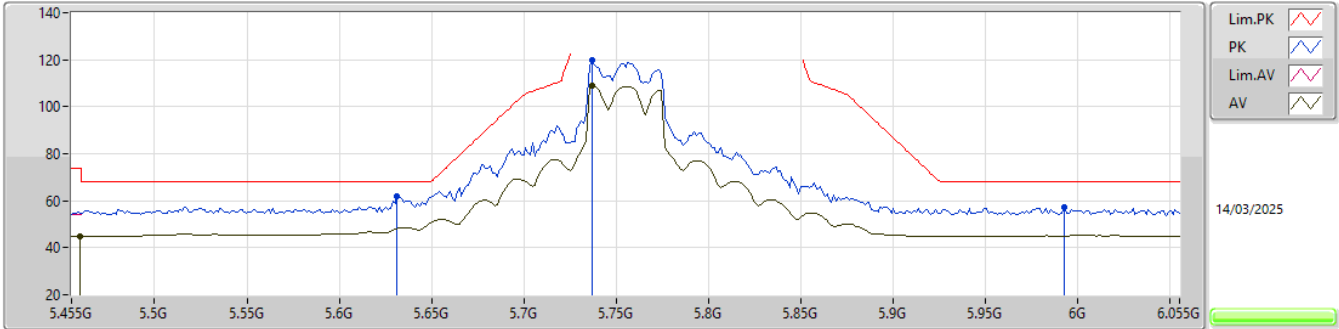

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.4598G	44.73	54.00	-9.27	5.30	3	Vertical	146	2.82	39.43	32.80	7.57	35.07
AV	5.737G	108.90	Inf	-Inf	6.22	3	Vertical	146	2.82	102.68	33.67	7.72	35.17
PK	5.6314G	61.93	68.20	-6.27	5.40	3	Vertical	146	2.82	56.53	32.99	7.54	35.13
PK	5.737G	119.76	Inf	-Inf	6.22	3	Vertical	146	2.82	113.54	33.67	7.72	35.17
PK	5.9926G	56.99	68.20	-11.21	6.56	3	Vertical	146	2.82	50.43	34.09	7.75	35.28

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX


5755MHz_TX

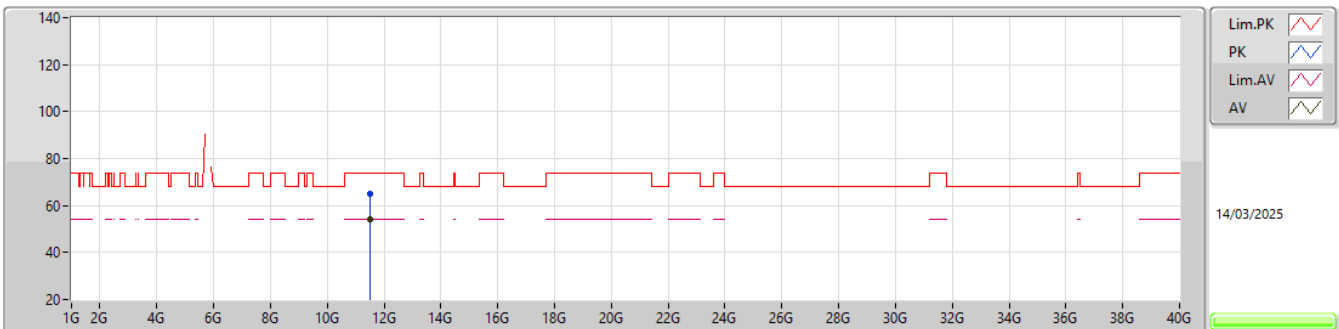

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.50064G	53.90	54.00	-0.10	15.70	3	Vertical	153	2.16	38.20	38.90	10.82	34.02
PK	11.49704G	64.76	74.00	-9.24	15.69	3	Vertical	153	2.16	49.07	38.90	10.81	34.02


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

5755MHz_TX

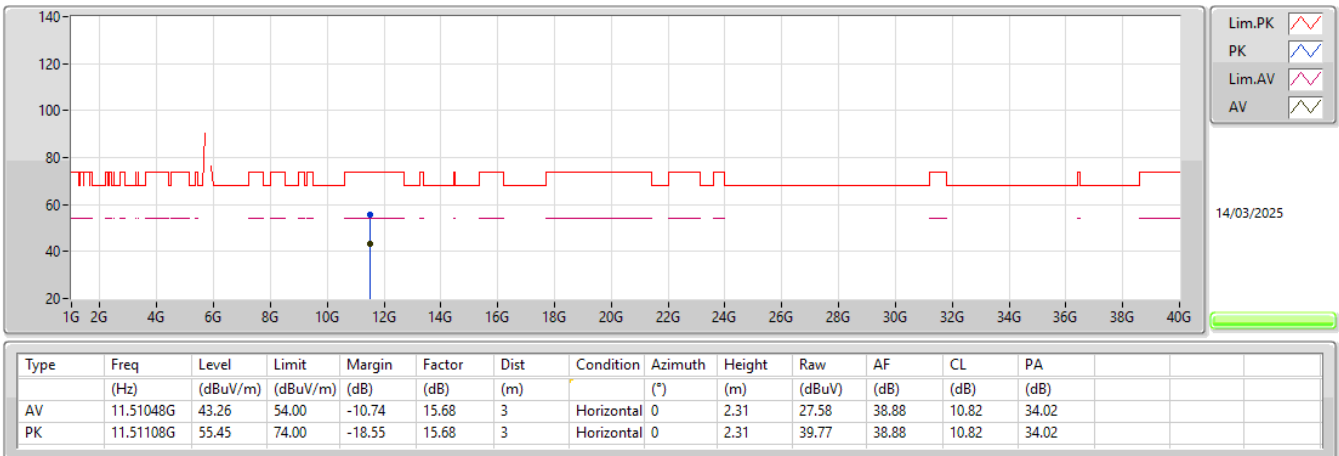


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_TX

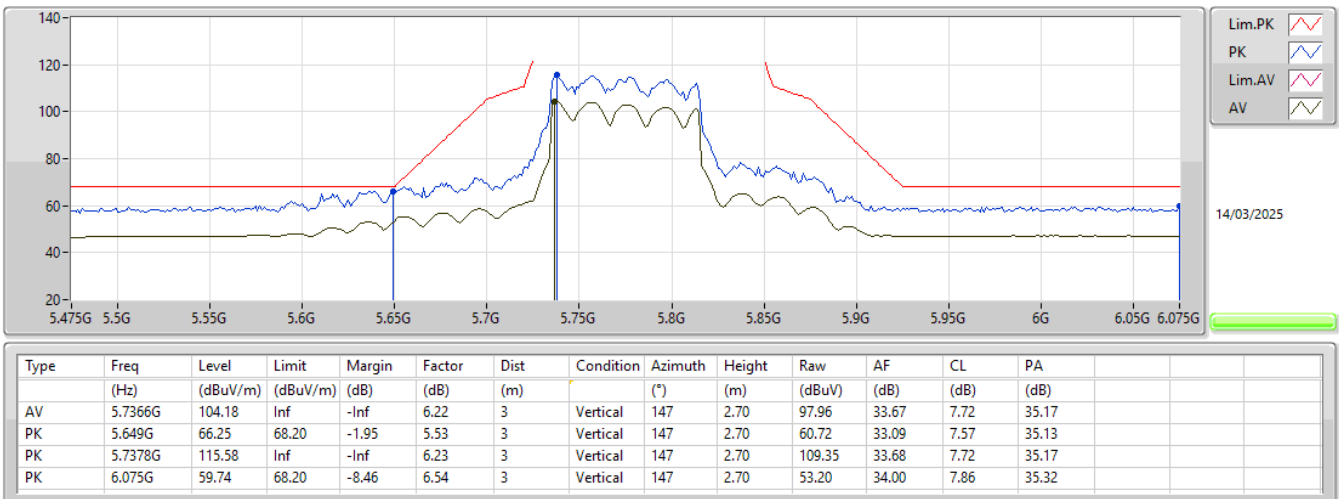


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_TX

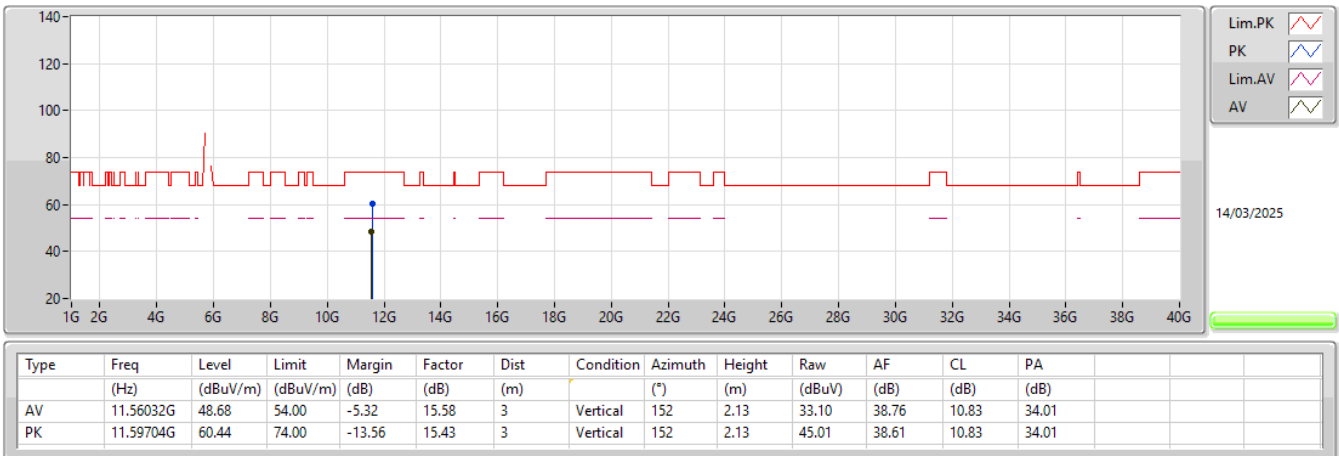

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

5775MHz_TX

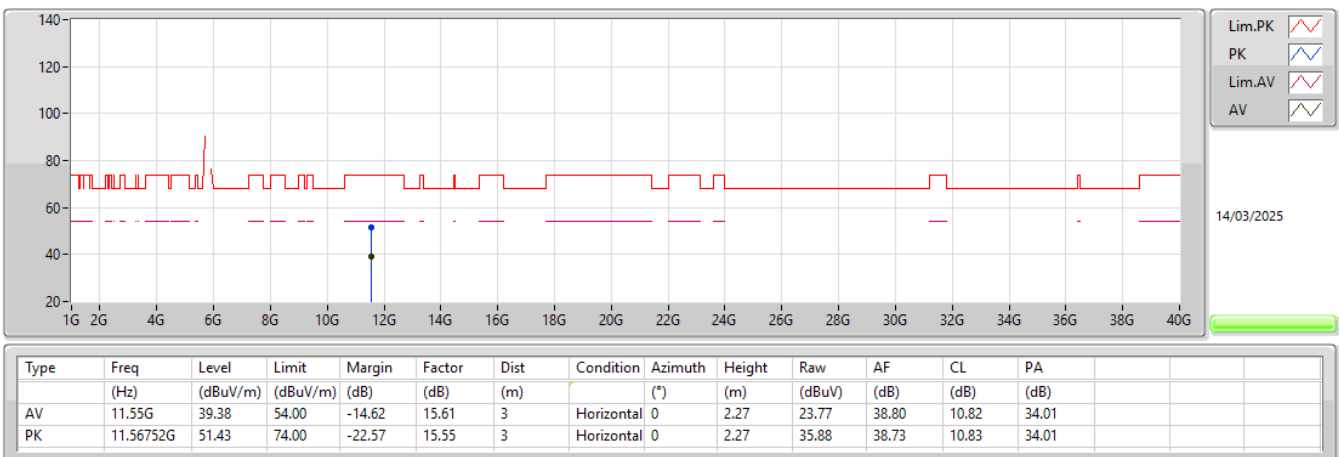




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	1.53492G	56.77	74.00	-17.23	Vertical

Result


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
Mode 1	Pass	AV	1.5393G	24.31	54.00	-29.69	3	Vertical	153	1.58
Mode 1	Pass	AV	2.15443G	27.40	68.20	-40.80	3	Vertical	293	1.50
Mode 1	Pass	AV	3.45578G	28.11	68.20	-40.09	3	Vertical	212	1.76
Mode 1	Pass	PK	1.53492G	56.77	74.00	-17.23	3	Vertical	153	1.58
Mode 1	Pass	PK	2.15295G	46.51	88.20	-41.69	3	Vertical	293	1.50
Mode 1	Pass	PK	3.472732G	45.33	88.20	-42.87	3	Vertical	212	1.76
Mode 1	Pass	AV	1.43958G	24.08	54.00	-29.92	3	Horizontal	220	1.50
Mode 1	Pass	AV	3.25699G	28.30	68.20	-39.90	3	Horizontal	225	2.64
Mode 1	Pass	AV	7.16411G	37.62	68.20	-30.58	3	Horizontal	5	1.23
Mode 1	Pass	PK	1.44001G	42.21	74.00	-31.79	3	Horizontal	220	1.50
Mode 1	Pass	PK	3.26059G	41.70	74.00	-32.30	3	Horizontal	225	2.64
Mode 1	Pass	PK	7.16397G	51.88	88.20	-36.32	3	Horizontal	5	1.23

Radiated Emissions above 1GHz_Mode 1

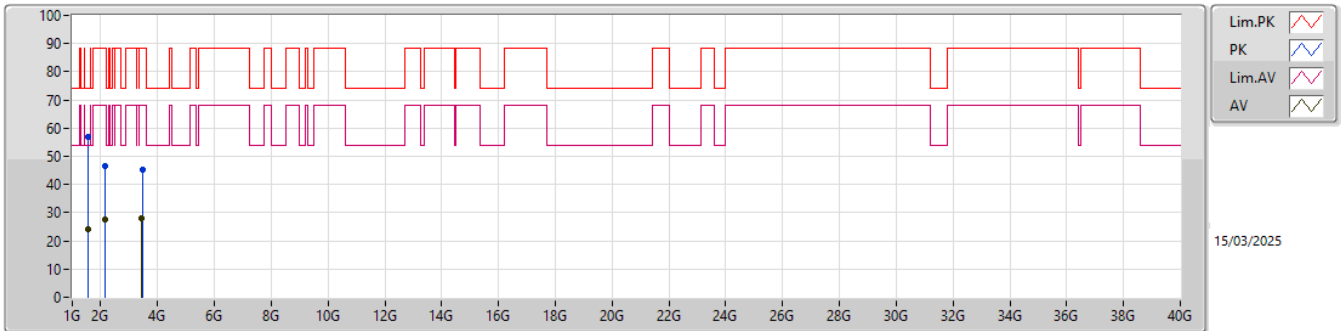

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	1.5393G	24.31	54.00	-29.69	-3.64	3	Vertical	153	1.58	27.95	25.59	4.35	33.58
AV	2.15443G	27.40	68.20	-40.80	-1.01	3	Vertical	293	1.50	28.41	27.44	5.13	33.58
AV	3.45578G	28.11	68.20	-40.09	2.01	3	Vertical	212	1.76	26.10	29.49	6.65	34.13
PK	1.53492G	56.77	74.00	-17.23	-3.69	3	Vertical	153	1.58	60.46	25.55	4.34	33.58
PK	2.15295G	46.51	88.20	-41.69	-1.02	3	Vertical	293	1.50	47.53	27.43	5.13	33.58
PK	3.472732G	45.33	88.20	-42.87	1.96	3	Vertical	212	1.76	43.37	29.45	6.67	34.16

Radiated Emissions above 1GHz_Mode 1

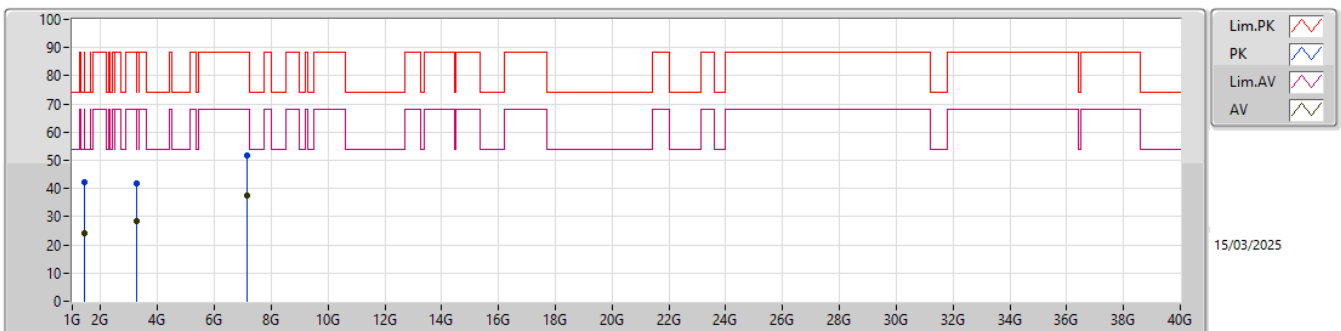

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	1.43958G	24.08	54.00	-29.92	-3.82	3	Horizontal	220	1.50	27.90	25.70	4.15	33.67
AV	3.25699G	28.30	68.20	-39.90	2.33	3	Horizontal	225	2.64	25.97	29.70	6.41	33.78
AV	7.16411G	37.62	68.20	-30.58	11.85	3	Horizontal	5	1.23	25.77	36.76	9.47	34.38
PK	1.44001G	42.21	74.00	-31.79	-3.82	3	Horizontal	220	1.50	46.03	25.70	4.15	33.67
PK	3.26059G	41.70	74.00	-32.30	2.33	3	Horizontal	225	2.64	39.37	29.70	6.41	33.78
PK	7.16397G	51.88	88.20	-36.32	11.85	3	Horizontal	5	1.23	40.03	36.76	9.47	34.38