

EL205 TigerCub 27.045 ~ 27.225MHz Transmitter Operation Description

The Microprocessor (U1, Figure 1) reads input commands (SW2/SW3/W2/W3, Figure 1), and then encodes them to digital codes. The codes are sent to RF oscillator via pin 6 of U1, Q6, Q7 and then modulates 27.045~27.225MHz carry frequency signal via Q1 (Figure 2) to achieve AM signal.

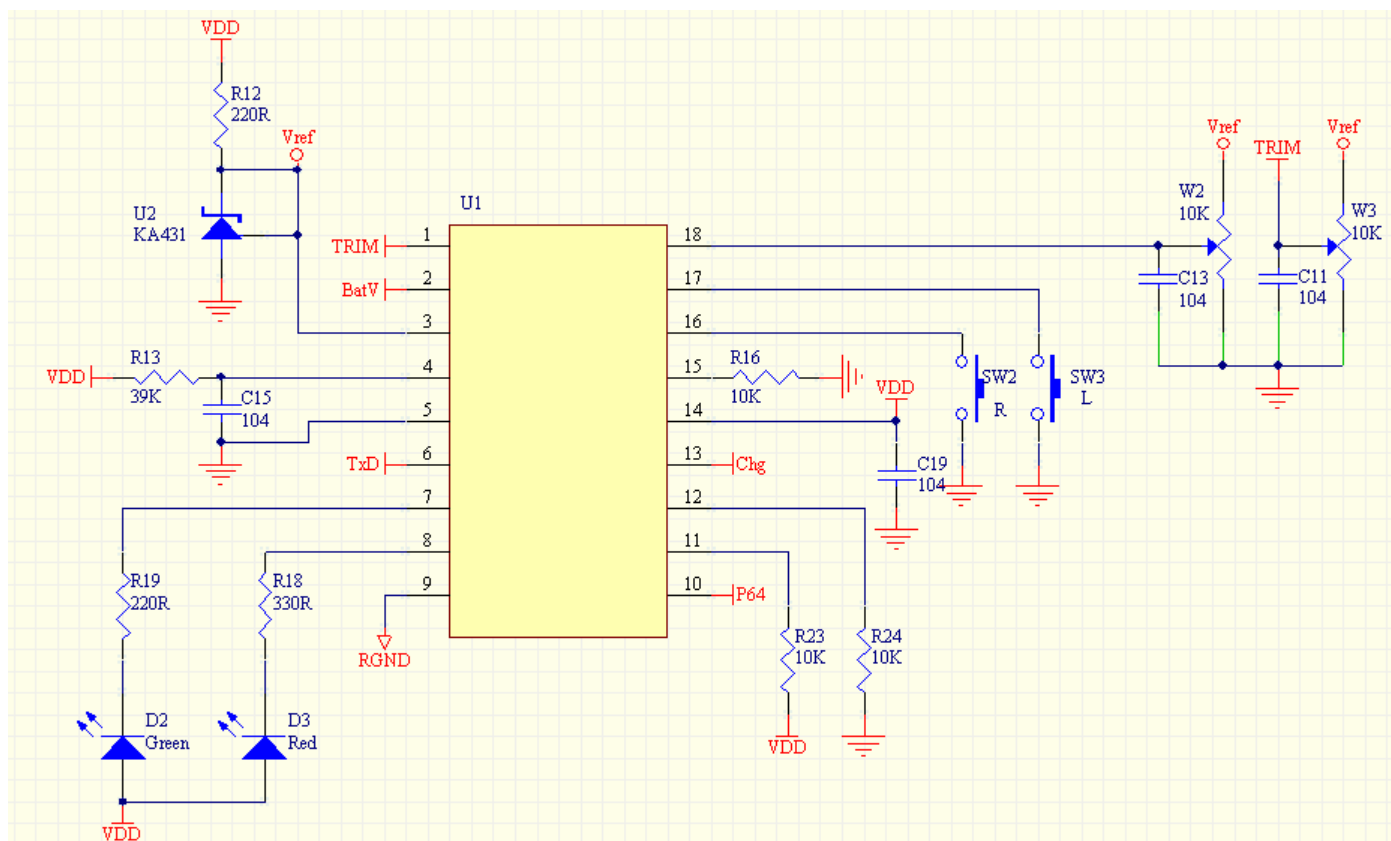


Figure 1

The Radio Frequency of the transmitter is based on standard 27MHz AM citizen's band. It generates low power 27.045~27.225MHz AM carrier frequency via major components of Q1, Y1, L1, C5, C21, R4, R3 and R28 etc. (**Figure 2**). Please note that the value of the components may vary. Please see the attached schematics for more detail.

EL205 TigerCub 27.045 ~ 27.225MHz Transmitter Operation Description

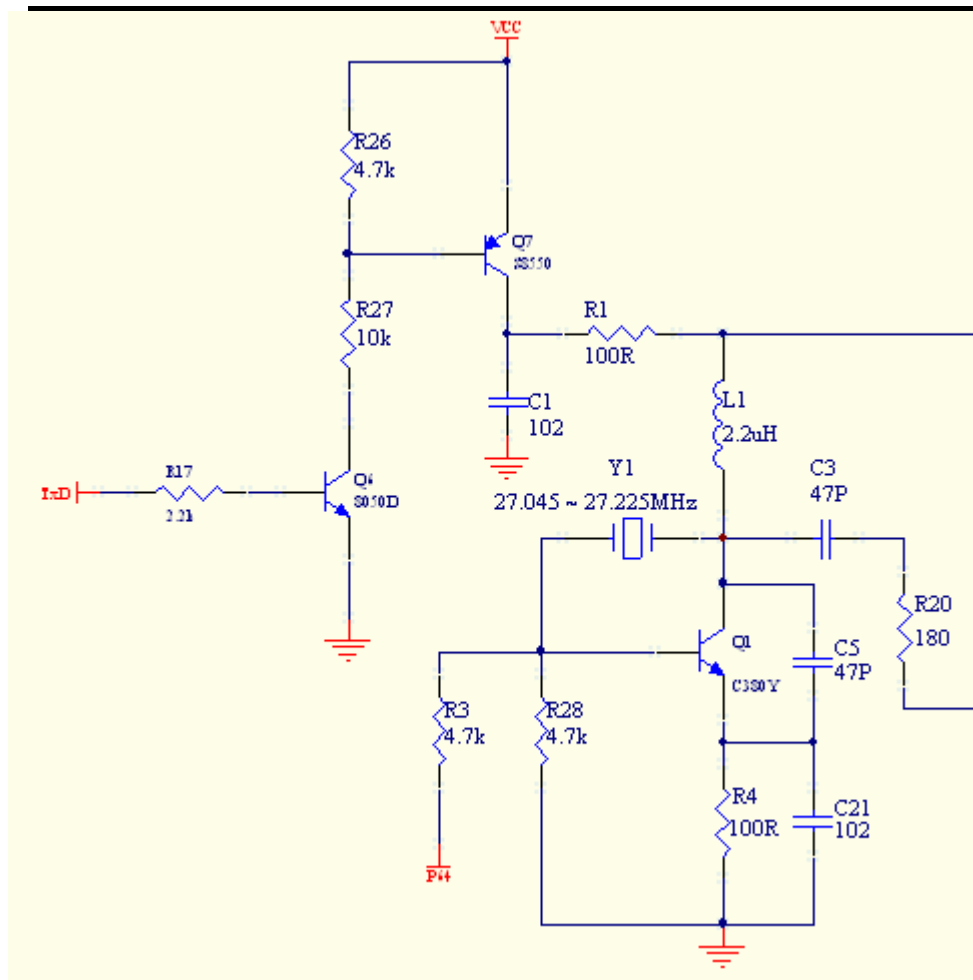


Figure 2

The AM signal (via capacitor C3) is passed to RF amplifier (**Figure 3**, Q2, C8, R9, C9 and L2), which amplifies the signal and then couples the signal into the antenna (ANT1) via components C4, C6, L4, C7 and L3.

EL205 TigerCub 27.045 ~ 27.225MHz Transmitter Operation Description

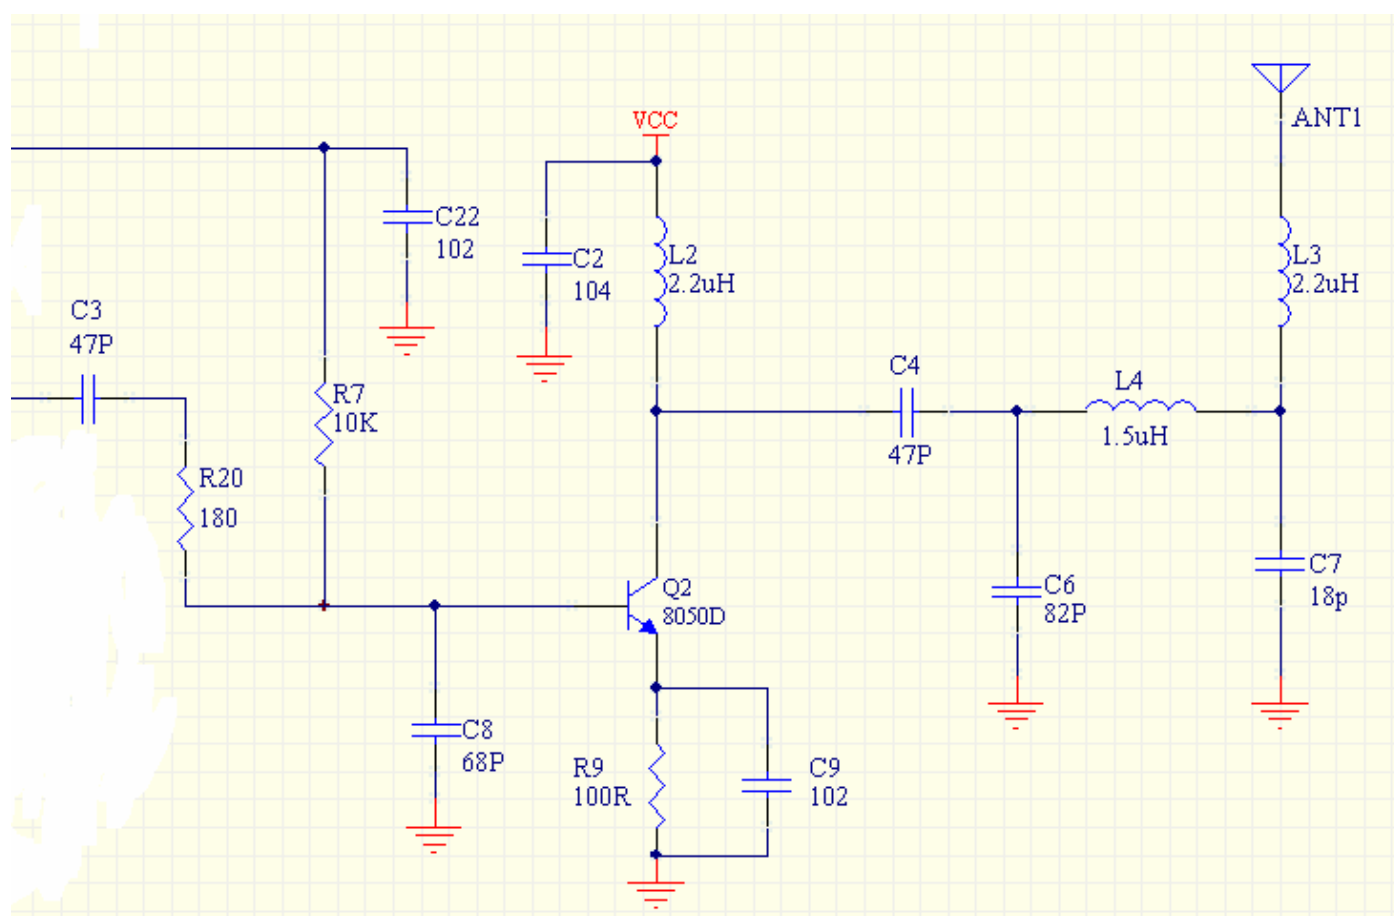


Figure 3

EL205 TigerCub 27.045 ~ 27.225MHz Receiver Operation Description

The Radio Frequency of the receiver is based on standard 27MHz AM (Amplitude Modulation) citizen's band. A low power local oscillator frequency of 27.045 ~ 27.225MHz, generated by components of Q1, C1, L1, C8, R5, C9, R3, C20 and T1(**Figure 1**), couple with antenna input via components of C2 (**Figure 1**) to discriminate RF signals from transmitter.

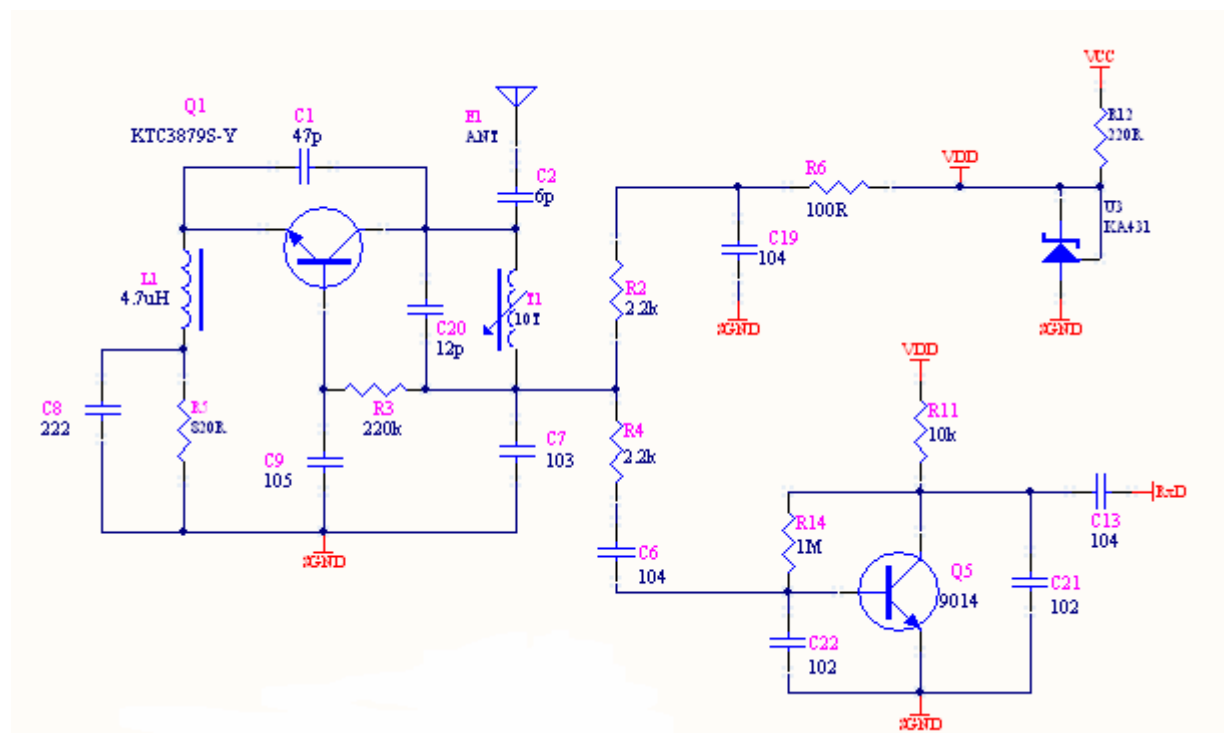


Figure 1

The demodulated signal is sent to Q5 by R4 and C6(see **Figure1**), and then is amplified by Q5,R14,C22, R11 and C21. The amplified signal is passed to the pin 11 of U1 via C13, R18 and is decoded to control commands by internal circuit of U1 (**Figure 2**).

EL205 TigerCub 27.045 ~ 27.225MHz Receiver Operation Description

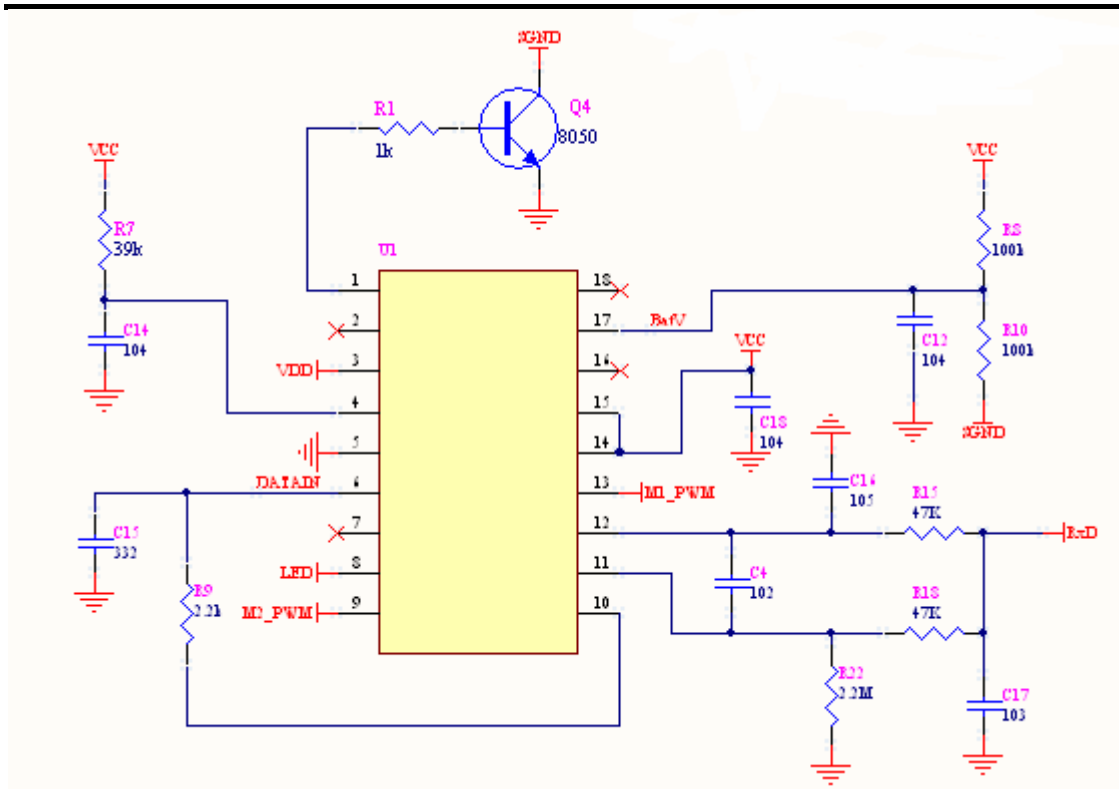


Figure2

The control command signals drive the motors via MOSFET Q2 and Q3 accordingly (**Figure 3**).

EL205 TigerCub 27.045 ~ 27.225MHz Receiver Operation Description

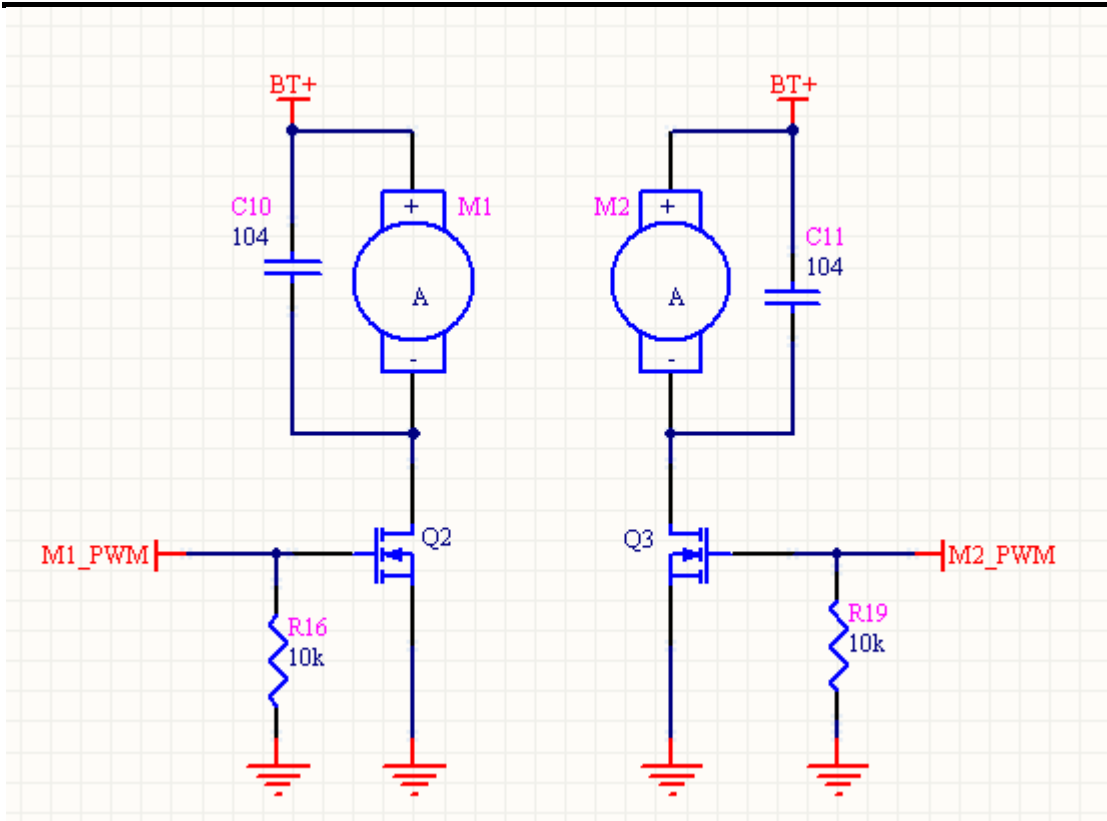


Figure3