

FCC MEASUREMENT AND TEST REPORT

For

ZTE Corporation

ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen,
Guangdong, China 518057

FCC ID: Q78-880219
IC: 5200A-880219

Sep 01, 2011

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: ZXSDR CDMA Basestation-8802
Test Engineer:	Bloom Xiong <i>Bloom</i>
Report No.:	FCC-2011-053
Test Date:	Apr 06 – June 28, 2011
Reviewed By:	Xie Yuming <i>Xie Yuming</i>
Prepared By:	ZTE Corporation
ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen, Guangdong, China 518057, P.R.China Tel: +86-755-26770000 Fax: +86-755-26771999	

Note: The test report is specially limited to the above company and this particular sample only. It may not be duplicated without prior written consent of ZTE Corporation. This report must not be used by the client to claim product certification 、 approval 、 or endorsement by any agency of the US Government.

TABLE OF CONTENTS

1 GENERAL INFORMATION.....4
 Product Description for Equipment Under Test (EUT).....4
 Objective.....5
 Related Submittal(s)/Grant(s).....5
 Test Methodology5
 Test Facility.....5
 2 SYSTEM TEST CONFIGURATION.....6
 Description of Test Configuration6
 3 SUMMARY OF TEST RESULTS7
 4 TRANSMITTER OUTPUT POWER.....8
 Applicable Standard: FCC §2.1046 §24.232 and IC RSS 133§6.48
 Test Equipment List and Details8
 Test Procedure8
 Environmental Conditions8
 Test Result: Pass9
 Test Mode: Transmitting CDMA.....9
 Test Data:.....9
 6 RF EXPOSURE.....15
 Applicable standard: FCC §2.1091 §1.1037 and IC RSS 102 §2.5.215
 Limit.....15
 Test Data15
 Test Result: pass.....15
 7 MODULATION CHARACTERISTIC.....16
 Applicable Standard: FCC §2.1047 and IC RSS 133 §6.216
 Test Equipment List and Details16
 Test Procedure16
 Test Data Environmental Conditions.....16
 Test Result: Pass16
 Test Mode: Transmitting CDMA.....16
 Test Data:.....16
 8 SPURIOUS RADIATED EMISSIONS19
 Applicable Standard: FCC CFR47, §2.1053 §24.238 and IC RSS 133§6.5, RSS Gen§4.919
 Test Equipment List and Details19
 Test Procedure20
 Test Results Summary: Pass20
 Environmental Conditions20
 Test data.....20
 9 SPURIOUS EMISSIONS AT ANTENNA TERMINALS22
 Applicable Standard: FCC§2.1051, §24.238 and IC RSS 133 §6.5.....22
 Test Equipment List and Details22
 Test Procedure22
 Test Data Environmental Conditions.....23
 Test Result: Pass23
 Test Mode: Transmitting CDMA.....23
 Test Data23
 10 OCCUPIED BANDWIDTH.....37
 Applicable Standard: FCC §2.1049, §24.229,§24.238 and IC RSS Gen §4.6.137
 Test Equipment List and Details:37
 Test Procedure37

Environmental Conditions 37
 Test Result: Pass 37
 Test Mode: Transmitting CDMA 37
 Test Data 37
 11 BAND EDGES 44
 Applicable Standard: FCC §2.1051, §24.238 and IC RSS133 §6.5 44
 Test Equipment List and Details 44
 Test Procedure 44
 Test Data Environmental Conditions 44
 Test Result: Pass 44
 Test Mode: Transmitting CDMA 44
 Test Data 45
 12 FREQUENCY STABILITY 50
 Applicable Standard: FCC § 2.1055, § 24.235 and IC RSS133 §6.3, RSS Gen §4.7 50
 Test Equipment List and Details 50
 Test Procedure 50
 Environmental Conditions 50
 Test Result: Pass 50
 Test Mode: Transmitting CDMA 51
 Test Data 51
 Frequency Stability Versus Temperature 51
 Frequency Stability Versus Voltage 51
 13 RECEIVER SPURIOUS EMISSIONS 52
 Applicable Standard: IC RSS Gen§6, RSS 133 §6.6 52
 Test Equipment List and Details 52
 Test Procedure 52
 Test Data Environmental Conditions 52
 Test Result: Pass 53
 Test Mode: Transmitting CDMA 53
 Test Data: 53

1 GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The ZTE Corporation's product, model number: ZXSDR BS8802 C100 or the "EUT" as referred to in this report is a ZXSDR CDMA Basestation-8802.

Technical specification:

Size: 260 mm × 180 mm × 58 mm (H x W x D)

Adapter: input 100-240V AC; 1.5 A; 50/60 Hz Output: 13V DC, 4.5A.

Input voltage: 85 -264V AC

Frequency range: 1930MHz to 1995MHz

(Bottom frequency is about 1930.8MHz, Middle frequency is about 1962.5MHz, Top frequency is about 1994.2MHz).

Max RF output power: 27.8 dBm

Gain of the antenna: 3 dBi

Modulation type of emission: QPSK

Appearance of EUT:



Objective

This Type approval report is prepared on behalf of ZTE Corporation in accordance with Part 2, Part 15, Part 24 of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, as well as the following parts:

Part 24 Wireless Communication Services

Applicable Standards: TIA EIA 137-A, TIA EIA 97-D, TIA/EIA 603-C, Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

All radiated and conducted measurement was performed at ZTE Corporation Reliability Testing Center. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by ZTE Corporation to collect test data is located in the 1/F,B2 Wing, ZTE Plaza, Keji Road South, Shenzhen, Guangdong, 518057, P.R.China, Tel: +86-755-26771609, Fax: +86-755-26770347. Test site at ZTE Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC). ZTE Corporation EMC Lab was certificated by CNAS and the registration number was L0611. The FCC registration number of ZTE corporation EMC lab is 373926. The IC registration number of ZTE corporation EMC lab is 5200A. The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 0009043175. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

2 SYSTEM TEST CONFIGURATION

Description of Test Configuration


Justification

The EUT was configured for testing according to TIA/EIA-603C.

The final qualification test was performed with EUT operating at normal mode.

Equipment Modifications

ZTE Corporation has not done any modification on the EUT.

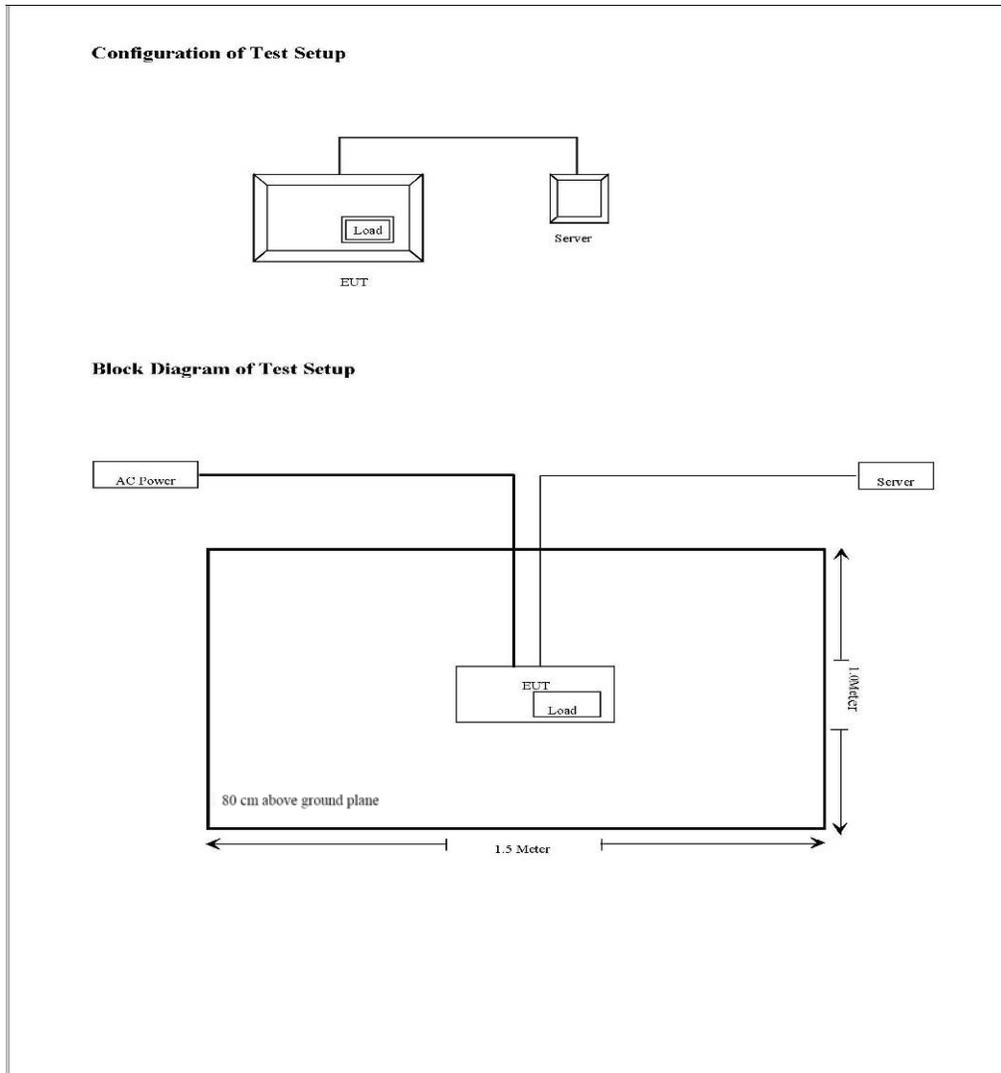

3 SUMMARY OF TEST RESULTS

FCC RULES	IC RULES	DESCRIPTION OF TEST	RESULT
§2.1046 ,§24.232	RSS 133 §6.4	Transmitter output Power	Compliant
§2.1091 ,§1.1037	RSS 102 §2.5.2	RF Exposure	Compliant
§2.1047	RSS 133 §6.2	Modulation Characteristic	Compliant
§2.1053, §24.238	RSS133§6.5, RSS Gen §4.9	Spurious Radiated Emissions	Compliant
§2.1051, §24.238	RSS 133 §6.5	Spurious Emissions AT Antenna Terminals	Compliant
§2.1049 §24.229§24.238	RSS Gen§4.6.1	Occupied Bandwidth	Compliant
§2.1051, §24.238	RSS 133 §6.5	Band Edge	Compliant
§ 2.1055, §24.235	RSS 133 §6.56.3, RSS Gen §4.7	Frequency stability	Compliant
--	IC RSS Gen§6, RSS 133 §6.6	RECEIVER Spurious Emissions	Compliant

4 TRANSMITTER OUTPUT POWER

Applicable Standard: FCC §2.1046 §24.232 and IC RSS 133§6.4

According to FCC §2.1046 & 24.232, the EIRP (equivalent isotropically radiated power) must not exceed 1640 Watts.

According to RSS-133, SRSP 510 5.1.1 the EIRP (equivalent isotropically radiated power) must not exceed 3280 Watts/MHz for base station transmitters operating in the band of 1930 MHz to 1995 MHz with the antenna height above average terrain up to 300 meters. If used in urban area, the limit should be 1640 Watts/MHz.


Note: EIRP = Max output Power + Antenna gain - Cable Loss

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-04-02	2012-04-01
Atten	30dB Attenuator	ATSI150-4-30	11300110201221	2011-04-02	2012-04-01
Forstar	Forstar RF Cable	004	1033	2011-04-02	2012-04-01

***statement of traceability:** ZTE Corporation Reliability Testing Center attests that all calibration has been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

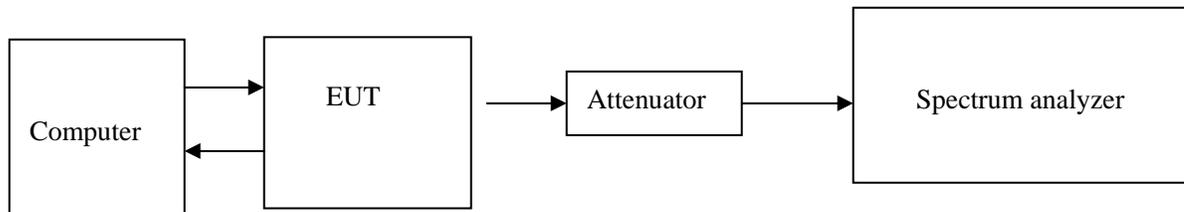

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. External attenuation Loss is 33.5dB

Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar


Test Result: Pass



Test Mode: Transmitting CDMA

Test Data:

Three Carriers


Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm	Antenna gain dBi	Equivalent radiated power dBm	Total Power in mW
1932.05	1930.8,1932.05,1933.3	27.45	3	30.45	1109
1962.5	1961.25,1962.5,1963.75	27.49	3	30.49	1119
1992.95	1991.7,1992.95,1994.2	27.37	3	30.37	1089

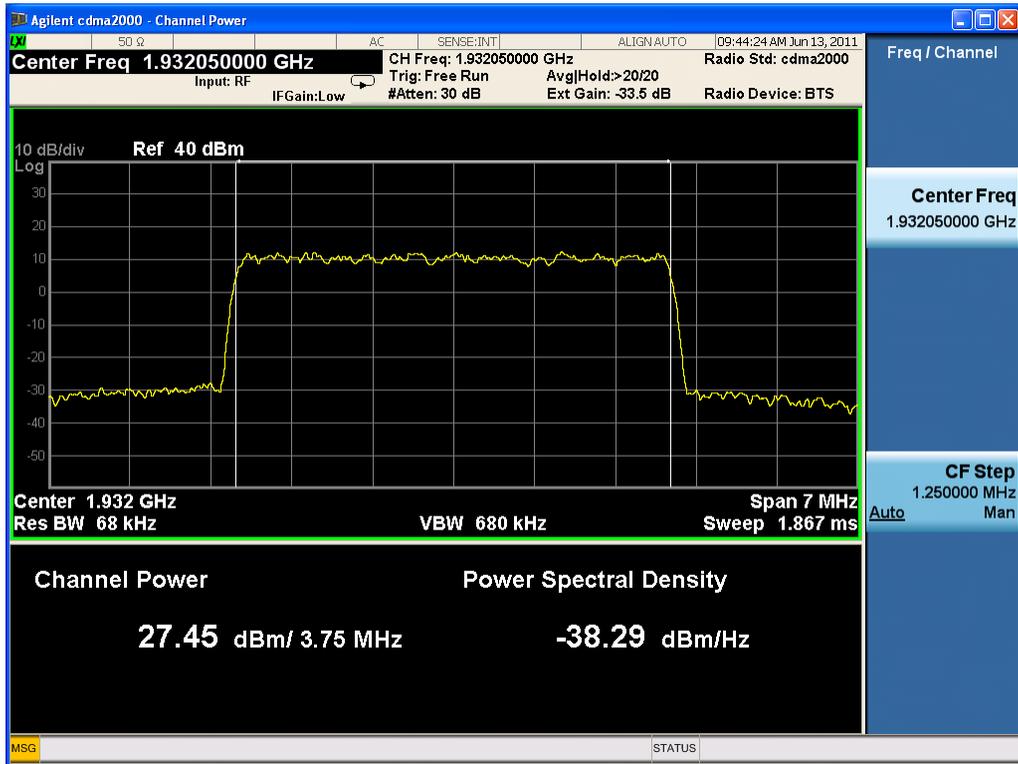

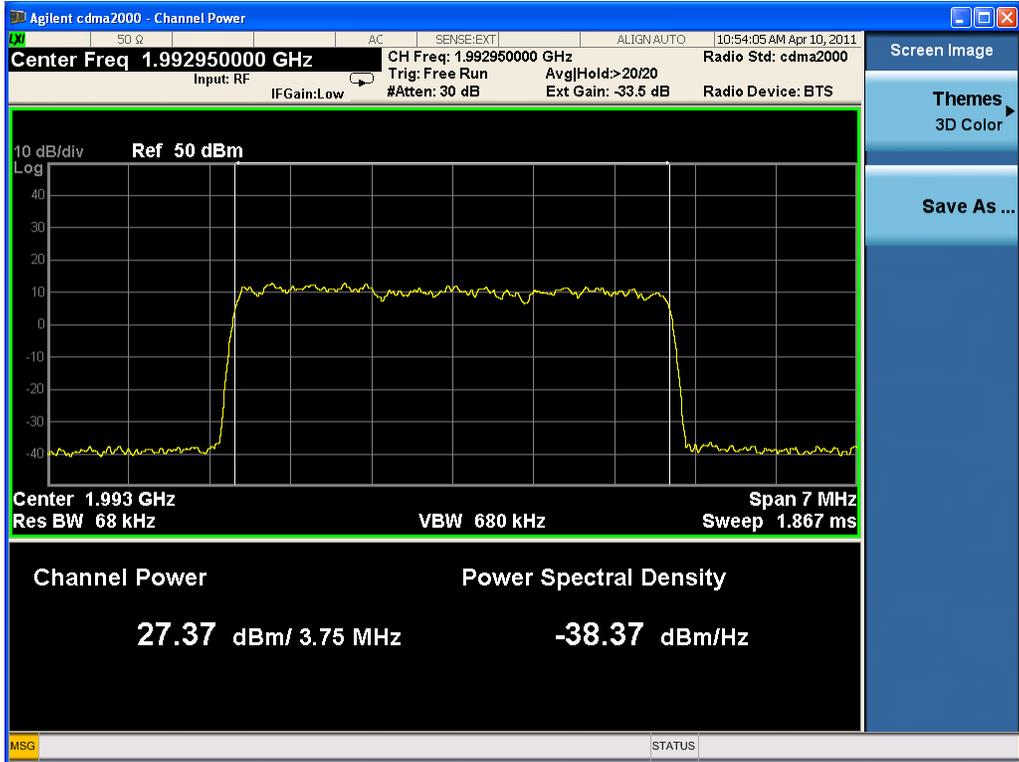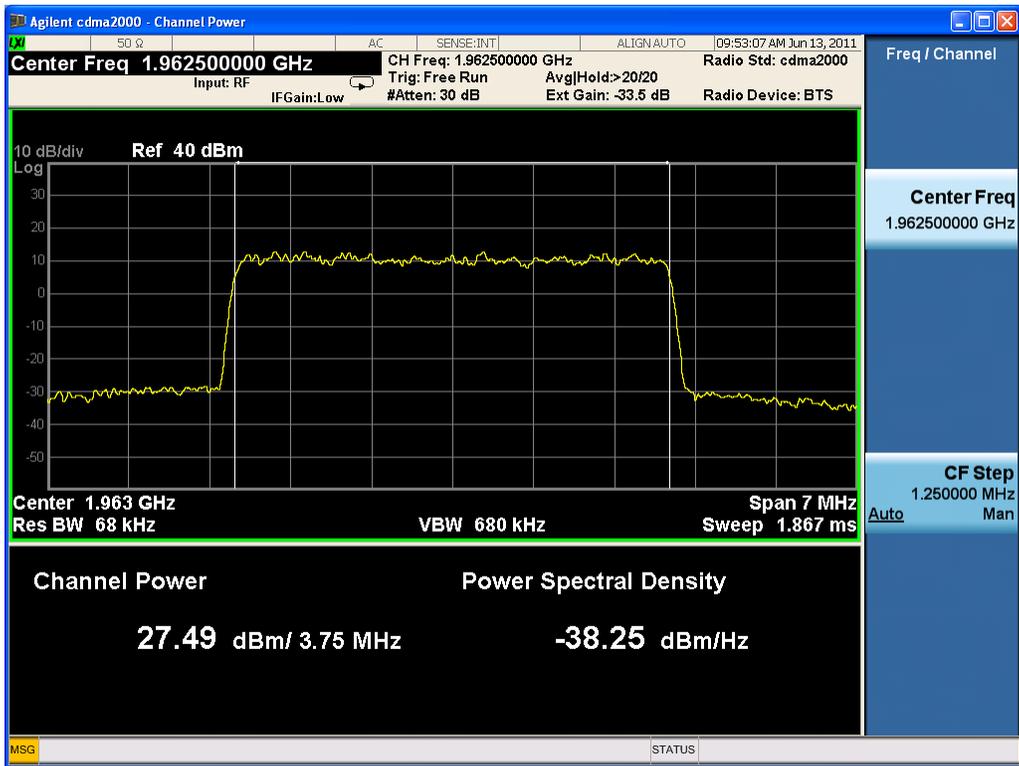

Two carriers


Center Freq. (MHz)	Frequency (MHz)	Max output Power (dBm)	Antenna gain (dBi)	Equivalent radiated power (dBm)	Total Power (mW)
1931.425	1930.8,1932.05	27.42	3	30.42	1102
1962.475	1961.85,1963.1	27.52	3	30.52	1127
1993.575	1992.95,1994.2	27.55	3	30.55	1135

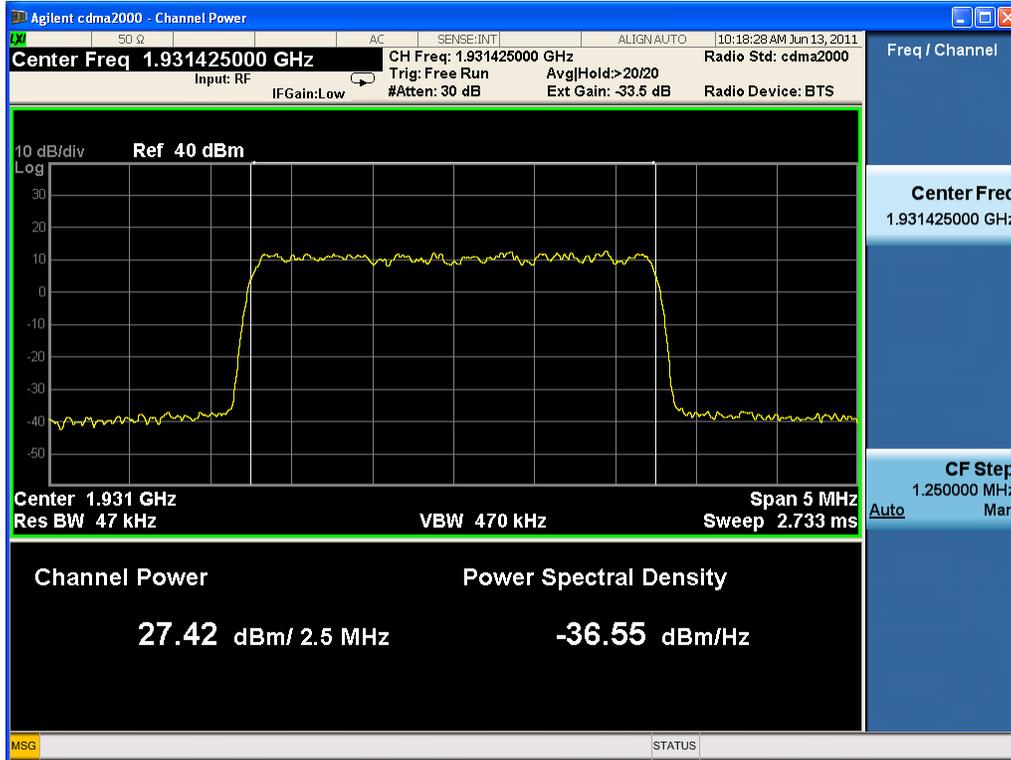




One carrier

Center Freq. (MHz)	Frequency (MHz)	Max output Power (dBm)	Antenna gain (dBi)	Equivalent radiated power (dBm)	Total Power (mW)
1930.8	1930.8	27.49	3	30.49	1119
1962.5	1962.5	27.48	3	30.48	1117
1994.2	1994.2	27.67	3	30.67	1167

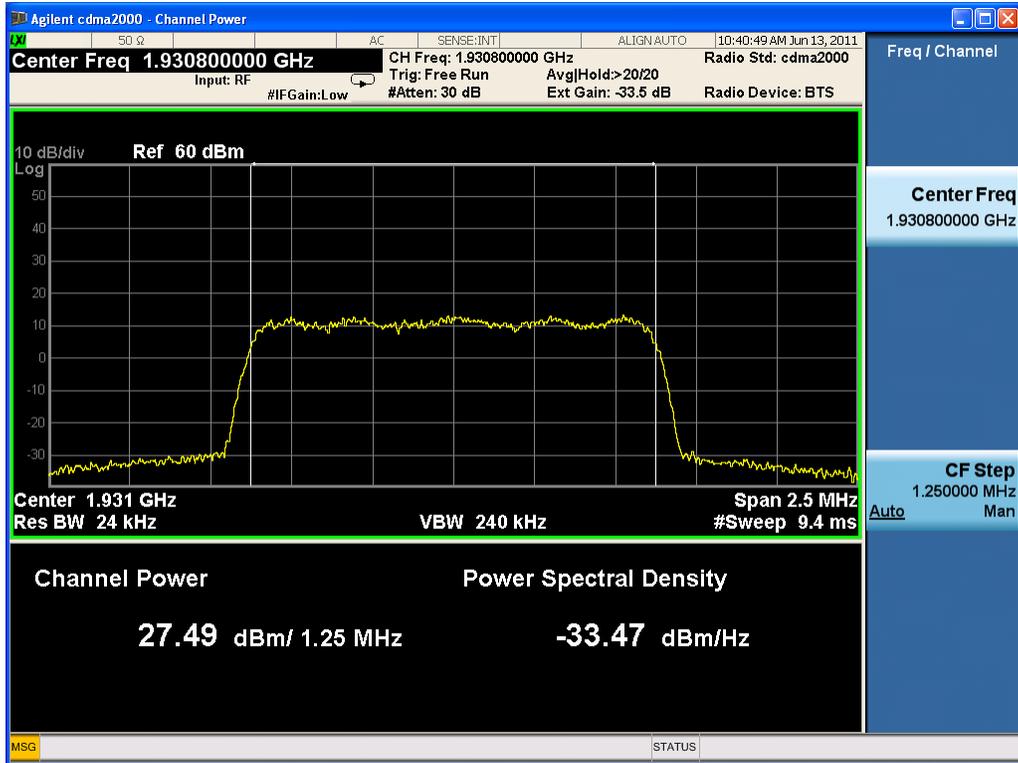

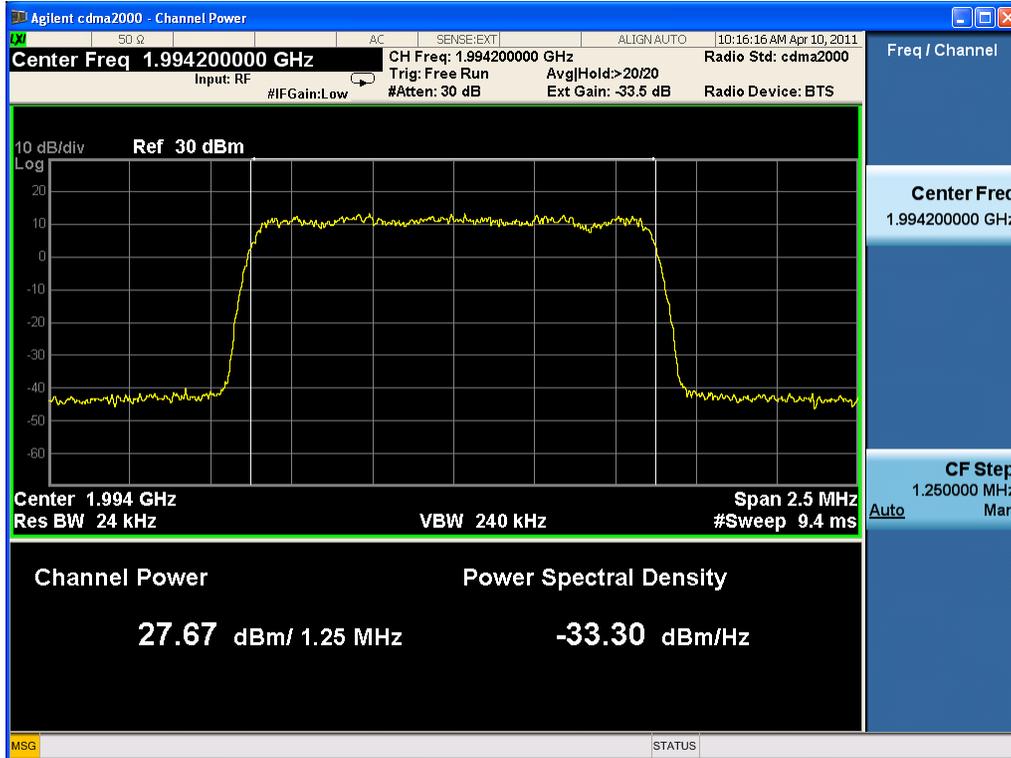

6 RF EXPOSURE

Applicable standard: FCC §2.1091 §1.1037 and IC RSS 102 §2.5.2

Limit

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated. Limits for Maximum Permissible Exposure (MPE)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

Test Data

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG / 4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal: 27.67(dBm) Maximum peak

output power at antenna input terminals: 0.59 (W), the cable loss is 0dB

Prediction distance: 400 (cm)

Predication frequency: 1994.2(MHz)

Antenna Gain (typical): 3 (dBi)

Power density at predication frequency at 400 cm: 0.00058(mW/cm²)

MPE limit for uncontrolled exposure at prediction frequency: 1.0 (mW/cm²)

According to IC RSS 102 §2.5.2, RF exposure evaluation is not required if the separation distance between the user and the device's radiating element is greater than 20 cm, above 1.5 GHz and the maximum e.i.r.p. of the device is equal to or less than 5 W.

Test Result: pass

7 MODULATION CHARACTERISTIC

Applicable Standard: FCC §2.1047 and IC RSS 133 §6.2

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-04-02	2012-04-01
Atten	30dB Attenuator	ATSI150-4-30	11300110201221	2011-04-02	2012-04-01
Forstar	Forstar RF Cable	004	1033	2011-04-02	2012-04-01

***statement of traceability:** ZTE Corporation Reliability Testing Center attests that all calibration has been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

CDMA digital mode is used by EUT.

Test Data Environmental Conditions



Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar


Test Result: Pass

Test Mode: Transmitting CDMA

Test Data:

Frequency (MHz)	Rho
1930.8	0.99659
1962.5	0.99647
1994.2	0.99358

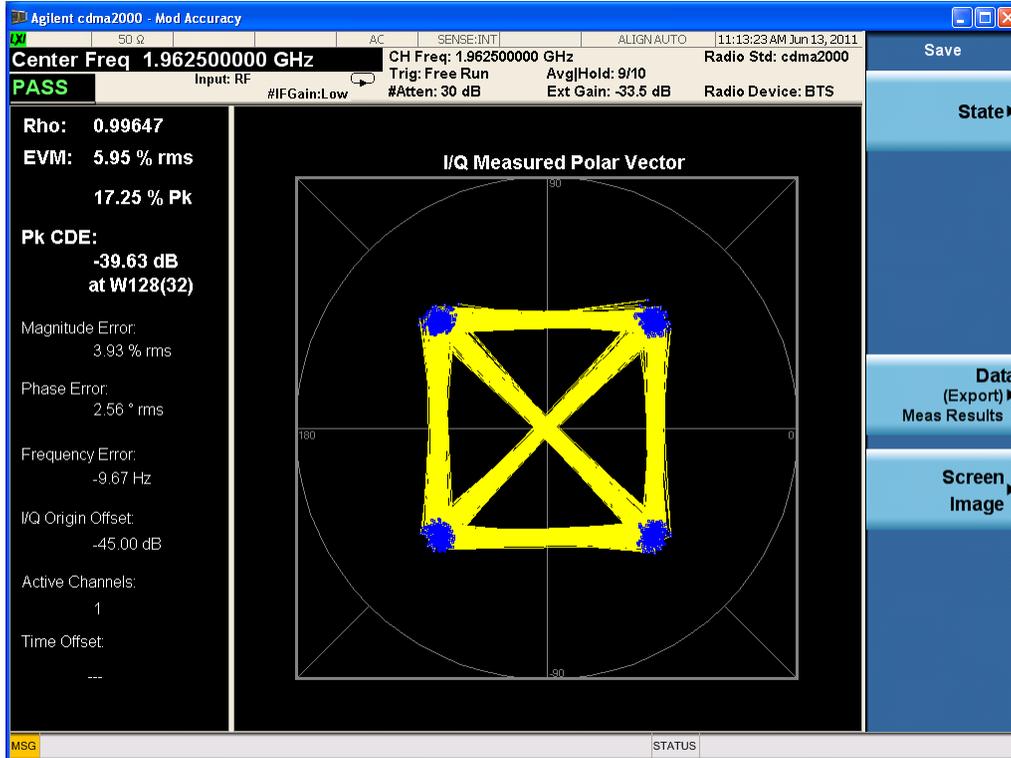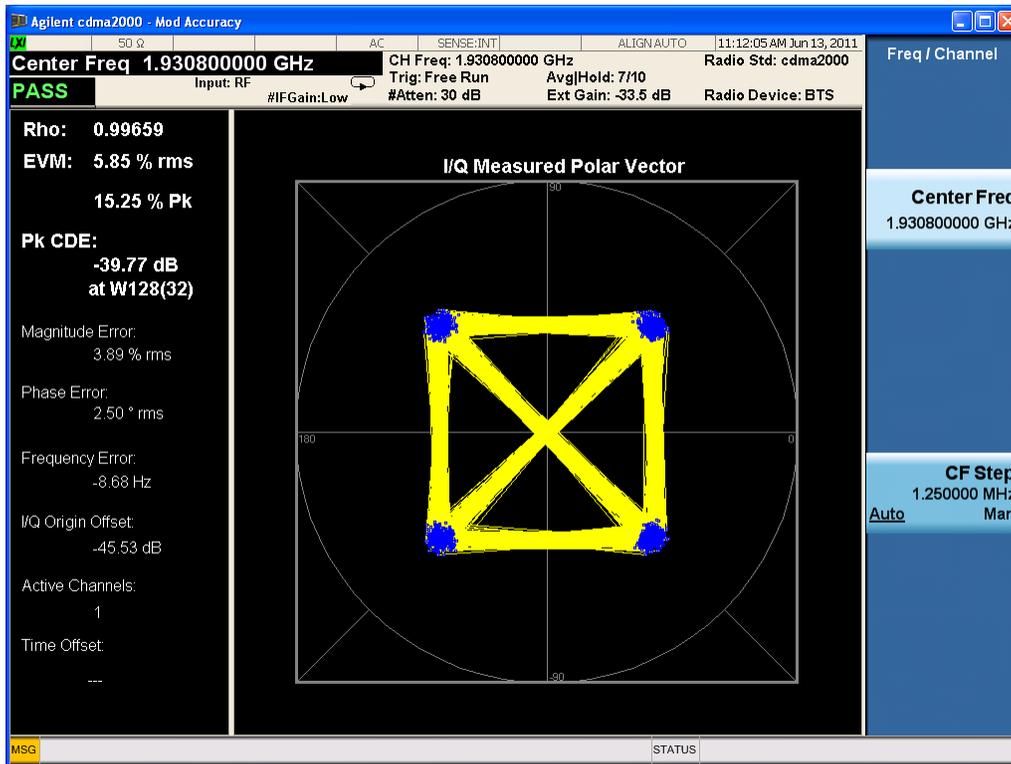

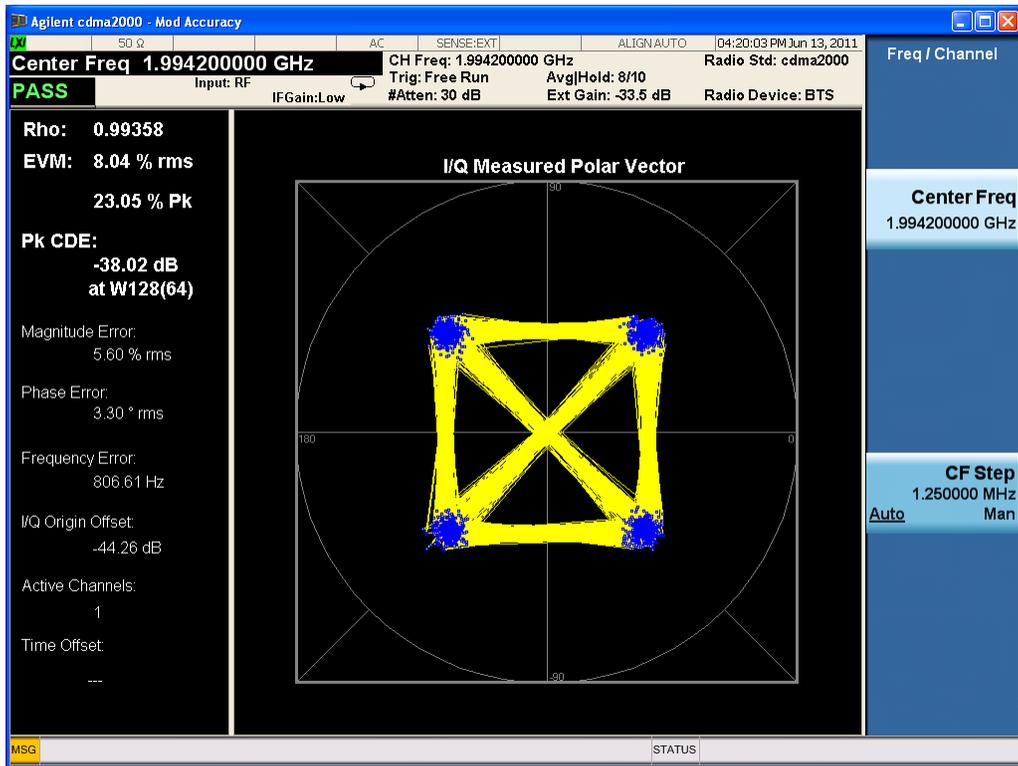

8 SPURIOUS RADIATED EMISSIONS

Applicable Standard: FCC CFR47, §2.1053 §24.238 and IC RSS 133§6.5, RSS Gen§4.9

Test Equipment List and Details


Manufacturer	Equipment	Model	Serial Number	Last Cal.	Cal. Interval
R&S	SIGNAL GENERATOR	SMR20	A00017351	2010-10-29	1 year
Albatross	Anechoic Chamber	3m Site	A00017354	2010-06-30	1 year
R&S	EMI Test Receiver	ESIB26	100058	2010-10-29	1 year
R&S	Ultra Breitband Antennas	HL562	100022	2010-08-05	1 year
R&S	Double-Ridged Waveguide Horn Antenna	HF906	100032	2010-08-05	1 year
R&S	Double-Ridged Waveguide Horn Antenna	HF906	100446	2010-08-05	1 year
SCHWARZ-BECK	Biconical Antenna	VUBA9117	9117-122	2010-08-05	1 year
Electro-Mechanics	Horn Antenna	3116	9510-2256	2010-10-29	1 year

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiated emissions measurement at the EMC lab. is 3.6dB.

EUT Setup

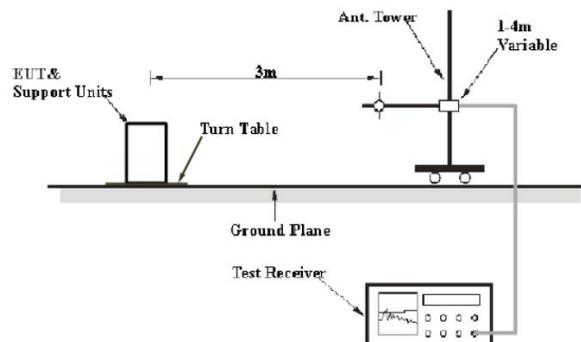

The radiated emission tests were performed in the 3-meter Chamber, using the setup accordance with the FCC part 2.1053. The specification used was the FCC 2.1053 limits and RSS 133 clause 6.5 limits.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 1g (TX pwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 43 + 10 Lg P (power out in Watts)

The resolution bandwidth of the spectrum analyzer was set at 1 percent as specified for 30MHz to 1GHz scanning, set at 1MHz for 1GHz to 20GHz scanning.

Test Results Summary: Pass

Environmental Conditions

Temperature:	26°C
Relative Humidity:	60 %
ATM Pressure:	1009 mbar

Test data

Working in middle frequency

Radiation emission spurious below 3GHz

Indicated		Test Antenna	Substituted		Cable Loss(dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	Amp. (dB μ V)	Polar (H/V)	Level (dBm)	Antenna Gain Correction						
35.831663	47.8	V	-16.59	-39.76	0.5	-56.85	2.15	-59	-13	46
78.597194	53.25	V	-21.8	-22.34	0.6	-44.74	2.15	-46.89	-13	33.89
103.867735	53.44	V	-27.42	-15.53	0.8	-43.75	2.15	-45.9	-13	32.9
1376.75351	46.93	V	-56.86	4.25	3.1	-55.71	2.15	-57.86	-13	44.86
3000	59.41	V	-42.33	7.75	4.6	-39.18	2.15	-41.33	-13	28.33
45.551102	43.94	H	-15.04	-33.69	0.5	-49.23	2.15	-51.38	-13	38.38
113.587174	39.16	H	-47	-13.47	0.8	-61.27	2.15	-63.42	-13	50.42
970.841683	42.34	H	-54.21	-2.82	2.6	-59.63	2.15	-61.78	-13	48.78
1336.67335	46.68	H	-59.42	4.25	3.1	-58.27	2.15	-60.42	-13	47.42
2975.9519	59.58	H	-44.53	7.95	4.6	-41.18	2.15	-43.33	-13	30.33

Radiation emission spurious above 3GHz

Indicated		Test Antenna	Substituted		Cable Loss(dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	Amp. (dB μ V)	Polar H/V	Level (dBm)	Antenna Gain Correction						
3753.50701	49.7	V	-58.31	7.75	5.1	-55.66	2.15	-57.81	-13	44.81
5645.29058	47.85	V	-58.78	9.05	6.5	-56.23	2.15	-58.38	-13	45.38
5941.88377	54.07	V	-49.41	9.05	6.6	-46.96	2.15	-49.11	-13	36.11
10204.4088	57.89	V	-50.93	11.35	8.9	-48.48	2.15	-50.63	-13	37.63
14476.9539	61.99	V	-47.53	9.65	10.9	-48.78	2.15	-50.93	-13	37.93
20000	76.69	V	-25.05	6.45	12.2	-30.8	2.15	-32.95	-13	19.95
3761.52305	46.8	H	-56.8	7.75	5.2	-54.25	2.15	-56.4	-13	43.4
5501.002	47.23	H	-53.67	9.05	6.4	-51.02	2.15	-53.17	-13	40.17
6991.98397	52.6	H	-52.82	9.25	7.3	-50.87	2.15	-53.02	-13	40.02
10204.4088	57.65	H	-51.29	11.35	8.9	-48.84	2.15	-50.99	-13	37.99
14555.1102	62.17	H	-46.18	9.15	11	-48.03	2.15	-50.18	-13	37.18
20000	76.36	H	-27.75	6.45	12.2	-33.5	2.15	-35.65	-13	22.65

9 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard: FCC§2.1051, §24.238 and IC RSS 133 §6.5

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-04-02	2012-04-01
Atten	30dB Attenuator	ATSI150-4-30	11300110201221	2011-04-02	2012-04-01
Forstar	Forstar RF Cable	004	1033	2011-04-02	2012-04-01

***statement of traceability:** ZTE Corporation Reliability Testing Center attests that all calibration has been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

EUT Setup:

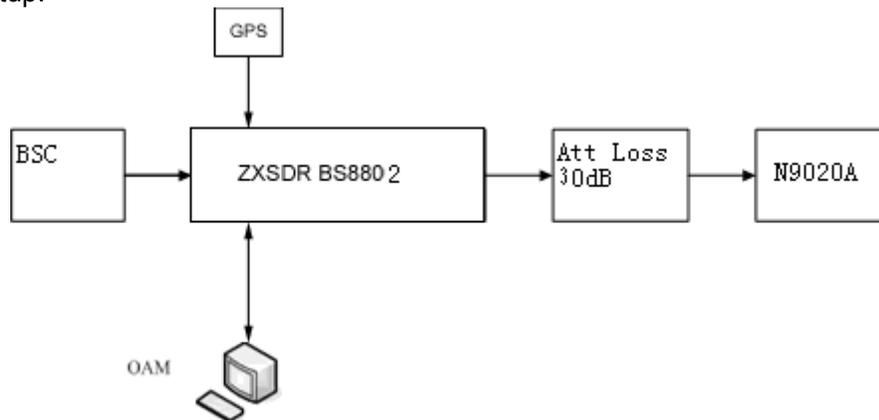

REMARKS: Attenuator loss (dB) =30dB, Cable Loss (dB) =3.5dB.

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz for 30MHz to 1GHz band, set at 3MHz for 1GHz to 20GHz band. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar



Test Result: Pass

Test Mode: Transmitting CDMA



Test Data


Three Carriers (working in bottom frequency)

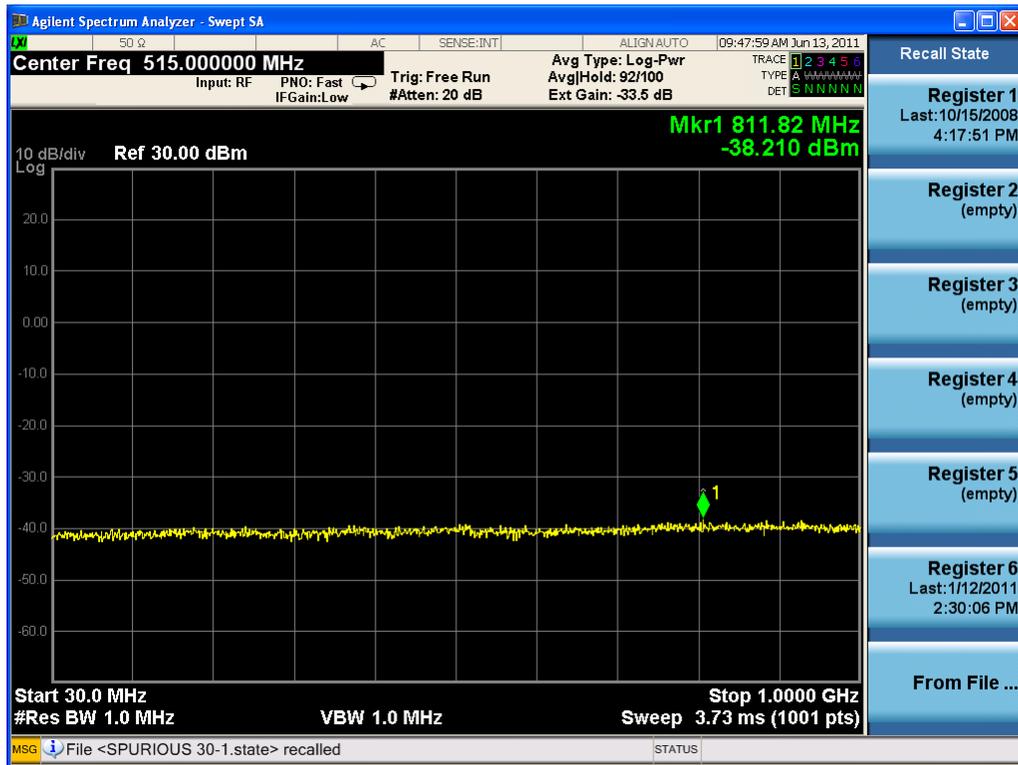

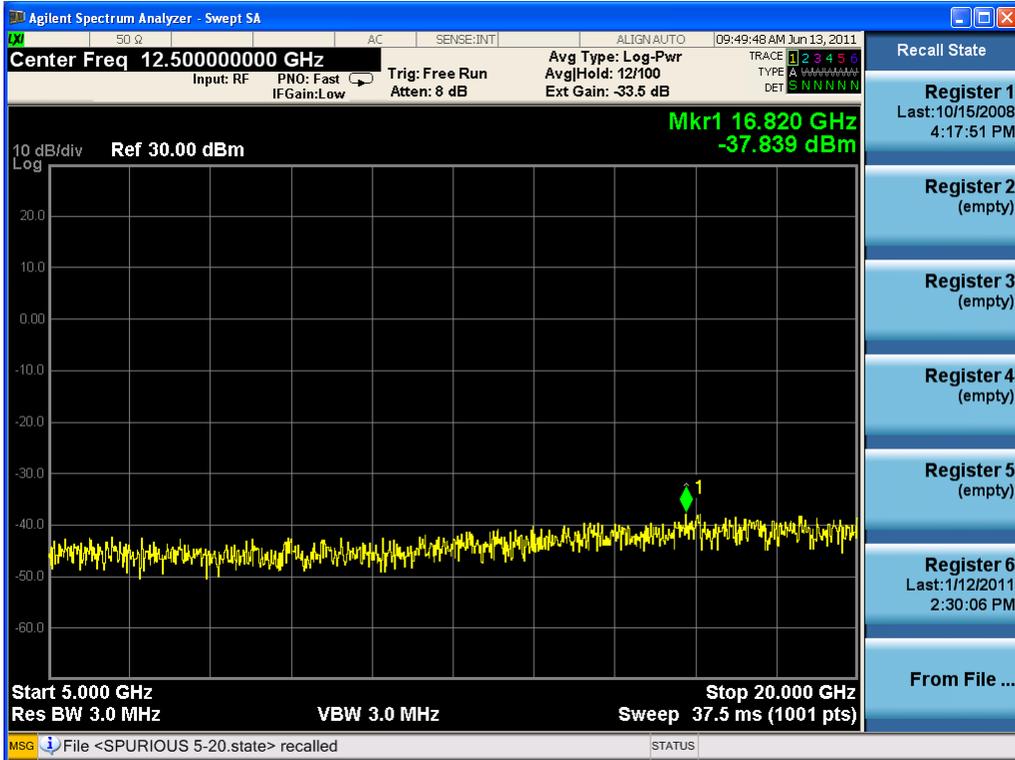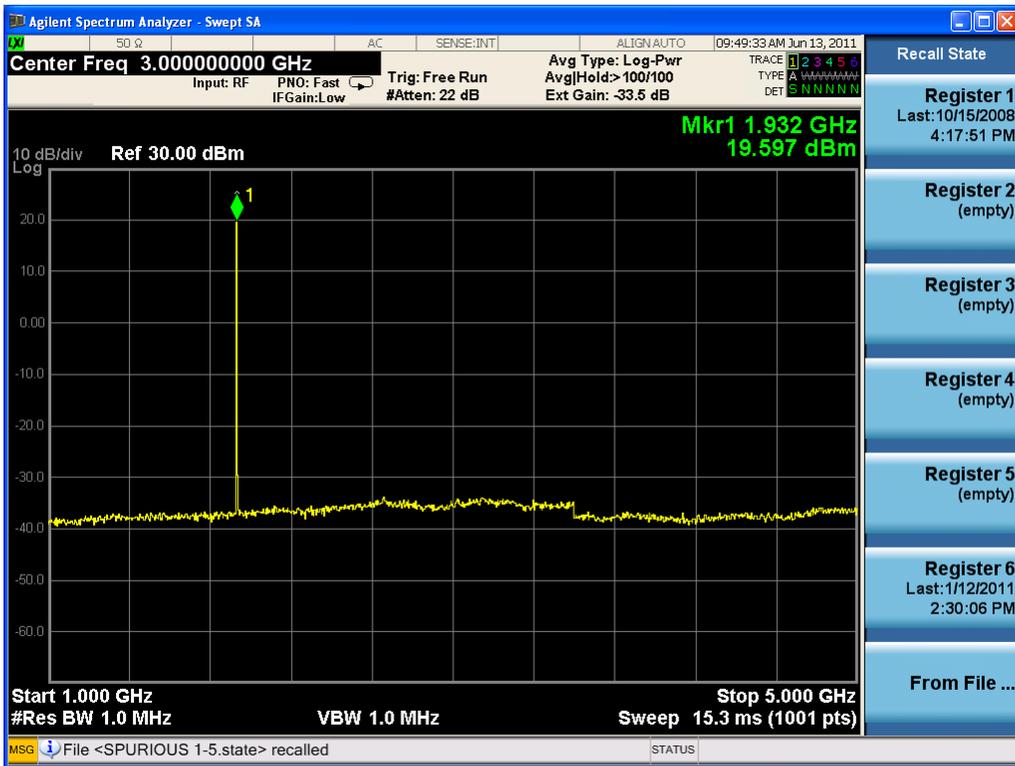




Three carriers (working in middle frequency)

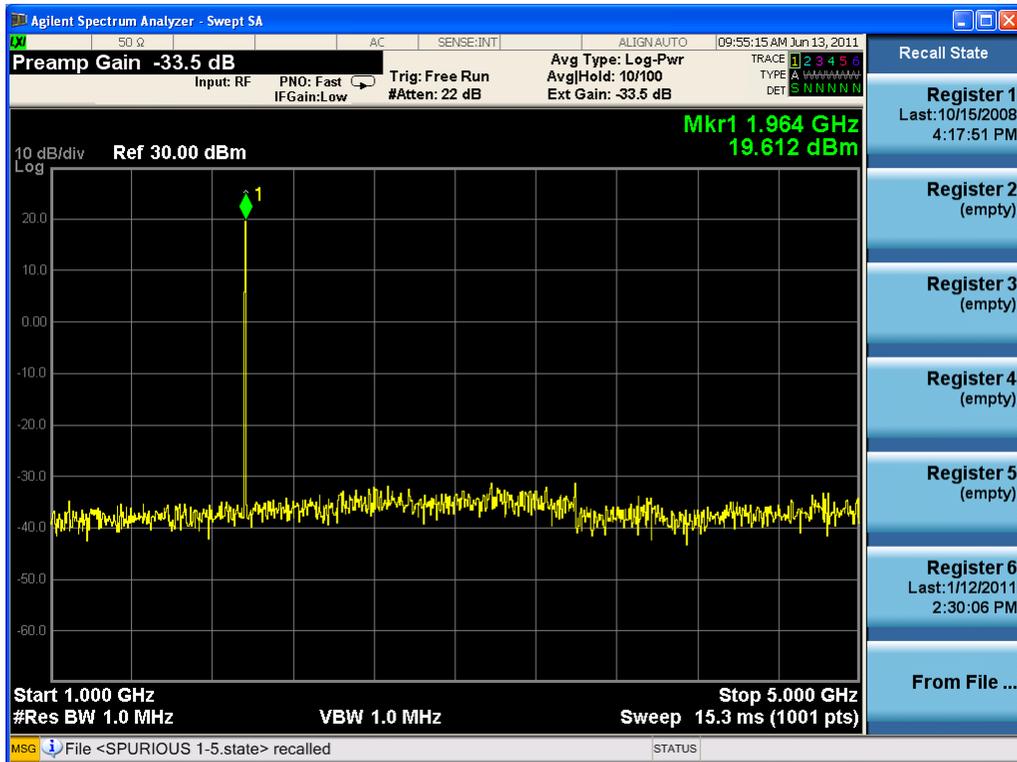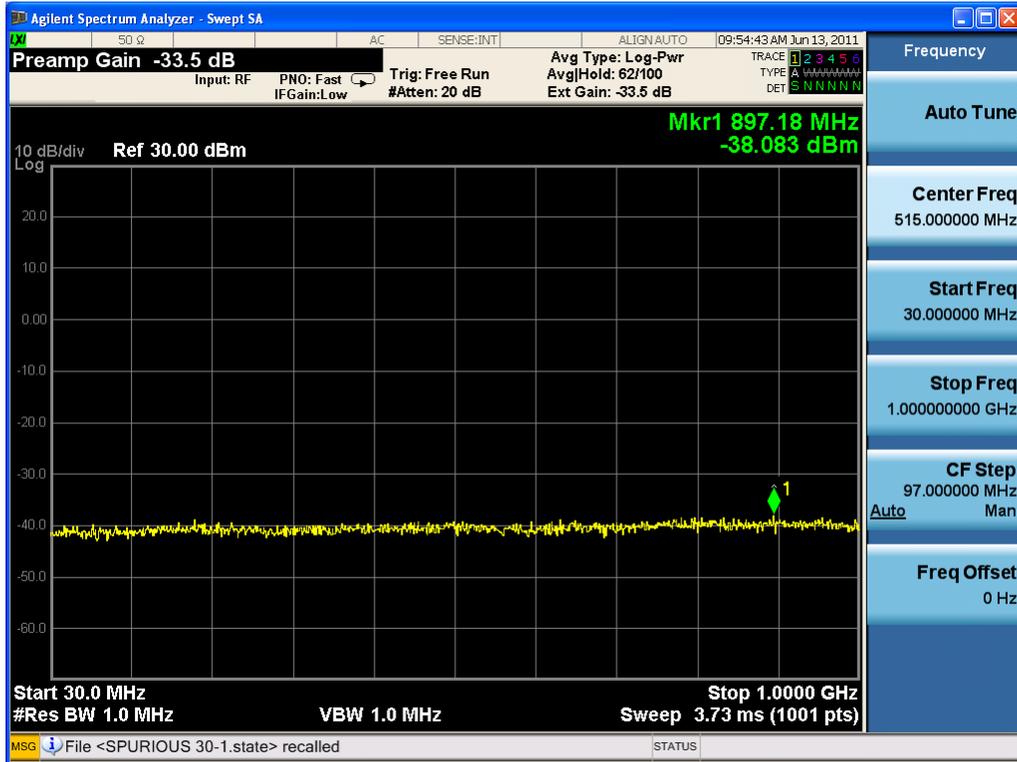


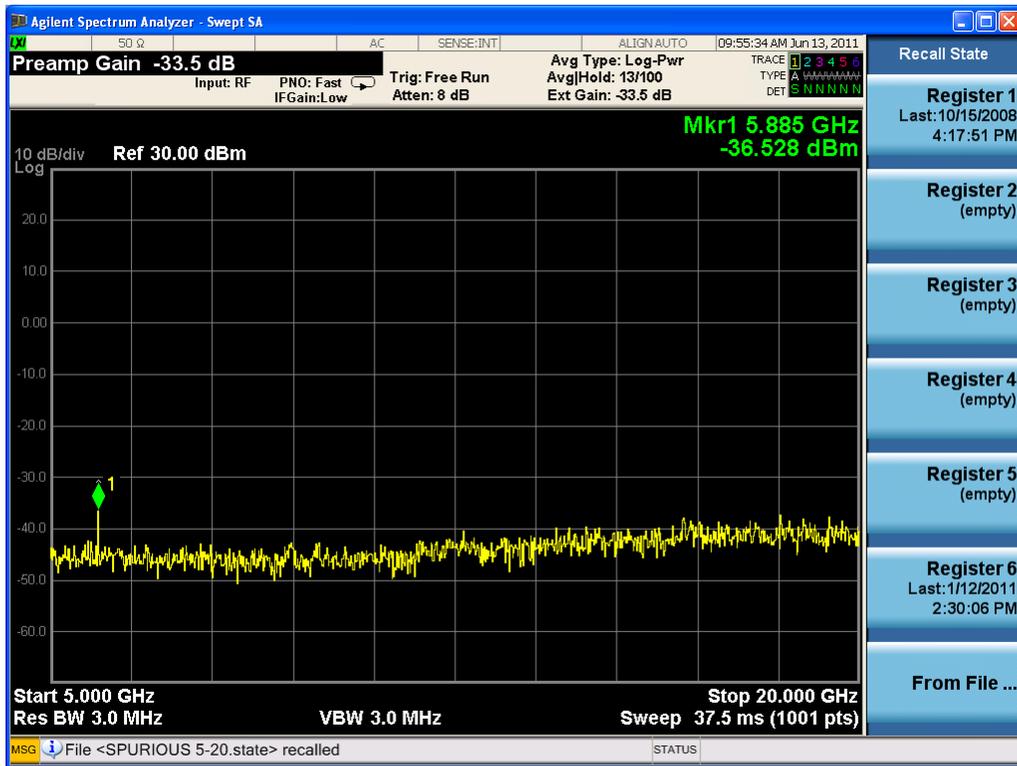


Three carriers (working in top frequency)

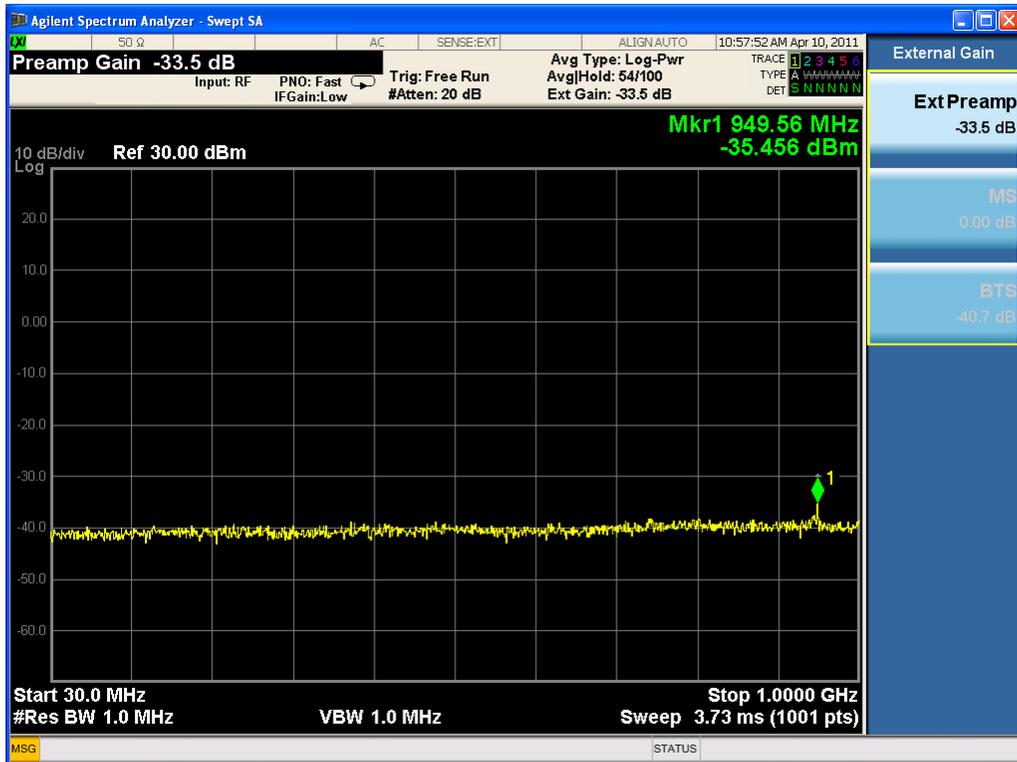

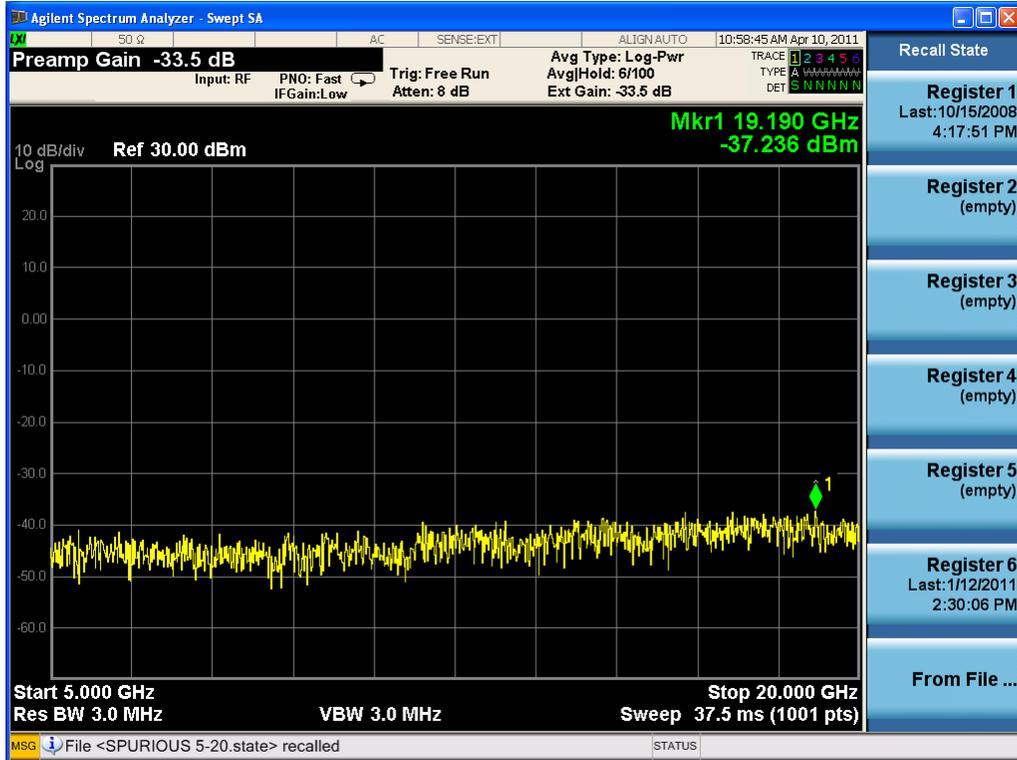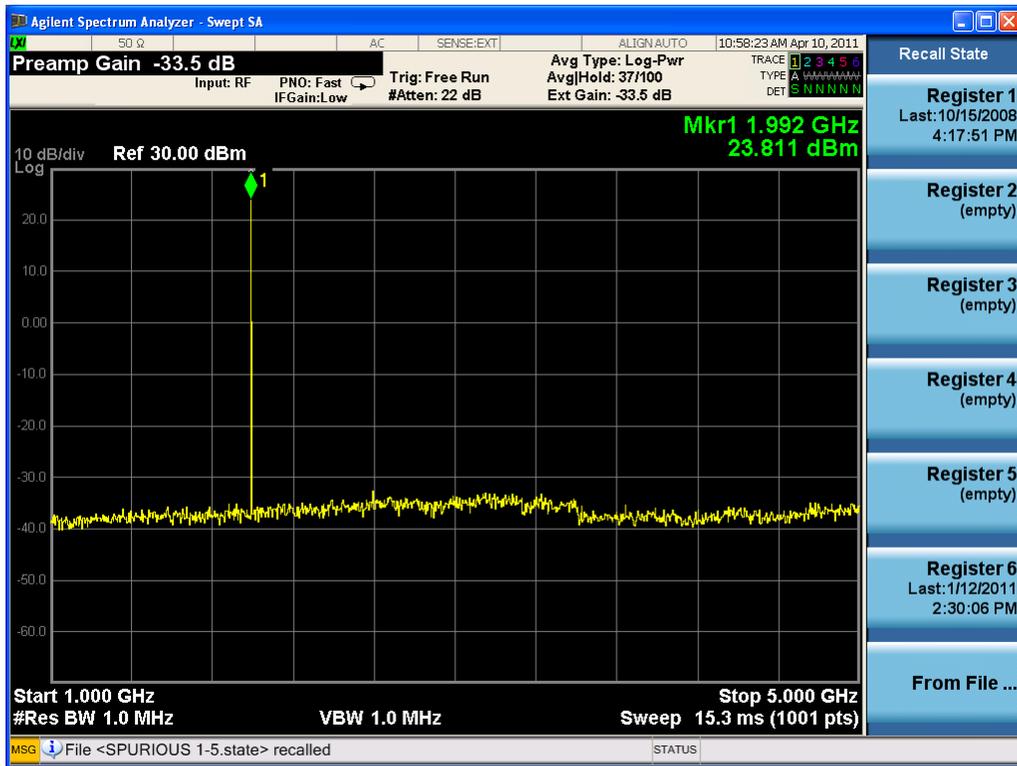



Two carriers (working in bottom frequency)

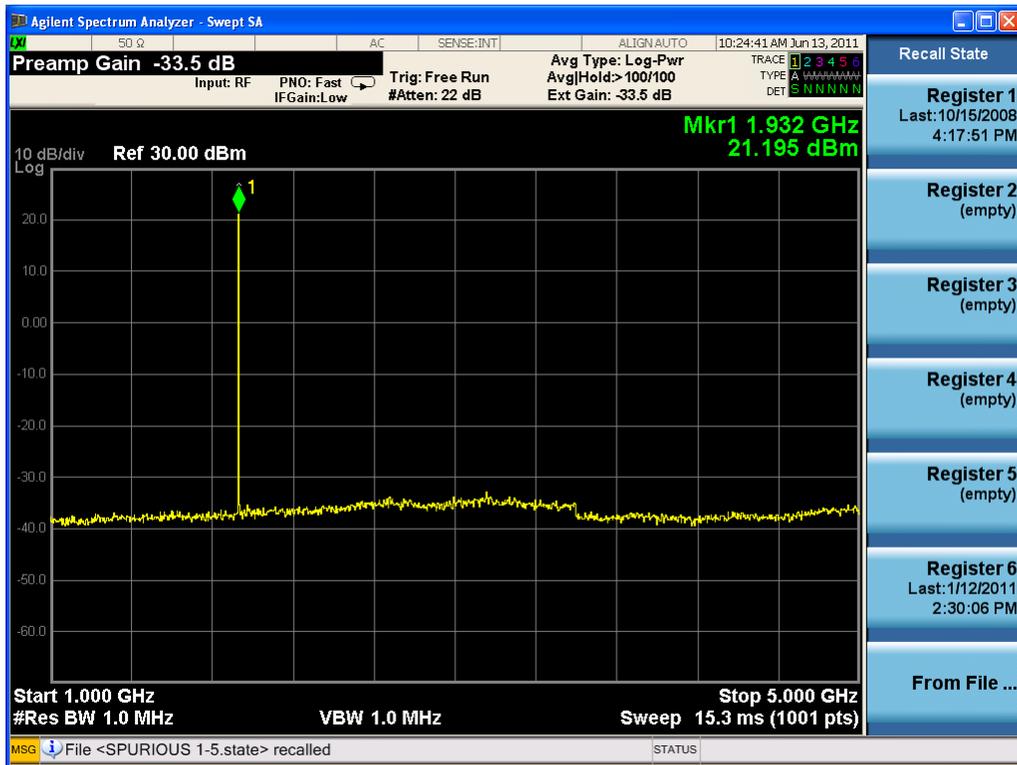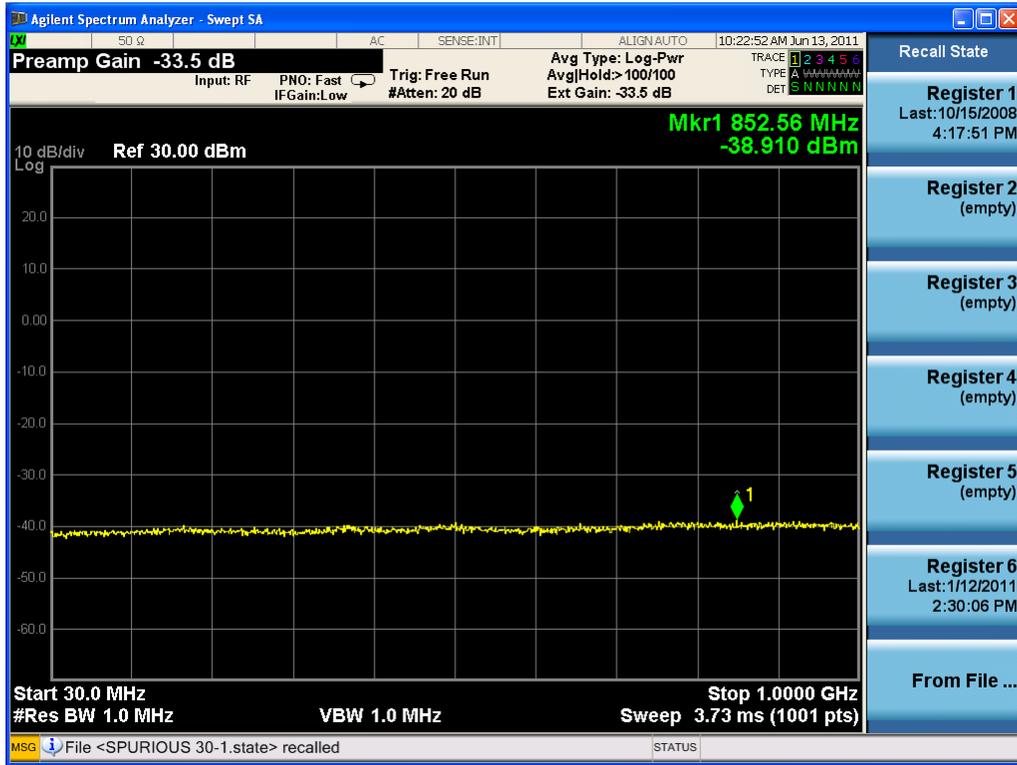






Two carriers (working in middle frequency)



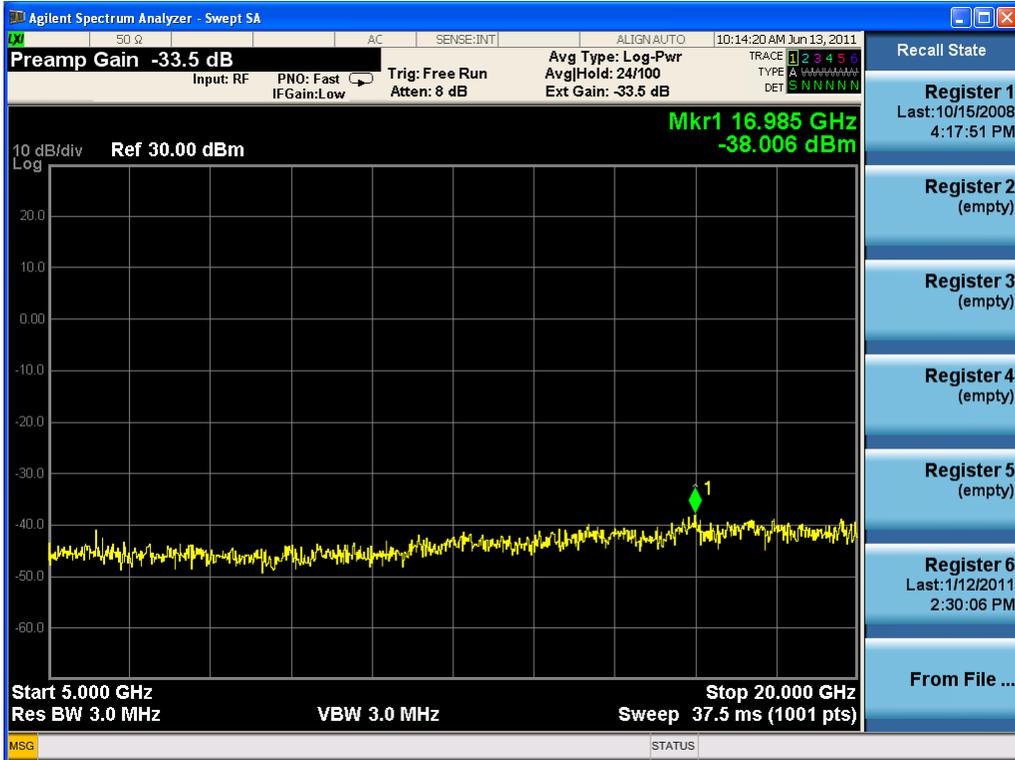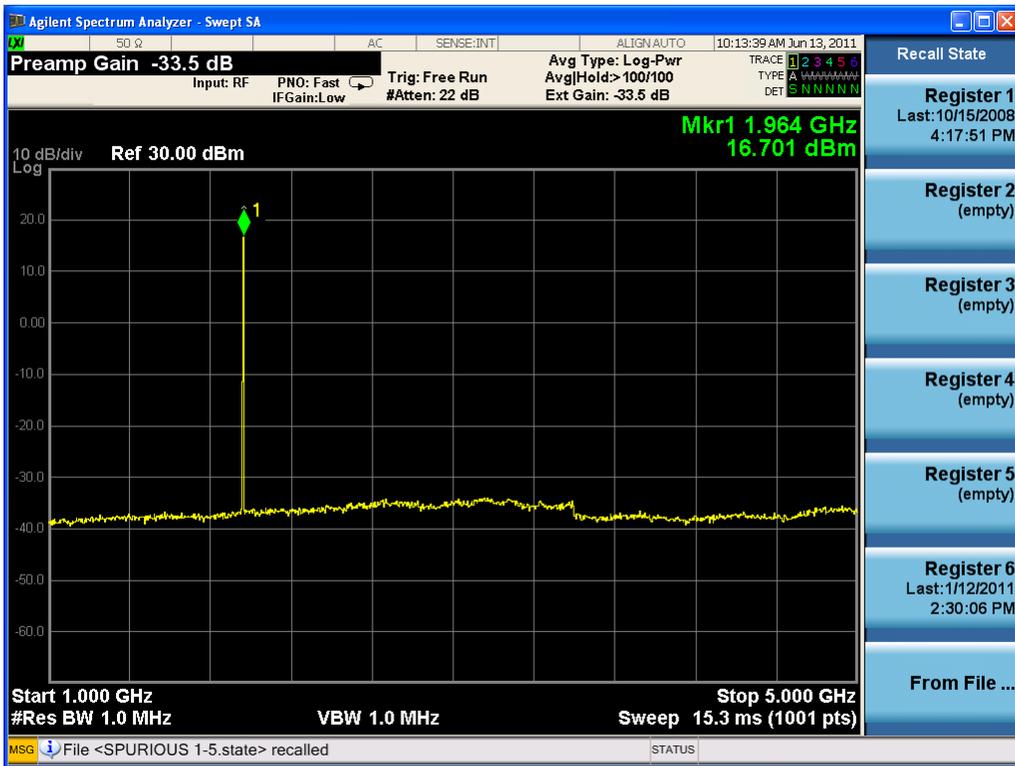




Two carriers (working in top frequency)

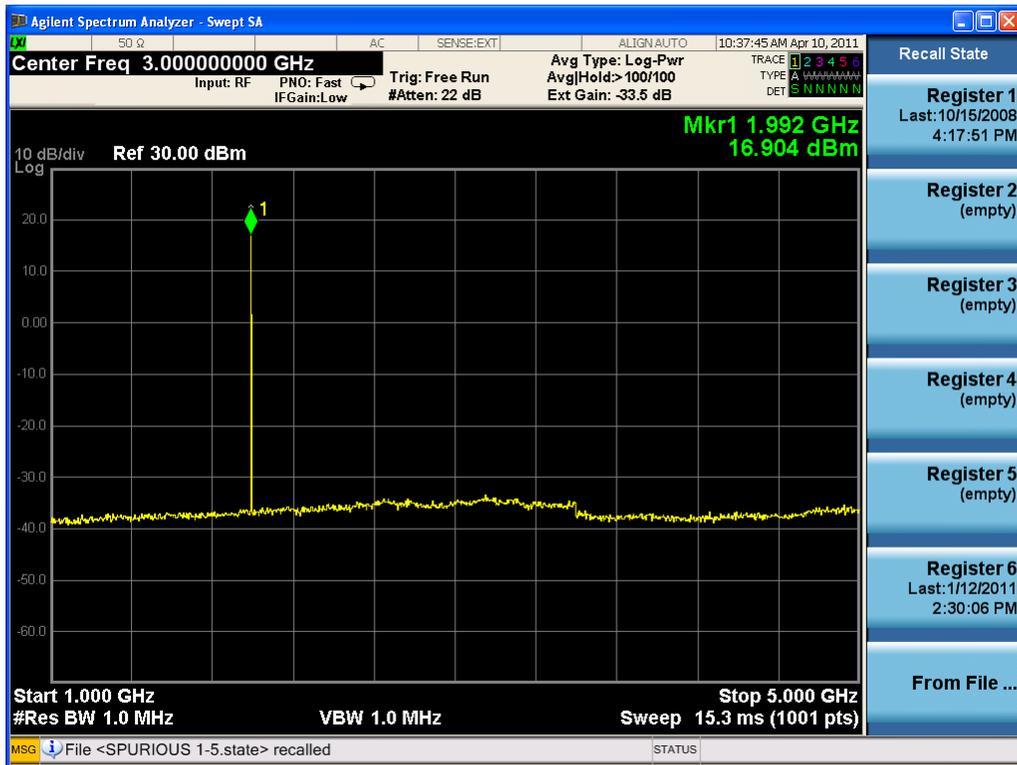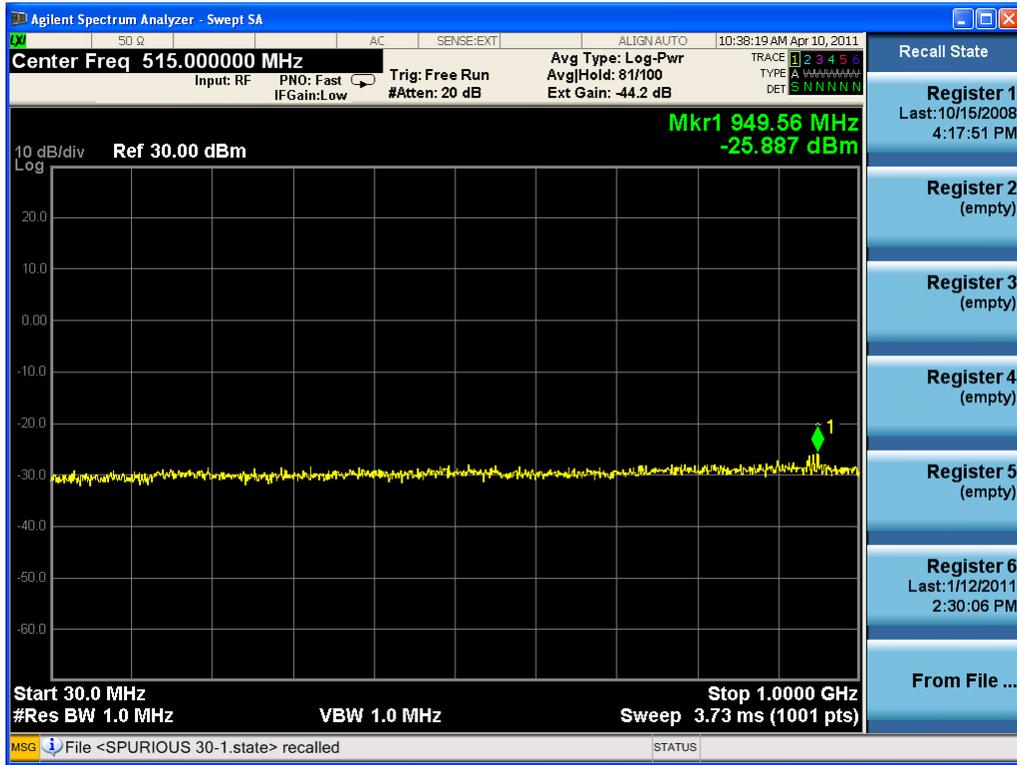


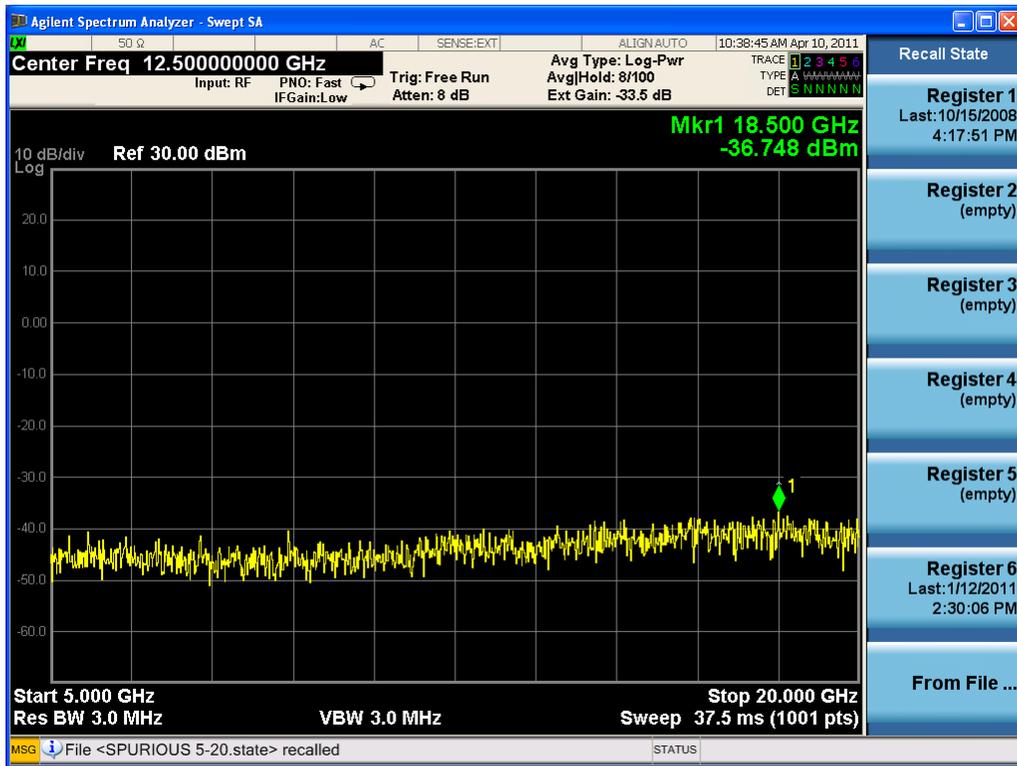


One carrier (working in bottom frequency)

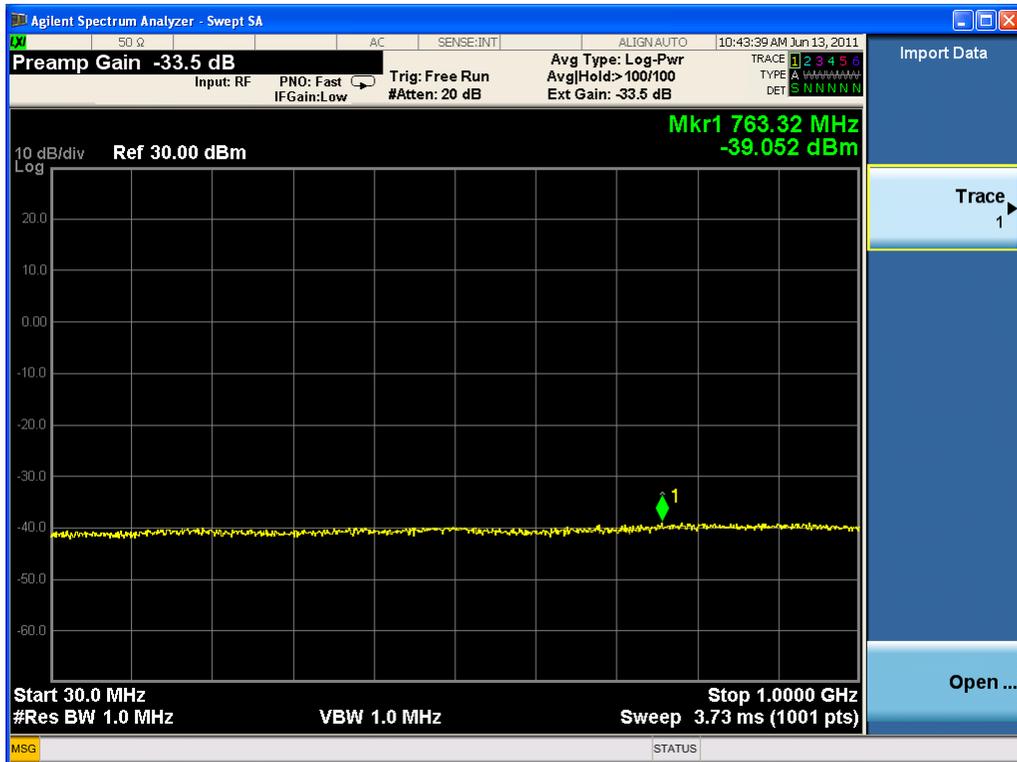

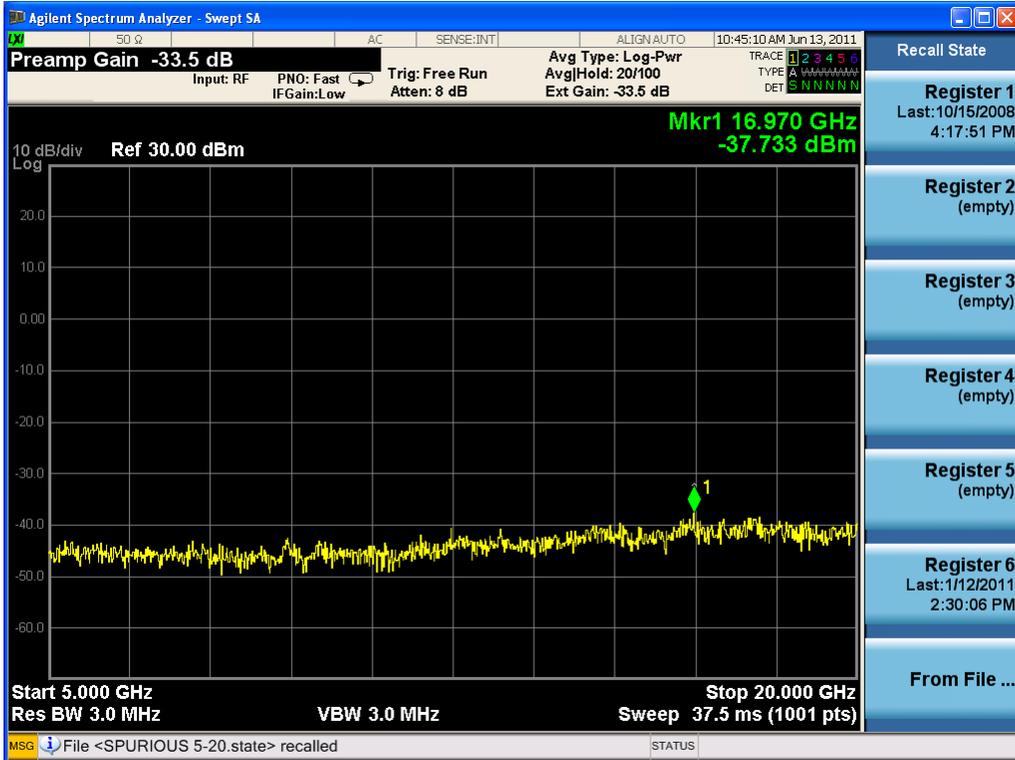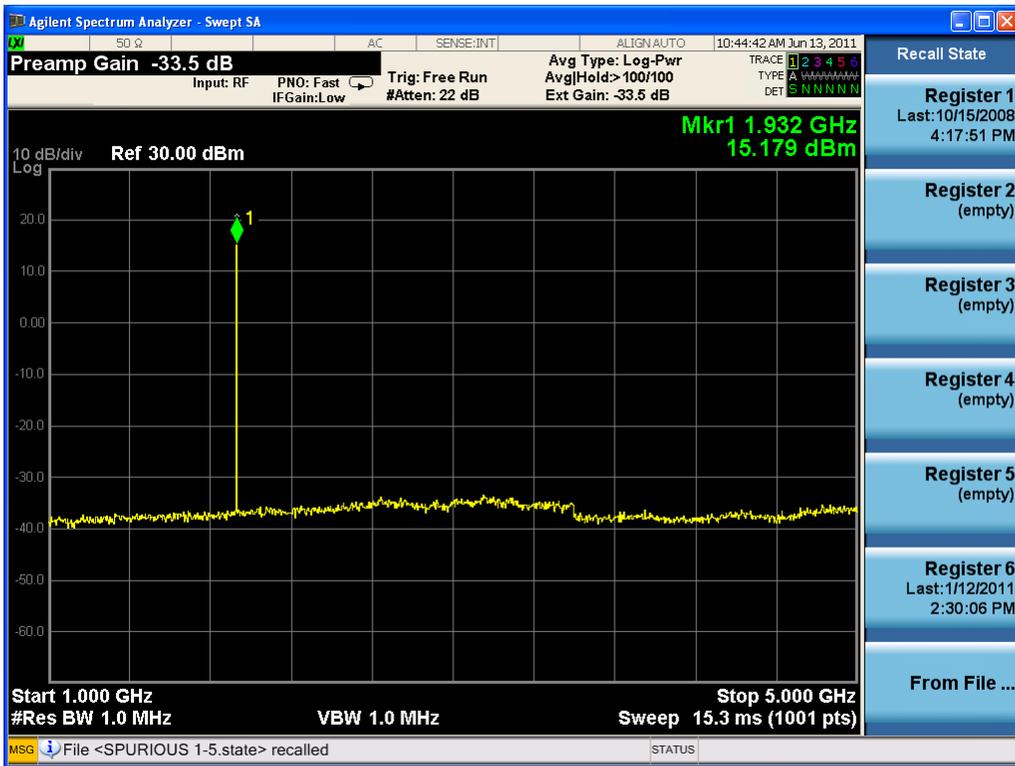




One carrier (working in middle frequency)

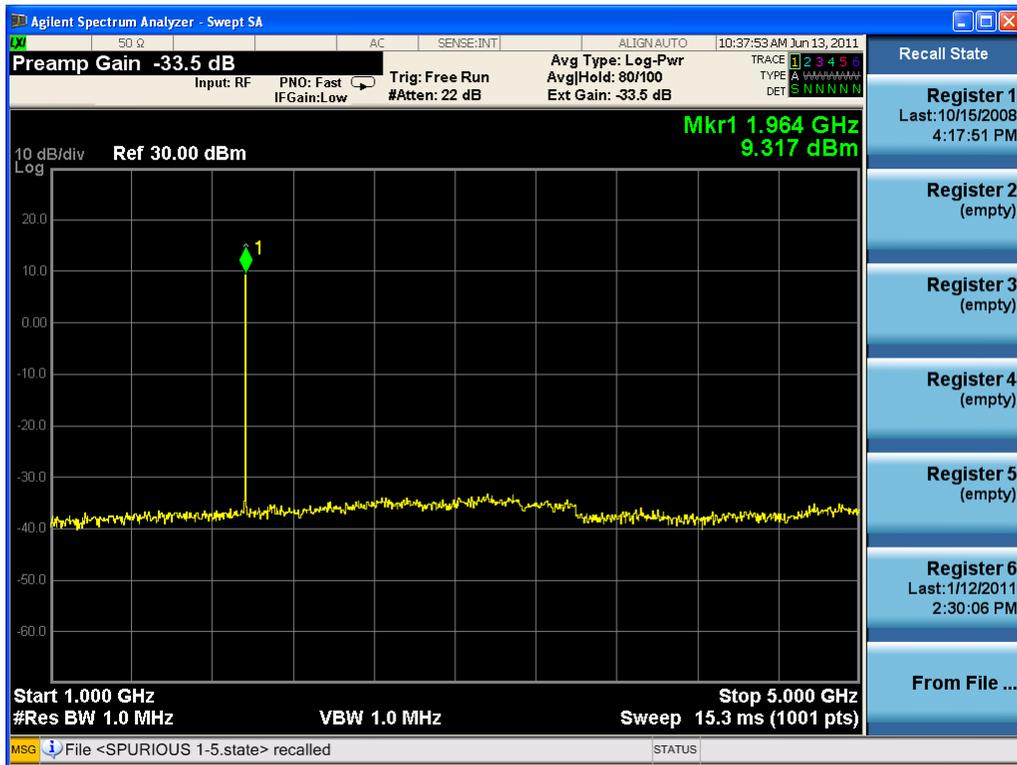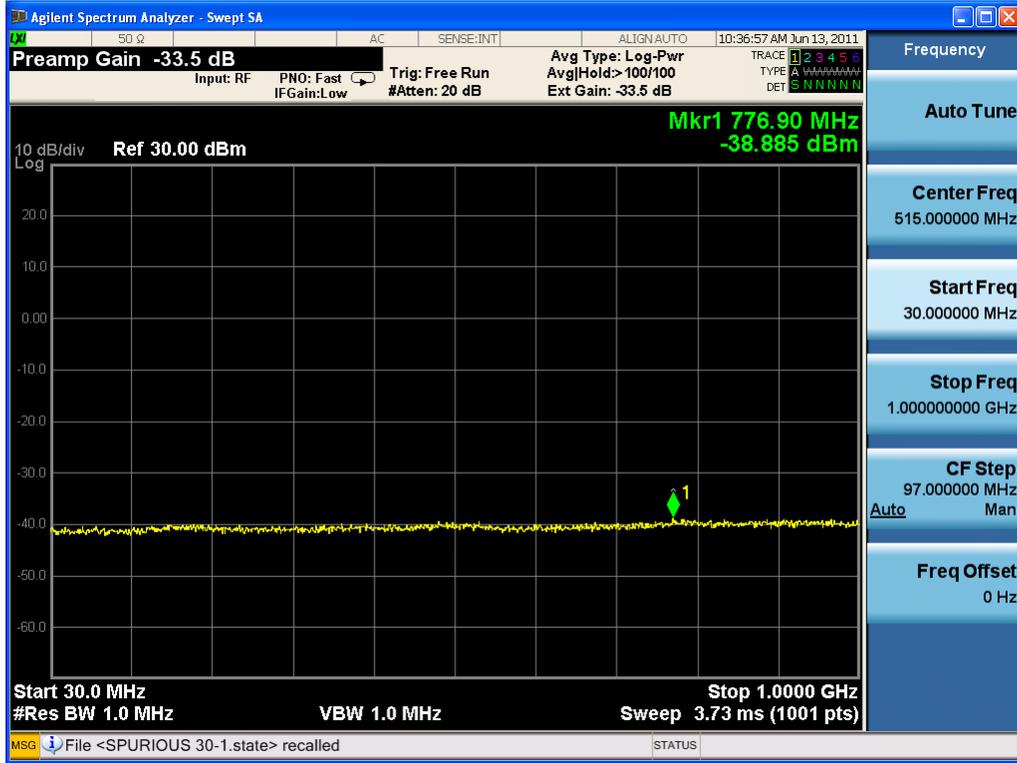



One carrier (working in top frequency)

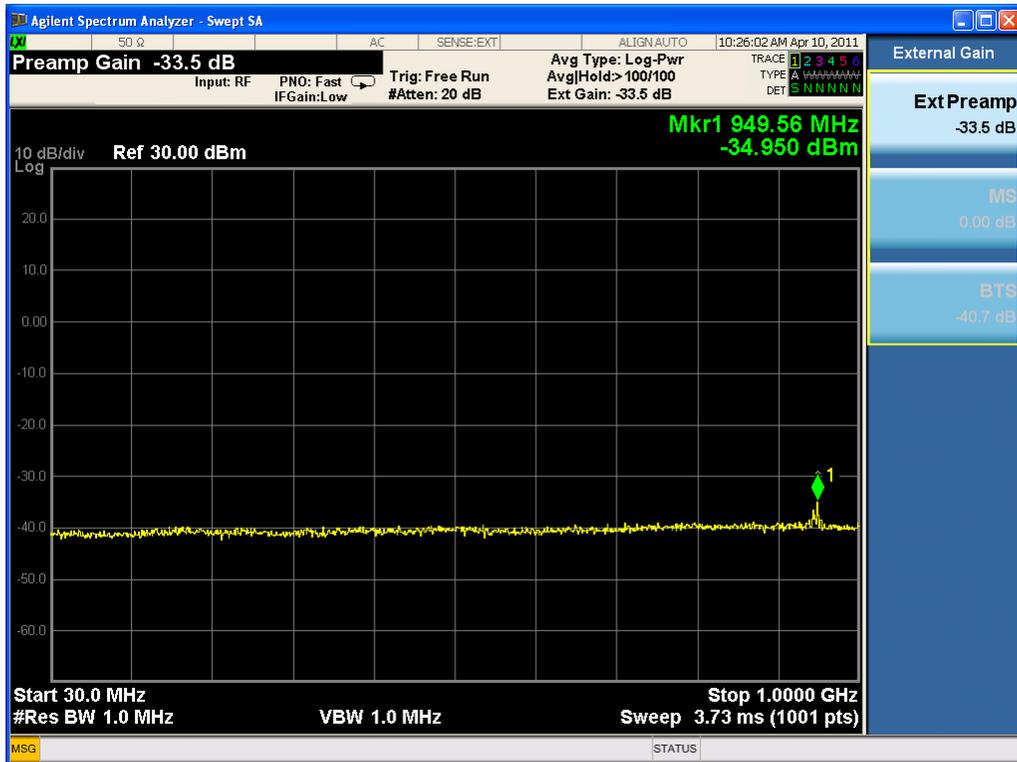

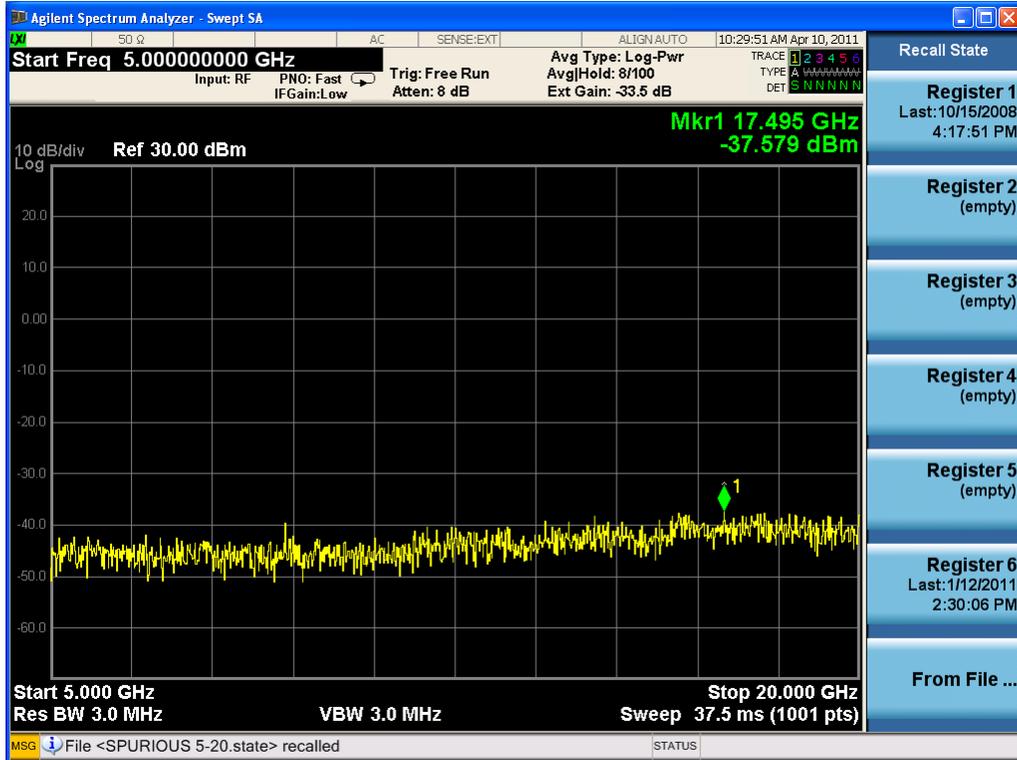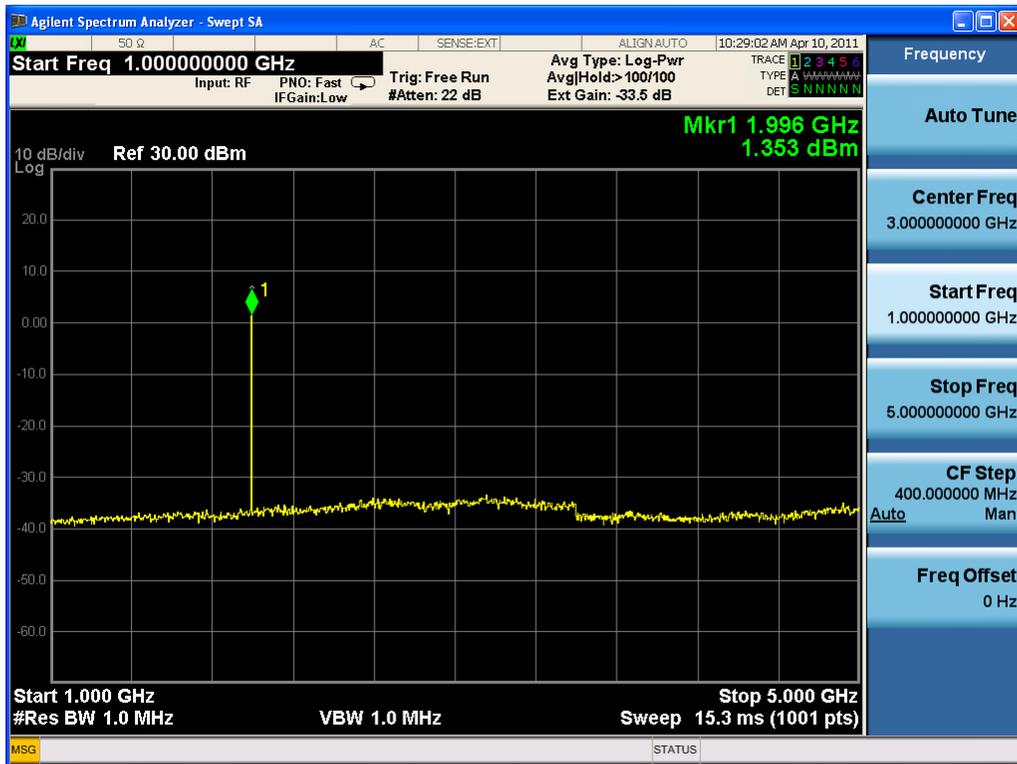

10 OCCUPIED BANDWIDTH

Applicable Standard: FCC §2.1049, §24.229, §24.238 and IC RSS Gen §4.6.1

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-04-02	2012-04-01
Atten	30dB Attenuator	ATSI150-4-30	11300110201221	2011-04-02	2012-04-01
Forstar	Forstar RF Cable	004	1033	2011-04-02	2012-04-01

***statement of traceability:** ZTE Corporation Reliability Testing Center attests that all calibration has been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

The RF out of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. 99%Power bandwidth was recorded.

Environmental Conditions

Temperature:	20 ° C
Relative Humidity:	53%
ATM Pressure:	1009mbar



Test Result: Pass


Test Mode: Transmitting CDMA

Test Data

For three carries:



Frequency (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
1932.05	3.6935	<3.75
1962.5	3.7076	<3.75
1992.95	3.6853	<3.75

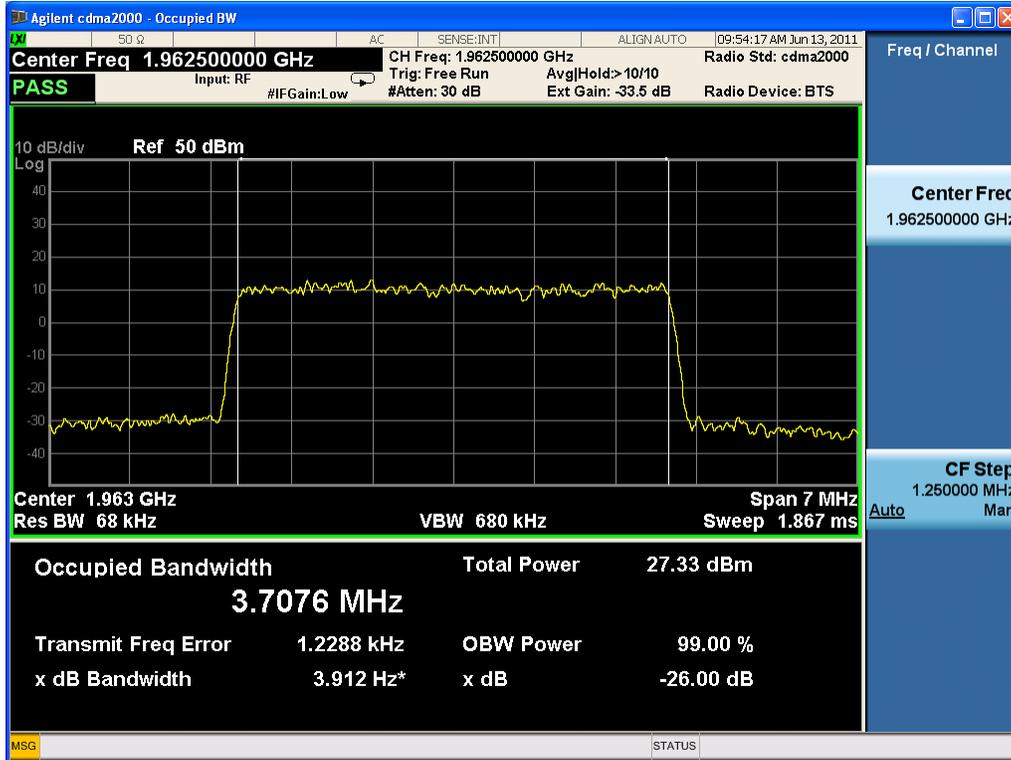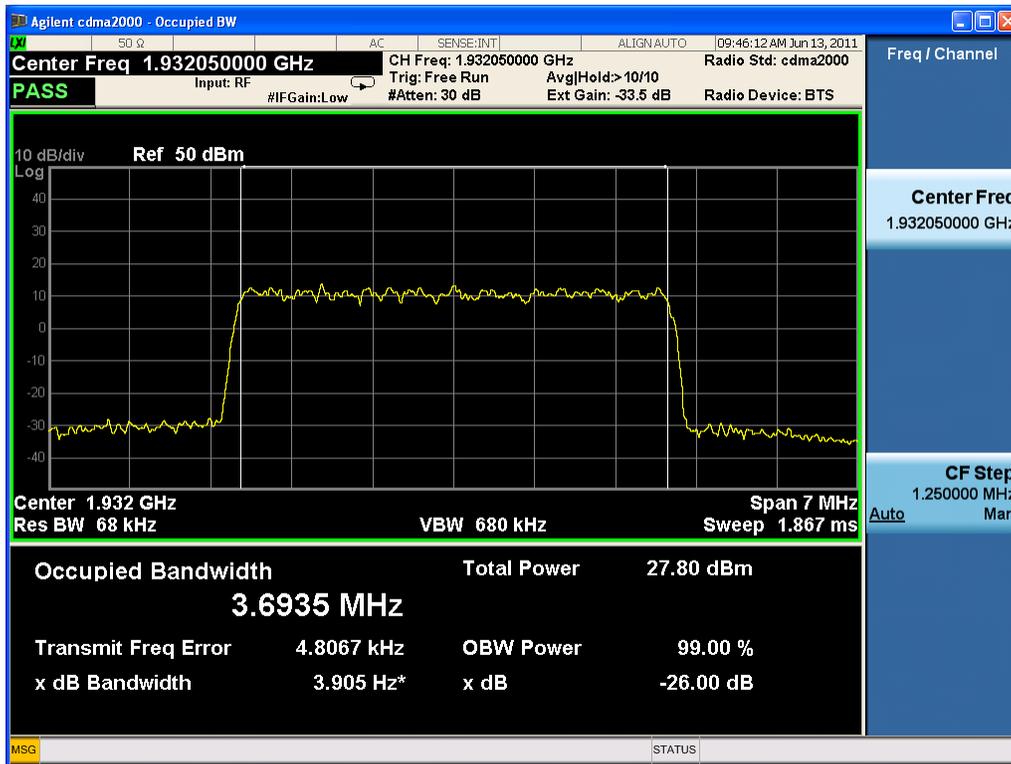


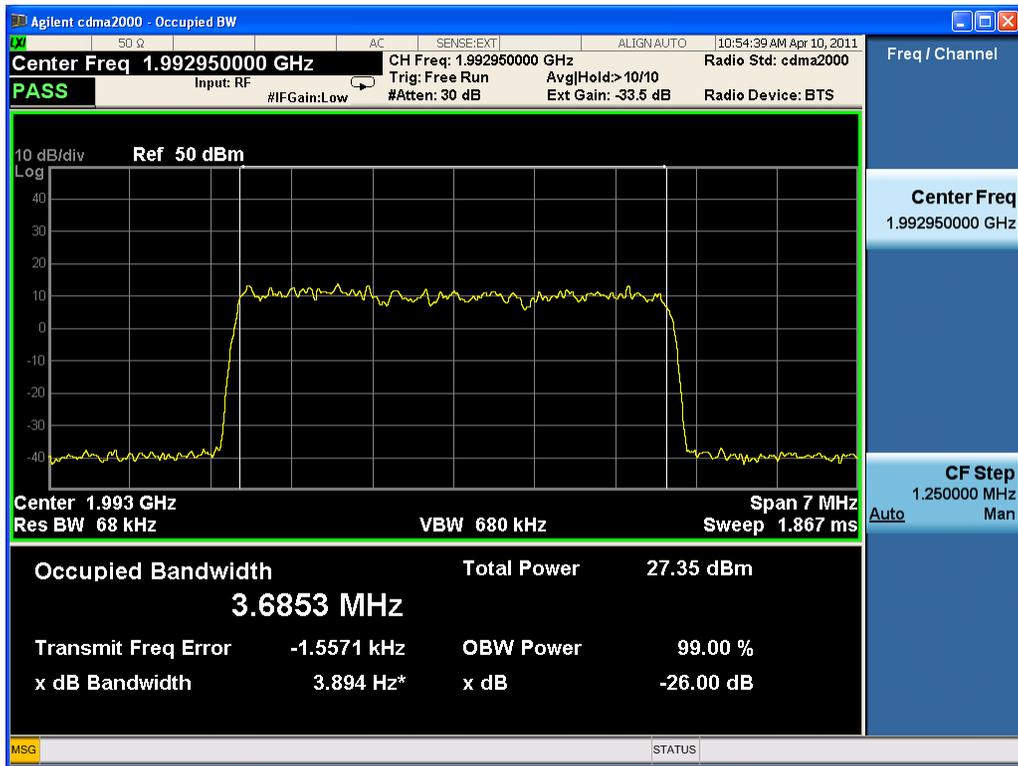

For two carries:


Frequency (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
1931.425	2.4651	<2.50
1962.475	2.4595	<2.50
1993.575	2.4512	<2.50

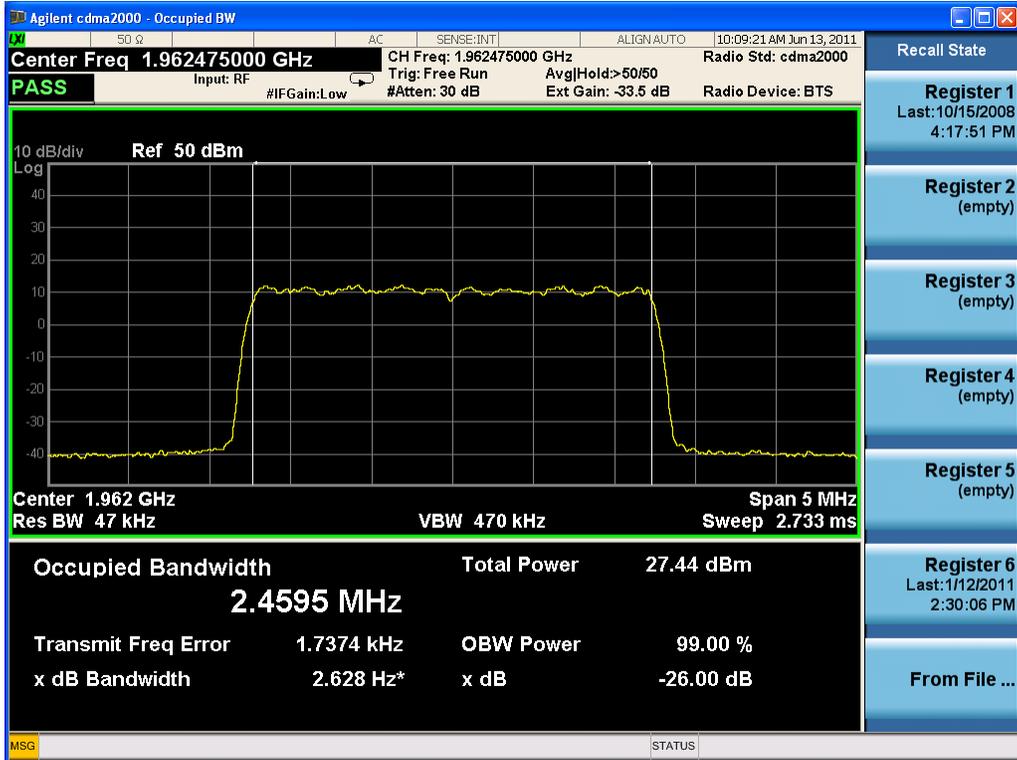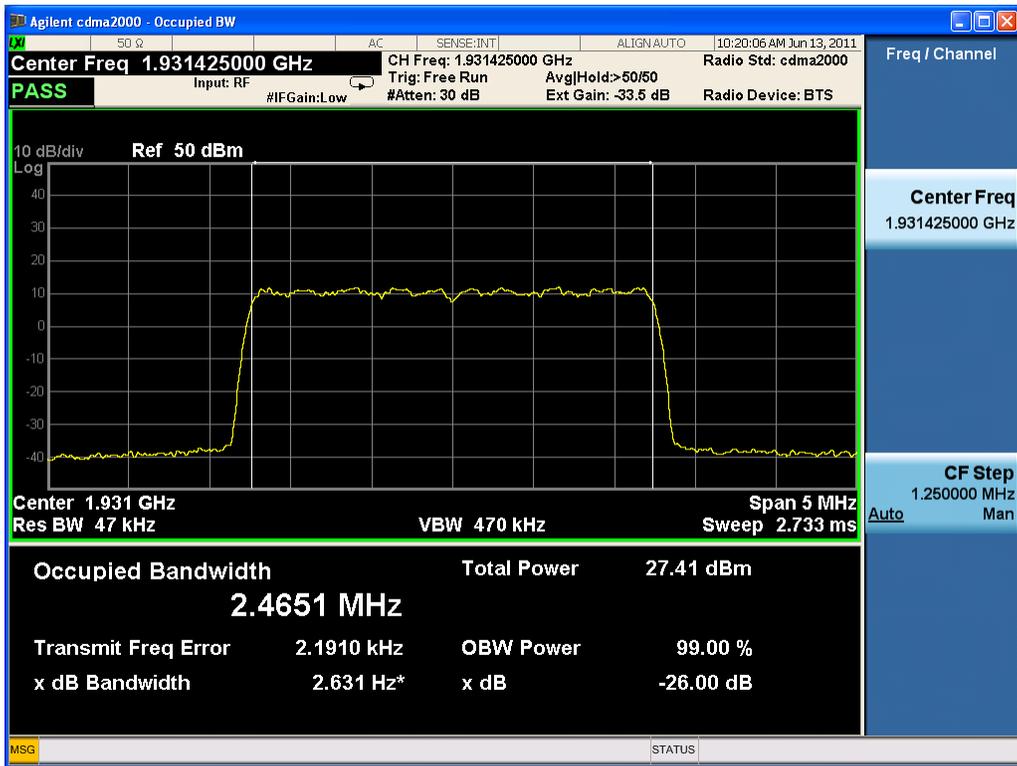


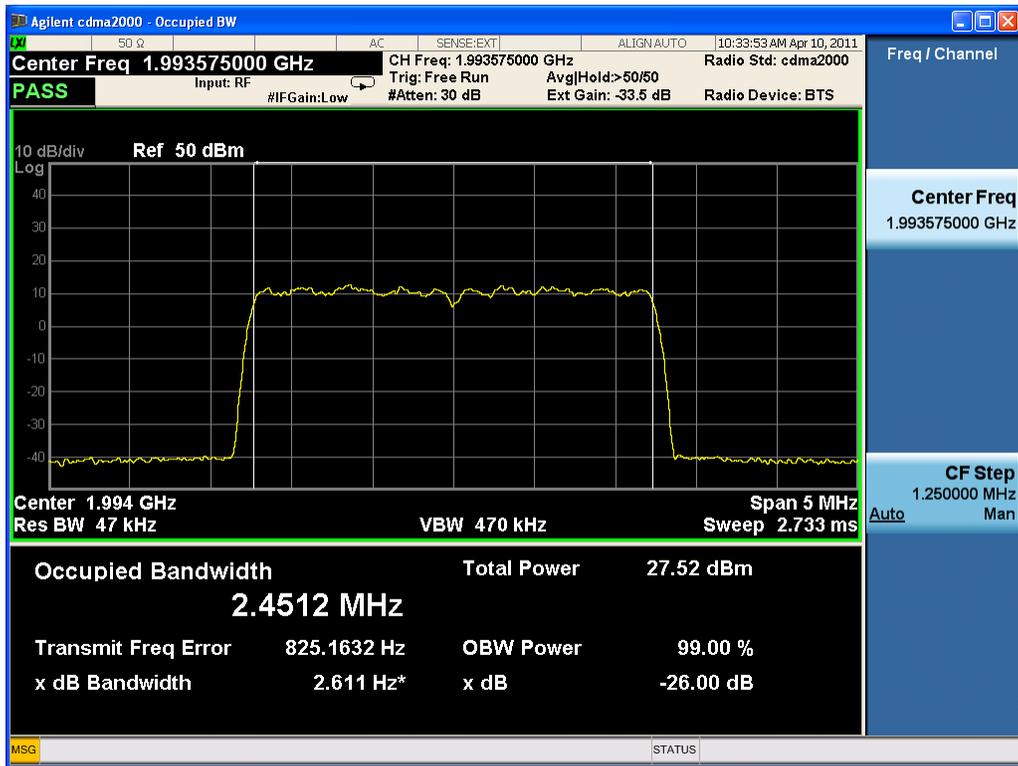

For one carrier

Frequency (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
1930.8	1.2266	<1.25
1962.5	1.2305	<1.25
1994.2	1.2178	<1.25

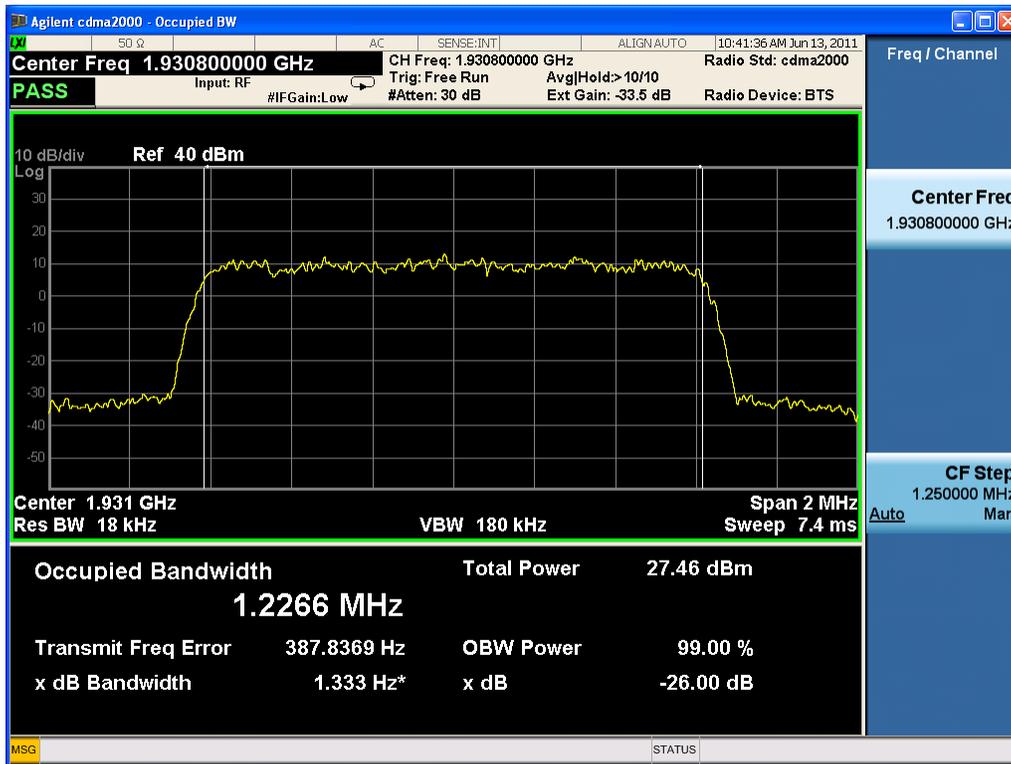

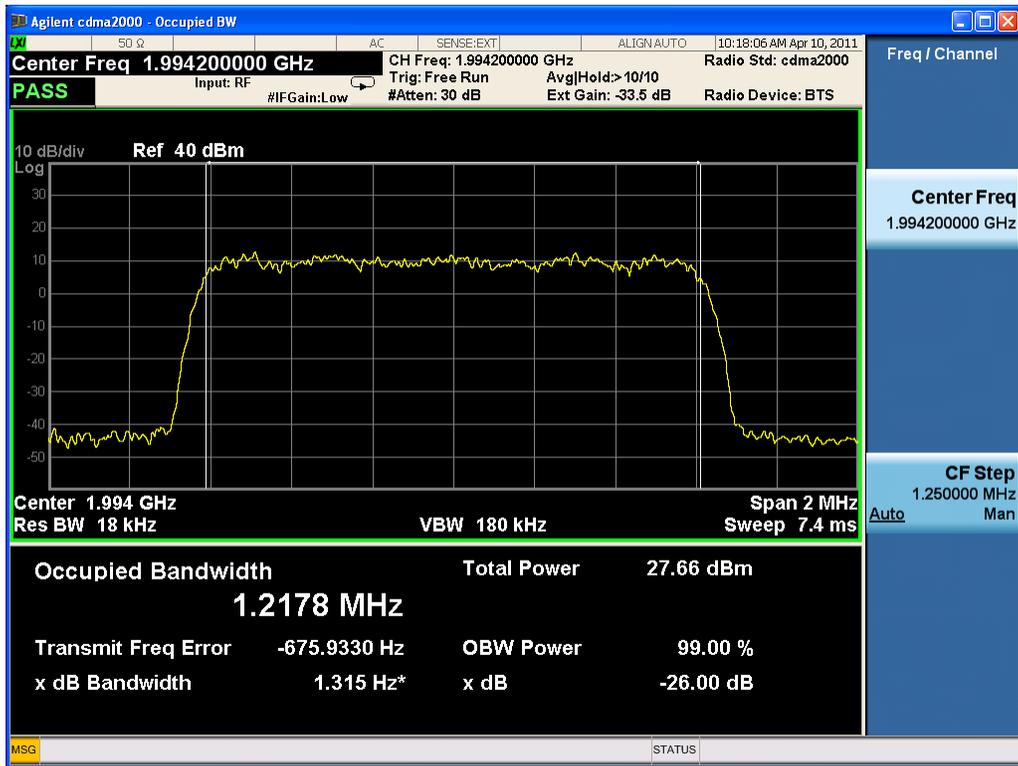

11 BAND EDGES

Applicable Standard: FCC §2.1051, §24.238 and IC RSS133 §6.5

According to §2.1051 and §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (p) by a factor of at least $43 + 10 \log(p)$ dB. The limit (dBm) should $< P - (43 + 10 \log(P)) = -13 \text{dBm}$.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-04-02	2012-04-01
Atten	30dB Attenuator	ATSI150-4-30	11300110201221	2011-04-02	2012-04-01
Forstar	Forstar RF Cable	004	1033	2011-04-02	2012-04-01

***statement of traceability:** ZTE Corporation Reliability Testing Center attests that all calibration has been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

Test Data Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53%
ATM Pressure:	1009mbar


Test Result: Pass

Test Mode: Transmitting CDMA

Test Data

Three carriers


Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1930.8,1932.05,1933.3	-39.562	-13.00
1991.7,1992.95,1994.2	-38.014	-13.00

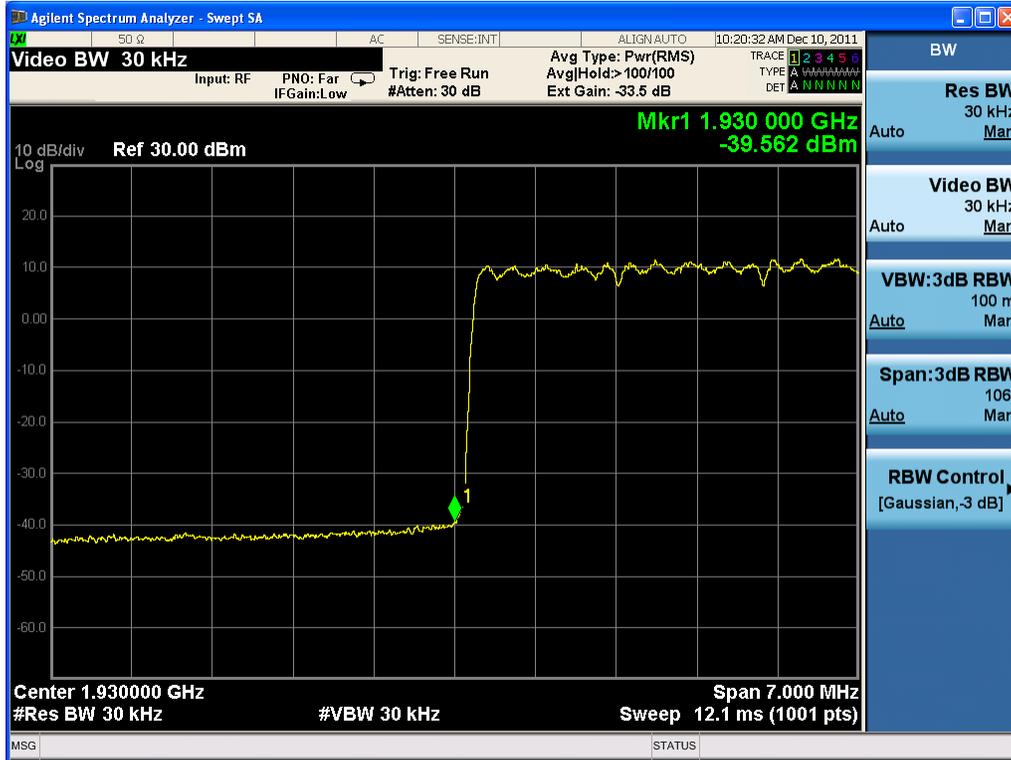




Two carriers

Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1930.8,1932.05	-30.917	-13.00
1992.95,1994.2	-34.489	-13.00

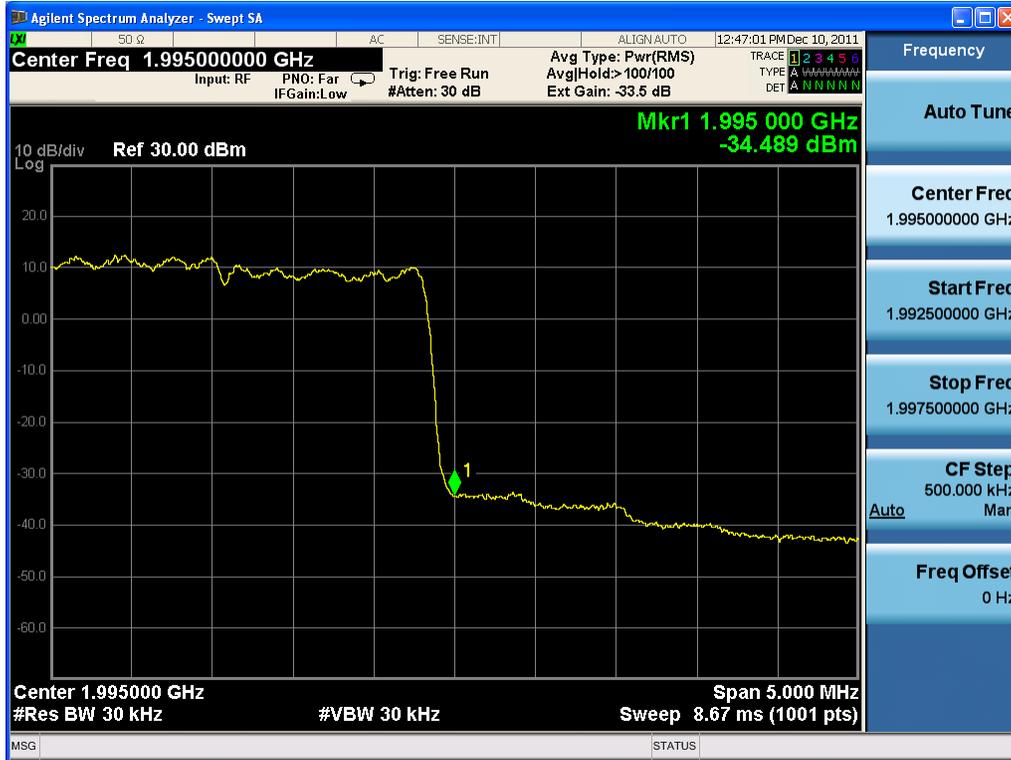

One carrier

Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1930.8	-37.549	-13.00
1994.2	-39.187	-13.00

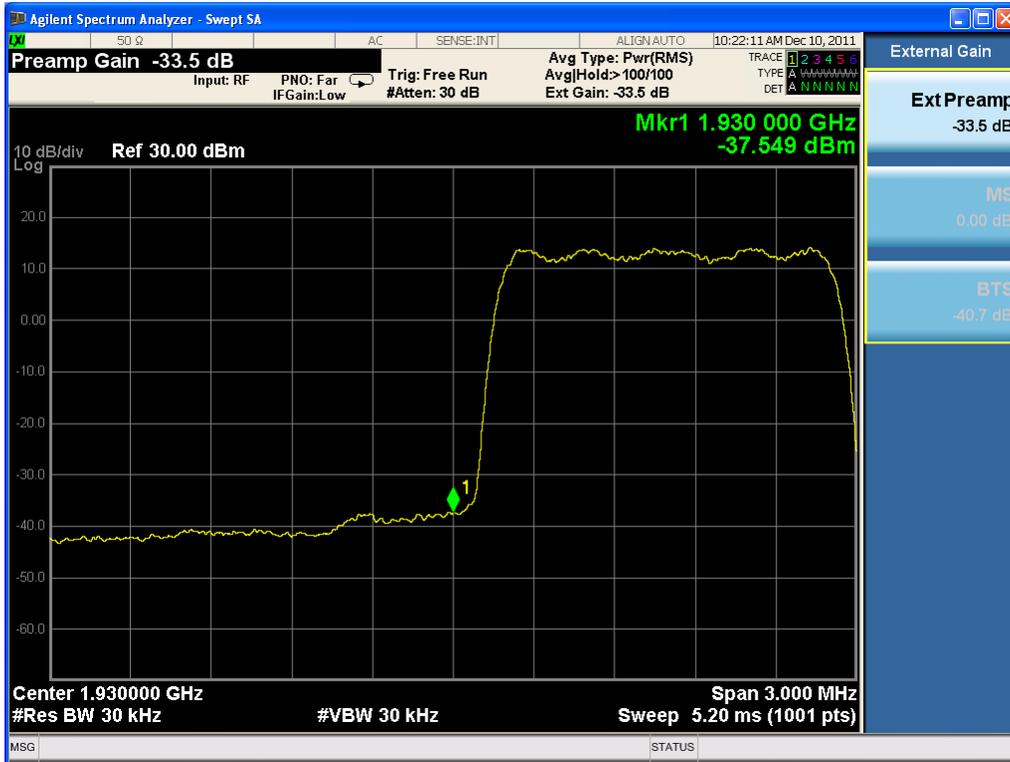



12 FREQUENCY STABILITY

Applicable Standard: FCC § 2.1055, § 24.235 and IC RSS133 §6.3, RSS Gen §4.7

Requirements: FCC § 2.1055 (a)(d), Part24.235 and IC RSS133§6.3,RSS Gen§4.7.The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
GZ-ESPEC	Temperature Chamber	EW0470	06113028	2011-01-26	2012-01-26
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-04-02	2012-04-01
Atten	30dB Attenuator	ATSI150-4-30	11300110201221	2011-04-02	2012-04-01
Forstar	Forstar RF Cable	004	1033	2011-04-02	2012-04-01

***statement of traceability:** ZTE Corporation Reliability Testing Center attests that all calibration has been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Spectrum Analyzer via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 150 minutes, the frequency output was recorded from the counter.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

Environmental Conditions

Normal condition:	25° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Test Result: Pass

Test Mode: Transmitting CDMA**Test Data****Frequency Stability Versus Temperature**

Frequency Stability vs Temperature					
Temperature (°C)	Power Supplied (V _{ac})	Frequency Measure Error (Hz)	Error (ppm)	Limit (ppm)	Result
f=1962.5MHz					
-40	120	-8.9	-0.005	1	PASS
-30	120	-9.6	-0.005	1	PASS
-20	120	-9.2	-0.005	1	PASS
-10	120	-9.7	-0.005	1	PASS
0	120	-8.4	-0.004	1	PASS
10	120	-9.2	-0.005	1	PASS
20	120	-9.5	-0.005	1	PASS
30	120	-8.5	-0.004	1	PASS
40	120	-8.2	-0.004	1	PASS
50	120	-8.8	-0.004	1	PASS
55	120	-8.6	-0.004	1	PASS

Frequency Stability Versus Voltage

Frequency Stability vs. Voltage					
VoltageVac	Temperature °C	Frequency Measure Error Hz	Error ppm	Limit ppm	Result
f=1962.5MHz					
90	20	-16.11	-0.008	1	PASS
264	20	-14.93	-0.008	1	PASS

13 RECEIVER SPURIOUS EMISSIONS

Applicable Standard: IC RSS Gen§6, RSS 133 §6.6

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-04-02	2012-04-01
Forstar	Forstar RF Cable	004	1033	2011-04-02	2012-04-01

***statement of traceability:** ZTE Corporation Reliability Testing Center attests that all calibration has been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

EUT Setup:

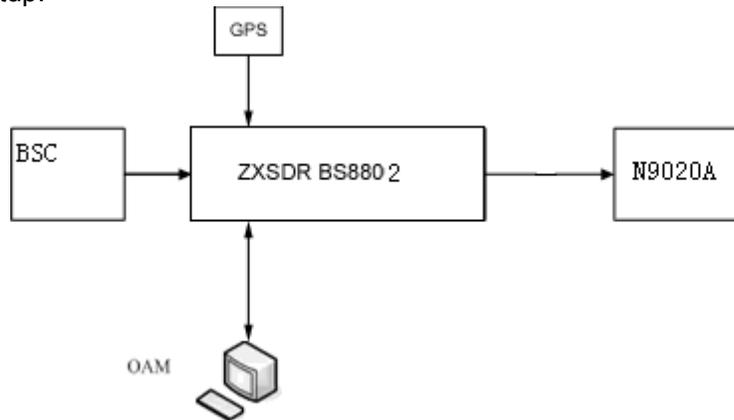

REMARKS: Cable Loss (dB)=3.5dB.

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz for 30MHz to 1GHz band, set at 3MHz for 1GHz to 20GHz band. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar

Test Result: Pass

Test Mode: Transmitting CDMA


Test Data:

Working in bottom frequency

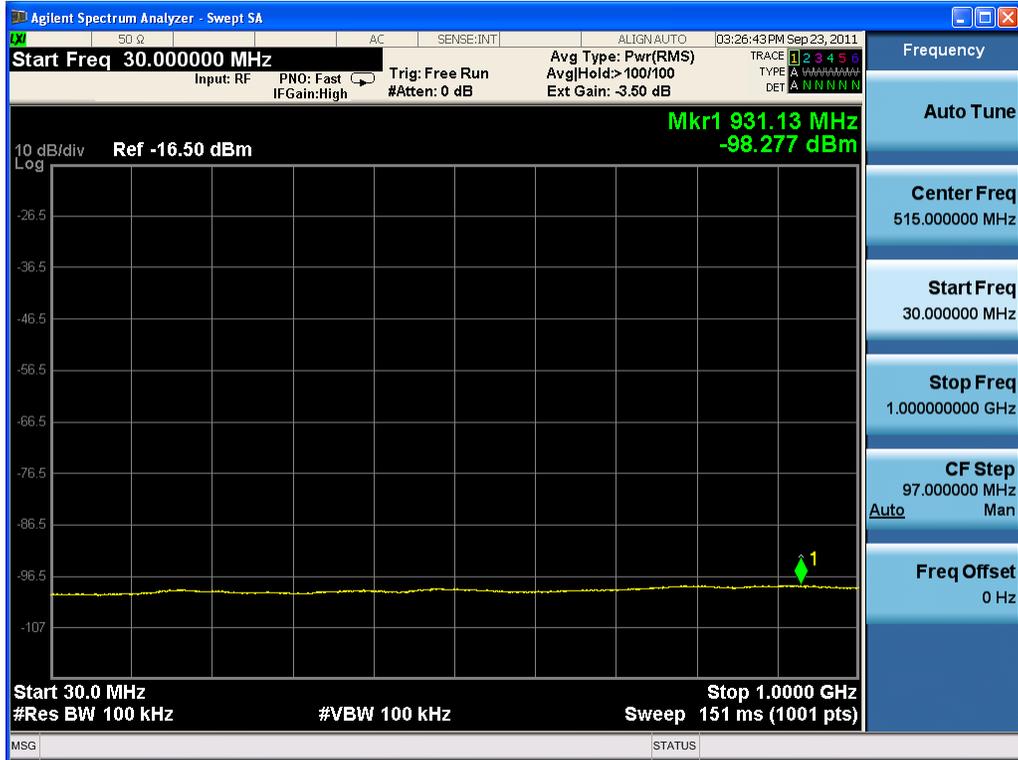



Working in middle frequency

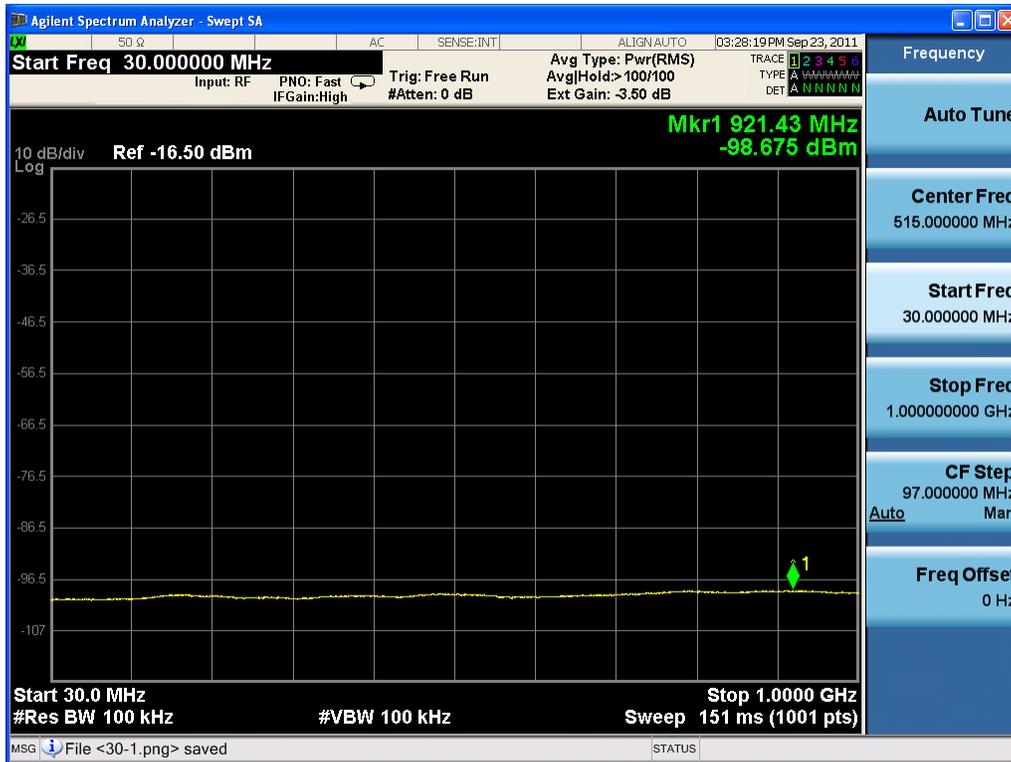



Working in top frequency

