



**47 CFR PART 15 SUBPART B**

**TEST REPORT**

of

**GSM Dual-band GPRS Digital Mobile Phone**

Model Name: ZTEA137+  
Brand Name: ZTE中兴  
Report No.: SZ07120061E01  
FCC ID: Q78-A137PLUS

*prepared for*

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen,  
Guangdong, 518057, P.R.China

**Shenzhen Electronic Product Quality Testing Center**

**Morlab Laboratory**  
3/F, Electronic Testing Building, Shahe Road, Xili,  
Nanshan District, Shenzhen, 518055 P. R. China

Tel: +86 755 86130398

Fax: +86 755 86130218



*NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.*



## TABLE OF CONTENTS

<b>1.</b>	<b>TEST CERTIFICATION</b> .....	<b>3</b>
<b>2.</b>	<b>GENERAL INFORMATION</b> .....	<b>4</b>
<b>2.1</b>	<b>EUT Description</b> .....	<b>4</b>
<b>2.2</b>	<b>Test Standards and Results</b> .....	<b>5</b>
<b>2.3</b>	<b>Facilities and Accreditations</b> .....	<b>6</b>
2.3.1	Facilities .....	6
2.3.2	Test Environment Conditions.....	6
<b>3.</b>	<b>TEST CONDITIONS SETTING</b> .....	<b>7</b>
<b>3.1</b>	<b>Test Mode</b> .....	<b>7</b>
<b>3.2</b>	<b>Test Setup and Equipments List</b> .....	<b>8</b>
3.2.1	Conducted Emission.....	8
3.2.2	Radiated Emission.....	9
<b>4.</b>	<b>47 CFR PART 15B REQUIREMENTS</b> .....	<b>10</b>
<b>4.1</b>	<b>Conducted Emission</b> .....	<b>10</b>
4.1.1	Requirement .....	10
4.1.2	Test Description .....	10
4.1.3	Test Result.....	10
<b>4.2</b>	<b>Radiated Emission</b> .....	<b>13</b>
4.2.1	Requirement .....	13
4.2.2	Test Description .....	13
4.2.3	Test Result.....	13

## 1. TEST CERTIFICATION

Equipment under Test: GSM Dual-band GPRS Digital Mobile Phone

Brand Name: ZTE中兴

Model Name: ZTEA137+

FCC ID: Q78-A137PLUS

Applicant: ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District,  
Shenzhen, Guangdong, 518057, P.R.China

Manufacturer: ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District,  
Shenzhen, Guangdong, 518057, P.R.China

Emission Designator 300KGXW

Test Standards: 47 CFR Part 15 Subpart B

Test Date(s): December 17, 2007 –December 19, 2007

Test Result: PASS

### \* We Hereby Certify That:

The equipment under test was tested by Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the requirement of related FCC rules.

The test results of this report only apply for the tested sample equipment identified above. The test report shall be invalid without all the signatures of the test engineer, the reviewer and the approver.

Tested by: Wei Yanquan Dated: 2008.1.8  
Wei Yanquan

Reviewed by: Ni Yong Dated: 2008.1.8  
Ni Yong

Approved by: Zeng Dexin Dated: 2008.1.8  
Zeng Dexin



## 2. GENERAL INFORMATION

### 2.1 EUT Description

EUT Type.....: GSM Dual-band GPRS Digital Mobile Phone  
Model Name .....: ZTEA137+  
Serial No.....: (n.a, marked #1 by test site)  
IMEI.....: 351756020000131  
Hardware Version .....: g4sA  
Software Version.....: P103B5BAV1\_0\_0B02  
Modulation Type.....: GMSK  
Power Supply.....: Battery  
Model Name: Li3707T42P3h553447  
Brand name: ZTE中兴  
Capacitance: 770mAh  
Rated voltage: 3.7V  
Manufacturer: ZTE CORPORATION  
Manufacturer Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China  
Ancillary Equipment 1.....: AC Adapter (Charger for Battery)  
Model Name: STC—A22O50U8—C  
Brand Name: ZTE中兴  
Serial No.: (n.a. marked #1 by test site)  
Rated Input: ~ 100-240V, 0.2A,50-60Hz  
Rated Output: = 5V, 700mA  
Manufacturer: ZTE CORPORATION  
Manufacturer Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park,Nanshan District,Shenzhen, Guangdong, 518057, P.R. China  
Wire Length: 115cm

*Note 1:* The EUT is a GSM/GPRS Wireless telephone; it supports GSM 850MHz, 1900MHz. GSM 850MHz, 1900MHz and GPRS model are tested in this report.

*Note 2:* For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

## 2.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-05 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result	Test date
1	15.107	Conducted Emission	PASS	2007-12-18
2	15.109	Radiated Emission	PASS	2007-12-18

NOTE:

The tests were performed according to the method of measurements prescribed in ANSI C63.4 2003.

## 2.3 Facilities and Accreditations

### 2.3.1 Facilities

Shenzhen Electronic Product Quality Testing Center Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

All measurement facilities used to collect the measurement data are located at Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen 518055 CHINA. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

### 2.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	20 - 25
Relative Humidity (%):	40 - 60
Atmospheric Pressure (kPa):	96

### 3. TEST CONDITIONS SETTING

#### 3.1 Test Mode

During the measurement, there are two Test Modes that will be tested in Conducted Emission and Radiated Emission. These test modes are showed as below:

(1) The first test mode (GSM)

The EUT configuration of the emission tests is EUT + Battery + Charger.

In this test mode, the EUT will be working under the Traffic operating mode and Idle operating mode.

During the measurement of Traffic operating mode, a communication link was established between the EUT and a System Simulator (SS). The EUT operated at GSM 850MHz mid ARFCN (190) and maximum output power (level 5).

(2) The second test mode (GPRS)

The EUT configuration of the emission tests is EUT + Battery + Charger.


In this test mode, a GPRS link was established between the EUT and a System Simulator (SS); data was transmitted between EUT and System Simulator (SS), and maintained during the measurement.

NOTE: These test modes are performed, only the worst cases are recorded in this report.

## 3.2 Test Setup and Equipments List

### 3.2.1 Conducted Emission

#### A. Test Setup:

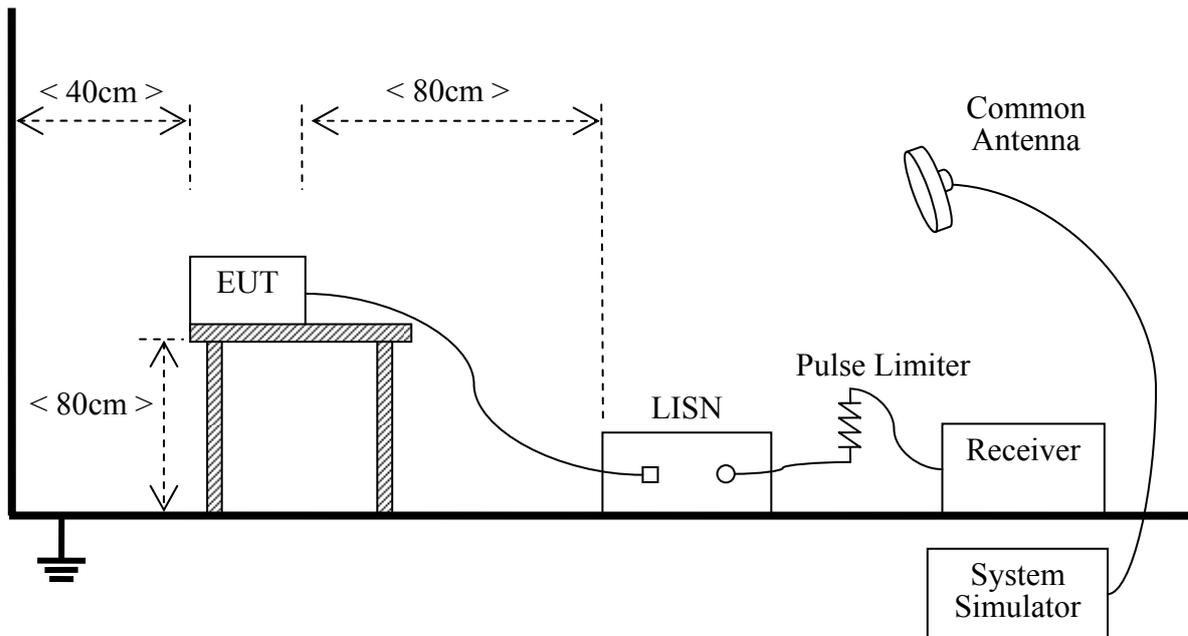


The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides  $50\Omega/50\mu\text{H}$  of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

#### B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2007.07	1year
LISN	Schwarzbeck	NSLK 8127	812744	2007.08	1year
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	(n.a.)	(n.a.)
System Simulator	Agilent	E5515C	GB43130131	2007.06	1year
Personal Computer	HP	Pavilion ze2202	CNF5460DNL	(n.a.)	(n.a.)
Bluetooth-Headset	Nokia	HS-36W	(n.a.)	(n.a.)	(n.a.)
Wireless Router	(n.a.)	D-Link	BN64448000052	(n.a.)	(n.a.)
T-Flash Card	SanDisk	256MB	(n.a.)	(n.a.)	(n.a.)

### 3.2.2 Radiated Emission

#### C. Test Setup:

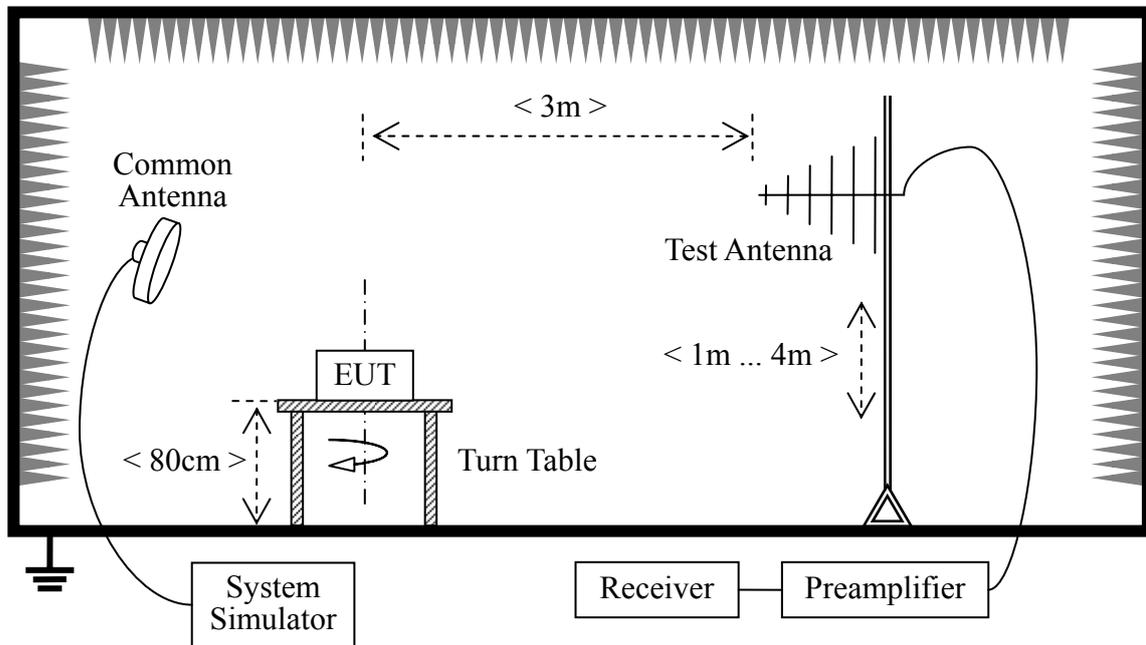

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower. The Common Antenna is used for the call between the EUT and the System Simulator (SS).

#### D. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2007.07	1year
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2006.08	2year
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2007.07	1year
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2007.07	1year
System Simulator	Agilent	E5515C	GB43130131	2007.06	1year
Personal Computer	HP	Pavilion ze2202	CNF5460DNL	(n.a.)	(n.a.)
Wireless Router	(n.a.)	D-Link	BN64448000052	(n.a.)	(n.a.)
Bluetooth-Headset	Nokia	HS-36W	(n.a.)	(n.a.)	(n.a.)
T-Flash Card	SanDisk	256MB	(n.a.)	(n.a.)	(n.a.)

## 4. 47 CFR PART 15B REQUIREMENTS

### 4.1 Conducted Emission

#### 4.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

NOTE:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

#### 4.1.2 Test Description

See section 3.2.1 of this report.

#### 4.1.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.


#### A. Test Verdict Recorded for Suspicious Points:

No.	@Frequency (MHz)	Measured Emission Level (dB $\mu$ V)				Limit (dB $\mu$ V)		Verdict
		PK	QP	AV	Phase	QP	AV	
1	0.587	44.4	--	--	L	56.0	46.0	PASS
2	0.611	47.7	45.5	35.4	L	56.0	46.0	PASS
3	0.655	44.6	--	--	L	56.0	46.0	PASS


No.	@Frequency (MHz)	Measured Emission Level (dB $\mu$ V)				Limit (dB $\mu$ V)		Verdict
		PK	QP	AV	Phase	QP	AV	
4	0.718	45.0	--	--	L	56.0	46.0	PASS
5	2.320	45.9	38.6	22.5	L	56.0	46.0	PASS
6	(n.a.)	(n.a.)	(n.a.)	(n.a.)	L	(n.a.)	(n.a.)	(n.a.)
7	0.592	45.2	--	--	N	56.0	46.0	PASS
8	0.713	44.0	--	--	N	56.0	46.0	PASS
9	2.039	46.6	41.3	28.5	N	56.0	46.0	PASS
10	2.168	49.9	45.2	30.6	N	56.0	46.0	PASS
11	2.377	50.3	45.1	31.5	N	56.0	46.0	PASS
12	3.852	44.9	--	--	N	56.0	46.0	PASS

Note: "--" in the table above means that the emissions are too small to be measured and are at least 10 dB below the limit.

**B. Test Plot:**

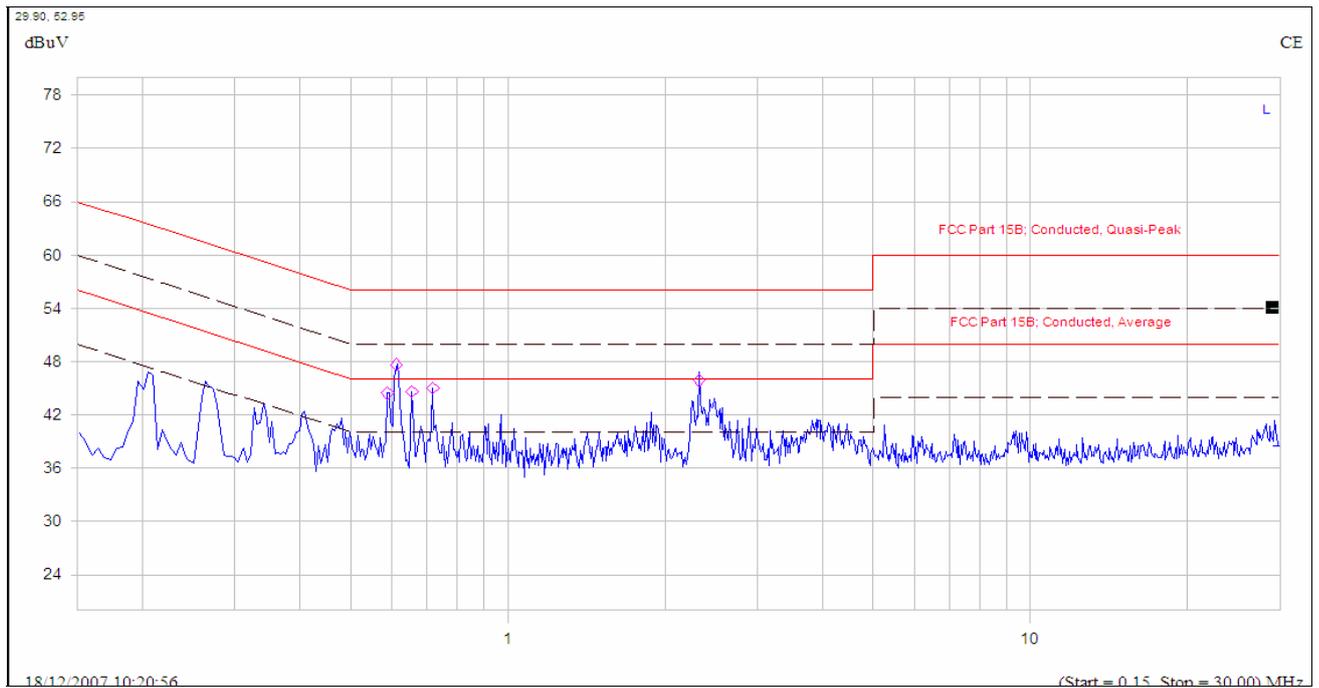

(Plot A: L Phase)

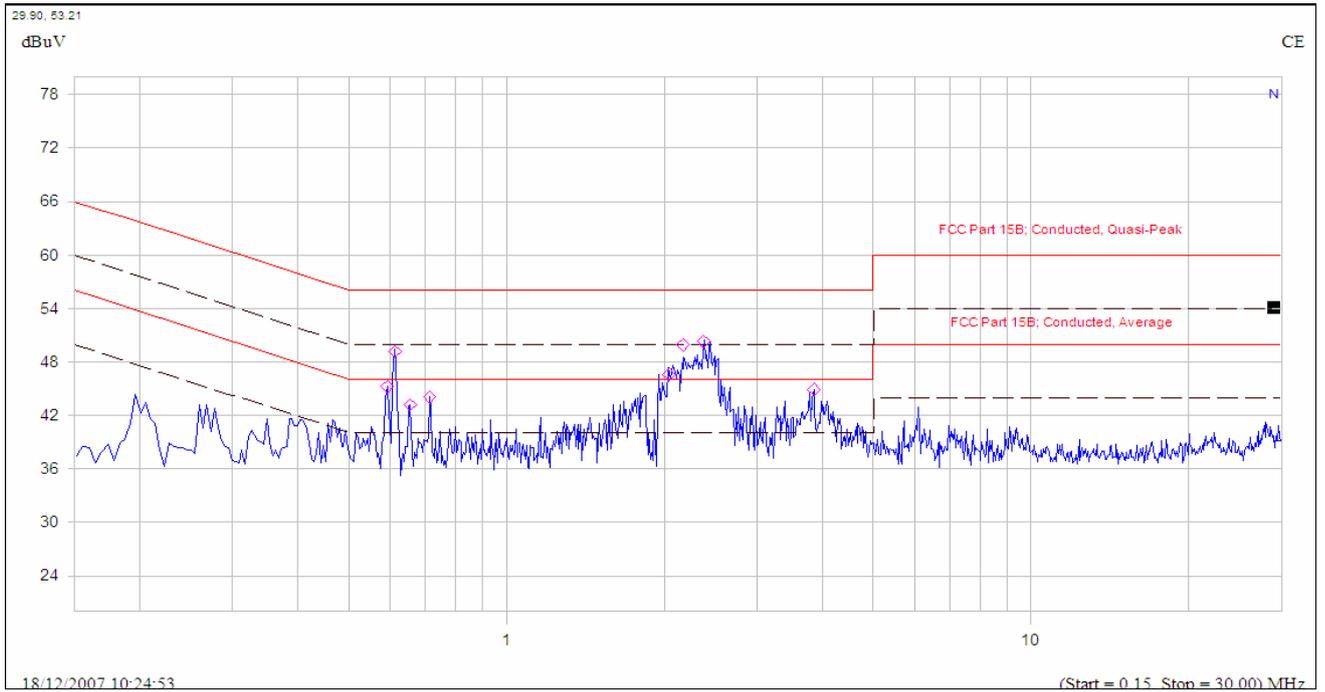

(Plot B: N Phase)

## 4.2 Radiated Emission

### 4.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength	
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

NOTE:

- Field Strength ( $\text{dB}\mu\text{V/m}$ ) =  $20 \cdot \log[\text{Field Strength } (\mu\text{V/m})]$ .
- In the emission tables above, the tighter limit applies at the band edges.

### 4.2.2 Test Description

See section 3.2.2 of this report.

### 4.2.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

#### A. Test Verdict Recorded for Suspicious Points:

No.	@Frequency (MHz)	Emission Level ( $\text{dB}\mu\text{V/m}$ )			Quasi-Peak Limit ( $\text{dB}\mu\text{V/m}$ )	Result
		PK	QP	Antenna Polarization		
1	32.025	33.1	--	Vertical	40	PASS
2	38.650	34.3	--	Vertical	40	PASS
3	50.554	39.0	31.3	Vertical	40	PASS
4	53.925	42.9	31.5	Vertical	40	PASS
5	624.175	38.0	--	Vertical	46	PASS
6	985.293	38.5	--	Vertical	54	PASS
7	30.400	33.6	--	Horizontal	40	PASS
8	54.275	30.6	--	Horizontal	40	PASS

No.	@Frequency (MHz)	Emission Level (dB $\mu$ V/m)			Quasi-Peak Limit (dB $\mu$ V/m)	Result
		PK	QP	Antenna Polarization		
9	312.025	30.4	--	Horizontal	46	PASS
10	463.850	35.0	--	Horizontal	46	PASS
11	624.175	37.5	--	Horizontal	46	PASS
12	985.293	37.6	--	Horizontal	54	PASS


Note: "--" in the table above means that the emissions are too small to be measured and are at least 10 dB below the limit.

**B. Test Plot:**

Note: Following is the plots for emission measurement; please note that marked spikes with circle should be ignored because they are MS and SS carrier frequency.



(Plot A: Test Antenna Vertical)

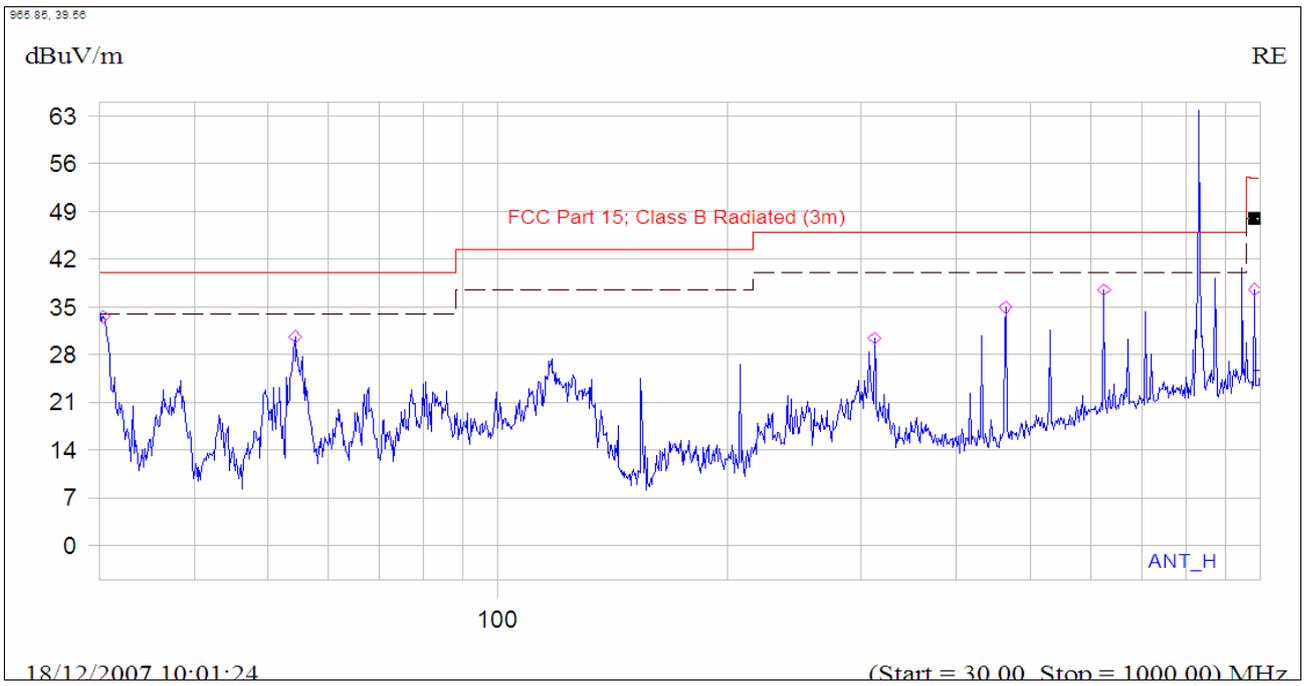

(Plot B: Test Antenna Horizontal)

\*\* END OF REPORT \*\*