



HCT CO., LTD.

PRODUCT COMPLIANCE DIVISION
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL : +82 31 639 8539 FAX : +82 31 639 8525 www.hct.co.kr

EMI VERIFICATION REPORT

Applicant:

ZTE CORPORATION

ZTE PLAZA Hi-tech Park, Nanshan District,
Shenzhen Guangdong 518057, China

Date of Issue: May 24, 2010

Test Report No.: HCTE1005FE28

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

MODEL:

A210

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B / CISPR 22 Class B

Equipment Type : Tri-Band CDMA Phone with Bluetooth (CDMA/PCS CDMA/AWS CDMA)

Trade Name : ZTE CORPORATION

Port / Connector(s) : DC Input Port / Headset Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Report prepared by

: Dong Sup Kim

Test Engineer of EMC Tech. Part



Approved by

: Nam Wook Kang

Manager of EMC Tech. Part

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	
1.1 Product description	3
1.2 Related submittal(s)/Grant(s)	3
1.3 Tested system details.	4
1.4 Cable description.	4
1.5 Noise suppression parts on cable. (I/O cable)	4
1.6 Test methodology	5
1.7 Test facility	5
1.8 Frequency Range of Radiated Measurements	5
2. SYSTEM TEST CONFIGURATION	
2.1 Configuration of tested system	6
3. PRELIMINARY TEST	
3.1 Conducted Emission test	7
3.2 Radiated Emission test	7
4. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY	
4.1 Conducted Emission test	8
4.2 Radiated Emission test	13
4.3 Test setup photos	14
5. FIELD STRENGTH CALCULATION	16
6. TEST EQUIPMENT	17
7. CONCLUSION	18

1. GENERAL INFORMATION

1.1 Product Description

Equipment Under Test (E.U.T) is **Tri-Band CDMA Phone with Bluetooth (CDMA/PCS CDMA/AWS CDMA)**, **Model: A210** manufactured by **ZTE CORPORATION**. Its basic purpose is used for communications.

Model	A210
E.U.T Type	Tri-Band CDMA Phone with Bluetooth (CDMA/PCS CDMA/AWS CDMA)
TX Frequency	824.70 MHz to 848.31 MHz (CDMA 835) 1 851.25 MHz to 1 908.75 MHz (CDMA 1 900) 1 711.25 MHz to 1 753.75 MHz (AWS CDMA)
RX Frequency	869.70 MHz to 893.31 MHz (CDMA 835) 1 931.25 MHz to 1 988.75 MHz (CDMA 1 900) 2 111.25 MHz to 2 153.75 MHz (AWS CDMA)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Number/ Part Number	FCC ID / DoC	Connected To
Tri-Band CDMA Phone with Bluetooth (CDMA/PCS CDMA /AWS CDMA)	ZTE CORPORATION	A210	-	TA
Travel adaptor	-	TL6D-0501000	-	E.U.T
Headset	-	-	-	E.U.T

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded(Y/N)	Length (M)
Tri-Band CDMA Phone with Bluetooth (CDMA/PCS CDMA /AWS CDMA)	DC in	Y	-	(P)1.8
	Headset jack	-	N	(P)1.3

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
Tri-Band CDMA Phone with Bluetooth (CDMA/PCS CDMA /AWS CDMA)	DC in	N	-	Y	E.U.T end
	Headset jack	N	-	Y	E.U.T end

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to E.U.T distance of 3 m

1.7 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-ri, Hobup-myun, Ichon-si, Kyoungki-do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 10, 2009. (Registration Number: 90661)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower


2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System

Power Line Conducted test : E.U.T was connected to LISN, all other peripheral equipment were connected to another LISN. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m open area test site.

[Configuration of Tested System]

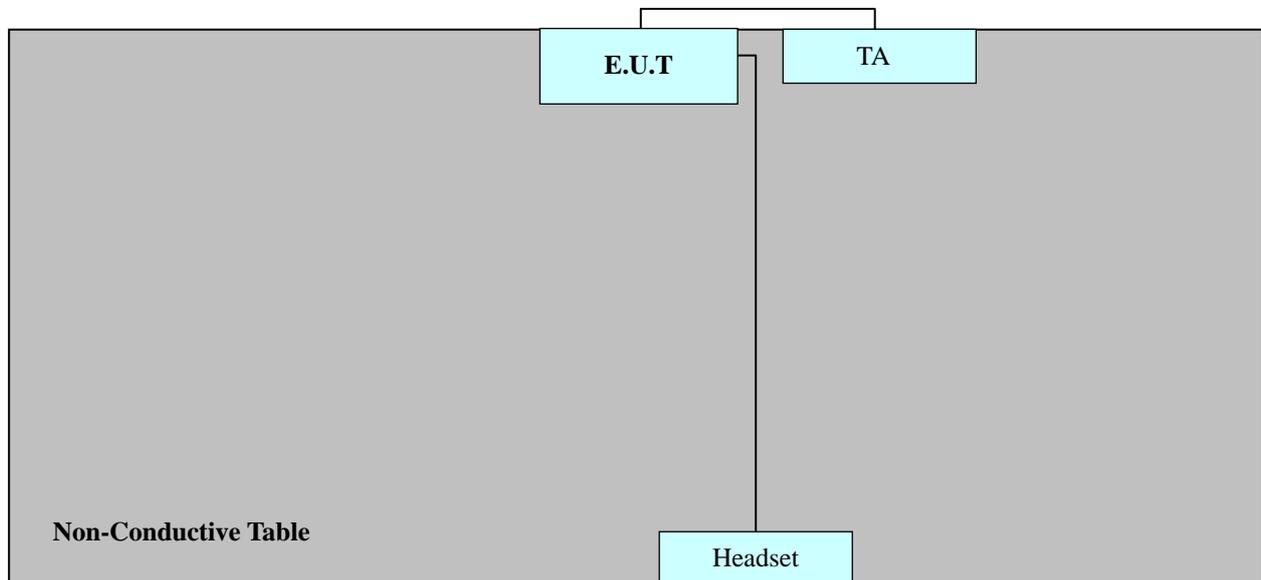

Power Line: 110 VAC

3. PRELIMINARY TEST

3.1 Conducted Emission Test

During preliminary tests, the following operating mode was investigated:

Operation Mode	The Worst Operating Condition
CDMA Idle (835, 1 900, AWS)	
Camera	○

3.2 Radiated Emission Test

During preliminary tests, the following operating mode was investigated:

Operation Mode	The Worst Operating Condition
CDMA Idle (835, 1 900, AWS)	
Camera	○

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit apply to	: CISPR 22 Class B
Result	: Passed by 18.7 dB
Operating condition	: Camera mode
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Temperature	: 23.7 °C
Humidity level	: 37.2 %
Test date	: March 31, 2010

Power Line Conducted Emissions			CISPR 22 Class B		
Frequency (MHz)	Amplitude (dB μ V)	Conductor	Result	Limit (dB μ V)	Margin (dB)
0.2180	44.2	NEUTRAL	Quasi-Peak	63.0	18.7
0.8760	35.8	HOT	Quasi-Peak	56.0	20.2
0.9280	25.9	NEUTRAL	Average	46.0	20.1
1.1680	24.6	HOT	Average	46.0	21.4

※ **NOTE:** Refer to page 9 to page 12 for details.

1. All modes of operation were investigated, and the worst-case emissions are reported.
2. Line H = Hot, Line N = Neutral


HCT

EMC

EUT: A210
 Manufacturer:
 Operating Condition: CAMERA MODE
 Test Site: SHIELD ROOM
 Operator: DS-KIM
 Test Specification: CISPR22 CLASS B
 Comment: H

SCAN TABLE: "CISPR22 CLASS B"

Short Description:		CISPR22 CLASS B				
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3 (20100210)
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3 (20100210)
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3 (20100210)
			Average			

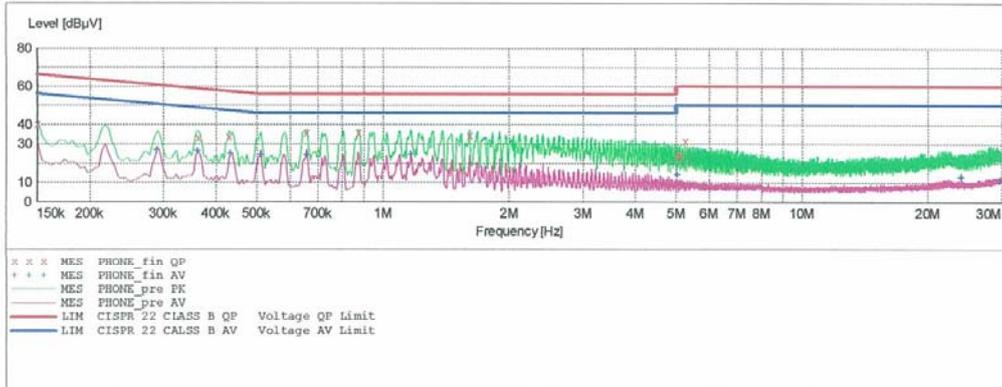

MEASUREMENT RESULT: "PHONE_fin_QP"

3/31/2010 1:27PM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Line	PE
0.150001	40.00	10.1	66	26.0	---	---
0.362001	33.10	10.1	59	25.6	---	---
0.430001	33.90	10.1	57	23.4	---	---
0.656000	35.70	10.1	56	20.3	---	---
0.876000	35.80	10.1	56	20.2	---	---
1.608000	34.50	10.1	56	21.5	---	---
5.032000	24.40	10.4	60	35.6	---	---
5.128000	23.50	10.4	60	36.5	---	---
5.264000	31.40	10.4	60	28.6	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

3/31/2010 1:27PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.290001	26.90	10.0	51	23.6	---	---
0.362001	26.40	10.1	49	22.3	---	---
0.434001	25.00	10.1	47	22.2	---	---
0.512000	24.30	10.1	46	21.7	---	---
0.660000	24.30	10.1	46	21.7	---	---
1.168000	24.60	10.1	46	21.4	---	---
5.044000	14.10	10.4	50	35.9	---	---
24.000000	12.90	11.7	50	37.1	---	---
29.808000	11.30	12.0	50	38.7	---	---


HCT

EMC

EUT: A210
 Manufacturer:
 Operating Condition: CAMERA MODE
 Test Site: SHIELD ROOM
 Operator: DS-KIM
 Test Specification: CISPR22 CLASS B
 Comment: N

SCAN TABLE: "CISPR22 CLASS B"

Short Description:		CISPR22 CLASS B				
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3 (20100210)
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3 (20100210)
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	ESH3 (20100210)
			Average			

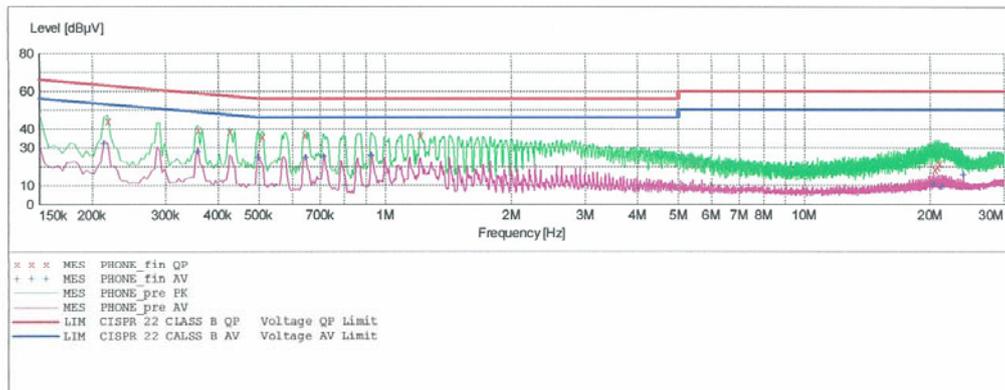

MEASUREMENT RESULT: "PHONE_fin_QP"

3/31/2010 1:23PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.218001	44.20	10.0	63	18.7	---	---
0.358001	39.30	10.1	59	19.4	---	---
0.426001	38.50	10.1	57	18.9	---	---
0.508000	35.70	10.1	56	20.3	---	---
0.644000	36.60	10.1	56	19.4	---	---
1.212000	36.20	10.1	56	19.8	---	---
20.476000	18.40	11.5	60	41.6	---	---
20.760000	20.00	11.5	60	40.0	---	---
20.984000	21.80	11.5	60	38.2	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

3/31/2010 1:23PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.214001	32.00	10.0	53	21.0	---	---
0.358001	27.60	10.1	49	21.1	---	---
0.498001	24.70	10.1	46	21.4	---	---
0.648000	24.70	10.1	46	21.3	---	---
0.716000	25.30	10.1	46	20.7	---	---
0.928000	25.90	10.1	46	20.1	---	---
20.408000	10.70	11.5	50	39.3	---	---
21.336000	9.20	11.6	50	40.8	---	---
24.000000	15.70	11.7	50	34.3	---	---

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Limit apply to : FCC PART 15 Subpart B
 Result : Passed by 7.3 dB
 Operating condition : Camera mode
 Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Temperature : 12.0 °C
 Humidity level : 65.0 %
 Test date : March 31, 2010

Frequency	Reading	Ant. Factor	Cable Loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB/m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
71.7	17.9	10.0	0.9	V	28.8	40.0	11.2
113.4	16.7	10.2	1.2	V	28.1	43.5	15.4
180.3	23.3	11.5	1.4	H	36.2	43.5	7.3
515.0	4.9	17.6	2.4	H	24.9	46.0	21.1
715.7	6.4	21.0	2.9	H	30.3	46.0	15.7
757.5	5.4	22.0	3.0	V	30.4	46.0	15.6

※ **NOTE:**

1. All modes of operation were investigated, and the worst-case emissions are reported.
2. For measurement above 1 GHz, noise level is more than 10 dB below the limit, specified in FCC Part 15.35

4.3 Test Setup Photos

[Conducted Emission]



[Radiated Emission]



5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Number</u>	<u>Next CAL Date</u>
<u>Conducted Emission</u>			
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	2011.02.19
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ESH3-Z5	2011.02.05
<input type="checkbox"/> LISN	Rohde & Schwarz	ENV216	2011.04.06
<input checked="" type="checkbox"/> Attenuator	Rohde & Schwarz	ESH3-Z2	2010.10.30
<u>Radiated Emission</u>			
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	2010.10.30
<input checked="" type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9160	2010.12.18
<input checked="" type="checkbox"/> Antenna Master	HD	MA240	-
<input checked="" type="checkbox"/> Turn Table	EMCO	1060	-
<input type="checkbox"/> Communication Antenna	TDK	LPDA-0802	-
<input type="checkbox"/> Antenna Position Tower	HD	240/520/00	-
<input type="checkbox"/> Base Station	Rohde & Schwarz	CMU 200	2011.02.17
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	2012.04.13
<input checked="" type="checkbox"/> RF-Amplifier	MITEQ	AMF-6D-00101800 -35.20P.PS	2011.05.20
<input type="checkbox"/> Bluetooth Base Station	TESCOM	TC-3000A	2011.01.07

7. CONCLUSION

The data collected shows that the **ZTE CORPORATION, Tri-Band CDMA Phone with Bluetooth (CDMA/PCS CDMA/AWS CDMA), Model: A210** complies with §15.107 and §15.109 of the FCC rules.