

# **FCC Part 15B TEST REPORT**

*of*

## **GSM Dual-band Digital Mobile Phone**

**FCC ID :** Q78-A35PLUS

**Model No. :** ZTE A35+

**Serial No. :** 320173147906

**Report No. :** FCC07-8091

**Date :** December 27, 2007

*Prepared for*

**ZTE Corporation**

Zhongxing Bldg, Hi-Tech Park, Nanshan, Shenzhen, P.R.China

*Prepared by*

**ShenZhen Electronic Product Quality Testing Center**

Electronic Testing Building, Shahe Road, Xili, Nanshan District, ShenZhen, 518055, P.R.China

Tel: 86 755 26627338 Fax: 86 755 26627238

This test report consists of **12** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.



# Table of Contents

- 1 Test Report Certification..... 3
- 2 General Information..... 4
  - 2.1 Description of EUT ..... 4
  - 2.2 Objective ..... 5
  - 2.3 Test Standards and Results ..... 5
  - 2.4 List of Equipments Used ..... 5
  - 2.5 Test Facility ..... 6
  - 2.6 Environmental conditions ..... 6
- 3 Radiated Emission Test..... 7
  - 3.1 Limits of Radiated Emission..... 7
  - 3.2 Test Procedure ..... 7
  - 3.3 Test Setup ..... 8
  - 3.4 EUT Setup and Operating Conditions..... 8
  - 3.5 Test Results..... 9
- Appendix I : Photographs of the EUT..... 11
- Appendix II : Photographs of the Test Configuration..... 12



# 1 Test Report Certification

**Product:** GSM Dual-band Digital Mobile Phone

**FCC ID:** Q78-A35PLUS

**Model No.:** ZTE A35+

**Applicant:** ZTE Corporation

**Applicant Address:** Zhongxing Bldg, Hi-Tech Park, Nanshan, Shenzhen, P.R.China

**Manufacturer:** ZTE Corporation

**Manufacturer Address:** Zhongxing Bldg, Hi-Tech Park, Nanshan, Shenzhen, P.R.China

**Test Standards:** 47 CFR Part 15, Class B

**Test Result:** PASS

We, Shenzhen Electronic Product Quality Testing Center, hereby certify that the submitted samples of the above item, as detailed in chapter 2.1 of this report, has been tested in our facility. The test record, data evaluation and test configuration represented herein are true and accurate accounts of measurements of the sample's EMC characteristics under the conditions herein specified.

Tested by: Sheng Xongpan, Date: Dec. 28, 2007  
Sheng Xongpan

Checked by: Smart Li, Date: Dec 28 2007  
Smart Li

Approved by: Wu Li An, Date: Dec. 28, 2007  
Wu Li An

## 2 General Information

### 2.1 Description of EUT

<b>EUT1</b>	
<b>Description:</b>	GSM Dual-band Digital Mobile Phone
<b>Model No.:</b>	ZTE A35+
<b>Serial No.:</b>	320173147906
<b>Hardware Version:</b>	g3dB
<b>Software Version:</b>	P108A5V1.0.0B04
<b>EUT2</b>	
<b>Description:</b>	Lithium-ion Battery
<b>Model No.:</b>	Li3706T42P3h383857
<b>Serial No.:</b>	N.A.
<b>Manufacturer:</b>	ZTE CORPORATION
<b>Capacitance:</b>	670mAh
<b>Rated Voltage:</b>	3.7V
<b>Extreme Voltage:</b>	High, 4.2V; Low, 3.6V
<b>EUT3</b>	
<b>Description:</b>	AC/DC Adaptor (Charger)
<b>Model No.:</b>	STC-A22O50U8
<b>Serial No.:</b>	100609110005351
<b>Manufacturer:</b>	ZTE CORPORATION
<b>Rated Input:</b>	a.c. 100-240V, 50/60Hz, 200mA
<b>Rated Output:</b>	d.c. 5.0V, 700mA
<b>Length of DC cable:</b>	190cm

#### NOTE:

1. The EUT is Quad-band GSM mobile phone which supports GSM 850MHz and 1900MHz bands.
2. The report is issued as an appendix to test report FCC07-8059 issued by Shenzhen Electronic Product Quality Testing Center on August 27, 2007.
3. Please refer to Appendix I for the photographs of the EUT. For a more detailed features description about the EUT, please refer to User's Manual.
4. ZTE A35+ is identical to ZTE A35 except the new added the FM receiver function
5. ZTE A35 has passed the FCC tests, please refer to the test report: **FCC07-8058** and **FCC07-8059**. Radiated Emission at FM receiver mode was re-tested for ZTE A35+.

## 2.2 Objective

Perform EMC test according to FCC Part 15 Subpart B (Class B digital device).

## 2.3 Test Standards and Results

The EUT has been tested according to 47 CFR Part 15, Radio Frequency Devices (10-1-05 Edition).

Test items and the results are as bellow:

?	FCC Rules	Test Type	Result	Test Date
1	§15.109	Radiated Emission	PASS	2007.12.27

## 2.4 List of Equipments Used

Description	Manufacturer	Model No.	Cal. Due Date	Serial No.
Test Receiver	Rohde & Schwarz	ESIB26	2008.06.02	A0304218
Ultra Broadband Ant.	Rohde & Schwarz	HL562	2008.06.02	A0304224
Universal Radio Communication Tester	Rohde & Schwarz	CMU200	2008.06.02	A0304212
Mobile Phone Tester	Willtek	4403	2008.02.10	0811211
3G Communication Antenna	European Antennas	PSA 75301R/170	2008.06.02	A0304213
Shield Room	Nanbo Tech	Site 3	2008.01.04	A9901141
Anechoic Chamber	Albatross	EMC12.8× 6.8× 6.4(m)	2008.04.10	A0304210

## 2.5 Test Facility

Shenzhen Electronic Product Quality Testing Center (SET) is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS), according to ISO/IEC 17025. The accreditation certificate number is L1659.

The EMC chamber site No.1 (EMC12.8×6.8×6.4(m)), and the radiated and conducted Emission test equipments of SET are constructed and calibrated to meet the FCC requirements ANSI C63.4:2001 and CISPR 22/EN 55022. The FCC Registration Number is **261302**.

The EMC chamber site No.1 (EMC12.8×6.8×6.4(m)) also complies with Canada standard RSS 212, and acceptable to Industry Canada for the performance of radiated measurements. The Industry Canada Registration Number is **IC 5915**.

## 2.6 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa



### 3 Radiated Emission Test

#### 3.1 Limits of Radiated Emission

According to FCC §15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54


**NOTE:**

1. Field Strength (dBµV/m) = 20log Field Strength (µV/m).
2. In the emission tables above, the tighter limit applies at the band edges.

#### 3.2 Test Procedure

- a. The EUT was placed on the top of a ratable 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to the heights from 1 to 4 meters and the ratable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detector Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emission that did not have 10 dB margins would be retested one by one using the quasi-peak method.

### 3.3 Test Setup

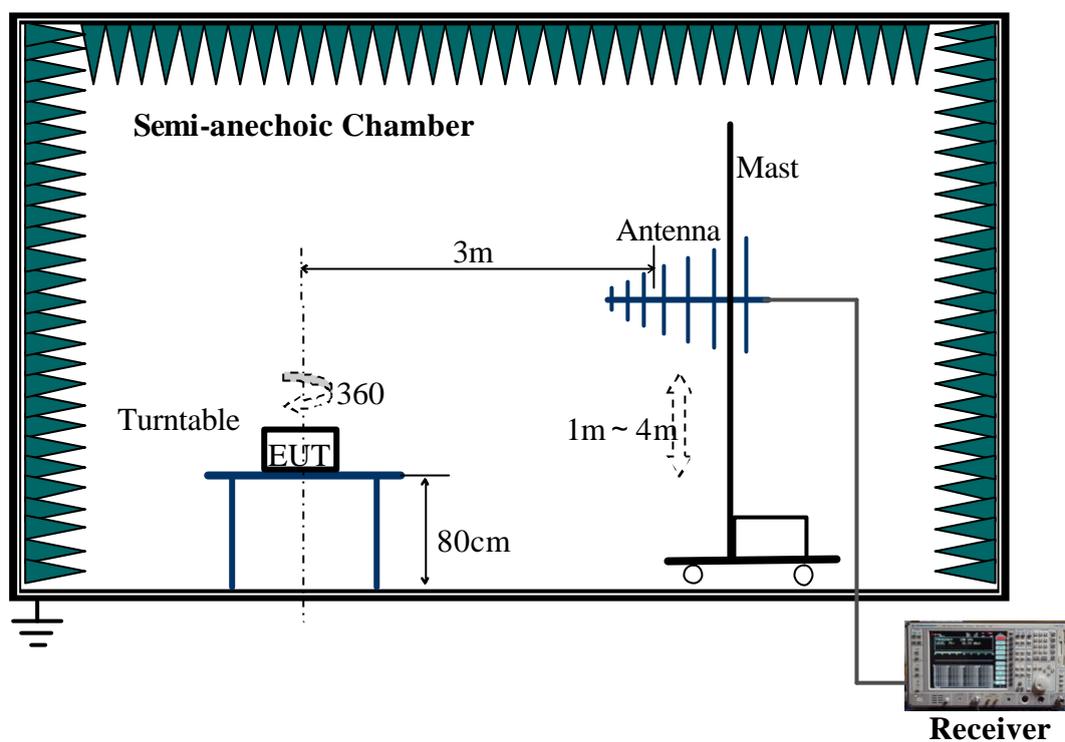

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

### 3.4 EUT Setup and Operating Conditions

The headphone was plugged in the EUT, and the EUT worked in the FM mode.


### 3.5 Test Results

No.	Frequency (MHz)	Antenna Polarization	QP Limits (dBmV/m)	Emission Level (dBmV/m)
1	30.00	Vertical	40	16.16
2	87.5	Vertical	40	7.63
3	100	Vertical	43.5	8.43
4	300	Vertical	46	11.16
5	600	Vertical	46	19.97
6	1000	Vertical	54	28.42
7	30.00	Horizontal	40	16.16
8	87.5	Horizontal	40	7.64
9	100	Horizontal	43.5	8.37
10	300	Horizontal	46	11.09
11	600	Horizontal	46	19.92
12	1000	Horizontal	54	28.38




**Test Plots**

1. Radiation disturbances, maxpeak detector, antenna polarization: Vertical

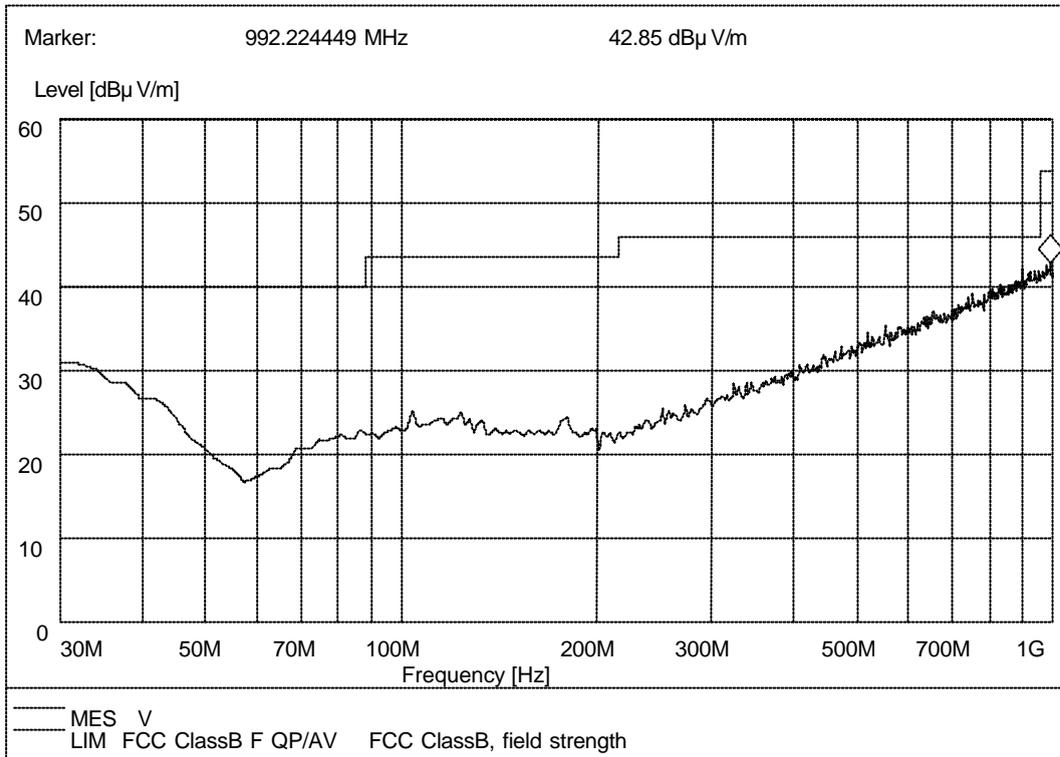

2. Radiation disturbances, maxpeak detector, antenna polarization: Horizontal

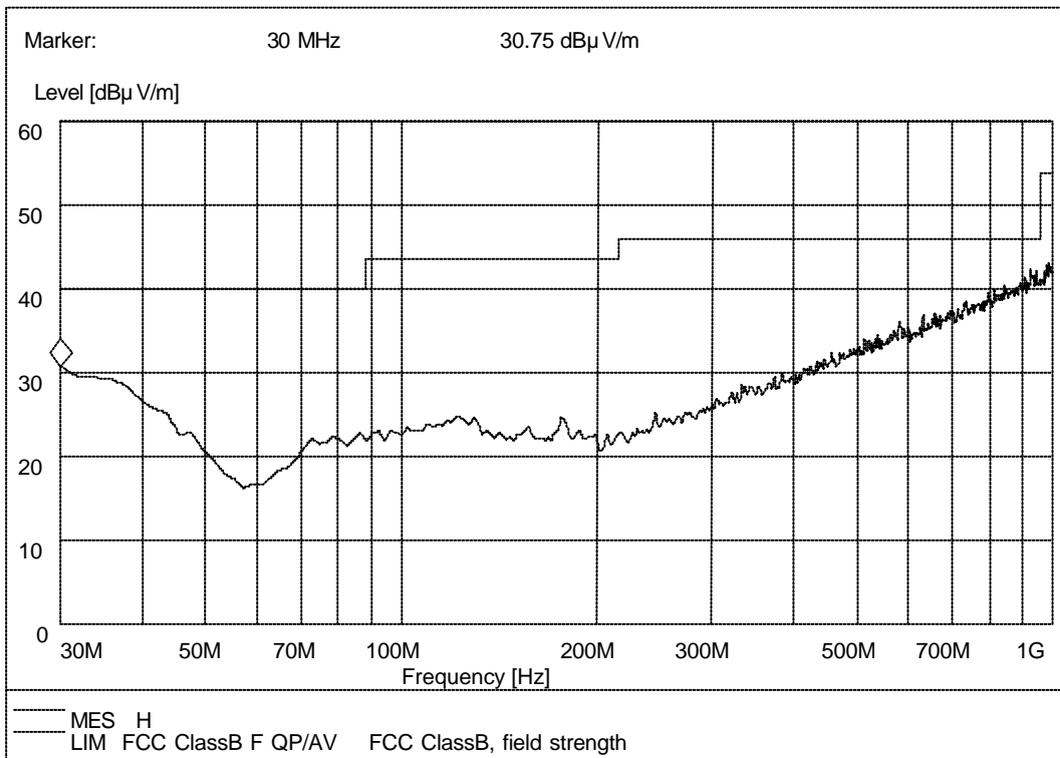

## Appendix I : Photographs of the EUT

### 1. Appearance of the MS



## Appendix II : Photographs of the Test Configuration

### 1. Radiated Emission Test

