

# TEST REPORT

**REPORT NUMBER: I09GC5568-FCC-SAR**

**ON**

**Type of Equipment:** GSM Dual-Band Digital Mobile Phone  
**Type of Designation:** ZTE A712+  
**Manufacturer:** ZTE CORPORATION

**ACCORDING TO**

**FCC Part 2.1093: Radiofrequency radiation exposure evaluation: portable devices, e-CFR March 23, 2006**


**FCC OET Bulletin 65 Supplement C (Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions**

**IEEE Std 1528™-2003: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques**

**China Telecommunication Technology Labs.**

*Month date, year*  
May 19, 2009

*Signature*



He Guili  
**Director**

**FCC ID:** Q78-A712PLUS  
**Report Date:** 2009-05-19

**Test Firm Name:** China Telecommunication Technology Labs  
**Registration Number:** 840587

### Statement

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported tests were carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 2.1093. The sample tested was found to comply with the requirements defined in the applied rules.

## Table of Contents

<b>1. General Information</b> .....	<b>4</b>
1.1 NOTES .....	4
1.2 TESTERS .....	错误! 未定义书签。
1.3 TESTING LABORATORY INFORMATION .....	6
1.4 DETAILS OF APPLICANT OR MANUFACTURER .....	7
<b>2 Test Item</b> .....	<b>8</b>
2.1 GENERAL INFORMATION .....	8
2.2 OUTLINE OF EUT .....	8
2.3 MODIFICATIONS INCORPORATED IN EUT .....	8
2.4 EQUIPMENT CONFIGURATION.....	8
2.5 OTHER INFORMATION .....	9
2.6 EUT PHOTOGRAPHS .....	9
<b>3 Measurement Systems</b> .....	<b>11</b>
3.1 SAR MEASUREMENT SYSTEMS SETUP .....	11
3.2 E-FIELD PROBE .....	12
3.3 PHANTOM .....	13
3.4 DEVICE HOLDER .....	14
<b>4 Test Results</b> .....	<b>15</b>
4.1 OPERATIONAL CONDITION.....	15
4.2 TEST EQUIPMENT USED.....	15
4.3 APPLICABLE LIMIT REGULATIONS .....	16
4.4 TEST RESULTS .....	16
4.5 TEST SETUP AND PROCEDURES .....	16
4.6 TEST ENVIRONMENT AND LIQUID PARAMETERS.....	17
4.7 SYSTEM VALIDATION CHECK .....	18
4.8 MAXIMUM OUTPUT POWER MEASUREMENT .....	20
4.9 TEST DATA .....	21
4.10 MEASUREMENT UNCERTAINTY.....	23
<b>ANNEX A Photographs</b> .....	<b>24</b>
<b>ANNEX B Graphical Plots</b> .....	<b>28</b>
<b>Annex C System Performance Check Graphical Results</b> .....	<b>58</b>
<b>ANNEX D Probes Calibration Certificates</b> .....	<b>66</b>
<b>ANNEX E Deviations from Prescribed Test Methods</b> .....	<b>76</b>

## 1. General Information

### 1.1 Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with the requirements of FCC CFR 47 Part 2.1093.

The test results of this test report relate exclusively to the item(s) tested as specified in section 2.

The following deviations from, additions to, or exclusions from the test specifications have been made. See Annex D.

China Telecommunication Technology Labs.(CTTL) authorizes the applicant or manufacturer (see section 1.4) to reproduce this report provided, and the test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTTL Mr. He Guili.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. CTTL accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

## 1.2 Testers

Name: Li Guoqing  
Position: Engineer  
Department: Department of EMC test  
Signature: 李國慶

### Editor of this test report:

Name: Li Guoqing  
Position: Engineer  
Department: Department of EMC test  
Date: 2009-05-19  
Signature: 李國慶

### Technical responsibility for testing:

Name: Zhang Xia  
Position: Manager  
Department: Department of EMC test  
Date: 2009-05-19  
Signature: 張夏

### 1.3 Testing Laboratory information

#### 1.3.1 Location

Name: China Telecommunication Technology Labs.  
Address: No. 52, Huanyuan Road, Haidian District  
BEIJING  
P. R. CHINA, 100083  
Tel: +86 10 68094053  
Fax: +86 10 68011404  
Email: [emc@chinattl.com](mailto:emc@chinattl.com)

#### 1.3.2 Details of accreditation status

Accredited by: China National Accreditation Service for Conformity  
Assessment (CNAS)  
Registration number: CNAS Registration No. CNAS L0570  
Standard: ISO/IEC 17025:2005

#### 1.3.3 Test location, where different from section 1.3.1

Name: -----  
Street: -----  
City: -----  
Country: -----  
Telephone: -----  
Fax: -----  
Postcode: -----

## 1.4 Details of applicant or manufacturer

### 1.4.1 Applicant

Name: ZTE CORPORATION  
Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial  
Park, Nanshan District, Shenzhen, Guangdong  
Country: China  
Telephone: +86-21-68896835  
Fax: +86-21-50701080  
Contact: Zhangmin  
Telephone: 021-68896835  
Email: Zhang.min13@zte.com.cn

### 1.4.2 Manufacturer (if different from applicant in section 1.4.1)

Name: --  
Address: --

### 1.4.3 Manufactory (if different from applicant in section 1.4.1)

Name: --  
Address: --

## 2 Test Item

### 2.1 General Information

Manufacturer: ZTE CORPORATION  
 Name: GSM Dual-Band Digital Mobile Phone  
 Model Number: ZTE A712+  
 Serial Number: --  
 Production Status: Product  
 Receipt date of test item: 2009-05-04

### 2.2 Outline of EUT

E.U.T. is a GSM Dual-Band Digital Mobile Phone supporting GSM 850 and 1900 bands.

### 2.3 Modifications Incorporated in EUT

The EUT has not been modified from what is described by the brand name and unique type identification stated above.

### 2.4 Equipment Configuration

Equipment configuration list:

Item	Generic Description	Manufacturer	Type	Serial No.	Remarks
A	handset	ZTE CORPORATION	ZTE A712+	--	None
B	adapter	Shenzhen Ruide Electronic Industrial Co.,Ltd	STC-A22050U8 -A	--	None
C	battery	CosLight/Ruide/BYD/Li shen	Li3707T42P3h4 63848	--	None
D	Earphone	Full-Sound (Dongguan) Electrical Products Ltd .	HMZ1-U8	--	None

Cables:

Item	Cable Type	Manufacturer	Length	Shield	Quantity	Remarks
1	DC cable on Adapter	Unknown	1.0m	No	1	None

## 2.5 Other Information

Version of hardware and software:

HW Version: g3xA

SW Version: EFSP-BS-P108B1(U)V1.0.0B01

Adaptor information:

Input: 100-240VAC 50-60Hz 200mA

Output: 5.0V 700mA

Battery information:

3.7VDC

## 2.6 EUT Photographs



Front view with clip colse



Front view with clip open




Back view

### 3 Measurement Systems

#### 3.1 SAR Measurement Systems Setup

All measurements were performed using the automated near-field scanning system, DASY5, from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision industrial robot which positions the probes with a positional repeatability of better than 0.02mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit.

A cell controller system containing the power supply, robot controller, teach pendant (Joystick) and remote control, is used to drive the robot motors. The PC consists of the Micron Pentium III 800 MHz computer with Windows 2000 system and SAR Measurement Software DASY5, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc., which is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical signal to digital electric signal of the DAE and transfers data to the PC plug-in card.

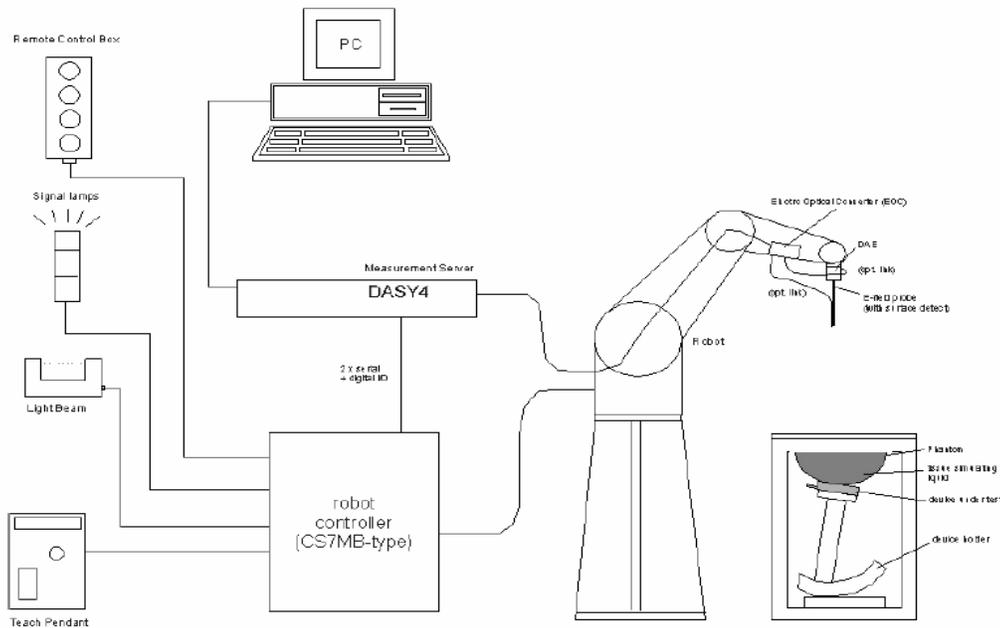

Demonstration of measurement system setup

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is

accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built-in VME-bus computer.

### 3.2 E-field Probe

#### 3.2.1 E-field Probe Description

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the standard procedure with an accuracy of better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ .

Items	Specification
Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection System Built-in shielding against static charges PEEK enclosure material(resistant to organic solvents, e.g., glycol)
Calibration	In air from 10 MHz to 2.5 GHz In brain and muscle simulating tissue at frequencies of 450MHz, 900MHz and 1.8GHz (accuracy $\pm 8\%$ ) Calibration for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 3 GHz)
Directivity	$\pm 0.2$ dB in brain tissue (rotation around probe axis) $\pm 0.4$ dB in brain tissue (rotation normal probe axis)
Dynamic Range	5u W/g to > 100mW/g; Linearity: $\pm 0.2\text{dB}$
Surface Detection	$\pm 0.2$ mm repeatability in air and clear liquids over diffuse reflecting surface
Dimensions	Overall length: 330mm Tip length: 16mm Body diameter: 12mm Tip diameter: 6.8mm Distance from probe tip to dipole centers: 2.7mm
Application	General dosimetry up to 3GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

### 3.2.2 E-field Probe Calibration

The Annex C is the copy of the calibration certificate of the used probes.

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The free-space E-field measured in the medium correlates to temperature increase in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

$\Delta T$  = Temperature increase due to RF exposure.

Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:

$\sigma$  = Simulated tissue conductivity,

$\rho$  = Tissue density ( $\text{kg}/\text{m}^3$ ).

### 3.3 Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Specifications:

Shell Thickness:  $2 \pm 0.1\text{mm}$

Filling Volume: Approx. 20 liters

Dimensions: 810 x 1000 x 500 mm (H x L x W)

Liquid depth when testing: at least 150 mm

### 3.4 Device Holder

In combination with the Generic Twin Phantom V3.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeat ably positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom etc).

TTL Test Report

## 4 Test Results

### 4.1 Operational Condition

**Specifications** FCC OET 65C (01-01), IEEE Std 1528™-2003

**Date of Tests** 2009-05-13/15/16/18

**Operation Mode** TX at the highest output peak power level

**Method of measurement:** FCC OET 65C (01-01), IEEE Std 1528™-2003

### 4.2 Test Equipment Used

ITEM	TYPE	S/N	CALIBRATION DATE	DUE DATE
probe	ES3DV3	3170	2008-05-30	2009-05-29
DAE	DAE4	797	2009-04-17	2010-04-16
dipole	D900V2	1d059	2009-04-14	2010-04-13
dipole	D1800V2	2d153	2009-04-15	2010-04-15
Power Meter	NRVS	10023	2009-01-09	2010-01-08
Power Meter	NRVS	10085	2009-01-09	2010-01-08
CMU200	Wireless Communication Test Set	109172	2009-04-08	2010-04-07
Radio Communication Analyzer	8820B	6220772659	NA	NA
Signal Generator	SMP04	1035.5005.04	NA	NA
Power Sensor	NRV-Z32	836471/003	2009-01-09	2010-01-08
Power Sensor	NRV-Z32	836471/004	2009-01-09	2010-01-08
Power Amplifier	150W1000	150W1000	NA	NA
Attenuator	2	BK9045	NA	NA
Attenuator	2	BK8960	NA	NA
Attenuator	2	BL1250	NA	NA
Attenuator	2	BK774	NA	NA
Dual directional coupler	4242-20	NA	NA	NA
Probe kit	85070E	3G-S-00139	NA	NA
Network Analyzer	E8362B	N069	NA	NA

### 4.3 Applicable Limit Regulations

Item	Limit Level
Local Specific Absorption Rate (SAR) (1g)	1.6W/kg

### 4.4 Test Results

The EUT complies.

**Note:**

All measurements are traceable to national standards.

### 4.5 Test Setup and Procedures

#### 4.5.1 Test Setup

The test setup is showed in the annex A.

Configurations	pictures no. in Annex A
Head Right Cheek position:	1
Head Right tilt position:	2
Head Left Cheek position:	3
Head Left Tilt position:	4
Body back to the phantom, flip open, with earphone:	5
Body back to the phantom, flip close, with earphone:	6
Body face to the phantom, flip open, with earphone:	7
Body face to the phantom, flip close, with earphone:	8

#### 4.5.2 Test distance for body-worn mode

The distance between the handset and the bottom of the flat section is 15 mm.

#### 4.5.3 Duty Factor and Crest Factor

For GSM mode, the duty factor is 1:8.3 and the crest factor is 8.3.

#### 4.5.4 Test procedure for head mode:

The evaluation was performed according to the following procedure:

Step 1: The SAR value at a fixed location above the ear point was measured and was used as a reference value for assessing the power drift.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the EUT and the horizontal grid spacing was 15 mm x 15 mm. Based on these data, the area of the maximum absorption was determined by interpolation.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7 x 7 x 7 points with the 5 mm grid spacing. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

- a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on the least square algorithm. A polynomial of the fourth order was calculated through the points in z-axis. This polynomial was then used to evaluate the points between the surface and the probe tip.
- b. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x ~ y and z-directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.
- c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation should be repeated.

#### 4.5.5 Test procedure for body-worn mode

Step 1: For one configuration, test the middle channel of each of the front side and back side mode with the 15 mm distance between the handset and the bottom of the phantom, including slip open and close. Find out the worst case.

Step 2: For the worst case of step 1, test the low and high channel.

Step 3: Find out the worst case of step 1 and 2, and for this case, test the mode with Bluetooth on, and then with earphone using voice traffic mode.

Step 4: Repeat all the above steps for other configurations.

### 4.6 Test Environment and Liquid Parameters

#### 4.6.1 Test Environment

Date	Ambient humidity (%)	Ambient temperature (°C)	Liquid temperature (°C)
standard	30~70	20~25	20~24
2009-05-18	35.5	22.2	22.0
2009-05-13	30.9	22.3	22.5
2009-05-15	41.8	21.0	21.5
2009-05-16	36.1	22.7	22.5

#### 4.6.2 Liquid Recipe

INGREDIENTS	TISSUE TYPE			
	835MHz Head	835MHz body	1900MHz Head	1900MHz body
Water	40.29	50.75	55.24	70.17
DGBE	0	0	44.45	29.44
Sugar	57.90	48.21	0	0
Salt	1.38	0.94	0.31	0.39
Cellulose	0.24	0.00	0	0
Preventol	0.18	0.10	0	0

#### 4.6.2 Liquid Parameters

Frequency (MHz)	Tissue Type	Description	Dielectric Parameters	
			permittivity	conductivity (S/m)
835	Head	Target	41.5	0.9
		±5% window	39.43~43.58	0.855~0.945
		2009-05-18	40.73	0.92
1900	Head	Target	40	1.4
		±5% window	38.00~42.00	1.33~1.47
		2009-05-13	39.68	1.47
835	Body	Target	55.2	0.97
		±5% window	52.25~57.75	0.92~1.02
		2009-05-15	53.82	1.00
1900	Body	Target	53.3	1.52
		±5% window	50.635~55.965	1.444~1.596
		2009-05-16	50.97	1.53

#### 4.7 System Validation Check

##### Validation Method:

The setup of system validation check or performance check is demonstrated as figure 5. The amplifier, low pass filter and attenuators are optional. The dipole shall be positioned and centered below the phantom, paralleling to the longest side of the phantom. A low loss and low dielectric constant spacer on the dipole may be used to guarantee the correct distance between the dipole top surface and the phantom bottom surface.

The separation  $d$ , which is defined as the distance from the liquid bottom surface to

the dipole's central axis at location of the feed-point, should be as following: for 835 MHz dipole,  $d = 15$  mm, and for 1900 MHz dipole,  $d = 10$  mm, and this can be obtained using two different size spacer. The dipole arms shall be parallel to the flat phantom surface.

First the power meter PM1 is connected to the cable and it measures the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the (Att1) value) and the power meter PM2 is read at that level. Then after connecting the cable to the dipole, the signal generator is readjusted for the same reading at the power meter PM2.

The system validation check procedures are the same as all measurement procedures used for compliance tests. A complete 1 g averaged SAR measurement is performed using the flat part of the phantom. The reference dipole input power is adjusted to produce a 1 g averaged SAR value falling in the range of 0.4 – 10 mW/g. The 1 g averaged SAR is measured at 835 MHz and 1900 MHz using corresponding dipole respectively. Then the results are normalized to 1 W forward input power and compared with the reference SAR values.

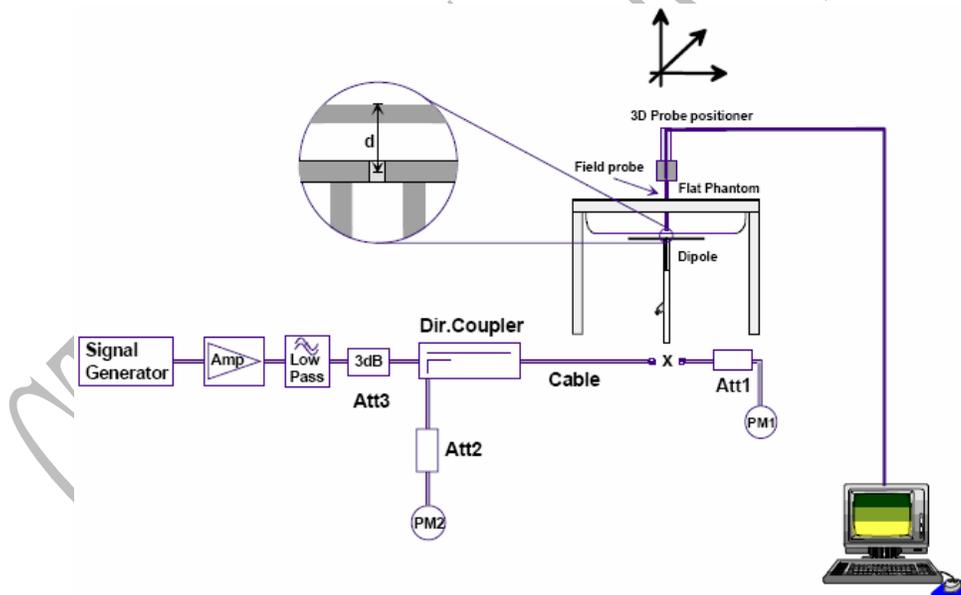


Figure 5 Illustration of system validation test setup

**Validation Results**

Date:	Frequency (MHz)	Tissue Type	Input Power	Targeted (SAR1g)	Measured (SAR1g)	Deviation (%)
2009-05-18	835	Head	250	9.06	9.80	8.2%
2009-05-13	1900	Head	250	39.7	39.72	0.05%
2009-05-15	835	Body	250	9.36	9.52	1.7%
2009-05-16	1900	Body	250	37.5	36.6	-2.4%

### 4.8 Maximum Output Power Measurement

According to FCC OET 65c, maximum output power shall be measured before and after each SAR test. The test setup and method are described as following.

Test setup

The output power measurement test setup is demonstrated as figure 6.

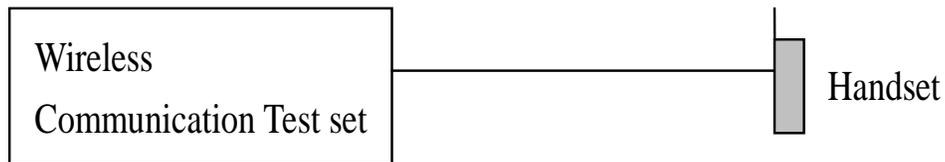


Figure 6 Demonstration of power measurement

The power control level settings and measurement value are as following table.

mode	PCL setting	Permissible max.values	Channel[low]	Channel[mid]	Channel[high]
GSM 850	5	33dBm	31.7dBm	31.6 dBm	31.8 dBm
			824.20MHz	836.60 MHz	848.80 MHz
PCS 1900	0	30dBm	29.3dBm	28.9dBm	29.1dBm
			1850.2 MHz	1880.0 MHz	1909.8 MHz

## 4.9 Test Data

### 4.9.1 Test Data for Head mode

GSM 850 head

Test configuration	Test position	SAR <sub>1g</sub> [W/kg] / Power Drift [dB]		
		Channel 128[low] 824.20 MHz	Channel 190[Mid] 836.60 MHz	Channel 251 [high] 848.80 MHz
Right side of Head	Cheek	1.17 / -0.037	<b>1.31 / -0.169</b>	1.05 / 0.082
	Tilted	- / -	0.234 / -0.031	- / -
Left side of Head	Cheek	1.12 / -0.034	1.03 / 0.072	0.791 / 0.173
	Tilted	- / -	0.147 / -0.135	- / -

GSM 1900 head

Test configuration	Test position	SAR <sub>1g</sub> [W/kg] / Power Drift [dB]		
		Channel 512[low] 1850.2 MHz	Channel 661[Mid] 1880.0 MHz	Channel 810 [high] 1909.8 MHz
Right side of Head	Cheek	1.2 / -0.11	1.29 / 0.025	<b>1.51 / -0.047</b>
	Tilted	- / -	0.419 / -0.117	- / -
Left side of Head	Cheek	1.08 / 0.2	1.18 / 0.187	<b>1.51 / -0.082</b>
	Tilted	- / -	0.461 / 0.004	- / -

### 4.9.2 Test Data for Body-Worn mode

#### GSM 850 body

Test configuration	Test position	SAR <sub>1g</sub> [W/kg] / Power Drift [dB]				
		Channel 128[low] 824.20 MHz		Channel 190[Mid] 836.60 MHz		Channel 251 [high] 848.80 MHz
face side with earphone, flip open	15mm	-	-	0.132	-0.013	- / -
Back side with earphone, flip open	15mm	0.422	0.082	<b>0.467</b>	<b>0.125</b>	0.226 / 0.013
face side with earphone, flip close	15mm	-	-	0.155	0.037	- / -
Back side with earphone, flip close	15mm	0.666	-0.062	0.371	0.044	<b>0.682</b> <b>0.102</b>

#### GSM 1900 body

Test configuration	Test position	SAR <sub>1g</sub> [W/kg] / Power Drift [dB]				
		Channel 512[low] 1850.2 MHz		Channel 661[Mid] 1880.0 MHz		Channel 810 [high] 1909.8 MHz
face side with earphone, flip open	15mm	-	-	0.087	0.000	- / -
Back side with earphone, flip open	15mm	0.205	0.004	0.108	0.037	<b>0.214</b> / <b>-0.033</b>
face side with earphone, flip close	15mm			0.095	0.017	
Back side with earphone, flip close	15mm	0.171	-0.076	0.249	0.124	<b>0.371</b> <b>0.065</b>


### 4.10 Measurement uncertainty

ERROR SOURCE	Uncertainty value (%)	Probability distribution	Divisor	$c_i$ (1g)	Standard Uncertainty (%)
<b>Measurement equipment</b>					
Probe calibration	5.9	Normal	1	1	5.9
Probe axial isotropy	4.7	Rectangular	$\sqrt{3}$	0.7	1.9
Probe hemispherical isotropy	9.6	Rectangular	$\sqrt{3}$	0.7	3.9
Probe linearity	4.7	Rectangular	$\sqrt{3}$	1	2.7
Detection limits	0.25	Rectangular	$\sqrt{3}$	1	0.6
Boundary effect	0.8	Rectangular	$\sqrt{3}$	1	0.6
Measurement device	0.3	Normal	1	1	0.3
Response time	0.0	Normal	1	1	0
Noise	0.0	Normal	1	1	0
Integration time	1.7	Normal	1	1	2.6
<b>Mechanical constraints</b>					
Scanning system	1.5	Rectangular	$\sqrt{3}$	1	0.2
Positioning of the probe	2.9	Normal	1	1	2.9
Phantom shell	4.0	Rectangular	$\sqrt{3}$	1	2.3
Positioning of the dipole	2.0	Normal	1	1	2.0
Positioning of the phone	2.9	Normal	1	1	2.9
Device holder disturbance	3.6	Normal	1	1	3.6
<b>Physical parameters</b>					
Liquid conductivity (deviation from target)	5.0	Rectangular	$\sqrt{3}$	0.5	1.4
Liquid conductivity (measurement error)	4.3	Rectangular	$\sqrt{3}$	0.5	1.2
Liquid permittivity (deviation from target)	5.0	Rectangular	$\sqrt{3}$	0.5	1.4
Liquid permittivity (measurement error)	4.3	Rectangular	$\sqrt{3}$	0.5	1.2
Drifts in output power of the phone, probe, temperature and humidity	5.0	Rectangular	$\sqrt{3}$	1	2.9
Environment disturbance	3.0	Rectangular	$\sqrt{3}$	1	1.7
<b>Post-processing</b>					
SAR interpolation and extrapolation	0.6	Rectangular	$\sqrt{3}$	1	0.6
Maximum SAR evaluation	1.0	Rectangular	$\sqrt{3}$		0.6
Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^m c_i^2 \cdot u_i^2} = 11.08\%$				
Expanded uncertainty (confidence interval of 95%)	Normal $u_e = 1.96u_c = 21.7\%$				

## ANNEX A Photographs




Picture 1: Head Right Cheek position

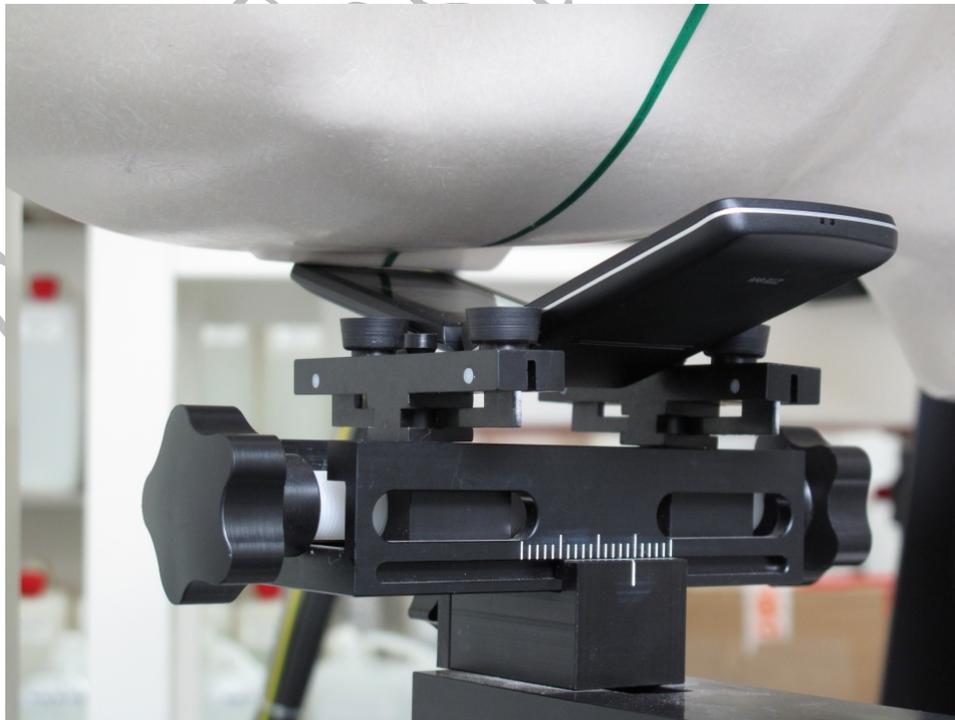


Picture 2: Head Right tilt position



Picture 3: Head Left Cheek position

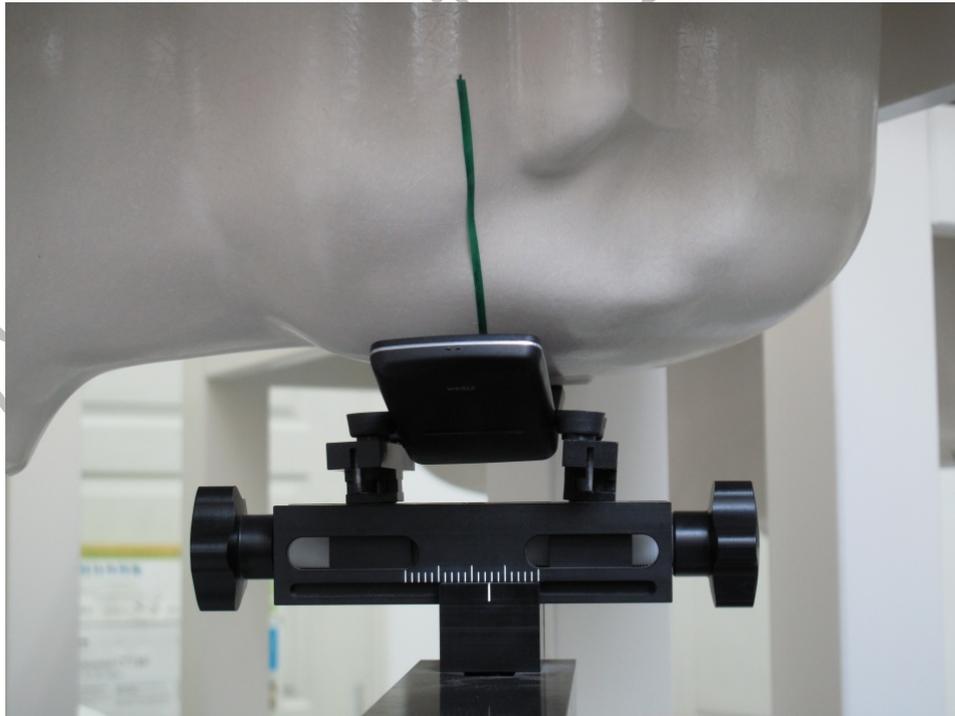

Picture 4: Head Left Tilt position

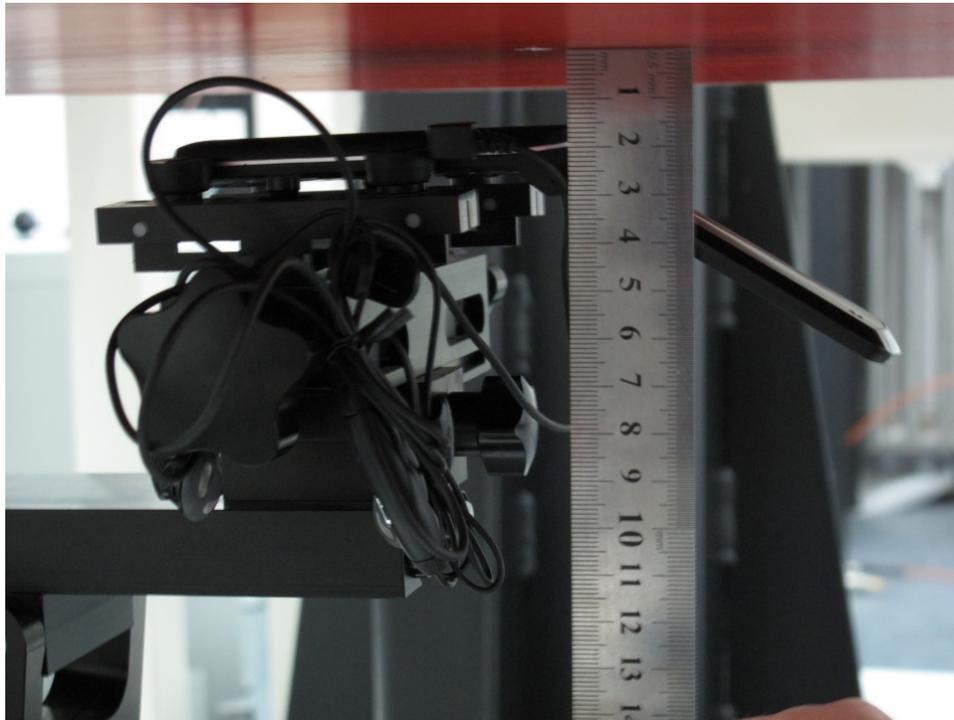

Picture 5: Body back to the phantom, flip open, with earphone



Picture 6: Body back to the phantom, flip close, with earphone



Picture 7: Body face to the phantom, flip open, with earphone



Picture 8: Body face to the phantom, flip close, with earphone

## ANNEX B Graphical Plots

### B.1 Head GSM 850 band, low channel, right cheek position

Test Laboratory: CTTL

ZTE712p\_right cheek\_GSM850\_low

DUT: ZTE\_A712p; Type: --; Serial: --

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3  
Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.908$  mho/m;  $\epsilon_r = 40.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(6.13, 6.13, 6.13); Calibrated: 5/30/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2009-04-17
- Phantom: West SAM; Type: SAM;
- Measurement SW: DASY5, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

**gsm\_TOUCH\_Right Low 2/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:

$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 6.48 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 1.7 W/kg


**SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.765 mW/g**

Maximum value of SAR (measured) = 1.26 mW/g

**gsm\_TOUCH\_Right Low 2/Area Scan (121x41x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 1.26 mW/g

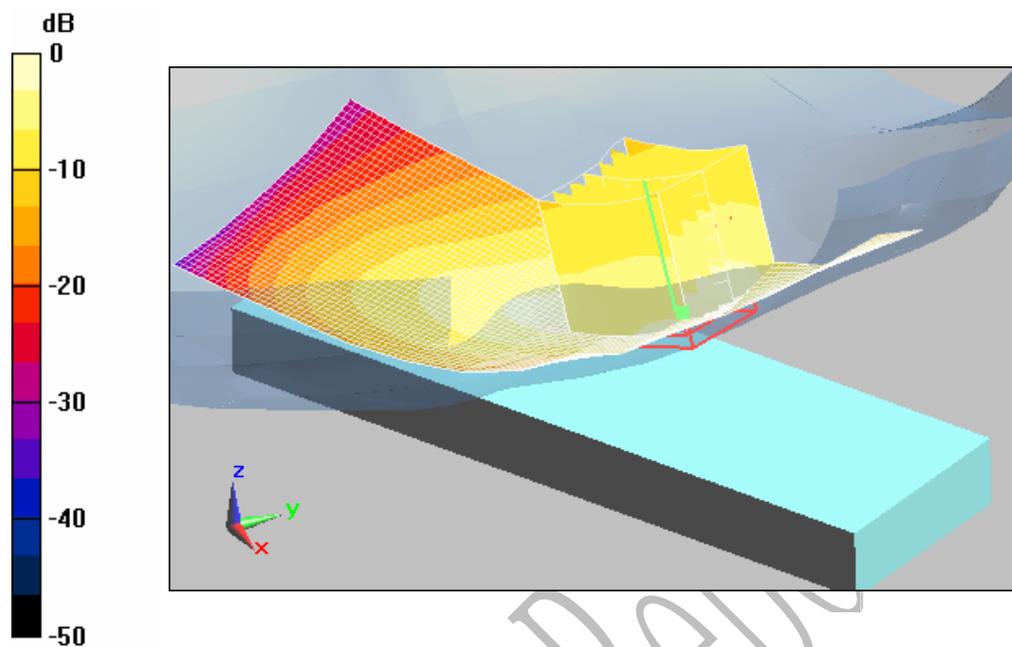

0 dB = 1.26mW/g

TTL Test Report

## B.2 head GSM 850 band, middle channel, right cheek position – Maximum SAR of Head 850 band

Test Laboratory: CTTL

ZTE712p\_right cheek\_GSM850\_mid

DUT: ZTE\_A712p; Type:---; Serial: --

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.928$  mho/m;  $\epsilon_r = 41.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(6.13, 6.13, 6.13); Calibrated: 5/30/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2009-04-17
- Phantom: West SAM; Type: SAM;
- Measurement SW: DASYS, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

**gsm\_Touch\_Right mid/Area Scan (121x41x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.43 mW/g

**gsm\_Touch\_Right mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.75 V/m; Power Drift = -0.169 dB

Peak SAR (extrapolated) = 1.98 W/kg

**SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.827 mW/g**

Maximum value of SAR (measured) = 1.42 mW/g

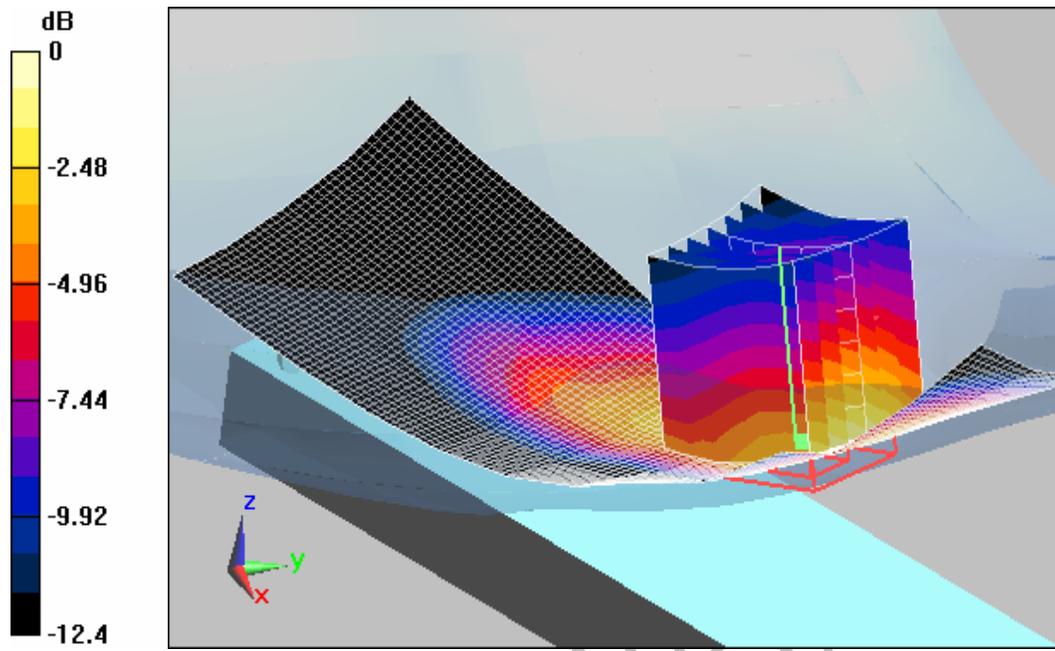

0 dB = 1.42mW/g

TTL TEST REPORT

### B.3 Head GSM 850 band, high channel, right cheek position

Test Laboratory: CTTL

ZTE712p\_right cheek\_GSM850\_high

DUT: ZTE\_A712p; Type: --; Serial: --

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.932$  mho/m;  $\epsilon_r = 40.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section  
Measurement Standard: DASY5 (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(6.13, 6.13, 6.13); Calibrated: 5/30/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2009-04-17
- Phantom: West SAM; Type: SAM;
- Measurement SW: DASY5, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

**gsm\_Touch\_Right High/Zoom Scan (7x7x6)/Cube 0:** Measurement grid:

$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 3.96 V/m; Power Drift = 0.082 dB

Peak SAR (extrapolated) = 1.58 W/kg


**SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.666 mW/g**

Maximum value of SAR (measured) = 1.15 mW/g

**gsm\_Touch\_Right High/Area Scan (121x41x1):** Measurement grid:  $dx=15$ mm,

$dy=15$ mm

Maximum value of SAR (interpolated) = 1.13 mW/g

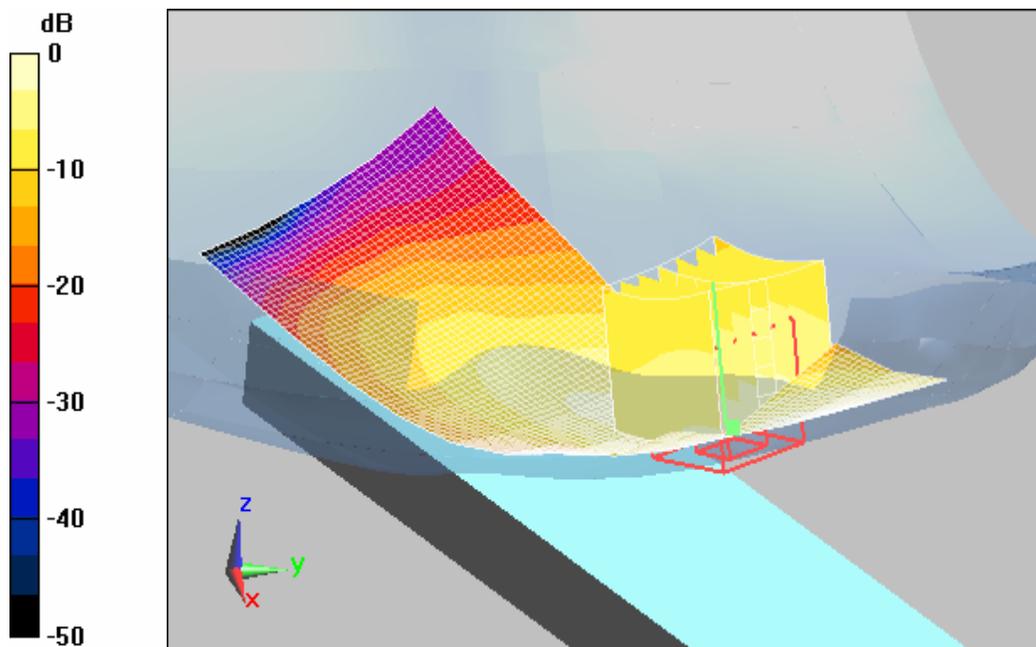

0 dB = 1.13mW/g

TTL TEST REPORT

## B.4 Head GSM 850 band, low channel, Left cheek position

Test Laboratory: CTTL

ZTE712p\_left cheek\_GSM850\_low

DUT: ZTE\_A712p; Type: --; Serial: --

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3  
Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.908$  mho/m;  $\epsilon_r = 40.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(6.13, 6.13, 6.13); Calibrated: 5/30/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2009-04-17
- Phantom: West SAM; Type: SAM;
- Measurement SW: DASYS, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

PCS\_Touch\_Left\_LOW/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 9.24 V/m; Power Drift = -0.034 dB


Peak SAR (extrapolated) = 1.55 W/kg

**SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.740 mW/g**

Maximum value of SAR (measured) = 1.19 mW/g

PCS\_Touch\_Left\_LOW/Area Scan (121x41x1): Measurement grid:  $dx=15$ mm,  
 $dy=15$ mm

Maximum value of SAR (interpolated) = 1.24 mW/g

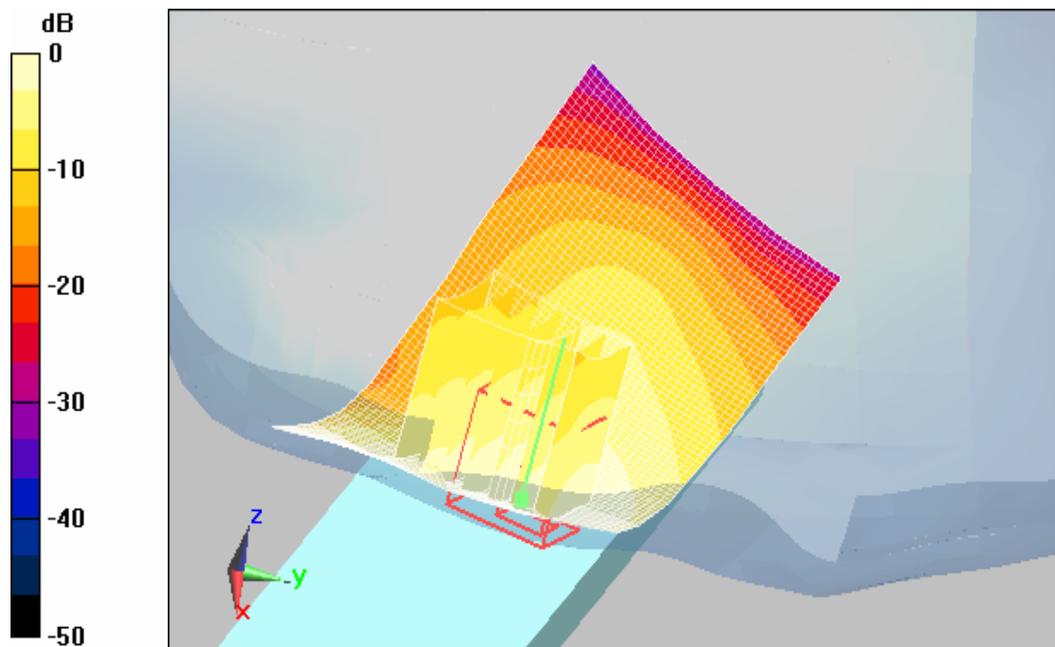

0 dB = 1.24mW/g

TTL TEST REPORT

## B.5 Head GSM 850 band, middle channel, Left cheek position

Test Laboratory: CTTL

ZTE712p\_left cheek\_GSM850\_mid

DUT: ZTE\_A712p; Type: --; Serial: --

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.928$  mho/m;  $\epsilon_r = 41.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(6.13, 6.13, 6.13); Calibrated: 5/30/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2009-04-17
- Phantom: West SAM; Type: SAM;
- Measurement SW: DASYS, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

**900\_Touch\_Left\_MID/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:

$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 5.39 V/m; Power Drift = 0.072 dB

Peak SAR (extrapolated) = 1.45 W/kg


**SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.686 mW/g**

Maximum value of SAR (measured) = 1.12 mW/g

**900\_Touch\_Left\_MID/Area Scan (121x41x1):** Measurement grid:  $dx=15$ mm,

$dy=15$ mm

Maximum value of SAR (interpolated) = 1.19 mW/g

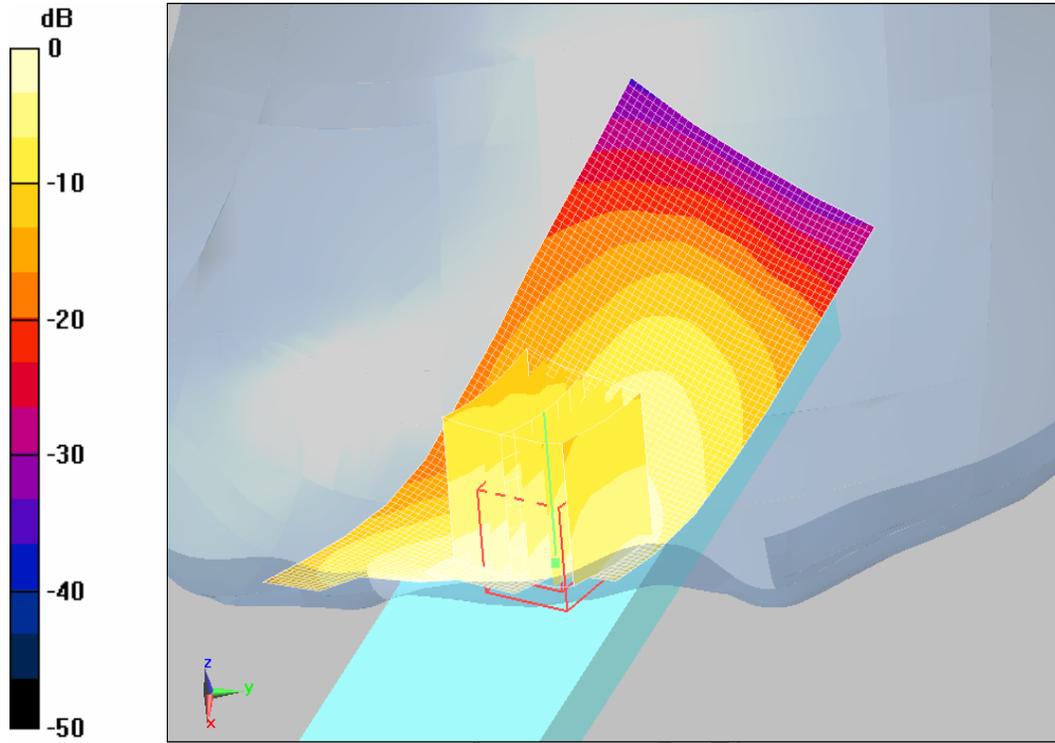

0 dB = 1.19mW/g

TTL TEST

## B.6 Head PCS 1900 band, low channel, Right cheek position

Test Laboratory: CTTL

ZTE712p\_right cheek\_PCS1900\_low

DUT: ZTE\_A712p; Type: --; Serial: --

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3  
Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.42$  mho/m;  $\epsilon_r = 40.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(5.02, 5.02, 5.02); Calibrated: 5/30/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2009-04-17
- Phantom: North SAM; Type: SAM; Serial: TP-1472
- Measurement SW: DASYS, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

PCS\_Touch\_Right\_low/Area Scan (121x41x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.29 mW/g

PCS\_Touch\_Right\_low/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.33 V/m; Power Drift = -0.110 dB

Peak SAR (extrapolated) = 1.91 W/kg

**SAR(1 g) = 1.2 mW/g; SAR(10 g) = 0.662 mW/g**

Maximum value of SAR (measured) = 1.3 mW/g

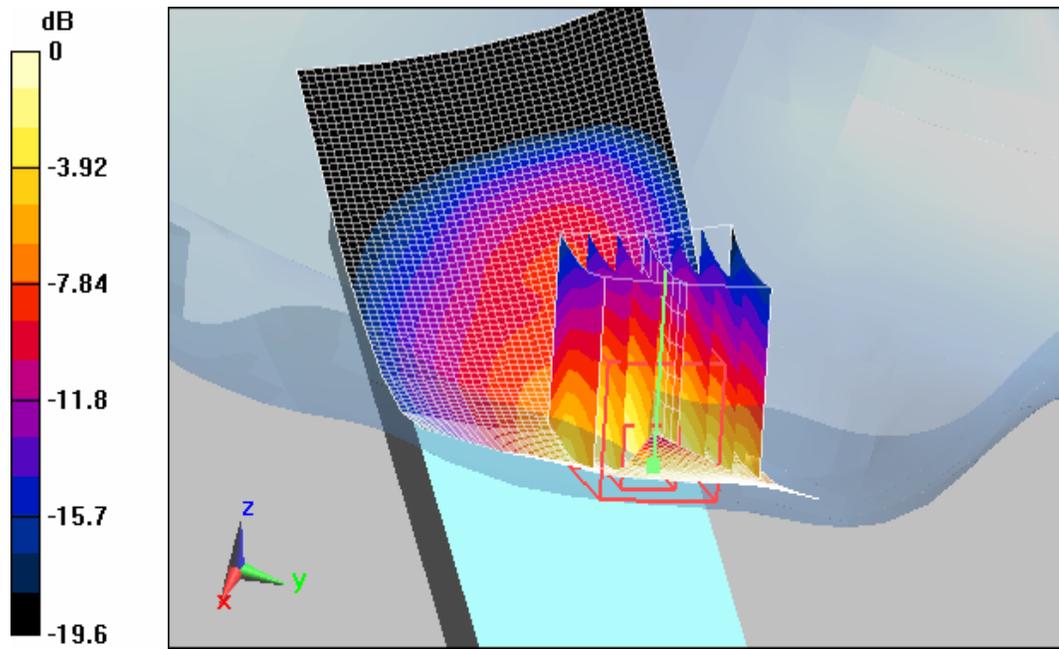

0 dB = 1.3mW/g

TTL Test Report

## B.7 Head PCS 1900 band, middle channel, Right cheek position

Test Laboratory: CTTL

ZTE712p\_right cheek\_PCS1900\_mid

DUT: ZTE\_A712p; Type:--; Serial: --

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.45$  mho/m;  $\epsilon_r = 40.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section  
Measurement Standard: DASY5 (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(5.02, 5.02, 5.02); Calibrated: 5/30/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2009-04-17
- Phantom: North SAM; Type: SAM; Serial: TP-1472
- Measurement SW: DASY5, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

**PCS\_Touch\_Right mid/Area Scan (121x41x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.41 mW/g


**PCS\_Touch\_Right mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.29 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 2.06 W/kg

**SAR(1 g) = 1.29 mW/g; SAR(10 g) = 0.708 mW/g**

Maximum value of SAR (measured) = 1.42 mW/g

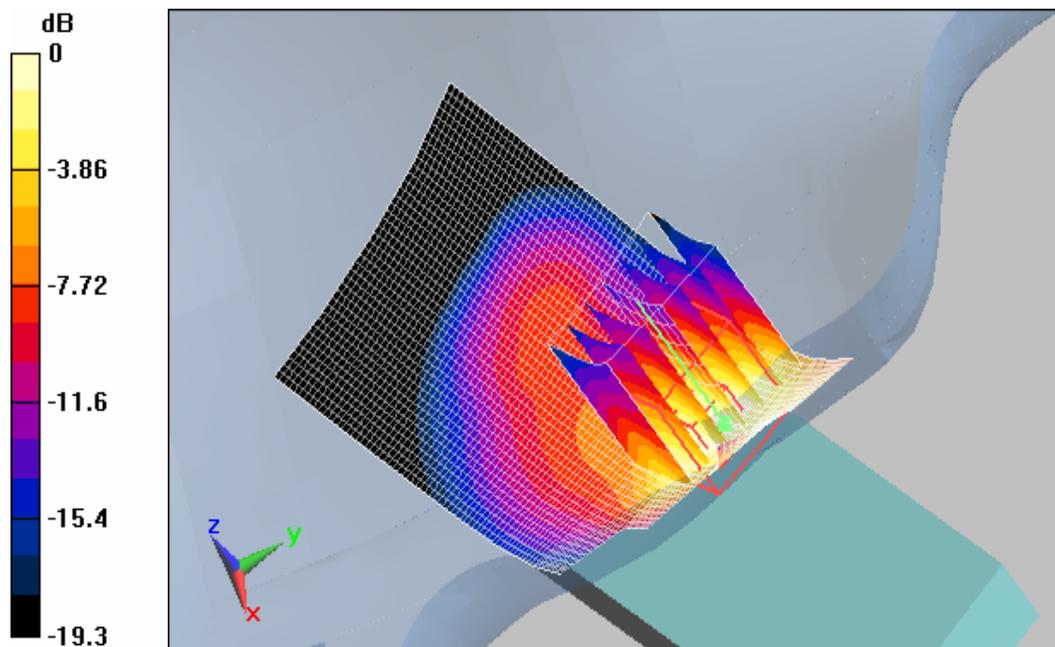

0 dB = 1.42mW/g

TTL TEST REPORT

## B.8 Head PCS 1900 band, high channel, Right cheek position – Maximum SAR of head 1900 band

Test Laboratory: CTTL

ZTE712p\_right cheek\_PCS1900\_high

DUT: ZTE\_A712p; Type: --; Serial: --

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.48$  mho/m;  $\epsilon_r = 40.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(5.02, 5.02, 5.02); Calibrated: 5/30/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2009-04-17
- Phantom: North SAM; Type: SAM; Serial: TP-1472
- Measurement SW: DASYS, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

**PCS\_Touch\_Right High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:

$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 3.95 V/m; Power Drift = -0.047 dB


Peak SAR (extrapolated) = 2.42 W/kg

**SAR(1 g) = 1.51 mW/g; SAR(10 g) = 0.821 mW/g**

Maximum value of SAR (measured) = 1.66 mW/g

**PCS\_Touch\_Right High/Area Scan (121x41x1):** Measurement grid:  $dx=15$ mm,  
 $dy=15$ mm

Maximum value of SAR (interpolated) = 1.54 mW/g

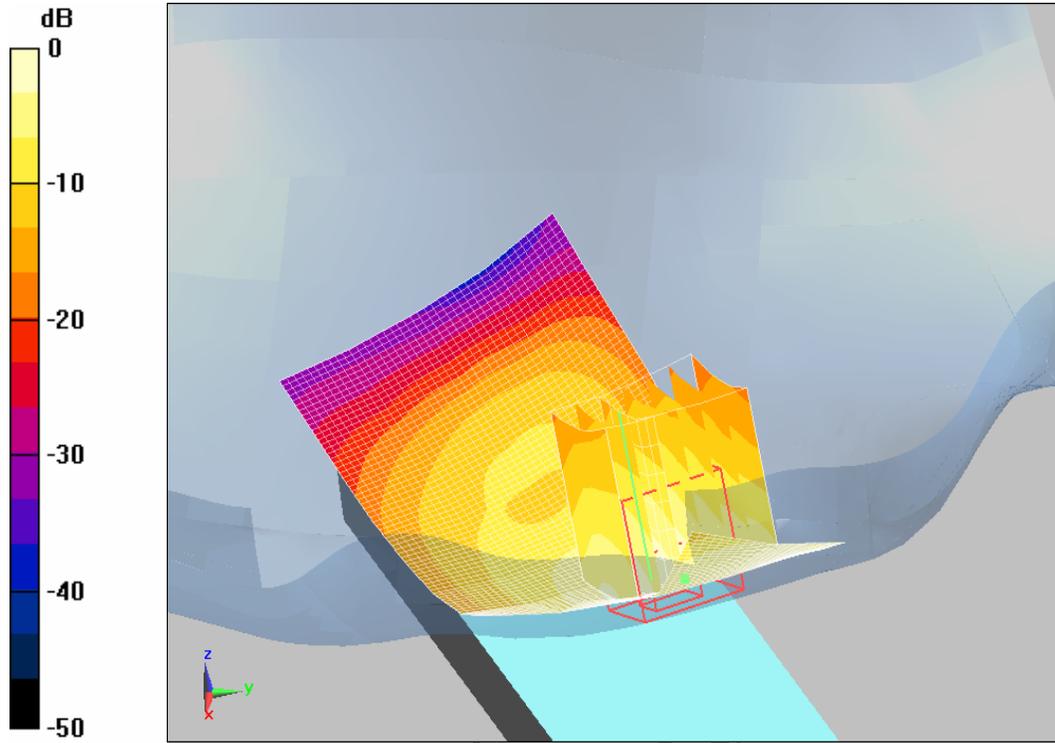

0 dB = 1.54mW/g

TTL TEST

## B.9 Head PCS 1900 band, low channel, Left cheek position

Test Laboratory: CTTL

ZTE712p\_left cheek\_PCS1900\_low

DUT: ZTE\_A712p; Type: --; Serial: --

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3  
Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 39.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(5.02, 5.02, 5.02); Calibrated: 5/30/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2/19/2008
- Phantom: North SAM; Type: SAM; Serial: TP-1472
- Measurement SW: DASYS, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

**PCS\_Touch\_Left\_low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:

$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 2.91 V/m; Power Drift = 0.200 dB


Peak SAR (extrapolated) = 1.7 W/kg

**SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.608 mW/g**

Maximum value of SAR (measured) = 1.2 mW/g

**PCS\_Touch\_Left\_low/Area Scan (121x41x1):** Measurement grid:  $dx=15$ mm,  
 $dy=15$ mm

Maximum value of SAR (interpolated) = 1.11 mW/g

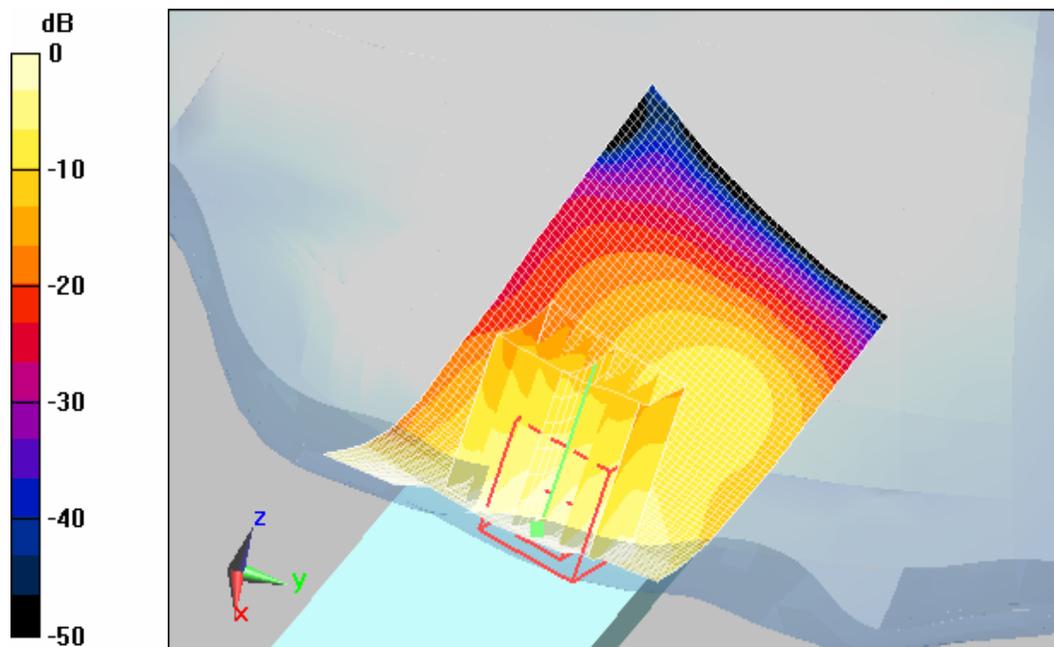

0 dB = 1.11mW/g

TTL Test Report

## B.10 Head PCS 1900 band, middle channel, Left cheek position

Test Laboratory: CTTL

ZTE712p\_left cheek\_PCS1900\_mid

DUT: ZTE\_A712p; Type: --; Serial: --

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.45$  mho/m;  $\epsilon_r = 40.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(5.02, 5.02, 5.02); Calibrated: 5/30/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2/19/2008
- Phantom: North SAM; Type: SAM; Serial: TP-1472
- Measurement SW: DASYS, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

PCS\_Touch\_Left\_mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 5.19 V/m; Power Drift = 0.187 dB


Peak SAR (extrapolated) = 1.91 W/kg

**SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.664 mW/g**

Maximum value of SAR (measured) = 1.32 mW/g

PCS\_Touch\_Left\_mid/Area Scan (121x41x1): Measurement grid:  $dx=15$ mm,  
 $dy=15$ mm

Maximum value of SAR (interpolated) = 1.17 mW/g

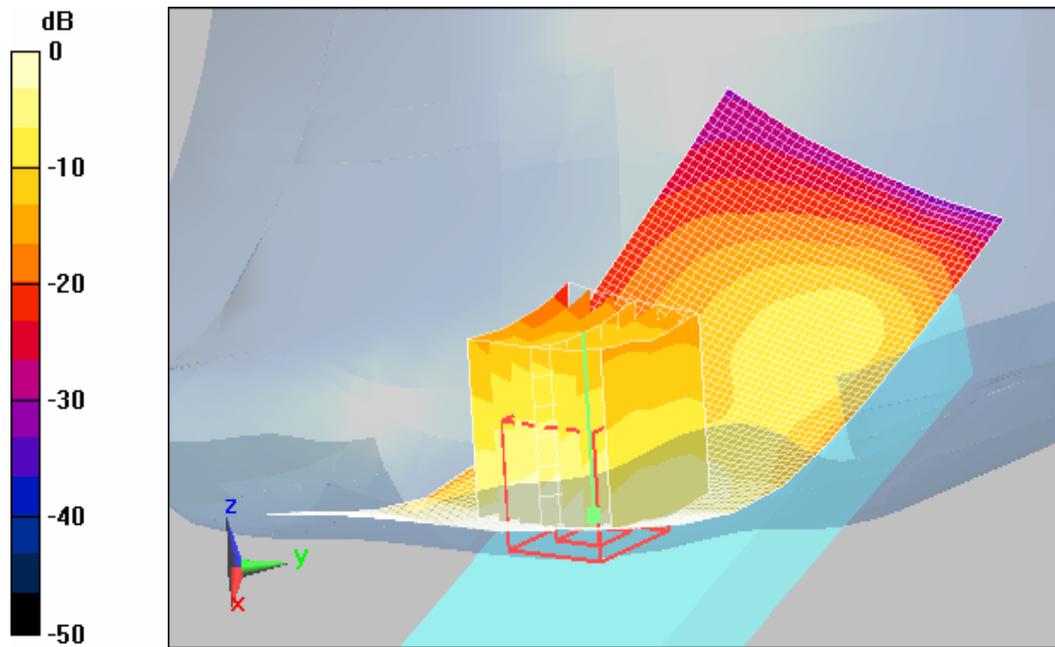

0 dB = 1.17mW/g

TTL Test Report

## B.11 Head PCS 1900 band, high channel, Left cheek position – Maximum SAR of head 1900 band

Test Laboratory: CTTL

ZTE712p\_left cheek\_PCS1900\_high

DUT: ZTE\_A712p; Type: --; Serial: --

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.49$  mho/m;  $\epsilon_r = 39.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(5.02, 5.02, 5.02); Calibrated: 5/30/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2/19/2008
- Phantom: North SAM; Type: SAM; Serial: TP-1472
- Measurement SW: DASYS, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

**PCS\_Tilt\_Left\_high/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.6 V/m; Power Drift = -0.082 dB


Peak SAR (extrapolated) = 2.45 W/kg

**SAR(1 g) = 1.51 mW/g; SAR(10 g) = 0.836 mW/g**

Maximum value of SAR (measured) = 1.66 mW/g

**PCS\_Tilt\_Left\_high/Area Scan (121x41x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.52 mW/g

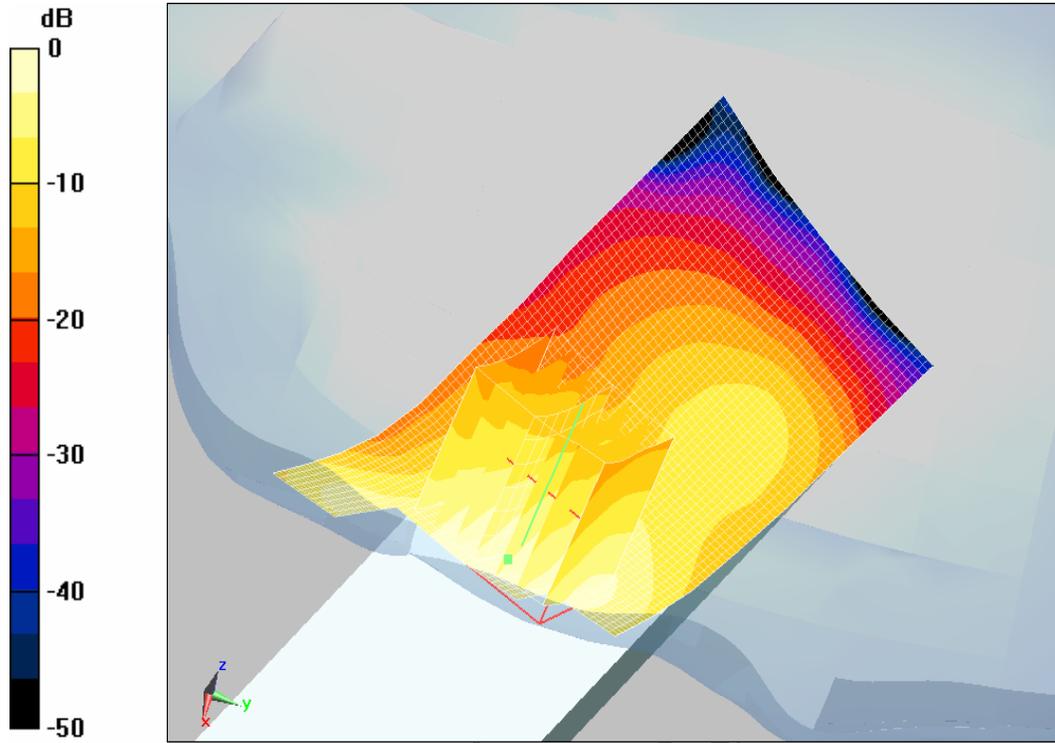

0 dB = 1.52mW/g

TTL TEST

## B.12 Body GSM 850 band, back side to phantom, with earphone, flip open, middle channel

Test Laboratory: CTTL

ZTEA712p\_body\_850\_mid\_back\_open

DUT: ZTE\_A712p; Type: A912p; Serial: --

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(6, 6, 6); Calibrated: 5/30/2008
- Sensor-Surface: 3.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 4/17/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASYS, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

**back earphone mid/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = 0.125 dB


Peak SAR (extrapolated) = 0.664 W/kg

**SAR(1 g) = 0.467 mW/g; SAR(10 g) = 0.313 mW/g**

Maximum value of SAR (measured) = 0.527 mW/g

**back earphone mid/Area Scan (61x131x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.524 mW/g

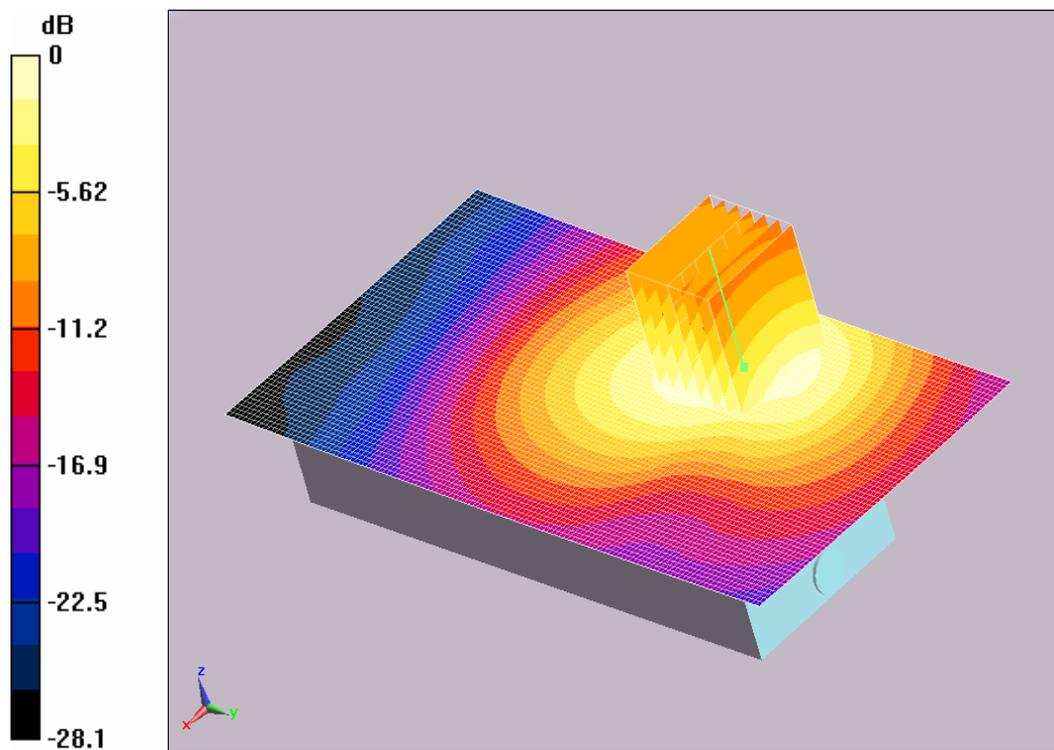

0 dB = 0.524mW/g

TTL TEST

### **B.13 Body GSM 850 band, back side to phantom, with earphone, flip close, high channel**

Test Laboratory: CTTL

**ZTE712p\_body\_850\_high\_back\_close**

**DUT: ZTE\_A712p; Type: A912p; Serial: --**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $f = 849$  MHz;  $\sigma = 1$  mho/m;  $\epsilon_r = 53.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(6, 6, 6); Calibrated: 5/30/2008
- Sensor-Surface: 3.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 4/17/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASYS, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

**back headset high close/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.771 mW/g


**back headset high close/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = 0.102 dB

Peak SAR (extrapolated) = 1.04 W/kg

**SAR(1 g) = 0.682 mW/g; SAR(10 g) = 0.431 mW/g**

Maximum value of SAR (measured) = 0.781 mW/g

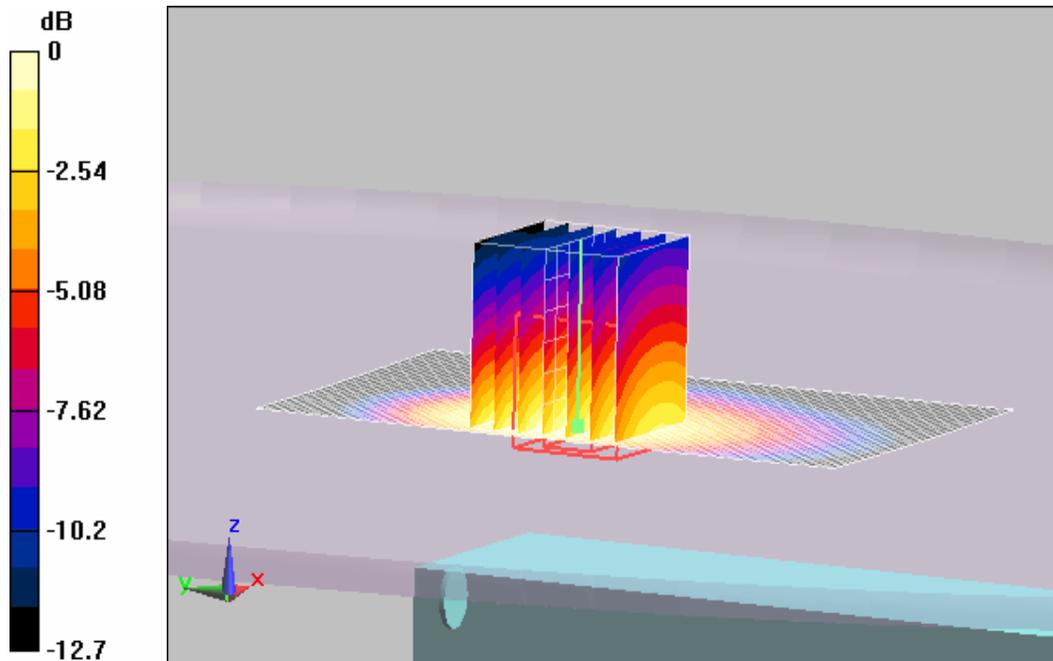

0 dB = 0.781mW/g

TTL Test Report

## B.14 Body PCS 1900 band, back side to phantom, with earphone, flip open, high channel

Test Laboratory: CTTL

ZTE712p\_body\_1900\_high\_back\_open

DUT: ZTE\_A712p; Type: --; Serial: --

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 50.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(4.62, 4.62, 4.62); Calibrated: 5/30/2008
- Sensor-Surface: 3.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2/19/2008
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASYS, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

**Earphone back High/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:

$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 10.8 V/m; Power Drift = -0.033 dB


Peak SAR (extrapolated) = 0.328 W/kg

**SAR(1 g) = 0.214 mW/g; SAR(10 g) = 0.135 mW/g**

Maximum value of SAR (measured) = 0.241 mW/g

**Earphone back High/Area Scan (81x111x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 0.248 mW/g

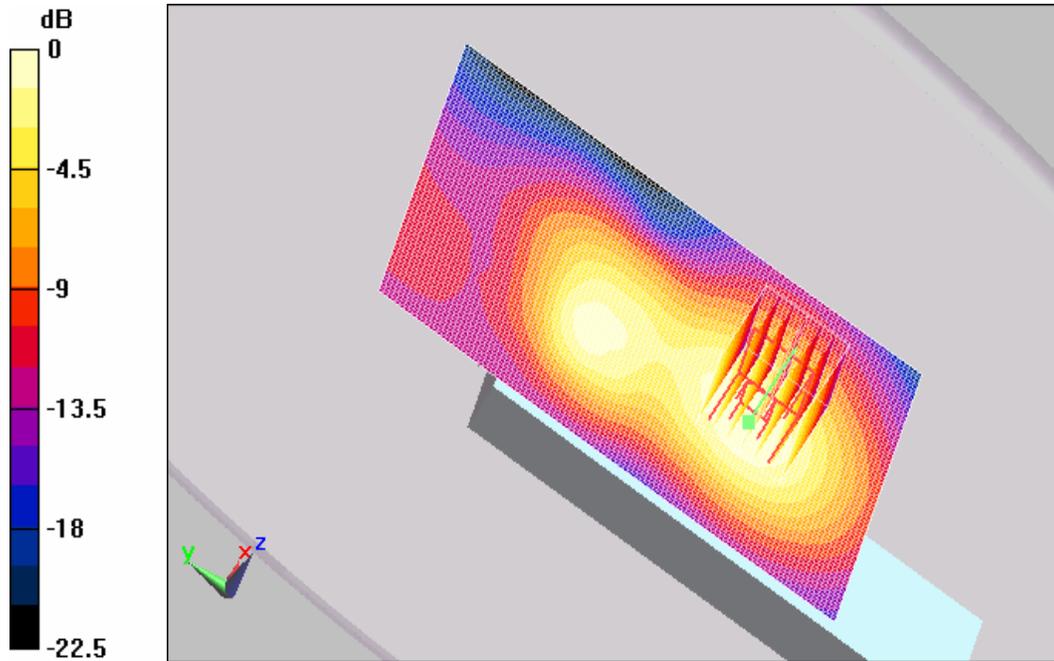

0 dB = 0.248mW/g

TTL TEST REPORT

## B.15 Body PCS 1900 band, back side to phantom, with earphone, flip close, high channel

Test Laboratory: CTTL

ZTE712p\_body\_1900\_high\_back\_close

DUT: ZTE\_A712p; Type: --; Serial: --

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3  
Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 50.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASYS (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(4.62, 4.62, 4.62); Calibrated: 5/30/2008
- Sensor-Surface: 3.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2/19/2008
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASYS, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

**Earphone back High/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid:

$dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 12.1 V/m; Power Drift = 0.065 dB


Peak SAR (extrapolated) = 0.590 W/kg

**SAR(1 g) = 0.371 mW/g; SAR(10 g) = 0.228 mW/g**

Maximum value of SAR (measured) = 0.425 mW/g

**Earphone back High/Area Scan (41x61x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) = 0.434 mW/g

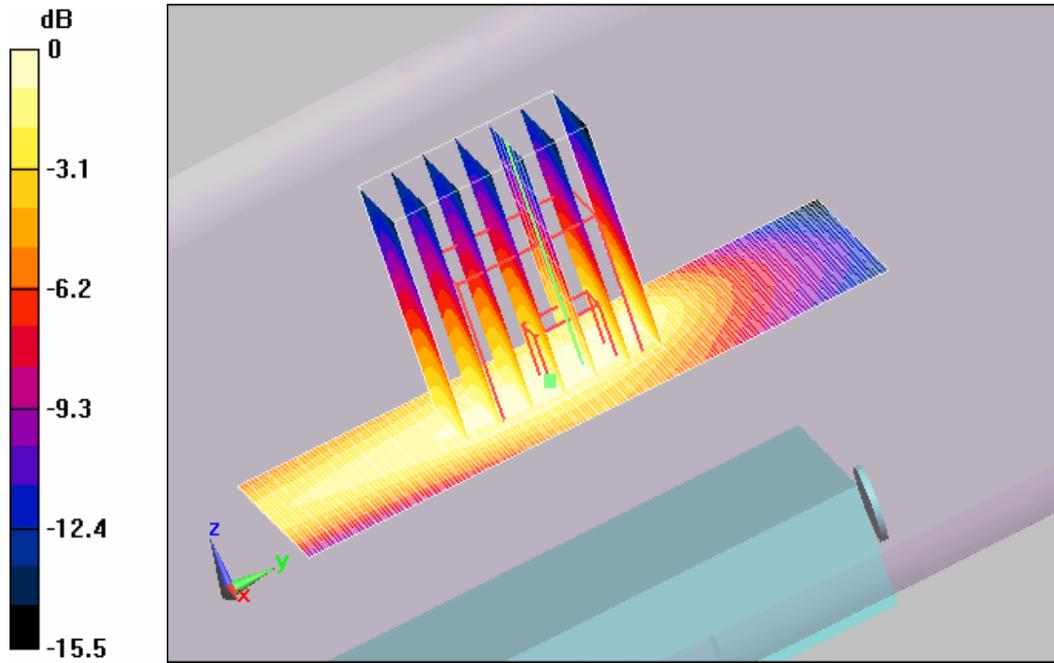

0 dB = 0.434mW/g

TTL Test Report

## Annex C System Performance Check Graphical Results

### C.1 System Validation Check – Head 835MHz

Test Laboratory: CTTL

**vali\_head835\_24dBm\_20090518**

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d060**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.92$  mho/m;  $\epsilon_r = 40.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(6.13, 6.13, 6.13); Calibrated: 5/30/2008
- Sensor-Surface: 3.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2009-04-17
- Phantom: West SAM; Type: SAM; Serial: --
- Measurement SW: DASYS, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

**d=15mm, Pin=24.00 dBm/Area Scan (31x91x1):** Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.74 mW/g

**d=15mm, Pin=24.00 dBm/Zoom Scan (7x7x7) (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.1 V/m; Power Drift = 0.00323 dB

Peak SAR (extrapolated) = 3.64 W/kg

**SAR(1 g) = 2.45 mW/g; SAR(10 g) = 1.6 mW/g**

Maximum value of SAR (measured) = 2.79 mW/g

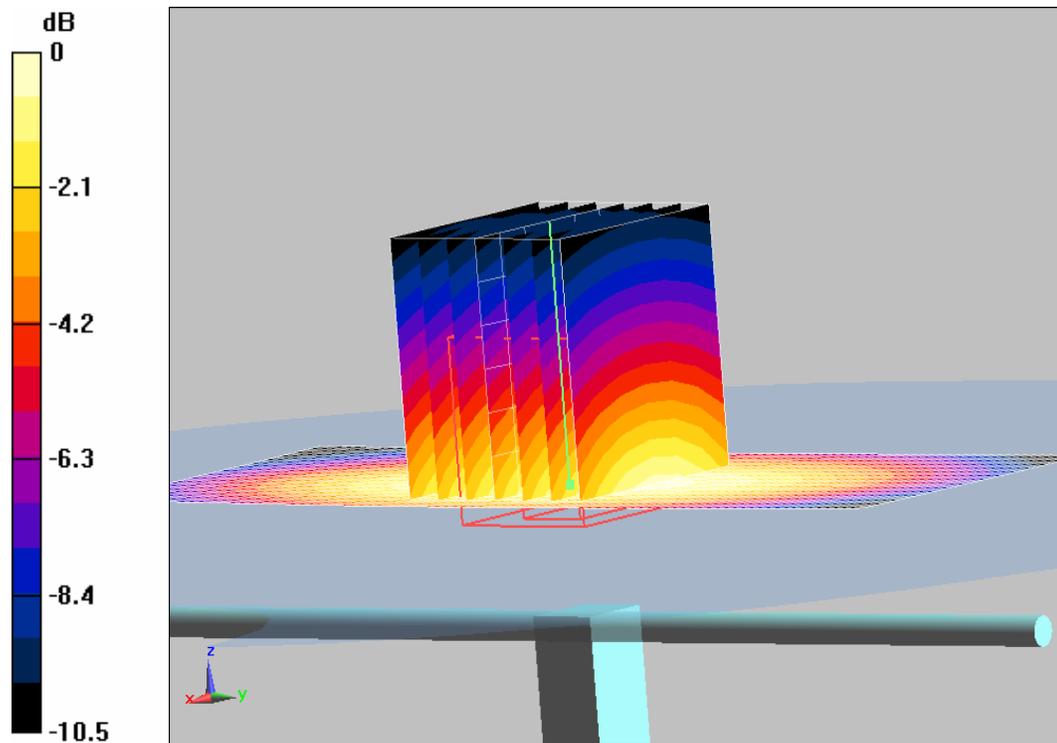

0 dB = 2.79mW/g

TTL TEST

## C.2 System Validation Check – Head 1900MHz

Test Laboratory: CTTL

**vali\_head1900\_24dBm\_20090513**

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d093**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.48$  mho/m;  $\epsilon_r = 39.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(5.02, 5.02, 5.02); Calibrated: 5/30/2008
- Sensor-Surface: 3.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2009-04-17
- Phantom: North SAM; Type: SAM; Serial: TP-1472
- Measurement SW: DASYS, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

**d=10mm, Pin=24dbm/Area Scan (31x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 13.2 mW/g


**d=10mm, Pin=24dbm/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.9 V/m; Power Drift = -0.155 dB

Peak SAR (extrapolated) = 17.9 W/kg

**SAR(1 g) = 9.93 mW/g; SAR(10 g) = 5.18 mW/g**

Maximum value of SAR (measured) = 12.1 mW/g

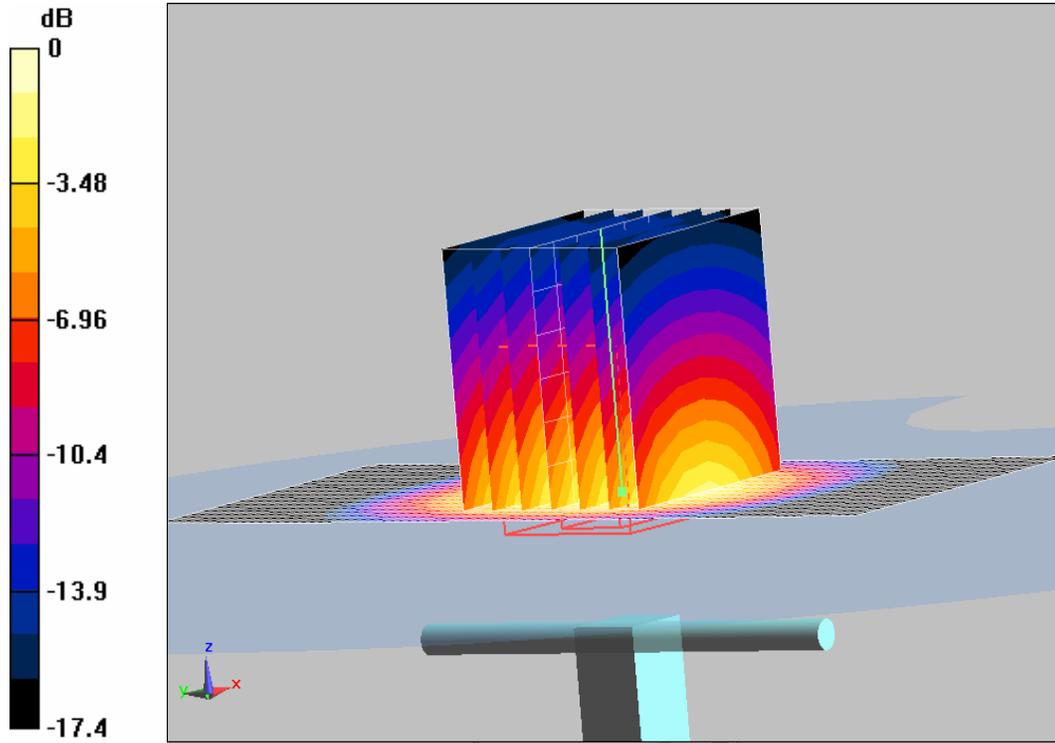

0 dB = 12.1mW/g

ATTN TEST

### C.3 System Validation Check – Body 835MHz

Test Laboratory: CTTL

**vali\_body835\_24dBm\_20090515**

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 – SN:4d060**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.999$  mho/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(6, 6, 6); Calibrated: 5/30/2008
- Sensor-Surface: 3.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2009-04-17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASYS, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

**d=15mm, Pin=24 dBm/Area Scan (31x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.68 mW/g


**d=15mm, Pin=24 dBm/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.6 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 3.46 W/kg

**SAR(1 g) = 2.38 mW/g; SAR(10 g) = 1.57 mW/g**

Maximum value of SAR (measured) = 2.7 mW/g

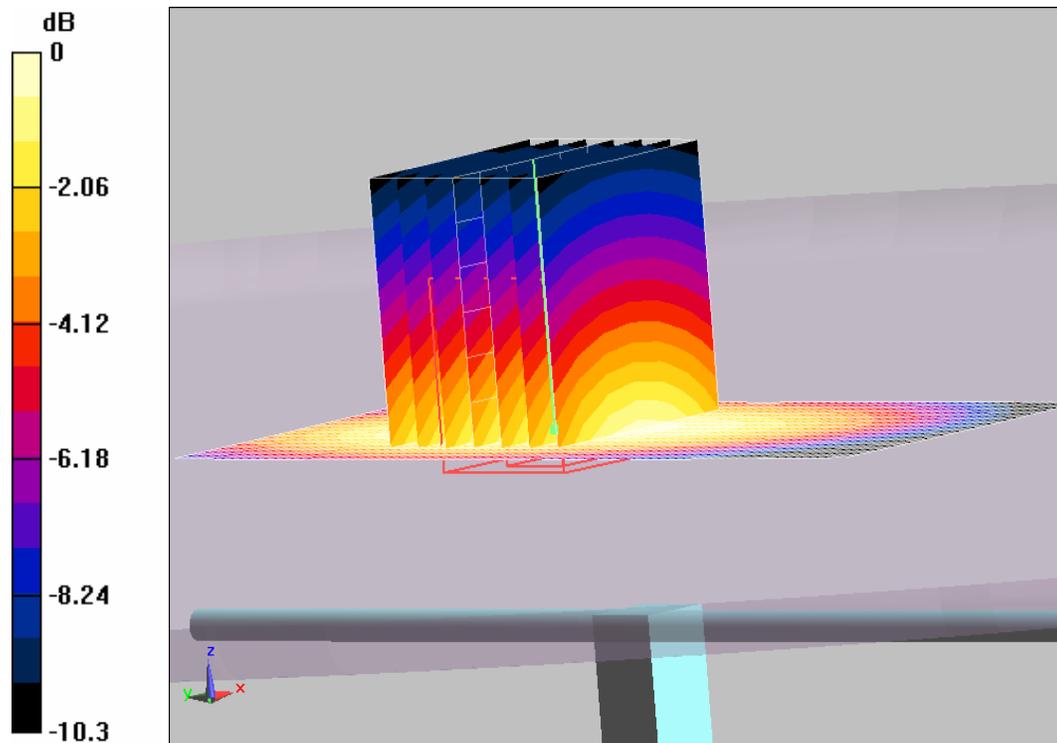

0 dB = 2.7mW/g

China Test

## C.4 System Validation Check – Body 1900MHz

Test Laboratory: CTTL

**vali\_body1900\_24dBm\_20090516**

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d093**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 51$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC)

DASY4 Configuration:

- Probe: ES3DV3 - SN3170; ConvF(4.62, 4.62, 4.62); Calibrated: 5/30/2008
- Sensor-Surface: 3.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn797; Calibrated: 2009-04-17
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: xxxx
- Measurement SW: DASYS, V5.0 Build 119; SEMCAD X Version 13.2 Build 87

**d=15mm, Pin=24 dBm/Area Scan (31x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.7 mW/g


**d=15mm, Pin=24 dBm/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88 V/m; Power Drift = -0.086 dB

Peak SAR (extrapolated) = 16.4 W/kg

**SAR(1 g) = 9.15 mW/g; SAR(10 g) = 4.81 mW/g**

Maximum value of SAR (measured) = 11.1 mW/g

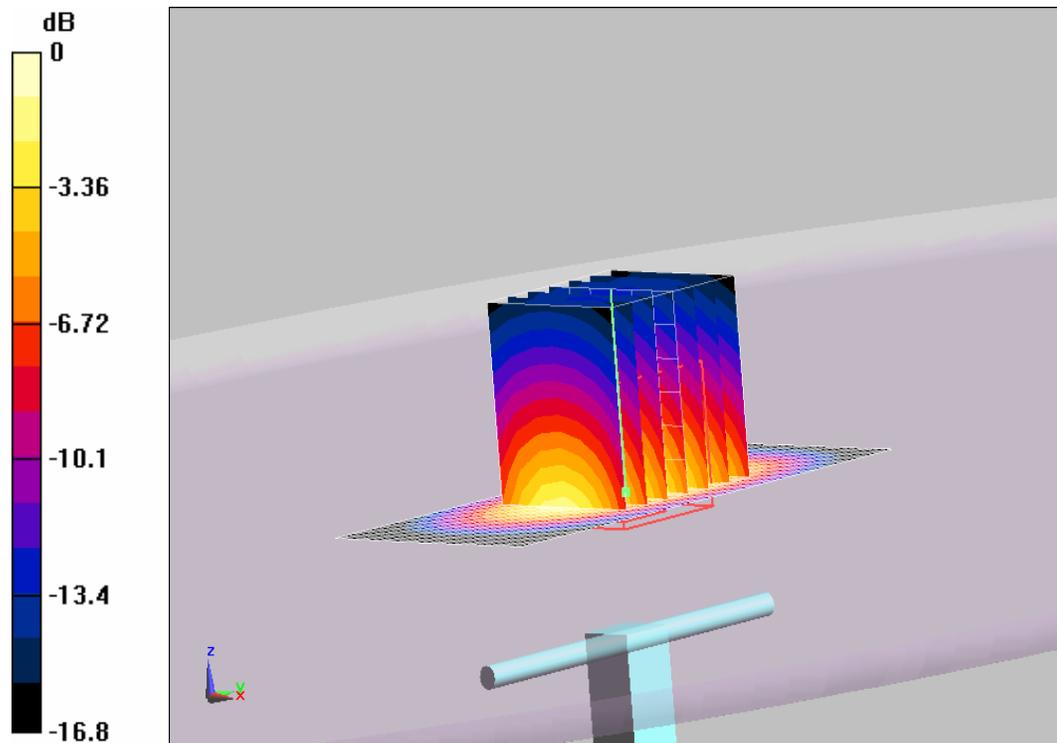

0 dB = 11.1mW/g

CTTL TEST

## ANNEX D Probes Calibration Certificates

The System Validation was conducted following the requirements of standard IEEE 1528: 2003 Clause 8.3.

The scanned copy of the calibration certificate of the probe used is as following.

*China Test Report*

**Calibration Laboratory of  
 Schmid & Partner  
 Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Sony Ericsson CN (MTT)**

Certificate No: **ES3-3170\_May08**

**CALIBRATION CERTIFICATE**

Object: **ES3DV3 - SN:3170**

Calibration procedure(s): **QA CAL-01.v6 and QA CAL-23.v3  
 Calibration procedure for dosimetric E-field probes**

Calibration date: **May 30, 2008**

Condition of the calibrated item: **In Tolerance**


This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&PE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41495277	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41498057	1-Apr-08 (No. 217-00788)	Apr-09
Reference 3 dB Attenuator	SN: S5054 (3c)	8-Aug-07 (No. 217-00719)	Aug-08
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-08 (No. 217-00787)	Apr-09
Reference 30 dB Attenuator	SN: S5129 (30b)	8-Aug-07 (No. 217-00720)	Aug-08
Reference Probe ES3DV2	SN: 3013	2-Jan-08 (No. ES3-3013_Jan08)	Jan-09
DAE4	SN: 660	3-Sep-07 (No. DAE4-660_Sep07)	Sep-08

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	in house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-07)	in house check: Oct-08

	Name	Function	Signature
Calibrated by:	<b>Katja Pokovic</b>	Technical Manager	
Approved by:	<b>Niels Kuster</b>	Quality Manager	

Issued: June 5, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL tissue simulating liquid  
NORM<sub>x,y,z</sub> sensitivity in free space  
ConvF sensitivity in TSL / NORM<sub>x,y,z</sub>  
DCP diode compression point  
Polarization  $\varphi$   $\varphi$  rotation around probe axis  
Polarization  $\vartheta$   $\vartheta$  rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e.,  $\vartheta = 0$  is normal to probe axis

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

**Methods Applied and Interpretation of Parameters:**

- **NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- **NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ES3DV3 SN:3170

May 30, 2008

# Probe ES3DV3

## SN:3170

Manufactured: January 23, 2008

Calibrated: May 30, 2008

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

Certificate No: ES3-3170\_May08

Page 3 of 9

ES3DV3 SN:3170

May 30, 2008

**DASY - Parameters of Probe: ES3DV3 SN:3170**

Sensitivity in Free Space<sup>A</sup>

Diode Compression<sup>B</sup>

NormX	1.27 ± 10.1%	μV/(V/m) <sup>2</sup>	DCP X	94 mV
NormY	1.02 ± 10.1%	μV/(V/m) <sup>2</sup>	DCP Y	92 mV
NormZ	0.97 ± 10.1%	μV/(V/m) <sup>2</sup>	DCP Z	102 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL                    900 MHz      Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SAR <sub>be</sub> [%]	Without Correction Algorithm	9.9	6.0
SAR <sub>be</sub> [%]	With Correction Algorithm	0.8	0.3

TSL                    1750 MHz      Typical SAR gradient: 10 % per mm

Sensor Center to Phantom Surface Distance		3.0 mm	4.0 mm
SAR <sub>be</sub> [%]	Without Correction Algorithm	10.4	6.6
SAR <sub>be</sub> [%]	With Correction Algorithm	0.7	0.3

Sensor Offset

Probe Tip to Sensor Center                    2.0 mm

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 8).


<sup>B</sup> Numerical linearization parameter: uncertainty not required.

ES3DV3 SN:3170

May 30, 2008

### Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)


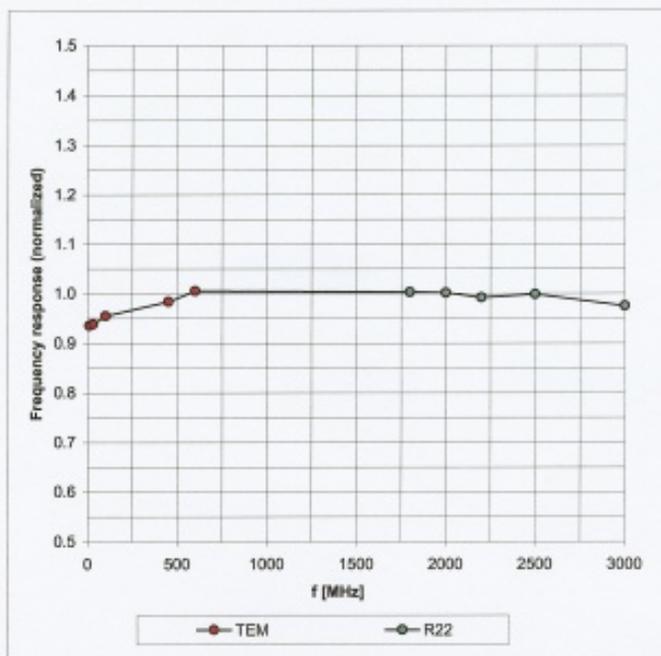


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

ES3DV3 SN:3170

May 30, 2008

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

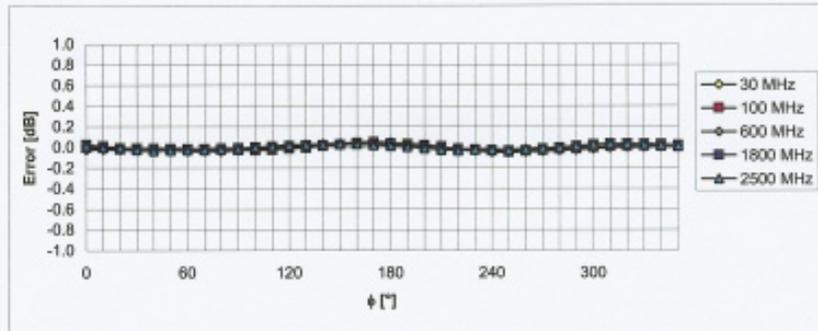
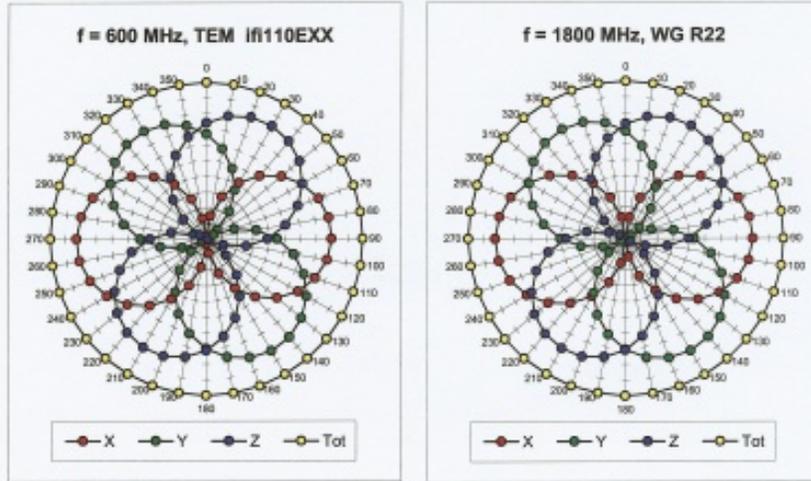


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

ES3DV3 SN:3170

May 30, 2008

### Dynamic Range $f(SAR_{head})$ (Waveguide R22, $f = 1800$ MHz)

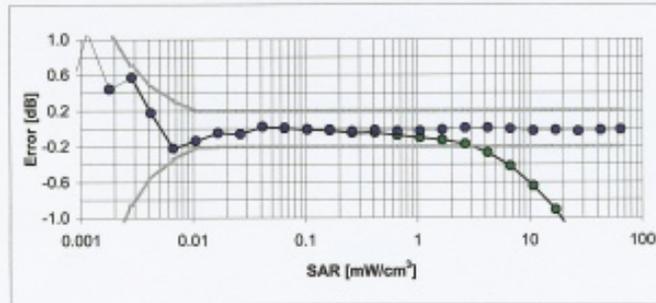
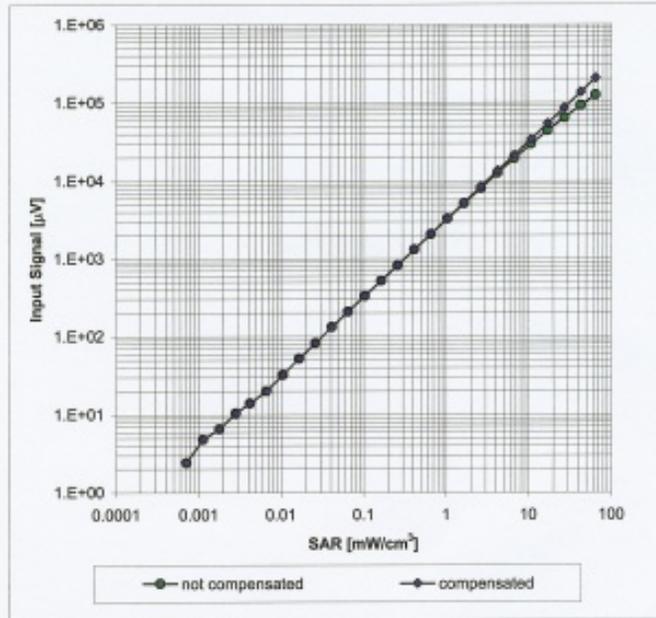


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

ES3DV3 SN:3170

May 30, 2008

### Conversion Factor Assessment

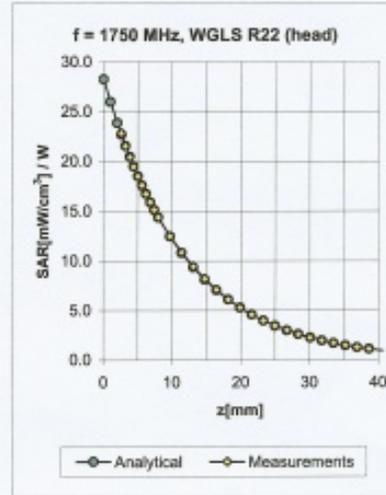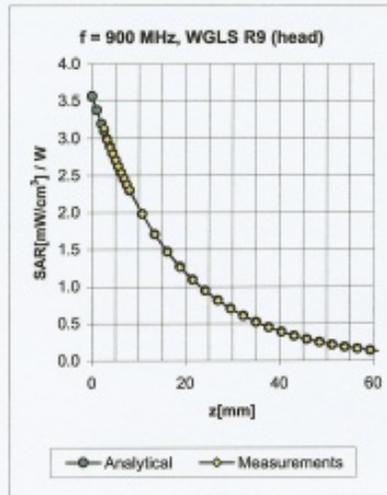

f [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.27	1.98	6.13	± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.28	2.03	5.96	± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.1 ± 5%	1.37 ± 5%	0.57	1.52	5.23	± 11.0% (k=2)
1900	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.48	1.66	5.02	± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.80	1.27	4.47	± 11.0% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.34	1.83	6.00	± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.43	1.61	5.86	± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.4 ± 5%	1.49 ± 5%	0.54	1.45	4.93	± 11.0% (k=2)
1900	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.61	1.44	4.62	± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.90	1.20	4.11	± 11.0% (k=2)


<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ES3DV3 SN:3170

May 30, 2008

### Deviation from Isotropy in HSL

Error ( $\phi$ ,  $\theta$ ),  $f = 900$  MHz

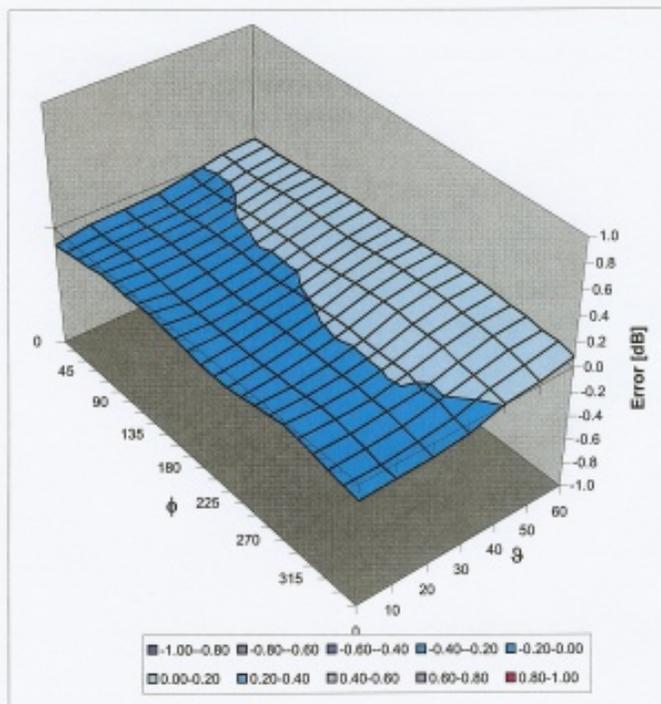

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

## ANNEX E Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

————— **The End of this Report** —————

*CTTL Test Report*