



# FCC Test Report

**EQUIPMENT** : UMTS/EVDO Dual Mode Wireless Data Terminal

**BRAND NAME** : ZTE

**MODEL NAME** : AD3700

**FCC ID** : Q78-AD3700

**STANDARD** : 47 CFR Part 2, 22(H), 24(E)

**CLASSIFICATION** : PCS Licensed transmitter (PCB)

**Tx/Rx FREQUENCY RANGE** : GSM850 : 824.2 ~ 848.8 MHz /  
869.2 ~ 893.8 MHz  
GSM1900 : 1850.2 ~ 1909.8 MHz /  
1930.2 ~ 1989.8 MHz  
WCDMA Band V : 826.4 ~ 846.6 MHz /  
871.4 ~ 891.6 MHz  
WCDMA Band II : 1852.4 ~ 1907.6 MHz /  
1932.4 ~ 1987.6 MHz  
CDMA2000 Cellular : 824.2 ~ 848.8 MHz /  
869.2 ~ 893.8 MHz  
CDMA2000 PCS : 1850.2 ~ 1910.8 MHz /  
1930.2 ~ 1989.8 MHz

**MAX. ERP/EIRP POWER** : GSM850(GPRS) : 0.55 W  
GSM1900(GPRS) : 1.07 W  
WCDMA Band V (WCDMA) : 0.10 W  
WCDMA Band II (HSDPA) : 0.16 W  
CDMA2000 Cellular (1xEVDO) : 0.09 W  
CDMA2000 PCS (1xEVDO) : 0.09 W

**EMISSION DESIGNATOR** : GSM : 248KGXW  
EDGE : 240KG7W  
WCDMA : 4M18F9W  
CDMA2000 : 1M28F9W

**APPLICANT** : ZTE CORPORATION  
ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,  
Nanshan District, Shenzhen, Guangdong, P.R.China

The product sample received on Nov. 22, 2008 and completely tested on Dec. 23, 2008. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.



Reviewed by: Roy Wu / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



# TABLE OF CONTENTS

**SUMMARY OF TEST RESULT ..... 4**

**REVISION HISTORY..... 5**

**1 GENERAL DESCRIPTION ..... 6**

    1.1 Applicant..... 6

    1.2 Manufacturer ..... 6

    1.3 Feature of Equipment Under Test..... 7

    1.4 Testing Site ..... 8

    1.5 Applied Standards ..... 8

    1.6 Ancillary Equipment List..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9**

    2.1 Test Mode..... 9

    2.2 Connection Diagram of Test System ..... 9

**3 TEST RESULT..... 10**

    3.1 Conducted Output Power Measurement..... 10

    3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement ..... 15

    3.3 Occupied Bandwidth and Band Edge Measurement ..... 20

    3.4 Conducted Emission Measurement ..... 37

    3.5 Field Strength of Spurious Radiation Measurement ..... 58

    3.6 Frequency Stability Measurement..... 75

**4 LIST OF MEASURING EQUIPMENTS ..... 80**

**5 UNCERTAINTY OF EVALUATION ..... 81**

**6 CERTIFICATION OF TAF ACCREDITATION ..... 83**

**APPENDIX A. PHOTOGRAPHS OF EUT**

**APPENDIX B. SETUP PHOTOGRAPHS**



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result
3.1	§2.1046	N/A	Conducted Output Power	N/A	PASS
3.2	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts for FCC (<6.3 Watts for IC)	PASS
3.2	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS
3.3	§2.1049 §22.917(a) §24.238(a)	N/A	Occupied Bandwidth	N/A	PASS
3.3	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge Measurement	< 43+10log <sub>10</sub> (P[Watts])	PASS
3.4	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Conducted Emission	< 43+10log <sub>10</sub> (P[Watts])	PASS
3.5	§2.1053 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Field Strength of Spurious Radiation	< 43+10log <sub>10</sub> (P[Watts])	PASS
3.6	§2.1055 §22.355 §24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS





# **1 General Description**

## **1.1 Applicant**

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China

## **1.2 Manufacturer**

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China

### 1.3 Feature of Equipment Under Test

Product Feature & Specification	
<b>Equipment</b>	UMTS/EVDO Dual Mode Wireless Data Terminal
<b>Brand Name</b>	ZTE
<b>Model Name</b>	AD3700
<b>Tx Frequency</b>	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~ 1910 MHz WCDMA Band V : 824 MHz ~ 849 MHz WCDMA Band II : 1850 MHz ~ 1910 MHz CDMA2000 Cellular : 824 MHz ~ 849 MHz CDMA2000 PCS : 1850 MHz ~1910 MHz
<b>Rx Frequency</b>	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz WCDMA Band V : 869 MHz ~ 894 MHz WCDMA Band II : 1930 MHz ~ 1990 MHz CDMA2000 Cellular : 869 MHz ~ 894 MHz CDMA2000 PCS : 1930 MHz ~ 1990 MHz
<b>Maximum Output Power to Antenna</b>	GSM850 (GPRS 8) : 32.36 dBm GSM1900 (GPRS 8) : 28.34 dBm WCDMA Band V (WCDMA) : 24.28 dBm WCDMA Band II (HSDPA) : 20.90 dBm CDMA2000 Cellular (1xEV-DO) : 24.84 dBm CDMA2000 PCS (1xEV-DO) : 18.64 dBm
<b>Maximum ERP/EIRP</b>	GSM850 (GPRS 8) : 0.55 W (27.39 dBm) GSM1900 (GPRS 8) : 1.07 W (30.31 dBm) WCDMA Band V (WCDMA) : 0.10 W (20.10 dBm) WCDMA Band II (HSDPA) : 0.16 W (22.02 dBm) CDMA2000 Cellular : 0.09 W (19.52 dBm) CDMA2000 PCS : 0.09 W (19.33 dBm)
<b>Antenna Type</b>	Fixed Internal Antenna
<b>HW Version</b>	E
<b>SW Version</b>	DS1050-SUUAASDA-2151
<b>Type of Modulation</b>	GSM / GPRS : GMSK EDGE : 8PSK WCDMA : QPSK HSDPA : QPSK / 16QAM HSUPA : BPSK CDMA2000 : QPSK
<b>Type of Emission</b>	GSM : 248KGXW EDGE : 240KG7W WCDMA : 4M18F9W CDMA : 1M28F9W
<b>EUT Stage</b>	Production Unit



### 1.4 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.	
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL : 86-0512-5790-0158 FAX : 86-0512-5790-0958	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH01-KS	03CH01-KS

### 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- 47 CFR Part 2, 22(H), 24(E)
- ANSI C63.4-2003
- ANSI / TIA / EIA-603-C-2004
- IC RSS-132, RSS-133

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

### 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Code
1.	GSM Base Station	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Monitor	AOC	712SWSa-1	FCC DoC	Shielded, 1.2 m	Unshielded, 1.8 m
3.	(USB)Mouse	DELL	MO56UC	FCc DoC	Shielded, 1.8 m	N/A
4.	PC	DELL	MT320	FCC DoC	N/A	Unshielded, 1.8 m
5.	(USB)Keyboard	DELL	L100	FCC DoC	Shielded, 1.8 m with core	N/A

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode


During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V
2. 30MHz to 19000 MHz for GSM1900 and WCDMA Band II.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	<ul style="list-style-type: none"> <li>■ GPRS Link</li> <li>■ EDGE Link</li> </ul>	<ul style="list-style-type: none"> <li>■ GPRS Link</li> <li>■ EDGE Link</li> </ul>
GSM 1900	<ul style="list-style-type: none"> <li>■ GPRS Link</li> <li>■ EDGE Link</li> </ul>	<ul style="list-style-type: none"> <li>■ GPRS Link</li> <li>■ EDGE Link</li> </ul>
WCDMA Band V	<ul style="list-style-type: none"> <li>■ WCDMA Link</li> </ul>	<ul style="list-style-type: none"> <li>■ WCDMA Link</li> <li>■ HSDPA Link</li> <li>■ HSUPA Link</li> </ul>
WCDMA Band II	<ul style="list-style-type: none"> <li>■ HSDPA Link</li> </ul>	<ul style="list-style-type: none"> <li>■ WCDMA Link</li> <li>■ HSDPA Link</li> <li>■ HSUPA Link</li> </ul>
CDMA2000 Cellular	<ul style="list-style-type: none"> <li>■ 1xEV-DO Rev. A Link Mode_CH1013</li> <li>■ 1xEV-DO Rev. A Link Mode_CH334</li> <li>■ 1xEV-DO Rev. A Link Mode_CH777</li> </ul>	<ul style="list-style-type: none"> <li>■ 1xRTT Link Mode</li> <li>■ 1xEV-DO Rev. 0 Link Mode</li> <li>■ 1xEV-DO Rev. A Link Mode</li> </ul>
CDMA2000 PCS	<ul style="list-style-type: none"> <li>■ 1xEV-DO Rev. A Link Mode_CH25</li> <li>■ 1xEV-DO Rev. A Link Mode_CH600</li> <li>■ 1xEV-DO Rev. A Link Mode_CH1175</li> </ul>	<ul style="list-style-type: none"> <li>■ 1xRTT Link Mode</li> <li>■ 1xEV-DO Rev. 0 Link Mode</li> <li>■ 1xEV-DO Rev. A Link Mode</li> </ul>

### 2.2 Connection Diagram of Test System

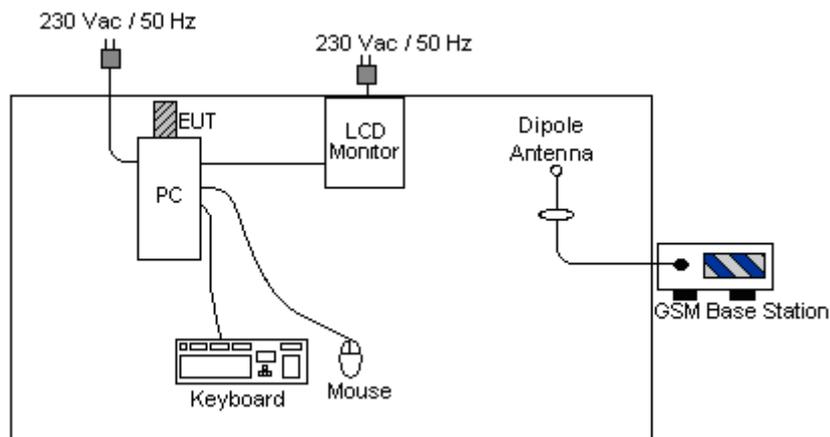

### 3 Test Result

#### 3.1 Conducted Output Power Measurement

##### 3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

##### 3.1.4 Test Setup

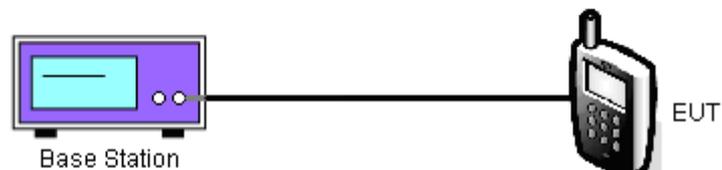



3.1.5 Test Result of Conducted Output Power

Cellular Band					
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)	
GPRS	128 (Low)	824.2	32.36	1.72	
	189 (Mid)	836.4	32.28	1.69	
	251 (High)	848.8	32.25	1.68	
EDGE	128 (Low)	824.2	26.78	0.48	
	189 (Mid)	836.4	26.61	0.46	
	251 (High)	848.8	26.51	0.45	
WCDMA Band V	12.2k bps	4132 (Low)	826.4	24.28	0.27
		4182 (Mid)	836.4	24.08	0.26
		4233 (High)	846.6	24.08	0.26
	HSDPA Subtest-1	4132 (Low)	826.4	24.15	0.26
		4182 (Mid)	836.4	24.07	0.26
		4233 (High)	846.6	23.98	0.25
	HSDPA Subtest-2	4132 (Low)	826.4	23.59	0.23
		4182 (Mid)	836.4	23.33	0.22
		4233 (High)	846.6	23.44	0.22
	HSDPA Subtest-3	4132 (Low)	826.4	23.60	0.23
		4182 (Mid)	836.4	23.45	0.22
		4233 (High)	846.6	23.36	0.22
	HSDPA Subtest-4	4132 (Low)	826.4	23.45	0.21
		4182 (Mid)	836.4	23.27	0.20
		4233 (High)	846.6	23.20	0.21
	HSUPA Subtest-1	4132 (Low)	826.4	23.88	0.24
		4182 (Mid)	836.4	23.78	0.24
		4233 (High)	846.6	23.70	0.23
	HSUPA Subtest-2	4132 (Low)	826.4	21.53	0.14
		4182 (Mid)	836.4	21.46	0.14
		4233 (High)	846.6	21.36	0.14
	HSUPA Subtest-3	4132 (Low)	826.4	22.58	0.18
		4182 (Mid)	836.4	22.38	0.17
		4233 (High)	846.6	22.33	0.17
	HSUPA Subtest-4	4132 (Low)	826.4	22.16	0.16
		4182 (Mid)	836.4	21.85	0.15
		4233 (High)	846.6	21.82	0.15
	HSUPA Subtest-5	4132 (Low)	826.4	23.81	0.24
		4182 (Mid)	836.4	23.75	0.24
		4233 (High)	846.6	23.74	0.24



Cellular Band					
Test Mode	Test Status	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
CDMA 2000 1xRTT	FCH_RC1	1013 (Low)	824.70	24.49	0.28
		334 (Mid)	835.02	24.47	0.28
		777 (High)	848.31	24.39	0.27
	FCH_RC3	1013 (Low)	824.70	24.47	0.28
		334 (Mid)	835.02	24.23	0.28
		777 (High)	848.31	24.40	0.27
	FCH+SCH_RC3	1013 (Low)	824.70	23.70	0.28
		334 (Mid)	835.02	23.36	0.28
		777 (High)	848.31	23.56	0.27
CDMA 2000 1xEV-DO (Rev. 0)	EVDO-UL: 9.6Kbps	1013 (Low)	824.70	24.42	0.28
		334 (Mid)	835.02	24.20	0.26
		777 (High)	848.31	24.30	0.27
	EVDO-UL: 38.4Kbps	1013 (Low)	824.70	24.44	0.28
		334 (Mid)	835.02	24.23	0.26
		777 (High)	848.31	24.28	0.27
	EVDO-UL: 153.6Kbps	1013 (Low)	824.70	24.40	0.28
		334 (Mid)	835.02	24.21	0.26
		777 (High)	848.31	24.25	0.27
CDMA 2000 1xEV-DO (Rev. A)	RETAP_128Kbps	1013 (Low)	824.70	24.41	0.30
		334 (Mid)	835.02	24.36	0.29
		777 (High)	848.31	24.45	0.28
	RETAP_2048Kbps	1013 (Low)	824.70	24.84	0.30
		334 (Mid)	835.02	24.56	0.29
		777 (High)	848.31	24.53	0.28
	RETAP_12288Kbps	1013 (Low)	824.70	23.74	0.30
		334 (Mid)	835.02	23.61	0.29
		777 (High)	848.31	20.50	0.28



PCS Band					
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)	
GPRS	512 (Low)	1850.2	28.34	0.68	
	661 (Mid)	1880.0	28.20	0.66	
	810 (High)	1909.8	28.07	0.64	
EDGE	512 (Low)	1850.2	25.29	0.34	
	661 (Mid)	1880.0	25.16	0.33	
	810 (High)	1909.8	24.04	0.25	
WCDMA Band II	12.2k bps	9262 (Low)	1852.4	20.78	0.12
		9400 (Mid)	1880.0	20.74	0.12
		9538 (High)	1907.6	20.57	0.11
	HSDPA Subtest-1	9262 (Low)	1852.4	20.90	0.12
		9400 (Mid)	1880.0	20.76	0.12
		9538 (High)	1907.6	20.78	0.12
	HSDPA Subtest-2	9262 (Low)	1852.4	20.88	0.12
		9400 (Mid)	1880.0	20.73	0.12
		9538 (High)	1907.6	20.78	0.12
	HSDPA Subtest-3	9262 (Low)	1852.4	20.43	0.11
		9400 (Mid)	1880.0	20.27	0.11
		9538 (High)	1907.6	20.24	0.11
	HSDPA Subtest-4	9262 (Low)	1852.4	20.38	0.11
		9400 (Mid)	1880.0	20.24	0.11
		9538 (High)	1907.6	20.26	0.11
	HSUPA Subtest-1	9262 (Low)	1852.4	20.49	0.11
		9400 (Mid)	1880.0	20.52	0.11
		9538 (High)	1907.6	20.24	0.11
	HSUPA Subtest-2	9262 (Low)	1852.4	18.45	0.07
		9400 (Mid)	1880.0	18.54	0.07
		9538 (High)	1907.6	18.18	0.07
	HSUPA Subtest-3	9262 (Low)	1852.4	19.43	0.09
		9400 (Mid)	1880.0	19.51	0.09
		9538 (High)	1907.6	19.26	0.08
	HSUPA Subtest-4	9262 (Low)	1852.4	18.49	0.07
		9400 (Mid)	1880.0	18.58	0.07
		9538 (High)	1907.6	18.24	0.07
	HSUPA Subtest-5	9262 (Low)	1852.4	20.48	0.11
		9400 (Mid)	1880.0	20.50	0.11
		9538 (High)	1907.6	20.18	0.10



CDMA2000 PCS					
Test Mode	Test Status	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
CDMA 2000 1xRTT	FCH_RC1	25 (Low)	1851.25	18.01	0.06
		600 (Mid)	1880.00	16.34	0.04
		1177 (High)	1908.75	17.86	0.06
	FCH_RC3	25 (Low)	1851.25	17.86	0.06
		600 (Mid)	1880.00	16.16	0.04
		1177 (High)	1908.75	17.83	0.06
	FCH+SCH_RC3	25 (Low)	1851.25	17.83	0.06
		600 (Mid)	1880.00	16.02	0.04
		1177 (High)	1908.75	17.87	0.06
CDMA 2000 1xEV-DO (Rev. 0)	EVDO-UL: 9.6Kbps	25 (Low)	1851.25	18.37	0.07
		600 (Mid)	1880.00	16.32	0.04
		1177 (High)	1908.75	18.43	0.07
	EVDO-UL: 38.4Kbps	25 (Low)	1851.25	18.18	0.07
		600 (Mid)	1880.00	16.25	0.04
		1177 (High)	1908.75	18.15	0.07
	EVDO-UL: 153.6Kbps	25 (Low)	1851.25	17.74	0.07
		600 (Mid)	1880.00	16.02	0.04
		1177 (High)	1908.75	17.73	0.07
CDMA 2000 1xEV-DO (Rev. A)	RETAP_128Kbps	25 (Low)	1851.25	18.59	0.07
		600 (Mid)	1880.00	16.53	0.05
		1177 (High)	1908.75	18.64	0.07
	RETAP_2048Kbps	25 (Low)	1851.25	18.54	0.07
		600 (Mid)	1880.00	16.61	0.05
		1177 (High)	1908.75	16.27	0.07
	RETAP_12288Kbps	25 (Low)	1851.25	18.31	0.07
		600 (Mid)	1880.00	16.27	0.05
		1177 (High)	1908.75	18.47	0.07

## 3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

### 3.2.1 Description of the ERP/EIRP Measurement

ERP/EIRP is measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.

### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The EUT was placed on a turntable with 1.0 meter height in a fully anechoic chamber.
2. The EUT was set at 1.2 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiated power.
4. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
5. Taking the record of maximum ERP/EIRP.
6. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
7. The conducted power at the terminal of the dipole antenna is measured.
8. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
9.  $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

$P_s$  (dBm) : Input power to substitution antenna.

$G_s$  (dBi or dBd) : Substitution antenna Gain.

$E_t = R_t + AF$


$E_s = R_s + AF$

AF (dB/m) : Receive antenna factor

$R_t$  : The highest received signal in spectrum analyzer for EUT.

$R_s$  : The highest received signal in spectrum analyzer for substitution antenna.

### 3.2.4 Test Setup

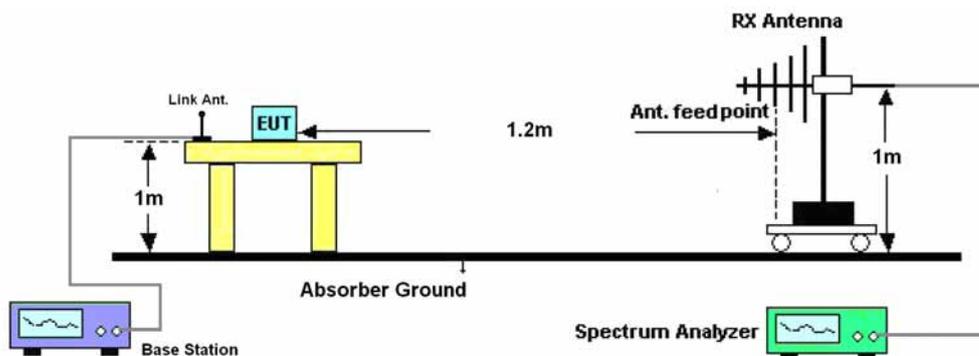

3.2.5 Test Result of ERP

GSM850 (GPRS 8) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-19.65	-48.12	0.00	-1.08	27.39	0.55
836.40	-20.30	-48.28	0.00	-0.93	27.05	0.51
848.80	-21.05	-48.35	0.00	-0.76	26.54	0.45
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-25.53	-47.97	0.00	-1.08	21.36	0.14
836.40	-25.64	-48.01	0.00	-0.93	21.44	0.14
848.80	-25.69	-48.05	0.00	-0.76	21.60	0.14

GSM850 (EDGE 8) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-24.80	-48.12	0.00	-1.08	22.24	0.17
836.40	-25.65	-48.28	0.00	-0.93	21.70	0.15
848.80	-26.33	-48.35	0.00	-0.76	21.26	0.13
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-30.47	-47.97	0.00	-1.08	16.42	0.04
836.40	-30.67	-48.01	0.00	-0.93	16.41	0.04
848.80	-30.88	-48.05	0.00	-0.76	16.41	0.04



WCDMA Band V (WCDMA) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-26.94	-48.12	0.00	-1.08	20.10	0.10
836.40	-27.73	-48.28	0.00	-0.93	19.62	0.09
846.60	-27.98	-48.35	0.00	-0.76	19.61	0.09
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-32.42	-47.97	0.00	-1.08	14.47	0.03
836.40	-33.03	-48.01	0.00	-0.93	14.05	0.03
846.60	-32.64	-48.05	0.00	-0.76	14.65	0.03

CDMA2000 Cellular 850 1xEV-DO Rev. A_RETAP_2048Kbps Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.70	-27.66	-48.12	0.00	-1.08	19.38	0.09
835.02	-27.83	-48.28	0.00	-0.93	19.52	0.09
848.31	-28.60	-48.35	0.00	-0.76	18.99	0.08
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.70	-33.77	-47.97	0.00	-1.08	13.12	0.02
835.02	-33.92	-48.01	0.00	-0.93	13.16	0.02
848.31	-34.41	-48.05	0.00	-0.76	12.88	0.02

3.2.6 Test Result of EIRP

GSM1900 (GPRS 8) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-24.42	-51.88	0.00	1.96	29.42	0.87
1880.00	-25.13	-52.99	0.00	2.00	29.86	0.97
1909.80	-25.95	-54.28	0.00	1.98	30.31	1.07
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-35.76	-52.13	0.00	1.96	18.33	0.07
1880.00	-36.75	-53.17	0.00	2.00	18.42	0.07
1909.80	-36.22	-54.13	0.00	1.98	19.89	0.10

GSM1900 (EDGE 8) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-27.87	-51.88	0.00	1.96	25.97	0.40
1880.00	-28.52	-52.99	0.00	2.00	26.47	0.44
1909.80	-29.51	-54.28	0.00	1.98	26.75	0.47
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-39.13	-52.13	0.00	1.96	14.96	0.03
1880.00	-40.06	-53.17	0.00	2.00	15.11	0.03
1909.80	-39.65	-54.13	0.00	1.98	16.46	0.04



WCDMA Band II (HSDPA) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-32.18	-51.88	0.00	1.96	21.66	0.15
1880.00	-33.13	-52.99	0.00	2.00	21.86	0.15
1907.60	-34.24	-54.28	0.00	1.98	22.02	0.16
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-43.52	-52.13	0.00	1.96	10.57	0.01
1880.00	-44.55	-53.17	0.00	2.00	10.62	0.01
1907.60	-44.74	-54.13	0.00	1.98	11.37	0.01

CDMA2000 PCS1900 1xEV-DO Rev. A_RETAP_128Kbps Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1851.25	-35.12	-51.88	0.00	1.96	18.72	0.07
1880.00	-37.34	-52.99	0.00	2.00	17.65	0.06
1908.75	-36.93	-54.28	0.00	1.98	19.33	0.09
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1851.25	-45.73	-52.13	0.00	1.96	8.36	0.01
1880.00	-47.83	-53.17	0.00	2.00	7.34	0.01
1908.75	-47.00	-54.13	0.00	1.98	9.11	0.01

### 3.3 Occupied Bandwidth and Band Edge Measurement

#### 3.3.1 Description of Occupied Bandwidth and Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the low, middle and high channels for the highest RF powers were measured.
3. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
4. The RBW was replaced by 10 kHz, due to the spectrum analyzer IF-Filter including an excess of the limit. A worst case correction factor of  $10 \log (1\% \text{ BW}/\text{measurement RBW})$  was implemented.

#### 3.3.4 Test Setup

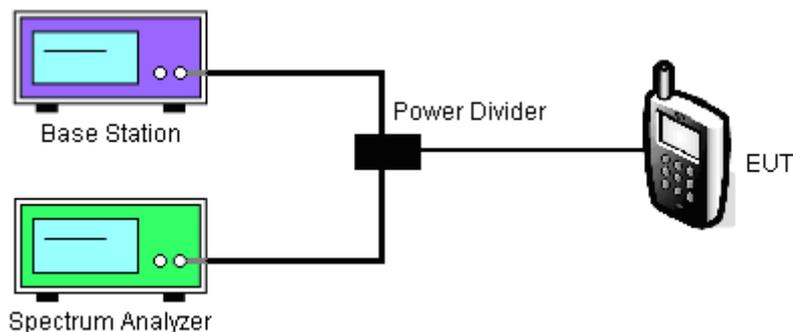




3.3.5 Test Result (Plots) of Occupied Bandwidth


Band :	GSM 850	Power Stage :	High
Test Mode :	GPRS 8 Link		

99% Occupied Bandwidth Plot on Channel 189

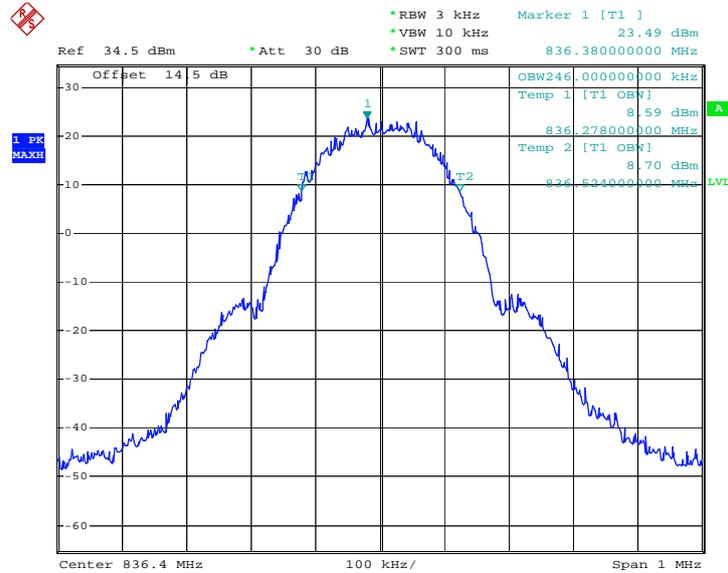

Date: 23.NOV.2008 14:18:52

26dB Bandwidth Plot on Channel 189

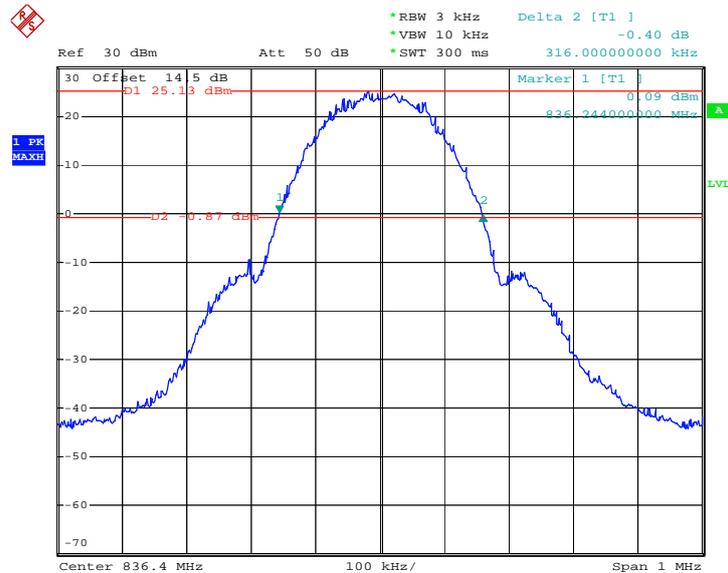


Date: 23.NOV.2008 13:58:06




Band :	GSM 850	Power Stage :	High
Test Mode :	EDGE 8 Link		

99% Occupied Bandwidth Plot on Channel 189

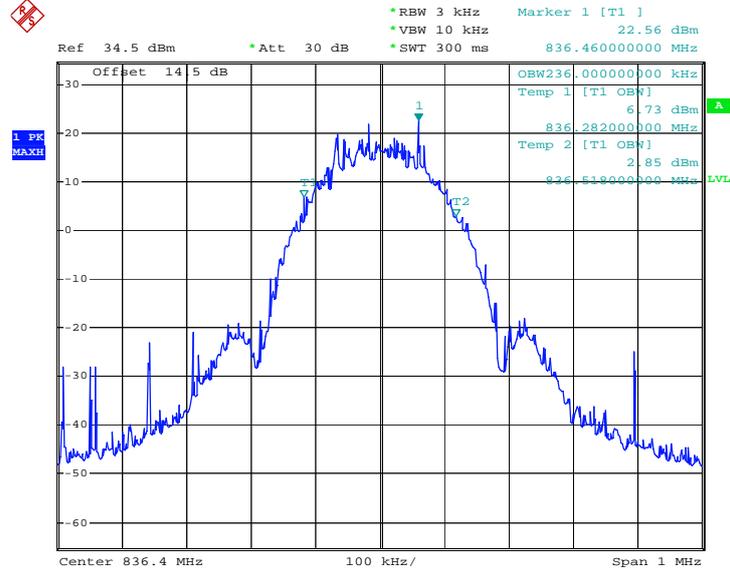

Date: 23.NOV.2008 15:07:51

26dB Bandwidth Plot on Channel 189

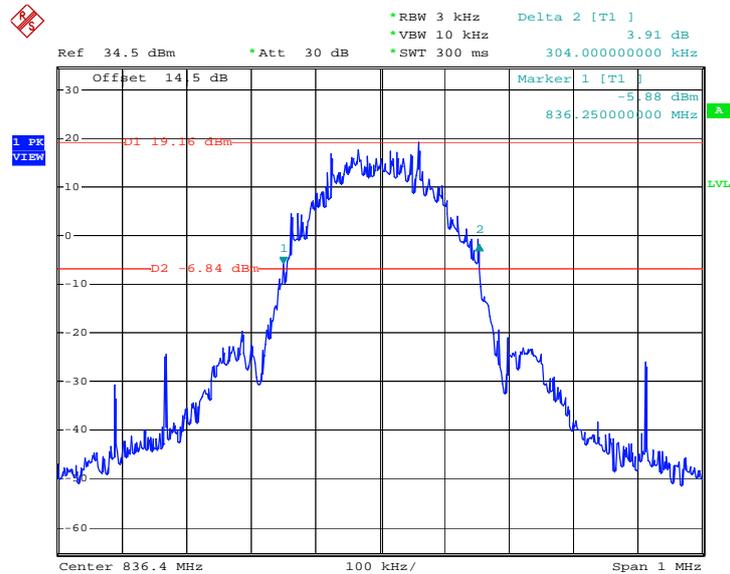


Date: 23.NOV.2008 14:40:30




<b>Band :</b>	GSM 1900	<b>Power Stage :</b>	High
<b>Test Mode :</b>	GPRS 8 Link		

**99% Occupied Bandwidth Plot on Channel 661**

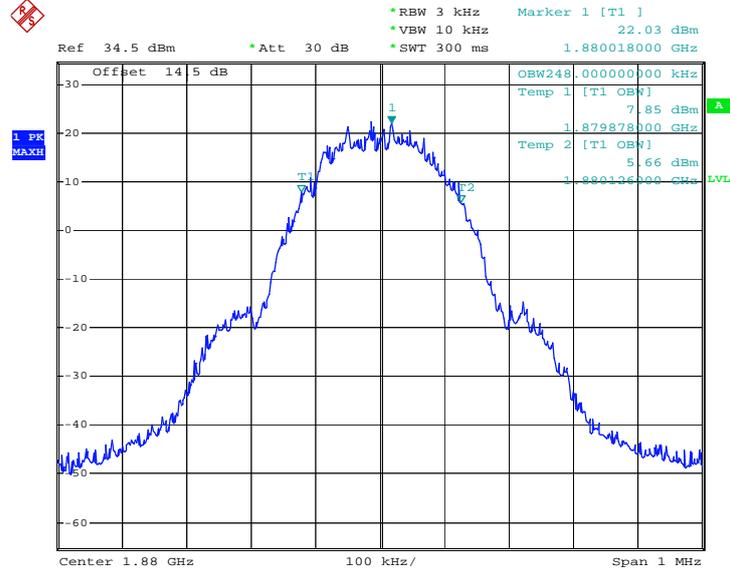

Date: 13.JAN.2003 22:39:18

**26dB Bandwidth Plot on Channel 661**

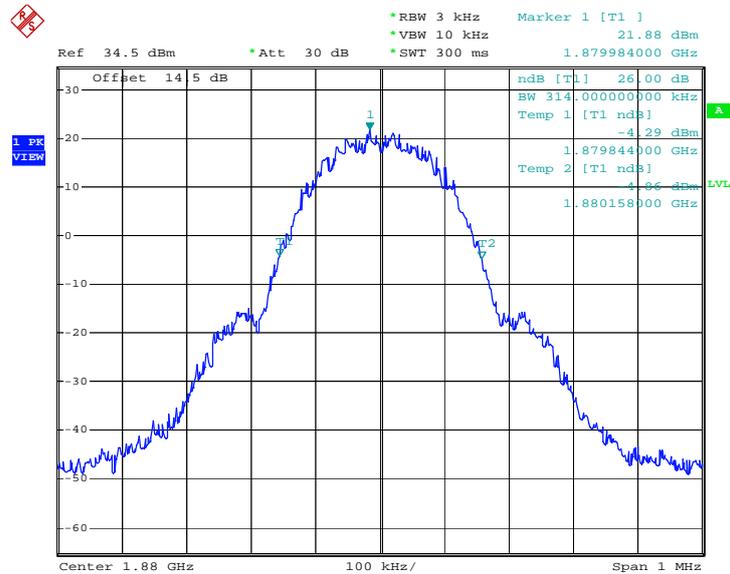


Date: 13.JAN.2003 22:27:16




<b>Band :</b>	GSM 1900	<b>Power Stage :</b>	High
<b>Test Mode :</b>	EDGE 8 Link		

**99% Occupied Bandwidth Plot on Channel 661**

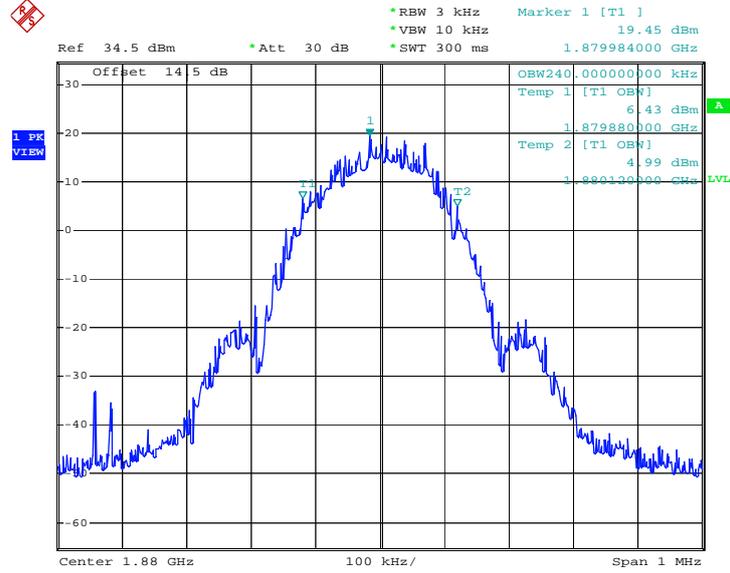

Date: 13.JAN.2003 23:52:12

**26dB Bandwidth Plot on Channel 661**

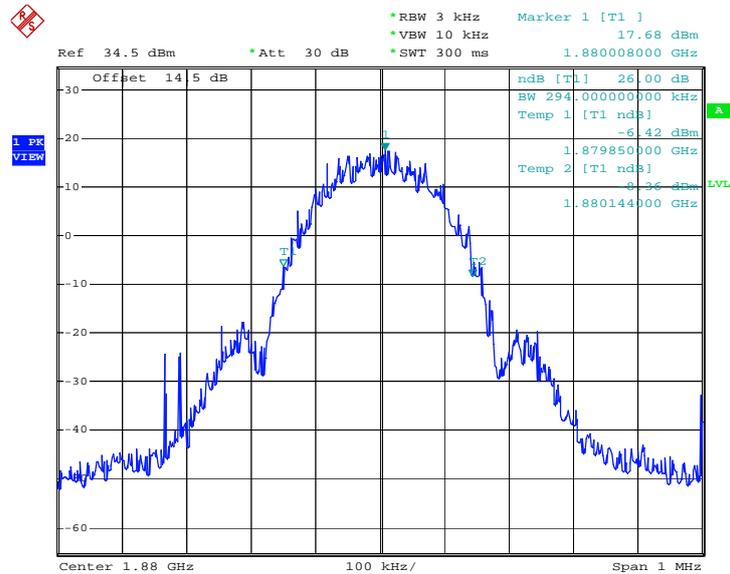


Date: 13.JAN.2003 23:37:34




Band :	WCDMA Band V	Power Stage :	High
Test Mode :	WCDMA Link		

99% Occupied Bandwidth Plot on Channel 4182

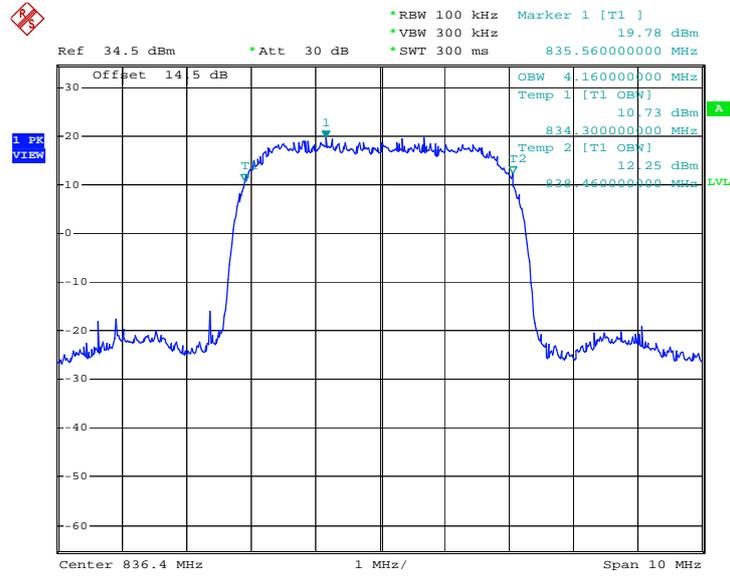

Date: 16.DEC.2008 07:48:57

26dB Bandwidth Plot on Channel 4182

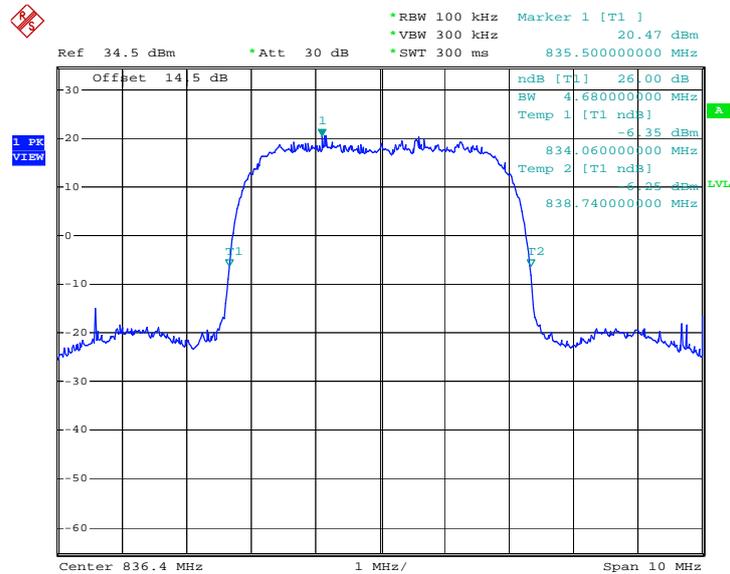


Date: 16.DEC.2008 07:33:14






<b>Band :</b>	CDMA2000 Cellular	<b>Power Stage :</b>	High
<b>Test Mode :</b>	1xEV-DO Rev. A_RETAP_ 2048Kbps		

**99% Occupied Bandwidth Plot on Channel 334**

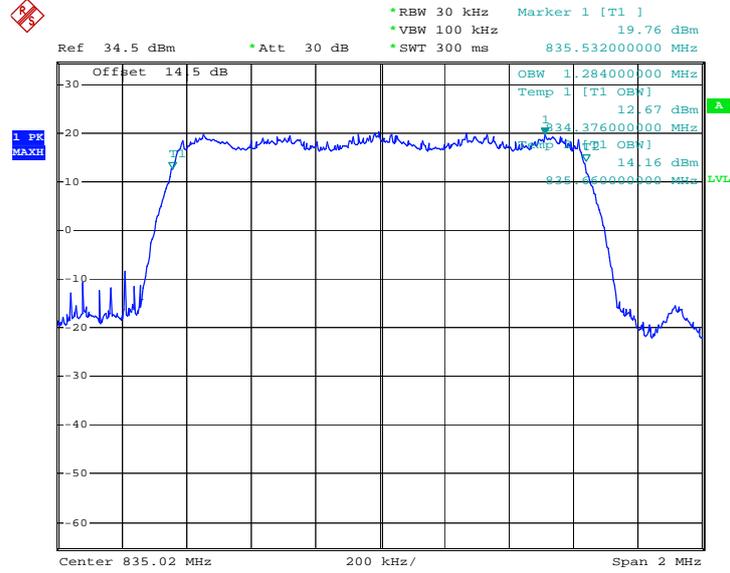

Date: 26.JAN.2003 00:26:15

**26dB Bandwidth Plot on Channel 334**

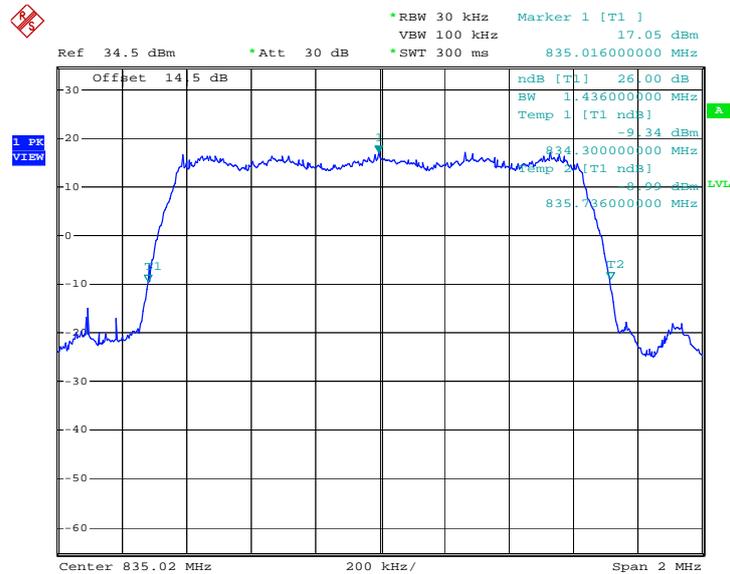


Date: 26.JAN.2003 00:05:26




<b>Band :</b>	CDMA2000 PCS	<b>Power Stage :</b>	High
<b>Test Mode :</b>	1xEV-DO Rev. A_RETAP_ 128Kbps		

**99% Occupied Bandwidth Plot on Channel 600**

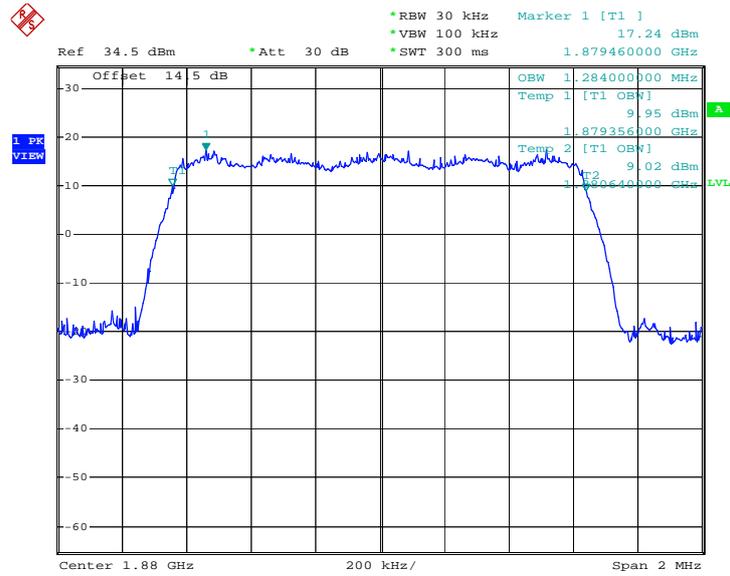

Date: 26.JAN.2003 03:09:32

**26dB Bandwidth Plot on Channel 600**

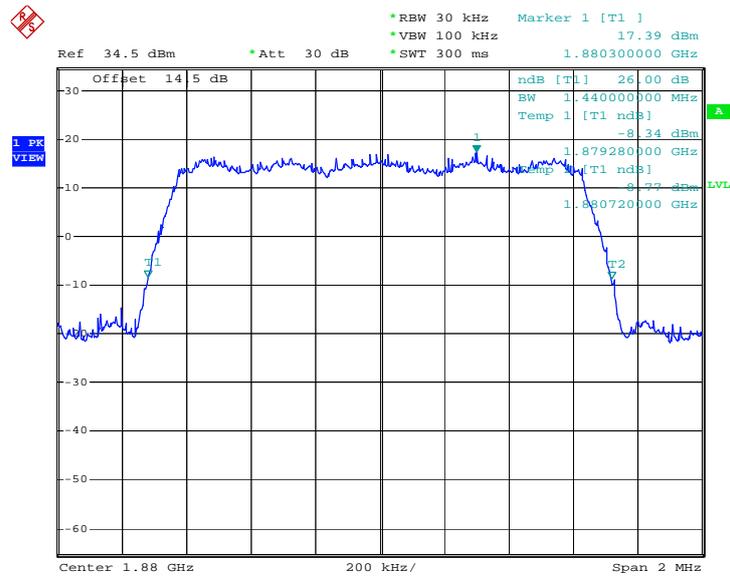


Date: 26.JAN.2003 01:36:29



### 3.3.6 Test Result (Plots) of Conducted Band Edges


Band :	GSM850	Power Stage :	High
Test Mode :	GPRS 8 Link		

Lower Band Edge Plot on Channel 128

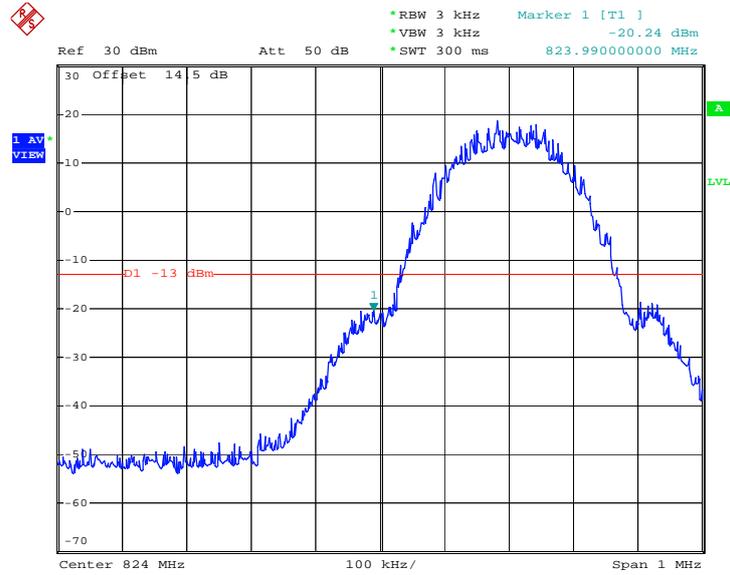

Date: 23.NOV.2008 14:05:14

Higher Band Edge Plot on Channel 251

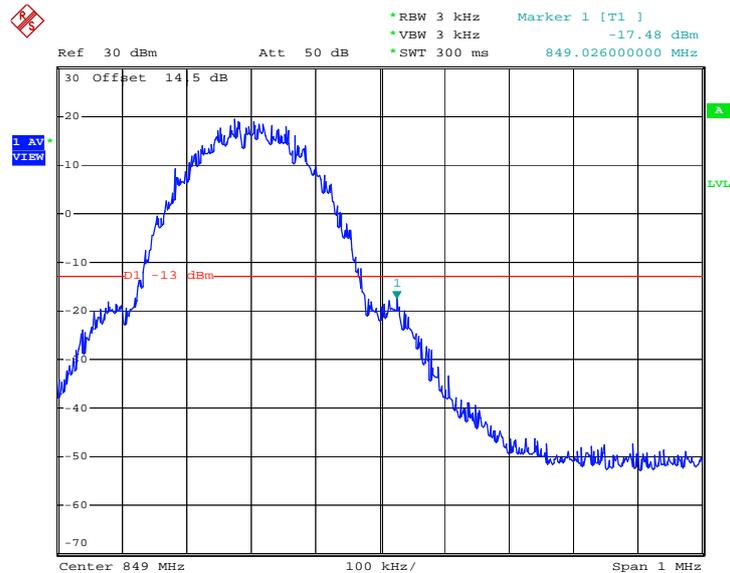


Date: 23.NOV.2008 14:07:01




Band :	GSM850	Power Stage :	High
Test Mode :	EDGE 8 Link		

Lower Band Edge Plot on Channel 128

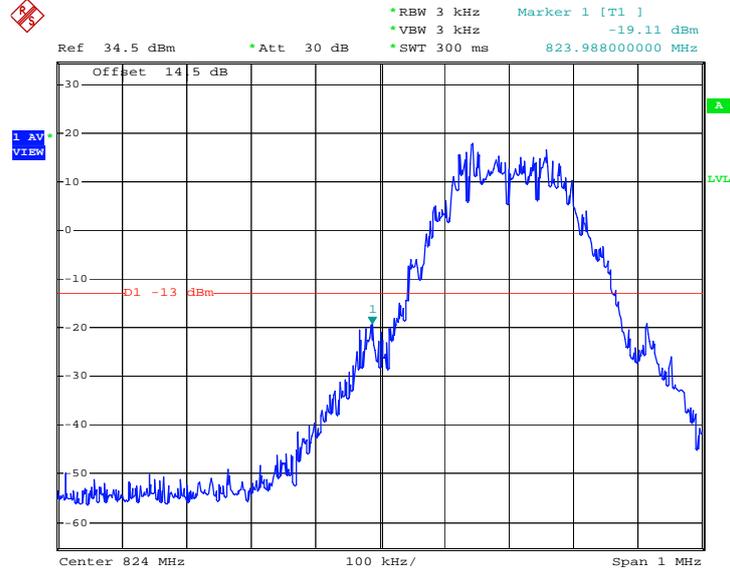

Date: 23.NOV.2008 14:43:53

Higher Band Edge Plot on Channel 251

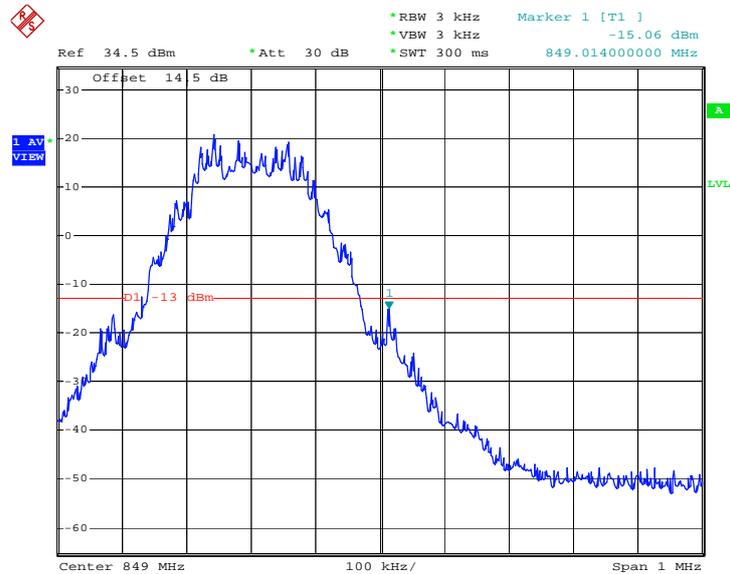


Date: 23.NOV.2008 14:51:27




Band :	GSM1900	Power Stage :	High
Test Mode :	GPRS 8 Link		

Lower Band Edge Plot on Channel 512

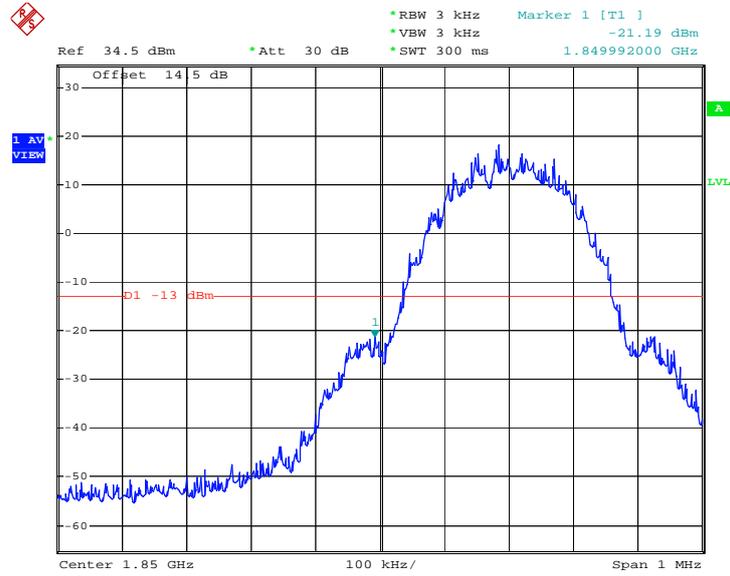

Date: 13.JAN.2003 22:30:48

Higher Band Edge Plot on Channel 810

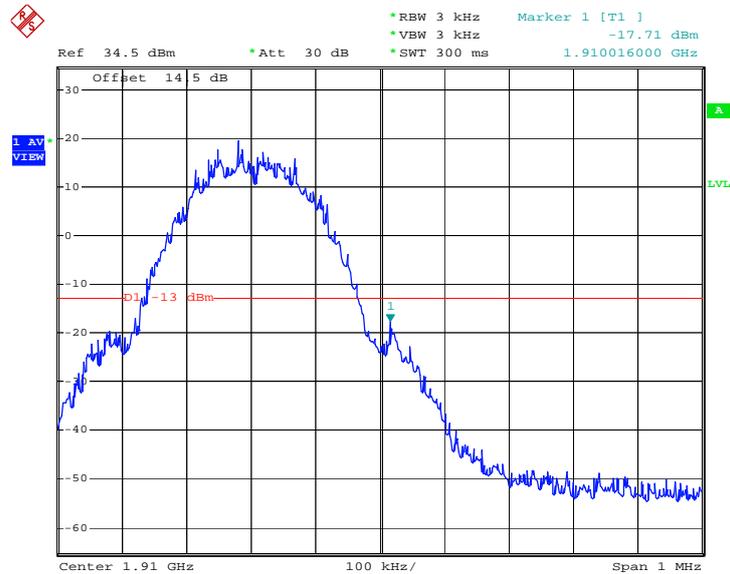


Date: 13.JAN.2003 22:32:15




Band :	GSM1900	Power Stage :	High
Test Mode :	EDGE 8 Link		

Lower Band Edge Plot on Channel 512

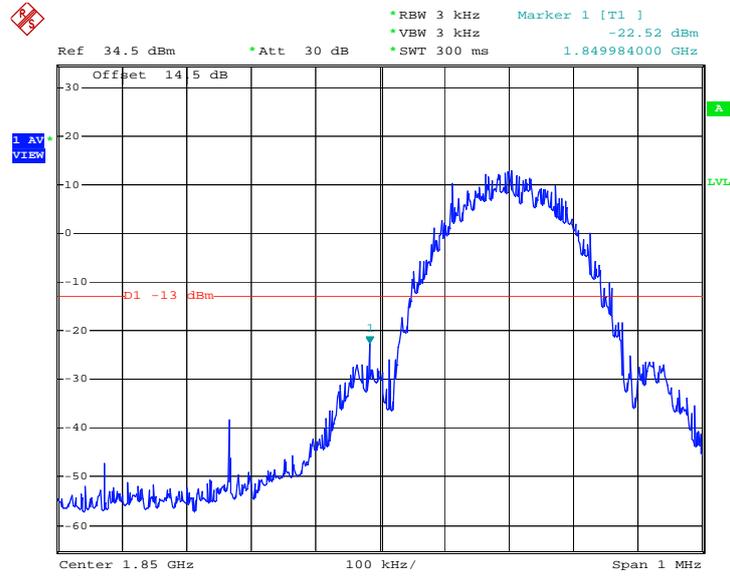

Date: 13.JAN.2003 23:42:22

Higher Band Edge Plot on Channel 810

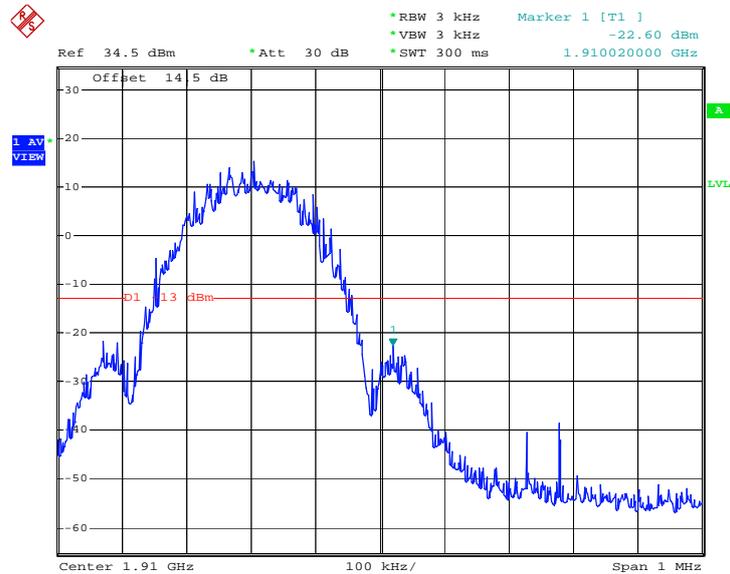


Date: 13.JAN.2003 23:40:38




Band :	WCDMA Band V	Power Stage :	High
Test Mode :	WCDMA Link		

Lower Band Edge Plot on Channel 4132

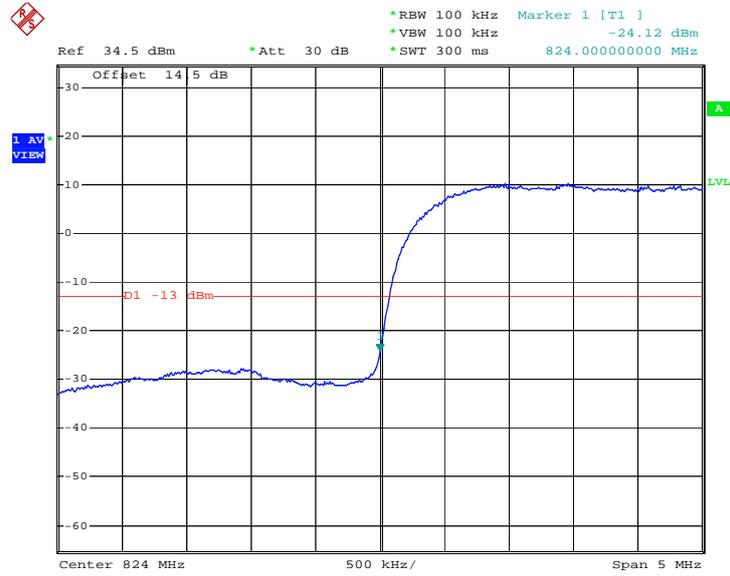

Date: 16.DEC.2008 07:41:16

Higher Band Edge Plot on Channel 4233

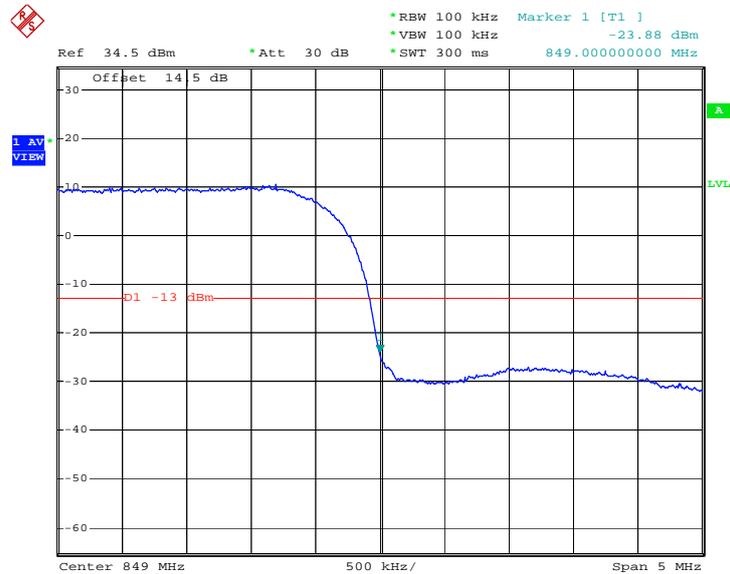


Date: 16.DEC.2008 07:39:39




Band :	WCDMA Band II	Power Stage :	High
Test Mode :	HSDPA Link		

Lower Band Edge Plot on Channel 9262

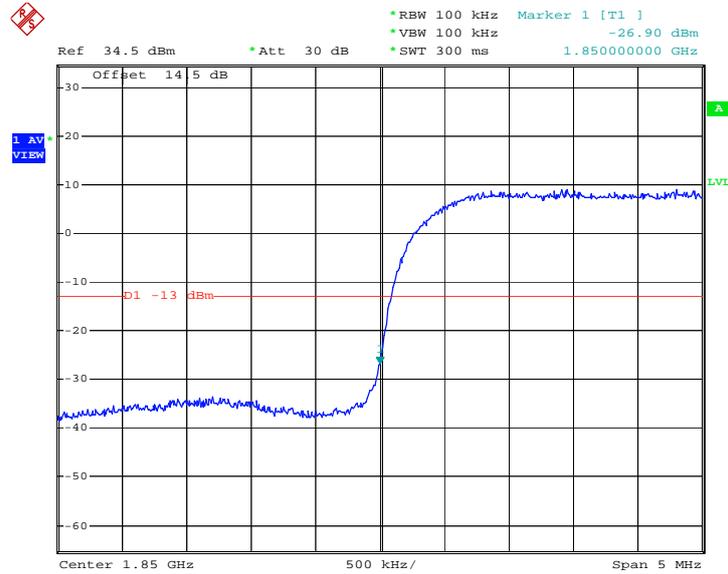

Date: 16.DEC.2008 08:18:53

Higher Band Edge Plot on Channel 9538

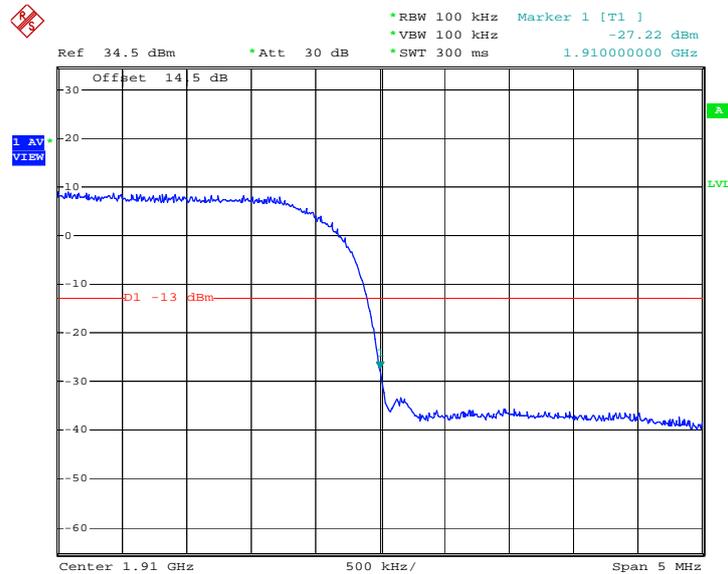


Date: 16.DEC.2008 08:17:46




Band :	CDMA2000 Cellular	Power Stage :	High
Test Mode :	1xEV-DO Rev. A_RETAP_ 2048Kbps		

Lower Band Edge Plot on Channel 1013

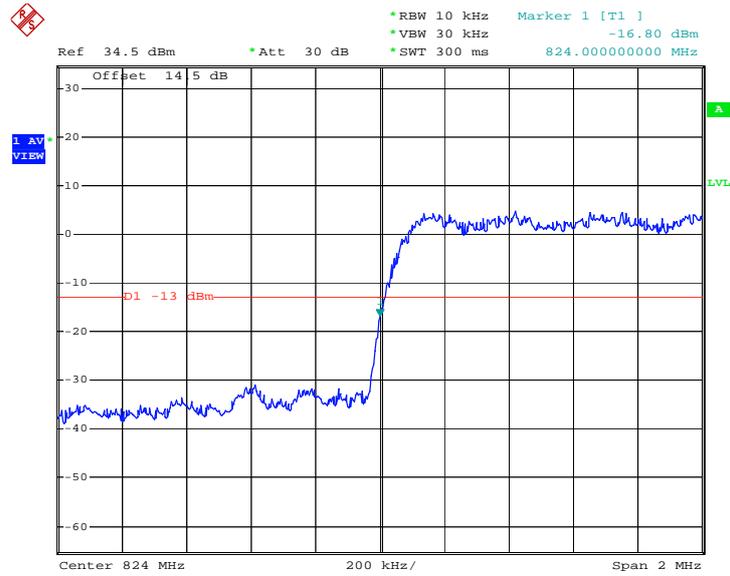

Date: 26.JAN.2003 00:23:17

Higher Band Edge Plot on Channel 777

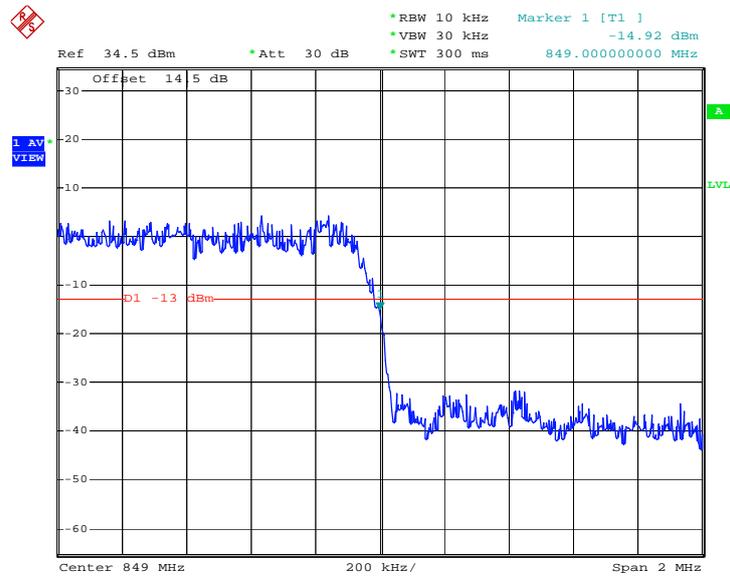


Date: 26.JAN.2003 02:13:02



<b>Band :</b>	CDMA2000 PCS	<b>Power Stage :</b>	High
<b>Test Mode :</b>	1xEV-DO Rev. A_RETAP_ 128Kbps		

**Lower Band Edge Plot on Channel 25**

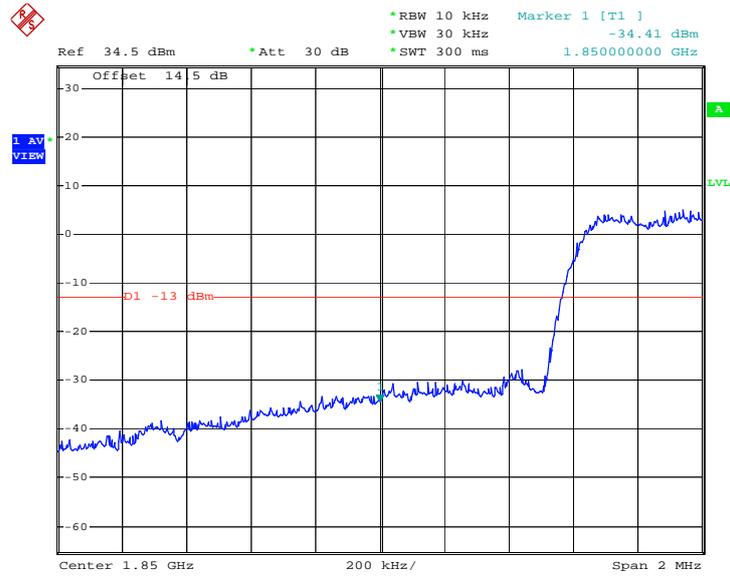

Date: 26.JAN.2003 01:52:49

**Higher Band Edge Plot on Channel 1175**



Date: 26.JAN.2003 01:48:17

### 3.4 Conducted Emission Measurement

#### 3.4.1 Description of Conducted Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.

#### 3.4.4 Test Setup

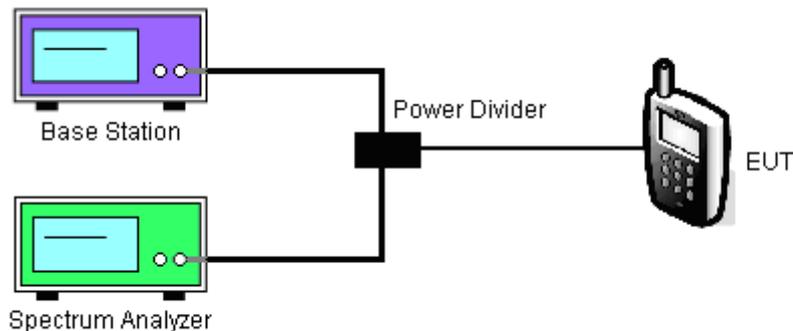




### 3.4.5 Test Result of Conducted Emission


Band :	GSM850	Channel :	CH189
Test Mode :	GPRS 8 Link		

Conducted Emission Plot between 30M-1G

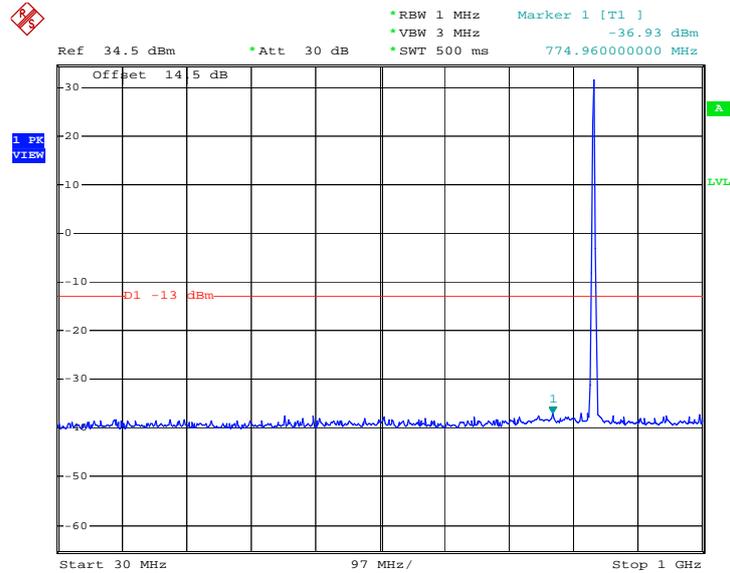

Date: 16.DEC.2008 05:53:06


Conducted Emission Plot between 1GHz ~ 3GHz

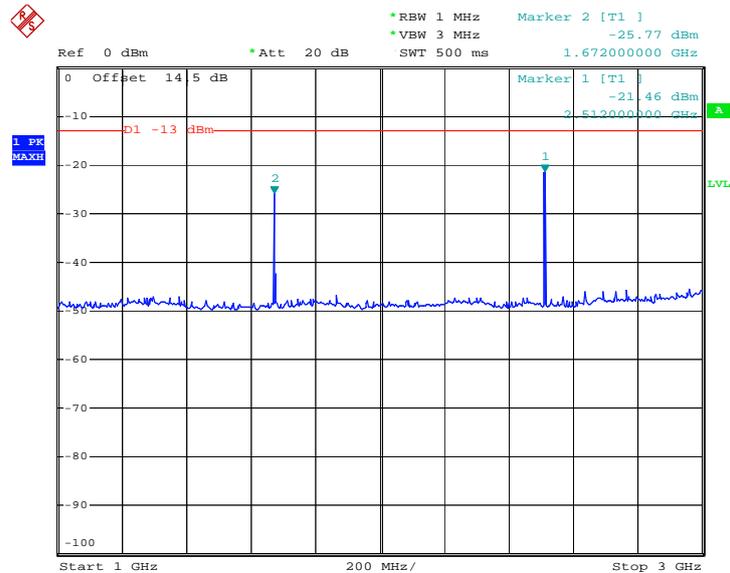

Date: 16.DEC.2008 05:54:29




Conducted Emission Plot between 3GHz ~ 7GHz

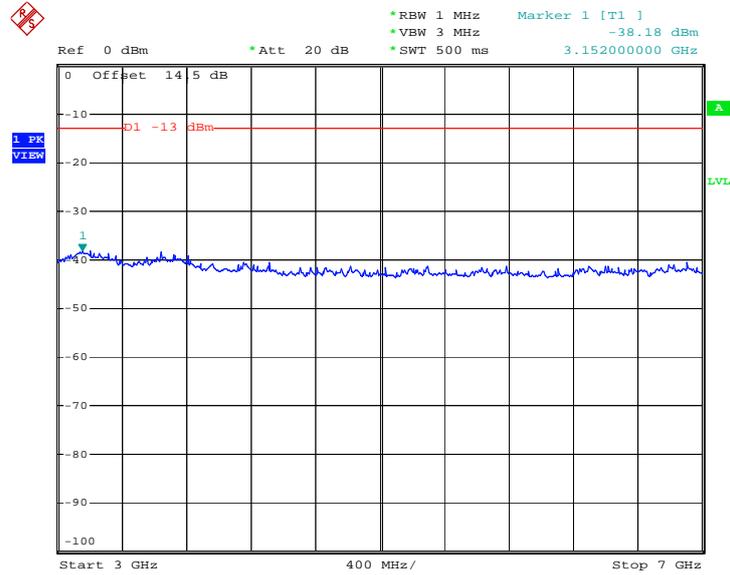

Date: 16.DEC.2008 05:55:26

Conducted Emission Plot between 7GHz ~ 9GHz

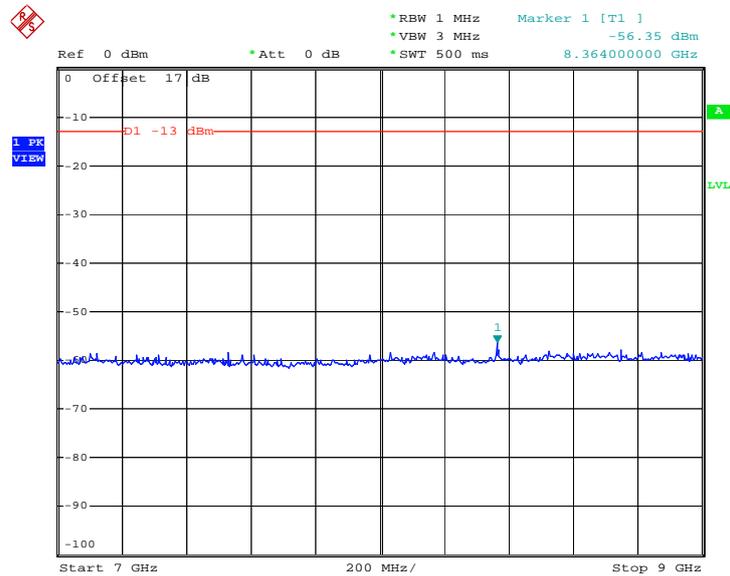


Date: 16.DEC.2008 05:56:52




Band :	GSM850	Channel :	CH189
Test Mode :	EDGE 8 Link		

Conducted Emission Plot between 30M-1G

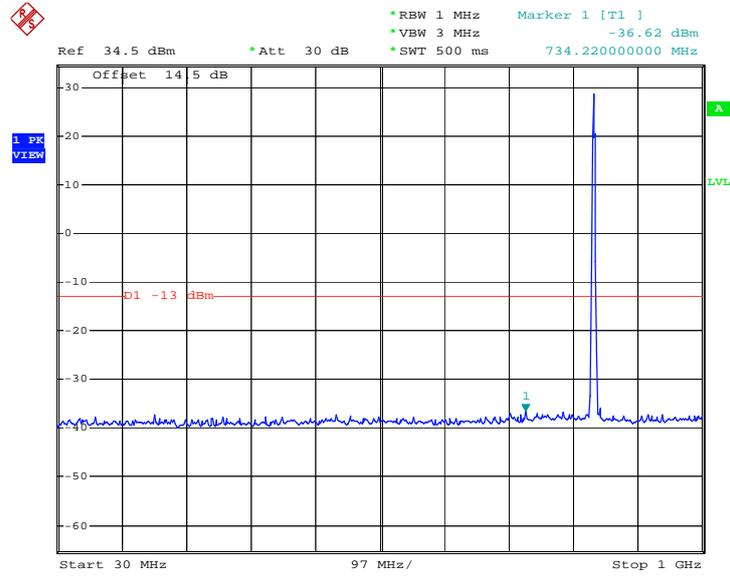

Date: 16.DEC.2008 04:43:02


Conducted Emission Plot between 1GHz ~ 3GHz

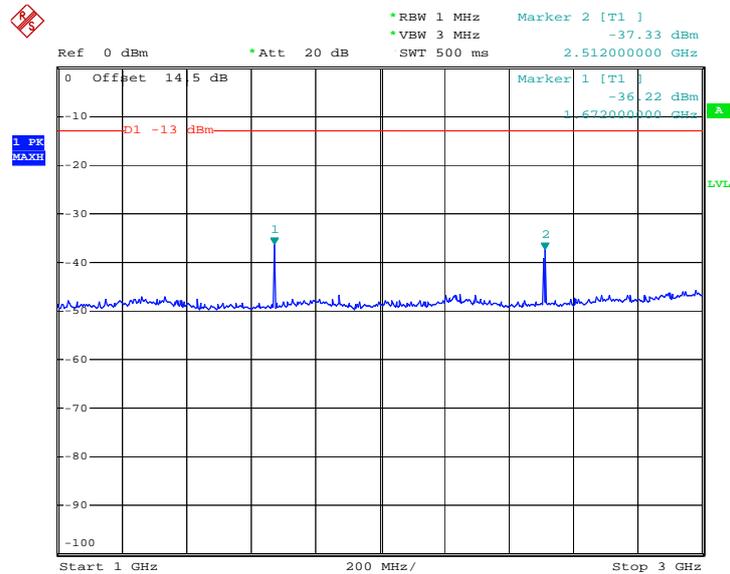

Date: 16.DEC.2008 04:59:08




### Conducted Emission Plot between 3GHz ~ 7GHz

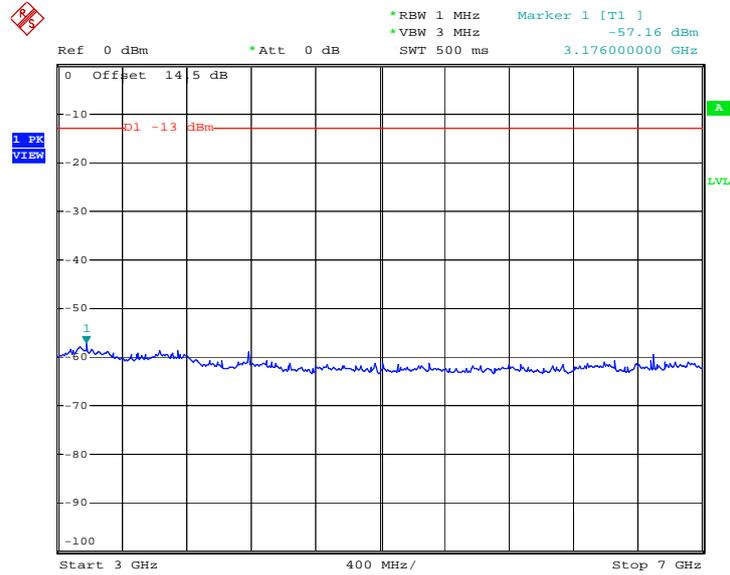

Date: 16.DEC.2008 04:52:18

### Conducted Emission Plot between 7GHz ~ 9GHz

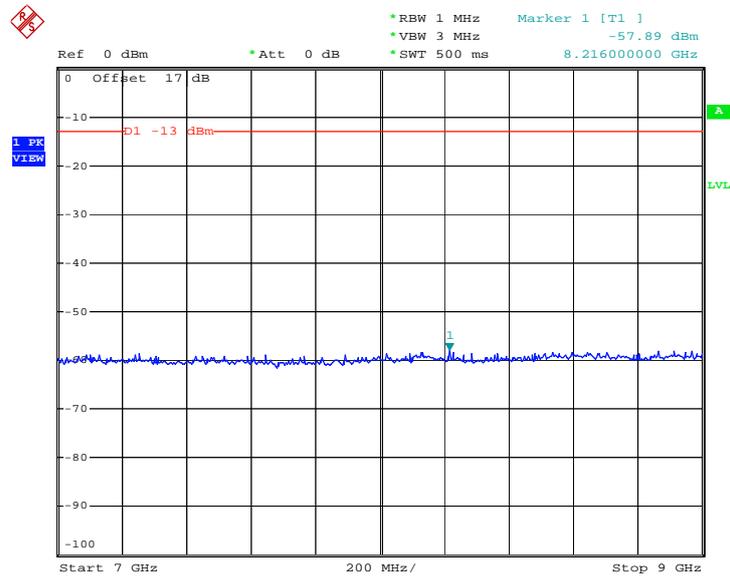


Date: 16.DEC.2008 04:54:57




Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS 8 Link		

Conducted Emission Plot between 30M-1G

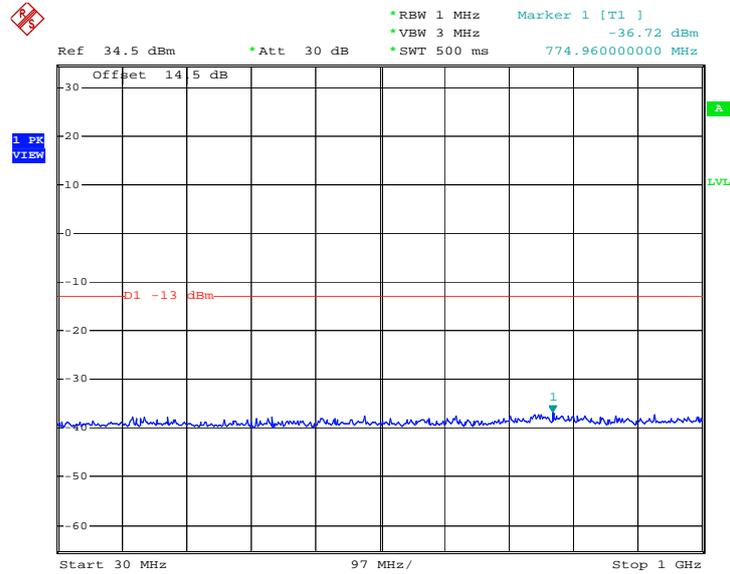

Date: 16.DEC.2008 06:03:59


Conducted Emission Plot between 1GHz ~ 3GHz

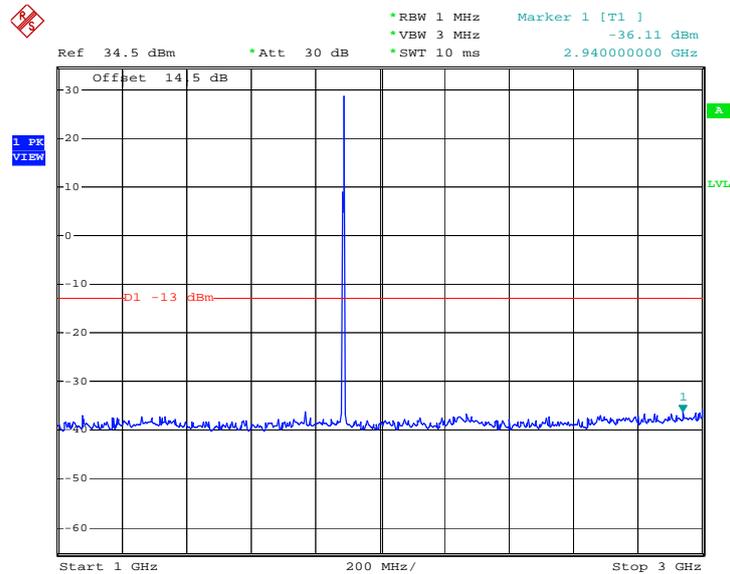

Date: 22.DEC.2008 22:05:05




### Conducted Emission Plot between 3G-7G

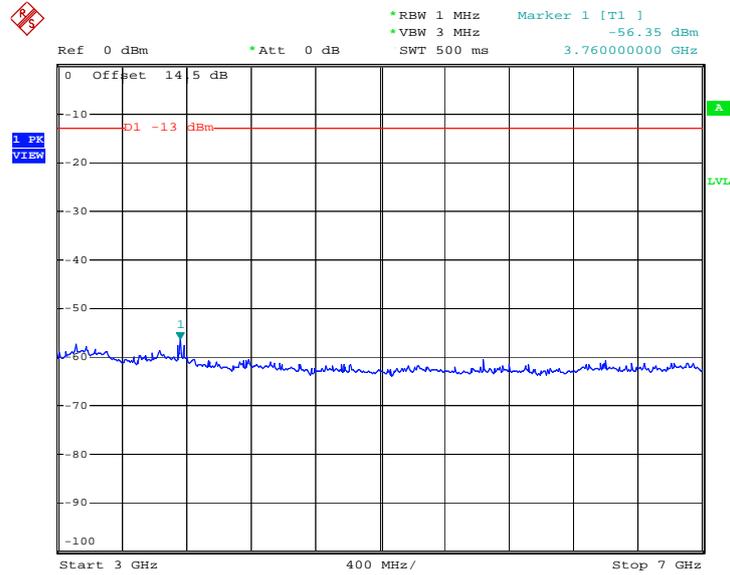

Date: 16.DEC.2008 06:09:41


### Conducted Emission Plot between 7G-13.6G

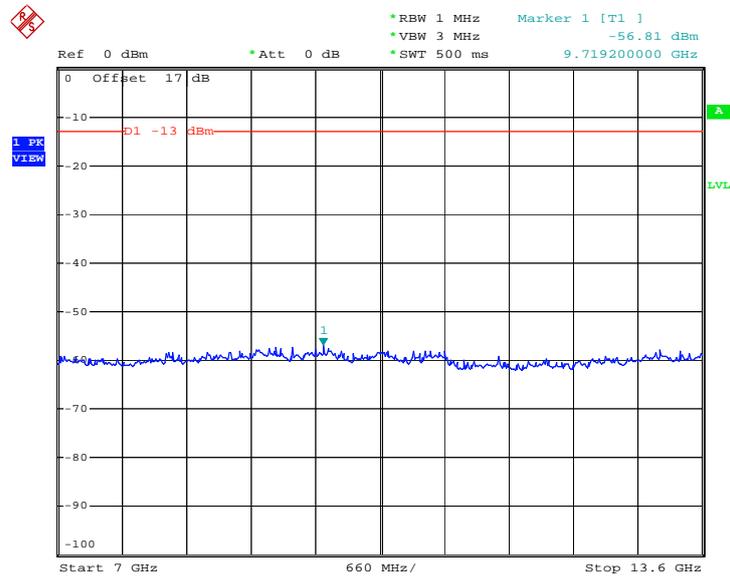

Date: 16.DEC.2008 06:10:52



Conducted Emission Plot between 13.6G-19.1G

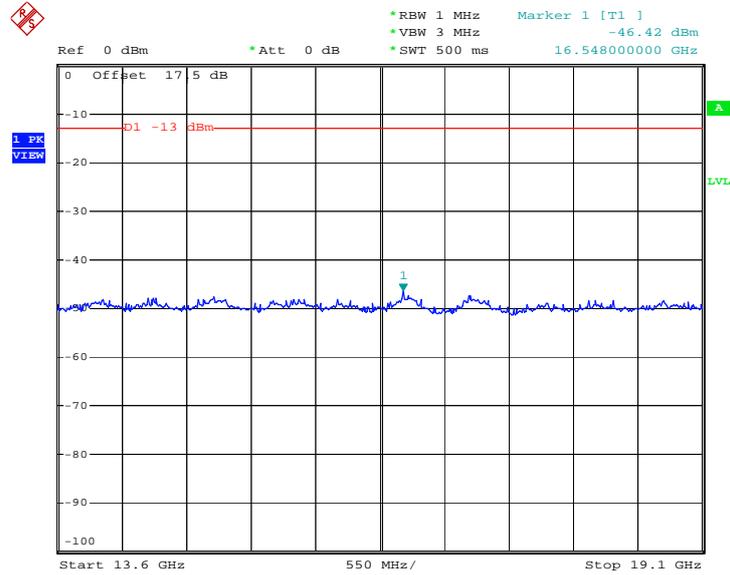


Date: 16.DEC.2008 06:12:39




Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE 8 Link		

Conducted Emission Plot between 30M-1G

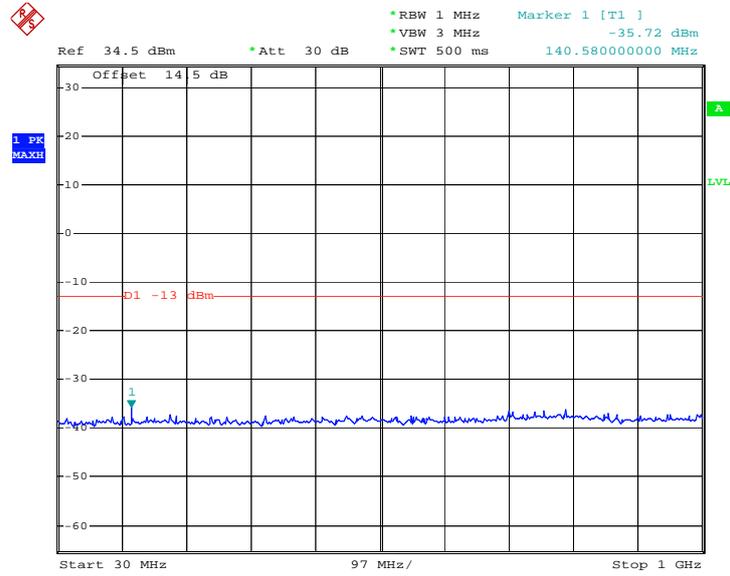

Date: 16.DEC.2008 05:31:19


Conducted Emission Plot between 1GHz ~ 3GHz

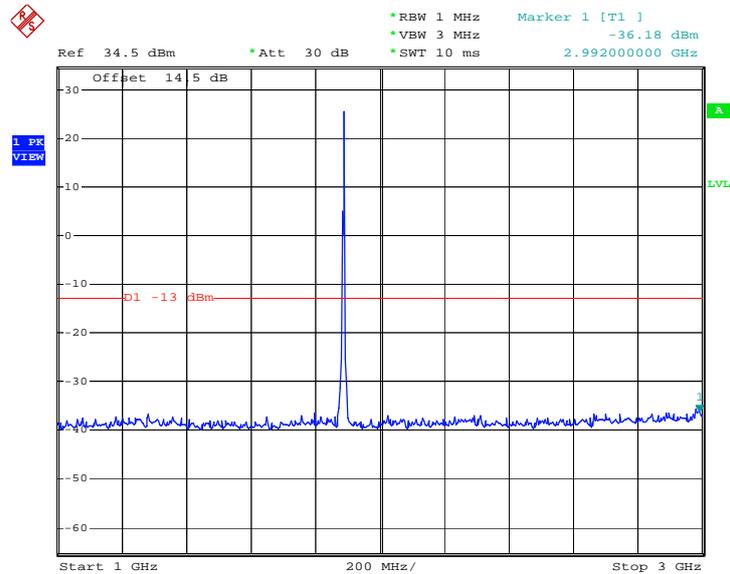

Date: 22.DEC.2008 22:07:54




### Conducted Emission Plot between 3G-7G

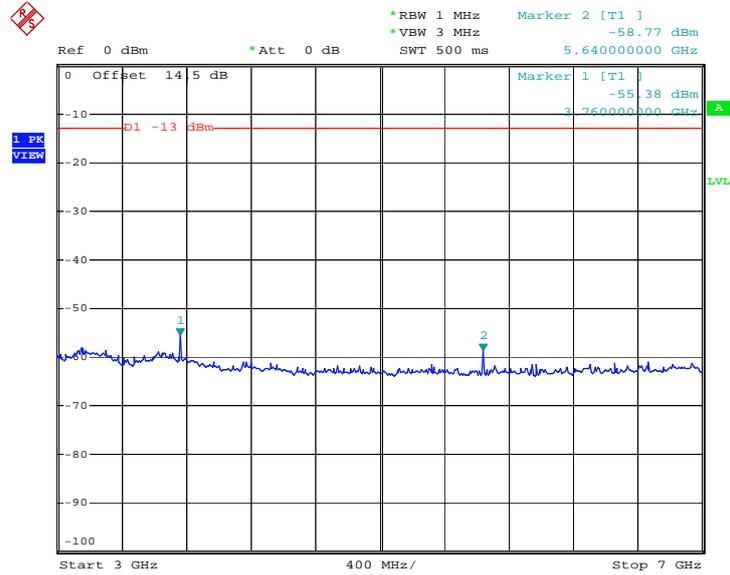

Date: 16.DEC.2008 05:34:15


### Conducted Emission Plot between 7G-13.6G

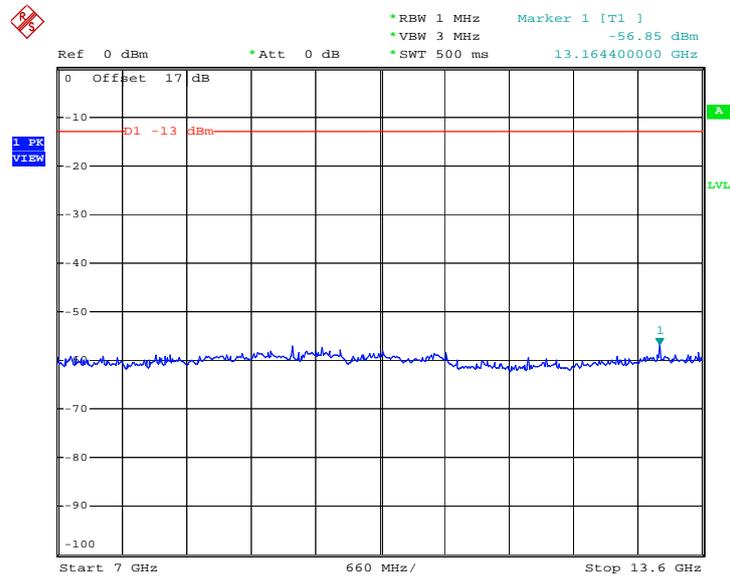

Date: 16.DEC.2008 05:35:42



Conducted Emission Plot between 13.6G-19.1G

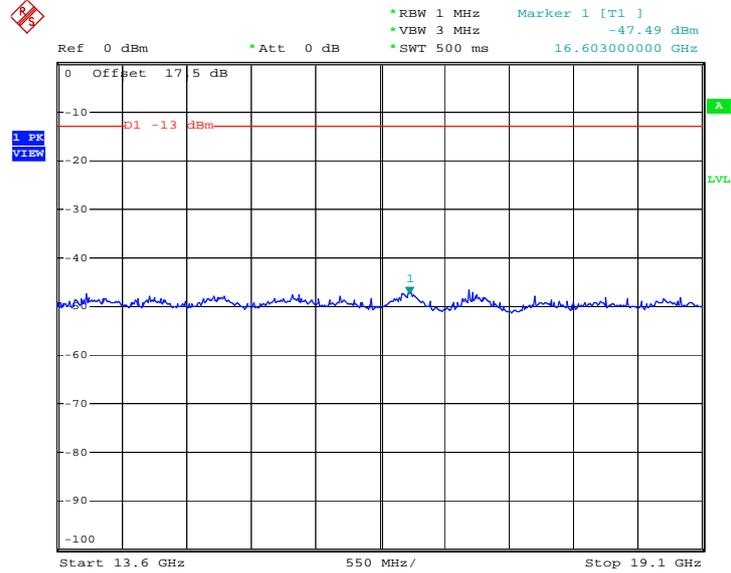


Date: 16.DEC.2008 05:36:56




Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	WCDMA Link		

Conducted Emission Plot between 30M-1G

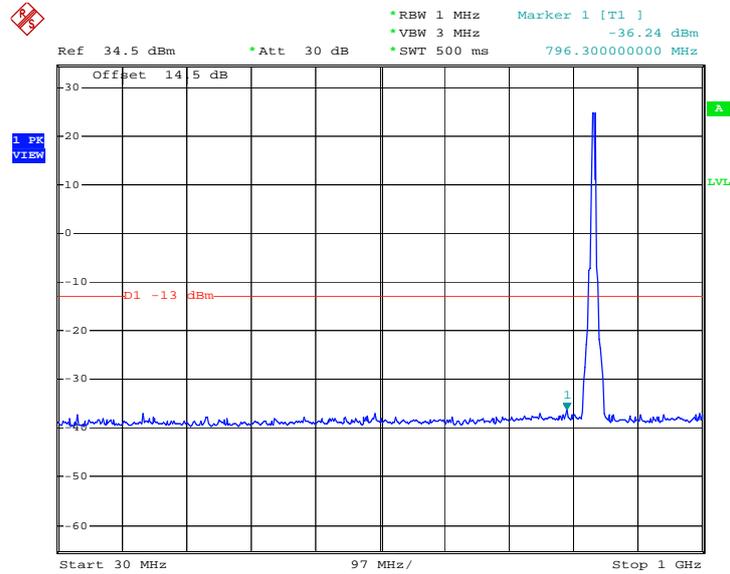

Date: 16.DEC.2008 06:28:20


Conducted Emission Plot between 1GHz ~ 3GHz

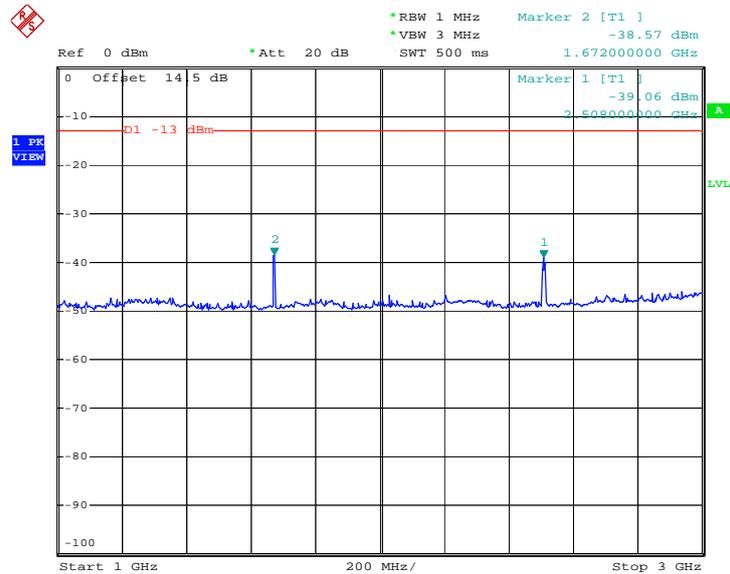

Date: 16.DEC.2008 06:34:01




### Conducted Emission Plot between 3GHz ~ 7GHz

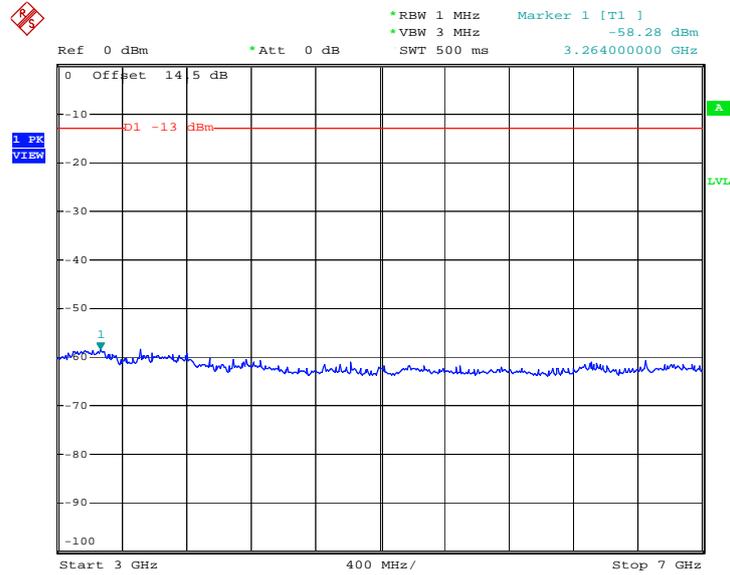

Date: 16.DEC.2008 06:35:08

### Conducted Emission Plot between 7GHz ~ 9GHz

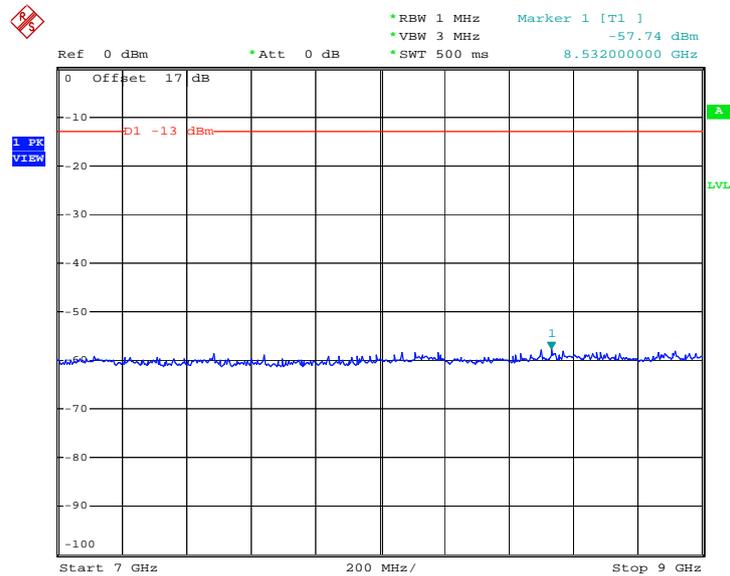


Date: 16.DEC.2008 06:36:06




Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	HSDPA Link		

Conducted Emission Plot between 30M-1G

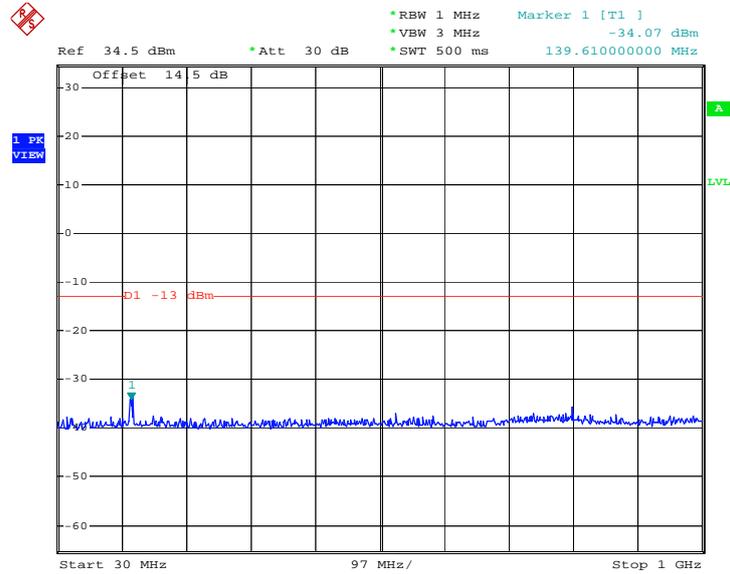

Date: 16.DEC.2008 08:04:31


Conducted Emission Plot between 1GHz ~ 3GHz

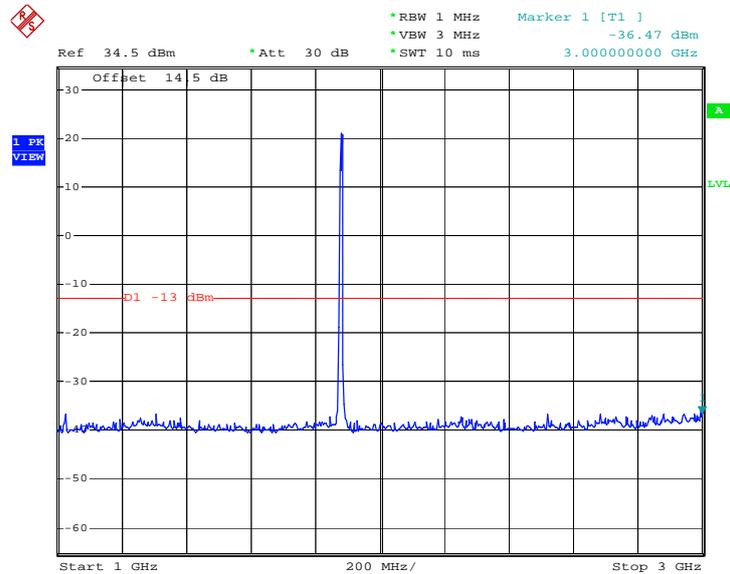

Date: 22.DEC.2008 23:28:12




### Conducted Emission Plot between 3G-7G

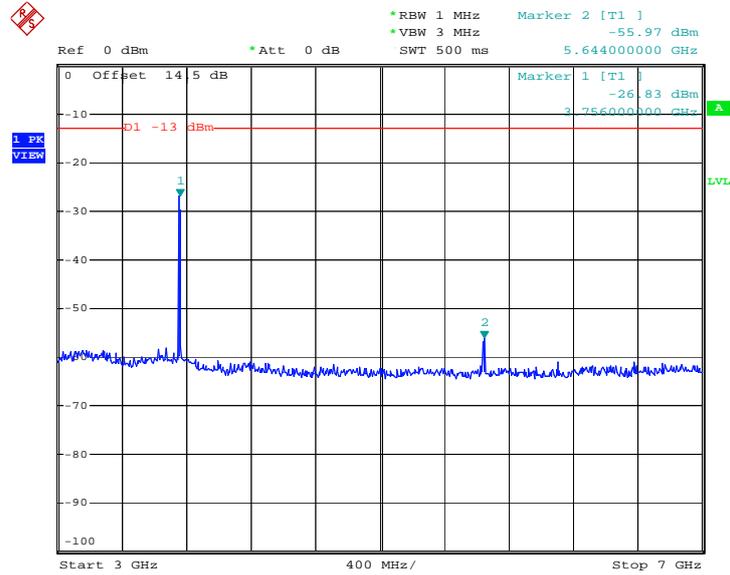

Date: 16.DEC.2008 08:07:12


### Conducted Emission Plot between 7G-13.6G

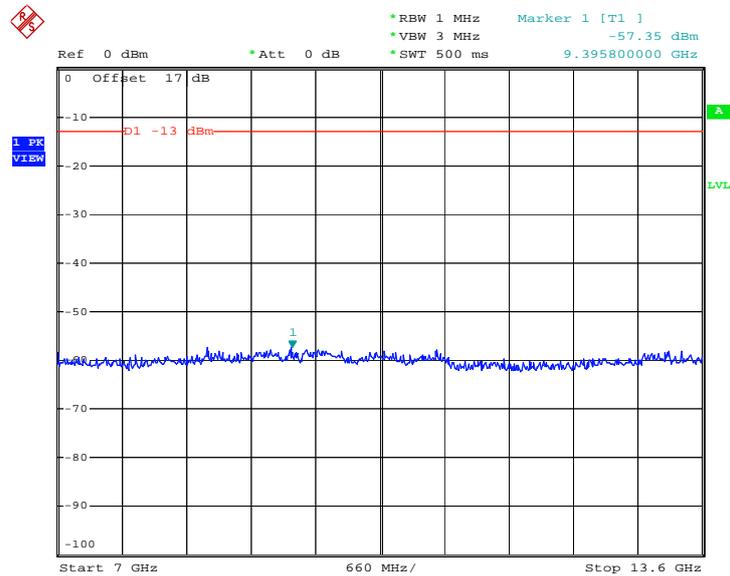

Date: 16.DEC.2008 08:08:57



Conducted Emission Plot between 13.6G-19.1G

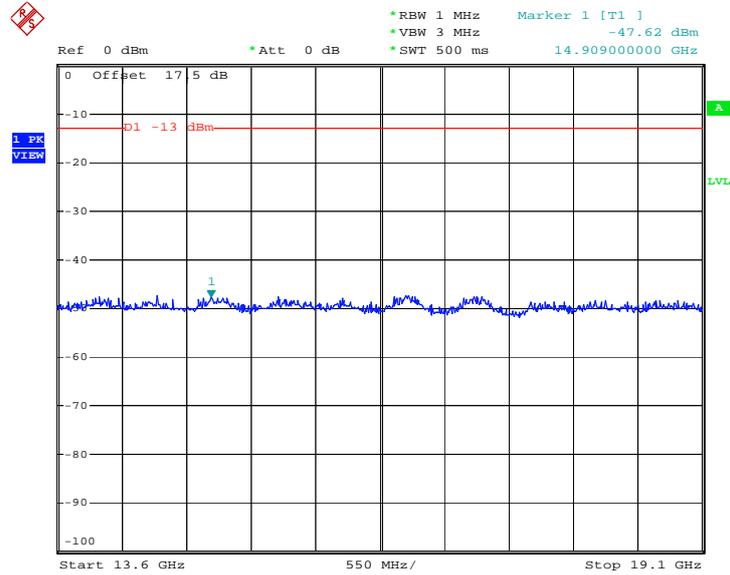


Date: 16.DEC.2008 08:10:43




<b>Band :</b>	CDMA2000 Cellular	<b>Power Stage :</b>	High
<b>Test Mode :</b>	1xEV-DO Rev. A_RETAP_ 2048Kbps		

**Conducted Emission Plot between 30M-1G**

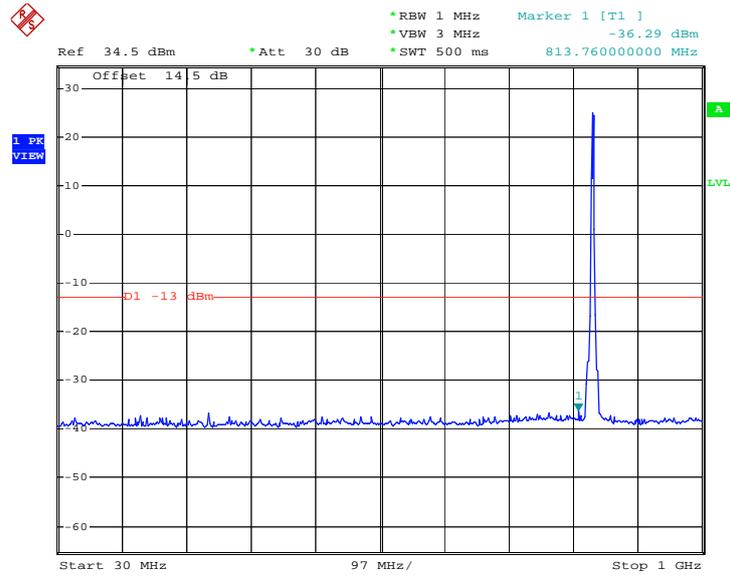

Date: 16.DEC.2008 03:58:47


**Conducted Emission Plot between 1GHz ~ 3GHz**

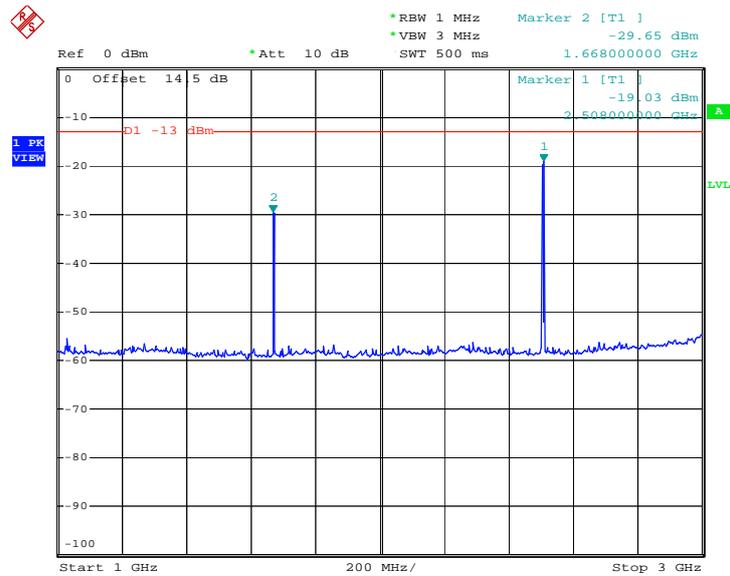

Date: 16.DEC.2008 04:03:15




### Conducted Emission Plot between 3GHz ~ 7GHz

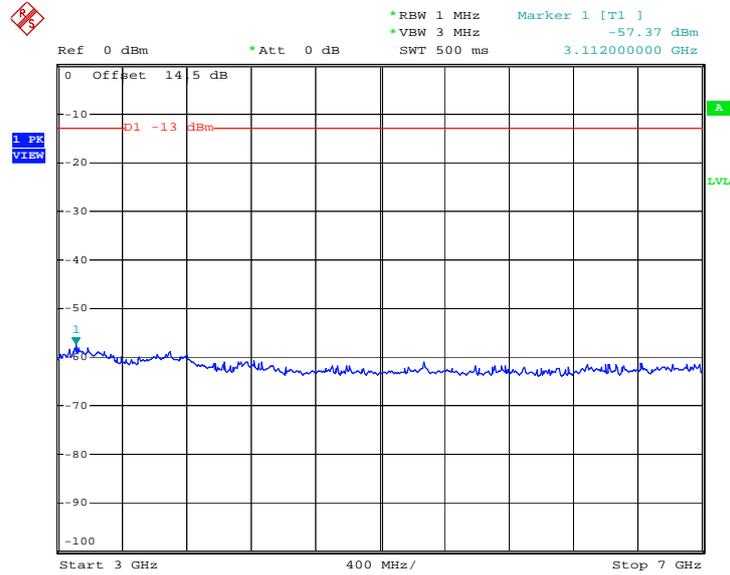

Date : 16.DEC.2008 04:05:00

### Conducted Emission Plot between 7GHz ~ 9GHz

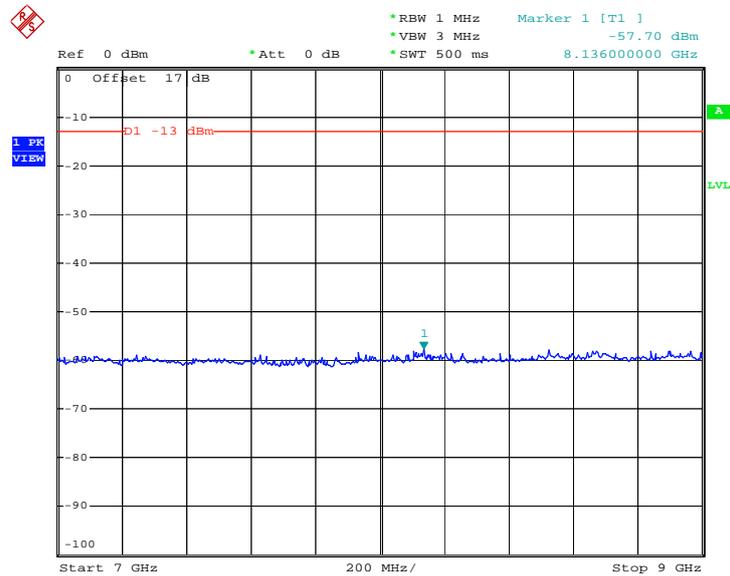


Date : 16.DEC.2008 04:06:44




Band :	CDMA2000 PCS	Channel :	CH600
Test Mode :	1xEV-DO Rev. A_128Kbps		

Conducted Emission Plot between 30M-1G

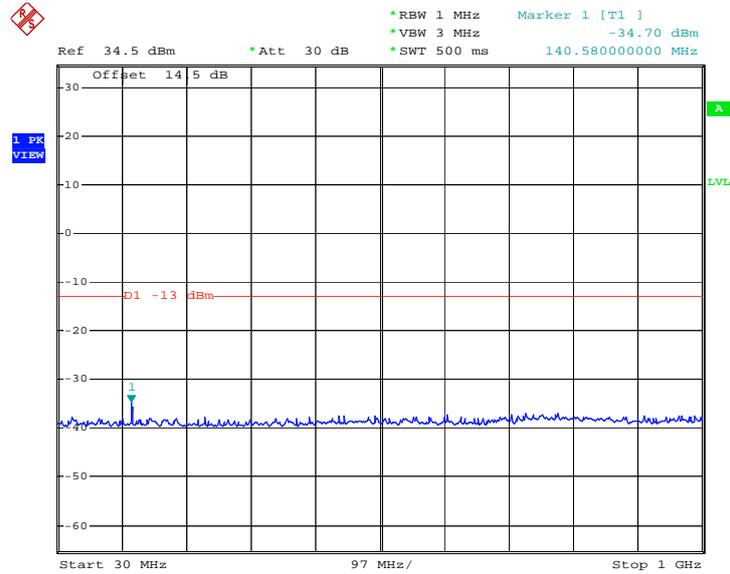

Date: 16.DEC.2008 04:10:31


Conducted Emission Plot between 1GHz ~ 3GHz

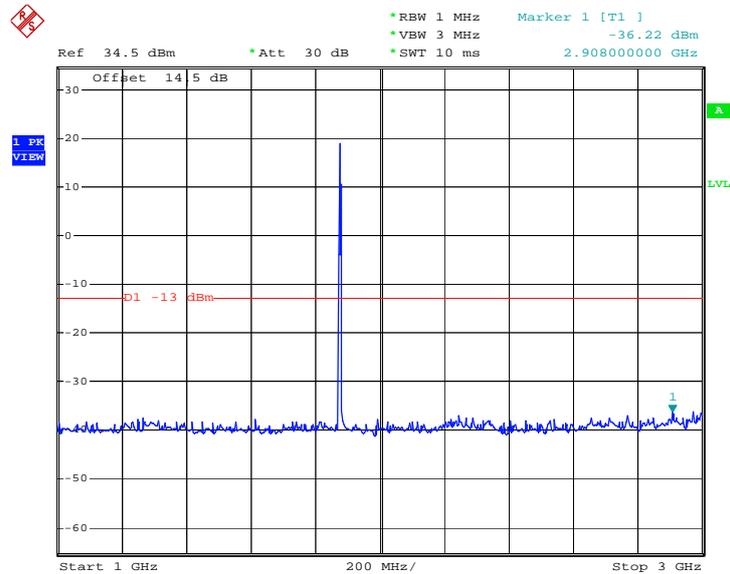

Date: 22.DEC.2008 22:35:37




### Conducted Emission Plot between 3G-7G

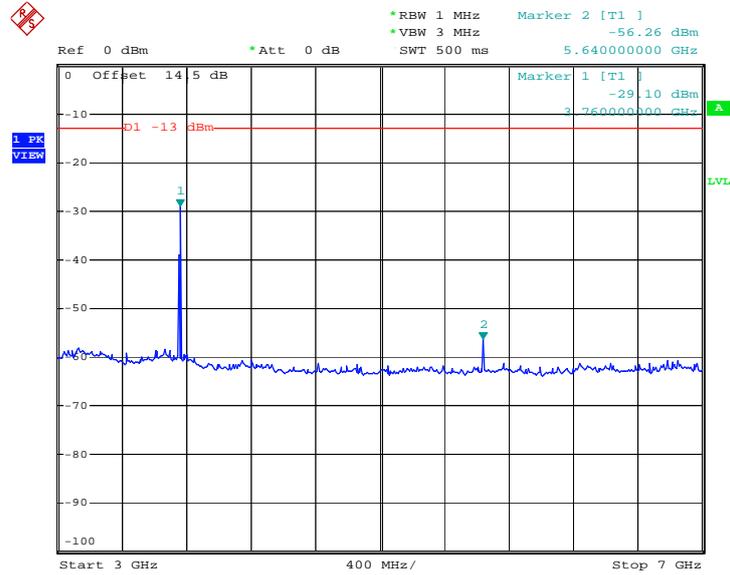

Date: 16.DEC.2008 04:12:11


### Conducted Emission Plot between 7G-13.6G

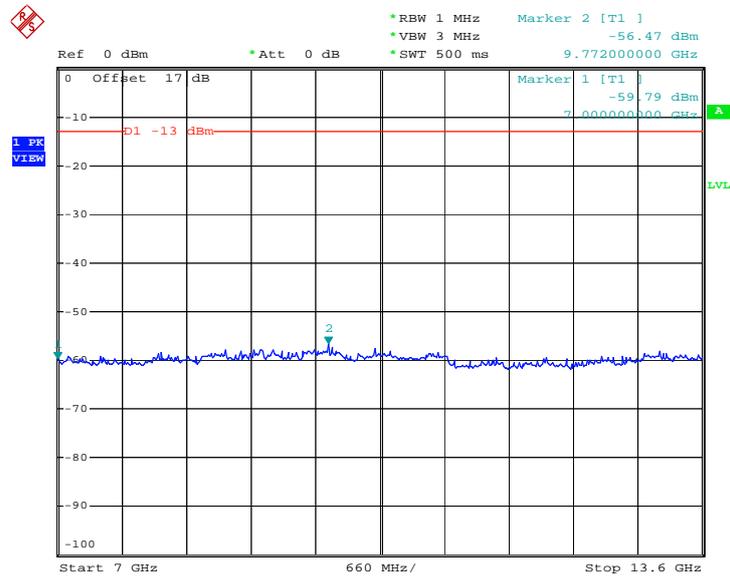

Date: 16.DEC.2008 04:14:01



Conducted Emission Plot between 13.6G-19.1G

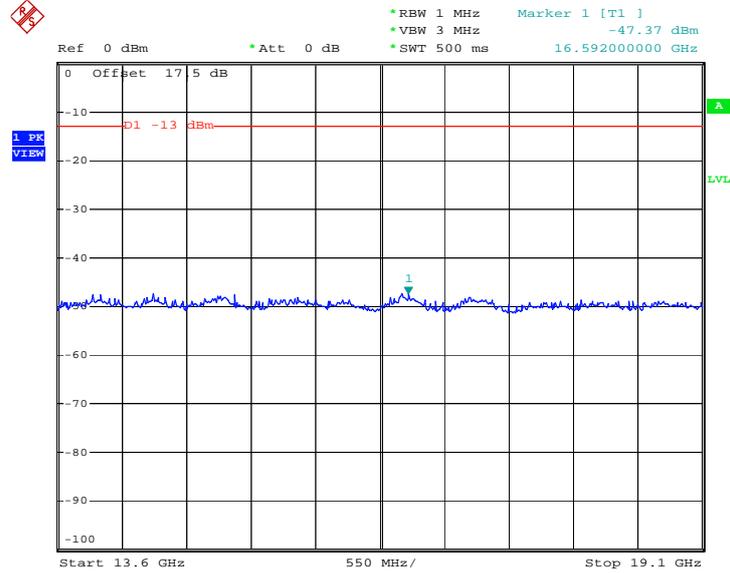

Date: 16.DEC.2008 04:17:04

### 3.5 Field Strength of Spurious Radiation Measurement

#### 3.5.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. Emission level (dBm) = output power + substitution Gain.


#### 3.5.4 Test Setup

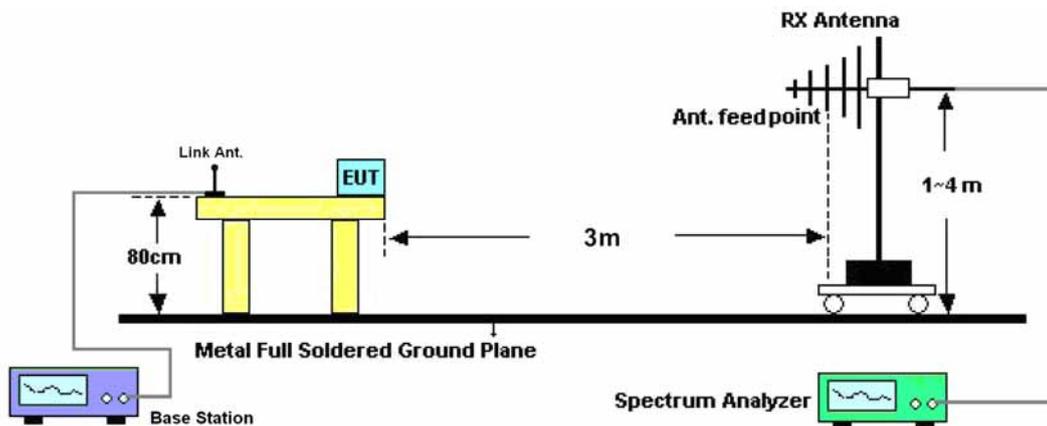



3.5.5 Test Result of Field Strength of Spurious Radiated

Band :	GSM850	Temperature :	17~21°C
Test Mode :	GPRS 8 Link	Relative Humidity :	37~45%
Test Engineer :	Peter Chou	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

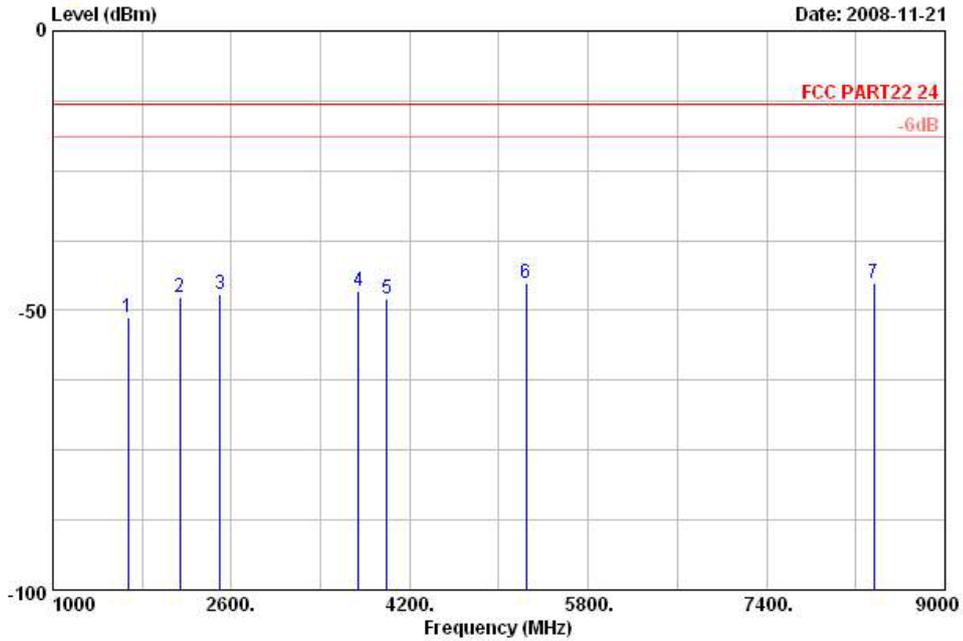


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-07091 HORIZONTAL  
 Model : FG 8N1901  
 Memo : Mode 1

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1674.00	-53.38	-13	-40.38	-55.7	-60.85	-0.68	8.94	H	Pass
2136.00	-49.89	-13	-36.89	-55.54	-57.56	-0.21	9.61	H	Pass
2502.00	-49.17	-13	-36.17	-57.47	-59.66	-2.34	10.30	H	Pass
3742.00	-48.74	-13	-35.74	-58.09	-60.80	-3.77	10.44	H	Pass
3994.00	-50.17	-13	-37.17	-60.54	-63.46	-4.59	10.85	H	Pass
5246.00	-47.30	-13	-34.30	-60.26	-63.56	-7.21	11.20	H	Pass
8364.00	-47.21	-13	-34.21	-63.47	-67.56	-9.82	12.68	H	Pass



Band :	GSM850	Temperature :	17~21°C
Test Mode :	GPRS 8 Link	Relative Humidity :	37~45%
Test Engineer :	Peter Chou	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

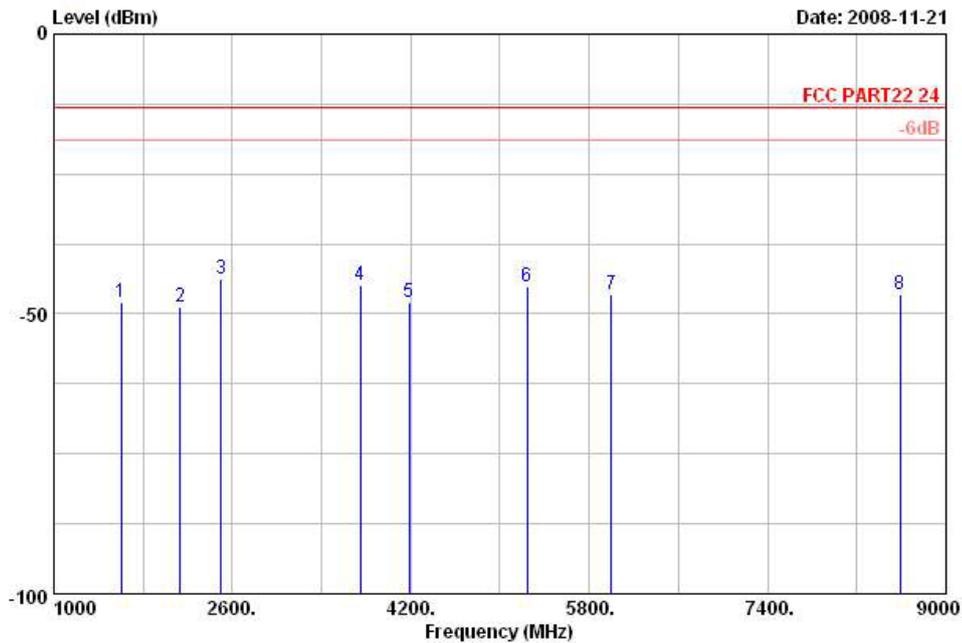


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-07091 VERTICAL  
 Model : FG 8N1901  
 Memo : Mode 1

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1600.00	-50.14	-13	-37.14	-51.81	-57.06	-0.25	8.82	V	Pass
2134.00	-50.83	-13	-37.83	-56.48	-58.50	-0.21	9.61	V	Pass
2500.00	-45.75	-13	-32.75	-54.05	-56.24	-2.34	10.30	V	Pass
3746.00	-47.02	-13	-34.02	-56.46	-59.18	-3.84	10.47	V	Pass
4184.00	-49.99	-13	-36.99	-60.77	-63.71	-4.71	11.16	V	Pass
5242.00	-47.37	-13	-34.37	-60.33	-63.63	-7.21	11.20	V	Pass
5996.00	-48.54	-13	-35.54	-63.59	-67.04	-8.95	11.70	V	Pass
8590.00	-48.74	-13	-35.74	-65.24	-69.37	-10.05	12.73	V	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	17~21°C
<b>Test Mode :</b>	EDGE 8 Link	<b>Relative Humidity :</b>	37~45%
<b>Test Engineer :</b>	Peter Chou	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

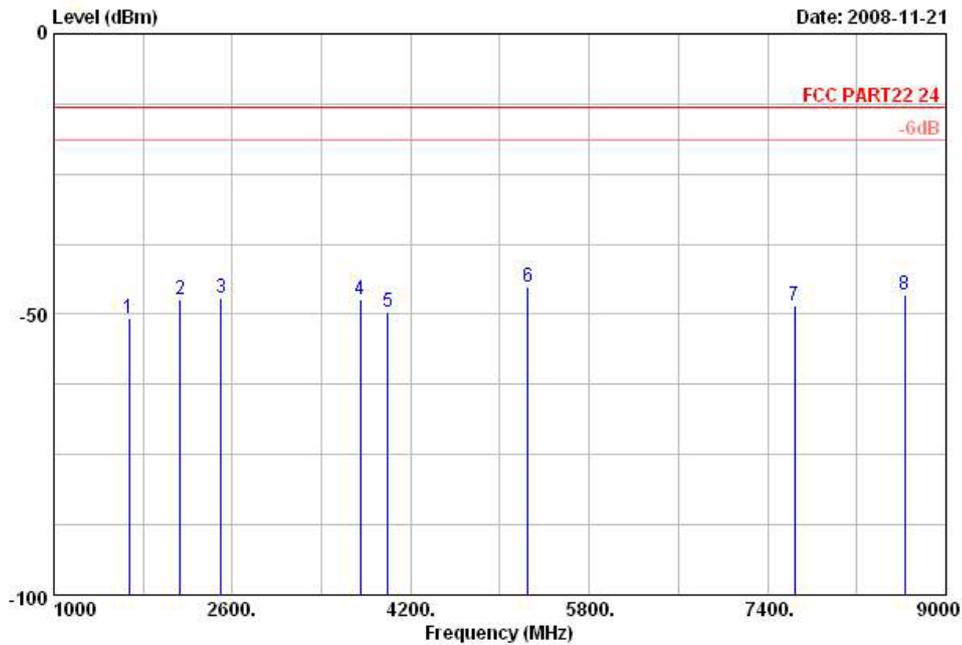


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-07091 HORIZONTAL  
 Model : FG 8N1901  
 Memo : Mode 2

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1674.00	-52.98	-13	-39.98	-55.3	-60.45	-0.68	8.94	H	Pass
2134.00	-49.45	-13	-36.45	-55.1	-57.12	-0.21	9.61	H	Pass
2502.00	-49.09	-13	-36.09	-57.39	-59.58	-2.34	10.30	H	Pass
3750.00	-49.41	-13	-36.41	-58.85	-61.57	-3.84	10.47	H	Pass
3994.00	-51.76	-13	-38.76	-62.13	-65.05	-4.59	10.85	H	Pass
5248.00	-47.33	-13	-34.33	-60.29	-63.59	-7.21	11.20	H	Pass
7640.00	-50.68	-13	-37.68	-66.1	-70.05	-9.51	12.01	H	Pass
8630.00	-48.78	-13	-35.78	-65.39	-69.54	-10.16	12.75	H	Pass



Band :	GSM850	Temperature :	17~21°C
Test Mode :	EDGE 8 Link	Relative Humidity :	37~45%
Test Engineer :	Peter Chou	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

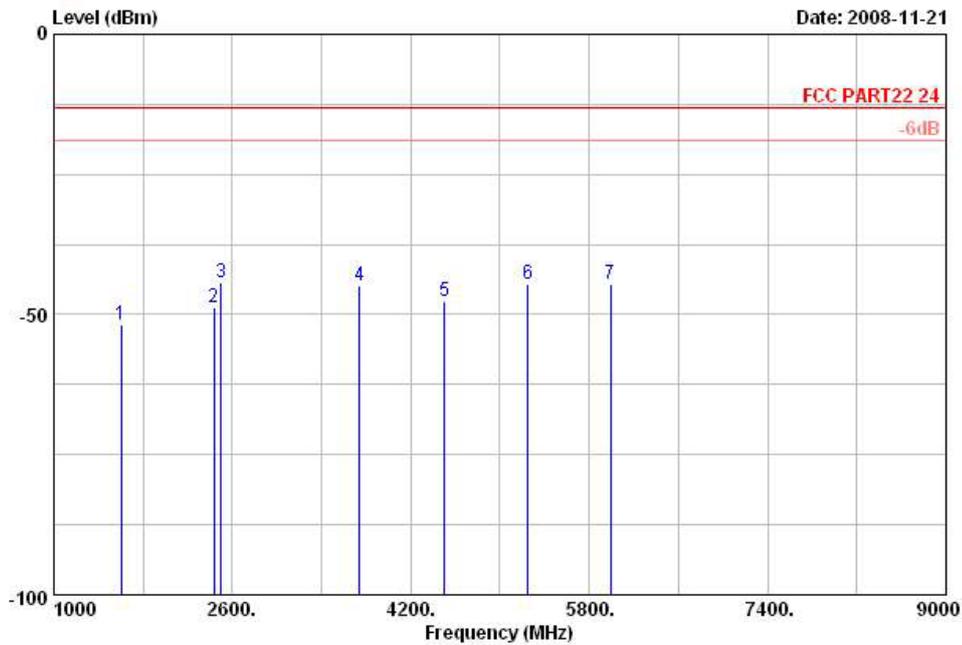


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-07091 VERTICAL  
 Model : FG 8W1901  
 Memo : Mode 2

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1600.00	-54.03	-13	-41.03	-55.7	-60.95	-0.25	8.82	V	Pass
2436.00	-50.82	-13	-37.82	-58.71	-60.87	-2.01	10.19	V	Pass
2502.00	-46.43	-13	-33.43	-54.73	-56.92	-2.34	10.30	V	Pass
3744.00	-46.99	-13	-33.99	-56.34	-59.05	-3.77	10.44	V	Pass
4500.00	-49.79	-13	-36.79	-61.11	-64.08	-4.94	11.50	V	Pass
5248.00	-46.85	-13	-33.85	-59.81	-63.11	-7.21	11.20	V	Pass
5994.00	-46.63	-13	-33.63	-61.68	-65.13	-8.95	11.70	V	Pass



Band :	GSM1900	Temperature :	17~21°C
Test Mode :	GPRS 8 Link	Relative Humidity :	37~45%
Test Engineer :	Peter Chou	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

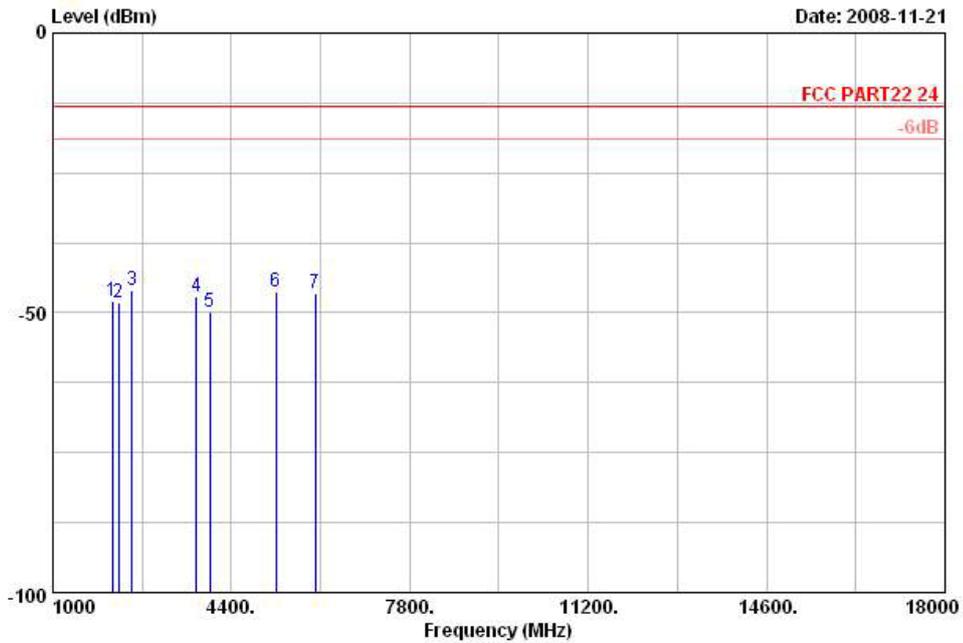


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-07091 HORIZONTAL  
 Model : FD 8M1901  
 Memo : Mode 1

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
2138.00	-47.86	-13	-34.86	-55.66	-55.53	-0.21	9.61	H	Pass
2248.00	-48.29	-13	-35.29	-56.86	-56.78	-0.83	9.81	H	Pass
2502.00	-45.89	-13	-32.89	-56.34	-56.38	-2.34	10.30	H	Pass
3742.00	-46.96	-13	-33.96	-58.46	-59.02	-3.77	10.44	H	Pass
3996.00	-49.94	-13	-36.94	-62.46	-63.23	-4.59	10.85	H	Pass
5248.00	-46.31	-13	-33.31	-61.42	-62.57	-7.21	11.20	H	Pass
6000.00	-46.44	-13	-33.44	-63.64	-64.94	-8.95	11.70	H	Pass



<b>Band :</b>	GSM1900	<b>Temperature :</b>	17~21°C
<b>Test Mode :</b>	GPRS 8 Link	<b>Relative Humidity :</b>	37~45%
<b>Test Engineer :</b>	Peter Chou	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

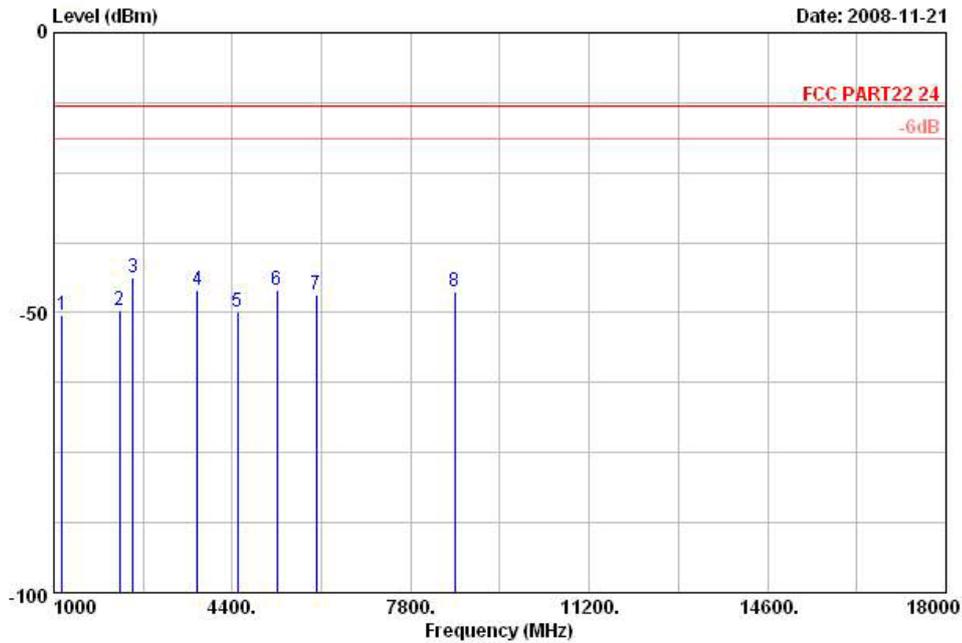


Site : 03CH01-K5  
 Condition: FCC PART22 24 HF EIRP FACTOR-07091 VERTICAL  
 Model : FD 8N1901  
 Memo : Mode 1

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1156.00	-50.45	-13	-37.45	-52.27	-53.99	4.46	10.15	V	Pass
2246.00	-49.69	-13	-36.69	-58.26	-59.52	-0.83	11.15	V	Pass
2502.00	-43.79	-13	-30.79	-54.24	-56.13	-2.34	12.15	V	Pass
3742.00	-45.87	-13	-32.87	-57.37	-60.64	-3.77	13.15	V	Pass
4500.00	-49.79	-13	-36.79	-63.26	-66.73	-4.94	14.15	V	Pass
5246.00	-45.92	-13	-32.92	-61.03	-66.13	-7.21	15.15	V	Pass
6000.00	-46.69	-13	-33.69	-63.89	-69.64	-8.95	16.15	V	Pass
8632.00	-46.26	-13	-33.26	-65.02	-71.42	-10.16	17.15	V	Pass



Band :	GSM1900	Temperature :	17~21°C
Test Mode :	EDGE 8 Link	Relative Humidity :	37~45%
Test Engineer :	Peter Chou	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

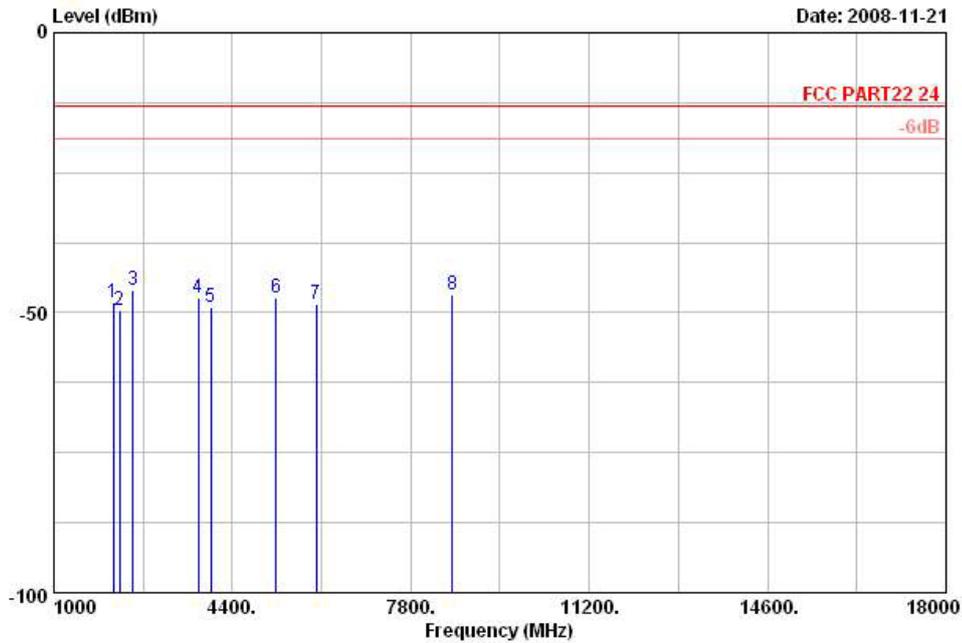


Site : 03CH01-K5  
 Condition: FCC PART22 24 HF EIRP FACTOR-07091 HORIZONTAL  
 Model : FD 8N1901  
 Memo : Mode 2

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
2138.00	-48.11	-13	-35.11	-55.91	-55.78	-0.21	9.61	H	Pass
2250.00	-49.56	-13	-36.56	-58.29	-58.22	-0.96	9.85	H	Pass
2502.00	-45.90	-13	-32.90	-56.35	-56.39	-2.34	10.30	H	Pass
3744.00	-47.37	-13	-34.37	-58.87	-59.43	-3.77	10.44	H	Pass
3994.00	-48.99	-13	-35.99	-61.51	-62.28	-4.59	10.85	H	Pass
5242.00	-47.24	-13	-34.24	-62.35	-63.50	-7.21	11.20	H	Pass
6000.00	-48.53	-13	-35.53	-65.73	-67.03	-8.95	11.70	H	Pass
8592.00	-46.77	-13	-33.77	-65.45	-67.44	-10.09	12.73	H	Pass



Band :	GSM1900	Temperature :	17~21°C
Test Mode :	EDGE 8 Link	Relative Humidity :	37~45%
Test Engineer :	Peter Chou	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

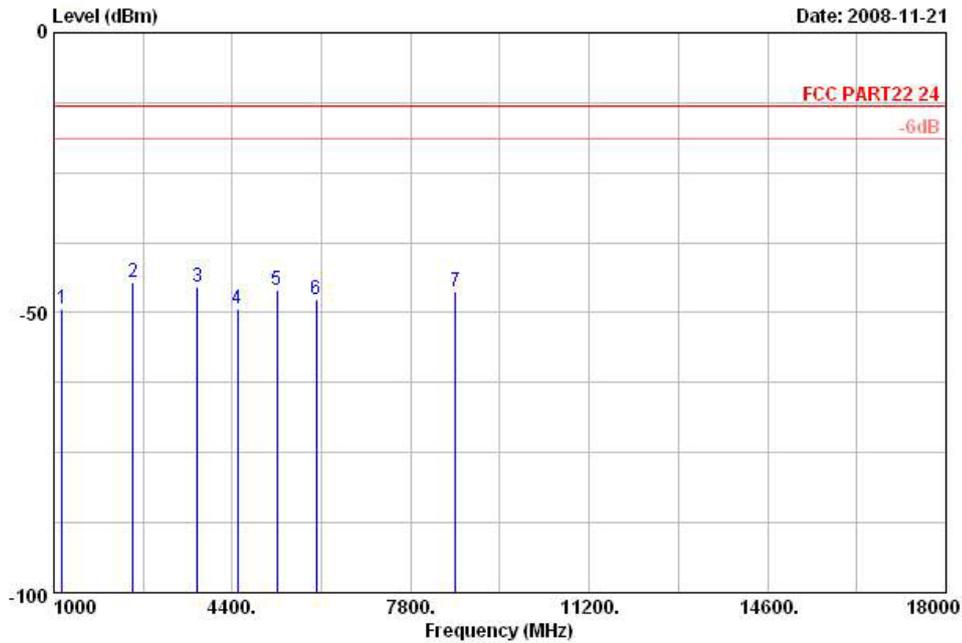


Site : 03CH01-K5  
 Condition: FCC PART22 24 HF EIRP FACTOR-07091 VERTICAL  
 Model : FD 8N1901  
 Memo : Mode 2

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1152.00	-49.35	-13	-36.35	-51.17	-52.89	4.46	10.15	V	Pass
2502.00	-44.49	-13	-31.49	-54.94	-55.83	-2.34	11.15	V	Pass
3742.00	-45.53	-13	-32.53	-57.03	-59.30	-3.77	12.15	V	Pass
4500.00	-49.37	-13	-36.37	-62.84	-65.31	-4.94	13.15	V	Pass
5248.00	-46.03	-13	-33.03	-61.14	-65.24	-7.21	14.15	V	Pass
6000.00	-47.74	-13	-34.74	-64.94	-69.69	-8.95	15.15	V	Pass
8660.00	-46.29	-13	-33.29	-65.12	-70.53	-10.24	16.15	V	Pass



Band :	WCDMA Band V	Temperature :	17~21°C
Test Mode :	WCDMA Link	Relative Humidity :	37~45%
Test Engineer :	Peter Chou	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

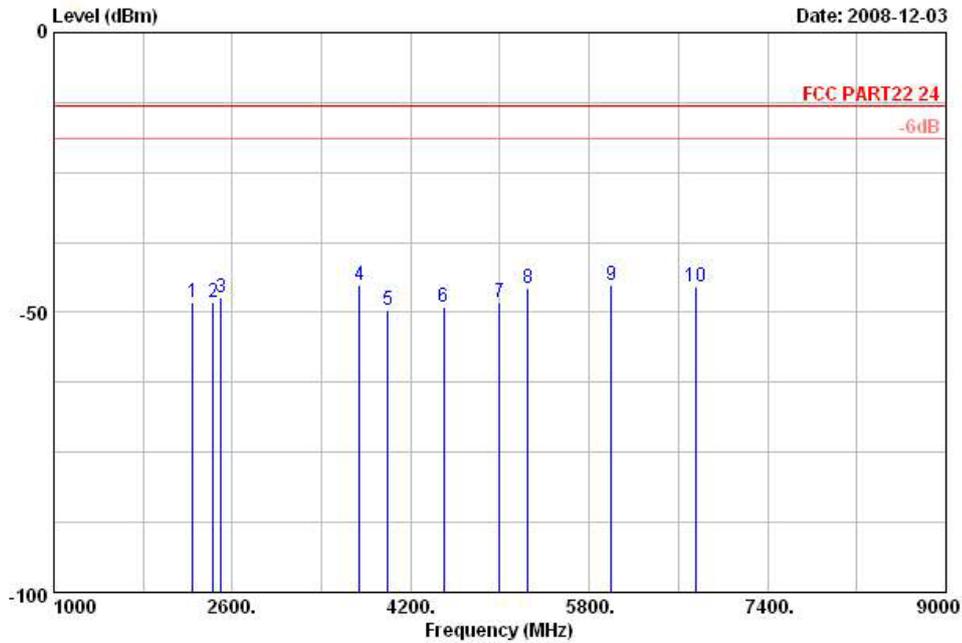


Site : 03CH01-K5  
 Condition: FCC PART22 24 HF EIRP FACTOR-07091 HORIZONTAL  
 Model : FG 8N1901  
 Memo : Mode 3

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
2248.00	-50.41	-13	-37.41	-56.83	-58.90	-0.83	9.81	H	Pass
2432.00	-50.24	-13	-37.24	-58.13	-60.29	-2.01	10.19	H	Pass
2500.00	-49.55	-13	-36.55	-57.85	-60.04	-2.34	10.30	H	Pass
3742.00	-47.35	-13	-34.35	-56.7	-59.41	-3.77	10.44	H	Pass
3996.00	-51.80	-13	-38.80	-62.17	-65.09	-4.59	10.85	H	Pass
4498.00	-51.14	-13	-38.14	-62.46	-65.43	-4.94	11.50	H	Pass
5000.00	-50.32	-13	-37.32	-62.44	-65.71	-6.54	11.00	H	Pass
5248.00	-47.75	-13	-34.75	-60.71	-64.01	-7.21	11.20	H	Pass
5998.00	-47.30	-13	-34.30	-62.35	-65.80	-8.95	11.70	H	Pass
6750.00	-47.60	-13	-34.60	-63.54	-67.40	-9.80	12.15	H	Pass



Band :	WCDMA Band V	Temperature :	17~21°C
Test Mode :	WCDMA Link	Relative Humidity :	37~45%
Test Engineer :	Peter Chou	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

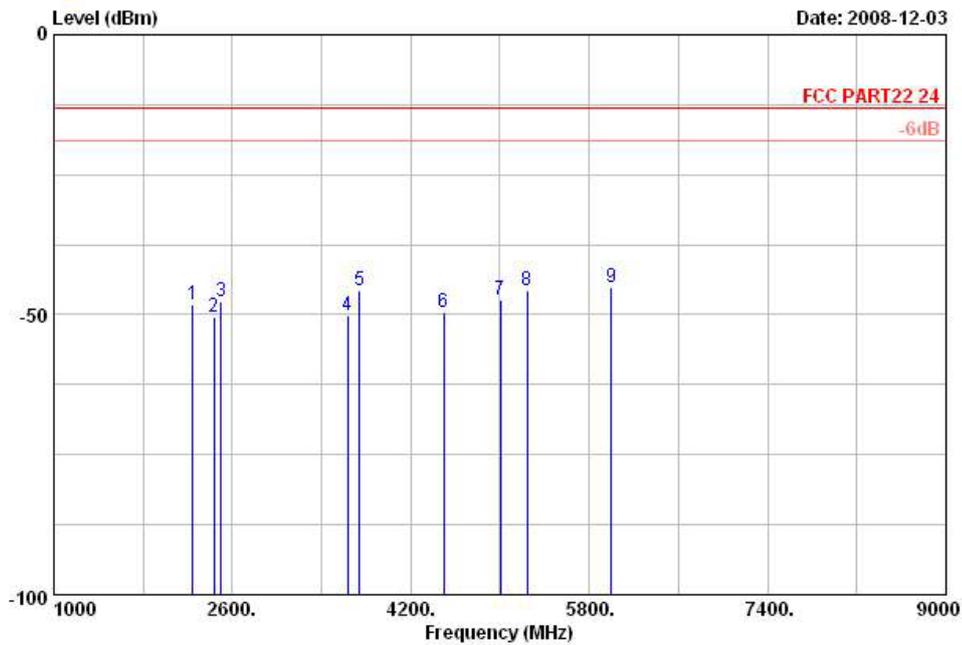


Site : 03CH01-K5  
 Condition: FCC PART22 24 HF EIRP FACTOR-07091 VERTICAL  
 Model : FG 8N1901  
 Memo : Mode 3

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
2248.00	-50.34	-13	-37.34	-56.76	-58.83	-0.83	9.81	V	Pass
2434.00	-52.44	-13	-39.44	-60.33	-62.49	-2.01	10.19	V	Pass
2502.00	-49.67	-13	-36.67	-57.97	-60.16	-2.34	10.30	V	Pass
3634.00	-52.26	-13	-39.26	-61.26	-63.88	-3.44	10.33	V	Pass
3744.00	-47.97	-13	-34.97	-57.32	-60.03	-3.77	10.44	V	Pass
4498.00	-51.65	-13	-38.65	-62.97	-65.94	-4.94	11.50	V	Pass
5002.00	-49.45	-13	-36.45	-61.57	-64.84	-6.54	11.00	V	Pass
5246.00	-47.71	-13	-34.71	-60.67	-63.97	-7.21	11.20	V	Pass
6000.00	-47.29	-13	-34.29	-62.34	-65.79	-8.95	11.70	V	Pass



Band :	WCDMA Band II	Temperature :	17~21°C
Test Mode :	HSDPA Link	Relative Humidity :	37~45%
Test Engineer :	Peter Chou	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

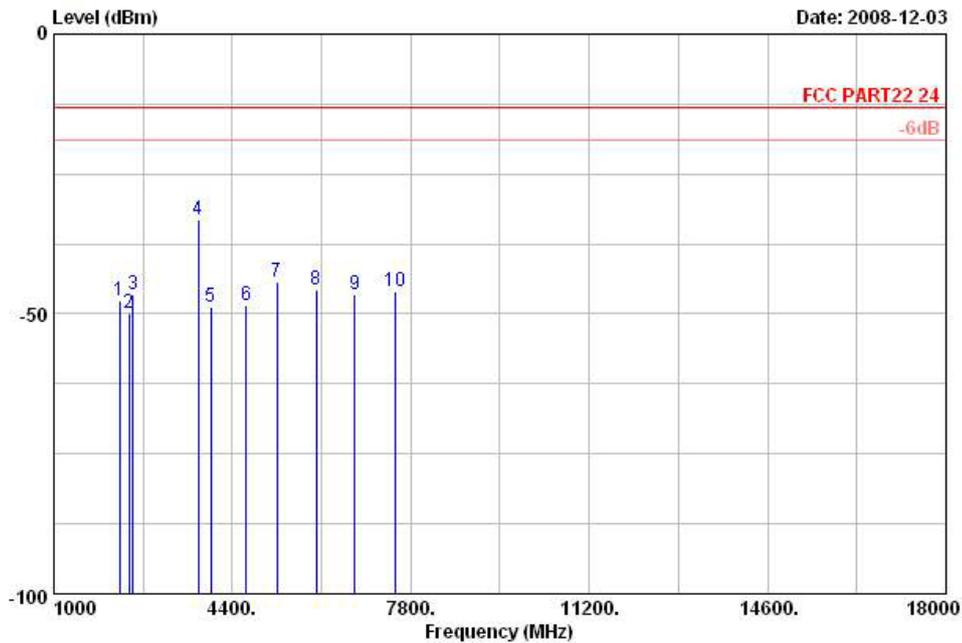


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-07091 HORIZONTAL  
 Model : FG 8N1901  
 Memo : Mode 3

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
2250.00	-47.61	-13	-34.61	-56.34	-56.27	-0.96	9.85	H	Pass
2434.00	-49.97	-13	-36.97	-60.01	-60.02	-2.01	10.19	H	Pass
2502.00	-46.51	-13	-33.51	-56.96	-57.00	-2.34	10.30	H	Pass
3758.00	-33.14	-13	-20.14	-44.73	-45.30	-3.84	10.47	H	Pass
3994.00	-48.66	-13	-35.66	-61.18	-61.95	-4.59	10.85	H	Pass
4662.00	-48.55	-13	-35.55	-62.25	-63.16	-5.40	11.36	H	Pass
5246.00	-44.35	-13	-31.35	-59.46	-60.61	-7.21	11.20	H	Pass
5999.00	-45.67	-13	-32.67	-62.87	-64.17	-8.95	11.70	H	Pass
6740.00	-46.56	-13	-33.56	-64.65	-66.36	-9.80	12.15	H	Pass
7502.00	-45.83	-13	-32.83	-63.22	-64.97	-9.49	11.80	H	Pass



Band :	WCDMA Band II	Temperature :	17~21°C
Test Mode :	HSDPA Link	Relative Humidity :	37~45%
Test Engineer :	Peter Chou	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

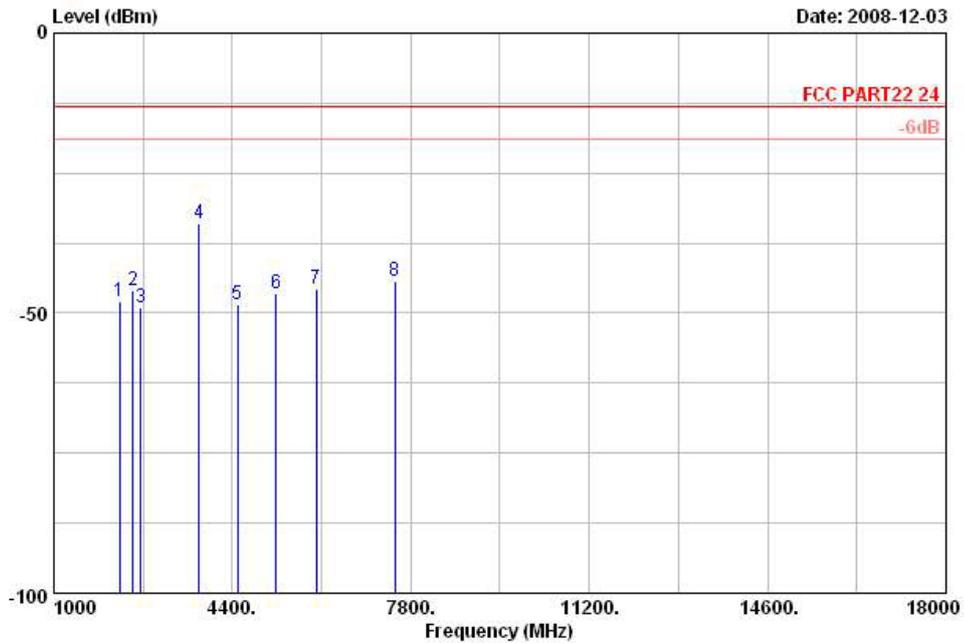


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-07091 VERTICAL  
 Model : FG 8N1901  
 Memo : Mode 3

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
2246.00	-47.95	-13	-34.95	-56.52	-56.78	-0.83	10.15	V	Pass
2502.00	-45.97	-13	-32.97	-56.42	-57.31	-2.34	11.15	V	Pass
2664.00	-49.07	-13	-36.07	-59.2	-61.13	-2.06	12.15	V	Pass
3762.00	-33.89	-13	-20.89	-45.48	-48.73	-3.84	13.15	V	Pass
4500.00	-48.54	-13	-35.54	-62.01	-65.48	-4.94	14.15	V	Pass
5240.00	-46.39	-13	-33.39	-61.43	-66.54	-7.15	15.15	V	Pass
5999.00	-45.73	-13	-32.73	-62.93	-68.68	-8.95	16.15	V	Pass
7502.00	-44.22	-13	-31.22	-61.61	-68.71	-9.49	17.15	V	Pass



<b>Band :</b>	CDMA2000 Cellular	<b>Temperature :</b>	17~21°C
<b>Test Mode :</b>	1xEV-DO Rev. A_RETAP_2048Kbps	<b>Relative Humidity :</b>	37~45%
<b>Test Engineer :</b>	Peter Chou	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

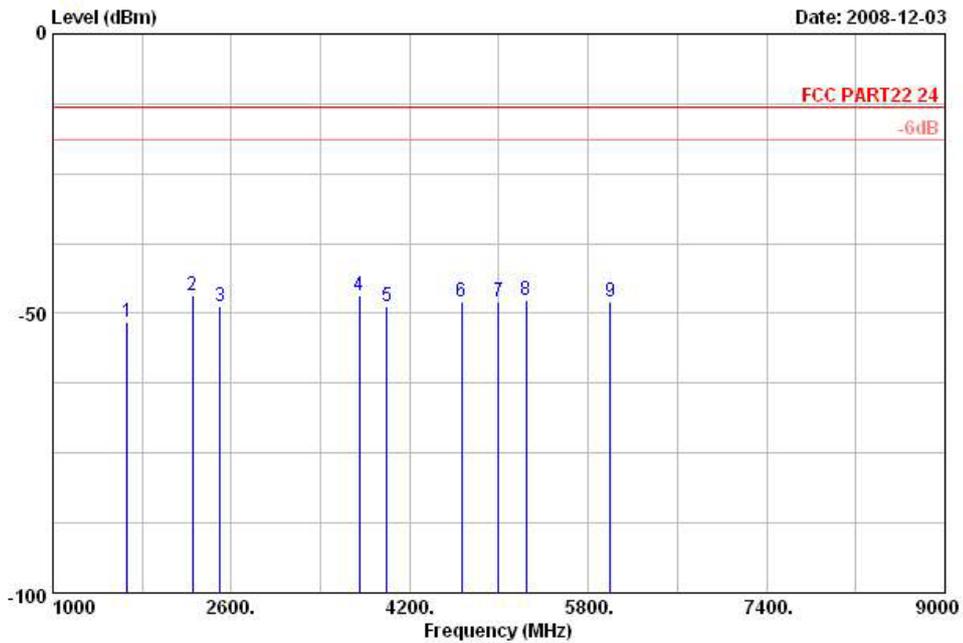


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-07091 HORIZONTAL  
 Model : FG 8N1901  
 Memo : Mode 4

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1670.00	-53.73	-13	-40.73	-55.91	-57.69	2.80	8.91	H	Pass
2250.00	-48.92	-13	-35.92	-55.5	-57.58	-0.96	9.85	H	Pass
2502.00	-50.76	-13	-37.76	-59.06	-61.25	-2.34	10.30	H	Pass
3750.00	-48.86	-13	-35.86	-58.3	-61.02	-3.84	10.47	H	Pass
3996.00	-51.03	-13	-38.03	-61.4	-64.32	-4.59	10.85	H	Pass
4662.00	-50.00	-13	-37.00	-61.55	-64.61	-5.40	11.36	H	Pass
5000.00	-50.08	-13	-37.08	-62.2	-65.47	-6.54	11.00	H	Pass
5246.00	-49.67	-13	-36.67	-62.63	-65.93	-7.21	11.20	H	Pass
5996.00	-50.02	-13	-37.02	-65.07	-68.52	-8.95	11.70	H	Pass



Band :	CDMA2000 Cellular	Temperature :	17~21°C
Test Mode :	1xEV-DO Rev. A_RETAP_ 2048Kbps	Relative Humidity :	37~45%
Test Engineer :	Peter Chou	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

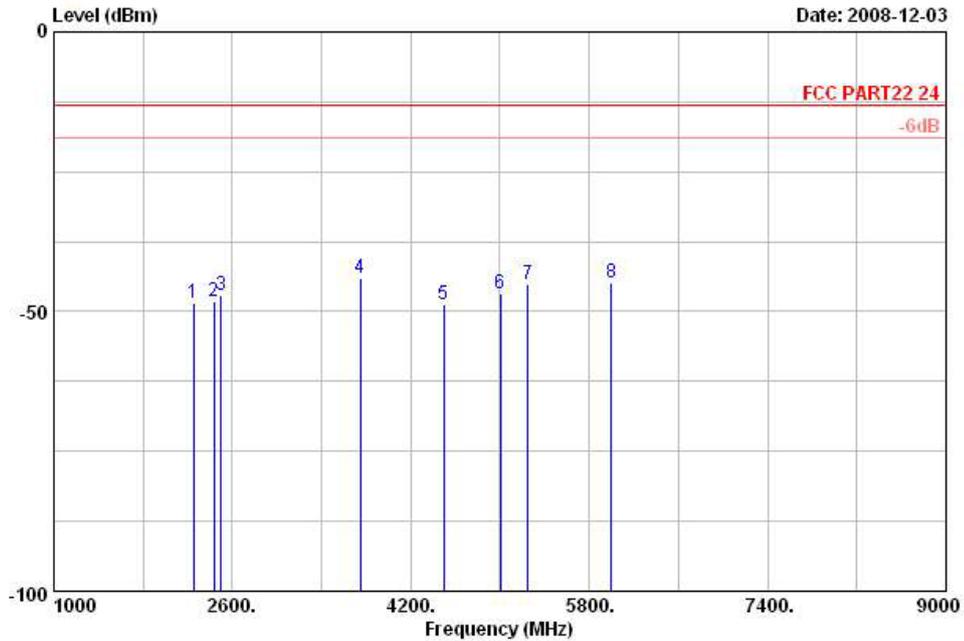


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-07091 VERTICAL  
 Model : FG 8N1901  
 Memo : Mode A

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
2250.00	-50.69	-13	-37.69	-57.27	-59.35	-0.96	9.85	V	Pass
2434.00	-50.39	-13	-37.39	-58.28	-60.44	-2.01	10.19	V	Pass
2502.00	-49.15	-13	-36.15	-57.45	-59.64	-2.34	10.30	V	Pass
3748.00	-46.03	-13	-33.03	-55.47	-58.19	-3.84	10.47	V	Pass
4498.00	-50.97	-13	-37.97	-62.29	-65.26	-4.94	11.50	V	Pass
5002.00	-49.03	-13	-36.03	-61.15	-64.42	-6.54	11.00	V	Pass
5248.00	-47.22	-13	-34.22	-60.18	-63.48	-7.21	11.20	V	Pass
6000.00	-47.00	-13	-34.00	-62.05	-65.50	-8.95	11.70	V	Pass



<b>Band :</b>	CDMA2000 PCS	<b>Temperature :</b>	17~21°C
<b>Test Mode :</b>	1xEV-DO Rev. A_RETAP_ 128Kbps	<b>Relative Humidity :</b>	37~45%
<b>Test Engineer :</b>	Peter Chou	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

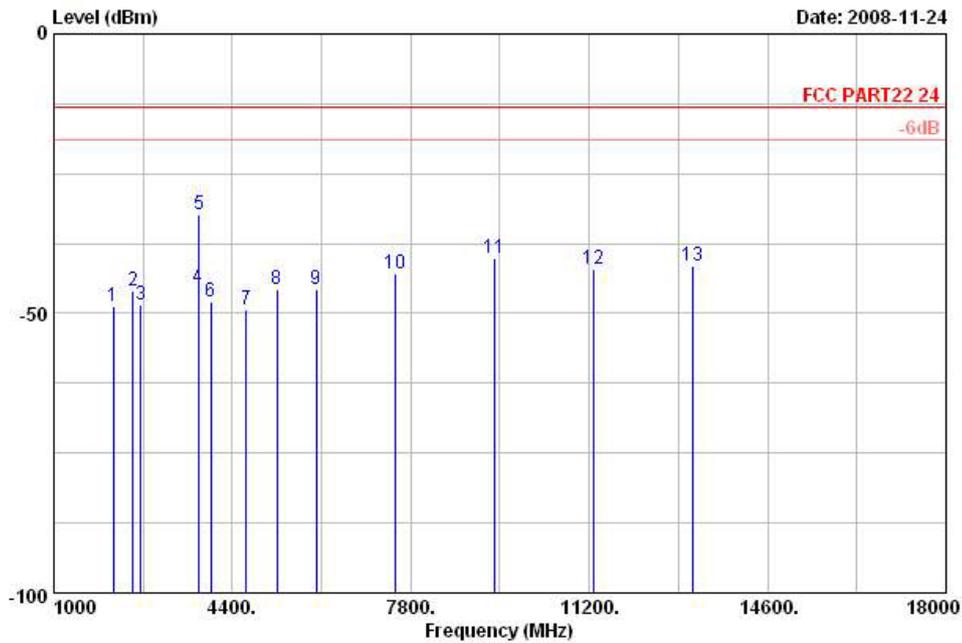


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-07091 HORIZONTAL  
 Model : FG 8N1901  
 Memo : Mode 4

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
2138.00	-48.81	-13	-35.81	-56.61	-56.48	-0.21	9.61	H	Pass
2502.00	-45.84	-13	-32.84	-56.29	-56.33	-2.34	10.30	H	Pass
2664.00	-48.55	-13	-35.55	-58.68	-58.76	-2.06	10.30	H	Pass
3748.00	-45.44	-13	-32.44	-57.03	-57.60	-3.84	10.47	H	Pass
3760.00	-32.29	-13	-19.29	-43.88	-44.45	-3.84	10.47	H	Pass
3994.00	-48.02	-13	-35.02	-60.54	-61.31	-4.59	10.85	H	Pass
4660.00	-49.38	-13	-36.38	-63.08	-63.99	-5.40	11.36	H	Pass
5246.00	-45.67	-13	-32.67	-60.78	-61.93	-7.21	11.20	H	Pass
6002.00	-45.64	-13	-32.64	-62.84	-64.14	-8.95	11.70	H	Pass
7502.00	-42.85	-13	-29.85	-60.24	-61.99	-9.49	11.80	H	Pass
9401.00	-40.20	-13	-27.20	-60.21	-62.43	-11.40	12.98	H	Pass
11276.00	-42.13	-13	-29.13	-64.97	-68.22	-14.54	13.70	H	Pass
13163.00	-41.43	-13	-28.43	-64.79	-68.67	-16.01	13.38	H	Pass



<b>Band :</b>	CDMA2000 PCS	<b>Temperature :</b>	17~21°C
<b>Test Mode :</b>	1xEV-DO Rev. A_RETAP_128Kbps	<b>Relative Humidity :</b>	37~45%
<b>Test Engineer :</b>	Peter Chou	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

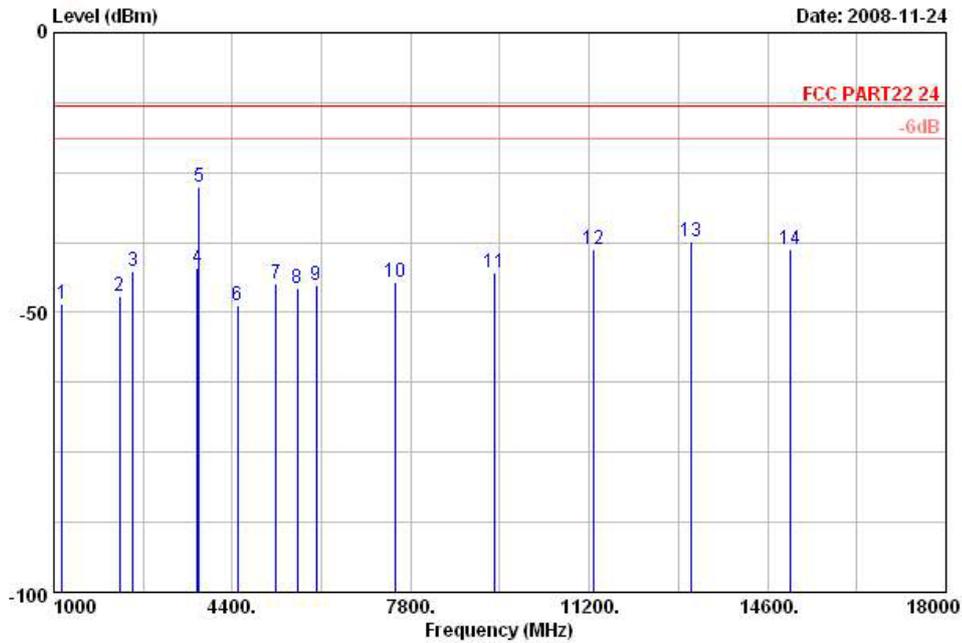

Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP ANT-070911 VERTICAL  
 Model : FG 8N1901  
 Memo : Mode 4

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1154.00	-48.53	-13	-35.53	-50.35	-56.99	-0.46	10.15	V	Pass
2248.00	-46.97	-13	-33.97	-55.54	-56.80	-0.83	11.15	V	Pass
2502.00	-42.66	-13	-29.66	-53.11	-55.00	-2.34	12.15	V	Pass
3742.00	-42.00	-13	-29.00	-53.5	-56.77	-3.77	13.15	V	Pass
3760.00	-27.63	-13	-14.63	-39.22	-43.47	-3.84	14.15	V	Pass
4498.00	-48.87	-13	-35.87	-62.34	-66.81	-4.94	15.15	V	Pass
5240.00	-44.81	-13	-31.81	-59.85	-65.96	-7.15	16.15	V	Pass
5639.00	-45.60	-13	-32.60	-61.84	-68.72	-8.12	17.15	V	Pass
5993.00	-45.15	-13	-32.15	-62.35	-70.10	-8.95	18.15	V	Pass
7502.00	-44.70	-13	-31.70	-62.09	-71.19	-9.49	19.15	V	Pass
9401.00	-42.96	-13	-29.96	-62.97	-72.36	-11.40	20.15	V	Pass
11276.00	-38.63	-13	-25.63	-61.47	-72.17	-14.54	21.15	V	Pass
13157.00	-37.39	-13	-24.39	-60.75	-73.40	-16.01	22.15	V	Pass
15044.00	-38.73	-13	-25.73	-60.03	-73.03	-13.30	23.15	V	Pass

## 3.6 Frequency Stability Measurement

### 3.6.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.


### 3.6.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT can not be turned on at  $-30^{\circ}\text{C}$ , the testing lowest temperature will be raised in  $10^{\circ}\text{C}$  step until the EUT can be turned on.

### 3.6.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

### 3.6.5 Test Setup

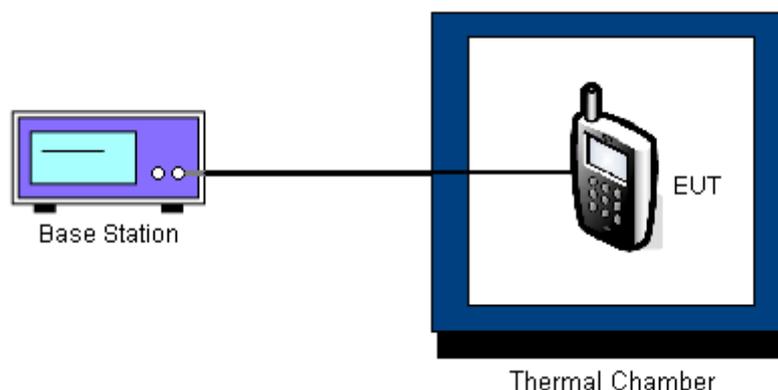



3.6.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5		

Temperature (°C)	GPRS 8		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	33	0.04	26	0.03	PASS
-20	48	0.06	33	0.04	
-10	27	0.03	-25	-0.03	
0	-12	-0.01	-14	-0.02	
10	35	0.04	41	0.05	
20	11	0.01	26	0.03	
30	38	0.04	8	0.01	
40	43	0.05	-12	-0.01	
50	-26	-0.03	-24	-0.03	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5		

Temperature (°C)	GPRS 8		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	-30	-0.02	12	0.01	PASS
-20	21	0.01	32	0.02	
-10	17	0.01	27	0.01	
0	41	0.02	25	0.01	
10	-7	0.00	18	0.01	
20	12	0.01	29	0.02	
30	23	0.01	31	0.02	
40	31	0.02	-11	-0.01	
50	6	0.00	16	0.01	



<b>Band :</b>	WCDMA Band V	<b>Channel :</b>	4182
<b>Limit (ppm) :</b>	2.5		

Temperature (°C)	WCDMA		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	22	0.03	PASS
-20	38	0.04	
-10	27	0.03	
0	25	0.03	
10	-31	-0.04	
20	18	0.02	
30	15	0.02	
40	27	0.03	
50	47	0.06	

<b>Band :</b>	WCDMA Band II	<b>Channel :</b>	9400
<b>Limit (ppm) :</b>	2.5		

Temperature (°C)	HSDPA		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	13	0.01	PASS
-20	24	0.01	
-10	11	0.01	
0	-4	0.00	
10	23	0.01	
20	18	0.01	
30	37	0.02	
40	15	0.01	
50	-16	-0.01	



<b>Band :</b>	CDMA2000 Cellular	<b>Channel :</b>	334
<b>Test Mode :</b>	1xEV-DO Rev. A_RETAP_2 048Kbps	<b>Limit (ppm) :</b>	2.5

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	-13	-0.02	PASS
-20	52	0.06	
-10	37	0.04	
0	46	0.05	
10	44	0.05	
20	12	0.01	
30	-14	-0.02	
40	-22	-0.03	
50	38	0.04	

<b>Band :</b>	CDMA2000 PCS	<b>Channel :</b>	600
<b>Test Mode :</b>	1xEV-DO Rev. A_RETAP_1 28Kbps	<b>Limit (ppm) :</b>	2.5

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	38	0.02	PASS
-20	13	0.01	
-10	-16	-0.01	
0	-14	-0.01	
10	22	0.01	
20	17	0.01	
30	15	0.01	
40	32	0.02	
50	18	0.01	



3.6.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS 8	5	14	0.02	2.5	PASS
		BEP	16	0.02		
		5.2	27	0.03		
	EDGE 8	5	-13	-0.02		
		BEP	29	0.03		
		5.2	5	0.01		
GSM 1900 CH661	GPRS 8	5	11	0.01		
		BEP	15	0.01		
		5.2	26	0.01		
	EDGE 8	5	-18	-0.01		
		BEP	13	0.01		
		5.2	24	0.01		
WCDMA Band V CH4182	WCDMA	5	27	0.03		
		BEP	13	0.02		
		5.2	-12	-0.01		
WCDMA Band II CH9400	HSDPA	5	-2	0.00		
		BEP	25	0.01		
		5.2	17	0.01		
CDMA2000 Cellular CH334	1xEV-DO Rev. A RETAP 2048Kbps	5	31	0.04		
		BEP	24	0.03		
		5.2	-17	-0.02		
CDMA2000 PCS CH600	1xEV-DO Rev. A RETAP 128Kbps	5	-12	-0.01		
		BEP	-11	-0.01		
		5.2	10	0.01		

Remark:

1. Normal Voltage = 5V.
2. Battery End Point (BEP) = 4.8 V.

## 4 List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9K~40GHz	Mar. 13, 2008	Mar. 12, 2009	Radiation (03CH01-KS)
EMI Test Receiver	R&S	ESCI	100724	9KHz~2.75GHz	Feb. 06, 2008	Feb. 05, 2009	Radiation (03CH01-KS)
Bilog Antenna	Schaffner	CBL6112D	23182	25MHz~2000MHz	May 21, 2008	May 20, 2009	Radiation (03CH01-KS)
Controller	MF	MF7802	N/A	N/A	N/A	N/A	Radiation (03CH01-KS)
AC Power Source	APC	AFC-11001 G	N/A	N/A	N/A	N/A	Radiation (03CH01-KS)
Preamplifier	Agilent	8449B	3008A02370	1G~26.5GHz	Jun. 03, 2008	Jun. 02, 2009	Radiation (03CH01-KS)
Preamplifier	Wireless	FPA6592G	60006	30M~2000MHz	Jul. 23, 2008	Jul. 22, 2009	Radiation (03CH01-KS)
High Pass filter (3GHz)	Microwave Circuits	H3G018G	N/A	N/A	N/A	N/A	Radiation (03CH01-KS)
High Pass filter (7GHz)	Microwave Circuits	H07G18G3	N/A	N/A	N/A	N/A	Radiation (03CH01-KS)
High Pass filter	N/A	WHKX1.5/1 5G-10SS	23	N/A	N/A	N/A	Radiation (03CH01-KS)
High Pass filter	N/A	WHKX2.2-1 8G-10SS	8	N/A	N/A	N/A	Radiation (03CH01-KS)
Band Reject Filter	WI	WRCG2400/2483-2390/2	14	N/A	N/A	N/A	Radiation (03CH01-KS)
Band Reject Filter	WI	WRCG 1850/1910-1	15	N/A	N/A	N/A	Radiation (03CH01-KS)
Band Reject Filter	WI	WRCG 824/849-814	34	N/A	N/A	N/A	Radiation (03CH01-KS)
DRG Horn(Medium)	EMCO	3117	75959	1GHz~18GHz	Apr. 17, 2007	Apr. 16, 2009	Radiation (03CH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Jun. 18, 2007	Jun. 17, 2009	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	50MHz~18GHz	Jun. 12, 2007	Jun. 11, 2009	Conducted (TH01-KS)
Thermal Chamber	Rten Billion	TTC-B3S	TBN-960502	-40~150C	Jun. 27, 2007	Jun. 26, 2009	Conducted (TH01-KS)
POWER DIVIDER	ARRA	A3200-2	N/A	DC~18GHz	Sep. 01, 2007	Aug. 31, 2009	Conducted (TH01-KS)
Terminator	Mini-Circuits	ANNE-50+	N/A	DC~18000MHz	N/A	N/A	Conducted (TH01-KS)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.10	Normal(k=2)	0.05
Cable loss	0.10	Normal(k=2)	0.05
AMN insertion loss	2.50	Rectangular	0.63
Receiver Spec	1.50	Rectangular	0.43
Site imperfection	1.39	Rectangular	0.80
Mismatch	+0.34/-0.35	U-shape	0.24
<b>Combined standard uncertainty Uc(y)</b>	<b>1.13</b>		
<b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b>	<b>2.26</b>		

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
<b>Combined standard uncertainty Uc(y)</b>	<b>1.27</b>		
<b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b>	<b>2.54</b>		

**Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)**

Contribution	Uncertainty of $x_i$		$u(x_i)$	$C_i$	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 \Gamma_2)$	+0.34/-0.35	U-shaped	0.244	1	0.244
<b>Combined standard uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring uncertainty for a level of confidence of 95% <math>U = 2U_c(y)</math></b>	<b>4.72</b>				

## 6 Certification of TAF Accreditation



Certificate No. : L1190-070110

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sporton International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix Accreditation Program for Designated Testing Laboratory
Specific Accreditation Program	: for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory

  
Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : January 10, 2007

PI, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP8N2204 as below.