

# FCC RF Test Report

APPLICANT : ZTE CORPORATION  
EQUIPMENT : USB Dongle  
BRAND NAME : ZTE  
MODEL NAME : AD3701  
FCC ID : Q78-AD3701  
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)  
CLASSIFICATION : PCS Licensed Transmitter (PCB)  
Tx/Rx FREQUENCY RANGE : GSM850 : 824.2 ~ 848.8 MHz /  
869.2 ~ 893.8 MHz  
GSM1900 : 1850.2 ~ 1909.8 MHz /  
1930.2 ~ 1989.8 MHz  
WCDMA Band V : 826.4 ~ 846.6 MHz /  
871.4 ~ 891.6 MHz  
WCDMA Band II : 1852.4 ~ 1907.6 MHz /  
1932.4 ~ 1987.6 MHz  
CDMA2000 BC0 : 824.70 ~ 848.31 MHz /  
869.70 ~ 893.31 MHz  
CDMA2000 BC1 : 1851.25 ~ 1908.75 MHz /  
1931.25 ~ 1988.75 MHz  
MAX. ERP/EIRP POWER : GSM850 (GSM) : 0.42 W  
GSM850 (EDGE 8) : 0.17 W  
GSM1900 (GSM) : 0.39 W  
GSM1900 (EDGE 8) : 0.22 W  
WCDMA Band V (RMC 12.2Kbps) : 0.11 W  
WCDMA Band II (HSDPA) : 0.18 W  
CDMA2000 BC0 : 0.22 W  
CDMA2000 BC1 : 0.20 W  
EMISSION DESIGNATOR : GMSK : 244KGXW  
8PSK : 246KG7W  
QPSK : 4M16F9W (for WCDMA)  
QPSK : 1M29F9W (for CDMA2000)

The product was received on Dec. 25, 2009 and completely tested on Jul. 18, 2010. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Roy Wu / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**

**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



# TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT .....4

**1 GENERAL DESCRIPTION .....5**

    1.1 Applicant.....5

    1.2 Manufacturer .....5

    1.3 Feature of Equipment Under Test.....6

    1.4 Testing Site.....7

    1.5 Applied Standards .....7

    1.6 Ancillary Equipment List.....7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....8**

    2.1 Test Mode.....8

    2.2 Connection Diagram of Test System .....10

**3 TEST RESULT.....11**

    3.1 Conducted Output Power Measurement.....11

    3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement .....13

    3.3 Occupied Bandwidth Measurement .....19

    3.4 Band Edge Measurement.....28

    3.5 Conducted Emission Measurement .....37

    3.6 Field Strength of Spurious Radiation Measurement .....58

    3.7 Frequency Stability Measurement.....76

**4 LIST OF MEASURING EQUIPMENT .....81**

**5 UNCERTAINTY OF EVALUATION .....82**

**APPENDIX A. PHOTOGRAPHS OF EUT**

**APPENDIX B. SETUP PHOTOGRAPHS**



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	N/A	Conducted Output Power	N/A	PASS	
3.2	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
3.2	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.3	§2.1049 §22.917(a) §24.238(a)	N/A	Occupied Bandwidth	N/A	PASS	-
3.4	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Band Edge Measurement	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Conducted Emission	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.6	§2.1053 §22.917(a) §24.238(a)	RSS-132 (4.5.1) RSS-133 (6.5.1)	Field Strength of Spurious Radiation	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 11.24 dB at 1674.00 MHz
3.7	§2.1055 §22.355 §24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



# **1 General Description**

## **1.1 Applicant**

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P. R. China

## **1.2 Manufacturer**

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P. R. China

### 1.3 Feature of Equipment Under Test

Product Feature & Specification	
<b>Equipment</b>	USB Dongle
<b>Brand Name</b>	ZTE
<b>Model Name</b>	AD3701
<b>FCC ID</b>	Q78-AD3701
<b>Tx Frequency</b>	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~ 1910 MHz WCDMA Band V : 824 MHz ~ 849 MHz WCDMA Band II : 1850 MHz ~ 1910 MHz CDMA2000 BC0 : 824 MHz ~ 849 MHz CDMA2000 BC1 : 1850 MHz ~ 1910 MHz
<b>Rx Frequency</b>	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz WCDMA Band V : 869 MHz ~ 894 MHz WCDMA Band II : 1930 MHz ~ 1990 MHz CDMA2000 BC0 : 869 MHz ~ 894 MHz CDMA2000 BC1 : 1930 MHz ~ 1990 MHz
<b>Maximum Output Power to Antenna</b>	GSM850 : 32.37 dBm GSM1900 : 30.30 dBm WCDMA Band V : 22.06 dBm WCDMA Band II : 22.27 dBm CDMA2000 BC0 : 23.54 dBm CDMA2000 BC1 : 23.55 dBm
<b>Maximum ERP/EIRP</b>	GSM850 (GSM) : 0.42 W (26.21 dBm) GSM850 (EDGE 8) : 0.17 W (22.25 dBm) GSM1900 (GSM) : 0.39 W (25.94 dBm) GSM1900 (EDGE 8) : 0.22 W (23.39 dBm) WCDMA Band V (RMC 12.2Kbps) : 0.11 W (20.35 dBm) WCDMA Band II (HSDPA) : 0.18 W (22.49 dBm) CDMA2000 BC0 : 0.22 W (23.48 dBm) CDMA2000 BC1 : 0.20 W (22.98 dBm)
<b>Antenna Type</b>	Fixed Internal Antenna
<b>HW Version</b>	Rev.C
<b>SW Version</b>	M76XX-TUCA7-205004
<b>Type of Modulation</b>	GSM / GPRS : GMSK EDGE : 8PSK WCDMA : QPSK HSDPA : QPSK / 16QAM HSUPA : BPSK CDMA2000 : QPSK
<b>Type of Emission</b>	GMSK : 244KGXW 8PSK : 246KG7W QPSK : 4M16F9W (for WCDMA) QPSK : 1M29F9W (for CDMA2000)
<b>EUT Stage</b>	Production Unit

**Remark:**

1. This test report recorded only product characteristics and test results of PCS Licensed Transmitter (PCB).
2. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.	
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH01-KS	03CH01-KS

### 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- FCC 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-C-2004
- IC RSS-132 Issue 2
- IC RSS-133 Issue 5

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

### 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	Dell	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 1.84m DC O/P: Shielded, 0.9m

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for GSM850, WCDMA Band V, and CDMA2000 BC0.
2. 30 MHz to 19000 MHz for GSM1900, WCDMA Band II, and CDMA2000 BC1.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE 8 Link</li> </ul>	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE 8 Link</li> </ul>
GSM 1900	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE 8 Link</li> </ul>	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE 8 Link</li> </ul>
WCDMA Band V	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>
WCDMA Band II	<ul style="list-style-type: none"> <li>■ HSDPA Link</li> </ul>	<ul style="list-style-type: none"> <li>■ HSDPA Link</li> </ul>
CDMA2000 BC0	<ul style="list-style-type: none"> <li>■ 1xRTT Link</li> </ul>	<ul style="list-style-type: none"> <li>■ 1xRTT Link</li> </ul>
CDMA2000 BC1	<ul style="list-style-type: none"> <li>■ 1xRTT Link</li> </ul>	<ul style="list-style-type: none"> <li>■ 1xRTT Link</li> </ul>

**Note:** The maximum power levels are GSM mode for GMSK link, EDGE multi-slot class 8 mode for 8PSK link, and RMC 12.2Kbps mode for WCDMA band V, HSDPA mode for WCDMA band II, 1xRTT RC1+SO55 mode for CDMA2000 BC0, 1xRTT RC3+SO55 mode for CDMA2000 BC1 on QPSK Link, only these modes were used for all tests.

The conducted power tables are as follows:


Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	32.37	32.27	32.22	30.30	29.76	29.12
GPRS 8	32.03	32.11	32.08	30.02	29.76	29.11
GPRS 10	29.48	29.55	29.52	26.85	27.30	26.61
GPRS 12	25.94	26.02	26.00	23.20	23.72	23.23
EDGE 8	26.75	26.86	26.87	26.46	26.85	26.12
EDGE 10	24.73	24.84	24.86	24.26	24.77	24.14
EDGE 12	23.71	23.83	23.84	23.02	23.54	23.03



Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880.0	1907.6
RMC 12.2K	22.02	22.06	21.96	22.02	22.10	21.71
HSDPA Subtest-1	21.86	21.87	21.74	22.08	22.27	21.85
HSDPA Subtest-2	21.60	21.75	21.55	21.85	22.20	21.75
HSDPA Subtest-3	21.64	21.65	21.57	21.85	22.10	21.67
HSDPA Subtest-4	21.46	21.68	21.48	21.86	21.90	21.50
HSUPA Subtest-1	21.25	21.27	21.25	21.83	21.13	21.21
HSUPA Subtest-2	20.65	20.70	20.65	20.35	20.66	20.35
HSUPA Subtest-3	20.46	20.49	20.42	20.48	20.62	20.51
HSUPA Subtest-4	20.65	20.59	20.55	20.50	20.86	20.15
HSUPA Subtest-5	21.52	21.34	21.26	21.60	21.70	21.37

Conducted Power (*Unit: dBm)						
Band	CDMA2000 BC0			CDMA2000 BC1		
Channel	1013	384	777	25	600	1175
Frequency	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1+S055	23.54	23.27	23.37	23.39	23.31	23.50
1xRTT RC3+S055	23.50	23.29	23.30	23.50	23.45	23.55
1xRTT RC3+S032	23.41	23.26	22.85	23.41	23.27	23.51
EVDO RTAP 153.6K	23.43	23.07	23.16	23.45	23.32	23.51
EVDO RETAP 4096K	23.46	23.17	23.16	23.09	23.37	23.42

## 2.2 Connection Diagram of Test System

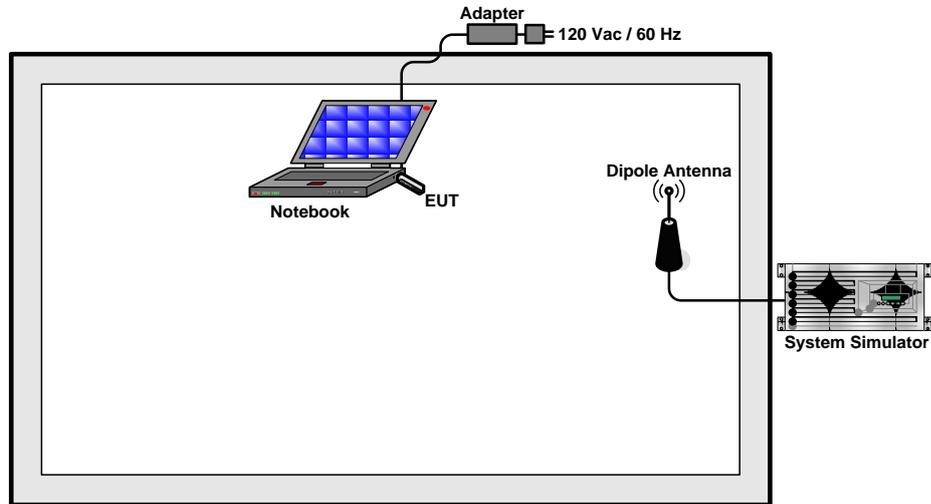

### 3 Test Result

#### 3.1 Conducted Output Power Measurement

##### 3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

##### 3.1.4 Test Setup

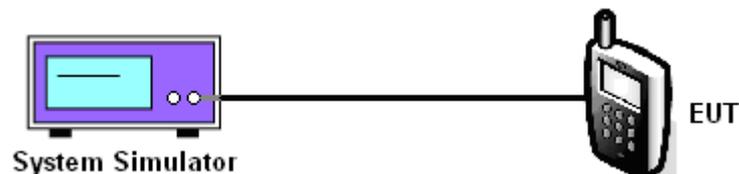

3.1.5 Test Result of Conducted Output Power

Cellular Band				
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM850 (GSM)	128 (Low)	824.20	32.37	1.73
	189 (Mid)	836.40	32.27	1.69
	251 (High)	848.80	32.22	1.67
GSM850 (EDGE 8)	128 (Low)	824.20	26.75	0.47
	189 (Mid)	836.40	26.86	0.49
	251 (High)	848.80	26.87	0.49
WCDMA Band V (RMC 12.2Kbps)	4132 (Low)	826.40	22.02	0.16
	4182 (Mid)	836.40	22.06	0.16
	4233 (High)	846.60	21.96	0.16
CDMA 2000 (1xRTT_RC1+SO55)	1013 (Low)	824.70	23.54	0.23
	384 (Mid)	836.52	23.27	0.21
	777 (High)	848.31	23.37	0.22

PCS Band				
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM1900 (GSM)	512 (Low)	1850.20	30.30	1.07
	661 (Mid)	1880.00	29.76	0.95
	810 (High)	1909.80	29.12	0.82
GSM1900 (EDGE 8)	512 (Low)	1850.20	26.46	0.44
	661 (Mid)	1880.00	26.85	0.48
	810 (High)	1909.80	26.12	0.41
WCDMA Band II (HSDPA)	9262 (Low)	1852.40	22.08	0.17
	9400 (Mid)	1880.00	22.27	0.17
	9538 (High)	1907.60	21.85	0.15
CDMA 2000 (1xRTT_RC3+SO55)	25 (Low)	1851.25	23.50	0.22
	600 (Mid)	1880.00	23.45	0.22
	1175 (High)	1908.75	23.55	0.23

## 3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

### 3.2.1 Description of the ERP/EIRP Measurement

ERP/EIRP is measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.

### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The EUT was placed on a turntable with 1.0 meter height in a fully anechoic chamber.
2. The EUT was set at 1.2 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiated power.
4. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
5. Taking the record of maximum ERP/EIRP.
6. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
7. The conducted power at the terminal of the dipole antenna is measured.
8. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
9.  $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

$P_s$  (dBm) : Input power to substitution antenna.

$G_s$  (dBi or dBd) : Substitution antenna Gain.

$E_t = R_t + AF$


$E_s = R_s + AF$

$AF$  (dB/m) : Receive antenna factor

$R_t$  : The highest received signal in spectrum analyzer for EUT.

$R_s$  : The highest received signal in spectrum analyzer for substitution antenna.

### 3.2.4 Test Setup

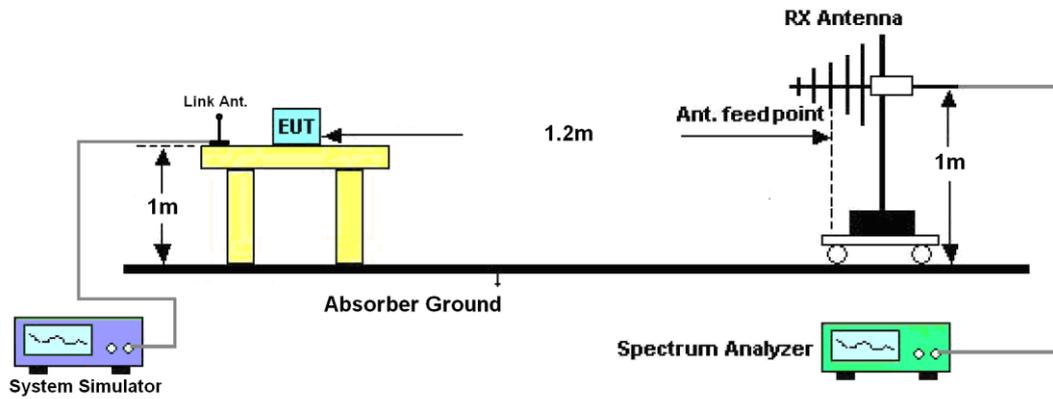

**3.2.5 Test Result of ERP**

<b>GSM850 (GSM) Radiated Power ERP</b>						
Horizontal Polarization						
<b>Frequency (MHz)</b>	<b>Rt (dBm)</b>	<b>Rs (dBm)</b>	<b>Ps (dBm)</b>	<b>Gs (dBd)</b>	<b>ERP (dBm)</b>	<b>ERP (W)</b>
824.20	-23.76	-48.12	0.00	-1.08	23.28	0.21
836.40	-22.34	-48.28	0.00	-0.93	25.01	0.32
848.80	-21.38	-48.35	0.00	-0.76	26.21	0.42
Vertical Polarization						
<b>Frequency (MHz)</b>	<b>Rt (dBm)</b>	<b>Rs (dBm)</b>	<b>Ps (dBm)</b>	<b>Gs (dBd)</b>	<b>ERP (dBm)</b>	<b>ERP (W)</b>
824.20	-27.22	-47.97	0.00	-1.08	19.67	0.09
836.40	-26.79	-48.01	0.00	-0.93	20.29	0.11
848.80	-26.43	-48.05	0.00	-0.76	20.86	0.12

<b>GSM850 (EDGE 8) Radiated Power ERP</b>						
Horizontal Polarization						
<b>Frequency (MHz)</b>	<b>Rt (dBm)</b>	<b>Rs (dBm)</b>	<b>Ps (dBm)</b>	<b>Gs (dBd)</b>	<b>ERP (dBm)</b>	<b>ERP (W)</b>
824.20	-25.72	-48.12	0.00	-1.08	21.32	0.14
836.40	-25.69	-48.28	0.00	-0.93	21.66	0.15
848.80	-25.34	-48.35	0.00	-0.76	22.25	0.17
Vertical Polarization						
<b>Frequency (MHz)</b>	<b>Rt (dBm)</b>	<b>Rs (dBm)</b>	<b>Ps (dBm)</b>	<b>Gs (dBd)</b>	<b>ERP (dBm)</b>	<b>ERP (W)</b>
824.20	-32.08	-47.97	0.00	-1.08	14.81	0.03
836.40	-32.58	-48.01	0.00	-0.93	14.50	0.03
848.80	-32.26	-48.05	0.00	-0.76	15.03	0.03



WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-27.05	-48.12	0.00	-1.08	19.99	0.10
836.40	-27.27	-48.28	0.00	-0.93	20.08	0.10
846.60	-27.24	-48.35	0.00	-0.76	20.35	0.11
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-31.73	-47.97	0.00	-1.08	15.16	0.03
836.40	-31.11	-48.01	0.00	-0.93	15.97	0.04
846.60	-30.63	-48.05	0.00	-0.76	16.66	0.05

CDMA2000 BC0 (1xRTT_RC1+S055) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.70	-24.78	-48.12	0.00	-1.08	22.26	0.17
836.52	-23.87	-48.28	0.00	-0.93	23.48	0.22
848.31	-24.56	-48.35	0.00	-0.76	23.03	0.20
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.70	-30.71	-47.97	0.00	-1.08	16.18	0.04
836.52	-29.41	-48.01	0.00	-0.93	17.67	0.06
848.31	-29.13	-48.05	0.00	-0.76	18.16	0.07

3.2.6 Test Result of EIRP

GSM1900 (GSM) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-27.90	-51.88	0.00	1.96	25.94	0.39
1880.00	-29.77	-52.99	0.00	2.00	25.22	0.33
1909.80	-31.34	-54.28	0.00	1.98	24.92	0.31
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-29.05	-52.13	0.00	1.96	25.04	0.32
1880.00	-31.19	-53.17	0.00	2.00	23.98	0.25
1909.80	-32.88	-54.13	0.00	1.98	23.23	0.21

GSM1900 (EDGE 8) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-30.45	-51.88	0.00	1.96	23.39	0.22
1880.00	-32.97	-52.99	0.00	2.00	22.02	0.16
1909.80	-35.00	-54.28	0.00	1.98	21.26	0.13
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-32.65	-52.13	0.00	1.96	21.44	0.14
1880.00	-34.14	-53.17	0.00	2.00	21.03	0.13
1909.80	-35.74	-54.13	0.00	1.98	20.37	0.11



WCDMA Band II (HSDPA) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-31.35	-51.88	0.00	1.96	22.49	0.18
1880.00	-32.70	-52.99	0.00	2.00	22.29	0.17
1907.60	-34.44	-54.28	0.00	1.98	21.82	0.15
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-33.48	-52.13	0.00	1.96	20.61	0.12
1880.00	-35.15	-53.17	0.00	2.00	20.02	0.10
1907.60	-37.03	-54.13	0.00	1.98	19.08	0.08

CDMA2000 BC1 (1xRTT_RC3+S055) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1851.25	-30.86	-51.88	0.00	1.96	22.98	0.20
1880.00	-32.46	-52.99	0.00	2.00	22.53	0.18
1908.75	-34.04	-54.28	0.00	1.98	22.22	0.17
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1851.25	-32.58	-52.13	0.00	1.96	21.51	0.14
1880.00	-34.83	-53.17	0.00	2.00	20.34	0.11
1908.75	-36.63	-54.13	0.00	1.98	19.48	0.09

### 3.3 Occupied Bandwidth Measurement

#### 3.3.1 Description of Occupied Bandwidth Measurement

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers were measured.


#### 3.3.4 Test Setup

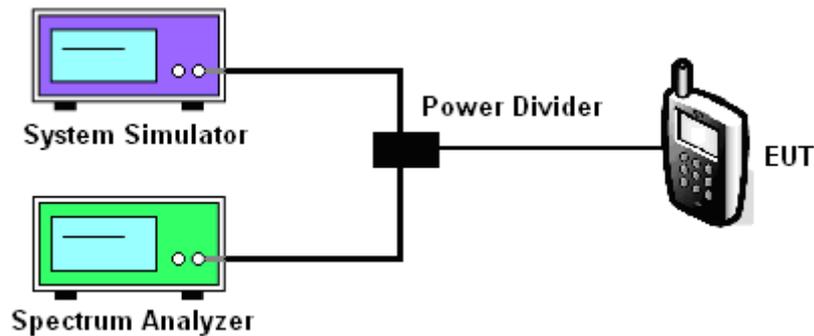

### 3.3.5 Test Result (Plots) of Occupied Bandwidth


<b>Band :</b>	GSM 850	<b>Power Stage :</b>	High
<b>Test Mode :</b>	GSM Link		

99% Occupied Bandwidth Plot on Channel 189

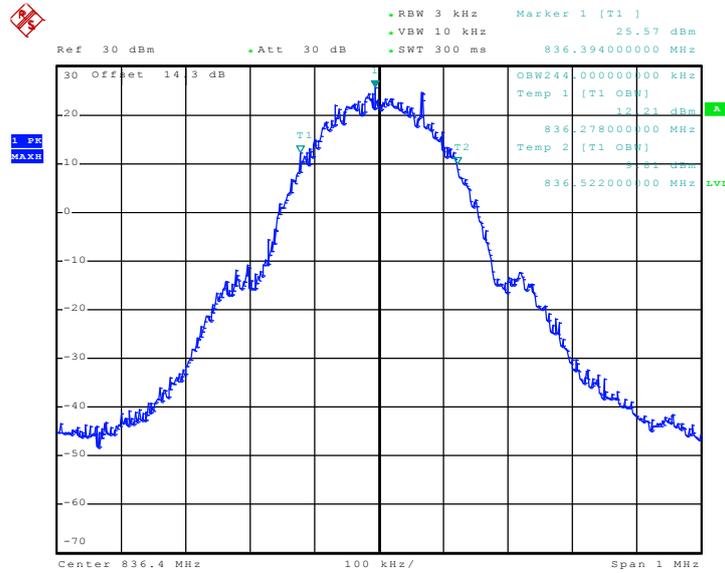

Date: 25.MAR.2010 09:33:27

26dB Bandwidth Plot on Channel 189

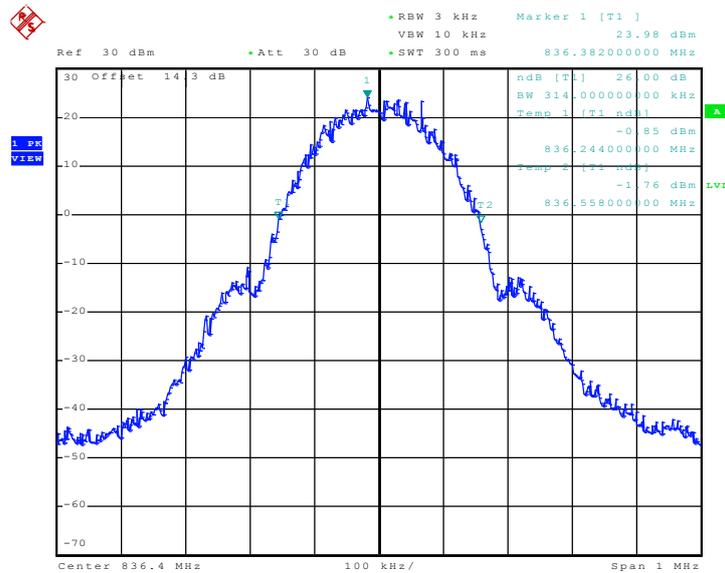


Date: 25.MAR.2010 09:20:53




<b>Band :</b>	GSM 850	<b>Power Stage :</b>	High
<b>Test Mode :</b>	EDGE 8 Link		

99% Occupied Bandwidth Plot on Channel 189

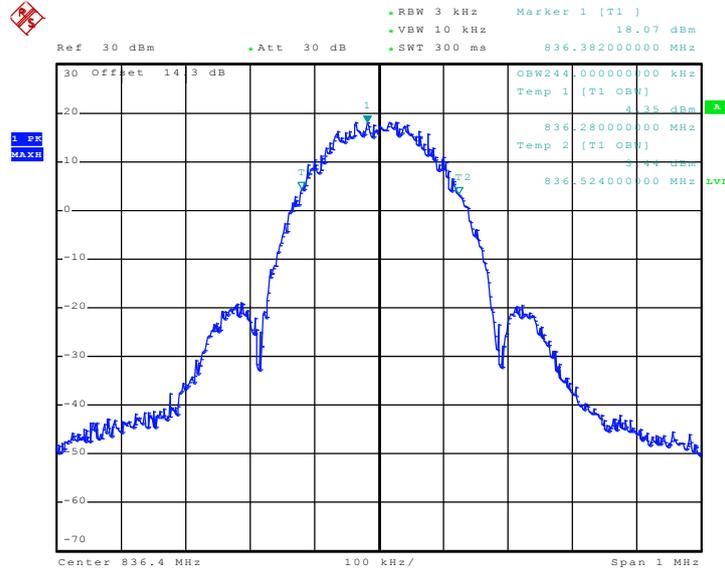

Date: 25.MAR.2010 12:58:58

26dB Bandwidth Plot on Channel 189

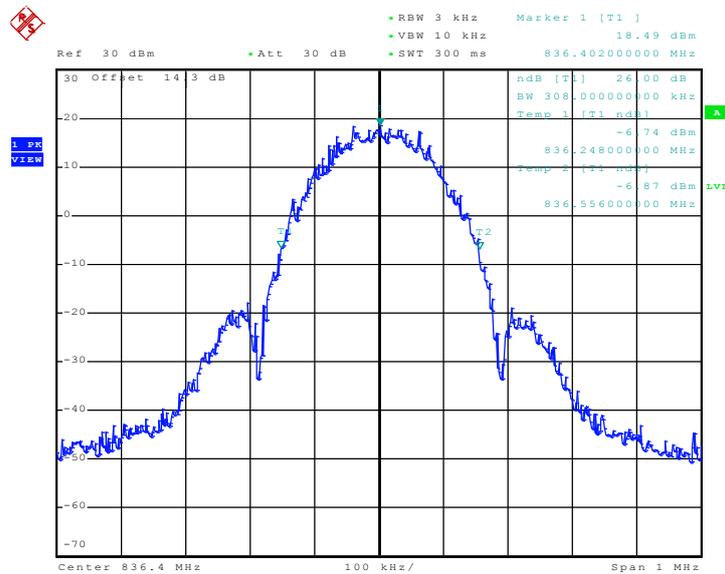


Date: 25.MAR.2010 12:45:54




<b>Band :</b>	GSM 1900	<b>Power Stage :</b>	High
<b>Test Mode :</b>	GSM Link		

**99% Occupied Bandwidth Plot on Channel 661**

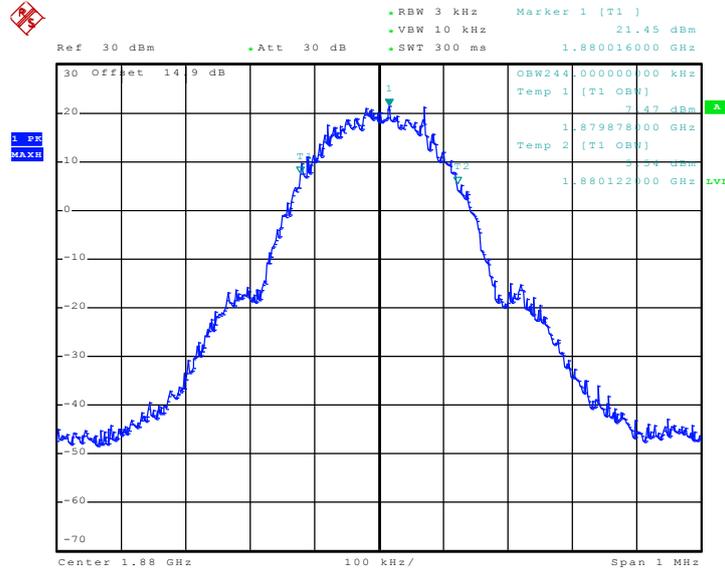

Date: 25.MAR.2010 15:24:44

**26dB Bandwidth Plot on Channel 661**

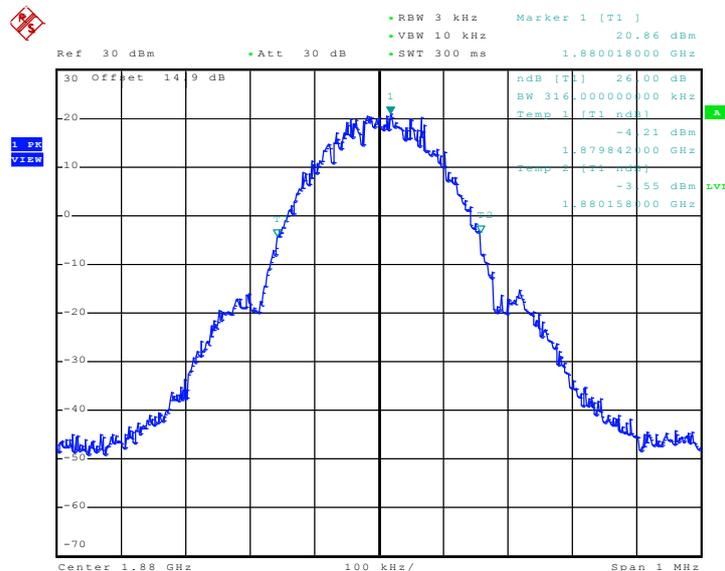


Date: 25.MAR.2010 15:12:42




<b>Band :</b>	GSM 1900	<b>Power Stage :</b>	High
<b>Test Mode :</b>	EDGE 8 Link		

99% Occupied Bandwidth Plot on Channel 661

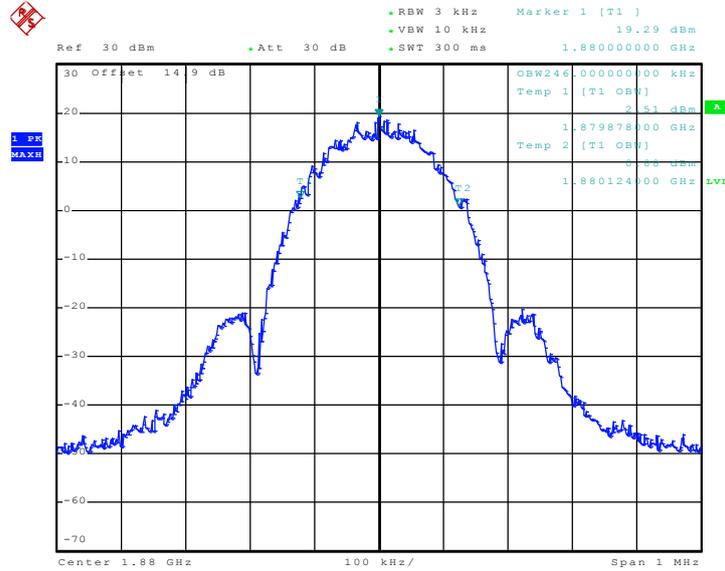

Date: 25.MAR.2010 14:04:59

26dB Bandwidth Plot on Channel 661

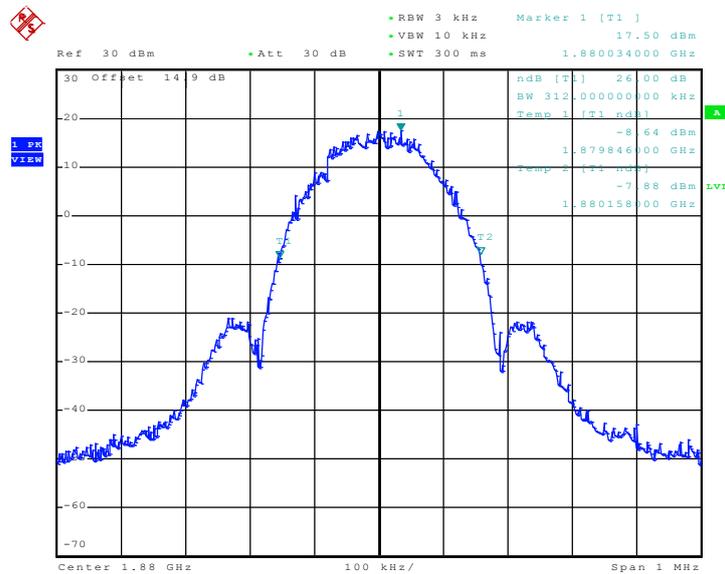


Date: 25.MAR.2010 13:50:04




Band :	WCDMA Band V	Power Stage :	High
Test Mode :	RMC 12.2Kbps Link		

99% Occupied Bandwidth Plot on Channel 4182

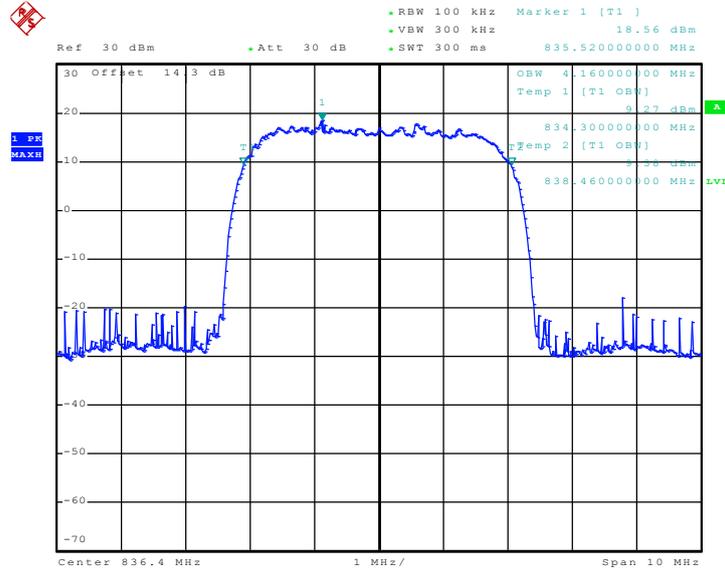

Date: 29.MAR.2010 08:14:26

26dB Bandwidth Plot on Channel 4182

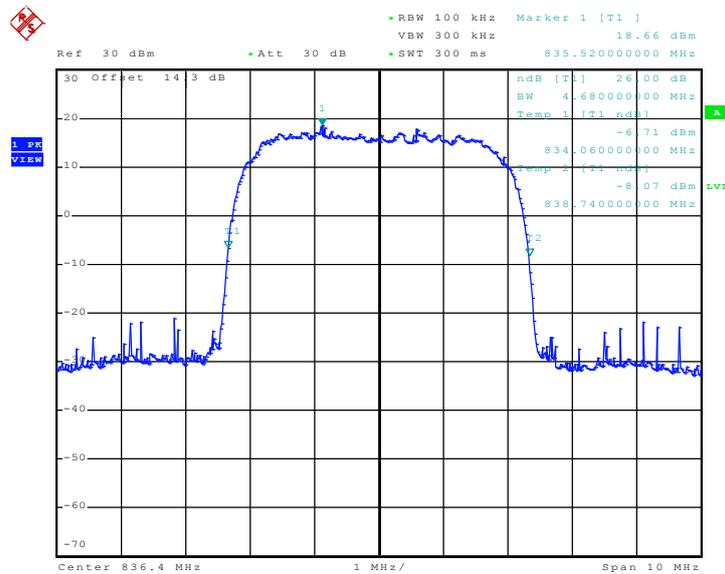


Date: 29.MAR.2010 08:10:19




Band :	WCDMA Band II	Power Stage :	High
Test Mode :	HSDPA Link		

99% Occupied Bandwidth Plot on Channel 9400

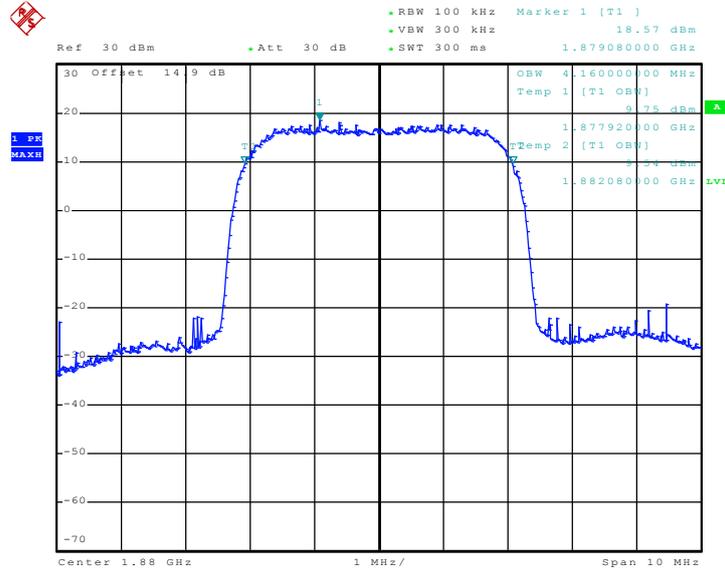

Date: 29.MAR.2010 08:41:52

26dB Bandwidth Plot on Channel 9400

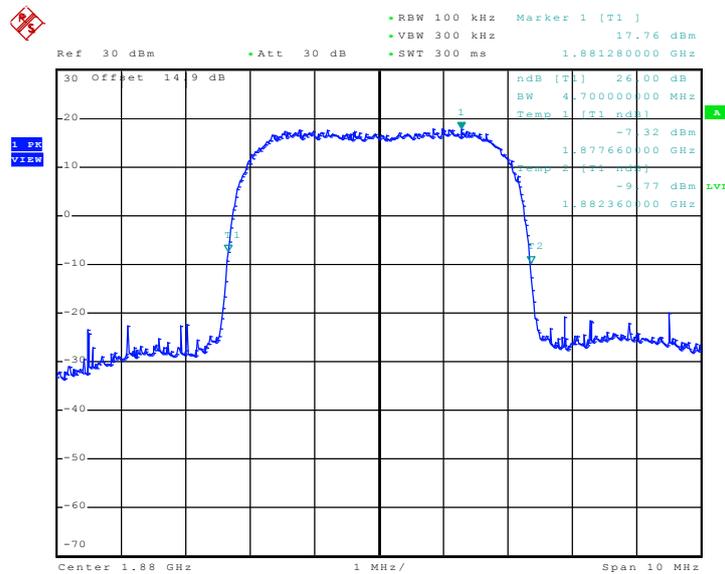


Date: 29.MAR.2010 08:37:50




Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xRTT_RC1+SO55		

99% Occupied Bandwidth Plot on Channel 384

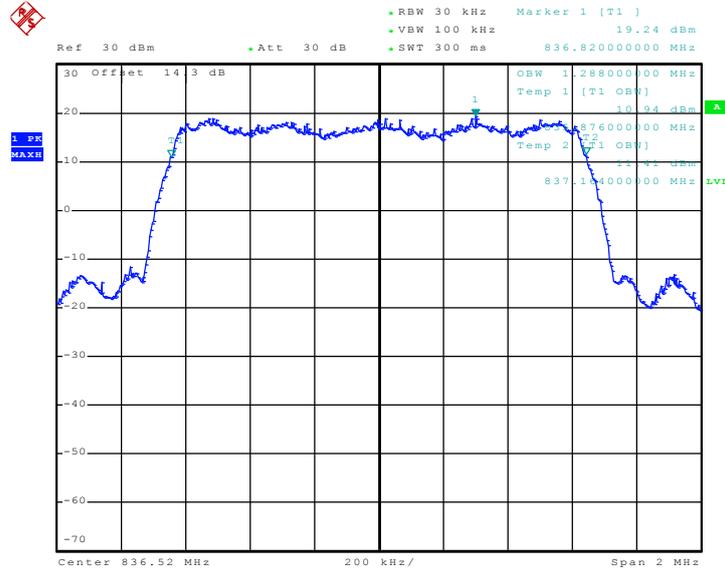

Date: 26.MAR.2010 13:35:07

26dB Bandwidth Plot on Channel 384

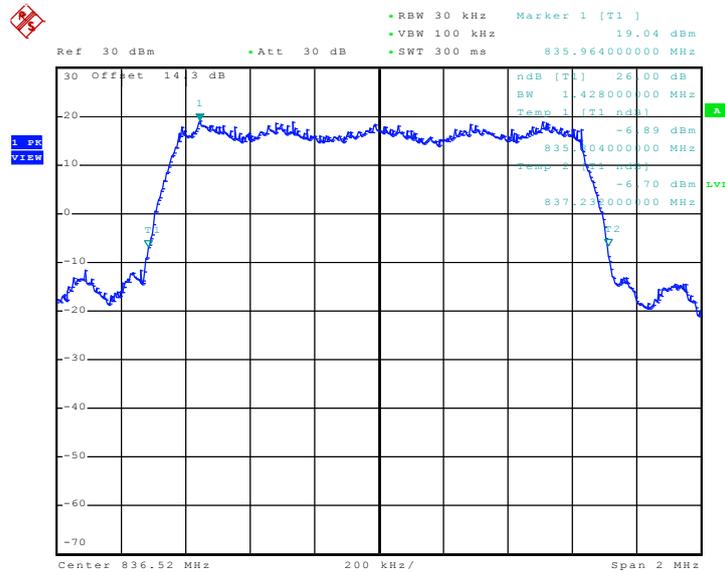


Date: 26.MAR.2010 13:24:33




<b>Band :</b>	CDMA2000 BC1	<b>Power Stage :</b>	High
<b>Test Mode :</b>	1xRTT_RC3+SO55		

99% Occupied Bandwidth Plot on Channel 600

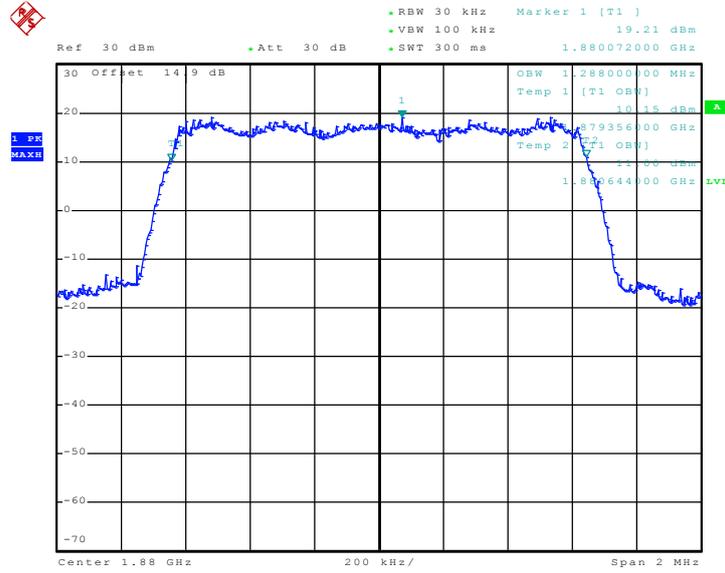

Date: 26.MAR.2010 14:13:56

26dB Bandwidth Plot on Channel 600

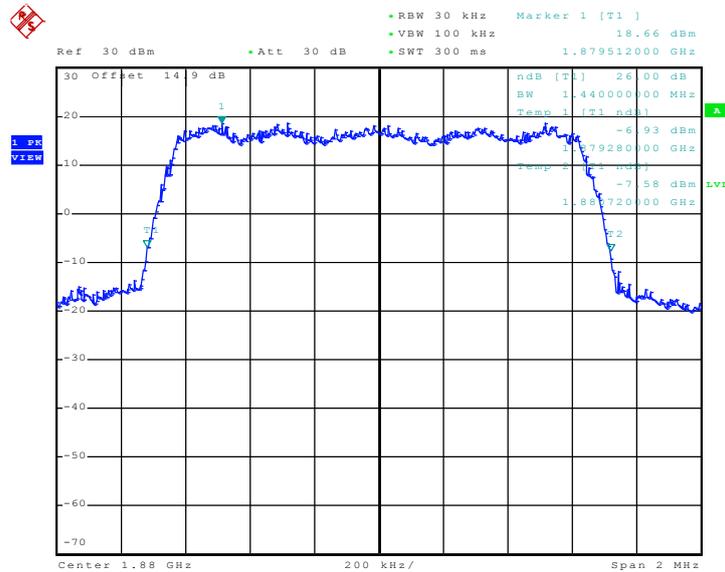

Date: 26.MAR.2010 14:09:39

## 3.4 Band Edge Measurement

### 3.4.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.


### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.4.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly  $BW/100$ .
3. The RBW was replaced by 10 kHz, due to the spectrum analyzer IF-Filter including an excess of the limit. A worst case correction factor of  $10 \log (1\% BW/\text{measurement RBW})$  was implemented.


### 3.4.4 Test Setup

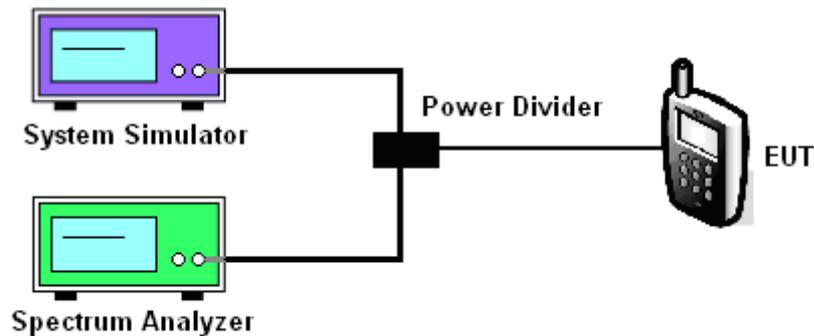

### 3.4.5 Test Result (Plots) of Conducted Band Edge


<b>Band :</b>	GSM850	<b>Power Stage :</b>	High
<b>Test Mode :</b>	GSM Link		

Lower Band Edge Plot on Channel 128

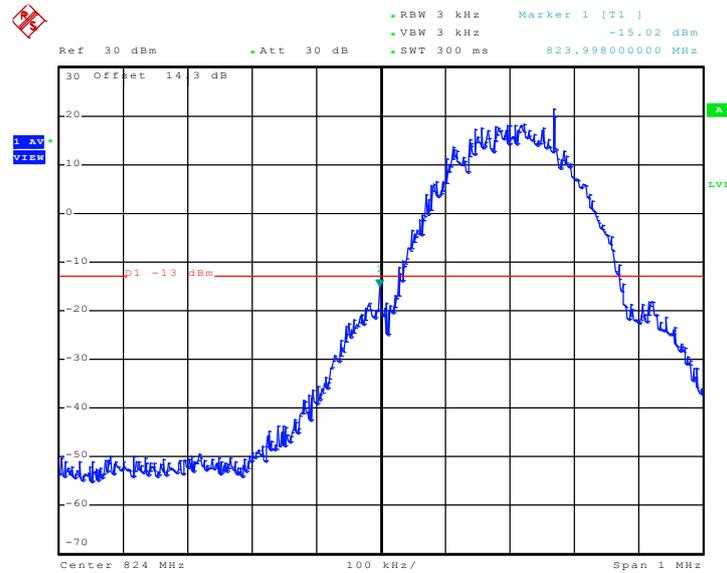

Date: 25.MAR.2010 09:26:01

Higher Band Edge Plot on Channel 251

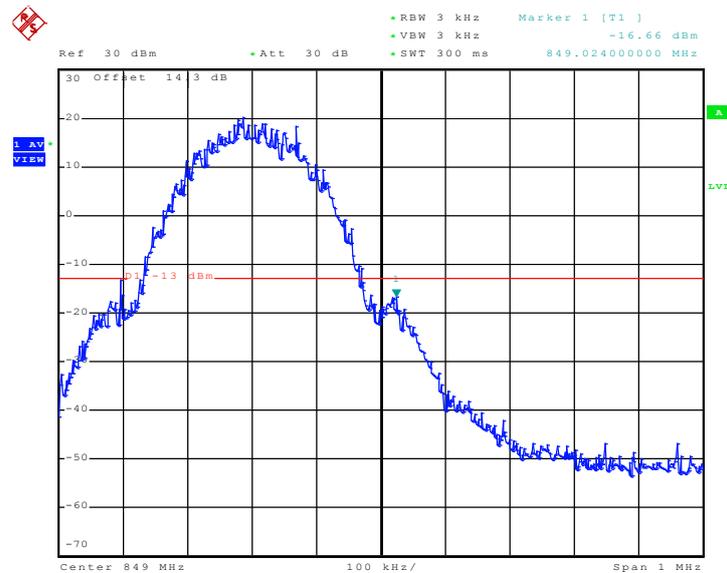


Date: 25.MAR.2010 09:28:30




Band :	GSM850	Power Stage :	High
Test Mode :	EDGE 8 Link		

Lower Band Edge Plot on Channel 128

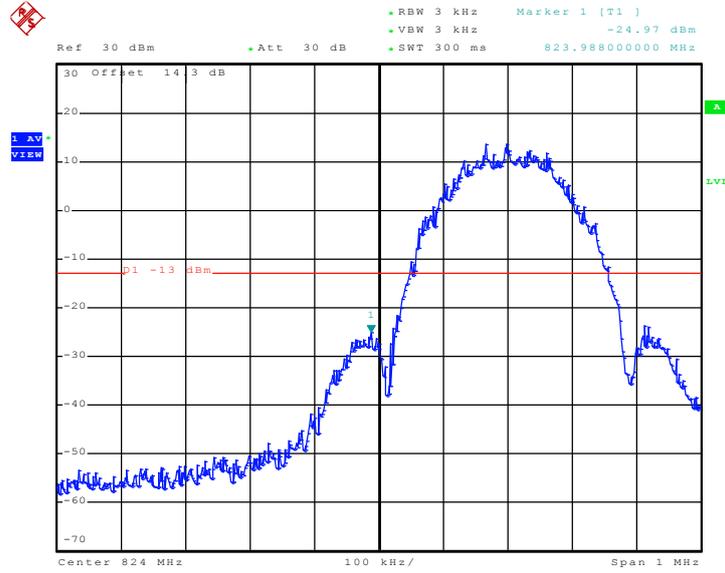

Date: 25.MAR.2010 12:50:36

Higher Band Edge Plot on Channel 251

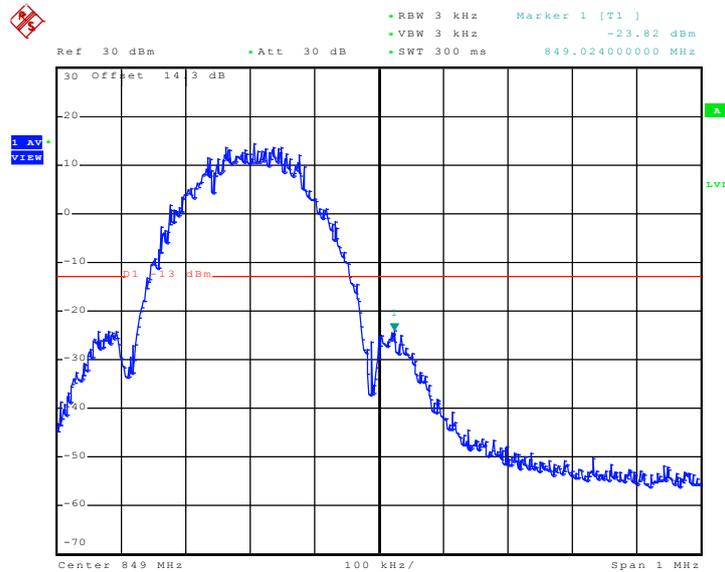


Date: 25.MAR.2010 12:52:38




Band :	GSM1900	Power Stage :	High
Test Mode :	GSM Link		

Lower Band Edge Plot on Channel 512

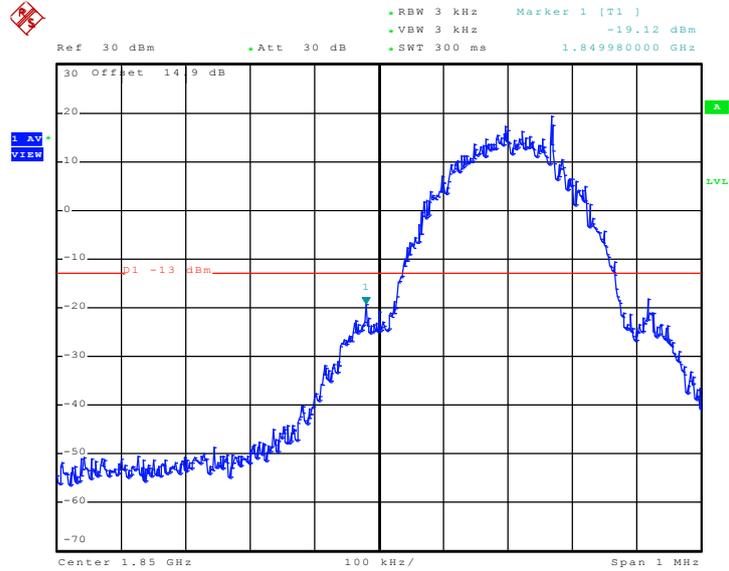

Date: 25.MAR.2010 15:16:57

Higher Band Edge Plot on Channel 810

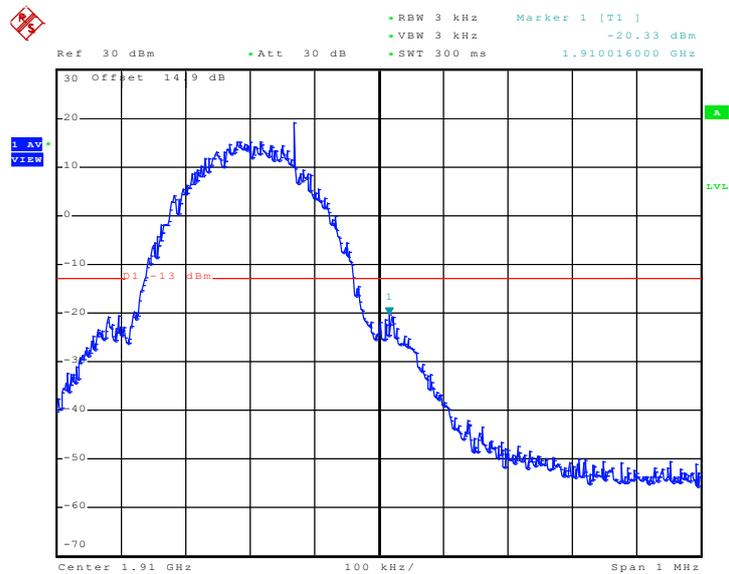


Date: 25.MAR.2010 15:18:34




Band :	GSM1900	Power Stage :	High
Test Mode :	EDGE 8 Link		

Lower Band Edge Plot on Channel 512

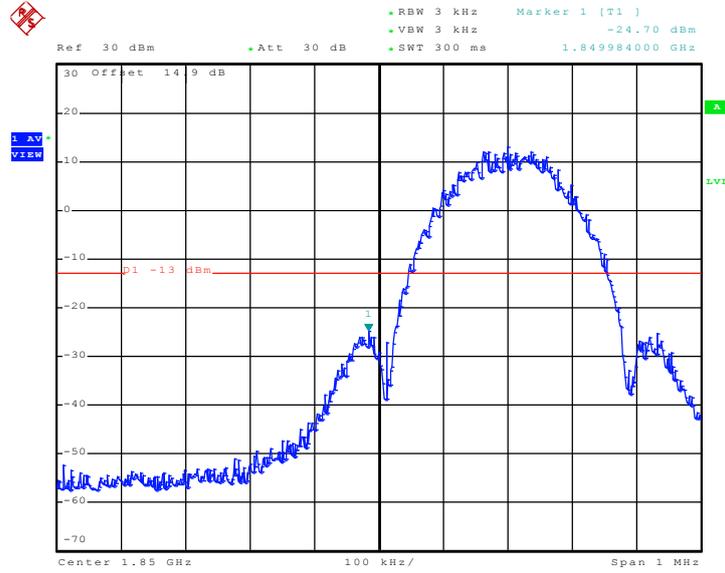

Date: 25.MAR.2010 13:54:18

Higher Band Edge Plot on Channel 810

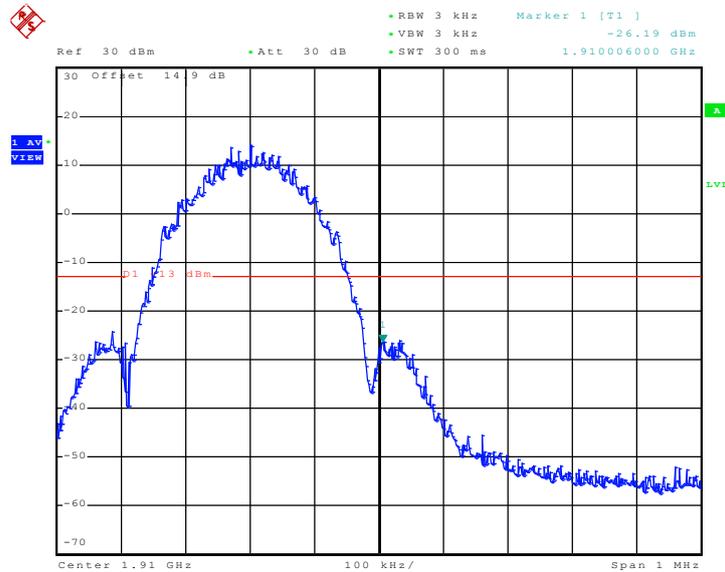


Date: 25.MAR.2010 13:56:28




<b>Band :</b>	WCDMA Band V	<b>Power Stage :</b>	High
<b>Test Mode :</b>	RMC 12.2Kbps Link		

**Lower Band Edge Plot on Channel 4132**

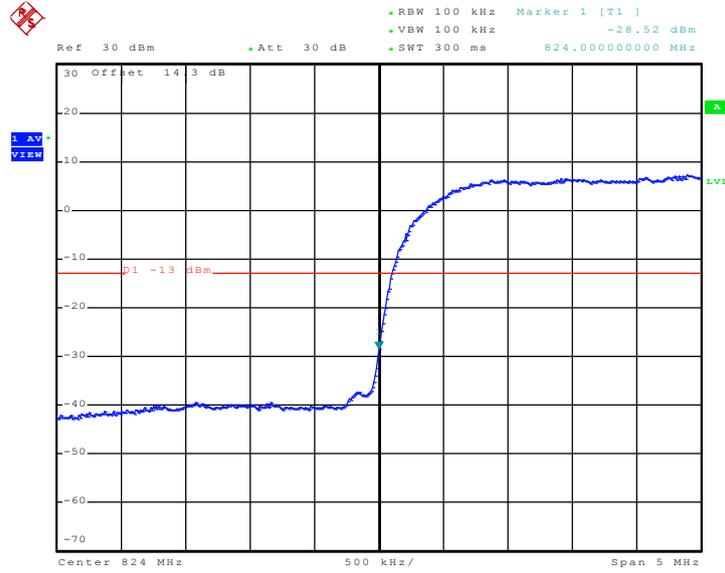

Date: 29.MAR.2010 08:12:17

**Higher Band Edge Plot on Channel 4233**

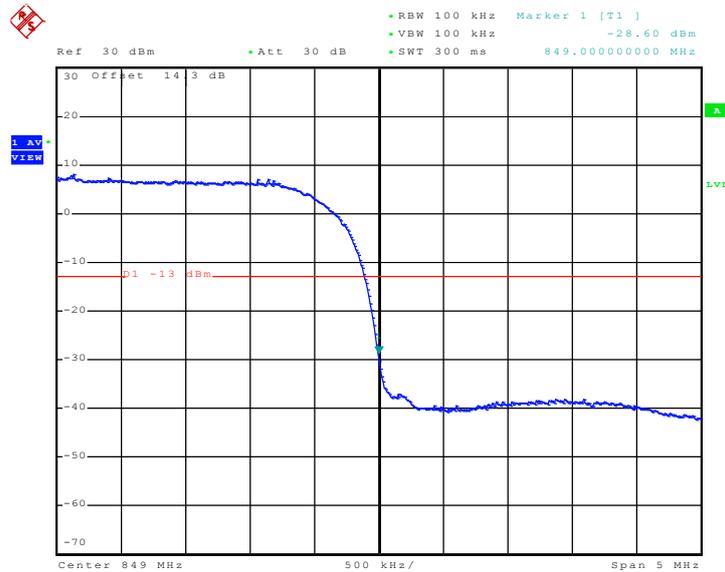


Date: 29.MAR.2010 08:12:44




<b>Band :</b>	WCDMA Band II	<b>Power Stage :</b>	High
<b>Test Mode :</b>	HSDPA Link		

**Lower Band Edge Plot on Channel 9262**

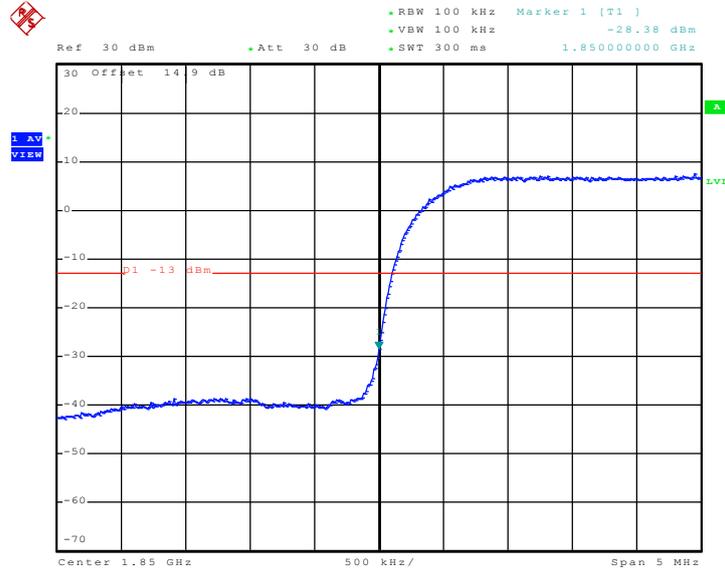

Date: 29.MAR.2010 08:39:42

**Higher Band Edge Plot on Channel 9538**

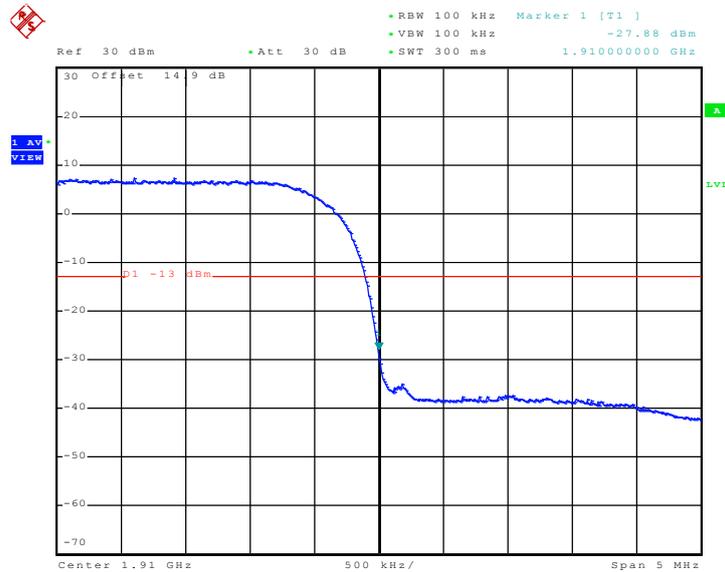


Date: 29.MAR.2010 08:40:15




Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xRTT_RC1+SO55		

Lower Band Edge Plot on Channel 1013

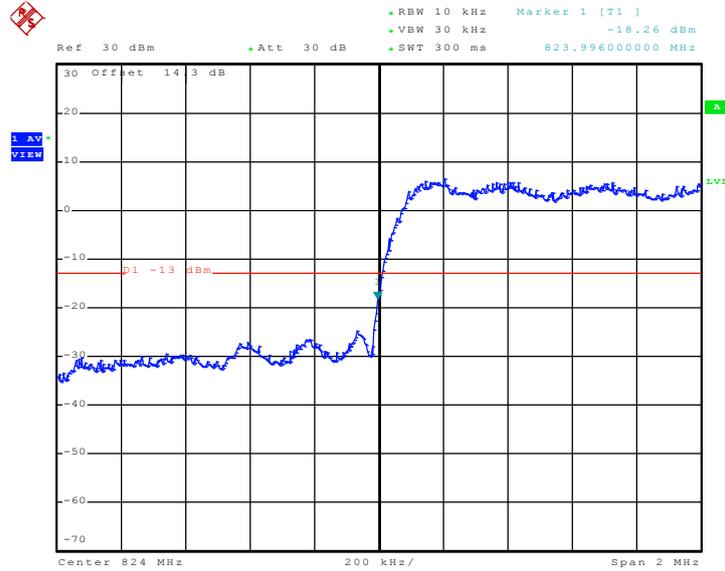

Date: 26.MAR.2010 13:31:53

Higher Band Edge Plot on Channel 777

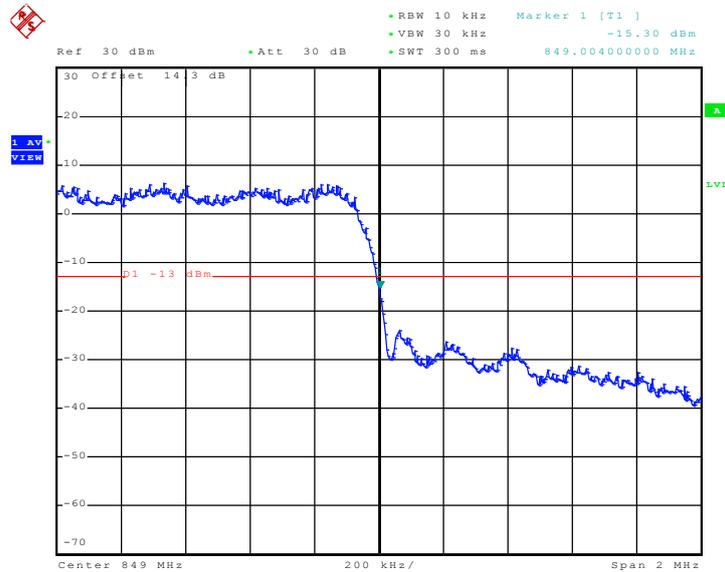


Date: 26.MAR.2010 13:31:10




Band :	CDMA2000 BC1	Power Stage :	High
Test Mode :	1xRTT_RC3+SO55		

Lower Band Edge Plot on Channel 25

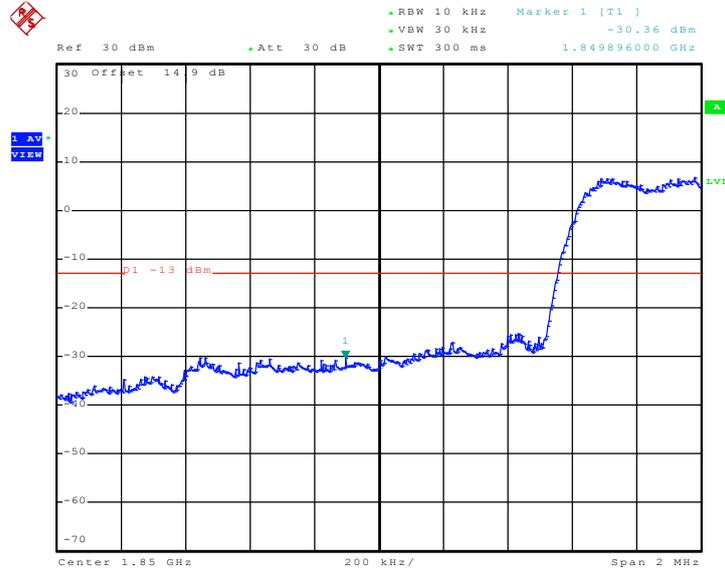

Date: 26.MAR.2010 14:11:35

Higher Band Edge Plot on Channel 1175

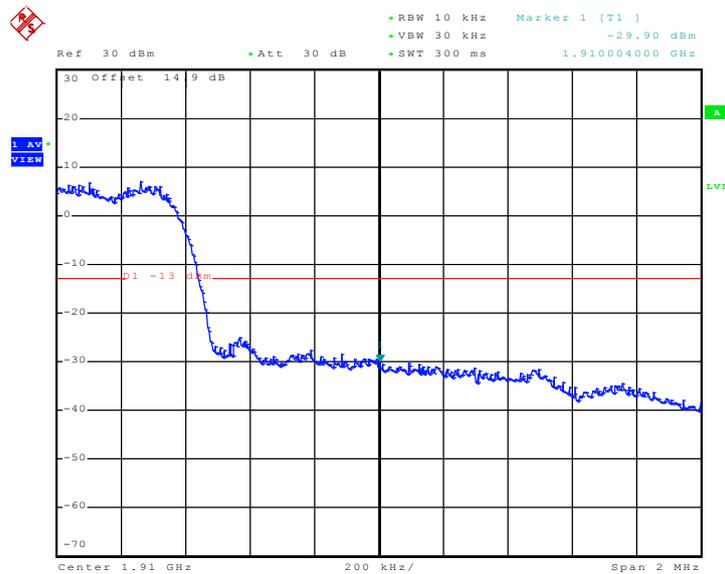

Date: 26.MAR.2010 14:12:37

## 3.5 Conducted Emission Measurement

### 3.5.1 Description of Conducted Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.5.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.


### 3.5.4 Test Setup

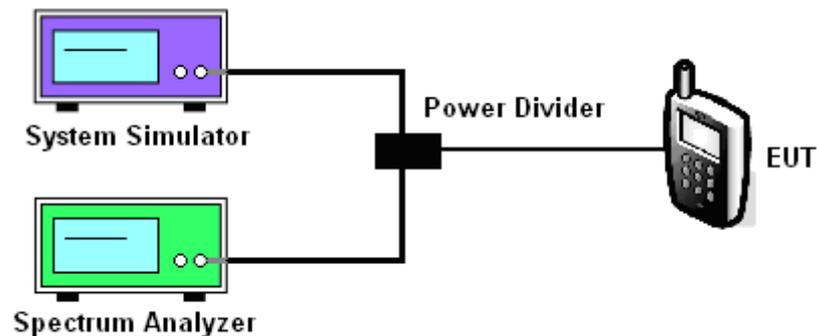

### 3.5.5 Test Result (Plots) of Conducted Emission


<b>Band :</b>	GSM850	<b>Channel :</b>	CH189
<b>Test Mode :</b>	GSM Link		

Conducted Emission Plot between 30MHz ~ 1GHz

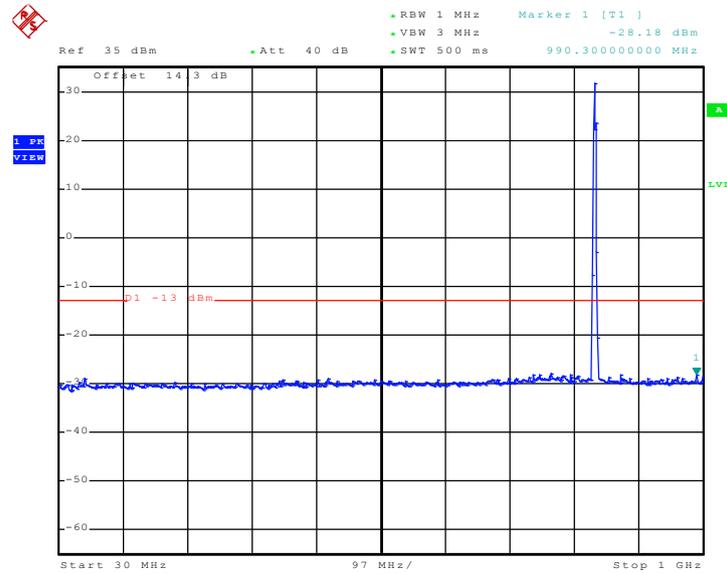

Date: 25.MAR.2010 10:00:18


Conducted Emission Plot between 1GHz ~ 3GHz

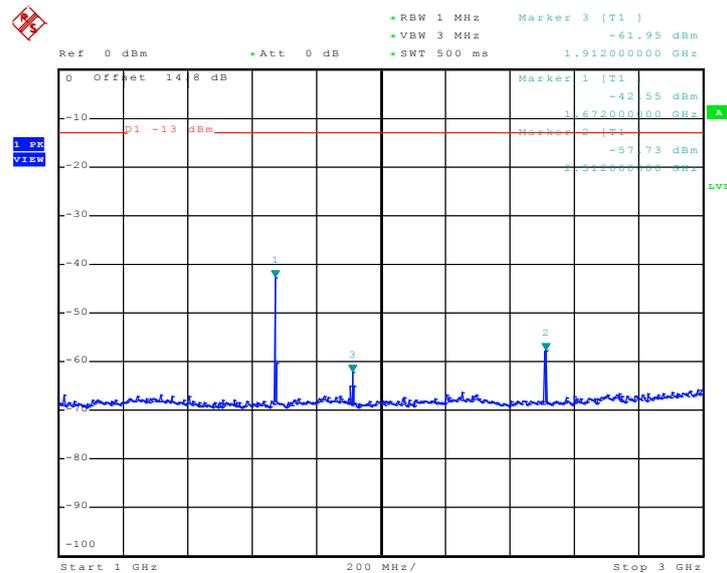

Date: 25.MAR.2010 10:08:24




Conducted Emission Plot between 3GHz ~ 7GHz

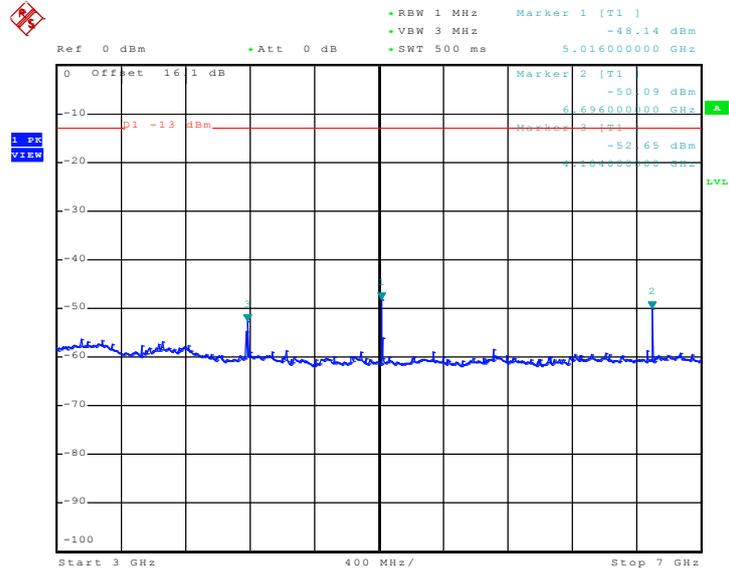

Date: 25.MAR.2010 10:15:15

Conducted Emission Plot between 7GHz ~ 9GHz

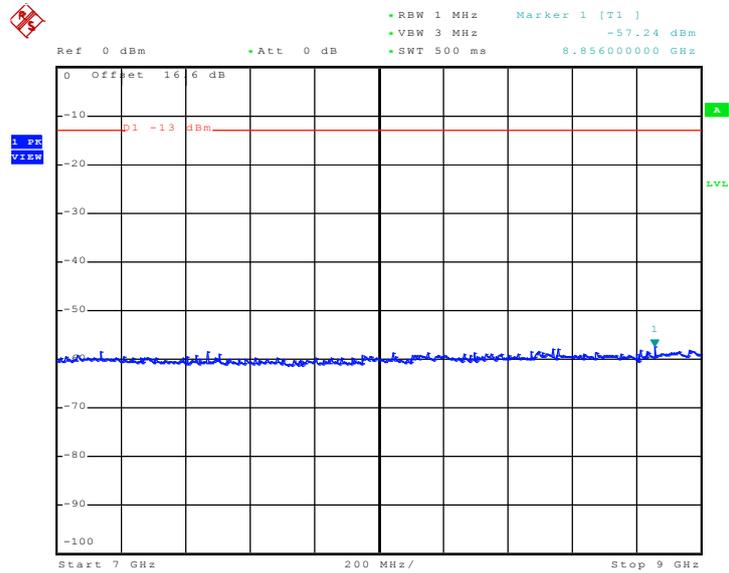


Date: 25.MAR.2010 10:18:16




<b>Band :</b>	GSM850	<b>Channel :</b>	CH189
<b>Test Mode :</b>	EDGE 8 Link		

**Conducted Emission Plot between 30MHz ~ 1GHz**

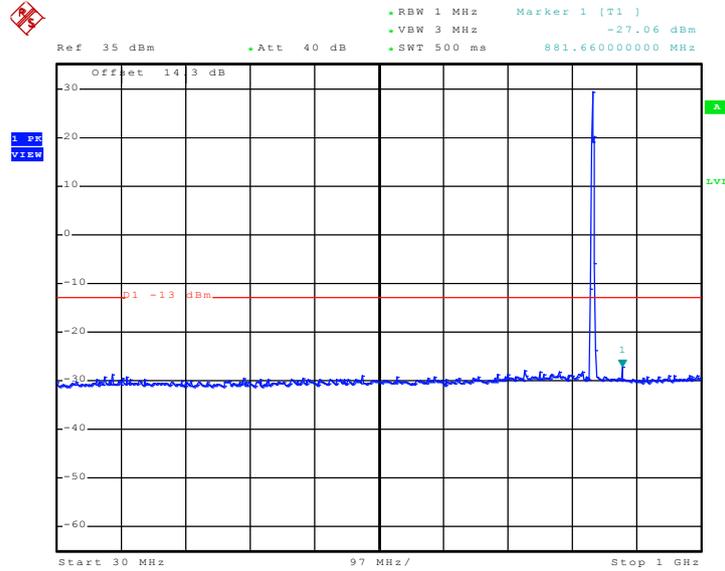

Date: 25.MAR.2010 13:20:21


**Conducted Emission Plot between 1GHz ~ 3GHz**

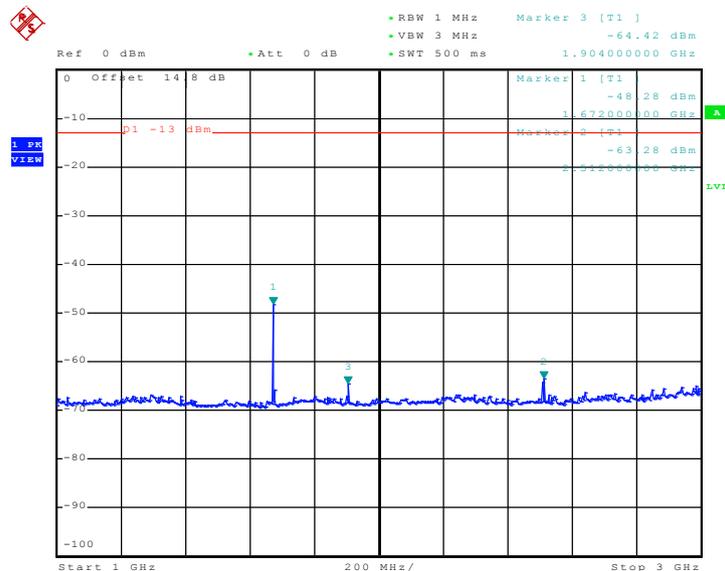

Date: 25.MAR.2010 15:53:16




### Conducted Emission Plot between 3GHz ~ 7GHz

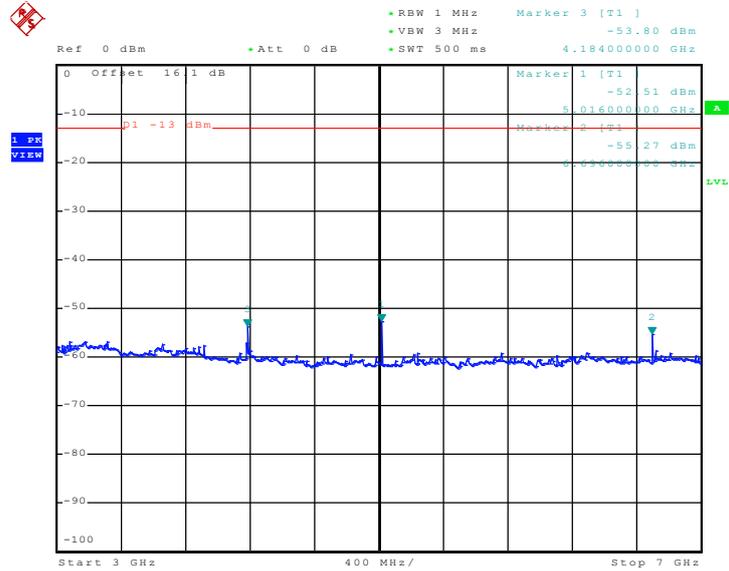

Date: 25.MAR.2010 13:28:00

### Conducted Emission Plot between 7GHz ~ 9GHz

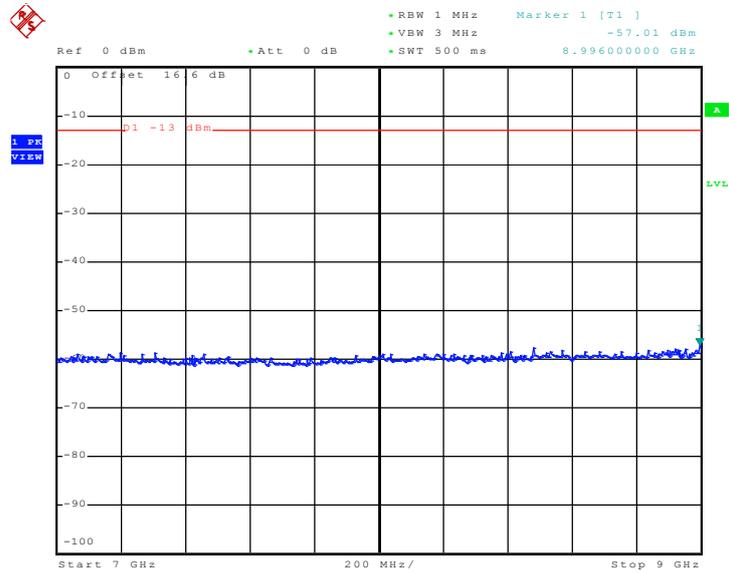


Date: 25.MAR.2010 13:30:36




Band :	GSM1900	Channel :	CH661
Test Mode :	GSM Link		

Conducted Emission Plot between 30MHz ~ 1GHz

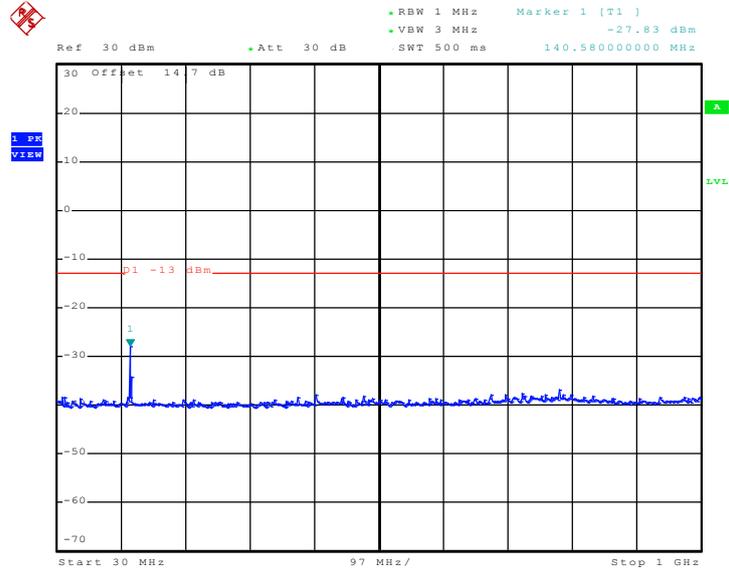

Date: 25.MAR.2010 14:57:31


Conducted Emission Plot between 1GHz ~ 3GHz

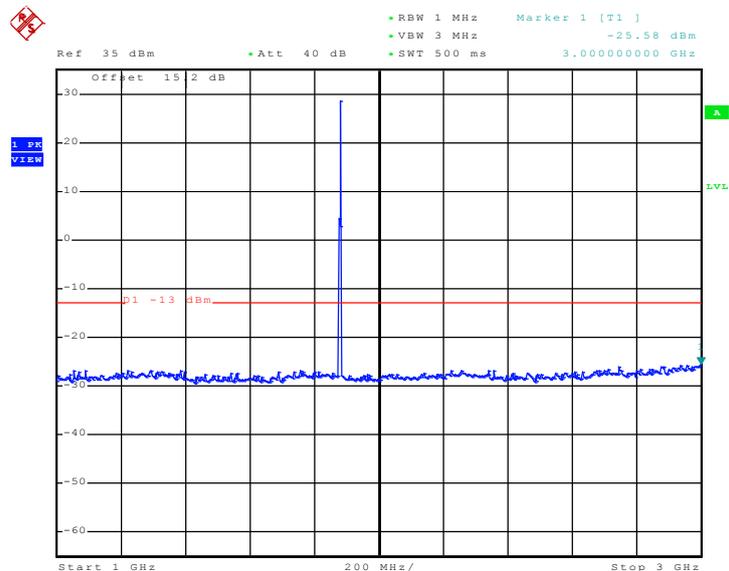

Date: 25.MAR.2010 14:55:23




### Conducted Emission Plot between 3GHz ~ 7GHz

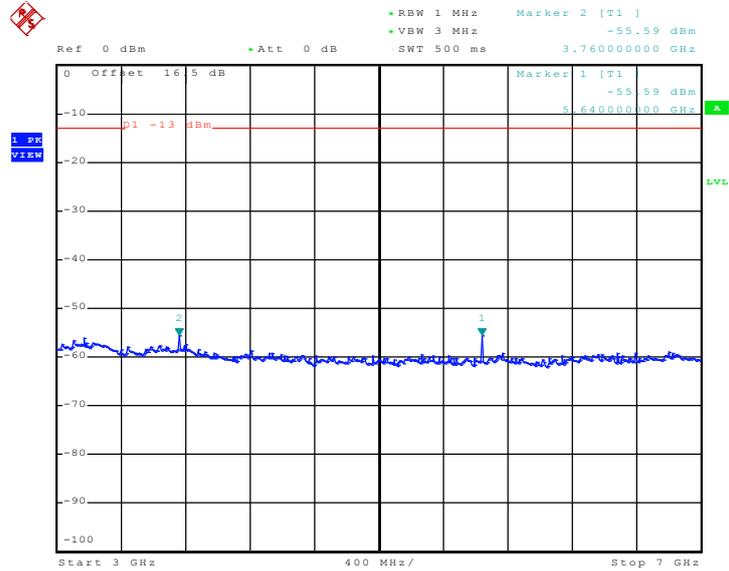

Date: 25.MAR.2010 14:59:57


### Conducted Emission Plot between 7GHz ~ 13.6GHz

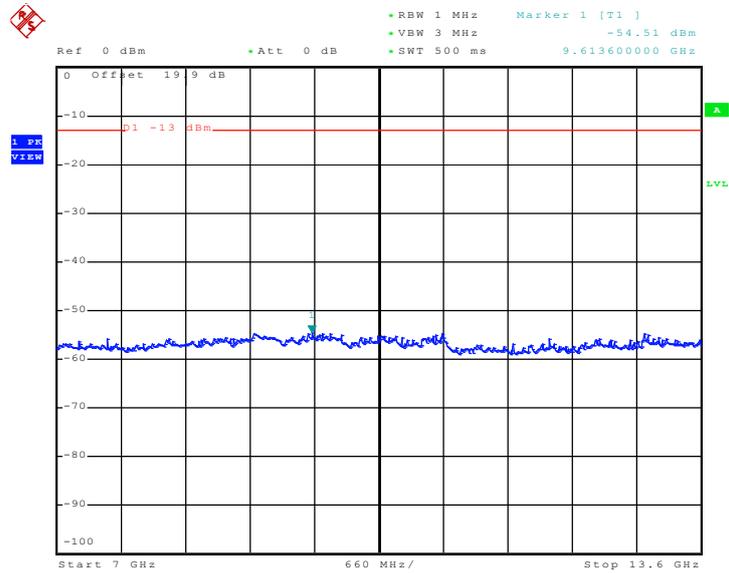

Date: 25.MAR.2010 15:02:13



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

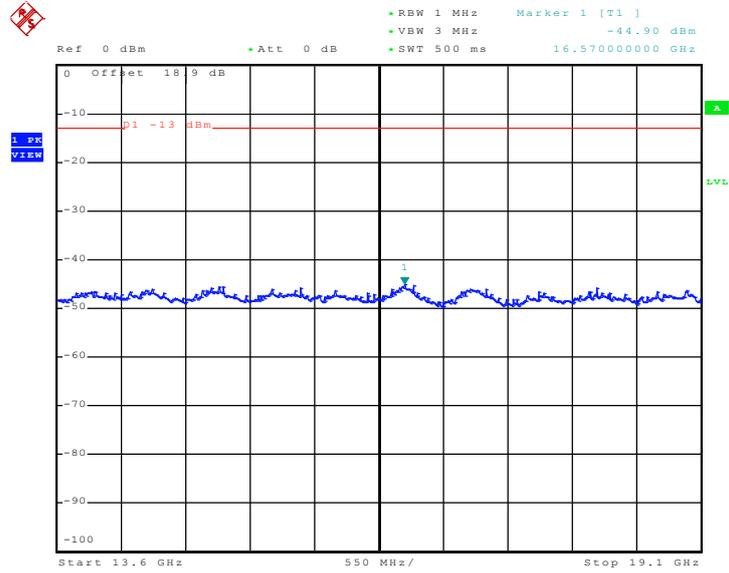


Date: 25.MAR.2010 15:03:56




Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE 8 Link		

Conducted Emission Plot between 30MHz ~ 1GHz

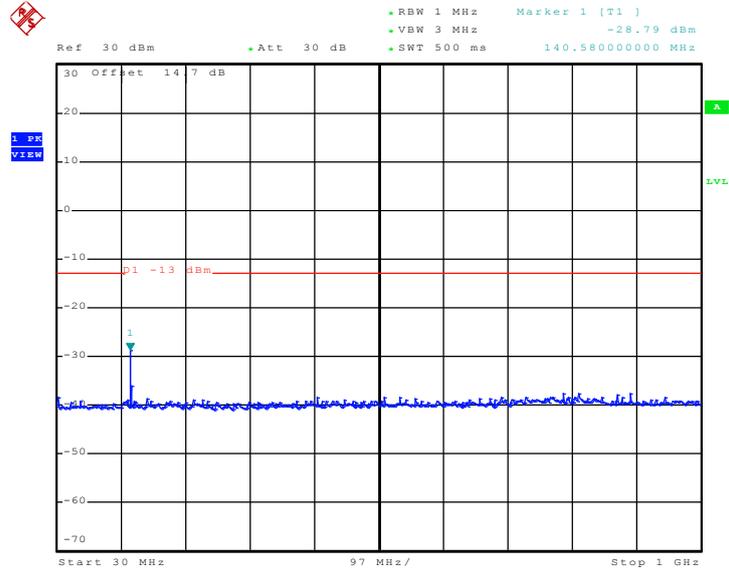

Date: 25.MAR.2010 14:24:06


Conducted Emission Plot between 1GHz ~ 3GHz

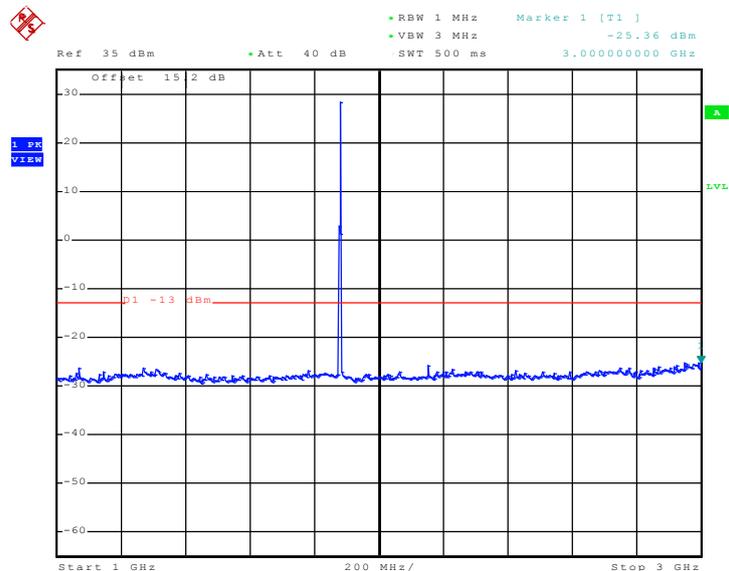

Date: 25.MAR.2010 14:41:19




### Conducted Emission Plot between 3GHz ~ 7GHz

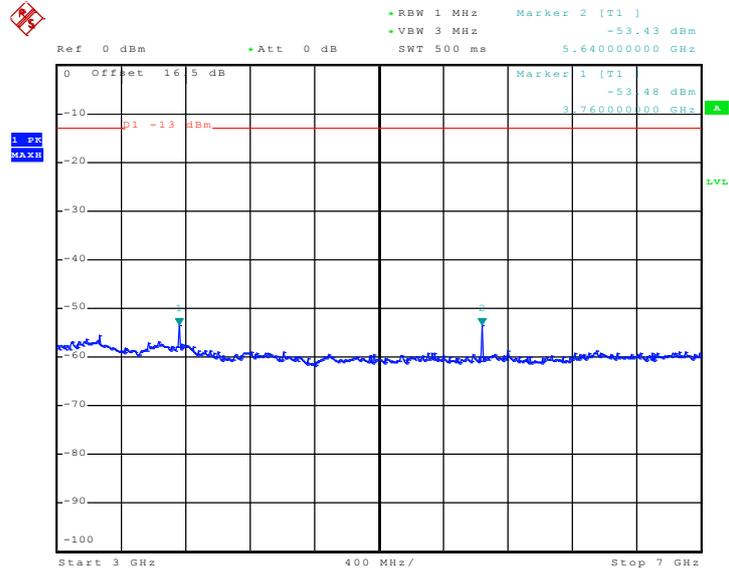

Date: 25.MAR.2010 14:30:01


### Conducted Emission Plot between 7GHz ~ 13.6GHz

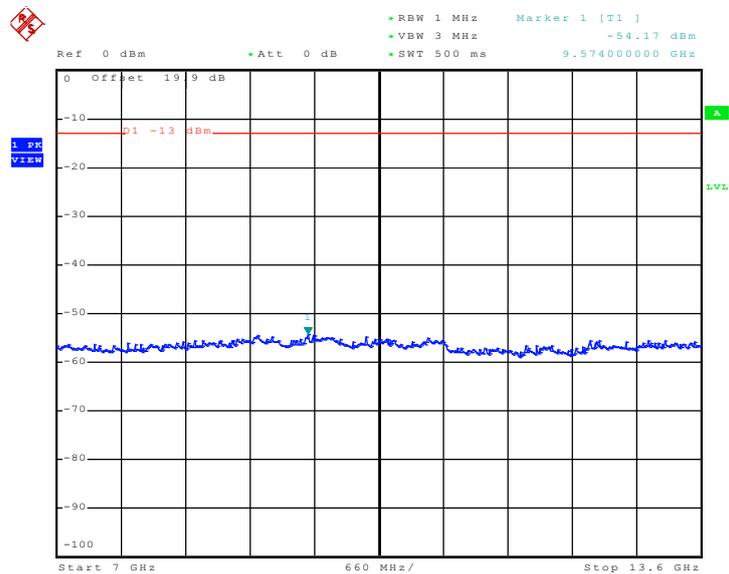

Date: 25.MAR.2010 14:33:49



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

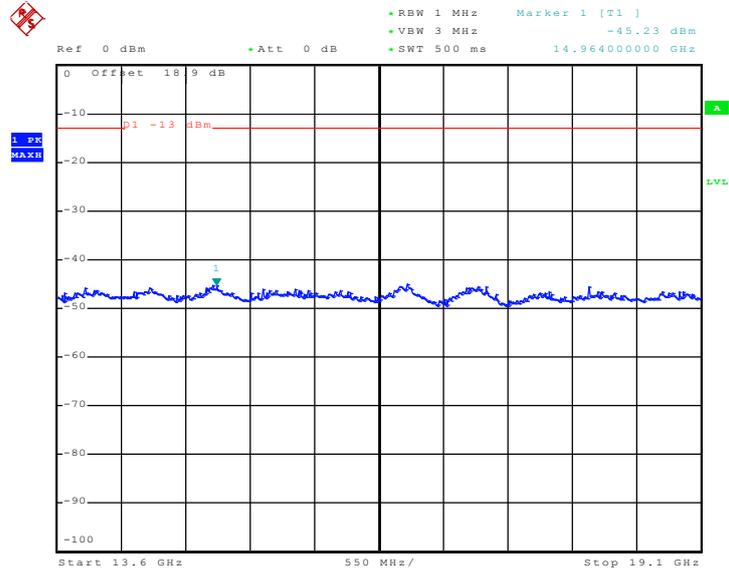


Date: 25.MAR.2010 14:36:10




<b>Band :</b>	WCDMA Band V	<b>Channel :</b>	CH4182
<b>Test Mode :</b>	RMC 12.2Kbps Link		

**Conducted Emission Plot between 30MHz ~ 1GHz**

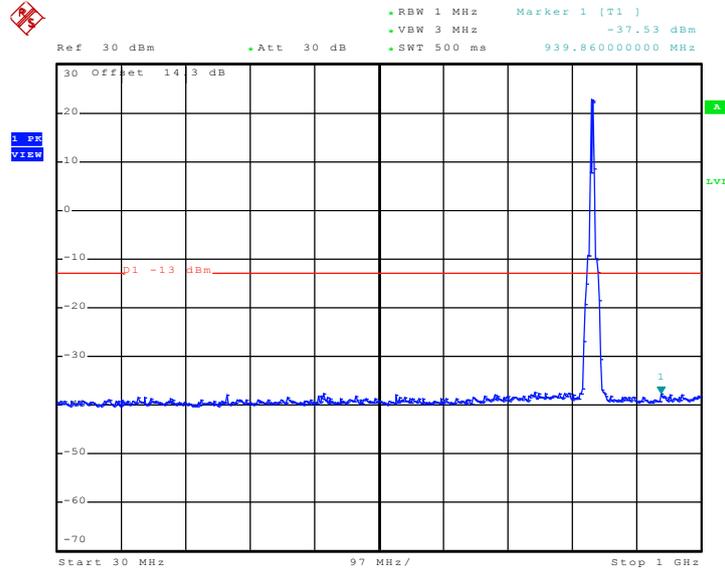

Date: 29.MAR.2010 08:32:51


**Conducted Emission Plot between 1GHz ~ 3GHz**

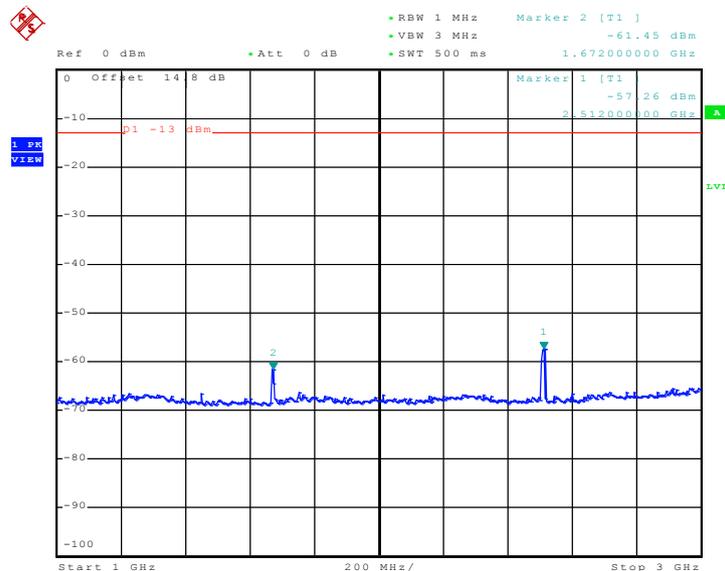

Date: 29.MAR.2010 09:15:34




### Conducted Emission Plot between 3GHz ~ 7GHz

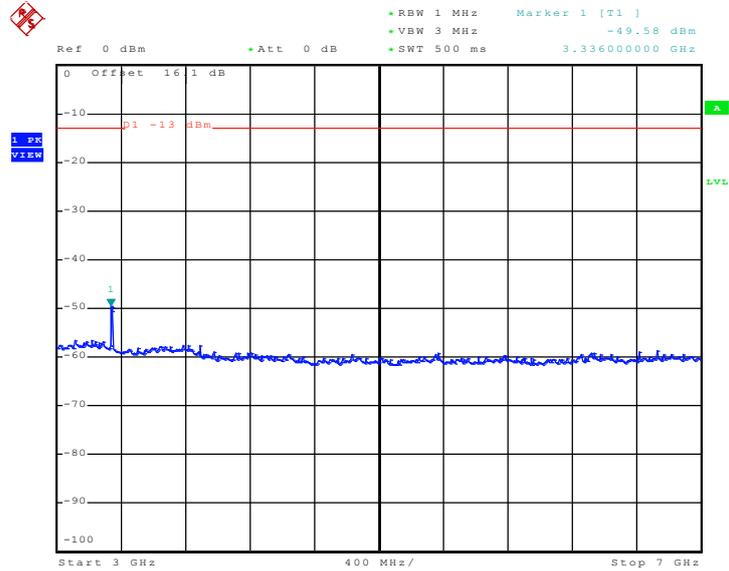

Date: 29.MAR.2010 09:17:02

### Conducted Emission Plot between 7GHz ~ 9GHz

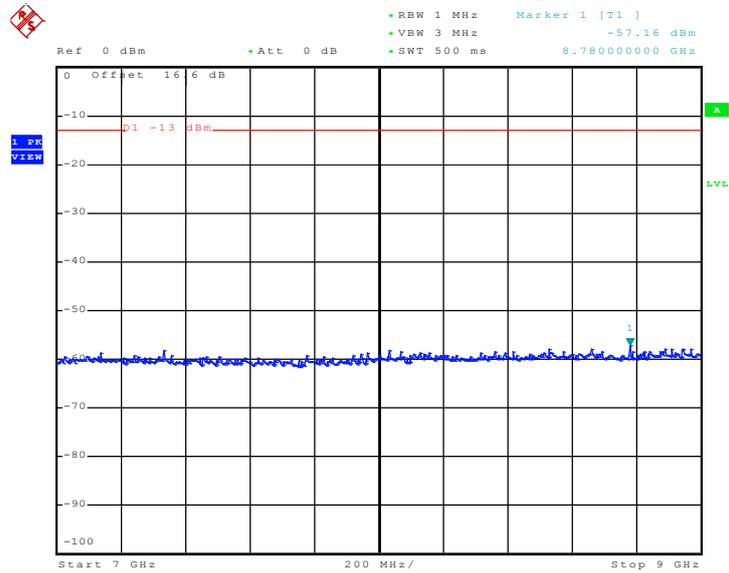


Date: 29.MAR.2010 09:17:44




<b>Band :</b>	WCDMA Band II	<b>Channel :</b>	CH9400
<b>Test Mode :</b>	HSDPA Link		

**Conducted Emission Plot between 30MHz ~ 1GHz**

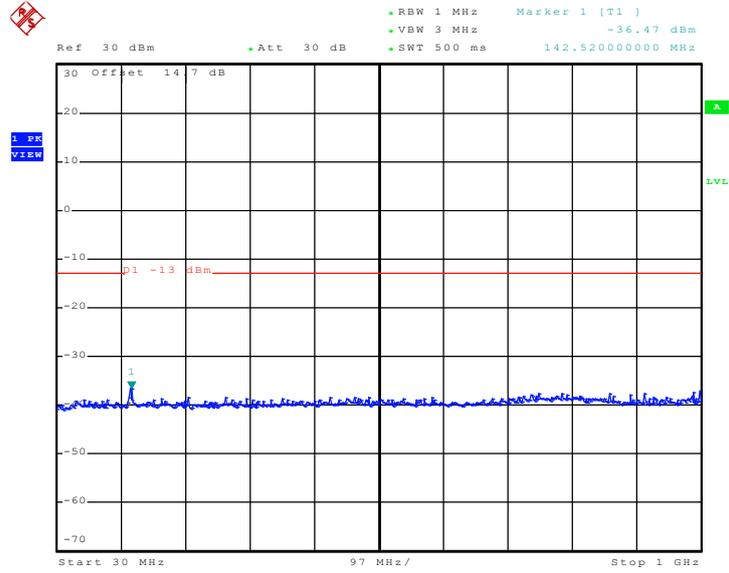

Date: 29.MAR.2010 09:00:12


**Conducted Emission Plot between 1GHz ~ 3GHz**

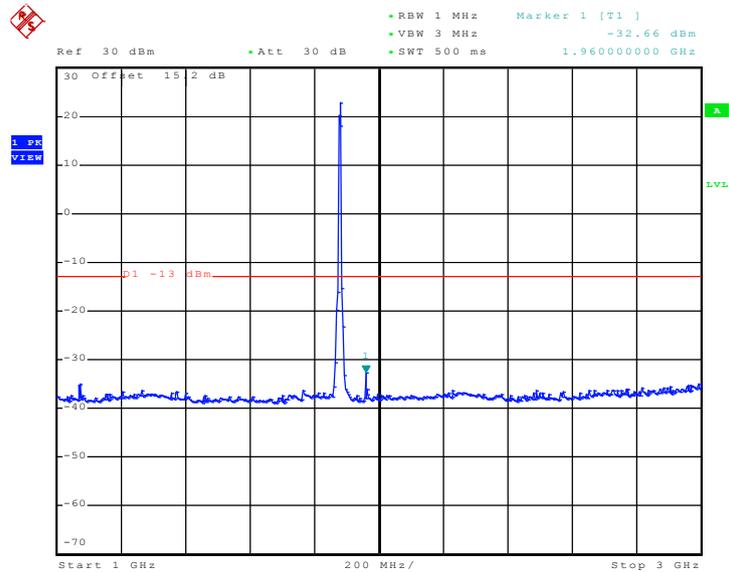

Date: 29.MAR.2010 09:07:58




### Conducted Emission Plot between 3GHz ~ 7GHz

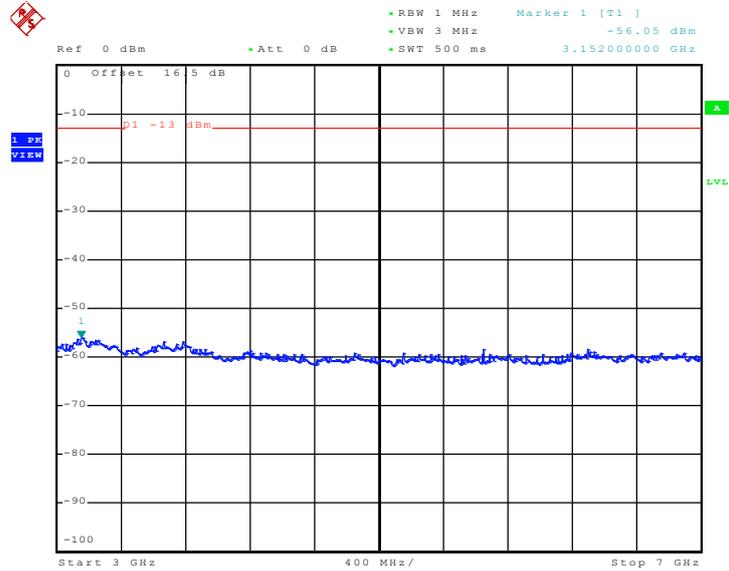

Date: 29.MAR.2010 09:09:26


### Conducted Emission Plot between 7GHz ~ 13.6GHz

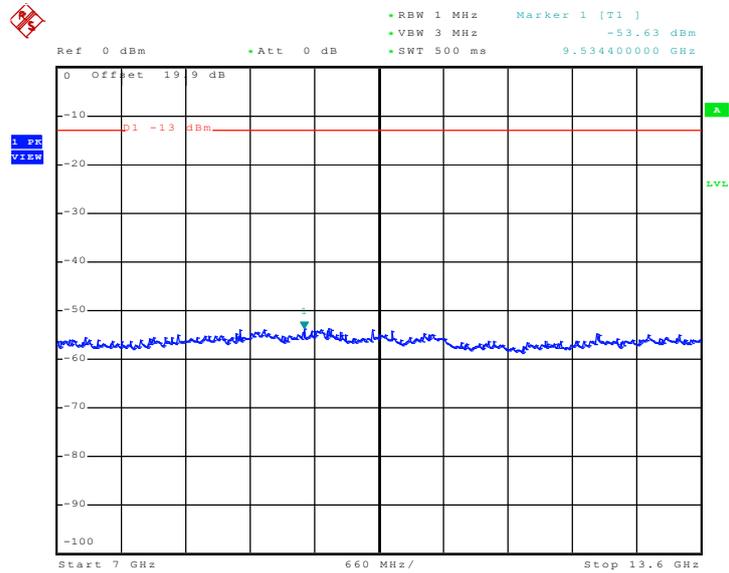

Date: 29.MAR.2010 09:10:42



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

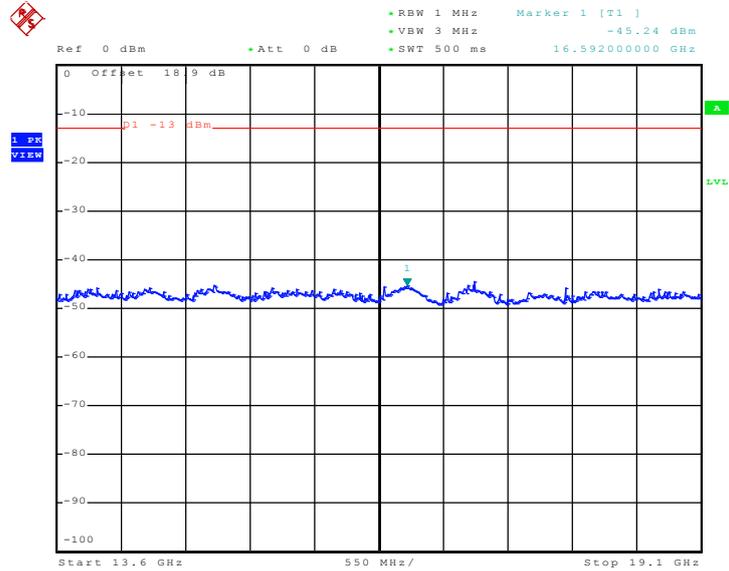


Date: 29.MAR.2010 09:11:33




Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xRTT_RC1+SO55		

Conducted Emission Plot between 30MHz ~ 1GHz

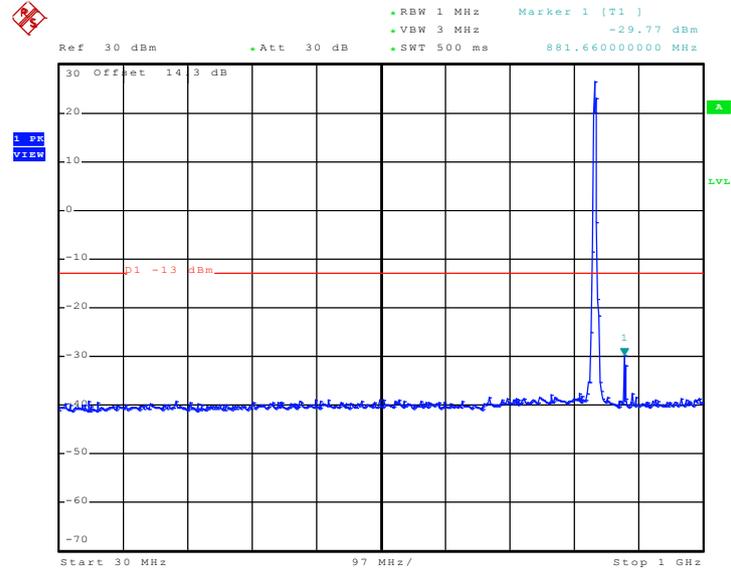

Date: 26.MAR.2010 13:55:18


Conducted Emission Plot between 1GHz ~ 3GHz

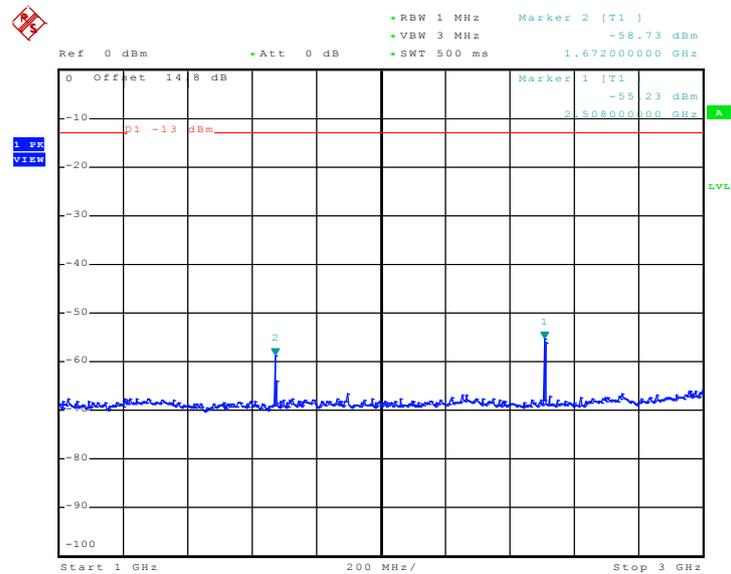

Date: 26.MAR.2010 13:51:38




### Conducted Emission Plot between 3GHz ~ 7GHz

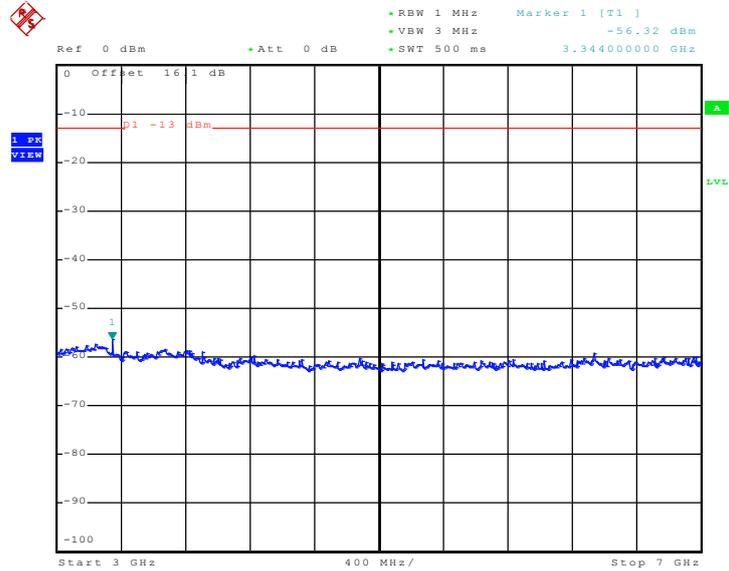

Date: 26.MAR.2010 13:52:14

### Conducted Emission Plot between 7GHz ~ 9GHz

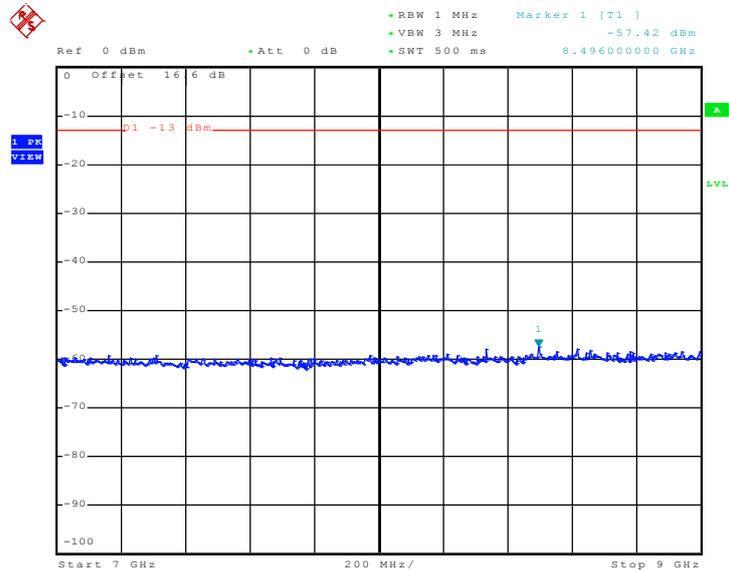


Date: 26.MAR.2010 13:52:59




Band :	CDMA2000 BC1	Power Stage :	High
Test Mode :	1xRTT_RC3+SO55		

Conducted Emission Plot between 30MHz ~ 1GHz

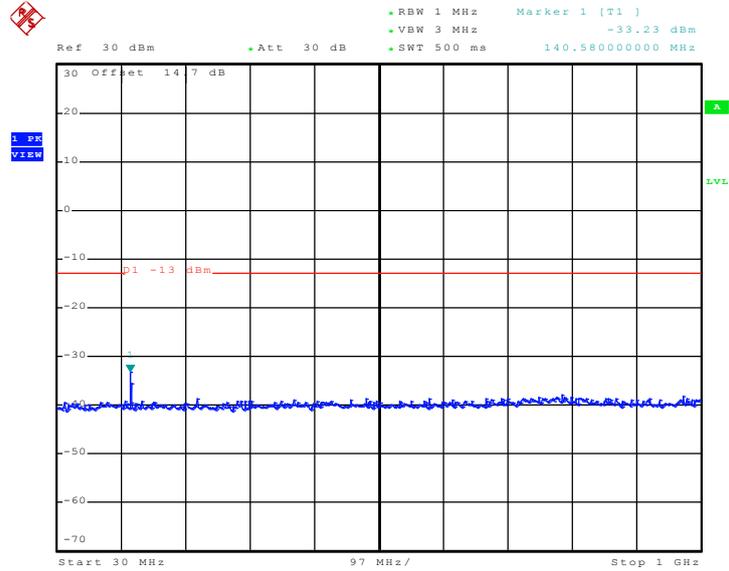

Date: 26.MAR.2010 14:27:19


Conducted Emission Plot between 1GHz ~ 3GHz

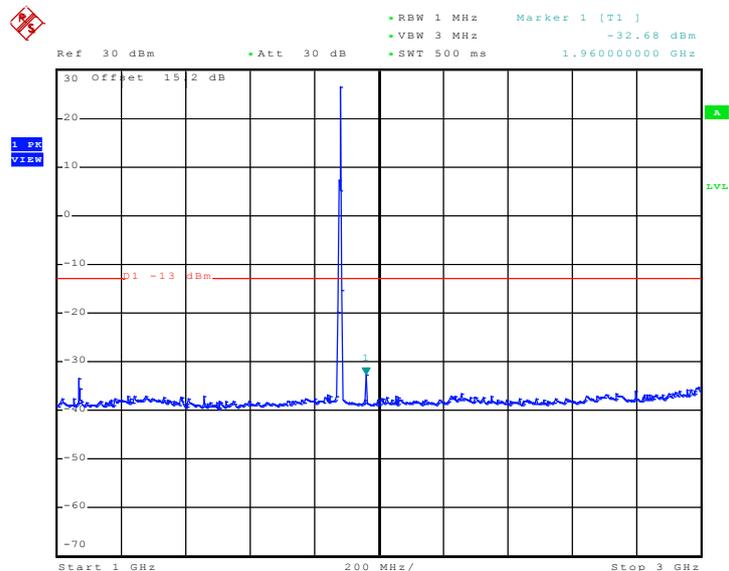

Date: 26.MAR.2010 14:28:09




Conducted Emission Plot between 3GHz ~ 7GHz

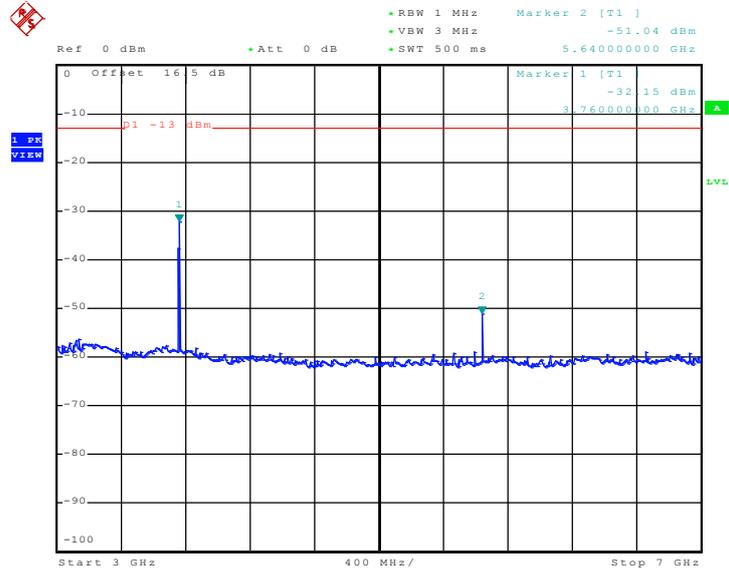

Date: 26.MAR.2010 14:24:05


Conducted Emission Plot between 7GHz ~ 13.6GHz

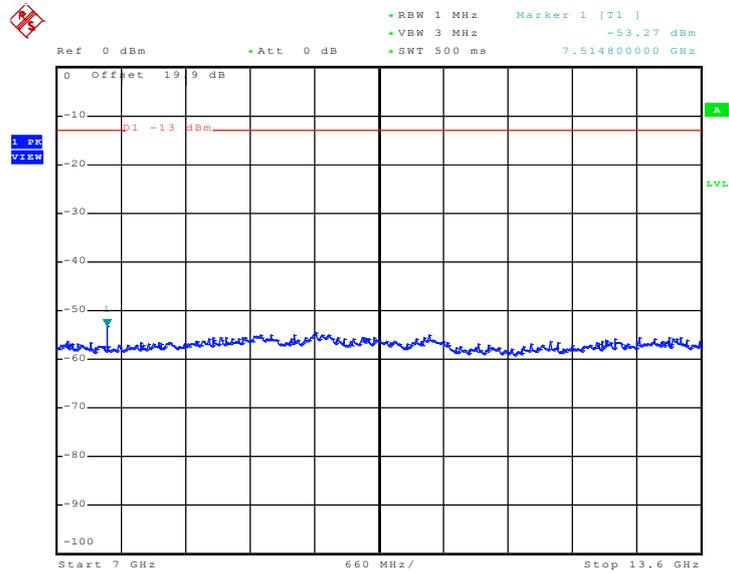

Date: 26.MAR.2010 14:25:02



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

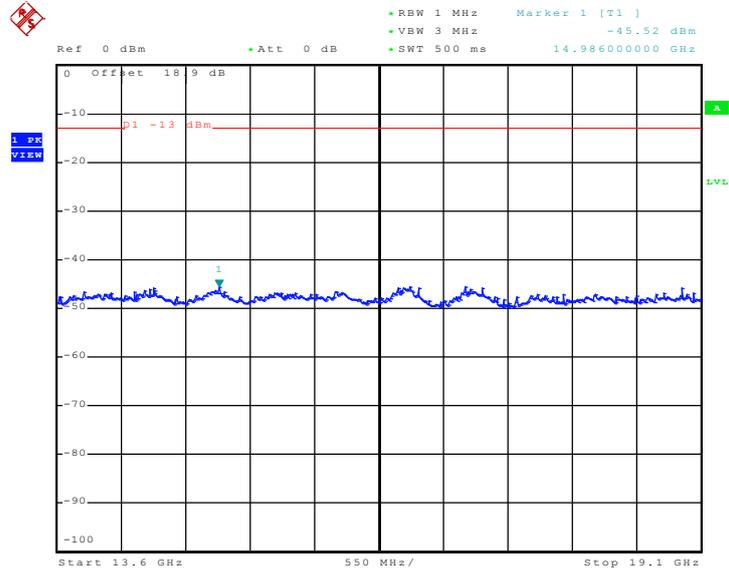

Date: 26.MAR.2010 14:25:53

## 3.6 Field Strength of Spurious Radiation Measurement

### 3.6.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.6.3 Test Procedures

1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$


### 3.6.4 Test Setup

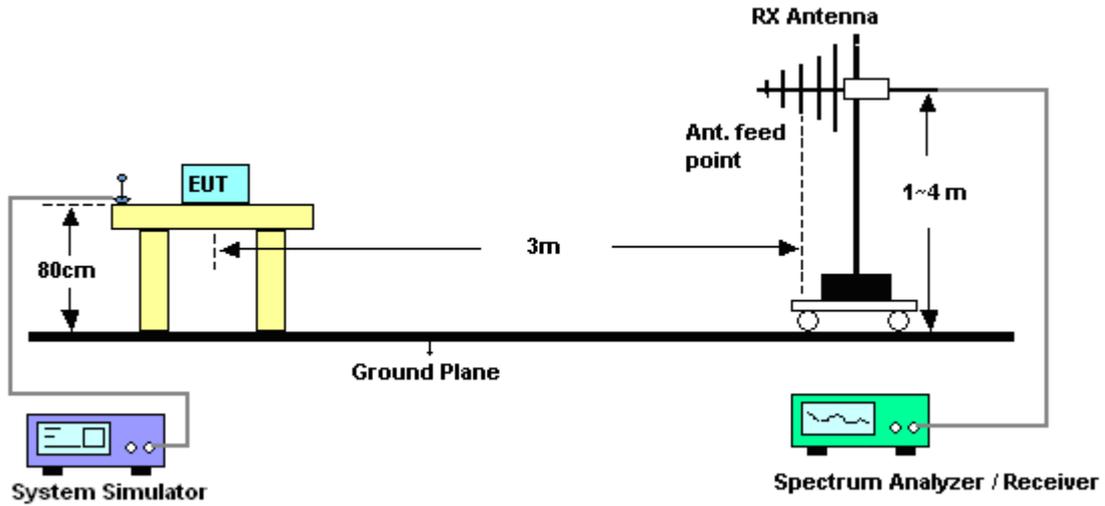



3.6.5 Test Result of Field Strength of Spurious Radiated

<b>Band :</b>	GSM850	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	GSM Link	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

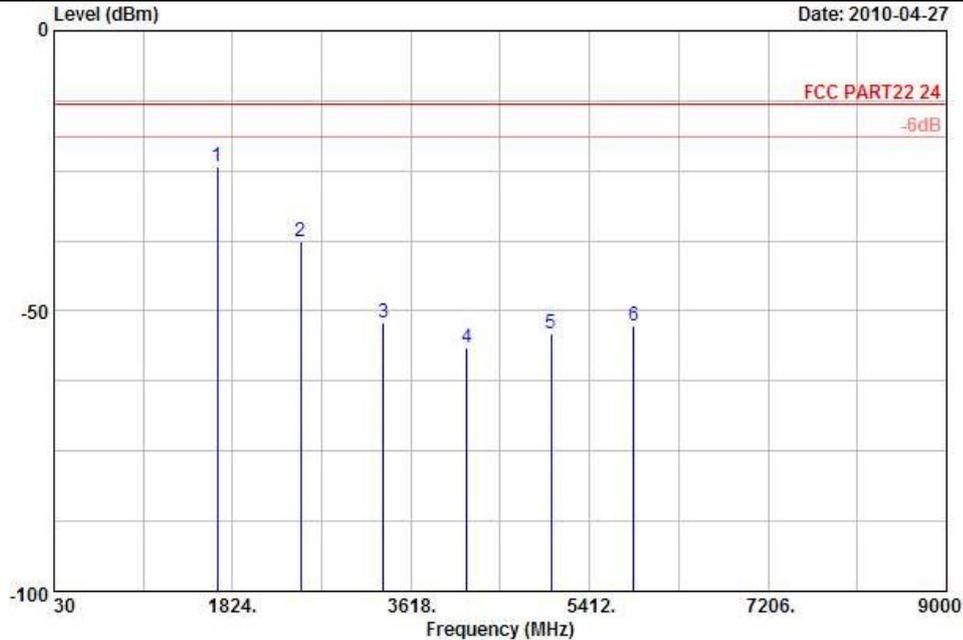


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-09020 HORIZONTAL  
 Project : FG 9D1803  
 Power : From system  
 Mode : mode 1

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1674	-24.24	-13	-11.24	-24.97	-24.89	0.57	3.37	H	Pass
2510	-37.49	-13	-24.49	-41.93	-39.72	0.78	5.16	H	Pass
3344	-52.21	-13	-39.21	-54.33	-55.85	0.87	6.66	H	Pass
4182	-56.49	-13	-43.49	-58.37	-61.08	0.97	7.71	H	Pass
5022	-54.13	-13	-41.13	-60.51	-59.80	1.09	8.91	H	Pass
5854	-52.75	-13	-39.75	-61.54	-59.19	1.22	9.81	H	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	GSM Link	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

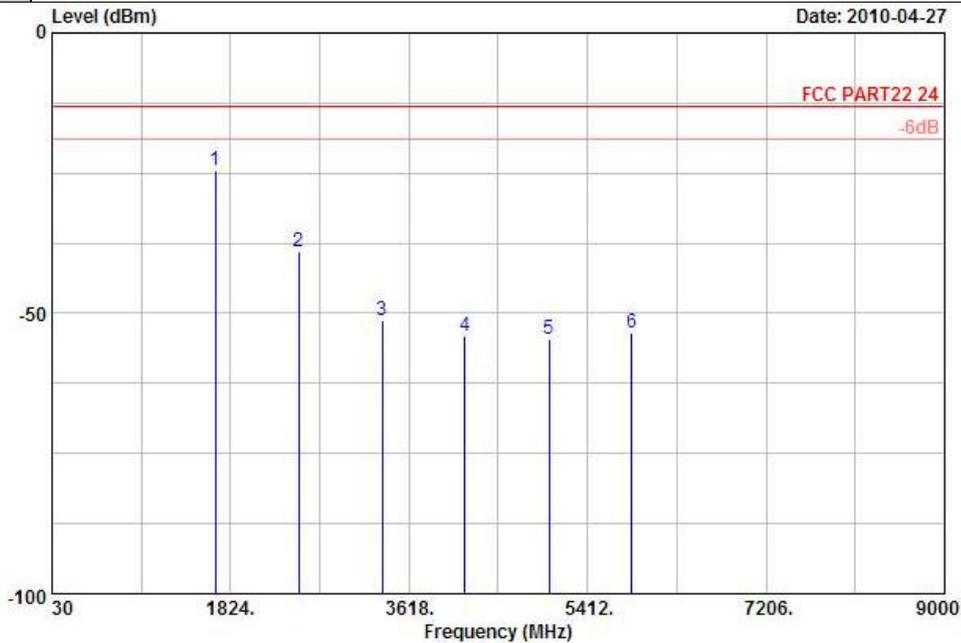


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-09020 VERTICAL  
 Project : FG 9D1803  
 Power : From system  
 Mode : mode 1

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1674	-24.48	-13	-11.48	-30.88	-25.13	0.57	3.37	V	Pass
2510	-39.05	-13	-26.05	-44.79	-41.28	0.78	5.16	V	Pass
3346	-51.23	-13	-38.23	-54.05	-54.87	0.87	6.66	V	Pass
4182	-54.00	-13	-41.00	-58.35	-58.59	0.97	7.71	V	Pass
5022	-54.53	-13	-41.53	-59.66	-60.20	1.09	8.91	V	Pass
5854	-53.41	-13	-40.41	-61.53	-59.85	1.22	9.81	V	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	EDGE 8 Link	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

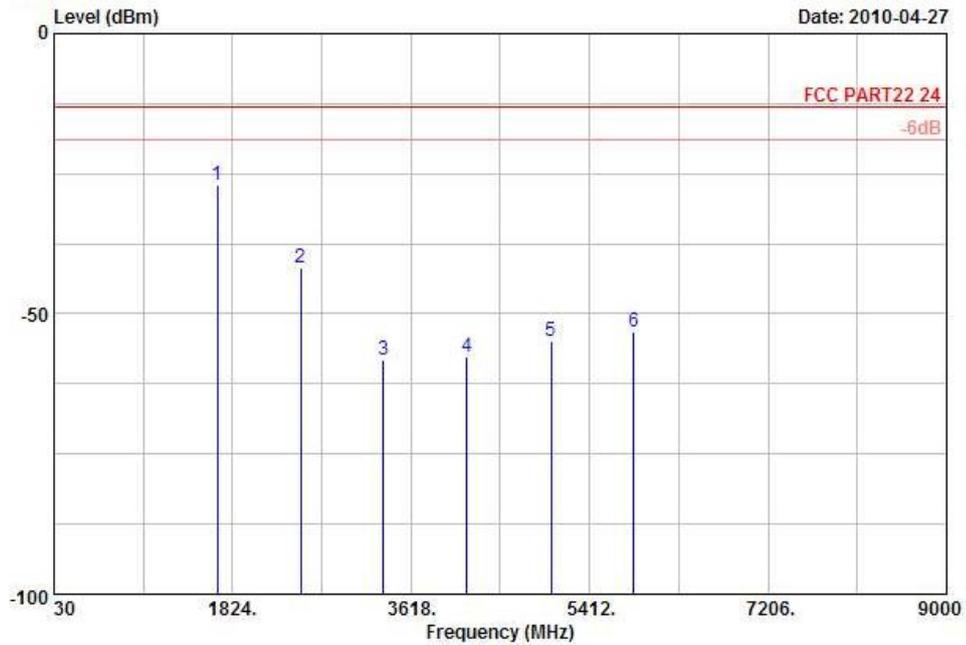


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-09020 HORIZONTAL  
 Project : FG 9D1803  
 Power : From system  
 Mode : mode 2

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1674	-27.02	-13	-14.02	-27.68	-27.67	0.57	3.37	H	Pass
2510	-41.68	-13	-28.68	-45.75	-43.91	0.78	5.16	H	Pass
3344	-58.23	-13	-45.23	-60.08	-61.87	0.87	6.66	H	Pass
4182	-57.65	-13	-44.65	-61.11	-62.24	0.97	7.71	H	Pass
5022	-54.87	-13	-41.87	-61.10	-60.54	1.09	8.91	H	Pass
5854	-53.07	-13	-40.07	-61.76	-59.51	1.22	9.81	H	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	EDGE 8 Link	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

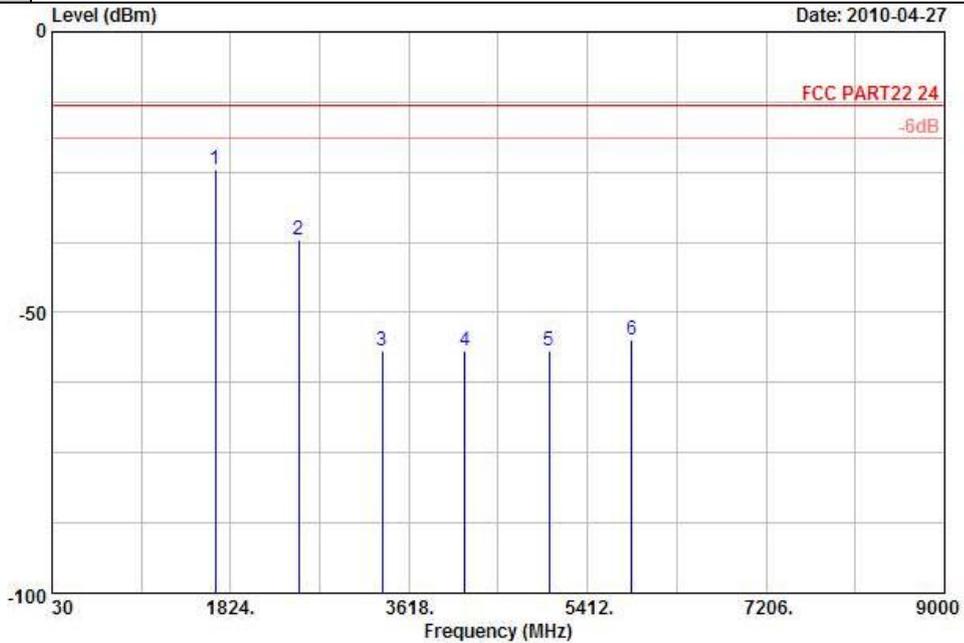


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-09020 VERTICAL  
 Project : FG 9D1803  
 Power : From system  
 Mode : mode 2

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1674	-24.58	-13	-11.58	-30.97	-25.23	0.57	3.37	V	Pass
2510	-36.97	-13	-23.97	-43.49	-39.20	0.78	5.16	V	Pass
3346	-56.79	-13	-43.79	-59.50	-60.43	0.87	6.66	V	Pass
4182	-56.72	-13	-43.72	-61.11	-61.31	0.97	7.71	V	Pass
5022	-56.73	-13	-43.73	-62.20	-62.40	1.09	8.91	V	Pass
5854	-54.90	-13	-41.90	-61.91	-61.34	1.22	9.81	V	Pass



Band :	GSM1900	Temperature :	21~22°C
Test Mode :	GSM Link	Relative Humidity :	42~43%
Test Engineer :	Haitao Yin	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

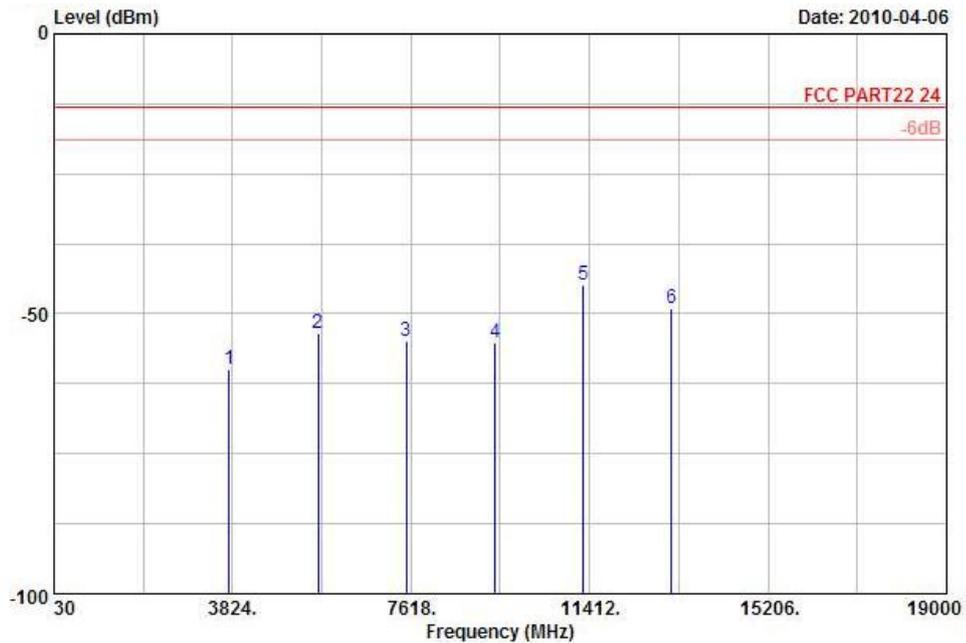


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-09020 HORIZONTAL  
 Project : FG 9D1803  
 Power : From system

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-59.78	-13	-46.78	-60.85	-66.16	0.78	7.16	H	Pass
5640	-53.62	-13	-40.62	-59.46	-62.16	1.04	9.58	H	Pass
7520	-54.91	-13	-41.91	-60.73	-65.02	1.35	11.46	H	Pass
9400	-55.14	-13	-42.14	-60.87	-66.20	1.75	12.81	H	Pass
11280	-44.81	-13	-31.81	-61.50	-55.90	2	13.09	H	Pass
13160	-48.94	-13	-35.94	-60.29	-60.65	2.04	13.75	H	Pass



<b>Band :</b>	GSM1900	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	GSM Link	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

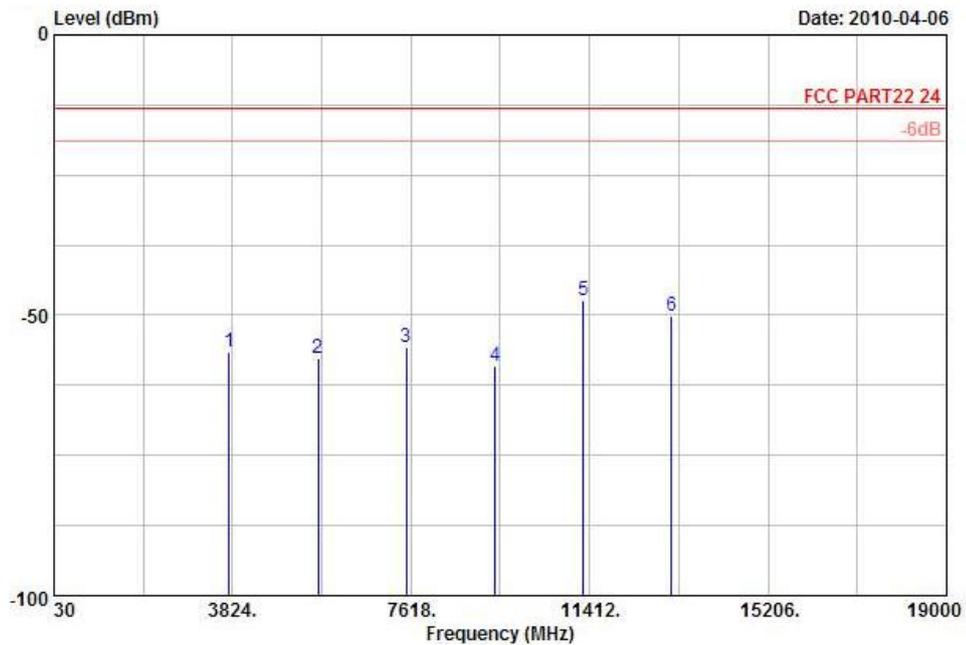


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-09020 VERTICAL  
 Project : FG 9D1803  
 Power : From system

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-56.55	-13	-43.55	-59.85	-62.93	0.78	7.16	V	Pass
5640	-57.76	-13	-44.76	-61.12	-66.30	1.04	9.58	V	Pass
7520	-55.64	-13	-42.64	-60.44	-65.75	1.35	11.46	V	Pass
9400	-59.04	-13	-46.04	-60.95	-70.10	1.75	12.81	V	Pass
11280	-47.24	-13	-34.24	-61.54	-58.33	2	13.09	V	Pass
13160	-50.03	-13	-37.03	-61.6	-61.74	2.04	13.75	V	Pass



Band :	GSM1900	Temperature :	21~22°C
Test Mode :	EDGE 8 Link	Relative Humidity :	42~43%
Test Engineer :	Haitao Yin	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

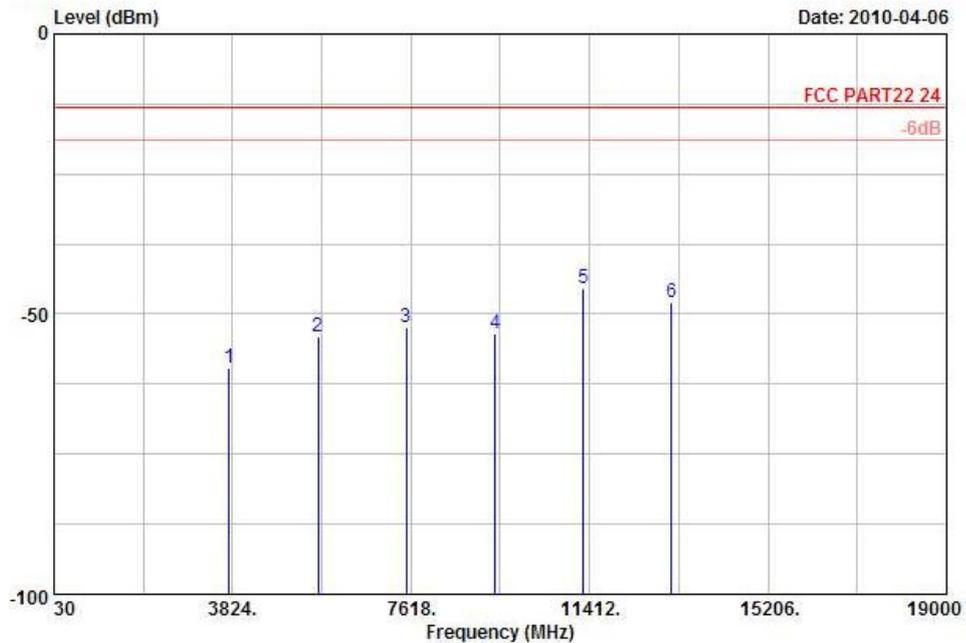


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-09020 HORIZONTAL  
 Project : FG 9D1803  
 Power : From system

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-59.72	-13	-46.72	-60.82	-66.10	0.78	7.16	H	Pass
5644	-53.92	-13	-40.92	-60.20	-62.46	1.04	9.58	H	Pass
7524	-52.40	-13	-39.40	-59.27	-62.51	1.35	11.46	H	Pass
9398	-53.38	-13	-40.38	-59.70	-64.44	1.75	12.81	H	Pass
11280	-45.27	-13	-32.27	-61.56	-56.36	2	13.09	H	Pass
13160	-47.91	-13	-34.91	-62.00	-59.62	2.04	13.75	H	Pass



<b>Band :</b>	GSM1900	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	EDGE 8 Link	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

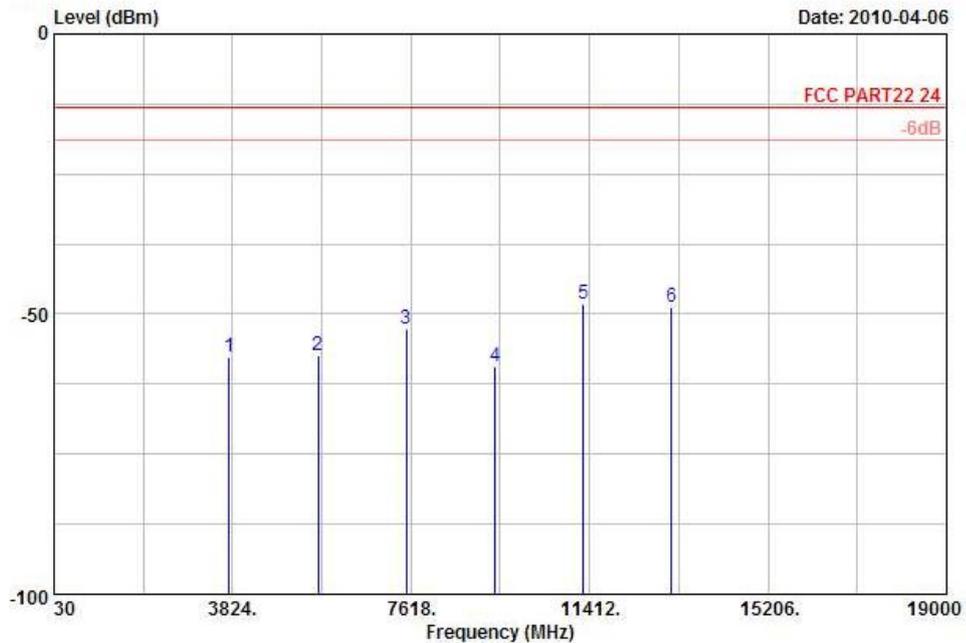


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-09020 VERTICAL  
 Project : FG 9D1803  
 Power : From system

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-57.66	-13	-44.66	-60.91	-64.04	0.78	7.16	V	Pass
5640	-57.39	-13	-44.39	-60.97	-65.93	1.04	9.58	V	Pass
7520	-52.61	-13	-39.61	-60.11	-62.72	1.35	11.46	V	Pass
9400	-59.29	-13	-46.29	-61	-70.35	1.75	12.81	V	Pass
11280	-48.15	-13	-35.15	-61.73	-59.24	2	13.09	V	Pass
13160	-48.82	-13	-35.82	-61.32	-60.53	2.04	13.75	V	Pass



<b>Band :</b>	WCDMA Band V	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	RMC 12.2Kbps Link	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

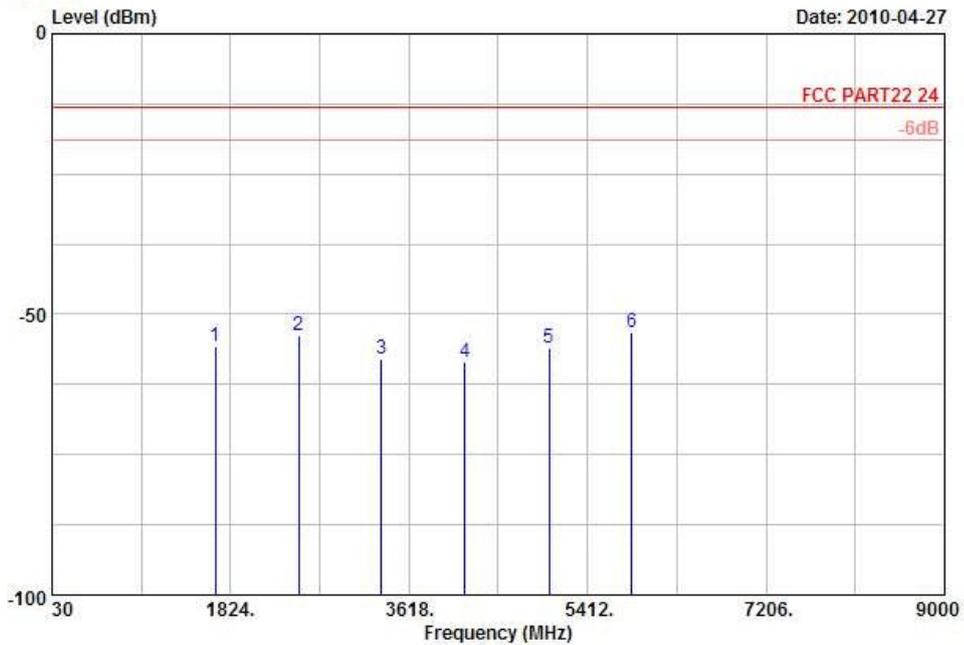


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-09020 HORIZONTAL  
 Project : FG 9D1803  
 Power : From system

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1674	-55.74	-13	-42.74	-53.30	-56.39	0.57	3.37	H	Pass
2509	-53.86	-13	-40.86	-56.09	-56.09	0.78	5.16	H	Pass
3344	-57.98	-13	-44.98	-59.92	-61.62	0.87	6.66	H	Pass
4182	-58.46	-13	-45.46	-61.49	-63.05	0.97	7.71	H	Pass
5022	-55.92	-13	-42.92	-62.14	-61.59	1.09	8.91	H	Pass
5854	-53.16	-13	-40.16	-62.13	-59.60	1.22	9.81	H	Pass



<b>Band :</b>	WCDMA Band V	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	RMC 12.2Kbps Link	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

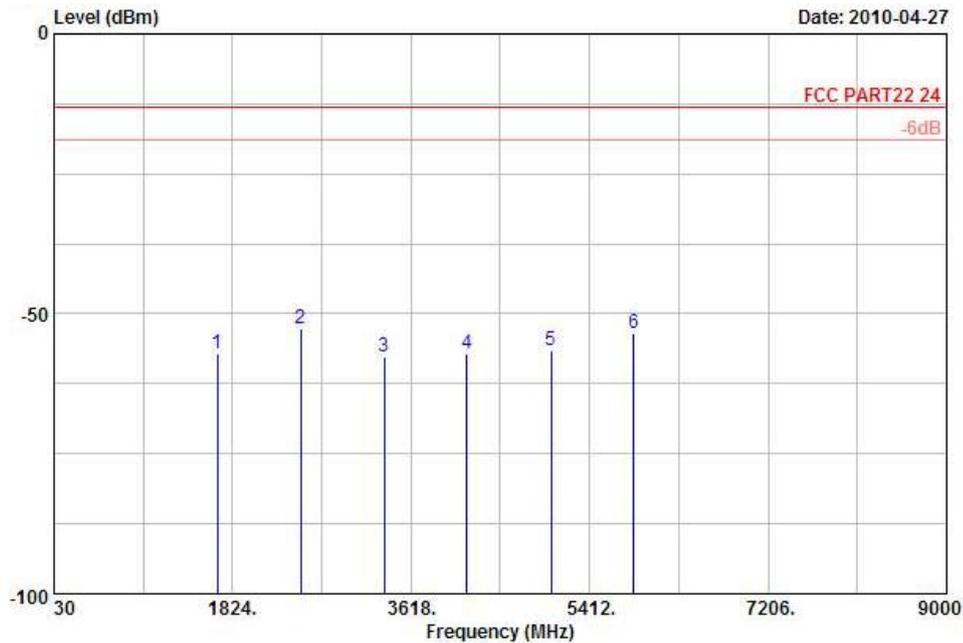


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-09020 VERTICAL  
 Project : FG 9D1803  
 Power : From system

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1674	-57.05	-13	-44.05	-55.35	-57.70	0.57	3.37	V	Pass
2510	-52.63	-13	-39.63	-55.95	-54.86	0.78	5.16	V	Pass
3346	-57.74	-13	-44.74	-60.46	-61.38	0.87	6.66	V	Pass
4182	-56.98	-13	-43.98	-61.33	-61.57	0.97	7.71	V	Pass
5022	-56.53	-13	-43.53	-61.66	-62.20	1.09	8.91	V	Pass
5854	-53.50	-13	-40.50	-61.60	-59.94	1.22	9.81	V	Pass



<b>Band :</b>	WCDMA Band II	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	HSDPA Link	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

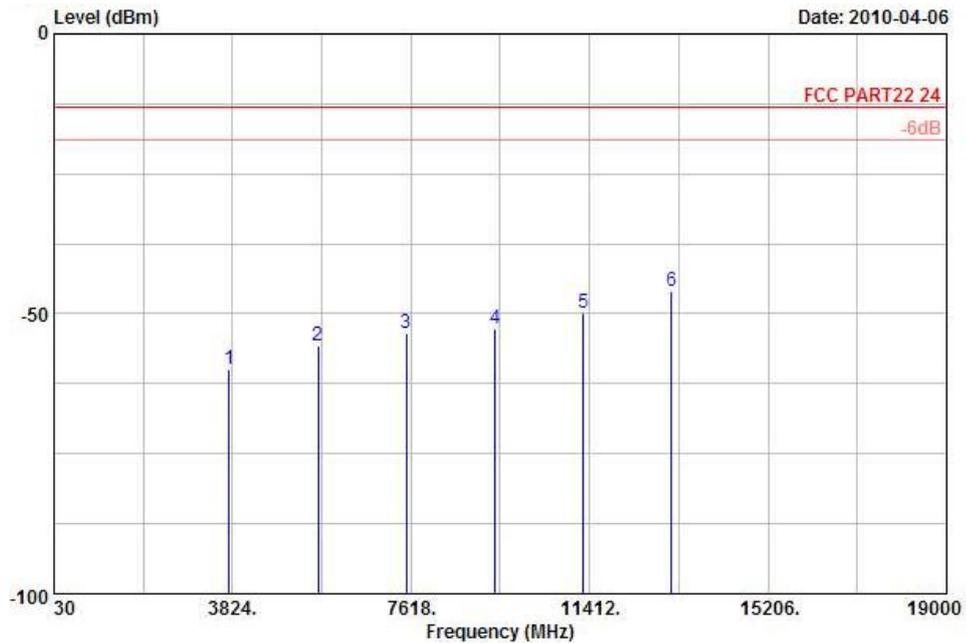


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-09020 HORIZONTAL  
 Project : FG 9D1803  
 Power : From system

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-59.80	-13	-46.80	-60.86	-66.18	0.78	7.16	H	Pass
5640	-55.74	-13	-42.74	-61.50	-64.28	1.04	9.58	H	Pass
7520	-53.40	-13	-40.40	-60.27	-63.51	1.35	11.46	H	Pass
9400	-52.67	-13	-39.67	-60.55	-63.73	1.75	12.81	H	Pass
11280	-49.92	-13	-36.92	-61.47	-61.01	2	13.09	H	Pass
13160	-45.85	-13	-32.85	-61.82	-57.56	2.04	13.75	H	Pass



<b>Band :</b>	WCDMA Band II	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	HSDPA Link	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

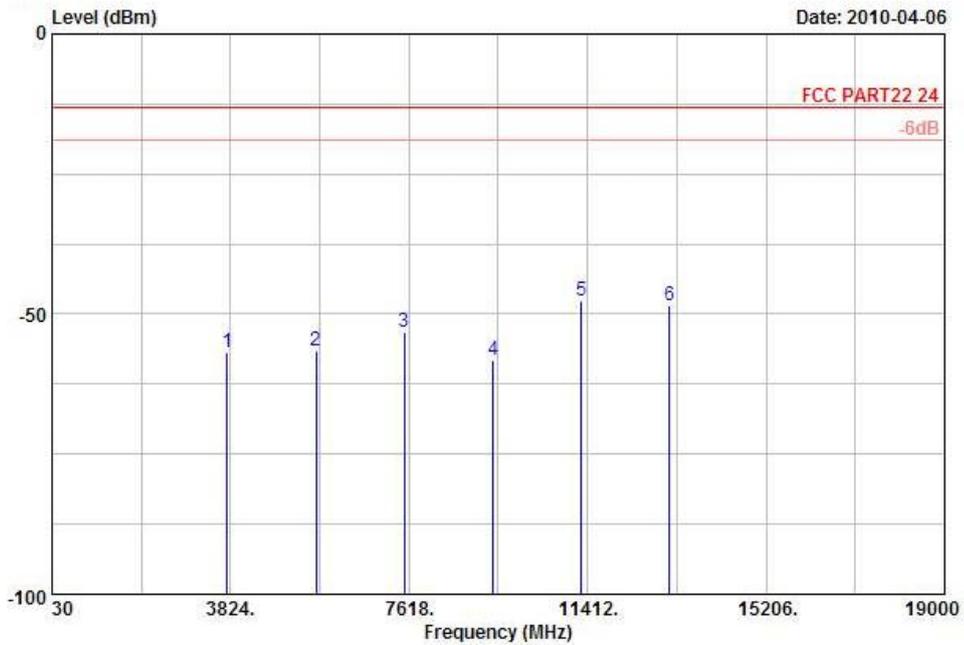


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-09020 VERTICAL  
 Project : FG 9D1803  
 Power : From system

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-56.76	-13	-43.76	-59.97	-63.14	0.78	7.16	V	Pass
5640	-56.59	-13	-43.59	-61.44	-65.13	1.04	9.58	V	Pass
7520	-53.14	-13	-40.14	-60.87	-63.25	1.35	11.46	V	Pass
9400	-58.19	-13	-45.19	-59.97	-69.25	1.75	12.81	V	Pass
11280	-47.76	-13	-34.76	-61.63	-58.85	2	13.09	V	Pass
13160	-48.5	-13	-35.50	-60.47	-60.21	2.04	13.75	V	Pass



<b>Band :</b>	CDMA2000 BC0	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	1xRTT_RC1+SO55	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

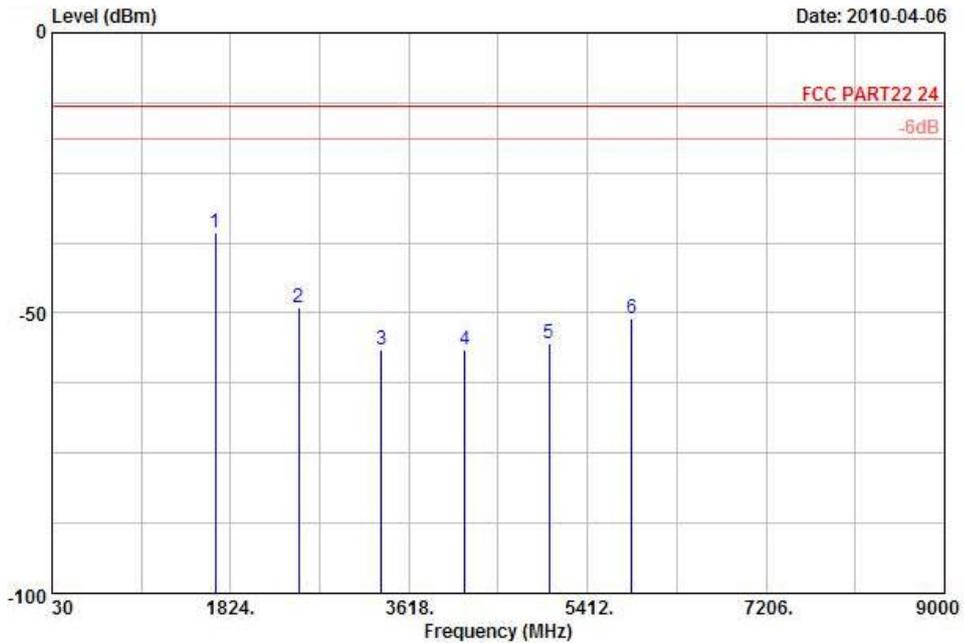


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-09020 HORIZONTAL  
 Project : FG 9D1803  
 Power : From system

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1674	-35.64	-13	-22.64	-35.99	-36.29	0.57	3.37	H	Pass
2508	-49.06	-13	-36.06	-53.79	-51.29	0.78	5.16	H	Pass
3344	-56.60	-13	-43.60	-58.49	-60.24	0.87	6.66	H	Pass
4182	-56.65	-13	-43.65	-60.11	-61.24	0.97	7.71	H	Pass
5022	-55.37	-13	-42.37	-61.70	-61.04	1.09	8.91	H	Pass
5854	-50.96	-13	-37.96	-59.68	-57.40	1.22	9.81	H	Pass



<b>Band :</b>	CDMA2000 BC0	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	1xRTT_RC1+SO55	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

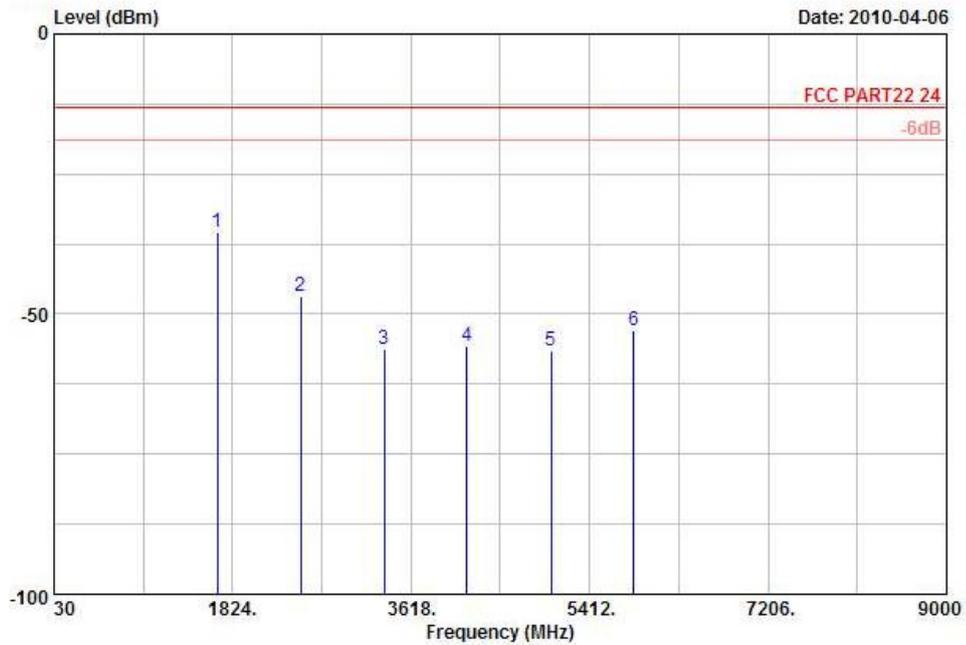


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-09020 VERTICAL  
 Project : FG 9D1803  
 Power : From system

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1674	-35.43	-13	-22.43	-40.73	-36.08	0.57	3.37	V	Pass
2508	-46.86	-13	-33.86	-51.17	-49.09	0.78	5.16	V	Pass
3346	-56.19	-13	-43.19	-58.73	-59.83	0.87	6.66	V	Pass
4182	-55.76	-13	-42.76	-60.14	-60.35	0.97	7.71	V	Pass
5022	-56.50	-13	-43.50	-61.64	-62.17	1.09	8.91	V	Pass
5854	-52.96	-13	-39.96	-60.96	-59.40	1.22	9.81	V	Pass



<b>Band :</b>	CDMA2000 BC1	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	1xRTT_RC3+SO55	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

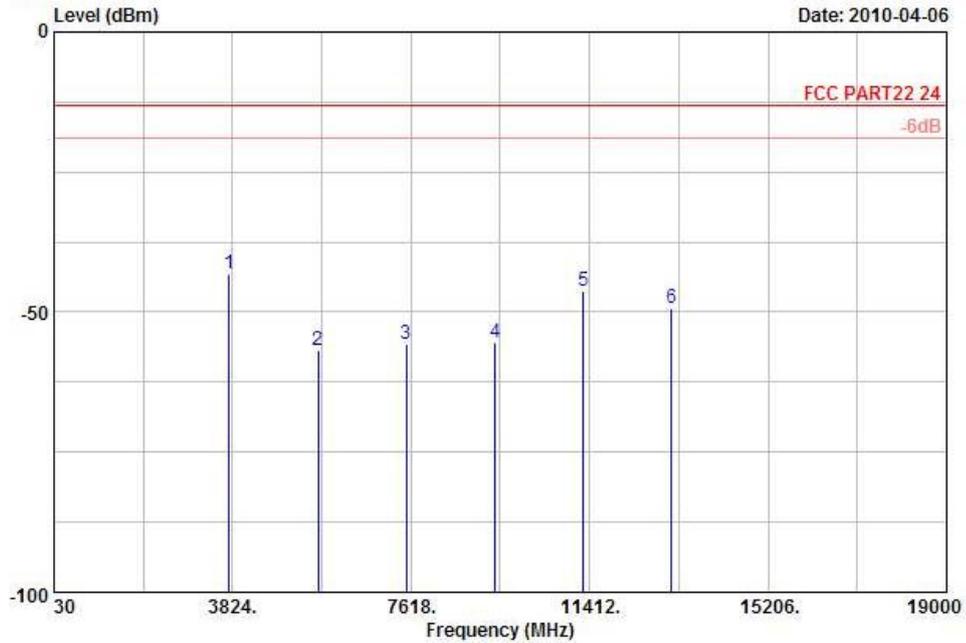


Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-09020 HORIZONTAL  
 Project : FG 9D1803  
 Power : From system

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3758	-43.08	-13	-30.08	-48.80	-49.46	0.78	7.16	H	Pass
5640	-56.95	-13	-43.95	-61.16	-65.49	1.04	9.58	H	Pass
7520	-55.68	-13	-42.68	-61.01	-65.79	1.35	11.46	H	Pass
9400	-55.57	-13	-42.57	-60.93	-66.63	1.75	12.81	H	Pass
11280	-46.18	-13	-33.18	-61.70	-57.27	2	13.09	H	Pass
13160	-49.33	-13	-36.33	-61.18	-61.04	2.04	13.75	H	Pass



<b>Band :</b>	CDMA2000 BC1	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	1xRTT_RC3+SO55	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Haitao Yin	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

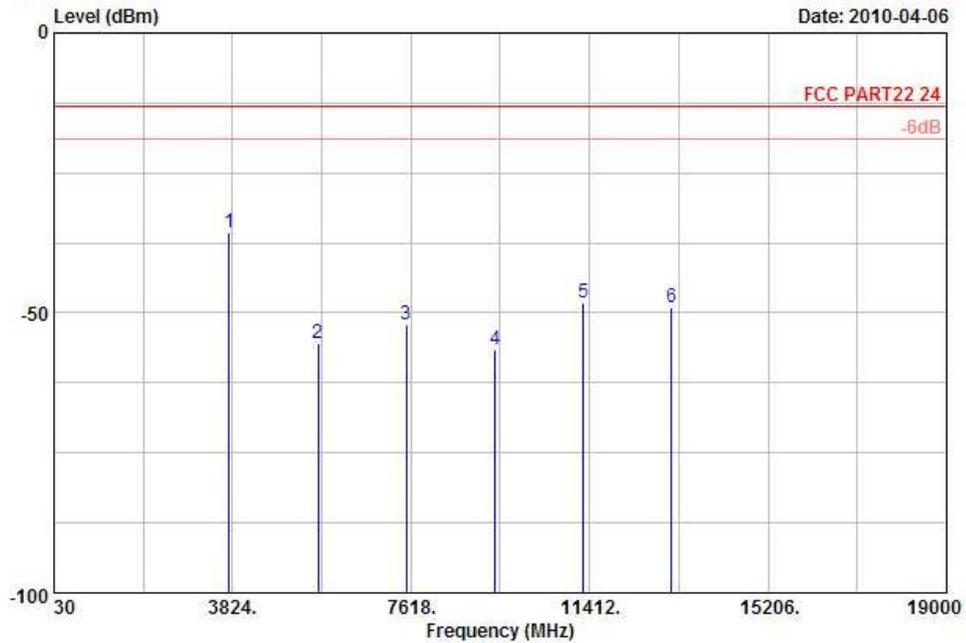

Site : 03CH01-KS  
 Condition: FCC PART22 24 HF EIRP FACTOR-09020 VERTICAL  
 Project : FG 9D1803  
 Power : From system

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3758	-35.67	-13	-22.67	-45.74	-42.05	0.78	7.16	V	Pass
5638	-55.38	-13	-42.38	-59.68	-63.92	1.04	9.58	V	Pass
7524	-52.00	-13	-39.00	-59.8	-62.11	1.35	11.46	V	Pass
9400	-56.64	-13	-43.64	-60.57	-67.70	1.75	12.81	V	Pass
11280	-48.18	-13	-35.18	-61.74	-59.27	2.00	13.09	V	Pass
13160	-49.09	-13	-36.09	-61.38	-60.80	2.04	13.75	V	Pass

## 3.7 Frequency Stability Measurement

### 3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.7.2 Measuring Instruments

See list of measuring instruments of this test report.


### 3.7.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT can not be turned on at  $-30^{\circ}\text{C}$ , the testing lowest temperature will be raised in  $10^{\circ}\text{C}$  step until the EUT can be turned on.

### 3.7.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

### 3.7.5 Test Setup

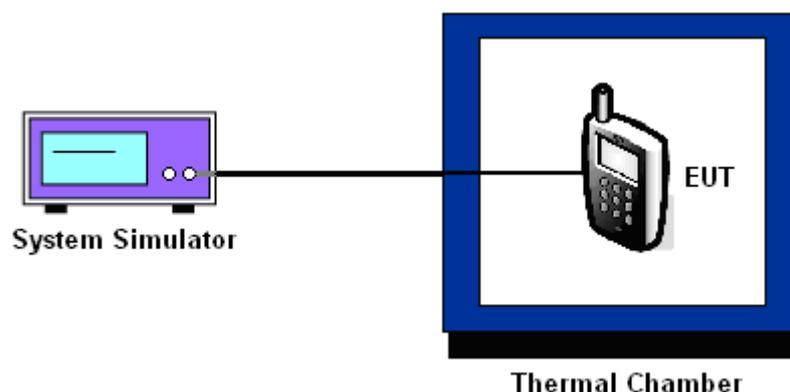

3.7.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5		

Temperature (°C)	GSM		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	N/A	N/A	PASS
-20	34	0.04	-20	-0.02	
-10	-16	-0.02	-16	-0.02	
0	15	0.02	-25	-0.03	
10	-25	-0.03	-45	-0.05	
20	-30	-0.04	18	0.02	
30	-28	-0.03	44	0.05	
40	-24	-0.03	-26	-0.03	
50	-22	-0.03	-48	-0.06	

Note:

1. The EUT stops transmitting at temperature -30°C.
2. The manufacturer declared that the EUT could work properly between temperatures -20°C~60°C.

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5		

Temperature (°C)	GSM		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	N/A	N/A	PASS
-20	-17	-0.01	52	0.03	
-10	25	0.01	49	0.03	
0	-28	-0.01	-26	-0.01	
10	-41	-0.02	-24	-0.01	
20	-36	-0.02	36	0.02	
30	-38	-0.02	84	0.04	
40	-37	-0.02	26	0.01	
50	-33	-0.02	-57	-0.03	

Note:

1. The EUT stops transmitting at temperature -30°C.
2. The manufacturer declared that the EUT could work properly between temperatures -20°C~60°C.



<b>Band :</b>	WCDMA Band V	<b>Channel :</b>	4182
<b>Limit (ppm) :</b>	2.5		

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	PASS
-20	-21	-0.02	
-10	-19	-0.02	
0	-26	-0.03	
10	-24	-0.03	
20	-25	-0.03	
30	-17	-0.02	
40	-23	-0.03	
50	-19	-0.02	

**Note:**

1. The EUT stops transmitting at temperature -30°C.
2. The manufacturer declared that the EUT could work properly between temperatures -20°C~60°C.

<b>Band :</b>	WCDMA Band II	<b>Channel :</b>	9400
<b>Limit (ppm) :</b>	2.5		

Temperature (°C)	HSDPA		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	PASS
-20	40	0.02	
-10	-35	-0.02	
0	-30	-0.02	
10	33	0.02	
20	31	0.02	
30	-32	-0.02	
40	-29	-0.02	
50	29	0.02	

**Note:**

1. The EUT stops transmitting at temperature -30°C.
2. The manufacturer declared that the EUT could work properly between temperatures -20°C~60°C.



<b>Band :</b>	CDMA2000 BC0	<b>Channel :</b>	384
<b>Test Mode :</b>	1xRTT_RC1+SO55	<b>Limit (ppm) :</b>	2.5

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	N/A	N/A	PASS
-20	34	0.04	
-10	-27	-0.03	
0	-35	-0.04	
10	-30	-0.04	
20	-29	-0.03	
30	-24	-0.03	
40	-31	-0.04	
50	-28	-0.03	

**Note:**

- 1. The EUT stops transmitting at temperature -30°C.
- 2. The manufacturer declared that the EUT could work properly between temperatures -20°C~60°C.

<b>Band :</b>	CDMA2000 BC1	<b>Channel :</b>	600
<b>Test Mode :</b>	1xRTT_RC3+SO55	<b>Limit (ppm) :</b>	2.5

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	N/A	N/A	PASS
-20	-33	-0.02	
-10	-30	-0.02	
0	-29	-0.02	
10	-34	-0.02	
20	32	0.02	
30	-28	-0.01	
40	-34	-0.02	
50	-31	-0.02	

**Note:**

- 1. The EUT stops transmitting at temperature -30°C.
- 2. The manufacturer declared that the EUT could work properly between temperatures -20°C~60°C.

3.7.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GSM	5.5	-21	-0.02	2.5	PASS
		4.5	-24	-0.03		
		5.0	-23	-0.03		
	EDGE 8	5.5	-18	-0.02		
		4.5	-16	-0.02		
		5.0	-19	-0.02		
GSM 1900 CH661	GSM	5.5	-39	-0.02		
		4.5	-38	-0.02		
		5.0	-37	-0.02		
	EDGE 8	5.5	-44	-0.02		
		4.5	-33	-0.02		
		5.0	-39	-0.02		
WCDMA Band V CH4182	RMC 12.2Kbps	5.5	-19	-0.02		
		4.5	-22	-0.03		
		5.0	-21	-0.02		
WCDMA Band II CH9400	HSDPA	5.5	-31	-0.02		
		4.5	-30	-0.02		
		5.0	-33	-0.02		
CDMA2000 BC0 CH384	1xRTT RC1+SO55	5.5	34	0.04		
		4.5	-36	-0.04		
		5.0	-29	-0.03		
CDMA2000 BC1 CH600	1xRTT RC3+SO55	5.5	33	0.02		
		4.5	-35	-0.02		
		5.0	26	0.01		

## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Jan. 18, 2010	Jan. 17, 2011	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Dec. 28, 2009	Dec. 27, 2010	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 17, 2009	Nov. 16, 2010	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	75959	1GHz~18GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Amplifier	Wireless	FPA6592G	60004	30MHz~2GHz	Feb. 02, 2010	Feb. 01, 2011	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
actice hore antenna	com-power	AHA-118	701023	1G-18GHz	Nov. 18, 2009	Nov. 17, 2010	Radiation (03CH01-KS)
Signal Generator	R&S	SMR40	100455	10MHz~40GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15-40GHz	Oct. 22, 2009	Oct. 21, 2010	Radiation (03CH01-KS)
System Simulator	R&S	CMU200	837587/066	Full-Band	Jan. 08, 2009	Jan. 07, 2011	Radiation (03CH01-KS)

## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.27</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.54</b>		

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$	$C_i$	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	$\pm 0.10$	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	$\pm 1.70$	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	$\pm 0.50$	Normal (k=2)	0.25	1	0.25
Receiver Correction	$\pm 2.00$	Rectangular	1.15	1	1.15
Antenna Factor Directional	$\pm 1.50$	Rectangular	0.87	1	0.87
Site Imperfection	$\pm 2.80$	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>4.72</b>				



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP9D2501 as below.