



FCC TEST REPORT (PART 22)

REPORT NO.: RF940829L05

MODEL NO.: C220

RECEIVED: Aug. 29, 2005

TESTED: Sep. 06 ~ Sep. 29, 2005

ISSUED: Oct. 09, 2005

APPLICANT: ZTE Corporation XI'AN Institute

ADDRESS: ZTE Plaza, Keji Road South, Hi-tech Industrial Park, Nanshan District, Shenzhen, P.R.China

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 54 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

| | | |
|-------|---|----|
| 1 | CERTIFICATION | 4 |
| 2 | SUMMARY OF TEST RESULTS | 5 |
| 2.1 | MEASUREMENT UNCERTAINTY | 6 |
| 3 | GENERAL INFORMATION..... | 7 |
| 3.1 | GENERAL DESCRIPTION OF EUT | 7 |
| 3.2 | DESCRIPTION OF TEST MODES | 8 |
| 3.3 | GENERAL DESCRIPTION OF APPLIED STANDARDS..... | 9 |
| 3.4 | DESCRIPTION OF SUPPORT UNITS..... | 9 |
| 4 | TEST TYPES AND RESULTS | 10 |
| 4.1 | MODULATION CHARACTERISTICS..... | 10 |
| 4.1.1 | DESCRIPTION OF MODULATION TECHNIQUE | 10 |
| 4.1.2 | THE ACTIVE TIME SLOT 8 MODULATED FRAME PLOT | 11 |
| 4.2 | OUTPUT POWER MEASUREMENT | 12 |
| 4.2.1 | LIMITS OF OUTPUT POWER MEASUREMENT | 12 |
| 4.2.2 | TEST INSTRUMENTS | 13 |
| 4.2.3 | TEST PROCEDURES..... | 14 |
| 4.2.4 | TEST SETUP | 15 |
| 4.2.5 | EUT OPERATING CONDITIONS..... | 16 |
| 4.2.6 | TEST RESULTS..... | 17 |
| 4.3 | FREQUENCY STABILITY MEASUREMENT | 19 |
| 4.3.1 | LIMITS OF FREQUENCY STABILITY MEASUREMENT | 19 |
| 4.3.2 | TEST INSTRUMENTS | 19 |
| 4.3.3 | TEST PROCEDURE | 20 |
| 4.3.4 | TEST SETUP | 20 |
| 4.3.5 | TEST RESULTS..... | 21 |
| 4.4 | OCCUPIED BANDWIDTH MEASUREMENT..... | 23 |
| 4.4.1 | LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT | 23 |
| 4.4.2 | TEST INSTRUMENTS | 23 |
| 4.4.3 | TEST SETUP | 23 |
| 4.4.4 | TEST PROCEDURES..... | 24 |
| 4.4.5 | EUT OPERATING CONDITION..... | 24 |
| 4.4.6 | TEST RESULTS..... | 25 |
| 4.5 | BAND EDGE MEASUREMENT | 27 |
| 4.5.1 | LIMITS OF BAND EDGE MEASUREMENT..... | 27 |
| 4.5.2 | TEST INSTRUMENTS | 27 |



| | | |
|-------|---|----|
| 4.5.3 | TEST SETUP | 27 |
| 4.5.4 | TEST PROCEDURES..... | 28 |
| 4.5.5 | EUT OPERATING CONDITION | 28 |
| 4.5.6 | TEST RESULTS..... | 29 |
| 4.6 | CONDUCTED SPURIOUS EMISSIONS..... | 30 |
| 4.6.1 | LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT ... | 30 |
| 4.6.2 | TEST INSTRUMENTS | 30 |
| 4.6.3 | TEST PROCEDURE | 31 |
| 4.6.4 | TEST SETUP | 31 |
| 4.6.5 | EUT OPERATING CONDITIONS..... | 31 |
| 4.6.6 | TEST RESULTS..... | 32 |
| 4.7 | RADIATED EMISSION MEASUREMENT (BELOW 1GHz) | 41 |
| 4.7.1 | LIMITS OF RADIATED EMISSION MEASUREMENT | 41 |
| 4.7.2 | TEST INSTRUMENTS | 42 |
| 4.7.3 | TEST PROCEDURES..... | 43 |
| 4.7.4 | DEVIATION FROM TEST STANDARD | 43 |
| 4.7.5 | TEST SETUP | 44 |
| 4.7.6 | EUT OPERATING CONDITIONS..... | 44 |
| 4.7.7 | TEST RESULTS..... | 45 |
| 4.8 | EFFECTIVE RADIATED POWER MEASUREMENT (ABOVE 1GHz) | 46 |
| 4.8.1 | LIMITS OF RADIATED EMISSION MEASUREMENT | 46 |
| 4.8.2 | TEST INSTRUMENTS | 47 |
| 4.8.3 | TEST PROCEDURES..... | 48 |
| 4.8.4 | DEVIATION FROM TEST STANDARD | 48 |
| 4.8.5 | TEST SETUP | 49 |
| 4.8.6 | EUT OPERATING CONDITIONS..... | 49 |
| 4.8.7 | TEST RESULTS..... | 50 |
| 5 | PHOTOGRAPHS OF THE TEST CONFIGURATION..... | 53 |
| 6 | INFORMATION ON THE TESTING LABORATORIES | 54 |



1 CERTIFICATION

PRODUCT : CDMA 2000 1X Mobile Phone
MODEL NO. : C220
BRAND NAME: ZTE
APPLICANT : ZTE Corporation XI'AN Institute
TESTED : Sep. 06 ~ Sep. 29, 2005
TEST SAMPLE : ENGINEERING SAMPLE
TEST STANDARDS : FCC Part 22, Subpart H
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Wendy Liao , **DATE:** Oct. 09, 2005
Wendy Liao

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** Oct. 09, 2005
Responsible for RF Gary Chang

APPROVED BY : Cody Chang , **DATE:** Oct. 09, 2005
Cody Chang / Deputy Manager



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 22 & Part 2 / IC RSS-132 | | | |
|--|--|---------------|--|
| STANDARD SECTION | TEST TYPE AND LIMIT | RESULT | REMARK |
| 2.1047 (d) | Modulation Characteristics | PASS | NA |
| 2.1046 22.913 (a) | Maximum Peak Output Power Limit: max. 7 watts e.r.p peak power | PASS | Meet the requirement of limit. Minimum passing margin is 21.20dBm at 848.76MHz. |
| 2.1055 | Frequency Stability AFC Freq. Error vs. Voltage AFC Freq. Error vs. Temperature Limit: max. ± 2.5 ppm | PASS | Meet the requirement of limit. |
| 2.1049 (h) | Occupied Bandwidth | PASS | Meet the requirement of limit. |
| 22.917 | Band Edge Measurements | PASS | NA |
| 2.1051 22.917 | Conducted Spurious Emissions | PASS | Meet the requirement of limit. Minimum passing margin is -31.65 dB at 1648.00MHz. |
| 2.1053 22.917 | Radiated Spurious Emissions | PASS | Meet the requirement of limit. Minimum passing margin is -55.39 dB at 790.06MHz. |



2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

| MEASUREMENT | FREQUENCY | UNCERTAINTY |
|---------------------|-----------------|-------------|
| Conducted emissions | 9kHz ~ 30MHz | 2.44 dB |
| Radiated emissions | 30MHz ~ 200MHz | 3.73 dB |
| | 200MHz ~1000MHz | 3.74 dB |
| | 1GHz ~ 18GHz | 2.20 dB |
| | 18GHz ~ 40GHz | 1.88 dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | |
|---|---|
| PRODUCT | CDMA 2000 1X Mobile Phone |
| MODEL NO. | C220 |
| POWER SUPPLY | 3.7Vdc from rechargeable lithium battery Brand: ZTE Model: Li3708T42P3h593662 |
| | 5.5Vdc from charger Brand: ZTE Model: STC-A22055F18 I/P: 100-240Vac, 50/60Hz 0.15A O/P: 5.5V, 520mA |
| MODULATION TYPE | OQPSK |
| NUMBER OF CHANNEL | 788 |
| FREQUENCY RANGE | Tx Frequency: 824.12MHz ~ 848.76MHz Rx Frequency: 869.12MHz ~ 893.76MHz |
| MAX. CONDUCTED PEAK OUTPUT POWER | 24.87dBm (0.307Watts) |
| MAX. ERP POWER | 21.20dBm (0.132Watts) |
| ANTENNA TYPE | Fixed external antenna with 0dBi gain |
| DATA CABLE | 1.25m nonshielded cable for Earphone cable |
| I/O PORTS | Refer to user's manual |
| ASSOCIATED DEVICES | Earphone, charger |
| EUT EXTREME VOL. RANGE | 3.3Vdc to 4.2Vdc |

NOTE:

- 1.The applicant defined the normal working voltage of the battery is from 3.3Vdc to 4.2Vdc.
- 2.The EUT is a CDMA 2000 1X Mobile Phone. The protocol of this system is CDMA850.
- 3.ESN: 696D4B29, 696D4B59, 694D4B58, 696D51EA, 696D4B30, 696D4B2D.
- 4.Hardware version: CD7C.
- 5.Software version: AUS_P300C2V1.1.0B01.
- 6.The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

630 channels are provided to this EUT in the CDMA850 band. Therefore, the low, middle and high channels are chosen for testing.

| | CHANNEL | FREQUENCY | TX MODE |
|--------|---------|------------|---------|
| LOW | 1013 | 824.12 MHz | CDMA |
| MIDDLE | 384 | 836.58 MHz | CDMA |
| HIGH | 777 | 848.76 MHz | CDMA |

NOTE:

1. Below 1 GHz, the channel 1013, 384, and 777 were pre-tested in chamber. The channel 1013 was chosen for final test.
2. Above 1 GHz, the channel 1013, 384, and 777 were tested individually.
3. When the Power Control Level set max., the worst case, was chosen for final test.
4. The channel space is 30KHz.
5. Since the EUT is considered a portable unit, it was pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

IC RSS-132

ANSI C63.4-2003

ANSI/TIA/EIA-603-A

NOTE: All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | CAL. DATE |
|-----|--------------------------------------|-------|-----------|------------|---------------|
| 1 | Universal Radio Communication Tester | R&S | CMU200 | 101095 | Oct. 10, 2005 |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1 | NA |

NOTE: All power cords of the above support units are non shielded (1.8m).



4 TEST TYPES AND RESULTS

4.1 MODULATION CHARACTERISTICS



4.1.1 DESCRIPTION OF MODULATION TECHNIQUE

According to FCC 2.1047(d), the system is used the digital modulation and accomplished with the CDMA requirement.

There are 788 channels and channel space is 30KHz. The frequency band 824.12 ~ 848.76MHz is allocated to the uplink and 869.12 ~ 893.76MHz to the downlink. The uplink and downlink channel space is 845MHz and is duplex at the same time.



4.1.2 THE ACTIVE TIME SLOT 8 MODULATED FRAME PLOT

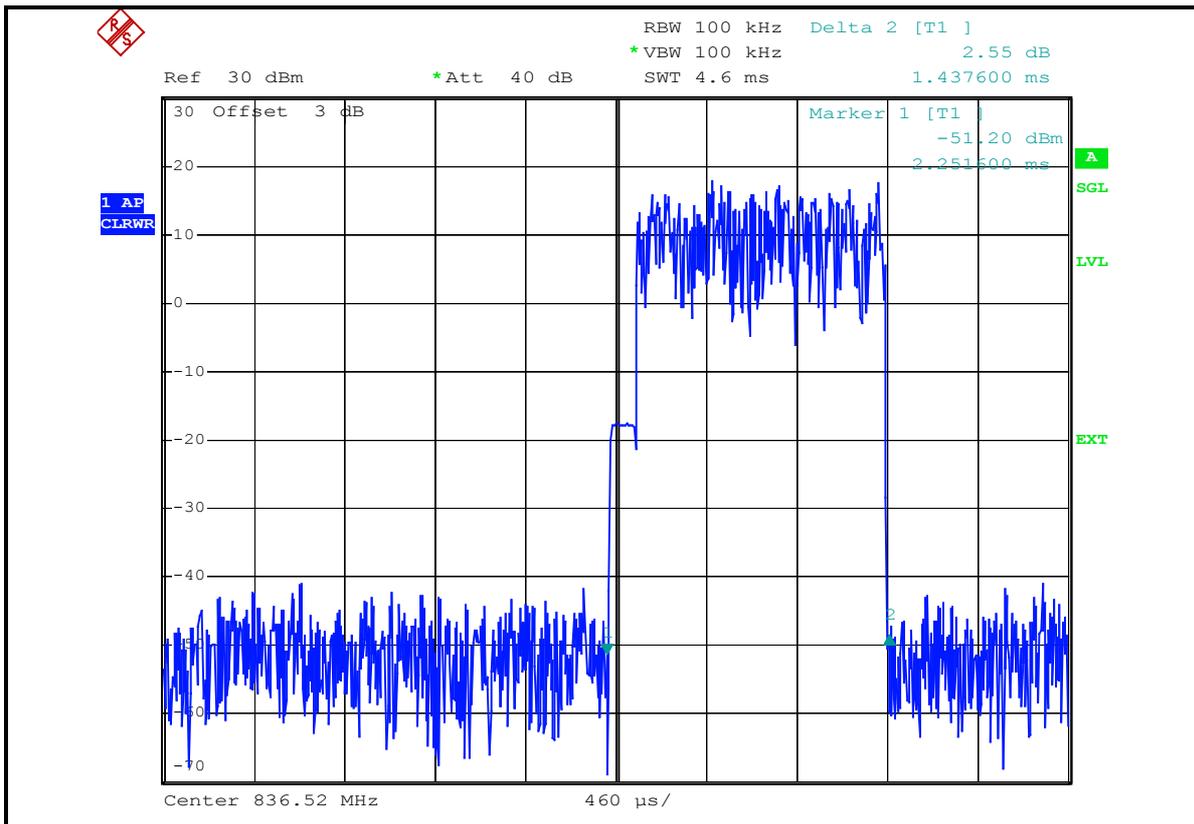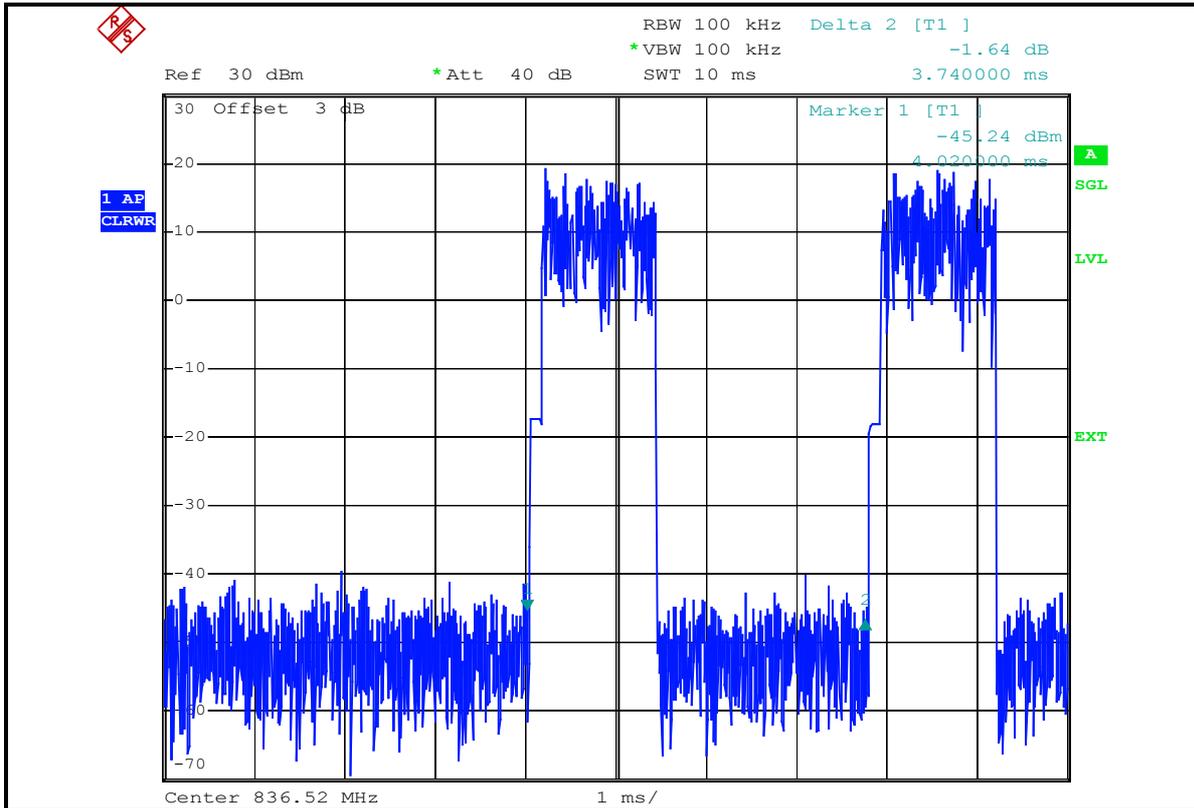



4.2 OUTPUT POWER MEASUREMENT

4.2.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 22.913 (a) that "Mobile / Portable station are limited to 7 watts e.r.p".



4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|--------------------------------------|--------------------|--------------|------------------|
| Test Receiver ROHDE & SCHWARZ | ESIB7 | 100188 | Dec. 19, 2005 |
| Spectrum Analyzer ROHDE & SCHWARZ | FSP40 | 100039 | Nov. 21, 2005 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-157 | Jan. 22, 2006 |
| HORN Antenna SCHWARZBECK | BBHA 9120 D | 9120D-407 | Jan. 16, 2006 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | BBHA 9170241 | Feb. 23, 2006 |
| Preamplifier Agilent | 8449B | 3008A01961 | Nov. 09, 2005 |
| Preamplifier Agilent | 8447D | 2944A10629 | Nov. 09, 2005 |
| RF signal cable HUBER+SUHNER | SUCOFLEX 104 | 218182/4 | Feb. 17, 2006 |
| RF signal cable HUBER+SUHNER | SUCOFLEX 104 | 218194/4 | Feb. 17, 2006 |
| Software ADT. | ADT_Radiated_V5.14 | NA | NA |
| Antenna Tower ADT. | AT100 | AT93021702 | NA |
| Turn Table ADT. | TT100. | TT93021702 | NA |
| Controller ADT. | SC100. | SC93021702 | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 1.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-2.




4.2.3 TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with CDMA link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 1013, 384 and 777 (low, middle and high operational frequency range.)
- b. The conducted peak output power used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The path loss included the splitter loss, cable loss and 20dB pad loss. The spectrum set RB/VB 3MHz, then read peak power value and record to the test. (All transmitted path loss shall be considered in the test report data.)
- c. E.I.R.P peak power measurement. In the fully anechoic chamber, EUT placed on the 1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- d. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the calibration antenna. Rotated the Turn Table to find the maximum radiation power. "Raw" is the spectrum reading value, "SG" is signal generator export power, "TX Gain" is calibration antenna isotropic gain value, "TX cable" is the transmitted cable loss between the calibration antenna and signal generator. The "Factor" means that the transmission path loss is equal to "SG" - "TX cable" + "TX Gain" - "Raw".
- e. Actually the real E.I.R.P peak power is equal to "Read Value" + "Factor"
- f. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.P.R power - 2.15dBi.

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection (PK)


4.2.4 TEST SETUP

EIRP POWER MEASUREMENT:

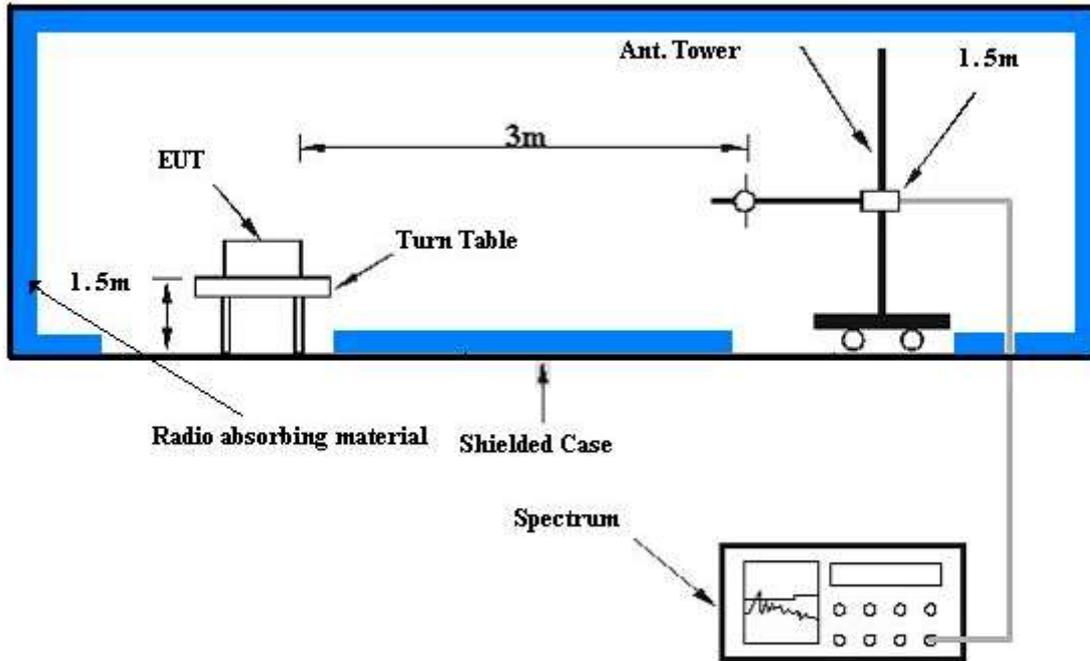

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

CONDUCTED POWER MEASUREMENT:

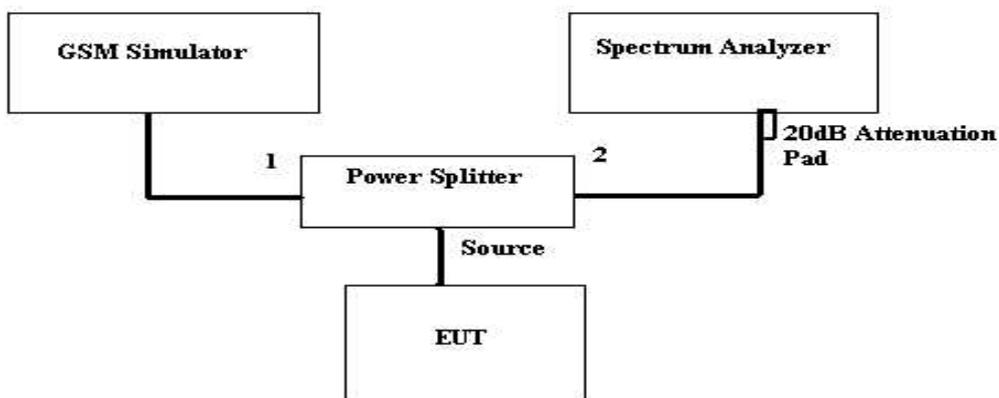

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.2.5 EUT OPERATING CONDITIONS

- a. The EUT makes a phone call to the CDMA simulator.
- b. The CDMA simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.



4.2.6 TEST RESULTS

| | | | |
|---------------------------------|---------------------------|----------------------------|-----------|
| EUT | CDMA 2000 1X Mobile Phone | MODEL | C220 |
| MODE | TX connected | POWER CONTROL LEVEL | Max. |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 65%RH, 991hPa | TESTED BY | Long Chen |

| CONDUCTED PEAK OUTPUT POWER | | | | | |
|-----------------------------|-----------------|-----------------|------------------------|-------------------|--------------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | PEAK OUTPUT POWER | |
| | | | | dBm | Watt |
| 1013 | 824.12 | 21.63 | 3.00 | 24.63 | 0.290 |
| 384 | 836.58 | 21.36 | 3.00 | 24.36 | 0.273 |
| 777 | 848.76 | 21.87 | 3.00 | 24.87 | 0.307 |

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).

2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB).



| | | | |
|---------------------------------|----------------------------|----------------------------|-----------|
| EUT | CDMA 2000 1X Mobile Phone | MODEL | C220 |
| MODE | TX connected | POWER CONTROL LEVEL | Max. |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 65%RH, 991hPa | TESTED BY | Long Chen |

| ERP RADIATED PEAK OUTPUT POWER | | | | | |
|--------------------------------|-----------------|-----------------|------------------------|-------------------|--------------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | PEAK OUTPUT POWER | |
| | | | | dBm | Watt |
| 1013 | 824.12 | -7.88 | 32.00 | 20.97 | 0.125 |
| 384 | 836.58 | -8.04 | 31.79 | 20.60 | 0.115 |
| 777 | 848.76 | -8.27 | 32.62 | 21.20 | 0.132 |

- REMARKS:**
1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Receiver Antenna Gain (dBi) + Cable Loss (dB) + Free Space Loss (dB).



4.3 FREQUENCY STABILITY MEASUREMENT

4.3.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

According to the FCC part 2.4235 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 2.5ppm of the received frequency from the base station. The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with the 2.1055(a)(1) $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.3.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|--|-------------|------------|------------------|
| * Hewlett Packard RF cable | 8120-6192 | 01428251 | NA |
| * Suhner RF cable | Sucoflex104 | 204850/4 | NA |
| * WIT Standard Temperature & Humidity Chamber | TH-4S-C | W981030 | Jul. 18, 2006 |


- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. "*" = These equipments are used for the final measurement.
 3. The test was performed in ADT RF OVEN room.

4.3.3 TEST PROCEDURE

- a. Because of the measure the carrier frequency under the condition of the AFC lock, it shall be used the mobile station in the CDMA link mode. This is accomplished with the use of the R&S CMU200 simulator station. The oven room could control the temperatures and humidity. The CDMA link channel is the 777.
- b. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- c. EUT is connected the external power supply to control the DC input power. The various Volts from the minimum 3.3 Volts to 4.2 Volts. Each step shall be record the frequency error rate.
- d. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing.
- e. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the CDMA simulator.

4.3.4 TEST SETUP

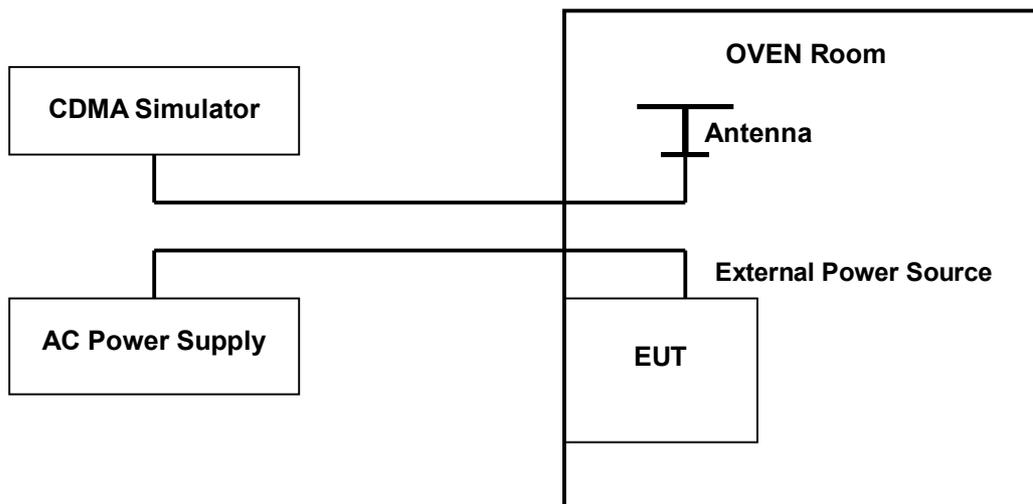



4.3.5 TEST RESULTS

| | | | |
|-----------------------------|---------------------------|---------------------------------|-------------------------|
| EUT | CDMA 2000 1X Mobile Phone | MODEL | C220 |
| MODE | TX channel 777 | POWER CONTROL LEVEL | Max. |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg. C, 65%RH, 991hPa |
| TESTED BY | Long Chen | | |

| AFC FREQUENCY ERROR vs. VOLTAGE | | | |
|--|-----------------------------|------------------------------|--------------------|
| VOLTAGE (Volts) | FREQUENCY ERROR (Hz) | FREQUENCY ERROR (ppm) | LIMIT (ppm) |
| 3.3 | -15 | -0.017929716 | 2.5 |
| 3.4 | -14 | -0.016734401 | 2.5 |
| 3.5 | -15 | -0.017929716 | 2.5 |
| 3.6 | -19 | -0.022710973 | 2.5 |
| 3.7 | 20 | 0.023906287 | 2.5 |
| 3.8 | -17 | -0.020320344 | 2.5 |
| 3.9 | -20 | -0.023906287 | 2.5 |
| 4.0 | -18 | -0.021515659 | 2.5 |
| 4.1 | 18 | 0.021515659 | 2.5 |
| 4.2 | 20 | 0.023906287 | 2.5 |

NOTE: The applicant defined the normal working voltage of the battery is from 3.3Vdc to 4.2Vdc.



| | | | |
|-----------------------------|---------------------------|---------------------------------|-------------------------|
| EUT | CDMA 2000 1X Mobile Phone | MODEL | C220 |
| MODE | TX channel 777 | POWER CONTROL LEVEL | Max. |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg. C, 65%RH, 991hPa |
| TESTED BY | Long Chen | | |

| AFC FREQUENCY ERROR vs. VOLTAGE | | | |
|--|-----------------------------|------------------------------|--------------------|
| TEMP. (°C) | FREQUENCY ERROR (Hz) | FREQUENCY ERROR (ppm) | LIMIT (ppm) |
| 50 | -35 | -0.041836003 | 2.5 |
| 40 | -39 | -0.046617260 | 2.5 |
| 30 | -37 | -0.044226632 | 2.5 |
| 20 | -34 | -0.040640689 | 2.5 |
| 10 | -48 | -0.057375090 | 2.5 |
| 0 | -46 | -0.054984461 | 2.5 |
| -10 | -37 | -0.044226632 | 2.5 |
| -20 | -57 | -0.068132919 | 2.5 |
| -30 | -30 | -0.035859431 | 2.5 |



4.4 OCCUPIED BANDWIDTH MEASUREMENT

4.4.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

According to FCC 2.1049 (h) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

4.4.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|--|--------------|------------|------------------|
| * ROHDE & SCHWARZ Spectrum Analyzer | FSP40 | 100035 | Apr. 13, 2006 |
| * Mini-Circuits Power Splitter | ZAPD-4 | 400005 | NA |
| * Hewlett Packard RF cable | 8120-6192 | 01428251 | NA |
| * JFW 20dB attenuation | 50HF-020-SMA | NA | NA |
| * Suhner RF cable | Sucoflex104 | 204850/4 | NA |

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

2. "*" = These equipments are used for the final measurement.

4.4.3 TEST SETUP

Same as Item 4.2.4 (Conducted Power Setup)



4.4.4 TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with CDMA link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 1013, 384 and 777 (low, middle and high operational frequency range.)
- b. The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss is the worst loss 4dB in the transmitted path track.
- c. FCC 2.1049 (h) required a measurement bandwidth is the fundamental emission below 26dB bandwidth.

4.4.5 EUT OPERATING CONDITION


- a. The EUT makes a phone call to the CDMA simulator.
- b. The CDMA simulator station system controlled a EUT to export maximum and minimum output power under transmission mode and specific channel frequency Same as Item 4.4.5



4.4.6 TEST RESULTS


| FREQUENCY (MHz) | OUTPUT POWER -26 dBc BANDWIDTH (kHz) |
|-----------------|--------------------------------------|
| 824.12 | 1416 |
| 836.58 | 1416 |
| 848.76 | 1424 |

CH 1013 POWER

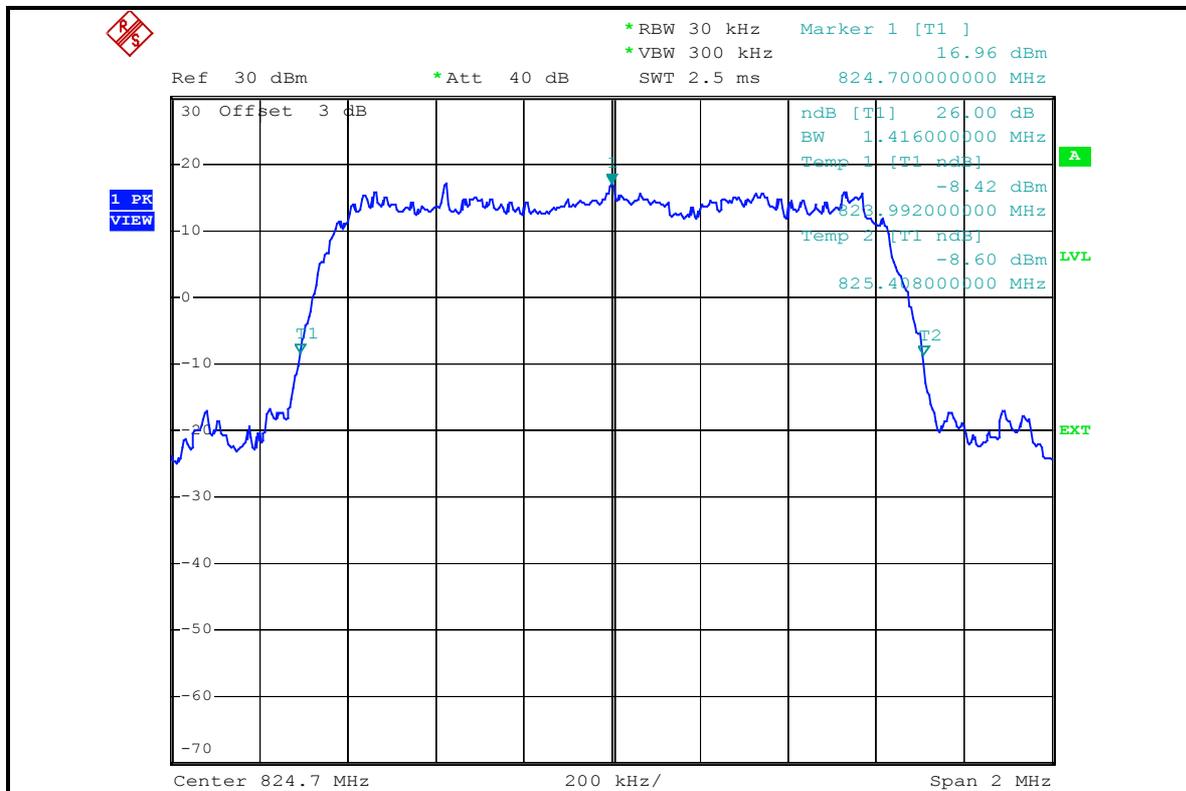




CH 384 POWER

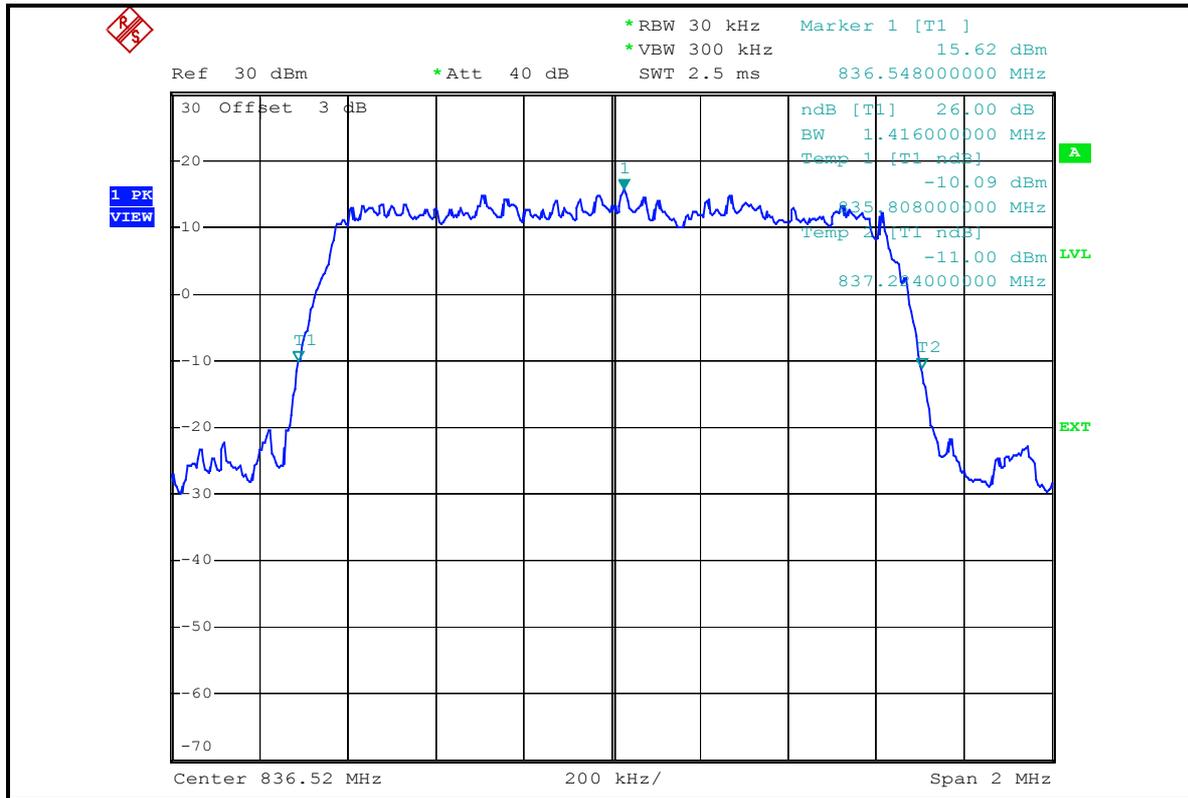

CH 777 POWER

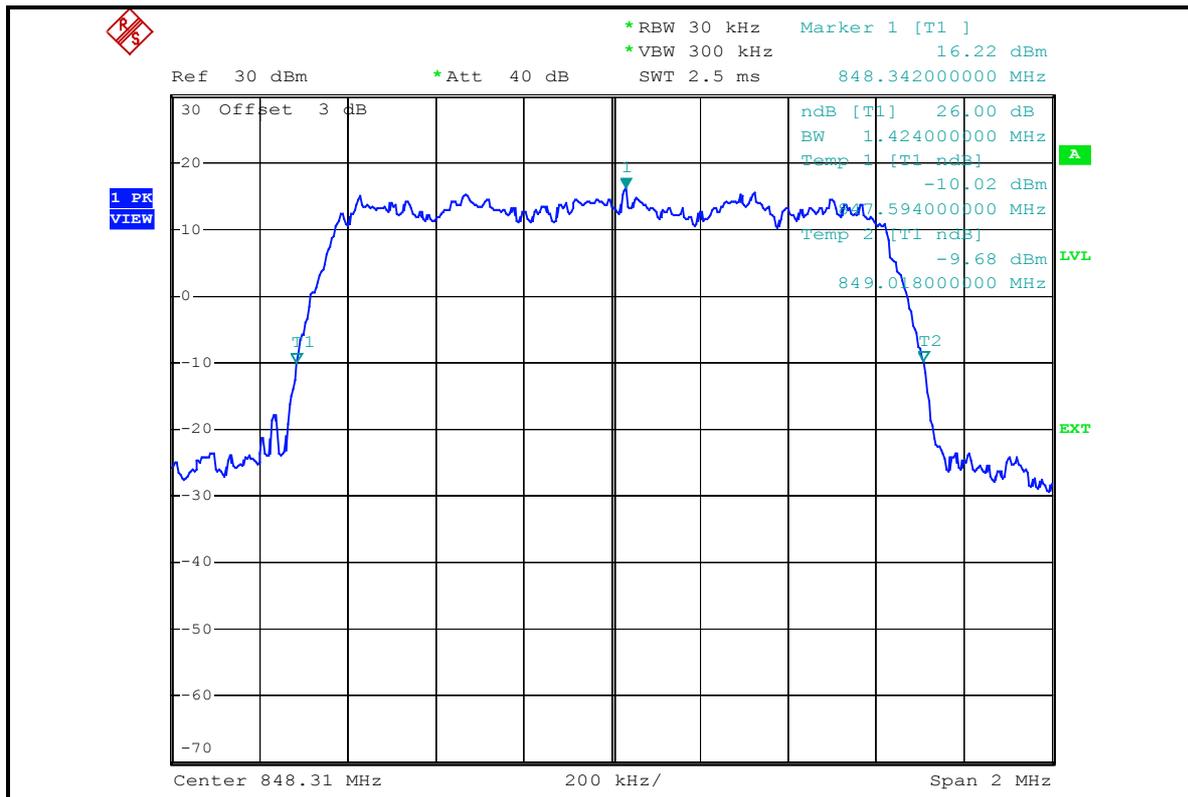



4.5 BAND EDGE MEASUREMENT

4.5.1 LIMITS OF BAND EDGE MEASUREMENT

According to FCC 22.917 specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. Then we measure that the bandwidth is about 300kHz and the resolution bandwidth is 3kHz.

4.5.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|--|--------------|------------|------------------|
| * ROHDE & SCHWARZ Spectrum Analyzer | FSP40 | 100035 | Apr. 13, 2006 |
| * Mini-Circuits Power Splitter | ZAPD-4 | 400005 | NA |
| * Hewlett Packard RF cable | 8120-6192 | 01428251 | NA |
| * JFW 20dB attenuation | 50HF-020-SMA | NA | NA |
| * Suhner RF cable | Sucoflex104 | 204850/4 | NA |

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. "*" = These equipments are used for the final measurement.

4.5.3 TEST SETUP

Same as Item 4.2.4 (Conducted Power Setup)



4.5.4 TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with CDMA data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels, 1013 and 777 (low and high operational frequency range.)
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss is the worst loss 4dB in the transmitted path track.
- c. The center frequency of spectrum is the band edge frequency and span is 2 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10KHz.
- d. Record the max trace plot into the test report.


4.5.5 EUT OPERATING CONDITION

- a. The EUT makes a phone call to the CDMA simulator.
- b. The CDMA simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency Same as Item 4.4.5.




4.5.6 TEST RESULTS

LOWER BAND EDGE

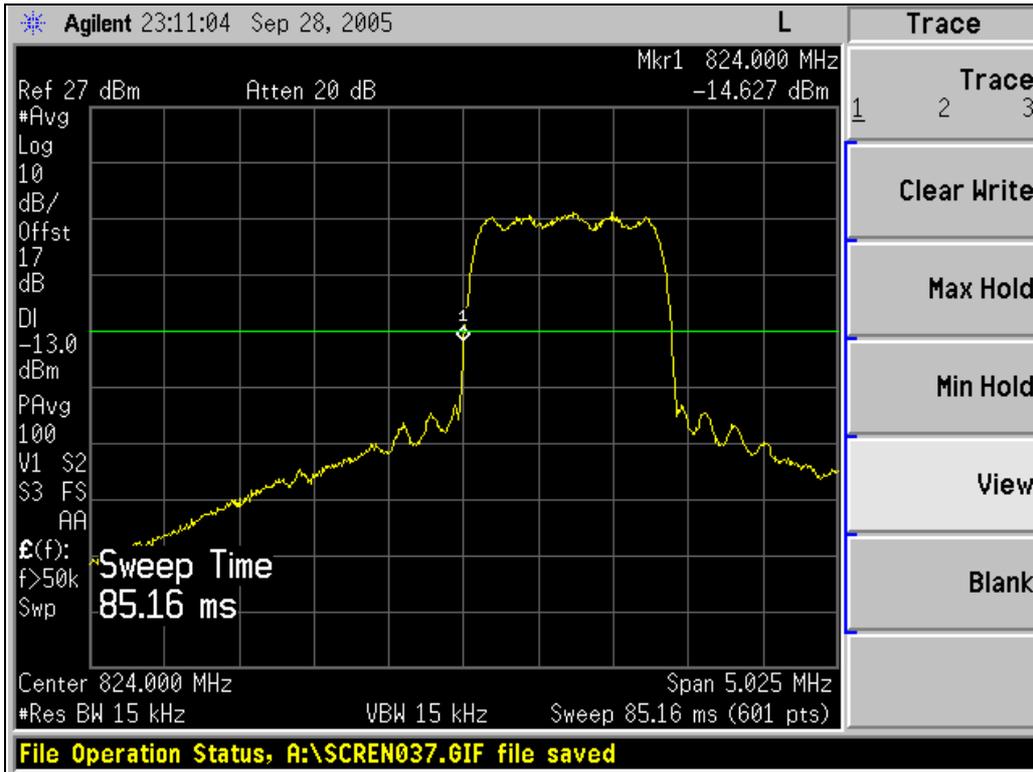

HIGHER BAND EDGE

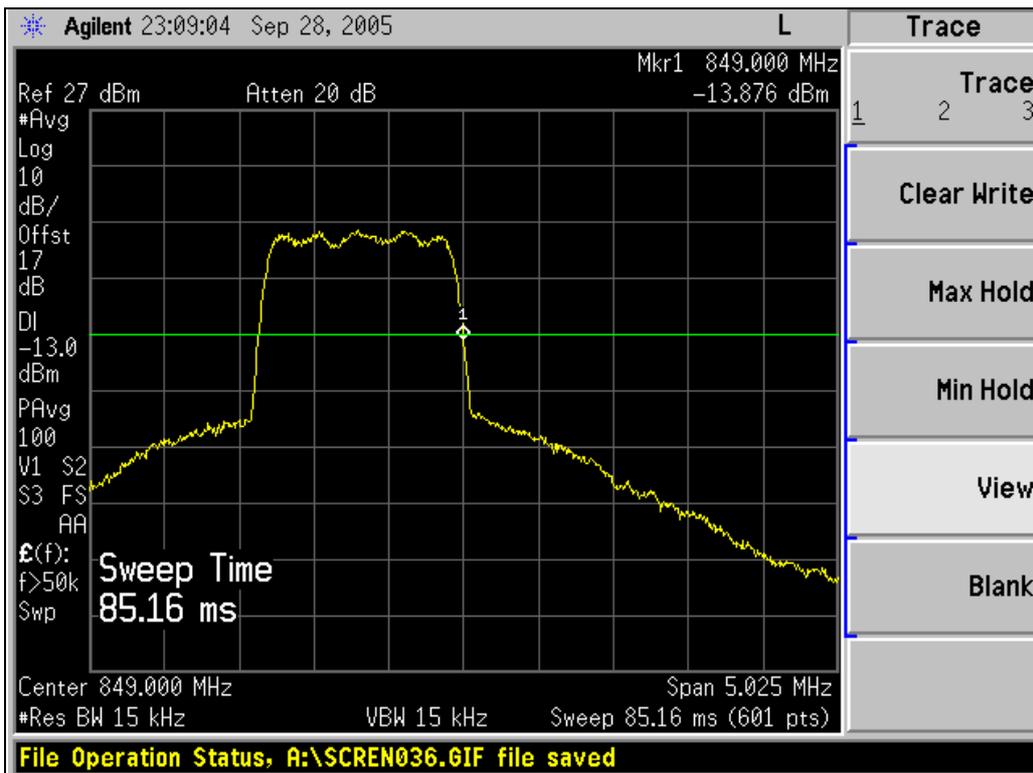



4.6 CONDUCTED SPURIOUS EMISSIONS

4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

In the FCC 22.917, On any frequency outside a licensee's frequency block within CDMA spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. At 24dBm (Power Control Level Max.) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13 dBm.

4.6.2 TEST INSTRUMENTS


| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|--|---|------------|------------------|
| * ROHDE & SCHWARZ Spectrum Analyzer | FSP40 | 100035 | Apr. 13, 2006 |
| AGILENT SIGNAL GENERATOR | E8257C | MY43320668 | Dec. 06, 2005 |
| * Wainwright Instruments Band Reject Filter | WRCG1850/1910- 1830/1930- 60/10SS | SN1 | NA |
| * Wainwright Instruments High Pass Filter | WHK3.1/18G-10SS | SN1 | NA |
| * Mini-Circuits Power Splitter | ZAPD-4 | 400005 | NA |
| * Hewlett Packard RF cable | 8120-6192 | 01428251 | NA |
| * JFW 20dB attenuation | 50HF-020-SMA | NA | NA |
| * Suhner RF cable | Sucoflex104 | 204850/4 | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
 2. "*" = These equipments are used for the final measurement.

4.6.3 TEST PROCEDURE

- a. The EUT was set up for the maximum peak power with CDMA link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 1013, 384 and 777 (low, middle and high operational frequency range.)
- b. The conducted spurious emission used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
- c. When the spectrum scanned from 9kHz to 3GHz, it shall be connected to the band reject filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.
- d. When the spectrum scanned from 3kHz to 9GHz, it shall be connected to the high pass filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.

4.6.4 TEST SETUP

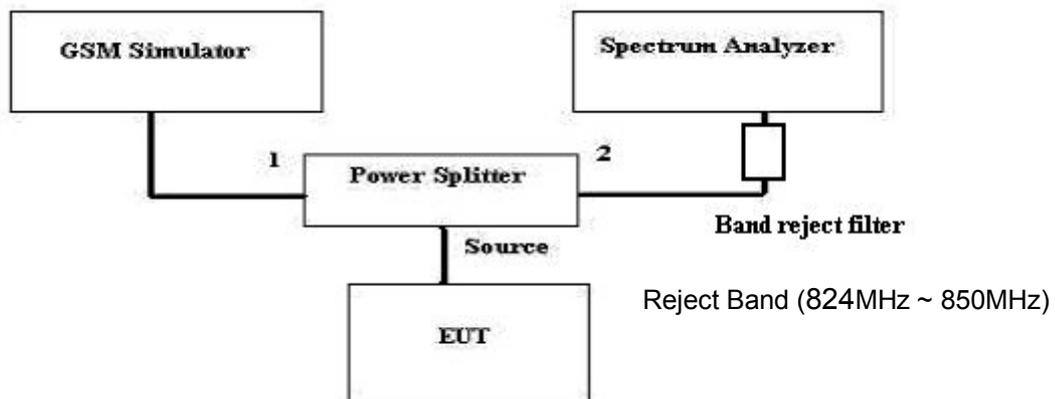


4.6.5 EUT OPERATING CONDITIONS

- a. The EUT makes a phone call to the CDMA simulator.
- b. The CDMA simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.




4.6.6 TEST RESULTS

CH 1013: 9kHz ~ 1GHz

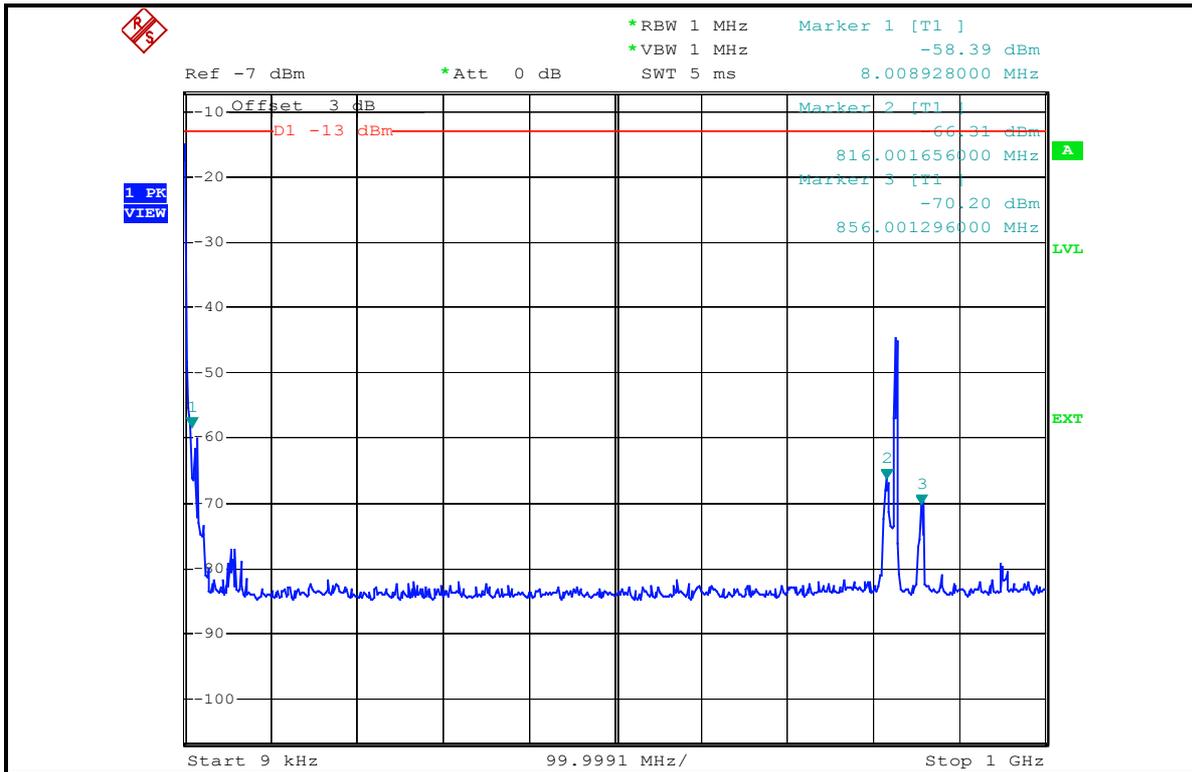


1GHz ~ 4GHz

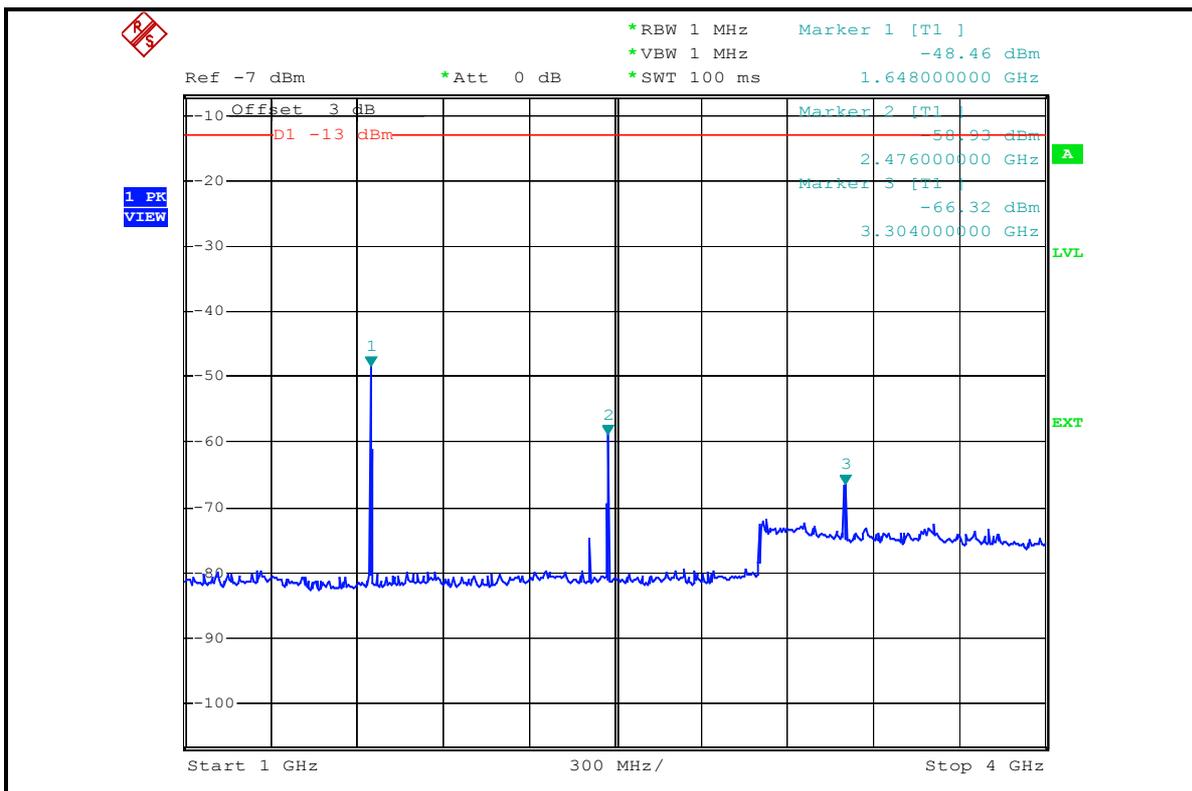




4GHz ~ 7GHz

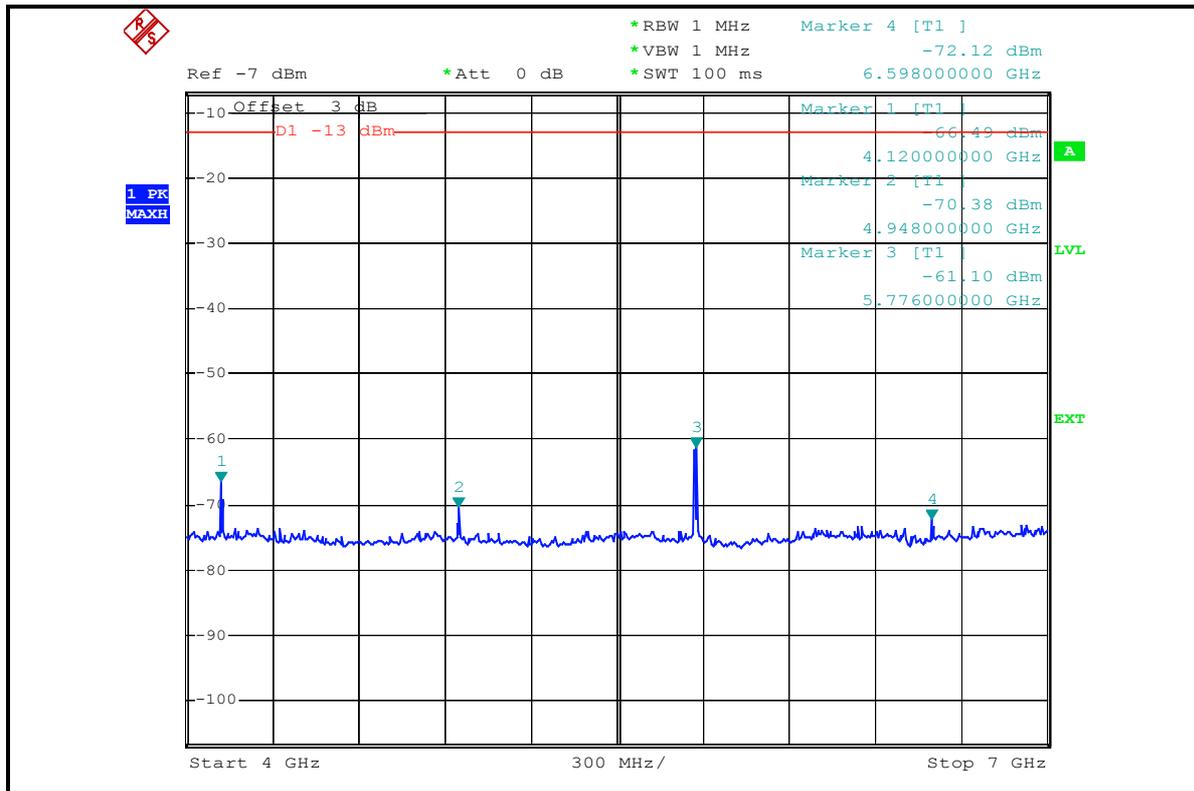


7GHz ~ 9GHz

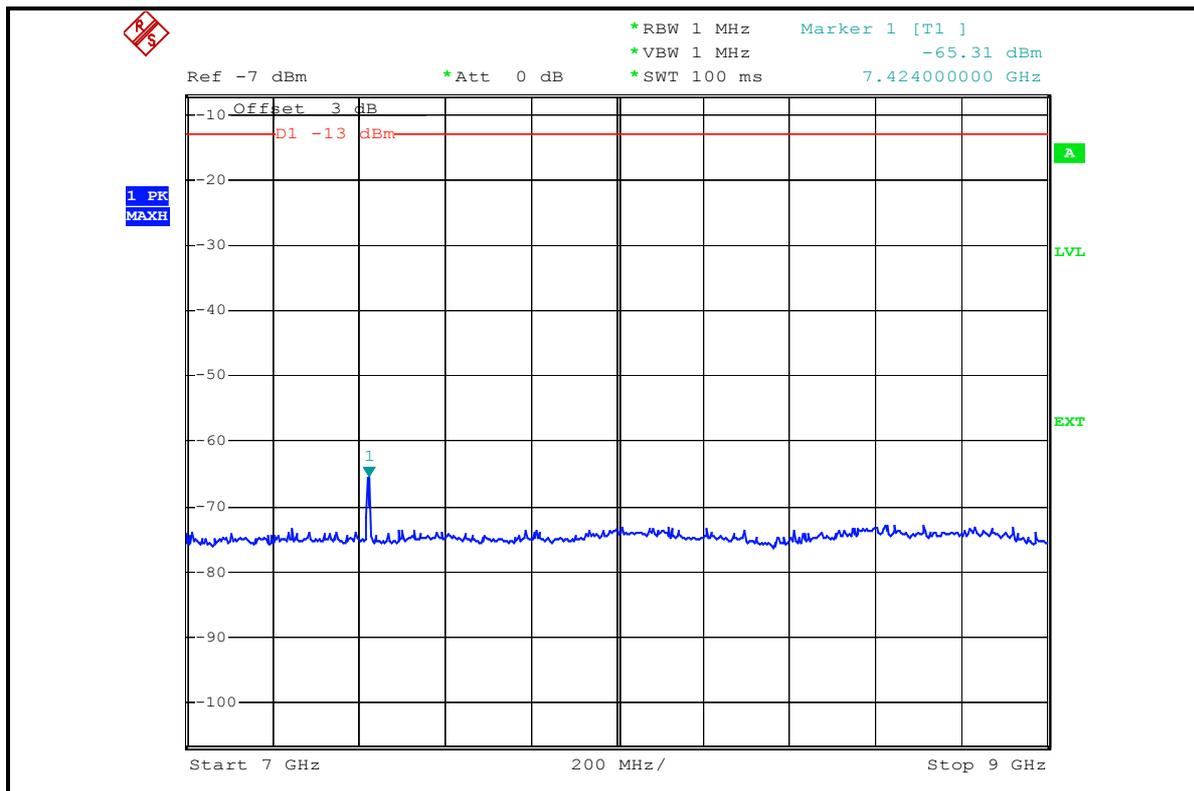




CH 384: 9kHz ~ 1GHz

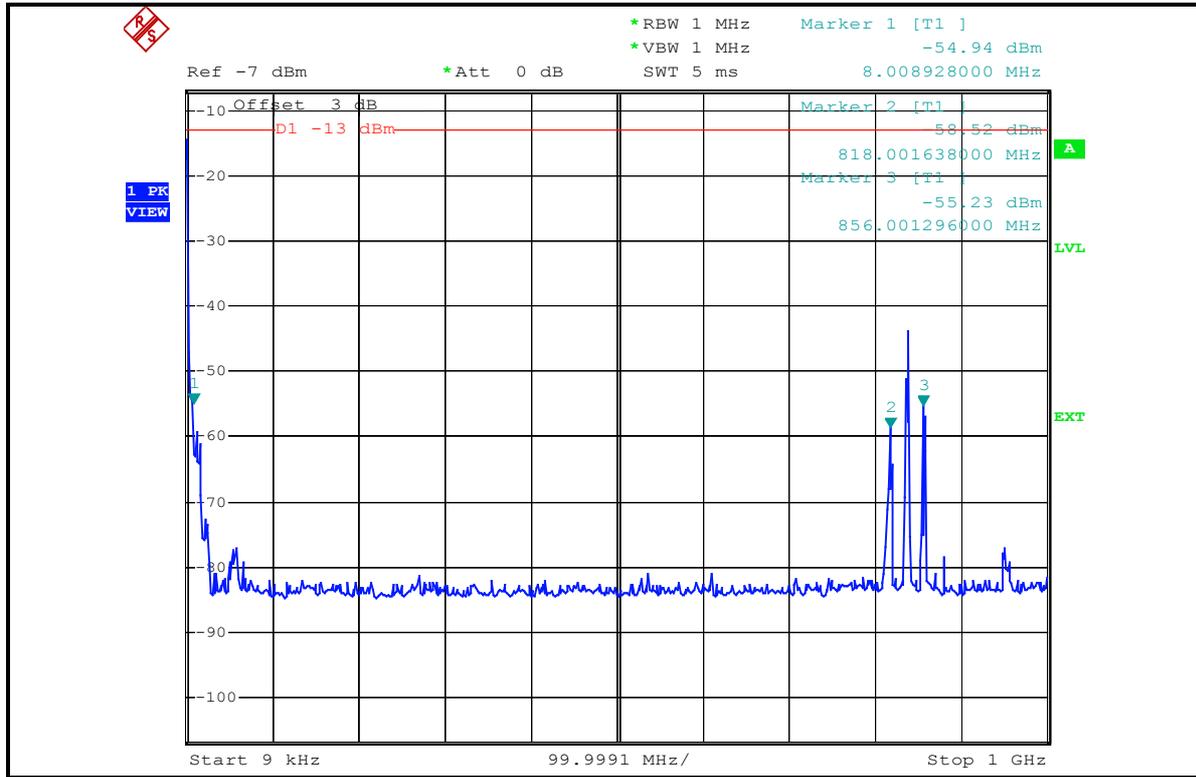


1GHz ~ 4GHz

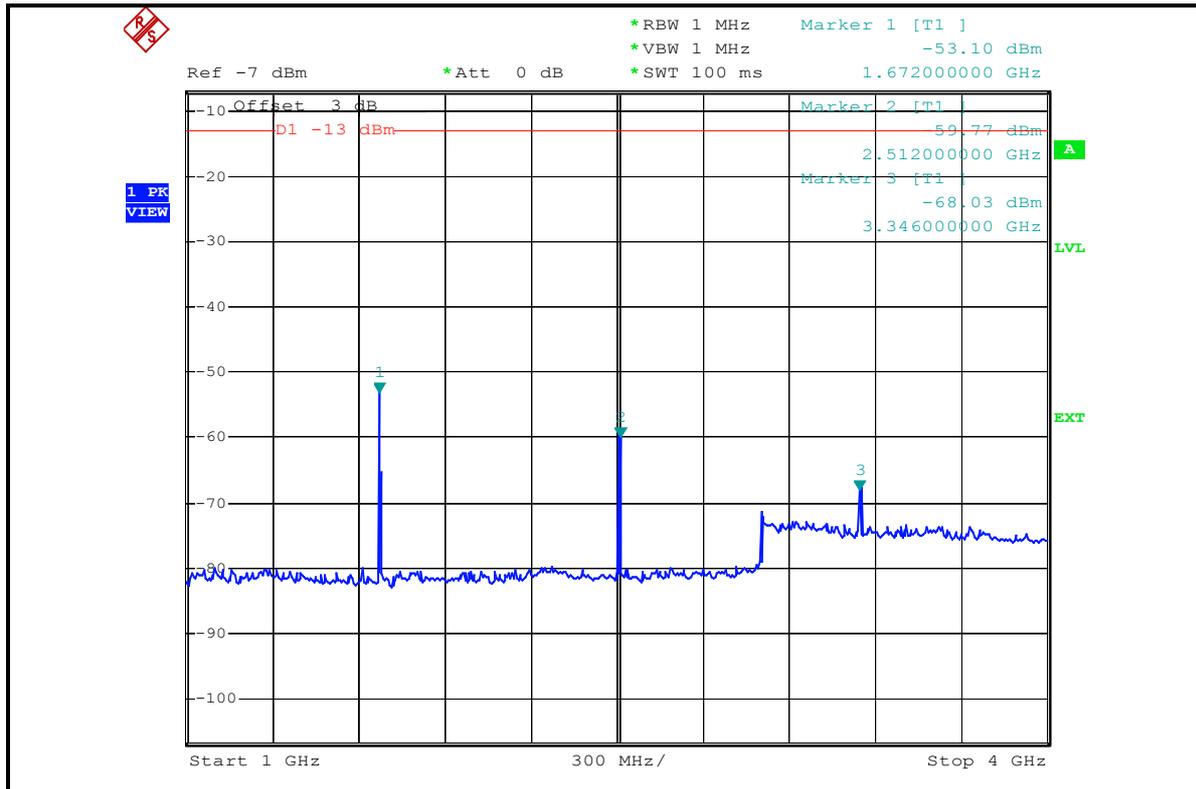




4GHz ~ 7GHz

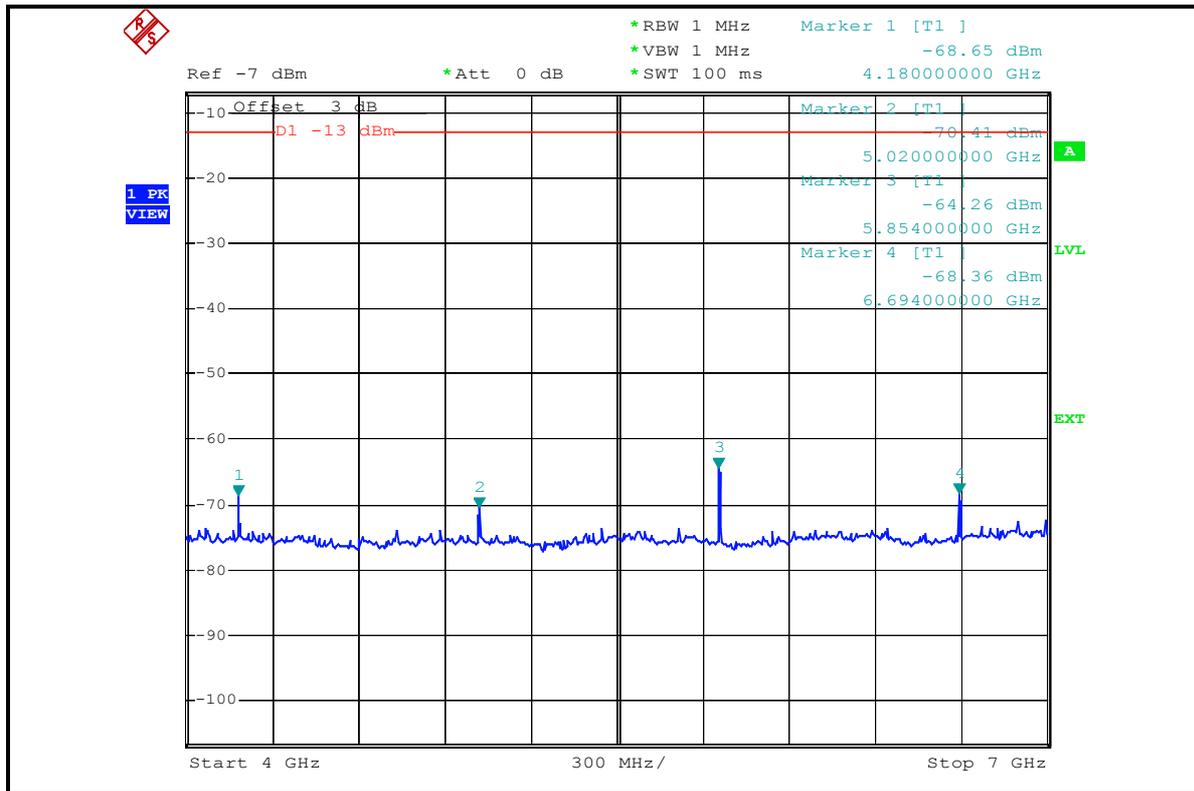


7GHz ~ 9GHz

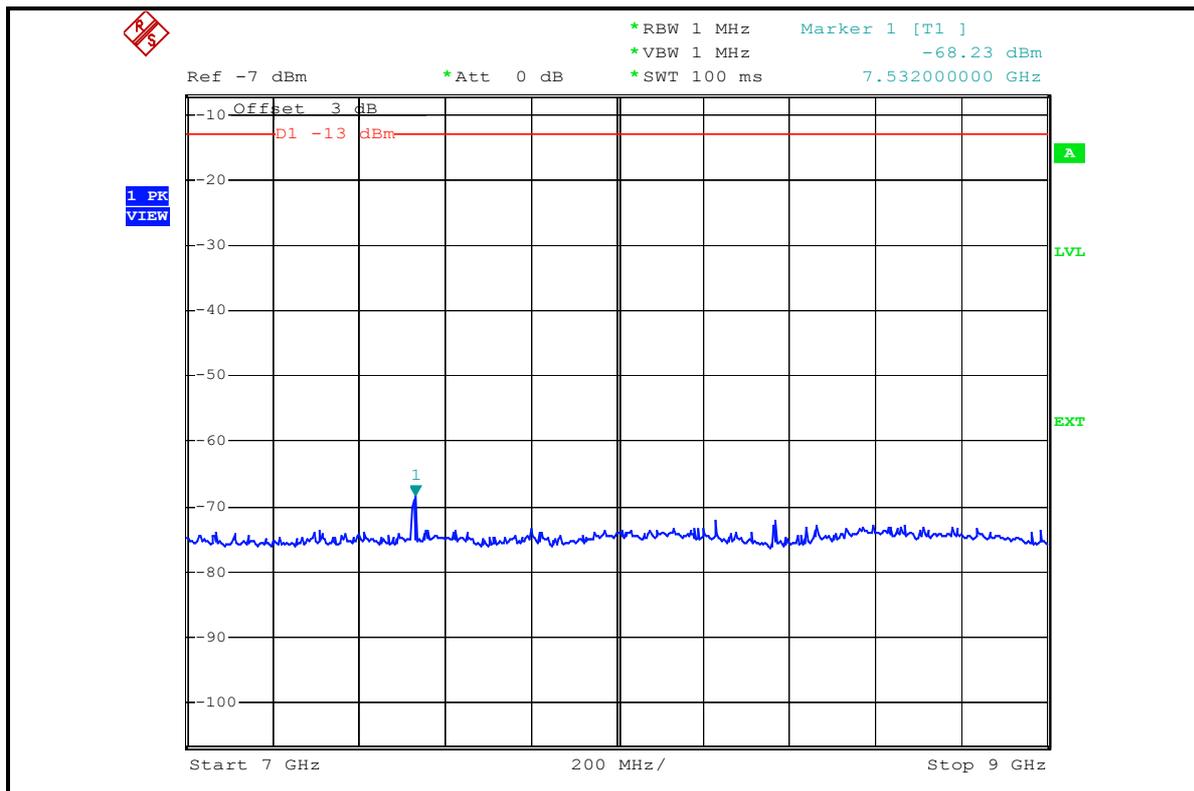




CH 777: 9kHz ~ 1GHz

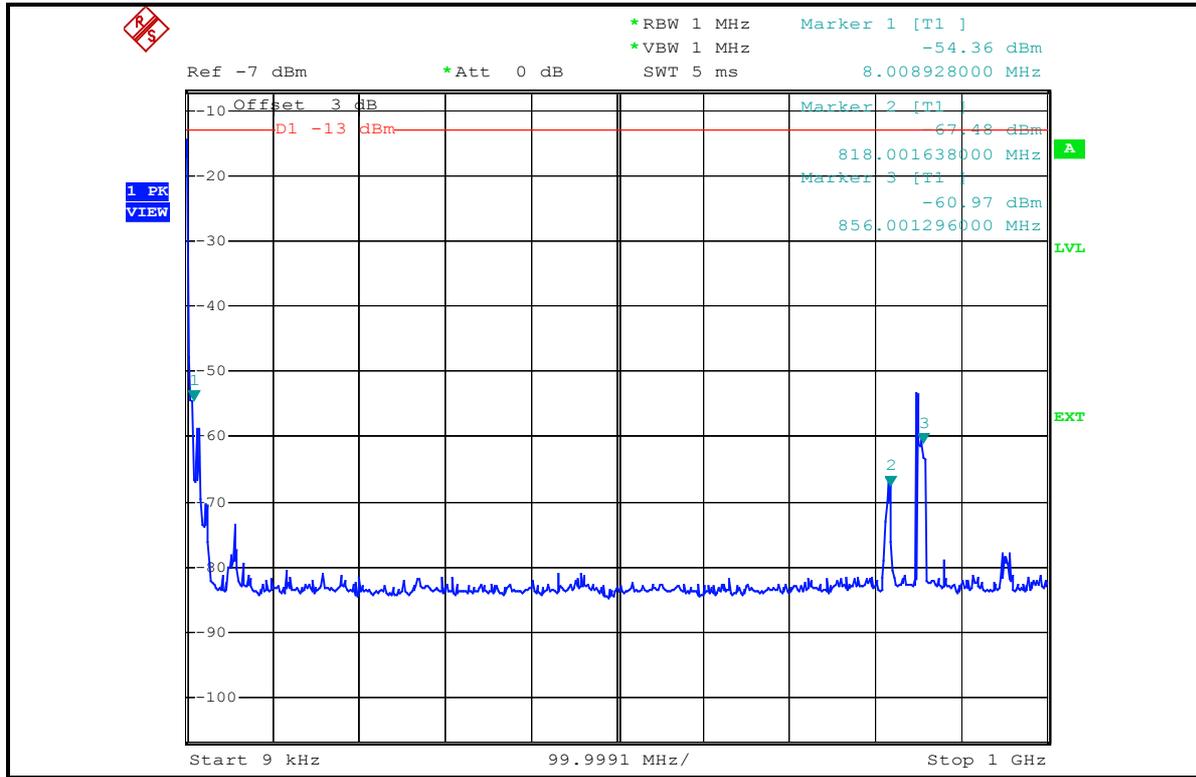


1GHz ~ 4GHz

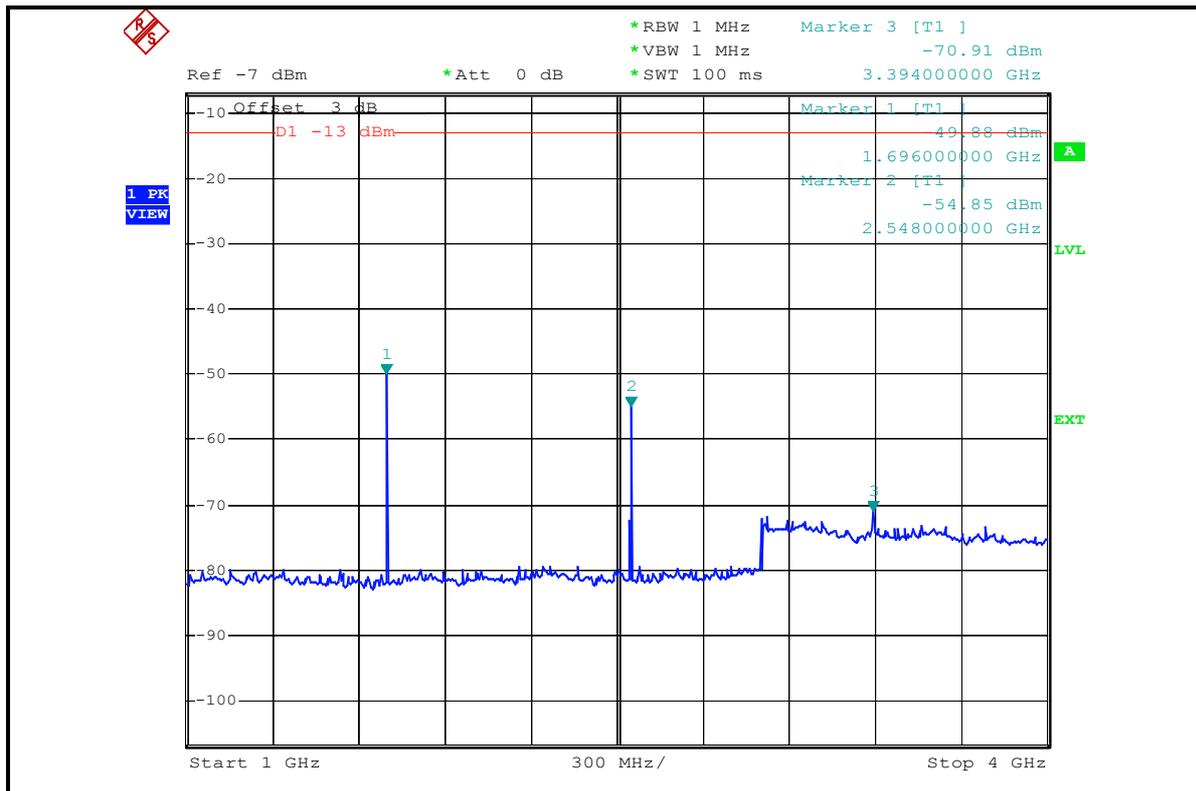




4GHz ~ 7GHz

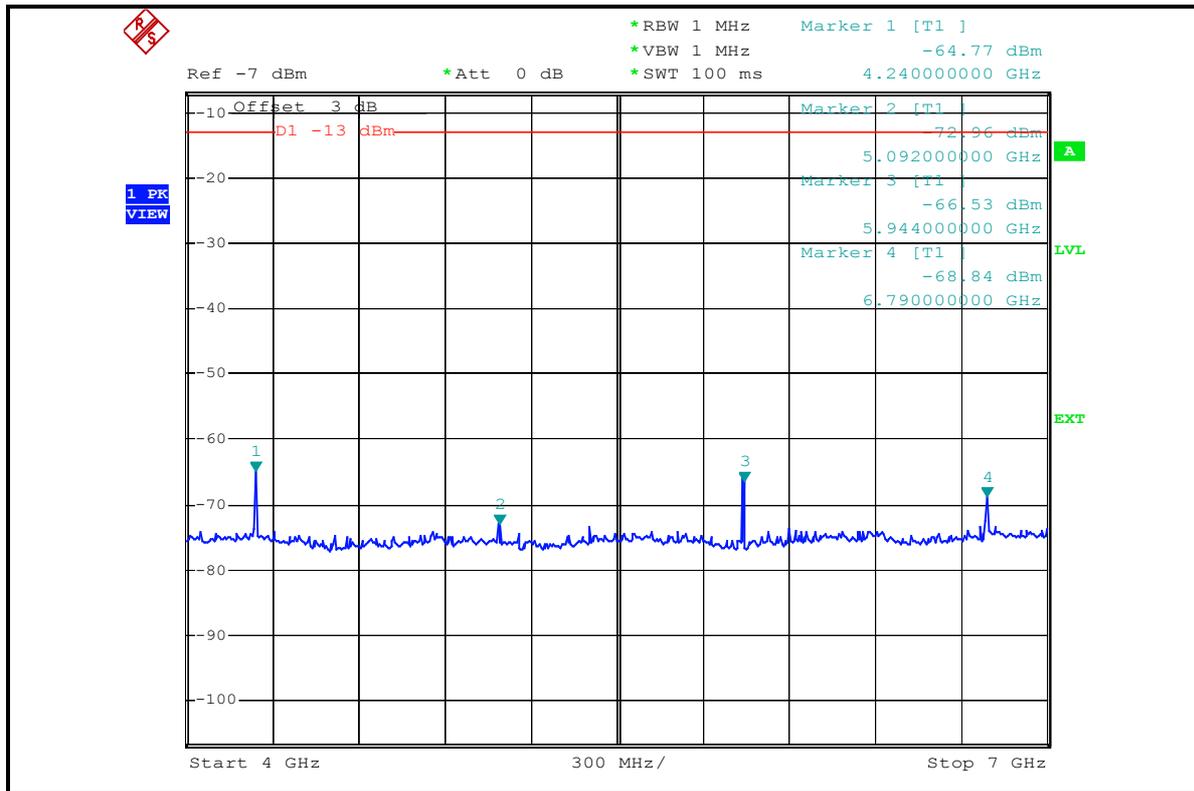

7GHz ~ 9GHz

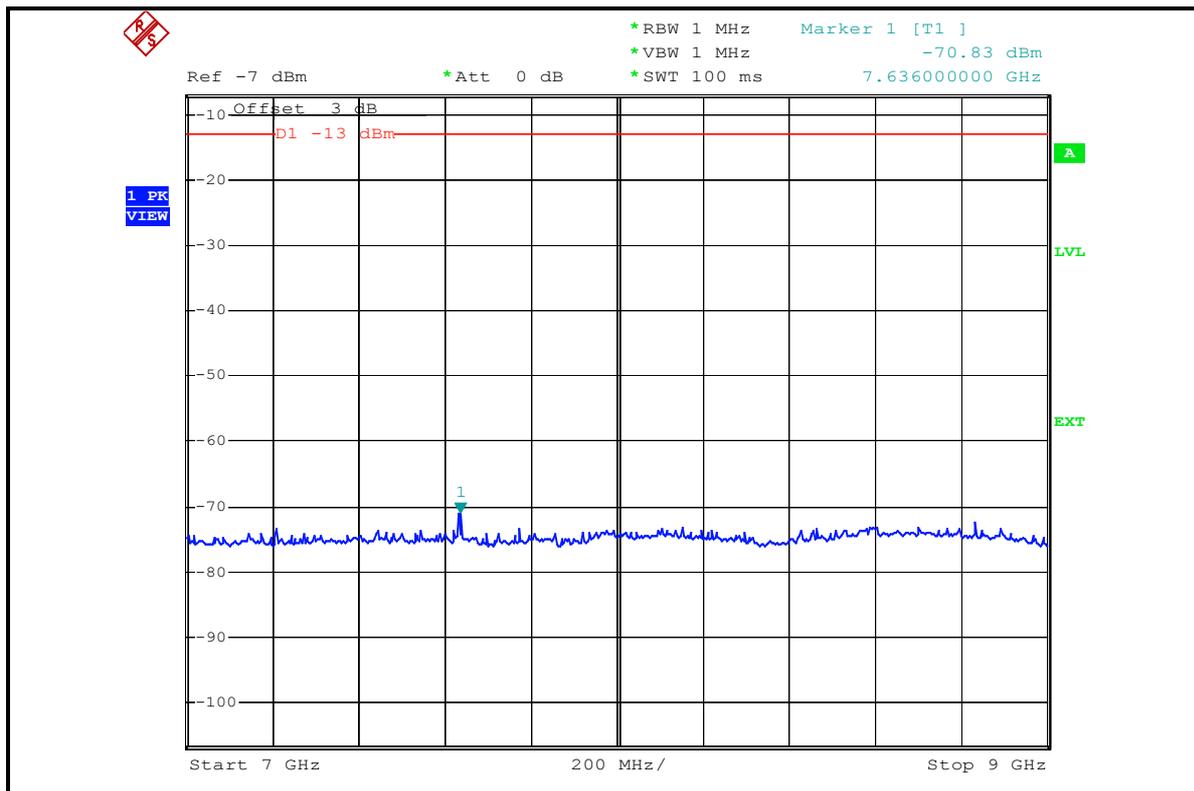



| | | | |
|---------------------------------|----------------------------|----------------------------|-----------|
| EUT | CDMA 2000 1X Mobile Phone | MODEL | C220 |
| MODE | TX channel 1013 | POWER CONTROL LEVEL | Max. |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 65%RH, 991hPa | TESTED BY | Long Chen |

| CONDUCTED SPURIOUS EMISSION | | | | | |
|-----------------------------|------------------------|-------------------|-----------------------|---------------|---------------|
| FREQUENCY (MHz) | CORRECTION FACTOR (dB) | S.A READING (dBm) | CONDUCTED LEVEL (dBm) | LIMIT (dBm) | MARGIN (dB) |
| 8 | 1.00 | -58.39 | -57.39 | -13.00 | -44.39 |
| 816 | 2.10 | -66.31 | -64.21 | -13.00 | -51.21 |
| 856 | 2.11 | -70.20 | -68.09 | -13.00 | -55.09 |
| 1648 | 3.81 | -48.46 | -44.65 | -13.00 | -31.65 |
| 2476 | 3.82 | -58.93 | -55.11 | -13.00 | -42.11 |
| 3304 | 4.18 | -66.32 | -62.14 | -13.00 | -49.14 |
| 4120 | 4.29 | -66.49 | -62.20 | -13.00 | -49.20 |
| 4948 | 4.40 | -70.38 | -65.98 | -13.00 | -52.98 |
| 5776 | 4.41 | -61.10 | -56.69 | -13.00 | -43.69 |
| 6598 | 4.46 | -72.12 | -67.66 | -13.00 | -54.66 |
| 7424 | 4.49 | -65.31 | -60.82 | -13.00 | -47.82 |

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB).



| | | | |
|---------------------------------|----------------------------|----------------------------|-----------|
| EUT | CDMA 2000 1X Mobile Phone | MODEL | C220 |
| MODE | TX channel 384 | POWER CONTROL LEVEL | Max. |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 65%RH, 991hPa | TESTED BY | Long Chen |

| CONDUCTED SPURIOUS EMISSION | | | | | |
|-----------------------------|------------------------|-------------------|-----------------------|-------------|-------------|
| FREQUENCY (MHz) | CORRECTION FACTOR (dB) | S.A READING (dBm) | CONDUCTED LEVEL (dBm) | LIMIT (dBm) | MARGIN (dB) |
| 8 | 1.00 | -54.94 | -53.94 | -13.00 | -40.94 |
| 818 | 2.10 | -58.52 | -56.42 | -13.00 | -43.42 |
| 856 | 2.11 | -55.23 | -53.12 | -13.00 | -40.12 |
| 1672 | 3.81 | -53.10 | -49.29 | -13.00 | -36.29 |
| 2512 | 3.82 | -59.77 | -55.95 | -13.00 | -42.95 |
| 3346 | 4.18 | -68.03 | -63.85 | -13.00 | -50.85 |
| 4180 | 4.30 | -68.65 | -64.35 | -13.00 | -51.35 |
| 5020 | 4.35 | -70.41 | -66.06 | -13.00 | -53.06 |
| 5854 | 4.40 | -64.26 | -59.86 | -13.00 | -46.86 |
| 6694 | 4.50 | -68.36 | -63.86 | -13.00 | -50.86 |
| 7532 | 4.60 | -68.23 | -63.63 | -13.00 | -50.63 |

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB).



| | | | |
|---------------------------------|----------------------------|----------------------------|-----------|
| EUT | CDMA 2000 1X Mobile Phone | MODEL | C220 |
| MODE | TX channel 777 | POWER CONTROL LEVEL | Max. |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | DETECTOR FUNCTION | Peak |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 65%RH, 991hPa | TESTED BY | Long Chen |

| CONDUCTED SPURIOUS EMISSION | | | | | |
|-----------------------------|------------------------|-------------------|-----------------------|-------------|-------------|
| FREQUENCY (MHz) | CORRECTION FACTOR (dB) | S.A READING (dBm) | CONDUCTED LEVEL (dBm) | LIMIT (dBm) | MARGIN (dB) |
| 8 | 1.00 | -54.36 | -53.36 | -13.00 | -40.36 |
| 818 | 2.10 | -67.48 | -65.38 | -13.00 | -52.38 |
| 856 | 2.11 | -60.97 | -58.86 | -13.00 | -45.86 |
| 1696 | 3.81 | -49.88 | -46.07 | -13.00 | -33.07 |
| 2548 | 4.02 | -54.85 | -50.83 | -13.00 | -37.83 |
| 3394 | 4.19 | -70.91 | -66.72 | -13.00 | -53.72 |
| 4240 | 4.30 | -64.77 | -60.47 | -13.00 | -47.47 |
| 5092 | 4.40 | -72.96 | -68.56 | -13.00 | -55.56 |
| 5944 | 4.50 | -66.53 | -62.03 | -13.00 | -49.03 |
| 6790 | 4.41 | -68.84 | -64.43 | -13.00 | -51.43 |
| 7636 | 4.47 | -70.83 | -66.36 | -13.00 | -53.36 |

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB).



4.7 RADIATED EMISSION MEASUREMENT (BELOW 1GHz)

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 22.917, On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. At 24dBm(Power Control Level Max.) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm.

| LIMIT (dBm) | EQUIVALENT FIELD STRENGTH AT 3m (dBuV/m) (NOTE) |
|-------------|--|
| -13 | 82.22 |

NOTE: The following formula is used to convert the equipment radiated power to field strength.

$$E = [1000000\sqrt{(30P)}] / 3 \text{ uV/m, where P is the eirp (Watts)}$$



4.7.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|--------------------------------------|--------------------|--------------|------------------|
| Test Receiver ROHDE & SCHWARZ | ESIB7 | 100188 | Dec. 19, 2005 |
| Spectrum Analyzer ROHDE & SCHWARZ | FSP40 | 100039 | Nov. 21, 2005 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-157 | Jan. 22, 2006 |
| HORN Antenna SCHWARZBECK | BBHA 9120 D | 9120D-407 | Jan. 16, 2006 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | BBHA 9170241 | Feb. 23, 2006 |
| Preamplifier Agilent | 8449B | 3008A01961 | Nov. 09, 2005 |
| Preamplifier Agilent | 8447D | 2944A10629 | Nov. 09, 2005 |
| RF signal cable HUBER+SUHNER | SUCOFLEX 104 | 218182/4 | Feb. 17, 2006 |
| RF signal cable HUBER+SUHNER | SUCOFLEX 104 | 218194/4 | Feb. 17, 2006 |
| Software ADT. | ADT_Radiated_V5.14 | NA | NA |
| Antenna Tower ADT. | AT100 | AT93021702 | NA |
| Turn Table ADT. | TT100. | TT93021702 | NA |
| Controller ADT. | SC100. | SC93021702 | NA |

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 1.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The IC Site Registration No. is IC4924-2.



4.7.3 TEST PROCEDURES


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the receiving antenna, which was mounted on antenna tower and its position at 0.8 m above the ground.
- c. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading and recorded the value.
- d. Repeat step a ~ c for horizontal polarization.

- NOTE:**
1. The resolution bandwidth of spectrum analyzer is 10 kHz and the video bandwidth is 300 kHz for spurious emission below 1GHz.
 2. The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for spurious emission above 1GHz.
 3. The resolution bandwidth of spectrum analyzer is 100kHz and the video bandwidth is 100kHz for the transmitter output measurement.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

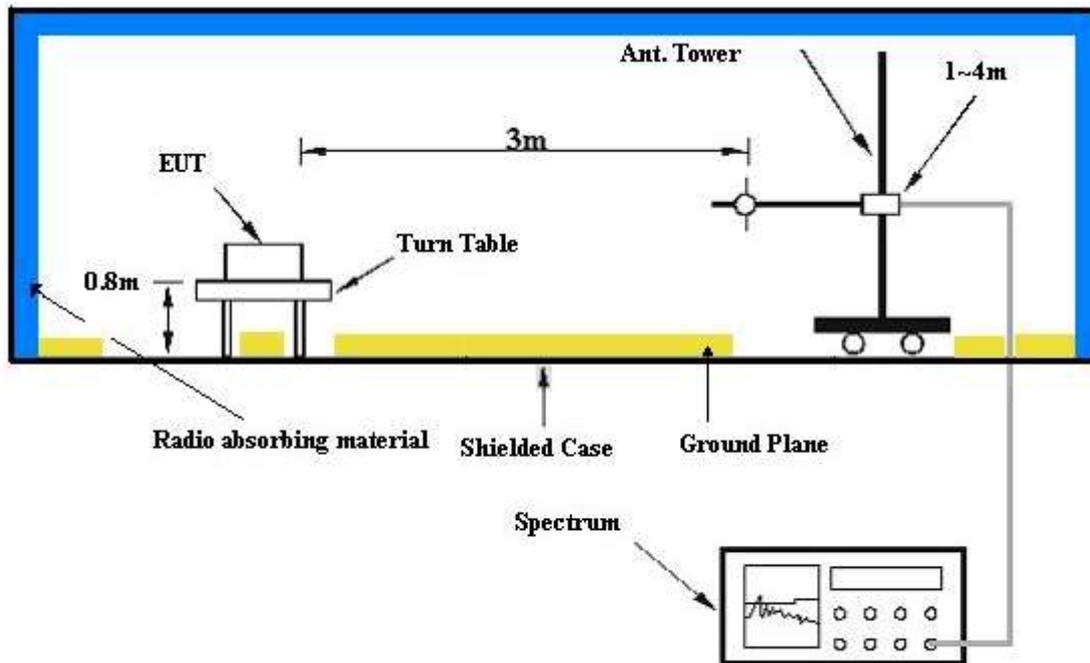

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.7.6 EUT OPERATING CONDITIONS

- a. The notebook system makes a phone call to the CDMA simulator.
- b. The CMDA simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.



4.7.7 TEST RESULTS

| | | | |
|---------------------------------|---------------------------|-----------------------------|---------------|
| EUT | CDMA 2000 1X Mobile Phone | MODEL | C220 |
| MODE | TX channel 1013 | DETECTOR FUNCTION | Quasi-Peak |
| FREQUENCY RANGE | Below 1000 MHz | INPUT POWER (SYSTEM) | 120Vac, 60 Hz |
| ENVIRONMENTAL CONDITIONS | 26deg. C, 65%RH, 991hPa | TESTED BY | Match Tsui |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|----------|---------------|-------------------------|----------------|---------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 43.61 | 24.69 QP | 82.22 | -57.53 | 1.50 H | 154 | 9.66 | 15.03 |
| 2 | 364.35 | 18.27 QP | 82.22 | -63.95 | 1.00 H | 244 | 2.47 | 15.80 |
| 3 | 757.01 | 21.37 QP | 82.22 | -60.85 | 1.50 H | 352 | -2.09 | 23.46 |
| 4 | 790.06 | 26.83 QP | 82.22 | -55.39 | 1.00 H | 79 | 3.19 | 23.64 |
| 5 | 937.80 | 23.60 QP | 82.22 | -58.62 | 1.00 H | 301 | -1.88 | 25.49 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | 43.61 | 25.20 QP | 82.22 | -57.02 | 1.00 V | 349 | 10.17 | 15.03 |
| 2 | 64.99 | 17.42 QP | 82.22 | -64.80 | 1.00 V | 118 | 4.52 | 12.90 |
| 3 | 101.92 | 18.75 QP | 82.22 | -63.47 | 1.50 V | 295 | 7.81 | 10.94 |
| 4 | 624.83 | 21.15 QP | 82.22 | -61.07 | 1.00 V | 313 | -0.09 | 21.24 |
| 5 | 757.01 | 21.61 QP | 82.22 | -60.61 | 2.00 V | 73 | -1.85 | 23.46 |
| 6 | 790.06 | 22.15 QP | 82.22 | -60.07 | 1.00 V | 151 | -1.49 | 23.64 |
| 7 | 933.91 | 24.23 QP | 82.22 | -57.99 | 1.50 V | 142 | -1.22 | 25.45 |

NOTE:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. This is valid for all 3 channels.



4.8 EFFECTIVE RADIATED POWER MEASUREMENT (ABOVE 1GHz)

4.8.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 22.917 (a), On any frequency outside a licensee's frequency block within CDMA spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB.. At 24dBm (Power Control Level Max.) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm .



4.8.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED UNTIL |
|--------------------------------------|--------------------|--------------|------------------|
| Test Receiver ROHDE & SCHWARZ | ESIB7 | 100188 | Dec. 19, 2005 |
| Spectrum Analyzer ROHDE & SCHWARZ | FSP40 | 100039 | Nov. 21, 2005 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-157 | Jan. 22, 2006 |
| HORN Antenna SCHWARZBECK | BBHA 9120 D | 9120D-407 | Jan. 16, 2006 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | BBHA 9170241 | Feb. 23, 2006 |
| Preamplifier Agilent | 8449B | 3008A01961 | Nov. 09, 2005 |
| Preamplifier Agilent | 8447D | 2944A10629 | Nov. 09, 2005 |
| RF signal cable HUBER+SUHNER | SUCOFLEX 104 | 218182/4 | Feb. 17, 2006 |
| RF signal cable HUBER+SUHNER | SUCOFLEX 104 | 218194/4 | Feb. 17, 2006 |
| Software ADT. | ADT_Radiated_V5.14 | NA | NA |
| Antenna Tower ADT. | AT100 | AT93021702 | NA |
| Turn Table ADT. | TT100. | TT93021702 | NA |
| Controller ADT. | SC100. | SC93021702 | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 1.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-2.



4.8.3 TEST PROCEDURES


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the receiving antenna, which was mounted on antenna tower and its position at 0.8 m above the ground.
- c. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading and recorded the value.
- d. The EUT is replaced by a horn antenna connected to a signal generator tuned to the frequency of emission.
- e. The signal generator level has to be adjusted to have the same emission nature.
- f. The radiated power can be calculated via the factor and antenna gain.
- g. Repeat step a ~ f for horizontal polarization.

- NOTE:**
1. The resolution bandwidth of spectrum analyzer is 10 kHz and the video bandwidth is 300 kHz for spurious emission below 1GHz.
 2. The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for spurious emission above 1GHz.
 3. The resolution bandwidth of spectrum analyzer is 100kHz and the video bandwidth is 100kHz for the transmitter output measurement.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation

4.8.5 TEST SETUP

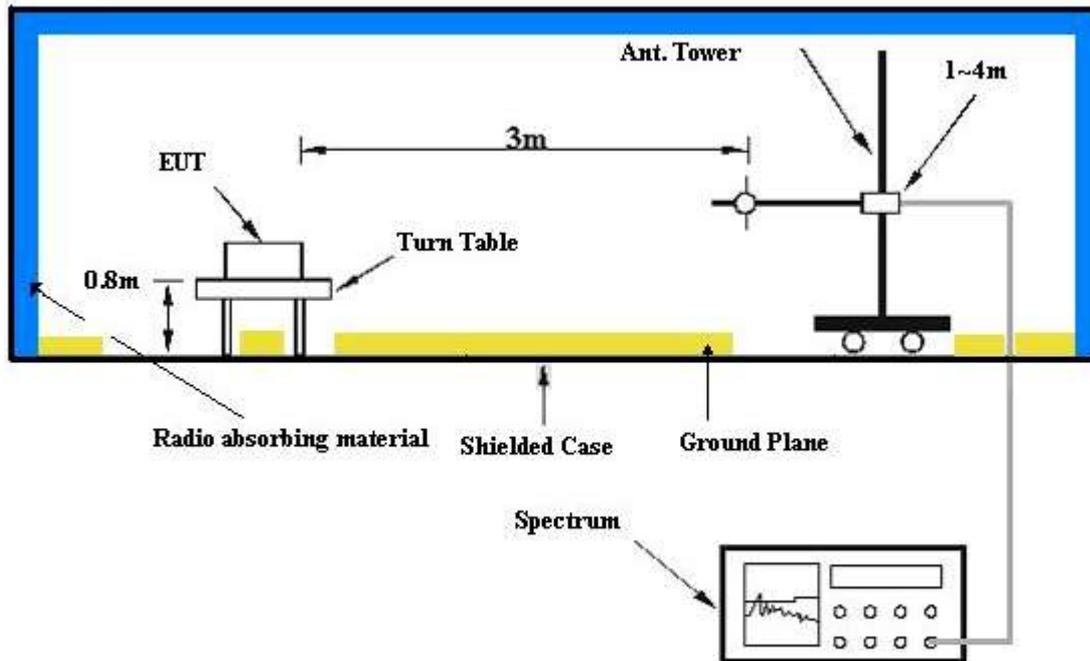

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.8.6 EUT OPERATING CONDITIONS

- The notebook system makes a phone call to the CDMA simulator.
- The CDMA simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.



4.8.7 TEST RESULTS

| | | | |
|-----------------------------|---------------------------|---------------------------------|-------------------------|
| EUT | CDMA 2000 1X Mobile Phone | MODEL | C220 |
| MODE | TX channel 1013 | FREQUENCY RANGE | Above 1000 MHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg. C, 65%RH, 991hPa |
| TESTED BY | Match Tsui | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | |
|--|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 1648.08 | 59.61 | -13.00 | -45.74 | 10.12 | -35.62 |
| 2 | 2472.12 | 50.45 | -13.00 | -56.27 | 11.49 | -44.78 |
| 3 | 3296.16 | 52.11 | -13.00 | -55.62 | 12.50 | -43.12 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | |
|--|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 1648.08 | 58.20 | -13.00 | -47.15 | 10.12 | -37.03 |
| 2 | 2472.12 | 52.91 | -13.00 | -53.81 | 11.49 | -42.32 |
| 3 | 3296.00 | 46.03 | -13.00 | -61.70 | 12.50 | -49.20 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



| | | | |
|-----------------------------|---------------------------|---------------------------------|-------------------------|
| EUT | CDMA 2000 1X Mobile Phone | MODEL | C220 |
| MODE | TX channel 384 | FREQUENCY RANGE | Above 1000 MHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg. C, 65%RH, 991hPa |
| TESTED BY | Match Tsui | | |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
|-----|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| 1 | 1673.00 | 48.39 | -13.00 | -56.96 | 10.12 | -46.84 |
| 2 | 2509.50 | 49.83 | -13.00 | -56.89 | 11.49 | -45.40 |
| 3 | 3346.00 | 43.69 | -13.00 | -64.04 | 12.50 | -51.54 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
|-----|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| 1 | 1673.00 | 56.77 | -13.00 | -48.58 | 10.12 | -38.46 |
| 2 | 2509.50 | 51.97 | -13.00 | -54.75 | 11.49 | -43.26 |
| 3 | 3346.00 | 43.31 | -13.00 | -64.42 | 12.50 | -51.92 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).



| | | | |
|-----------------------------|---------------------------|---------------------------------|-------------------------|
| EUT | CDMA 2000 1X Mobile Phone | MODEL | C220 |
| MODE | TX channel 777 | FREQUENCY RANGE | Above 1000 MHz |
| INPUT POWER (SYSTEM) | 120Vac, 60 Hz | ENVIRONMENTAL CONDITIONS | 26deg. C, 65%RH, 991hPa |
| TESTED BY | Match Tsui | | |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
|-----|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| 1 | 1696.60 | 61.19 | -13.00 | -44.21 | 10.17 | -34.04 |
| 2 | 2544.92 | 63.06 | -13.00 | -43.66 | 11.49 | -32.17 |
| 3 | 3393.25 | 49.35 | -13.00 | -58.44 | 12.56 | -45.88 |



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
|-----|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| 1 | 1696.60 | 65.92 | -13.00 | -39.48 | 10.17 | -29.31 |
| 2 | 2544.92 | 59.72 | -13.00 | -47.00 | 11.49 | -35.51 |
| 3 | 3393.25 | 48.77 | -13.00 | -59.02 | 12.56 | -46.46 |

NOTE: Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

RADIATED EMISSION TEST

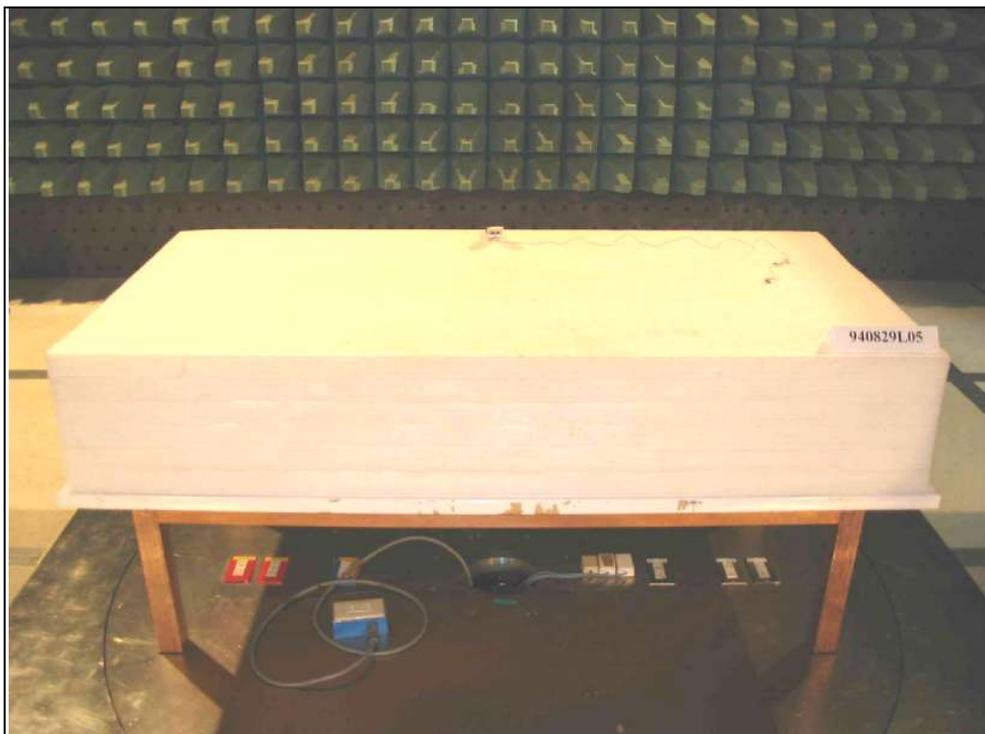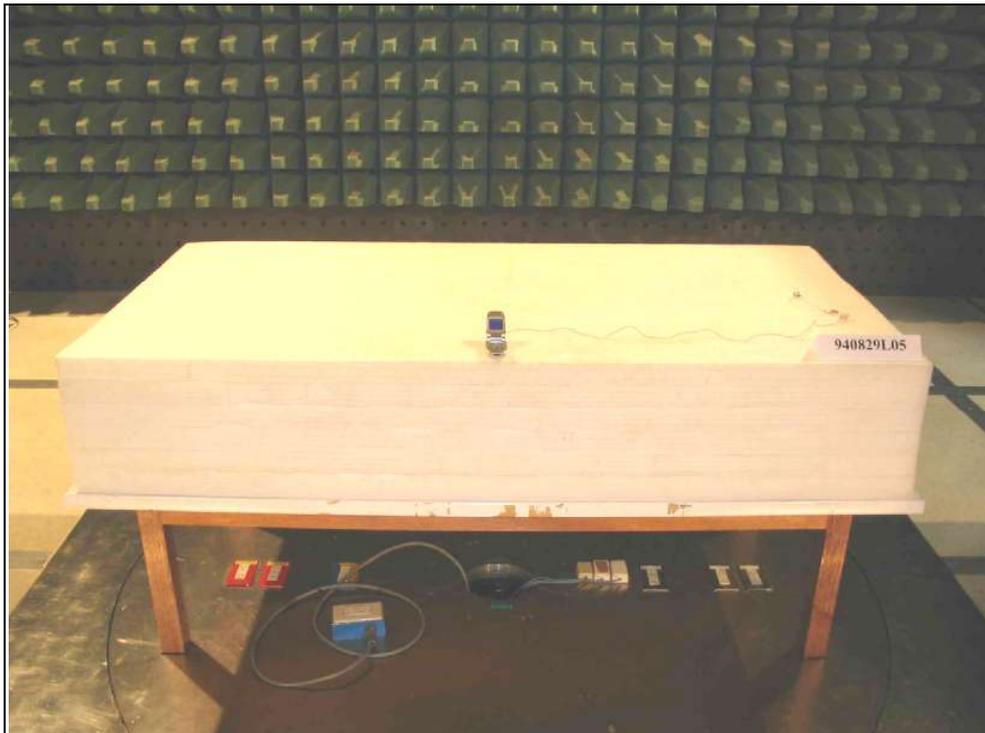



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

| | |
|--------------------|-----------------------|
| USA | FCC, NVLAP, UL, A2LA |
| GERMANY | TUV Rheinland |
| JAPAN | VCCI |
| NORWAY | NEMKO |
| CANADA | INDUSTRY CANADA , CSA |
| R.O.C. | CNLA, BSMI, DGT |
| NETHERLANDS | Telefication |
| SINGAPORE | PSB , GOST-ASIA (MOU) |
| RUSSIA | CERTIS (MOU) |

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index_5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab:

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.