

# FCC RF Test Report

**APPLICANT** : ZTE CORPORATION  
**EQUIPMENT** : CDMA 2000 1X Digital Mobile Phone  
**BRAND NAME** : ZTE  
**MODEL NAME** : ZTE C76  
**FCC ID** : Q78-C76  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : Digital Spread Spectrum (DSS)

The product was received on Sep. 09, 2010 and completely tested on Sep. 14, 2010. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Anderson Chiu / Deputy Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer..... 5

    1.3 Feature of Equipment Under Test ..... 5

    1.4 Testing Site ..... 6

    1.5 Applied Standards ..... 6

    1.6 Ancillary Equipment List ..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7**

    2.1 RF Output Power ..... 7

    2.2 Test Mode..... 8

    2.3 Connection Diagram of Test System..... 9

    2.4 RF Utility ..... 9

**3 TEST RESULT ..... 10**

    3.1 Number of Channel Measurement ..... 10

    3.2 20dB and 99% Bandwidth Measurement ..... 12

    3.3 Hopping Channel Separation Measurement ..... 25

    3.4 Dwell Time Measurement..... 28

    3.5 Peak Output Power Measurement ..... 30

    3.6 Band Edges Measurement ..... 33

    3.7 Spurious Emission Measurement..... 37

    3.8 AC Conducted Emission Measurement..... 41

    3.9 Radiated Emission Measurement..... 45

    3.10 Antenna Requirements ..... 54

**4 LIST OF MEASURING EQUIPMENT..... 55**

**5 UNCERTAINTY OF EVALUATION..... 56**

**APPENDIX A. PHOTOGRAPHS OF EUT**

**APPENDIX B. SETUP PHOTOGRAPHS**



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(1)	A8.4(2)	Number of Channels	≥ 15Chs	Pass	-
3.2	15.247(a)(1)	A8.1(a)	20dB Bandwidth	NA	Pass	-
3.2	-	Gen 4.4.1	99% Bandwidth	-	Pass	-
3.3	15.247(a)(1)	A8.1(b)	Channel Separation	≥ 2/3 of 20dB BW	Pass	-
3.4	15.247(a)(1)	A8.1(d)	Dwell Time of Each Channel	≤ 0.4sec in 31.6sec period	Pass	-
3.5	15.247(b)(1)	A8.1(b)	Peak Output Power	≤ 1W	Pass	-
3.6	15.247(d)	A8.5	Frequency Band Edges	≤ 20dBc	Pass	-
3.7	15.247(d)	A8.5	Spurious Emission	< 20 dBc	Pass	-
3.8	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 19.97 dB at 2.31 MHz
3.9	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.5 dB at 2483.51 MHz
3.10	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

# 1 General Description

## 1.1 Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.2 Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	CDMA 2000 1X Digital Mobile Phone
Brand Name	ZTE
Model Name	ZTE C76
FCC ID	Q78-C76
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Channel Spacing	1 MHz
Maximum Output Power to Antenna	Bluetooth (1Mbps) : 0.17 dBm (0.001 W) Bluetooth EDR (2Mbps) : 2.33 dBm (0.002 W) Bluetooth EDR (3Mbps) : 2.67 dBm (0.002 W)
Antenna Type	PIFA Antenna with gain 0 dBi
HW Version	c2rA
SW Version	CAPMIC76V1.0.0B02
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi$ /4-DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
EUT Stage	Identical Prototype

**Remark:**

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Spread Spectrum (DSS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 1.4 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958
<b>Test Site No.</b>	<b>Sporton Site No.</b> 03CH01-KS ; CO01-KS

### 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC Public Notice DA 00-705
- ANSI C63.4-2003
- IC RSS-210 Issue 7

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

### 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Earphone	Nokia	HS-12W	PYAHS-12W	N/A	N/A
3.	Bluetooth Base Station	Anritsu	8852B	N/A	N/A	Unshielded, 1.8 m

## 2 Test Configuration of Equipment Under Test

### 2.1 RF Output Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi$ /4-DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	-0.33 dBm	2.33 dBm	<b>2.67 dBm</b>
Ch39	2441MHz	0.17 dBm	2.04 dBm	2.35 dBm
Ch78	2480MHz	-0.95 dBm	1.74 dBm	2.04 dBm

**Remark:**

1. The data rate was set in 3Mbps for all the test items due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

## 2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).


Pre-scanned tests were conducted to determine the final configuration from all possible combinations.

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps $\pi/4$ -DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz	Mode 4: CH00_2402 MHz Mode 5: CH39_2441 MHz Mode 6: CH78_2480 MHz	Mode 7: CH00_2402 MHz Mode 8: CH39_2441 MHz Mode 9: CH78_2480 MHz
Radiated TCs	N/A	N/A	Mode 1: CH00_2402 MHz Mode 2: CH39_2441 MHz Mode 3: CH78_2480 MHz
AC Conducted Emission	Mode 1 :CDMA2000 BC0 Idle + Bluetooth Link + Adapter		
<b>Remark:</b> For radiated TCs, the data rate was set in 3Mbps due to the highest RF output power; only the data of these modes was reported.			

## 2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

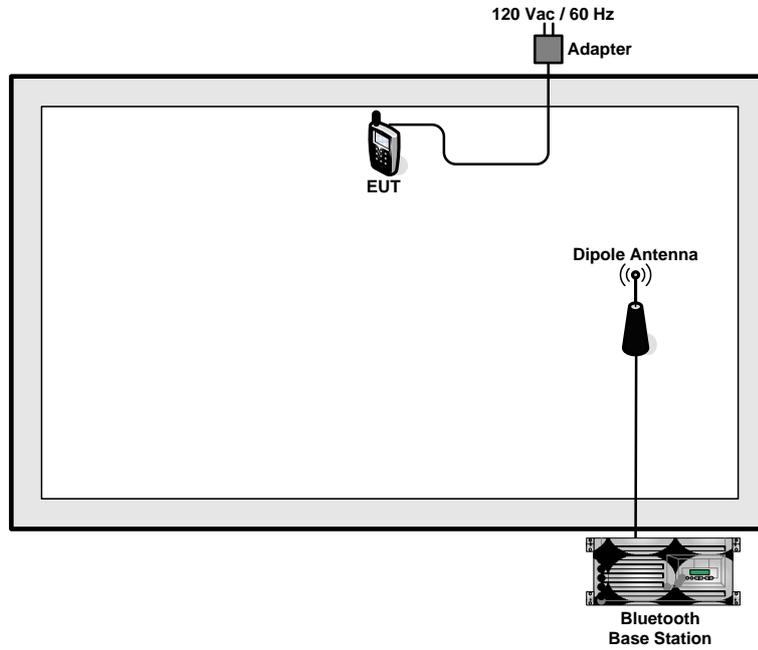

<EUT with Adapter Mode>

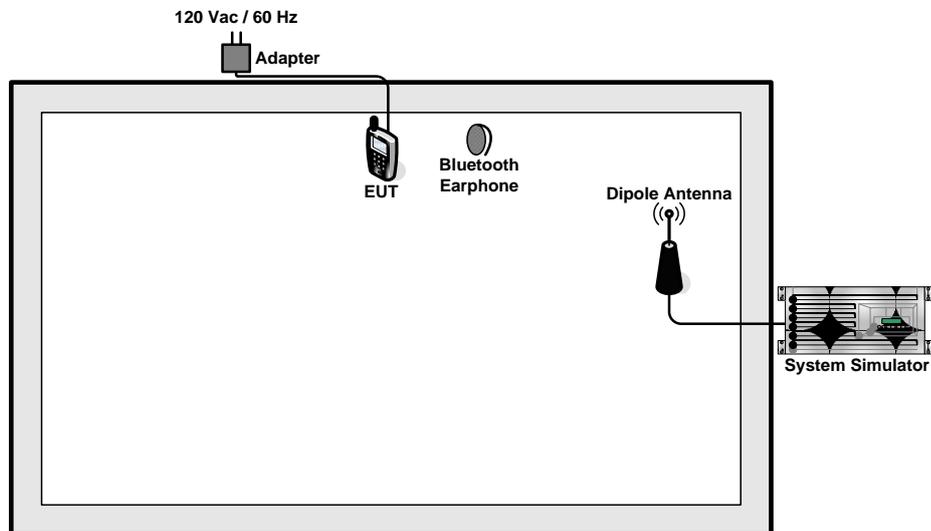

## 2.4 RF Utility

Key in “\*983\*28#” to make the EUT into the engineering modes to contact with Bluetooth base station for transmitting and receiving signals continuously.

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = the frequency band of operation;  $RBW \geq 1\%$  of the span;  $VBW \geq RBW$ ; Sweep = auto;  
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.


##### 3.1.4 Test Setup

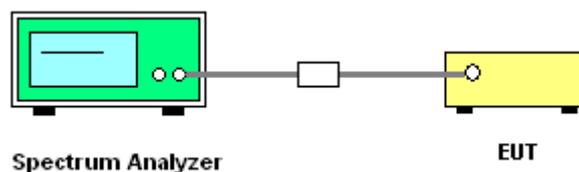

### 3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	Mode 7~9	Temperature :	22~23°C
Test Engineer :	Sky Liu	Relative Humidity :	43~44%
Number of Hopping Channels (Channel)		Limits (Channel)	
79		> 15	
		Pass/Fail	
		Pass	

Number of Hopping Channel Plot on Channel 00 - 78

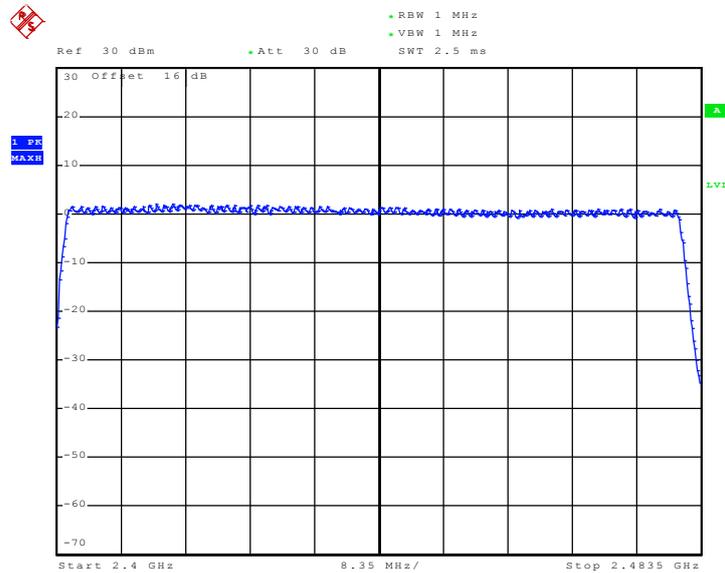

Date: 13.SEP.2010 09:17:13

## 3.2 20dB and 99% Bandwidth Measurement

### 3.2.1 Limit of 20dB Bandwidth

N/A


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

### 3.2.4 Test Setup

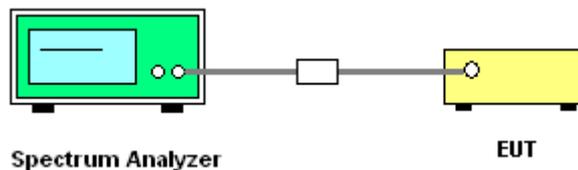


### 3.2.5 Test Result of 20dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	22~23°C
Test Engineer :	Sky Liu	Relative Humidity :	43~44%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.228
39	2441	1.240
78	2480	1.248


20 dB Bandwidth Plot on Channel 00

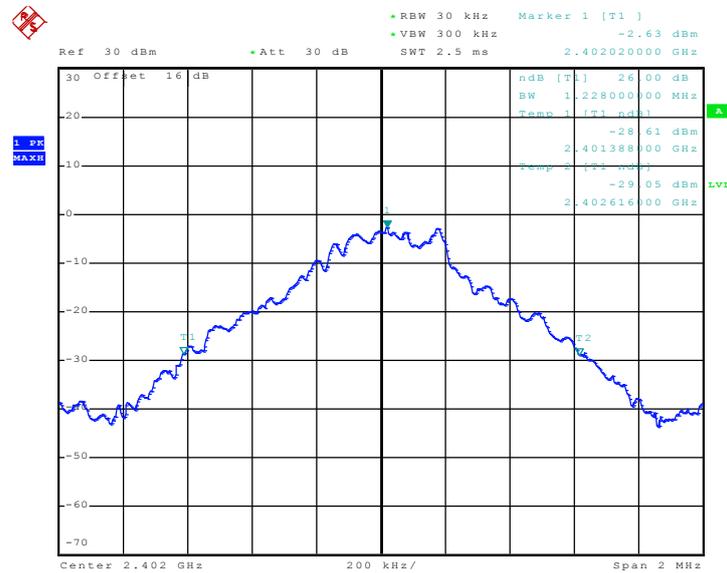

Date: 13.SEP.2010 10:02:00




### 20 dB Bandwidth Plot on Channel 39

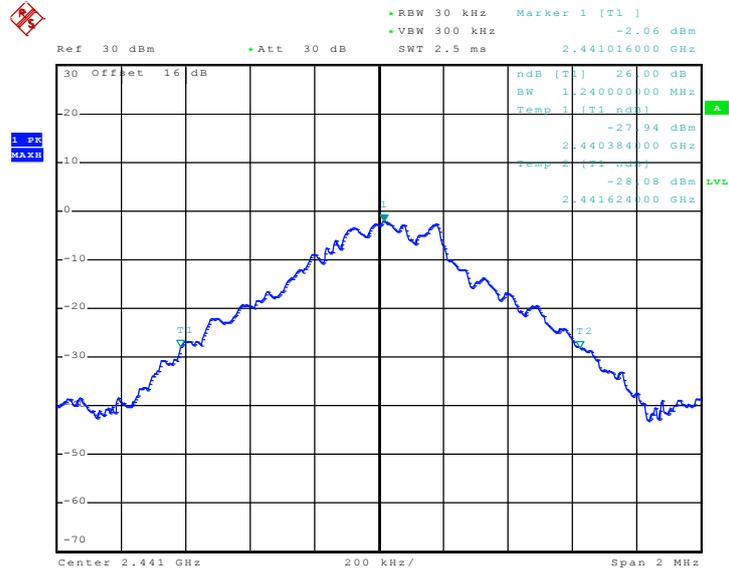

Date: 13.SEP.2010 10:02:35

### 20 dB Bandwidth Plot on Channel 78

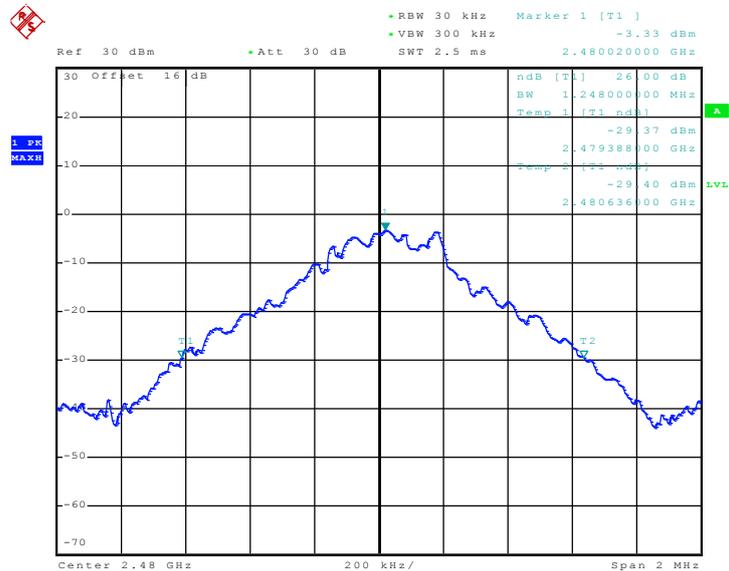


Date: 13.SEP.2010 10:03:03



Test Mode :	Mode 4, 5, 6	Temperature :	22~23°C
Test Engineer :	Sky Liu	Relative Humidity :	43~44%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.374
39	2441	1.374
78	2480	1.374


20 dB Bandwidth Plot on Channel 00

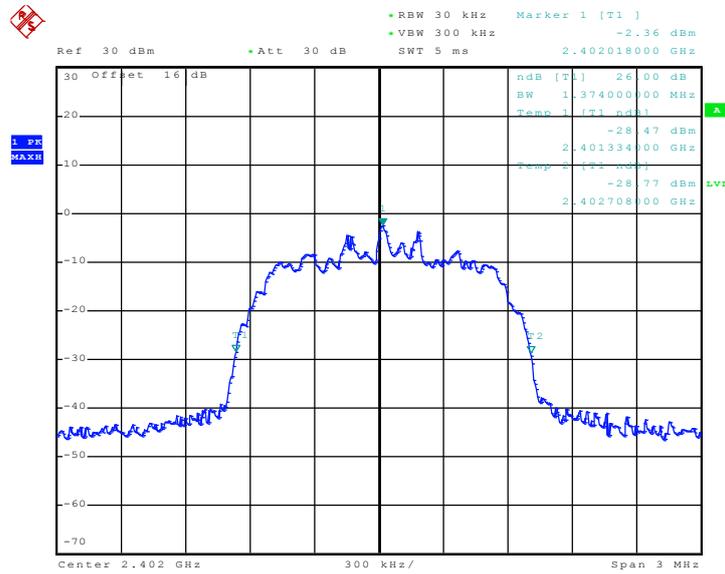

Date: 13.SEP.2010 10:00:24




20 dB Bandwidth Plot on Channel 39

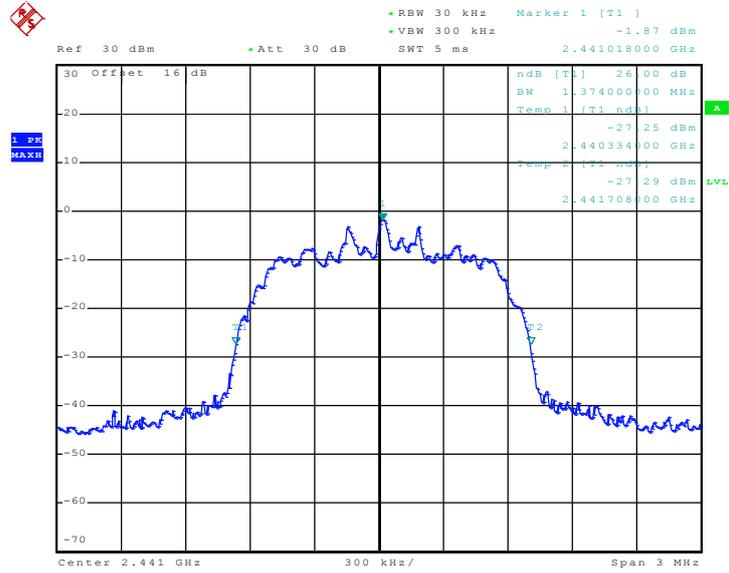

Date: 13.SEP.2010 10:00:53

20 dB Bandwidth Plot on Channel 78

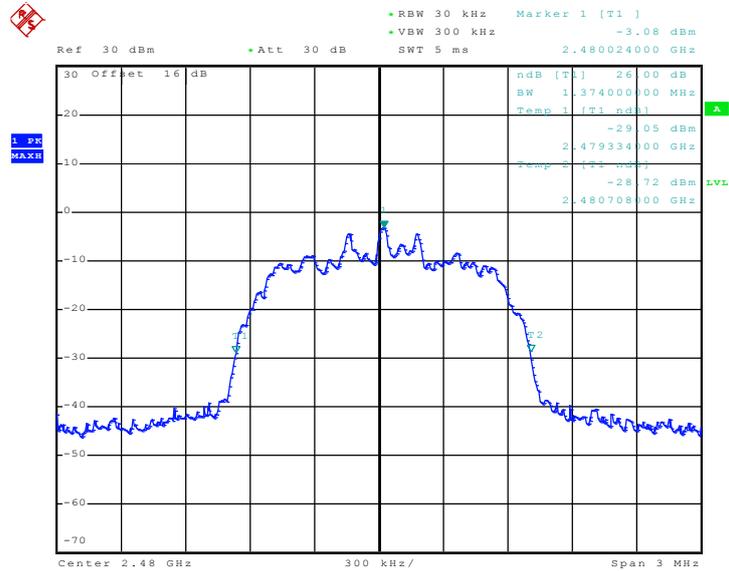


Date: 13.SEP.2010 10:01:24



Test Mode :	Mode 7, 8, 9	Temperature :	22~23°C
Test Engineer :	Sky Liu	Relative Humidity :	43~44%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.368
39	2441	1.368
78	2480	1.368


20 dB Bandwidth Plot on Channel 00

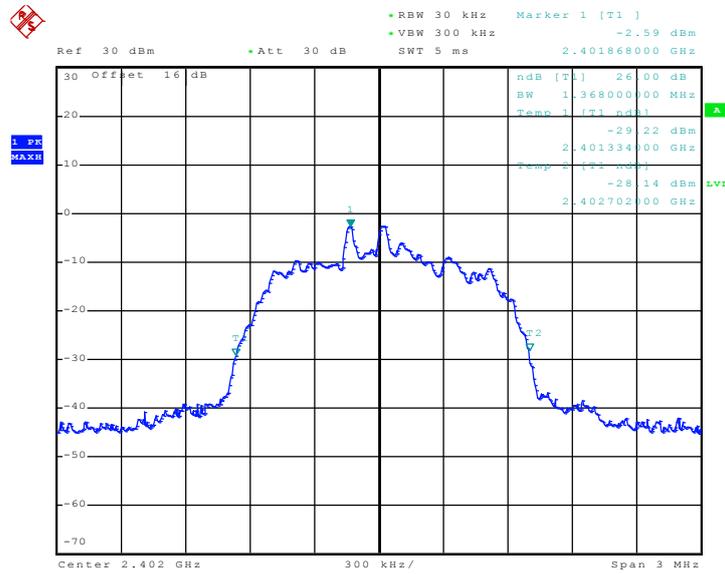

Date: 13.SEP.2010 09:59:04




20 dB Bandwidth Plot on Channel 39

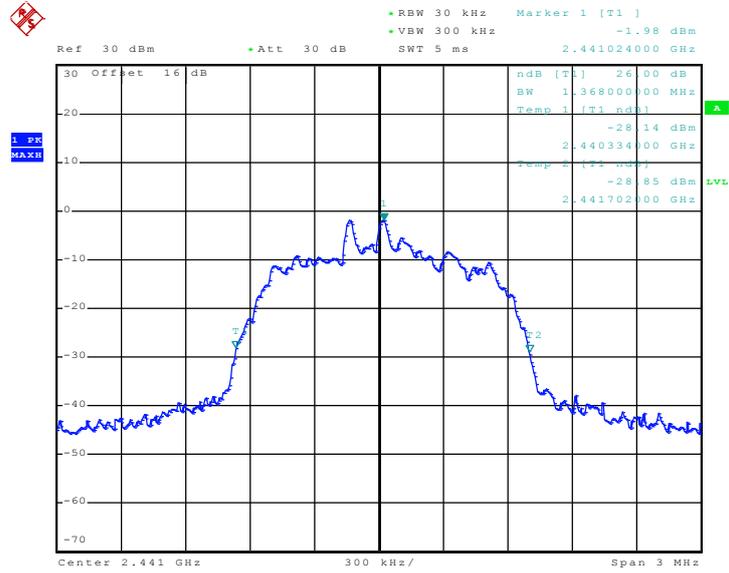

Date: 13.SEP.2010 09:59:28

20 dB Bandwidth Plot on Channel 78

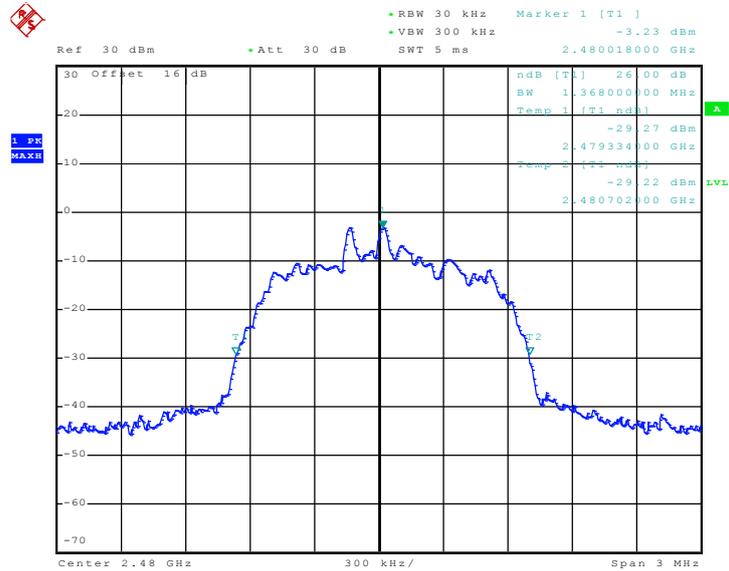

Date: 13.SEP.2010 09:59:55




3.2.6 Test Result of 99% Occupied Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	22~23°C
Test Engineer :	Sky Liu	Relative Humidity :	43~44%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	0.918
39	2441	0.918
78	2480	0.918


99% Bandwidth Plot on Channel 00

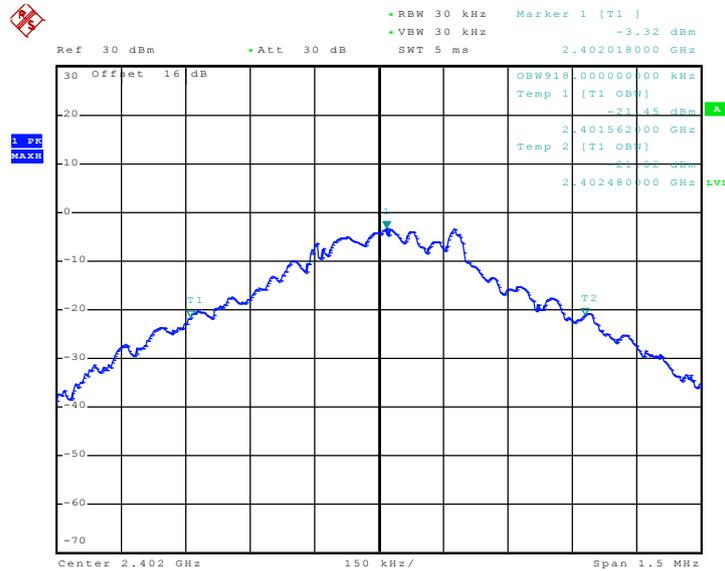

Date: 13.SEP.2010 09:48:12




99% Occupied Bandwidth Plot on Channel 39

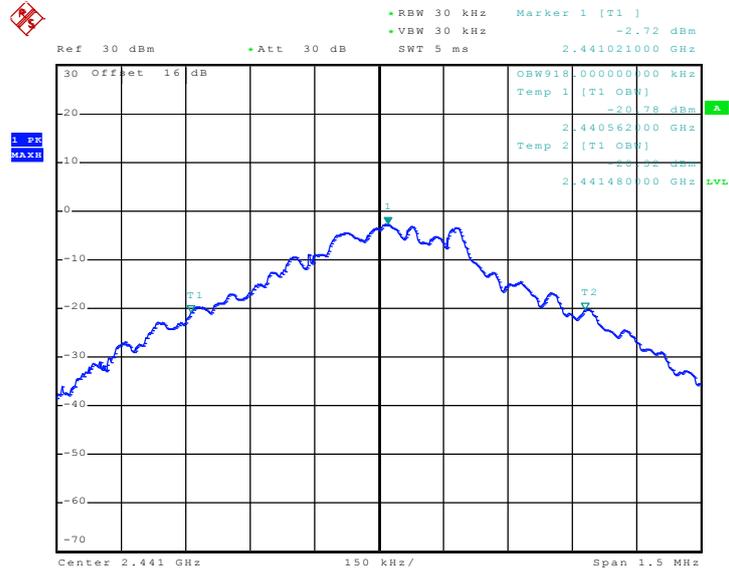

Date: 13.SEP.2010 09:48:32

99% Occupied Bandwidth Plot on Channel 78

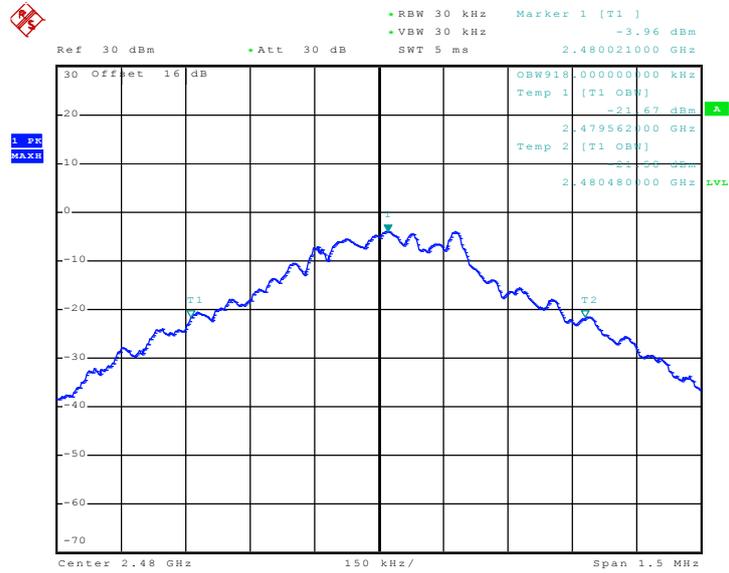


Date: 13.SEP.2010 09:48:57



Test Mode :	Mode 4, 5, 6	Temperature :	22~23°C
Test Engineer :	Sky Liu	Relative Humidity :	43~44%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.180
39	2441	1.180
78	2480	1.180


99% Bandwidth Plot on Channel 00

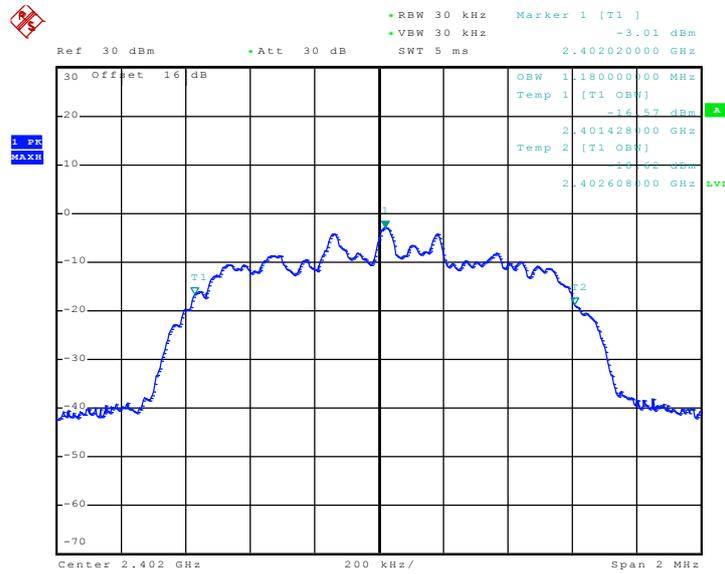

Date: 13.SEP.2010 09:52:54




99% Occupied Bandwidth Plot on Channel 39

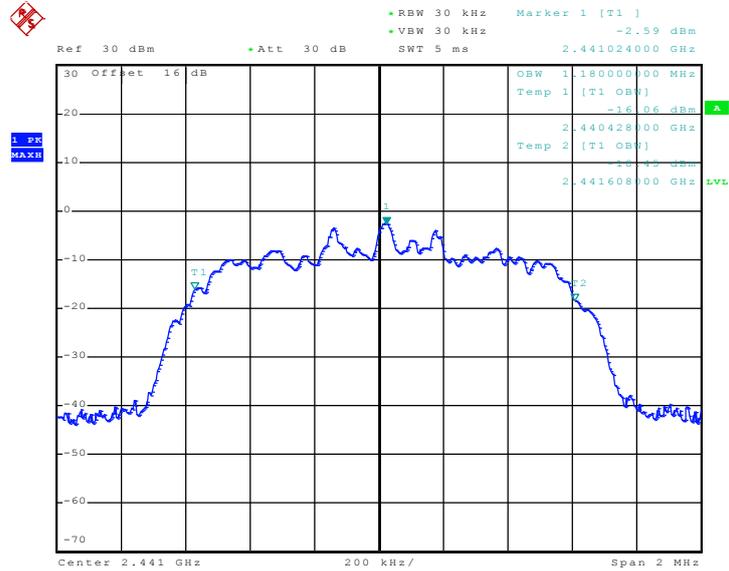

Date: 13.SEP.2010 09:53:21

99% Occupied Bandwidth Plot on Channel 78

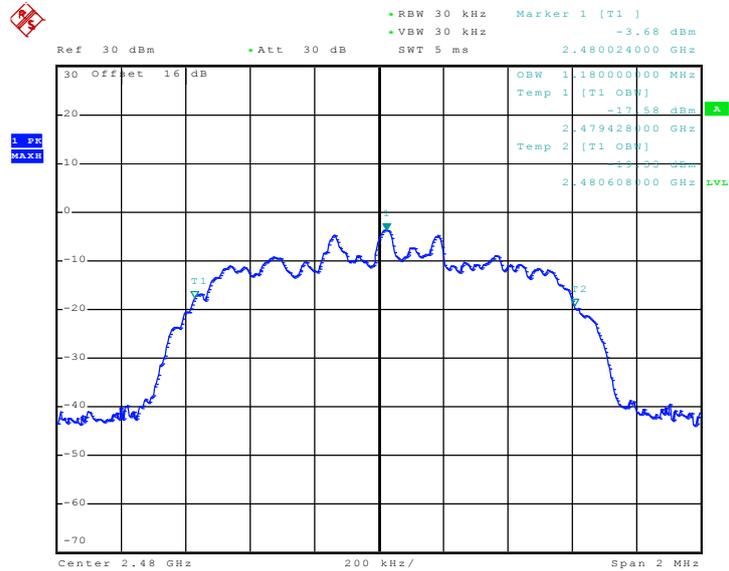


Date: 13.SEP.2010 09:53:57



Test Mode :	Mode 7, 8, 9	Temperature :	22~23°C
Test Engineer :	Sky Liu	Relative Humidity :	43~44%

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
00	2402	1.168
39	2441	1.168
78	2480	1.168

99% Bandwidth Plot on Channel 00

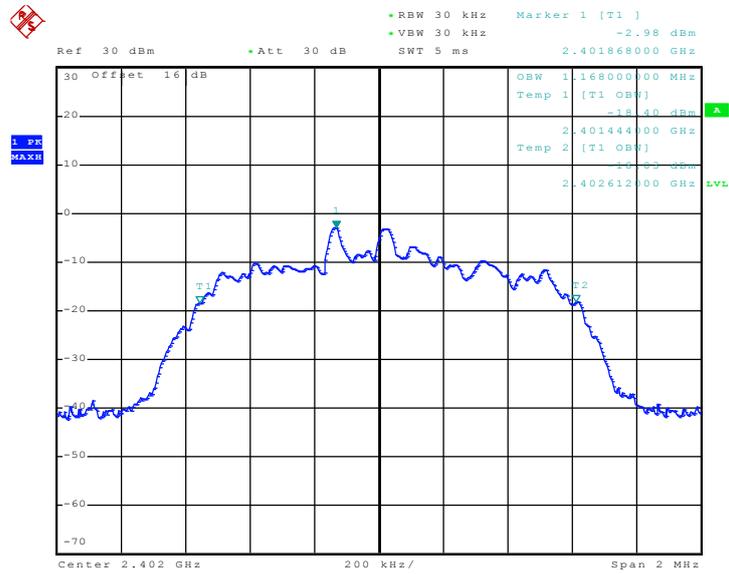

Date: 13.SEP.2010 09:55:13



### 3.3 Hopping Channel Separation Measurement

#### 3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels; RBW  $\geq$  1% of the span;  
VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

#### 3.3.4 Test Setup

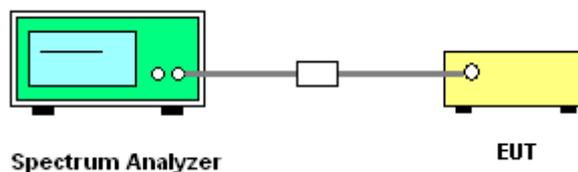




3.3.5 Test Result of Hopping Channel Separation

Test Mode :	Mode 7, 8, 9	Temperature :	22~23°C
Test Engineer :	Sky Liu	Relative Humidity :	43~44%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.002	0.912	Pass
39	2441	1.002	0.912	Pass
78	2480	1.002	0.912	Pass


Channel Separation Plot on Channel 00 - 01

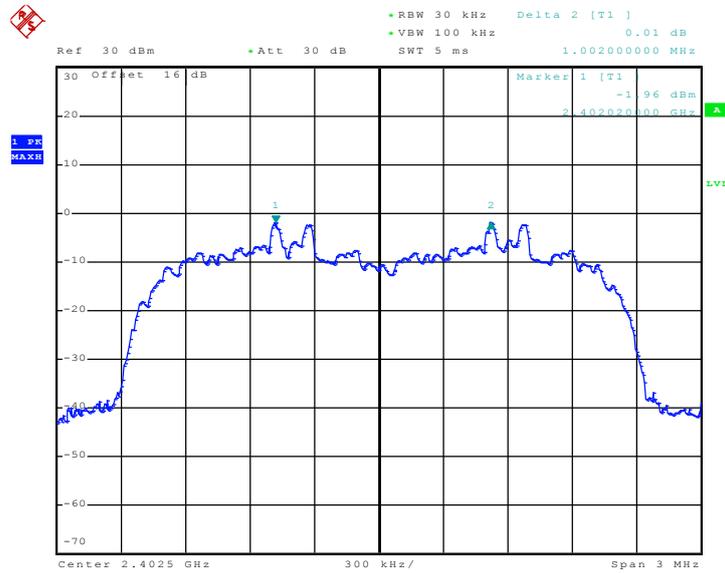

Date: 13.SEP.2010 09:12:46




Channel Separation Plot on Channel 39 - 40

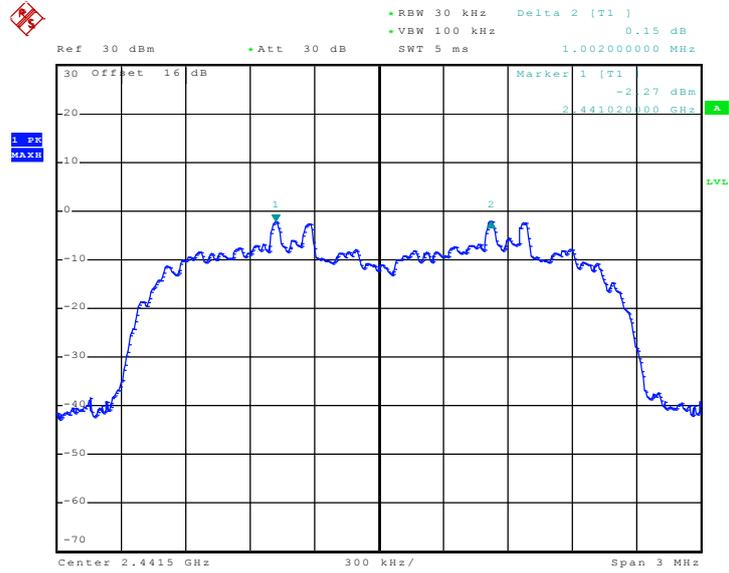

Date: 13.SEP.2010 09:14:04

Channel Separation Plot on Channel 77 - 78

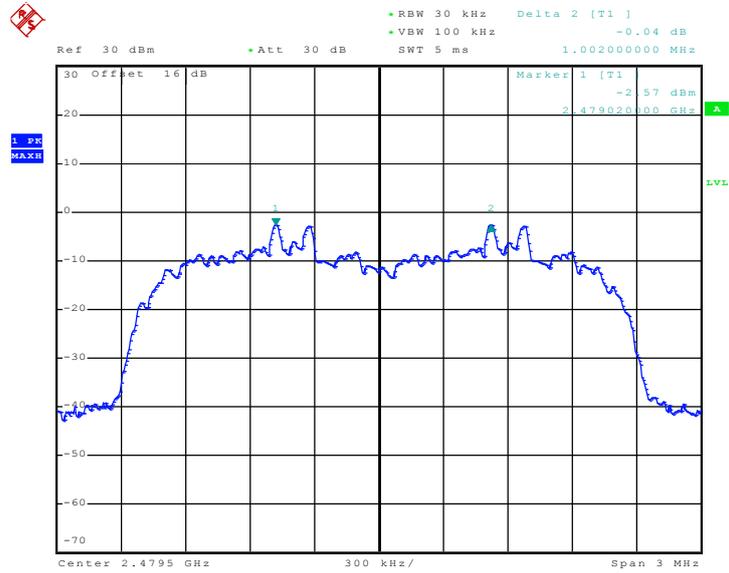

Date: 13.SEP.2010 09:15:33

### 3.4 Dwell Time Measurement

#### 3.4.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:  
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

#### 3.4.4 Test Setup

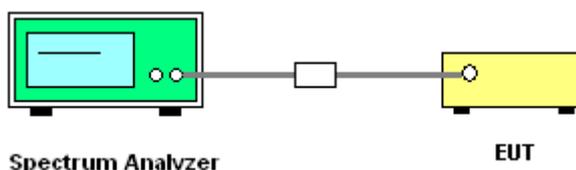

#### 3.4.5 Test Result of Dwell Time

Test Mode :	Mode 8	Temperature :	22~23°C
Test Engineer :	Sky Liu	Relative Humidity :	43~44%


Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
3DH5	2.90	2980.00	0.27	0.4	Pass

**Remark:**

1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)




### 3DH5 Dwell Time (One Pulse) Plot on Channel 39

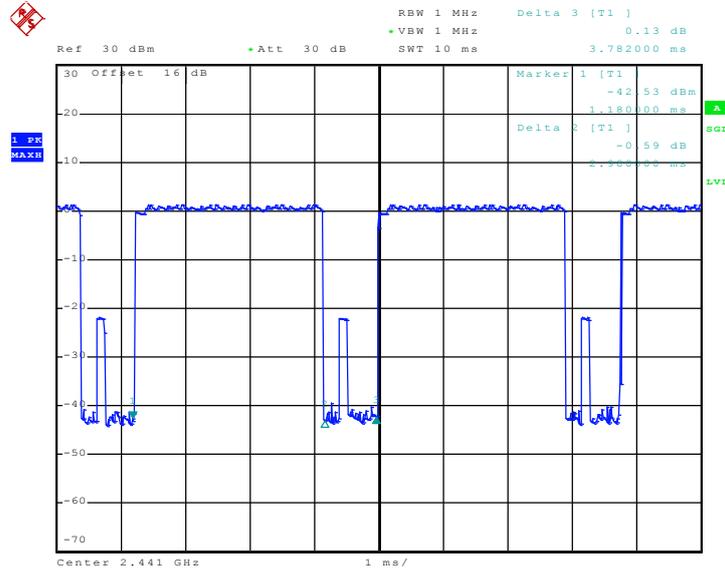

Date: 13.SEP.2010 09:07:55

### 3DH5 Dwell Time (Count Pulses) Plot on Channel 39

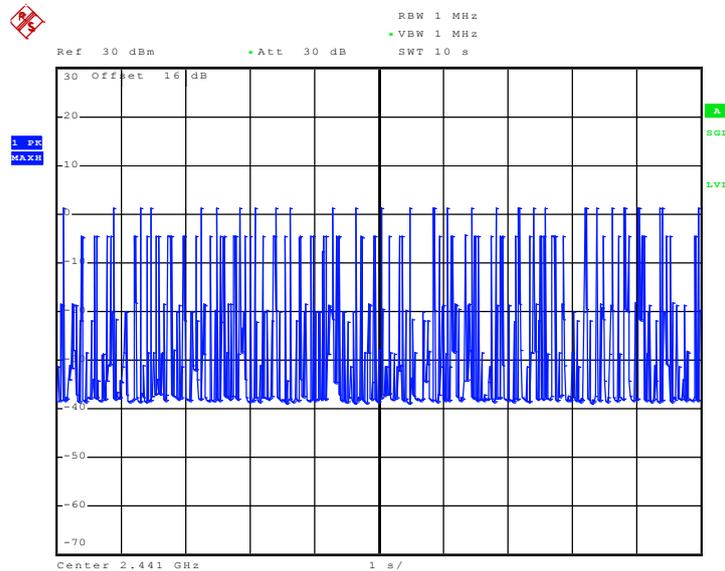

Date: 13.SEP.2010 09:09:37

### 3.5 Peak Output Power Measurement

#### 3.5.1 Limit of Peak Output Power

Frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1W (30 dBm).


#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.

#### 3.5.4 Test Setup

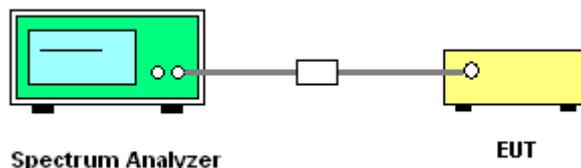


#### 3.5.5 Test Result of Peak Output Power

<b>Test Mode :</b>	Mode 7, 8, 9	<b>Temperature :</b>	22~23°C
<b>Test Engineer :</b>	Sky Liu	<b>Relative Humidity :</b>	43~44%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	2.67	30	Pass
39	2441	2.35	30	Pass
78	2480	2.04	30	Pass




Peak Output Power Plot on Channel 00

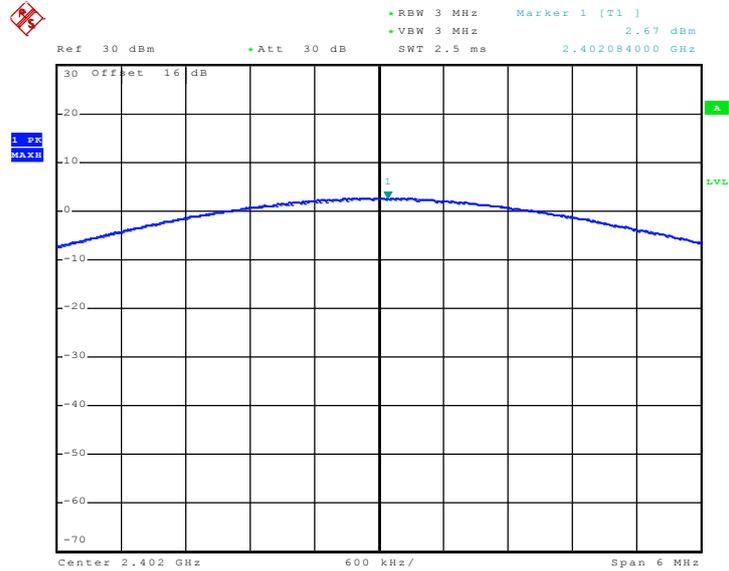

Date: 13.SEP.2010 08:49:25


Peak Output Power Plot on Channel 39

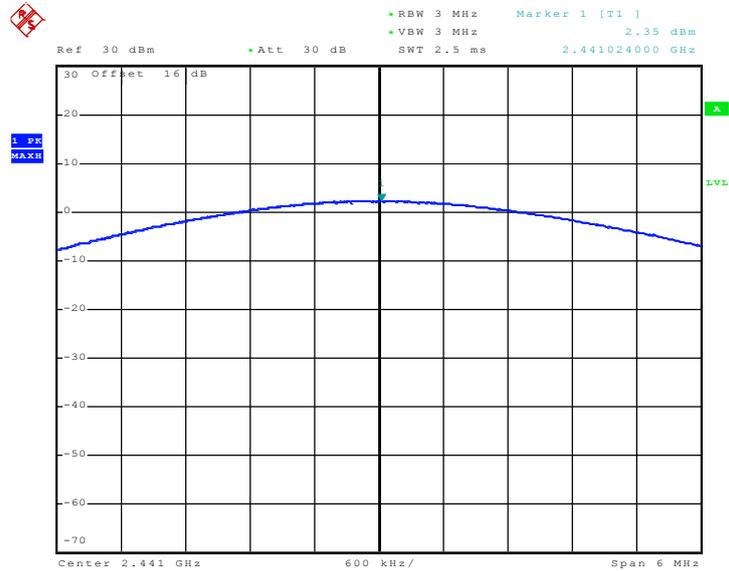

Date: 13.SEP.2010 08:49:53



Peak Output Power Plot on Channel 78

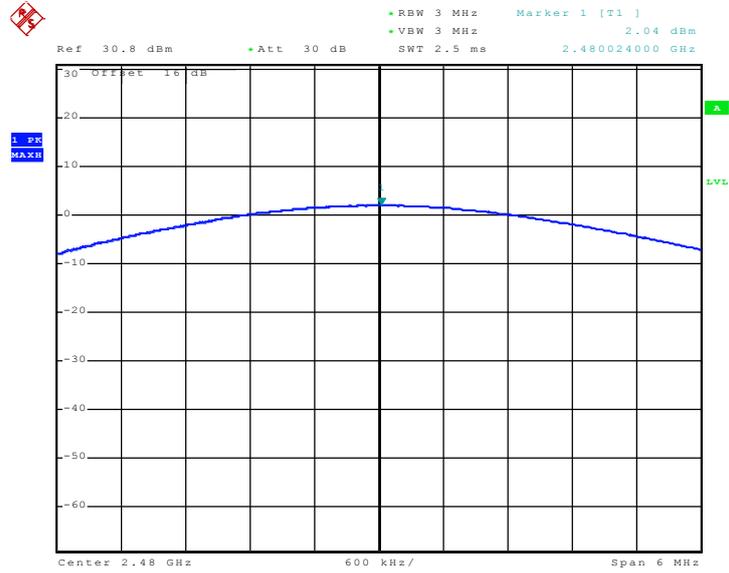

Date: 13.SEP.2010 08:45:01



## **3.6 Band Edges Measurement**

### **3.6.1 Limit of Band Edges**

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.

### **3.6.2 Measuring Instruments**


See list of measuring instruments of this test report.

### **3.6.3 Test Procedures**


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 300kHz, Video bandwidth (VBW)  $\geq$  RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 300k Hz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 1MHz, Sweep: Auto for Peak; set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto for Average. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).
4. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

### 3.6.4 Test Setup

#### <Radiated Band Edges>

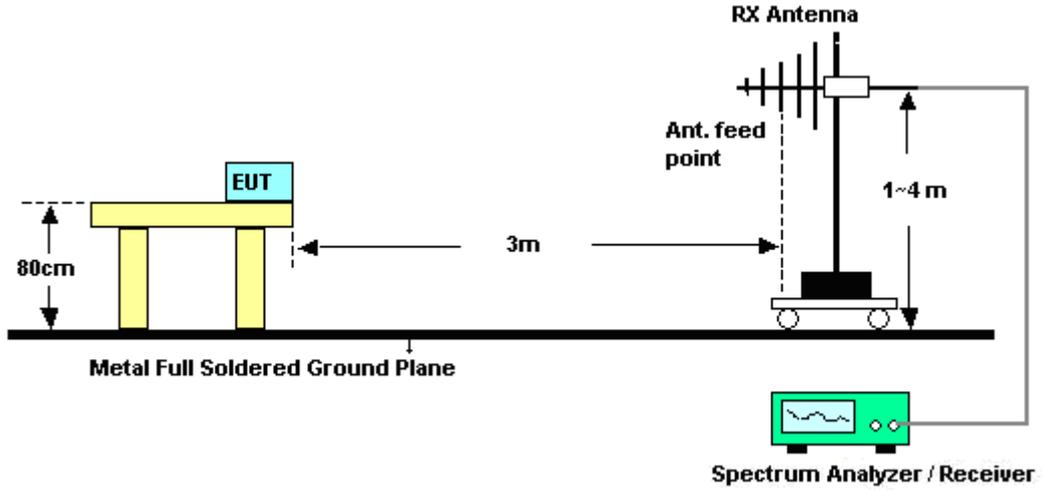

#### <Conducted Band Edges>

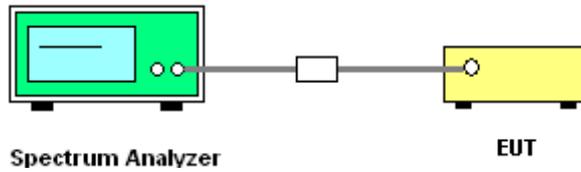



3.6.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	23~24°C
Test Channel :	00	Relative Humidity :	43~44%
		Test Engineer :	Ritchie Ran

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2355.41	46.01	-27.99	74	45.04	32.81	3.12	34.96	148	230	Peak
2355.41	32.5	-21.5	54	31.53	32.81	3.12	34.96	148	230	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2335.65	45.93	-28.07	74	44.98	32.78	3.1	34.93	150	148	Peak
2335.65	31.93	-22.07	54	30.98	32.78	3.1	34.93	150	148	Average

Test Mode :	Mode 3	Temperature :	23~24°C
Test Channel :	78	Relative Humidity :	43~44%
		Test Engineer :	Ritchie Ran


ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.51	62.15	-11.85	74	60.88	33.01	3.2	34.94	164	338	Peak
2483.51	52.5	-1.5	54	51.23	33.01	3.2	34.94	164	338	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.51	59.67	-14.33	74	58.4	33.01	3.2	34.94	122	264	Peak
2483.51	50.98	-3.02	54	49.71	33.01	3.2	34.94	122	264	Average

### 3.6.6 Test Result of Conducted Band Edges


Test Mode :	Mode 7 and 9	Temperature :	22~23°C
Test Channel :	00 and 78	Relative Humidity :	43~44%
		Test Engineer :	Sky Liu

Low Band Edge Plot on Channel 00

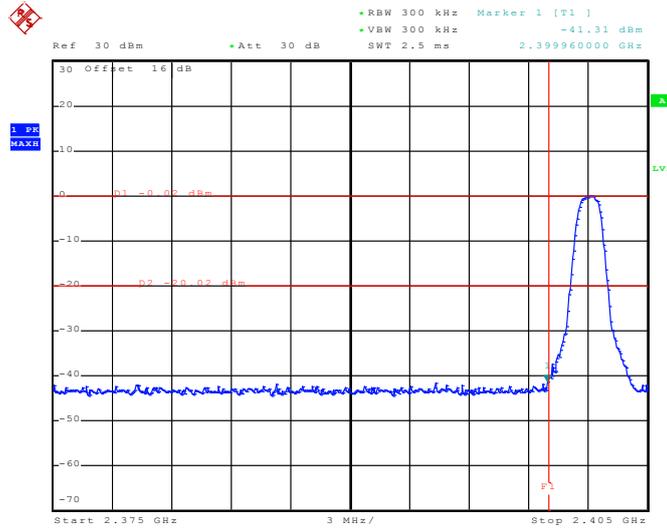

Date: 13.SEP.2010 09:19:14

High Band Edge Plot on Channel 78

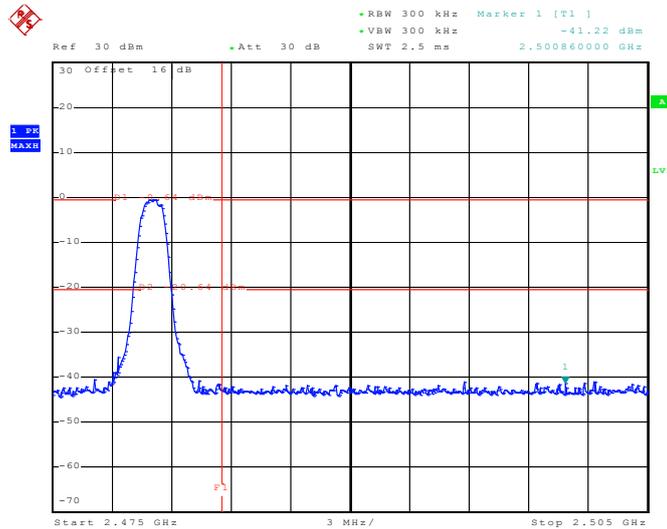

Date: 13.SEP.2010 09:21:49

## 3.7 Spurious Emission Measurement

### 3.7.1 Limit of Spurious Emission Measurement

All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band.


### 3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.7.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW)  $\geq$  RBW, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

### 3.7.4 Test Setup

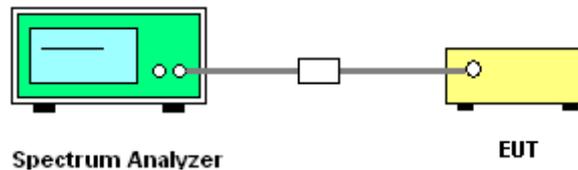




3.7.5 Test Result


Test Mode :	Mode 7	Temperature :	22~23°C
Test Channel :	00	Relative Humidity :	43~44%
		Test Engineer :	Sky Liu

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

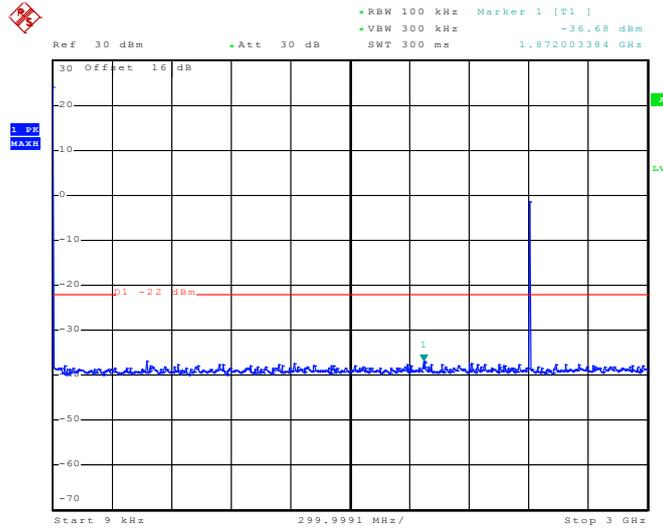

Date: 13.SEP.2010 09:30:40

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

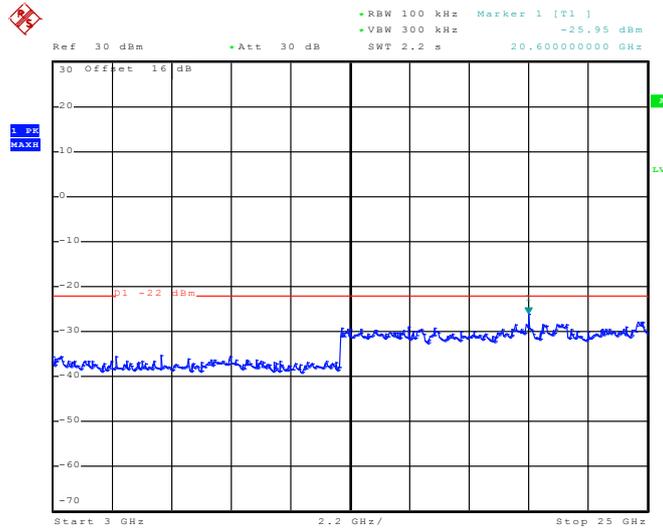


Date: 13.SEP.2010 09:31:18




Test Mode :	Mode 8	Temperature :	22~23°C
Test Channel :	39	Relative Humidity :	43~44%
		Test Engineer :	Sky Liu

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

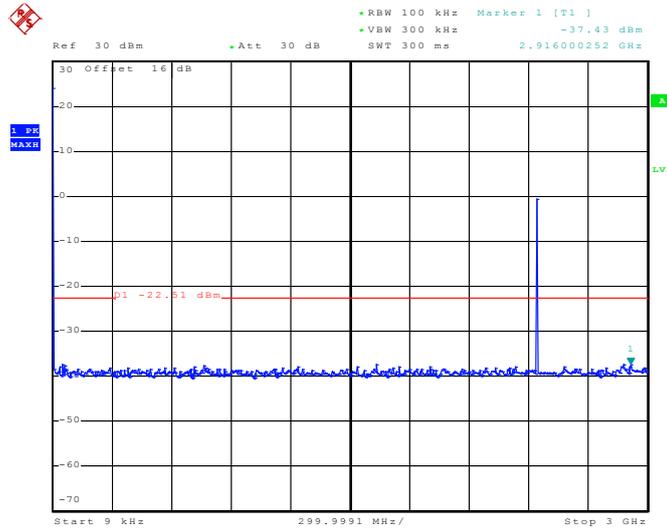

Date: 13.SEP.2010 09:32:12

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

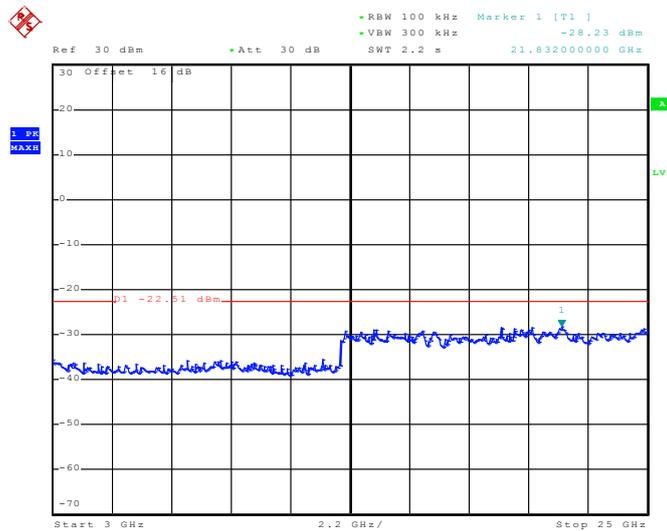


Date: 13.SEP.2010 09:32:36




Test Mode :	Mode 9	Temperature :	22~23°C
Test Channel :	78	Relative Humidity :	43~44%
		Test Engineer :	Sky Liu

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

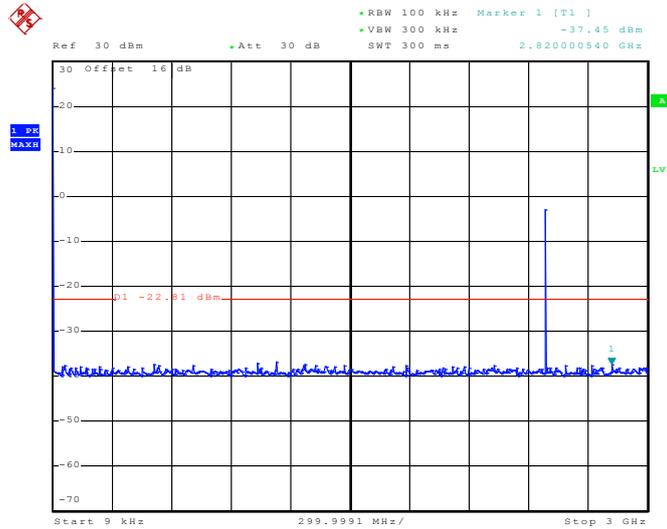

Date: 13.SEP.2010 09:33:50

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

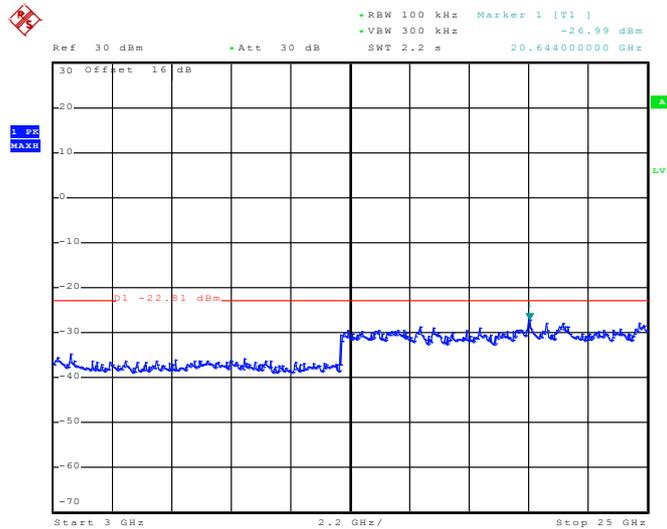

Date: 13.SEP.2010 09:34:14

## 3.8 AC Conducted Emission Measurement

### 3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.8.3 Test Procedures

1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


### 3.8.4 Test Setup

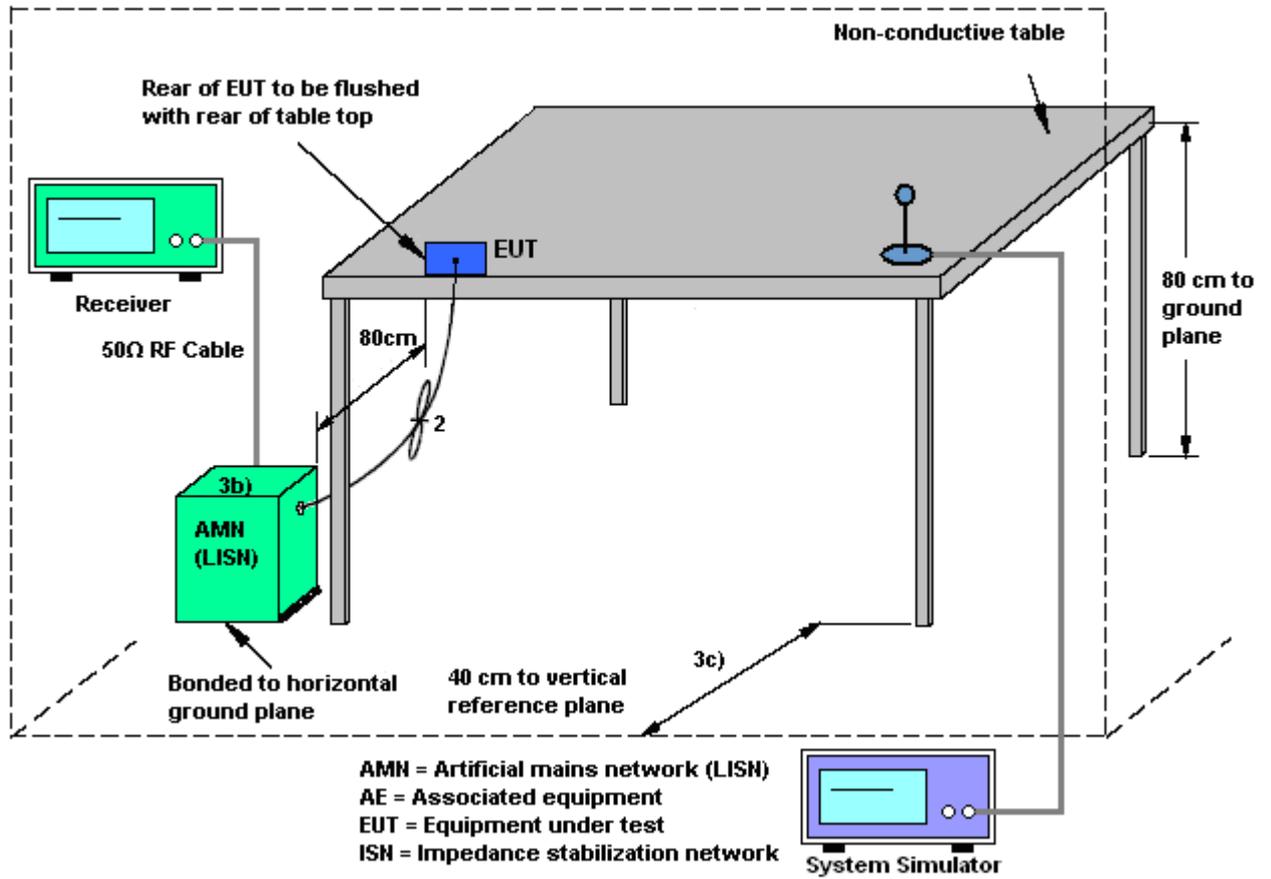



3.8.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~23°C
Test Engineer :	Lewis Lu	Relative Humidity :	44~45%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	CDMA2000 BC0 Idle + Bluetooth Link + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

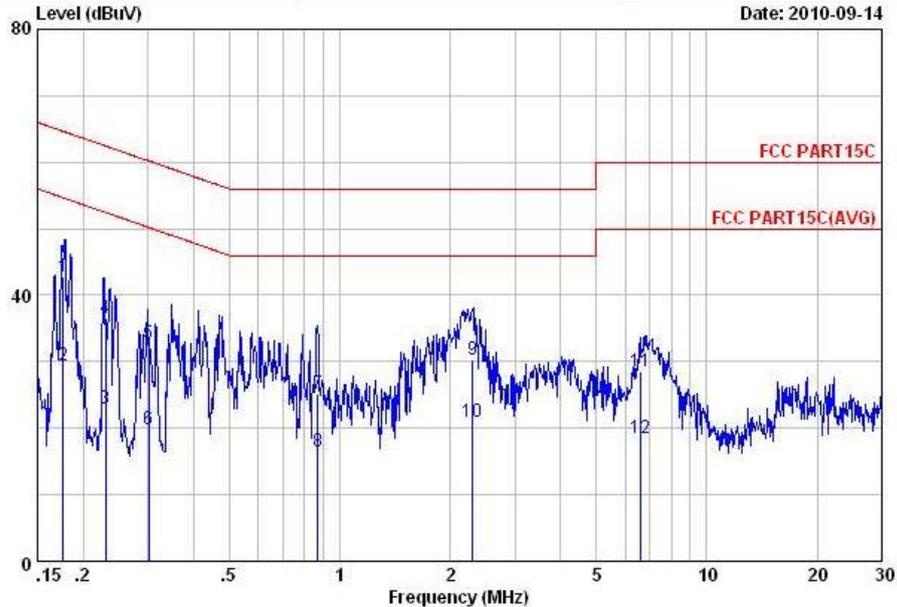


Site : C001-KS  
 Condition: FCC PART15C LISN-100807 LINE

mode : mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.18	42.68	-21.99	64.67	32.60	-0.07	10.15	QP
2	0.18	29.38	-25.29	54.67	19.30	-0.07	10.15	Average
3	0.23	22.99	-29.46	52.45	12.90	-0.07	10.16	Average
4	0.23	36.49	-25.96	62.45	26.40	-0.07	10.16	QP
5	0.30	32.80	-27.41	60.21	22.70	-0.07	10.17	QP
6	0.30	19.80	-30.41	50.21	9.70	-0.07	10.17	Average
7	0.87	25.25	-30.75	56.00	15.10	-0.10	10.25	QP
8	0.87	16.45	-29.55	46.00	6.30	-0.10	10.25	Average
9	2.30	30.33	-25.67	56.00	20.10	-0.11	10.34	QP
10	2.30	21.03	-24.97	46.00	10.80	-0.11	10.34	Average
11	6.63	28.59	-31.41	60.00	18.30	-0.13	10.42	QP
12	6.63	18.39	-31.61	50.00	8.10	-0.13	10.42	Average



Test Mode :	Mode 1	Temperature :	22~23°C
Test Engineer :	Lewis Lu	Relative Humidity :	44~45%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	CDMA2000 BC0 Idle + Bluetooth Link + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

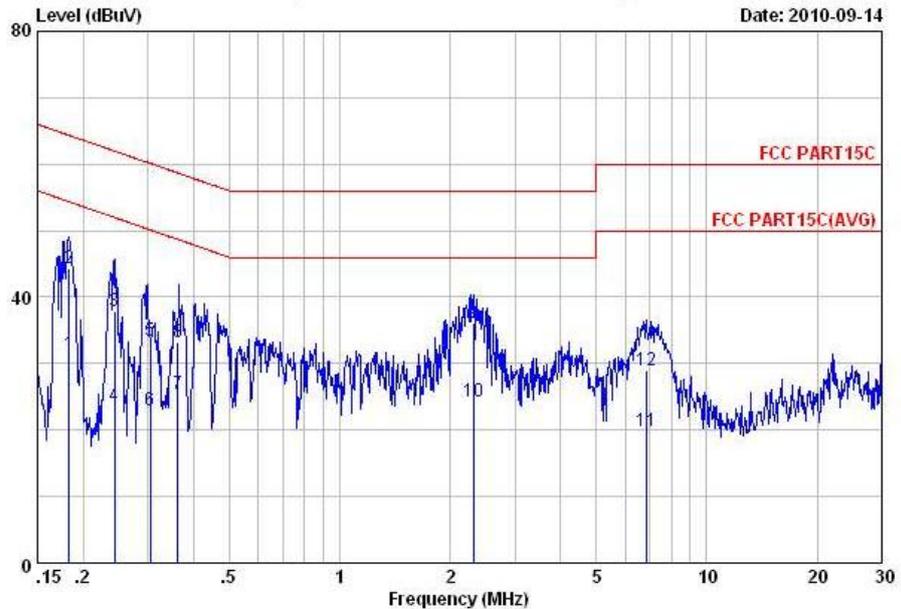

Site : C001-KS  
 Condition: FCC PART15C LISN-100807 NEUTRAL

mode : mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.18	31.37	-22.98	54.35	21.30	-0.08	10.15	Average
2	0.18	44.27	-20.08	64.35	34.20	-0.08	10.15	QP
3	0.24	37.99	-24.00	61.99	27.90	-0.07	10.16	QP
4	0.24	23.69	-28.30	51.99	13.60	-0.07	10.16	Average
5	0.30	33.50	-26.63	60.13	23.40	-0.07	10.17	QP
6	0.30	22.90	-27.23	50.13	12.80	-0.07	10.17	Average
7	0.36	25.31	-23.39	48.70	15.21	-0.08	10.18	Average
8	0.36	33.31	-25.39	58.70	23.21	-0.08	10.18	QP
9	2.31	36.03	-19.97	56.00	25.80	-0.11	10.34	QP
10	2.31	24.33	-21.67	46.00	14.10	-0.11	10.34	Average
11	6.84	19.79	-30.21	50.00	9.50	-0.13	10.42	Average
12	6.84	28.89	-31.11	60.00	18.60	-0.13	10.42	QP

## 3.9 Radiated Emission Measurement

### 3.9.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.9.2 Measuring Instruments


See list of measuring instruments of this test report.

### 3.9.3 Test Procedures


1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. Use the following spectrum analyzer settings:
  - (1) Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
  - (2) Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.  
Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$  (dB)
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

### 3.9.4 Test Setup

For radiated emissions below 30MHz

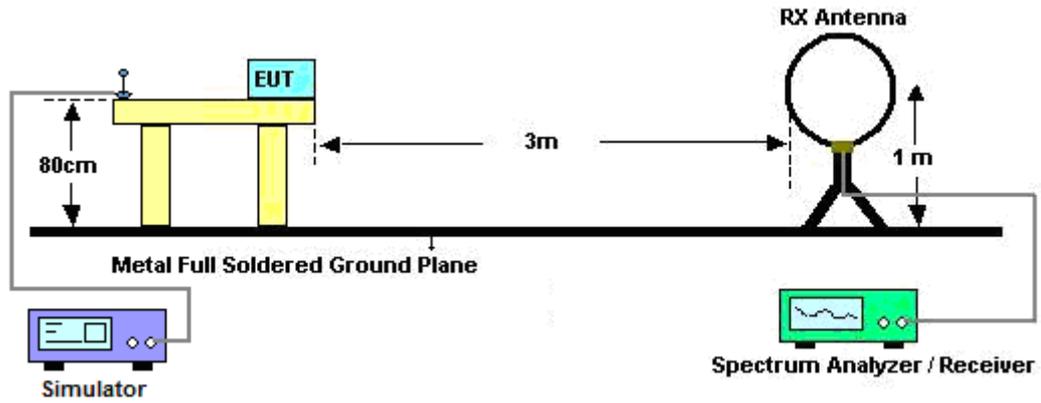

For radiated emissions above 30MHz

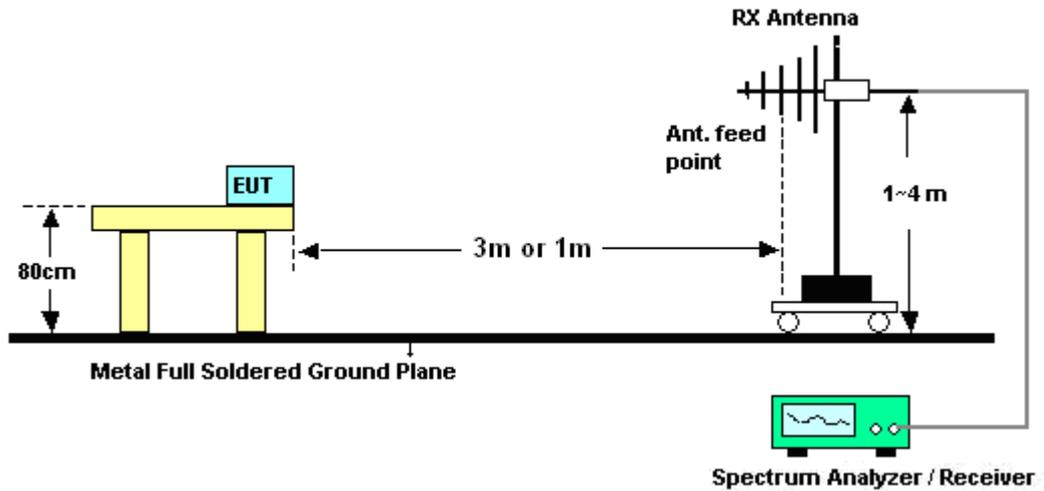



3.9.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Ritchie Ran	Temperature :	23~24°C	
		Relative Humidity :	43~44%	
Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.



3.9.6 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)

Test Mode :	Mode 1	Temperature :	23~24°C
Test Channel :	00	Relative Humidity :	43~44%
Test Engineer :	Ritchie Ran	Polarization :	Horizontal
Remark :	2402 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	21.1	-18.9	40	32.12	18	0.25	29.27	150	351	Peak
108.84	16.16	-27.34	43.5	33.2	11.68	0.45	29.17	-	-	Peak
230.61	16.44	-29.56	46	34.33	10.97	0.7	29.56	-	-	Peak
483.4	21.23	-24.77	46	33.27	16.93	0.97	29.94	-	-	Peak
587	23.49	-22.51	46	33.63	18.58	1.05	29.77	-	-	Peak
942.6	27.08	-26.92	54	32.65	20.7	1.31	27.58	-	-	Peak
2355.41	46.01	-27.99	74	45.04	32.81	3.12	34.96	148	230	Peak
2355.41	32.5	-21.5	54	31.53	32.81	3.12	34.96	148	230	Average
2402	83.56	-	-	82.53	32.86	3.15	34.98	195	250	Average
2402	100.65	-	-	99.62	32.86	3.15	34.98	195	250	Peak
2484.23	45.34	-28.66	74	44.07	33.01	3.2	34.94	140	258	Peak
2484.23	41.27	-12.73	54	40	33.01	3.2	34.94	140	258	Average



<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	00	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Ritchie Ran	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2402 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
48.36	24.6	-15.4	40	45.42	8.12	0.31	29.25	-	-	Peak
55.65	24.91	-15.09	40	47.63	6.2	0.33	29.25	144	125	Peak
162.03	16.73	-26.77	43.5	35.96	9.53	0.6	29.36	-	-	Peak
408.5	20.09	-25.91	46	32.98	16.04	0.89	29.82	-	-	Peak
629	23.2	-22.8	46	32.99	18.78	1.08	29.65	-	-	Peak
945.4	26.96	-27.04	54	32.48	20.71	1.32	27.55	-	-	Peak
2335.65	45.93	-28.07	74	44.98	32.78	3.1	34.93	150	148	Peak
2335.65	31.93	-22.07	54	30.98	32.78	3.1	34.93	150	148	Average
2402	98.19	-	-	97.16	32.86	3.15	34.98	100	272	Peak
2402	83.68	-	-	82.65	32.86	3.15	34.98	100	272	Average
2485.75	45.87	-28.13	74	44.6	33.01	3.2	34.94	114	316	Peak
2485.75	32.28	-21.72	54	31.01	33.01	3.2	34.94	114	316	Average



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Ritchie Ran	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2441 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	21.39	-18.61	40	32.41	18	0.25	29.27	120	122	Peak
119.37	16.62	-26.88	43.5	33.38	11.8	0.46	29.02	-	-	Peak
276.51	16.79	-29.21	46	33.09	12.56	0.76	29.62	-	-	Peak
447.7	18.17	-27.83	46	30.87	16.29	0.93	29.92	-	-	Peak
608.7	22.37	-23.63	46	32.38	18.64	1.06	29.71	-	-	Peak
863.5	25.75	-20.25	46	32.33	20.5	1.27	28.35	-	-	Peak
2331.66	46.77	-27.23	74	45.84	32.76	3.1	34.93	180	20	Peak
2331.66	32.5	-21.5	54	31.57	32.76	3.1	34.93	180	20	Average
2441	99.8	-	-	98.62	32.95	3.18	34.95	200	232	Peak
2441	84.68	-	-	83.5	32.95	3.18	34.95	200	232	Average
2495.25	45.89	-28.11	74	44.56	33.05	3.21	34.93	120	145	Peak
2495.25	31.59	-22.41	54	30.26	33.05	3.21	34.93	120	145	Average



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Ritchie Ran	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2441 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
48.09	24.24	-15.76	40	45.06	8.12	0.31	29.25	-	-	Peak
55.38	24.31	-15.69	40	47.03	6.2	0.33	29.25	150	236	Peak
126.66	16.2	-27.3	43.5	33.1	11.73	0.5	29.13	-	-	Peak
432.3	20.23	-25.77	46	33.01	16.21	0.9	29.89	-	-	Peak
639.5	24.06	-21.94	46	33.74	18.85	1.09	29.62	-	-	Peak
841.1	26.64	-19.36	46	33.45	20.42	1.25	28.48	-	-	Peak
2310	46	-28	74	45.09	32.73	3.08	34.9	180	250	Peak
2310	31.93	-22.07	54	31.02	32.73	3.08	34.9	180	250	Average
2441	79.99	-	-	78.81	32.95	3.18	34.95	200	48	Average
2441	98.47	-	-	97.29	32.95	3.18	34.95	200	48	Peak
2498.29	45.57	-28.43	74	44.24	33.05	3.21	34.93	150	254	Peak
2498.29	31.46	-22.54	54	30.13	33.05	3.21	34.93	150	254	Average



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Ritchie Ran	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2480 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	21.32	-18.68	40	32.34	18	0.25	29.27	147	351	Peak
106.95	16.13	-27.37	43.5	33.45	11.43	0.45	29.2	-	-	Peak
299.73	18.08	-27.92	46	33.93	13	0.78	29.63	-	-	Peak
563.2	23.47	-22.53	46	33.77	18.52	1.04	29.86	-	-	Peak
699.7	25.97	-20.03	46	34.78	19.29	1.14	29.24	-	-	Peak
898.5	27.74	-18.26	46	34.11	20.45	1.29	28.11	-	-	Peak
2325.01	46.41	-27.59	74	45.48	32.76	3.1	34.93	140	184	Peak
2325.01	32.35	-21.65	54	31.42	32.76	3.1	34.93	140	184	Average
2480	99.61	-	-	98.34	33.01	3.2	34.94	197	232	Peak
2480	83.02	-	-	81.75	33.01	3.2	34.94	197	232	Average
2483.51	52.5	-1.5	54	51.23	33.01	3.2	34.94	164	338	Average
2483.51	62.15	-11.85	74	60.88	33.01	3.2	34.94	164	338	Peak



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	23~24°C
<b>Test Channel :</b>	78	<b>Relative Humidity :</b>	43~44%
<b>Test Engineer :</b>	Ritchie Ran	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2480 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
47.28	24.98	-15.02	40	45.43	8.5	0.31	29.26	100	360	Peak
55.65	24.83	-15.17	40	47.55	6.2	0.33	29.25	-	-	Peak
114.51	16.8	-26.7	43.5	33.62	11.8	0.46	29.08	-	-	Peak
472.2	21.1	-24.9	46	33.4	16.67	0.96	29.93	-	-	Peak
743.8	24.75	-21.25	46	32.77	19.85	1.18	29.05	-	-	Peak
934.9	27.01	-18.99	46	32.7	20.66	1.31	27.66	-	-	Peak
2331.66	38.33	-15.67	54	37.4	32.76	3.1	34.93	125	256	Average
2331.66	45.84	-28.16	74	44.91	32.76	3.1	34.93	125	256	Peak
2480	83.78	-	-	82.51	33.01	3.2	34.94	123	265	Average
2480	97.16	-	-	95.89	33.01	3.2	34.94	123	265	Peak
2483.51	50.98	-3.02	54	49.71	33.01	3.2	34.94	122	264	Average
2483.51	59.67	-14.33	74	58.4	33.01	3.2	34.94	122	264	Peak



## **3.10 Antenna Requirements**

### **3.10.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.10.2 Antenna Connected Construction**

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

### **3.10.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Jan. 18, 2010	Jan. 17, 2011	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY451015 55	N/A	Aug. 24, 2010	Aug. 23, 2011	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY444211 98	N/A	Aug. 24, 2010	Aug. 23, 2011	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 17, 2009	Nov. 16, 2010	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Jan. 18, 2010	Jan. 17, 2011	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Jan. 18, 2010	Jan. 17, 2011	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	N/A	Nov. 26, 2009	Nov. 25, 2010	Conduction (CO01-KS)
System Simulator	R&S	CMU200	837587/06 6	Full-Band	Jan. 08, 2009	Jan. 07, 2011	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESCI	100724	9kHz – 2.75GHz	Mar. 09, 2010	Mar. 08, 2011	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Amplifier	Wireless	FPA-6592G	060004	30MHz~2GHz	Feb. 02, 2010	Feb. 01, 2011	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A023 70	1GHz~26.5GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
Active horn antenna	com-power	AHA-118	701023	1G-18GHz	Nov. 18, 2009	Nov. 17, 2010	Radiation (03CH01-KS)
Signal Generator	R&S	SMR40	100455	10MHz~40GHz	Jan. 18, 2010	Jan. 17, 2011	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA1702 49	15-40GHz	Oct. 22, 2009	Oct. 21, 2010	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/00 1	9 kHz~30 MHz	Jul. 29, 2010	Jul. 28, 2011	Radiation (03CH01-KS)
Bluetooth Base Station	ANRITSU	MT8852B	6K000049 35	BT EDR	Sep. 17, 2009	Sep. 16, 2010	Radiation (03CH01-KS)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.13</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.26</b>		

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.27</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.54</b>		

**Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)**

Contribution	Uncertainty of $X_i$		$u(X_i)$	$C_i$	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>4.72</b>				



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP090932 as below.