

#19 CDMA Bc0_RC3+SO55_Right Cheek_Ch384

DUT: 902129

Communication System: CDMA ; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: HSL_850_091116 Medium parameters used: $f = 837$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.3, 6.3, 6.3); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM - Front; Type: SAM; Serial: TP-1446
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch384/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.35 mW/g


Ch384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.4 V/m; Power Drift = -0.188 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.868 mW/g

Maximum value of SAR (measured) = 1.27 mW/g

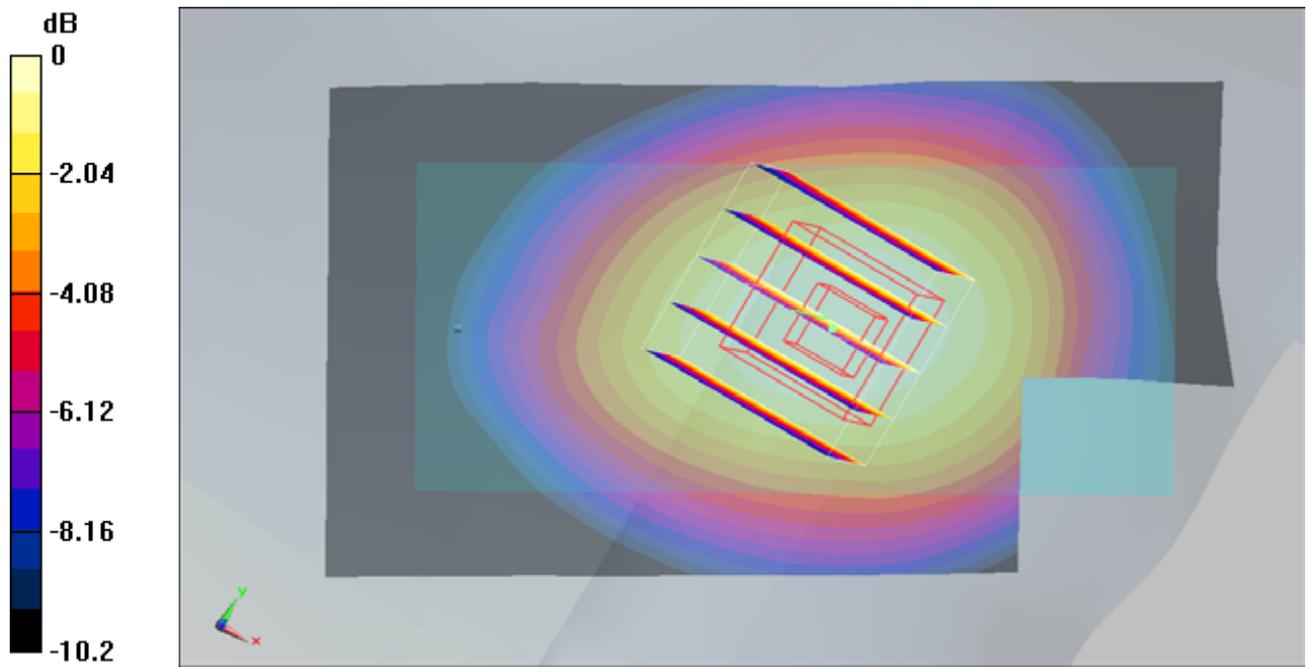

0 dB = 1.27mW/g

#20 CDMA Bc0_RC3+SO55_Right Tilted_Ch384

DUT: 902129

Communication System: CDMA ; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: HSL_850_091116 Medium parameters used: $f = 837$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$

kg/m³

Ambient Temperature : 22.5 ; Liquid Temperature : 21.6

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.3, 6.3, 6.3); Calibrated: 2009/9/23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn778; Calibrated: 2009/9/18

- Phantom: SAM - Front; Type: SAM; Serial: TP-1446

- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch384/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.636 mW/g


Ch384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.2 V/m; Power Drift = -0.147 dB

Peak SAR (extrapolated) = 0.764 W/kg

SAR(1 g) = 0.604 mW/g; SAR(10 g) = 0.438 mW/g

Maximum value of SAR (measured) = 0.643 mW/g

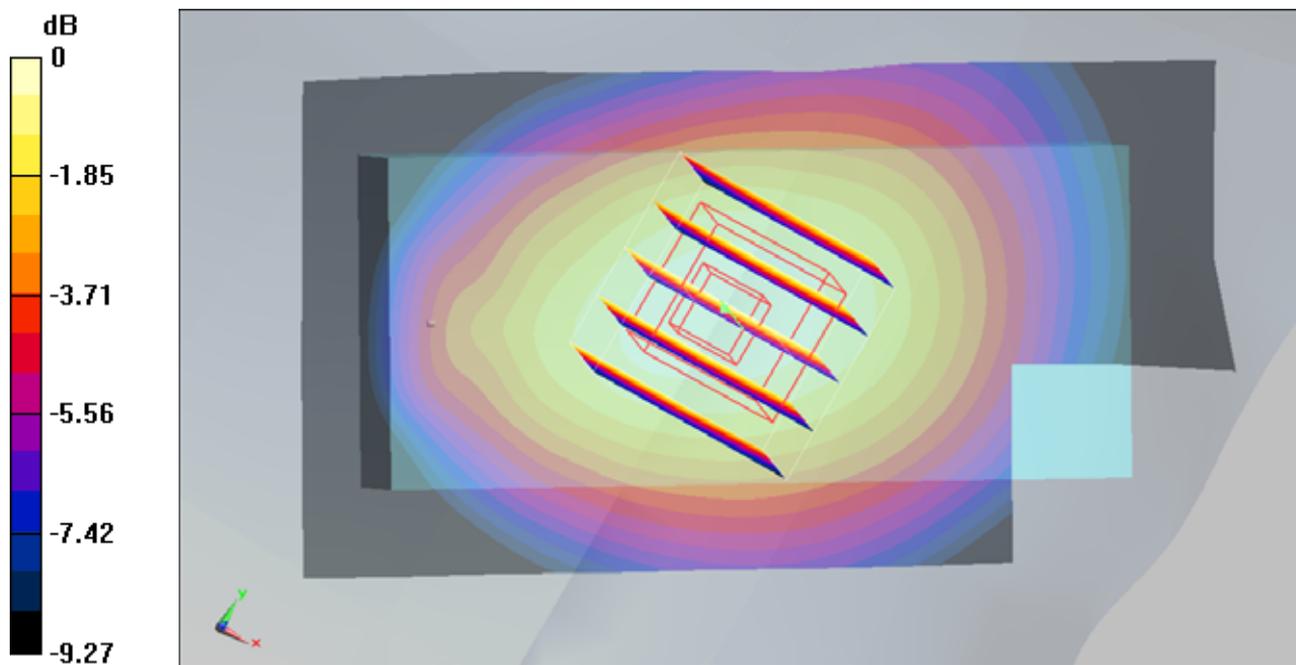

0 dB = 0.643mW/g

#21 CDMA Bc0_RC3+SO55_Left Cheek_Ch384

DUT: 902129

Communication System: CDMA ; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: HSL_850_091116 Medium parameters used: $f = 837$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$

kg/m³

Ambient Temperature : 22.5 ; Liquid Temperature : 21.6

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.3, 6.3, 6.3); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM - Front; Type: SAM; Serial: TP-1446
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch384/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.4 mW/g


Ch384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.2 V/m; Power Drift = -0.098 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 1.29 mW/g; SAR(10 g) = 0.917 mW/g

Maximum value of SAR (measured) = 1.39 mW/g

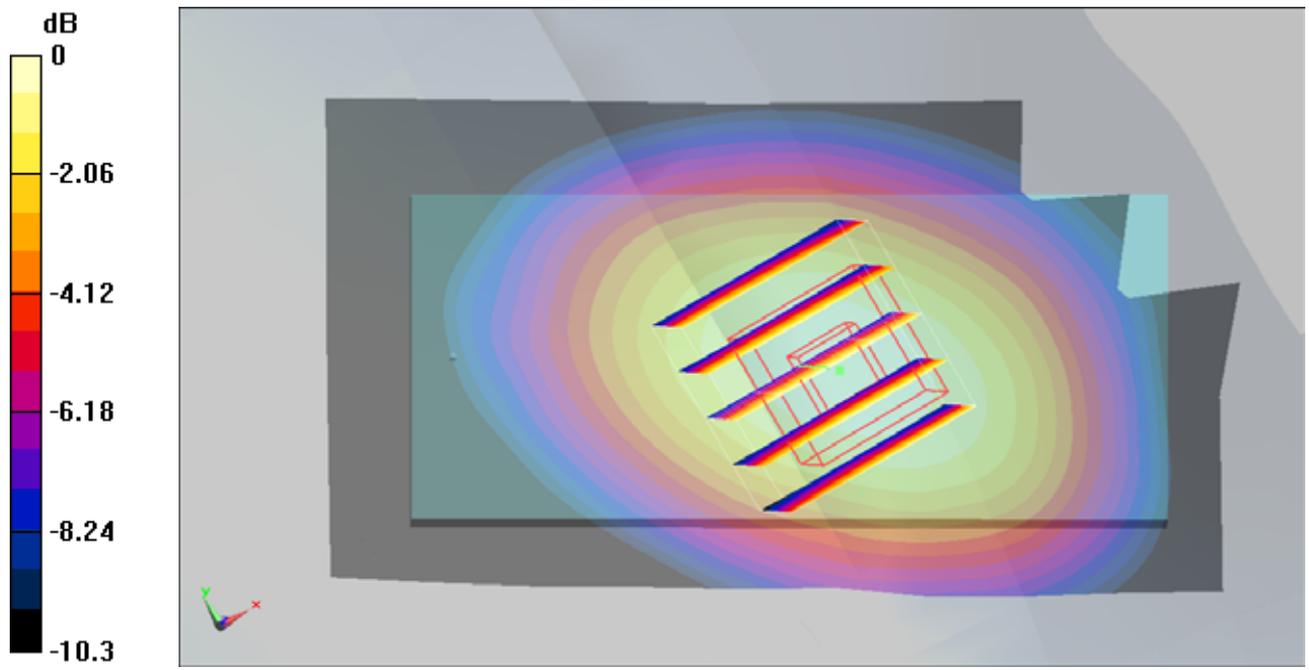

0 dB = 1.39mW/g

#21 CDMA Bc0_RC3+SO55_Left Cheek_Ch384_2D

DUT: 902129

Communication System: CDMA ; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium: HSL_850_091116 Medium parameters used: $f = 837$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$

kg/m³

Ambient Temperature : 22.5 ; Liquid Temperature : 21.6

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.3, 6.3, 6.3); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM - Front; Type: SAM; Serial: TP-1446
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch384/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.4 mW/g


Ch384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.2 V/m; Power Drift = -0.098 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 1.29 mW/g; SAR(10 g) = 0.917 mW/g

Maximum value of SAR (measured) = 1.39 mW/g

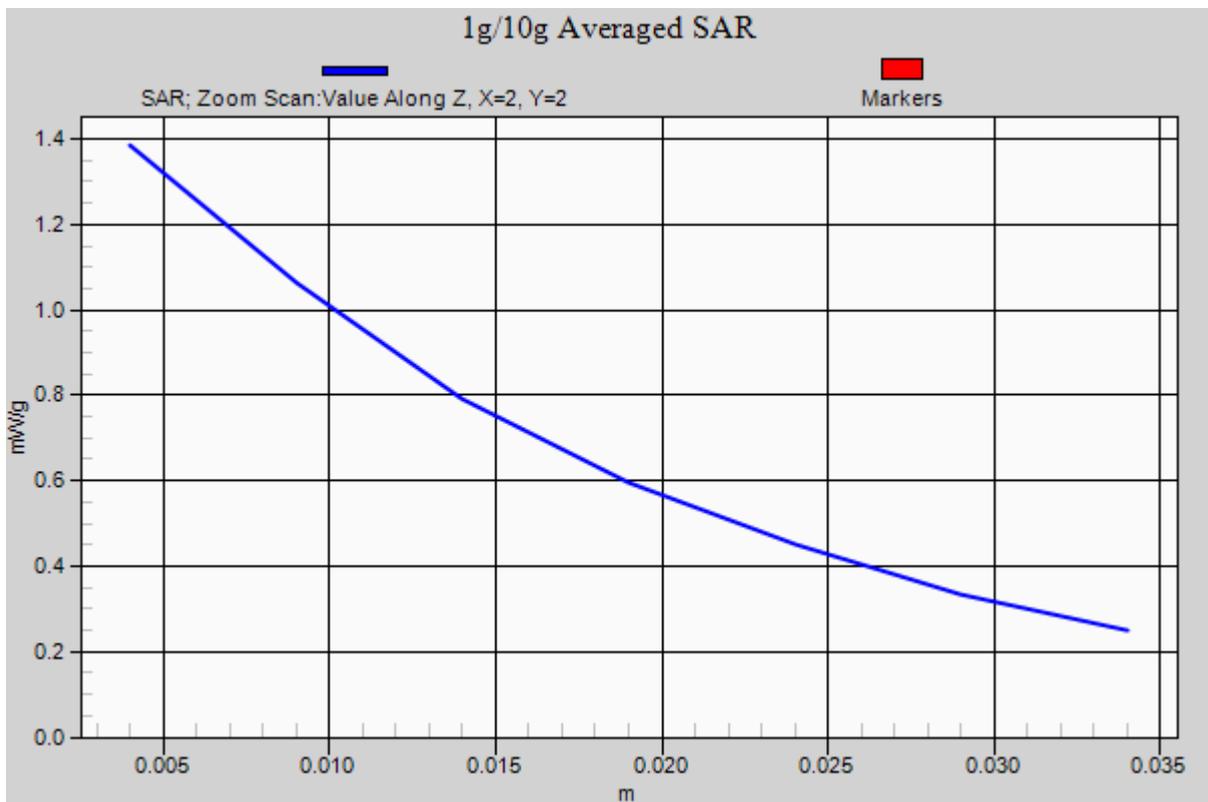

#22 CDMA Bc0_RC3+SO55_Left Tilted_Ch384

DUT: 902129

Communication System: CDMA ; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: HSL_850_091116 Medium parameters used: $f = 837$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$

kg/m³

Ambient Temperature : 22.5 ; Liquid Temperature : 21.6

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.3, 6.3, 6.3); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM - Front; Type: SAM; Serial: TP-1446
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch384/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.634 mW/g


Ch384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = -0.129 dB

Peak SAR (extrapolated) = 0.731 W/kg

SAR(1 g) = 0.585 mW/g; SAR(10 g) = 0.431 mW/g

Maximum value of SAR (measured) = 0.617 mW/g

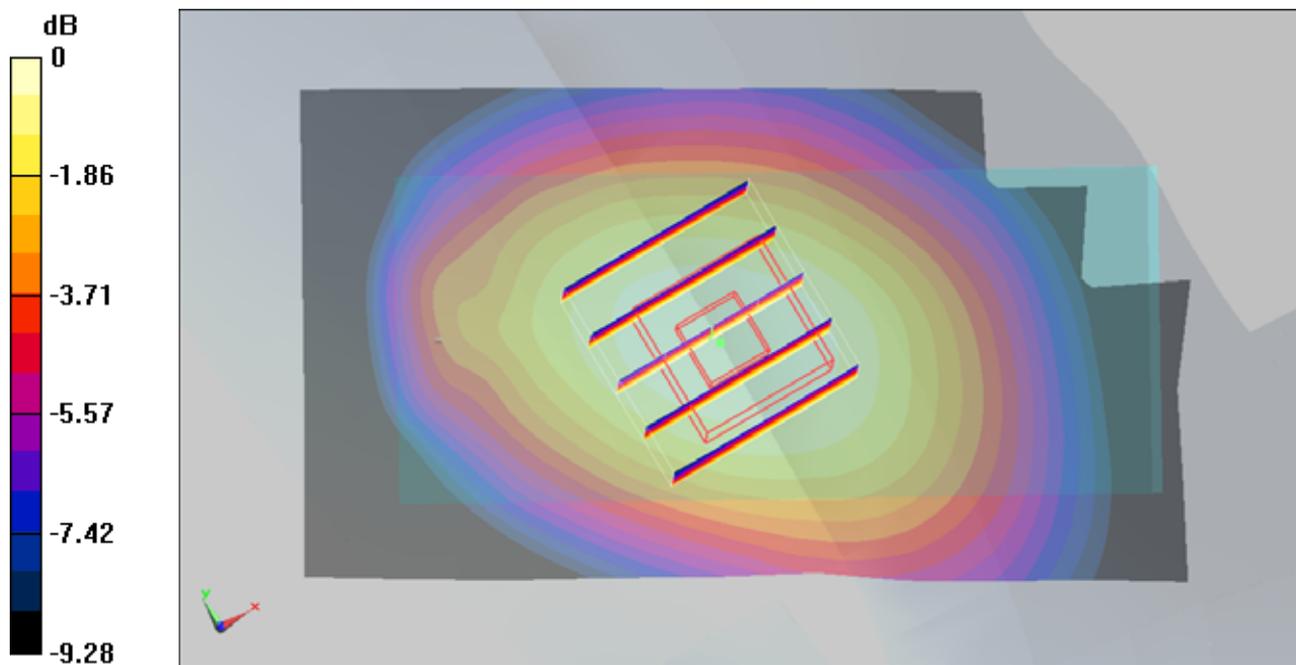

0 dB = 0.617mW/g

#09 CDMA Bc15_RC3+SO55_Right Cheek_Ch425

DUT: 902129

Communication System: CDMA ; Frequency: 1731.25 MHz; Duty Cycle: 1:1

Medium: HSL_1800_091116 Medium parameters used : $f = 1731.25$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 ; Liquid Temperature : 21.1

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.34, 5.34, 5.34); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch425/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.627 mW/g


Ch425/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.15 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.728 W/kg

SAR(1 g) = 0.552 mW/g; SAR(10 g) = 0.355 mW/g

Maximum value of SAR (measured) = 0.599 mW/g

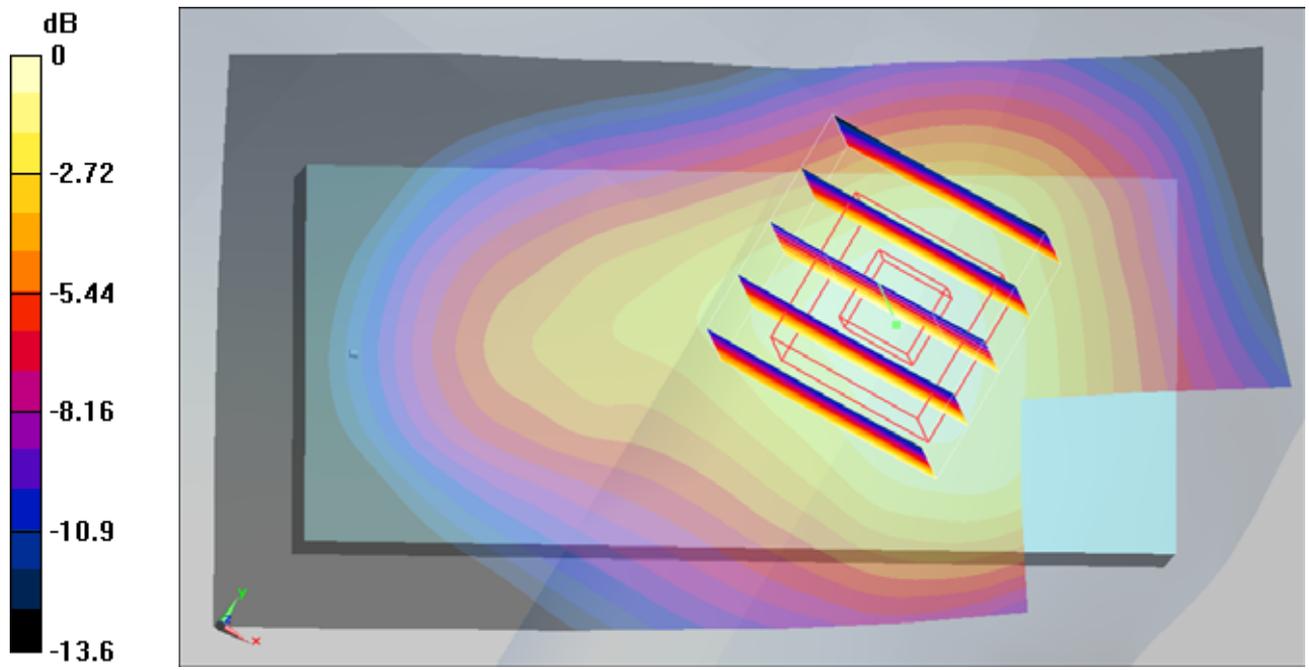

0 dB = 0.599mW/g

#10 CDMA Bc15_RC3+SO55_Right Tilted_Ch425

DUT: 902129

Communication System: CDMA ; Frequency: 1731.25 MHz; Duty Cycle: 1:1

Medium: HSL_1800_091116 Medium parameters used : $f = 1731.25$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 ; Liquid Temperature : 21.1

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.34, 5.34, 5.34); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch425/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.201 mW/g


Ch425/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.44 V/m; Power Drift = -0.097 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.179 mW/g; SAR(10 g) = 0.119 mW/g

Maximum value of SAR (measured) = 0.191 mW/g

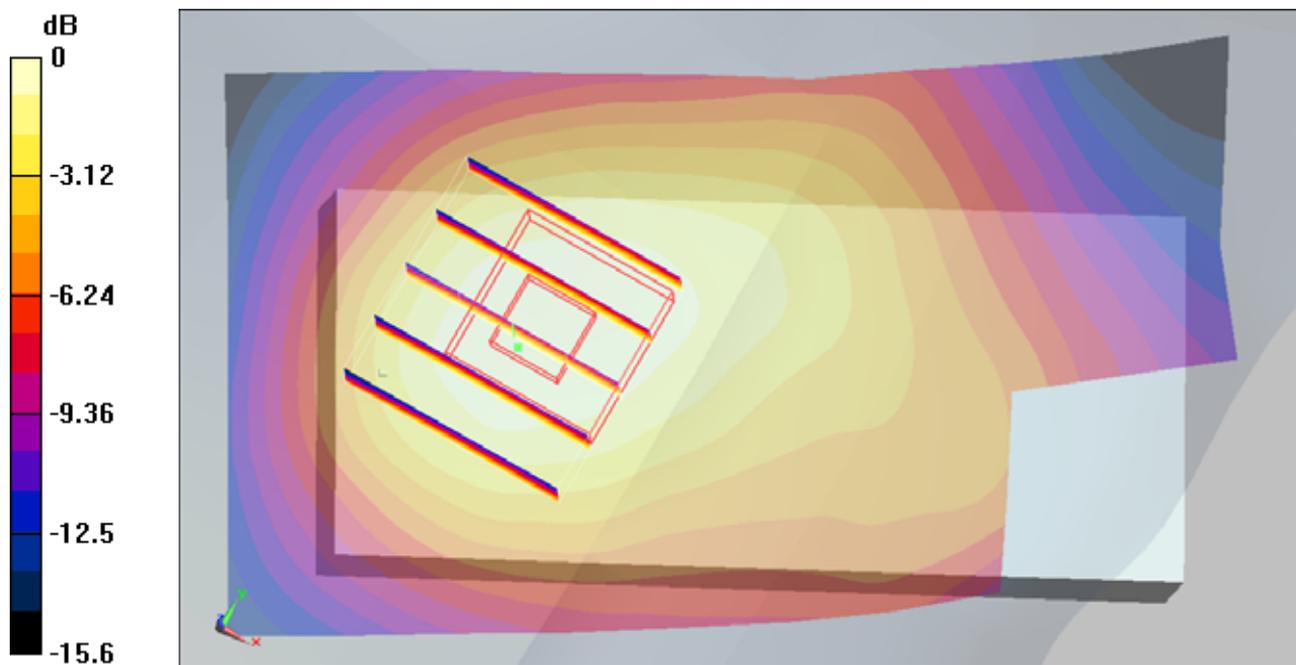

0 dB = 0.191mW/g

#14 CDMA Bc15_RC3+SO55_Left Cheek_Ch875

DUT: 902129

Communication System: CDMA ; Frequency: 1753.75 MHz; Duty Cycle: 1:1

Medium: HSL_1800_091116 Medium parameters used: $f = 1754$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$

kg/m³

Ambient Temperature : 22.4 ; Liquid Temperature : 21.1

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.34, 5.34, 5.34); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch875/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.69 mW/g


Ch875/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 2.32 W/kg

SAR(1 g) = 1.53 mW/g; SAR(10 g) = 0.885 mW/g

Maximum value of SAR (measured) = 1.68 mW/g

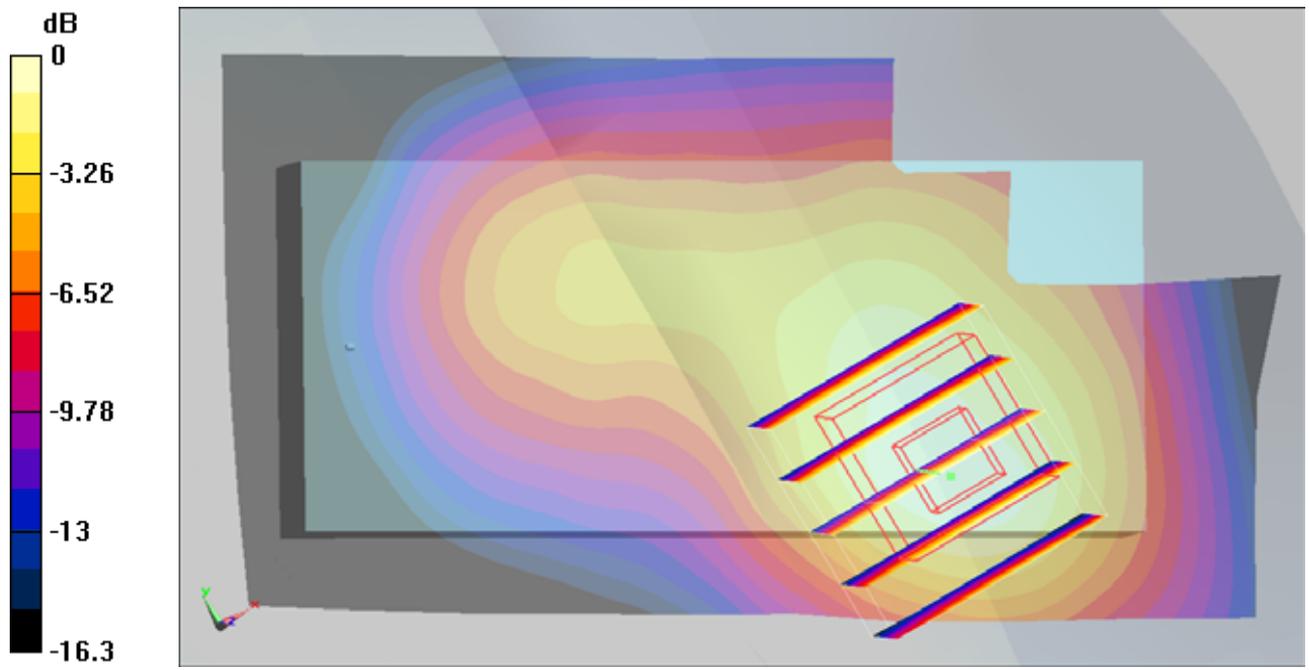

0 dB = 1.68mW/g

#14 CDMA Bc15_RC3+SO55_Left Cheek_Ch875_2D

DUT: 902129

Communication System: CDMA ; Frequency: 1753.75 MHz;Duty Cycle: 1:1

Medium: HSL_1800_091116 Medium parameters used: $f = 1754$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 ; Liquid Temperature : 21.1

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.34, 5.34, 5.34); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch875/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.69 mW/g


Ch875/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 2.32 W/kg

SAR(1 g) = 1.53 mW/g; SAR(10 g) = 0.885 mW/g

Maximum value of SAR (measured) = 1.68 mW/g

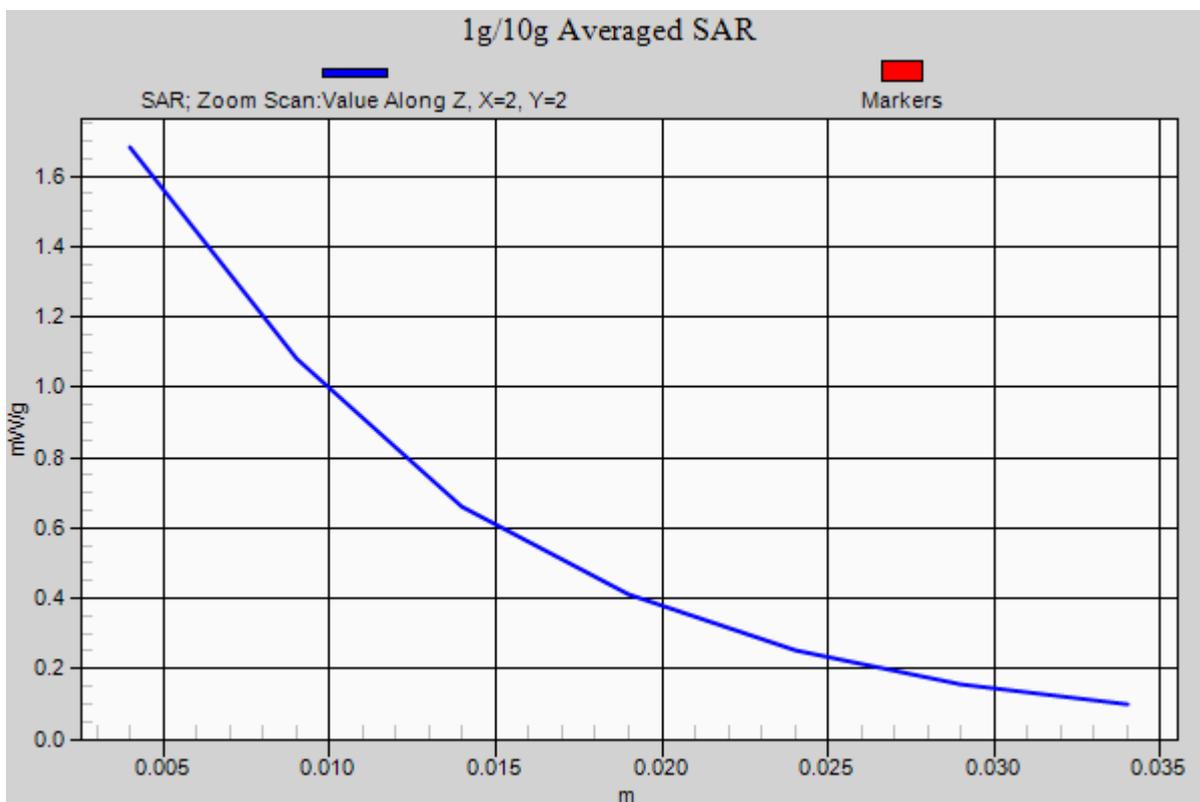

#12 CDMA Bc15_RC3+SO55_Left Tilted_Ch425

DUT: 902129

Communication System: CDMA ; Frequency: 1731.25 MHz; Duty Cycle: 1:1

Medium: HSL_1800_091116 Medium parameters used : $f = 1731.25$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 ; Liquid Temperature : 21.1

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.34, 5.34, 5.34); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch425/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.244 mW/g


Ch425/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.81 V/m; Power Drift = -0.098 dB

Peak SAR (extrapolated) = 0.286 W/kg

SAR(1 g) = 0.216 mW/g; SAR(10 g) = 0.141 mW/g

Maximum value of SAR (measured) = 0.226 mW/g

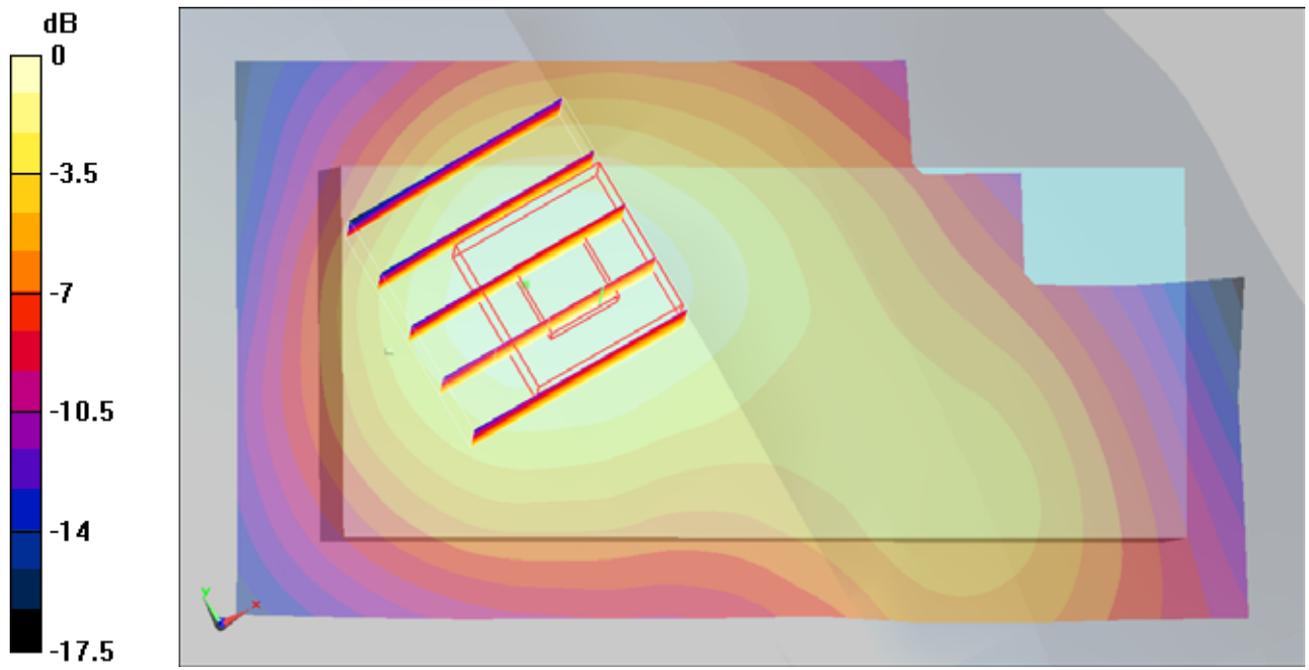

0 dB = 0.226mW/g

#07 CDMA Bc1_RC3+SO55_Right Cheek_Ch25

DUT: 902129

Communication System: CDMA ; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: HSL_1900_091116 Medium parameters used : $f = 1851.25$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 ; Liquid Temperature : 21.3

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.12, 5.12, 5.12); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch25/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.18 mW/g


Ch25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.98 V/m; Power Drift = -0.171 dB

Peak SAR (extrapolated) = 1.4 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.647 mW/g

Maximum value of SAR (measured) = 1.1 mW/g

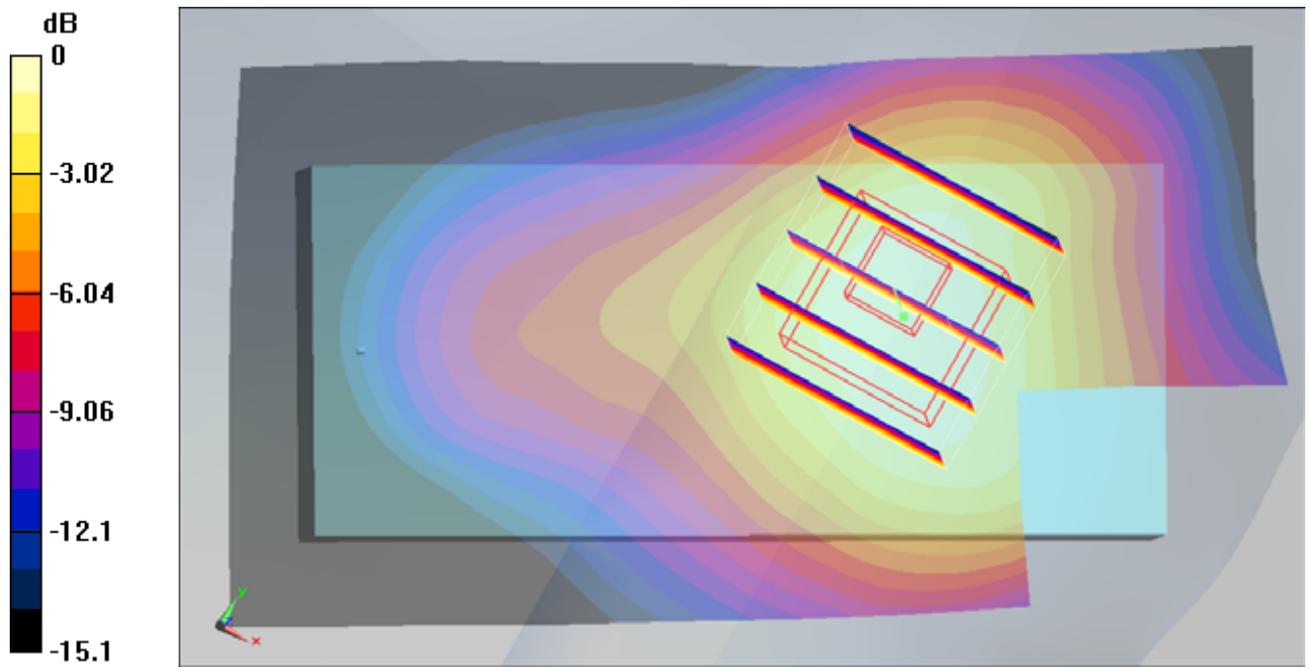

0 dB = 1.1mW/g

#02 CDMA Bc1_RC3+SO55_Right Tilted_Ch600

DUT: 902129

Communication System: CDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: HSL_1900_091116 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$

kg/m³

Ambient Temperature : 22.7 ; Liquid Temperature : 21.3

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.12, 5.12, 5.12); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch600/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.288 mW/g


Ch600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = 0.098 dB

Peak SAR (extrapolated) = 0.343 W/kg

SAR(1 g) = 0.249 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 0.270 mW/g

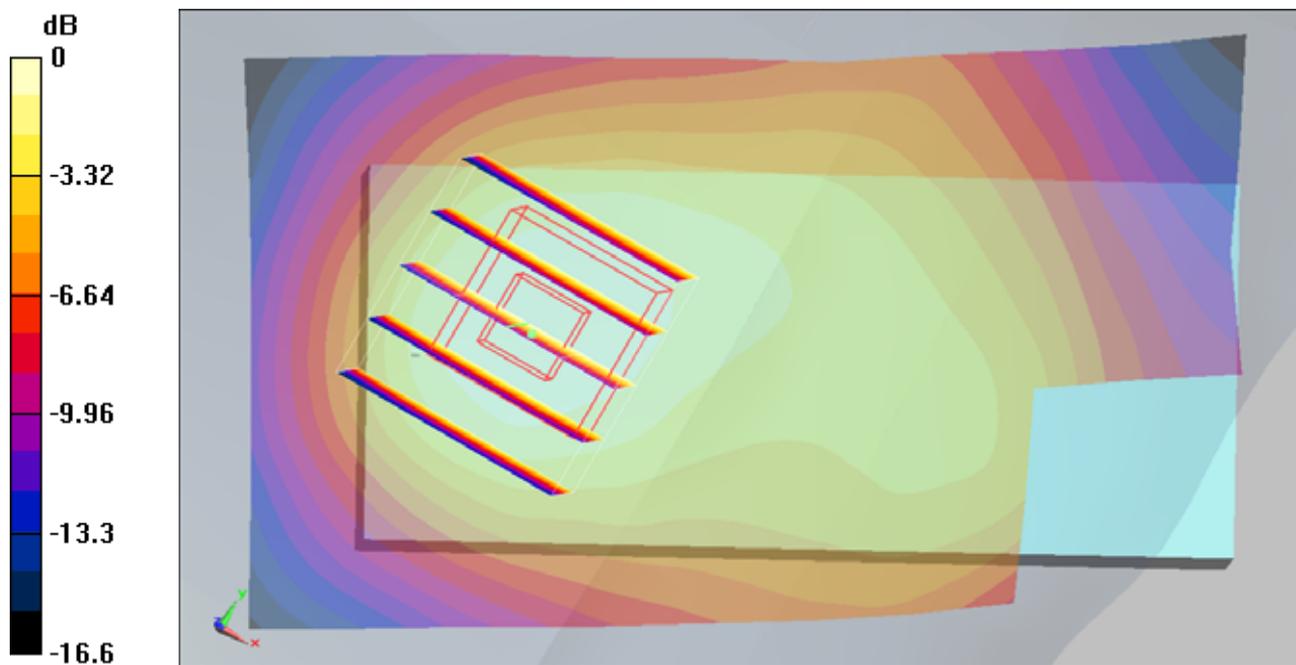

0 dB = 0.270mW/g

#05 CDMA Bc1_RC3+SO55_Left Cheek_Ch25

DUT: 902129

Communication System: CDMA ; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: HSL_1900_091116 Medium parameters used : $f = 1851.25$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.7 ; Liquid Temperature : 21.3

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.12, 5.12, 5.12); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch25/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.47 mW/g


Ch25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.16 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.749 mW/g

Maximum value of SAR (measured) = 1.45 mW/g

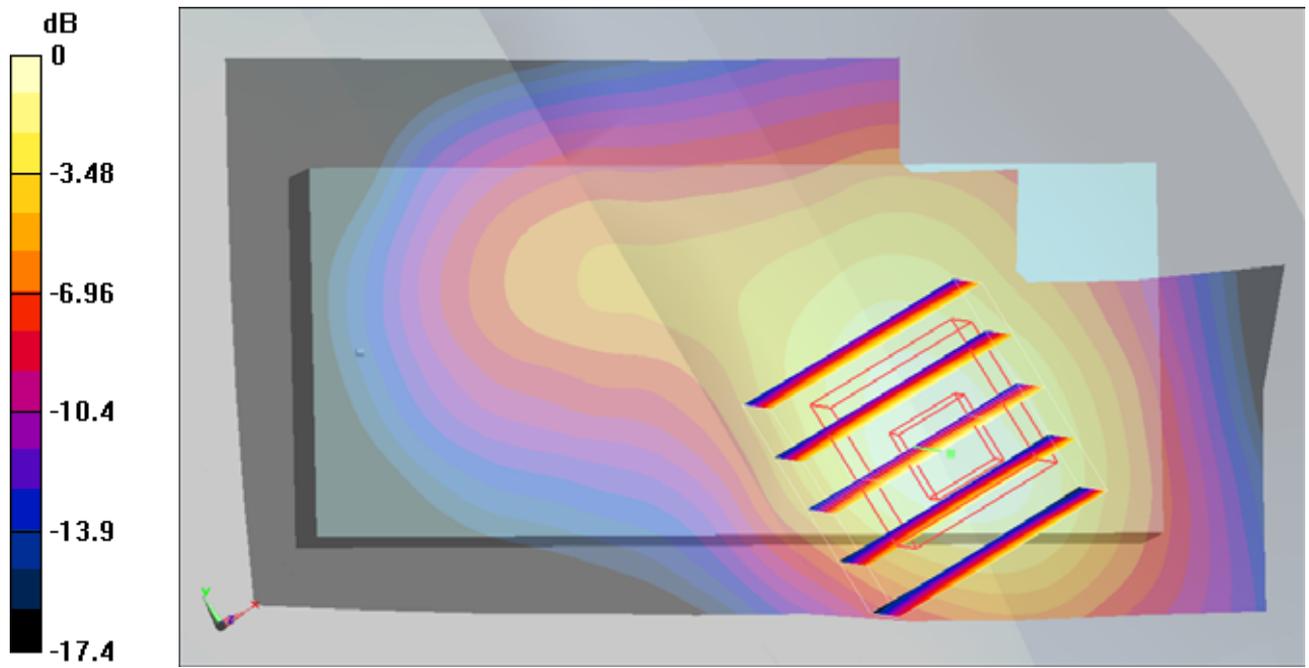

0 dB = 1.45mW/g

#05 CDMA Bc1_RC3+SO55_Left Cheek_Ch25_2D

DUT: 902129

Communication System: CDMA ; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium: HSL_1900_091116 Medium parameters used : $f = 1851.25 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 39.5$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.7 ; Liquid Temperature : 21.3

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.12, 5.12, 5.12); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch25/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.47 mW/g


Ch25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.16 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.749 mW/g

Maximum value of SAR (measured) = 1.45 mW/g

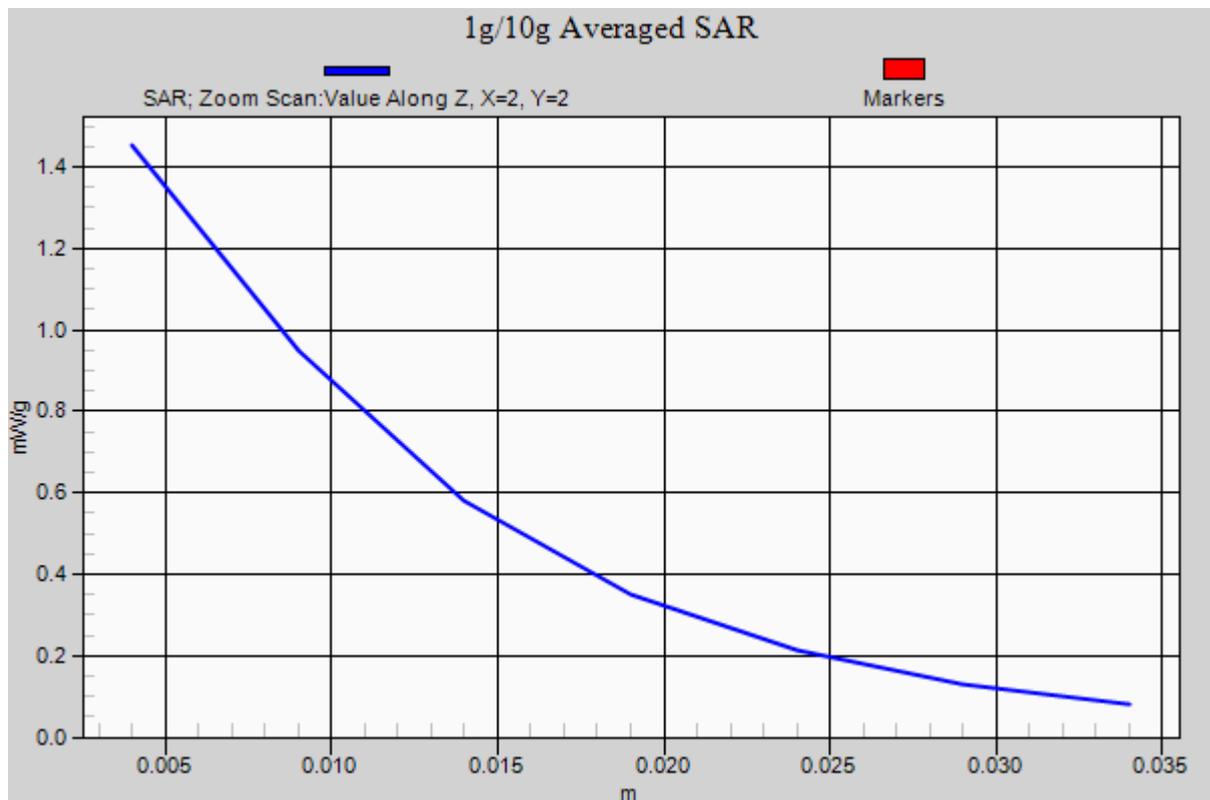

#04 CDMA Bc1_RC3+SO55_Left Tilted_Ch600

DUT: 902129

Communication System: CDMA ; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_1900_091116 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$

kg/m³

Ambient Temperature : 22.7 ; Liquid Temperature : 21.3

DASY5 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.12, 5.12, 5.12); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch600/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.323 mW/g


Ch600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12 V/m; Power Drift = 0.057 dB

Peak SAR (extrapolated) = 0.389 W/kg

SAR(1 g) = 0.281 mW/g; SAR(10 g) = 0.178 mW/g

Maximum value of SAR (measured) = 0.300 mW/g

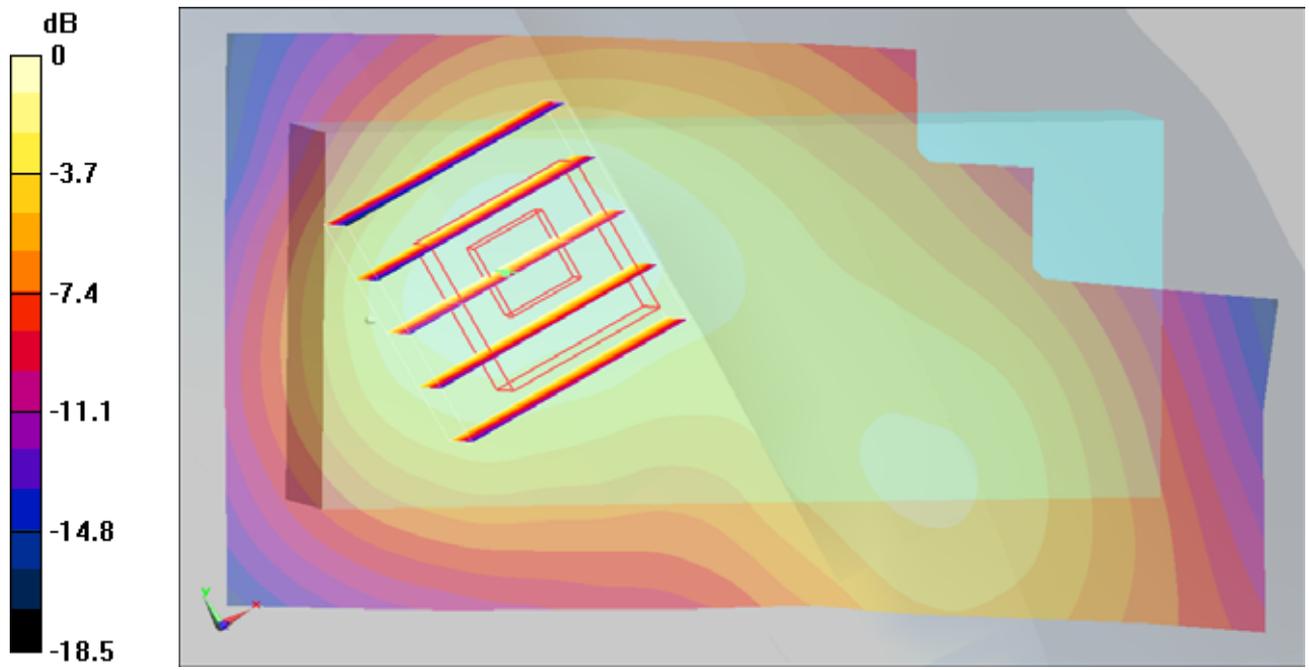

0 dB = 0.300mW/g

#35 CDMA Bc14_RC3+SO55_Right Cheek_Ch1225

DUT: 9O2129

Communication System: CDMA ; Frequency: 1911.25 MHz; Duty Cycle: 1:1

Medium: HSL_1900_091130 Medium parameters used: $f = 1911.25$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.3$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.4 ; Liquid Temperature : 21.4

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.12, 5.12, 5.12); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1225/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.783 mW/g


Ch1225/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.78 V/m; Power Drift = 0.143 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.715 mW/g; SAR(10 g) = 0.449 mW/g

Maximum value of SAR (measured) = 0.774 mW/g

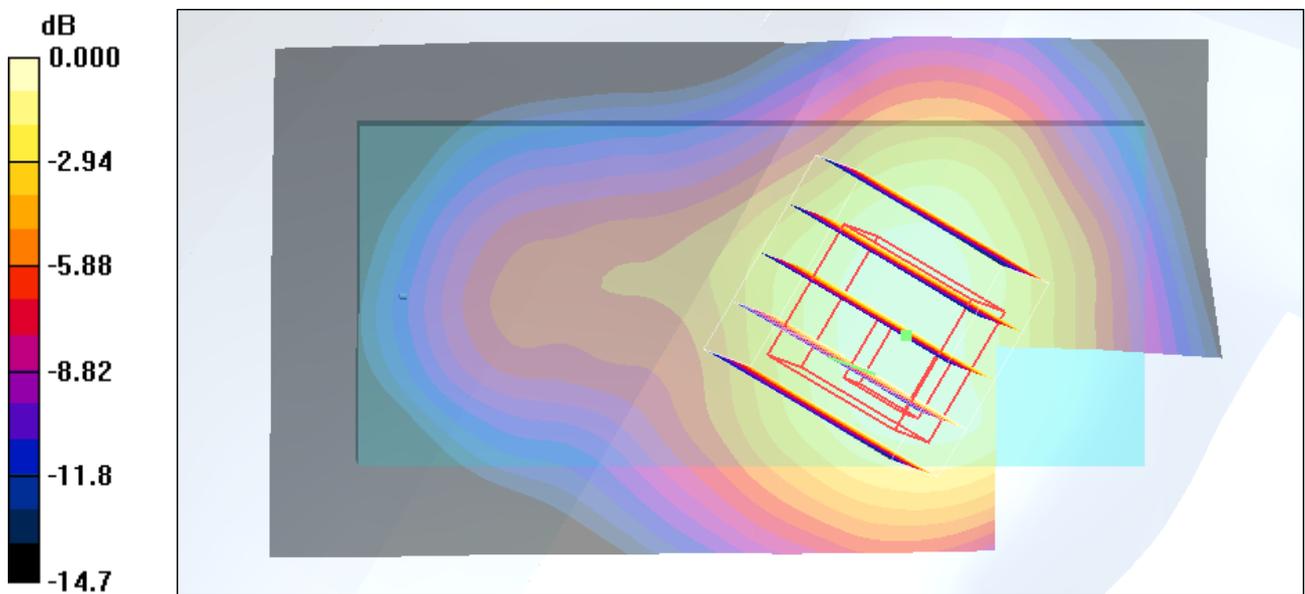

0 dB = 0.774mW/g

#36 CDMA Bc14_RC3+SO55_Right Tilted_Ch1225

DUT: 9O2129

Communication System: CDMA ; Frequency: 1911.25 MHz; Duty Cycle: 1:1

Medium: HSL_1900_091130 Medium parameters used: $f = 1911.25$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.3$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.4 ; Liquid Temperature : 21.4

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.12, 5.12, 5.12); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1225/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.220 mW/g


Ch1225/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.271 W/kg

SAR(1 g) = 0.190 mW/g; SAR(10 g) = 0.118 mW/g

Maximum value of SAR (measured) = 0.203 mW/g

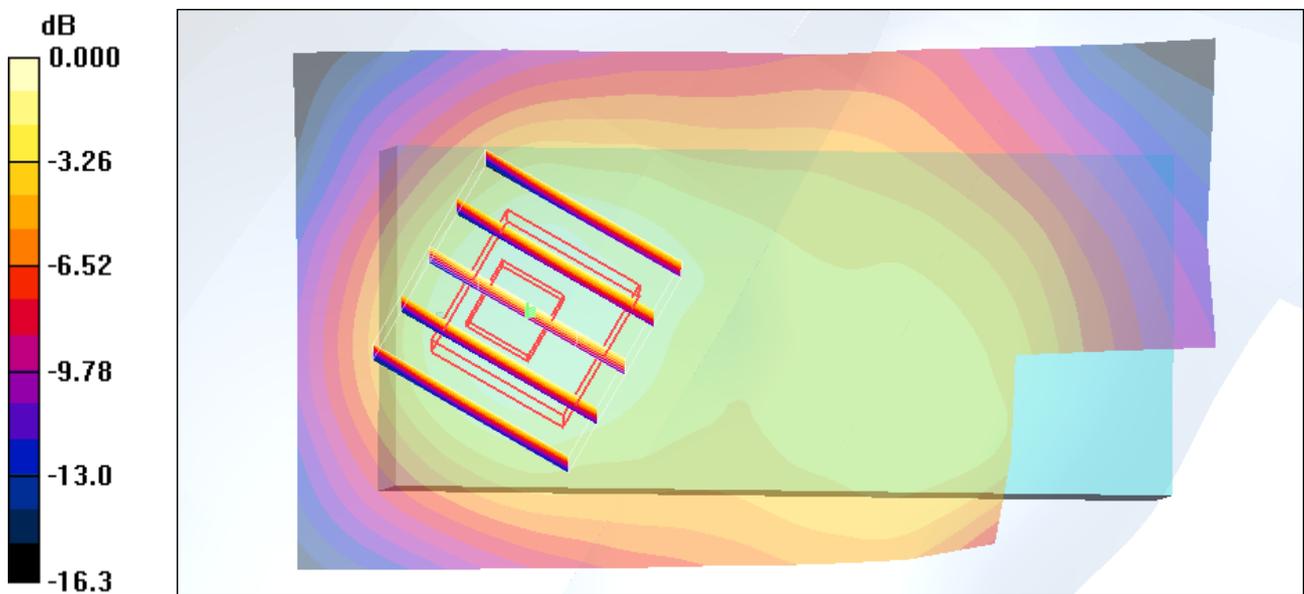

0 dB = 0.203mW/g

#40 CDMA Bc14_RC3+SO55_Left Cheek_Ch1275

DUT: 9O2129

Communication System: CDMA ; Frequency: 1913.75 MHz; Duty Cycle: 1:1

Medium: HSL_1900_091130 Medium parameters used: $f = 1914$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 ; Liquid Temperature : 21.4

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.12, 5.12, 5.12); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1275/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.28 mW/g


Ch1275/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.57 V/m; Power Drift = -0.196 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.709 mW/g

Maximum value of SAR (measured) = 1.36 mW/g

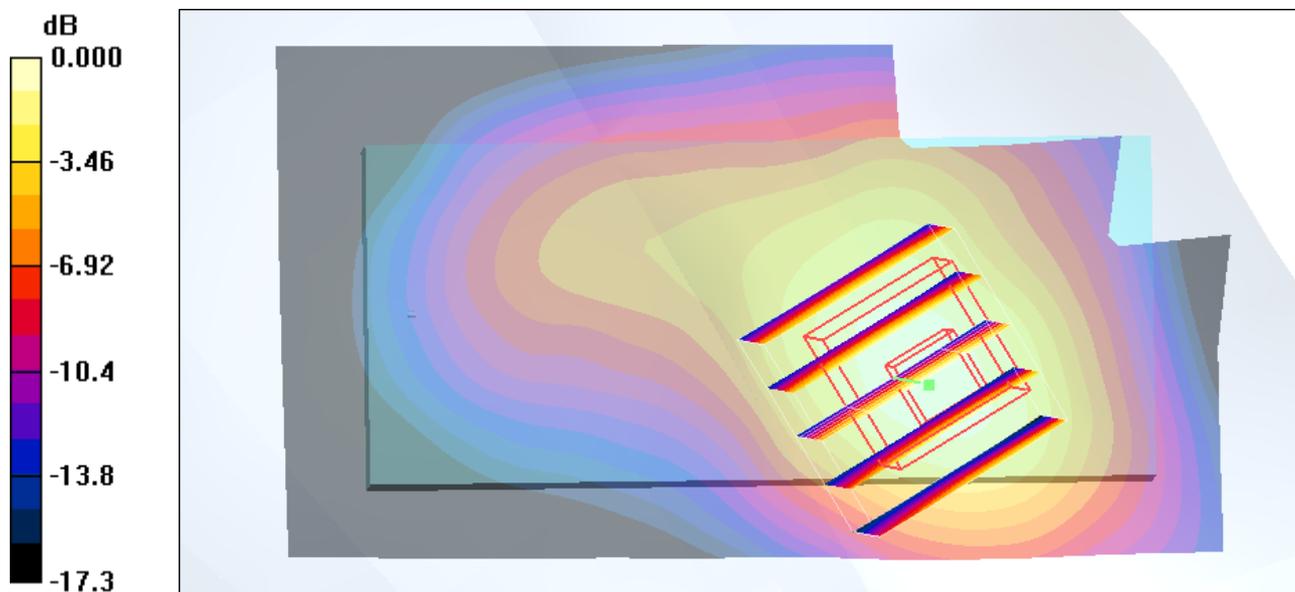

0 dB = 1.36mW/g

#40 CDMA Bc14_RC3+SO55_Left Cheek_Ch1275_2D

DUT: 9O2129

Communication System: CDMA ; Frequency: 1913.75 MHz; Duty Cycle: 1:1

Medium: HSL_1900_091130 Medium parameters used: $f = 1914$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 ; Liquid Temperature : 21.4

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.12, 5.12, 5.12); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1275/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.28 mW/g


Ch1275/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.57 V/m; Power Drift = -0.196 dB

Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.709 mW/g

Maximum value of SAR (measured) = 1.36 mW/g

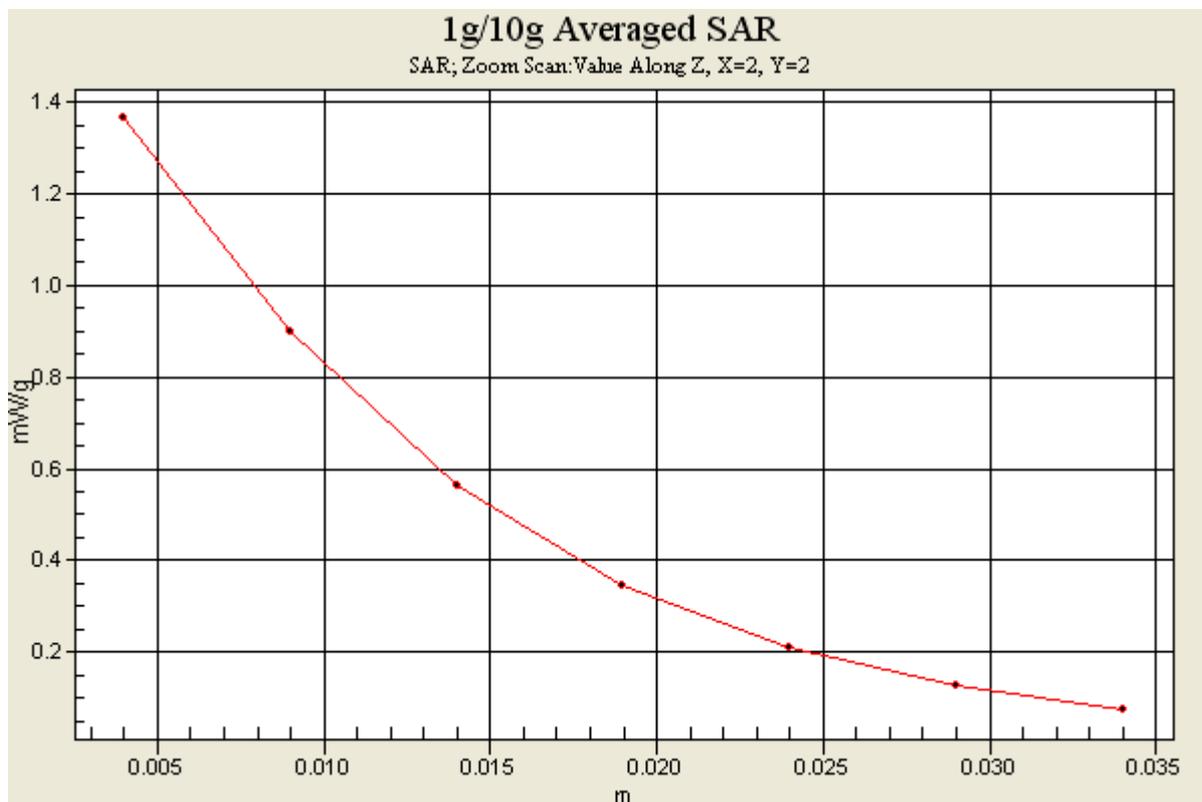

#38 CDMA Bc14_RC3+SO55_Left Tilted_Ch1225

DUT: 9O2129

Communication System: CDMA ; Frequency: 1911.25 MHz;Duty Cycle: 1:1

Medium: HSL_1900_091130 Medium parameters used: $f = 1911.25$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39.3$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.5 ; Liquid Temperature : 21.4

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(5.12, 5.12, 5.12); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Left; Type: QD 000 P40 C; Serial: TP-1477
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1225/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.228 mW/g


Ch1225/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.99 V/m; Power Drift = -0.102 dB

Peak SAR (extrapolated) = 0.273 W/kg

SAR(1 g) = 0.185 mW/g; SAR(10 g) = 0.121 mW/g

Maximum value of SAR (measured) = 0.196 mW/g

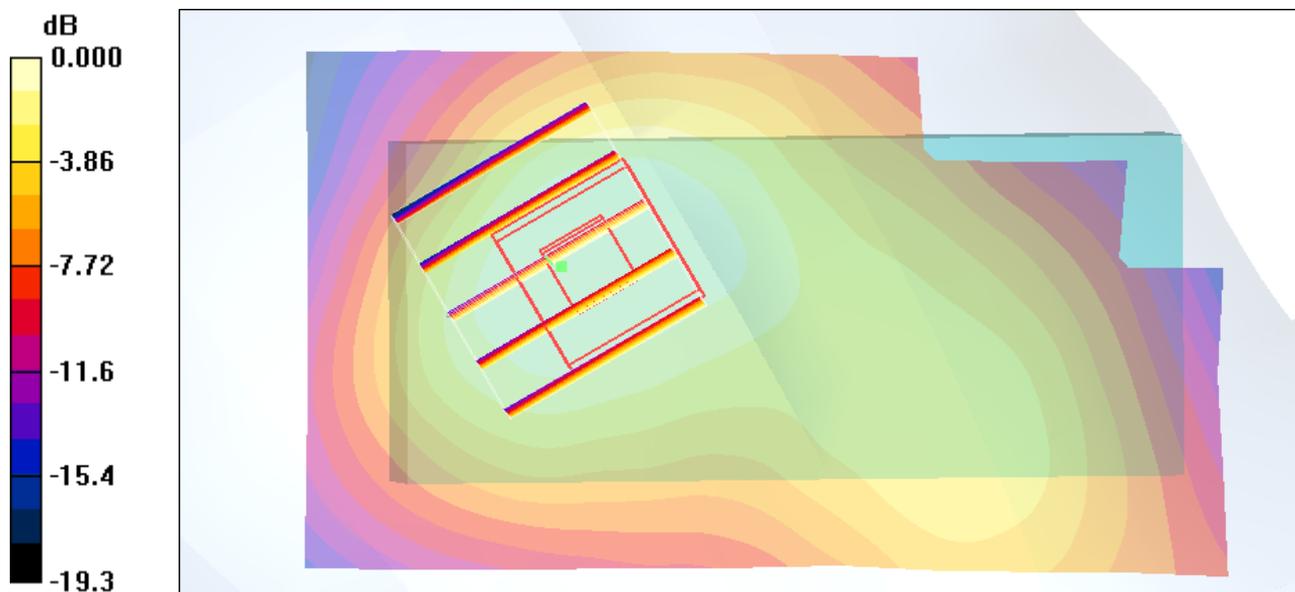

0 dB = 0.196mW/g

#15 CDMA Bc0_RC3+SO55_Face_1.5cm_Ch384

DUT: 902129

Communication System: CDMA ; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: MSL_850_091116 Medium parameters used: $f = 837$ MHz; $\sigma = 0.986$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.08, 6.08, 6.08); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch384/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.648 mW/g


Ch384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.6 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.773 W/kg

SAR(1 g) = 0.601 mW/g; SAR(10 g) = 0.437 mW/g

Maximum value of SAR (measured) = 0.637 mW/g

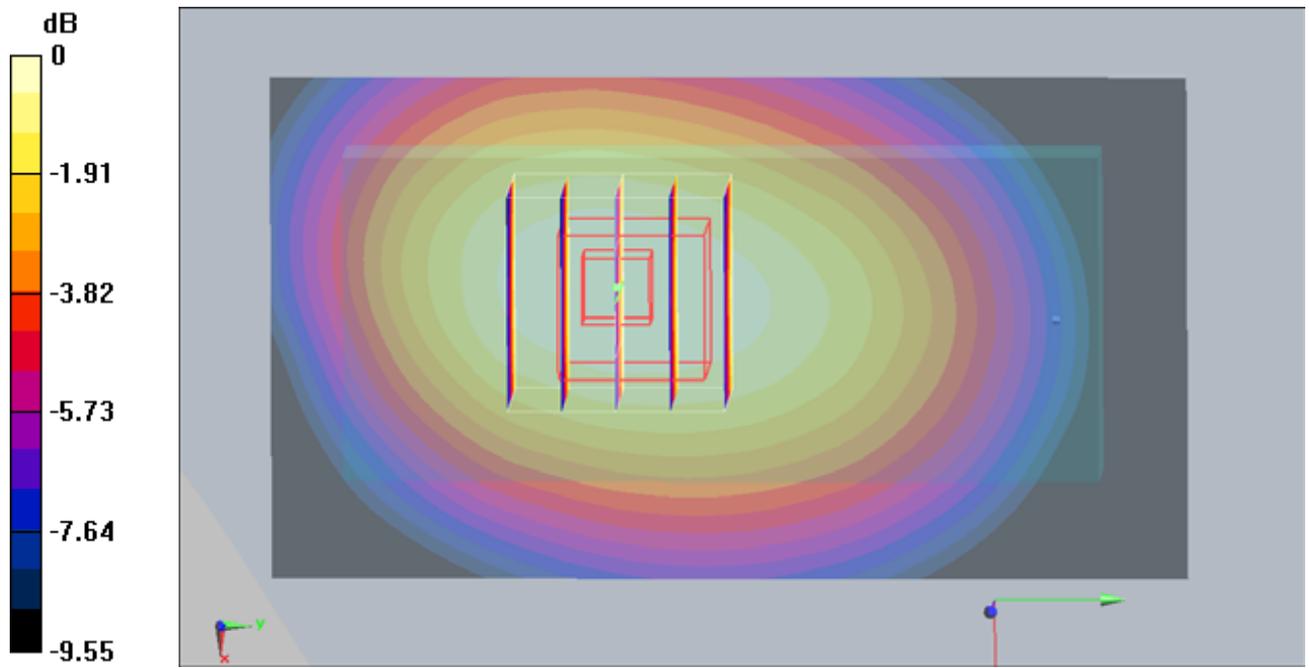

0 dB = 0.637mW/g

#17 CDMA Bc0_RC3+SO55_Bottom_1.5cm_Ch1013

DUT: 902129

Communication System: CDMA ; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: MSL_850_091116 Medium parameters used: $f = 825$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.08, 6.08, 6.08); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch1013/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.704 mW/g


Ch1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 0.847 W/kg

SAR(1 g) = 0.662 mW/g; SAR(10 g) = 0.476 mW/g

Maximum value of SAR (measured) = 0.702 mW/g

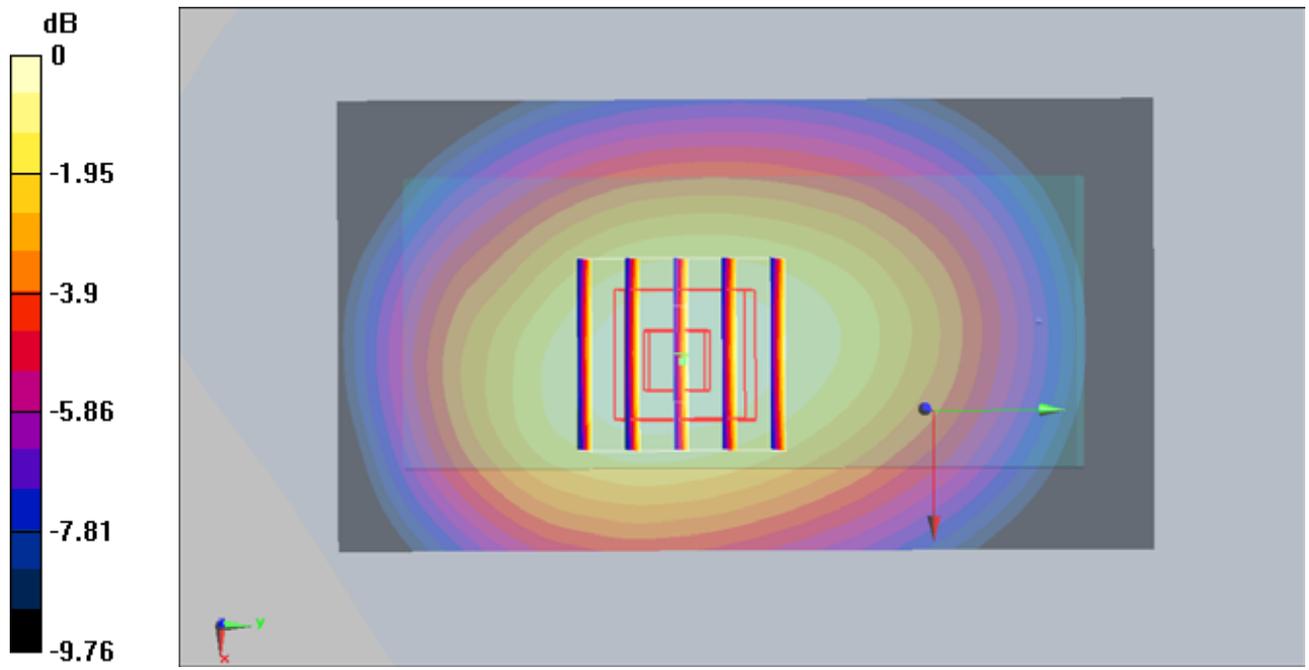

0 dB = 0.702mW/g

#17 CDMA Bc0_RC3+SO55_Bottom_1.5cm_Ch1013_2D

DUT: 902129

Communication System: CDMA ; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: MSL_850_091116 Medium parameters used: $f = 825$ MHz; $\sigma = 0.973$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 ; Liquid Temperature : 21.4

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(6.08, 6.08, 6.08); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: SAM-Back; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch1013/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.704 mW/g


Ch1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 0.847 W/kg

SAR(1 g) = 0.662 mW/g; SAR(10 g) = 0.476 mW/g

Maximum value of SAR (measured) = 0.702 mW/g

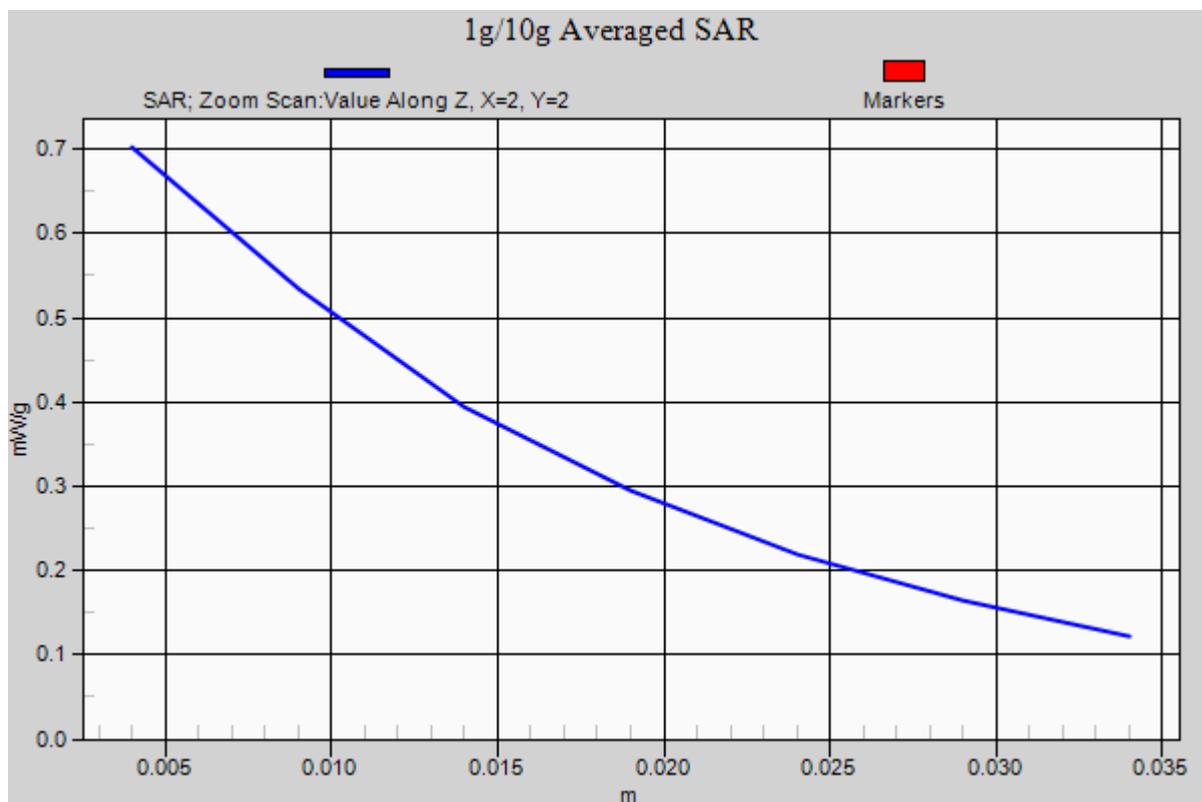

#34 CDMA Bc15_RC3+SO55_Face_1.5cm_Ch875

DUT: 902129

Communication System: CDMA ; Frequency: 1753.75 MHz; Duty Cycle: 1:1

Medium: MSL_1800_091116 Medium parameters used: $f = 1754$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$

kg/m³

Ambient Temperature : 22.5 ; Liquid Temperature : 21.6

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.77, 4.77, 4.77); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch875/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.615 mW/g



Ch875/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.4 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.770 W/kg

SAR(1 g) = 0.558 mW/g; SAR(10 g) = 0.346 mW/g

Maximum value of SAR (measured) = 0.608 mW/g

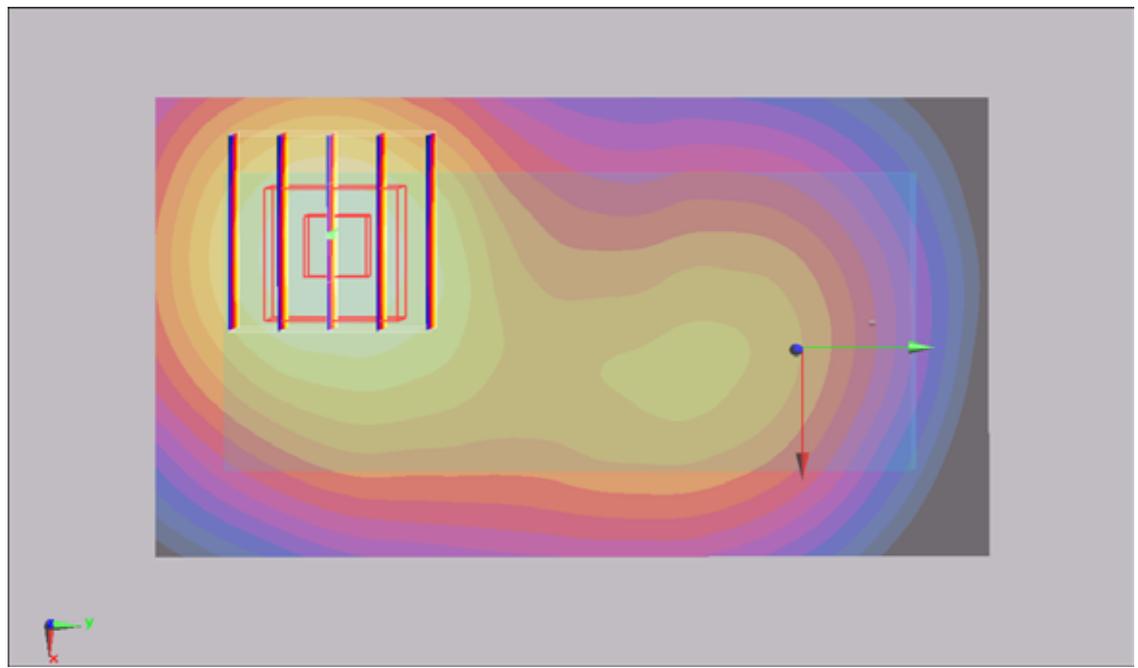

0 dB = 0.608mW/g

#34 CDMA Bc15_RC3+SO55_Face_1.5cm_Ch875_2D

DUT: 902129

Communication System: CDMA ; Frequency: 1753.75 MHz;Duty Cycle: 1:1

Medium: MSL_1800_091116 Medium parameters used: $f = 1754$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 ; Liquid Temperature : 21.6

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.77, 4.77, 4.77); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch875/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.615 mW/g


Ch875/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.4 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.770 W/kg

SAR(1 g) = 0.558 mW/g; SAR(10 g) = 0.346 mW/g

Maximum value of SAR (measured) = 0.608 mW/g

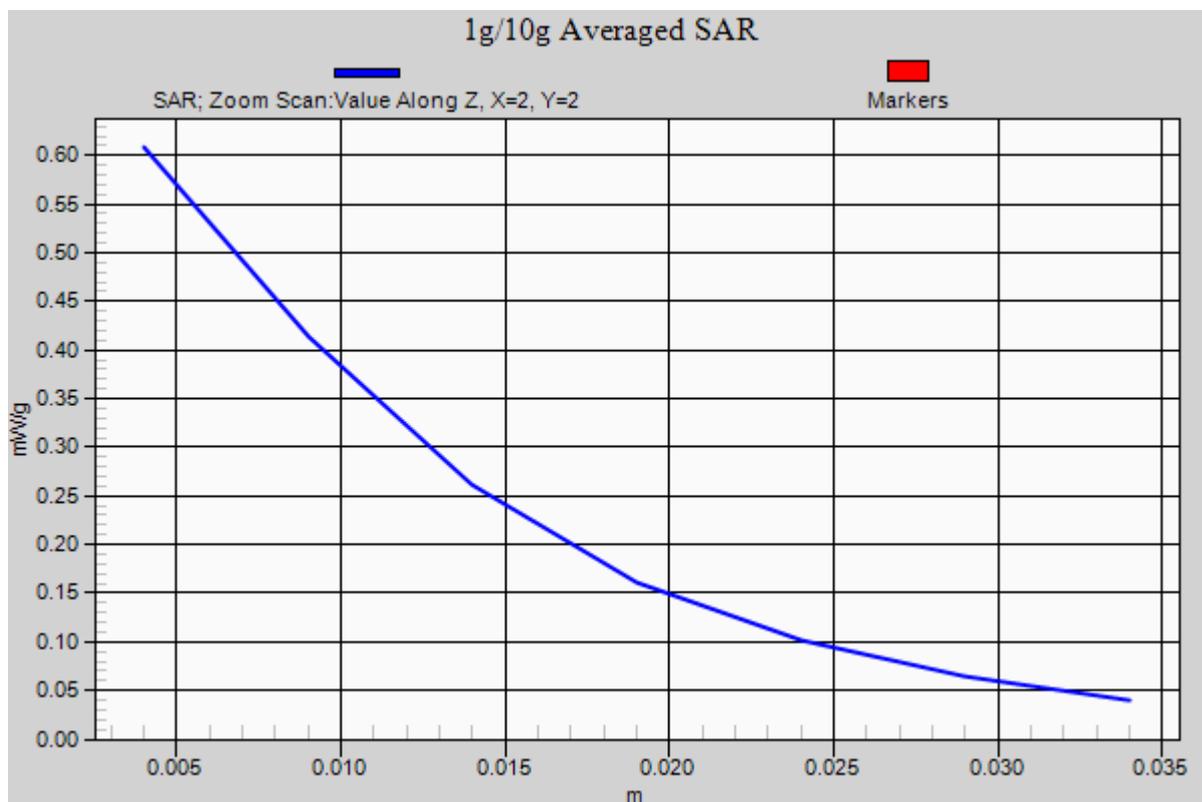

#32 CDMA Bc15_RC3+SO55_Bottom_1.5cm_Ch425

DUT: 902129

Communication System: CDMA ; Frequency: 1731.25 MHz; Duty Cycle: 1:1

Medium: MSL_1800_091116 Medium parameters used: $f = 1731.25$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 ; Liquid Temperature : 21.6

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.77, 4.77, 4.77); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch425/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.221 mW/g



Ch425/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.74 V/m; Power Drift = -0.184 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.197 mW/g; SAR(10 g) = 0.124 mW/g

Maximum value of SAR (measured) = 0.214 mW/g

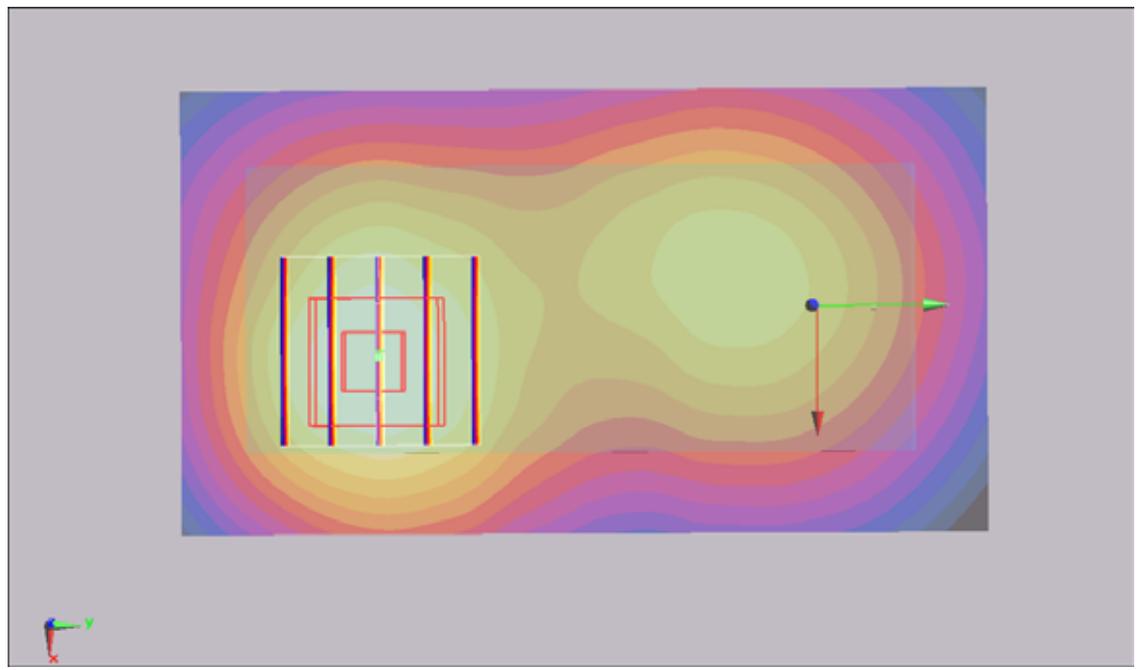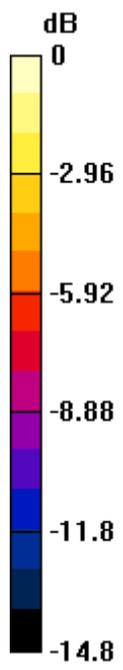

0 dB = 0.214mW/g

#29 CDMA Bc1_RC3+SO55_Face_1.5cm_Ch25

DUT: 902129

Communication System: CDMA ; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium: MSL_1900_091116 Medium parameters used: $f = 1851.25$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 ; Liquid Temperature : 21.3

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.52, 4.52, 4.52); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch25/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.538 mW/g


Ch25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.14 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.471 mW/g; SAR(10 g) = 0.284 mW/g

Maximum value of SAR (measured) = 0.522 mW/g

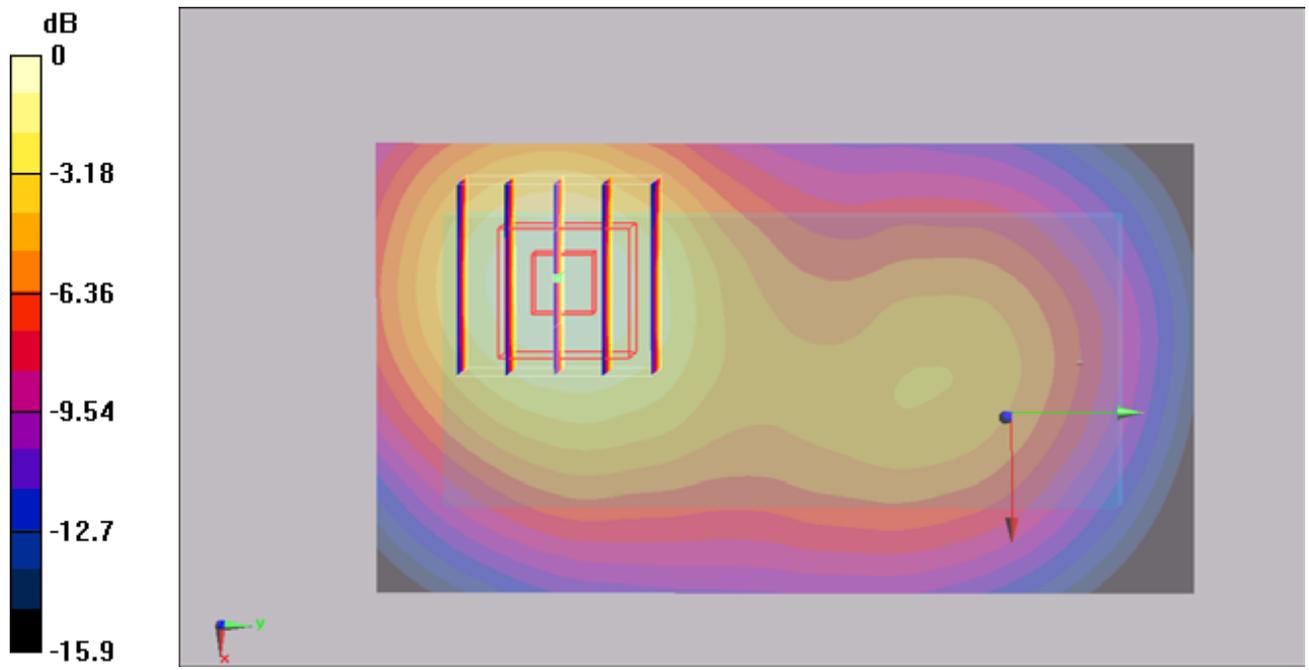

0 dB = 0.522mW/g

#29 CDMA Bc1_RC3+SO55_Face_1.5cm_Ch25_2D

DUT: 902129

Communication System: CDMA ; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium: MSL_1900_091116 Medium parameters used: $f = 1851.25$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 ; Liquid Temperature : 21.3

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.52, 4.52, 4.52); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch25/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.538 mW/g


Ch25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.14 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.471 mW/g; SAR(10 g) = 0.284 mW/g

Maximum value of SAR (measured) = 0.522 mW/g

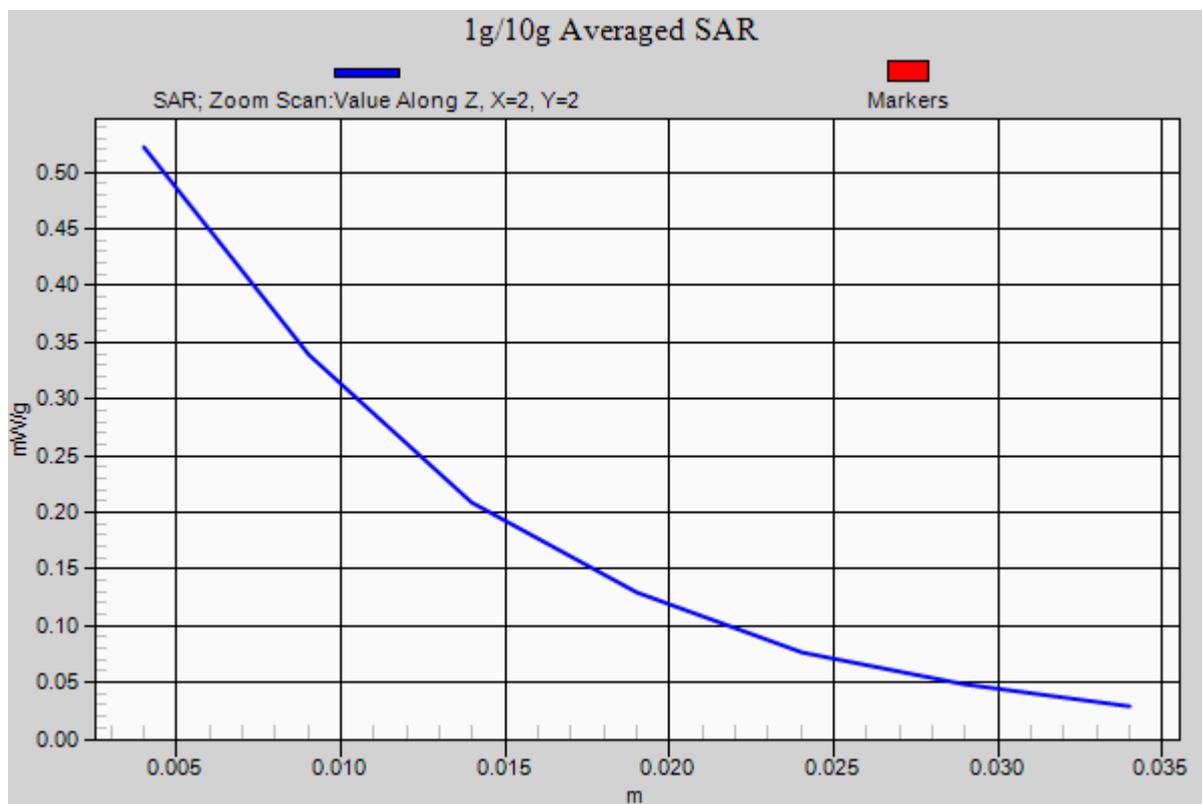

#28 CDMA Bc1_RC3+SO55_Bottom_1.5cm_Ch600

DUT: 902129

Communication System: CDMA ; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium: MSL_1900_091116 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52$; $\rho = 1000$

kg/m³

Ambient Temperature : 22.4 ; Liquid Temperature : 21.3

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.52, 4.52, 4.52); Calibrated: 2009/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2009/9/18
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1029
- Measurement SW: DASY5, V5.0 Build 125; SEMCAD X Version 13.4 Build 125

Ch600/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.320 mW/g


Ch600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.87 V/m; Power Drift = -0.067 dB

Peak SAR (extrapolated) = 0.388 W/kg

SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.178 mW/g

Maximum value of SAR (measured) = 0.306 mW/g

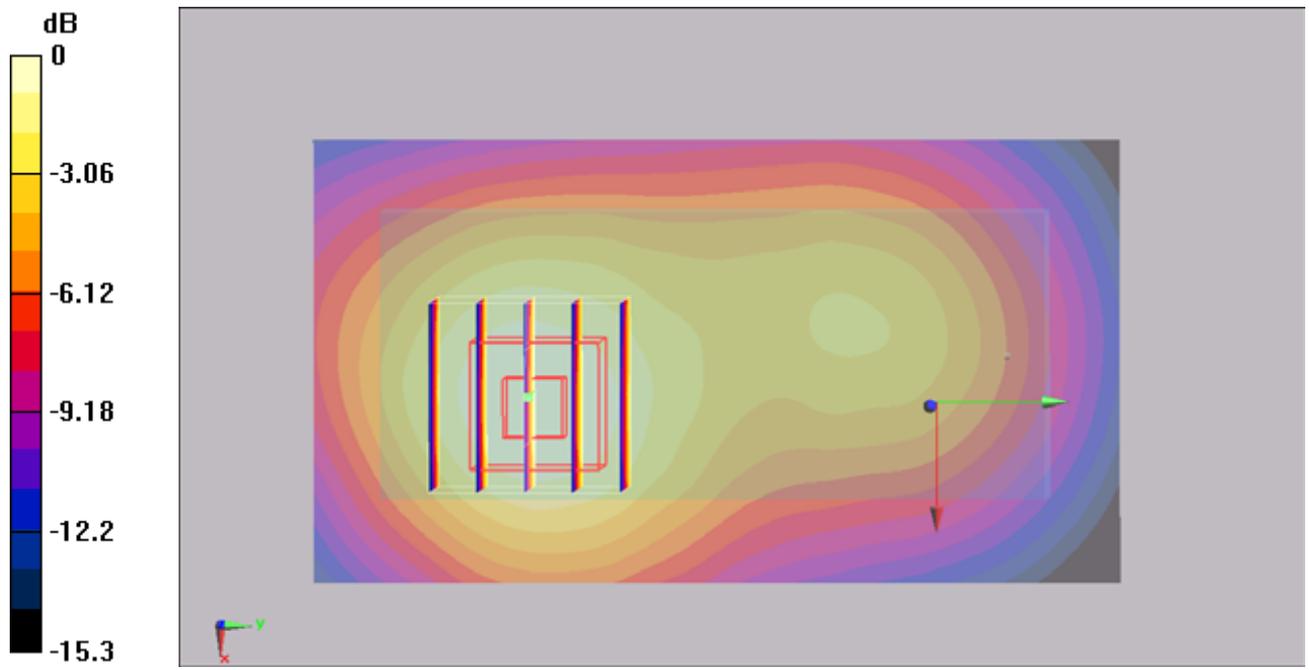

0 dB = 0.306mW/g

#44 CDMA Bc14_RC3+SO55_Face_1.5cm_Ch1275

DUT: 9O2129

Communication System: CDMA ; Frequency: 1913.75 MHz; Duty Cycle: 1:1

Medium: MSL_1900_091130 Medium parameters used: $f = 1914$ MHz; $\sigma = 1.58$ mho/m; $\epsilon_r = 51.6$; ρ

$= 1000$ kg/m³

Ambient Temperature : 22.5 ; Liquid Temperature : 21.5

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.49, 4.49, 4.49); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1275/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.376 mW/g


Ch1275/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.03 V/m; Power Drift = -0.176 dB

Peak SAR (extrapolated) = 0.483 W/kg

SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.354 mW/g

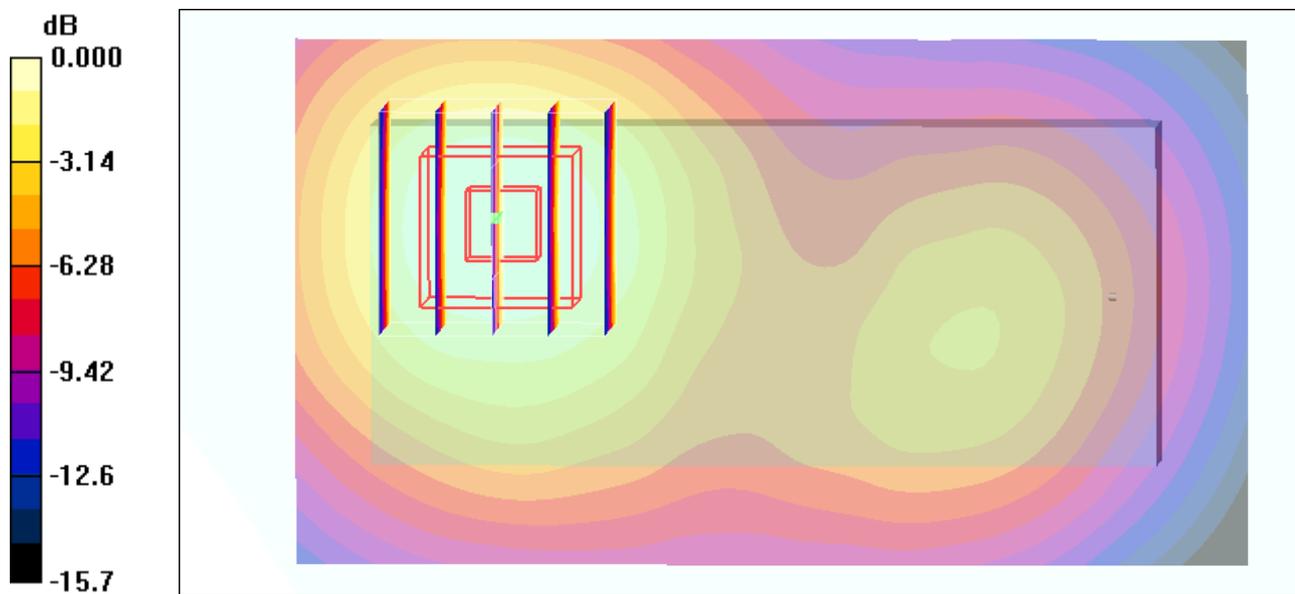

0 dB = 0.354mW/g

#44 CDMA Bc14_RC3+SO55_Face_1.5cm_Ch1275_2D

DUT: 9O2129

Communication System: CDMA ; Frequency: 1913.75 MHz; Duty Cycle: 1:1

Medium: MSL_1900_091130 Medium parameters used: $f = 1914$ MHz; $\sigma = 1.58$ mho/m; $\epsilon_r = 51.6$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.5 ; Liquid Temperature : 21.5

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.49, 4.49, 4.49); Calibrated: 2009/5/26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2009/8/24
- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1275/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.376 mW/g


Ch1275/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.03 V/m; Power Drift = -0.176 dB

Peak SAR (extrapolated) = 0.483 W/kg

SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.354 mW/g

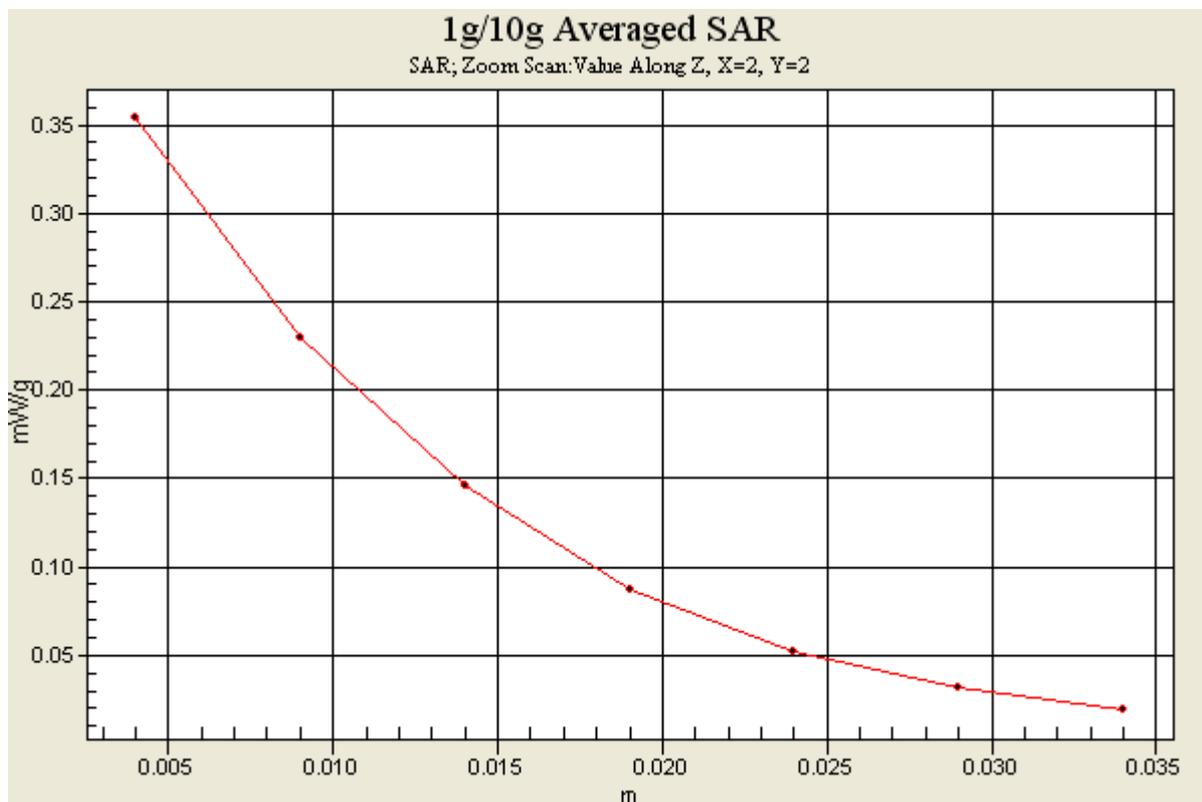

#42 CDMA Bc14_RC3+SO55_Bottom_1.5cm_Ch1225

DUT: 9O2129

Communication System: CDMA ; Frequency: 1911.25 MHz; Duty Cycle: 1:1

Medium: MSL_1900_091130 Medium parameters used: $f = 1911.25$ MHz; $\sigma = 1.58$ mho/m; $\epsilon_r =$

51.6 ; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 ; Liquid Temperature : 21.5

DASY4 Configuration:

- Probe: ET3DV6 - SN1787; ConvF(4.49, 4.49, 4.49); Calibrated: 2009/5/26

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn577; Calibrated: 2009/8/24

- Phantom: SAM-Right; Type: QD 000 P40 C; Serial: TP-1383

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch1225/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.260 mW/g


Ch1225/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.11 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.235 mW/g; SAR(10 g) = 0.144 mW/g

Maximum value of SAR (measured) = 0.256 mW/g

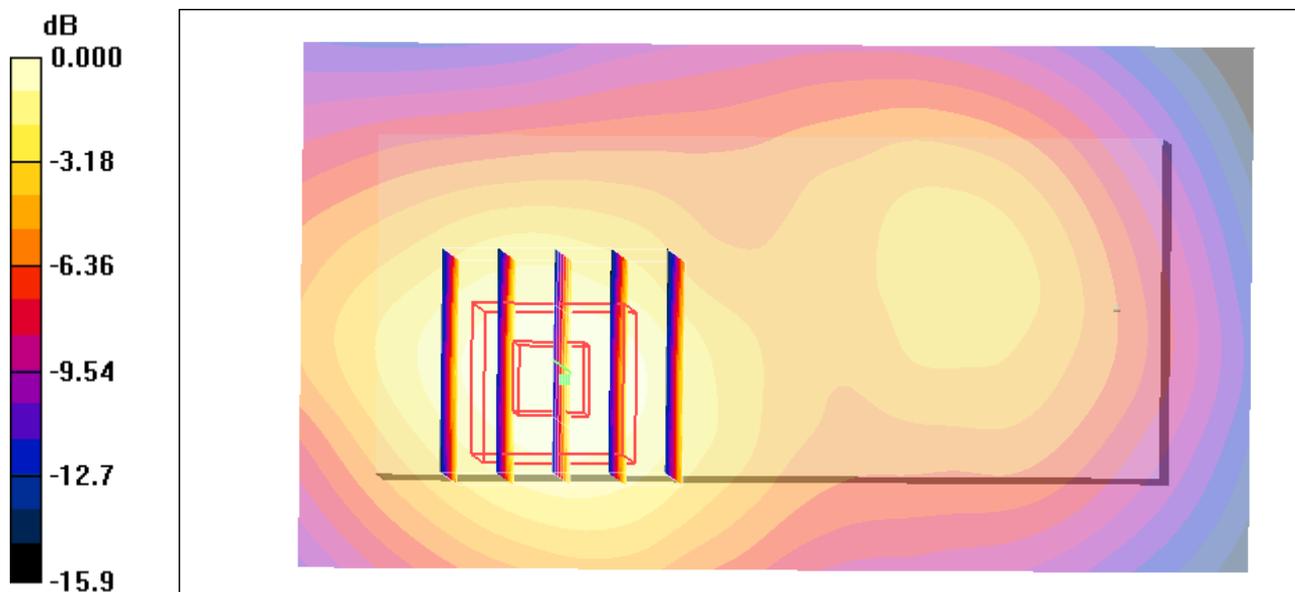

0 dB = 0.256mW/g