


FCC PART 24 TYPE APPROVAL
EMI MEASUREMENT AND TEST REPORT
For
ZTE Corporation

ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen, Guangdong, China

FCC ID: Q78-CBTSI119

November 1, 2005

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: CDMA2000 Compact Base Transceiver Station-II
Test Engineer: Sam Lin 	
Report No.: RSZ05091603	
Test Date: September 21-30, 2005	
Reviewed By: Chris Zeng 	
Prepared By: Bay Area Compliance Lab Corp. (ShenZhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone, ShenZhen, Guangdong 518038, P.R.China Tel: +86-755-33320018 Fax: +86-755-33320008	

Note: The test report is specially limited to the above company and this particular sample only. It may not be duplicated without prior written consent of Bay Area Compliance Lab Corp. (ShenZhen). This report **must not** be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the US Government.

TABLE OF CONTENTS

GENERAL INFORMATION.....4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4

 OBJECTIVE4

 RELATED SUBMITTAL(S)/GRANT(S).....4

 TEST METHODOLOGY4

 TEST FACILITY4

 EXTERNAL I/O CABLE5

SYSTEM TEST CONFIGURATION.....6

 DESCRIPTION OF TEST CONFIGURATION6

 EQUIPMENT MODIFICATIONS6

 CONFIGURATION OF TEST SETUP7

 BLOCK DIAGRAM OF TEST SETUP7

SUMMARY OF TEST RESULTS8

§2.1091 - RF EXPOSURE.....9

 LIMIT9

 TEST DATA9

§2.1046, §24.232- CONDUCTED OUTPUT POWER.....10

 APPLICABLE STANDARD10

 TEST EQUIPMENT LIST AND DETAILS.....10

 TEST PROCEDURE10

 TEST DATA10

§2.1047- MODULATION CHARACTERISTIC15

 APPLICABLE STANDARD15

 TEST EQUIPMENT LIST AND DETAILS.....15

 TEST PROCEDURE15

 TEST DATA15

§15.109(a)- UNINTENTIONAL RADIATED EMISSION20

 MEASUREMENT UNCERTAINTY20

 EUT SETUP20

 EMI TEST RECEIVER SETUP20

 TEST EQUIPMENT LIST AND DETAILS.....21

 TEST PROCEDURE21

 CORRECTED AMPLITUDE & MARGIN CALCULATION21

 TEST RESULTS SUMMARY21

 TEST DATA22

 PLOT(S) OF TEST DATA.....22

§2.1053- SPURIOUS RADIATED EMISSIONS25

 APPLICABLE STANDARD25

 TEST EQUIPMENT LIST AND DETAILS.....25

 TEST PROCEDURE25

 TEST RESULTS SUMMARY25

 TEST DATA25

§2.1051, §24.238(a)- SPURIOUS EMISSIONS AT ANTENNA TERMINALS28

 APPLICABLE STANDARD28

 TEST EQUIPMENT LIST AND DETAILS.....28

 TEST PROCEDURE28

 TEST DATA28

§2.1049& §24.238-OCCUPIED BANDWIDTH44

 APPLICABLE STANDARD44

 TEST EQUIPMENT LIST AND DETAILS.....44

TEST PROCEDURE	44
TEST DATA	44
§24.238- BAND EDGES	47
APPLICABLE STANDARD	47
TEST EQUIPMENT LIST AND DETAILS.....	47
TEST PROCEDURE	47
TEST DATA	47
§2.1055 (a), §2.1055 (d) & §24.235 - FREQUENCY STABILITY	49
APPLICABLE STANDARD	49
TEST EQUIPMENT LIST AND DETAILS.....	49
TEST PROCEDURE	49
TEST DATA	49

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The ZTE Corporation's product, model number: ZXC10 CBTS I119 or the "EUT" as referred to in this report is a CDMA2000 Compact Base Transceiver Station-II. The EUT is measured approximately 70.0 cm L x 80.0cmW x 80.0cmH, rated input voltage: DC -48 V.

** The test data gathered are from production sample, serial number: 0504169, provided by the manufacturer, we received the EUT on 2005-9-16.*

Objective

This Type approval report is prepared on behalf of ZTE Corporation in accordance with Part 2, Subpart J, and Part 24 Subpart E of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2,Sub-part J as well as the following parts:

Part 24 Subpart E - PCS

Applicable Standards: TIA EIA 137-A, TIA EIA 97-D, TIA/EIA 603-C, Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

Test Facility

The Test site used by Bay Area Compliance Lab Corp. (ShenZhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone, ShenZhen, Guangdong 518038, P.R.China.

Test site at Bay Area Compliance Lab Corp. (ShenZhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Lab Corp. (ShenZhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2007070.htm>

External I/O Cable

Cable Description	Length (M)	From/Port	To
Unshielded Detachable DC Power Cable	2.5	EUT	DC Power

SYSTEM TEST CONFIGURATION


Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).


Equipment Modifications

Bay Area Compliance Lab Corp. (ShenZhen) has not done any modification on the EUT.

Configuration of Test Setup

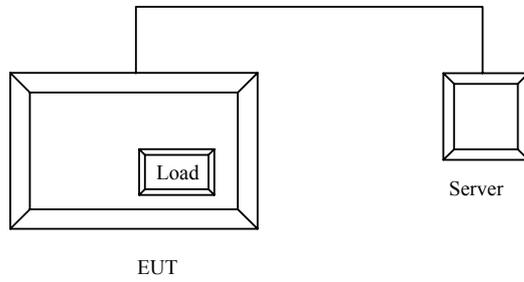

Block Diagram of Test Setup

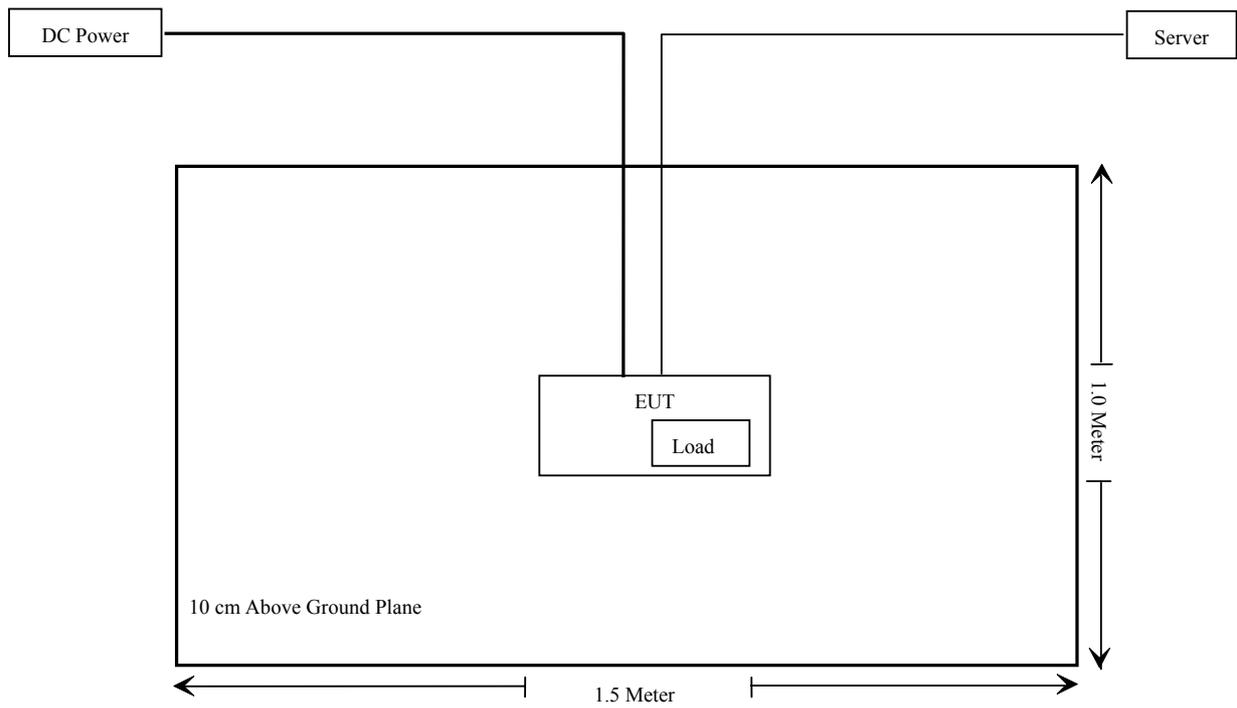

SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§2.1046, §24.232	Conducted Output Power	Compliant
§ 2.1091	RF Exposure	Compliant
§2.1047	Modulation characteristic	Compliant
§15.109(a)	Unintentional Radiation Emission	Compliant
§2.1053	Spurious Radiated Emissions	Compliant
§2.1051, §24.238(a)	Spurious Emissions AT Antenna Terminals	Compliant
§2.1049, §24.238	Occupied Bandwidth	Compliant
§24.238	Band Edge	Compliant
§ 2.1055 (a) § 2.1055 (d) § 24.235	Frequency stability	Compliant

§2.1091 - RF EXPOSURE

Limit

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1093 RF exposure is calculated.

Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300.	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6

f = frequency in MHz

* = Plane-wave equivalent power density

Test Data

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal: 46.69 (dBm)

Maximum peak output power at antenna input terminal: 46.67 (W)

Prediction distance: 250 (cm)

Predication frequency: 1931.25 (MHz)

Antenna Gain (typical): 17 (dBi)

Power density at predication frequency at 250 cm: 1.011 (mW/cm²)

MPE limit for uncontrolled exposure at prediction frequency: 5 (mW/cm²)

Test Result: Pass

§2.1046, §24.232- CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §24.232(a), in no case may the peak output power of a base station transmitter exceed 100 watt.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	PSA Spectrum Analyzer	E4445A	MY44300451	2005-6-3	2006-6-3

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Test Data

Environmental Conditions

Temperature:	18 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar

The testing was performed by Sam Lin on 2005-9-27.

Test Result: Pass


Test Mode: Transmitting

The result has been complied with the §2.1046, §24.232, see the following plot:


For 1 Carrier

Channel	Frequency (MHz)	Output Power in dBm	Output Power in W	Limit in W
Channel 25	1931.25	46.56	45.29	100
Channel 600	1960.00	45.78	37.84	100
Channel 1175	1988.75	46.16	41.34	100


Channel 25

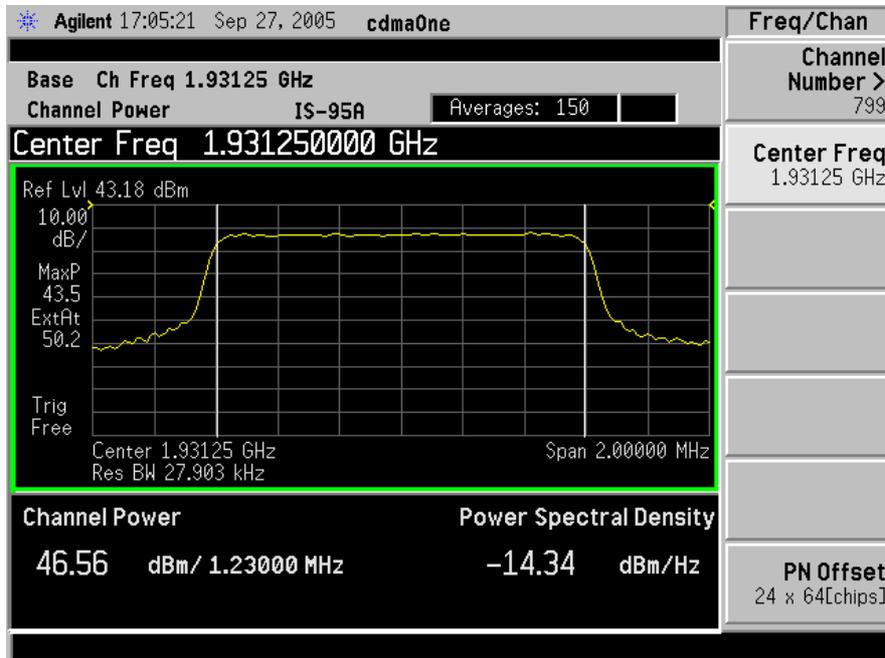

Channel 600

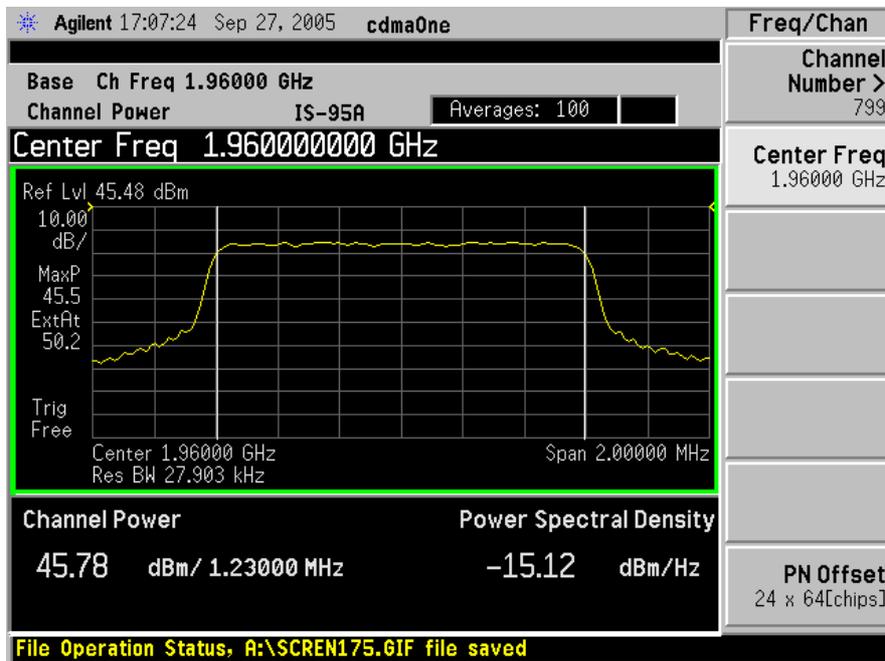


Channel 1175

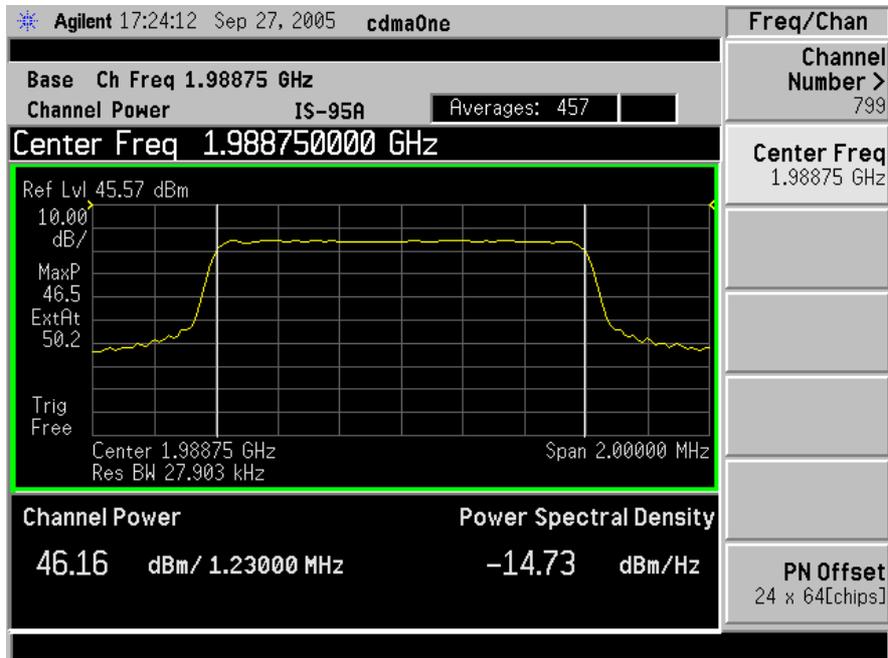


For 4 Carrier

Channel	Frequency (MHz)	Output Power in dBm	Output Power in W	Limit in W
Channel 25, 50, 75, 100	1931.25	46.69	46.67	100
Channel 600, 625, 650, 675	1960.00	46.05	40.27	100
Channel 1100, 1125, 1150, 1175	1988.75	46.51	44.77	100


Channel 25, 50, 75, 100

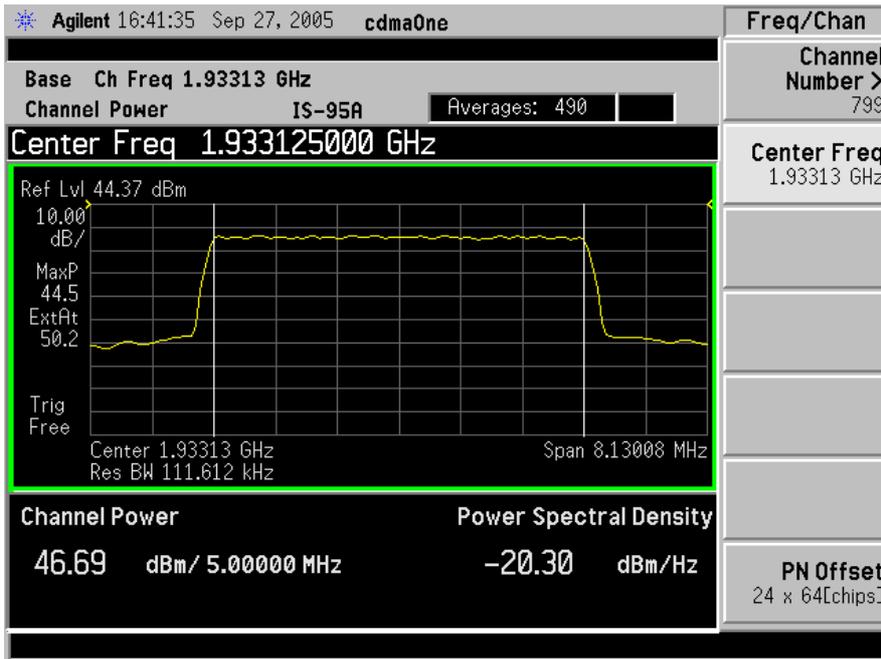

Channel 600, 625, 650, 675

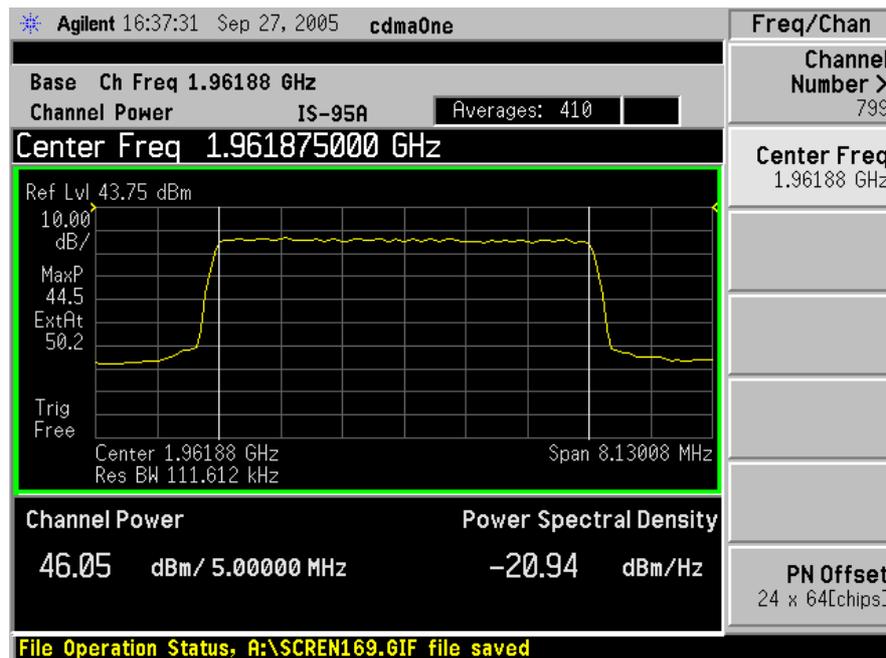

Channel 1100, 1125, 1150, 1175

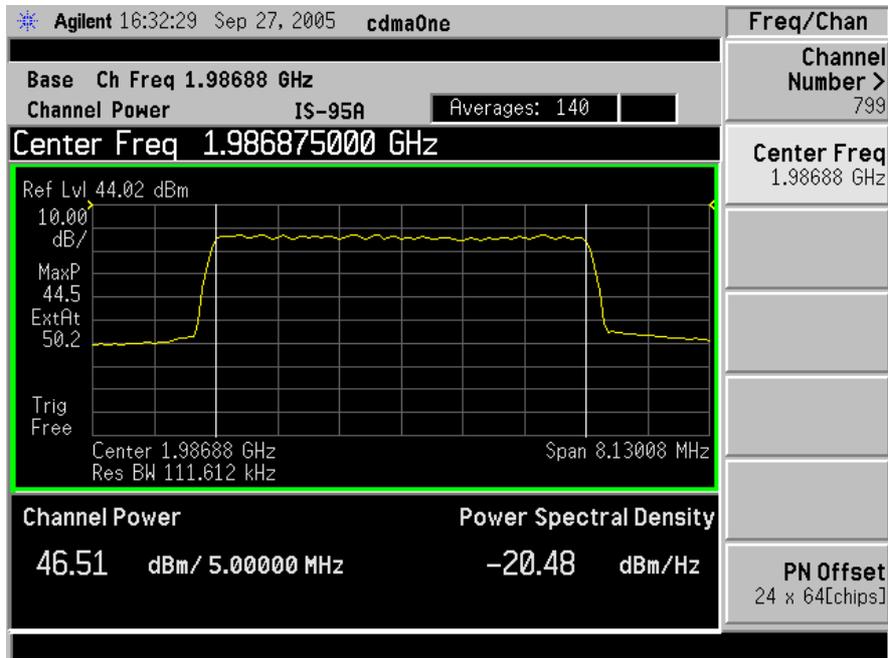

§2.1047- MODULATION CHARACTERISTIC

Applicable Standard

Requirement: §2.1047.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	PSA Spectrum Analyzer	E4445A	MY44300451	2005-6-3	2006-6-3

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

CDMA digital mode is used by EUT.

Test Data

Environmental Conditions

Temperature:	18 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar

The testing was performed by Sam Lin on 2005-9-29.

Test Result: Pass


Test Mode: Transmitting

The result has been complied with the §2.1047, see the following plot:


For 1 Carrier

Channel	Frequency (MHz)	Rho
Channel 25	1931.25	0.9975
Channel 600	1960.00	0.9975
Channel 1175	1988.75	0.9976


Channel 25

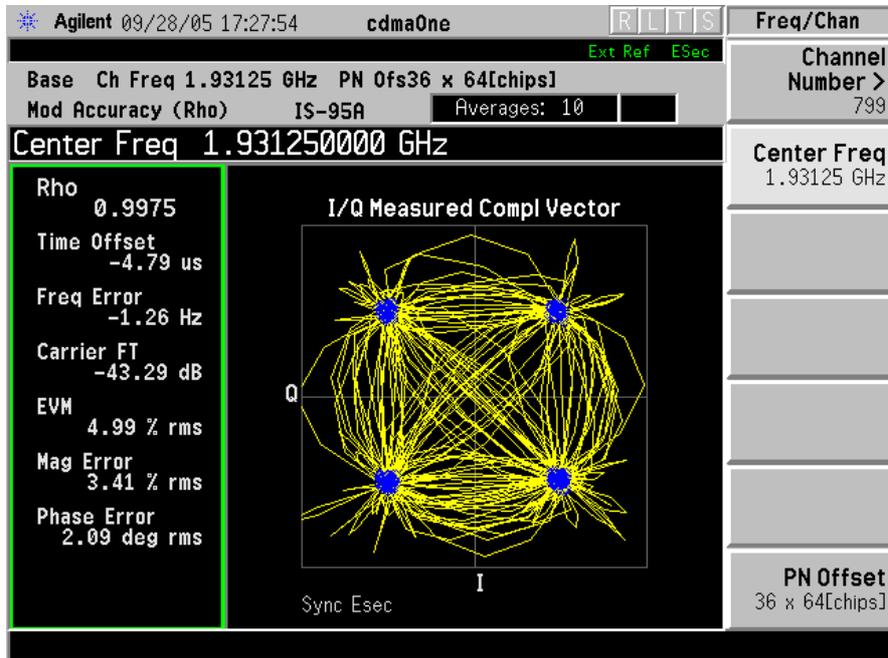

Channel 600

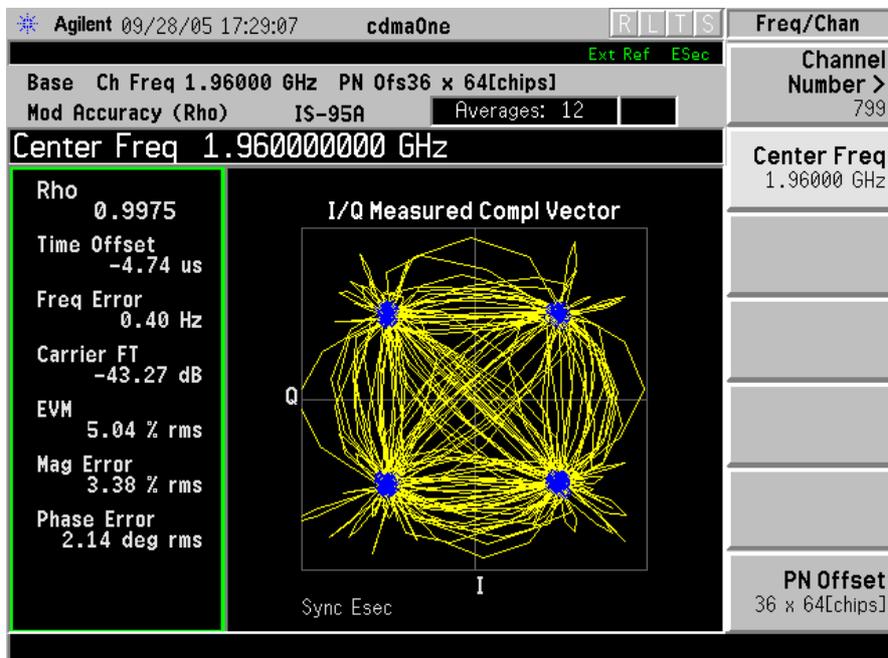


Channel 1175

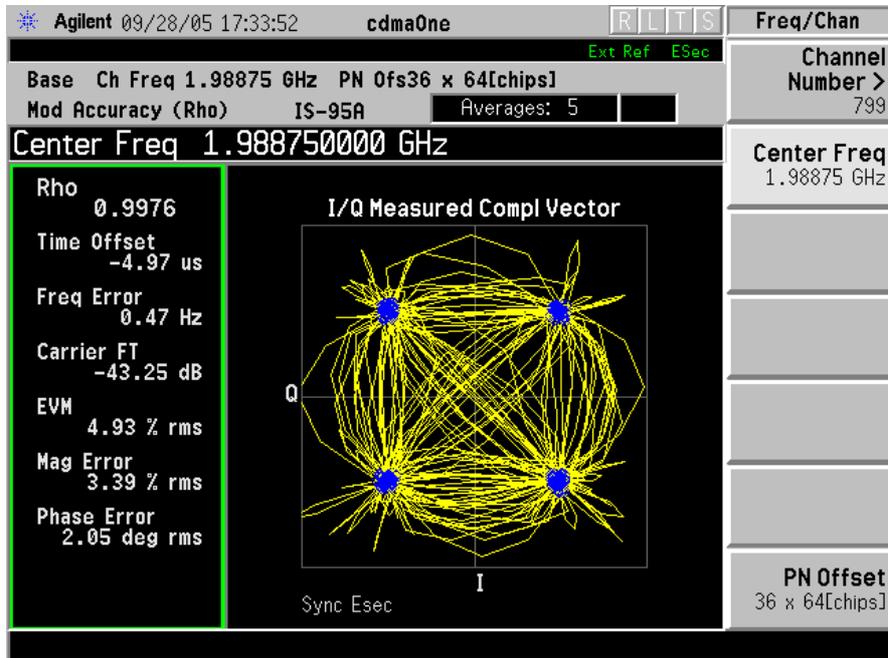


For 4 Carrier

Channel	Frequency (MHz)	Rho
Channel 25, 50, 75, 100	1931.25	0.9898
Channel 600, 625, 650, 675	1960.00	0.9893
Channel 1100, 1125, 1150, 1175	1988.75	0.9898


Channel 25, 50, 75, 100

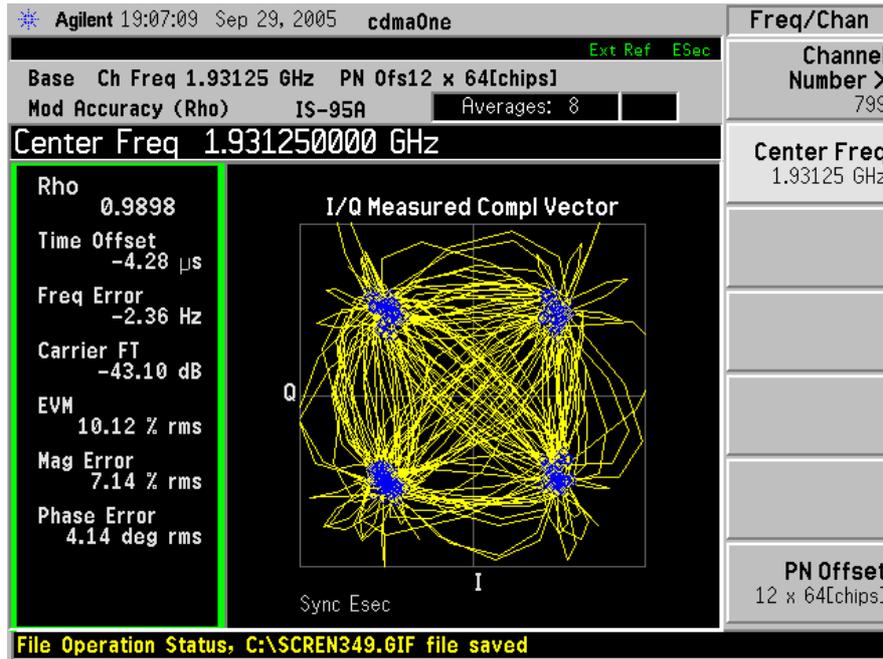

Channel 600, 625, 650, 675

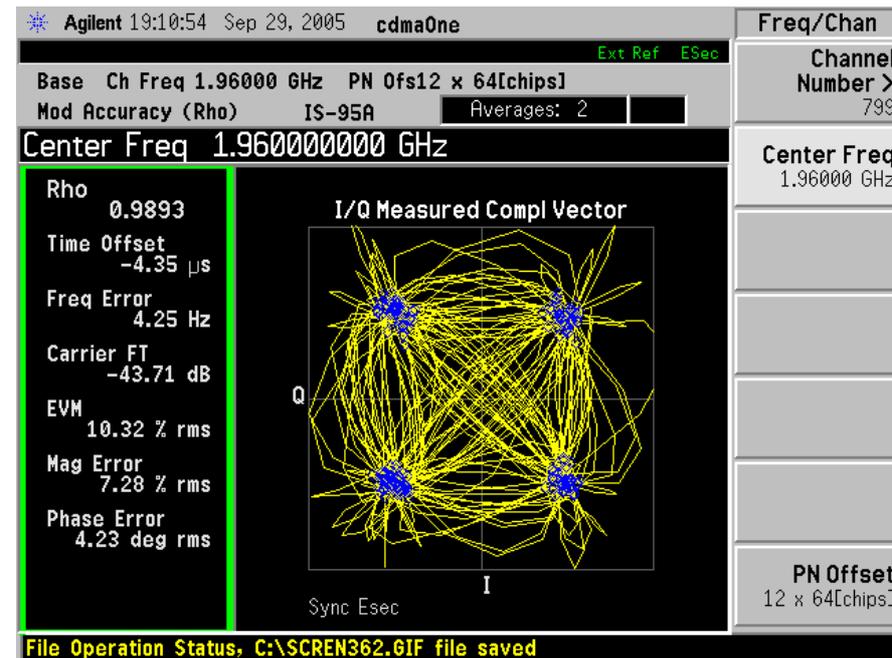

Channel 1100, 1125, 1150, 1175

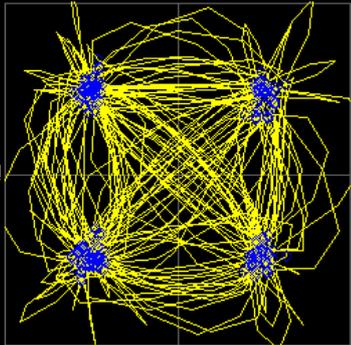* Agilent 19:14:08 Sep 29, 2005 cdmaOne		Freq/Chan	
Base Ch Freq 1.98875 GHz PN Ofs12 x 64[chips]		Channel Number >	
Mod Accuracy (Rho) IS-95A Averages: 6		799	
Center Freq 1.988750000 GHz		Center Freq	
		1.98875 GHz	
Rho	0.9898		
Time Offset	-4.63 μ s		
Freq Error	-3.69 Hz		
Carrier FT	-43.13 dB		
EVM	10.11 % rms		
Mag Error	7.03 % rms		
Phase Error	4.20 deg rms		
I/Q Measured Compl Vector			
			
Sync Esec			
		PN Offset	
		12 x 64[chips]	
File Operation Status, C:\SCREN373.GIF file saved			


§15.109(a)- UNINTENTIONAL RADIATED EMISSION

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Lab Corp. (ShenZhen) is ± 4.0 dB.

EUT Setup

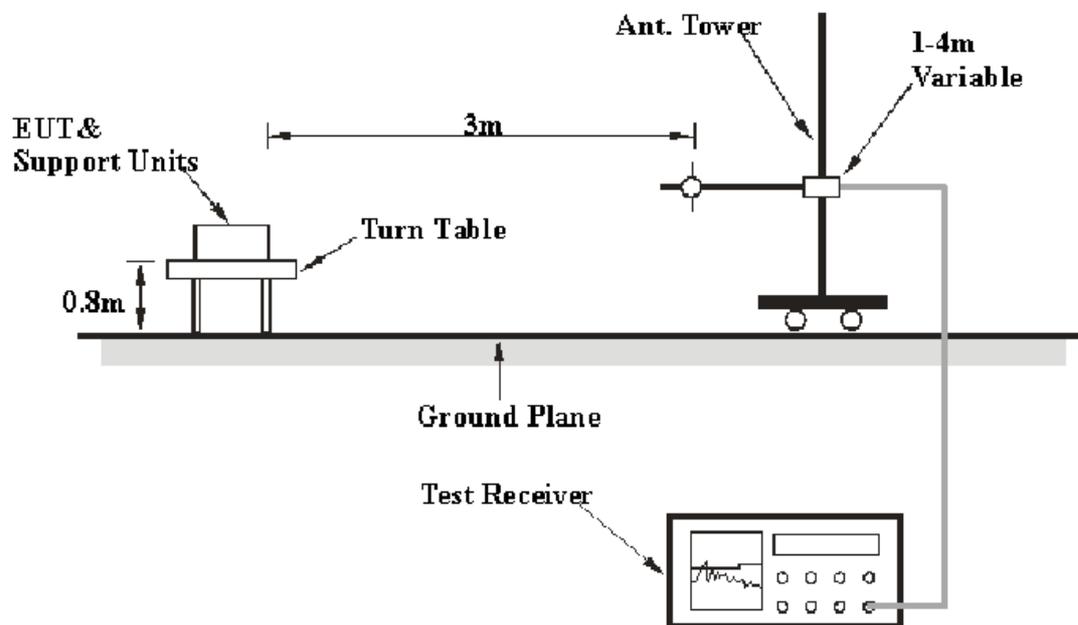

The radiated emission tests were performed in the 3-meter Chamber B using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.109(a) limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 1000 MHz.

During the radiated emission test, the EMI Test Receiver was set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>IF B/W</i>
30 – 1000 MHz	100 kHz	300kHz	120kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447D	2944A09795	2005-8-17	2006-8-17
Rohde & Schwarz	Test Receiver	ESCI	100028	2005-8-17	2006-8-17
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2005-4-28	2006-4-28

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the PK detection mode.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.109(a), with the worst margin reading of:

-7.2 dB at 528.24 MHz in the Horizontal polarization.

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	47 %
ATM Pressure:	1000 mbar

The testing was performed by Sam Lin on 2005-9-21, and the data were only for unintentional radiator and be subjected to verification

Test Mode: Transmitting


INDICATED		TABLE Angle Degree	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE Corr. Ampl. dBμV/m	FCC Part 15.109(a)	
Frequency MHz	Meter Reading dBμV/m		Height Meter	Polar H/ V	Antenna Loss dB	Cable Loss dB	Amplifier Gain dB		Limit dBμV/m	Margin dB
528.24	53.3	45	1.0	H	18.3	4.7	27.1	49.2	56.4	-7.20
90.22	61.9	35	3.8	H	7.7	1.9	26.8	44.7	53.5	-8.80
793.39	45.1	60	1.2	H	21.9	6.0	26.9	46.1	56.4	-10.30
153.73	54.4	45	1.2	H	13.1	2.0	26.6	42.9	53.5	-10.60
210.78	54.2	90	1.2	H	11.4	2.6	26	42.2	53.5	-11.30
90.22	58.4	289	1.0	V	7.7	1.9	26.8	41.2	53.5	-12.30
271.32	54.2	35	3.8	H	12.6	3.2	26	43.9	56.4	-12.50
271.32	52.2	289	1.0	V	12.6	3.2	26	41.9	56.4	-14.50
78.41	49.5	45	1.0	V	8.6	1.8	26.8	33.1	49.1	-16.00
562.66	41.1	60	1.0	V	19.0	4.9	27.1	37.9	56.4	-18.50
96.09	50.8	45	1.2	V	8.2	2.0	26.8	34.2	53.5	-19.30
192.41	46.5	180	1.2	V	11.8	2.4	26.6	34.1	53.5	-19.40

Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference.



*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz 41.94 dBμV
*Att 10 dB *SWT 300 ms 271.324559598 MHz

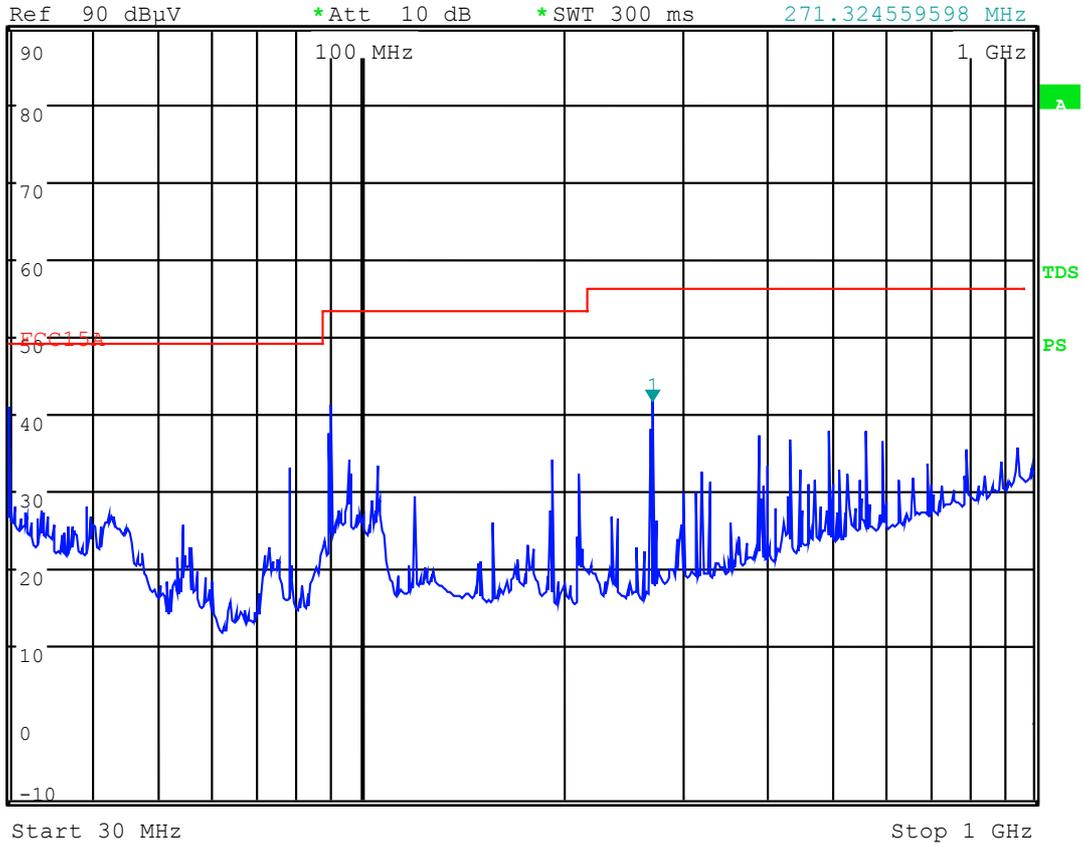




*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz 49.22 dBuV
*SWT 300 ms 528.245819010 MHz

Ref 90 dBuV

*Att 10 dB

528.245819010 MHz

1 PK
VIEW

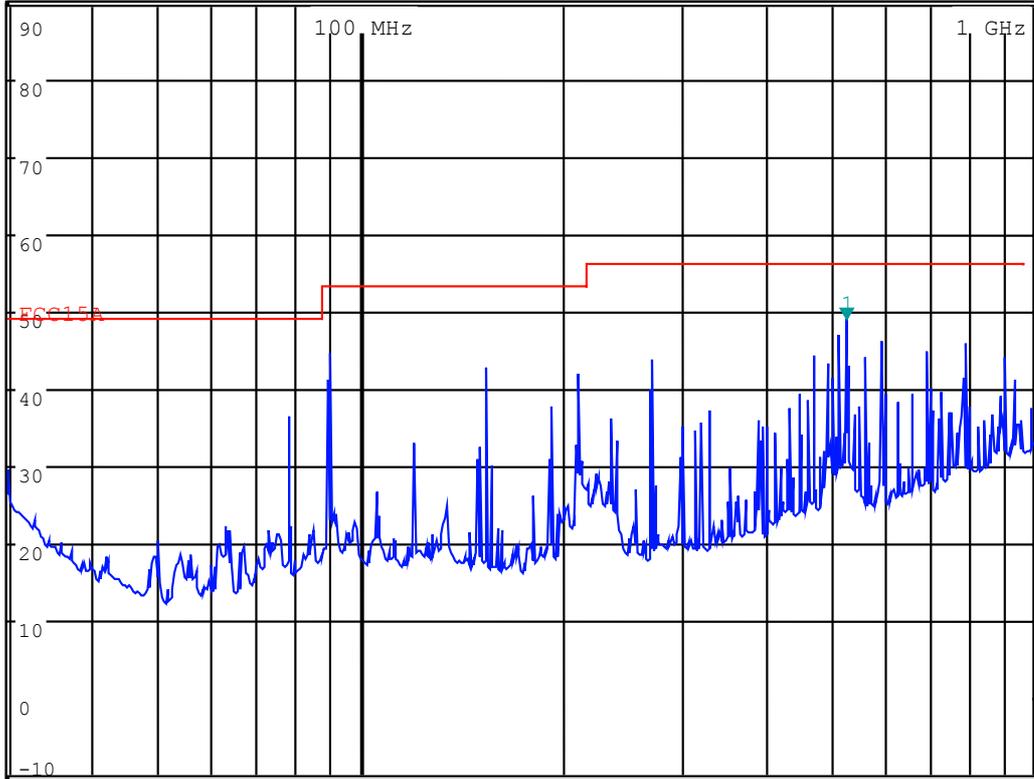

Start 30 MHz

Stop 1 GHz

§2.1053- SPURIOUS RADIATED EMISSIONS

Applicable Standard

Requirements: CFR 47, §2.1053

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8449B	3008A00277	2005-8-17	2006-8-17
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2004-11-10	2005-11-10
SUNOL SCIENCES	Horn Antenna	DRH-118	A052604	2005-7-20	2006-7-20
A.H. System	Horn Antenna	SAS-200/571	135	2005-4-28	2006-4-28
Giga-tronics	Signal Generator	1026	270801	2005-2-28	2006-2-28

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 43 + 10 Log₁₀ (power out in Watts)

Test Results Summary

Channel 25: -31.77 dB at 1072.14 MHz

Channel 600: -33.18 dB at 1132.26 MHz

Channel 1175: -32.10dB at 1072.14 MHz

Test Data

Environmental Conditions

Temperature:	18 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar

The testing was performed by Sam Lin on 2005-9-21

Test Mode: Transmitting

Indicated		Table	Test Antenna		Substituted			Antenna	Cable	Absolute	Limit	Margin
Frequency	Meter	Angle	Height	Polar	Frequency	Level	Polar	Gain	Loss	Level		
MHz	Reading	Degree	Meter	H/V	MHz	dBm	H/V	Correction	dB	dBm	dBm	dB
	dBuV/m							dBi				
Channel 25 f=1931.25MHz												
1072.14	48.04	90	1.2	H	1072.14	-49.96	H	5.7	0.51	-44.77	-13.00	-31.77
1096.19	46.79	180	1.2	V	1096.19	-51.21	V	5.7	0.51	-46.02	-13.00	-33.02
3862.50	45.92	45	1.2	H	3862.50	-52.08	H	6.6	1.01	-46.49	-13.00	-33.49
5793.75	44.04	60	1.2	V	5793.75	-53.96	V	8.5	1.09	-46.55	-13.00	-33.55
5793.75	43.84	45	1.0	H	5793.75	-54.16	H	8.5	1.09	-46.75	-13.00	-33.75
11587.50	43.28	45	1.0	V	11587.5	-54.72	V	8.6	1.12	-47.24	-13.00	-34.24
11587.50	43.16	45	1.0	H	11587.50	-54.84	H	8.6	1.12	-47.36	-13.00	-34.36
7725.01	43.56	0	1.0	H	7725.01	-54.44	H	8.2	1.33	-47.57	-13.00	-34.57
7725.00	42.83	45	1.2	V	7725.00	-55.17	V	8.2	1.33	-48.30	-13.00	-35.30
3862.50	44.09	270	1.0	V	3862.50	-53.91	V	6.6	1.01	-48.32	-13.00	-35.32
9656.25	44.04	180	1.2	V	9656.25	-53.96	V	7.2	1.58	-48.34	-13.00	-35.34
9656.25	44.02	60	1.0	H	9656.25	-53.98	H	7.2	1.58	-48.36	-13.00	-35.36
Channel 600 f=1960.00MHz												
1132.26	47.83	158	1.2	H	1132.26	-51.87	H	6.2	0.51	-46.18	-13.00	-33.18
5880.01	43.99	220	1.0	V	5880.01	-54.21	V	8.5	1.12	-46.83	-13.00	-33.83
5880.08	43.77	60	1.0	H	5880.08	-54.23	H	8.5	1.12	-46.85	-13.00	-33.85
1144.28	47.15	238	1.0	V	1144.28	-52.55	V	6.2	0.51	-46.86	-13.00	-33.86
7840.11	44.01	97	1.2	V	7840.11	-54.19	V	8.2	1.18	-47.17	-13.00	-34.17
9800.01	44.25	125	1.2	H	9800.01	-55.45	H	8.2	1.58	-48.83	-13.00	-35.83
9800.09	44.17	300	1.0	V	9800.09	-54.03	V	6.7	1.58	-48.91	-13.00	-35.91
3920.03	43.56	115	1.0	V	3920.03	-54.64	V	6.6	0.95	-48.99	-13.00	-35.99
11759.97	43.32	270	1.2	V	11759.97	-56.38	V	8.1	1.19	-49.47	-13.00	-36.47
7840.02	43.14	90	1.0	H	7840.02	-56.56	H	8.2	1.18	-49.54	-13.00	-36.54
11760.05	43.11	180	1.0	H	11760.05	-56.59	H	8.1	1.19	-49.68	-13.00	-36.68
3920.02	43.54	360	1.2	H	3920.02	-56.16	H	6.6	0.95	-50.51	-13.00	-37.51

Indicated Frequency MHz	Meter Reading dBuV/m	Table	Test Antenna		Substituted			Antenna Gain Correction dBi	Cable Loss dB	Absolute Level dBm	Limit dBm	Margin dB
		Angle Degree	Height Meter	Polar H/V	Frequency MHz	Level dBm	Polar H/V					
Channel 1175 f=1988.75MHz												
1072.14	48.31	238	1.2	H	1072.14	-50.29	H	5.7	0.51	-45.10	-13.00	-32.10
1132.26	47.22	162	1.0	V	1132.26	-50.78	V	5.7	0.51	-45.59	-13.00	-32.59
5966.25	44.04	263	1.2	V	5966.25	-54.16	V	8.3	1.12	-46.98	-13.00	-33.98
11932.52	42.95	120	1.0	V	11932.52	-55.05	V	9.0	1.19	-47.24	-13.00	-34.24
7955.06	44.06	124	1.2	V	7955.06	-54.34	V	7.9	1.18	-47.62	-13.00	-34.62
11932.51	43.74	228	1.0	H	11932.51	-55.46	H	9.0	1.19	-47.65	-13.00	-34.65
5966.27	44.02	98	1.0	H	5966.27	-55.28	H	8.3	1.12	-48.10	-13.00	-35.10
3977.52	43.45	125	1.0	H	3977.52	-54.15	H	6.6	0.95	-48.50	-13.00	-35.50
3977.48	43.92	321	1.0	V	3977.48	-54.58	V	6.6	0.95	-48.93	-13.00	-35.93
9943.75	43.89	309	1.0	V	9943.75	-55.41	V	7.1	1.6	-49.91	-13.00	-36.91
9943.79	44.00	168	1.0	H	9943.79	-55.70	H	7.1	1.6	-50.20	-13.00	-37.20
7955.02	42.45	196	1.0	H	7955.02	-56.95	H	7.9	1.18	-50.23	-13.00	-37.23

§2.1051, §24.238(a)- SPURIOUS EMISSIONS AT ANTENNA TERMINALS**Applicable Standard**

Requirements: CFR 47§ 2.1051 & §24.238(a)

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in §2.1057

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2004-11-10	2005-11-10

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Data**Environmental Conditions**

Temperature:	18 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar

The testing was performed by Sam Lin on 2005-9-23.


Test Result: Pass

Test Mode: Transmitting

Channel 25



Ref Lvl 15 dBm
Marker 1 [T1] -36.93 dBm
9.00000000 kHz
RBW 1 kHz
RF Att 10 dB
VBW 1 kHz
SWT 1 s
Unit dBm

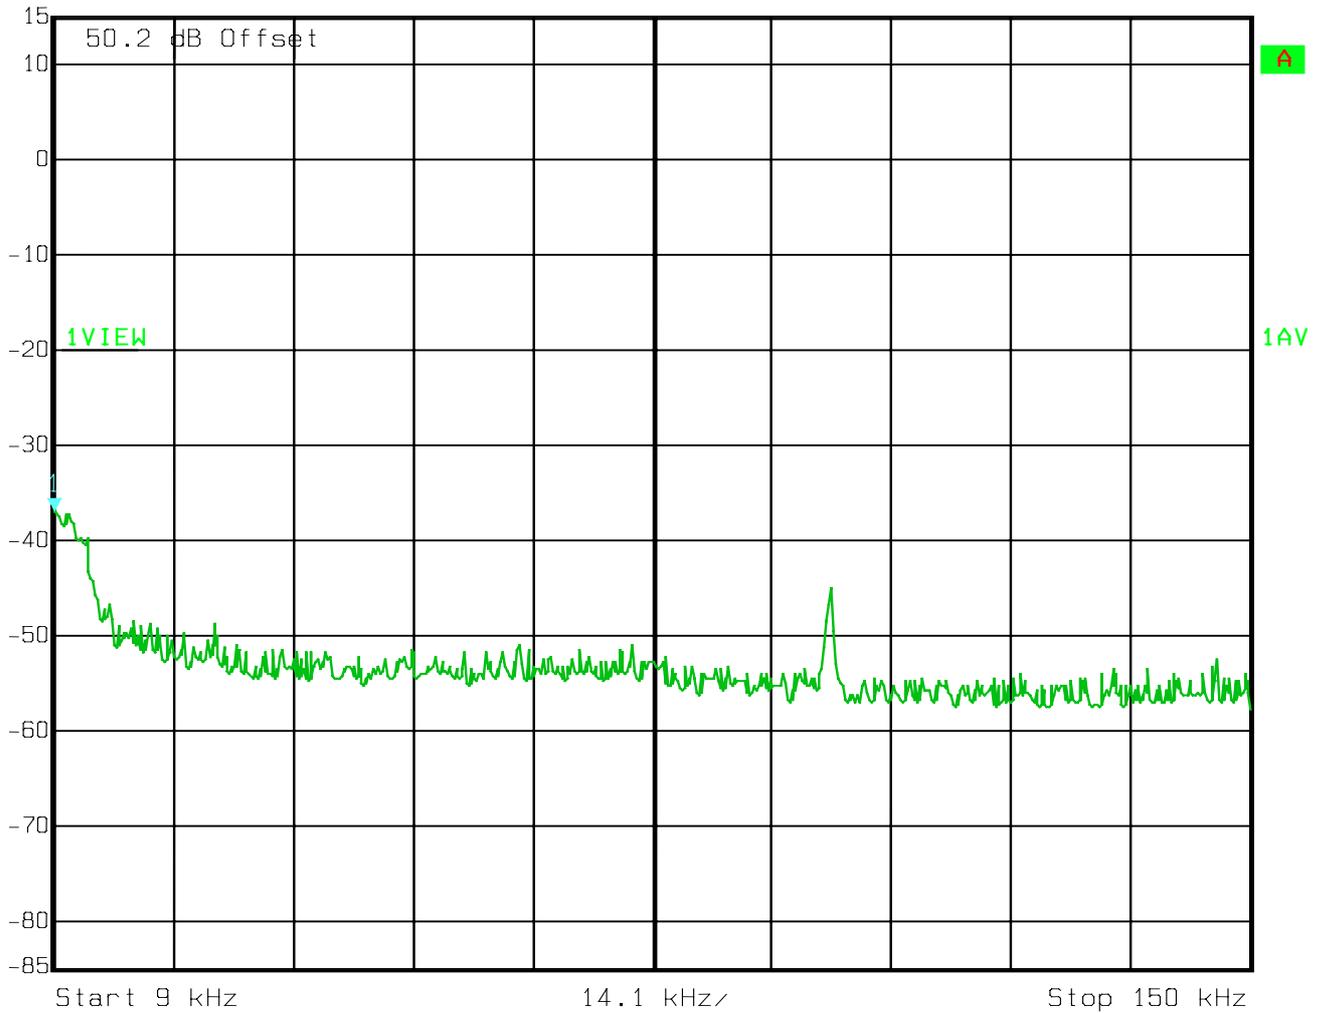


Date: 23.SEP.2005 17:24:51



Ref Lvl
15 dBm

Marker 1 [T1]
-47.31 dBm
150.0000000 kHz


RBW 10 kHz RF Att 10 dB
VBW 10 kHz
SWT 1 s Unit dBm

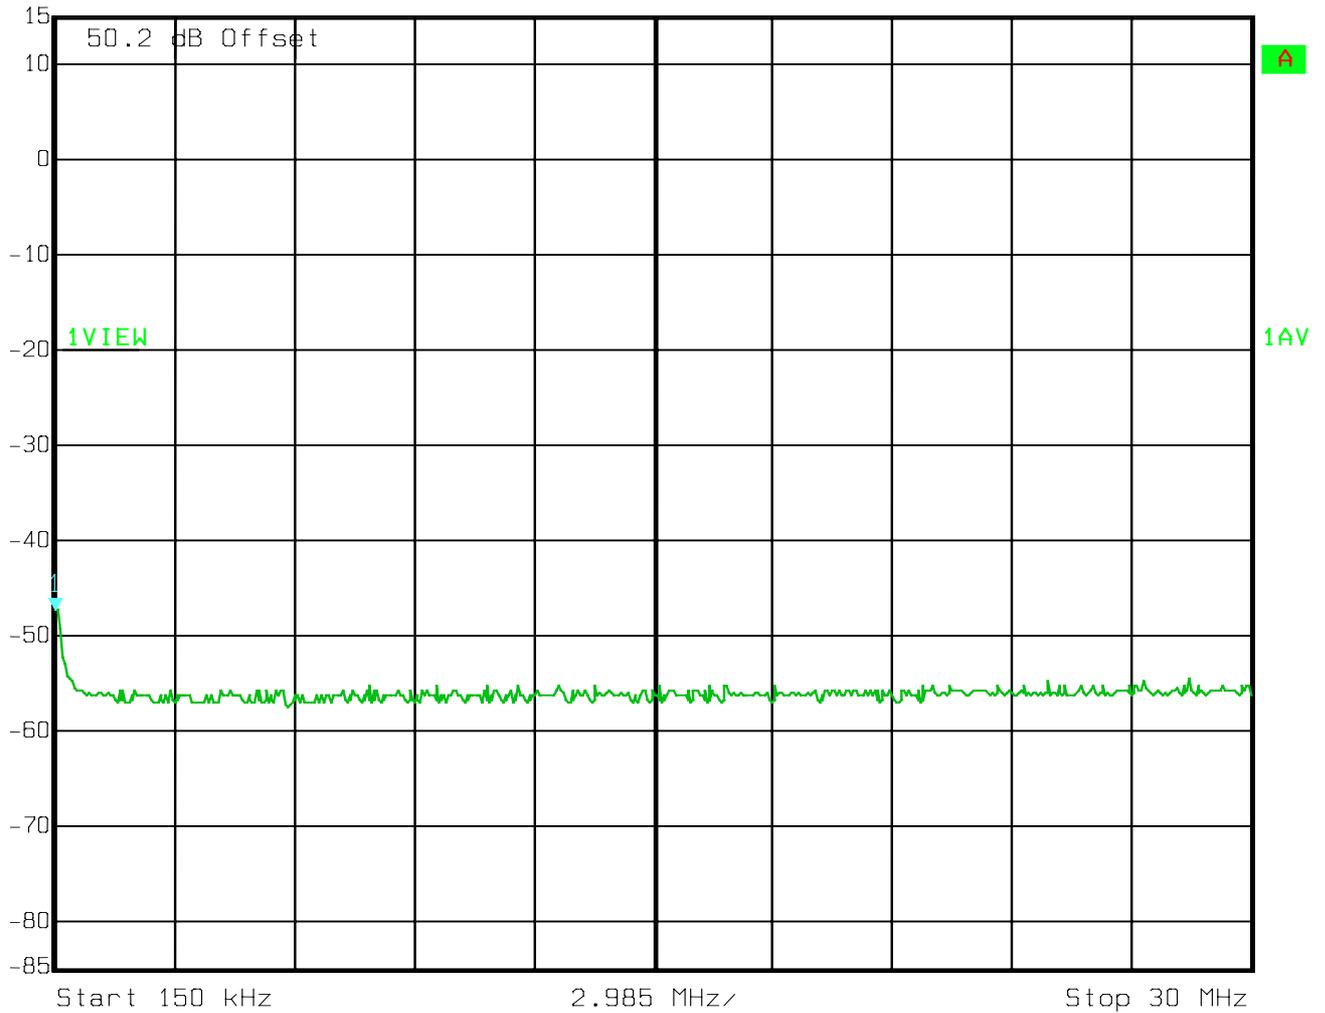

Date: 23.SEP.2005 17:26:39




Marker 1 [T1] RBW 100 kHz RF Att 10 dB
Ref Lvl -39.20 dBm VBW 100 kHz
25 dBm 990.28056112 MHz SWT 1 s Unit dBm

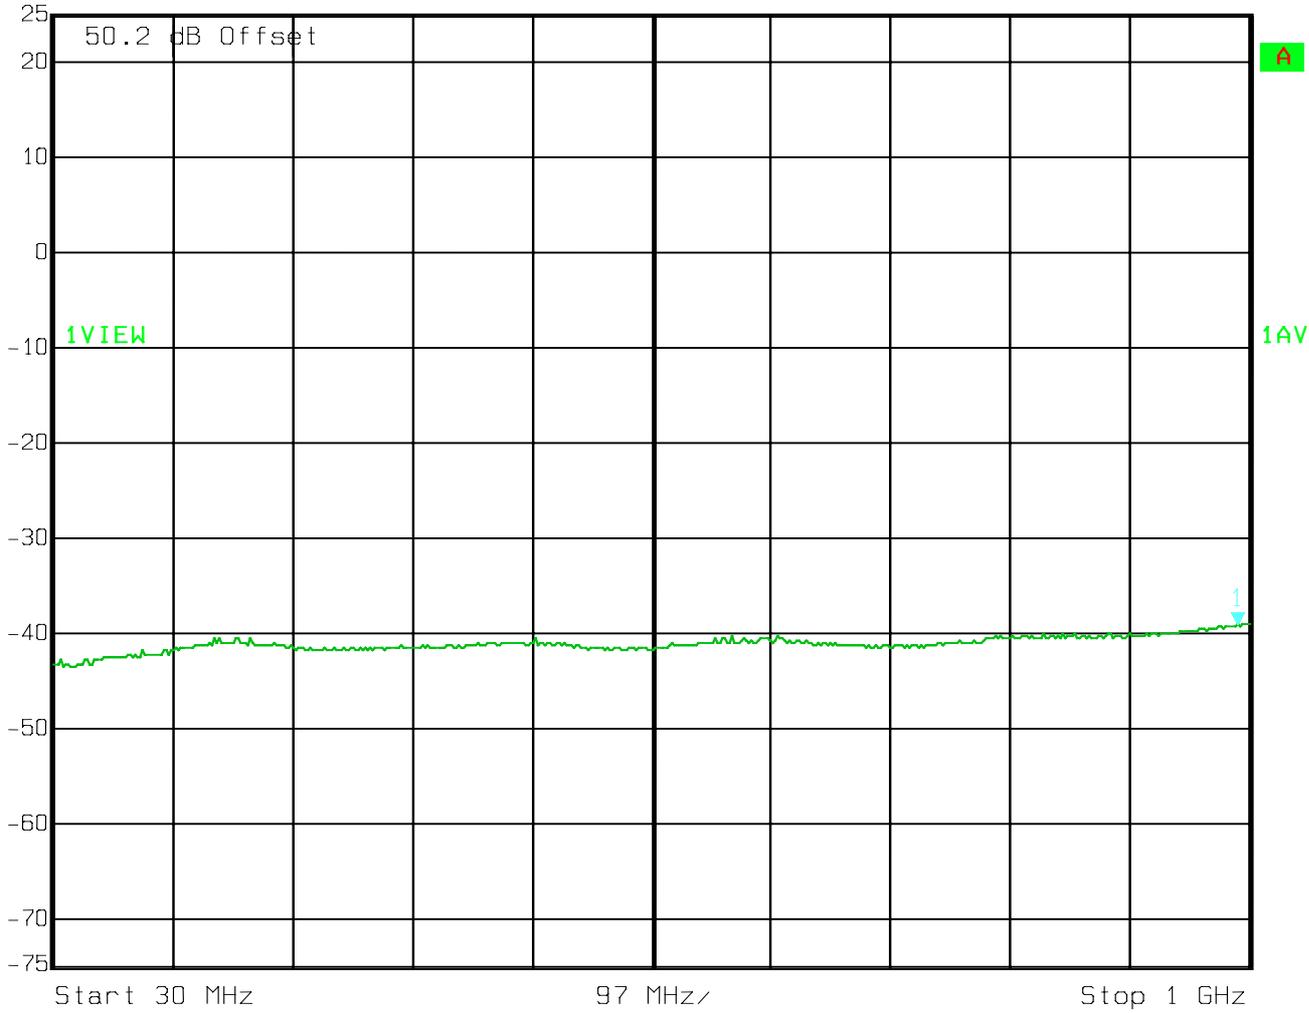

Date: 23.SEP.2005 17:28:17




Ref Lvl 35 dBm
Marker 1 [T1] 6.60320641 GHz -24.44 dBm
RBW 1 MHz RF Att 10 dB
VBW 1 MHz
SWT 1 s Unit dBm

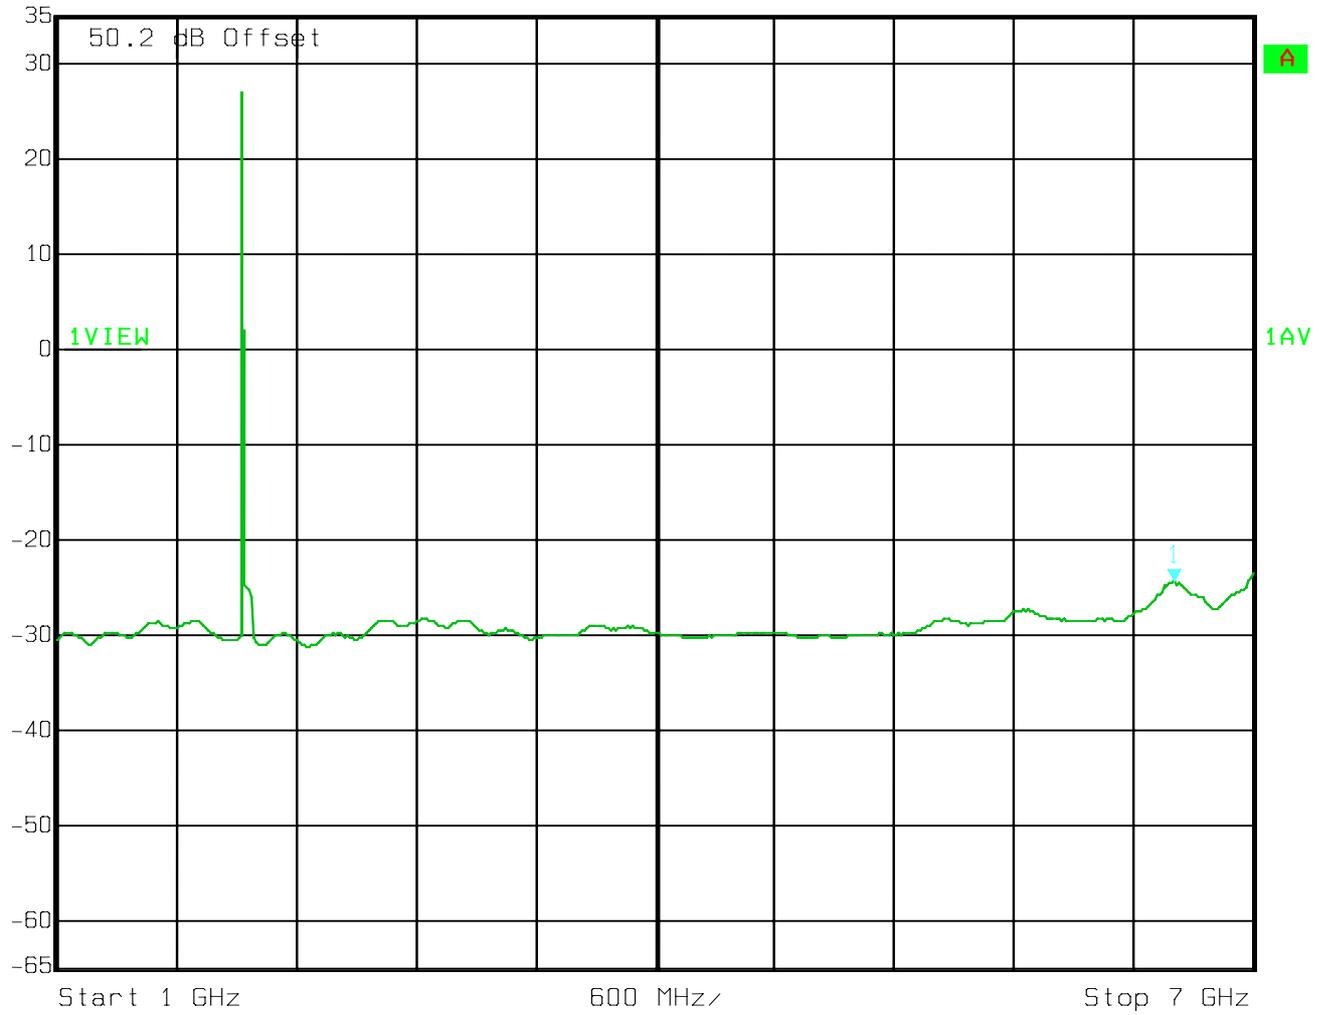

Date: 23.SEP.2005 17:30:03



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -28.98 dBm VBW 1 MHz
25 dBm 18.69739479 GHz SWT 1 s Unit dBm

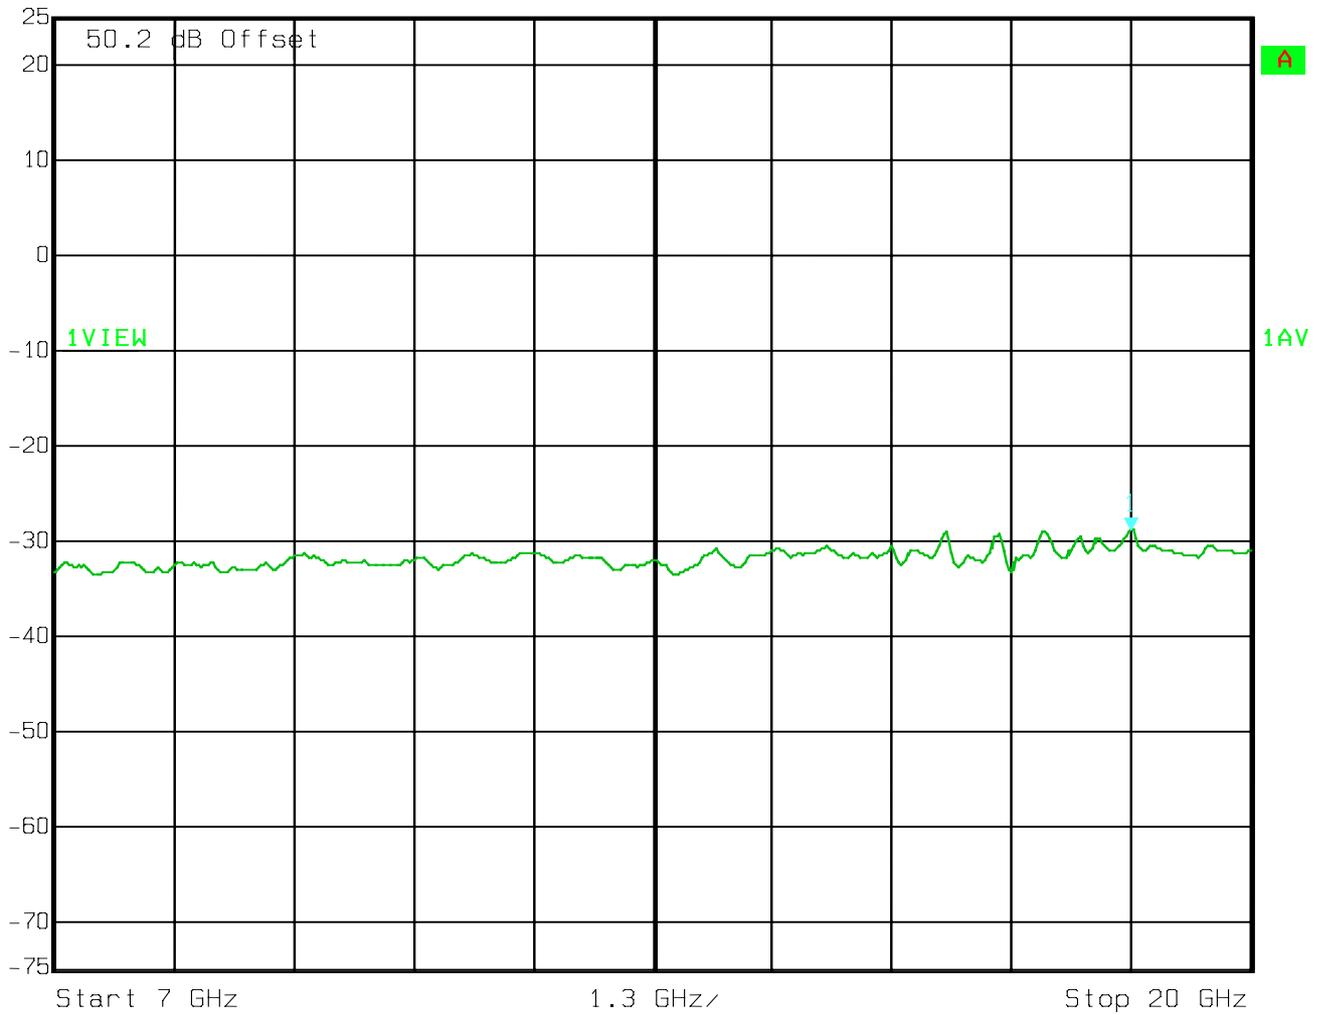

Date: 23.SEP.2005 17:31:40

Channel 600



Marker 1 [T1]


RBW 1 kHz RF Att 10 dB

Ref Lvl -40.48 dBm

VBW 1 kHz

15 dBm 9.84769539 kHz


SWT 1 s Unit dBm

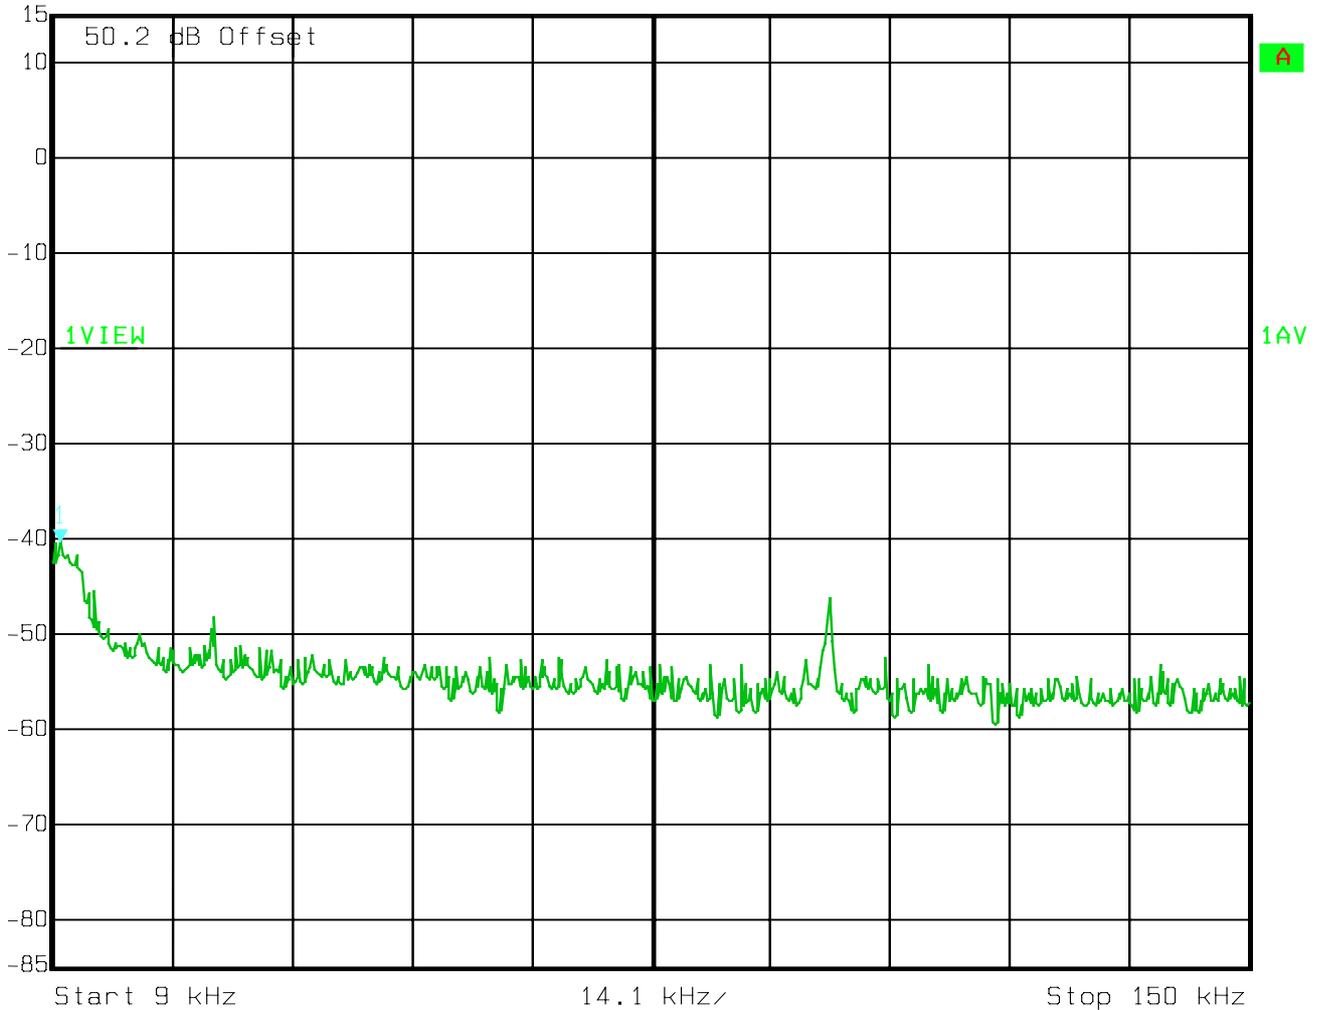

Date: 23.SEP.2005 17:56:22



Ref Lvl 15 dBm
Marker 1 [T1] -47.31 dBm
209.81963928 kHz
RBW 10 kHz
RF Att 10 dB
VBW 10 kHz
SWT 1 s
Unit dBm

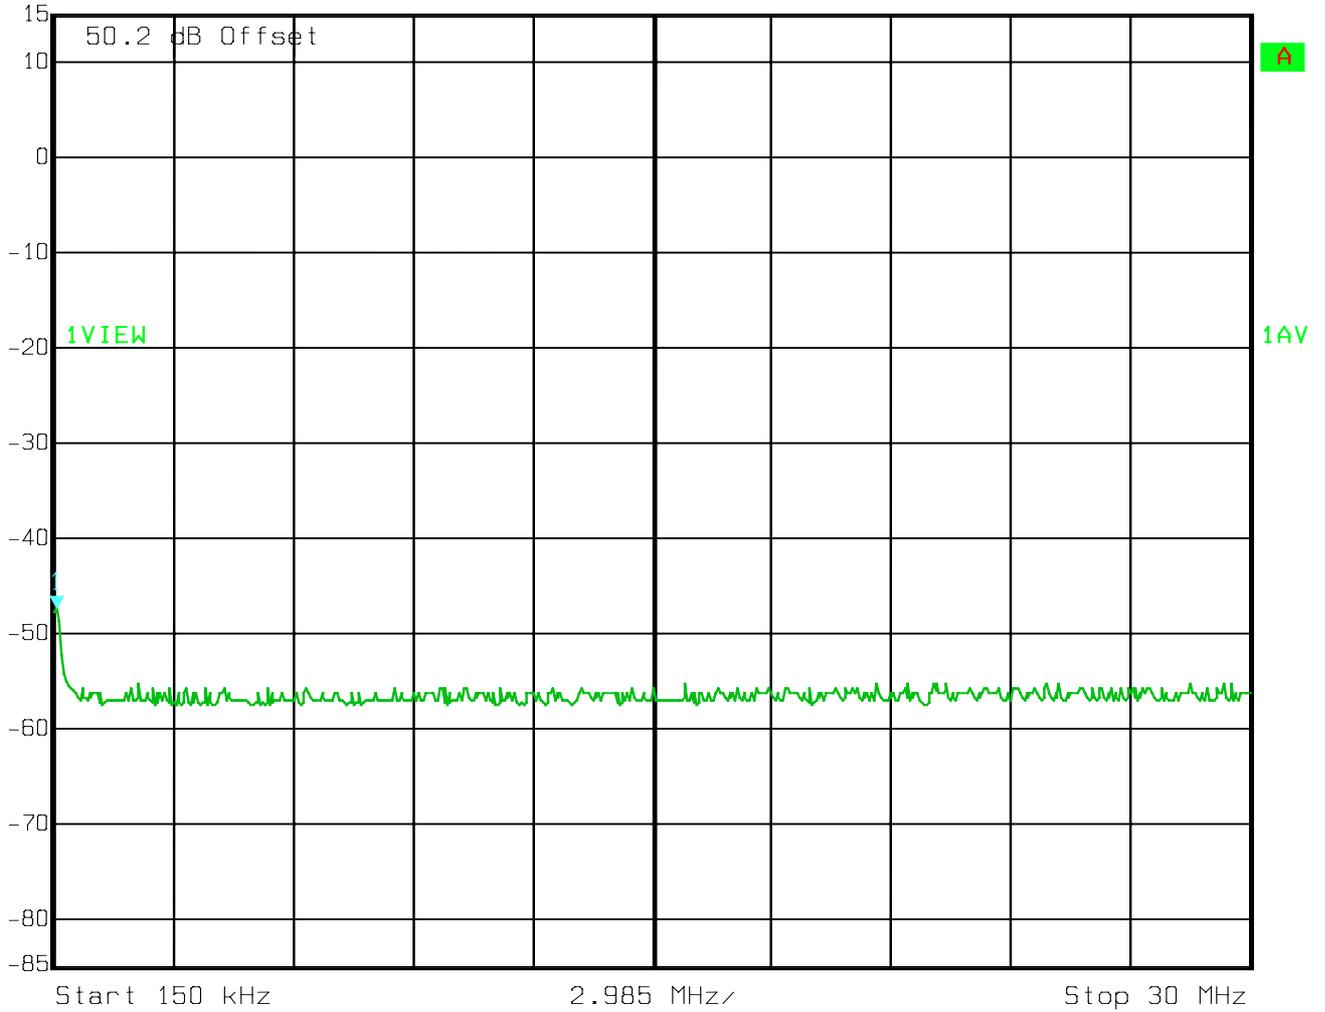


Date: 23.SEP.2005 17:55:10



Ref Lvl
15 dBm

Marker 1 [T1]
-38.77 dBm
996.11222445 MHz


RBW 100 kHz RF Att 10 dB
VBW 100 kHz
SWT 1 s Unit dBm

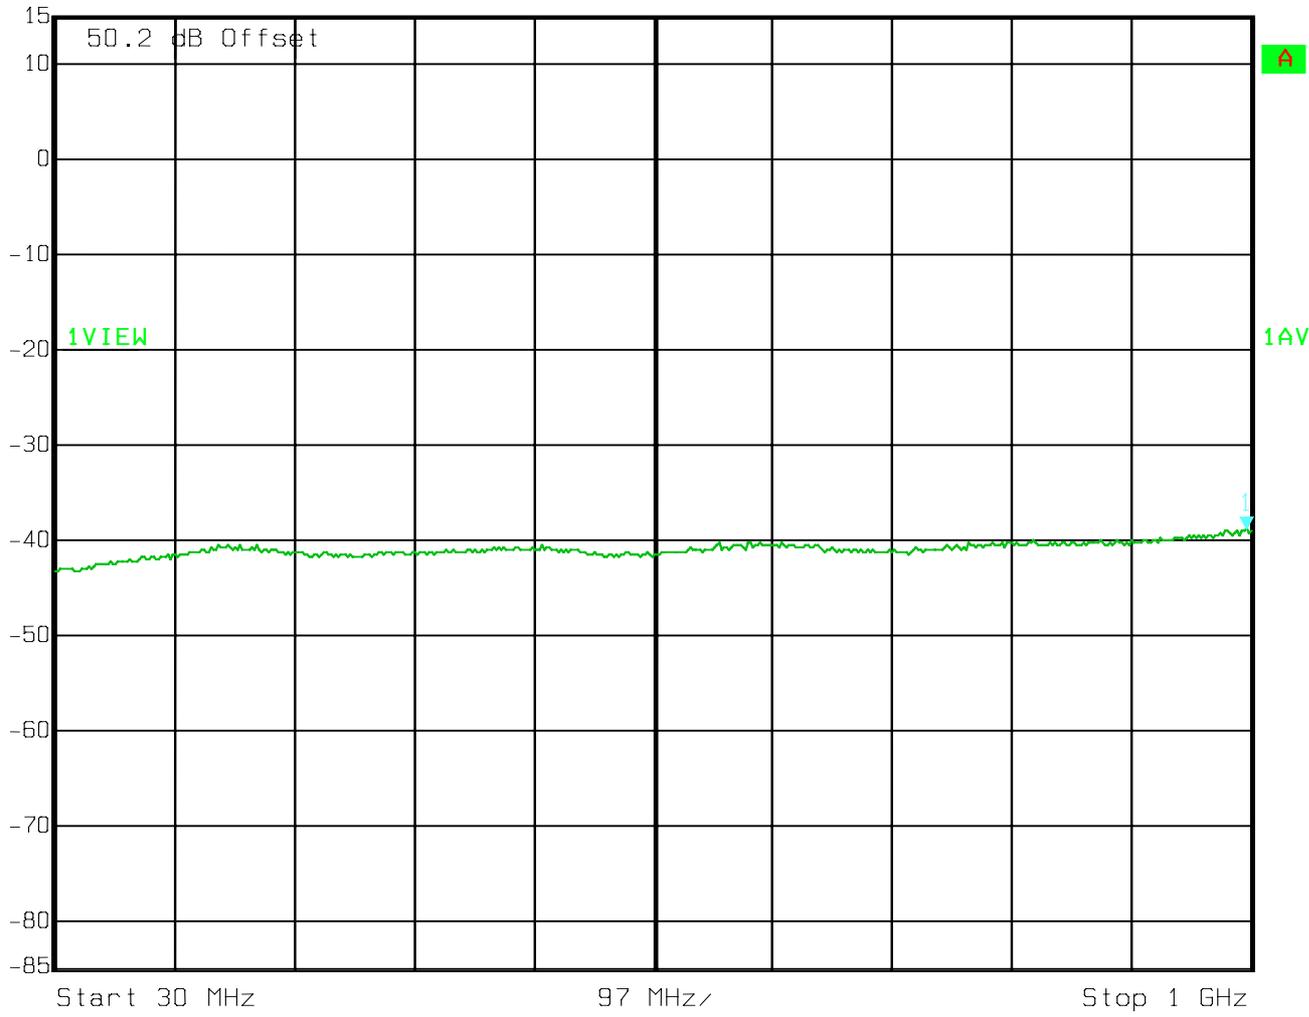

Date: 23.SEP.2005 17:53:13




Ref Lvl 35 dBm
Marker 1 [T1] -24.44 dBm
6.57915832 GHz
RBW 1 MHz
RF Att 10 dB
VBW 1 MHz
SWT 1 s
Unit dBm

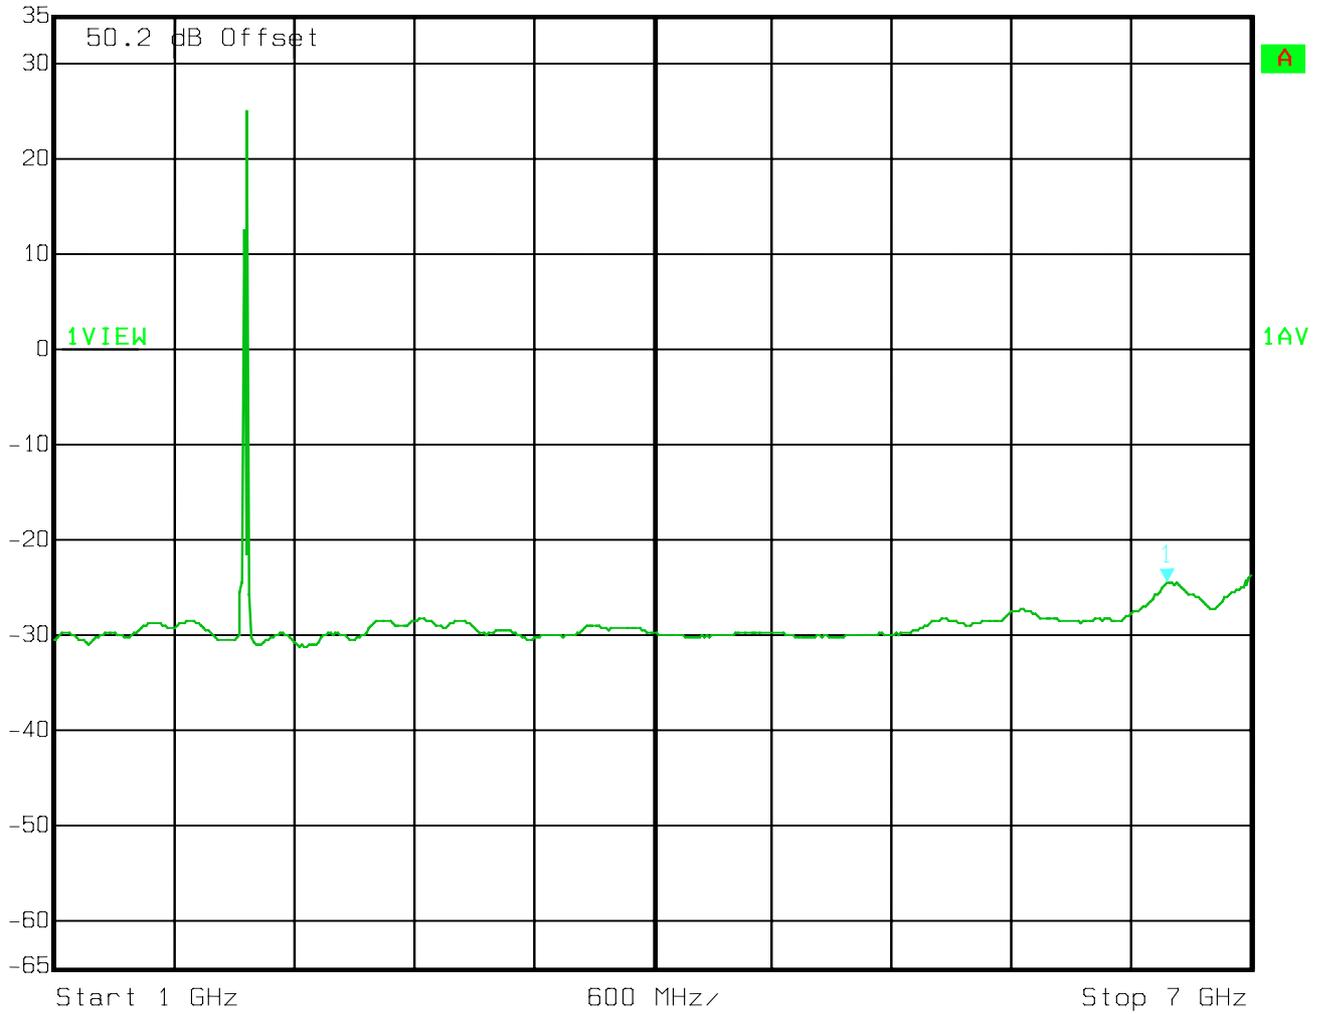

Date: 23.SEP.2005 17:51:50



Ref Lvl 25 dBm
Marker 1 [T1] 17.75951904 GHz
RBW 1 MHz
RF Att 10 dB
VBW 1 MHz
SWT 1 s
Unit dBm

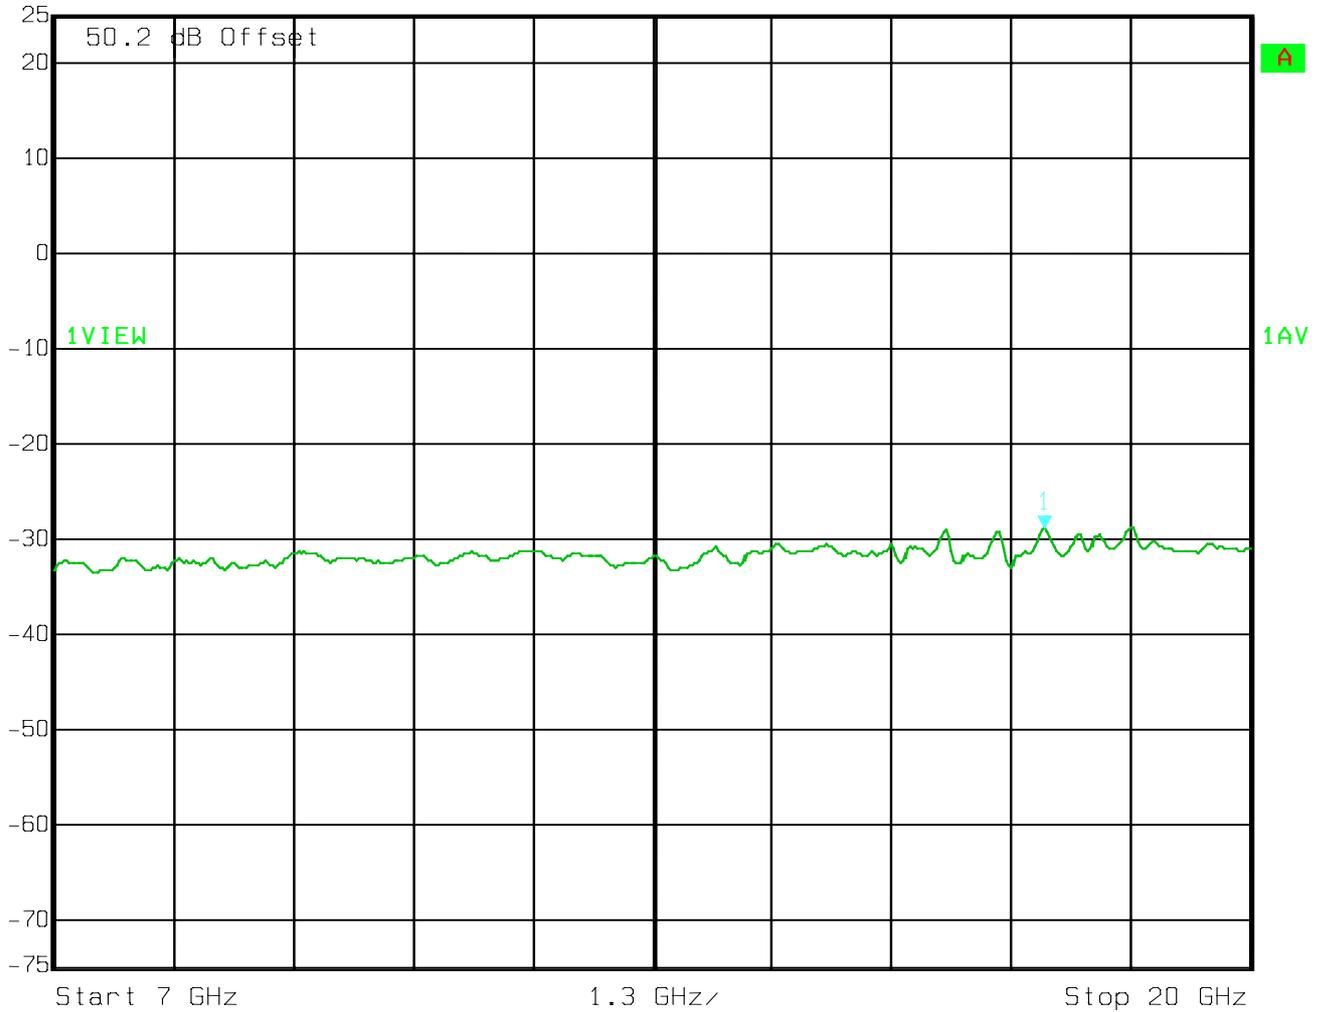


Date: 23.SEP.2005 17:50:50

Channel 1175




Ref Lvl 15 dBm
Marker 1 [T1] -38.98 dBm
10.69539078 kHz
RBW 1 kHz
RF Att 10 dB
VBW 1 kHz
SWT 1 s
Unit dBm

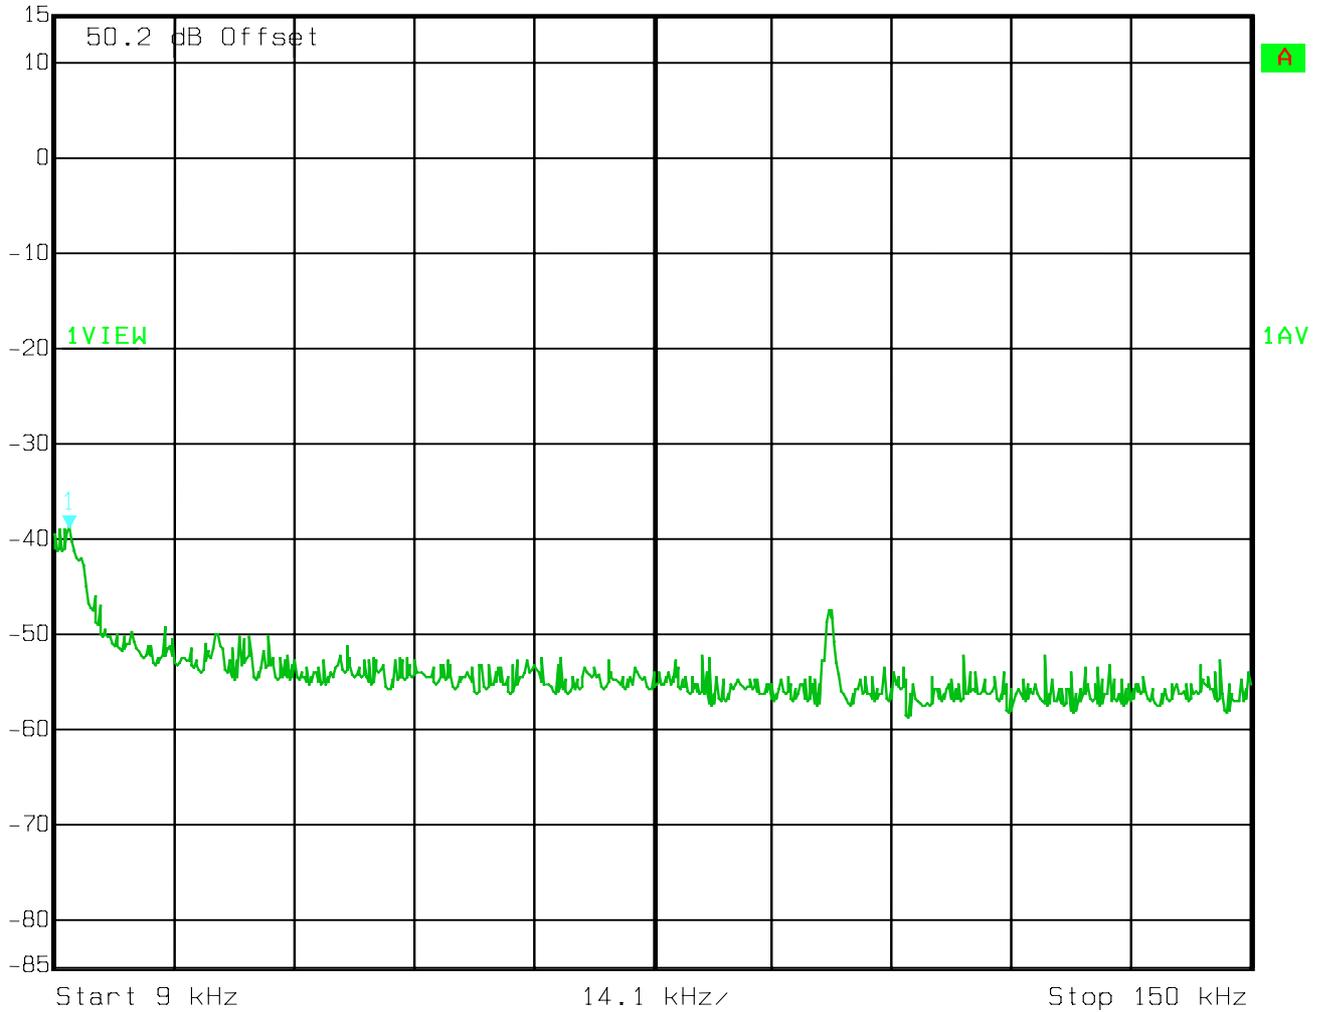

Date: 23.SEP.2005 18:18:57




Marker 1 [T1] RBW 10 kHz RF Att 10 dB
Ref Lvl -47.12 dBm VBW 10 kHz
15 dBm 209.81963928 kHz SWT 1 s Unit dBm

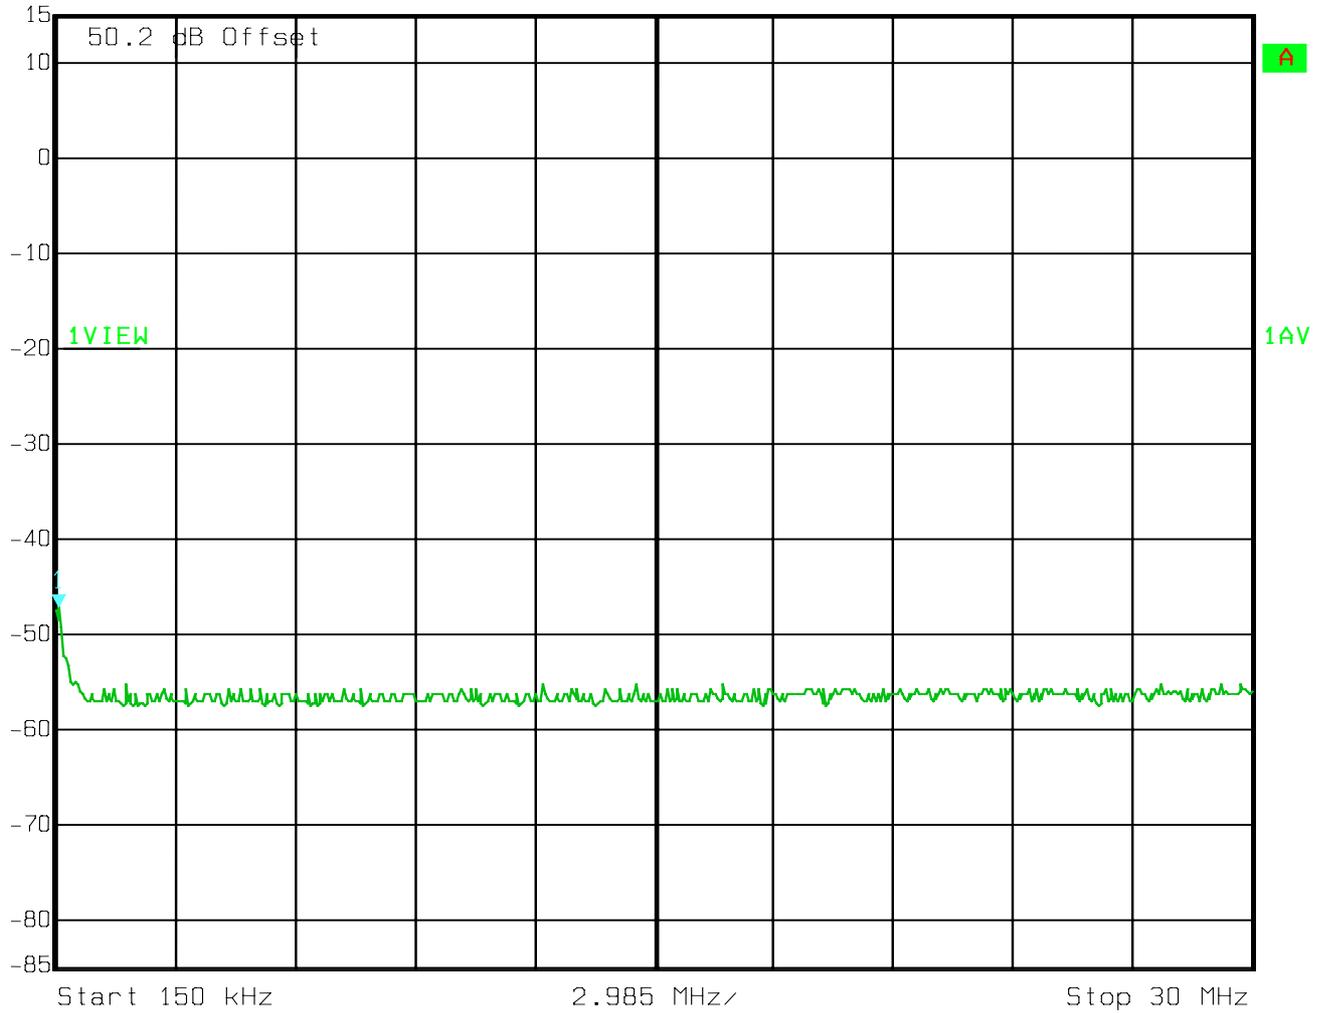

Date: 23.SEP.2005 18:17:38




Ref Lvl 15 dBm
Marker 1 [T1] 996.11222445 MHz -38.91 dBm
RBW 100 kHz RF Att 10 dB
VBW 100 kHz
SWT 1 s Unit dBm

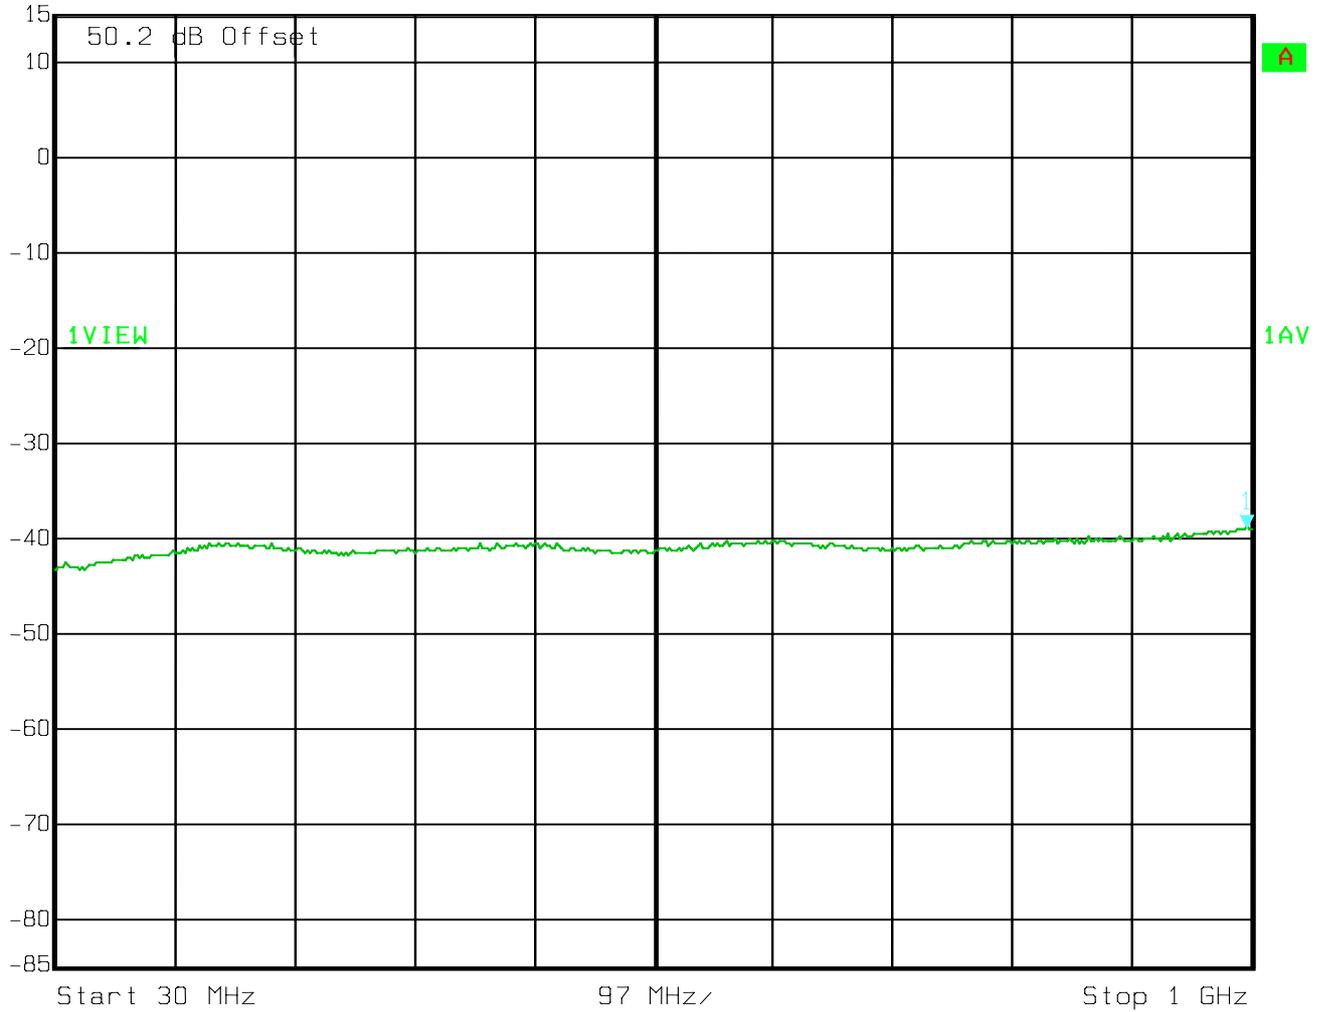

Date: 23.SEP.2005 18:16:19




Ref Lvl 35 dBm
Marker 1 [T1] -24.58 dBm
6.59118236 GHz
RBW 1 MHz RF Att 10 dB
VBW 1 MHz
SWT 1 s Unit dBm

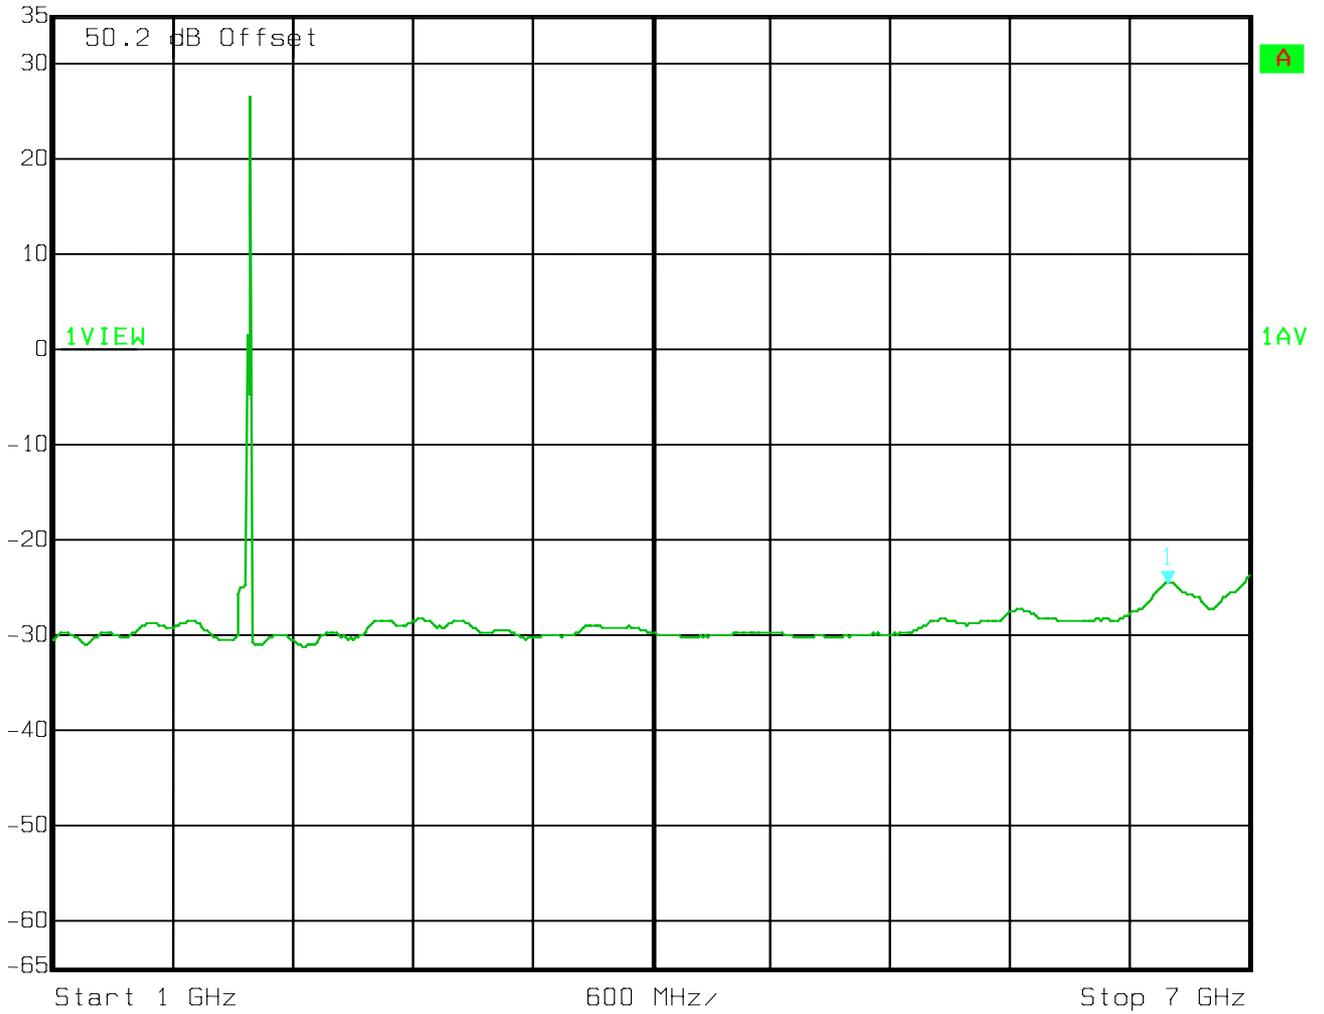

Date: 23.SEP.2005 18:15:09



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -29.05 dBm VBW 1 MHz
25 dBm 18.72344689 GHz SWT 1 s Unit dBm

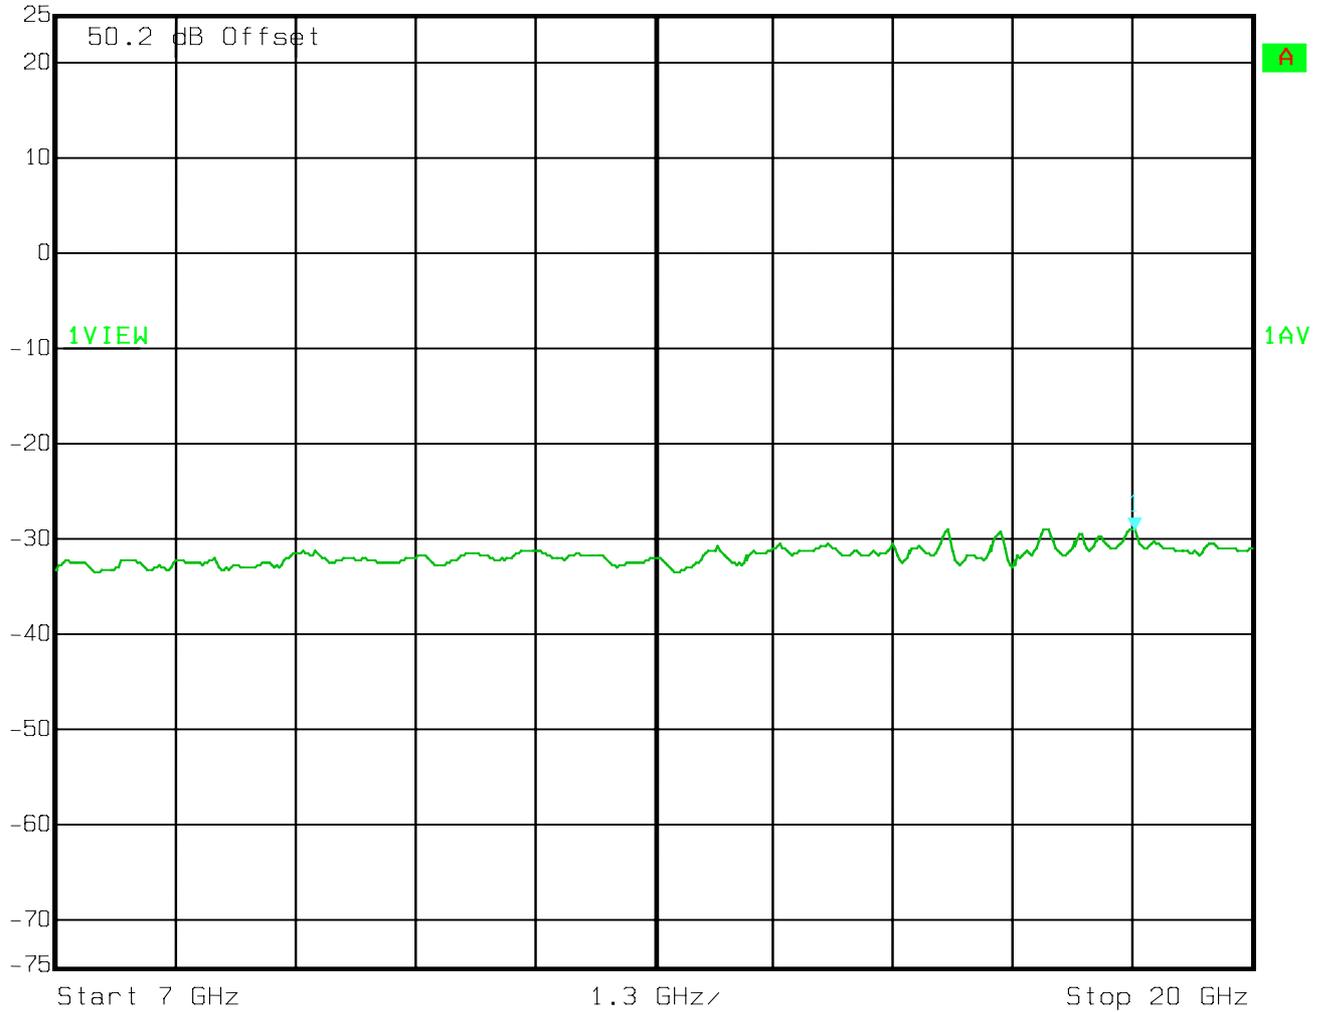

Date: 23.SEP.2005 18:12:42

§2.1049& §24.238-OCCUPIED BANDWIDTH

Applicable Standard

Requirements: CFR 47, Section 2.1049 and Section 24.238.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	PSA Spectrum Analyzer	E4445A	MY44300451	2005-6-3	2006-6-3

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The RF out of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 30 kHz and the 26 dB and 99%Power bandwidth was recorded.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	50%
ATM Pressure:	1009mbar

The testing was performed by Sam Lin on 2005-9-28.


Test Result: Pass

Test Mode: Transmitting


The result has been complied with the §2.1049 & §24.238, see the following plot:

Channel	Channel frequency (MHz)	99% Power Bandwidth (MHz)	26 dB Bandwidth (MHz)
Channel 25	1931.25	1.2049	1.314
Channel 600	1960.00	1.2052	1.312
Channel 1175	1988.75	1.2058	1.311


Channel 25

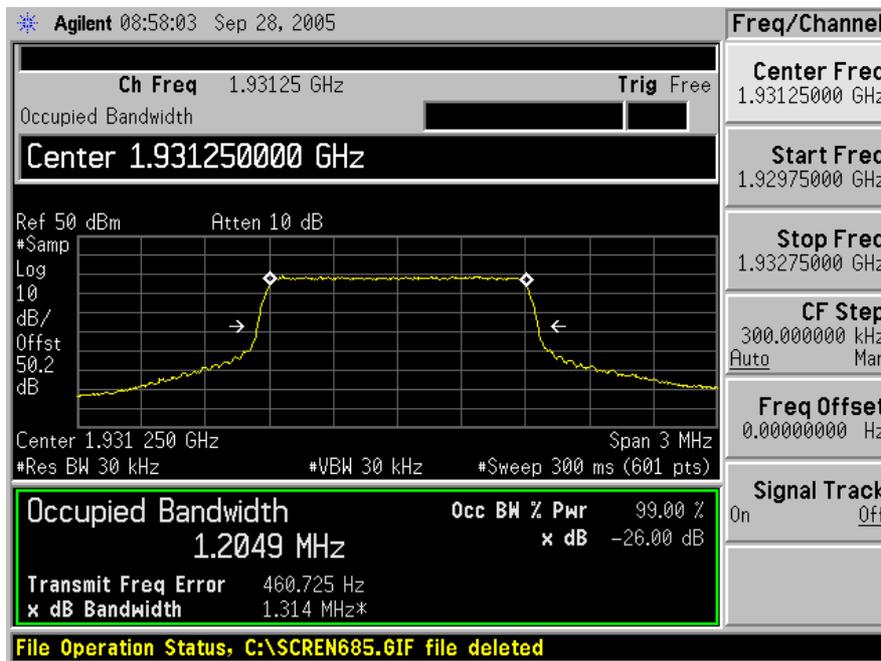

Channel 600

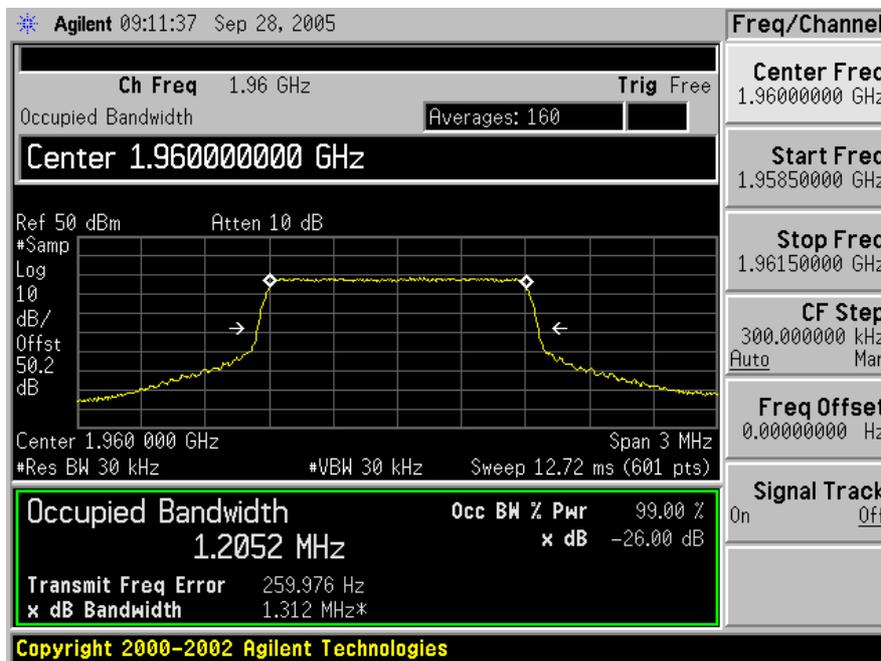

Channel 1175

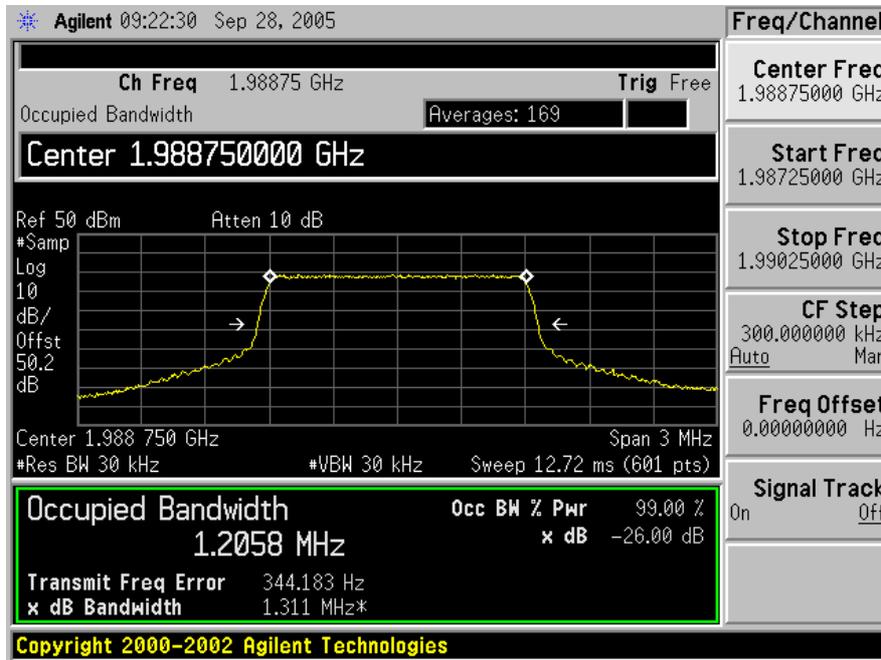

§24.238- BAND EDGES

Applicable Standard

According to §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (p) by a factor of at least $43+10 \log(p)$ dB.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2004-11-10	2005-11-10

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency, RBW set to 30 kHz.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	59%
ATM Pressure:	1009 mbar



The testing was performed by Sam Lin on 2005-9-27.

Test Result: Pass

Test Mode: Transmitting

The result has been complied with the §24.238, see the following plot:

Frequency MHz	Emission dBm	Limit dBm
1930.00	-28.850	-13.00
1990.00	-27.044	-13.00

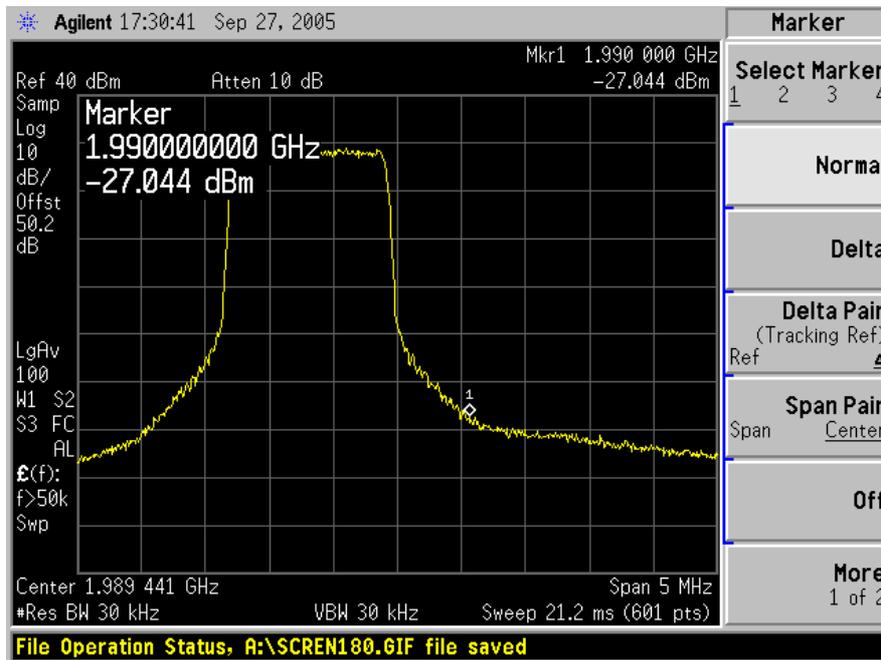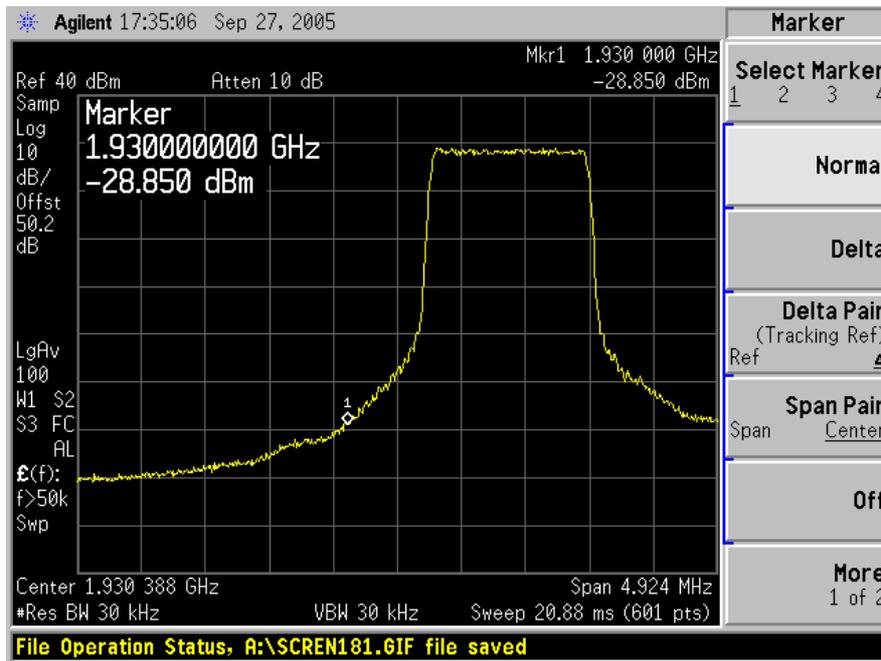

§2.1055 (a), §2.1055 (d) & §24.235 - FREQUENCY STABILITY

Applicable Standard

Requirements: FCC § 2.1055 (a), § 2.1055 (d) & following:

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	PSA Spectrum Analyzer	E4445A	MY44300451	2005-6-3	2006-6-3
GZ-ESPEC	Temperature Chamber	GRW-120	00020268	2005-3-8	2006-3-8
Chroma	DC Power	6230K-80	N/A	2005-8-11	2006-8-11

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a f Spectrum Analyzer via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Spectrum Analyzer.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

Test Data

Environmental Conditions

Temperature:	20° C
Relative Humidity:	49%
ATM Pressure:	1009 mbar

The testing was performed by Sam Lin on 2005-9-30.

Test Result: Pass

Test Mode: Transmitting

Frequency Stability Versus Temperature

Frequency Stability vs. Temperature				
Temperature °C	Power Supplied Vdc	Frequency Measure Error Hz	Error ppm	Result
CH25 f=1931.25MHz				
-5	-48	-4.01	0.002076	PASS
5	-48	-3.13	0.001621	PASS
15	-48	-3.47	0.001797	PASS
25	-48	2.49	0.0012893	PASS
35	-48	2.10	0.0010874	PASS
45	-48	-1.79	0.000927	PASS
CH600 f=1960.00MHz				
-5	-48	4.9	0.0025	PASS
5	-48	-3.66	0.001867	PASS
15	-48	4.01	0.0020459	PASS
25	-48	-3.70	0.001888	PASS
35	-48	-2.80	0.001429	PASS
45	-48	-2.22	0.001133	PASS
CH1175 f=1988.75MHz				
-5	-48	4.47	0.0022476	PASS
5	-48	3.25	0.0016342	PASS
15	-48	-3.81	0.001916	PASS
25	-48	3.32	0.0016694	PASS
35	-48	-1.57	0.000789	PASS
45	-48	-1.89	0.00095	PASS

Frequency Stability Versus Voltage

Frequency Stability vs. Voltage				
Voltage Vdc	Temperature °C	Frequency Measure Error Hz	Error ppm	Limit 1.5ppm
CH25 f=1931.25MHz				
-42	20	-3.05	0.001579	PASS
-46	20	2.90	0.0015016	PASS
-48	20	-2.36	0.001222	PASS
-50	20	-1.14	0.00059	PASS
-54	20	-3.95	0.002045	PASS
-58	20	2.57	0.0013307	PASS
CH600 f=1960.00MHz				
-42	20	3.20	0.0016327	PASS
-46	20	-4.41	0.00225	PASS
-48	20	4.25	0.0021684	PASS
-50	20	-4.80	0.002449	PASS
-54	20	4.45	0.0022704	PASS
-58	20	4.68	0.0023878	PASS
CH1175 f=1988.75MHz				
-42	20	2.96	0.0014884	PASS
-46	20	-5.01	0.002519	PASS
-48	20	-3.69	0.001855	PASS
-50	20	-2.30	0.001157	PASS
-54	20	-3.12	0.001569	PASS
-58	20	-3.84	0.001931	PASS