



# TEST REPORT

No. 2011TAR057

for

**ZTE Corporation**

**GSM Dual-Band GPRS Digital Mobile Phone**

**Model Name: ZTE-G R222**

**FCC ID : Q78-GR222**

with

**Hardware Version: g9qA**

**Software Version: EC-R8SM-P109A17V1.0.0**

**Issued Date: 2011-02-15**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

***DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02***

***FCC 2.948 Listed: No.733176***

***IC O.A.T.S listed: No.6629A-1***

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633 , Fax:+86(0)10-62304633 Email:welcome@emcite.com. www.emcite.com

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>3</b>
<b>1.1. TESTING LOCATION .....</b>	<b>3</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>3</b>
<b>1.3. PROJECT DATA .....</b>	<b>3</b>
<b>1.4. SIGNATURE.....</b>	<b>3</b>
<b>2. CLIENT INFORMATION .....</b>	<b>4</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>4</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>4</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>5</b>
<b>3.1. ABOUT EUT.....</b>	<b>5</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>5</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....</b>	<b>5</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>6</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>6</b>
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>7</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>8</b>
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>9</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>10</b>

## **1. Test Laboratory**

### **1.1. Testing Location**

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: No 52, Huayuan beilu, Haidian District, Beijing, P. R. China  
Postal Code: 100191  
Telephone: 00861062304633  
Fax: 00861062304633

### **1.2. Testing Environment**

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### **1.3. Project data**


Testing Start Date: Jan 24, 2011  
Testing End Date: Jan 29, 2011

### **1.4. Signature**




---

**Qu Pengfei**  
**(Prepared this test report)**



---

**Sun Xiangqian**  
**(Reviewed this test report)**



---

**Lu Bingsong**  
**Deputy Director of the laboratory**  
**(Approved this test report)**

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: ZTE Corporation  
Address /Post: #68 Zijin Hua Road, Nanjing, Jiangsu Province, P. R. China  
City: Nan Jing  
Postal Code: 210012  
Country: China  
Telephone: +86-25-52878232  
Fax: +86-25-68897541

### **2.2. Manufacturer Information**

Company Name: ZTE Corporation  
Address /Post: #68 Zijin Hua Road, Nanjing, Jiangsu Province, P. R. China  
City: Nan Jing  
Postal Code: 210012  
Country: China  
Telephone: +86-25-52878232  
Fax: +86-25-68897541

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	GSM Dual-Band GPRS Digital Mobile Phone
Model Name	ZTE-G R222
FCC ID	Q78-GR222
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.7VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MII of People's Republic of China.

#### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>SN or IMEI</b>	<b>HW Version</b>	<b>SW Version</b>
N11	865155001235270	g9qA	EC-R8SM-P109A17V1.0.0

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

<b>AE ID*</b>	<b>Description</b>	<b>SN</b>
AE1	Battery	/
AE2	Travel Adapter	/

AE1

Model	Li3710T42P3h553457
Manufacturer	ZTE
Capacitance	1000mAh
Nominal Voltage	3.7V

AE2

Model	STC-A22O50I700M5-C
Manufacturer	RUIDE
Length of DC line	120cm

\*AE ID: is used to identify the test sample in the lab internally.

## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices	July 10, 2008 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber** (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

## 6. SUMMARY OF TEST RESULTS

<b>Abbreviations used in this clause:</b>	
P	Pass
NA	Not applicable
F	Fail

<b>Clause</b>	<b>List</b>	<b>Clause in FCC rules</b>	<b>Verdict</b>
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P

## 7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTUR E	CAL DUE DATE
1	Test Receiver	ESCI	100344	R&S	2011-03-12
2	Test Receiver	ESCI	100766	R&S	2011-12-06
3	Test Receiver	ESI40	831564/002	R&S	2012-02-11
4	BiLog Antenna	VUL9163	9163-302	Schwarzbeck	2012-02-9
5	Signal Generator	SMB100A	102063	R&S	2011-03-05
6	LISN	ESH2-Z5	829991/012	R&S	2011-04-20
7	Universal Radio Communication Tester	CMU200	100680	R&S	2011-09-05
8	Dual-Ridge Waveguide Horn Antenna	3115	6914	EMCO	2011-3

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission (§15.109(a))**

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

#### **A.1.2 EUT Operating Mode:**

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. The MS is operating in the charging mode. During the test MS is connected to a charger in the case of charging mode.

#### **A.1.3 Measurement Limit**

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

#### **A.1.4 Test Condition**

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15

### A.1.5 Measurement Results

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + F_A + G_{\text{PL}}$$

Where

$F_A$ : Receive Antenna Factor


$G_{\text{PL}}$ : Cable Loss

$P_{\text{Mea}}$ : The measurement result on receiver.


### Charging Mode

Frequency(MHz)	Result(dBuV/m)	$G_{\text{PL}}$ (dB)	$F_A$ (dB)	$P_{\text{Mea}}$ (dBuV/m)	Polarity
3484.97	50.95	-19.6	31.2	39.35	HORIZONTAL
3725.451	50.79	-19.6	33.4	36.99	HORIZONTAL
3985.972	50.68	-19.3	33.4	36.58	VERTICAL
3505.01	50.58	-19.7	33.4	36.88	VERTICAL
3701.403	50.54	-19.4	33.4	36.54	VERTICAL
3675.351	50.5	-19.6	33.4	36.7	VERTICAL

**Charging Mode**

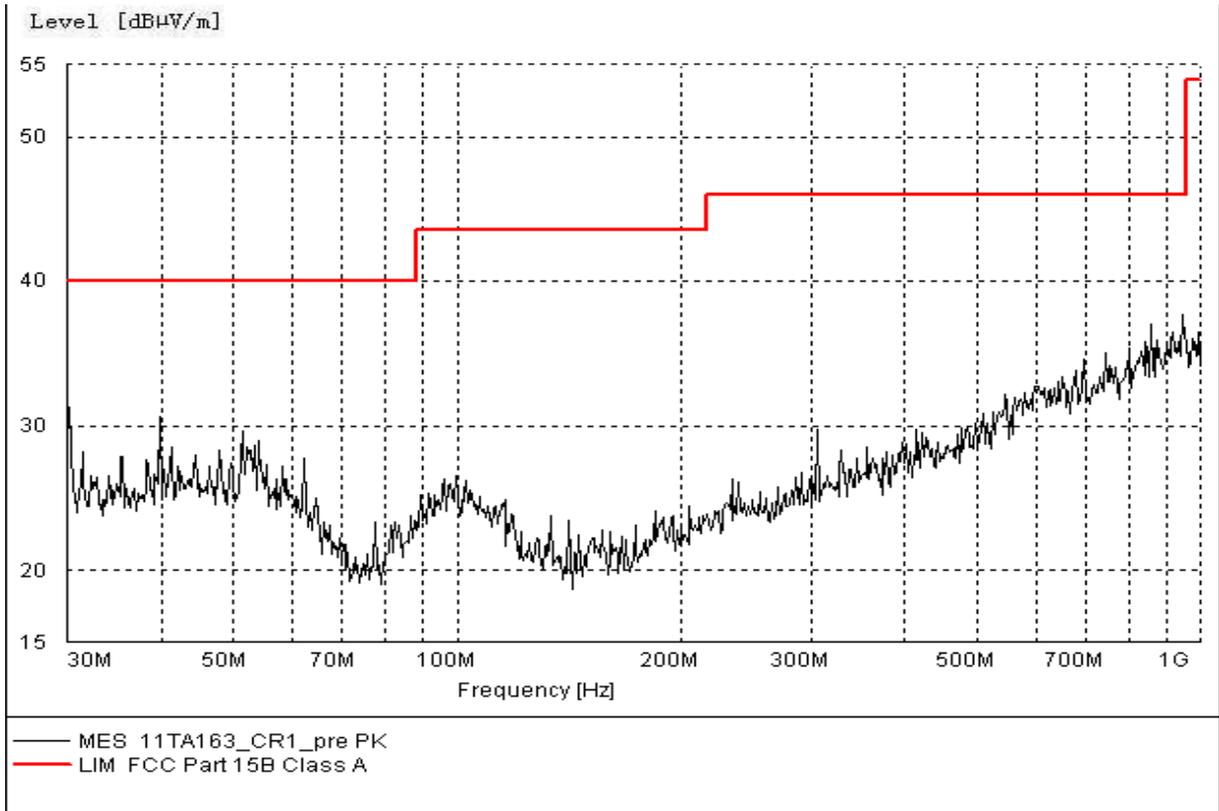

**Figure A.1 Radiated Emission from 30MHz to 1GHz**

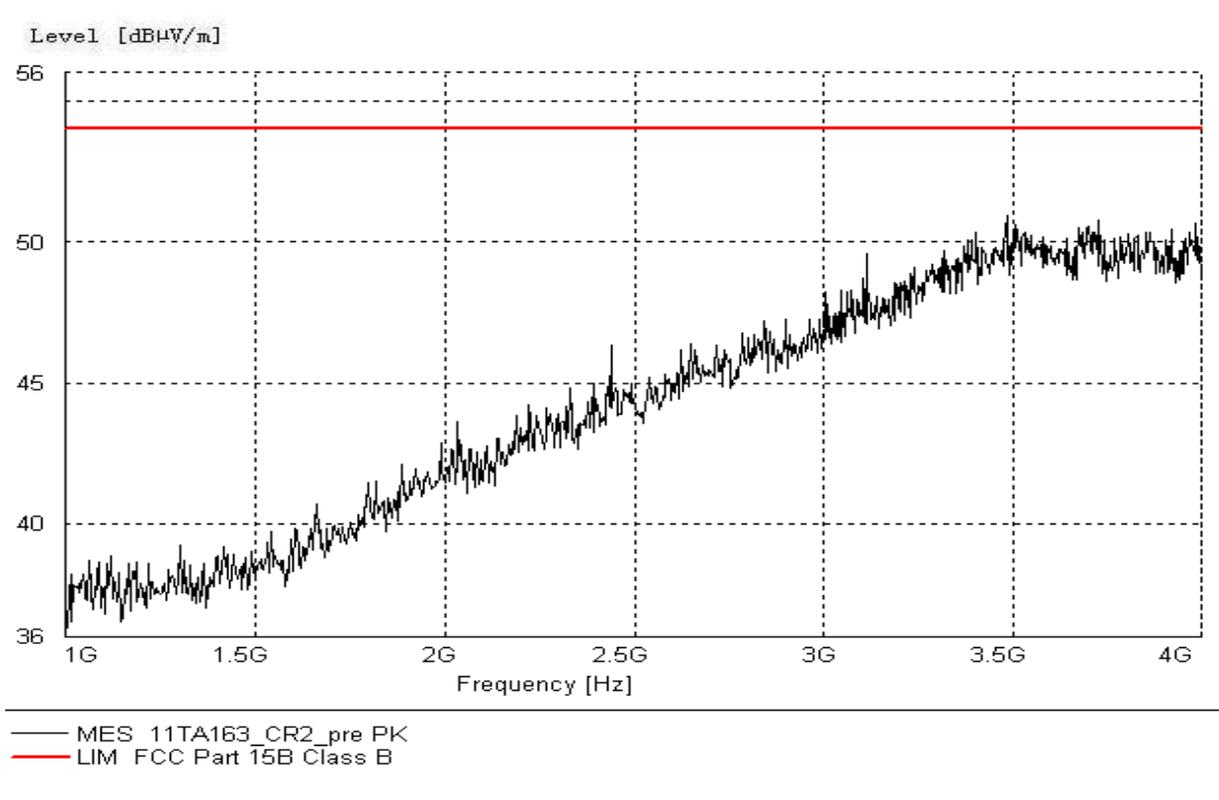

**Figure A.2 Radiated Emission from 1GHz to 4GHz**

**A.2 Conducted Emission (§15.107(a))**

**A.2.1 Method of measurement**

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 7.2.

**A.2.2 EUT Operating Mode:**

The MS is operating in the charging mode. During the test MS is connected to a charger in the case of charging mode.

**A.2.3 Measurement Limit**

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

**A.2.4 Test Condition in charging mode**

Voltage (V)	Frequency (Hz)
120	60

RBW	Sweep Time(s)
9kHz	1

### A.2.4 Measurement Results Charging Mode

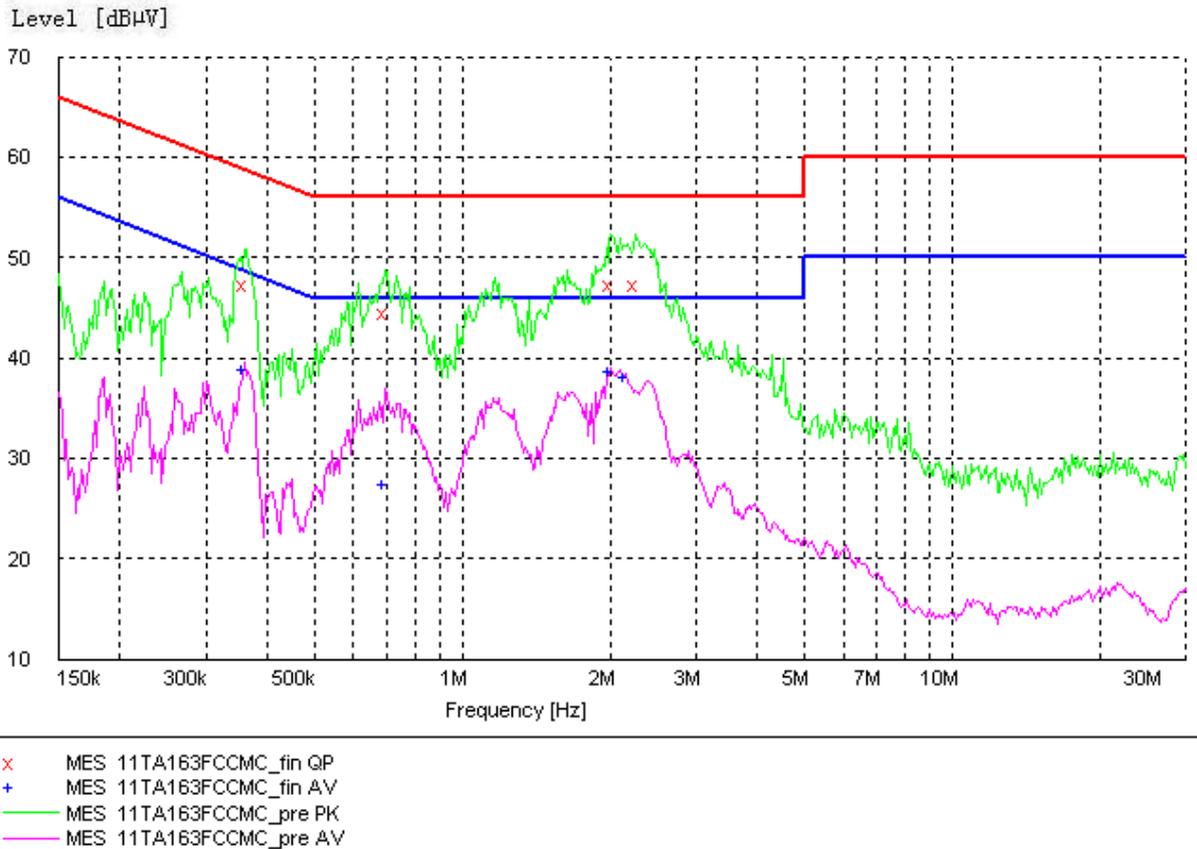


Figure A.3 Conducted Emission

#### MEASUREMENT RESULT: "11TA163FCCMC\_fin QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.360058	47.20	10.1	59	11.5	L1	FLO
0.694357	44.50	10.1	56	11.5	L1	GND
2.020000	47.30	10.1	56	8.7	L1	FLO
2.253650	47.20	10.1	56	8.8	L1	FLO

#### MEASUREMENT RESULT: "11TA163FCCMC\_fin AV"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.360058	38.90	10.1	49	9.8	L1	GND
0.694357	27.40	10.1	46	18.6	L1	FLO
2.020000	38.60	10.1	46	7.4	L1	FLO
2.165713	38.20	10.1	46	7.8	L1	GND

\*\*\*END OF REPORT\*\*\*