




# FCC Test Report

According to

## 47 CFR Part 22H, 24E

**Equipment** : GSM/GPRS Dual-band Digital Mobile Phone  
**Trade Name** : ZTE  
**Model Name** : i766  
**FCC ID** : Q78-I766  
**Tx Frequency Range** : GSM850 : 824.2 ~ 848.8 MHz  
GSM1900 : 1850.2 ~ 1909.8 MHz  
**Max. ERP/EIRP Power** : GSM850 : 0.66 W  
GSM1900 : 0.97 W  
**Emission Designator** : 300KGXW  
**Applicant** : ZTE CORPORATION  
ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,  
Nanshan District, Shenzhen, Guangdong, P.R.China

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- The data shown in this test report were carried out on Jul. 05, 2008 at **Sporton International Inc. LAB.**
- Report No.: FG871117, Report Version: Rev. 02.

  
\_\_\_\_\_  
Roy Wu  
Manager

**SPORTON International (Kunshan) Inc.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



# Table of Contents

**History of This Test Report ..... ii**

**1. General Information ..... 1**

1.1 Applicant..... 1

1.2 Manufacturer ..... 1

1.3 Basic Description of Accessory ..... 1

1.4 Feature of Equipment under Test..... 1

**2. Test Configuration of Equipment under Test ..... 2**

2.1 Test Manner ..... 2

2.2 Test Mode ..... 2

2.3 Connection Diagram of Test System ..... 2

2.4 Ancillary Equipment List ..... 2

**3. General Information of Test Site..... 3**

3.1 Test Voltage ..... 3

3.2 Test Compliance..... 3

3.3 Frequency Range..... 3

3.4 Test Distance..... 3

**4. Test Data and Test Result ..... 4**

4.1 List of Measurements and Examinations ..... 4

4.2 RF Output Power..... 5

4.3 ERP / EIRP Measurement..... 6

4.4 Occupied Bandwidth and Band Edge Measurement ..... 9

4.5 Conducted Emission..... 34

4.6 Field Strength of Spurious Radiation ..... 44

4.7 Frequency Stability (Temperature Variation) ..... 50

4.8 Frequency Stability (Voltage Variation) ..... 52

**5. List of Measurement Equipments ..... 53**

**6. Uncertainty Evaluation ..... 54**

**Appendix A. Photographs of EUT**

**Appendix B. Setup Photographs**





# 1. General Information

## 1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China

## 1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China

## 1.3 Basic Description of Accessory

AC Adapter	Brand Name	ZTE
	Model Name	STC-A22O50U12-C
	Power Rating	I/P: 100-240Vac, 50-60Hz, 200mA; O/P: 5Vdc, 700mA
	AC Power Cord Type	1.4 meter non-shielded cable without ferrite core
Battery	Brand Name	ZTE
	Model Name	Li3708T42P3h553457A
	Rating	3.7Vdc
	Type	Li-ion

Remark: Above EUT's information was declared by manufacturer. Please refer to the specifications of manufacturer or User's Manual for more detailed features description.

## 1.4 Feature of Equipment under Test

Product Feature & Specification	
DUT Type :	GSM/GPRS Dual-band Digital Mobile Phone
Trade Name :	ZTE
Model Name :	i766
FCC ID :	Q78-I766
Tx Frequency :	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~ 1910 MHz
Rx Frequency :	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz
Maximum Output Power to Antenna :	GSM850 : 32.73 dBm GSM1900 : 28.30 dBm
Maximum ERP/EIRP :	GSM850 : 0.66 W (28.21 dBm) GSM1900 : 0.97 W (29.88 dBm)
Antenna Type :	Fixed Internal
HW Version :	A
SW Version :	I766_V2_S_A07A102
Type of Modulation :	GMSK
Type of Emission :	300KGXW
DUT Stage :	Production Unit

## 2. Test Configuration of Equipment under Test


### 2.1 Test Manner

1. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range.
2. During all testings, EUT is in link mode with base station emulator at maximum power level.
3. Frequency range investigated: radiated emission 30 MHz to 9000 MHz for GSM850 and; 30MHz to 19000 MHz for GSM1900.

### 2.2 Test Mode

Application	GSM850	GSM1900
Radiated Emission	<input checked="" type="checkbox"/> Mode 1: GSM Link	<input checked="" type="checkbox"/> Mode 2: GSM Link
Conducted Measurement	<input checked="" type="checkbox"/> Mode 1: GSM Link	<input checked="" type="checkbox"/> Mode 2: GSM Link

### 2.3 Connection Diagram of Test System

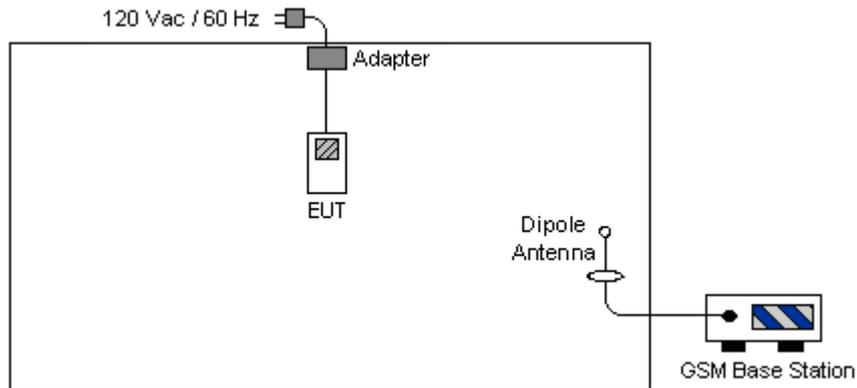

### 2.4 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Code
1.	GSM Base Station	R&S	CMU200	N/A	N/A	Unshielded, 1.8m



### **3. General Information of Test Site**

Test Site Location : No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.  
TEL : 86-0512-5790-0158  
FAX : 86-0512-5790-0958  
Test Site No. : TH01-KS, 03CH01-KS

#### **3.1 Test Voltage**

AC 120V / 60Hz

#### **3.2 Test Compliance**

47 CFR Part 22H, 24E, Part 2

#### **3.3 Frequency Range**

- a. Radiation: from 30MHz to 9000MHz for GSM850.
- b. Radiation: from 30 MHz to 19000 MHz for GSM1900.

#### **3.4 Test Distance**

The test distance of radiated emission from antenna to EUT is 3 m.



## 4. Test Data and Test Result

### 4.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result	Section
§2.1046	RF Output Power	Passed	4.2
§22.913 §24.232	ERP / EIRP	Passed	4.3
§2.1049, §22.917, §24.238(b)	Occupied Bandwidth & Band Edge Measurement	Passed	4.4
§2.1051	Conducted Emission	Passed	4.5
§2.1053	Field Strength of Spurious Radiation	Passed	4.6
§2.1055, §22.355, §24.235	Frequency Stability vs. Temperature	Passed	4.7
§2.1055, §22.355, §24.235	Frequency Stability vs. Voltage	Passed	4.8

## 4.2 RF Output Power


### 4.2.1 Measurement Instruments

As described in chapter 5 of this test report.

### 4.2.2 Test Procedure

- a. The transmitter output was connected to power meter and base station through power divider.
- b. Set EUT at PCL=5 for GSM850 and/or PCL=0 for GSM1900 maximum power through base station.
- c. Select lowest, middle, and highest channels for each band.

### 4.2.3 Test Setup Layout

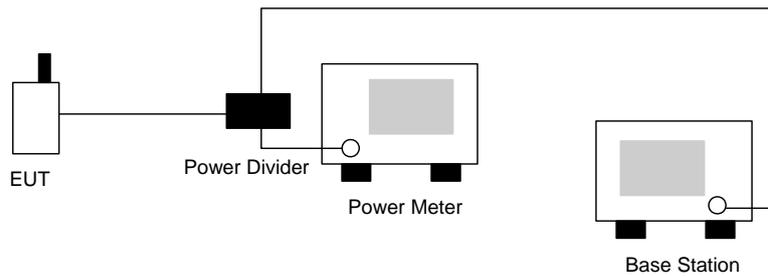

### 4.2.4 Test Result

Bands	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM850	128	824.2 (Low)	32.01	1.589
	189	836.4 (Mid)	32.73	1.875
	251	848.8 (High)	32.66	1.845
GSM1900	512	1850.2 (Low)	28.00	0.631
	661	1880.0 (Mid)	28.20	0.661
	810	1909.8 (High)	28.30	0.676



### 4.3 ERP / EIRP Measurement

Equivalent isotropic radiated power measurements by substitution method according to ANSI/TIA/EIA-603-C.

#### 4.3.1 Measurement Instruments

As described in chapter 5 of this test report.

#### 4.3.2 Test Procedure

- a. The EUT was placed on a tutable with 1.0 meter height in an fully anechoic chamber.
- b. The EUT was set 1.2 meters from the receiving antenna which was mounted on the antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiated power.
- d. The height of the receiving antenna is also kept at 1.0M height.
- e. Taking the record of maximum ERP/EIRP.
- f. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
- g. The conducted power at the terminal of the dipole antenna is measured.
- h. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
- i.  $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

$P_s$  (dBm) : Input power to substitution antenna.

$G_s$  (dBi or dBd) : Substitution antenna Gain.

$E_t = R_t + AF$


$E_s = R_s + AF$

$AF$  (dB/m) : Receive antenna factor

$R_t$  : The highest received signal in Spectrum Analyzer for EUT.

$R_s$  : The highest received signal in spectrum analyzer for substitution antenna.

4.3.3 Test Setup Layout of ERP/EIRP

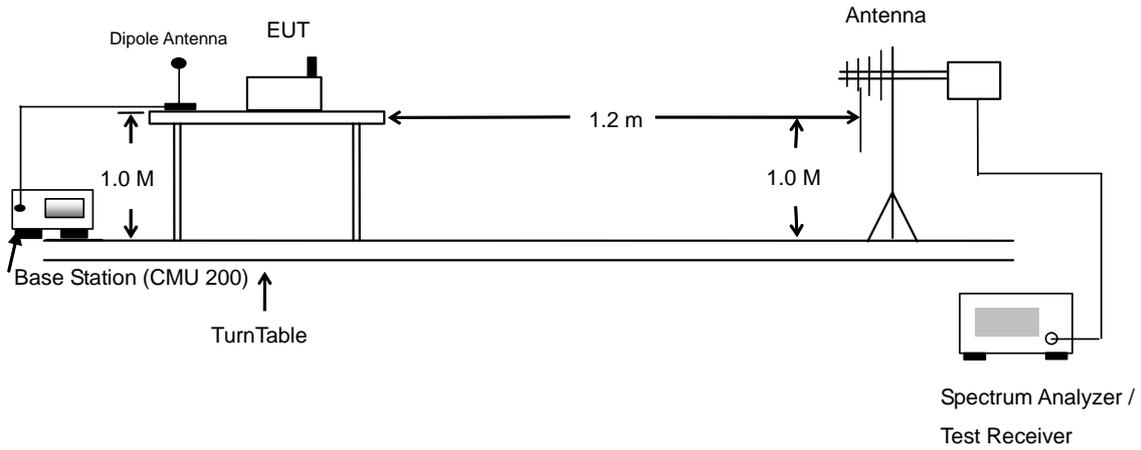



4.3.4 Test Result

GSM850 (GSM) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-18.83	-48.12	0.00	-1.08	28.21	0.66
836.40	-20.62	-48.28	0.00	-0.93	26.73	0.47
848.80	-21.97	-48.35	0.00	-0.76	25.62	0.36
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-31.79	-47.97	0.00	-1.08	15.10	0.03
836.40	-33.65	-48.01	0.00	-0.93	13.43	0.02
848.80	-35.09	-48.05	0.00	-0.76	12.20	0.02

GSM1900 (GSM) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-24.52	-51.88	0.00	1.96	29.32	0.86
1880.00	-25.11	-52.99	0.00	2.00	29.88	0.97
1909.80	-28.00	-54.28	0.00	1.98	28.26	0.67
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-25.29	-52.13	0.00	1.96	28.80	0.76
1880.00	-25.80	-53.17	0.00	2.00	29.37	0.86
1909.80	-27.03	-54.13	0.00	1.98	29.08	0.81

## 4.4 Occupied Bandwidth and Band Edge Measurement


### 4.4.1 Measurement Instruments

As described in chapter 5 of this test report.

### 4.4.2 Test Procedure

- a. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
- b. The 99% occupied bandwidth of middle channel for the highest and lowest RF powers were measured.
- c. The bandedge of low and high channels for the highest RF powers within the transmitting frequency band were measured. Setting RBW as roughly  $BW/100$ .

### 4.4.3 Test Setup Layout

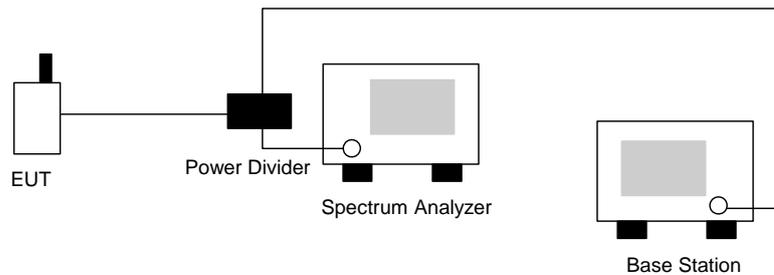




4.4.4 Test Result

- Mode 1
- Test Mode : GSM850 (GSM) CH128 Lower Band Edge
- Power State : High



Ref 34.5 dBm      Att 60 dB      \*RBW 3 kHz      Marker 1 [T1 ]  
 \*VBW 3 kHz      -15.71 dBm  
 \*SWT 300 ms      823.998000000 MHz

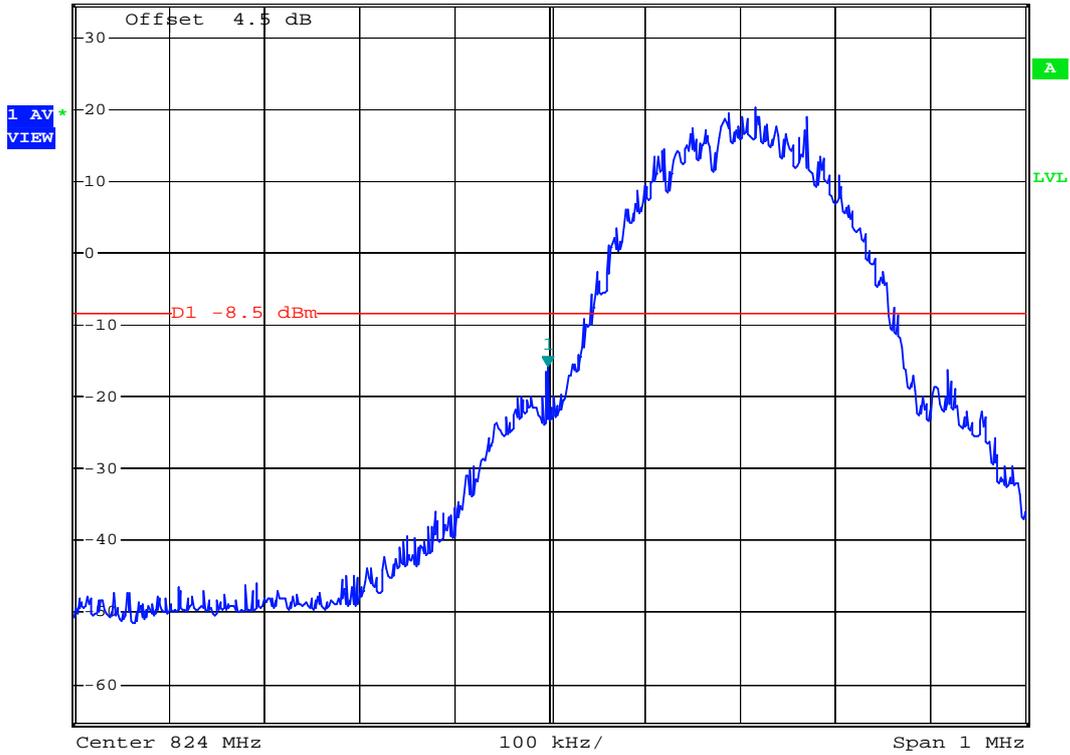


Date: 5.JUL.2008 11:58:00



\*RBW 3 kHz Marker 1 [T1 ]  
\*VBW 10 kHz -19.63 dBm  
\*SWT 300 ms 824.00000000 MHz

Ref 34.5 dBm \*Att 40 dB

1 AV \*  
VIEW

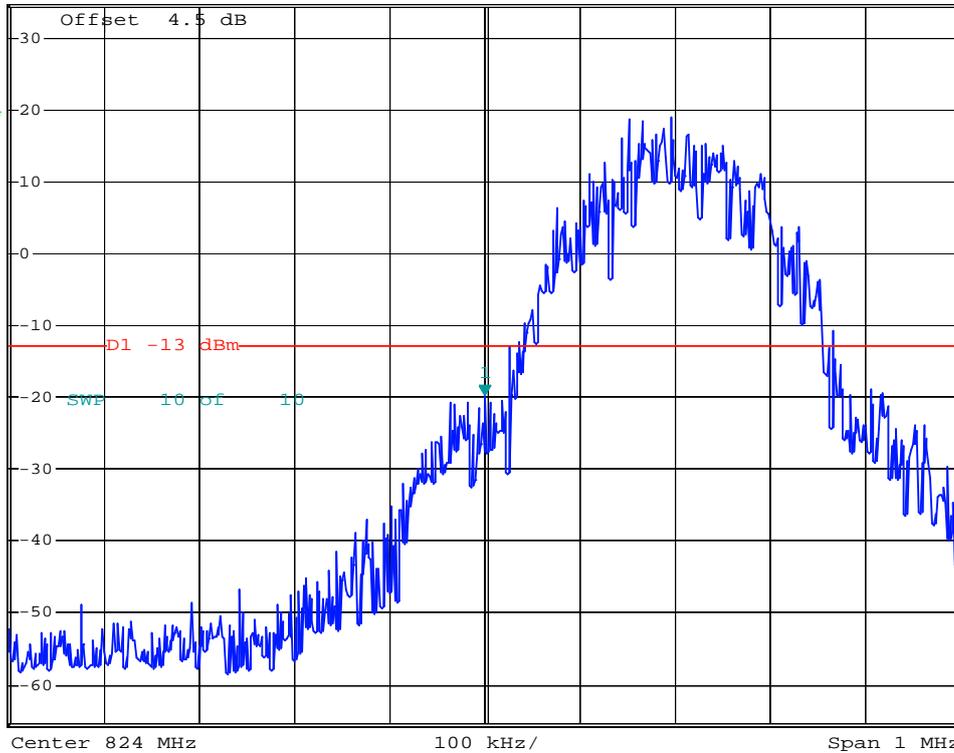


Date: 5.JUL.2008 12:41:38



- Test Mode : GSM850 (GSM) CH128 99% Occupied Bandwidth
- Power State : High



Ref 34.5 dBm      \*Att 60 dB      \*RBW 3 kHz      Marker 1 [T1 ]  
 \*VBW 10 kHz      22.65 dBm  
 \*SWT 300 ms      824.268000000 MHz

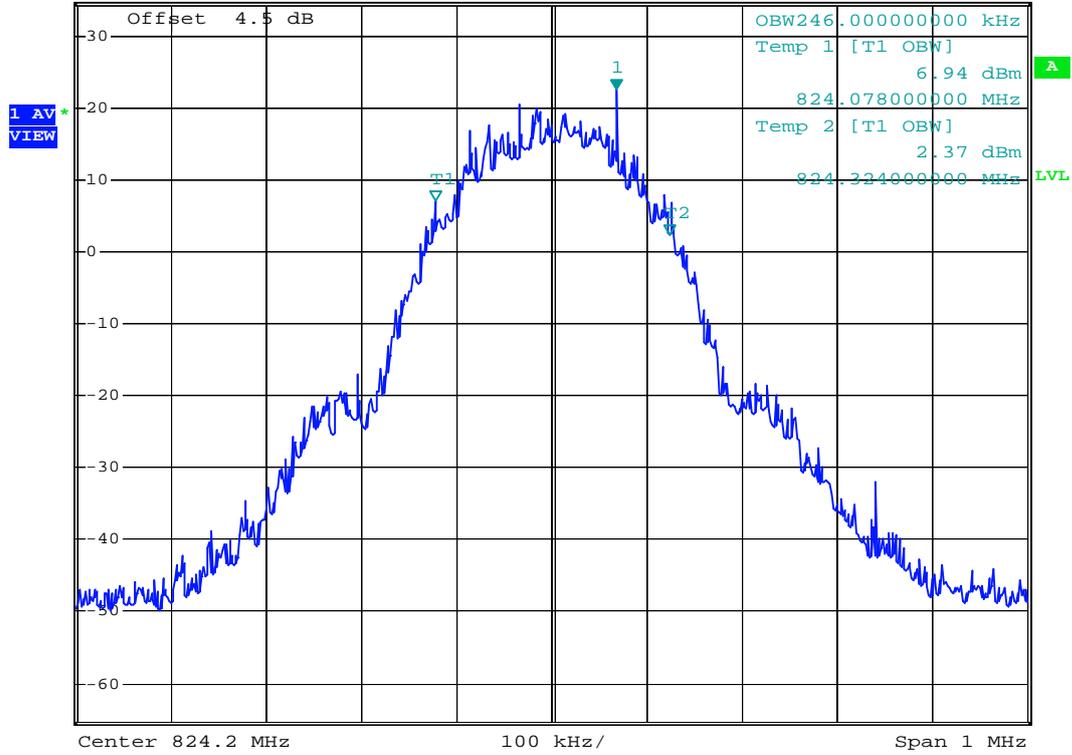


Date: 5.JUL.2008 12:14:57



- Test Mode : GSM850 (GSM) CH189 99% Occupied Bandwidth
- Power State : High



\*RBW 3 kHz      Marker 1 [T1 ]  
 \*VBW 10 kHz      22.91 dBm  
 \*SWT 300 ms      836.384000000 MHz

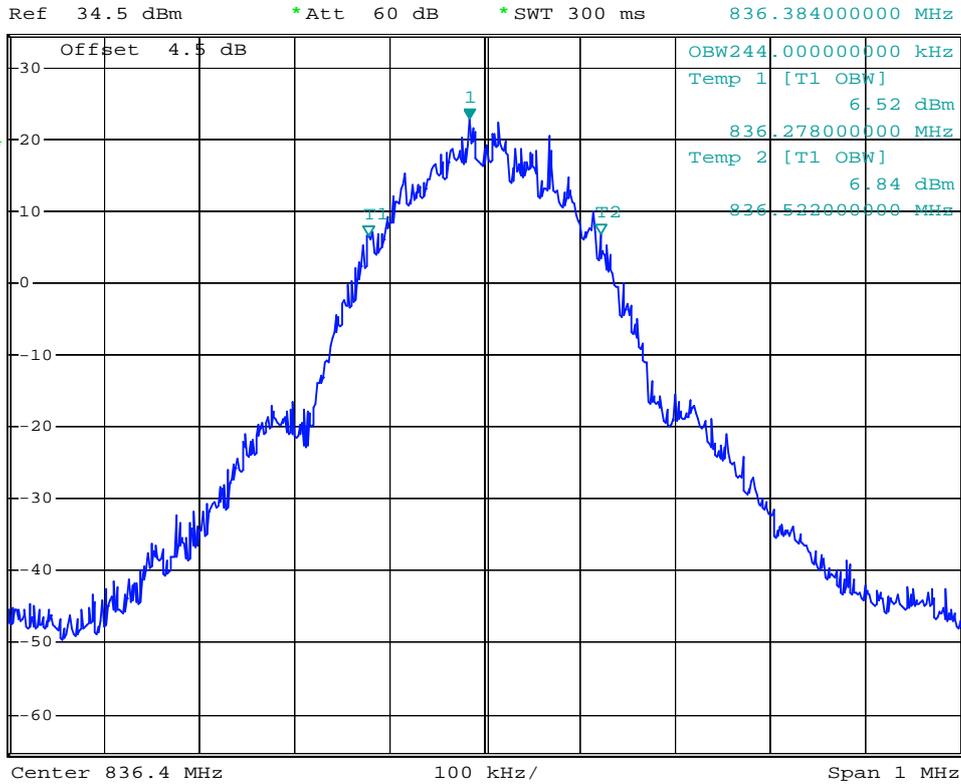

Date: 5.JUL.2008 12:19:24




\*RBW 3 kHz      Marker 1 [T1 ]  
 \*VBW 3 kHz      25.24 dBm  
 \*SWT 300 ms      836.468000000 MHz

Ref 34.5 dBm

\*Att 40 dB

1 PK  
VIEW

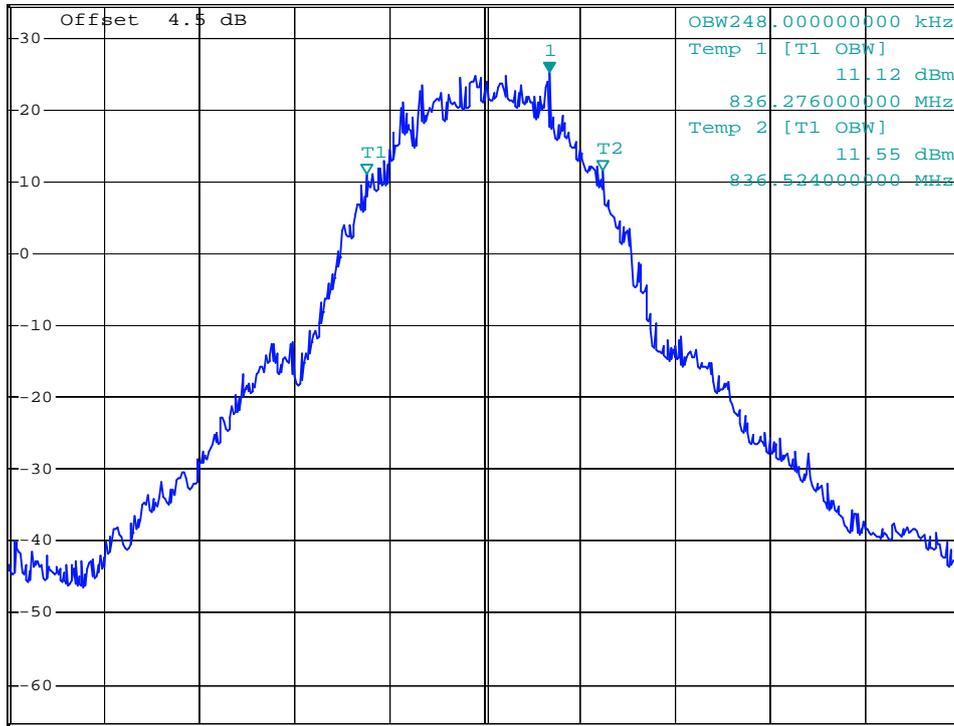

Center 836.4 MHz

100 kHz/

Span 1 MHz

Date: 5.JUL.2008 12:43:16









- Test Mode : GSM850 (GSM) CH189 26dB Bandwidth
- Power State : High




\*RBW 3 kHz      Delta 2 [T1 ]  
 \*VBW 10 kHz      0.90 dB  
 \*SWT 300 ms      314.000000000 kHz

Ref 34.5 dBm

Att 60 dB

1 AV \*  
VIEW

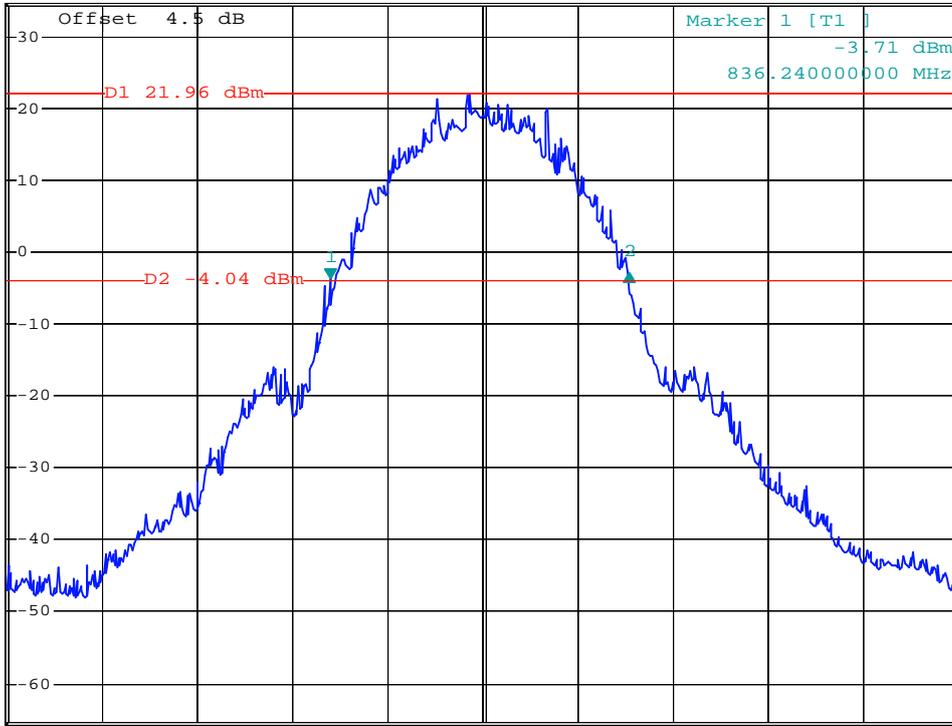

Center 836.4 MHz

100 kHz/

Span 1 MHz

Date: 5.JUL.2008 12:03:08



- Test Mode : GSM850 (GSM) CH 251 26dB Bandwidth
- Power State : High




\*RBW 3 kHz      Delta 2 [T1 ]  
 \*VBW 10 kHz      0.64 dB  
 \*SWT 300 ms      306.000000000 kHz

Ref 34.5 dBm

Att 60 dB

1 AV \*  
VIEW

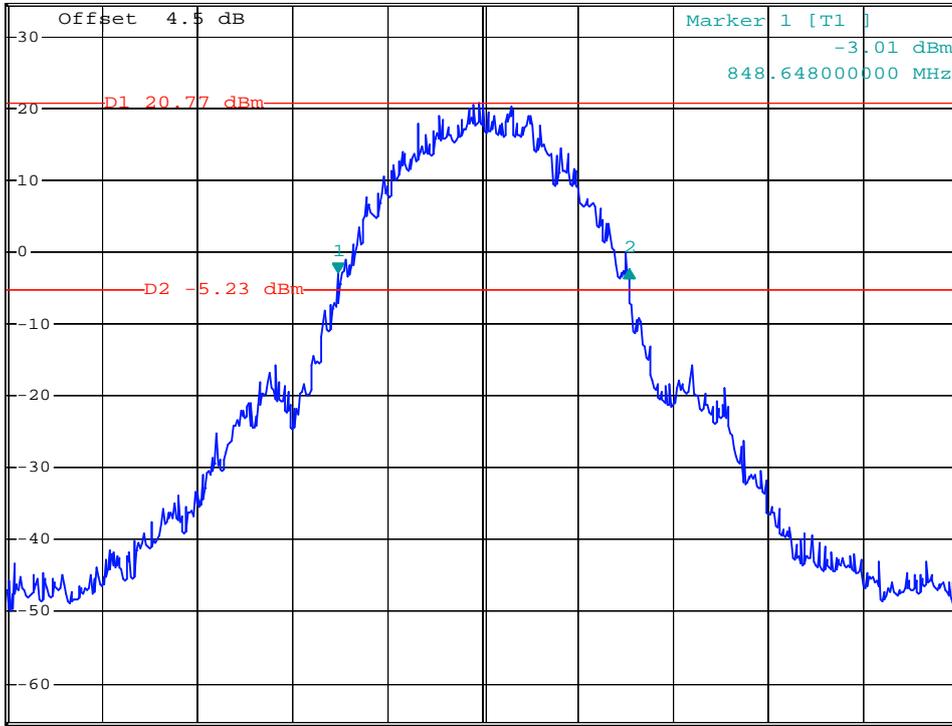

Center 848.8 MHz

100 kHz/

Span 1 MHz

Date: 5.JUL.2008 12:04:51



- Test Mode : GSM850 (GSM) CH251 Higher Band Edge
- Power State : High




\*RBW 3 kHz      Marker 1 [T1 ]  
 \*VBW 3 kHz      -15.79 dBm  
 \*SWT 300 ms      849.004000000 MHz

Ref 34.5 dBm

Att 60 dB

1 AV \*  
VIEW

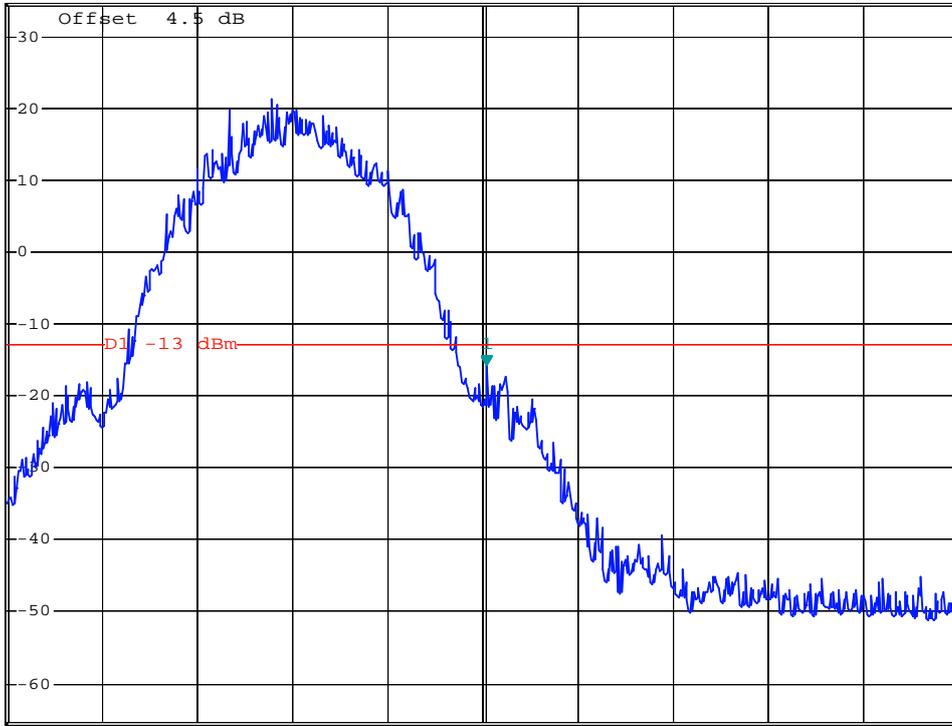

Center 849 MHz

100 kHz/

Span 1 MHz


Date: 5.JUL.2008 12:08:33



\*RBW 3 kHz      Marker 1 [T1 ]  
 \*VBW 10 kHz      -17.58 dBm  
 \*SWT 300 ms      849.028000000 MHz

Ref 34.5 dBm      Att 60 dB


1 AV \*  
 VIEW

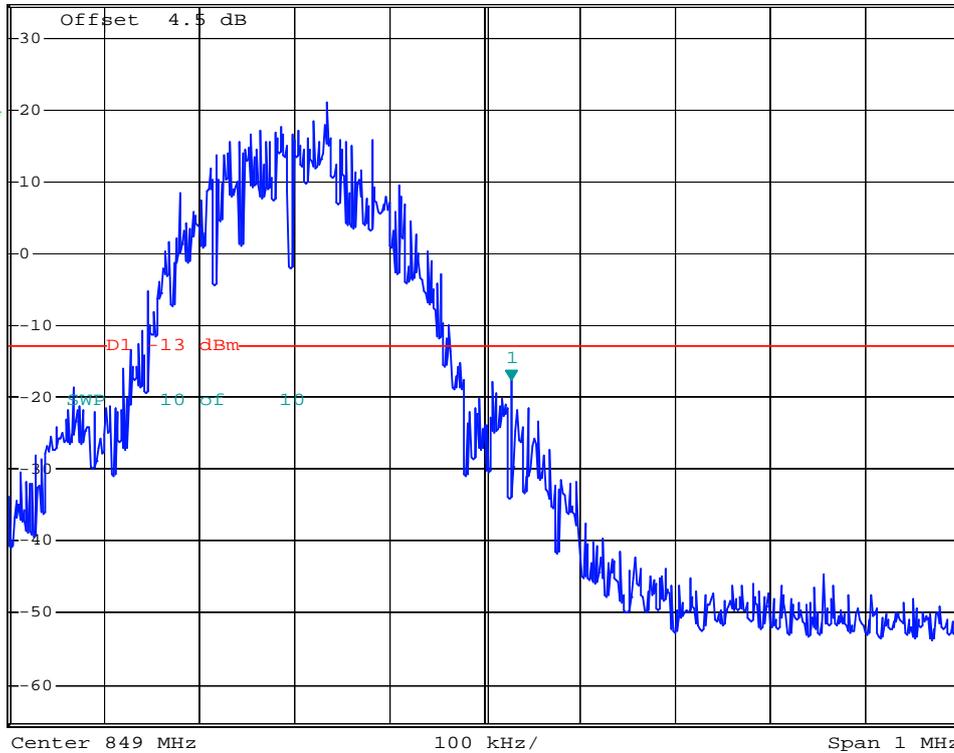

Date: 5.JUL.2008 12:07:18



- Mode 3
- Test Mode : GSM1900 (GSM) CH512 Lower Band Edge
- Power State : High

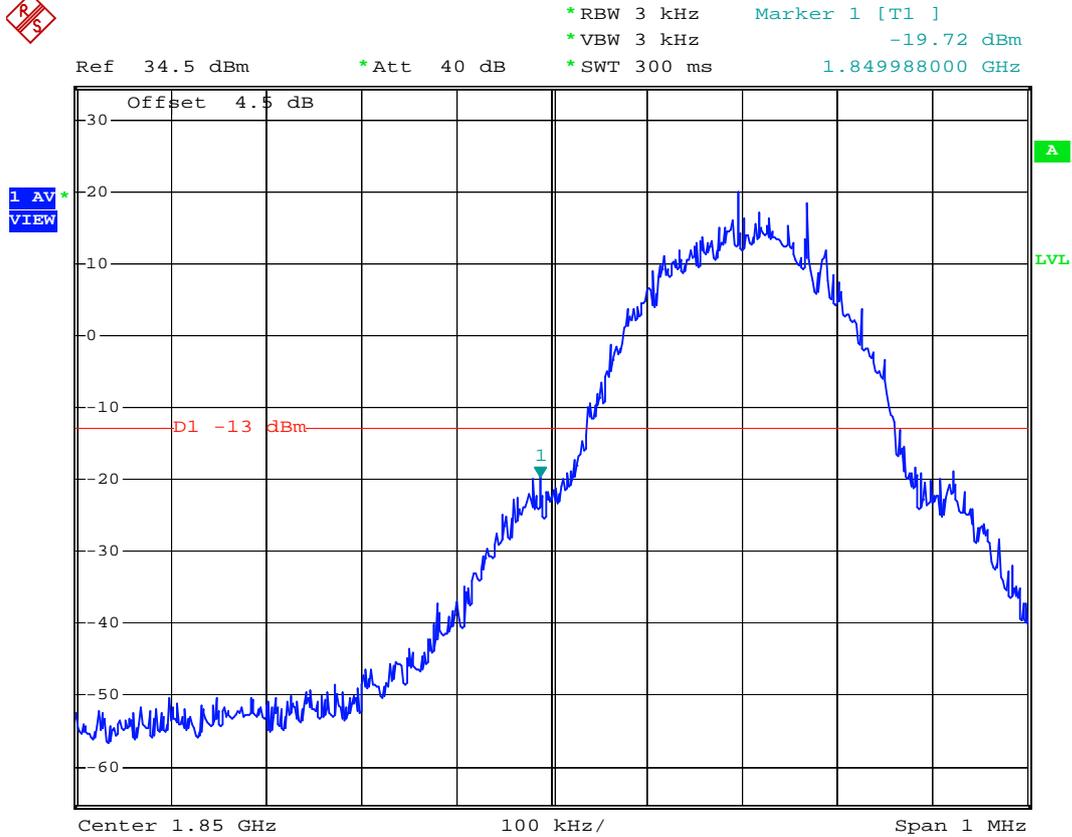


Date: 5.JUL.2008 12:54:10



\*RBW 3 kHz      Marker 1 [T1 ]  
\*VBW 10 kHz      -20.00 dBm  
\*SWT 300 ms      1.849982000 GHz

Ref 34.5 dBm      \*Att 40 dB

1 AV \*  
VIEW

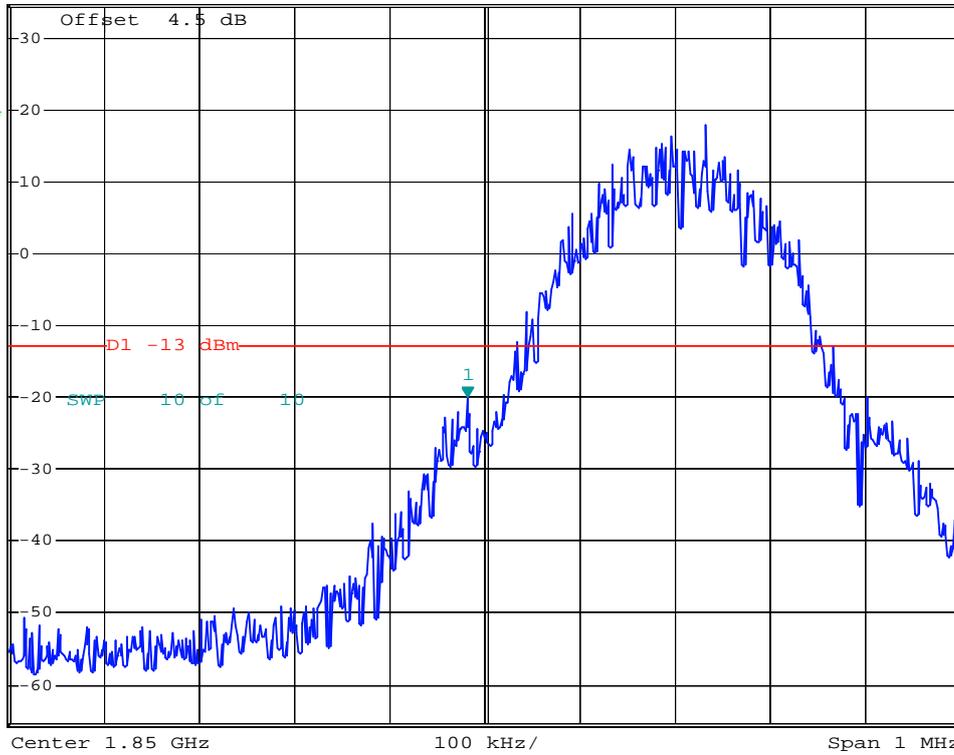

Date: 5.JUL.2008 12:56:29




- Test Mode : GSM1900 (GSM) CH512 99% Occupied Bandwidth
- Power State : High



\*RBW 3 kHz      Marker 1 [T1 ]  
 \*VBW 10 kHz      17.30 dBm  
 \*SWT 300 ms      1.850220000 GHz

Ref 34.5 dBm      \*Att 40 dB

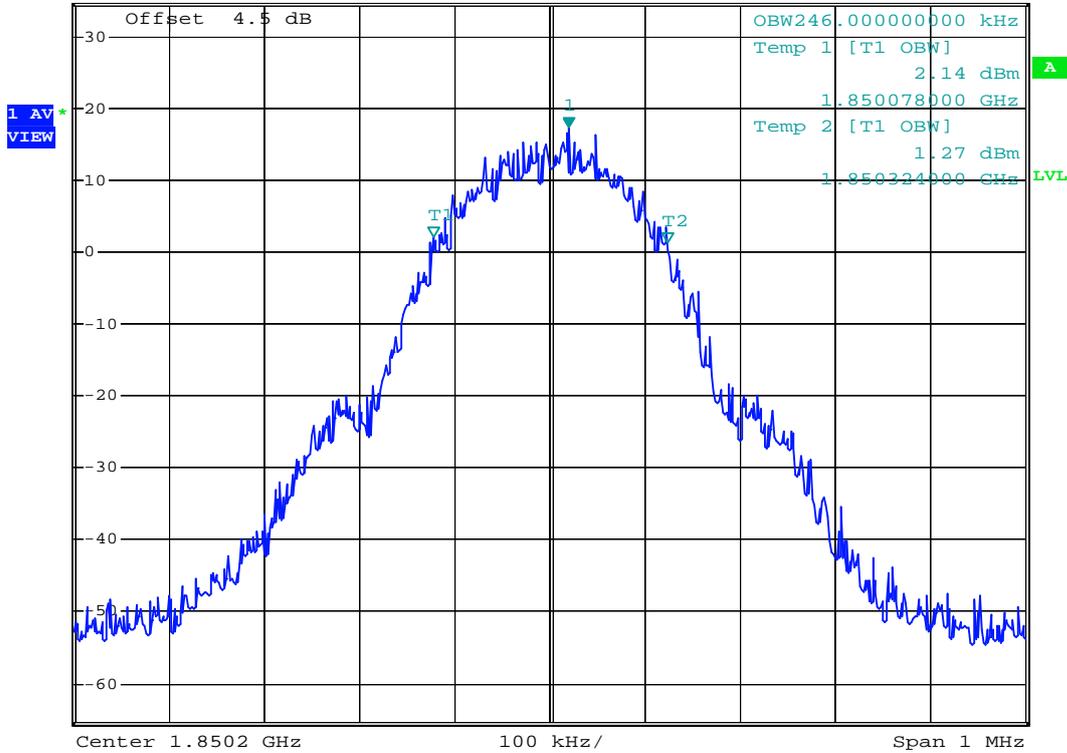


Date: 5.JUL.2008 13:04:09



- Test Mode : GSM1900 (GSM) CH661 99% Occupied Bandwidth
- Power State : High



Ref 34.5 dBm      \*Att 40 dB      \*RBW 3 kHz      Marker 1 [T1 ]  
 \*VBW 10 kHz      14.12 dBm  
 \*SWT 300 ms      1.879996000 GHz

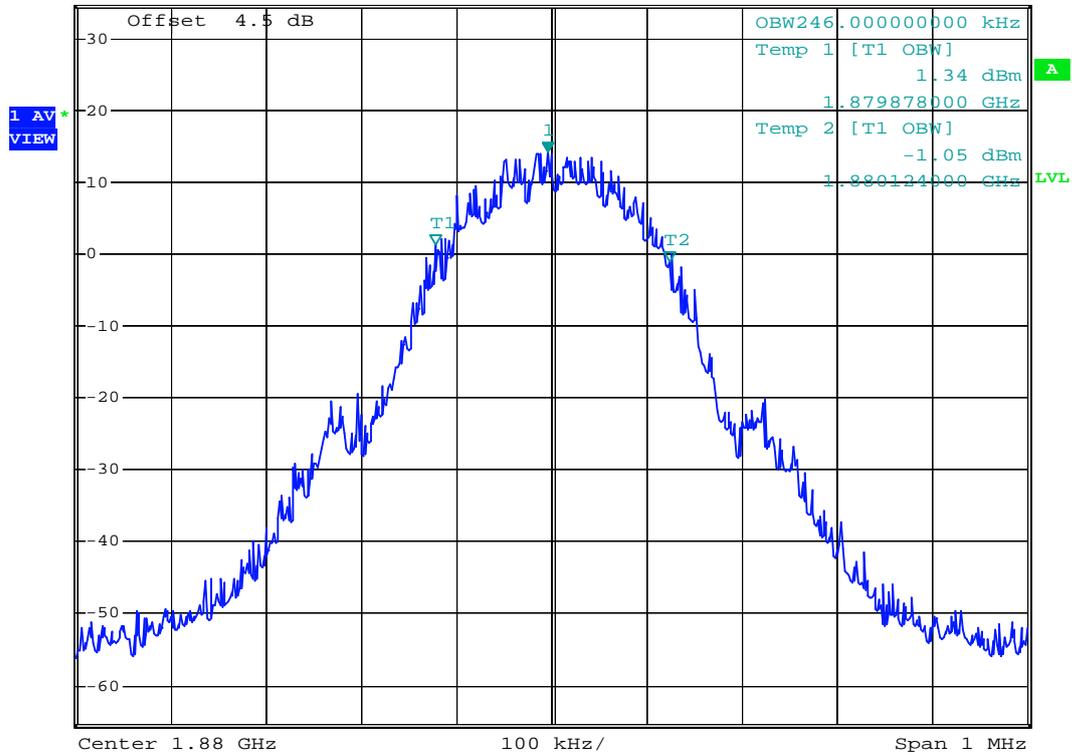

Date: 5.JUL.2008 13:05:13




\*RBW 3 kHz      Marker 1 [T1 ]  
 \*VBW 3 kHz      18.92 dBm  
 \*SWT 300 ms      1.880070000 GHz

Ref 34.5 dBm

\*Att 40 dB

1 PK  
VIEW

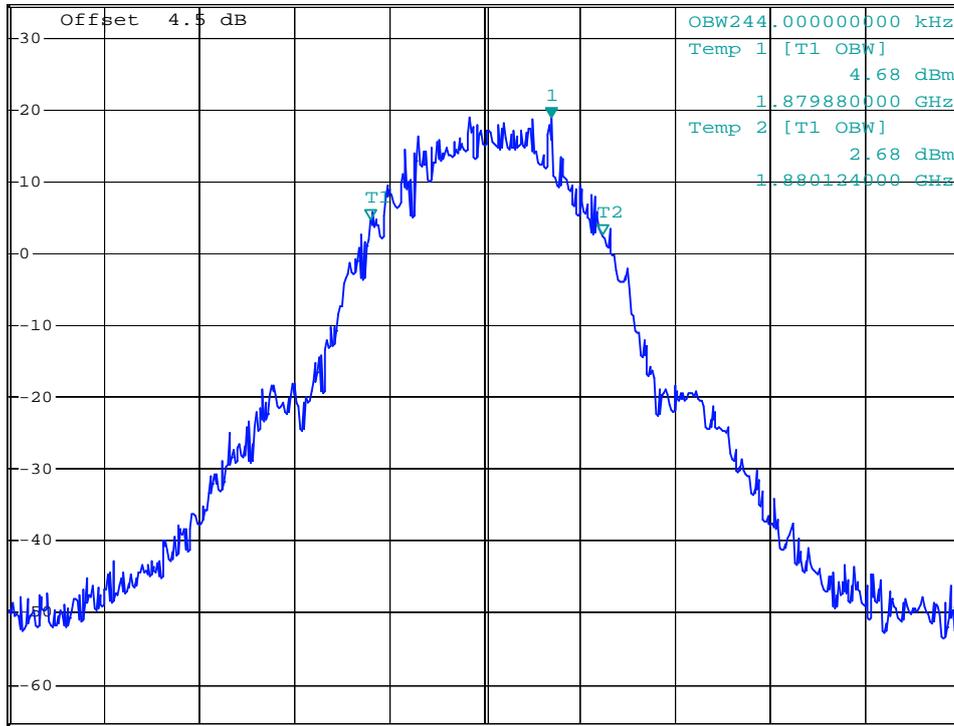

Center 1.88 GHz

100 kHz/

Span 1 MHz


Date: 5.JUL.2008 13:23:05



\*RBW 3 kHz      Marker 1 [T1 ]  
 \*VBW 30 kHz      18.85 dBm  
 \*SWT 300 ms      1.879988000 GHz

Ref 34.5 dBm      \*Att 40 dB

1 PK  
VIEW

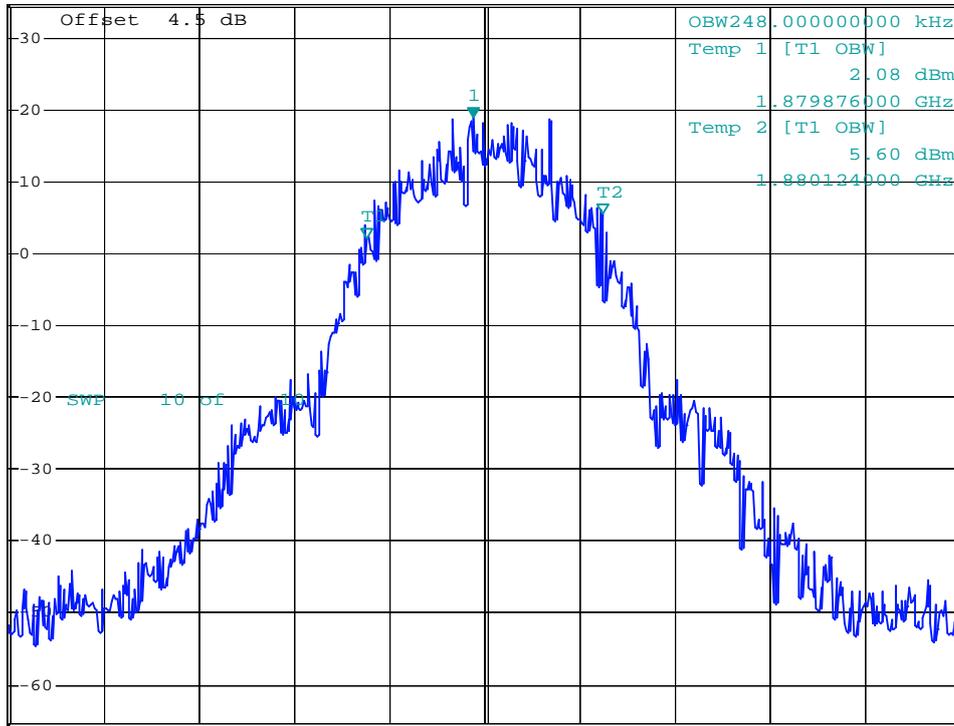

Center 1.88 GHz      100 kHz/      Span 1 MHz

Date: 5.JUL.2008 13:08:20



- Test Mode : GSM1900 (GSM) CH810 99% Occupied Bandwidth
- Power State : High




\*RBW 3 kHz      Marker 1 [T1 ]  
 \*VBW 10 kHz      16.40 dBm  
 \*SWT 300 ms      1.909784000 GHz

Ref 34.5 dBm

\*Att 40 dB

1 AV \*  
VIEW

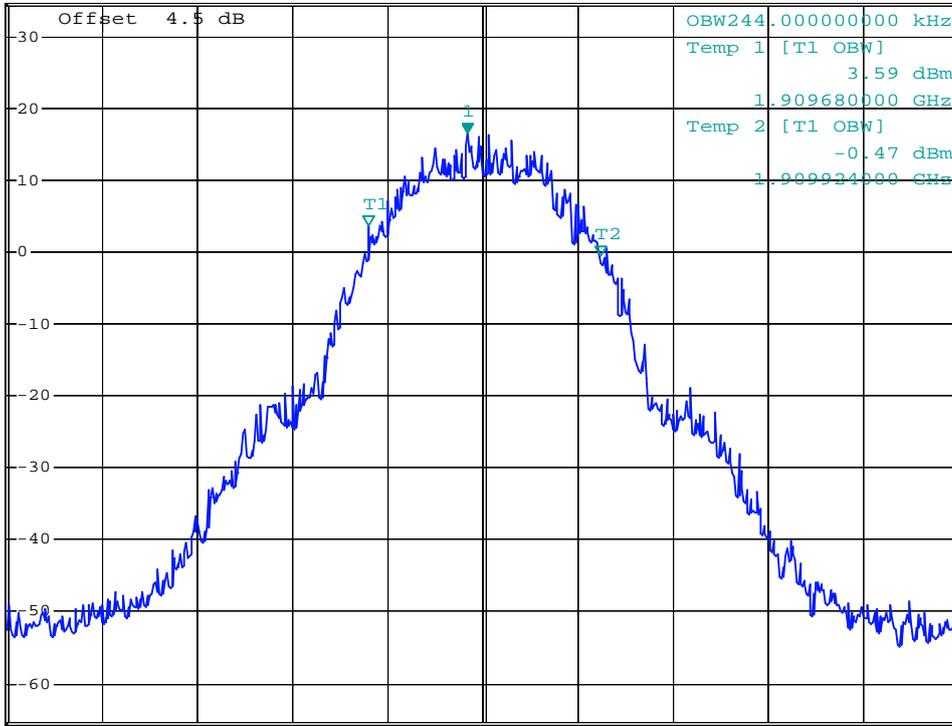

Center 1.9098 GHz      100 kHz/      Span 1 MHz


Date: 5.JUL.2008 13:06:32



- Test Mode : GSM1900 (GSM) CH512 26dB Bandwidth
- Power State : High



Ref 34.5 dBm      \*Att 40 dB      \*RBW 3 kHz      Delta 2 [T1 ]  
 \*VBW 10 kHz      0.31 dB  
 \*SWT 300 ms      302.000000000 kHz

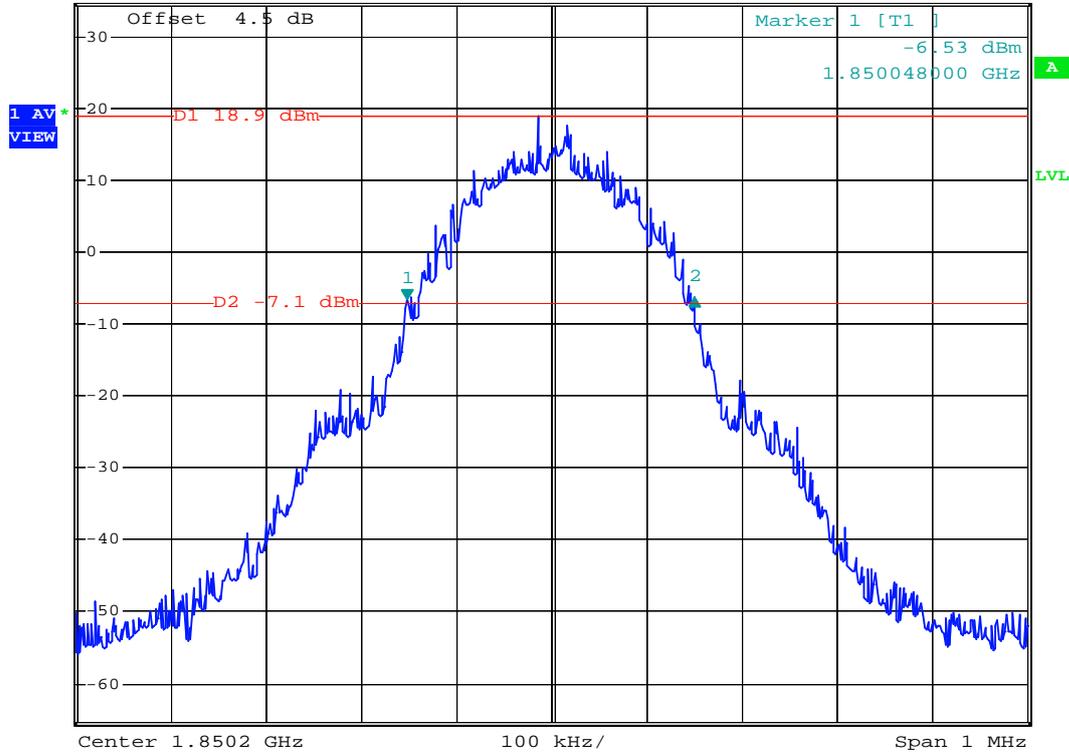

Date: 5.JUL.2008 12:46:55




- Test Mode : GSM1900 (GSM) CH661 26dB Bandwidth
- Power State : High



\*RBW 3 kHz      Delta 2 [T1 ]  
 \*VBW 10 kHz      1.88 dB  
 \*SWT 300 ms      308.000000000 kHz

Ref 34.5 dBm      \*Att 40 dB

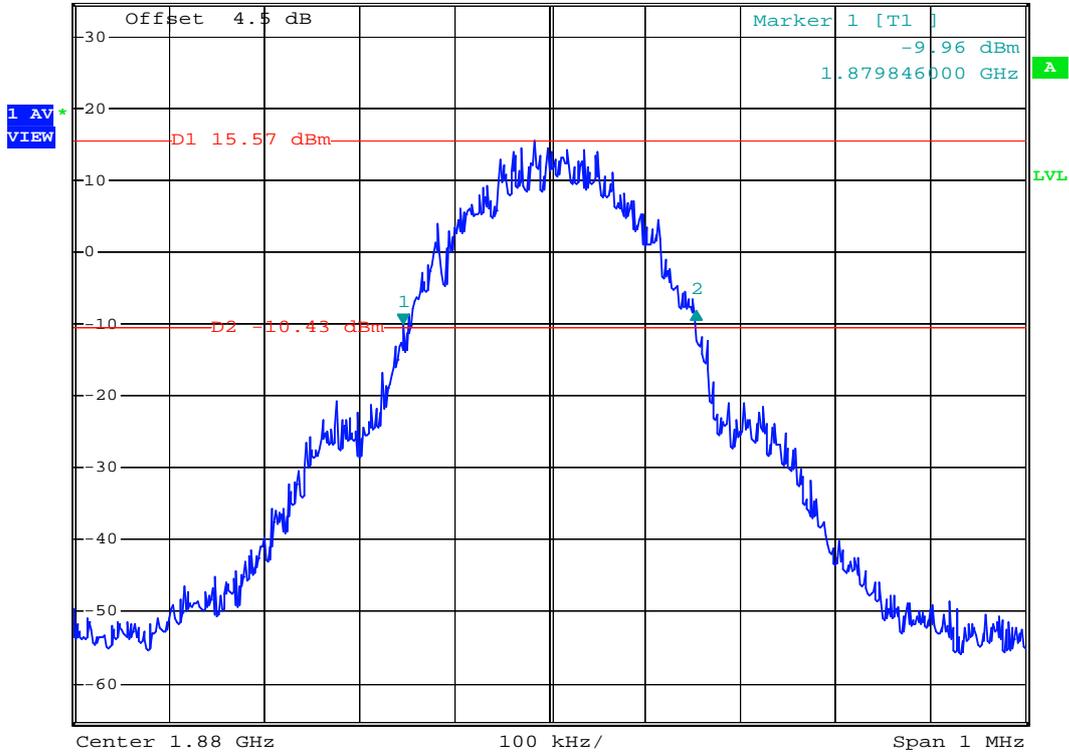


Date: 5.JUL.2008 12:49:21



- Test Mode : GSM1900 (GSM) CH810 26dB Bandwidth
- Power State : High



Ref 34.5 dBm      \*Att 40 dB      \*RBW 3 kHz      Delta 2 [T1 ]  
 \*VBW 10 kHz      -1.22 dB  
 \*SWT 300 ms      308.000000000 kHz

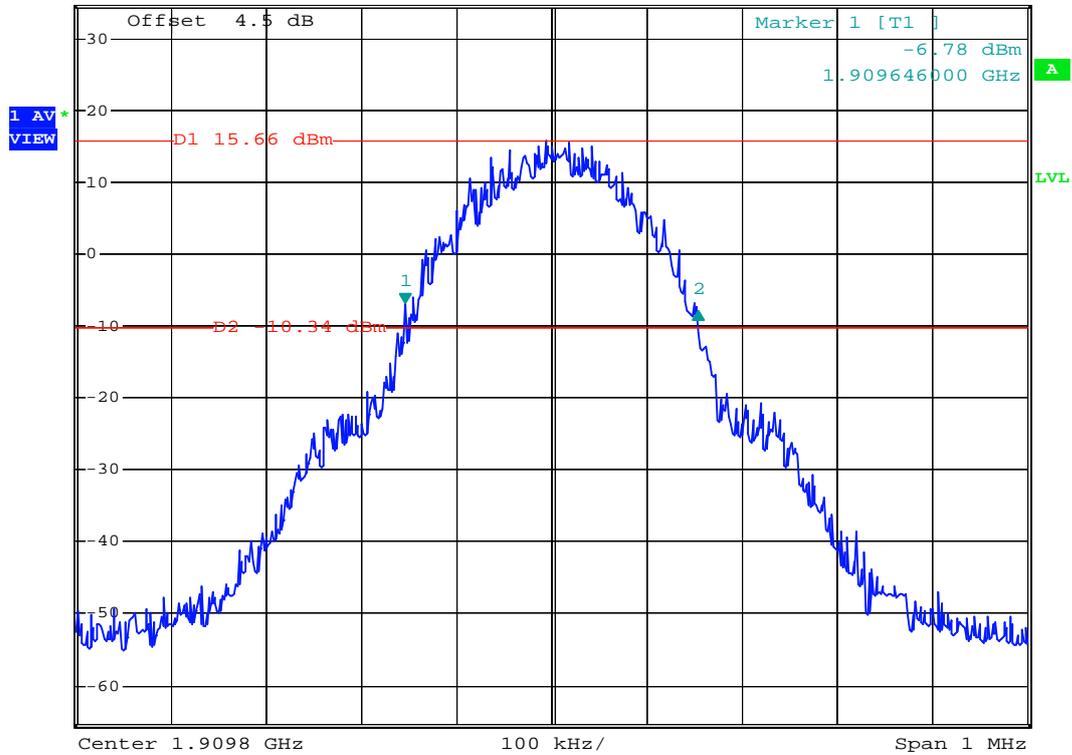


Date: 5.JUL.2008 12:51:36



- Test Mode : GSM1900 (GSM) CH810 Higher Band Edge
- Power State : High



\*RBW 3 kHz      Marker 1 [T1 ]  
\*VBW 3 kHz      -19.40 dBm  
\*SWT 300 ms      1.910004000 GHz

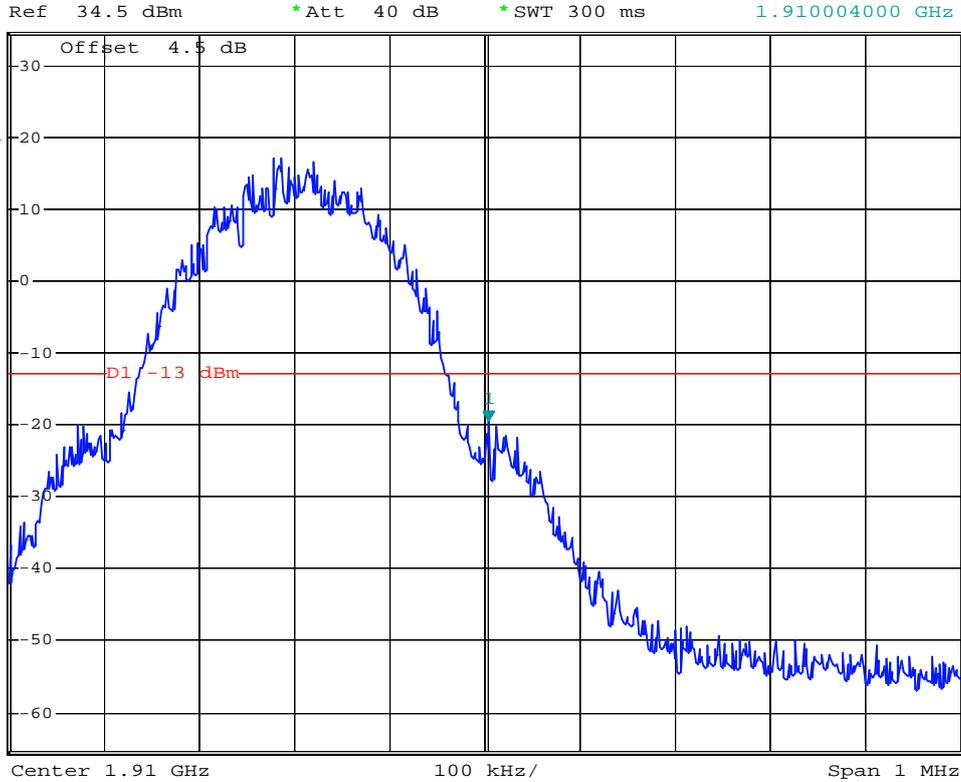


Date: 5.JUL.2008 12:59:57



\*RBW 3 kHz      Marker 1 [T1 ]  
 \*VBW 10 kHz      -20.82 dBm  
 \*SWT 300 ms      1.910014000 GHz

Ref 34.5 dBm      \*Att 40 dB

1 AV \*  
 VIEW

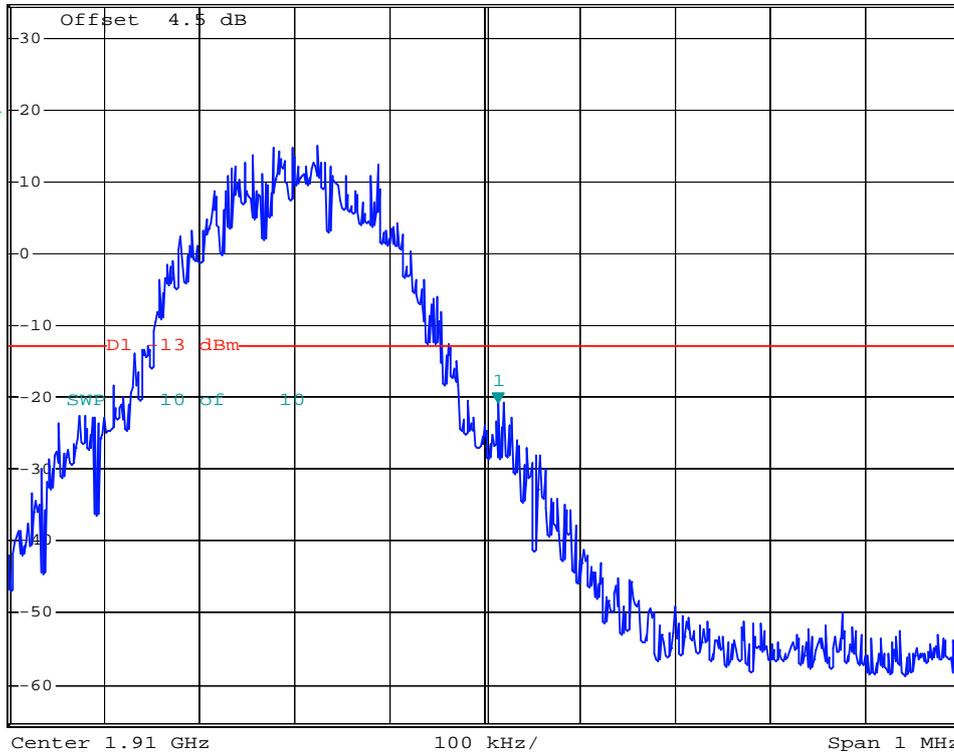

Date: 5.JUL.2008 12:57:34

## 4.5 Conducted Emission


### 4.5.1 Measurement Instruments

As described in chapter 5 of this test report.

### 4.5.2 Test Procedure

- a. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
- b. The middle channel for the highest RF power within the transmitting frequency was measured.
- c. The conducted spurious emission for the whole frequency range was taken.


### 4.5.3 Test Setup Layout

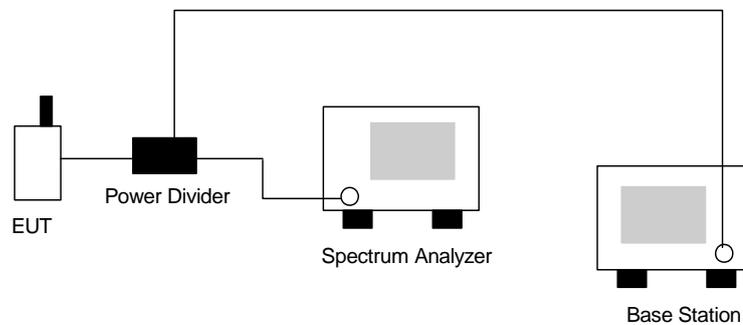



4.5.4 Test Result

- Mode 1
- Test Mode : GSM850 (GSM) CH189
- Frequency Range : 30M-1G

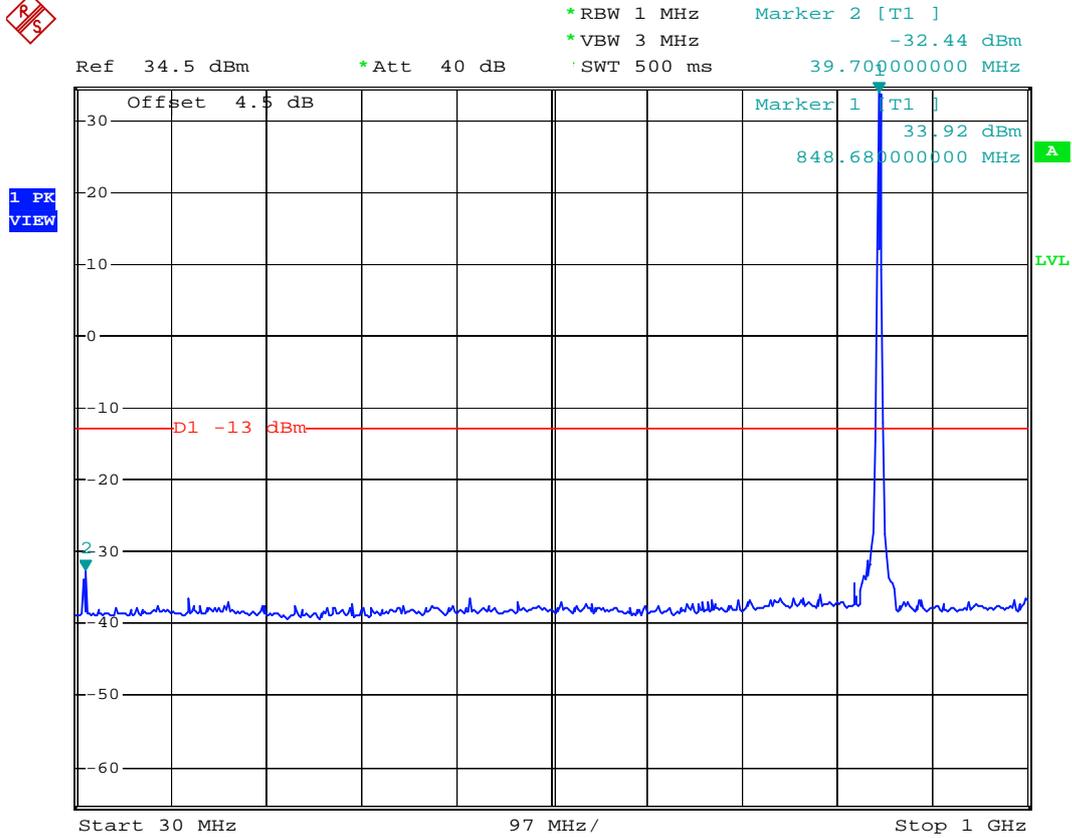


Date: 5.JUL.2008 12:32:47



- Test Mode : GSM850 (GSM) CH189
- Frequency Range : 1G-3G



Ref 4.5 dBm      \*Att 30 dB      \*RBW 1 MHz      Marker 2 [T1 ]  
 \*VBW 3 MHz      -20.33 dBm  
 \*SWT 500 ms      1.696000000 GHz

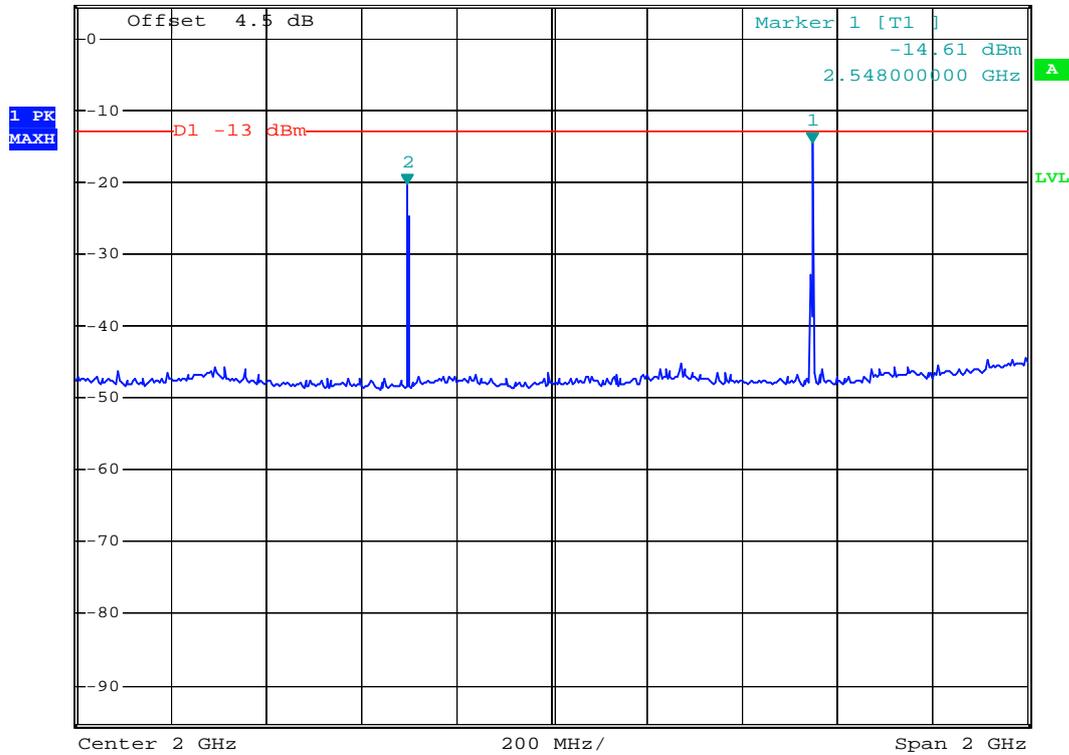

Date: 5.JUL.2008 12:25:07



- Test Mode : GSM850 (GSM) CH189
- Frequency Range : 3G-7G




\*RBW 1 MHz      Marker 3 [T1 ]  
 \*VBW 3 MHz      -65.93 dBm  
 \*SWT 500 ms      6.792000000 GHz

Ref -5.5 dBm

\*Att 0 dB

1 PK  
MAXH

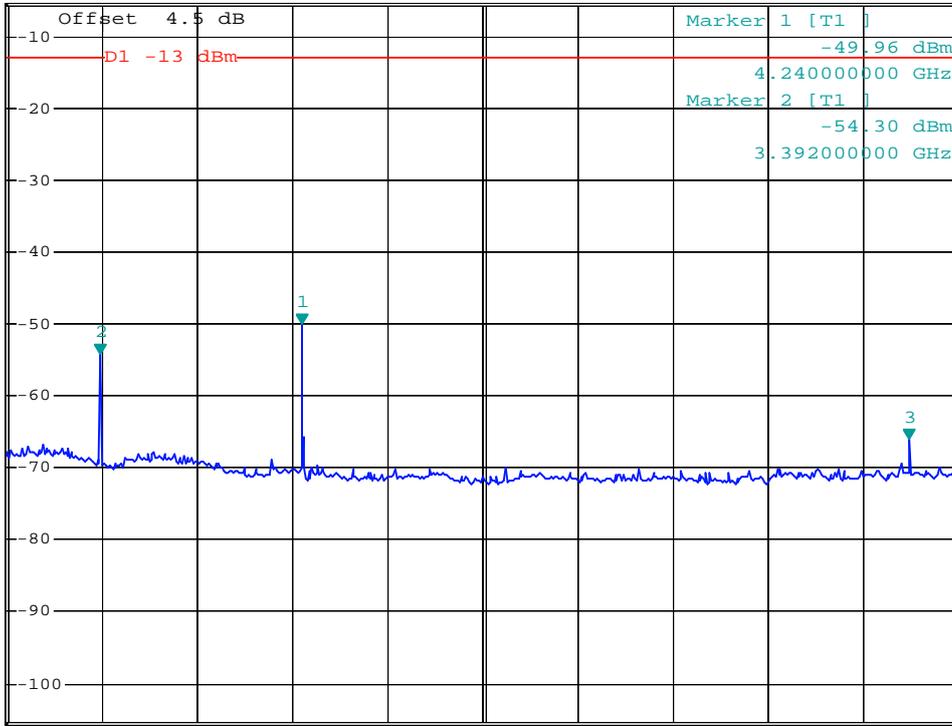

Start 3 GHz

400 MHz/

Stop 7 GHz


Date: 5.JUL.2008 12:28:12



- Test Mode : GSM850 (GSM) CH189
- Frequency Range : 7G-9G



Ref -5.5 dBm      \*Att 0 dB      \*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -68.77 dBm  
\*SWT 500 ms      7.640000000 GHz

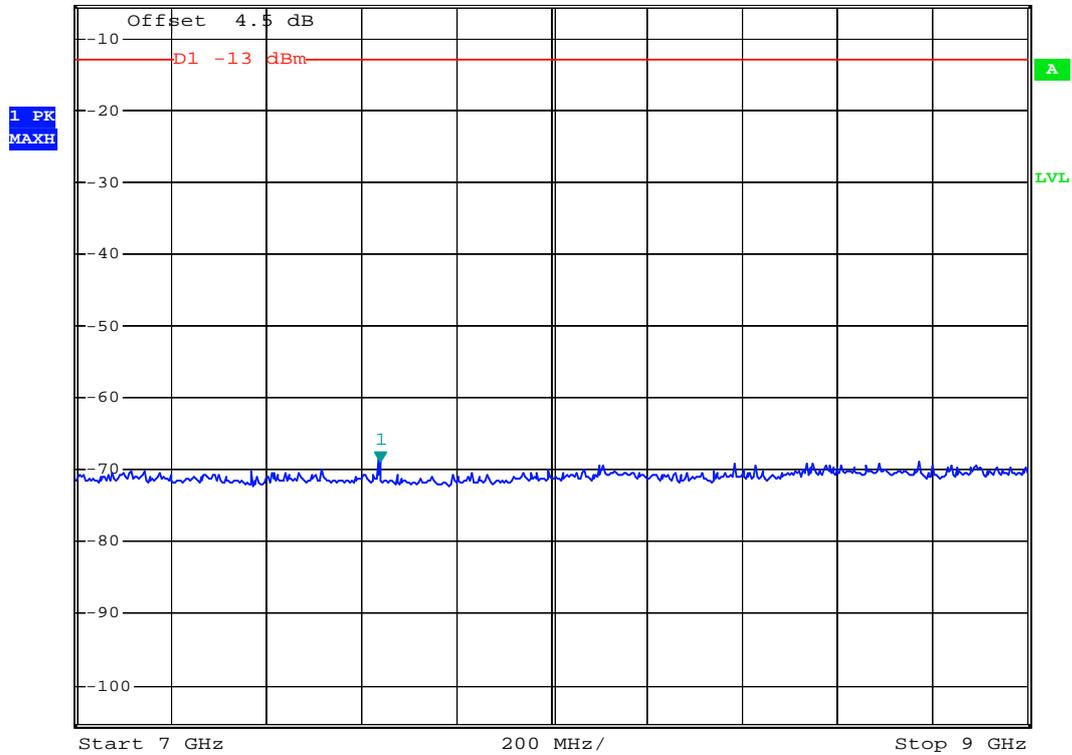

Date: 5.JUL.2008 12:29:05




- Mode 3
- Test Mode : GSM1900 (GSM) CH661
- Frequency Range : 30M-1G



\*RBW 1 MHz      Marker 1 [T1 ]  
 \*VBW 3 MHz      -28.52 dBm  
 \*SWT 500 ms      140.58000000 MHz

Ref 34.5 dBm      \*Att 40 dB

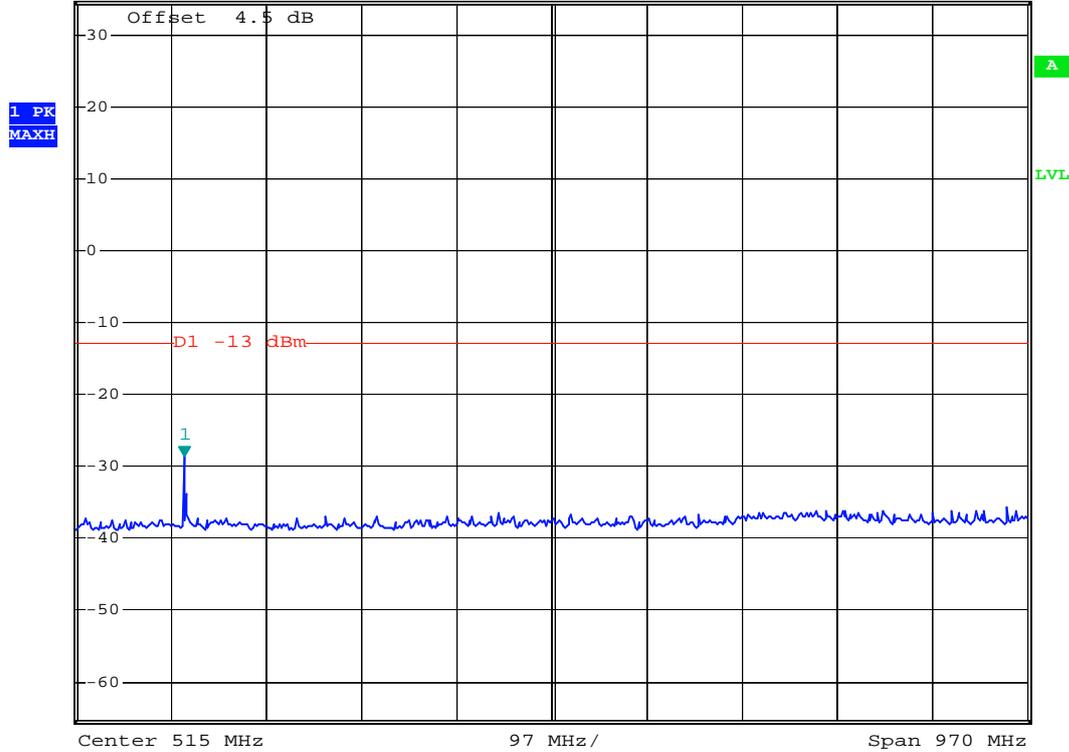


Date: 5.JUL.2008 13:11:05



- Test Mode : GSM1900 (GSM) CH661
- Frequency Range : 1G-3G



Ref 34.5 dBm      \*Att 40 dB      \*RBW 1 MHz      Marker 2 [T1 ]  
 \*VBW 3 MHz      -33.08 dBm  
 \*SWT 500 ms      1.932000000 GHz

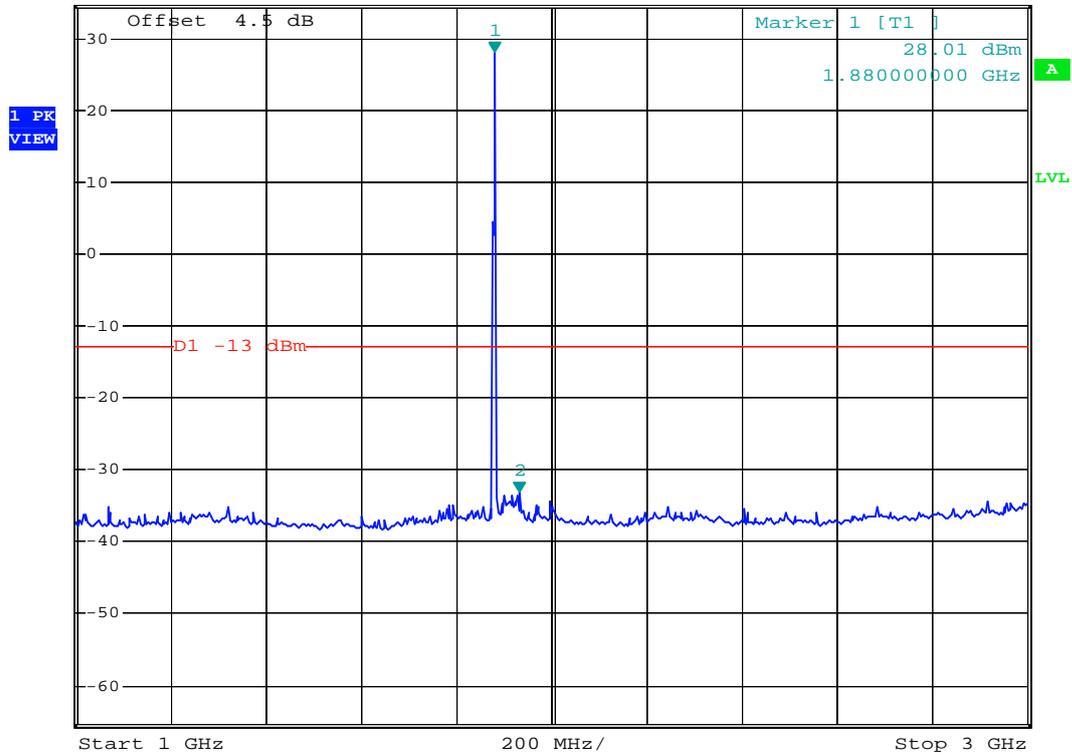


Date: 5.JUL.2008 13:12:02



- Test Mode : GSM1900 (GSM) CH661
- Frequency Range : 3G-7G



Ref -5.5 dBm      \*Att 0 dB      \*RBW 1 MHz      Marker 2 [T1 ]  
 \*VBW 3 MHz      -63.46 dBm  
 \*SWT 500 ms      5.640000000 GHz

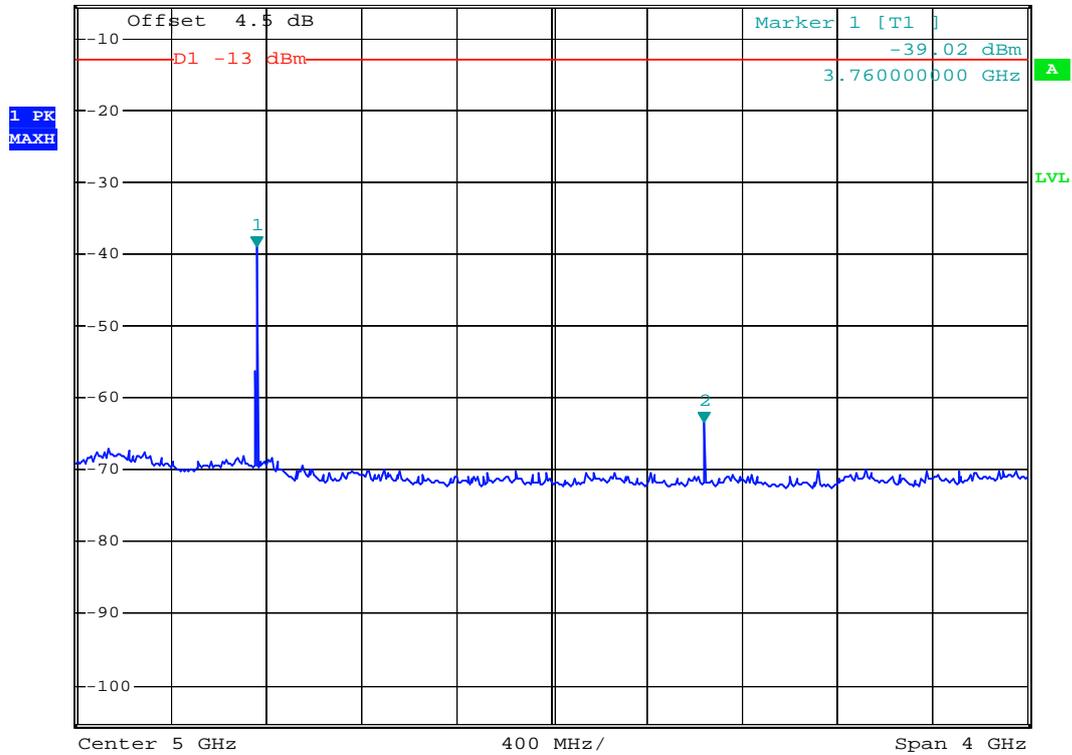


Date: 5.JUL.2008 13:14:30



- Test Mode : GSM1900 (GSM) CH661
- Frequency Range : 7G-13.6G




Ref -5.5 dBm      \*Att 0 dB      \*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -68.34 dBm  
\*SWT 500 ms      9.019600000 GHz

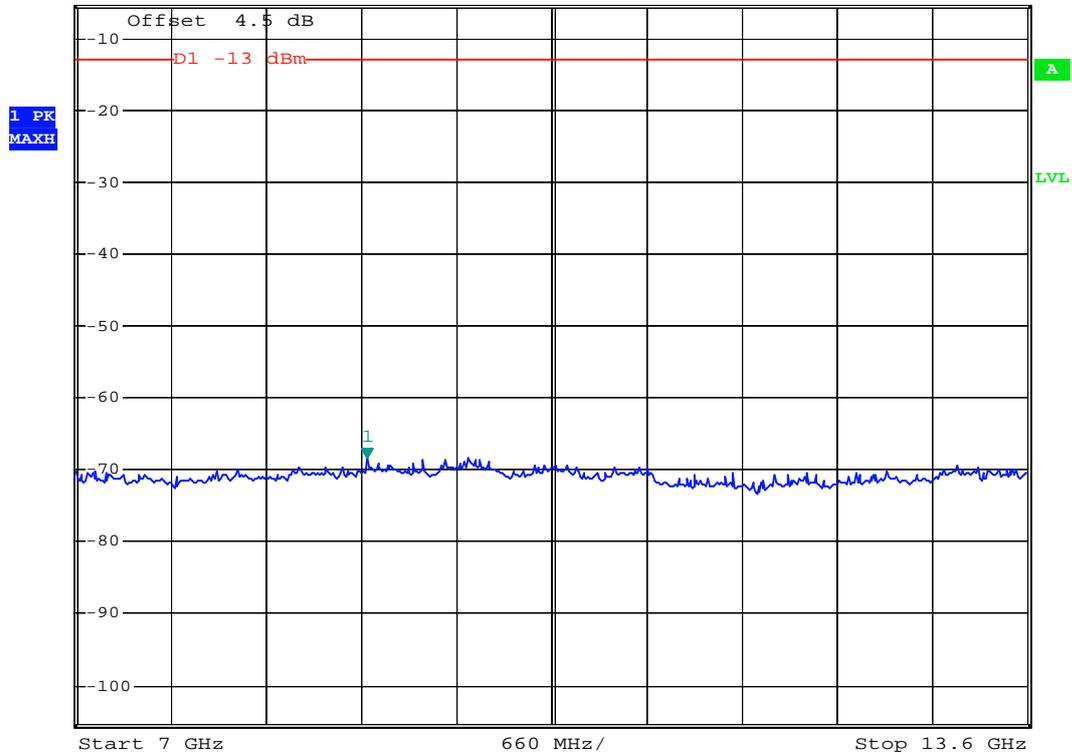

Date: 5.JUL.2008 13:15:26



- Test Mode : GSM1900 (GSM) CH661
- Frequency Range : 13.6G-19.1G

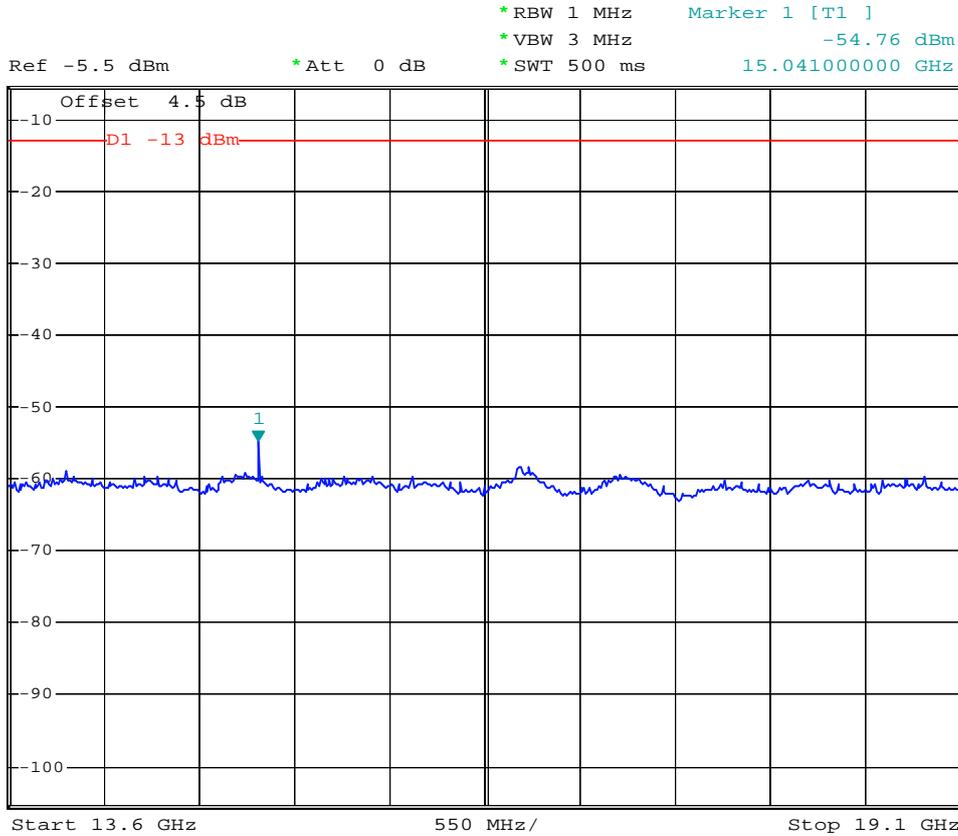

Date: 5.JUL.2008 13:16:52



## **4.6 Field Strength of Spurious Radiation**

Equivalent isotropic radiated Power Measurements by substitution method according to ANSI/TIA/EIA-603-C.


### **4.6.1 Measurement Instruments**

As described in chapter 5 of this test report.

### **4.6.2 Test Procedure**

- a. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
- b. The EUT was set 3 meters from the receiving antenna which was mounted on the antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- d. The height of the receiving antenna is varied between one meter and four meters to reach the maximum spurious emission for both horizontal and vertical polarizations.
- e. Taking the record of maximum spurious emission.
- f. A Horn antenna was substituted in place of the EUT and was driven by a signal generator.
- g. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- h. Taking the record of output power at antenna port.
- i. Repeat step 7 to step 8 for another polarization.
- j. Emission level (dBm) = output power + substitution Gain.


4.6.3 Test Setup Layout

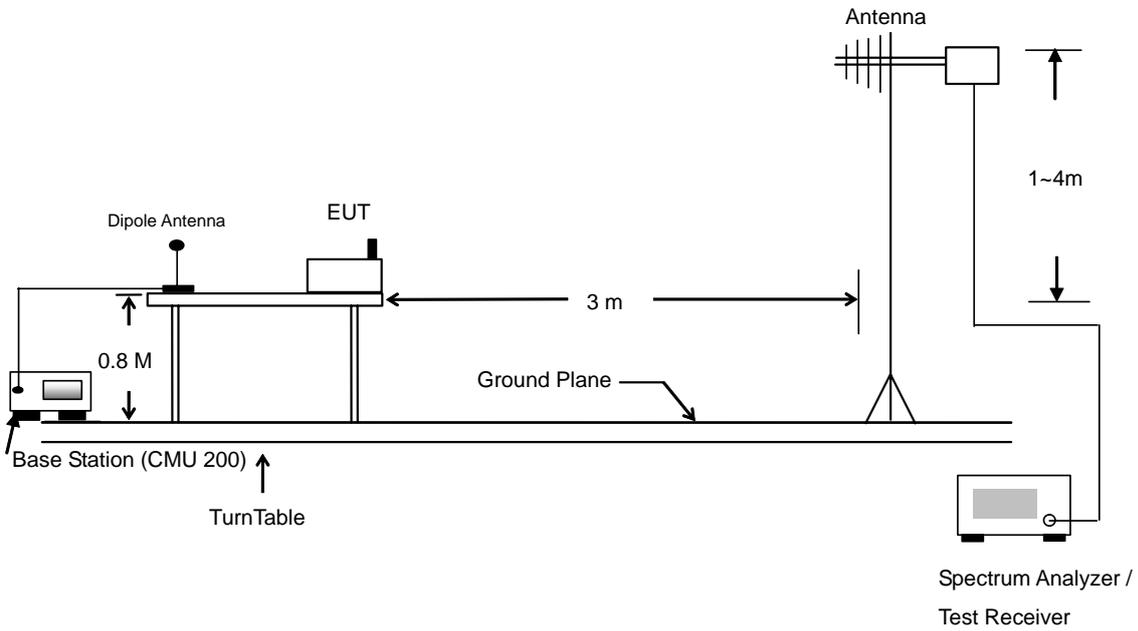



4.6.4 Test Data

- Mode 1
- Horizontal Polarization

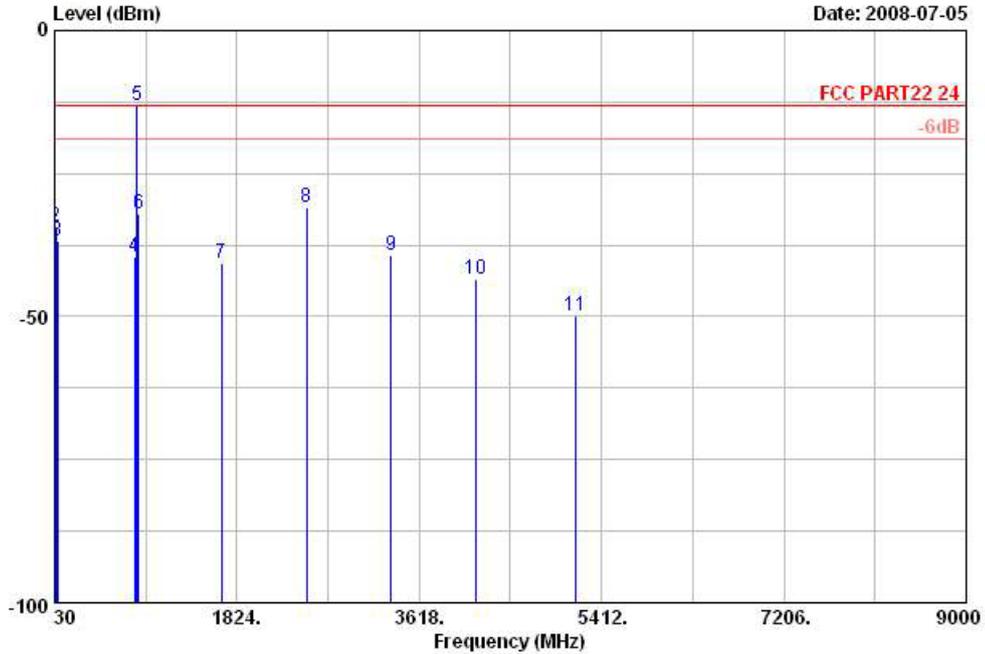


Site : 03CH01-KS  
 Condition: FCC PART22 24 LF EIRP FACTOR-07091 LINE  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : i766  
 Memo : GSM850 Link

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
32.97	-52.26	-13	-39.26	-64.25	-64.54	-30.49	-16.06	H	Pass
45.66	-49.86	-13	-36.86	-54.92	-55.24	-13.61	-6.08	H	Pass
55.38	-55.84	-13	-42.84	-54.72	-55.10	-2.68	-1.27	H	Pass
818.00	-42.88	-13	-29.88	-51.91	-53.17	-3.95	8.49	H	Pass
836.90	-16.58	-	-	-27.14	-28.38	-5.35	8.60	H	-
860.70	-37.31	-13	-24.31	-47.92	-49.16	-5.33	8.67	H	Pass
1672.00	-39.24	-13	-26.24	-41.56	-43.35	2.68	8.94	H	Pass
2510.00	-37.21	-13	-24.21	-45.49	-47.68	-2.32	10.30	H	Pass
3346.00	-42.74	-13	-29.74	-50.99	-53.46	-2.64	10.23	H	Pass
4182.00	-49.46	-13	-36.46	-60.24	-63.18	-4.71	11.16	H	Pass

Remark: 836.90MHz is Mobile Station TCH Signal.



Vertical Polarization

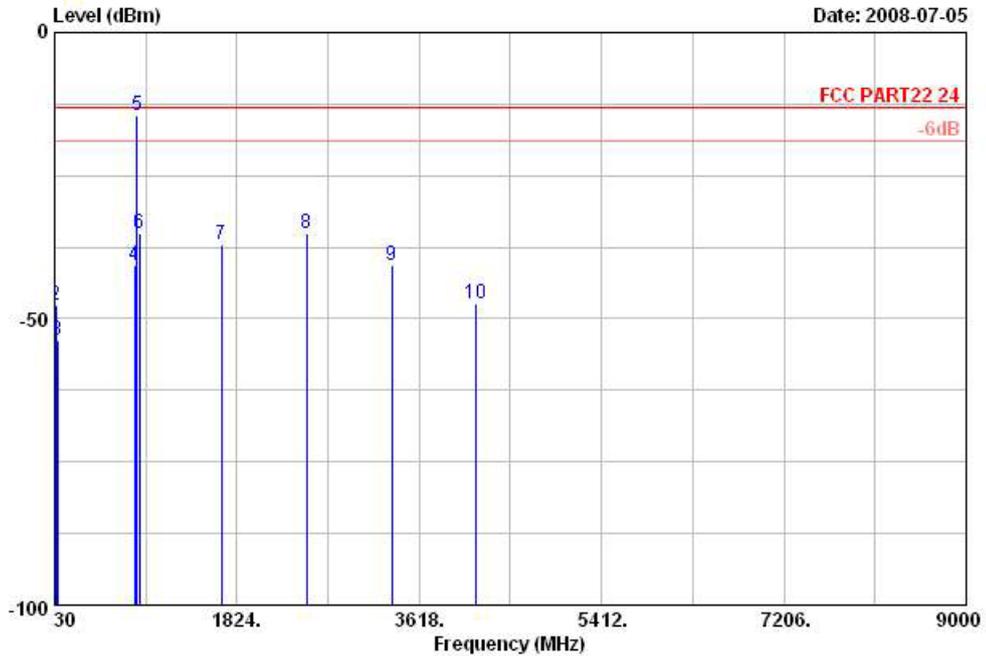


Site : 03CH01-KS  
 Condition: FCC PART22 24 LF EIRP FACTOR-07091 NEUTRAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : i766  
 Memo : GSM850 Link

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
32.70	-34.15	-13	-21.15	-46.14	-46.43	-30.49	-16.06	V	Pass
44.85	-36.39	-13	-23.39	-41.90	-42.22	-14.66	-6.68	V	Pass
55.11	-38.94	-13	-25.94	-37.82	-38.20	-2.68	-1.27	V	Pass
816.60	-41.79	-13	-28.79	-50.75	-52.01	-3.89	8.48	V	Pass
836.90	-15.20	-	-	-25.76	-27.00	-5.35	8.60	V	-
855.80	-34.11	-13	-21.11	-45.00	-46.24	-5.62	8.66	V	Pass
1672.00	-42.86	-13	-29.86	-45.18	-46.97	2.68	8.94	V	Pass
2510.00	-33.16	-13	-20.16	-41.44	-43.63	-2.32	10.30	V	Pass
3344.00	-41.35	-13	-28.35	-49.60	-52.07	-2.64	10.23	V	Pass
4182.00	-45.47	-13	-32.47	-56.25	-59.19	-4.71	11.16	V	Pass
5152.00	-51.91	-13	-38.91	-64.48	-67.76	-6.89	11.11	V	Pass

Remark: 836.90MHz is Mobile Station TCH Signal.



- Mode 2
- Horizontal Polarization

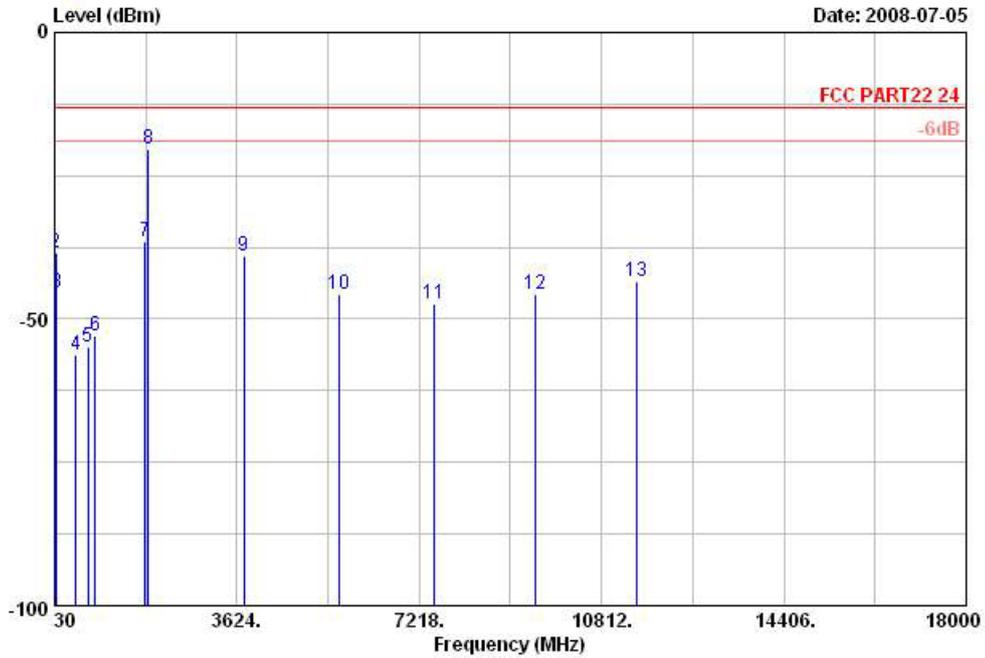


Site : 03CH01-KS  
 Condition: FCC PART22 24 LF EIRP FACTOR-07091 LINE  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : i766  
 Memo : GSM1900 Link

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
32.70	-50.94	-13	-37.94	-65.08	-89.43	-30.49	10.15	H	Pass
214.68	-47.92	-13	-34.92	-49.74	-51.44	5.48	11.15	H	Pass
245.73	-48.98	-13	-35.98	-54.89	-59.09	-0.11	12.15	H	Pass
446.30	-56.47	-13	-43.47	-69.08	-74.16	-6.69	13.15	H	Pass
650.00	-56.58	-13	-43.58	-70.07	-75.60	-7.02	14.15	H	Pass
844.60	-57.87	-13	-44.87	-70.97	-76.59	-5.72	15.15	H	Pass
1816.00	-38.16	-13	-25.16	-43.87	-50.59	1.57	16.15	H	Pass
1880.00	-20.00	-	-	-26.23	-33.89	1.11	17.15	H	-
1936.00	-40.25	-13	-27.25	-46.83	-55.45	0.80	18.15	H	Pass
3760.00	-39.34	-13	-26.34	-50.93	-60.18	-3.84	19.15	H	Pass
5639.00	-47.37	-13	-34.37	-63.61	-73.49	-8.12	20.15	H	Pass
7550.00	-47.54	-13	-34.54	-64.99	-76.04	-9.50	21.15	H	Pass
9479.00	-45.70	-13	-32.70	-65.81	-77.18	-11.48	22.15	H	Pass
11567.00	-43.41	-13	-30.41	-65.83	-78.65	-14.24	23.15	H	Pass

Remark: 1880.00MHz is Mobile Station TCH Signal.



Vertical Polarization

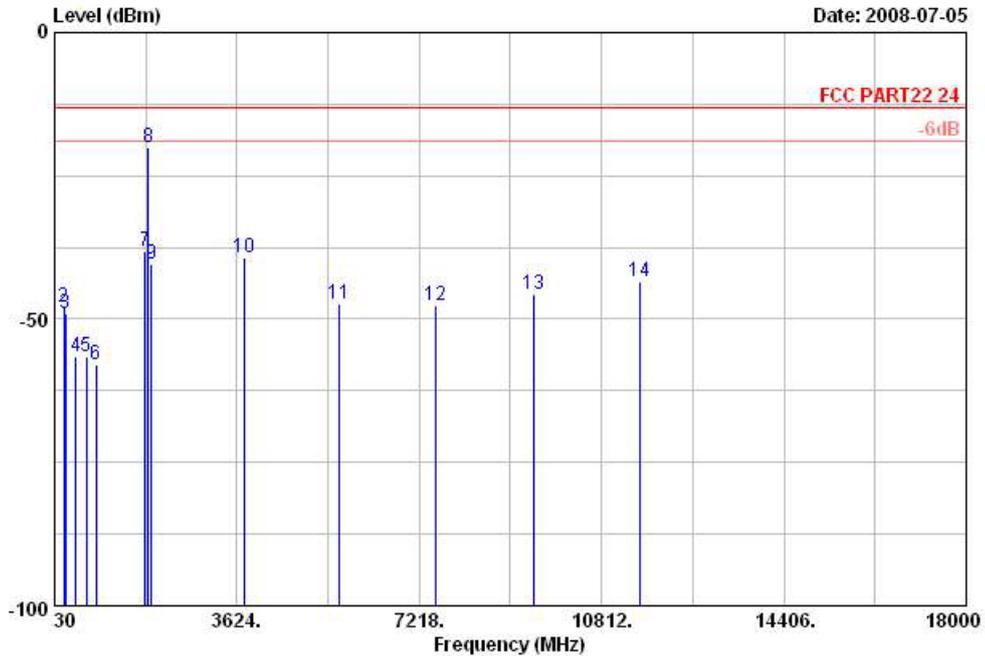

Site : 03CH01-KS  
 Condition: FCC PART22 24 LF EIRP FACTOR-07091 NEUTRAL  
 EUT : Mobile Phone  
 Power : 120Vac/60Hz  
 Model : i766  
 Memo : GSM1900 Link

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
32.97	-33.56	-13	-20.56	-47.70	-45.84	-30.49	-16.06	V	Pass
48.36	-38.38	-13	-25.38	-43.63	-41.81	-10.15	-4.57	V	Pass
76.71	-45.53	-13	-32.53	-44.27	-42.58	2.60	1.80	V	Pass
451.20	-56.26	-13	-43.26	-69.26	-68.09	-7.02	6.96	V	Pass
689.90	-54.86	-13	-41.86	-64.41	-63.42	-2.88	7.83	V	Pass
829.20	-52.88	-13	-39.88	-65.06	-64.16	-4.87	8.56	V	Pass
1818.00	-36.52	-13	-23.52	-42.23	-41.96	1.57	9.16	V	Pass
1880.00	-20.43	-	-	-26.66	-26.43	1.11	9.26	V	-
3760.00	-39.01	-13	-26.01	-50.60	-51.17	-3.84	10.47	V	Pass
5639.00	-45.58	-13	-32.58	-61.82	-63.02	-8.12	11.47	V	Pass
7520.00	-47.22	-13	-34.22	-64.64	-66.40	-9.49	11.84	V	Pass
9494.00	-45.61	-13	-32.61	-65.73	-67.95	-11.49	13.00	V	Pass
11507.00	-43.59	-13	-30.59	-66.1	-69.49	-14.35	13.70	V	Pass

Remark: 1880.00MHz is Mobile Station TCH Signal.

## 4.7 Frequency Stability (Temperature Variation)


### 4.7.1 Measurement Instrument

As described in chapter 5 of this test report.

### 4.7.2 Test Procedure

- a. The EUT and test equipment were set up as shown on the following section.
- b. With all power removed, the temperature was decreased to  $-30^{\circ}\text{C}$  and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
- c. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
- d. The temperature tests were performed for the worst case.
- e. Test data was recorded.

### 4.7.3 Test Setup Layout

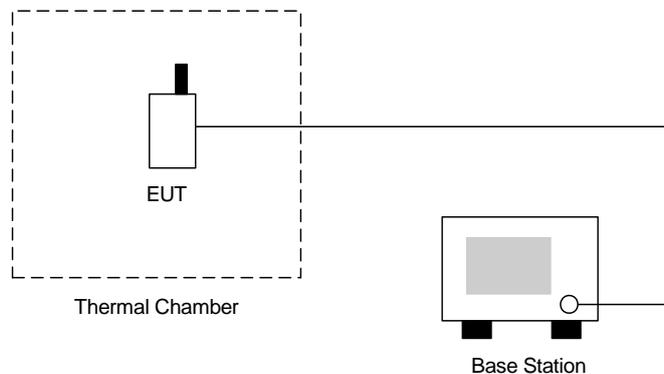



4.7.4 Test Result

• Test Mode : GSM850 (GSM) CH189

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	-24.17	-0.01	2.5	Passed
-20	-18.75	-0.02		
-10	16.37	0.02		
0	5.78	0.01		
10	-18.3	-0.02		
20	-19.86	-0.02		
30	-17.47	-0.02		
40	6.11	0.01		
50	11.69	0.01		

• Test Mode : GSM1900 (GSM) CH661

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	-33.32	-0.02	2.5	Passed
-20	61.71	0.03		
-10	65.85	0.03		
0	23.55	0.01		
10	28.94	0.02		
20	29.5	0.02		
30	55.55	0.03		
40	54.93	0.03		
50	13.62	0.01		

### 4.8 Frequency Stability (Voltage Variation)


#### 4.8.1 Measurement Instrument

As described in chapter 5 of this test report.

#### 4.8.2 Test Procedure

- a. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected as the following section.
- b. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
- c. The variation in frequency was measured for the worst case.

#### 4.8.3 Test Setup Layout

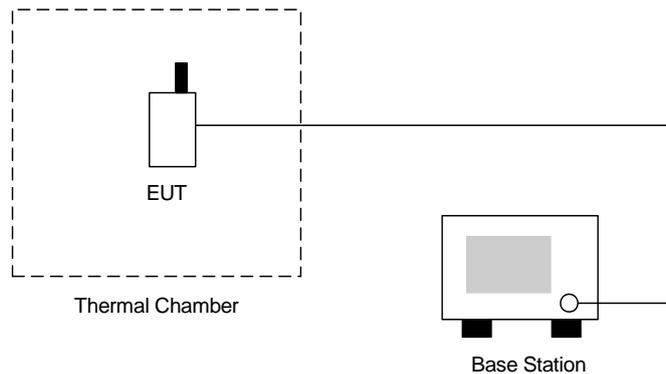

#### 4.8.4 Test Result

- Test Mode : GSM850 (GSM) CH189

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
3.7	15.9	0.02	2.5	Passed
BEP	15.9	0.02		
4.2	15.4	0.02		

- Test Mode : GSM1900 (GSM) CH661

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
3.7	24.9	0.01	2.5	Passed
BEP	24.9	0.01		
4.2	28.1	0.01		

Remark:

- 1. Normal Voltage= 3.7V.
- 2. Battery End Point (BEP)= 3.7 V.



## 5. List of Measurement Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9K~40GHz	Mar. 13, 2008	Mar. 12, 2009	Radiation (03CH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9KHz~2.75GHz	Mar. 15, 2008	Mar. 14, 2009	Radiation (03CH01-KS)
Bilog Antenna	Schaffner	CBL6112D	23182	25MHz~2000MHz	May 22, 2007	May 21, 2009	Radiation (03CH01-KS)
Preamplifier	Agilent	8449B	3008A02370	1G~26.5GHz	Jun. 04, 2007	Jun. 03, 2009	Radiation (03CH01-KS)
Preamplifier	Wireless	FPA6592G	60006	30M~2000MHz	Jul. 24, 2007	Jul. 23, 2009	Radiation (03CH01-KS)
DRG Horn(Medium)	EMCO	3117	75959	1GHz ~ 18GHz	Aug. 17, 2007	Aug. 16, 2008	Radiation (03CH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Jun. 18, 2007	Jun. 17, 2009	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	50MHz~18GHz	Jun. 12, 2007	Jun. 11, 2009	Conducted (TH01-KS)
Thermal	Rten Billion	TTC-B3S	TBN-960502	-40~150C	Jun. 27, 2007	Jun. 26, 2009	Conducted (TH01-KS)
Power Divider	ARRA	A3200-2	N/A	DC~18GHz	Sep. 01, 2007	Aug. 31, 2008	Conducted (TH01-KS)
DC Power	Topward	3306D	N/A	30V6A	N/A	N/A	Conducted (TH01-KS)

## 6. Uncertainty Evaluation

### Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
<b>Combined standard uncertainty Uc(y)</b>	<b>1.27</b>		
<b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b>	<b>2.54</b>		

### Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of $x_i$		$u(x_i)$	$C_i$	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 * \Gamma_2 * \Gamma_3)$	+0.34/-0.35	U-shaped	0.244	1	0.244
<b>Combined standard uncertainty Uc(y)</b>	<b>2.36</b>				
<b>Measuring uncertainty for a level of confidence of 95% U=2Uc(y)</b>	<b>4.72</b>				

END OF TEST REPORT



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP871117 as below.