

TEST REPORT

REPORT NUMBER: I08GE6422-FCC-EMC

ON


Type of Equipment: HSDPA USB Stick
Type of Designation: K3565-Z
Manufacturer: ZTE CORPORATION

ACCORDING TO
FCC CFR Part 2, FREQUENCY ALLOCATIONS AND RADIO
TREATY MATTERS; GENERAL RULES AND REGULATIONS;
e-CFR, March 23, 2006
PART 22, PUBLIC MOBILE SERVICES (Oct 1, 02 Edition)
PART 24, PERSONAL COMMUNICATIONS SERVICES (Oct 1, 97
Edition)

China Telecommunication Technology Labs.

Month date, year
Sep, 19, 2008

Signature

A handwritten signature in black ink, appearing to be 'He Guili', written over a vertical line.

He Guili
Director

FCC ID: Q78-K3565-Z

Report Date: 2008-09-19

Test Firm Name: China Telecommunication Technology Labs

Registration Number: 840587

Statement

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported tests were carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Parts 2, 22, and 24. The sample tested was found to comply with the requirements defined in the applied rules.

CONTENTS

1 GENERAL INFORMATION	4
1.1 NOTES	4
1.2 TESTERS	5
1.3 TESTING LABORATORY INFORMATION	6
1.4 DETAILS OF APPLICANT OR MANUFACTURER	7
2 TEST ITEM	8
2.1 GENERAL INFORMATION	8
2.2 OUTLINE OF EUT	8
2.3 MODIFICATIONS INCORPORATED IN EUT	8
2.4 EQUIPMENT CONFIGURATION	8
2.5 OTHER INFORMATION	9
3 SUMMARY OF TEST RESULTS	10
4 TEST RESULTS OF MODE	11
4.1 RADIATED SPURIOUS EMISSION	11
4.2 RADIATED RF POWER OUTPUT AND ERP	21
4.3 OCCUPIED BANDWIDTH	24
4.4 FREQUENCY STABILITY OVER TEMPERATURE VARIATION	32
4.5 FREQUENCY STABILITY OVER VOLTAGE VARIATION	35
4.6 CONDUCTED RF POWER OUTPUT	37
4.7 CONDUCTED SPURIOUS EMISSION	40
4.8 BAND EDGE	45
ANNEX A EXTERNAL PHOTOS	51
ANNEX B INTERNAL PHOTOS.....	53
ANNEX C DEVIATIONS FROM PRESCRIBED TEST METHODS.....	54

1 General Information

1.1 Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Parts 2, 22 and 24.

The test results of this test report relate exclusively to the item(s) tested as specified in section 2.


The following deviation from, additions to, or exclusions from the test specifications have been made. See Annex C.

China Telecommunication Technology Labs.(CTTL) authorizes the applicant or manufacturer (see section 1.4) to reproduce this report provided, and the test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTTL Mr. He Guili.


Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. CTTL accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

1.2 Testers


Name: Lv Ke
Position: Engineer
Department: Department of EMC test

Signature: 

Name: Yuan Yuan
Position: Engineer
Department: Department of EMC test

Signature: 


Name: An Shaogeng
Position: Engineer
Department: Department of EMC test

Signature: 

Editor of this test report:

Name: Lv Ke
Position: Engineer
Department: Department of EMC test


Date: 2008-09-19

Signature: 

Technical responsibility for area of testing:

Name: Zou Dongyi
Position: Manager
Department: Department of EMC test

Date: 2008-09-19

Signature: 

1.3 Testing Laboratory information

1.3.1 Location

Name: China Telecommunication Technology Labs.
Address: No. 11, Yue Tan Nan Jie, Xi Cheng District
BEIJING
P. R. CHINA, 100083
Tel: +86 10 68094053
Fax: +86 10 68011404
Email: emc@chinattl.com

1.3.2 Details of accreditation status

Accredited by: China National Accreditation Service for Conformity
Assessment (CNAS)
Registration number: CNAS Registration No. CNAS L0570
Standard: ISO/IEC 17025:2005

1.3.3 Test location, where different from section 1.3.1

Name: -----
Street: -----
City: -----
Country: -----
Telephone: -----
Fax: -----
Postcode: -----

1.4 Details of applicant or manufacturer

1.4.1 Applicant

Name: ZTE Corporation
Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial
Park, Nanshan District, Shenzhen, Guangdong,
518057, P.R.China
Country: China
Telephone: +86-21-50701080
Fax: +86-21-68895196
Contact: Li Dezi
Telephone: +86-21-50701080
Email: li.dz@zte.com.cn

1.4.2 Manufacturer (if different from applicant in section 1.4.1)

Name: --
Address: --

1.4.3 Manufactory (if different from applicant in section 1.4.1)

Name: --
Address: --

2 Test Item

2.1 General Information

Manufacturer: ZTE CORPORATION
 Name: HSDPA USB Stick
 Model Number: K3565-Z
 Serial Number: --
 Production Status: Product
 Receipt date of test item: 2008-08-15

2.2 Outline of EUT

E.U.T. is a USB modem.

2.3 Modifications Incorporated in EUT

The EUT has not been modified from what is described by the brand name and unique type identification stated above.

2.4 Equipment Configuration

Equipment configuration list:

Item	Generic Description	Manufacturer	Type	Serial No.	Remarks
A	handset	ZTE CORPORATION	K3565-Z	--	None
B	adapter	--	--	--	None
C	battery	--	--	--	None
D	Earphone	--	--	--	None

Cables:

Item	Cable Type	Manufacturer	Length	Shield	Quantity	Remarks
1	DC cable on Adapter	Unknown	1.0 m	No	1	None

2.5 Other Information

(a) Modulation is GMSK for GPRS, and 8PSK for EGPRS.

(b) Emission Designator is 246KGXW for GPRS and 251KG7W for EGPRS.

(c) Version of hardware and software

HW Version: --

SW Version: --

CITL Test Report

3 Summary of Test Results

A brief summary of the tests carried out is shown as following.

GPRS mode:		
2.1051, 24.238, 2.1053,22.917	Radiated Spurious Emission	Pass
2.1046,24.232	Radiated RF Power Output	Pass
22.913(a)	Effective Radiated Power (ERP)	Pass
2.1049,22.917(b), 24.238(b)	Occupied Bandwidth	*Note 2
2.1055,22.355, 24.235	Frequency Stability over Temperature Variation	Pass
2.1055,22.355, 24.235	Frequency Stability over Voltage Variation	Pass
2.1046,22.913(a), 24.232(c)	Conducted RF Power Output	Pass
2.1051,22.917,24. 238	Conducted spurious emissions	Pass
Note 2: No applicable performance criteria.		

EGPRS mode:		
2.1051, 24.238, 2.1053,22.917	Radiated Spurious Emission	Pass
2.1046,24.232	Radiated RF Power Output	Pass
22.913(a)	Effective Radiated Power (ERP)	Pass
2.1049,22.917(b), 24.238(b)	Occupied Bandwidth	*Note 3
2.1055,22.355, 24.235	Frequency Stability over Temperature Variation	Pass
2.1055,22.355, 24.235	Frequency Stability over Voltage Variation	Pass
2.1046,22.913(a), 24.232(c)	Conducted RF Power Output	Pass
2.1051,22.917,24. 238	Conducted spurious emissions	Pass
Note 3: No applicable performance criteria.		

4 Test Results of mode

4.1 Radiated Spurious Emission

Specifications:	2.1051, 24.238, 2.1053, 22.917					
Date of Tests	2008-09-19					
Test conditions:	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
Operation Mode	TX on, channel 190 and 661					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-03	Normal
7330	Ultra Broadband Antenna	R/S	HL562	100013	2009-07-24	Normal
7330	Double-Ridged Horn Antenna	R/S	HF906	100037	2009-01-14	Normal
713	Fully-Anechoic Chamber	ETS	11.8m×6.5m×6.3 m	--	2010-11-17	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	2008-11-25	Normal

Limit Level Construction:

According to Part 24.238 (a), i.e., Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB, so the limit level is:
 $P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13\text{dBm}$

Limits for Radiated spurious emissions(UE)

Frequency range	Limit Level /Resolution Bandwidth
30 MHz to 20000 MHz	-13dBm/1MHz

Test Setup:

The EUT was placed in an anechoic chamber, see figure SP. The Wireless Communications Test Set was used to set the TX channel and power level and modulate the TX signal with different bit patterns. The test was done using an automated test system, where all test equipments were controlled by a computer.

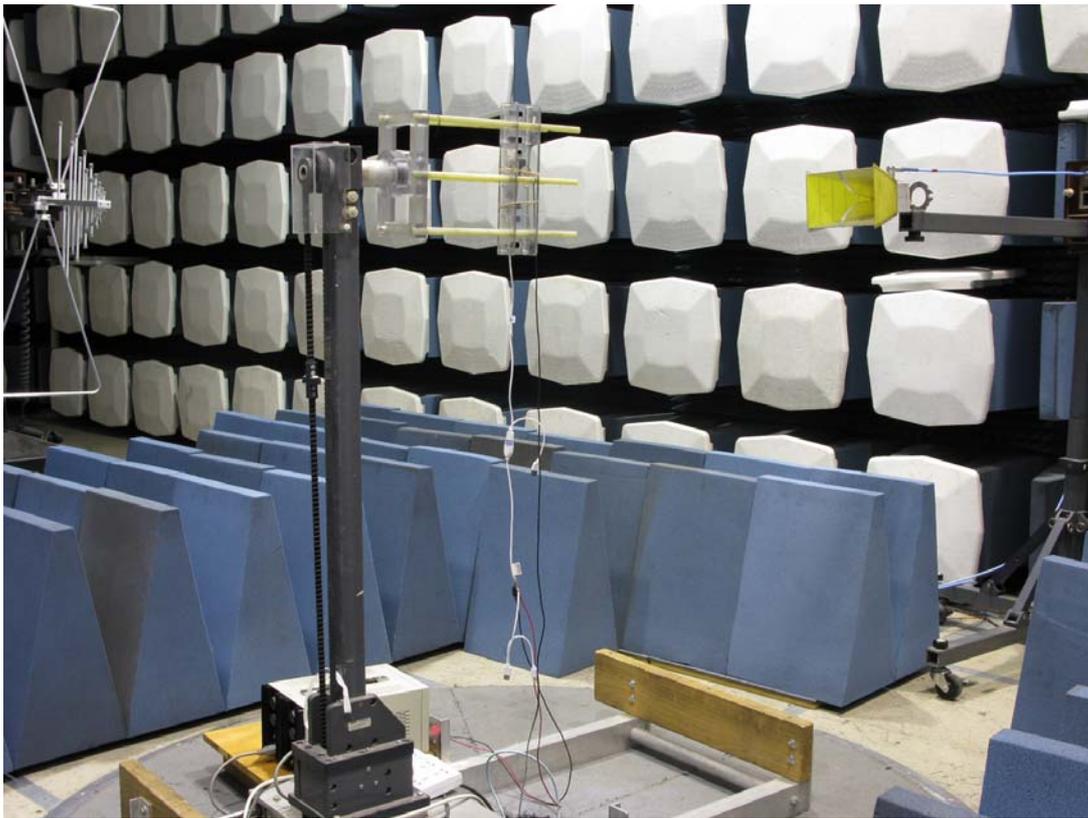


Figure SP

Test Method:

The measurement was performed accordance with section 2.2.12 of ANSI/TIA-603-B-2002: *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*.

1 The maximum spurious emissions were searched by turning the azimuth of the turntable, shifting the polarization of the measuring antenna and changing the pose of the EUT.

2 Levels of EUT's transmitter harmonics and suspicious signals were recorded.

3 The recorded levels were corrected in the automated test system with the correction factors given by a substitution calibration made before the measurement. The calibration was made separately for vertical and horizontal polarization and the system uses different correction factors depending on the measuring antenna polarization.


4 The corrected values of radiated spurious emissions indicated as EIRP are reported.

Note:


1 The investigated ARFCNs are 190 (836.6 MHz) and 661 (1880.0 MHz).

2 The investigated frequency range is 30 MHz ~ 18 GHz.


Test Results for GPRS mode:

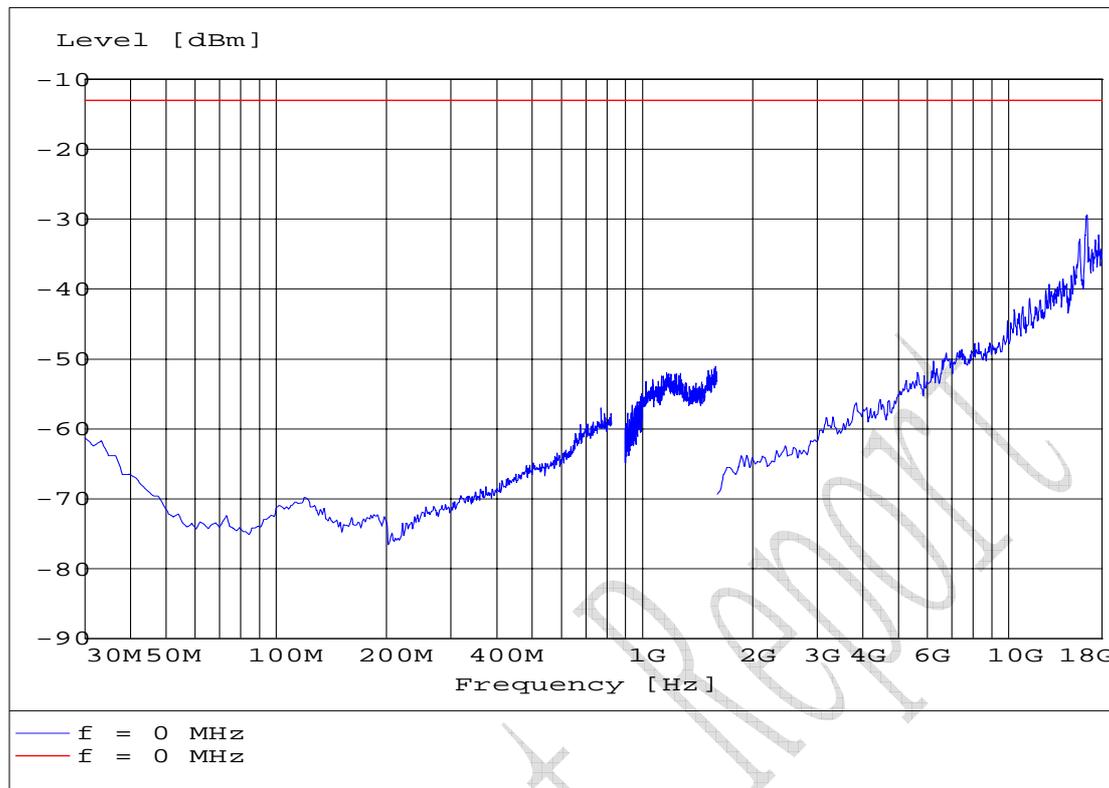


S190VF for GPRS mode

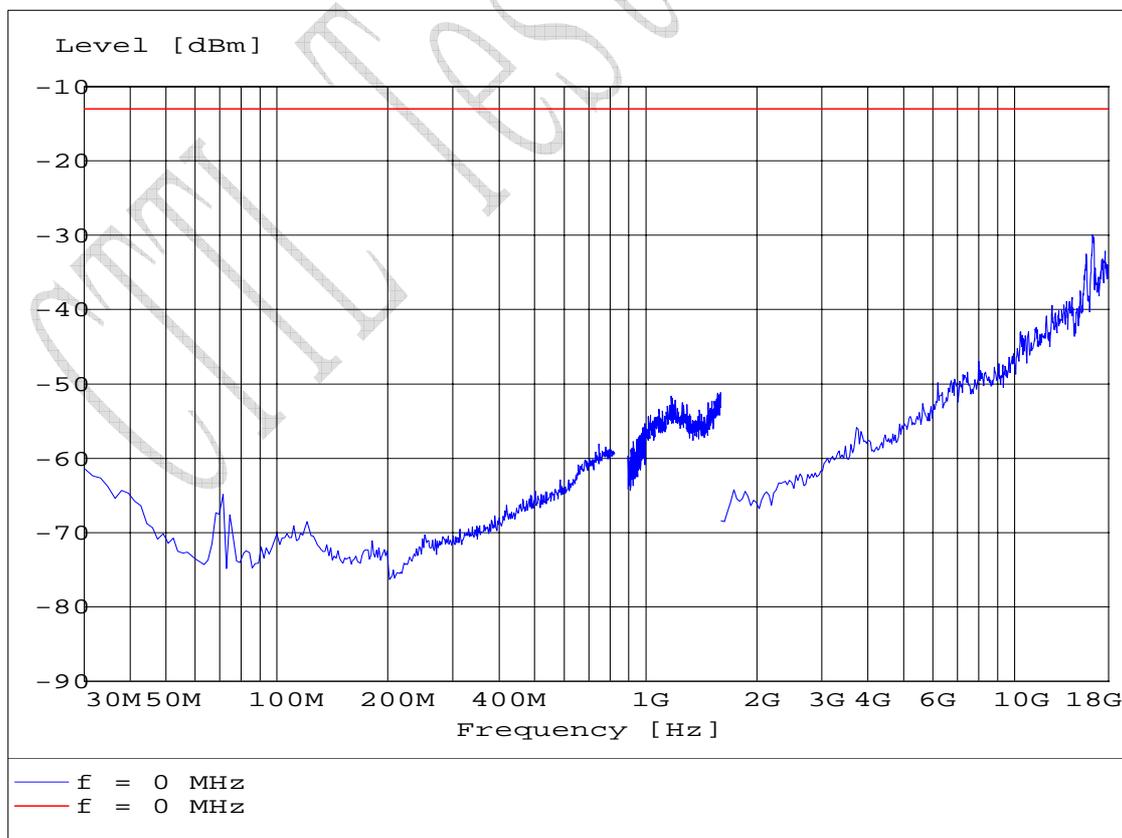


S190HF for GPRS mode

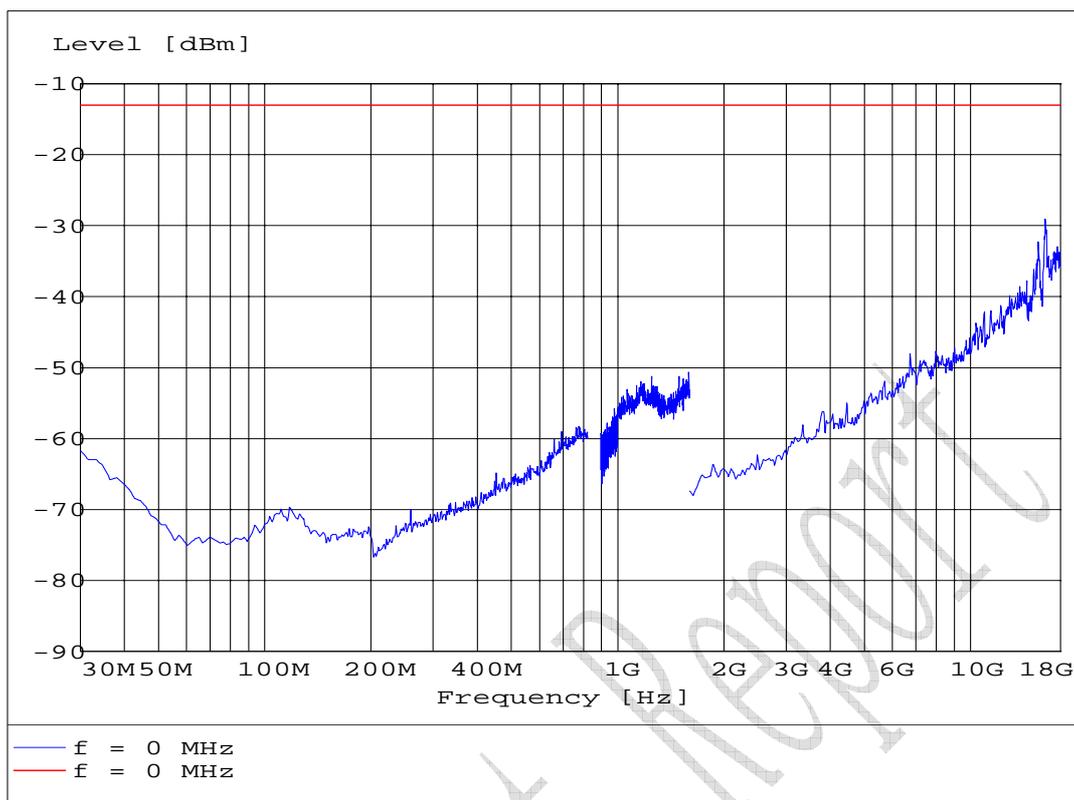


S190VT for GPRS mode

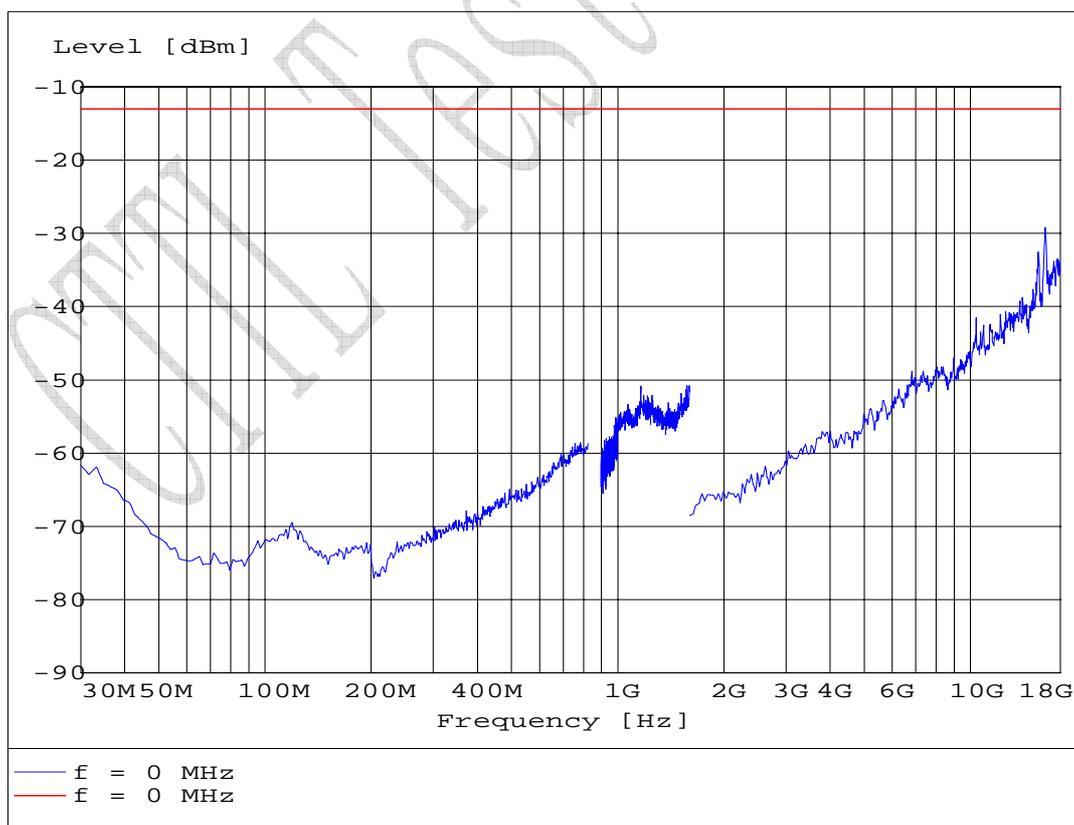


S190HT for GPRS mode

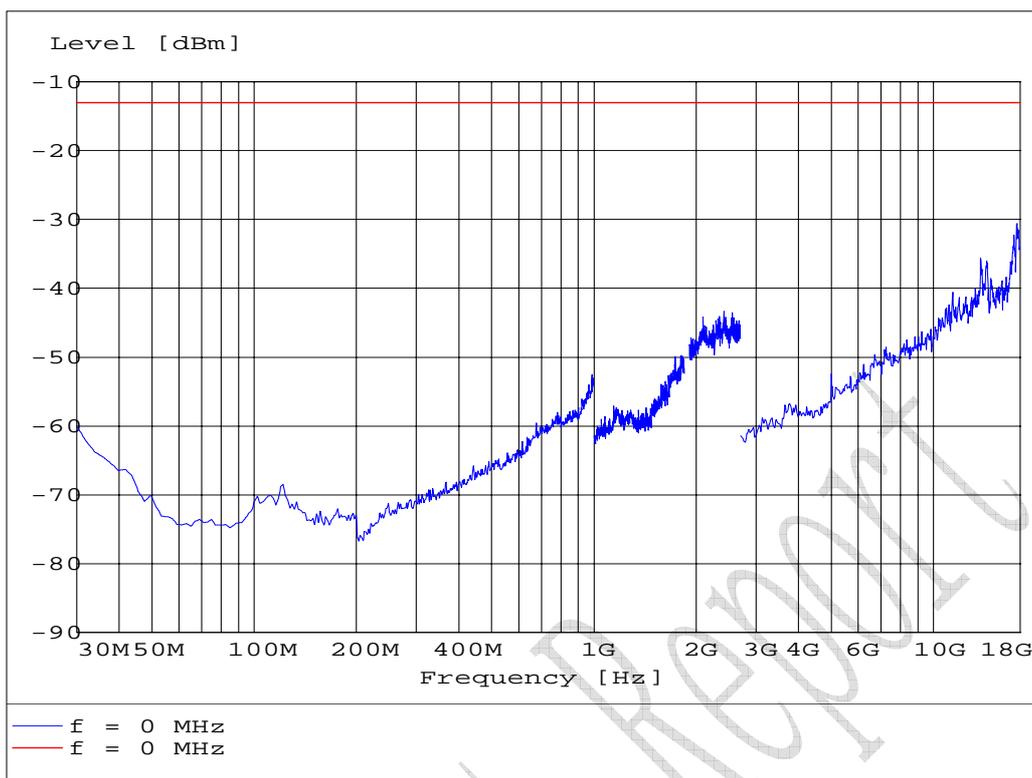


S661VF for GPRS mode

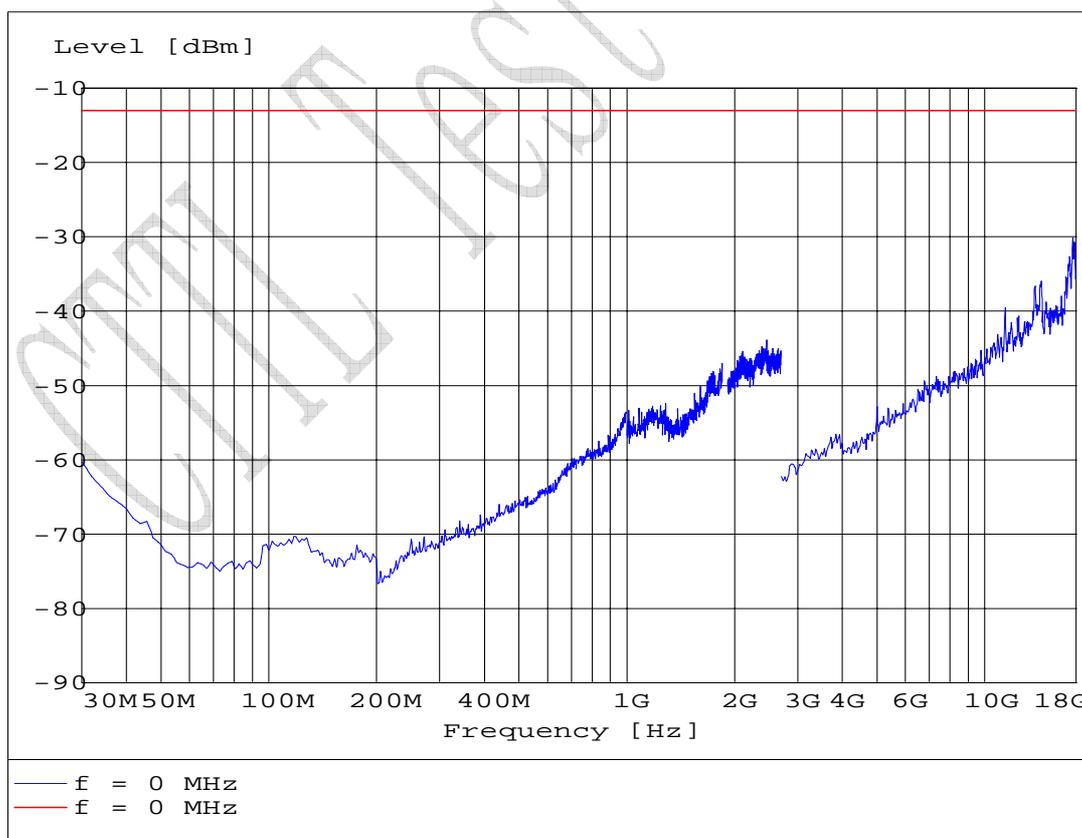

S661HF for GPRS mode

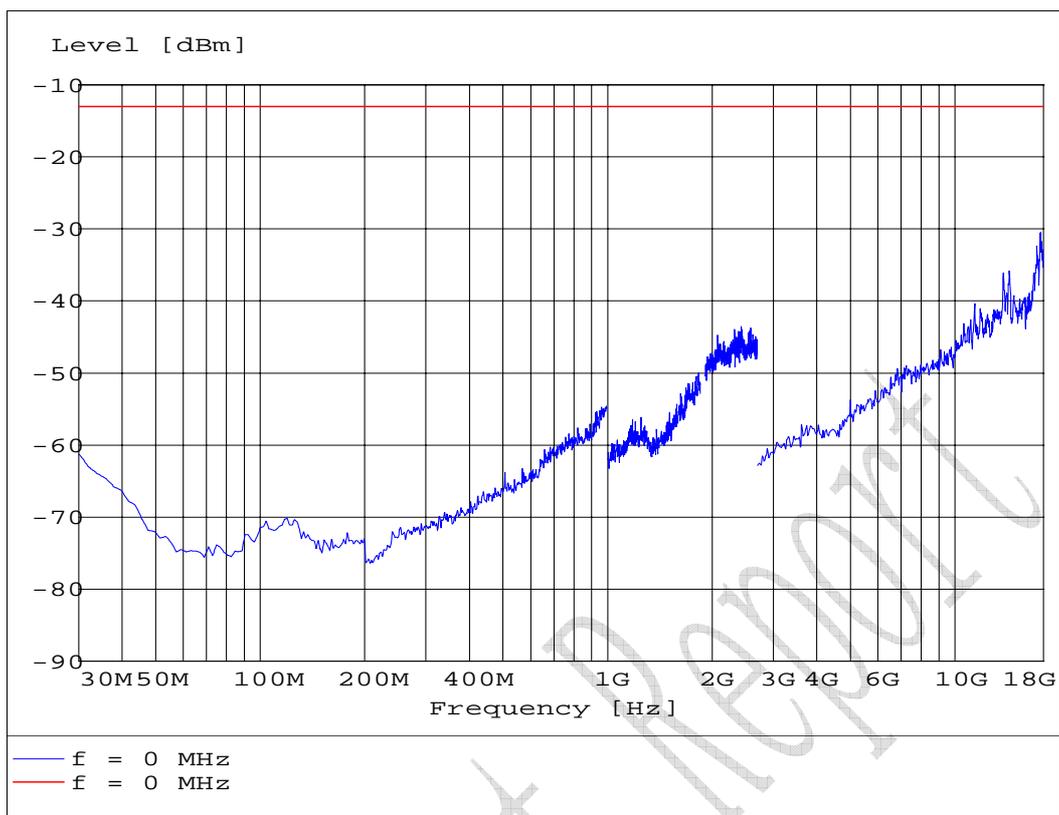


S661VT for GPRS mode

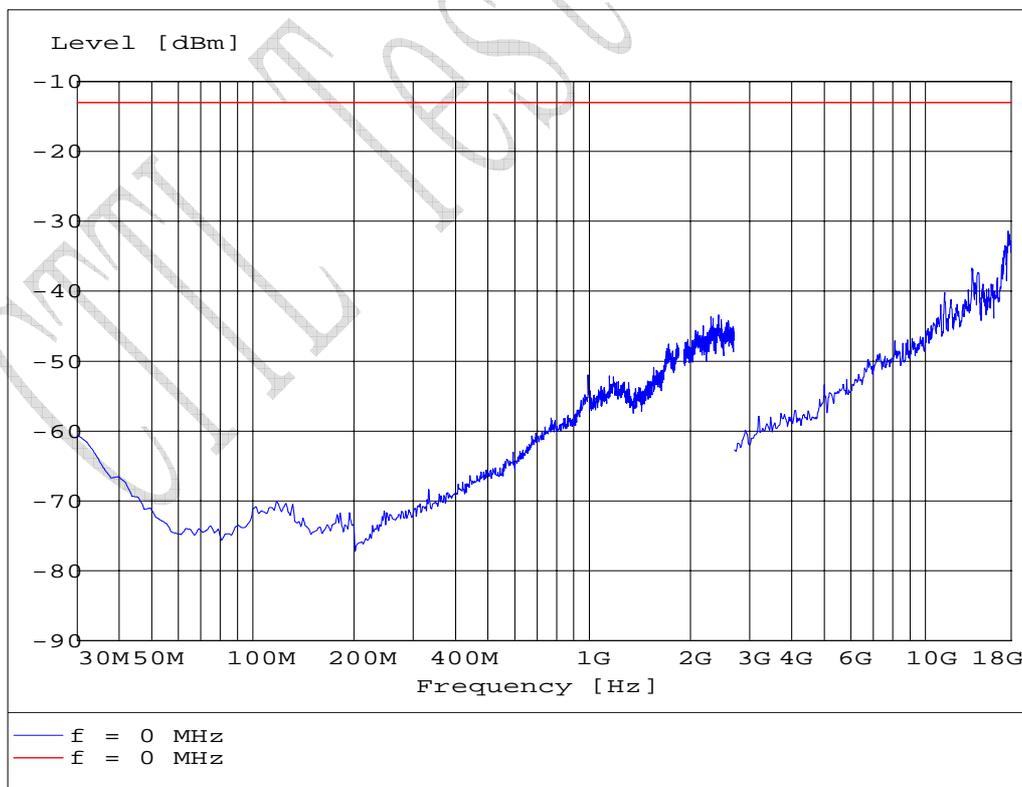


S661HT for GPRS mode


Test Results for EGPRS mode:

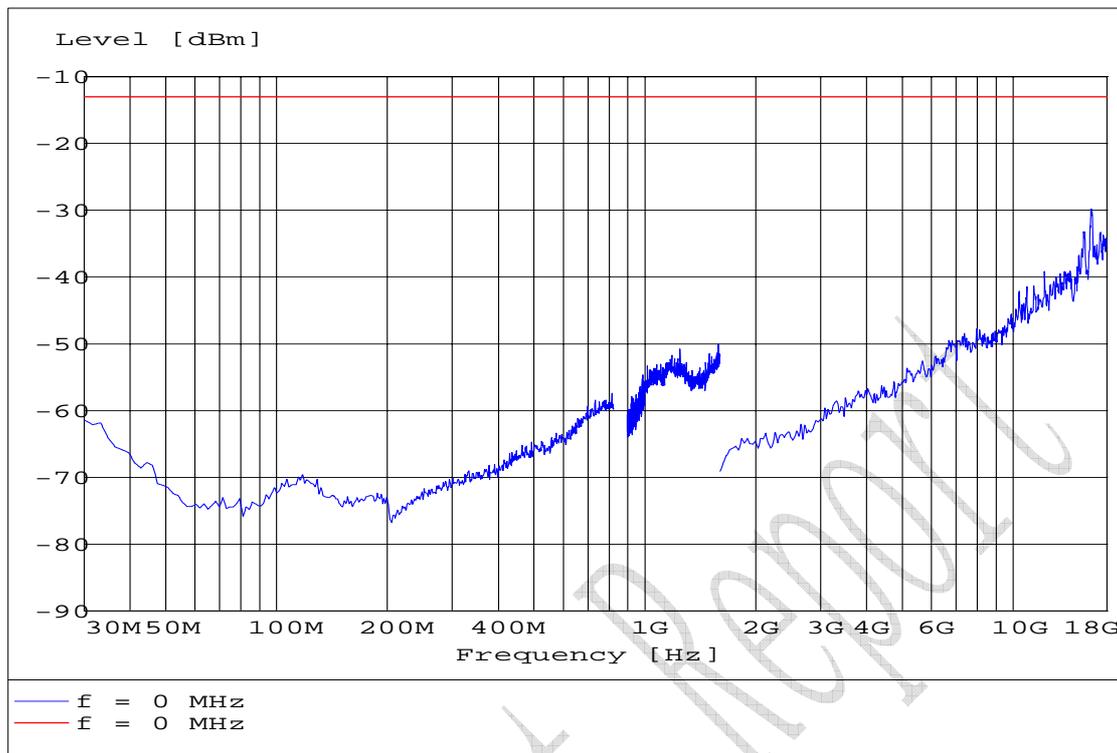


S190VF for EGPRS mode

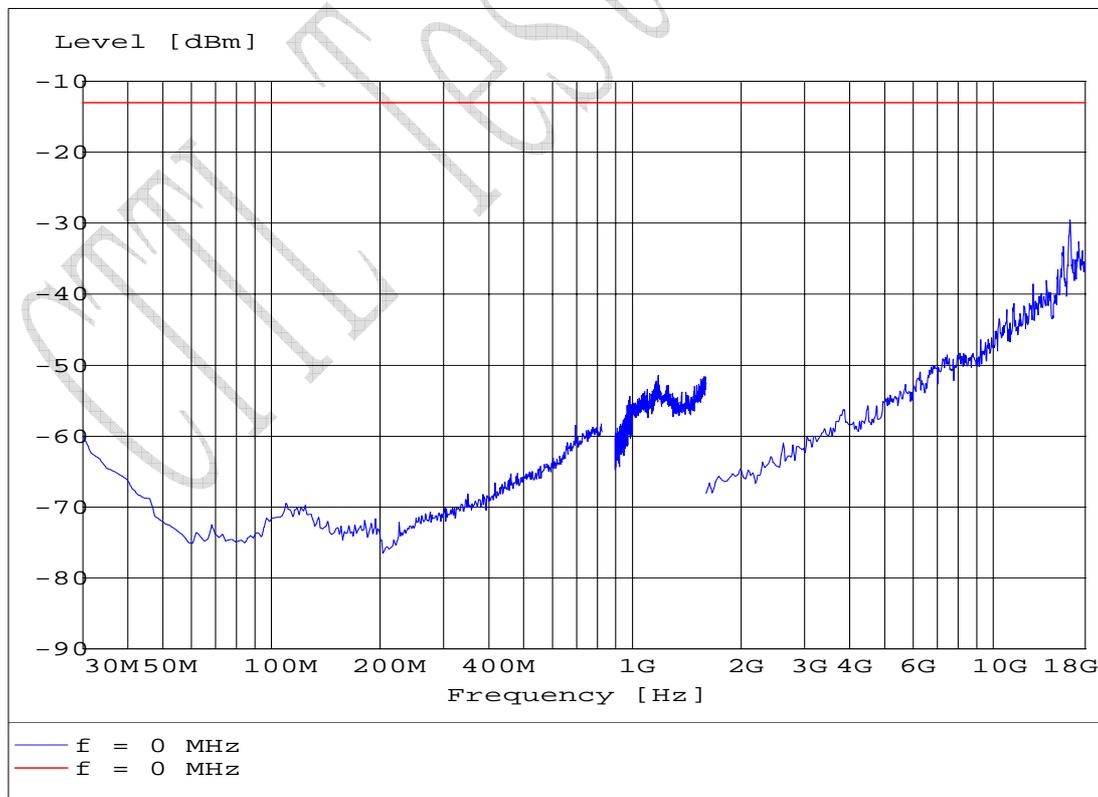


S190HF for EGPRS mode

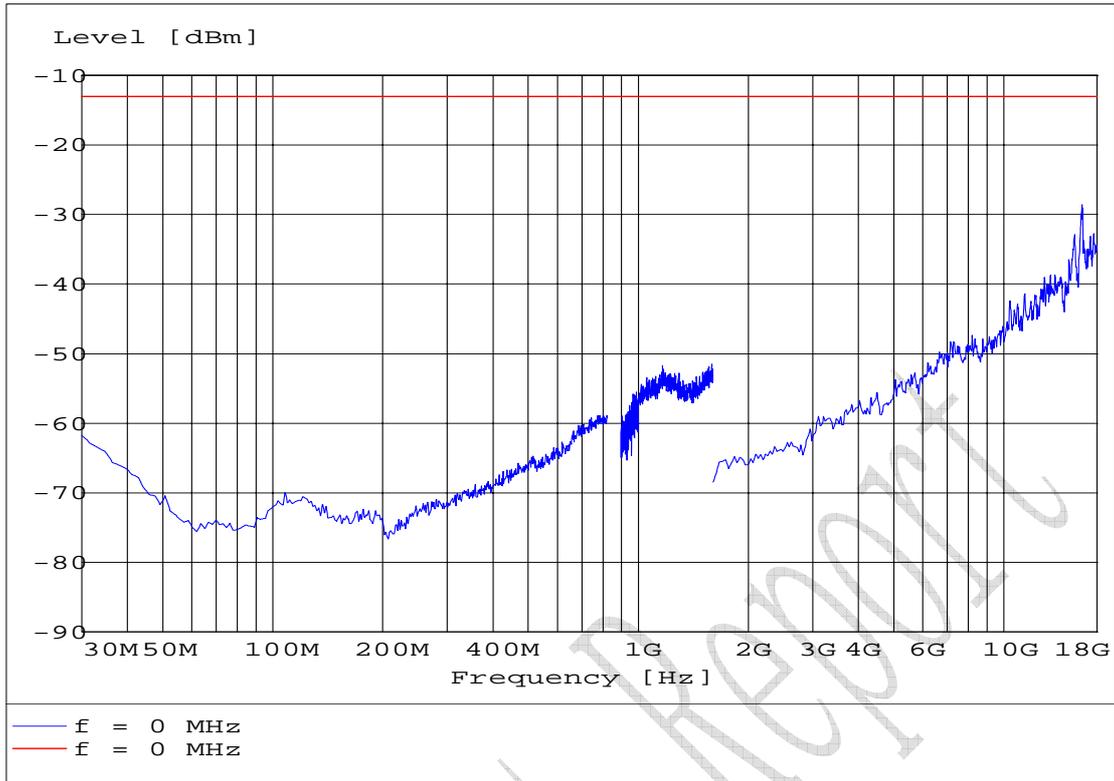


S190VT for EGPRS mode

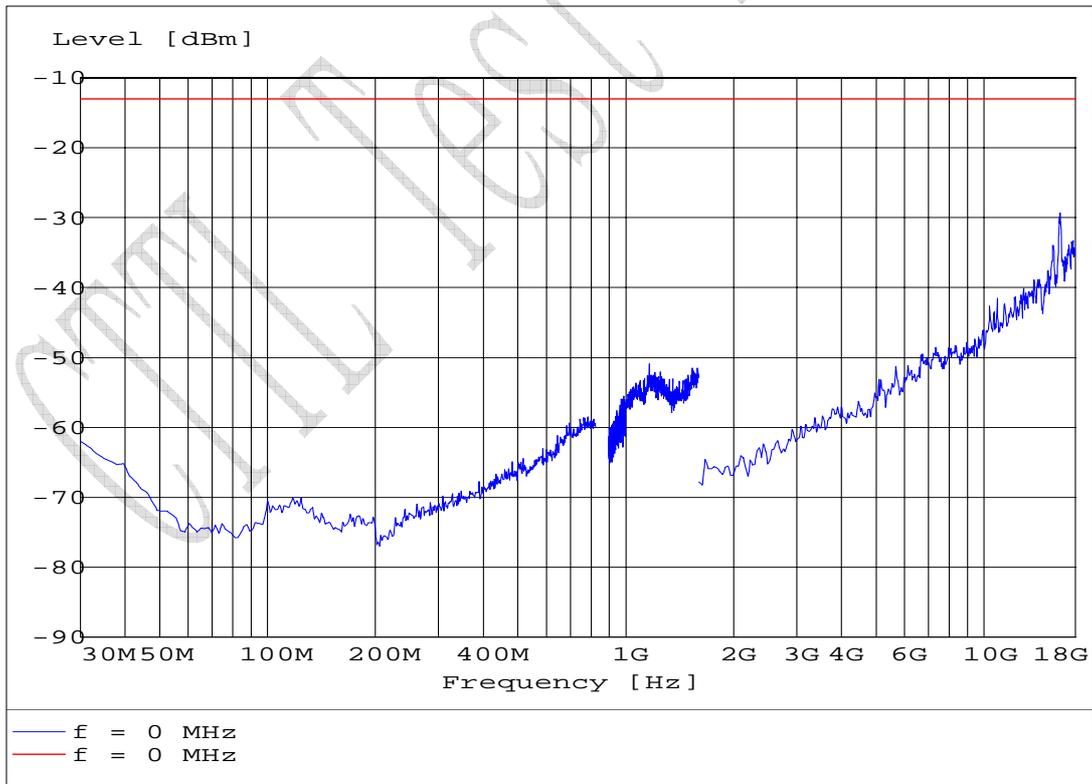


S190HT for EGPRS mode

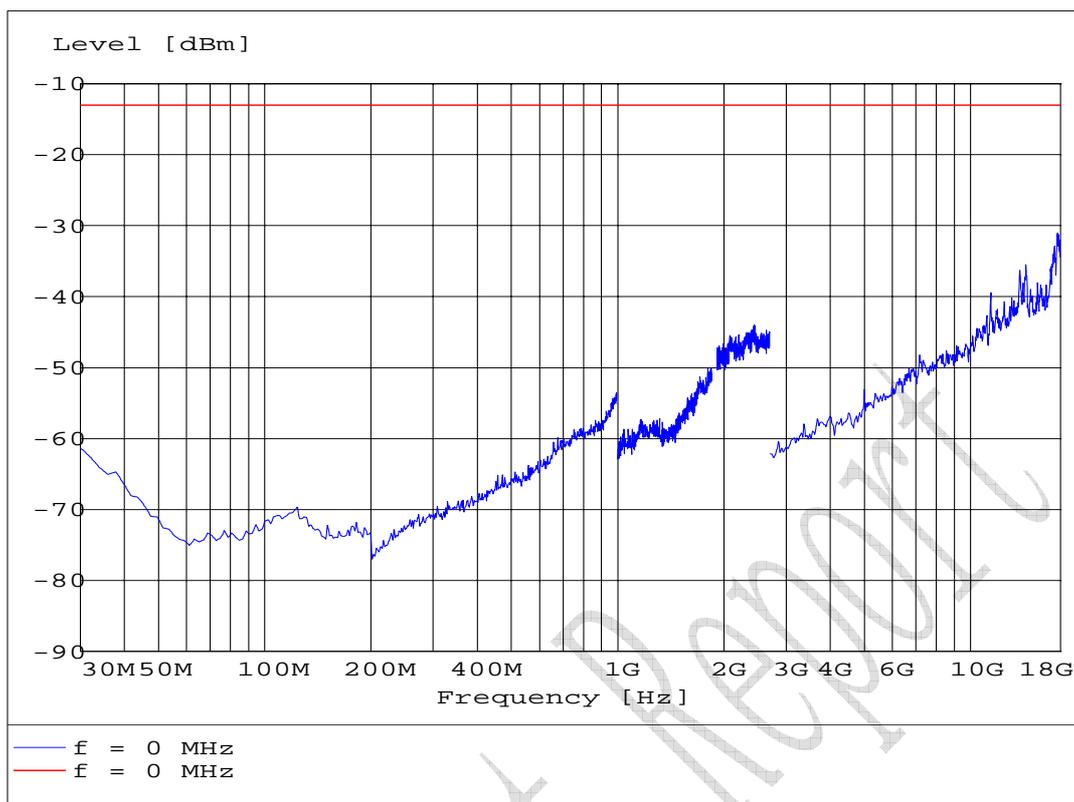


S661VF for EGPRS mode

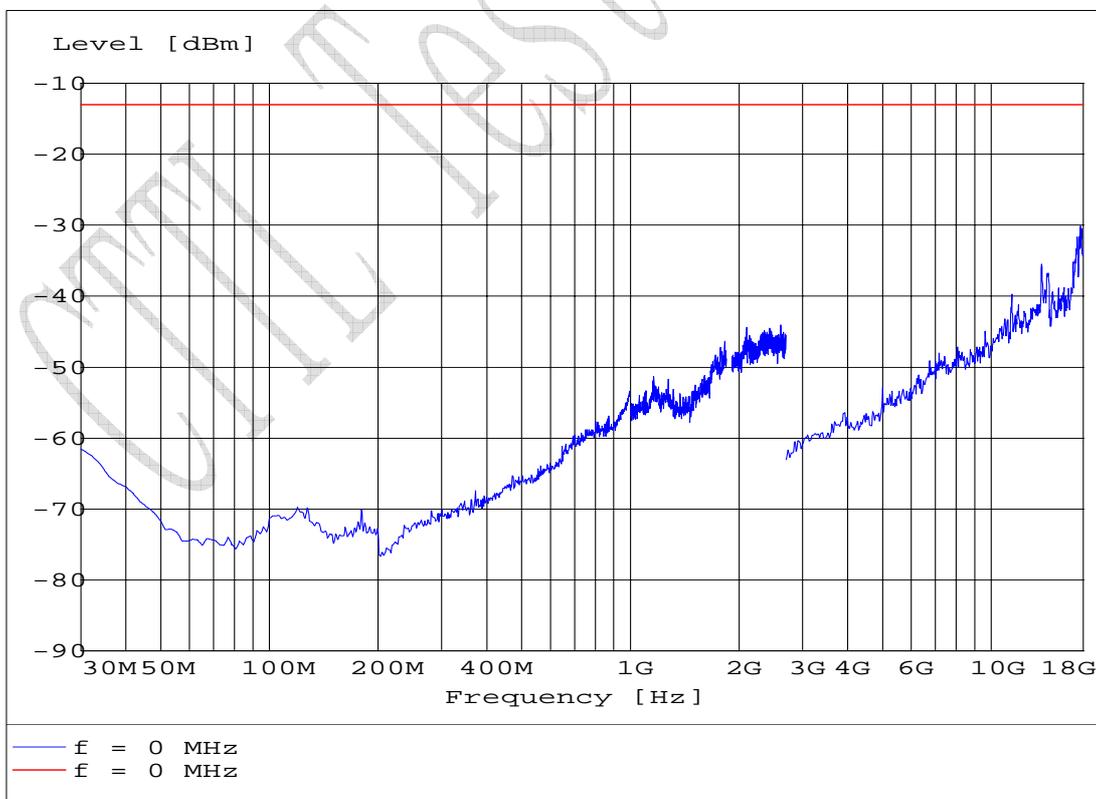

S661HF for EGPRS mode

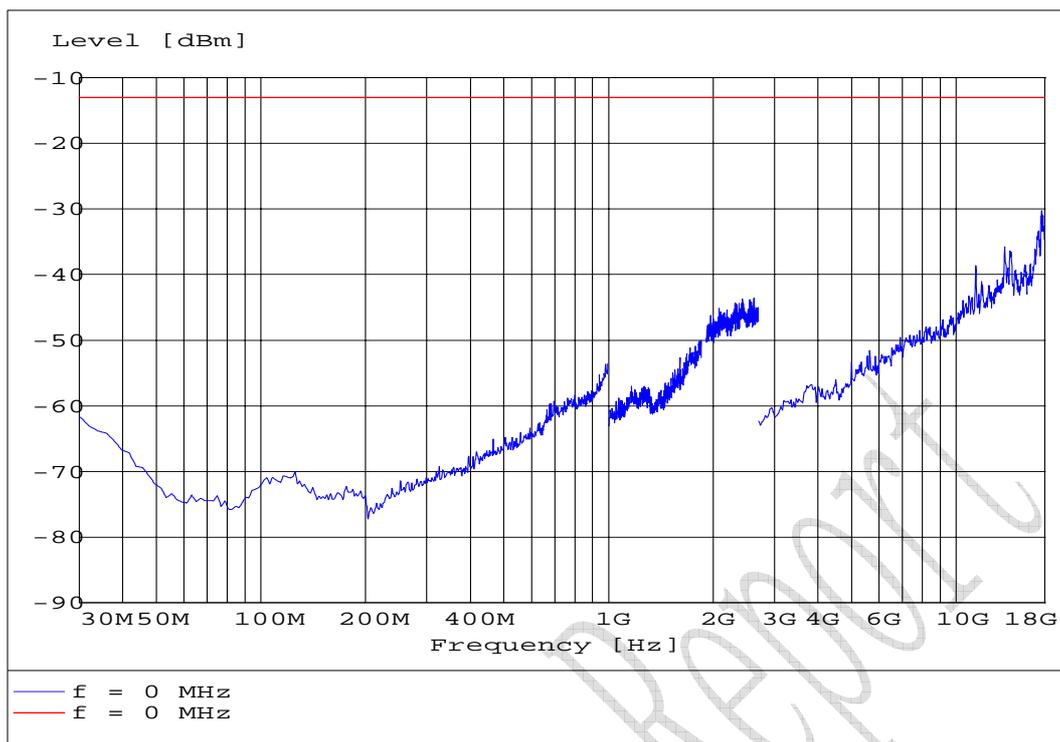

S661VT for EGPRS mode

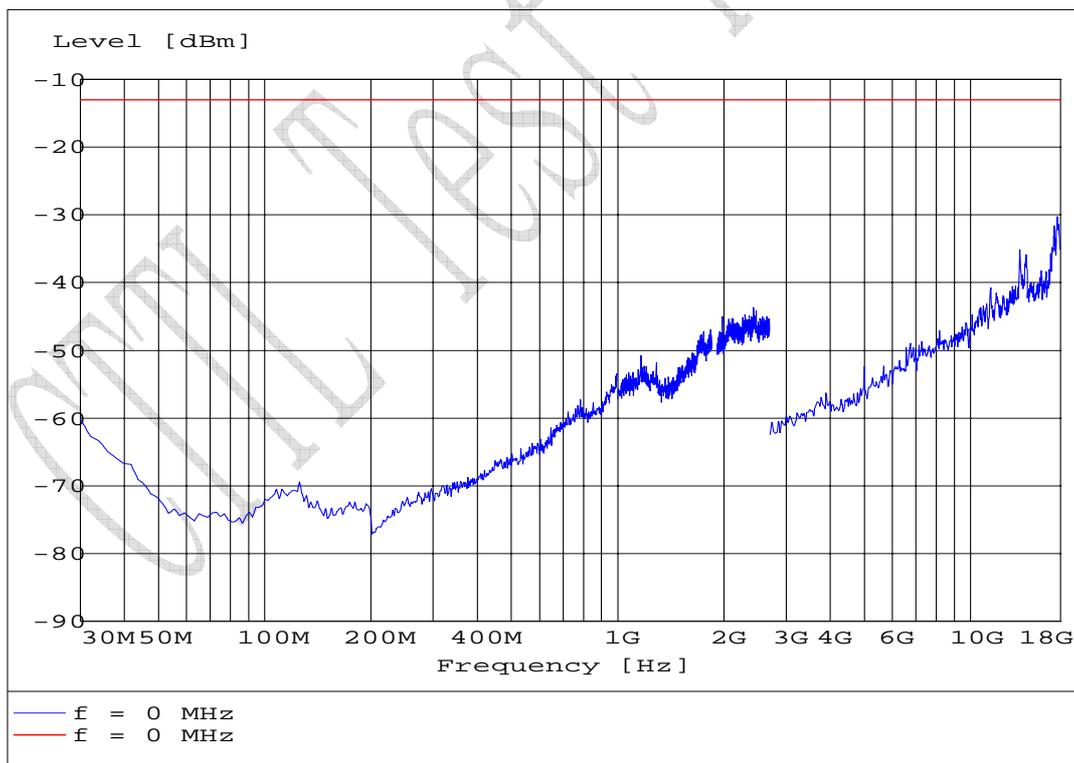

S661HT for EGPRS mode

4.2 Radiated RF Power Output and ERP

Specifications:	2.1046,24.232,22.913(a)					
Date of Tests	2008-09-19					
Test conditions:	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
Operation Mode	TX on, channel 128, 190, 251, 512, 661 and 810					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-04	Normal
7330	Ultra Broadband Antenna	R/S	HL562	100013	2009-07-24	Normal
7330	Double-Ridged Horn Antenna	R/S	HF906	100037	2009-01-14	Normal
713	Fully-Anechoic Chamber	ETS	11.8m×6.5m×6.3m	--	2010-11-17	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	2008-11-25	Normal

Limit Level Construction:

(a) Radiated RF Power Output

According to Part 24.232(b), i.e., Mobile/portable stations are limited to 2 watts EIRP peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications, so the limit level is 2 W or 33 dBm.

(b) ERP

According to Part 22.913(a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

Limits for Radiated RF Power Output

Frequency range	Limit Level (EIRP)/Resolution Bandwidth
TX channel	33dBm/1MHz

Limits for ERP

Frequency range	Limit Level (ERP)
TX channel	7W

Test Setup:

The EUT was set in an anechoic chamber, which is connected to the Wireless Communications Test Set located outside the chamber over the air. The test was done using an automated test system, where all test equipments were controlled by a computer.

Test Method

The measurement was performed accordance with section 2.2.17 of ANSI/TIA-603-B-2002: *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*.

1 The maximum power was searched by turning the azimuth of the turntable, shifting the polarization of the measuring antenna and changing the pose of the EUT.

2 The measured levels are EIRP values corrected in the automated test system with the correction factors given by a substitution calibration made before the measurement. The calibration is made separately for vertical and horizontal polarization and the system uses different correction factors depending on the measuring antenna polarization.

3 The corrected maximum levels were reported for EIRP values, and ERP values can be calculated from EIRP values.

Note:

ERP dBm = EIRP dBm – 2.15dB.

ERP Value for GPRS 850 band mode:

ARFCN	Frequency [MHz]	ERP [dBm]
512	824.128	16.15
661	836.693	16.24
810	848.777	15.16

EIRP Value for GPRS 1900 band mode:

ARFCN	Frequency [MHz]	EIRP [dBm]
128	1850.260	12.62
190	1880.080	11.49
251	1909.739	16.59

ERP Value for EGPRS 850 band mode:

ARFCN	Frequency [MHz]	ERP [dBm]
512	824.228	16.25
661	836.553	16.25
810	848.777	15.33

EIRP Value for EGPRS 1900 band mode:

ARFCN	Frequency [MHz]	EIRP [dBm]
128	1850.100	16.27
190	1879.919	15.37
251	1909.739	16.66

TTL Test Report

4.3 Occupied bandwidth

Specifications:	2.1049,22.917(b),24.238(b)					
Date of Test	2008-09-18					
Test conditions:	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
Operation Mode	TX on, channel 128, 190, 251, 512, 661 and 810					
Test Results:	--					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-03	Normal
7330	Ultra Broadband Antenna	R/S	HL562	100013	2009-07-24	Normal
7330	Double-Ridged Horn Antenna	R/S	HF906	100037	2009-01-14	Normal
713	Fully-Anechoic Chamber	ETS	11.8m×6.5m×6.3 m	--	2010-11-17	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	2008-11-25	Normal

Test Setup

The situation under which maximum EIRP values were found in the measurement of the radiated RF power output was used to determine the 99% occupied bandwidth. The Wireless Communications Test Set was used to set the TX channel, power level and modulation.

Test Method


The 99% occupied bandwidth was calculated from the spectrum analyzer. Markers in the spectrum analyzer were then placed between the calculated frequencies to show the calculated 99% power band.

Note: --

Results data of GPRS mode:

EUT channel	99% occupied bandwidth [kHz]
128	244
190	246
251	242
512	246
661	246
810	244


Graphical results for GPRS mode:

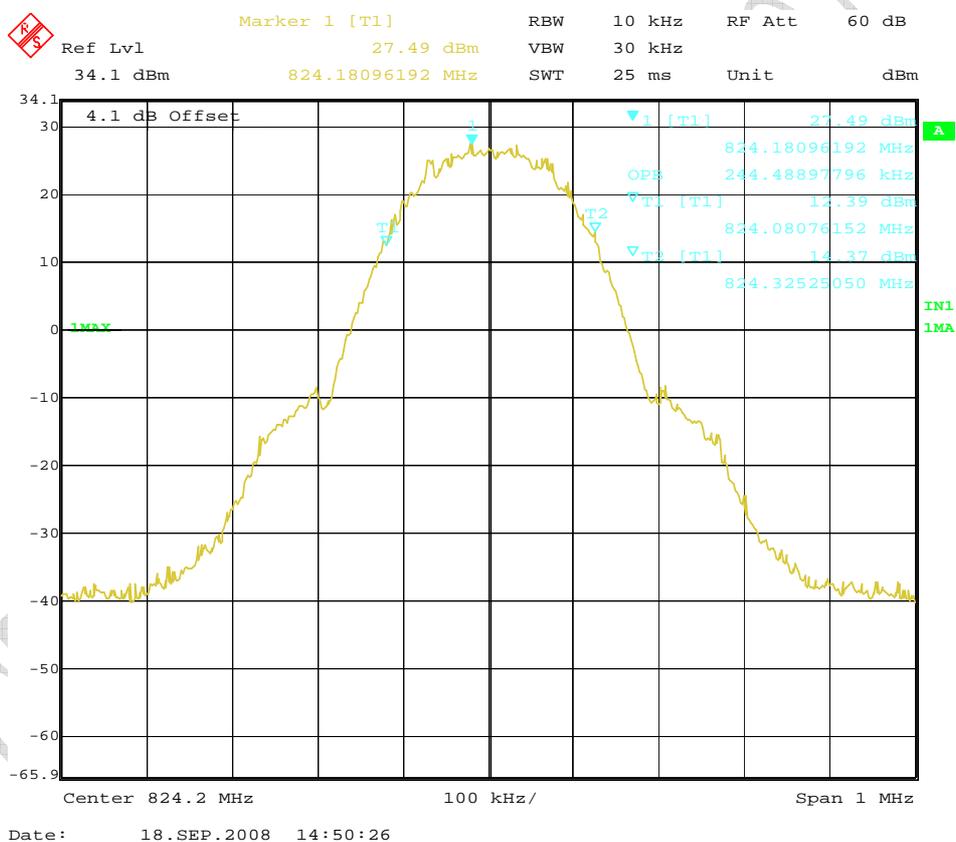

Channel 128


FCC Parts 2, 22, 24
Equipment: K3565-Z

REPORT NO.: I08GE6422-FCC-EMC

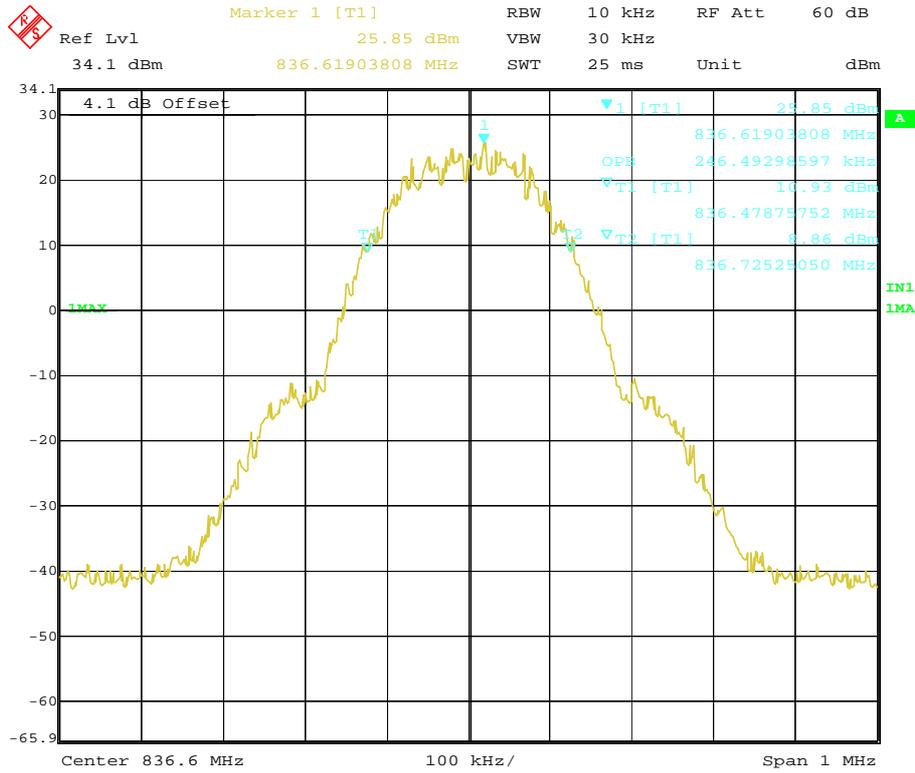

Date: 18.SEP.2008 14:51:42

Channel 190

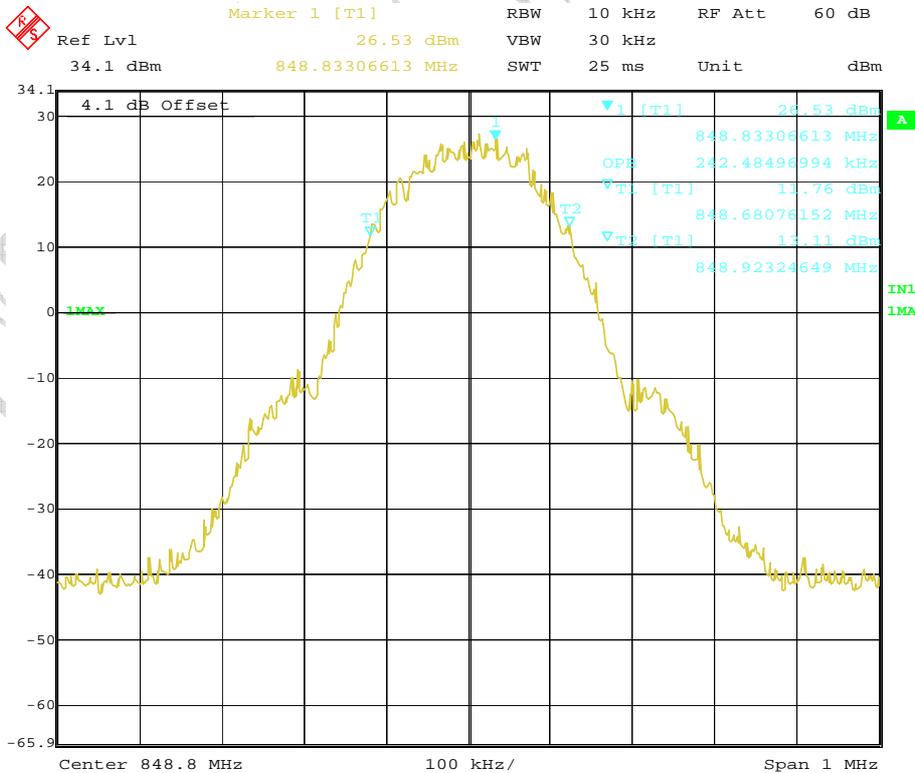


Date: 18.SEP.2008 14:52:22


Channel 251

FCC Parts 2, 22, 24
Equipment: K3565-Z

REPORT NO.: I08GE6422-FCC-EMC

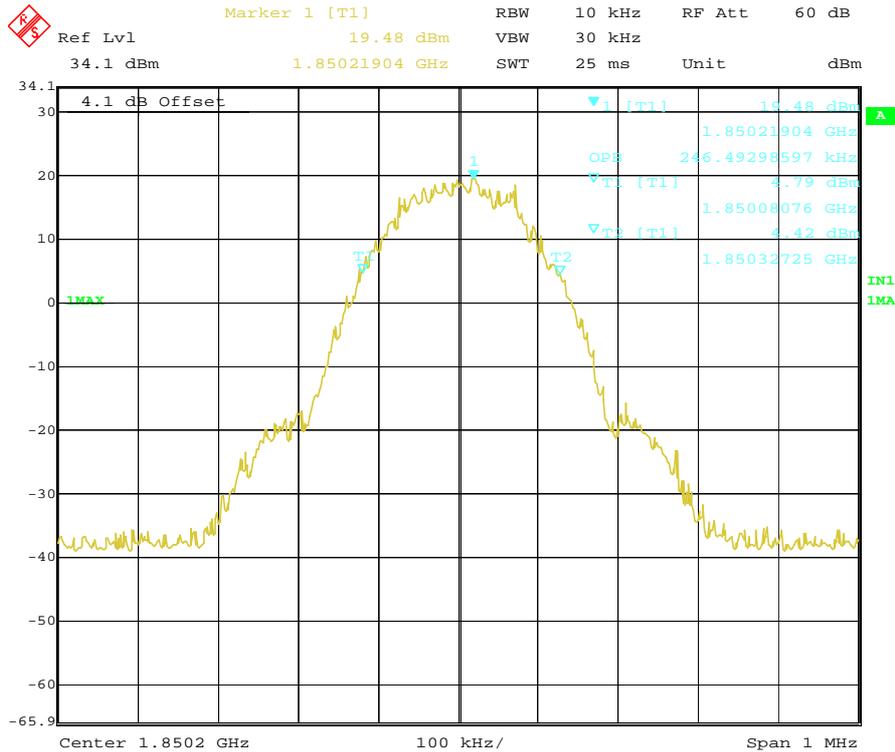


Channel 512

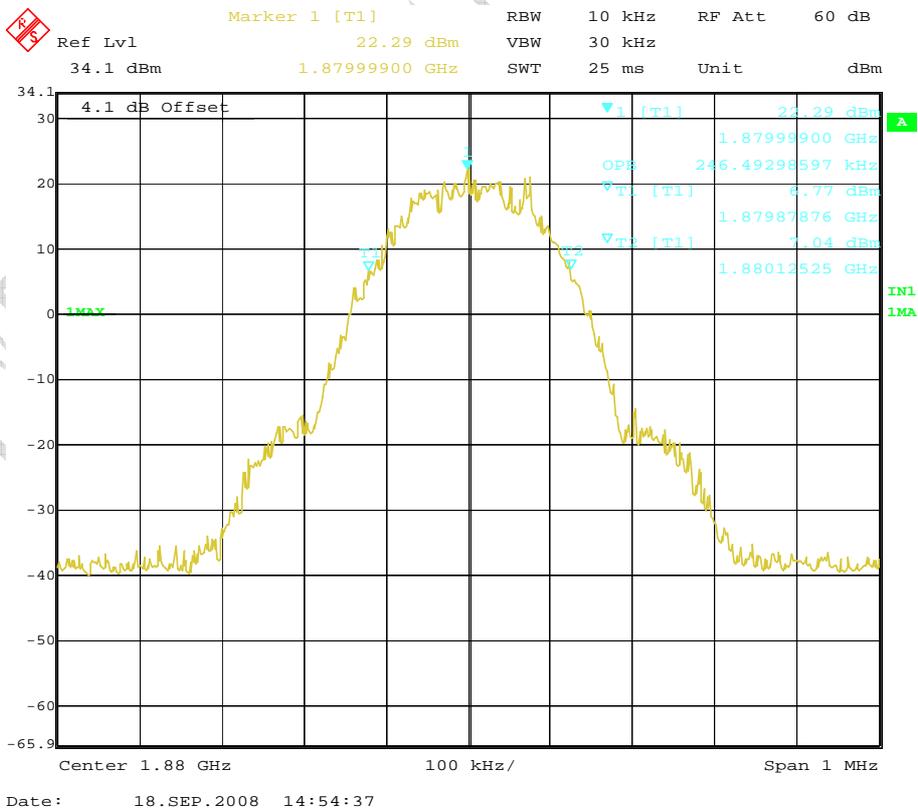

Channel 661

FCC Parts 2, 22, 24
Equipment: K3565-Z

REPORT NO.: I08GE6422-FCC-EMC

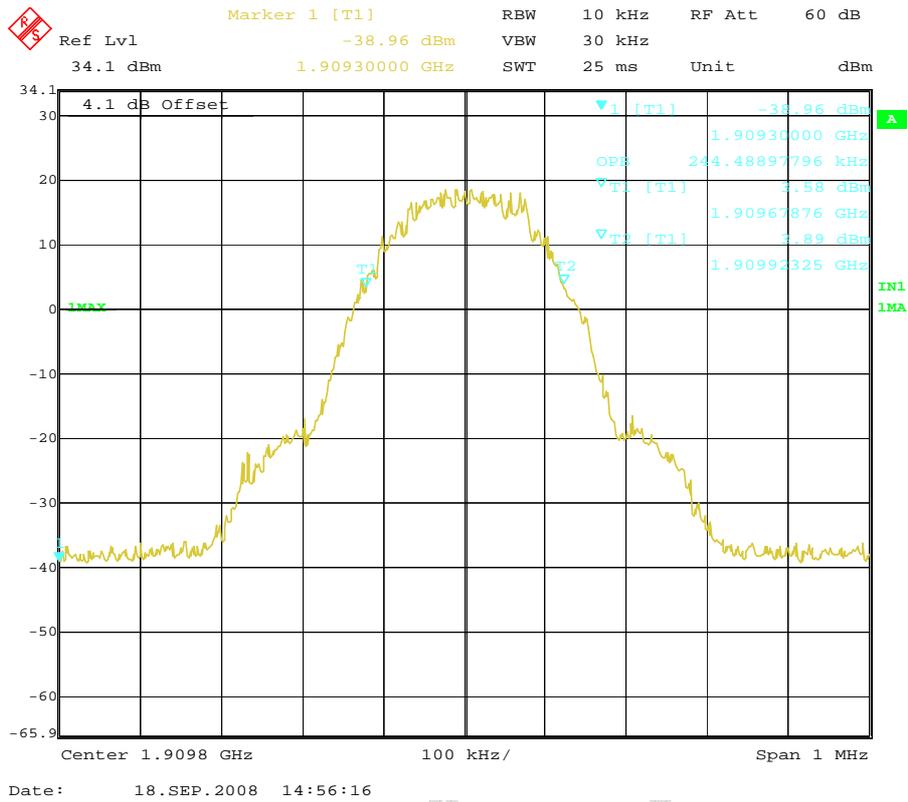

Channel 810


Results data of EGPRS mode:

EUT channel	99% occupied bandwidth [kHz]
128	246
190	246
251	248
512	251
661	246
810	248


Graphical results for EGPRS mode:

FCC Parts 2, 22, 24
Equipment: K3565-Z

REPORT NO.: I08GE6422-FCC-EMC

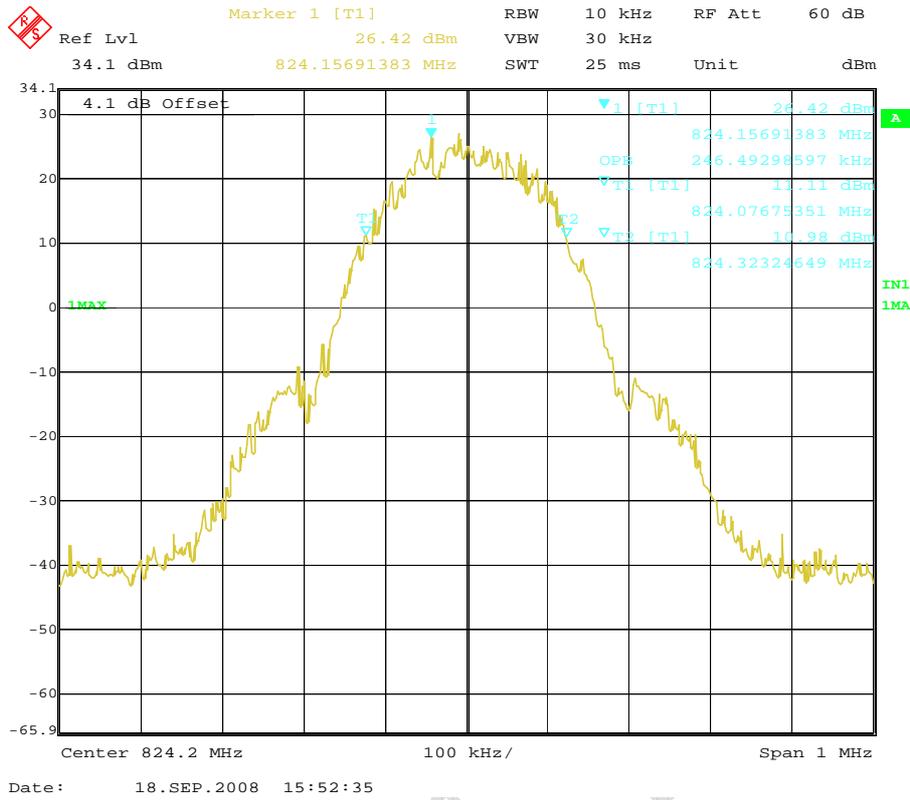


Channel 128

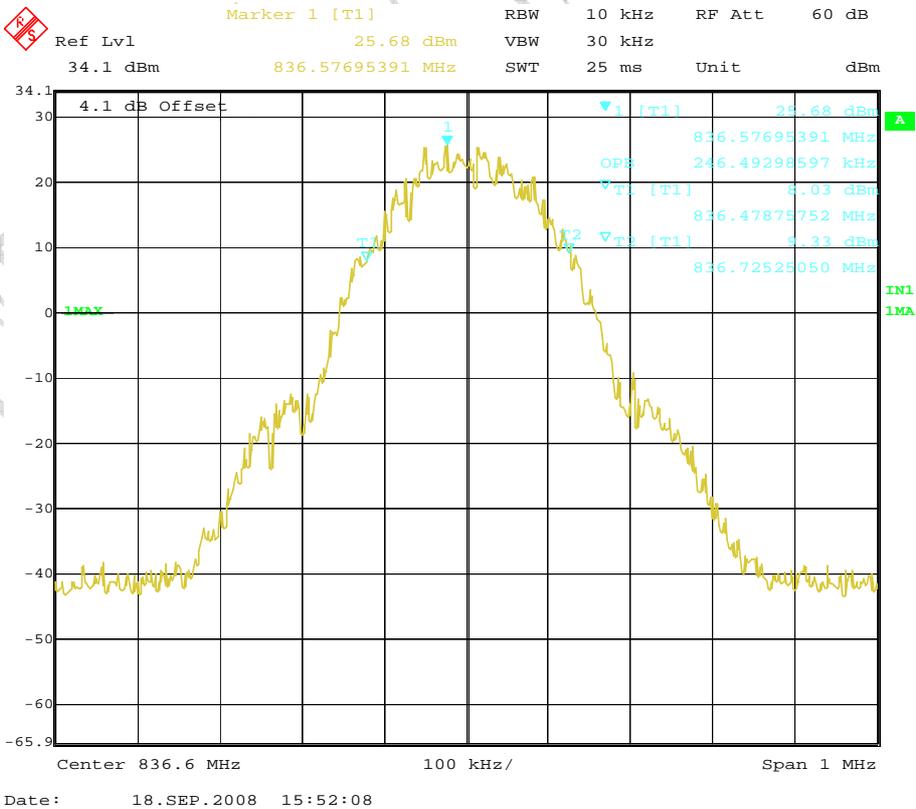

Channel 190


FCC Parts 2, 22, 24
Equipment: K3565-Z

REPORT NO.: I08GE6422-FCC-EMC

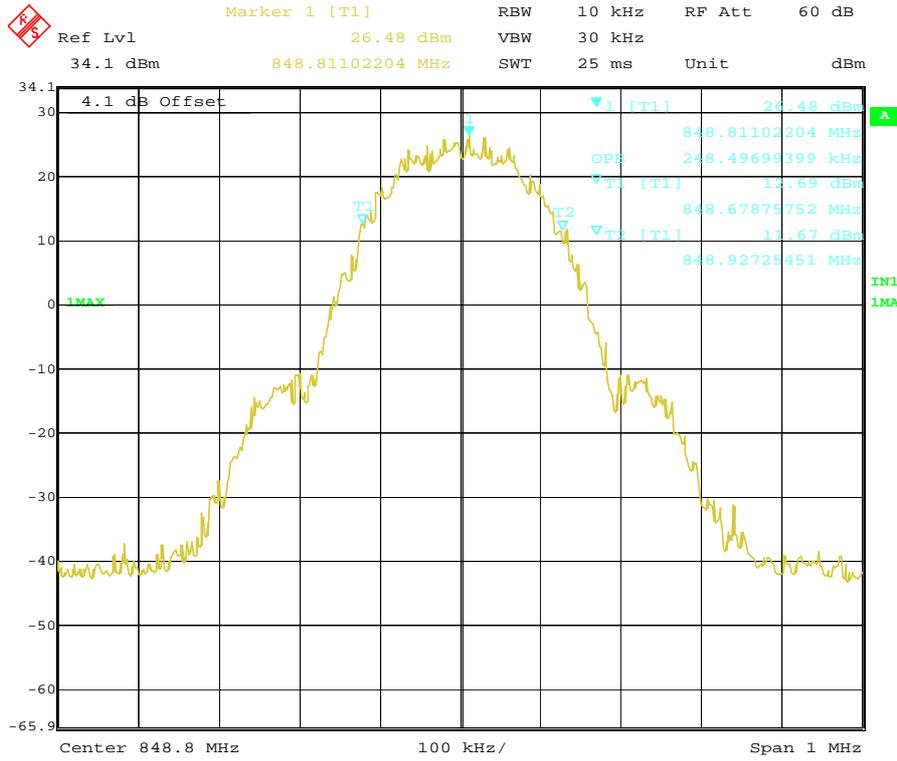

Date: 18.SEP.2008 15:51:38

Channel 251

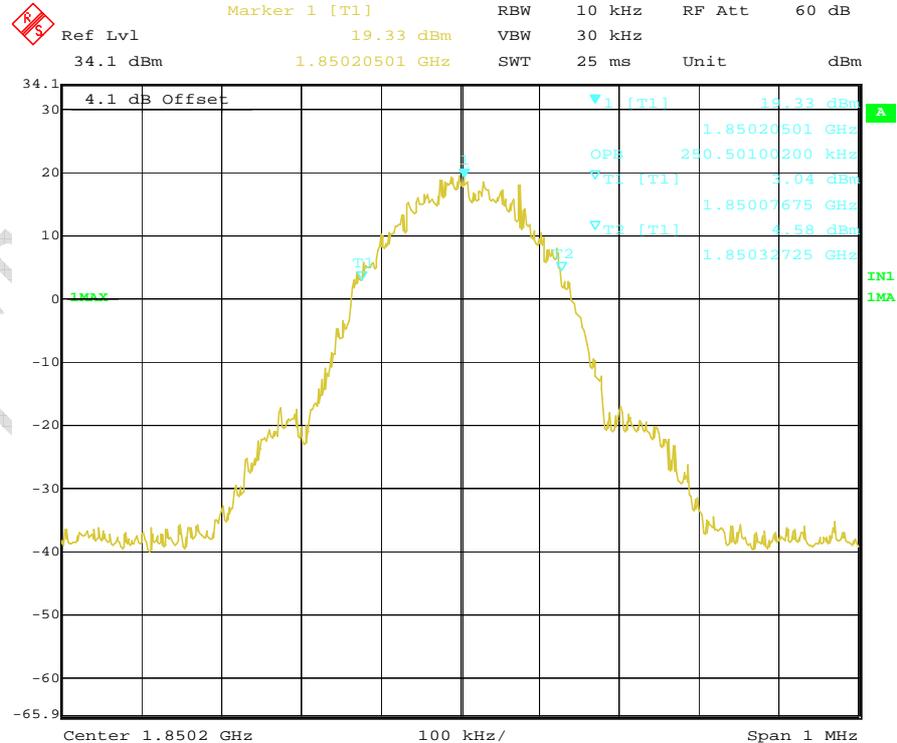


Date: 18.SEP.2008 15:50:36


Channel 512

FCC Parts 2, 22, 24
Equipment: K3565-Z

REPORT NO.: I08GE6422-FCC-EMC

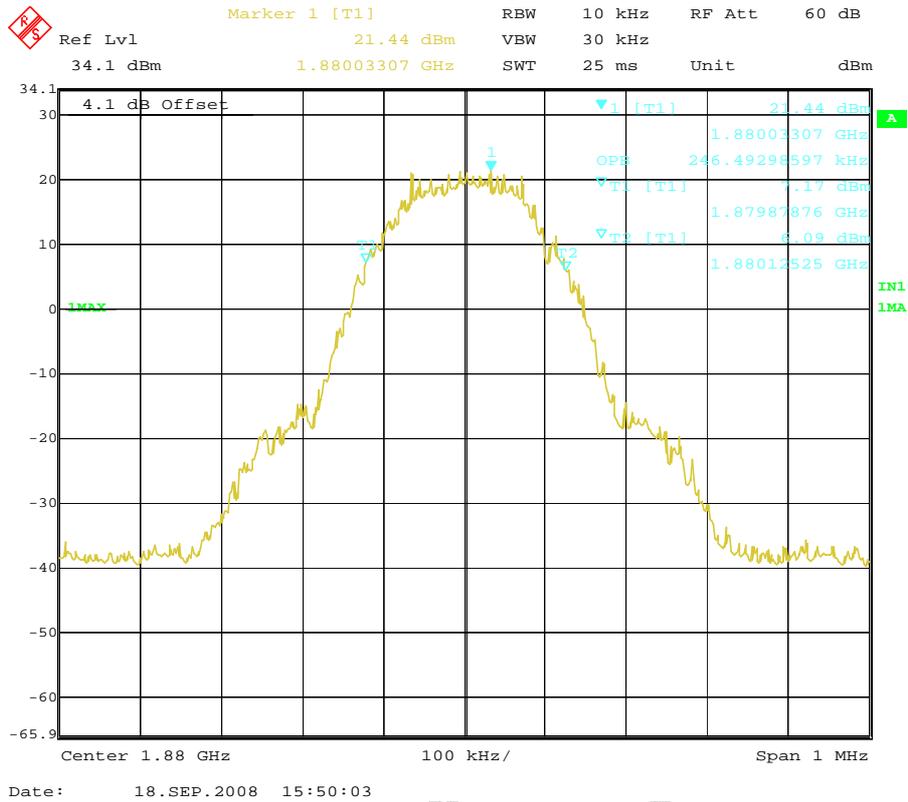

Channel 661

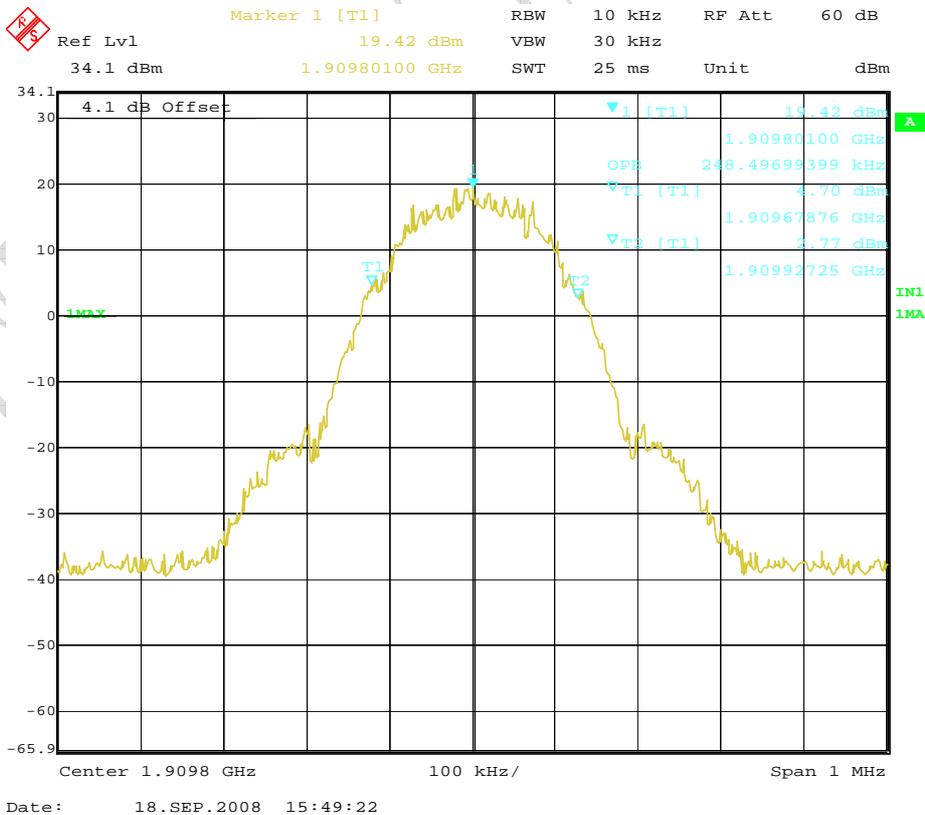

Channel 810

4.4 Frequency Stability over Temperature Variation

Specifications:	2.1055,22.355,24.235					
Date of Test	2008-09-18					
Test conditions:	Ambient Temperature: -30°C-50°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
Operation Mode	TX on, channel 190 and 661					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
561	Temperature Chamber	Terchy Environmental Technology LTD.	MHU-800SR	84121202	2009-05-06	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal
Limit						
Frequency deviation [ppm]	±2.5					

Test Setup

The EUT was placed in a temperature chamber, demonstrated as figure T. The wireless communications test set (test simulator) was used to set the TX channel and power levels, modulate the TX signal with different bit patterns and measure the frequency of TX.

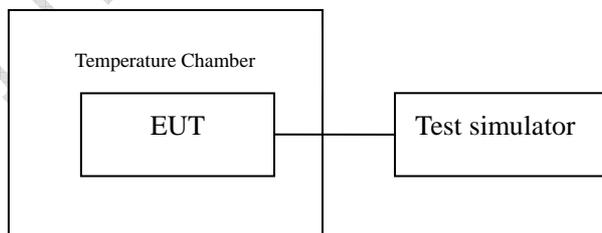


Figure T: setup for measurement of frequency stability over temperature variation

Test Method

1. The EUT was turned off and placed in the temperature chamber.
2. The temperature of the chamber was set to -30°C and allowed to stabilize.
3. The EUT temperature was allowed to stabilize for 45 minutes.
4. The EUT was turned on and set to transmit with 8960.
5. The maximum transmit frequency deviation during one minute period was measured by Wireless Communications Test Set.
6. The steps 3-5 were repeated for -20°C, -10°C, 0°C, 10°C, 20°C, 30°C, 40°C and 50°C.

Test results data for GPRS mode:

Channel 190:

Temperature[°C]	Deviation[Hz]	Remarks
-30	-21	Pass
-20	17	Pass
-10	-21	Pass
0	22	Pass
10	41	Pass
20	21	Pass
30	-33	Pass
40	-15	Pass
50	-35	Pass

Channel 661:

Temperature[°C]	Deviation[Hz]	Remarks
-30	30	Pass
-20	28	Pass
-10	-33	Pass
0	51	Pass
10	42	Pass
20	-51	Pass
30	-36	Pass
40	-40	Pass
50	-54	Pass

Test results data for EGPRS mode:

Channel 190:

Temperature[°C]	Deviation[Hz]	Remarks
-30	-20	Pass
-20	-11	Pass
-10	-17	Pass
0	-34	Pass
10	46	Pass
20	-14	Pass
30	-18	Pass
40	-26	Pass
50	-36	Pass

Channel 661:

Temperature[°C]	Deviation[Hz]	Remarks
-30	-29	Pass
-20	33	Pass
-10	-28	Pass
0	-18	Pass
10	-34	Pass
20	-33	Pass
30	-35	Pass
40	-42	Pass
50	-58	Pass

4.5 Frequency Stability over Voltage Variation

Specifications:	2.1055,22.355,24.235					
Date of Test	2008-09-18					
Test conditions:	Ambient Temperature: 15°C -35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
Operation Mode	TX on, channel 190 and 661					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal
7982	DC Power Source	4NIC	DH1715A-3	004224	--	Normal
Limit						
Frequency deviation [ppm]	±2.5					

Test Setup

The EUT was placed in a shielding chamber and powered by the dummy battery which is connected to a DC power source, demonstrated as figure V. The wireless communications test set was used to set the TX channel and power level, modulate the TX signal with different bit patterns and measure the frequency of TX.

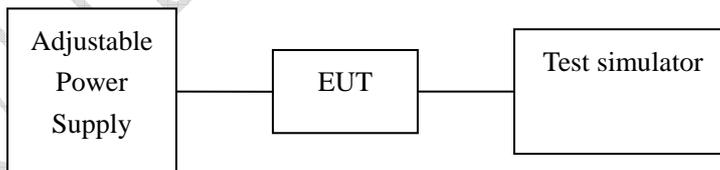


Figure V: test setup for measurement of frequency stability over voltage variation

Test Results data for GPRS mode:

Channel 190:

Level	Voltage[V]	Deviation[Hz]	Remarks
Nominal	4.5	21	Pass
Cut-off point	3.3	-61	Pass

Channel 661:

Level	Voltage[V]	Deviation[Hz]	Remarks
Nominal	4.5	-51	Pass
Cut-off point	3.3	-103	Pass

Test Results data for EGPRS mode:

Channel 190:

Level	Voltage[V]	Deviation[Hz]	Remarks
Nominal	4.5	-14	Pass
Cut-off point	3.3	-73	Pass

Channel 661:

Level	Voltage[V]	Deviation[Hz]	Remarks
Nominal	4.5	-33	Pass
Cut-off point	3.3	-95	Pass


4.6 Conducted RF Power Output

Specifications:	2.1046,22.913(a),24.232(c)					
Date of Tests	2008-09-18					
Test conditions:	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
Operation Mode	TX on, channel 128, 190, 251, 512, 661 and 810					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-04	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
---	Power splitter	Jie sai	---	1000132	2009-01-04	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

Limits for Radiated RF Power Output	
Frequency range	Limit Level (EIRP)/Resolution Bandwidth
TX channel	33dBm/1MHz
Limits for ERP	
Frequency range	Limit Level (ERP)
TX channel	7W

Test Setup:

During the process of testing, the EUT was controlled via the Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by Rhode & Schwarz EMI test receiver (ESI26).

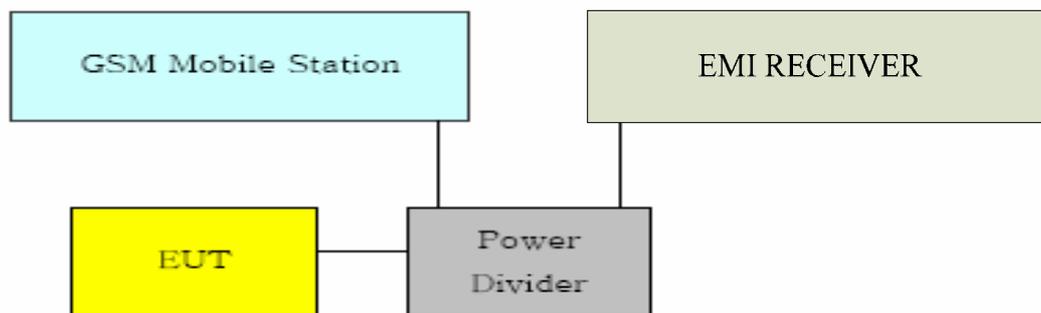

Test Method

- 1) The EUT was coupled to the EMI test receiver analyzer mode and the base station simulator through a power divider. The radio frequency load attached to the EUT antenna terminal was 50 Ohm. The loss of the cables the test system is calibrated to correct the readings.
- 2) The spectrum analyzer was set to Maxpeak Detector function and Maximum hold mode.
- 3) The resolution bandwidth of the spectrum analyzer was comparable to the emission bandwidth.

Note: --

Test Results for GPRS mode:

ERP Value for GPRS 850 band:

ARFCN	Peak output power [dBm]
128	27.48
190	26.57
251	27.80

EIRP Value for GPRS 1900 band:

ARFCN	Peak output power [dBm]
512	22.96
661	24.89
810	22.11

Test Results for EGPRS mode:

ERP Value for EGPRS 850 band:

ARFCN	Peak output power [dBm]
128	27.55
190	26.67
251	27.80

EIRP Value for EGPRS 1900 band:

ARFCN	Peak output power [dBm]
512	22.96
661	24.89
810	22.17

TTL Test Report

4.7 Conducted Spurious Emission

Specifications:	2.1051,22.917,24.238					
Date of Tests	2008-09-18					
Test conditions:	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
Operation Mode	TX on, channel 190 and 661					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ES126	100211	2009-01-04	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
---	Power splitter	Jie sai	---	1000132	2009-01-04	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

Limit Level Construction:


According to Part 24.238 (a), i.e., Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB, so the limit level is:
 $P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13\text{dBm}$

Limits for Radiated spurious emissions(UE)

Frequency range	Limit Level /Resolution Bandwidth
30 MHz to 20000 MHz	-13dBm/1MHz

Test Setup:

During the process of testing, the EUT was controlled via Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by Rhode & Schwarz EMI test receiver (ES126)

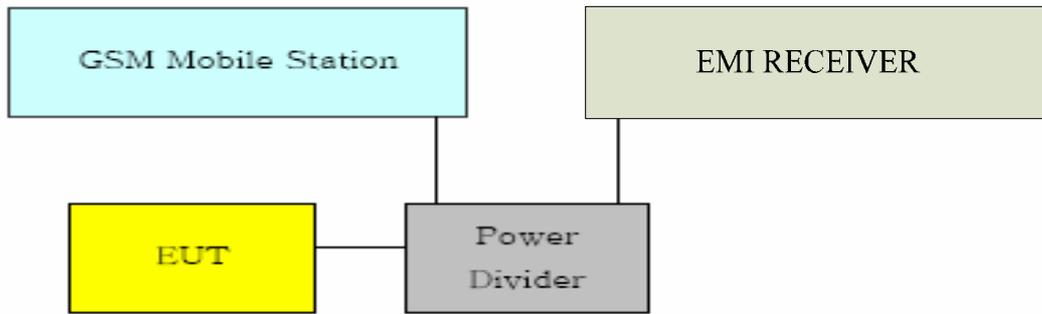

Test Method

The measurement was performed accordance with section 2.2.13 of ANSI/TIA-603-B-2002: *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*.

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment under test, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

Note: --


Test Results for GSM mode:

Out of band emission	
Frequency [MHz]	Level (dBm)
--	--

Test Results for GPRS mode:

Out of band emission	
Frequency [MHz]	Level (dBm)
--	--

Graphical results for GPRS mode:

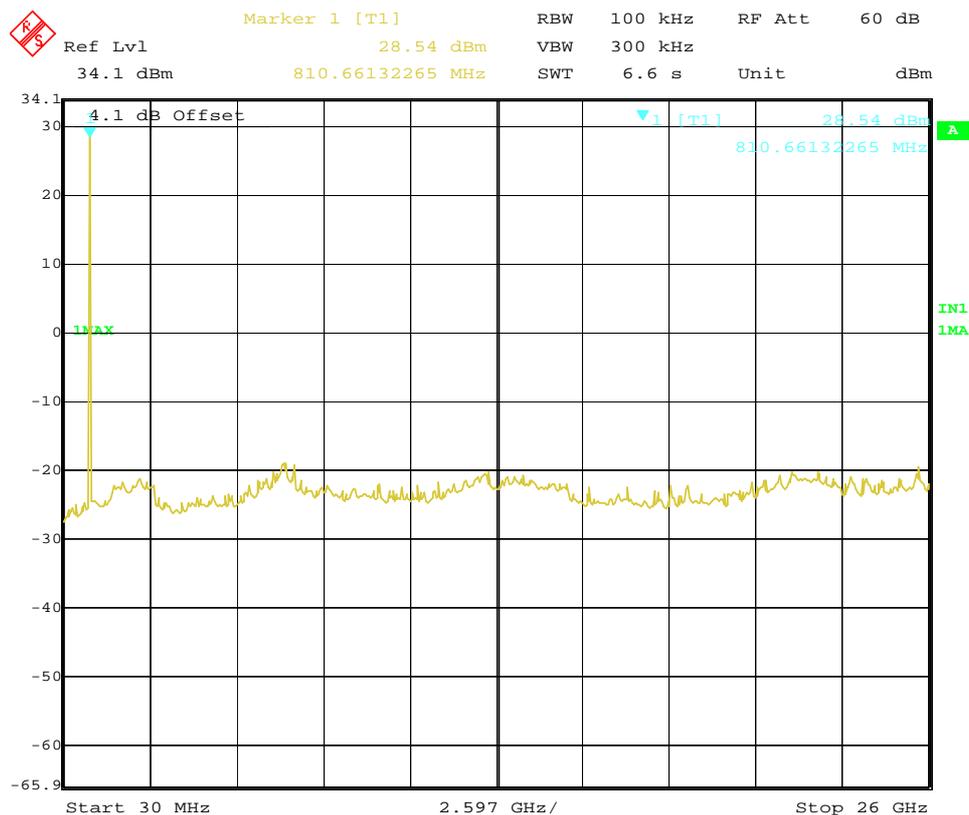


Date: 18.SEP.2008 15:18:50

Channel 190

FCC Parts 2, 22, 24
Equipment: K3565-Z

REPORT NO.: I08GE6422-FCC-EMC

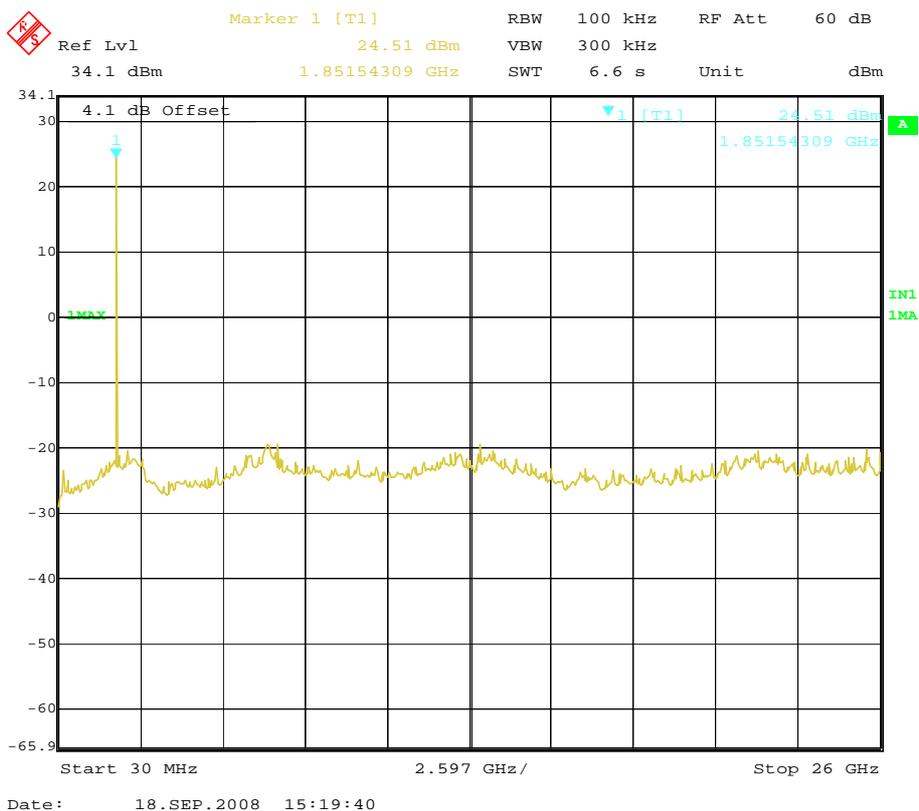

Channel 661



Test Results for EGPRS mode:

Out of band emission	
Frequency [MHz]	Level (dBm)
--	--

FCC Parts 2, 22, 24
Equipment: K3565-Z

REPORT NO.: I08GE6422-FCC-EMC

Graphical results for EGPRS mode:

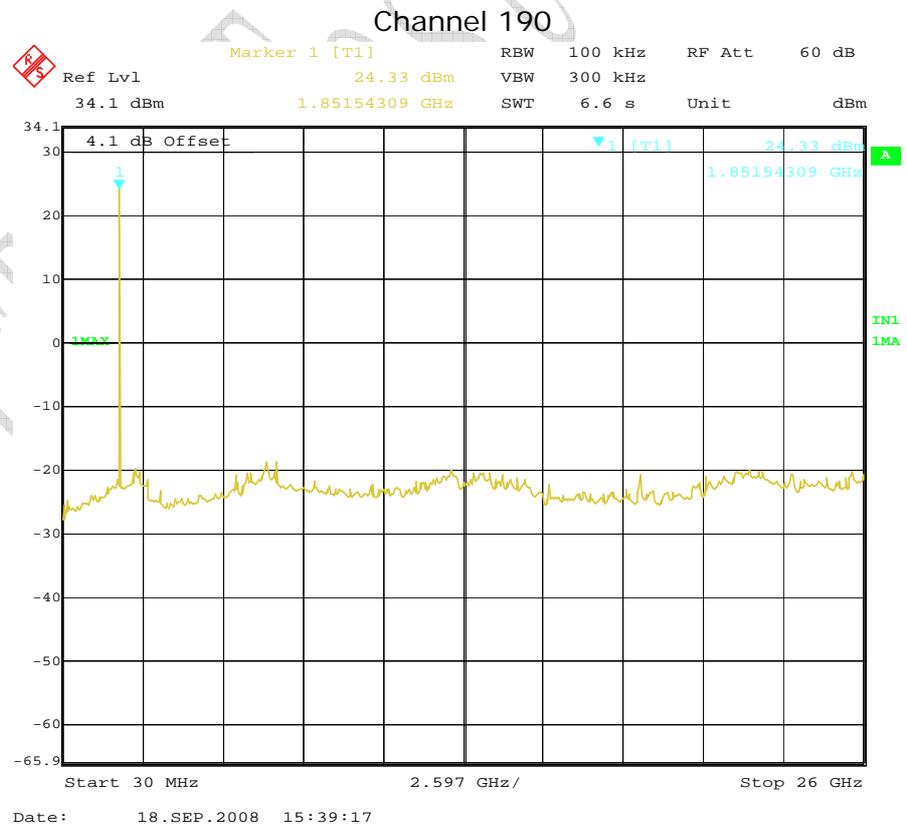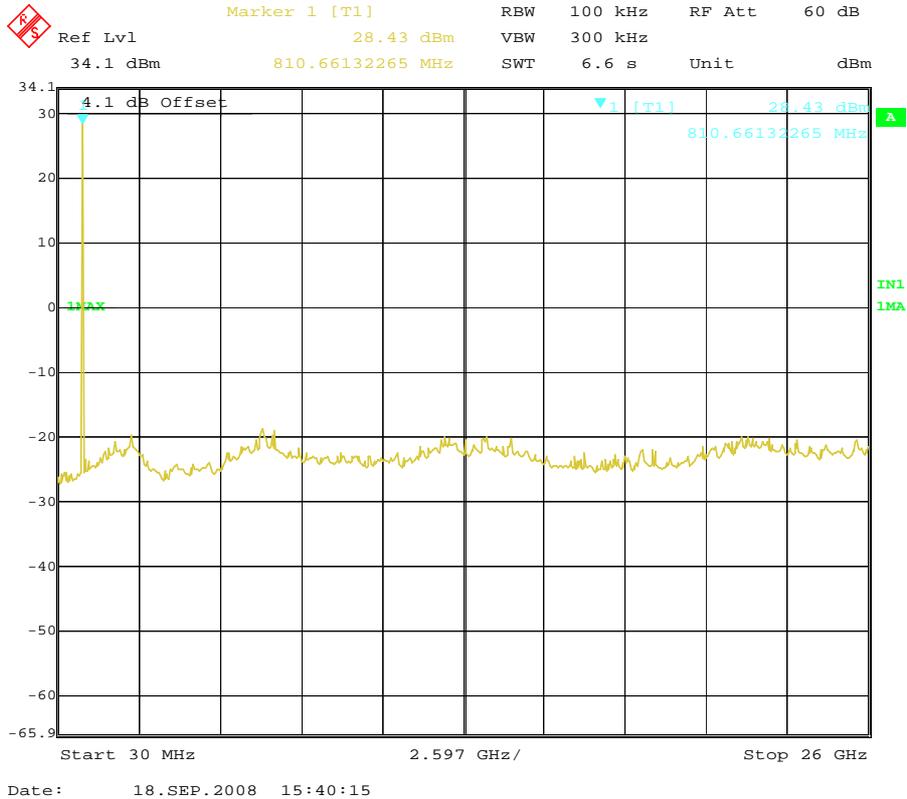

Channel 661

4.8 Band Edge

Specifications:	2.1051, 24.238, 2.1053, 22.917					
Date of Tests	2008-09-18					
Test conditions:	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
Operation Mode	TX on, channel 128, 251, 512 and 810					
Test Results:	Pass					
Test equipment Used:						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-04	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
---	Power splitter	Jie sai	---	1000132	2009-01-04	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

Limit Level Construction:


According to Part 24.238 (a), i.e., Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB, so the limit level is:
 $P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13\text{dBm}$

Limits for Radiated spurious emissions(UE)

Frequency range	Limit Level /Resolution Bandwidth
30 MHz to 20000 MHz	-13dBm/1MHz

Test Setup:

During the process of testing, the EUT was controlled via the Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by Rhode & Schwarz EMI test receiver (ESI26).

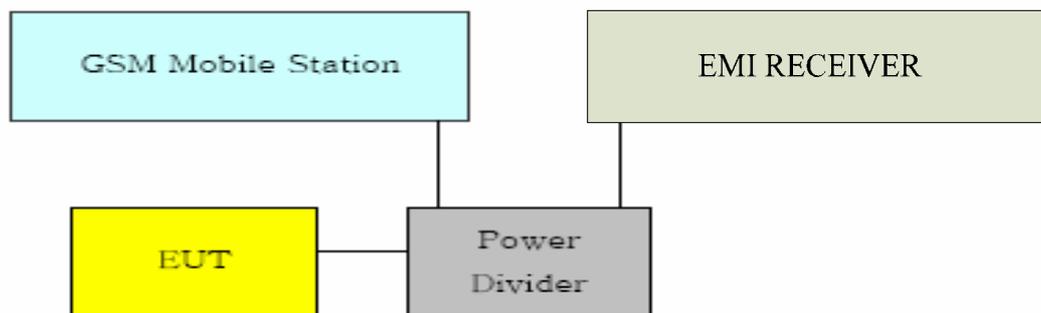

Test Method

- 1) The EUT was coupled to the EMI test receiver analyzer mode and the base station simulator through a power divider. The radio frequency load attached to the EUT antenna terminal was 50 Ohm. The loss of the cables the test system is calibrated to correct the readings.
- 2) The spectrum analyzer was set to Maxpeak Detector function and Maximum hold mode.
- 3) The resolution bandwidth of the spectrum analyzer was comparable to the emission bandwidth.

Note: --

Test Results:

GPRS mode:


Band-edge emission		
EUT Channel	Frequency [MHz]	Level [dBm]
128 Left band edge	824.000	-13.21
251 Right band edge	849.000	-15.25
512 Left band edge	1850.000	-21.03
810 Right band edge	1910.000	-20.95

EGPRS mode:

Band-edge emission		
EUT Channel	Frequency [MHz]	Level [dBm]
128 Left band edge	824.000	-15.71
251 Right band edge	849.000	-13.27
512 Left band edge	1850.000	-22.41
810 Right band edge	1910.000	-23.51


FCC Parts 2, 22, 24
Equipment: K3565-Z

REPORT NO.: I08GE6422-FCC-EMC

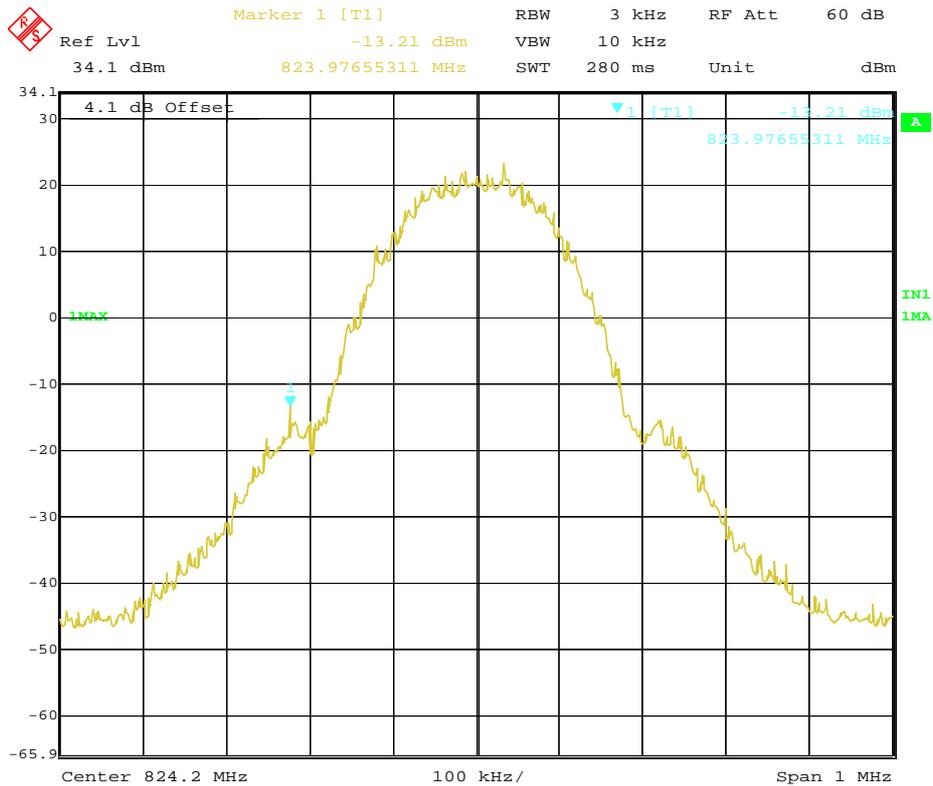

Date: 18.SEP.2008 15:26:56

GPRS channel 128 Left band edge

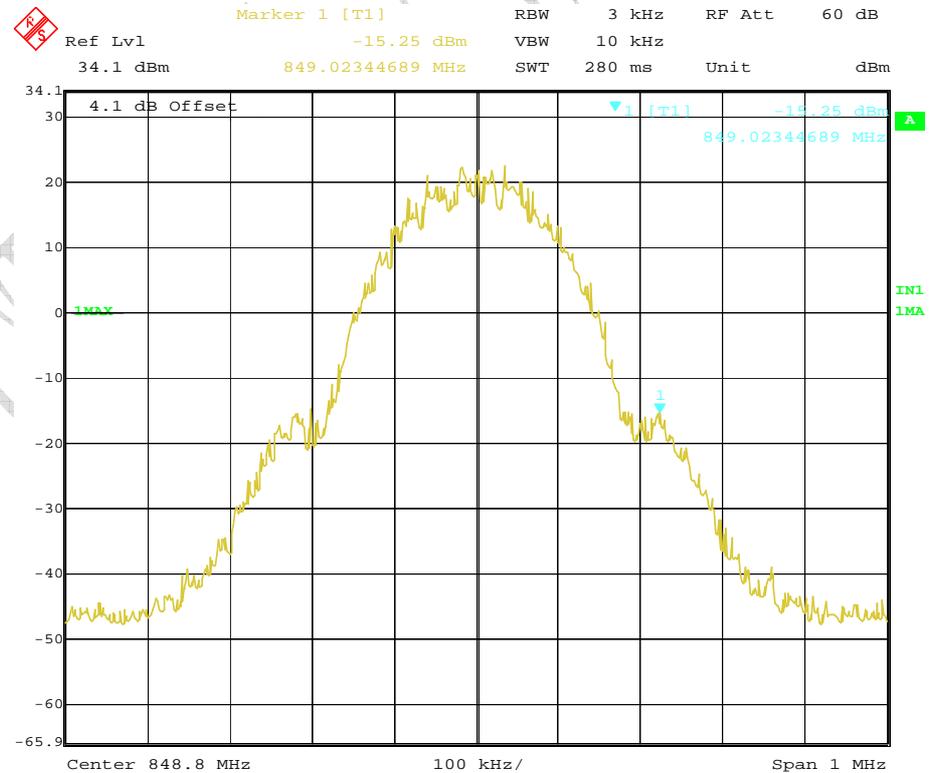


Date: 18.SEP.2008 15:27:39

GPRS channel 251 Right band edge


FCC Parts 2, 22, 24
Equipment: K3565-Z

REPORT NO.: I08GE6422-FCC-EMC

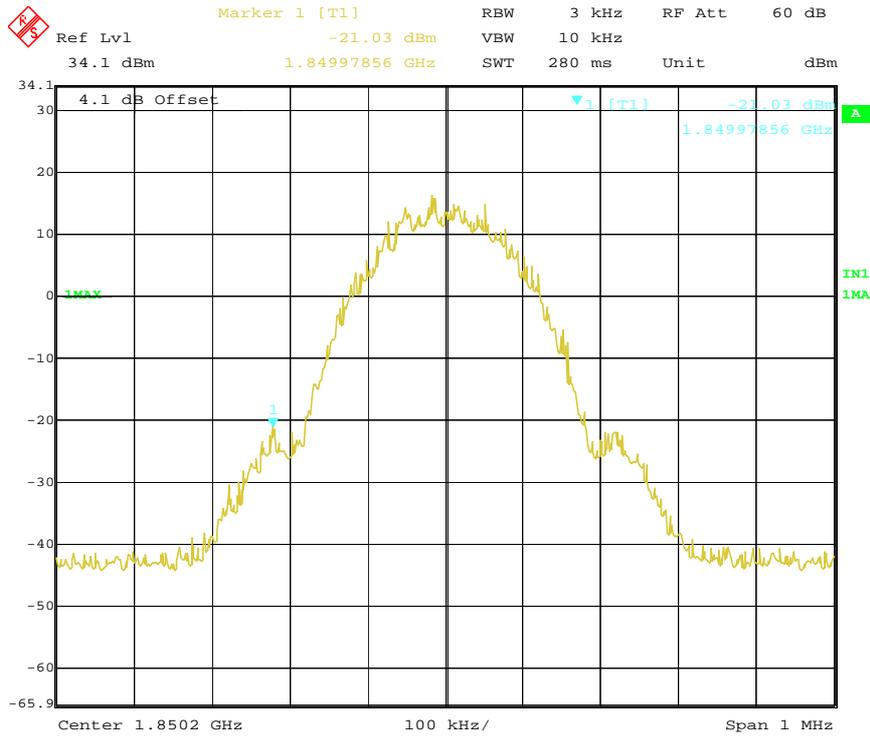

Date: 18.SEP.2008 15:25:29

GPRS channel 512 Left band edge

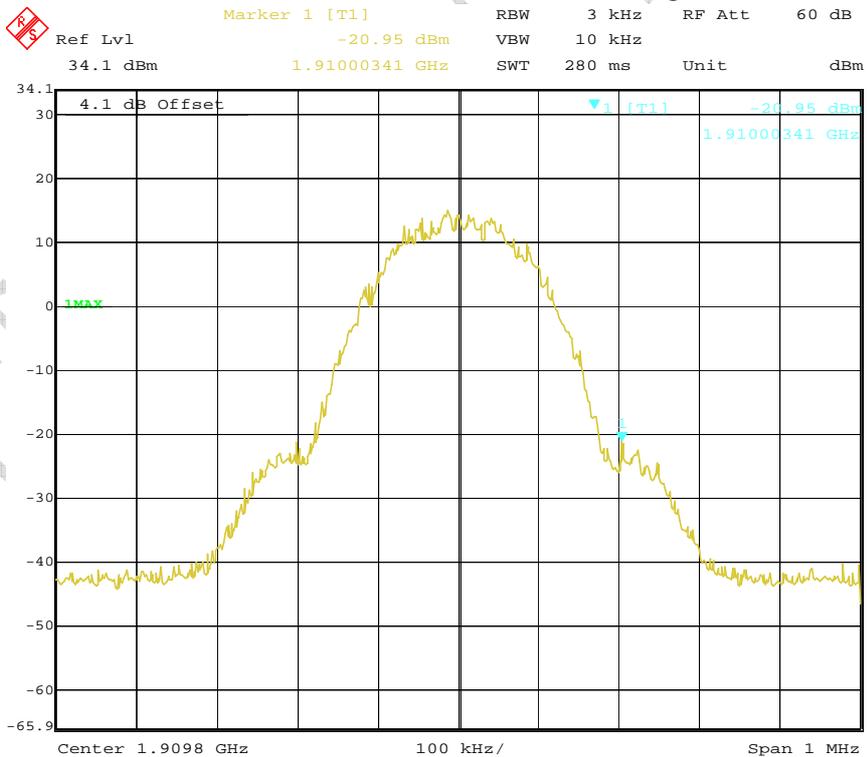

Date: 18.SEP.2008 15:24:26


GPRS channel 810 Right band edge

FCC Parts 2, 22, 24
Equipment: K3565-Z

REPORT NO.: I08GE6422-FCC-EMC



EGPRS channel 128 Left band edge

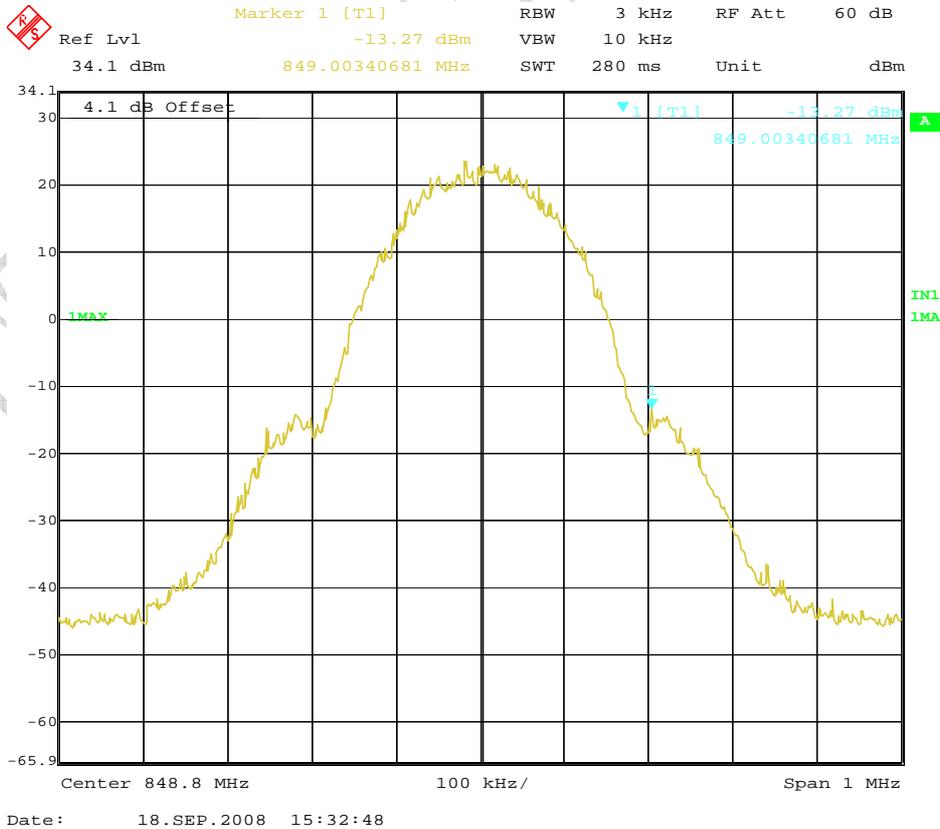


EGPRS channel 251 Right band edge

FCC Parts 2, 22, 24
Equipment: K3565-Z

REPORT NO.: I08GE6422-FCC-EMC


	Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	60 dB
	34.1 dBm	-22.41 dBm	VBW	10 kHz		
		1.84999860 GHz	SWT	280 ms	Unit	dBm

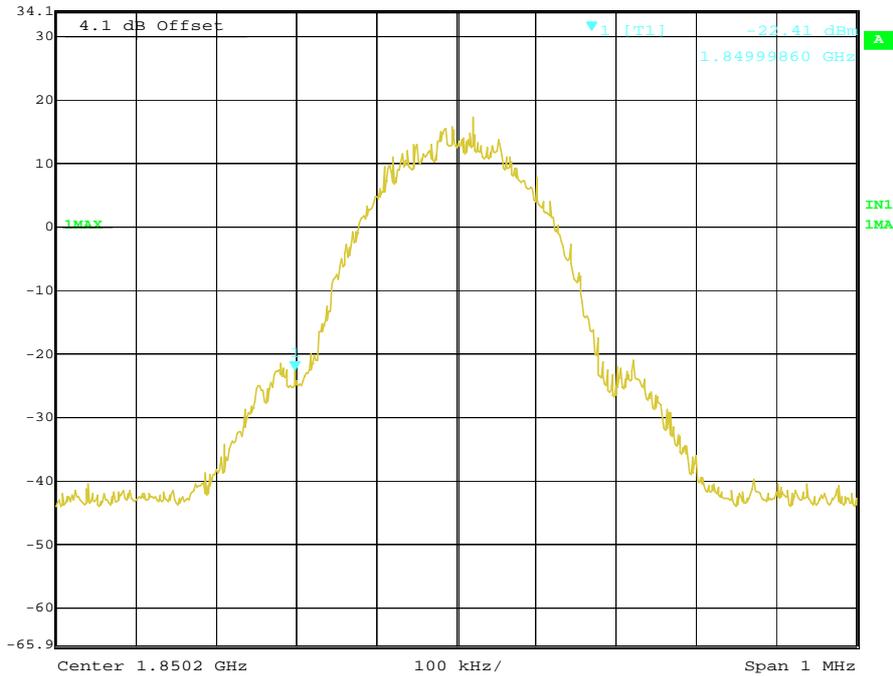

Date: 18.SEP.2008 15:35:42

EGPRS channel 512 Left band edge


	Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	60 dB
	34.1 dBm	-23.51 dBm	VBW	10 kHz		
		1.91000541 GHz	SWT	280 ms	Unit	dBm

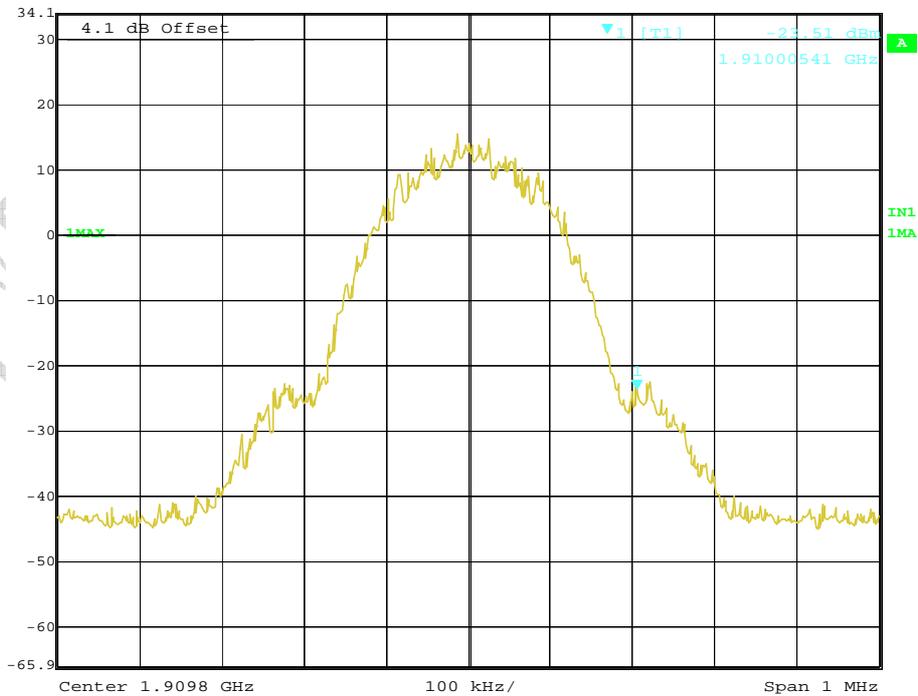

Date: 18.SEP.2008 15:36:40

EGPRS channel 810 Right band edge

Annex A External Photos

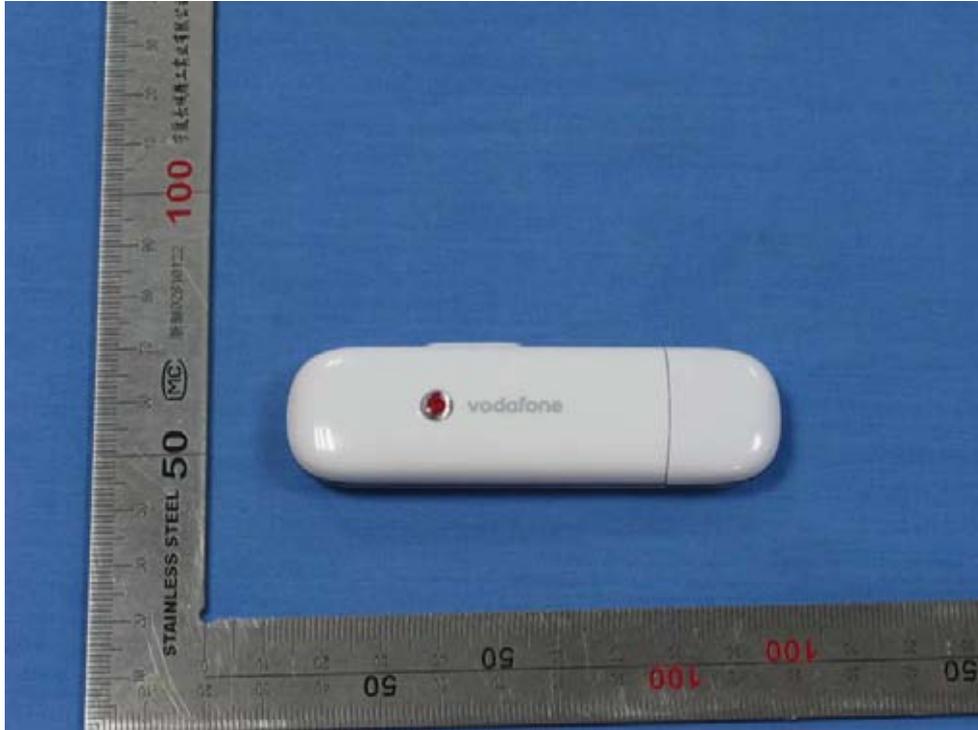

Front view



Back view




Face view




Cable

Annex B Internal Photos

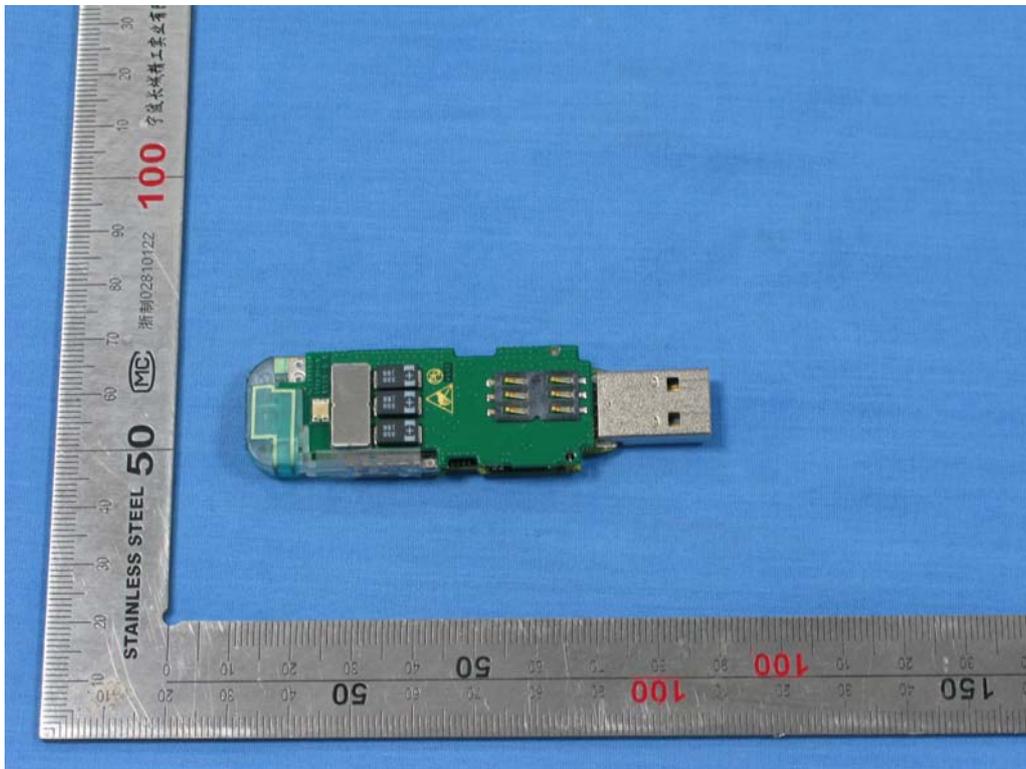

Main board (face)

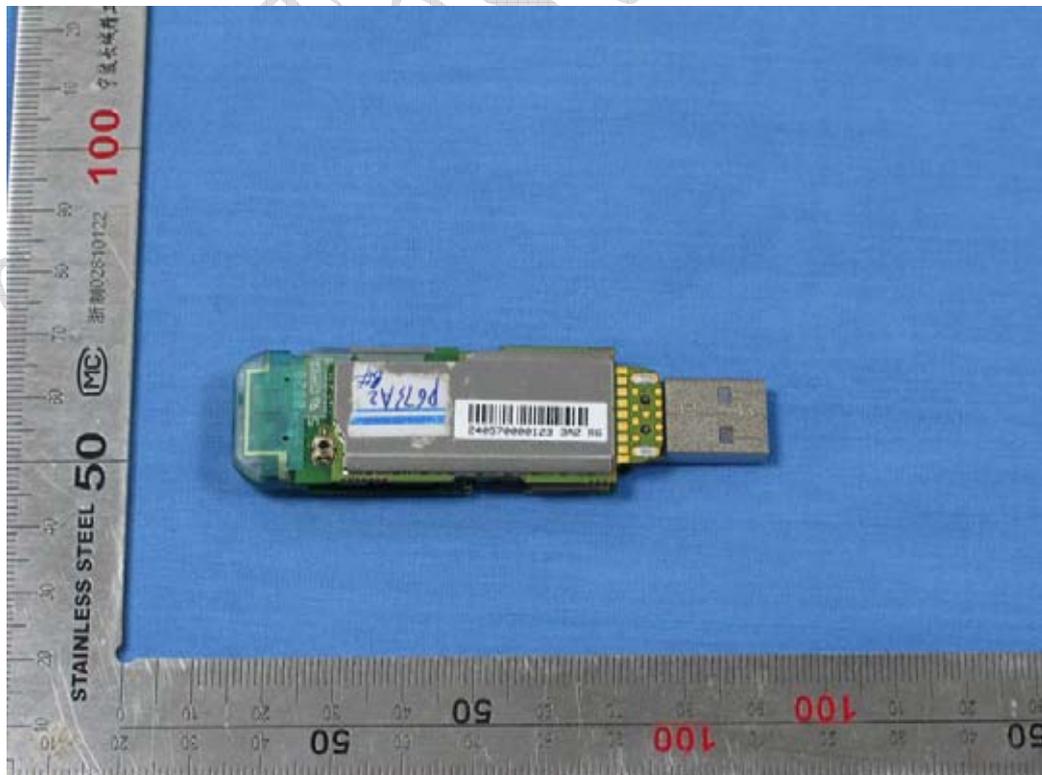

Main board (back)

ANNEX C Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

————— **The End of this Report** —————

TTL Test Report