



# TEST REPORT

No. 2011TAR640

for

**ZTE Corporation**

**WCDMA uFi**

**Model Name: MF51**

with

**FCC ID : Q78-ZTEMF51**

**Hardware Version: d61C**

**Software Version: EN\_ZTE\_MF51W850V1.0.0B02**

**Issued Date: Feb. 16<sup>th</sup>, 2012**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

***DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02***

***FCC 2.948 Listed: No.733176***

***IC O.A.T.S listed: No.6629A-1***

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633-2678 , Fax:+86(0)10-62304633-2504 Email:welcome@emcite.com. www.emcite.com

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>3</b>
<b>1.1. TESTING LOCATION .....</b>	<b>3</b>
<b>1.2. TESTING ENVIRONMENT .....</b>	<b>3</b>
<b>1.3. PROJECT DATA .....</b>	<b>3</b>
<b>1.4. SIGNATURE.....</b>	<b>3</b>
<b>2. CLIENT INFORMATION .....</b>	<b>4</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>4</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>4</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>5</b>
<b>3.1. ABOUT EUT.....</b>	<b>5</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>5</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....</b>	<b>5</b>
<b>3.4. EUT SET-UPS .....</b>	<b>6</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>7</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>7</b>
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>8</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>10</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>11</b>

## **1. Test Laboratory**

### **1.1. Testing Location**

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: No 52, Huayuan beilu, Haidian District, Beijing, P. R. China  
Postal Code: 100191  
Telephone: 00861062304633  
Fax: 00861062304633

### **1.2. Testing Environment**

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### **1.3. Project data**


Testing Start Date: Dec. 15<sup>th</sup>, 2011  
Testing End Date: Feb. 15<sup>th</sup>, 2012

### **1.4. Signature**




---

**Qu Pengfei**  
**(Prepared this test report)**



---

**Sun Xiangqian**  
**(Reviewed this test report)**



---

**Lu Bingsong**  
**Deputy Director of the laboratory**  
**(Approved this test report)**

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: ZTE Corporation  
Address /Post: #68 Zijin Hua Road, Nanjing, Jiangsu Province, P. R. China  
City: Nan Jing  
Postal Code: 210012  
Country: China  
Telephone: +86-25-52878232  
Fax: +86-25-68897541

### **2.2. Manufacturer Information**

Company Name: ZTE Corporation  
Address /Post: #68 Zijin Hua Road, Nanjing, Jiangsu Province, P. R. China  
City: Nan Jing  
Postal Code: 210012  
Country: China  
Telephone: +86-25-52878232  
Fax: +86-25-68897541

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	WCDMA uFi
Model Name	MF51
FCC ID	Q78-ZTEMF51
Antenna	Internal
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.7VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	860943010003499	d61C	EN_ZTE_MF51W850V1.0.0B02

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description	SN	Note
AE1	Battery	/	/
AE2	Travel Adapter	/	/
AE3	USB Cable	/	/
AE4	Travel Adapter	/	/

##### AE1

Model	Li3715T42P3h654251
Manufacturer	ZTE
Capacitance	1500mAh
Nominal Voltage	3.7V

##### AE2

Model	STC-A22O50I700USBA-A
Manufacturer	DOKOCOM
Length of cable	120cm (Length of USB cable)

##### AE3

Model	/
Manufacturer	ZTE
Length of headset line	120cm

##### AE4

Model	STC-A22O50I700USBA-Z
Manufacturer	RUIDE
Length of headset line	120cm (Length of USB cable)

\*AE ID: is used to identify the test sample in the lab internally.

### 3.4. EUT set-ups

<b>EUT set-up No.</b>	<b>Combination of EUT and AE</b>	<b>Remarks</b>
Set.1	EUT1+ AE1+ AE2+AE3	Charging mode
Set.2	EUT1+ AE1+ AE4+AE3	Charging mode
Set.3	EUT1+ AE1+ AE3	USB mode

## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices	10-1-10 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

**Conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber1**(6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Fully-anechoic chamber2**(8.6 meters×6.1 meters×3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 1Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

## 6. SUMMARY OF TEST RESULTS

<b>Abbreviations used in this clause:</b>	
P	Pass
NA	Not applicable
F	Fail

<b>Clause</b>	<b>List</b>	<b>Clause in FCC rules</b>	<b>Verdict</b>
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P

## 7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESCI	100344	R&S	2012-03-12
2	Test Receiver	ESCI	100766	R&S	2012-12-06
3	Test Receiver	ESI40	831564/002	R&S	2013-02-12
4	BiLog Antenna	VUL9163	302	Schwarzbeck	2014-02-10
5	Signal Generator	SMB100A	102063	R&S	2012-03-05
6	LISN	ESH2-Z5	829991/012	R&S	2012-04-20
7	Universal Radio Communication Tester	CMU200	100680	R&S	2012-09-05
8	Universal Radio Communication Tester	CMU200	116455	R&S	2012-05-21
9	Dual-Ridge Waveguide Horn Antenna	3115	6914	EMCO	2012-12-16
10	PC	OPTIPLEX 755	3908243625	DELL	N/A
11	Monitor	E178FPc	CN-OWR979-64 180-7AJ-D2MS	DELL	N/A
12	Printer	DeskJet D2368	TH72E12G7Q	HP	N/A
13	Keyboard	L100	CN0RH6596589 07ATOI40	DELL	N/A
14	Mouse	VR-301	6927225500198	XINGYU	N/A

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission (§15.109(a))**

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (USB mode of EUT and charging mode of EUT) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.1.2 EUT Operating Mode:**

The EUT is operating in the USB mode and charging mode. During the test EUT is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to EUT, reading and erasing the data after copy action was finished.

#### **A.1.3 Measurement Limit**

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

#### **A.1.4 Test Condition**

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15

#### **A.1.5 Measurement Results**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_{\text{A}} + G_{\text{PL}}$$

Where

$G_{\text{A}}$ : Antenna factor of receive antenna

$G_{\text{PL}}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.

**Set.1 Charging Mode**

Frequency(MHz)	Result(dBuV/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dBuV)	Polarity
3699.399	39.42	-19.5	33.4	25.52	VERTICAL
3701.403	39.41	-19.4	33.4	25.41	HORIZONTAL
3697.395	39.37	-19.5	33.4	25.47	VERTICAL
3705.411	39.33	-19.4	33.4	25.33	VERTICAL
3695.391	39.32	-19.5	33.4	25.42	VERTICAL
3703.407	39.32	-19.4	33.4	25.32	VERTICAL

**Set.2 Charging Mode**

Frequency(MHz)	Result(dBuV/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dBuV)	Polarity
3533.066	40.13	-19.4	33.4	26.13	VERTICAL
3695.391	40.13	-19.5	33.4	26.23	VERTICAL
3701.403	40.12	-19.4	33.4	26.12	VERTICAL
3535.070	40.10	-19.4	33.4	26.10	VERTICAL
3699.399	40.10	-19.5	33.4	26.20	VERTICAL
3697.395	40.09	-19.5	33.4	26.19	VERTICAL

**Set.3 USB Mode**

Frequency(MHz)	Result(dBuV/m)	G <sub>PL</sub> (dB)	G <sub>A</sub> (dB/m)	P <sub>Mea</sub> (dBuV)	Polarity
3701.403	39.67	-19.4	33.4	25.67	VERTICAL
3699.399	39.62	-19.5	33.4	25.72	VERTICAL
3697.395	39.61	-19.5	33.4	25.71	VERTICAL
3703.407	39.59	-19.4	33.4	25.59	VERTICAL
3695.391	39.53	-19.5	33.4	25.63	VERTICAL
2995.992	39.51	-19.5	29.2	29.81	VERTICAL

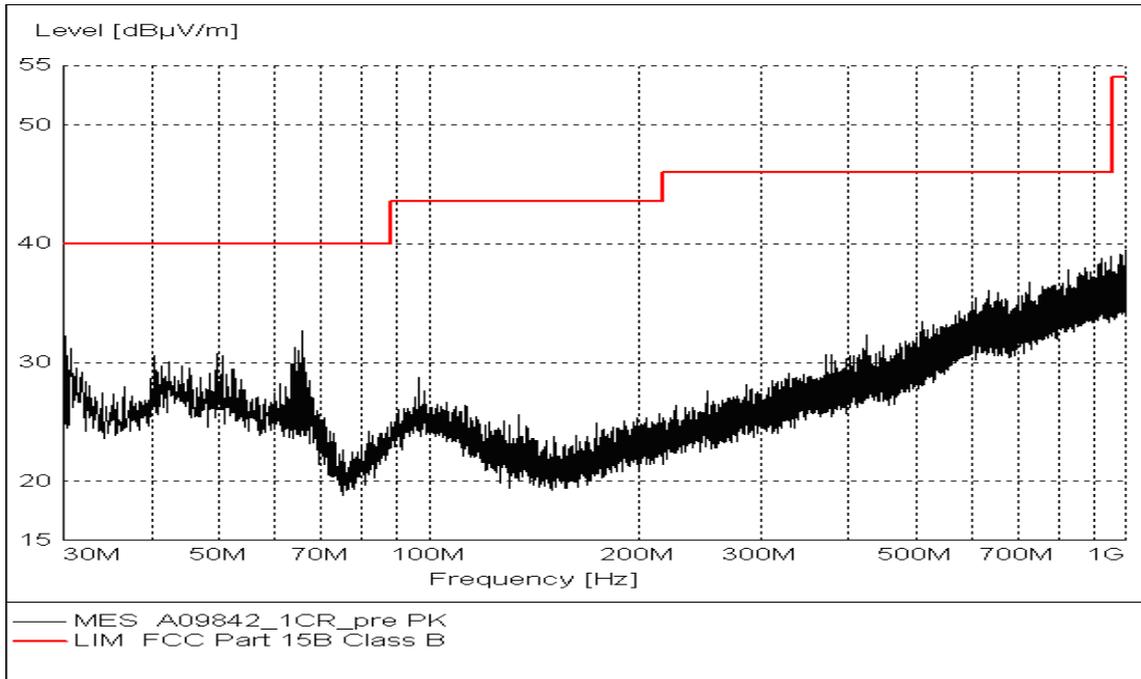


Figure A.1 Radiated Emission from 30MHz to 1GHz (Set.1, charging mode)

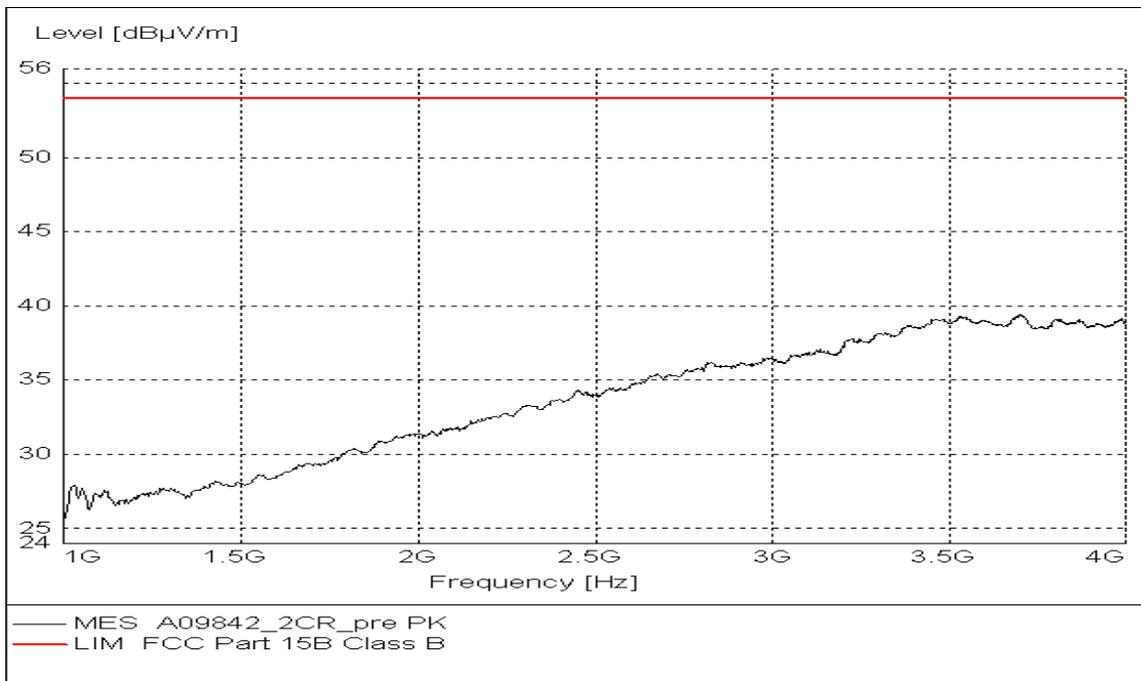


Figure A.2 Radiated Emission from 1GHz to 4GHz (Set.1, charging mode)

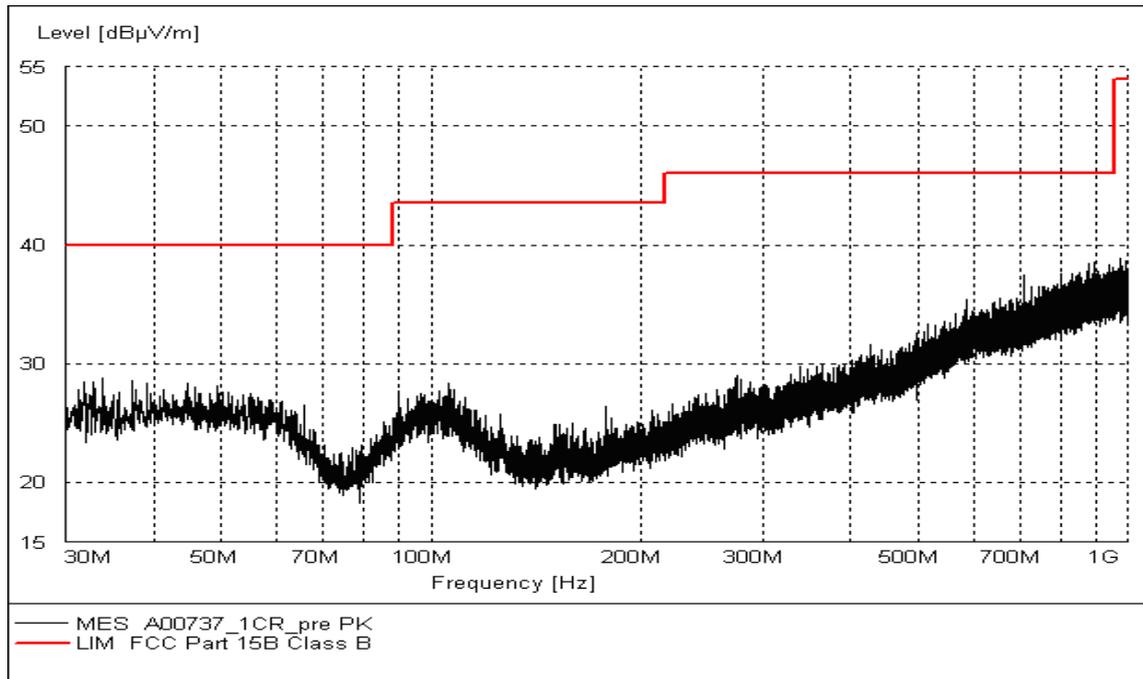


Figure A.3 Radiated Emission from 30MHz to 1GHz (Set.2, charging mode)

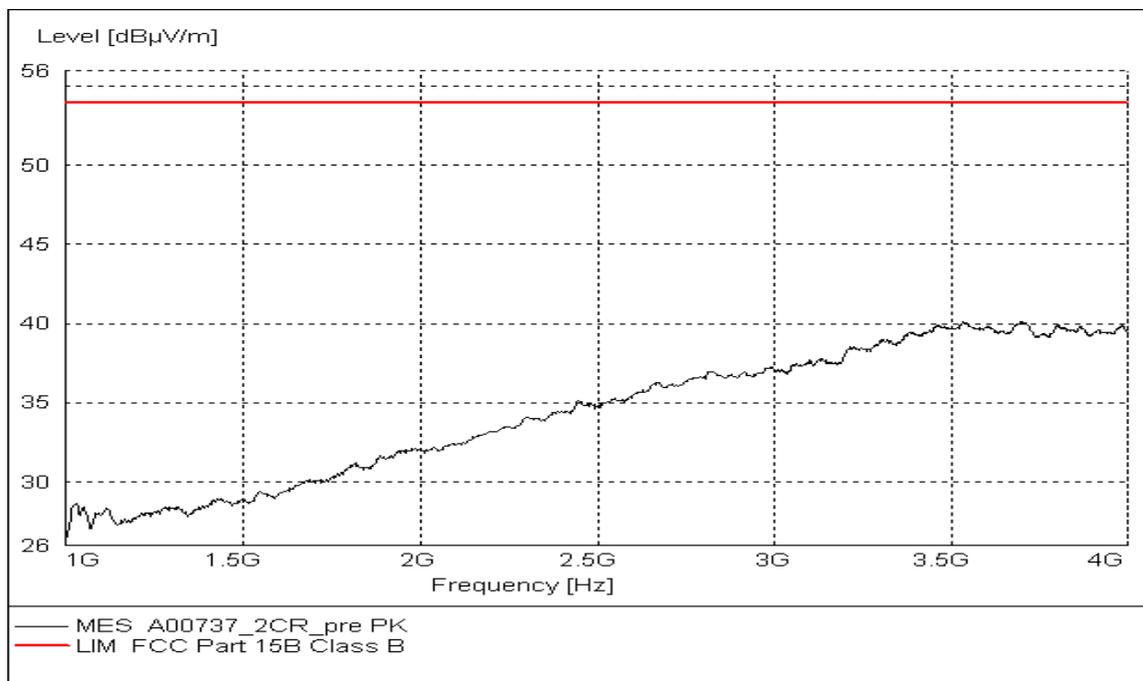


Figure A.4 Radiated Emission from 1GHz to 4GHz (Set.2, charging mode)

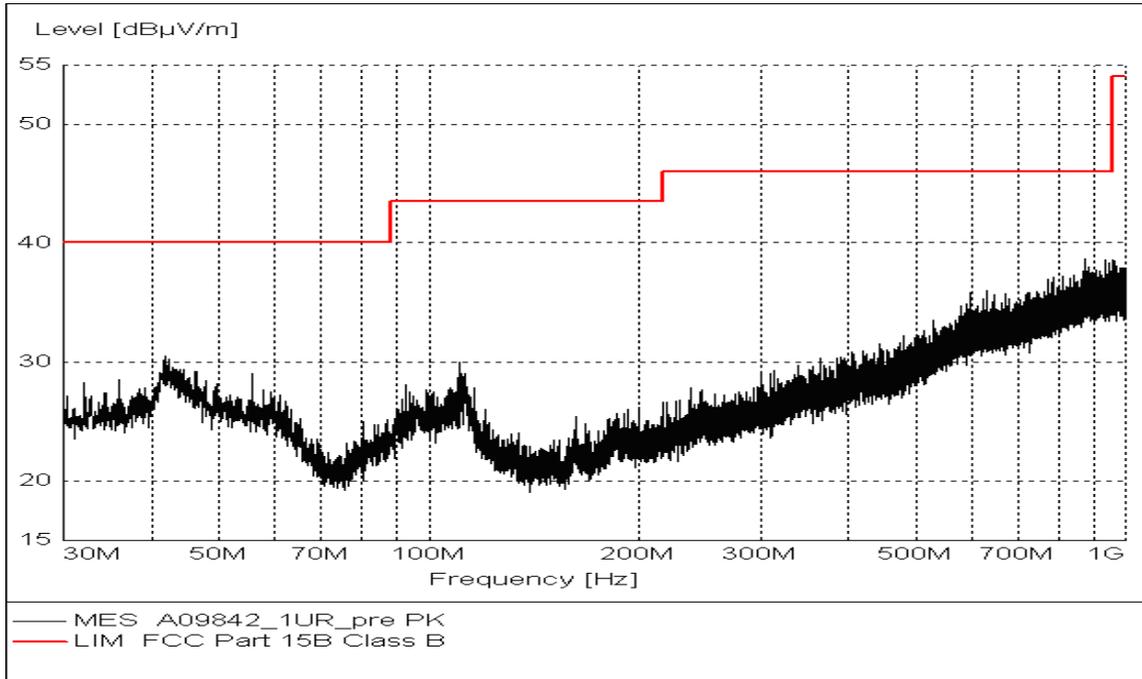


Figure A.5 Radiated Emission from 30MHz to 1GHz (Set.3, USB mode)

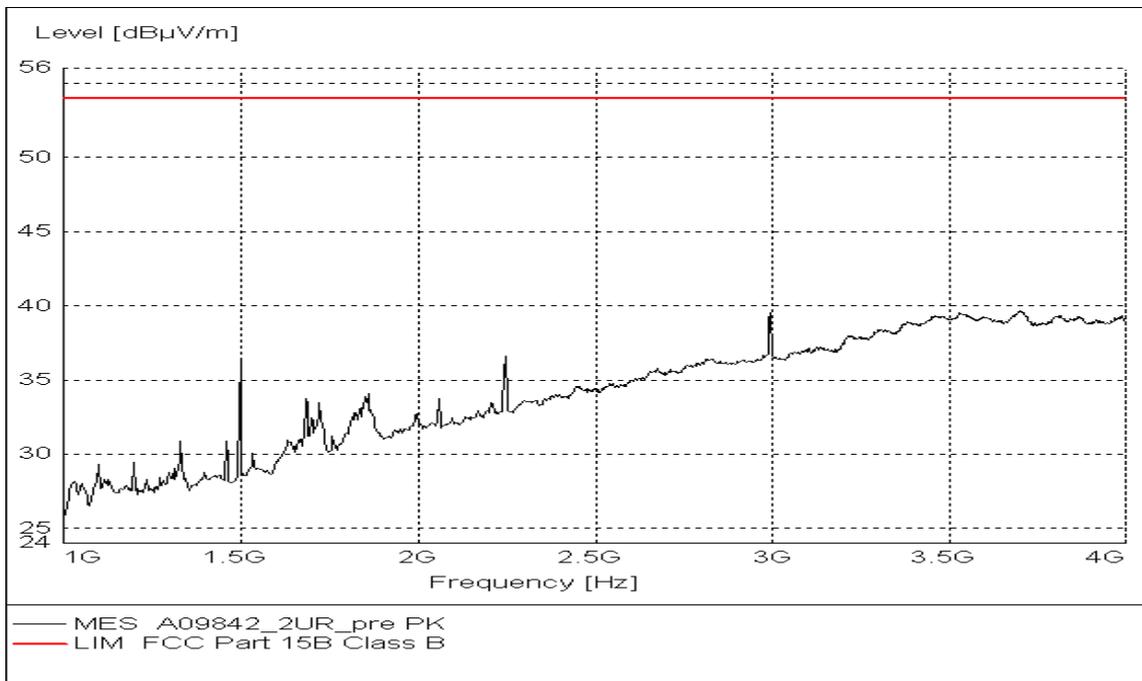


Figure A.6 Radiated Emission from 1GHz to 4GHz (Set.3, USB mode)

**A.2 Conducted Emission (§15.107(a))**

**A.2.1 Method of measurement**

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 7.2.

**A.2.2 EUT Operating Mode:**

The EUT is operating in the USB Mode and charging mode. During the test EUT is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to EUT, reading and erasing the data after copy action was finished.

**A.2.3 Measurement Limit**

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

**A.2.4 Test Condition in charging mode**

Voltage (V)	Frequency (Hz)
120	60

RBW	Sweep Time(s)
9kHz	1

### A.2.4 Measurement Results

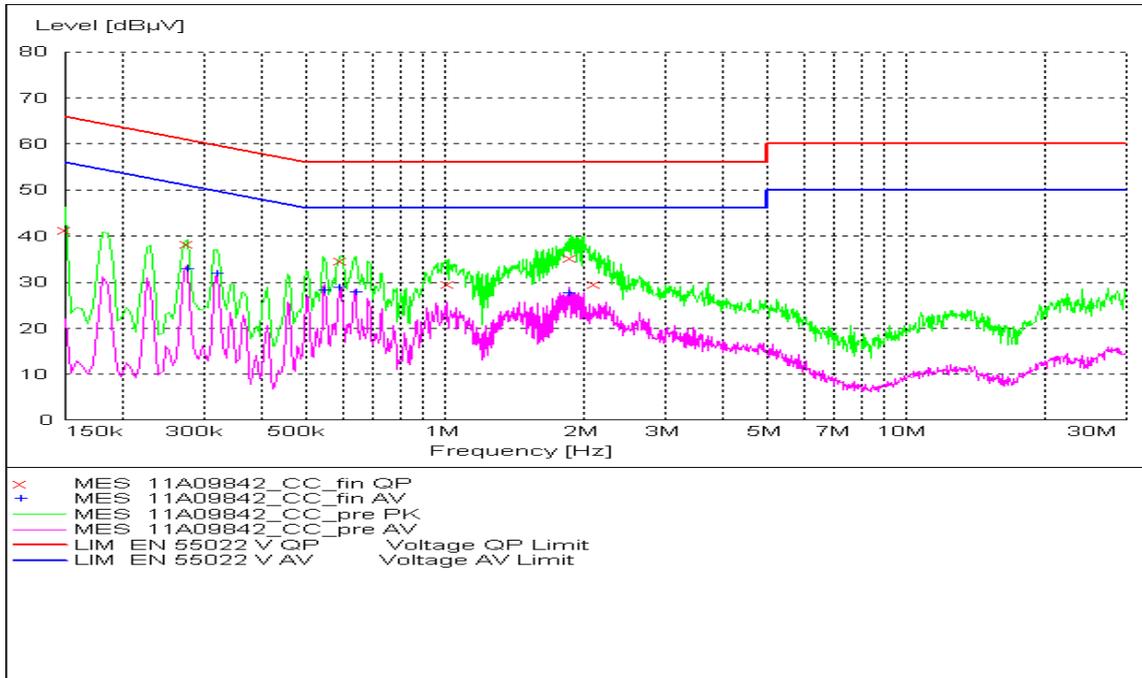


Figure A.7 Conducted Emission (Set.1, charging mode)

#### MEASUREMENT RESULT: "11A09842\_CC\_fin QP"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.150000	41.30	10.2	66	24.7	L1	GND
0.276000	38.30	10.2	61	22.7	N	GND
0.595500	34.70	10.2	56	21.3	N	GND
1.023000	29.70	10.2	56	26.3	N	GND
1.887000	35.20	10.2	56	20.8	N	GND
2.123356	29.60	10.2	56	26.4	L1	GND

#### MEASUREMENT RESULT: "11A09842\_CC\_fin AV"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.276000	32.90	10.2	51	18.1	N	GND
0.321000	31.90	10.2	50	17.8	N	GND
0.550500	28.30	10.2	46	17.7	N	GND
0.591000	28.90	10.2	46	17.1	N	GND
0.640500	27.80	10.2	46	18.2	N	GND
1.860000	27.50	10.2	46	18.5	N	GND

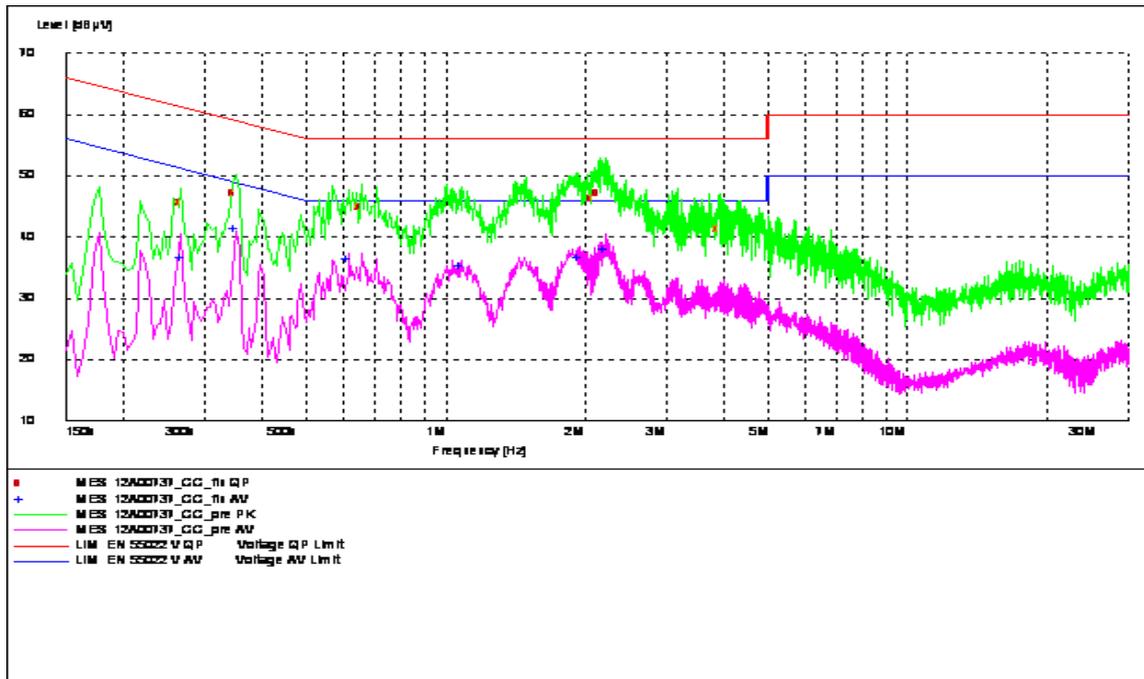


Figure A.8 Conducted Emission (Set.2, charging mode)

**MEASUREMENT RESULT: "12A00737\_CC\_fin QP"**

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.267000	45.50	10.1	61	15.7	L1	GND
0.352500	47.20	10.1	59	11.7	L1	GND
0.658500	44.80	10.1	56	11.2	L1	GND
2.094053	46.30	10.1	56	9.7	L1	GND
2.162077	47.20	10.1	56	8.8	L1	GND
3.921499	41.30	10.1	56	14.7	L1	GND

**MEASUREMENT RESULT: "12A00737\_CC\_fin AV"**

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.267000	36.60	10.1	51	14.6	N	GND
0.352500	41.30	10.1	49	7.6	L1	GND
0.618000	36.40	10.1	46	9.6	L1	GND
1.081500	35.30	10.1	46	10.7	L1	GND
1.954500	36.60	10.1	46	9.4	L1	GND
2.210121	37.90	10.1	46	8.1	L1	GND

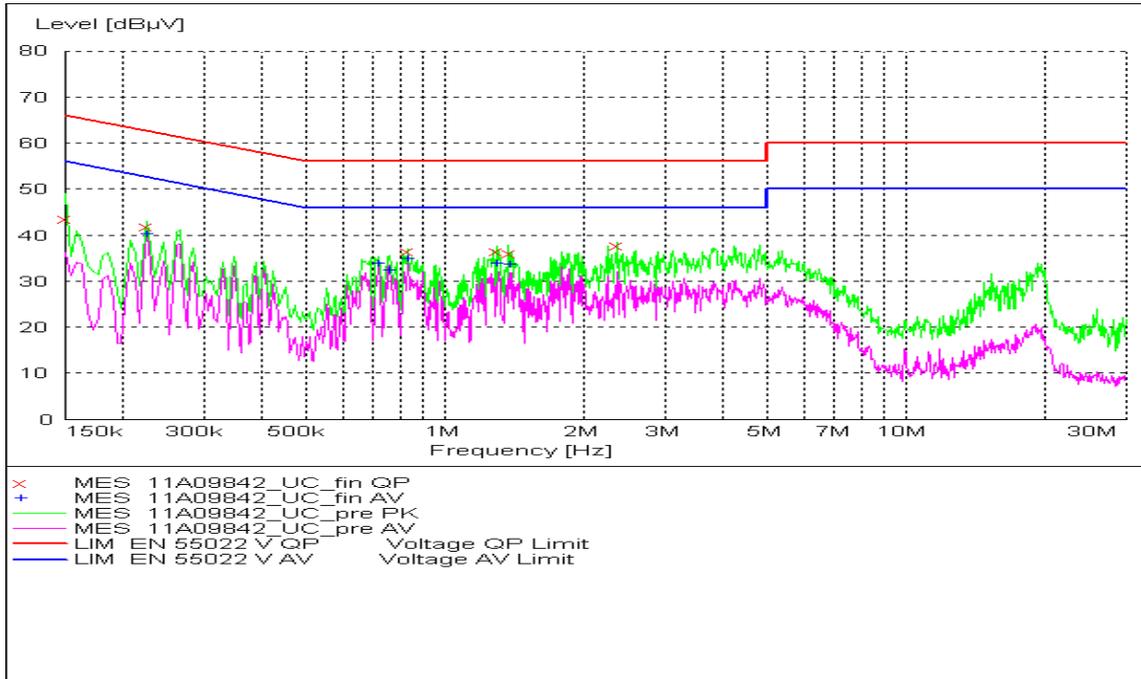


Figure A.9 Conducted Emission (Set.3, USB mode)

**MEASUREMENT RESULT: "11A09842\_UC\_fin QP"**

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.150000	43.70	10.2	66	22.3	L1	GND
0.226500	42.00	10.2	63	20.6	N	GND
0.829500	36.60	10.2	56	19.4	N	GND
1.302000	36.70	10.2	56	19.3	N	GND
1.378500	36.10	10.2	56	19.9	N	GND
2.357817	37.80	10.2	56	18.2	N	GND

**MEASUREMENT RESULT: "11A09842\_UC\_fin AV"**

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.226500	40.30	10.2	53	12.3	N	GND
0.717000	33.80	10.2	46	12.2	N	GND
0.757500	32.40	10.2	46	13.6	N	GND
0.829500	35.00	10.2	46	11.0	N	GND
1.302000	33.80	10.2	46	12.2	N	GND
1.378500	33.60	10.2	46	12.4	N	GND

\*\*\*END OF REPORT\*\*\*