



Report No.: RZA2009-1777



OET 65

TEST REPORT

Product Name	Digital TV HSPA USB Stick
Model	MF645
FCC ID	Q78-MF645
Client	ZTE CORPORATION

TA Technology (Shanghai) Co., Ltd.



GENERAL SUMMARY

Product Name	Digital TV HSPA USB Stick	Model	MF645
FCC ID	Q78-MF645		
Report No.	RZA2009-1777		
Client	ZTE CORPORATION		
Manufacturer	ZTE CORPORATION		
Reference Standard(s)	<p>ANSI/IEEE C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p>OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.</p> <p>IEC 62209-2:2008(106/162/CDV): Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR)for wireless communication devices used in close proximity to the human body .(frequency rang of 30MHz to 6GHz)</p> <p>KDB 447498 D02 -2009.11.13</p>		
Conclusion	<p>This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 7 of this test report are below limits specified in the relevant standards.</p> <p>General Judgment: Pass</p> <p style="text-align: right;">(Stamp) Date of issue: December 31st 2009</p>		
Comment	The test result only responds to the measured sample.		

Approved by 杨伟中
Yang Weizhong

Revised by 凌敏宝
Ling Minbao

Performed by 李进昌
Li Jinchang

TABLE OF CONTENT

1. General Information	5
1.1. Notes of the test report	5
1.2. Testing laboratory	5
1.3. Applicant Information	6
1.4. Manufacturer Information	6
1.5. Information of EUT	7
1.6. Test Date	8
2. Operational Conditions during Test	9
2.1. General description of test procedures	9
2.2. GSM Test Configuration	9
2.3. WCDMA Test Configuration	10
2.4. HSDPA Test Configuration	10
2.5. HSUPA Test Configuration	12
2.6. Position of module in Portable devices	14
2.7. Picture of host product	15
3. SAR Measurements System Configuration	17
3.1. SAR Measurement Set-up	17
3.2. Dasy4 E-field Probe System	18
3.2.1. EX3DV4 Probe Specification	18
3.2.2. E-field Probe Calibration	19
3.3. Other Test Equipment	19
3.3.1. Device Holder for Transmitters	19
3.3.2. Phantom	20
3.4. Scanning procedure	20
3.5. Data Storage and Evaluation	22
3.5.1. Data Storage	22
3.5.2. Data Evaluation by SEMCAD	22
3.6. System check	25
3.7. Equivalent Tissues	26
4. Laboratory Environment	26
5. Characteristics of the Test	27
5.1. Applicable Limit Regulations	27
5.2. Applicable Measurement Standards	27
6. Conducted Output Power Measurement	28
6.1. Summary	28
6.2. Conducted Power Results	28
7. Test Results	32
7.1. Dielectric Performance	32
7.2. System check	32
7.3. Summary of Measurement Results	33
7.3.1. GSM 850(GPRS/EGPRS)	33
7.3.2. GSM 1900(GPRS/EGPRS)	35
7.3.3. WCDMA Band II (WCDMA/HSDPA/HSUPA)	37

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2009-1777

Page 4 of 154

7.3.4. WCDMA Band V (WCDMA/HSDPA/HSUPA).....	39
7.4. Conclusion	40
8. Measurement Uncertainty	41
9. Main Test Instruments	42
ANNEX A: Test Layout	43
ANNEX B: System Check Results	45
ANNEX C: Graph Results	49
ANNEX D: Probe Calibration Certificate	121
ANNEX E: D835V2 Dipole Calibration Certificate	130
ANNEX F: D1900V2 Dipole Calibration Certificate	139
ANNEX G: DAE4 Calibration Certificate.....	147
ANNEX H: The EUT Appearances and Test Configuration.....	152

1. General Information

1.1. Notes of the test report

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

1.2. Testing laboratory

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Yang Weizhong
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: yangweizhong@ta-shanghai.com

1.3. Applicant Information

Company: ZTE CORPORATION
Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
City: Shenzhen
Postal Code: 518057
Country: P.R.China
Contact: Zhang Min
Telephone: 021-68897541
Fax: 021-50801070

1.4. Manufacturer Information

Company: ZTE CORPORATION
Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
City: Shenzhen
Postal Code: 518057
Country: P.R.China
Telephone: 021-68897541
Fax: 021-50801070

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2009-1777

Page 7 of 154

1.5. Information of EUT

General information

Device type :	portable device		
Exposure category:	uncontrolled environment / general population		
Name of EUT:	Digital TV HSPA USB Stick		
IMEI or SN:	324592950076		
Device operating configurations :			
Operating mode(s):	GSM850; (tested) GSM1900; (tested) WCDMA Band II; (tested) WCDMA Band V; (tested)		
Test modulation:	(GSM)GMSK, (WCDMA) QPSK		
GPRS multislot class :	10		
EGPRS multislot class:	12		
HSDPA UE category	8		
HSUPA UE category	5		
Operating frequency range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824.2 ~ 848.8	869.2 ~ 893.8
	GSM1900	1850.2 ~ 1909.8	1930.2 ~ 1989.8
	WCDMA Band II	1852.4 ~ 1907.6	1932.4 ~ 1987.6.
	WCDMA Band V	826.4 ~ 846.6	871.4 ~ 891.6
Power class	GSM 850: 4, tested with power level 5		
	GSM 1900: 1, tested with power level 0		
	WCDMA Band II: 3, tested with maximum output power		
	WCDMA Band V: 3, tested with maximum output power		
Test channel (Low –Middle –High)	128 -190 - 251	(GSM850) (tested)	
	512 - 661 - 810	(GSM1900) (tested)	
	9262 - 9400 - 9538	(WCDMA Band II) (tested)	
	4132 - 4183 - 4233	(WCDMA Band V) (tested)	
Hardware version:	P675B1		
Software version:	BD_VIVOP675B1V1.0.0B02		
Antenna type:	Internal antenna		
Used host products:	IBM R60e		
	BenQ Joybook R55V		

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2009-1777

Page 8 of 154

Equipment Under Test (EUT) is a Digital TV HSPA USB Stick with internal antenna. During SAR test of the EUT, it was connected to a portable computer. SAR is tested for the EUT respectively for GSM 850, GSM1900, WCDMA Band II and WCDMA Band V. The EUT have GPRS (class 10), EGPRS (class 12), and WCDMA/HSDPA/HSUPA functions.

Since the EUT only has the data transfer function, but does not have the voice transfer function, the tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS and EGPRS, the tests in the band of WCDMA Band II and WCDMA Band V are performed in the mode of WCDMA/HSDPA/HSUPA, The measurements were performed in combination with two different host products (IBM R60e, BenQ Joybook R55V). IBM R60e laptop has horizontal USB slot, BenQ Joybook R55V laptop has vertical USB slot.

The sample undergoing test was selected by the Client.

Components list please refer to documents of the manufacturer.

1.6. Test Date

The test is performed from December 25, 2009 to December 26, 2009.

2. Operational Conditions during Test

2.1. General description of test procedures

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

Since the EUT only has the data transfer function, but does not have the voice transfer function, the tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS and EGPRS, The tests in the band of WCDMA Band II and WCDMA Band V are performed in the mode of WCDMA/HSDPA/HSUPA. The measurements were performed in combination with two different host products (IBM R60e, BenQ Joybook R55V). IBM R60e laptop has horizontal USB slot, BenQ Joybook R55V laptop has vertical USB slot.

2.2. GSM Test Configuration

For the body SAR tests for GSM 850, GSM 1900, a communication link is set up with a System Simulator (SS) by air link. The EUT is commanded to operate at maximum transmitting power. Since the EUT only has the data transfer function, but does not have the speech transfer function. The tests in the band of GSM 850, GSM 1900 are only performed in the mode of GPRS and EGPRS. The GPRS class is 10 for this EUT; it has at most 2 timeslots in uplink. The EGPRS class is 12 for this EUT; it has at most 4 timeslots in uplink.

Table 1: The allowed power reduction in the multi-slot configuration

Number of timeslots in uplink assignment	Permissible nominal reduction of maximum output power,(dB)
1	0
2	0 to 3,0
3	1,8 to 4,8
4	3,0 to 6,0

2.3. WCDMA Test Configuration

As the SAR body tests for WCDMA Band II and WCDMA Band V, we established the radio link through call processing. The maximum output power were verified on high, middle and low channels for each test band according to 3GPP TS 34.121 with the following configuration:

- 1) 12.2kbps RMC, 64,144,384 kbps RMC with TPC set to all "all '1's"
- 2) Test loop Mode 1

For the output power, the configurations for the DPCCH and DPDCH₁ are as followed (EUT do not support the DPDCH_{2-n})

Table 2: The configurations for the DPCCH and DPDCH₁

	Channel Bit Rate(kbps)	Channel Symbol Rate(kbps)	Spreading Factor	Spreading Code Number	Bits/Slot
DPCCH	15	15	256	0	10
DPDCH ₁	15	15	256	64	10
	30	30	128	32	20
	60	60	64	16	40
	120	120	32	8	80
	240	240	16	4	160
	480	480	8	2	320
	960	960	4	1	640

SAR is tested with 12.2kps RMC and not required for other spreading codes (64,144, and 384 kbps RMC) and multiple DPDCH_n, because the maximum output power for each of these other configurations < 0.25dB higher than 12.2kbps RMC and the multiple DPDCH_n is not applicable for the EUT.

2.4. HSDPA Test Configuration

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. In addition, body SAR is also measured for HSDPA when the maximum average output of each RF channel with HSDPA active is at least 1/4 dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to the UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be

TA Technology (Shanghai) Co., Ltd.

Test Report

configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors(β_c, β_d), and HS-DPCCH power offset parameters($\Delta_{ACK}, \Delta_{NACK}, \Delta_{CQI}$) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Table 3: Subtests for UMTS Release 5 HSDPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
 Note2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 8$ ($A_{hs} = 30/15$) with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 7$ ($A_{hs} = 24/15$) with $\beta_{hs} = 24/15 * \beta_c$.
 Note3: CM=1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
 Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Table 4: Settings of required H-Set 1 QPSK in HSDPA mode

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	534
Inter-TTI Distance	TTI's	3
Number of HARQ Processes	Processes	2
Information Bit Payload (N_{INF})	Bits	3202
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	4800
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	9600
Coding Rate	/	0.67
Number of Physical Channel Codes	Codes	5
Modulation	/	QPSK

Table 5: HSDPA UE category

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum Transport Bits/HS-DSCH	Total Channel
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

2.5. HSUPA Test Configuration

Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least ¼ dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA.⁴⁰

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests.⁴¹ The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA should be configured according to the β values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Devices' sections of 3 G device.

TA Technology (Shanghai) Co., Ltd. Test Report

Table 6: Sub-Test 5 Setup for Release 6 HSUPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Table 7: HSUPA UE category

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI (ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	11484	5.76
	4	4	10		20000	2.00
7 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4.

UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM. (TS25.306-7.3.0)

2.6. Position of module in Portable devices

The measurements were performed in combination with two host products (IBM R60e, BenQ Joybook R55V). IBM R60e laptop has horizontal USB slot, BenQ Joybook R55V laptop has vertical USB slot.

A test distance of 5mm or less, according to KDB 447498 D02 -2009.11.13, should be considered for the orientation that can satisfy such requirements.

For each channel, the EUT is tested at the following 4 test positions:

- Test Position 1: The EUT is connected to the portable computer with horizontal USB slot. The back side of the portable computer is directed tightly to touch the bottom of the flat phantom, and the back side of the EUT towards the bottom of the flat phantom. (ANNEX H Picture 6)
- Test Position 2: The EUT is connected to the portable computer through a 19 cm USB cable. The front side of the EUT towards the bottom of the flat phantom. (ANNEX H Picture 7)
- Test Position 3: The EUT is connected to the portable computer through a 19 cm USB cable. The left side of the EUT towards the bottom of the flat phantom. (ANNEX H Picture 8)
- Test Position 4: The EUT is connected to the portable computer with vertical USB slot. The back side of the portable computer is directed tightly to touch the bottom of the flat phantom, and the right side of the EUT towards the bottom of the flat phantom. (ANNEX H Picture 9)

2.7. Picture of host product

During the test, IBM R60e and BenQ Joybook R55V laptops were used as an assistant to help to setup communication. (See Picture 1)



Picture 1-a: IBM R60e Close



Picture 1-b: IBM R60e Open



Picture 1-c: BenQ Joybook R55V(118) Close



Picture 1-d: BenQ Joybook R55V(118) Open



Picture 1-e: IBM R60e with horizontal USB slot



Picture 1-f: BenQ Joybook R55V(118) with Vertical USB slot

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2009-1777

Page 16 of 154



Picture 1-g: a 19 cm USB cable

Picture 1: Computer as a test assistant

3. SAR Measurements System Configuration

3.1. SAR Measurement Set-up

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY4 measurement server.
- The DASY4 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY4 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

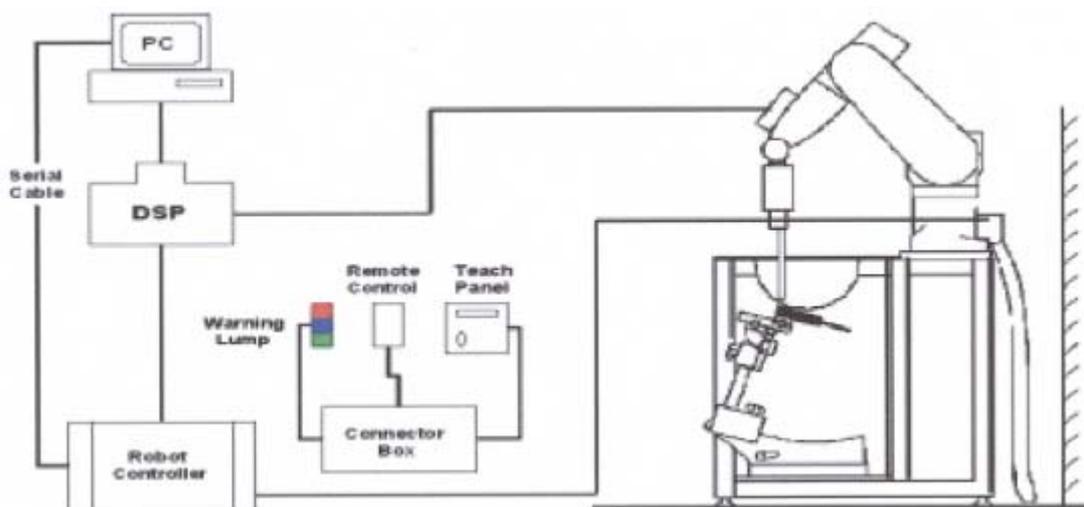


Figure 1. SAR Lab Test Measurement Set-up

3.2. Dasy4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

3.2.1. EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 900 and HSL 1750 Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



Figure 2. EX3DV4 E-field Probe



Figure 3. EX3DV4 E-field probe

3.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),
C = Heat capacity of tissue (brain or muscle),
 ΔT = Temperature increase due to RF exposure.
Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:
 σ = Simulated tissue conductivity,
 ρ = Tissue density (kg/m³).

3.3. Other Test Equipment

3.3.1. Device Holder for Transmitters

Construction: Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.) It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.

Material: POM, Acrylic glass, Foam

3.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



Figure 4. Generic Twin Phantom

3.4. Scanning procedure

The DASY4 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. ± 5 %.
- The "surface check" measurement tests the optical surface detection system of the DASY4 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within ± 30°.)

- Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 10 mm x 10 mm is set. During the scan the distance of the probe to the phantom remains

unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- **Zoom Scan**

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY4 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space.

They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

3.5. Data Storage and Evaluation

3.5.1. Data Storage

The DASY4 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	Dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	
	- Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

TA Technology (Shanghai) Co., Ltd.
Test Report

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With V_i = compensated signal of channel i (i = x, y, z)

$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \rho) / (\cdot 1000)$$

with SAR = local specific absorption rate in mW/g

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2009-1777

Page 24 of 154

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

3.6. System check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the table 12.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the DASY 4 system.

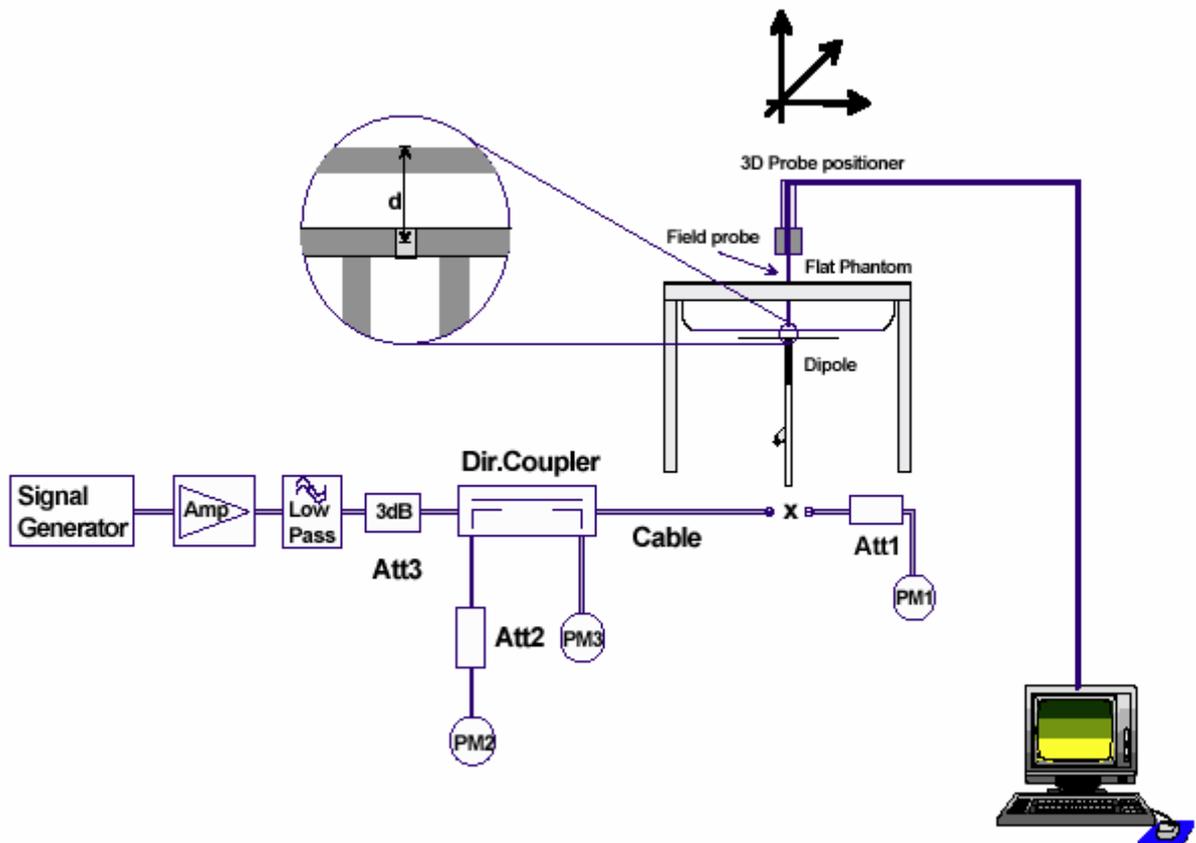


Figure 5. System Check Set-up

3.7. Equivalent Tissues

The liquid is consisted of water, sugar, salt, Glycol monobutyl, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 8 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by OET 65.

Table 8: Composition of the Body Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Body)835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$

MIXTURE%	FREQUENCY (Body) 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

4. Laboratory Environment

Table 9: The Ambient Conditions during Test

Temperature	Min. = 20°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

5. Characteristics of the Test

5.1. Applicable Limit Regulations

ANSI/IEEE C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

5.2. Applicable Measurement Standards

OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.

IEC 62209-2:2008(106/162/CDV): Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body .(frequency rang of 30MHz to 6GHz).

KDB 447498 D02 -2009.11.13

6. Conducted Output Power Measurement

6.1. Summary

The DUT is tested using an E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power. Conducted output power was measured using an integrated RF connector and attached RF cable. This result contains conducted output power for the EUT.

6.2. Conducted Power Results

Table 10: Conducted Power Measurement Results

GSM850 + GPRS		Conducted Power(dBm)						
		Channel 128	Channel 190	Channel 251		Channel 128	Channel 190	Channel 251
1TXslot	Before	32.07	32.14	32.06	-9.03dB	23.04	23.11	23.03
	After	32.08	32.13	32.07	-9.03dB	23.05	23.10	23.04
2TXslots	Before	29.91	29.98	29.95	-6.02dB	23.89	23.96	23.93
	After	29.89	29.96	29.93	-6.02dB	23.87	23.94	23.91
GSM850 + EGPRS		Conducted Power(dBm)						
		Channel 128	Channel 190	Channel 251		Channel 128	Channel 190	Channel 251
1TXslot	Before	31.97	32.04	31.96	-9.03dB	22.94	23.01	22.93
	After	31.98	32.03	31.97	-9.03dB	22.95	23.00	22.94
2TXslots	Before	29.84	29.91	29.85	-6.02dB	23.82	23.89	23.83
	After	29.85	29.92	29.86	-6.02dB	23.83	23.90	23.84
3TXslots	Before	27.46	27.53	27.44	-4.26dB	23.20	23.27	23.18
	After	27.47	27.55	27.45	-4.26dB	23.21	23.29	23.19
4TXslots	Before	25.68	25.77	25.72	-3.01dB	22.67	22.76	22.71
	After	25.66	25.76	25.73	-3.01dB	22.65	22.75	22.72
GSM1900 + GPRS		Conducted Power(dBm)						
		Channel 512	Channel 661	Channel 810		Channel 512	Channel 661	Channel 810
1TXslot	Before	29.03	29.05	29.22	-9.03dB	20.00	20.02	20.19
	After	29.02	29.06	29.24	-9.03dB	19.99	20.03	20.21
2TXslots	Before	26.42	26.43	26.59	-6.02dB	20.40	20.41	20.57
	After	26.40	26.41	26.58	-6.02dB	20.38	20.39	20.56

TA Technology (Shanghai) Co., Ltd. Test Report

GSM1900 + EGPRS		Conducted Power(dBm)						
		Channel 512	Channel 661	Channel 810		Channel 512	Channel 661	Channel 810
1TXslot	Before	28.91	28.93	29.11	-9.03dB	19.88	19.90	20.08
	After	28.92	28.94	29.10	-9.03dB	19.89	19.91	20.07
2TXslots	Before	26.33	26.36	26.51	-6.02dB	20.31	20.34	20.49
	After	26.31	26.35	26.50	-6.02dB	20.29	20.33	20.48
3TXslots	Before	24.53	24.59	24.75	-4.26dB	20.27	20.33	20.49
	After	24.52	24.57	24.73	-4.26dB	20.26	20.31	20.47
4TXslots	Before	23.30	23.28	23.44	-3.01dB	20.29	20.27	20.43
	After	23.31	23.27	23.42	-3.01dB	20.30	20.26	20.41

Note:

1) Division Factors

To average the power, the division factor is as follows:

1 TX- slot = 1 transmit tome slot out of 8 time slots

=> conducted power divided by (8/1) => -9.03 dB

2 TX- slot = 2 transmit tome slots out of 8 time slots

=> conducted power divided by (8/2) => -6.02 dB

3TX- slot = 3 transmit tome slots out of 8 time slots

=> conducted power divided by (8/3) => -4.26 dB

4 TX- slot = 4 transmit tome slots out of 8 time slots

=> conducted power divided by (8/4) => -3.01 dB

2) Average power numbers

The maximum power numbers are marks in bold.

3) For SAR testing the EUT was set to multislot class based on the maximum averaged conducted power.

WCDMA Band II(dBm)		Conducted Power		
		Channel 9262	Channel 9400	Channel 9538
12.2kbps RMC	Before	21.67	21.75	21.51
	After	21.65	21.75	21.50
64kbps RMC	Before	21.64	21.74	21.50
	After	21.63	21.75	21.49
144kbps RMC	Before	21.61	21.72	21.49
	After	21.62	21.71	21.50
384kbps RMC	Before	21.59	21.71	21.47
	After	21.61	21.69	21.48
WCDMA Band II+HSDPA(dBm)		Conducted Power		
		Channel 9262	Channel 9400	Channel 9538

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2009-1777

Page 30 of 154

Sub - Test 1	Before	21.52	21.66	21.48
	After	21.51	21.65	21.46
Sub - Test 2	Before	21.51	21.53	21.43
	After	21.50	21.52	21.41
Sub - Test 3	Before	21.12	21.13	21.07
	After	21.13	21.14	21.06
Sub - Test 4	Before	21.11	21.11	21.05
	After	21.10	21.12	21.03
WCDMA Band II+HSUPA(dBm)		Conducted Power		
		Channel 9262		Channel 9262
Sub - Test 1	Before	20.55	20.66	21.18
	After	20.54	20.67	21.19
Sub - Test 2	Before	19.21	19.35	19.23
	After	19.23	19.34	19.22
Sub - Test 3	Before	20.13	20.25	20.23
	After	20.14	20.26	20.25
Sub - Test 4	Before	19.81	19.81	19.79
	After	19.83	19.82	29.78
Sub - Test 5	Before	20.30	20.45	20.87
	After	20.31	20.44	20.86
WCDMA Band V(dBm)		Conducted Power		
		Channel 4132	Channel 4183	Channel 4233
12.2kbps RMC	Before	22.05	22.30	21.90
	After	20.06	22.31	21.10
64kbps RMC	Before	22.04	22.29	21.89
	After	22.03	22.30	21.88
144kbps RMC	Before	22.03	22.27	21.87
	After	22.04	22.26	21.85
384kbps RMC	Before	22.01	22.24	21.86
	After	22.02	22.23	21.84
WCDMA Band V+HSDPA(dBm)		Conducted Power		
		Channel 4132	Channel 4183	Channel 4233
Sub - Test 1	Before	21.82	22.16	21.80
	After	21.81	22.15	21.79
Sub -	Before	21.78	22.03	21.65

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2009-1777

Page 31 of 154

Test 2	After	21.79	22.04	21.63
Sub - Test 3	Before	21.31	21.51	21.24
	After	21.30	21.52	21.23
Sub - Test 4	Before	21.27	21.46	21.17
	After	21.28	21.45	21.15
WCDMA Band V+HSUPA(dBm)		Conducted Power		
		Channel 4132	Channel 4183	Channel 4233
Sub - Test 1	Before	20.68	20.73	20.55
	After	20.67	20.75	20.53
Sub - Test 2	Before	19.14	19.33	18.96
	After	19.15	19.34	18.97
Sub - Test 3	Before	19.96	19.98	19.74
	After	19.94	19.97	19.75
Sub - Test 4	Before	19.44	19.55	19.31
	After	19.45	19.56	19.32
Sub - Test 5	Before	20.36	20.41	20.33
	After	20.35	20.42	20.31

7. Test Results

7.1. Dielectric Performance

Table 11: Dielectric Performance of Body Tissue Simulating Liquid

Frequency	Description	Dielectric Parameters		Temp °C
		ϵ_r	σ (s/m)	
835MHz (body)	Target value ±5% window	55.20 52.44 — 57.96	0.97 0.92 — 1.02	/
	Measurement value 2009-12-25	53.56	0.99	21.5
1900MHz (body)	Target value ±5% window	53.30 50.64 — 55.97	1.52 1.44 — 1.60	/
	Measurement value 2009-12-26	52.58	1.53	21.7

7.2. System check

Table 12: System check

Frequency	Description	SAR(W/kg)		Dielectric Parameters		Temp °C
		10g	1g	ϵ_r	σ (s/m)	
835MHz	Recommended result ±10% window	1.67 1.50 - 1.84	2.54 2.29 - 2.79	53.5	1.00	/
	Measurement value 2009-12-25	1.57	2.38	53.56	0.99	21.9
1900 MHz	Recommended result ±10% window	5.52 4.97—6.07	10.50 9.45 — 11.55	54	1.55	/
	Measurement value 2009-12-26	5.12	10.01	52.58	1.53	21.7

Note: 1. The graph results see ANNEX B.

2. Target Values used derive from the calibration certificate and 250 mW is used as feeding power to the Calibrated dipole.

7.3. Summary of Measurement Results

7.3.1. GSM 850(GPRS/EGPRS)

Table 13: SAR Values [GSM850 (GPRS/EGPRS)]

Limit of SAR (W/kg)			10 g Average	1g Average	Power Drift(dB)	Graph Results
			2.0	1.6	± 0.21	
Test Case Of Body			Measurement Result (W/kg)		Power Drift(dB)	
Different Test Position	Different Timeslots	Channel	10 g Average	1 g Average		
IBM R60e						
Test Position 1	2 timeslots	Middle	0.255(max.cube)	0.414(max.cube)	0.042	Figure 10
Test Position 2	2 timeslots	High	0.427	0.711	0.055	Figure 12
		Middle	0.311(max.cube)	0.496(max.cube)	0.108	Figure 14
		Low	0.493	0.789	-0.175	Figure 16
BenQ Joybook R55V						
Test Position 3	2 timeslots	Middle	0.180(max.cube)	0.303(max.cube)	0.007	Figure 18
Test Position 4	2 timeslots	Middle	0.279(max.cube)	0.484(max.cube)	0.146	Figure 20
Worst case position of GPRS with EGPRS						
Test Position 2	2 timeslots	Low	0.494	0.784	0.046	Figure 22

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

TA Technology (Shanghai) Co., Ltd.
Test Report

Table 14: SAR Values (GSM850, enhanced energy coupling at increased separation distances)

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 2	initial position	Low	0.915	0.458	1.144
	5mm		0.344		

- Note: 1. The probe tip location is fixed at the distance of 2mm from the phantom surface.
 2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
 3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

TA Technology (Shanghai) Co., Ltd. Test Report

7.3.2. GSM 1900(GPRS/EGPRS)

Table 15: SAR Values [GSM1900 (GPRS/EGPRS)]

Limit of SAR (W/kg)			10 g Average	1g Average	Power Drift(dB)	Graph Results
			2.0	1.6	± 0.21	
Test Case Of Body			Measurement Result (W/kg)		Power Drift(dB)	
Different Test Position	Different Timeslots	Channel	10 g Average	1 g Average		
IBM R60e						
Test Position 1	2 timeslots	Middle	0.371	0.654	0.105	Figure 24
Test Position 2	2 timeslots	Middle	0.352	0.594	0.161	Figure 26
BenQ Joybook R55V						
Test Position 3	2 timeslots	Middle	0.236	0.509	0.155	Figure 28
Test Position 4	2 timeslots	High	0.515	0.978	-0.169	Figure 30
		Middle	0.391	0.724	-0.176	Figure 32
		Low	0.375	0.702	-0.171	Figure 34
Worst case position of GPRS with EGPRS						
Test Position 4	2 timeslots	High	0.523	1.010	0.059	Figure 36

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.

3. Upper and lower frequencies were measured at the worst case.

TA Technology (Shanghai) Co., Ltd.
Test Report

Table 16: SAR Values (GSM1900, enhanced energy coupling at increased separation distances)

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 4	initial position	High	1.317	0.659	1.646
	5mm		0.526		

- Note: 1. The probe tip location is fixed at the distance of 2mm from the phantom surface.
2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

TA Technology (Shanghai) Co., Ltd.
Test Report

7.3.3. WCDMA Band II (WCDMA/HSDPA/HSUPA)

Table 17: SAR Values [WCDMA Band II (WCDMA/HSDPA/HSUPA)]

Limit of SAR (W/kg)		10 g Average	1g Average	Power Drift(dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Body		Measurement Result (W/kg)		Power Drift(dB)	
Different Test Position	Channel	10 g Average	1 g Average	Power Drift(dB)	
IBM R60e					
Test Position 1	High	0.455	0.808	0.030	Figure 38
	Middle	0.515	0.916	0.066	Figure 40
	Low	0.568	1.010	0.138	Figure 42
Test Position 2	High	0.384(max.cube)	0.706(max.cube)	0.126	Figure 44
	Middle	0.502	0.814	-0.123	Figure 46
	Low	0.505(max.cube)	0.847(max.cube)	0.010	Figure 48
BenQ Joybook R55V					
Test Position 3	High	0.377	0.846	0.019	Figure 50
	Middle	0.428(max.cube)	0.938(max.cube)	0.111	Figure 52
	Low	0.451	0.950	-0.023	Figure 54
Test Position 4	High	0.504	0.943	0.075	Figure 56
	Middle	0.545	1.020	-0.149	Figure 58
	Low	0.597	1.130	0.019	Figure 60
Worst case position of RMC with HSDPA					
Test Position 4	Low	0.694	1.120	0.149	Figure 62
Worst case position of RMC with HSUPA					
Test Position 4	Low	0.683	1.090	-0.164	Figure 64

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

TA Technology (Shanghai) Co., Ltd.
Test Report

Table 18: SAR Values (WCDMA Band II, enhanced energy coupling at increased separation distances)

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 4	initial position	Low	1.237	0.619	1.546
	5mm		0.960		
	10mm		0.492		

- Note: 1. The probe tip location is fixed at the distance of 2mm from the phantom surface.
 2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
 3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

TA Technology (Shanghai) Co., Ltd.
Test Report

7.3.4. WCDMA Band V (WCDMA/HSDPA/HSUPA)

Table 19: SAR Values [WCDMA Band V (WCDMA/HSDPA/HSUPA)]

Limit of SAR (W/kg)		10 g Average	1g Average	Power Drift(dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Body		Measurement Result (W/kg)		Power Drift(dB)	
Different Test Position	Channel	10 g Average	1 g Average	Power Drift(dB)	
IBM R60e					
Test Position 1	Middle	0.205(max.cube)	0.331(max.cube)	0.004	Figure 66
Test Position 2	Middle	0.207(max.cube)	0.328(max.cube)	-0.156	Figure 68
BenQ Joybook R55V					
Test Position 3	Middle	0.219	0.372	-0.185	Figure 70
Test Position 4	High	0.242(max.cube)	0.351(max.cube)	-0.139	Figure 72
	Middle	0.281(max.cube)	0.438(max.cube)	0.141	Figure 74
	Low	0.295(max.cube)	0.384(max.cube)	-0.183	Figure 76
Worst case position of RMC with HSDPA					
Test Position 4	Middle	0.246(max.cube)	0.355(max.cube)	-0.116	Figure 78
Worst case position of RMC with HSUPA					
Test Position 4	Middle	0.268(max.cube)	0.376(max.cube)	-0.139	Figure 80

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

TA Technology (Shanghai) Co., Ltd.
Test Report

Table 20: SAR Values (WCDMA Band V, enhanced energy coupling at increased separation distances)

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 4	initial position	Middle	0.446	0.223	0.558
	5mm		0.278		
	10mm		0.116		

- Note: 1. The probe tip location is fixed at the distance of 2mm from the phantom surface.
 2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
 3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

7.4. Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR_{1g} is 1.130 W/kg that is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2009-1777

Page 41 of 154

8. Measurement Uncertainty

No.	source	Type	Uncertainty Value (%)	Probability Distribution	k	c _i	Standard uncertainty u _i (%)	Degree of freedom V _{eff} or v _i
1	System repetivity	A	0.5	N	1	1	0.5	9
Measurement system								
2	probe calibration	B	5.9	N	1	1	5.9	∞
3	axial isotropy of the probe	B	4.7	R	$\sqrt{3}$	$\sqrt{0.5}$	1.9	∞
4	Hemispherical isotropy of the probe	B	9.4	R	$\sqrt{3}$	$\sqrt{0.5}$	3.9	∞
6	boundary effect	B	1.9	R	$\sqrt{3}$	1	1.1	∞
7	probe linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞
8	System detection limits	B	1.0	R	$\sqrt{3}$	1	0.6	∞
9	readout Electronics	B	1.0	N	1	1	1.0	∞
10	response time	B	0	R	$\sqrt{3}$	1	0	∞
11	integration time	B	4.32	R	$\sqrt{3}$	1	2.5	∞
12	noise	B	0	R	$\sqrt{3}$	1	0	∞
13	RF Ambient Conditions	B	3	R	$\sqrt{3}$	1	1.73	∞
14	Probe Positioner Mechanical Tolerance	B	0.4	R	$\sqrt{3}$	1	0.2	∞
15	Probe Positioning with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	∞
16	Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	∞
Test sample Related								
17	-Test Sample Positioning	A	2.9	N	1	1	2.9	5
18	-Device Holder Uncertainty	A	4.1	N	1	1	4.1	5
19	-Output Power Variation - SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.9	∞
Physical parameter								

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2009-1777

Page 42 of 154

20	-phantom	B	4.0	R	$\sqrt{3}$	1	2.3	∞
21	-liquid conductivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.64	1.8	∞
22	-liquid conductivity (measurement uncertainty)	B	5.0	N	1	0.64	3.2	∞
23	-liquid permittivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
24	-liquid permittivity (measurement uncertainty)	B	5.0	N	1	0.6	3.0	∞
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					12.0	
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		N	k=2	24.0		

9. Main Test Instruments

Table 21: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 13, 2009	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 14, 2009	One year
04	Power sensor	Agilent 8481H	MY41091316	March 14, 2009	One year
05	Signal Generator	HP 8341B	2730A00804	September 13, 2009	One year
06	Amplifier	IXA-020	0401	No Calibration Requested	
07	Validation Kit 835MHz	D835V2	4d031	January 22, 2009	One year
08	Validation Kit 1900MHz	D1900V2	5d018	June 26, 2009	One year
09	BTS	E5515C	MY48360988	December 15, 2009	One year
10	E-field Probe	EX3DV4	3677	September 23, 2009	One year
11	DAE	DAE4	905	June 24, 2009	One year

END OF REPORT BODY

ANNEX A: Test Layout



Picture 2: Specific Absorption Rate Test Layout



Picture 3: Liquid depth in the Flat Phantom (835 MHz)



Picture 4: Liquid depth in the Flat Phantom (1900 MHz)

ANNEX B: System Check Results

System Performance Check at 835 MHz

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d031

Date/Time: 12/25/2009 1:13 PM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 53.56$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 – SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW/Area Scan (101x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.93 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.7 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 3.59 W/kg

SAR(1 g) = 2.38 mW/g; SAR(10 g) = 1.57 mW/g

Maximum value of SAR (measured) = 2.92 mW/g

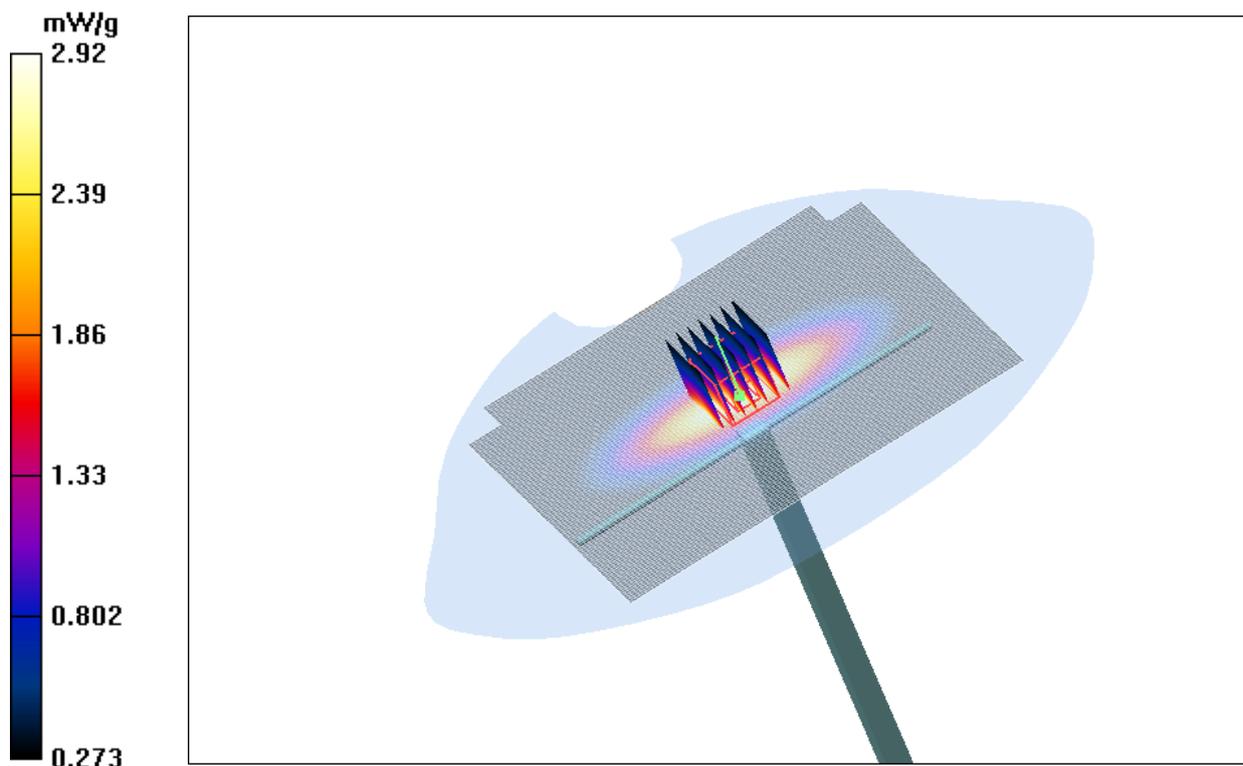


Figure 6 System Performance Check 835MHz 250mW

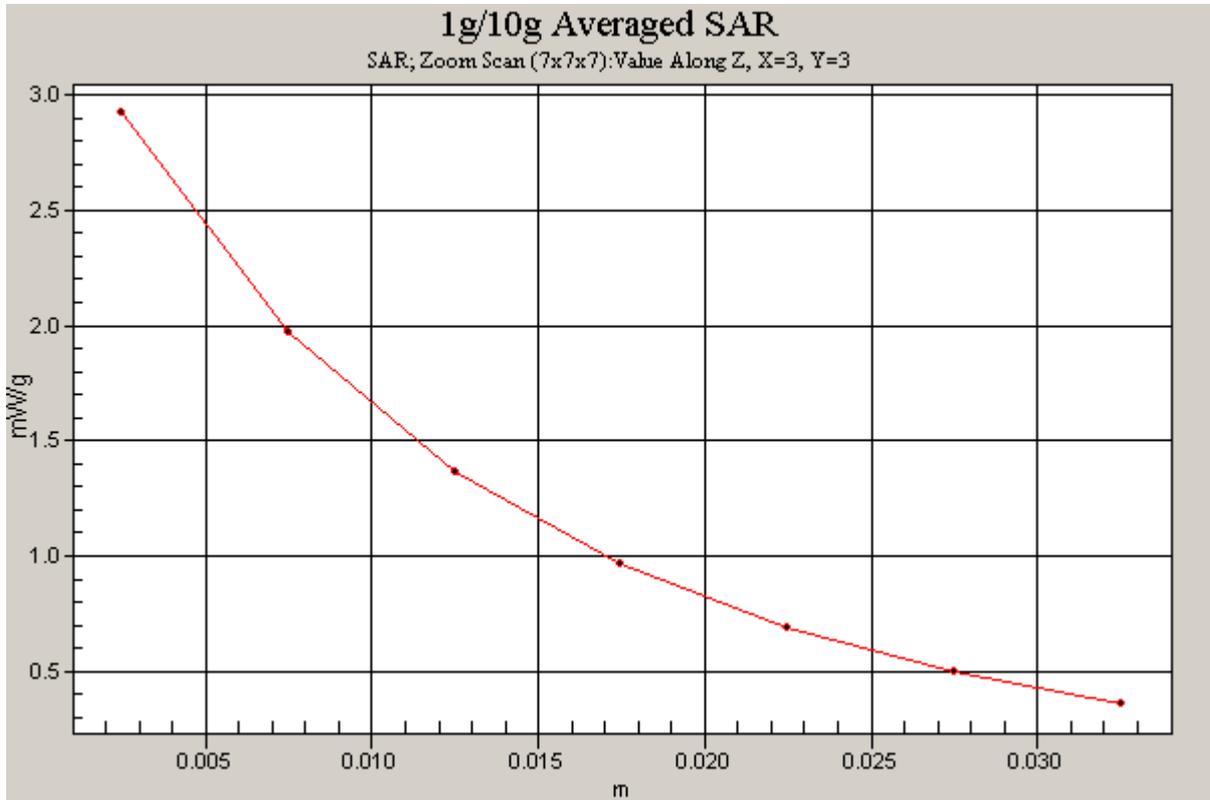


Figure 7 Z-Scan at power reference point (system Check at 835 MHz dipole)

System Performance Check at 1900 MHz

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018

Date/Time: 12/26/2009 7:52:18 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.58$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 – SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.9 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.0 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 18.9 W/kg

SAR(1 g) = 10.01 mW/g; SAR(10 g) = 5.12 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

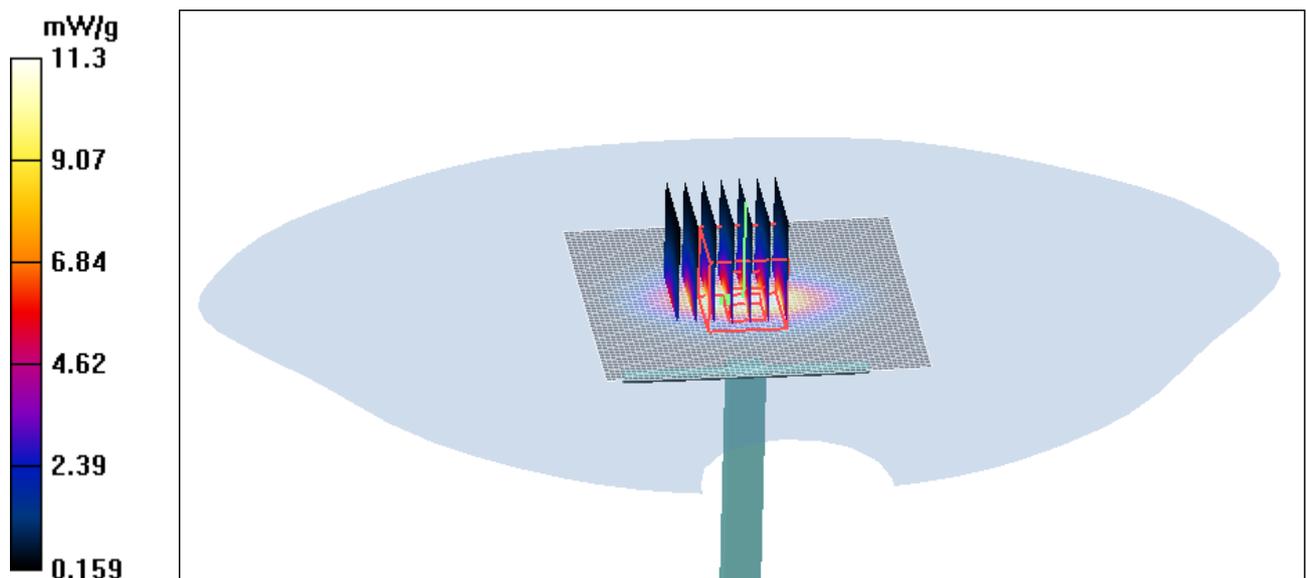


Figure 8 System Performance Check 1900MHz 250mW

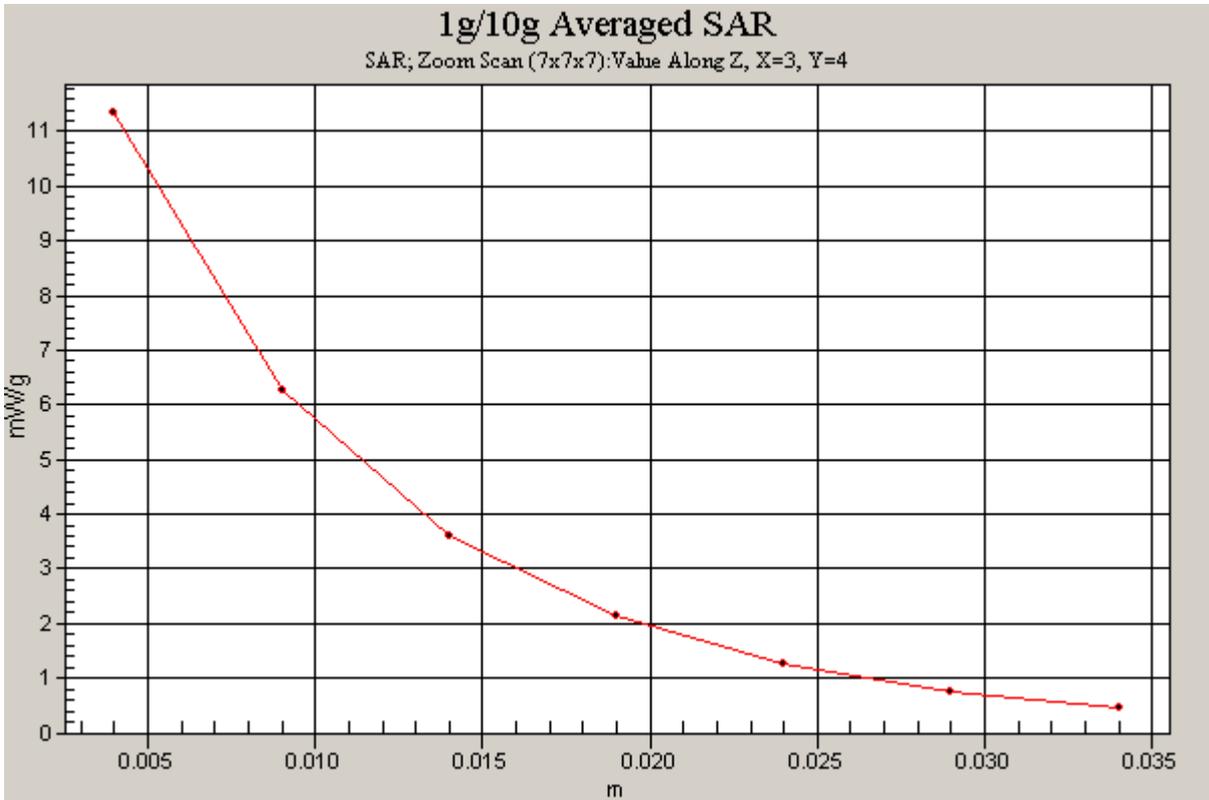


Figure 9 Z-Scan at power reference point (system Check at 1900 MHz dipole)

ANNEX C: Graph Results

GSM 850 GPRS (2 timeslots in uplink) with IBM R60e Test Position 1 Middle Frequency

Date/Time: 12/25/2009 5:33:05 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.453 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.6 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.819 W/kg

SAR(1 g) = 0.414 mW/g; SAR(10 g) = 0.255 mW/g

Maximum value of SAR (measured) = 0.456 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.6 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.343 mW/g; SAR(10 g) = 0.228 mW/g

Maximum value of SAR (measured) = 0.369 mW/g

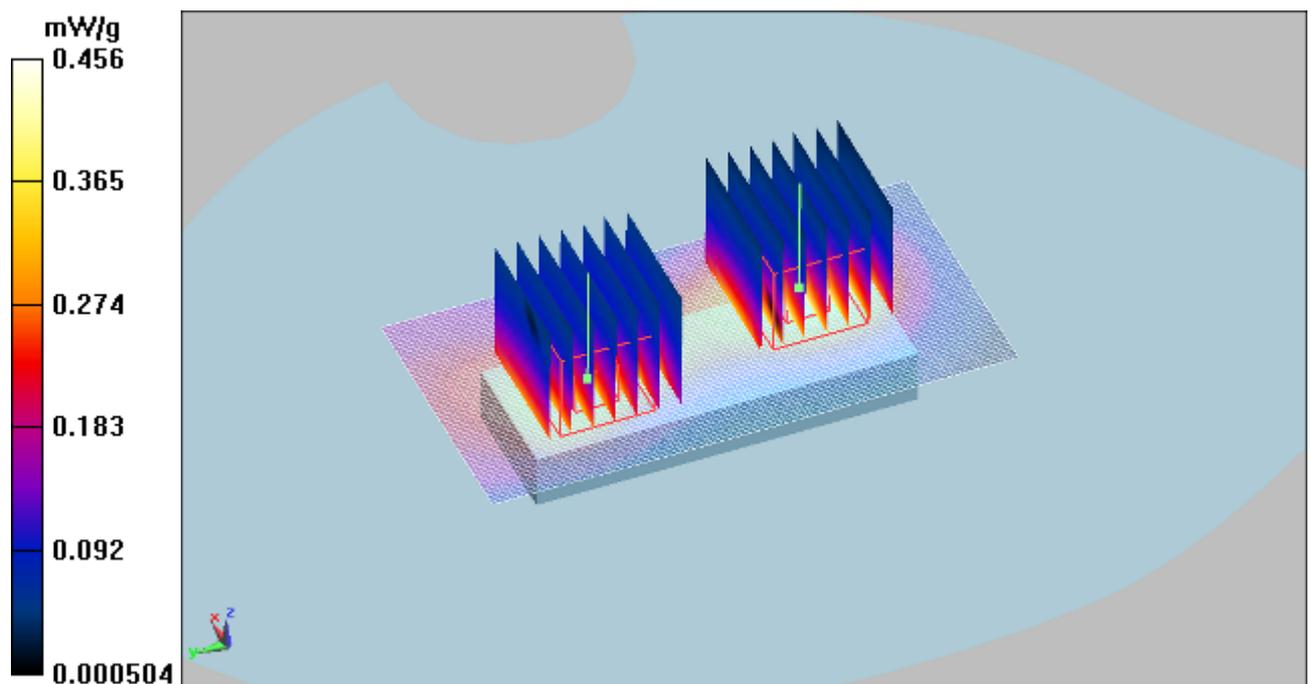


Figure 10 GSM 850 GPRS (2 timeslots in uplink) with IBM R60e Test Position 1 Channel 190

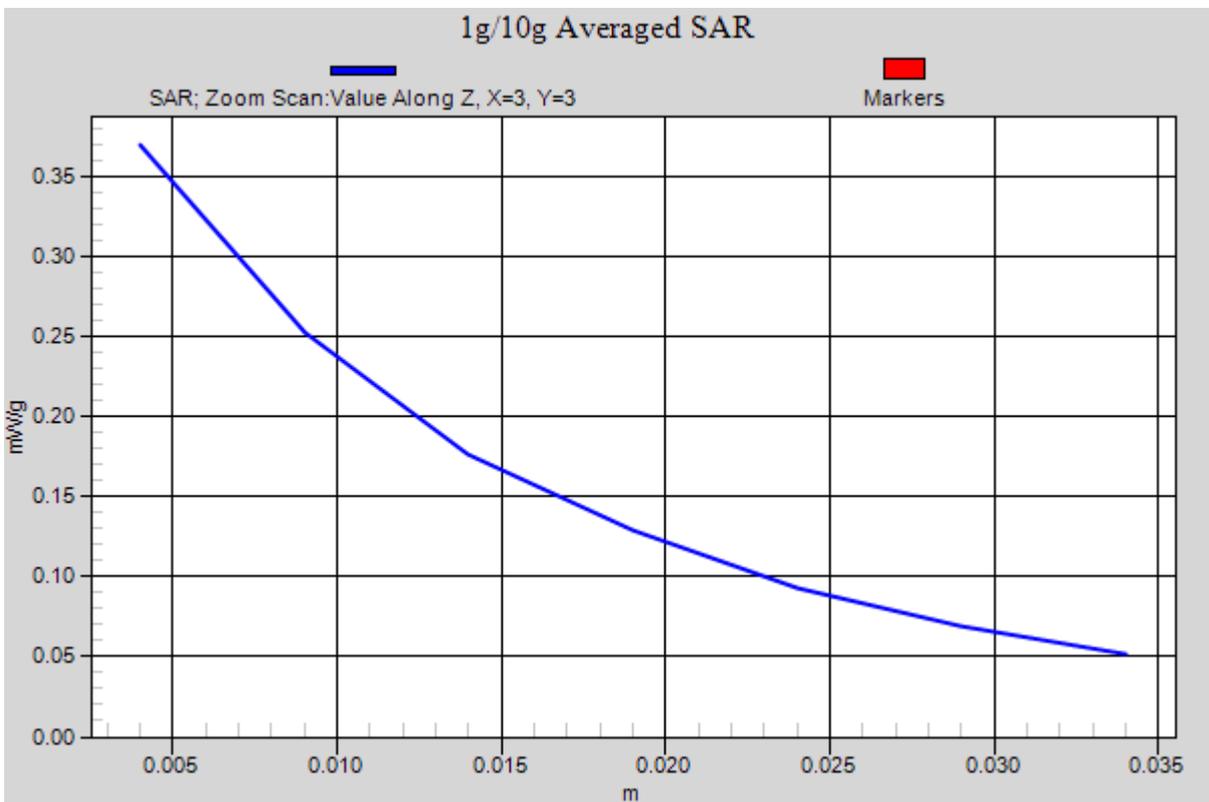
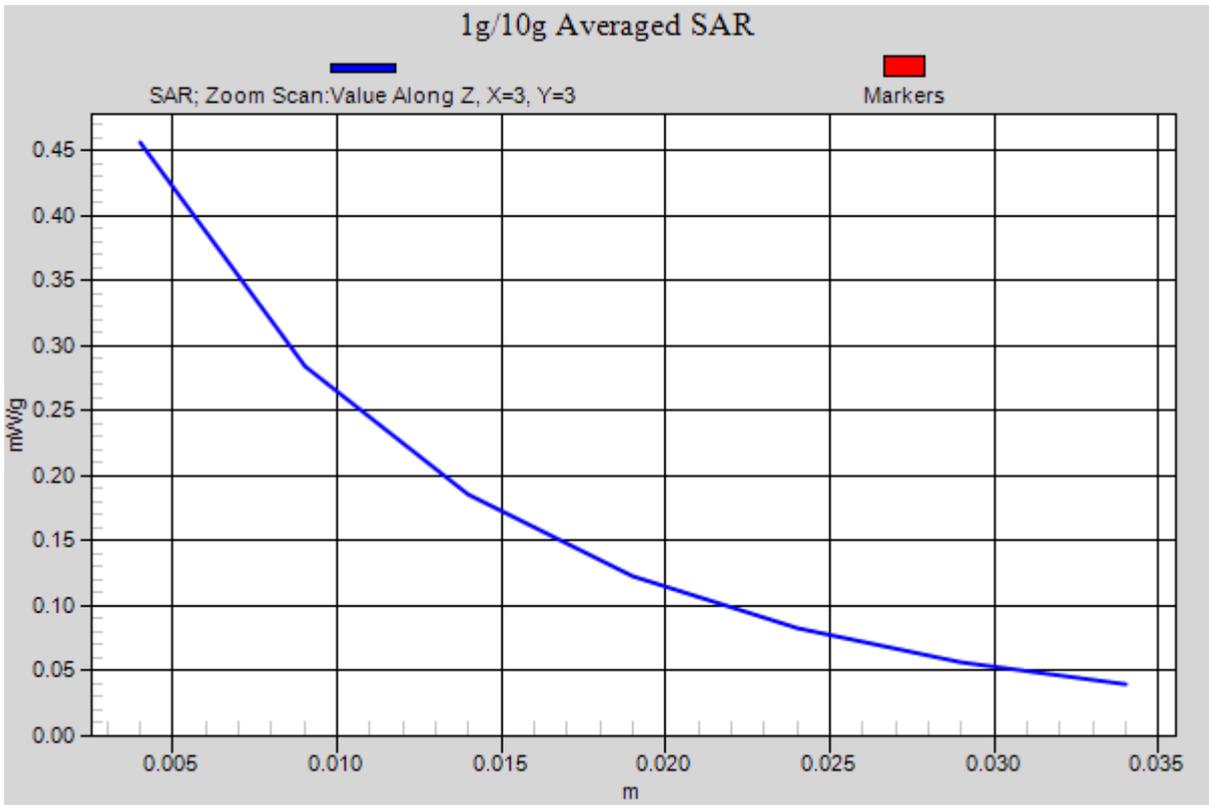


Figure 11 Z-Scan at power reference point [GSM 850 GPRS (2 timeslots in uplink) with IBM R60e
Test Position 1 Channel 190]

GSM 850 GPRS (2 timeslots in uplink) with IBM R60e Test Position 2 High Frequency

Date/Time: 12/25/2009 10:08:01 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 849$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 High/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.745 mW/g

Test Position 2 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.2 V/m; Power Drift = 0.055 dB

Peak SAR (extrapolated) = 1.73 W/kg

SAR(1 g) = 0.711 mW/g; SAR(10 g) = 0.427 mW/g

Maximum value of SAR (measured) = 0.750 mW/g

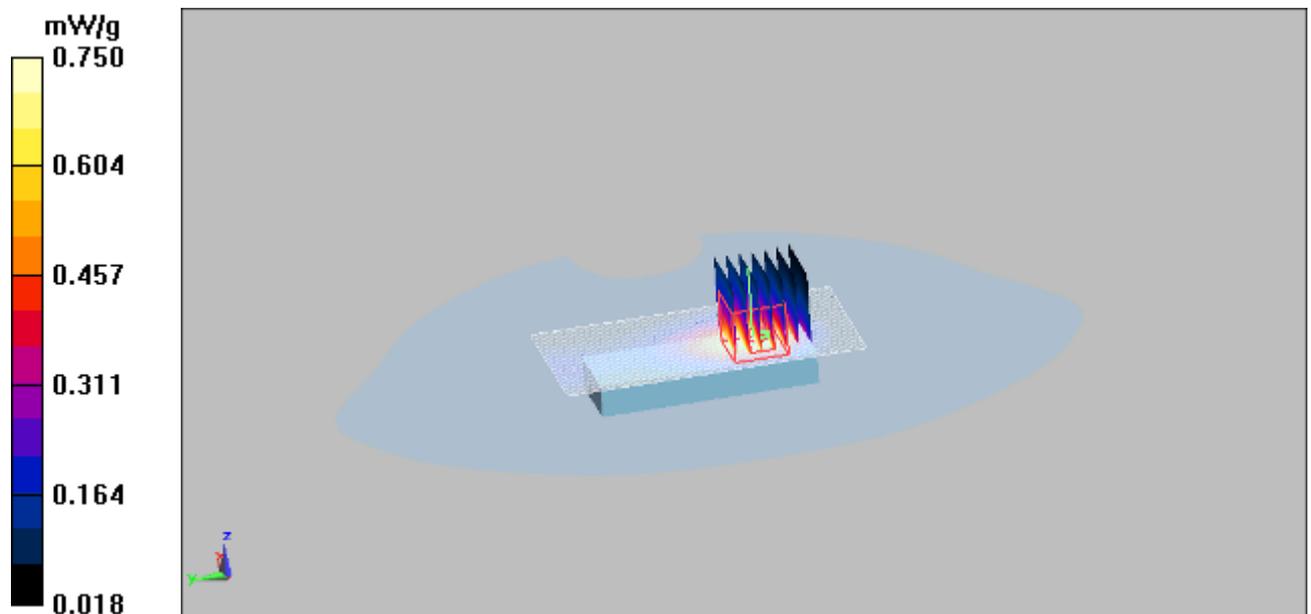


Figure 12 GSM 850 GPRS (2 timeslots in uplink) with IBM R60e Test Position 2 Channel 251

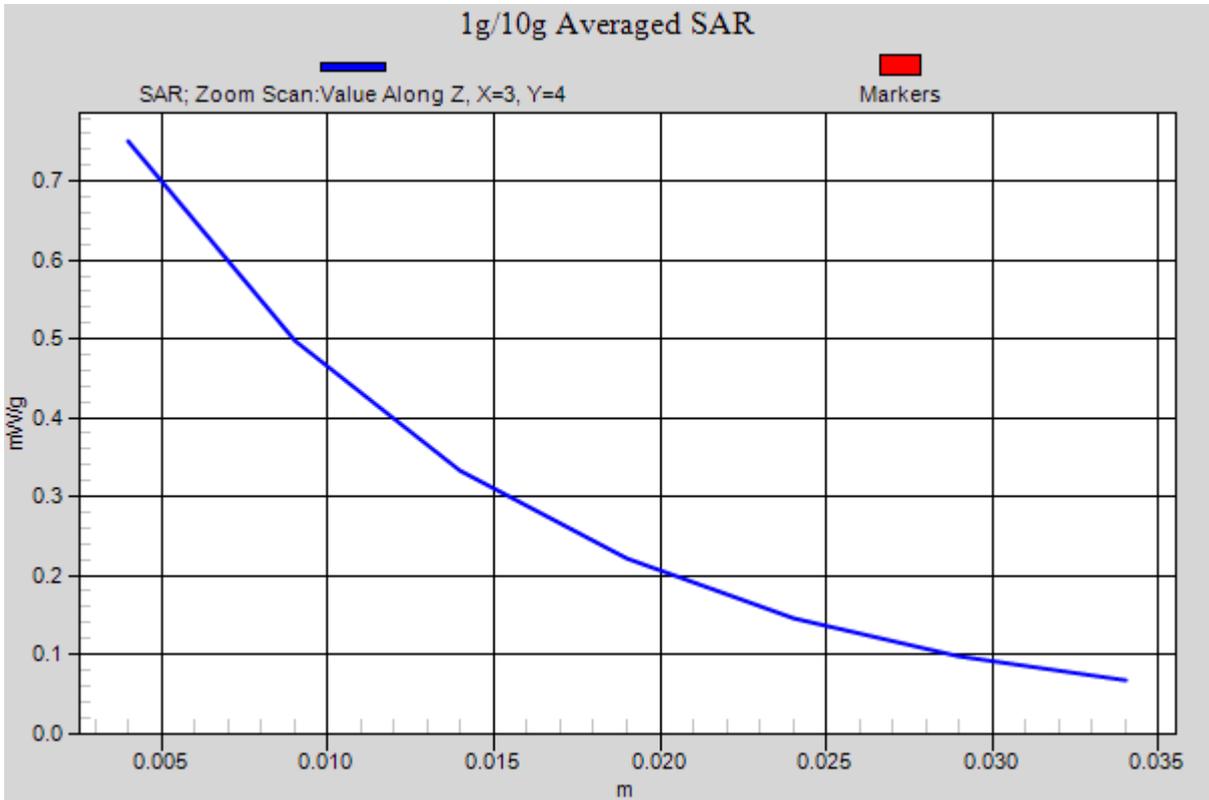


Figure 13 Z-Scan at power reference point [GSM 850 GPRS (2 timeslots in uplink) with IBM R60e Test Position 2 Channel 251]

GSM 850 GPRS (2 timeslots in uplink) with IBM R60e Test Position 2 Middle Frequency

Date/Time: 12/25/2009 7:02:57 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.538 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.3 V/m; Power Drift = 0.108 dB

Peak SAR (extrapolated) = 0.880 W/kg

SAR(1 g) = 0.496 mW/g; SAR(10 g) = 0.311 mW/g

Maximum value of SAR (measured) = 0.531 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.3 V/m; Power Drift = 0.108 dB

Peak SAR (extrapolated) = 0.641 W/kg

SAR(1 g) = 0.418 mW/g; SAR(10 g) = 0.270 mW/g

Maximum value of SAR (measured) = 0.454 mW/g

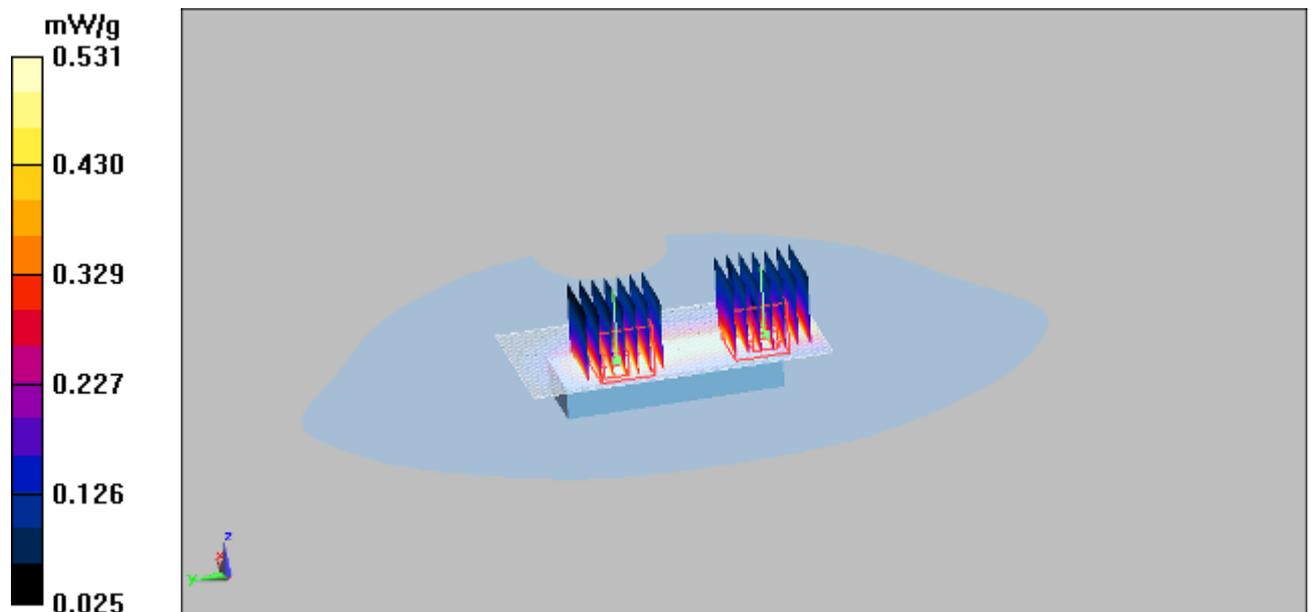


Figure 14 GSM 850 GPRS (2 timeslots in uplink) with IBM R60e Test Position 2 Channel 190

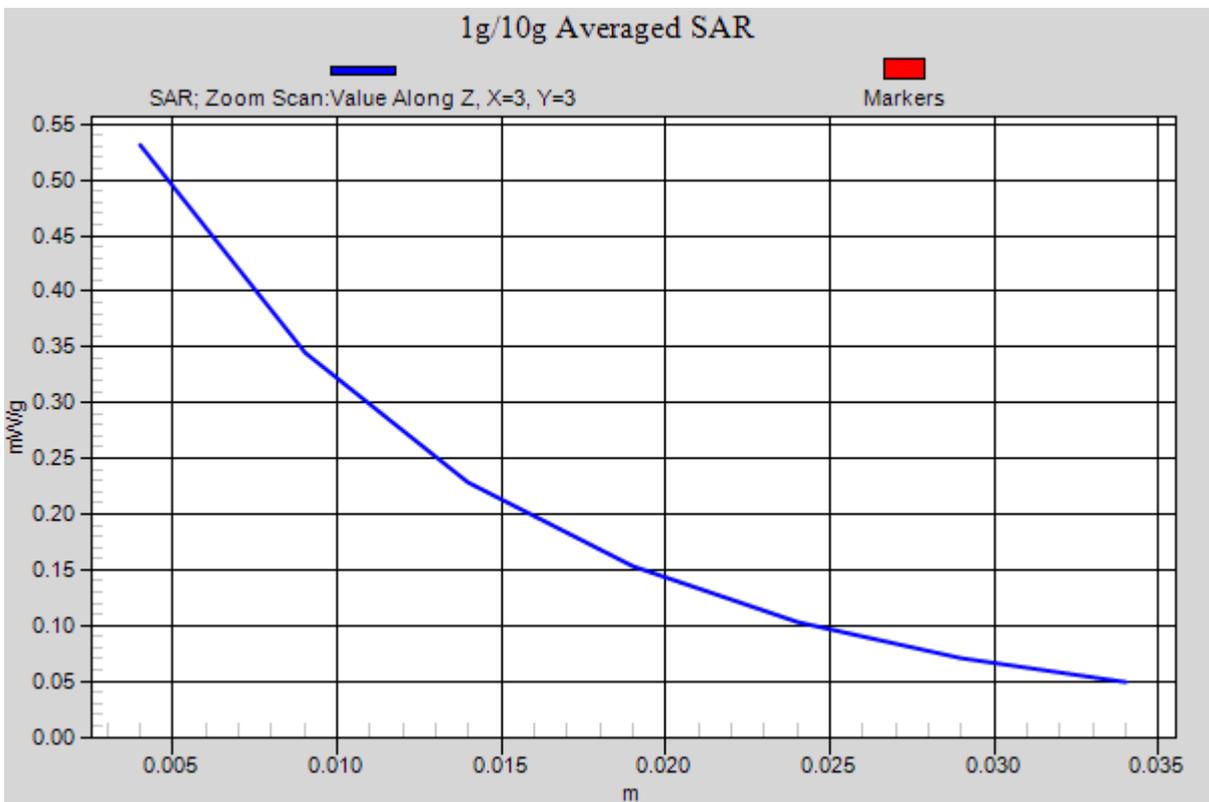
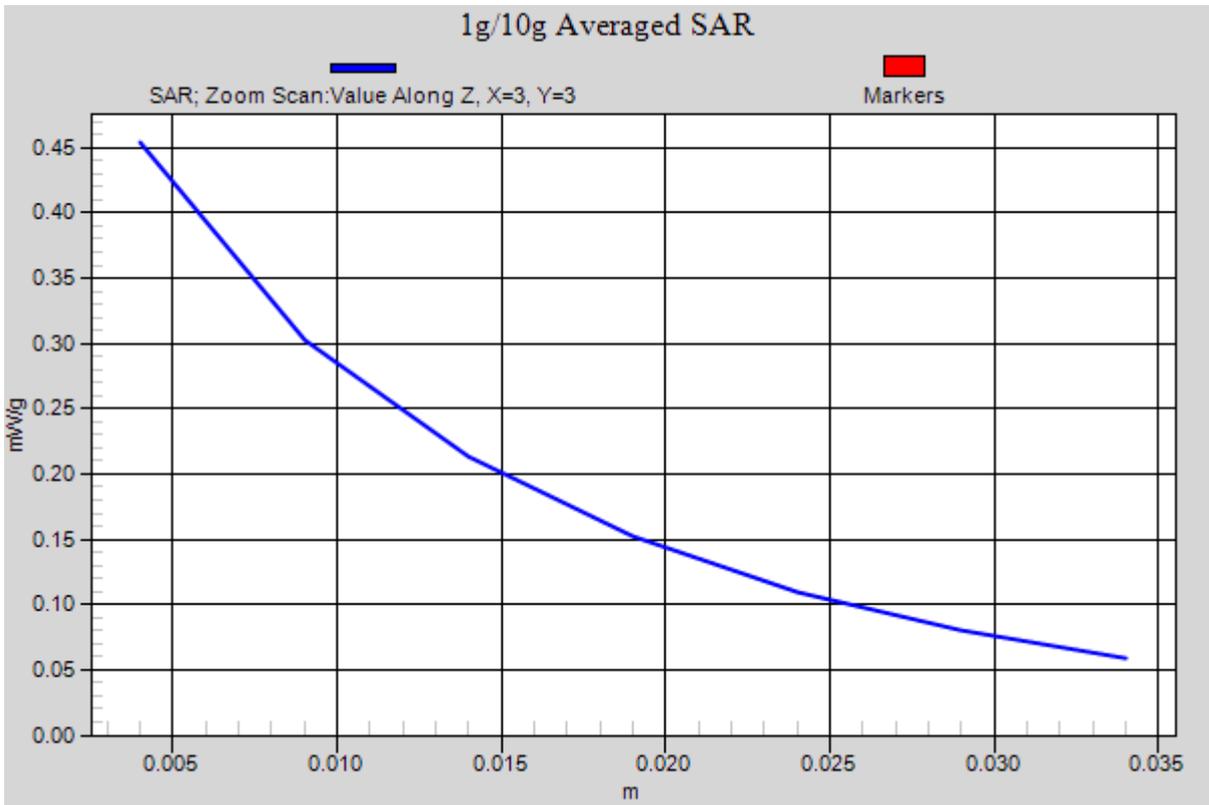


Figure 15 Z-Scan at power reference point [GSM 850 GPRS (2 timeslots in uplink) with IBM R60e Test Position 2 Channel 190]

GSM 850 GPRS (2 timeslots in uplink) with IBM R60e Test Position 2 Low Frequency

Date/Time: 12/25/2009 10:29:18 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Low/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.912 mW/g

Test Position 2 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.8 V/m; Power Drift = -0.175 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.789 mW/g; SAR(10 g) = 0.493 mW/g

Maximum value of SAR (measured) = 0.860 mW/g

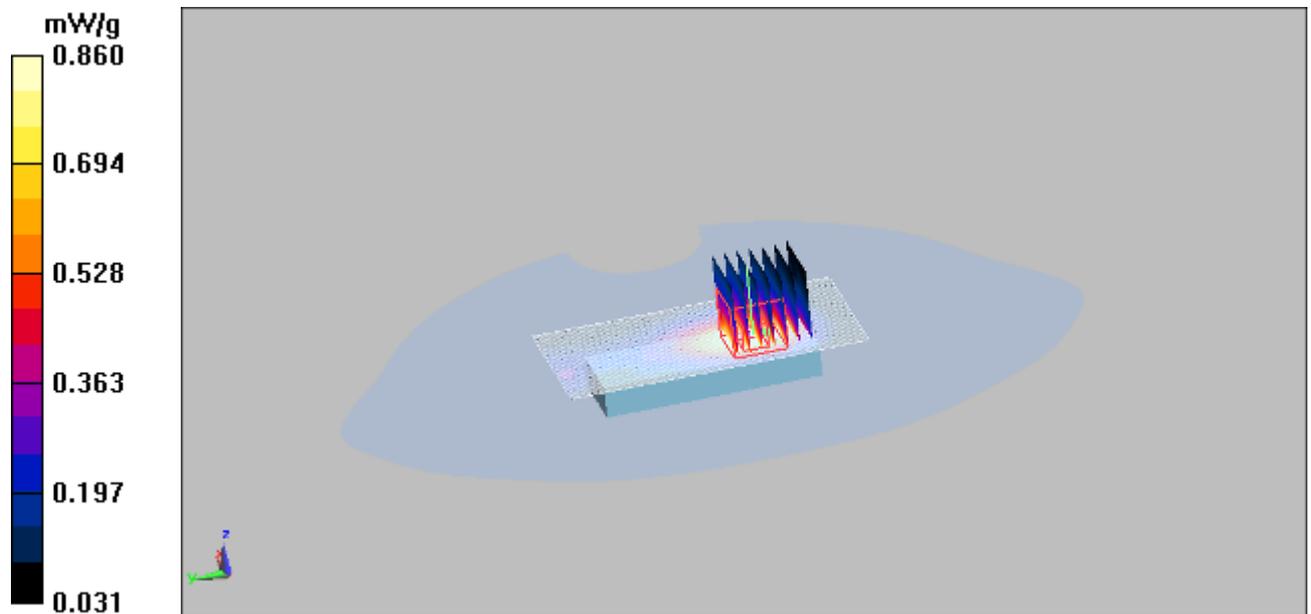


Figure 16 GSM 850 GPRS (2 timeslots in uplink) with IBM R60e Test Position 2 Channel 128

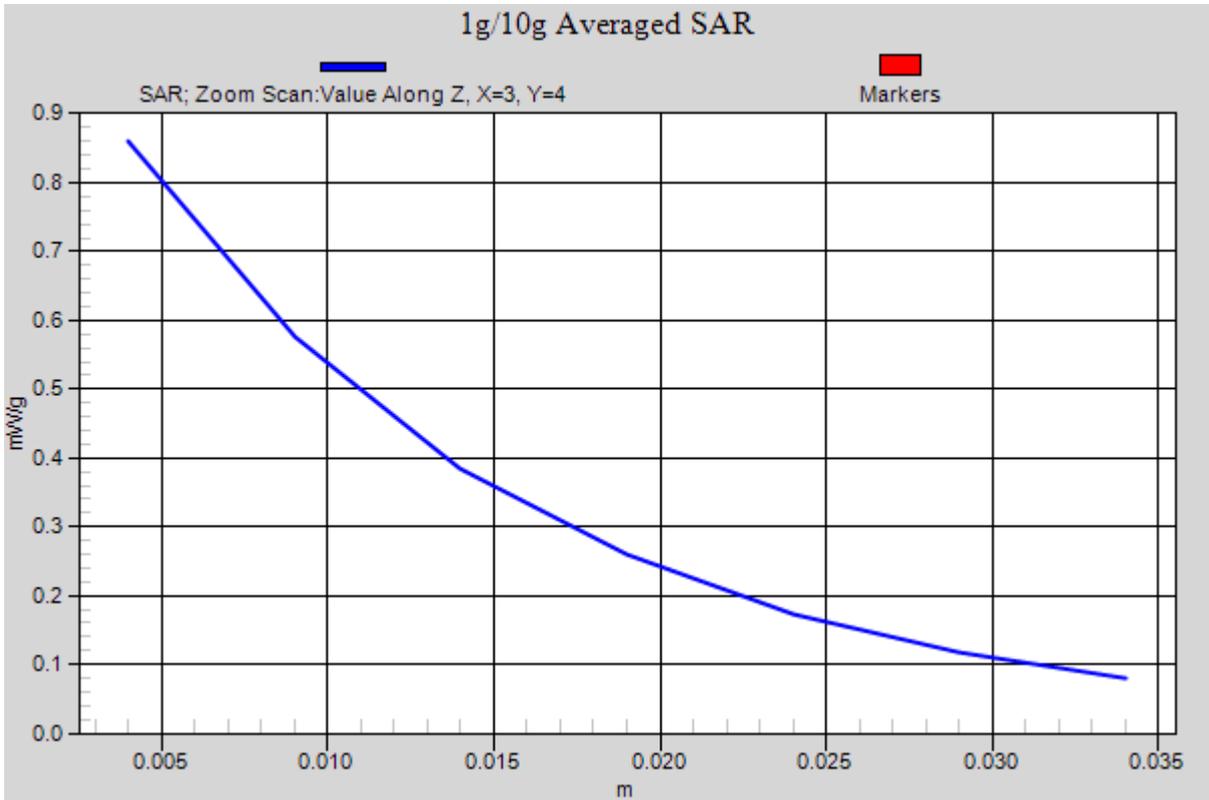


Figure 17 Z-Scan at power reference point [GSM 850 GPRS (2 timeslots in uplink) with IBM R60e
Test Position 2 Channel 128]

GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Middle Frequency

Date/Time: 12/25/2009 9:01:14 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.358 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 0.511 W/kg

SAR(1 g) = 0.301 mW/g; SAR(10 g) = 0.185 mW/g

Maximum value of SAR (measured) = 0.328 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 0.510 W/kg

SAR(1 g) = 0.303 mW/g; SAR(10 g) = 0.180 mW/g

Maximum value of SAR (measured) = 0.330 mW/g

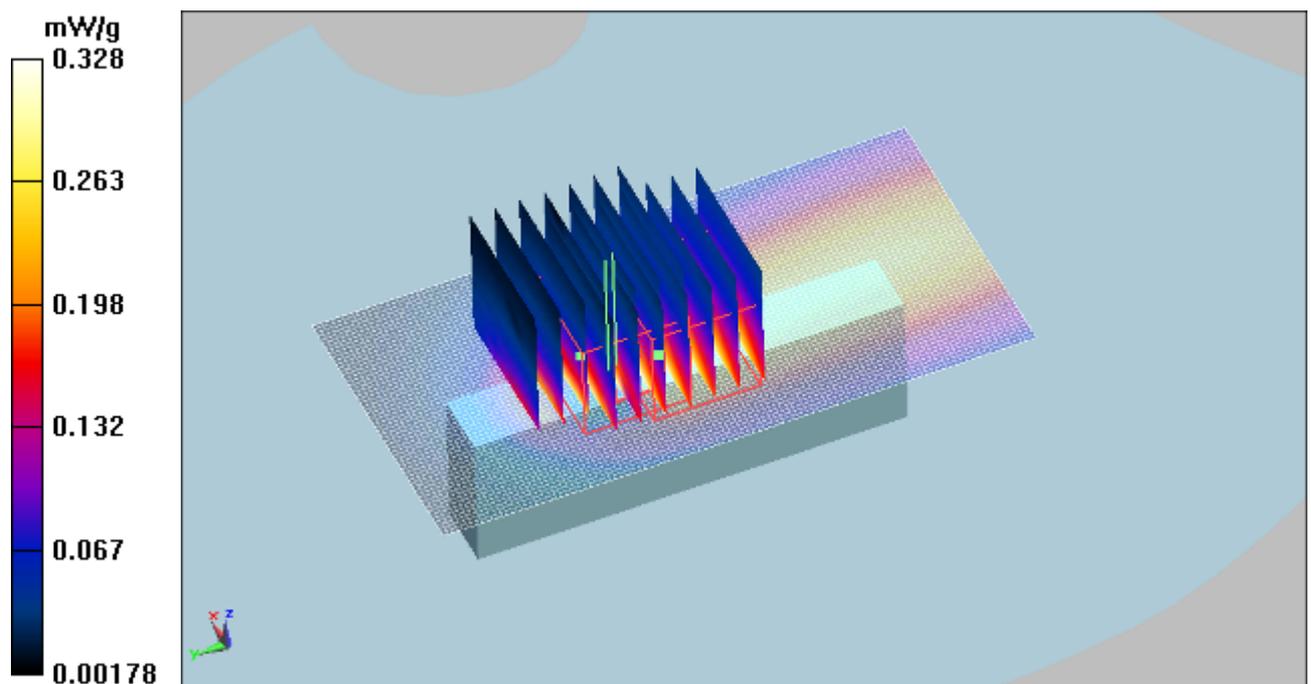


Figure 18 GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 190

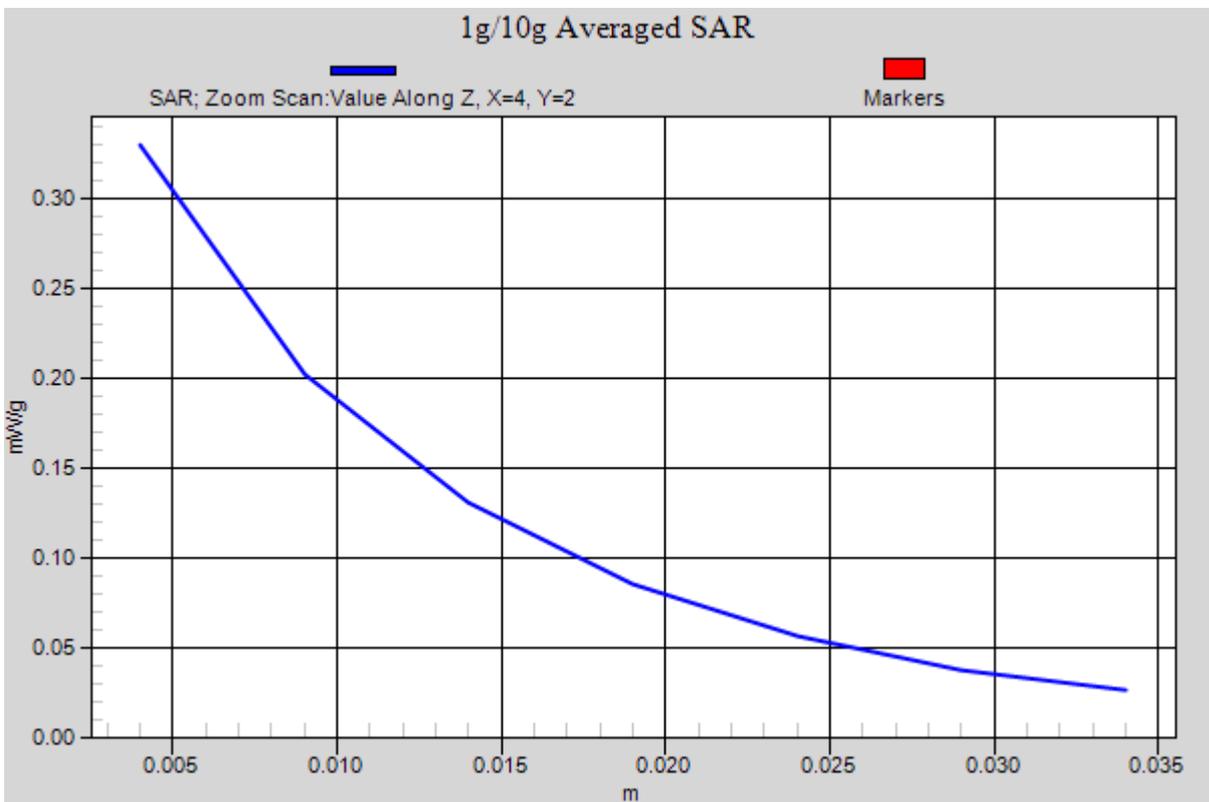
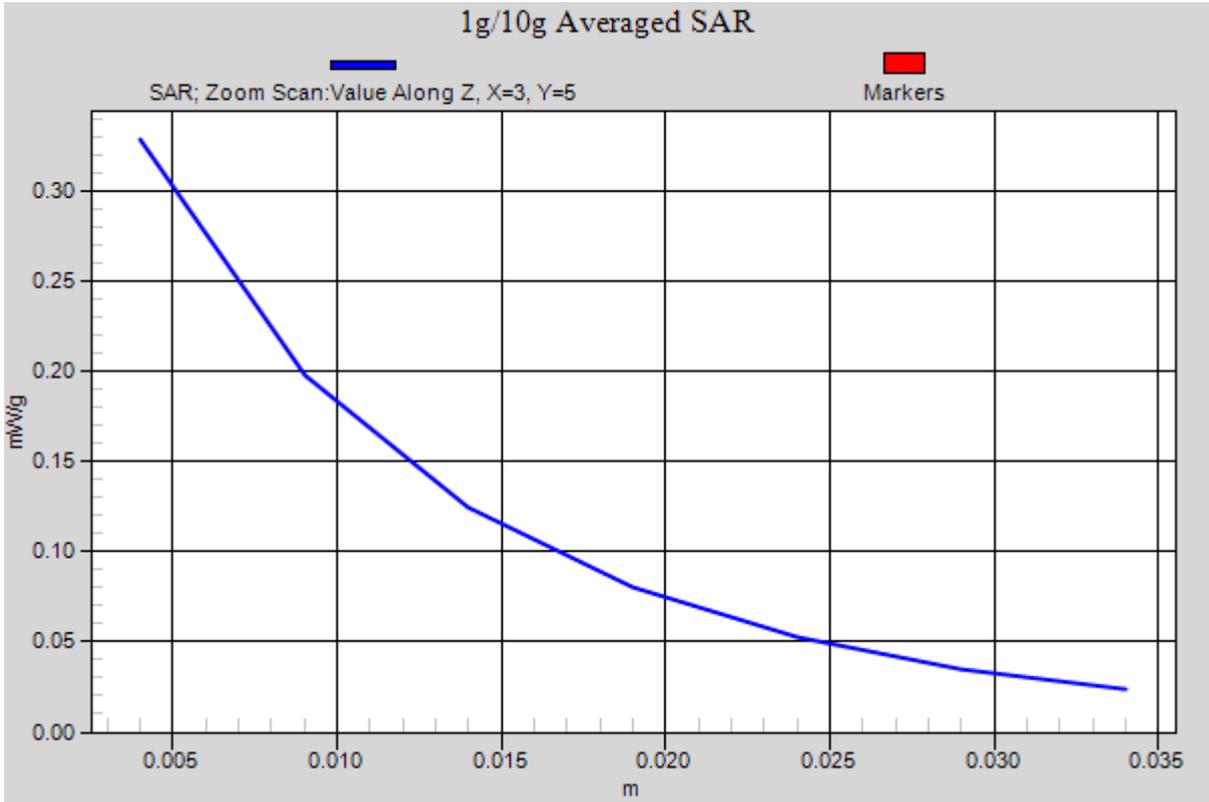


Figure 19 Z-Scan at power reference point [GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 190]

GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 4 Middle Frequency

Date/Time: 12/25/2009 9:48:14 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.531 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.1 V/m; Power Drift = 0.146 dB

Peak SAR (extrapolated) = 0.880 W/kg

SAR(1 g) = 0.484 mW/g; SAR(10 g) = 0.279 mW/g

Maximum value of SAR (measured) = 0.547 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.1 V/m; Power Drift = 0.146 dB

Peak SAR (extrapolated) = 0.610 W/kg

SAR(1 g) = 0.447 mW/g; SAR(10 g) = 0.320 mW/g

Maximum value of SAR (measured) = 0.470 mW/g

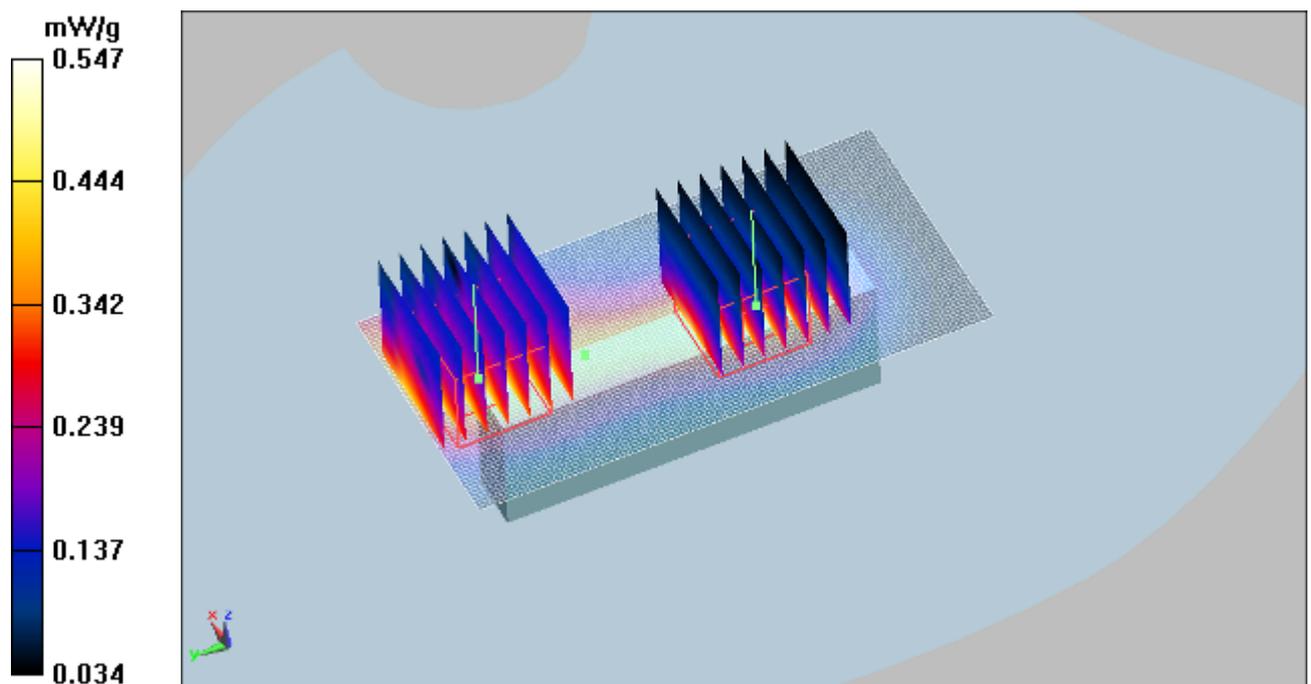


Figure 20 GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 4 Channel 190

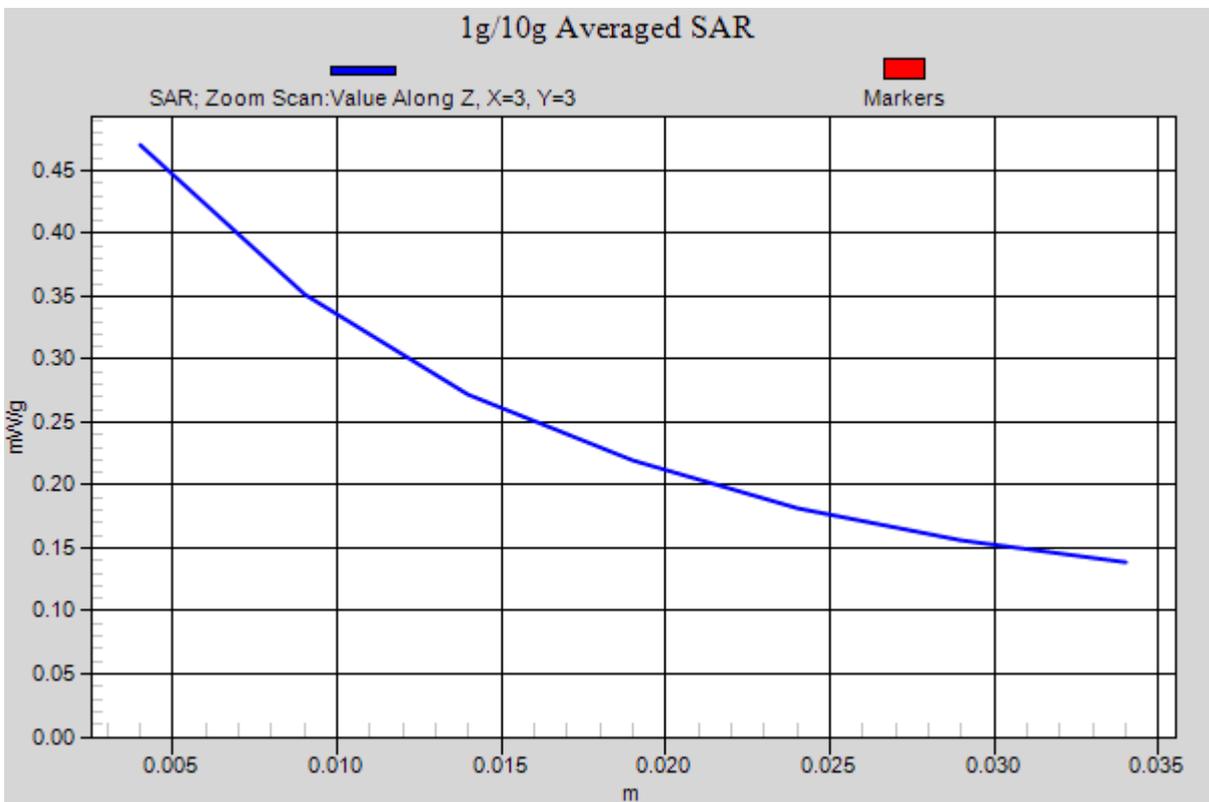
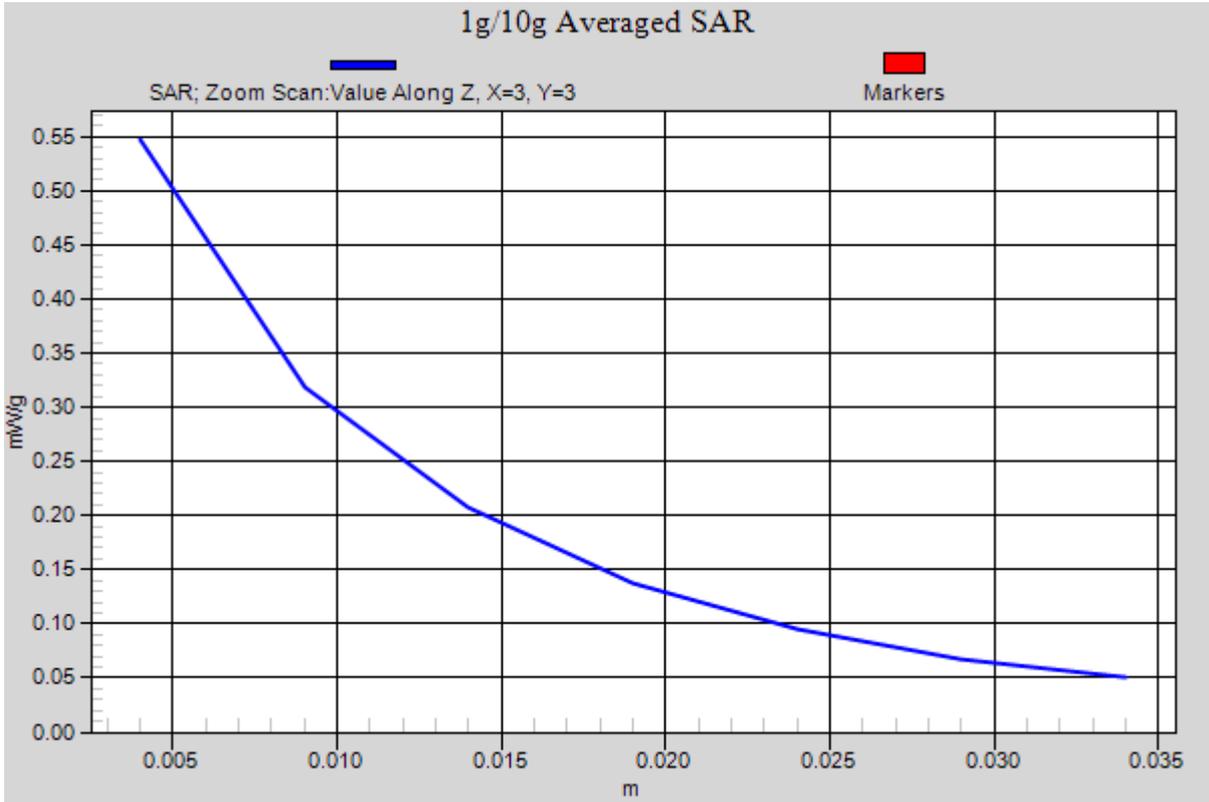


Figure 21 Z-Scan at power reference point [GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 4 Channel 190]

GSM 850 EGPRS (2 timeslots in uplink) with IBM R60e Test Position 2 Low Frequency

Date/Time: 12/25/2009 10:46:04 PM

Communication System: GSM850 + EGPRS(2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Low/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.872 mW/g

Test Position 2 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.784 mW/g; SAR(10 g) = 0.494 mW/g

Maximum value of SAR (measured) = 0.848 mW/g

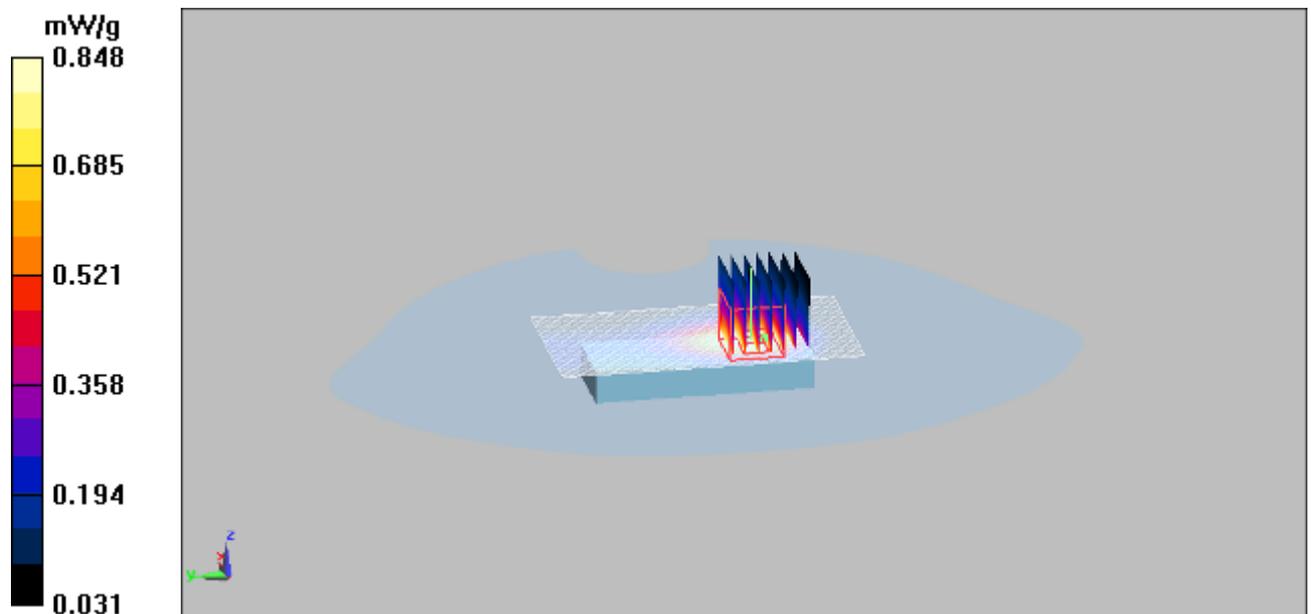


Figure 22 GSM 850 EGPRS (2 timeslots in uplink) with IBM R60e Test Position 2 Channel 128

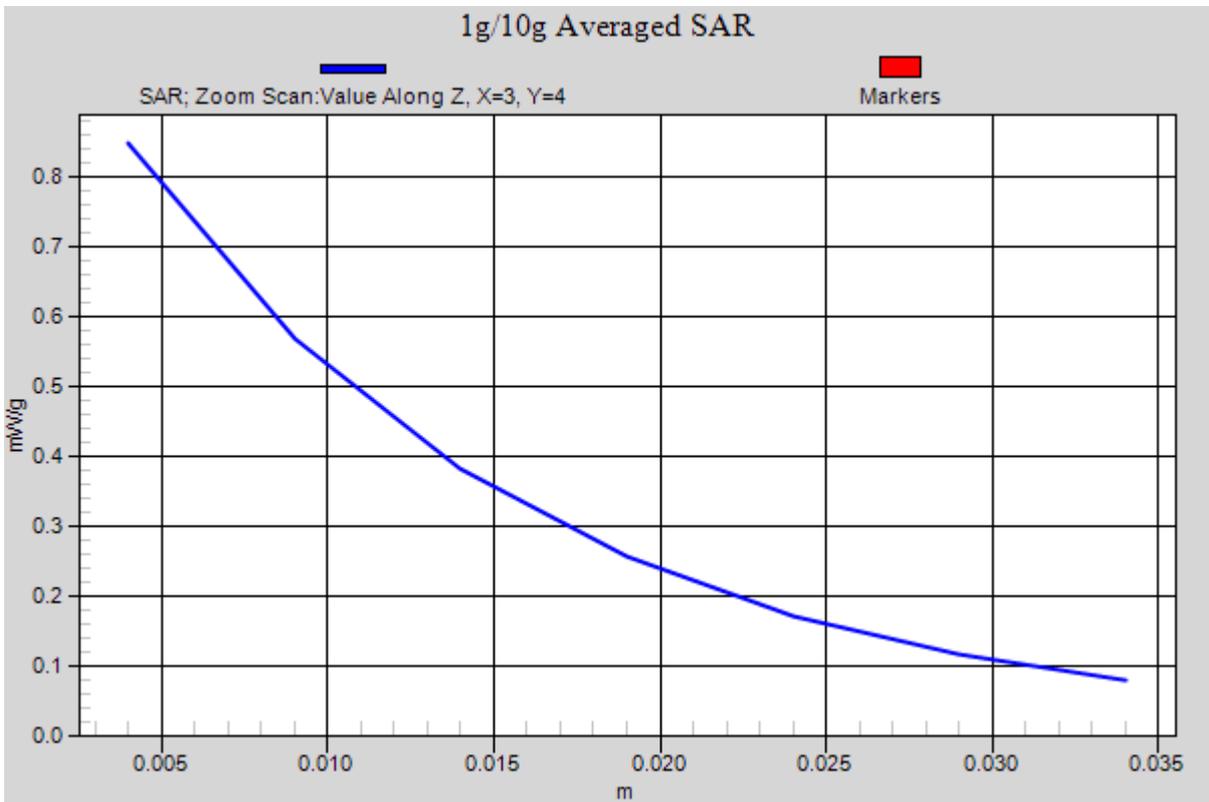


Figure 23 Z-Scan at power reference point [GSM 850 EGPRS (2 timeslots in uplink) with IBM R60e Test Position 2 Channel 128]

GSM 1900 GPRS (2 timeslots in uplink) with IBM R60e Test Position 1 Middle Frequency

Date/Time: 12/26/2009 9:36:10 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.689 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = 0.105 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.654 mW/g; SAR(10 g) = 0.371 mW/g

Maximum value of SAR (measured) = 0.721 mW/g

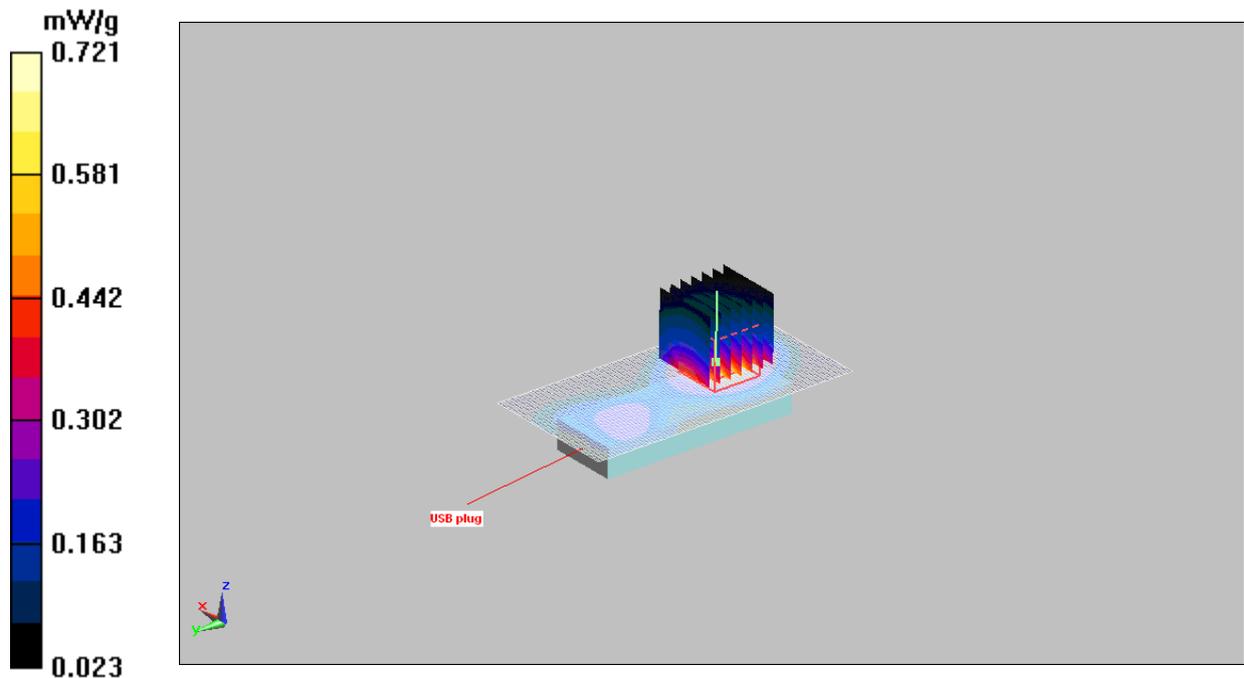


Figure 24 GSM 1900 GPRS (2 timeslots in uplink) with IBM R60e Test Position 1 Channel 661

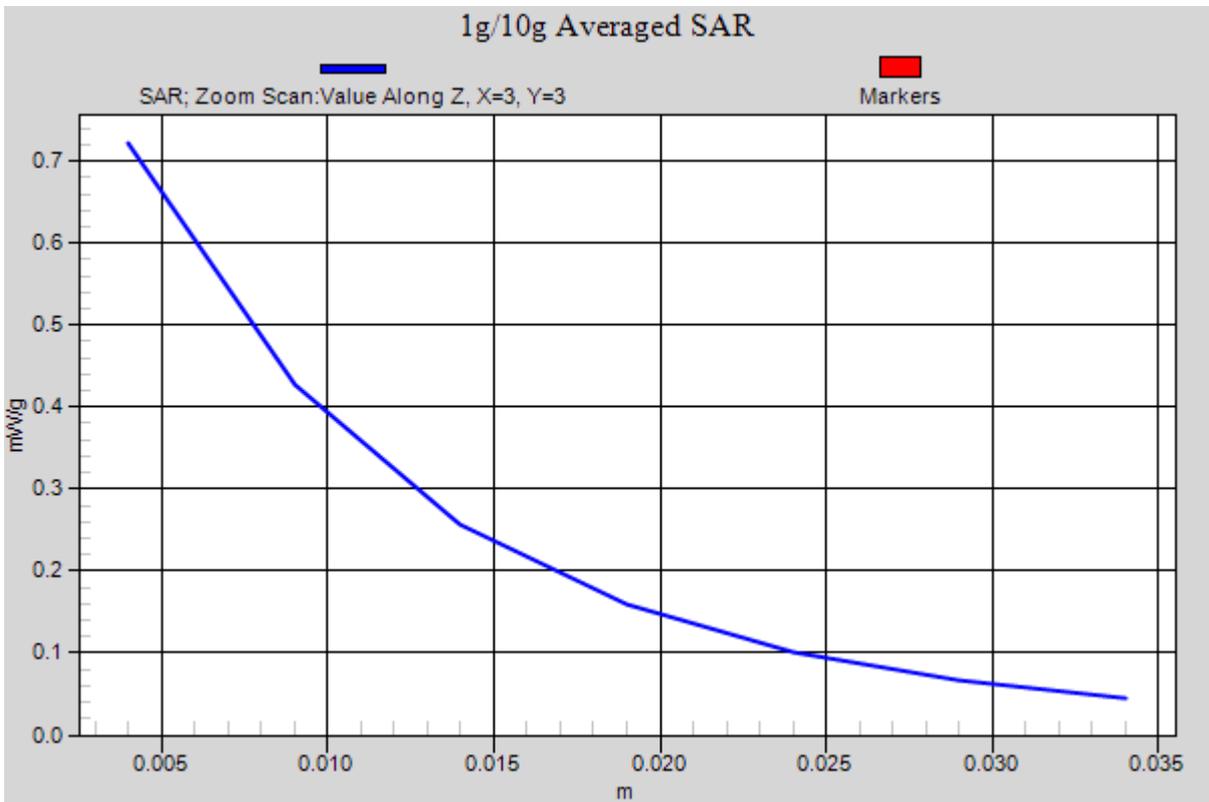


Figure 25 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with IBM R60e Test Position 1 Channel 661]

GSM 1900 GPRS (2 timeslots in uplink) with IBM R60e Test Position 2 Middle Frequency

Date/Time: 12/26/2009 9:20:36 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.614 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.8 V/m; Power Drift = 0.161 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.594 mW/g; SAR(10 g) = 0.352 mW/g

Maximum value of SAR (measured) = 0.646 mW/g

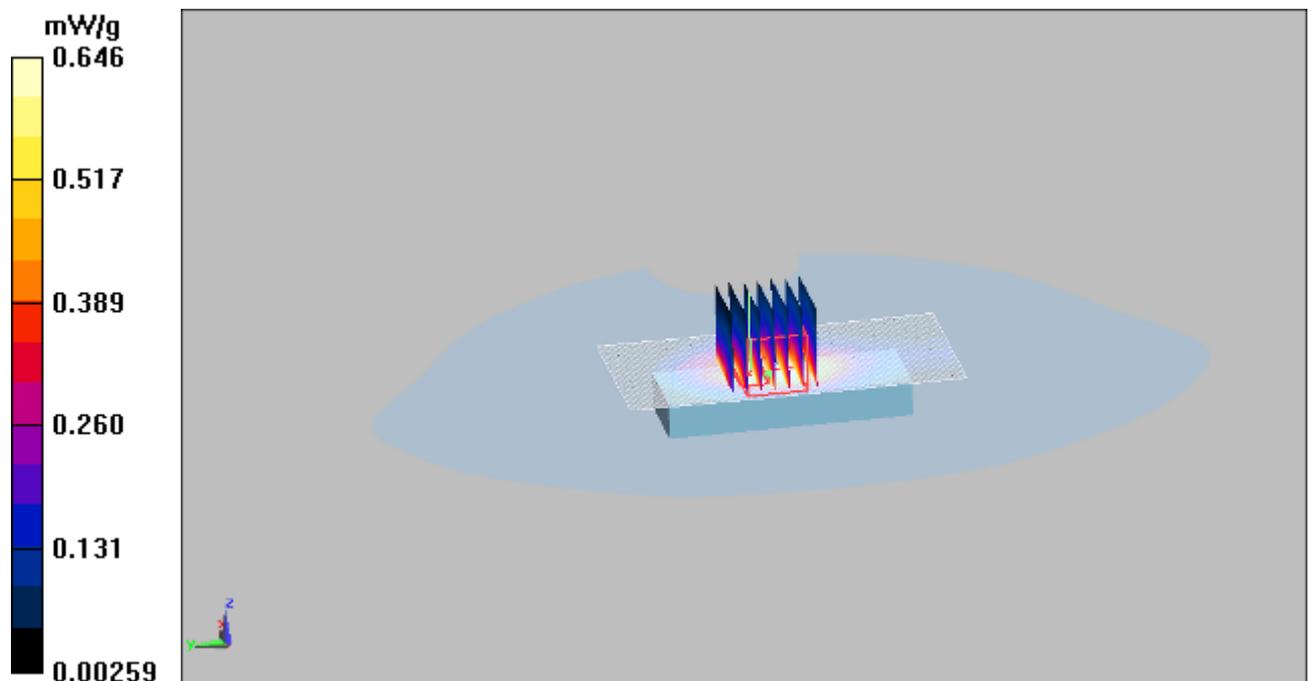


Figure 26 GSM 1900 GPRS (2 timeslots in uplink) with IBM R60e Test Position 2 Channel 661

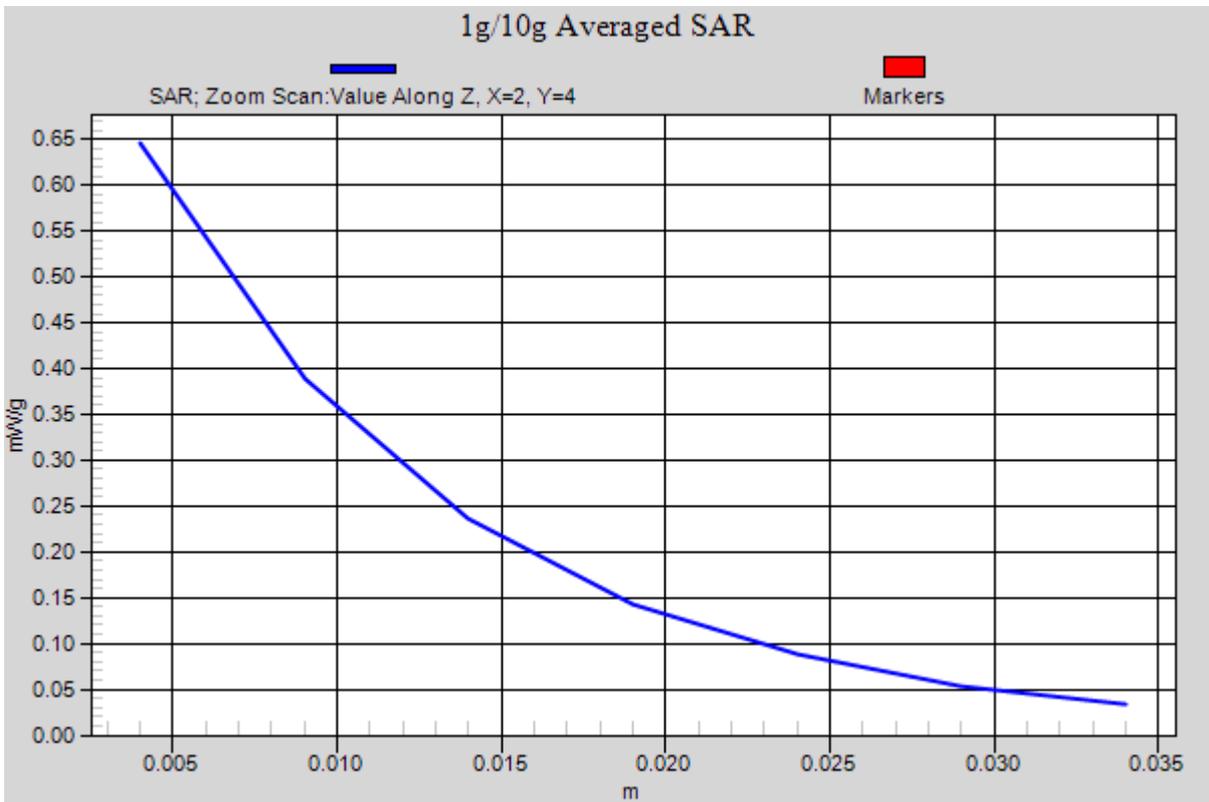


Figure 27 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with IBM R60e Test Position 2 Channel 661]

GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Middle Frequency

Date/Time: 12/26/2009 3:02:49 PM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.684 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.1 V/m; Power Drift = 0.155 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.509 mW/g; SAR(10 g) = 0.236 mW/g

Maximum value of SAR (measured) = 0.589 mW/g

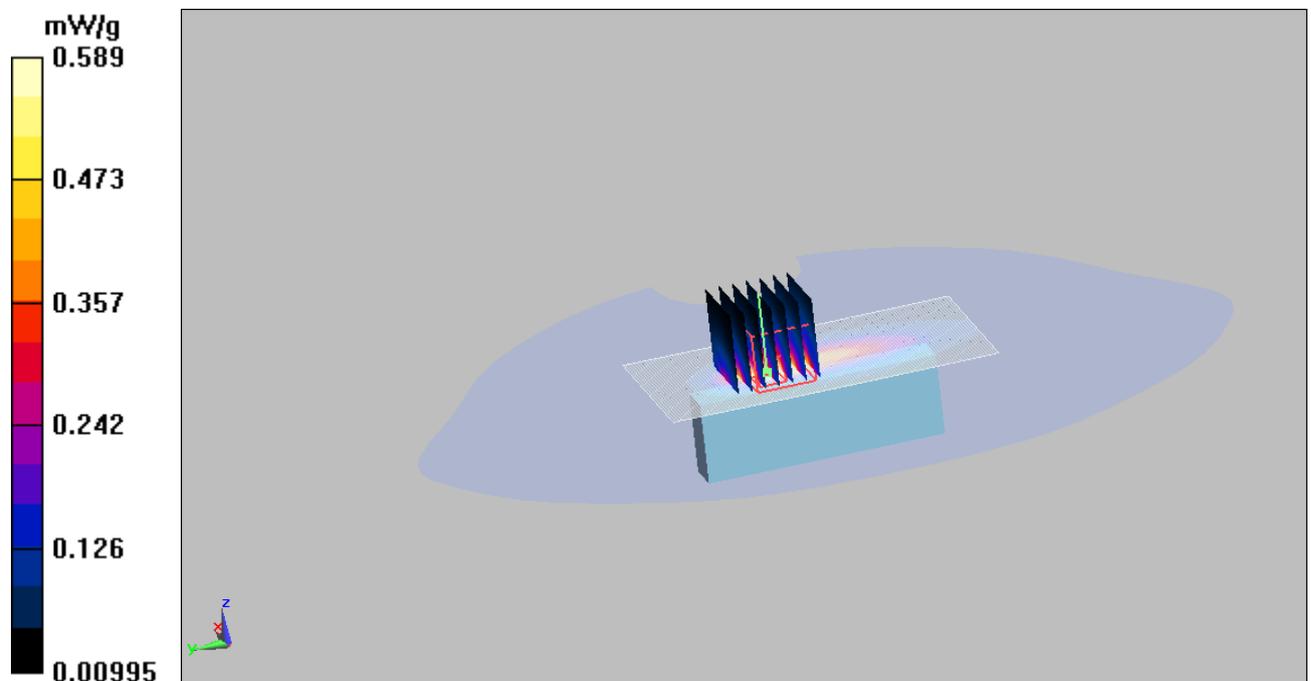


Figure 28 GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 661

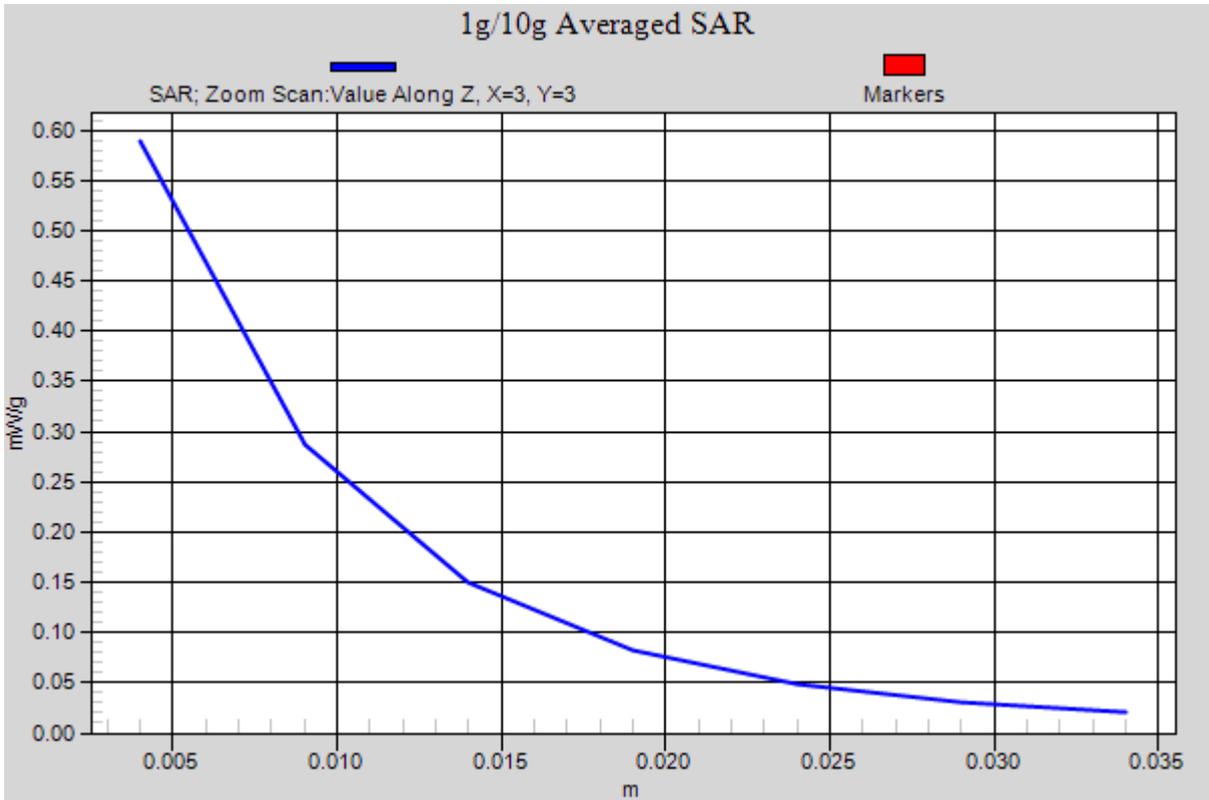


Figure 29 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 661]

GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 4 High Frequency

Date/Time: 12/26/2009 4:36:34 PM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 High/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.18 mW/g

Test Position 4 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.9 V/m; Power Drift = -0.169 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.978 mW/g; SAR(10 g) = 0.515 mW/g

Maximum value of SAR (measured) = 1.1 mW/g

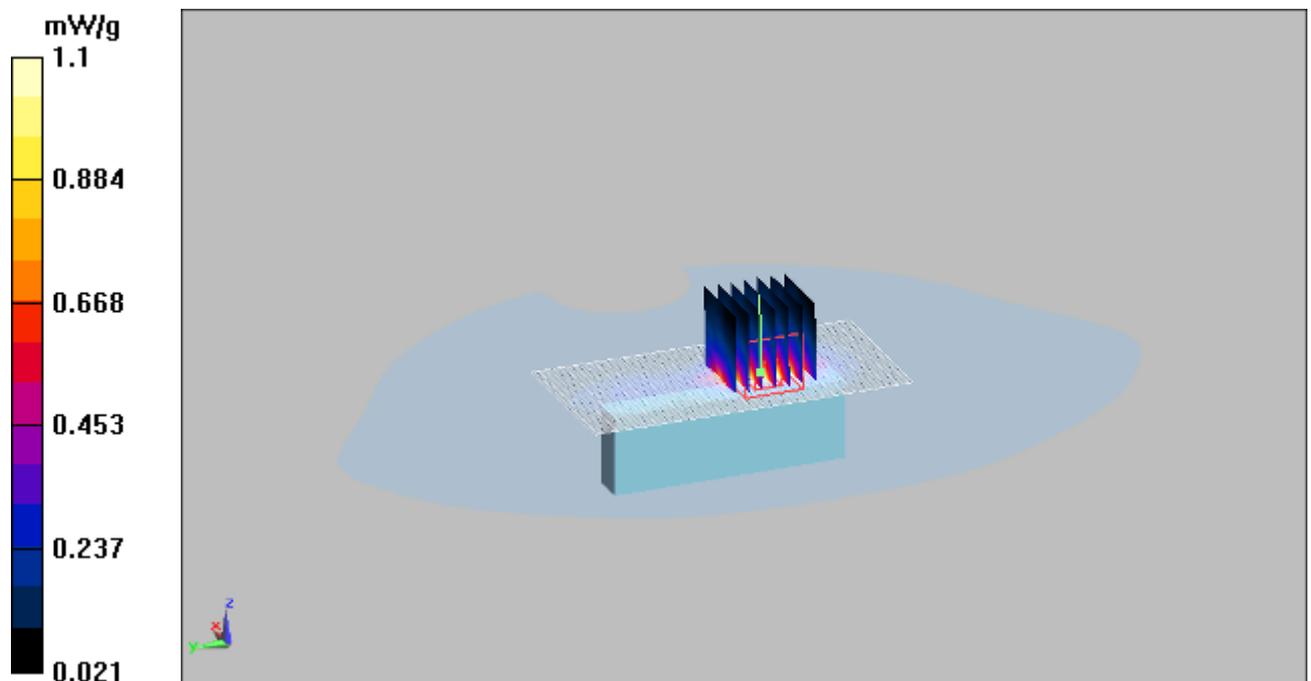


Figure 30 GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 4 Channel 810

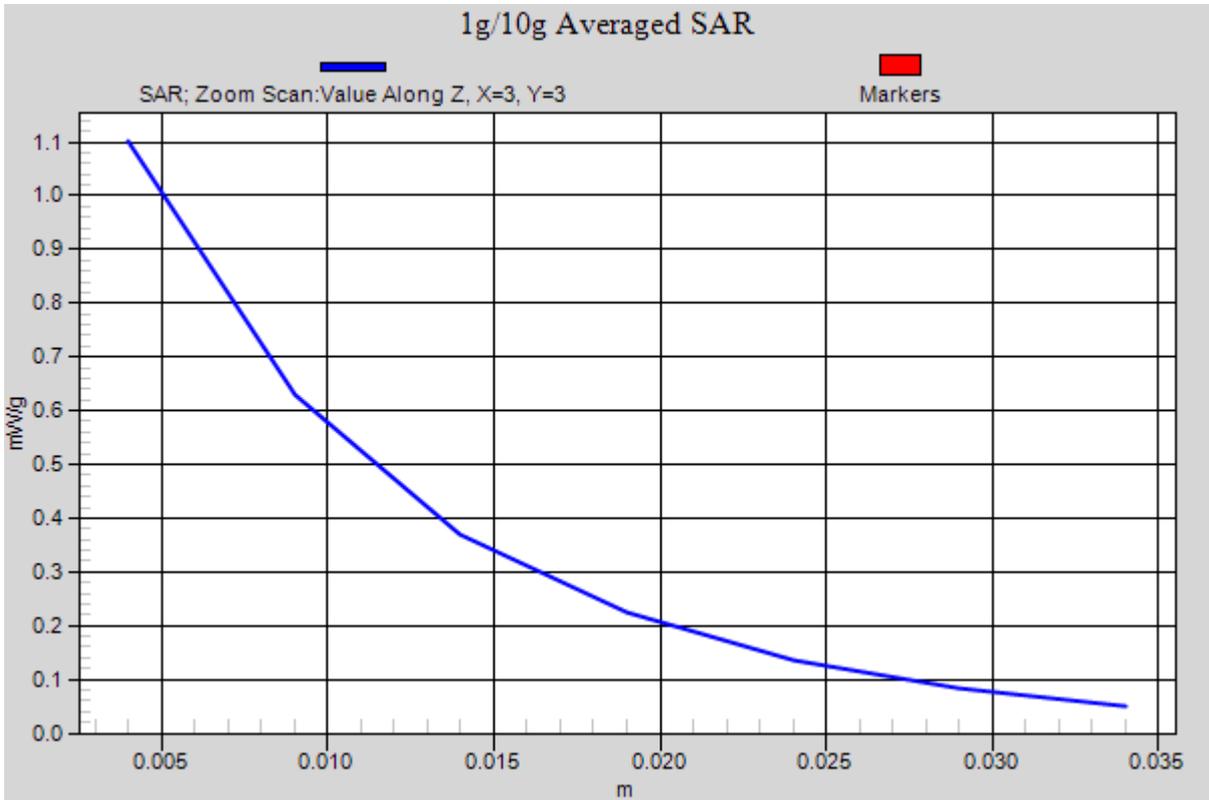


Figure 31 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 4 Channel 810]

GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 4 Middle Frequency

Date/Time: 12/26/2009 3:30:26 PM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.871 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.9 V/m; Power Drift = -0.176 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.724 mW/g; SAR(10 g) = 0.391 mW/g

Maximum value of SAR (measured) = 0.816 mW/g

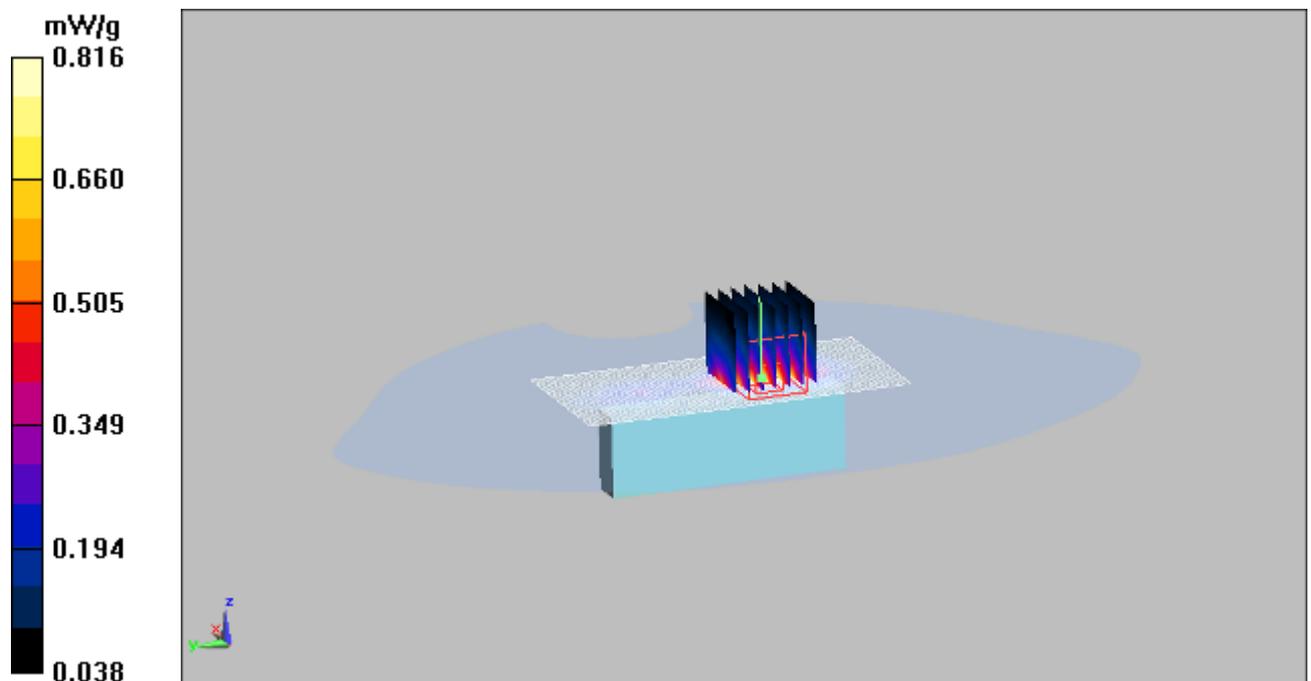


Figure 32 GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 4 Channel 661

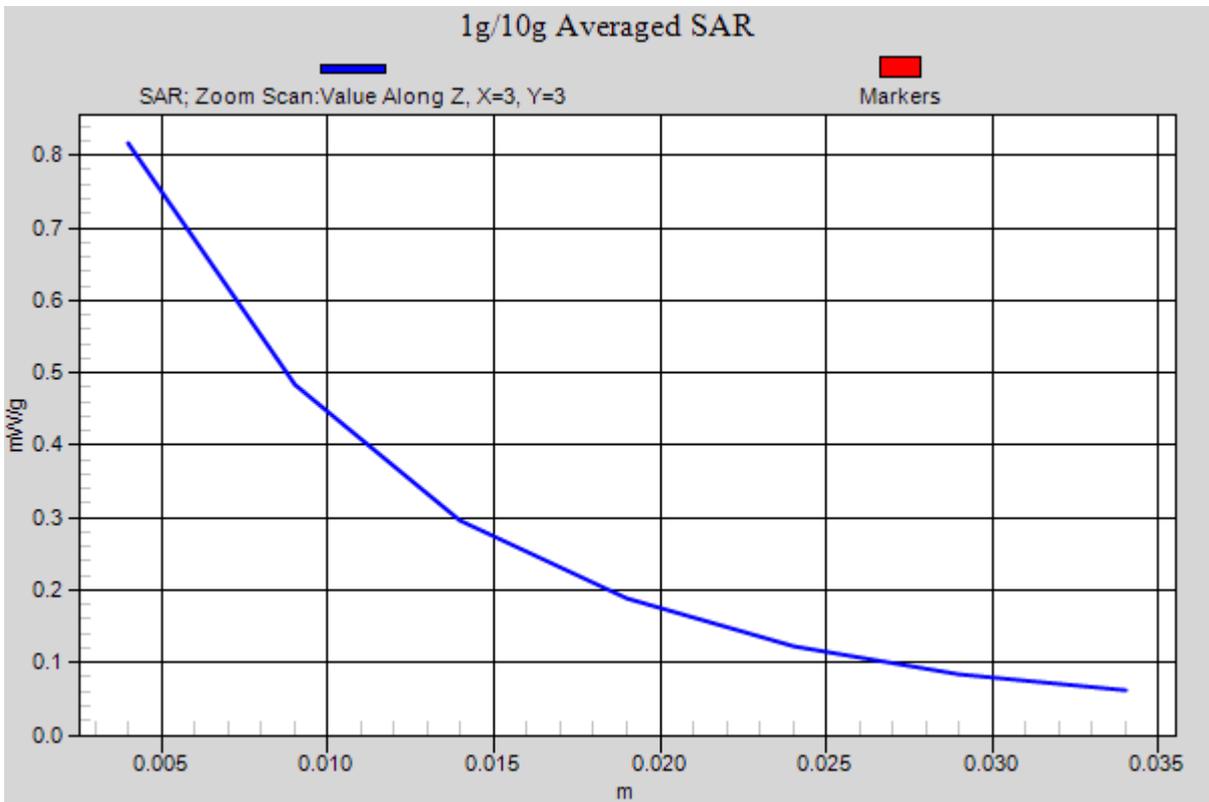


Figure 33 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 4 Channel 661]

GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 4 Low Frequency

Date/Time: 12/26/2009 3:56:23 PM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Low/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.796 mW/g

Test Position 4 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.2 V/m; Power Drift = -0.171 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.702 mW/g; SAR(10 g) = 0.375 mW/g

Maximum value of SAR (measured) = 0.789 mW/g

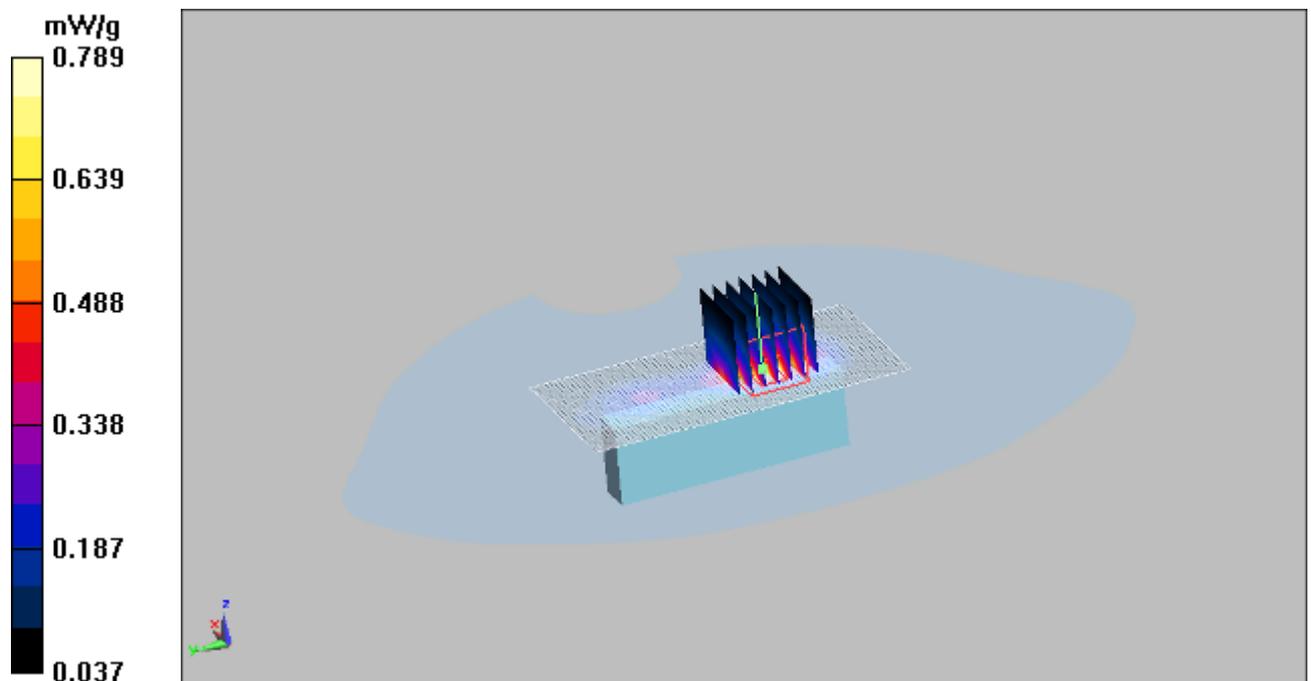


Figure 34 GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 4 Channel 512

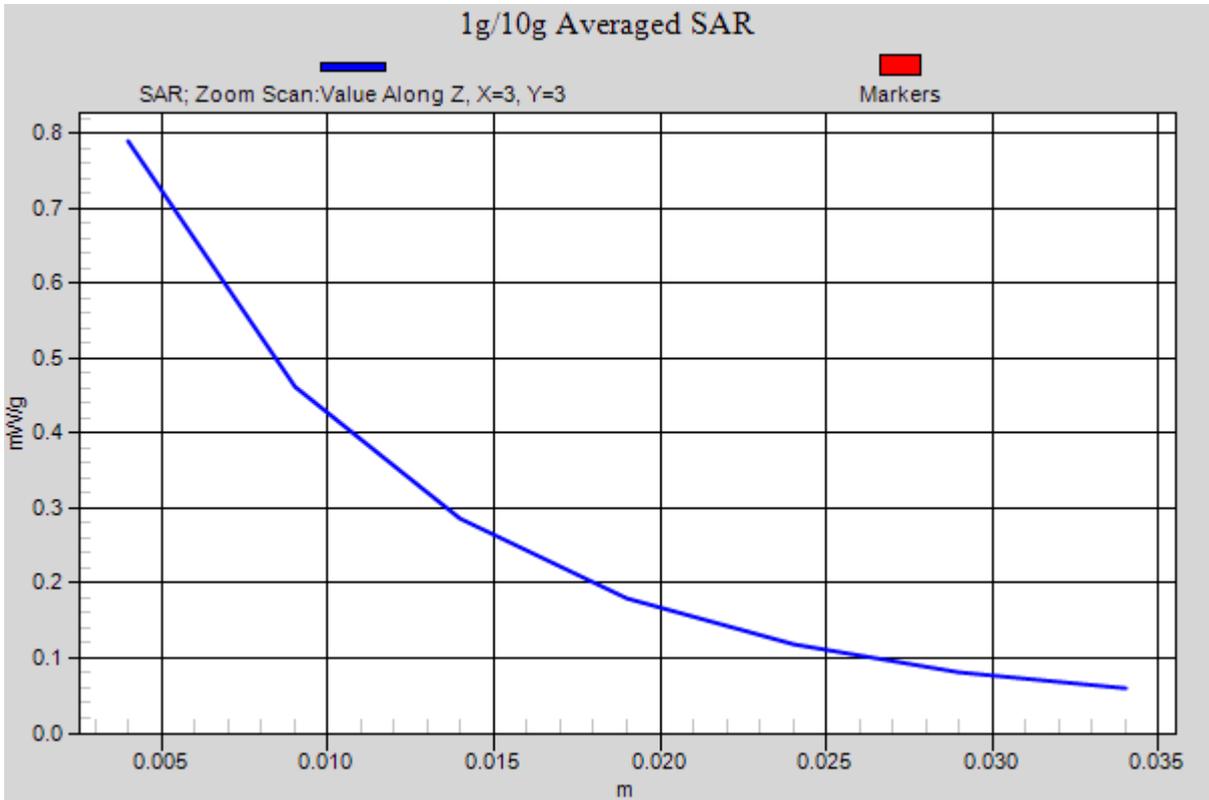


Figure 35 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 4 Channel 512]

GSM 1900 EGPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 4 High Frequency

Date/Time: 12/26/2009 5:14:01 PM

Communication System: PCS 1900+EGPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 High/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.2 mW/g

Test Position 4 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.8 V/m; Power Drift = 0.059 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.523 mW/g

Maximum value of SAR (measured) = 1.14 mW/g

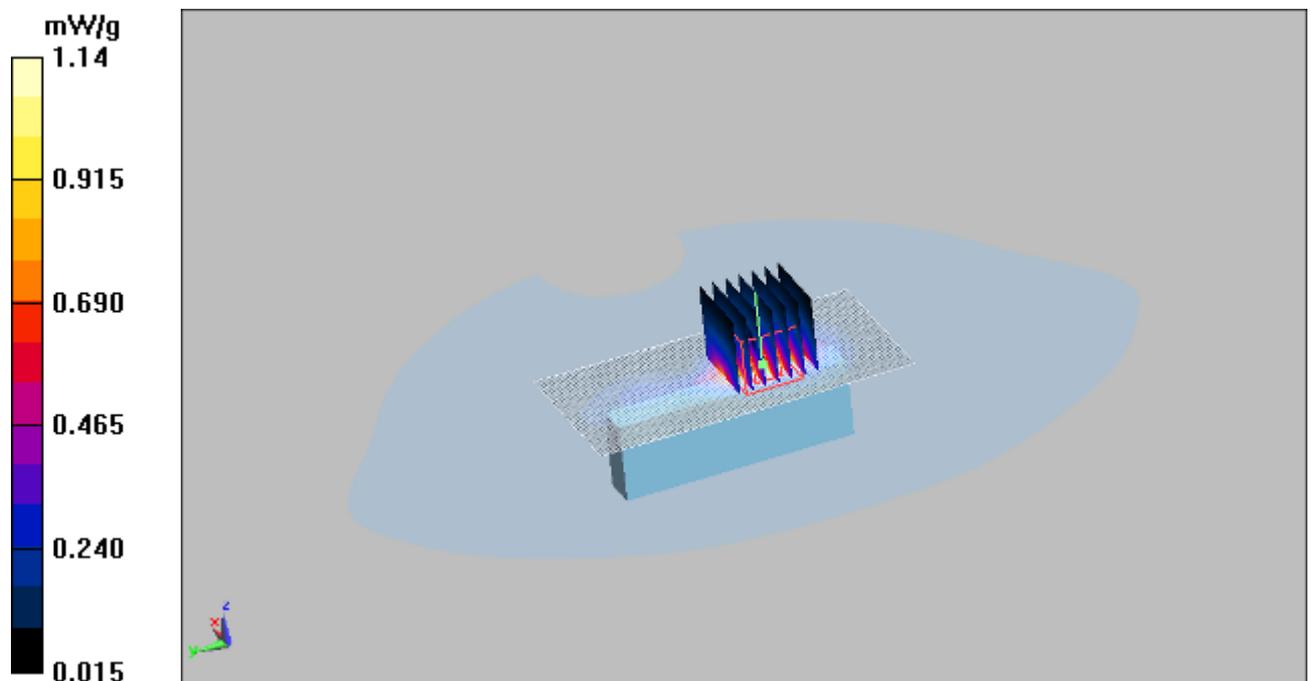


Figure 36 GSM 1900 EGPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 4 Channel 810

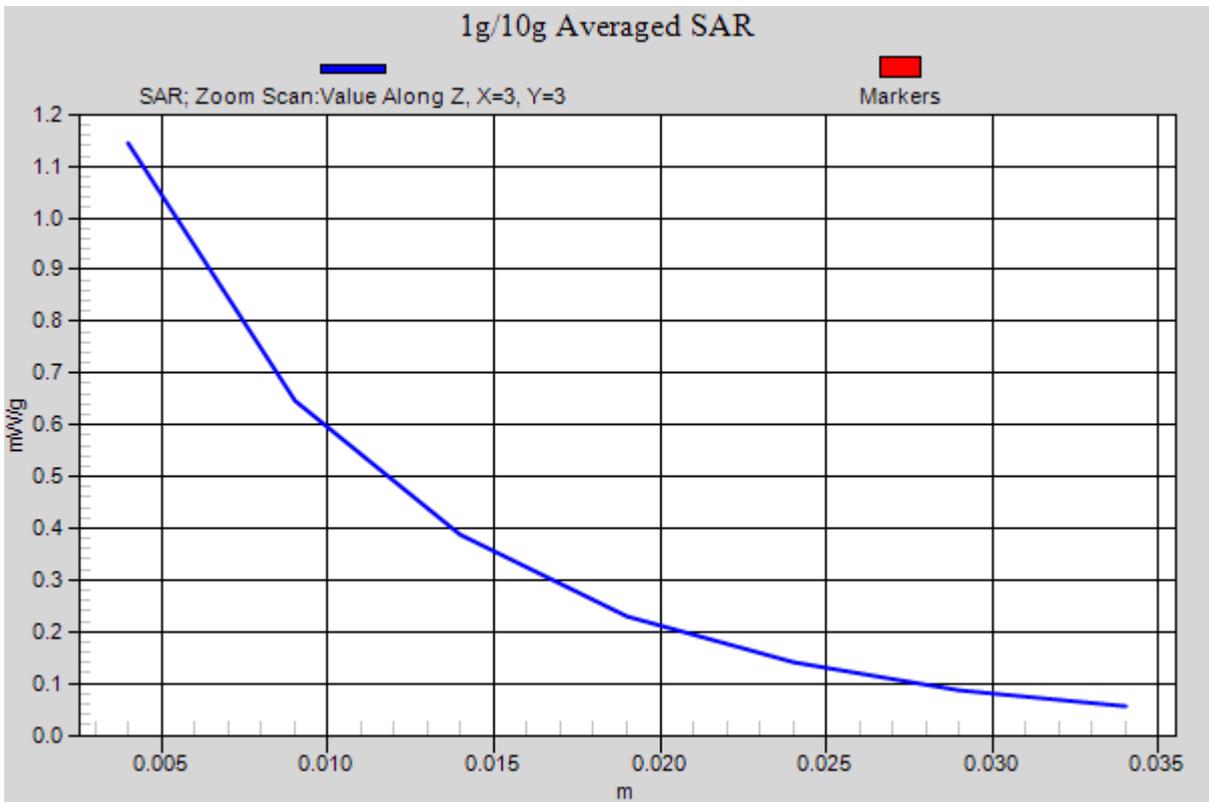


Figure 37 Z-Scan at power reference point [GSM 1900 EGPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 4 Channel 810]

WCDMA Band II with IBM R60e Test Position 1 High Frequency

Date/Time: 12/26/2009 10:18:48 AM

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 High/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.894 mW/g

Test Position 1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.808 mW/g; SAR(10 g) = 0.455 mW/g

Maximum value of SAR (measured) = 0.903 mW/g

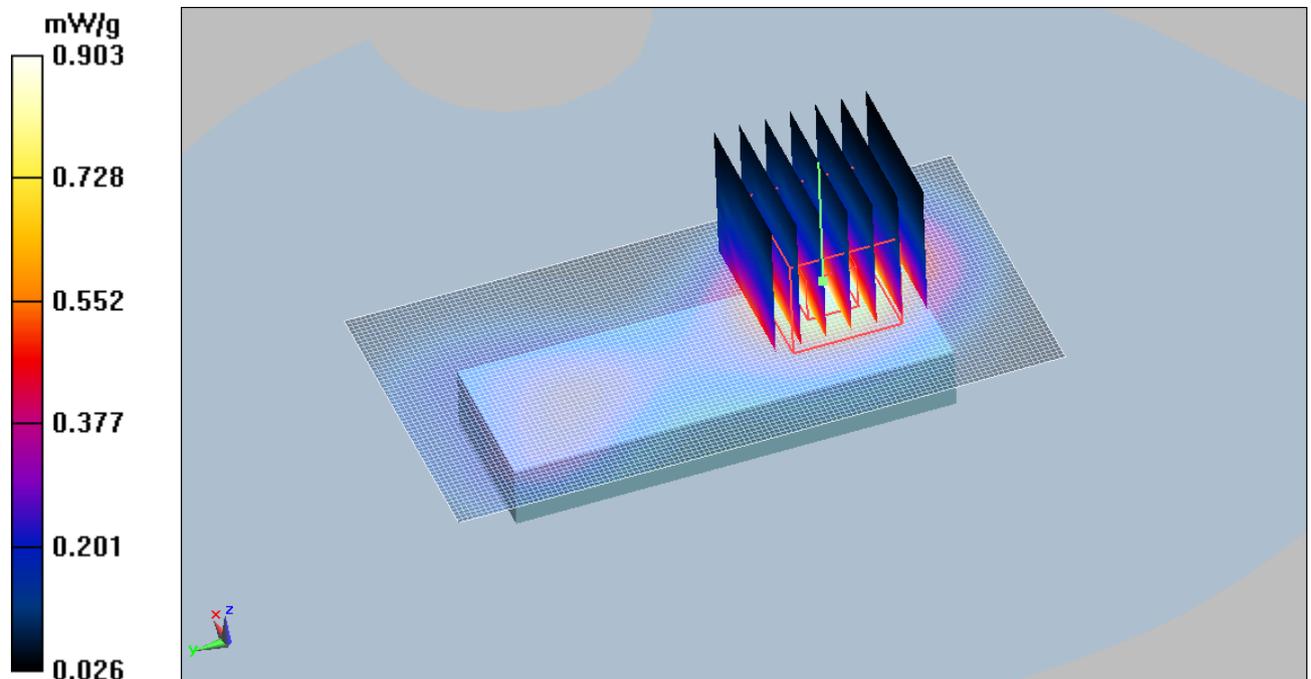


Figure 38 WCDMA Band II with IBM R60e Test Position 1 Channel 9538

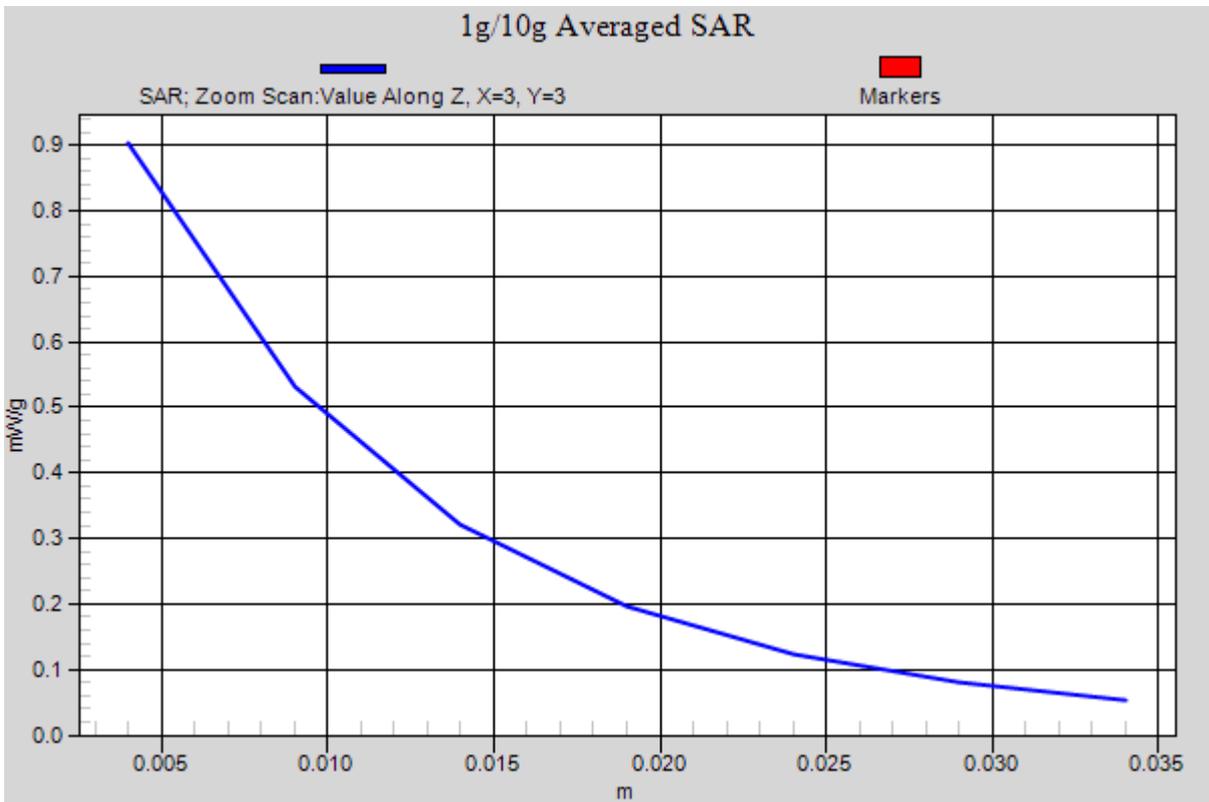


Figure 39 Z-Scan at power reference point [WCDMA Band II with IBM R60e Test Position 1 Channel 9538]

WCDMA Band II with IBM R60e Test Position 1 Middle Frequency

Date/Time: 12/26/2009 9:53:39 AM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 1.03 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = 0.066 dB

Peak SAR (extrapolated) = 1.6 W/kg

SAR(1 g) = 0.916 mW/g; SAR(10 g) = 0.515 mW/g

Maximum value of SAR (measured) = 1.02 mW/g

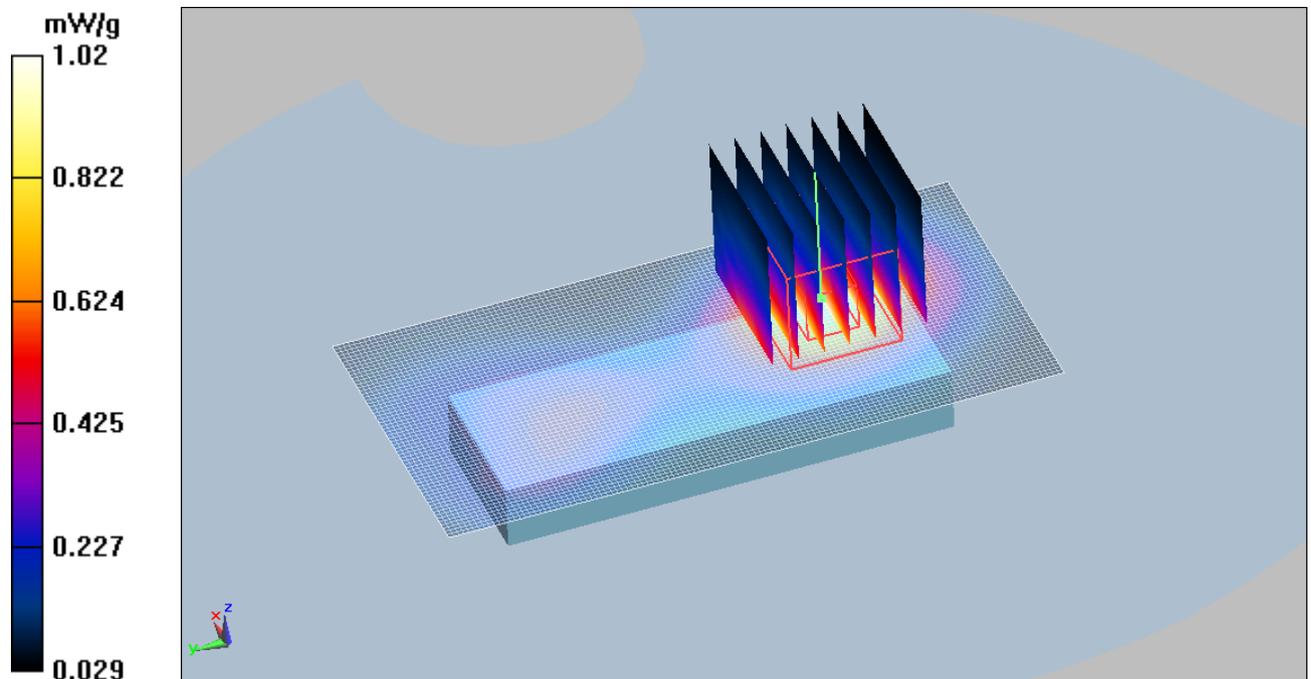


Figure 40 WCDMA Band II with IBM R60e Test Position 1 Channel 9400

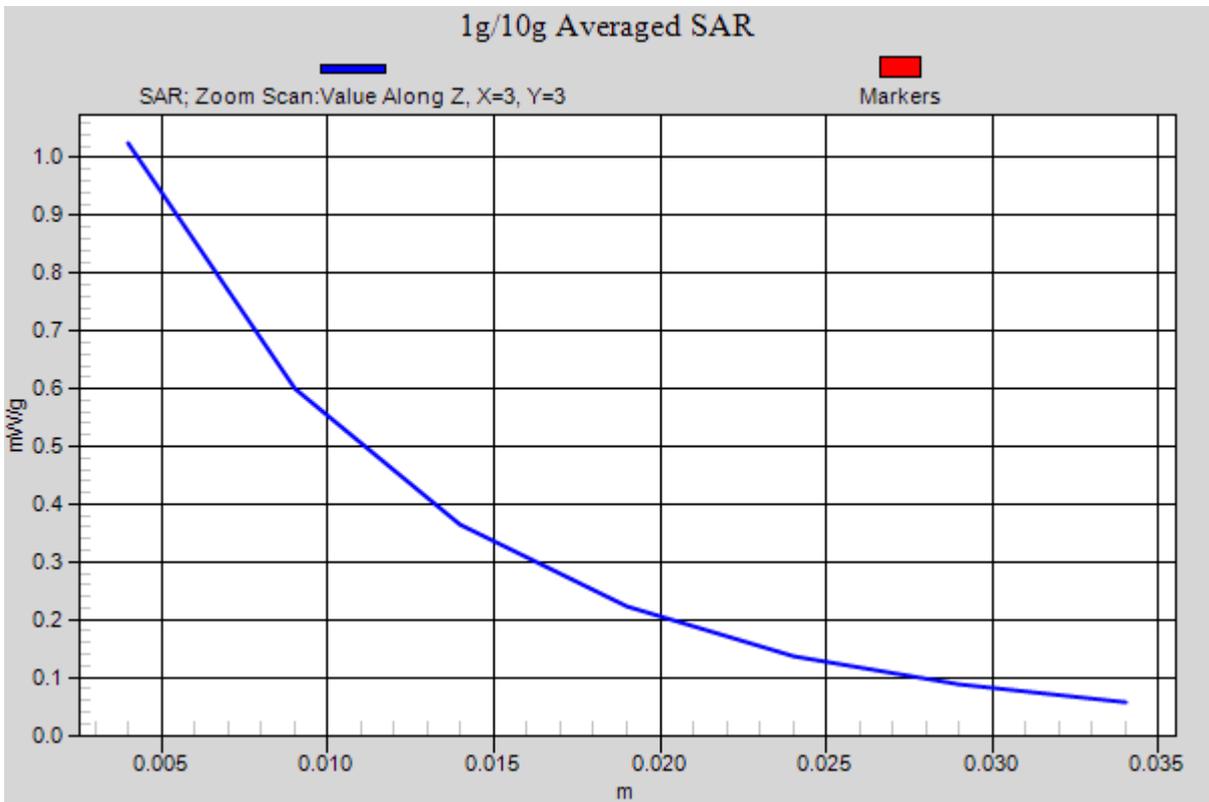


Figure 41 Z-Scan at power reference point [WCDMA Band II with IBM R60e Test Position 1 Channel 9400]

WCDMA Band II with IBM R60e Test Position 1 Low Frequency

Date/Time: 12/26/2009 10:36:30 AM

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Low/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.11 mW/g

Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = 0.138 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.568 mW/g

Maximum value of SAR (measured) = 1.12 mW/g

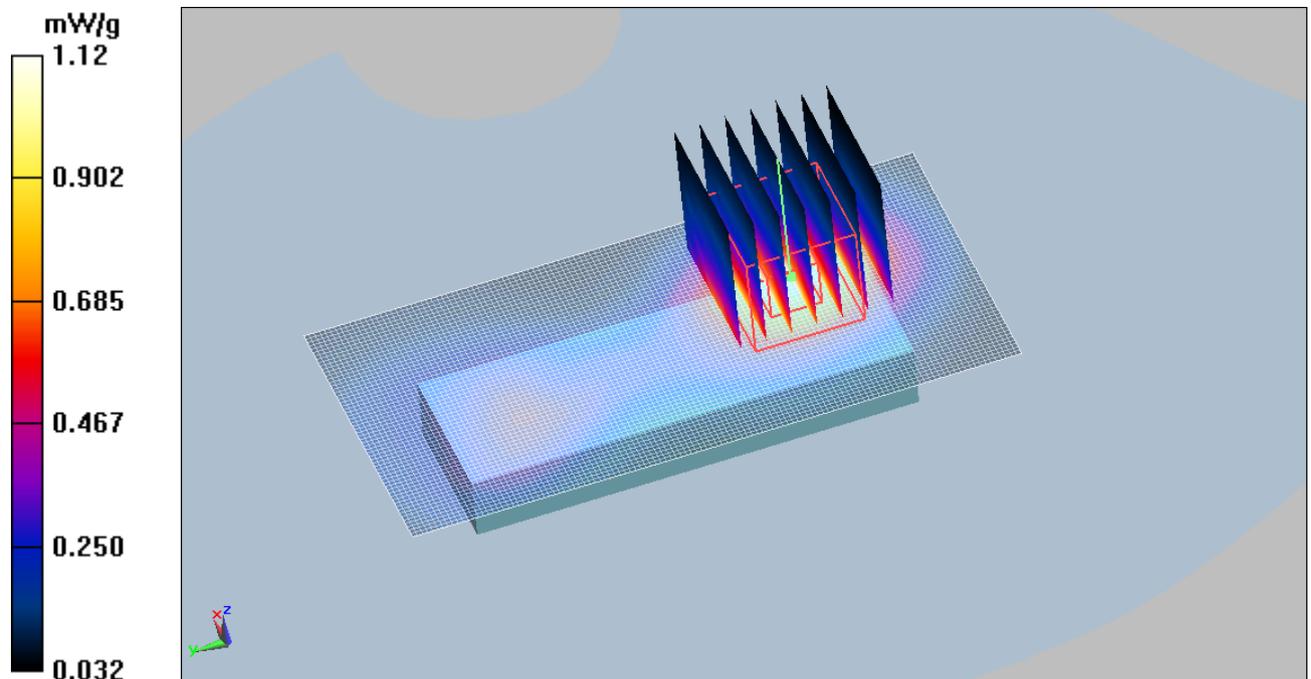


Figure 42 WCDMA Band II with IBM R60e Test Position 1 Channel 9262

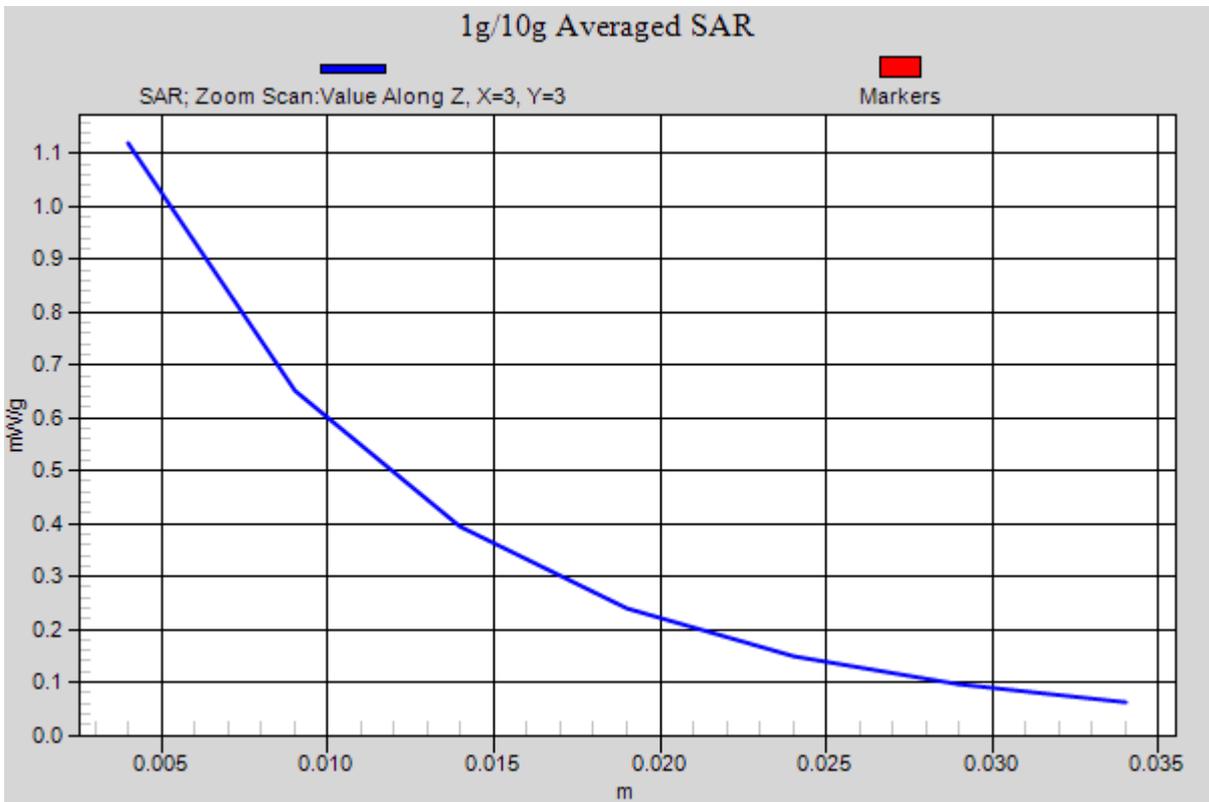


Figure 43 Z-Scan at power reference point [WCDMA Band II with IBM R60e Test Position 1 Channel 9262]

WCDMA Band II with IBM R60e Test Position 2 High Frequency

Date/Time: 12/26/2009 11:17:29 AM

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 High/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.758 mW/g

Test Position 2 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.7 V/m; Power Drift = 0.126 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.694 mW/g; SAR(10 g) = 0.434 mW/g

Maximum value of SAR (measured) = 0.744 mW/g

Test Position 2 High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.7 V/m; Power Drift = 0.126 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.706 mW/g; SAR(10 g) = 0.384 mW/g

Maximum value of SAR (measured) = 0.763 mW/g

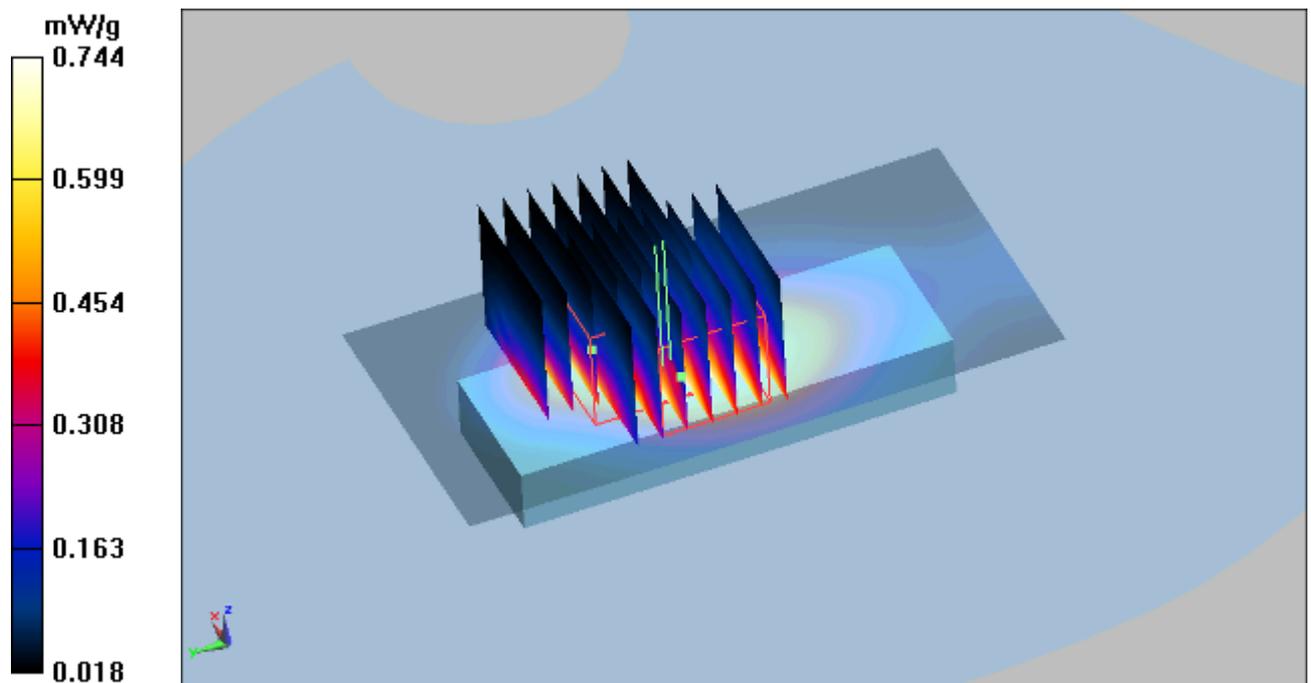


Figure 44 WCDMA Band II with IBM R60e Test Position 2 Channel 9538

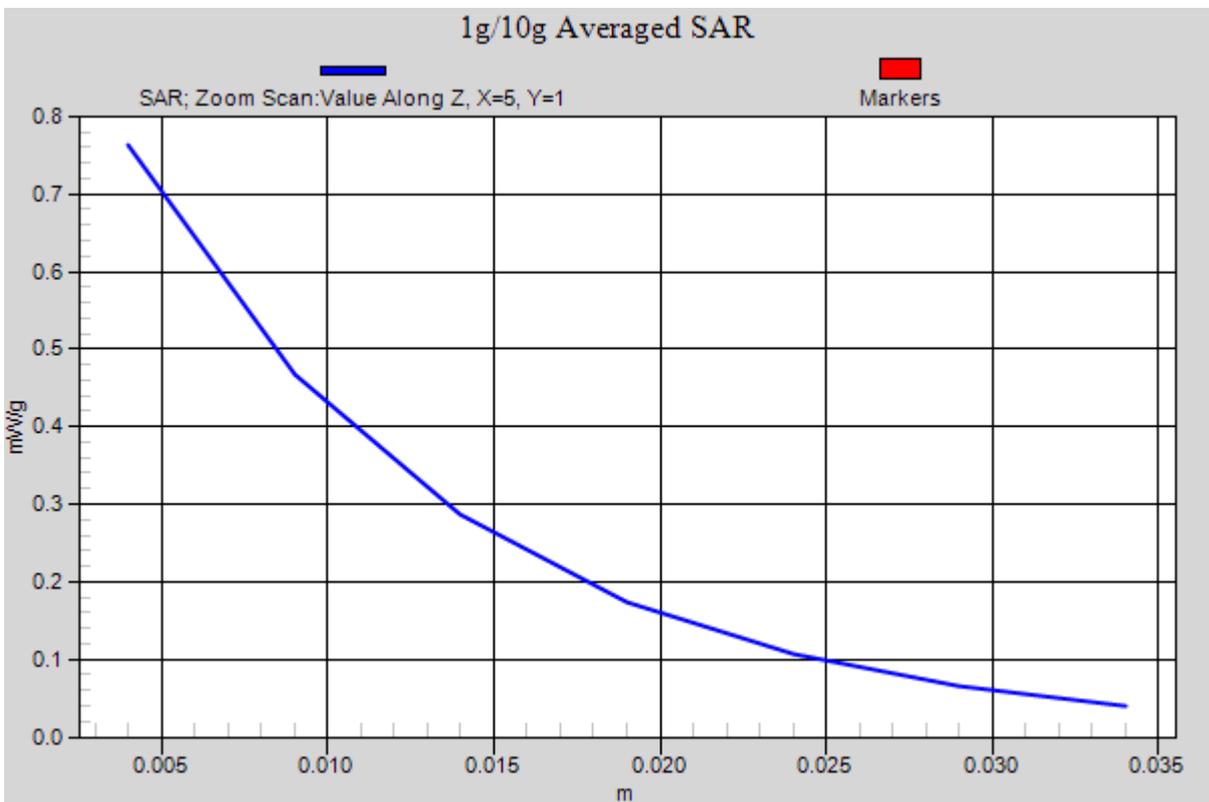
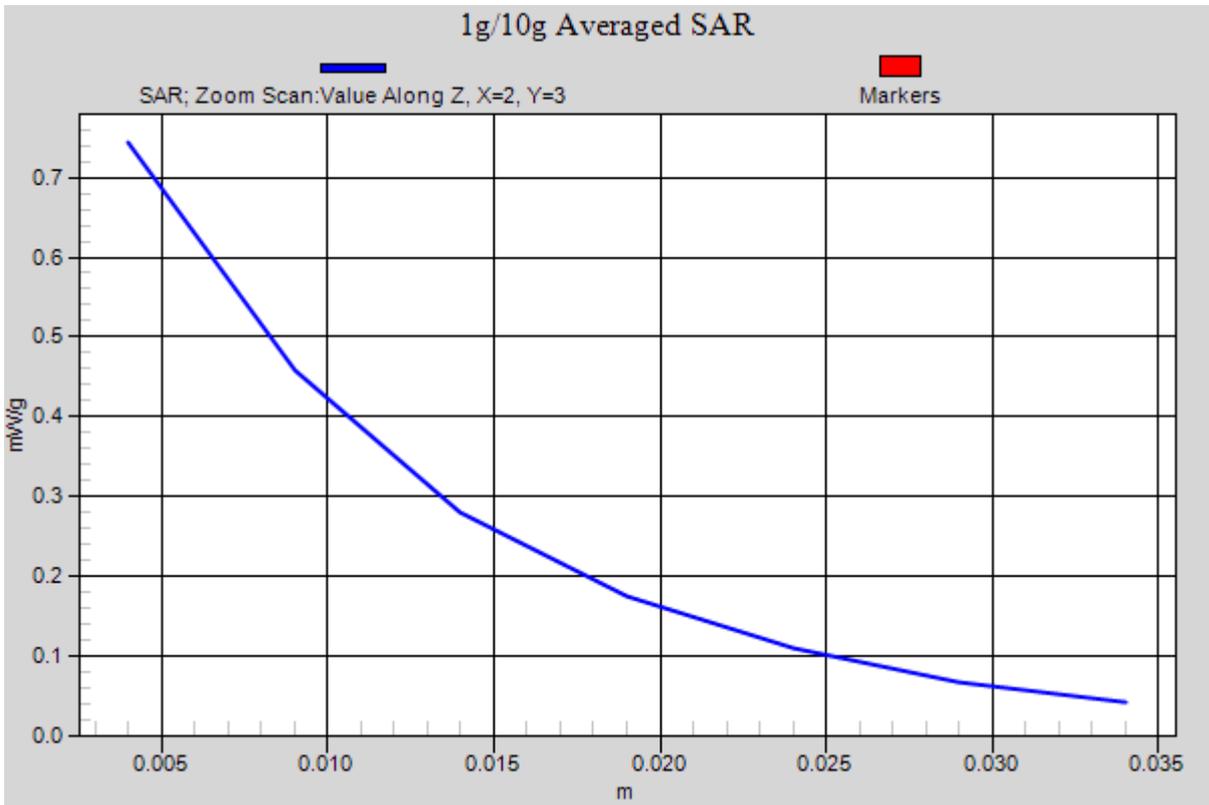


Figure 45 Z-Scan at power reference point [WCDMA Band II with IBM R60e Test Position 2 Channel 9538]

WCDMA Band II with IBM R60e Test Position 2 Middle Frequency

Date/Time: 12/26/2009 10:55:53 AM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.898 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 22.7 V/m; Power Drift = -0.123 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.814 mW/g; SAR(10 g) = 0.502 mW/g

Maximum value of SAR (measured) = 0.888 mW/g

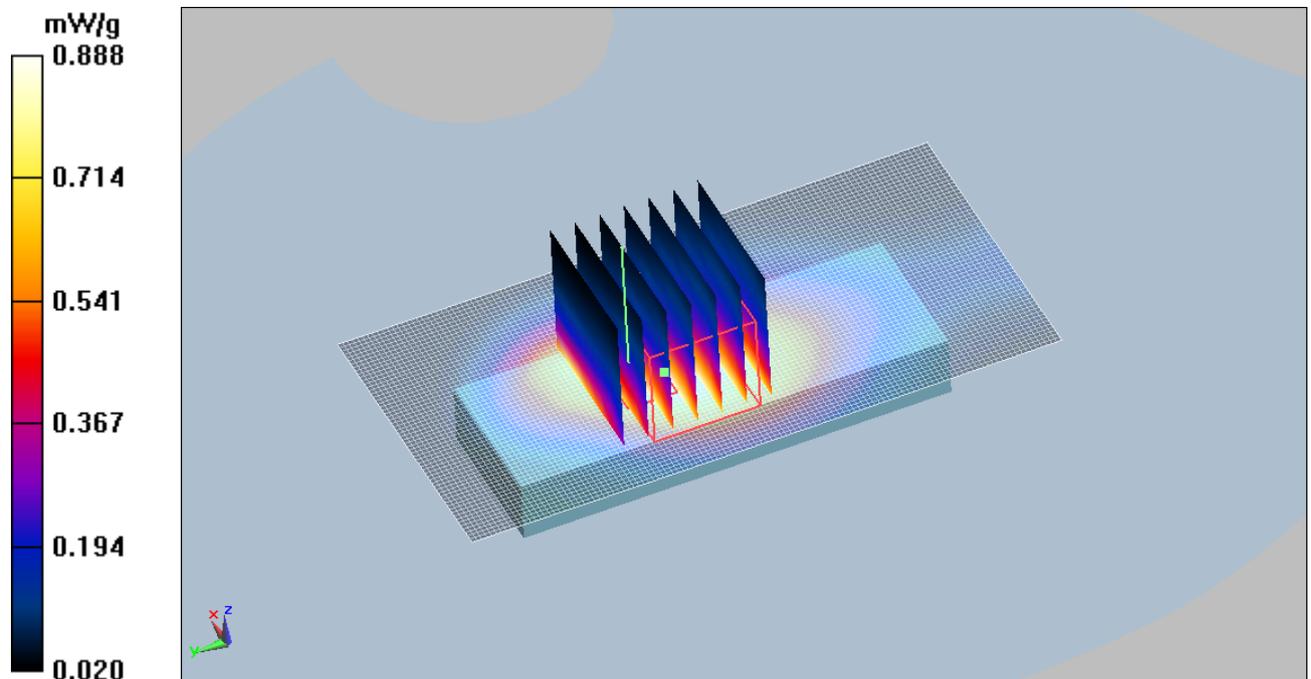


Figure 46 WCDMA Band II with IBM R60e Test Position 2 Channel 9400

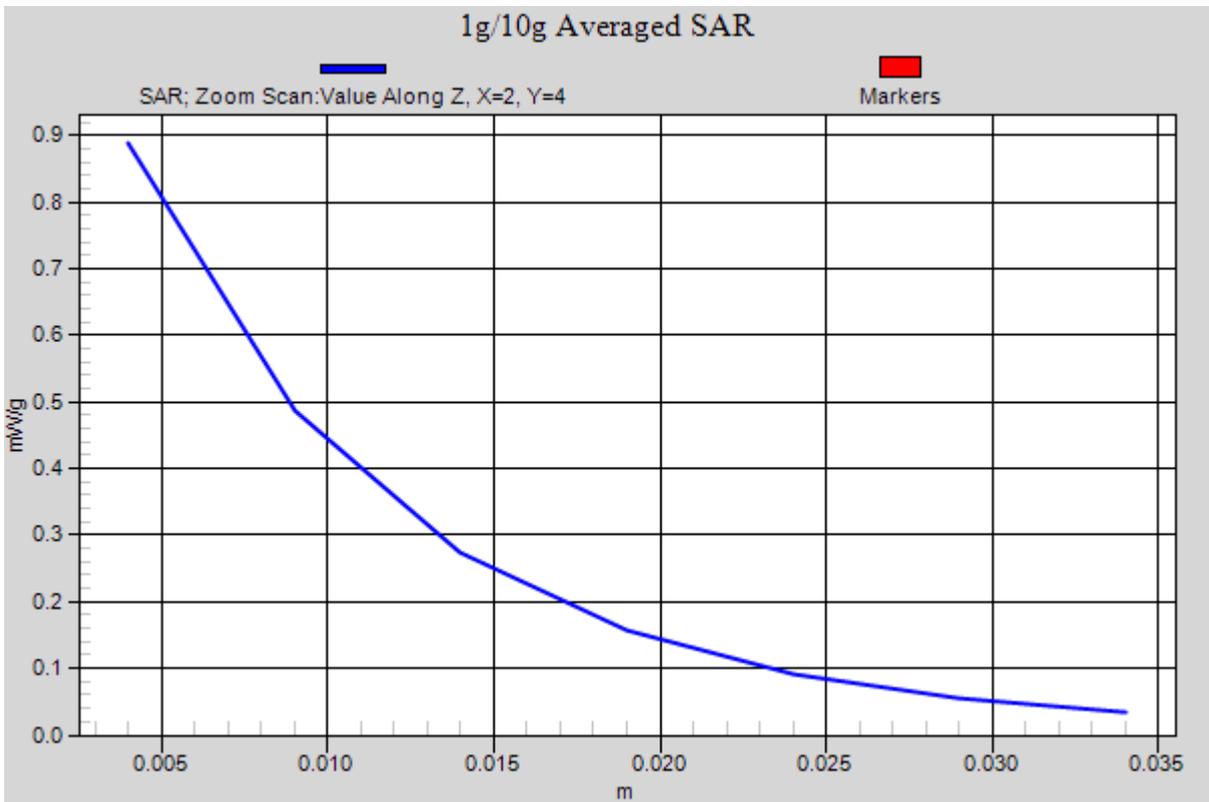


Figure 47 Z-Scan at power reference point [WCDMA Band II with IBM R60e Test Position 2 Channel 9400]

WCDMA Band II with IBM R60e Test Position 2 Low Frequency

Date/Time: 12/26/2009 11:42:22 AM

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Low/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.902 mW/g

Test Position 2 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.6 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.833 mW/g; SAR(10 g) = 0.519 mW/g

Maximum value of SAR (measured) = 0.901 mW/g

Test Position 2 Low/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.6 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.847 mW/g; SAR(10 g) = 0.505 mW/g

Maximum value of SAR (measured) = 0.920 mW/g

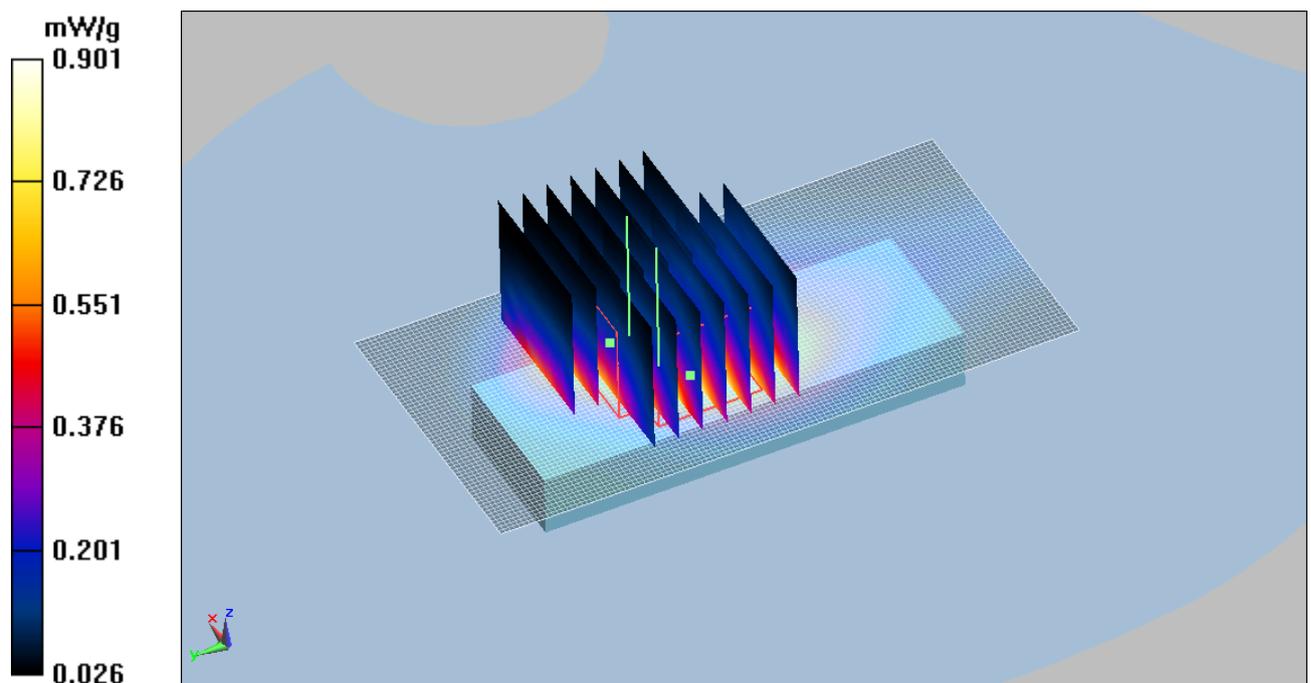


Figure 48 WCDMA Band II with IBM R60e Test Position 2 Channel 9262

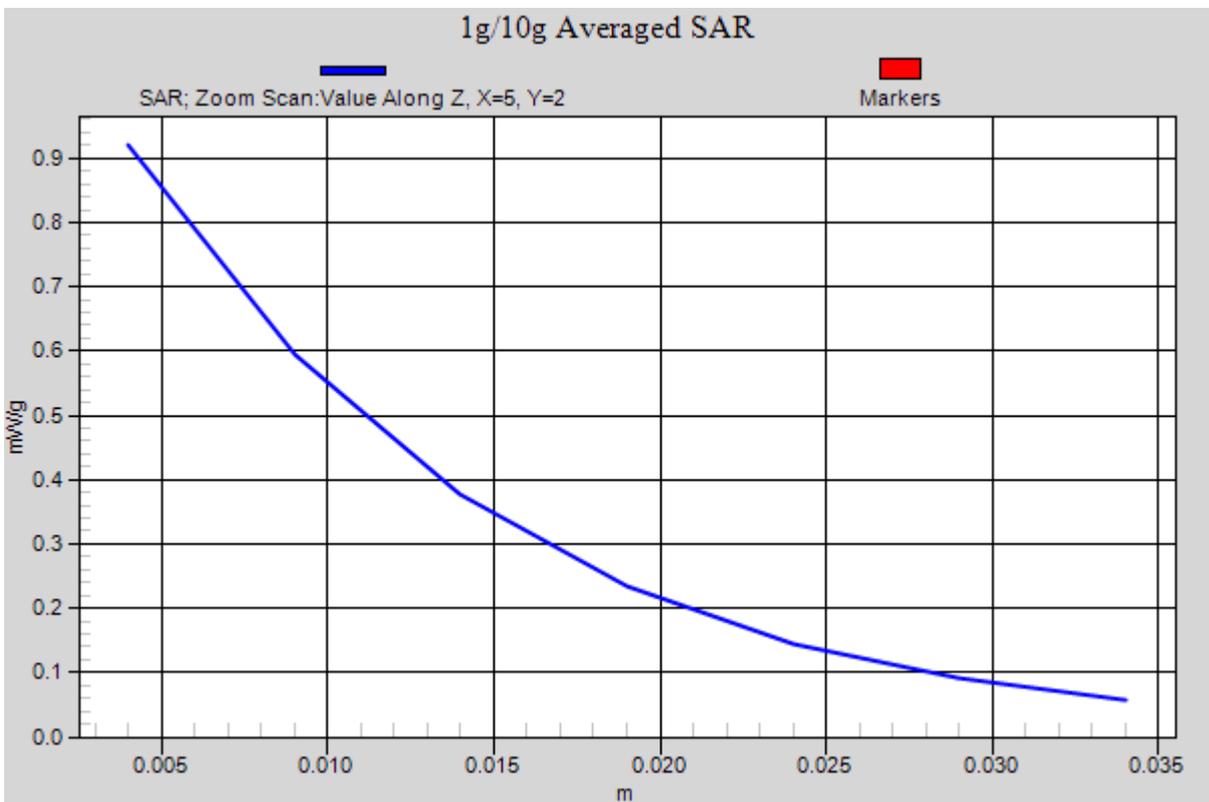
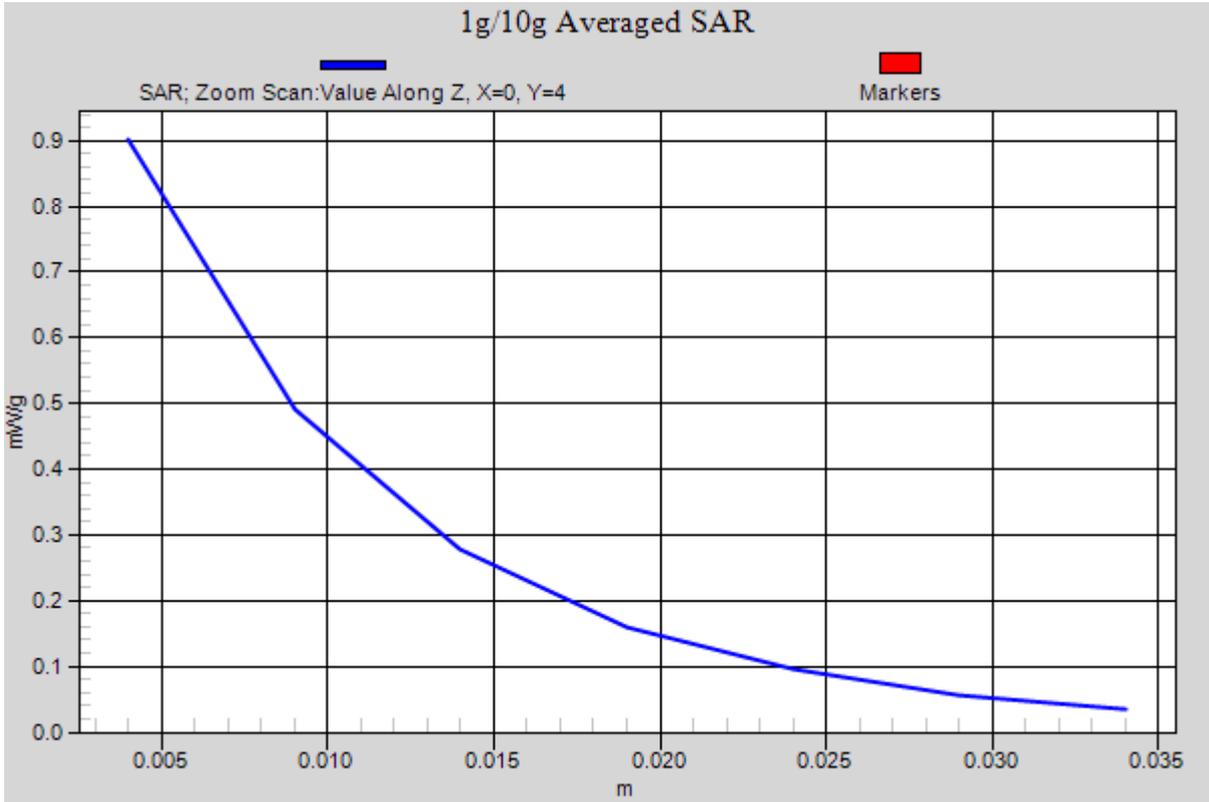


Figure 49 Z-Scan at power reference point [WCDMA Band II with IBM R60e Test Position 2 Channel 9262]

WCDMA Band II with BenQ Joybook R55V Test Position 3 High Frequency

Date/Time: 12/26/2009 2:32:56 PM

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 High/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.01 mW/g

Test Position 3 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.8 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.846 mW/g; SAR(10 g) = 0.377 mW/g

Maximum value of SAR (measured) = 0.999 mW/g

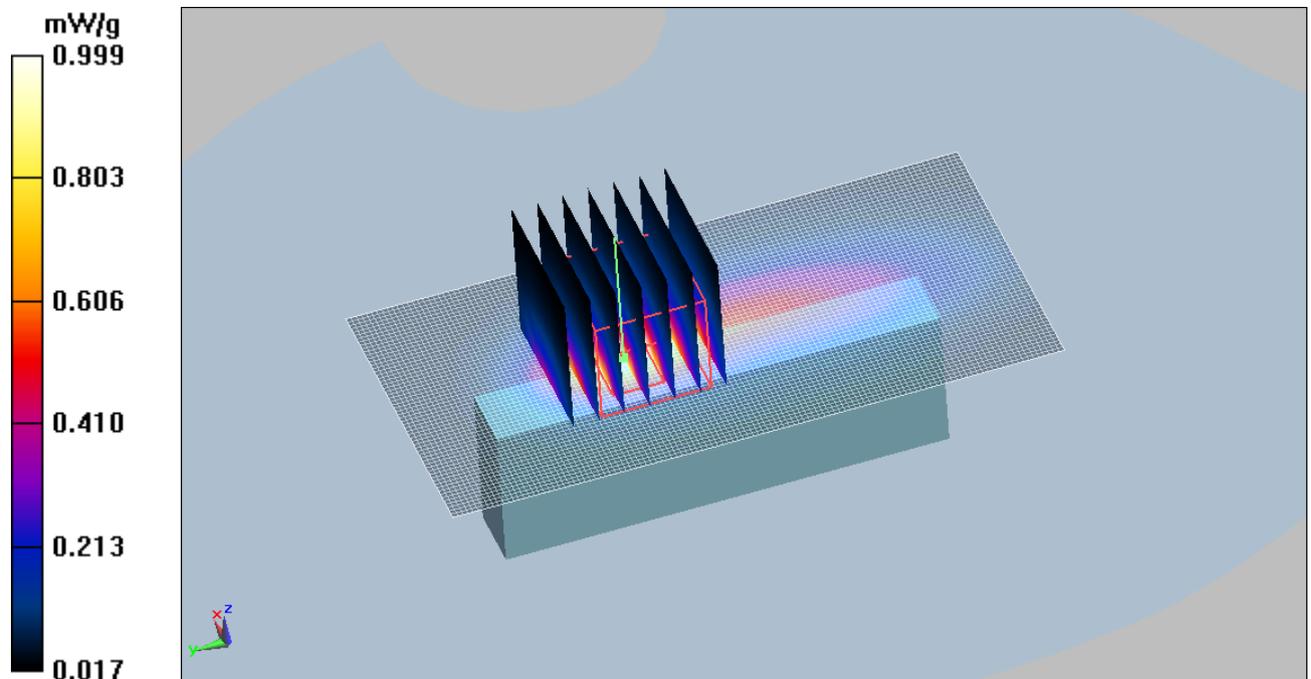


Figure 50 WCDMA Band II with BenQ Joybook R55V Test Position 3 Channel 9538

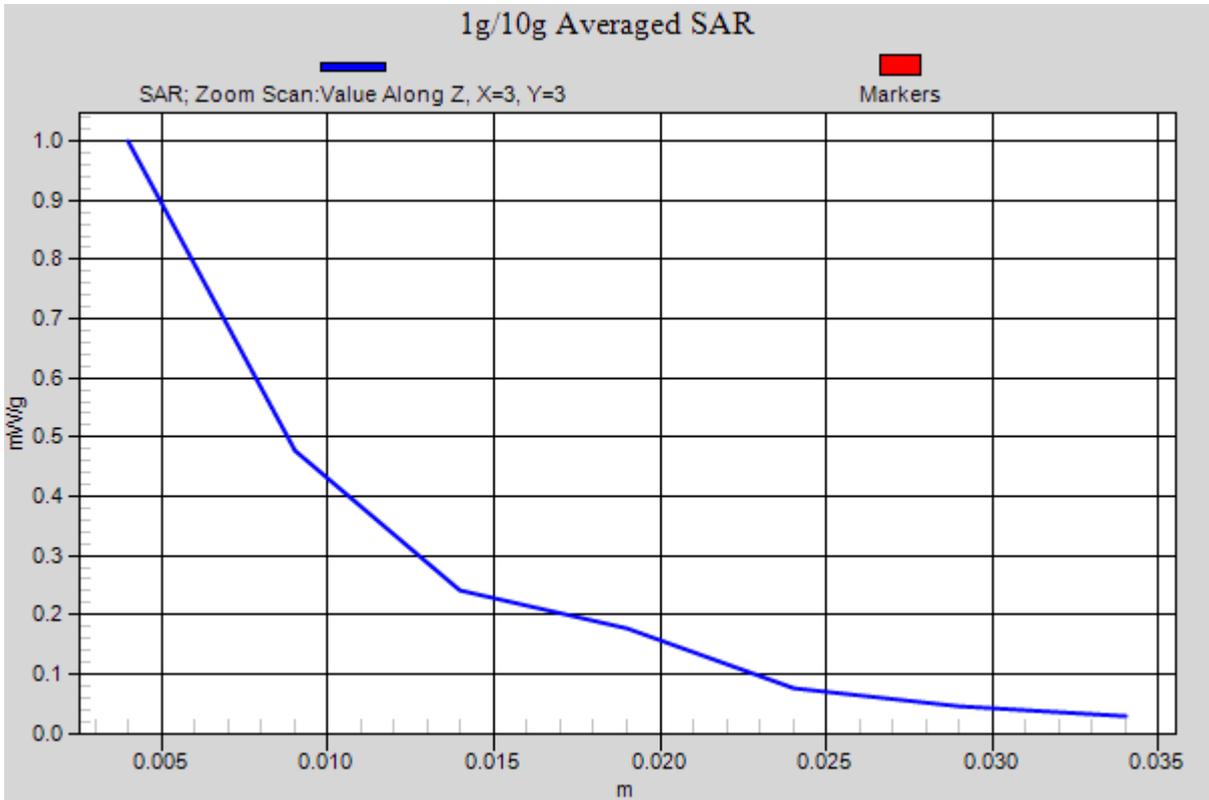


Figure 51 Z-Scan at power reference point [WCDMA Band II with BenQ Joybook R55V Test Position 3 Channel 9538]

WCDMA Band II with BenQ Joybook R55V Test Position 3 Middle Frequency

Date/Time: 12/26/2009 1:28:40 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.04 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.5 V/m; Power Drift = 0.111 dB

Peak SAR (extrapolated) = 2.14 W/kg

SAR(1 g) = 0.938 mW/g; SAR(10 g) = 0.428 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.5 V/m; Power Drift = 0.111 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.735 mW/g; SAR(10 g) = 0.380 mW/g

Maximum value of SAR (measured) = 0.987 mW/g

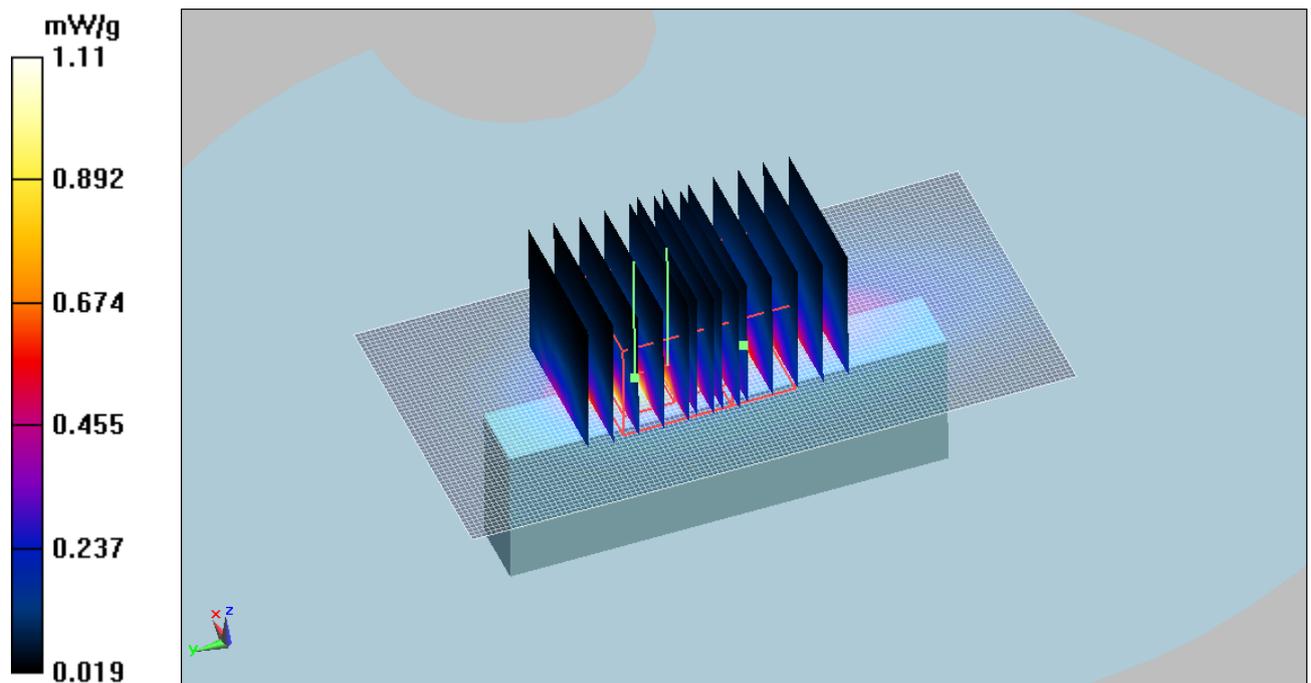


Figure 52 WCDMA Band II with BenQ Joybook R55V Test Position 3 Channel 9400

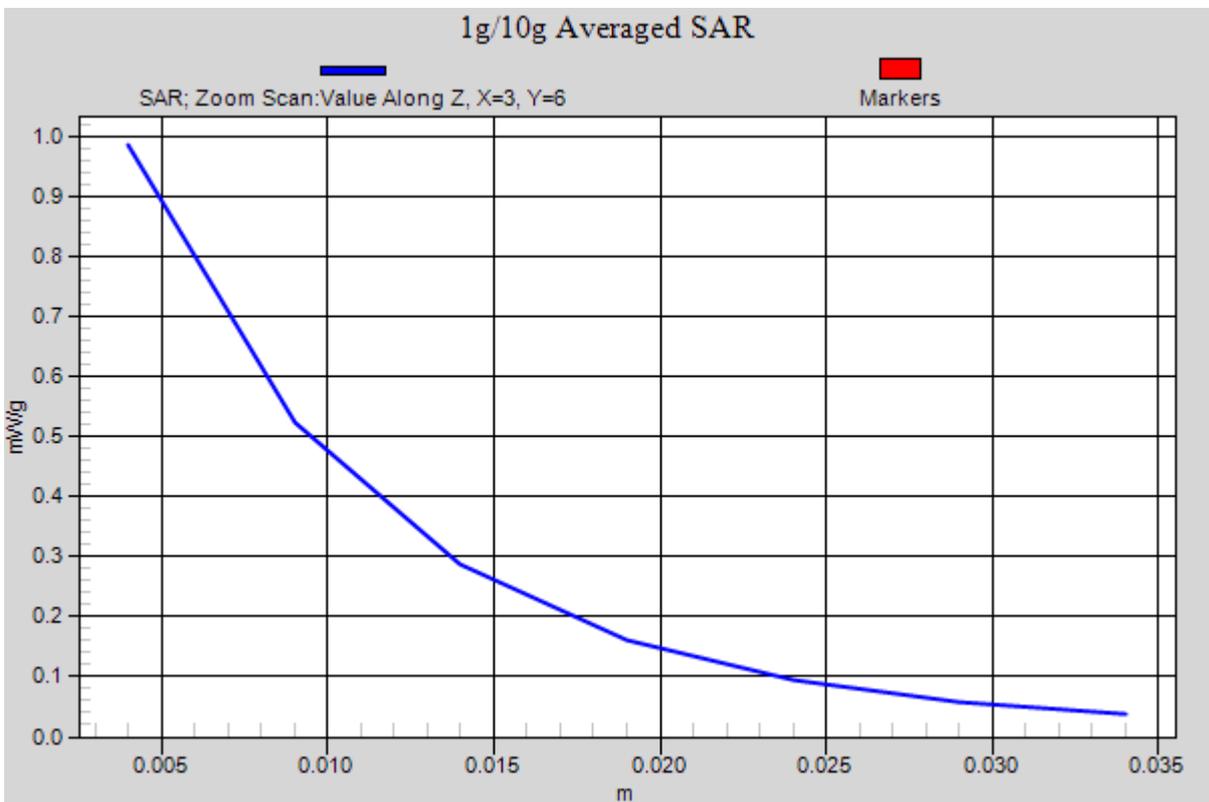
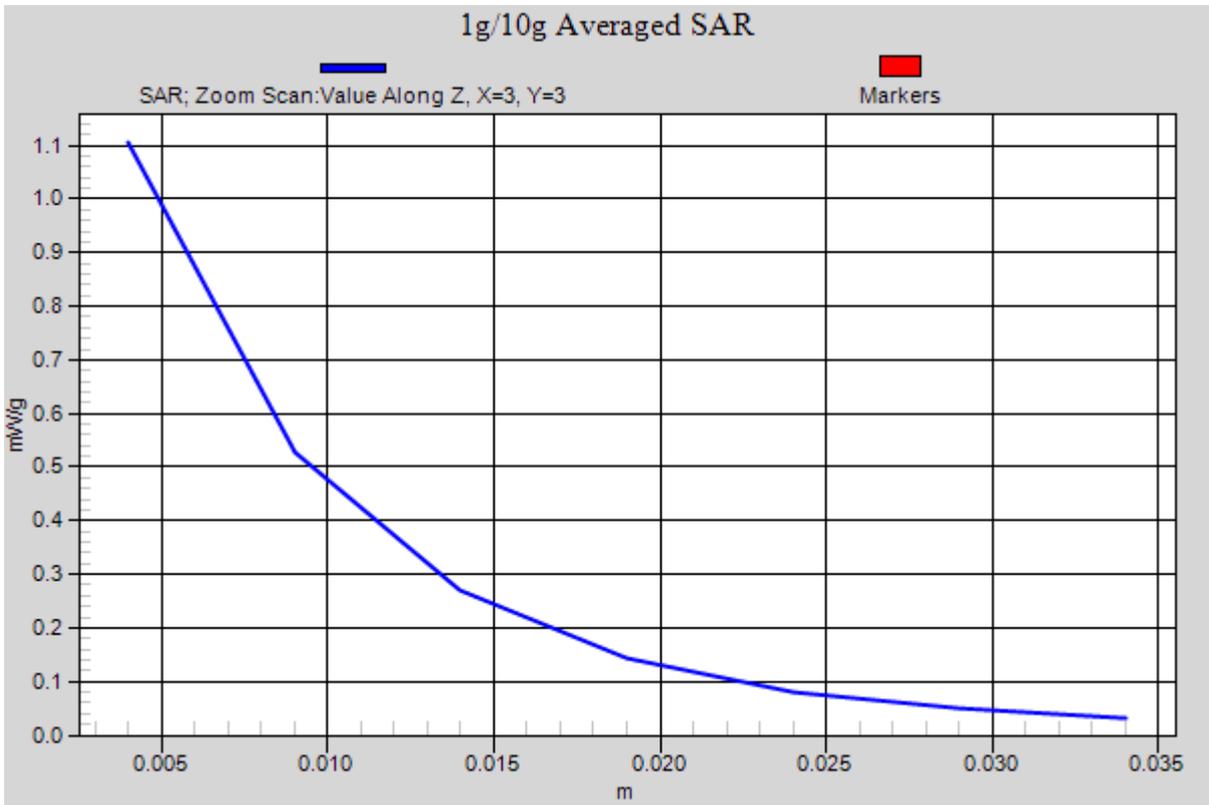


Figure 53 Z-Scan at power reference point [WCDMA Band II with BenQ Joybook R55V Test Position 3 Channel 9400]

WCDMA Band II with BenQ Joybook R55V Test Position 3 Low Frequency

Date/Time: 12/26/2009 2:08:20 PM

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 Low/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.1 mW/g

Test Position 3 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.5 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 0.950 mW/g; SAR(10 g) = 0.451 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

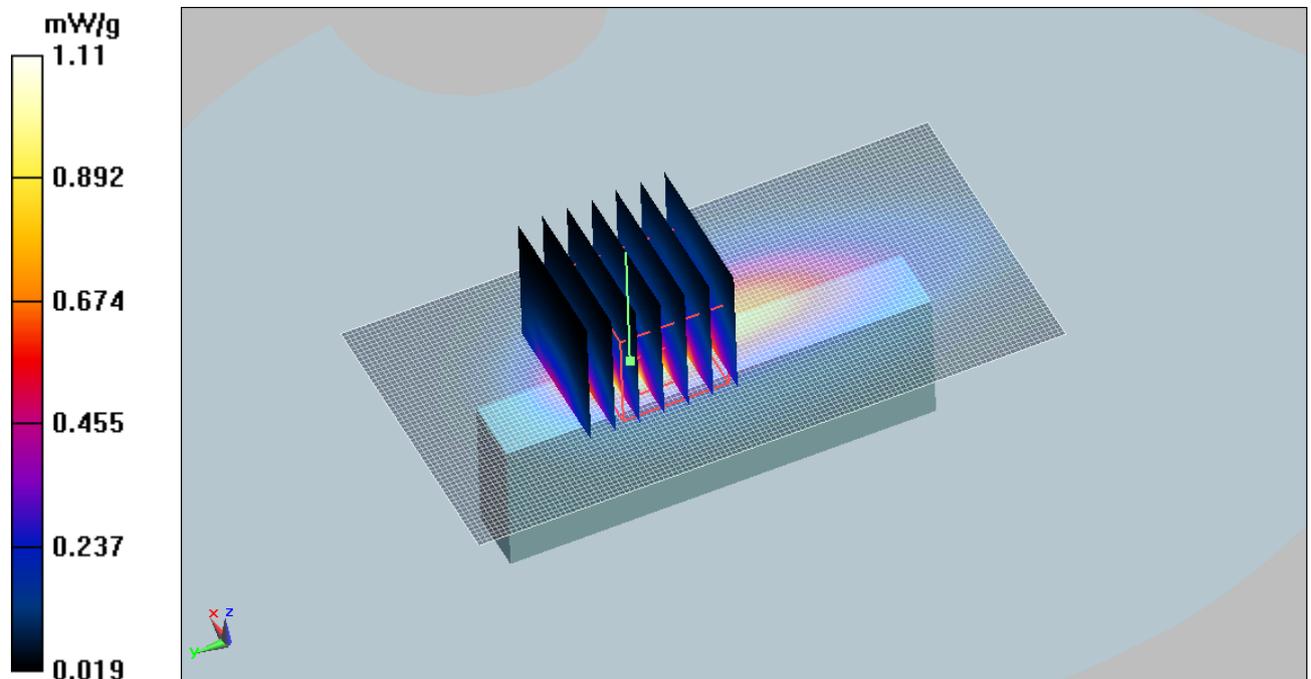


Figure 54 WCDMA Band II with BenQ Joybook R55V Test Position 3 Channel 9262

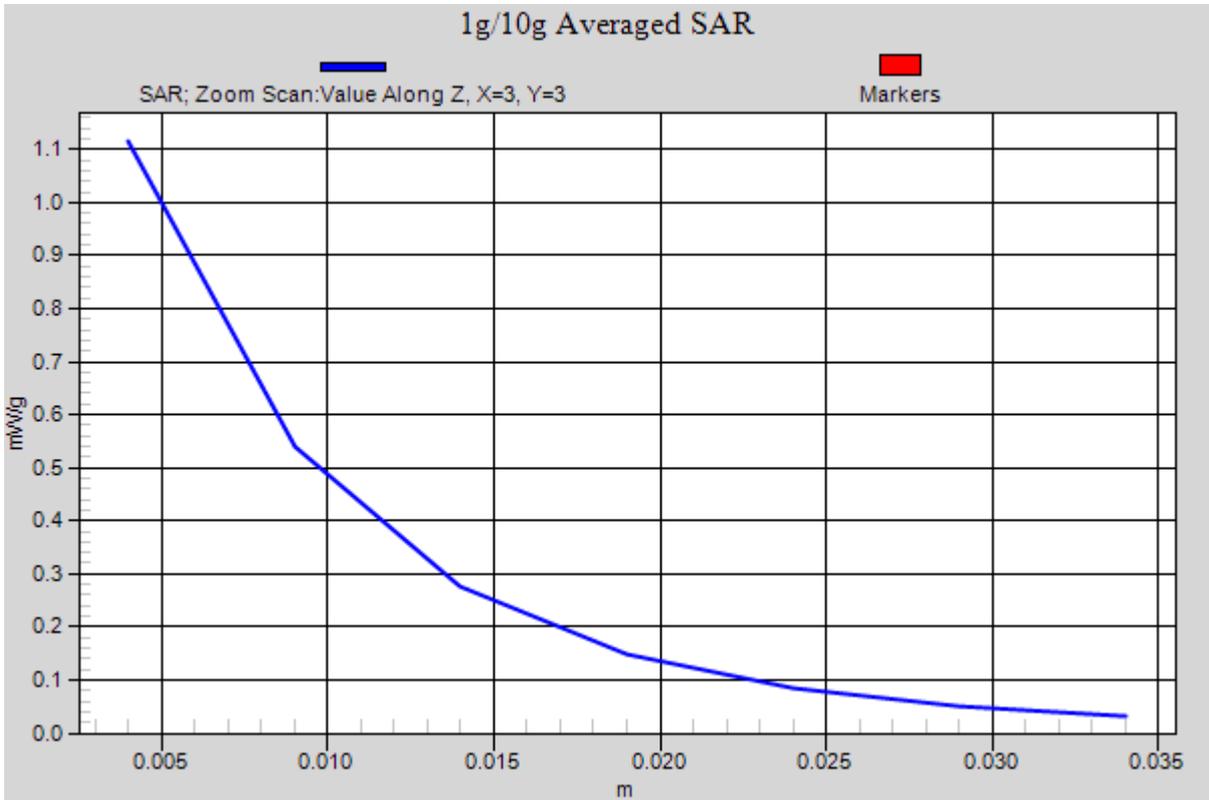


Figure 55 Z-Scan at power reference point [WCDMA Band II with BenQ Joybook R55V Test Position 3 Channel 9262]

WCDMA Band II with BenQ Joybook R55V Test Position 4 High Frequency

Date/Time: 12/26/2009 12:57:46 PM

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 High/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.11 mW/g

Test Position 4 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.2 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.943 mW/g; SAR(10 g) = 0.504 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

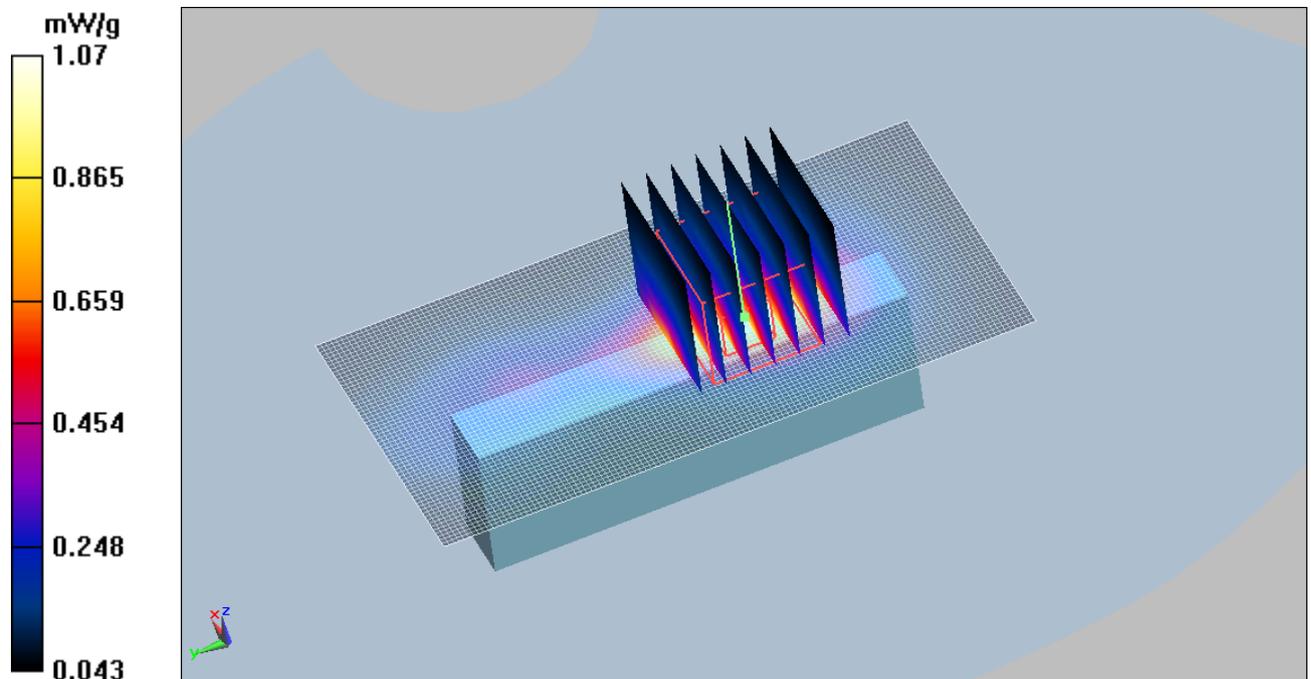


Figure 56 WCDMA Band II with BenQ Joybook R55V Test Position 4 Channel 9538

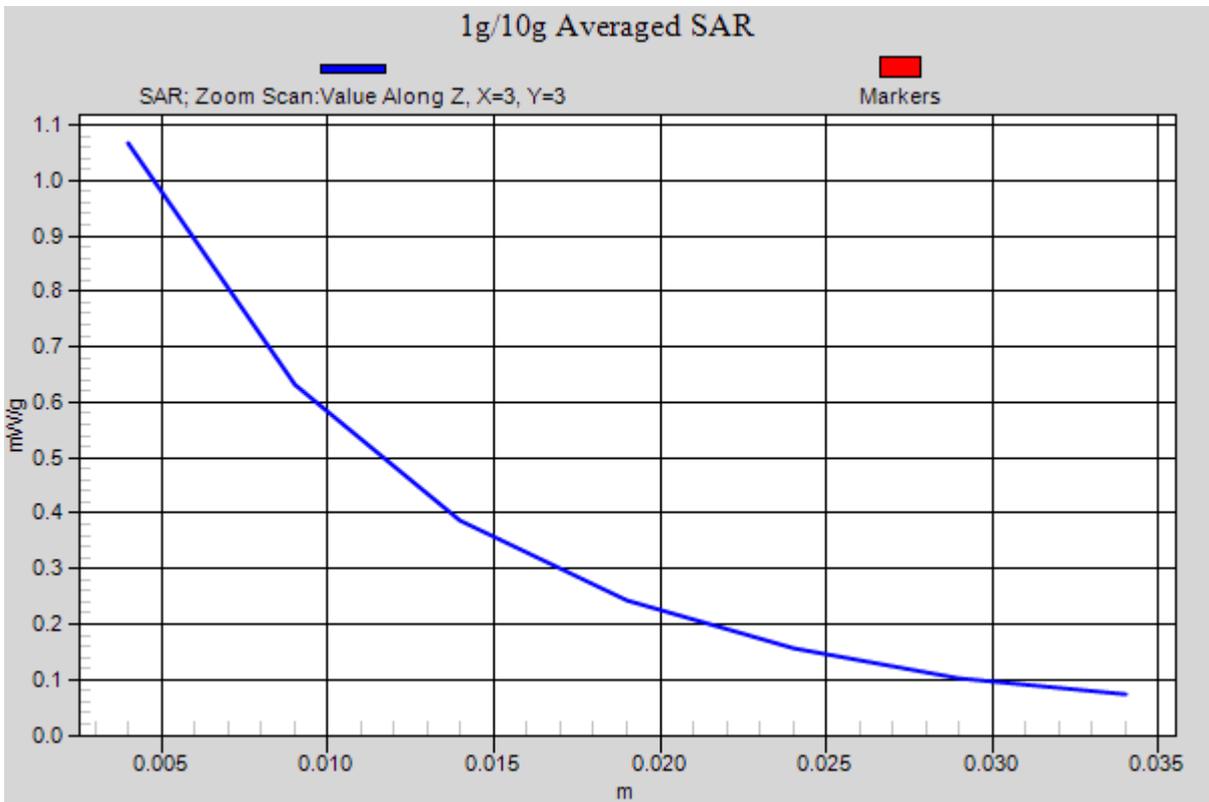


Figure 57 Z-Scan at power reference point [WCDMA Band II with BenQ Joybook R55V Test Position 4 Channel 9538]

WCDMA Band II with BenQ Joybook R55V Test Position 4 Middle Frequency

Date/Time: 12/26/2009 12:16:51 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.23 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.7 V/m; Power Drift = -0.149 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.545 mW/g

Maximum value of SAR (measured) = 1.16 mW/g

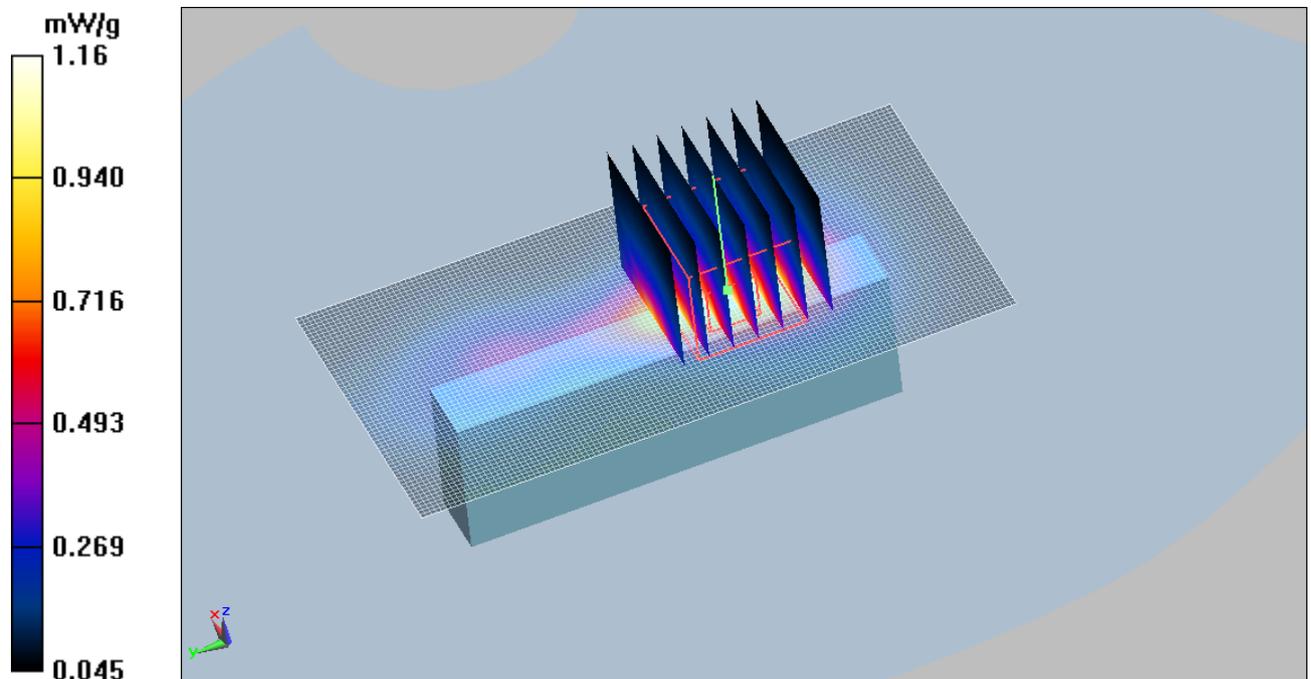


Figure 58 WCDMA Band II with BenQ Joybook R55V Test Position 4 Channel 9400

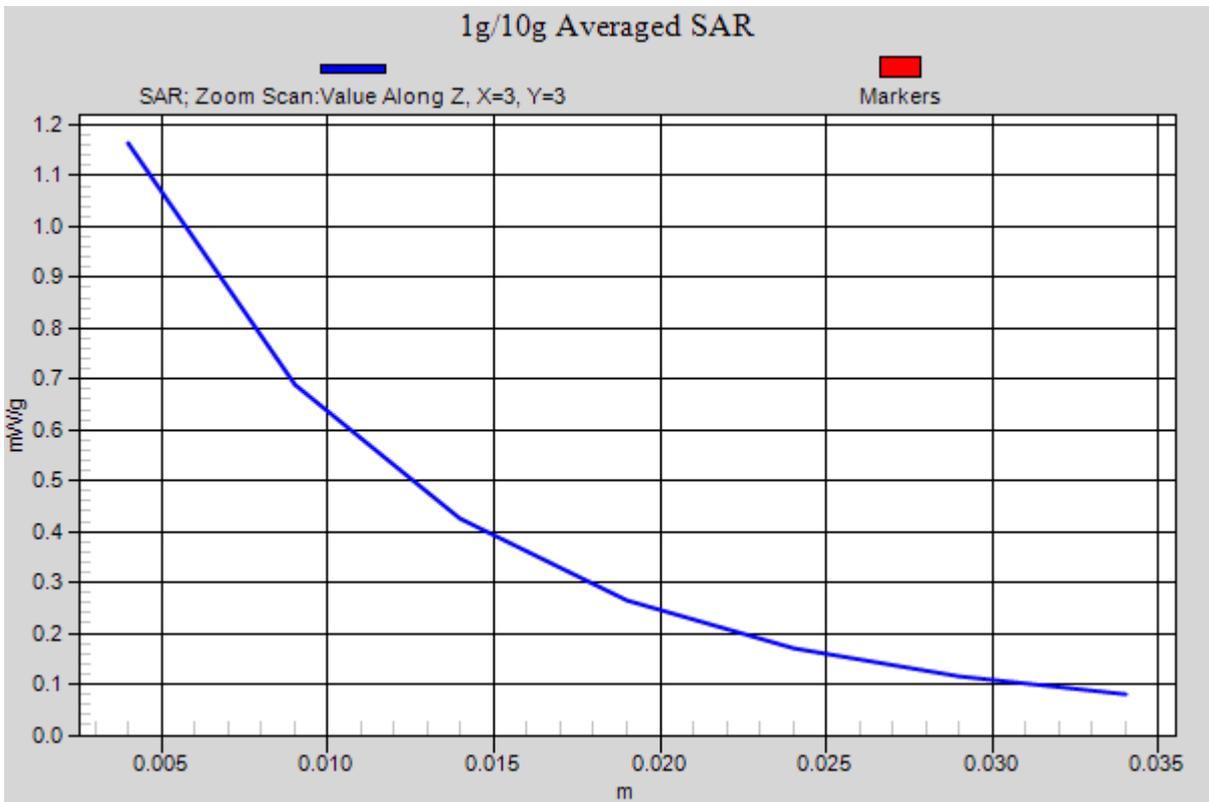


Figure 59 Z-Scan at power reference point [WCDMA Band II with BenQ Joybook R55V Test Position 4 Channel 9400]

WCDMA Band II with BenQ Joybook R55V Test Position 4 Low Frequency

Date/Time: 12/26/2009 12:33:16 PM

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Low/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.31 mW/g

Test Position 4 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.6 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.597 mW/g

Maximum value of SAR (measured) = 1.29 mW/g

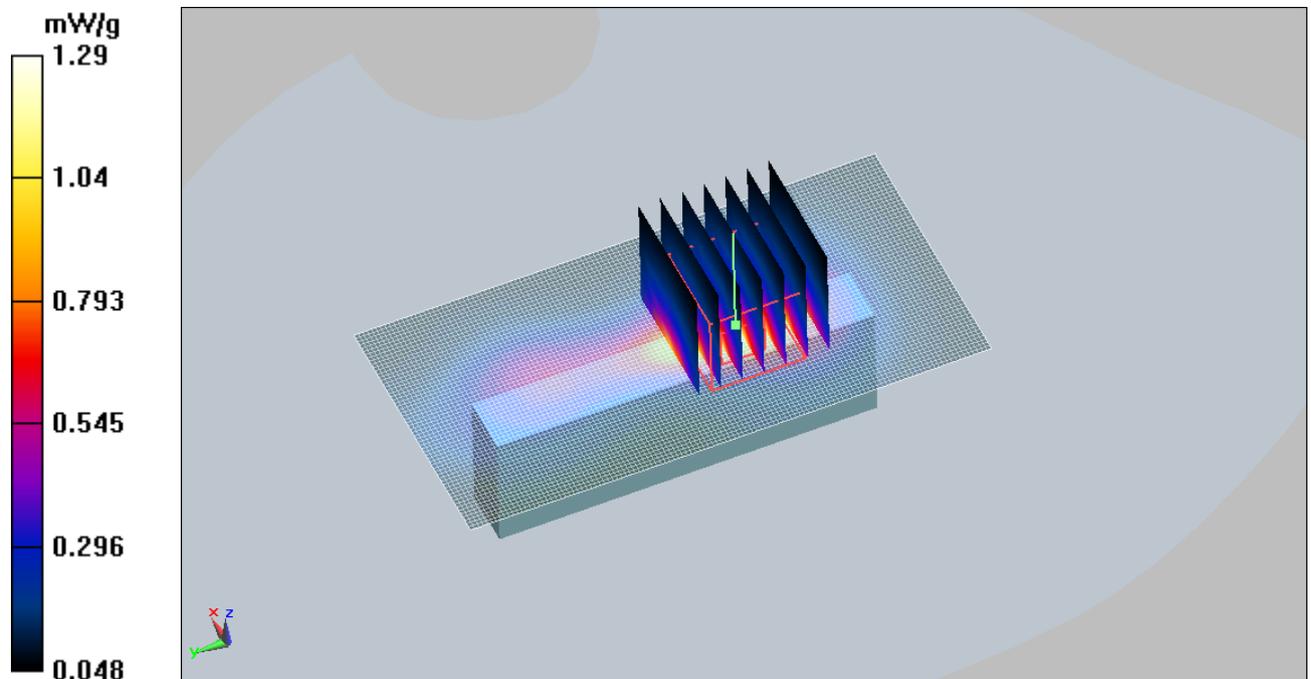


Figure 60 WCDMA Band II with BenQ Joybook R55V Test Position 4 Channel 9262

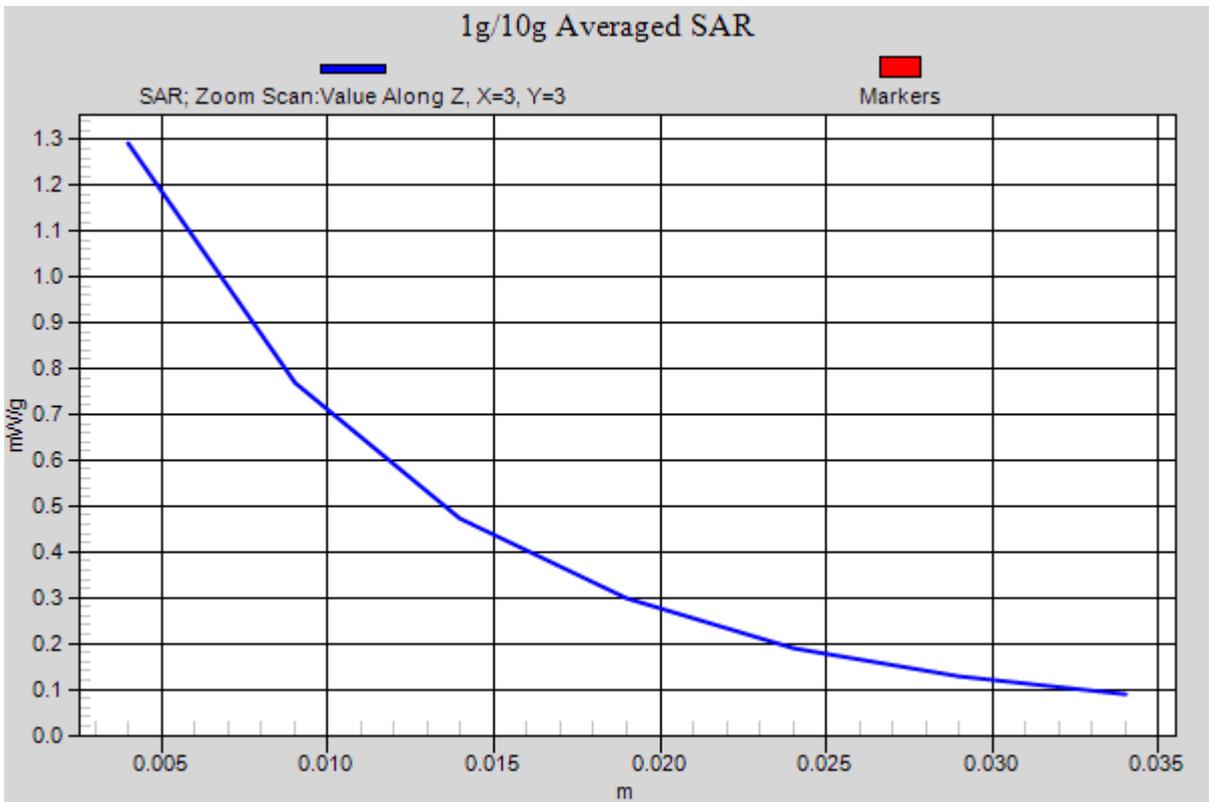


Figure 61 Z-Scan at power reference point [WCDMA Band II with BenQ Joybook R55V Test Position 4 Channel 9262]

WCDMA Band II+HSDPA with BenQ Joybook R55V Test Position 4 Low Frequency

Date/Time: 12/26/2009 5:35:36 PM

Communication System: WCDMA Band II+HSDPA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Low 2/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.26 mW/g

Test Position 4 Low 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.6 V/m; Power Drift = 0.149 dB

Peak SAR (extrapolated) = 2.83 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.694 mW/g

Maximum value of SAR (measured) = 1.49 mW/g

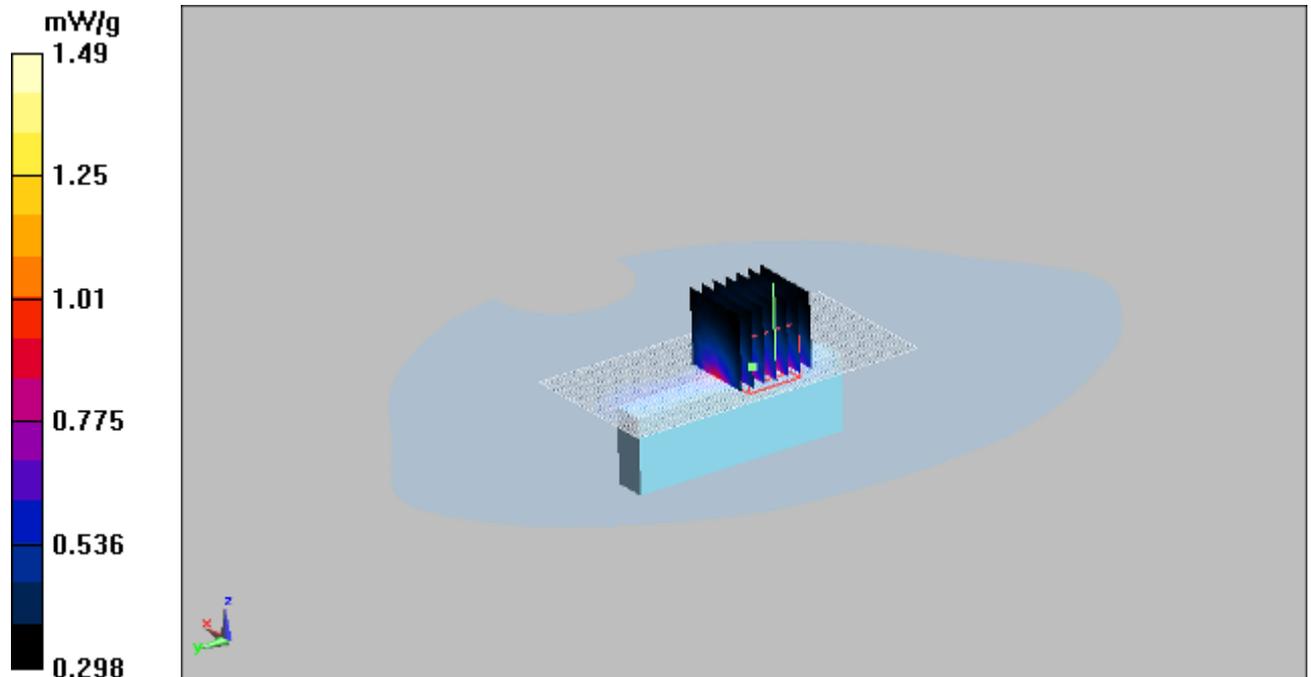


Figure 62 WCDMA Band II+HSDPA with BenQ Joybook R55V Test Position 4 Channel 9262

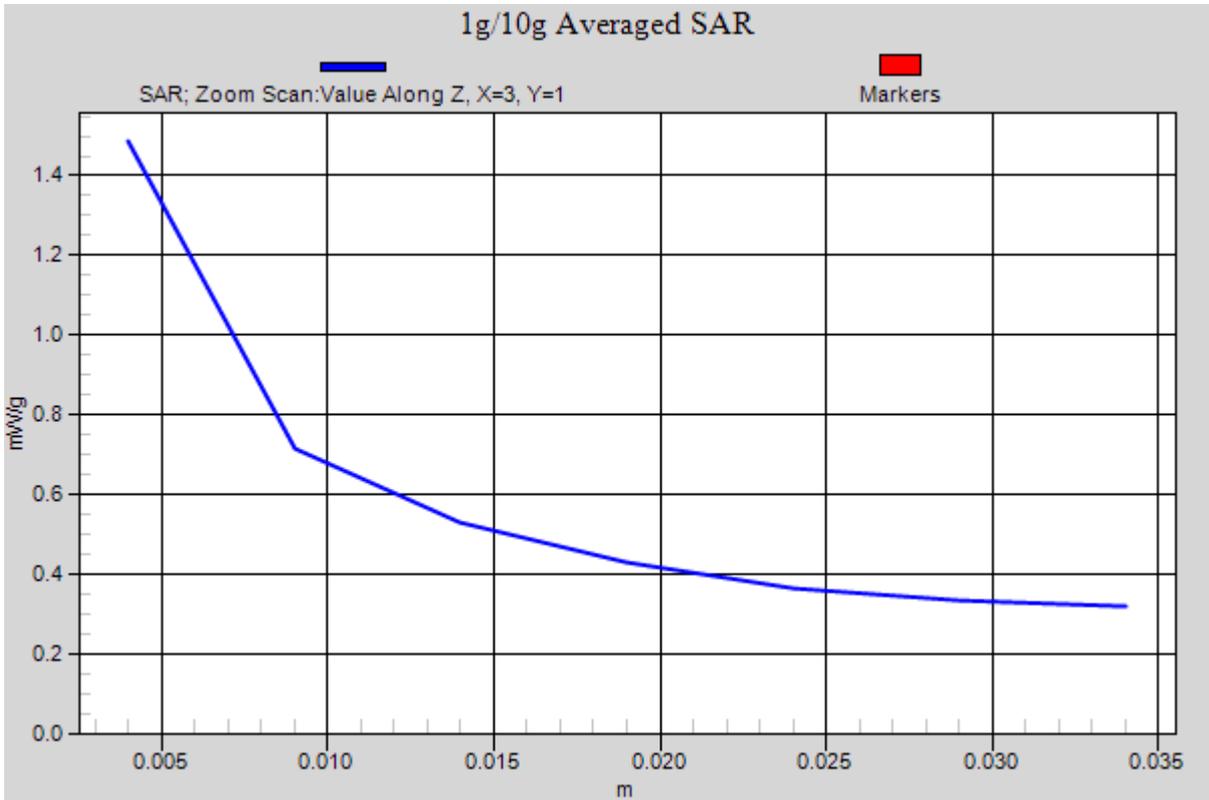


Figure 63 Z-Scan at power reference point [WCDMA Band II +HSDPA with BenQ Joybook R55V
Test Position 4 Channel 9262]

WCDMA Band II+HSUPA with BenQ Joybook R55V Test Position 4 Low Frequency

Date/Time: 12/26/2009 5:56:28 PM

Communication System: WCDMA Band II+HSUPA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Low/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.3 mW/g

Test Position 4 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.4 V/m; Power Drift = -0.164 dB

Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.683 mW/g

Maximum value of SAR (measured) = 1.21 mW/g

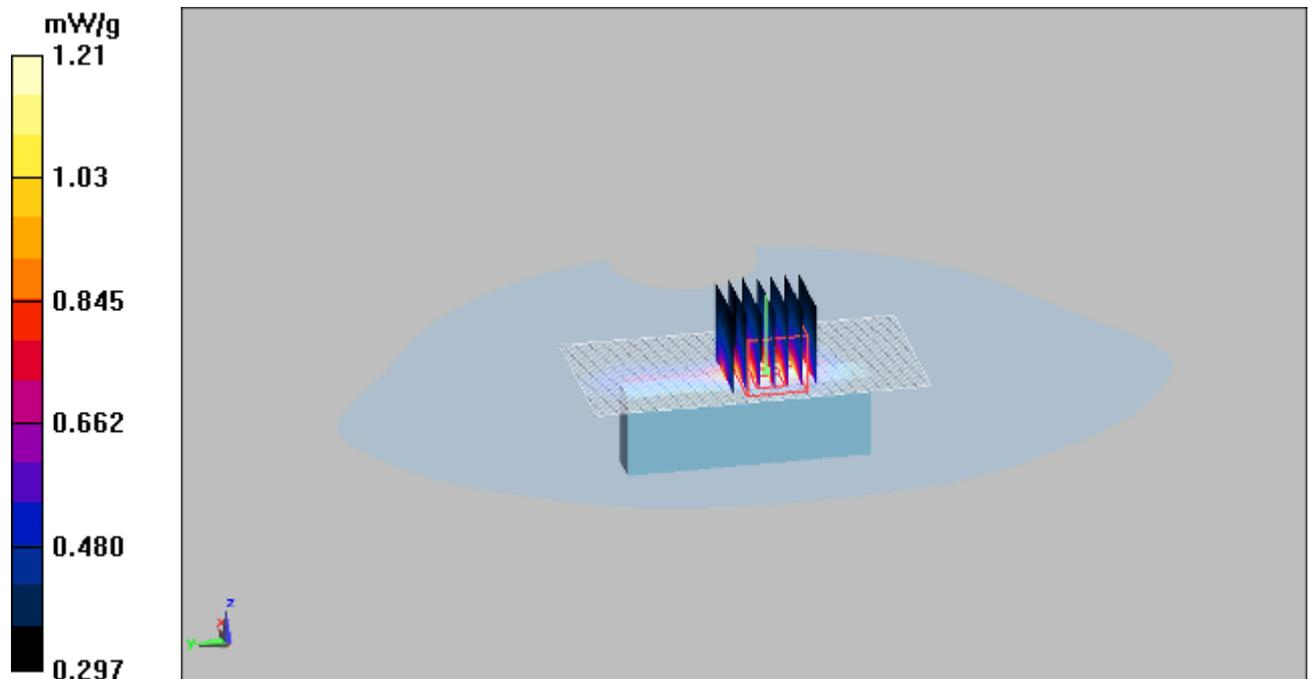


Figure 64 WCDMA Band II+HSUPA with BenQ Joybook R55V Test Position 4 Channel 9262

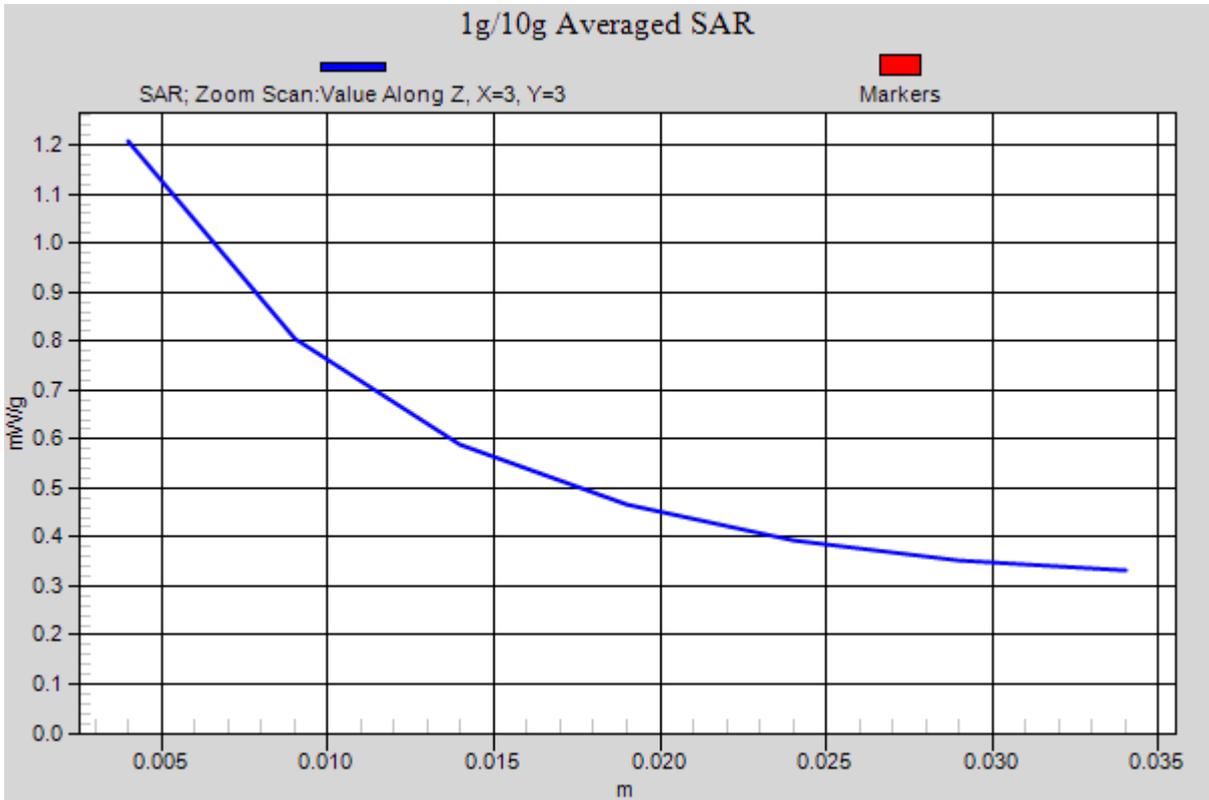


Figure 65 Z-Scan at power reference point [WCDMA Band II +HSUPA with BenQ Joybook R55V
Test Position 4 Channel 9262]

WCDMA Band V with IBM R60e Test Position 1 Middle Frequency

Date/Time: 12/25/2009 3:00:59 PM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.361 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.8 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.331 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.358 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.8 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 0.405 W/kg

SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.180 mW/g

Maximum value of SAR (measured) = 0.290 mW/g

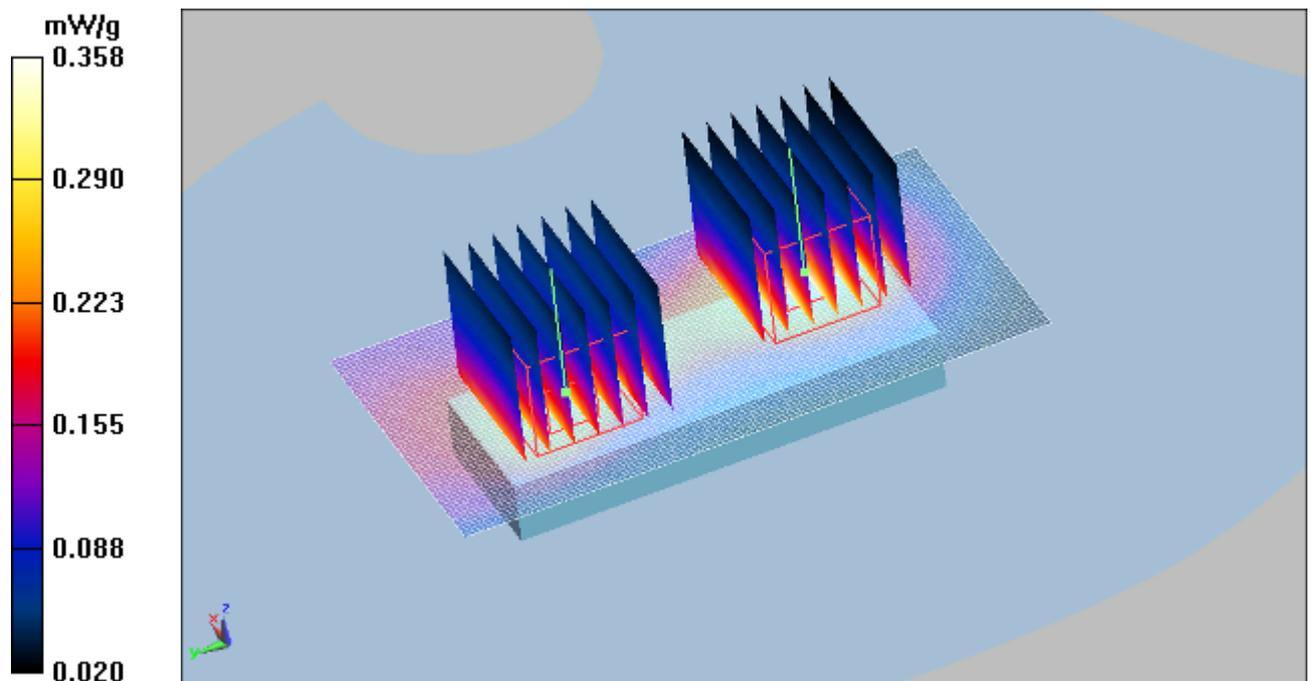


Figure 66 WCDMA Band V with IBM R60e Test Position 1 Channel 4183

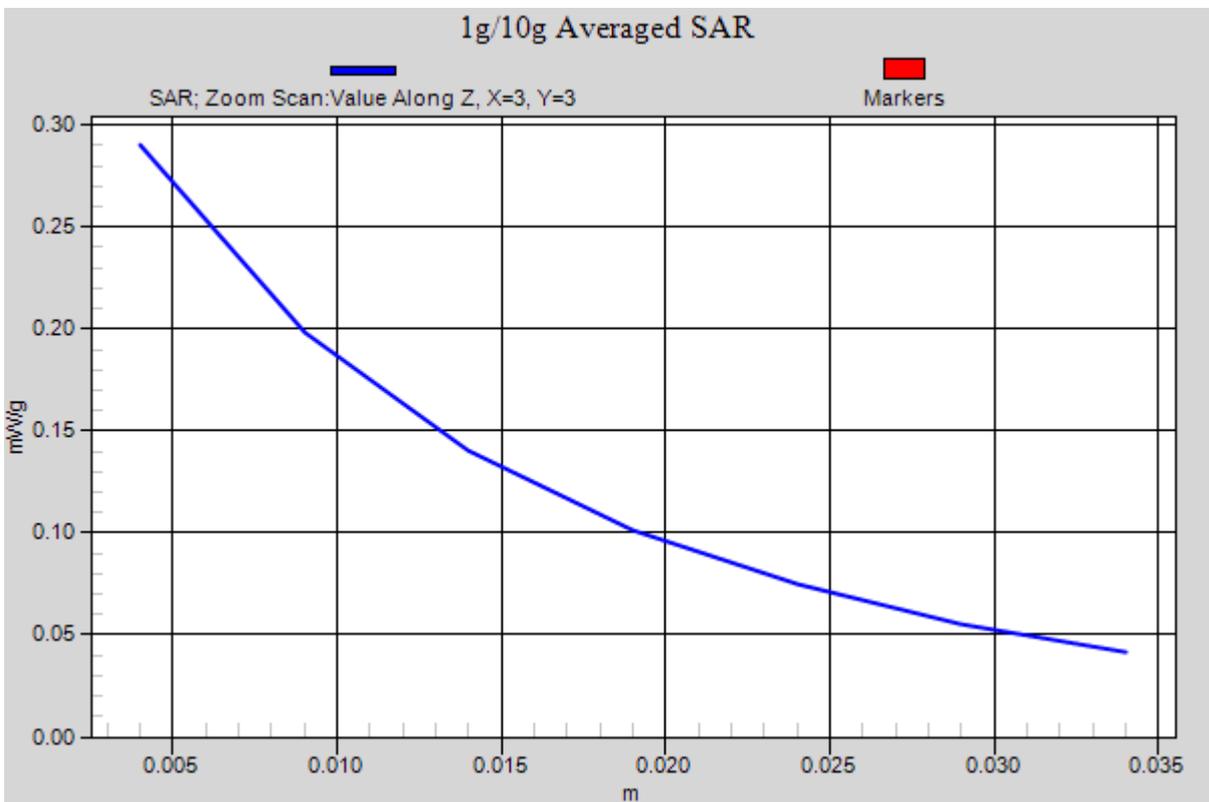
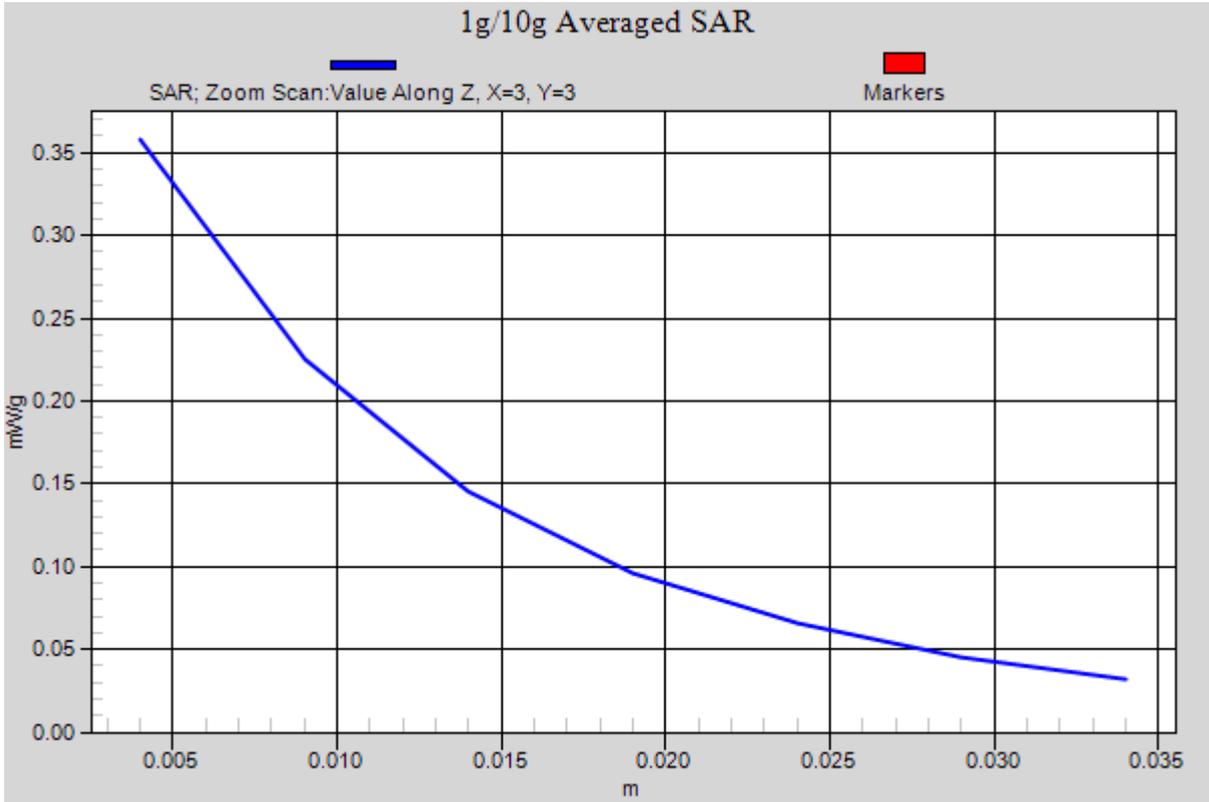


Figure 67 Z-Scan at power reference point [WCDMA Band V with IBM R60e Test Position 1 Channel 4183]

WCDMA Band V with IBM R60e Test Position 2 Middle Frequency

Date/Time: 12/25/2009 2:42:07 PM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.358 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.1 V/m; Power Drift = -0.156 dB

Peak SAR (extrapolated) = 0.536 W/kg

SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.207 mW/g

Maximum value of SAR (measured) = 0.353 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.1 V/m; Power Drift = -0.156 dB

Peak SAR (extrapolated) = 0.415 W/kg

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.179 mW/g

Maximum value of SAR (measured) = 0.295 mW/g

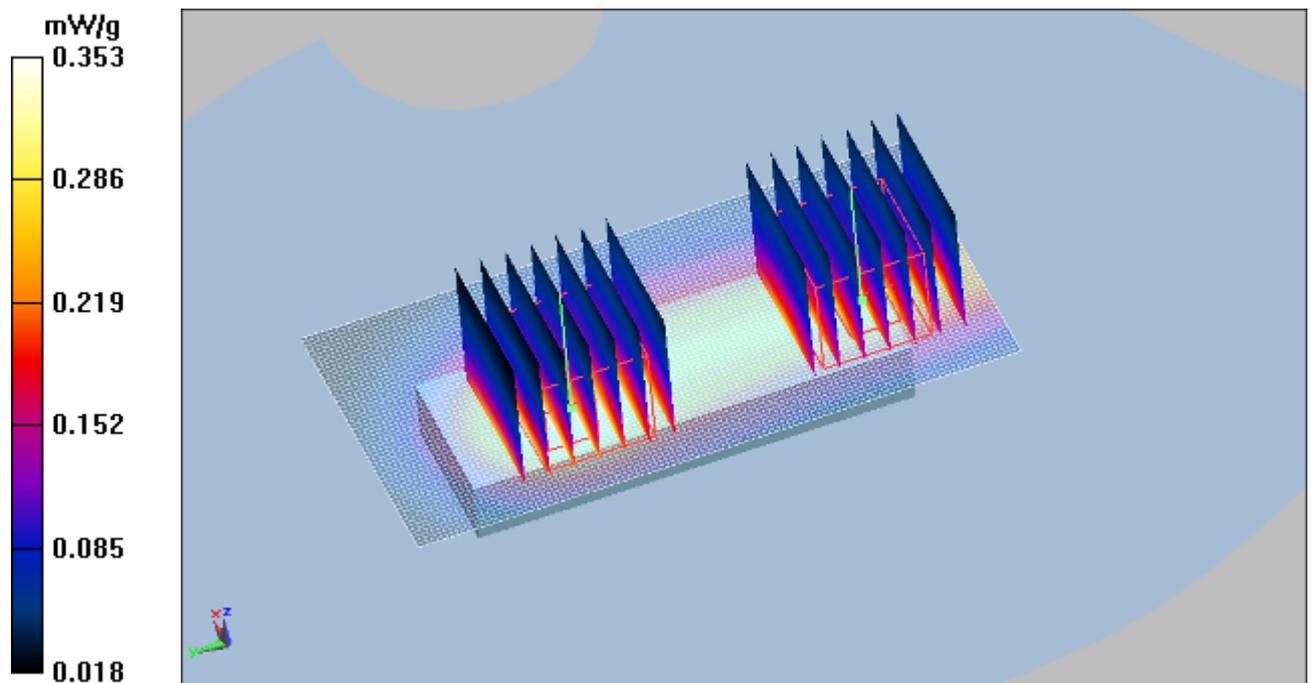


Figure 68 WCDMA Band V with IBM R60e Test Position 2 Channel 4183

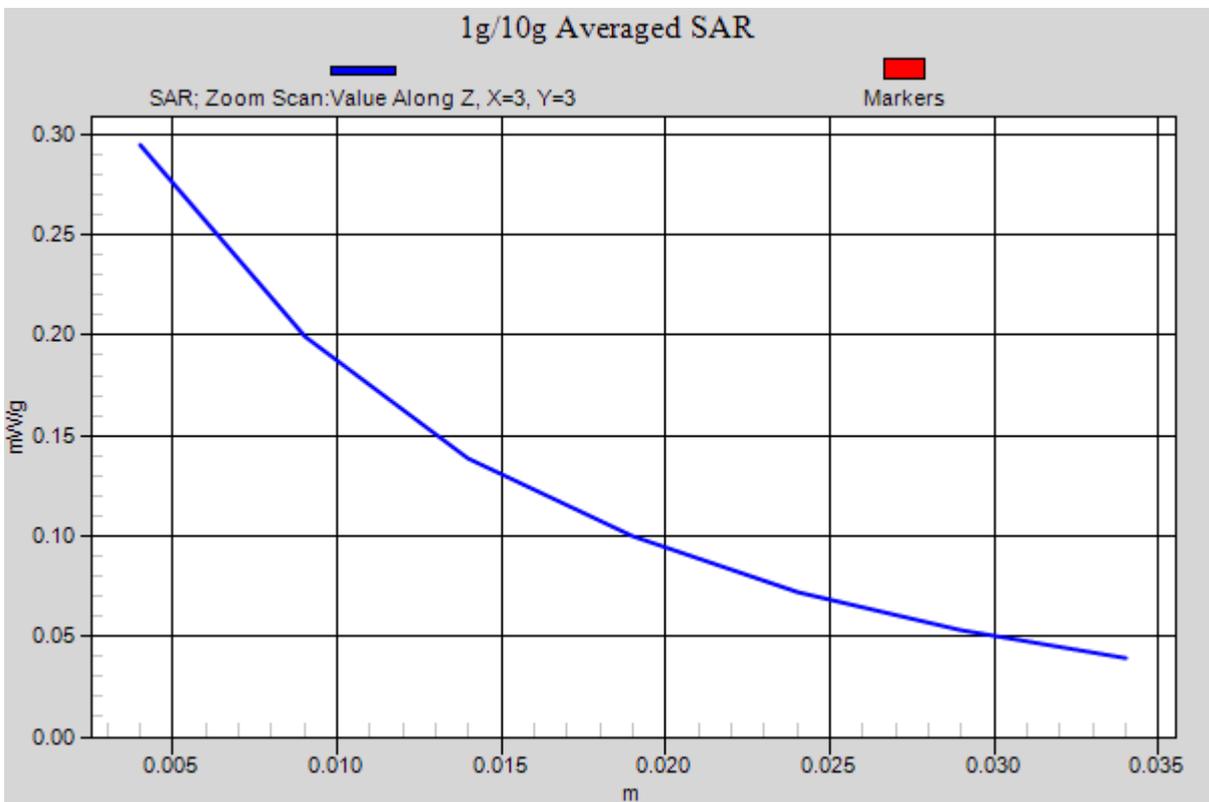
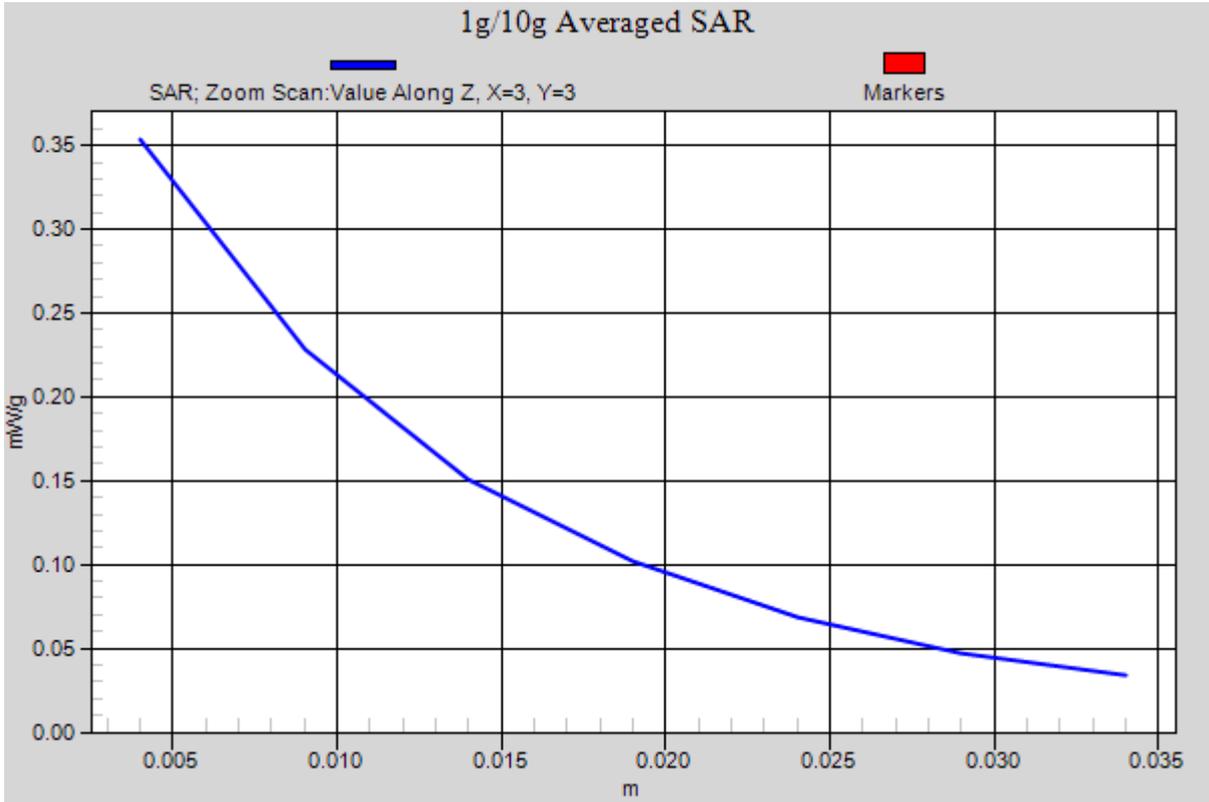


Figure 69 Z-Scan at power reference point [WCDMA Band V with IBM R60e Test Position 2 Channel 4183]

WCDMA Band V with BenQ Joybook R55V Test Position 3 Middle Frequency

Date/Time: 12/25/2009 3:21:25 PM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 Middle /Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.422 mW/g

Test Position 3 Middle /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.6 V/m; Power Drift = -0.185 dB

Peak SAR (extrapolated) = 0.624 W/kg

SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.219 mW/g

Maximum value of SAR (measured) = 0.410 mW/g

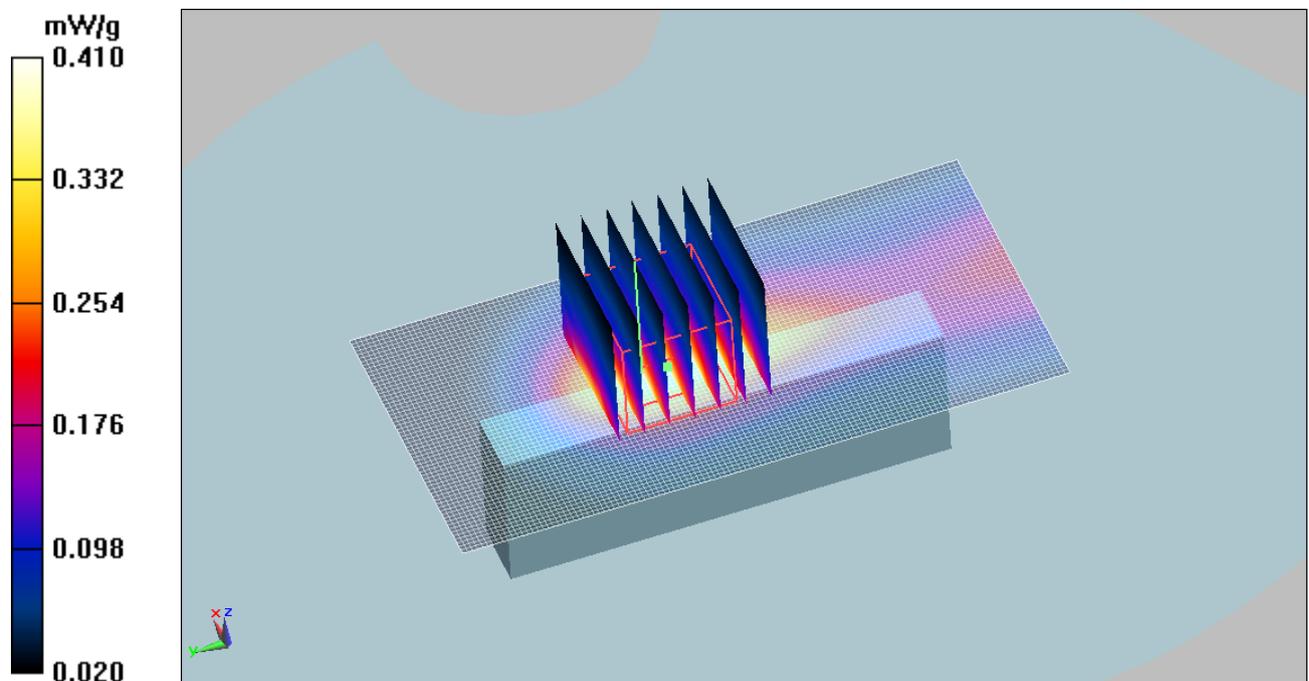


Figure 70 WCDMA Band V with BenQ Joybook R55V Test Position 3 Channel 4183

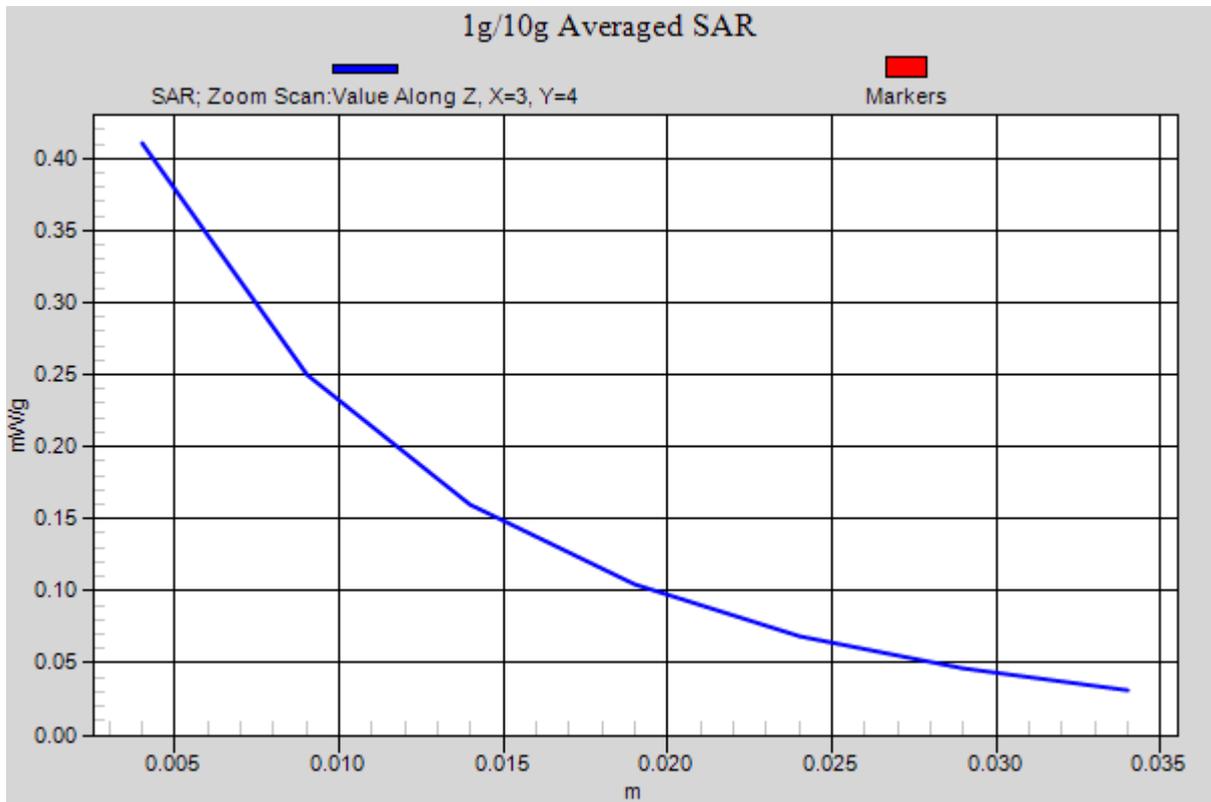


Figure 71 Z-Scan at power reference point [WCDMA Band V with BenQ Joybook R55V Test Position 3 Channel 4183]

WCDMA Band V with BenQ Joybook R55V Test Position 4 High Frequency

Date/Time: 12/25/2009 4:21:44 PM

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 High/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.382 mW/g

Test Position 4 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19 V/m; Power Drift = -0.139 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.351 mW/g; SAR(10 g) = 0.242 mW/g

Maximum value of SAR (measured) = 0.381 mW/g

Test Position 4 High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19 V/m; Power Drift = -0.139 dB

Peak SAR (extrapolated) = 0.412 W/kg

SAR(1 g) = 0.315 mW/g; SAR(10 g) = 0.246 mW/g

Maximum value of SAR (measured) = 0.331 mW/g

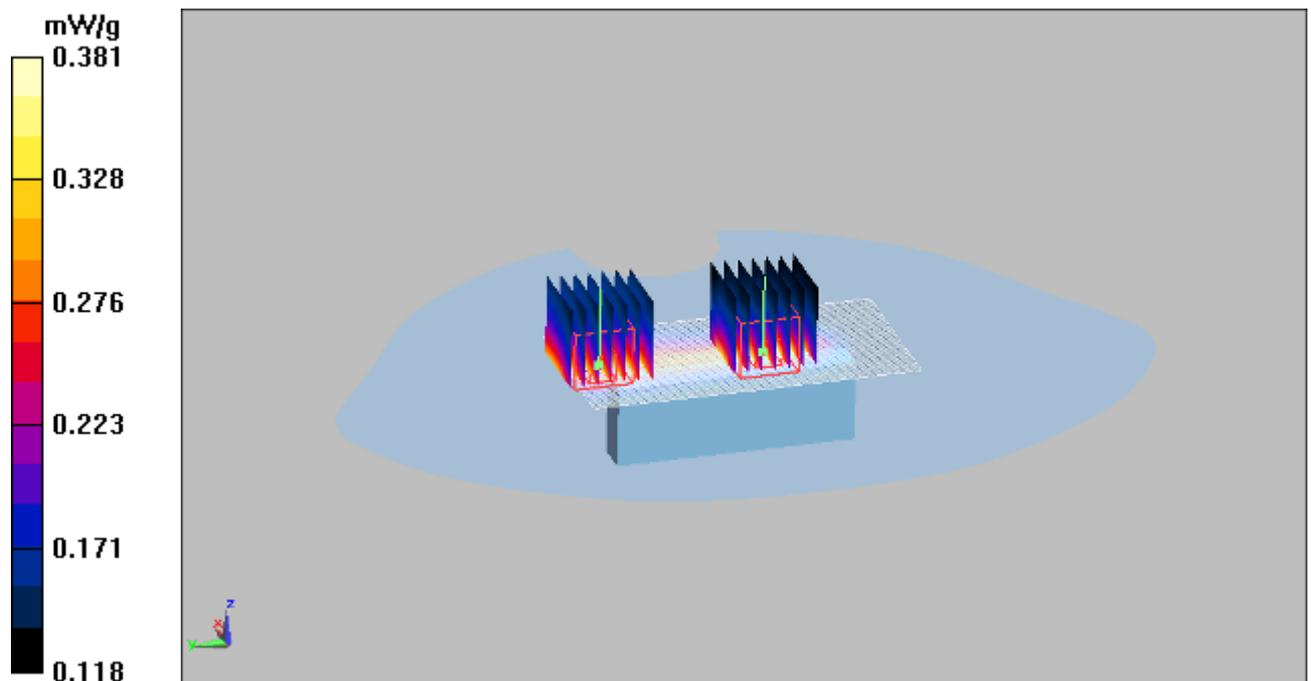


Figure 72 WCDMA Band V with BenQ Joybook R55V Test Position 4 Channel 4233

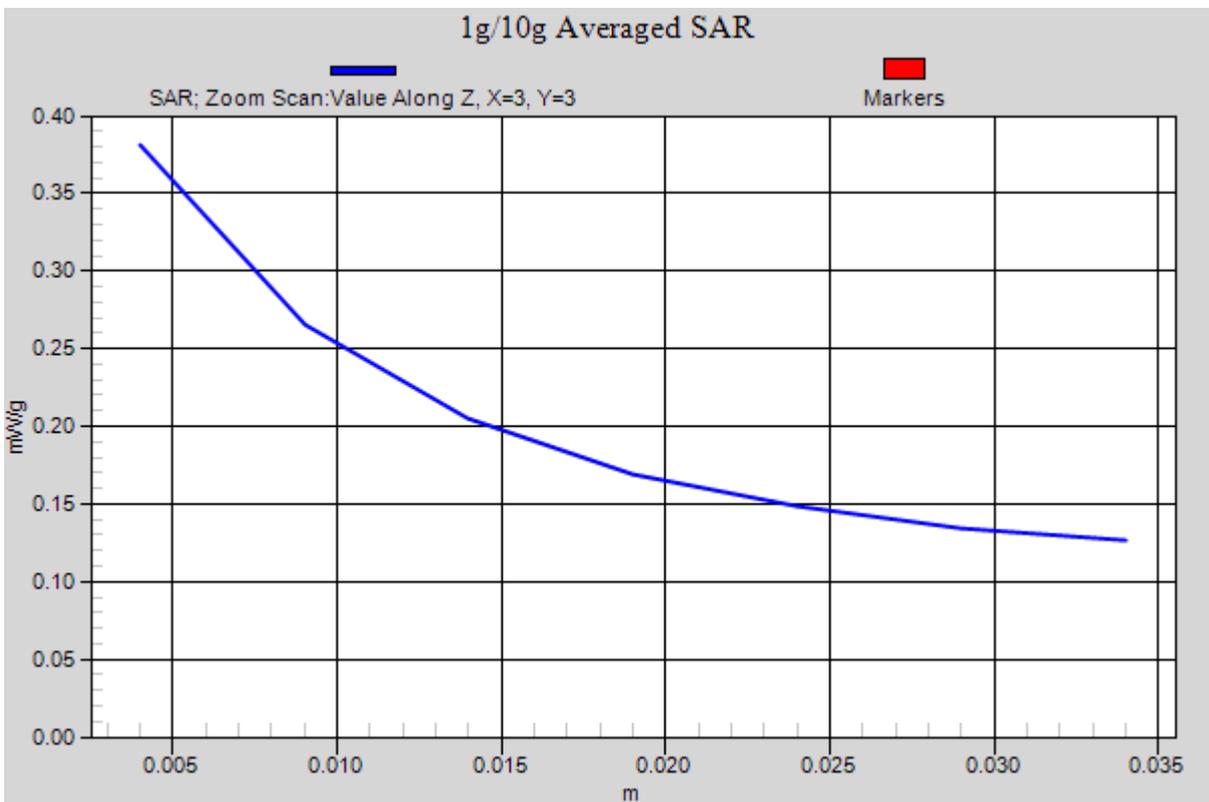
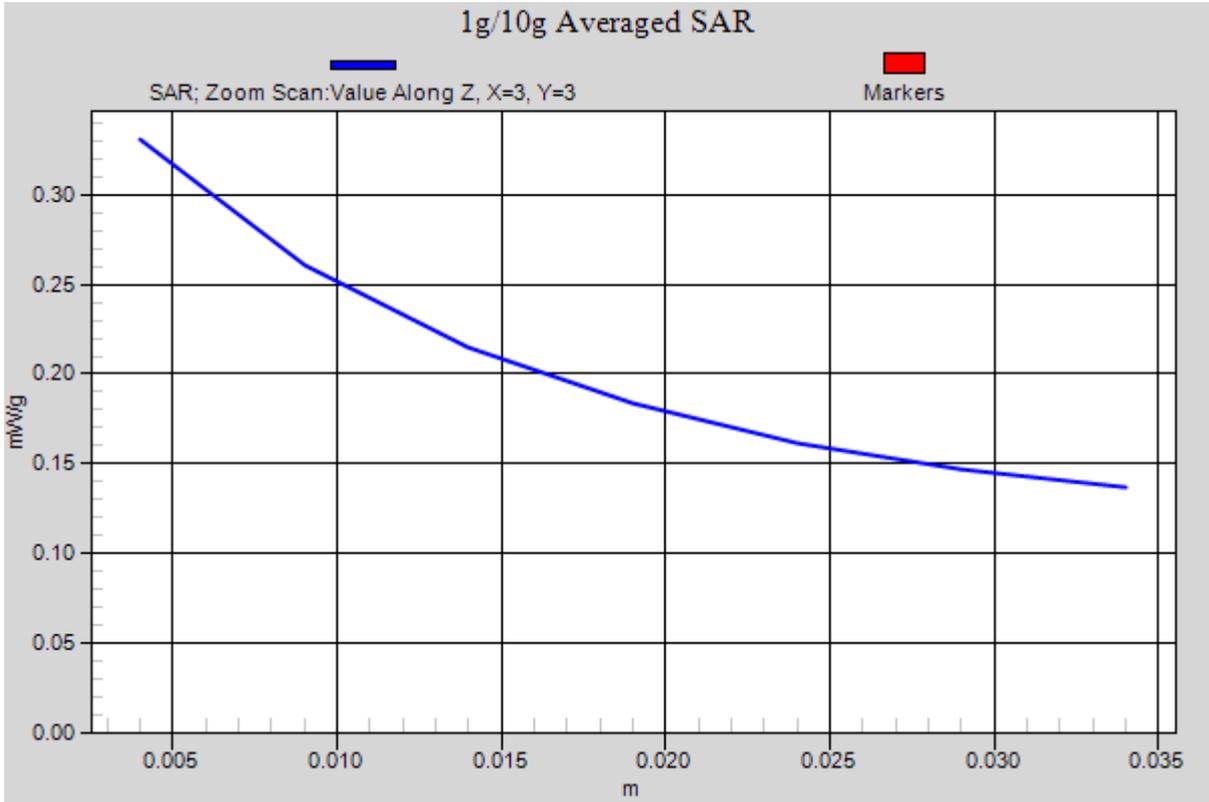


Figure 73 Z-Scan at power reference point [WCDMA Band V with BenQ Joybook R55V Test Position 4 Channel 4233]

WCDMA Band V with BenQ Joybook R55V Test Position 4 Middle Frequency

Date/Time: 12/25/2009 3:40:47 PM

Communication System: WCDMA Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.468 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.3 V/m; Power Drift = 0.141 dB

Peak SAR (extrapolated) = 0.761 W/kg

SAR(1 g) = 0.438 mW/g; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.486 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.3 V/m; Power Drift = 0.141 dB

Peak SAR (extrapolated) = 0.487 W/kg

SAR(1 g) = 0.361 mW/g; SAR(10 g) = 0.272 mW/g

Maximum value of SAR (measured) = 0.381 mW/g

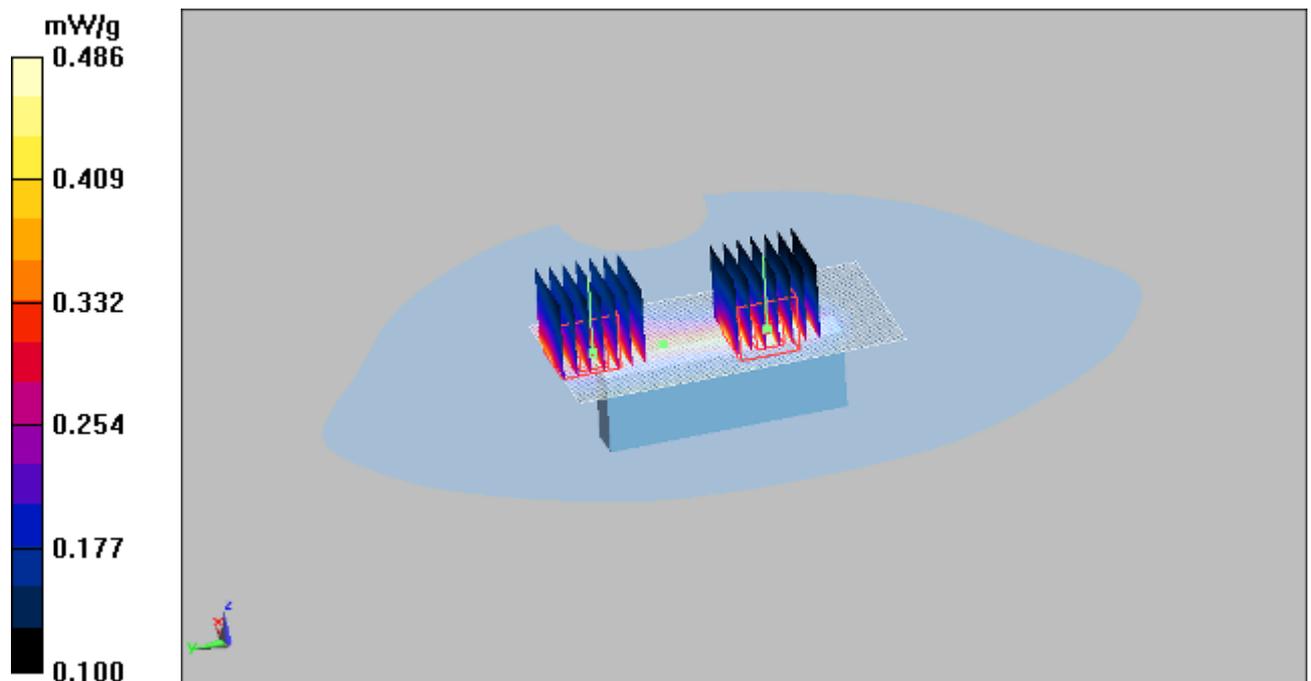


Figure 74 WCDMA Band V with BenQ Joybook R55V Test Position 4 Channel 4183

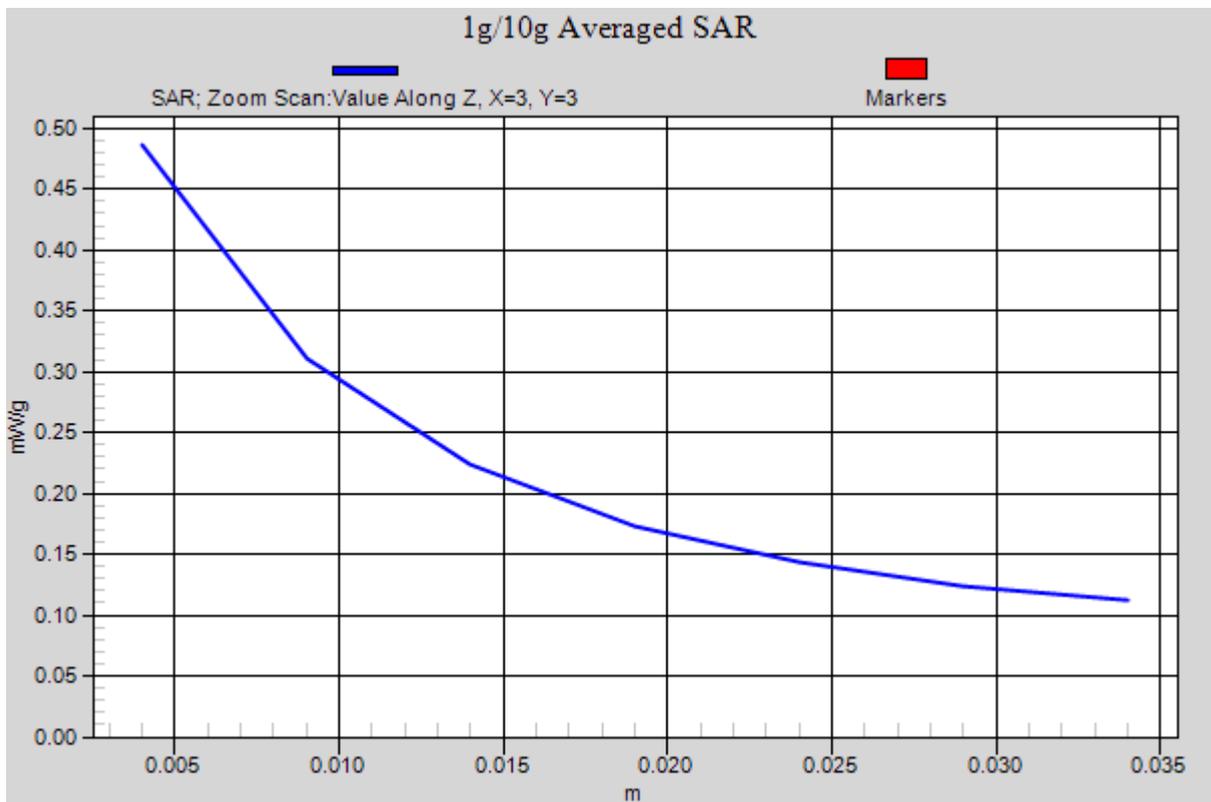
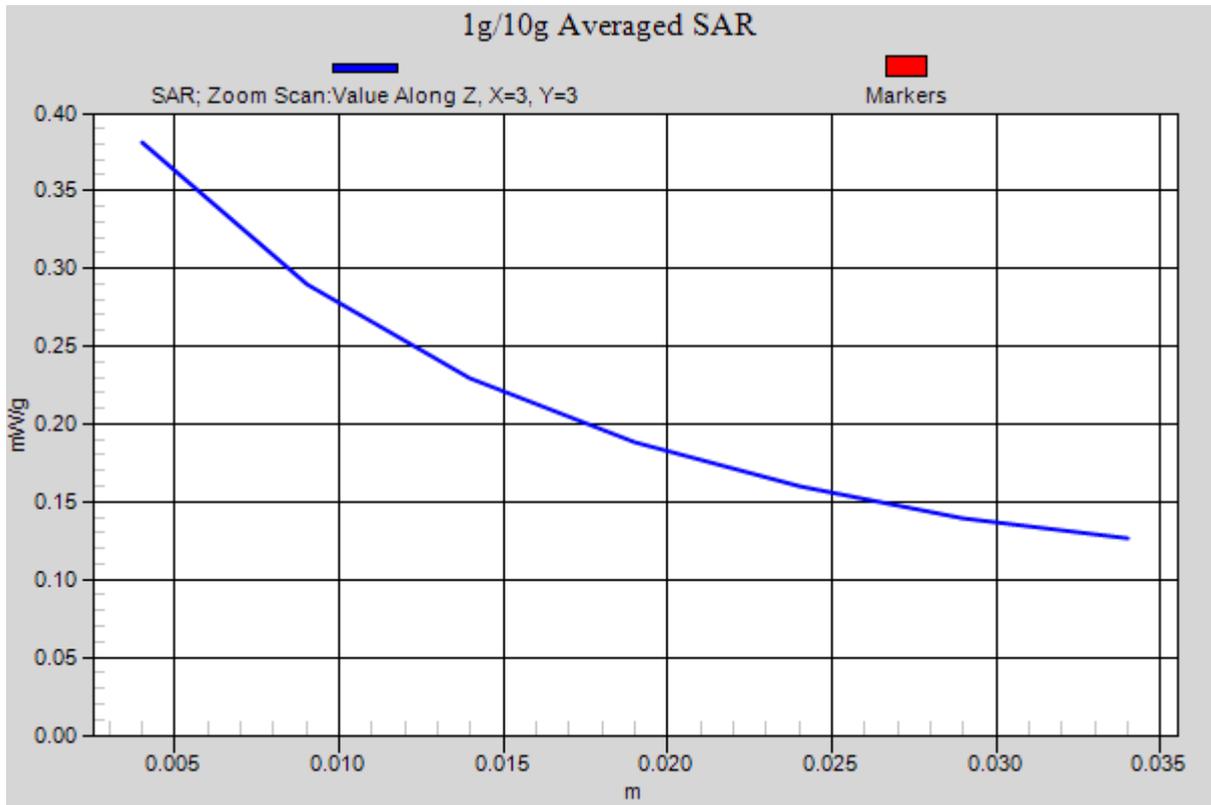


Figure 75 Z-Scan at power reference point [WCDMA Band V with BenQ Joybook R55V Test Position 4 Channel 4183]

WCDMA Band V with BenQ Joybook R55V Test Position 4 Low Frequency

Date/Time: 12/25/2009 4:01:46 PM

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.974$ mho/m; $\epsilon_r = 53.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Low/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.405 mW/g

Test Position 4 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = -0.183 dB

Peak SAR (extrapolated) = 0.502 W/kg

SAR(1 g) = 0.384 mW/g; SAR(10 g) = 0.295 mW/g

Maximum value of SAR (measured) = 0.402 mW/g

Test Position 4 Low/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = -0.183 dB

Peak SAR (extrapolated) = 0.506 W/kg

SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.271 mW/g

Maximum value of SAR (measured) = 0.392 mW/g

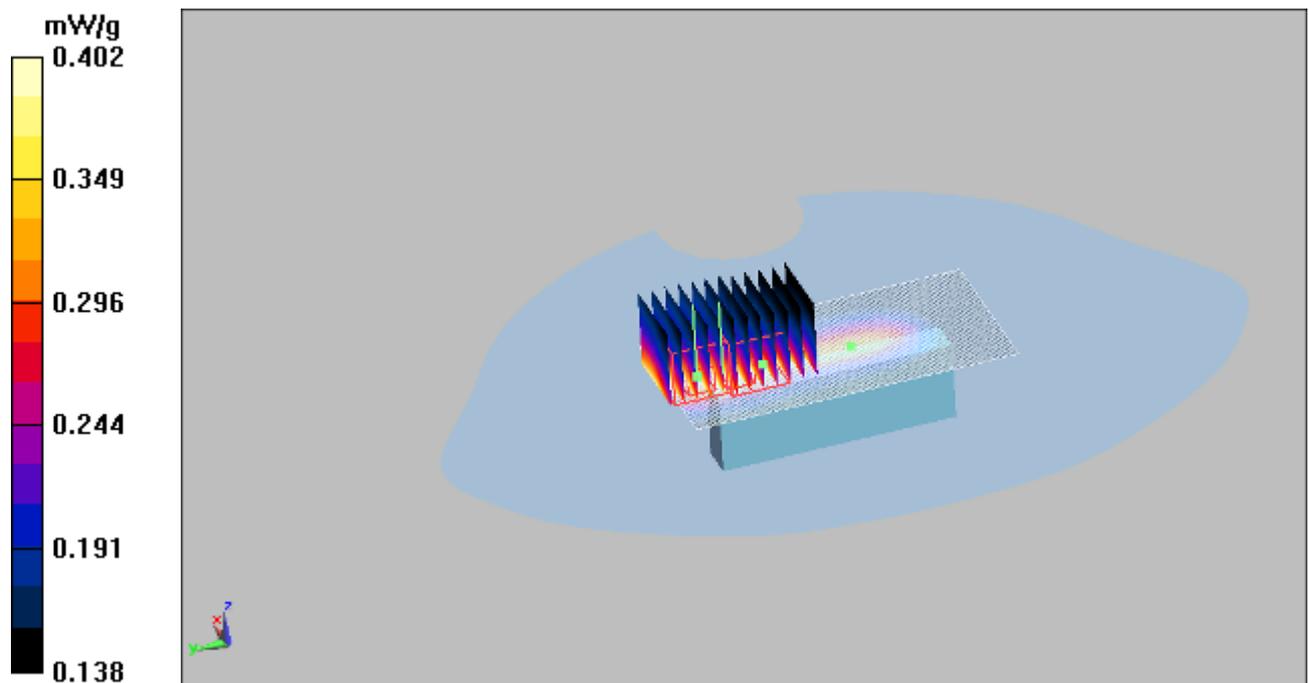


Figure 76 WCDMA Band V with BenQ Joybook R55V Test Position 4 Channel 4132

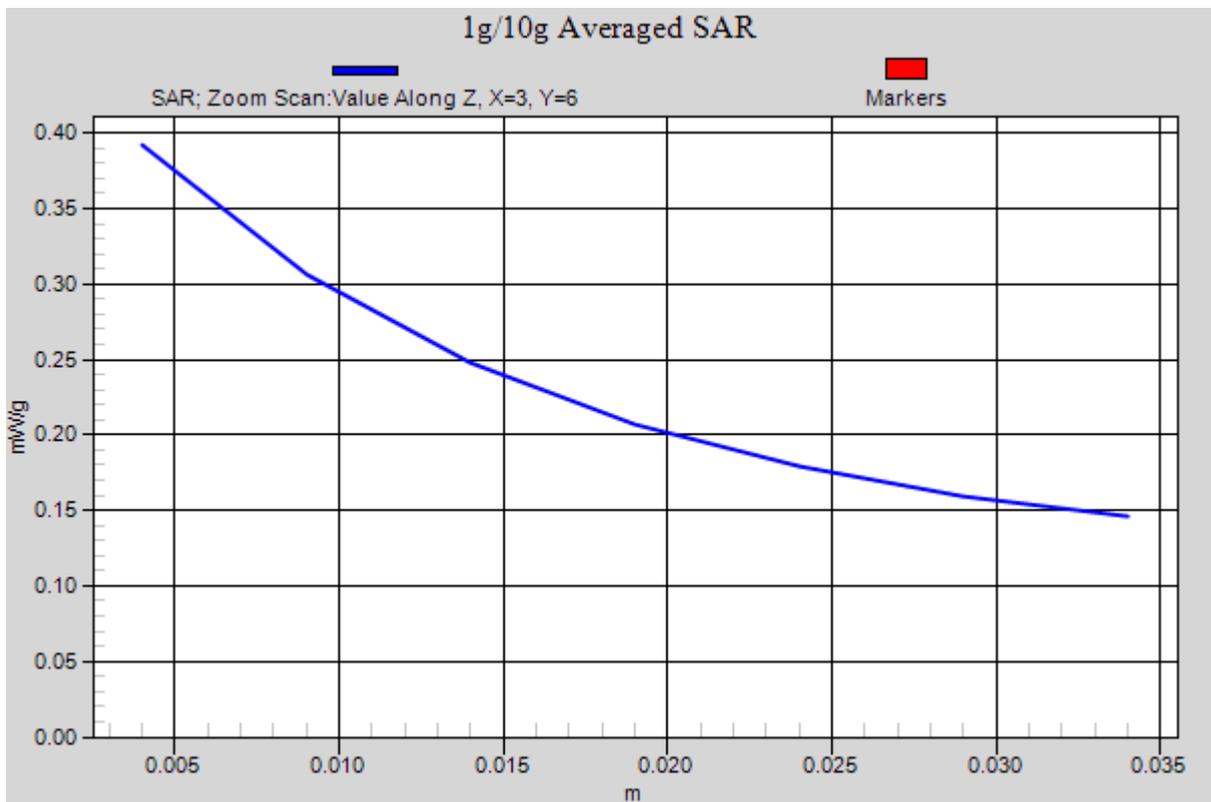
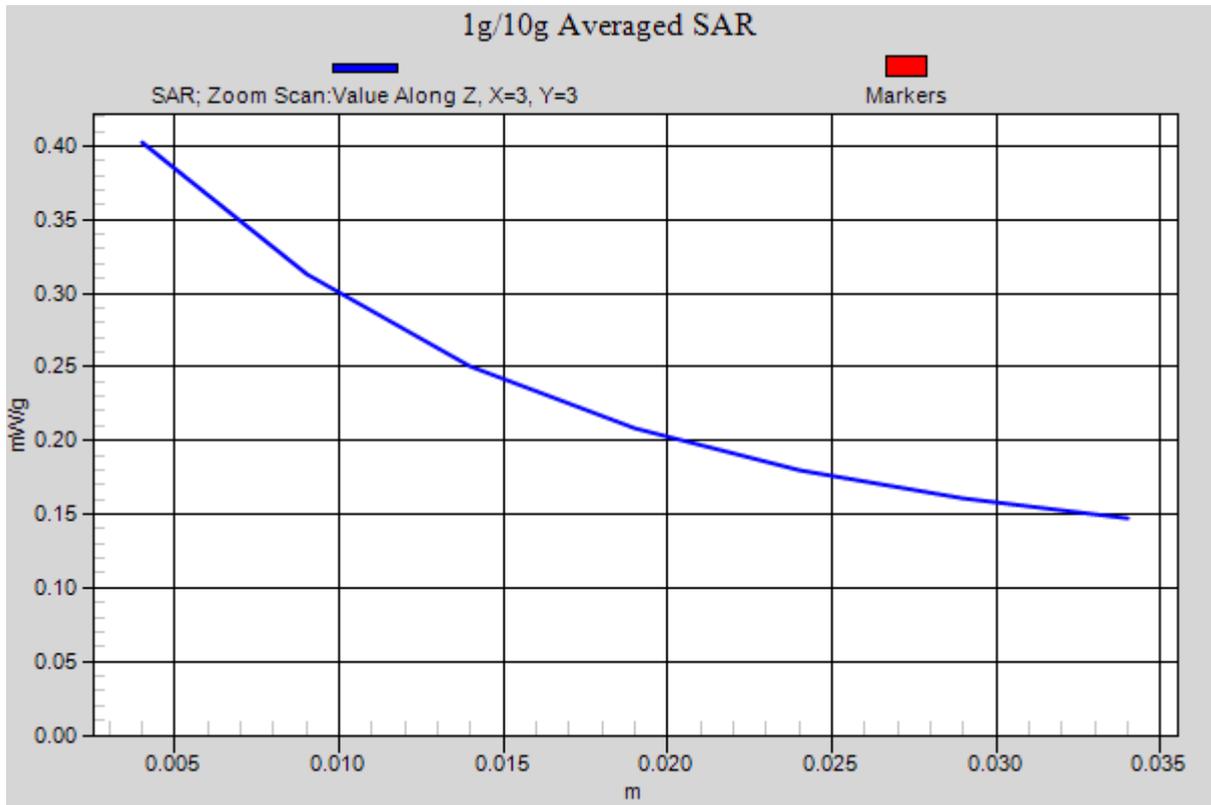


Figure 77 Z-Scan at power reference point [WCDMA Band V with BenQ Joybook R55V Test Position 4 Channel 4132]

WCDMA Band V +HSDPA with BenQ Joybook R55V Test Position 4 Middle Frequency

Date/Time: 12/25/2009 4:53:54 PM

Communication System: WCDMA Band V+HSDPA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.389 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.4 V/m; Power Drift = -0.116 dB

Peak SAR (extrapolated) = 0.600 W/kg

SAR(1 g) = 0.355 mW/g; SAR(10 g) = 0.246 mW/g

Maximum value of SAR (measured) = 0.384 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.4 V/m; Power Drift = -0.116 dB

Peak SAR (extrapolated) = 0.395 W/kg

SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.250 mW/g

Maximum value of SAR (measured) = 0.326 mW/g

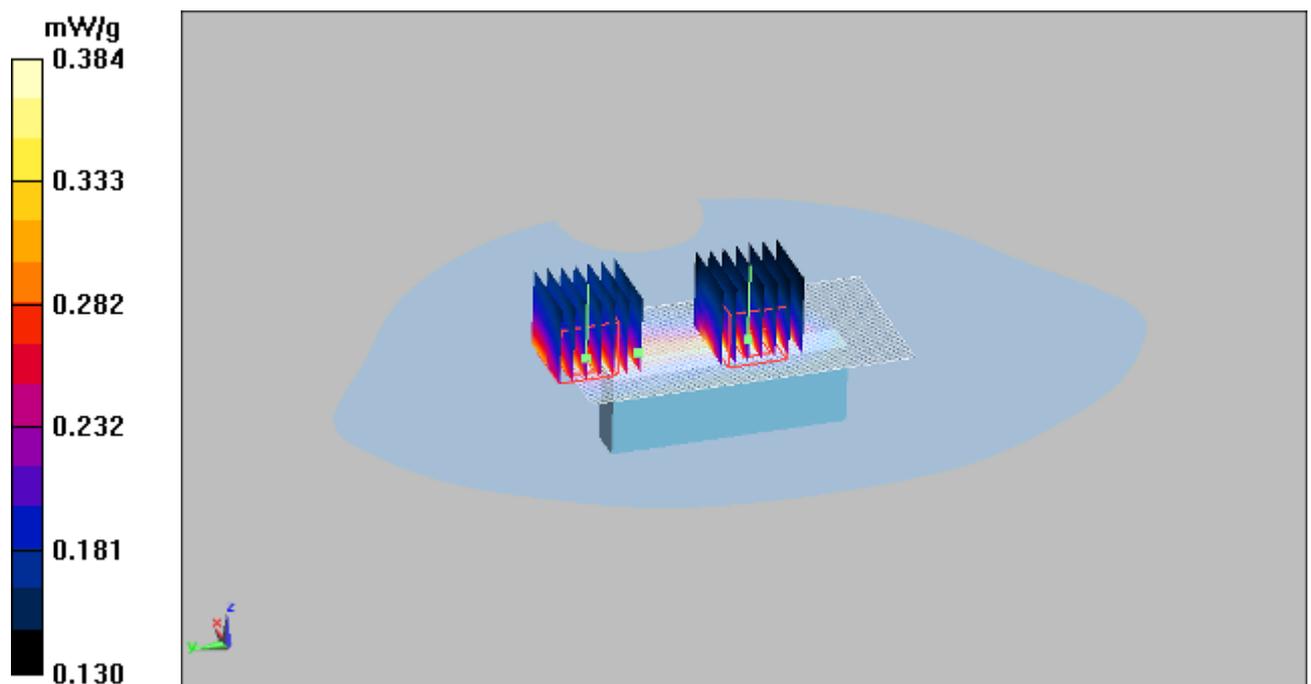


Figure 78 WCDMA Band V +HSDPA with BenQ Joybook R55V Test Position 4 Channel 4183

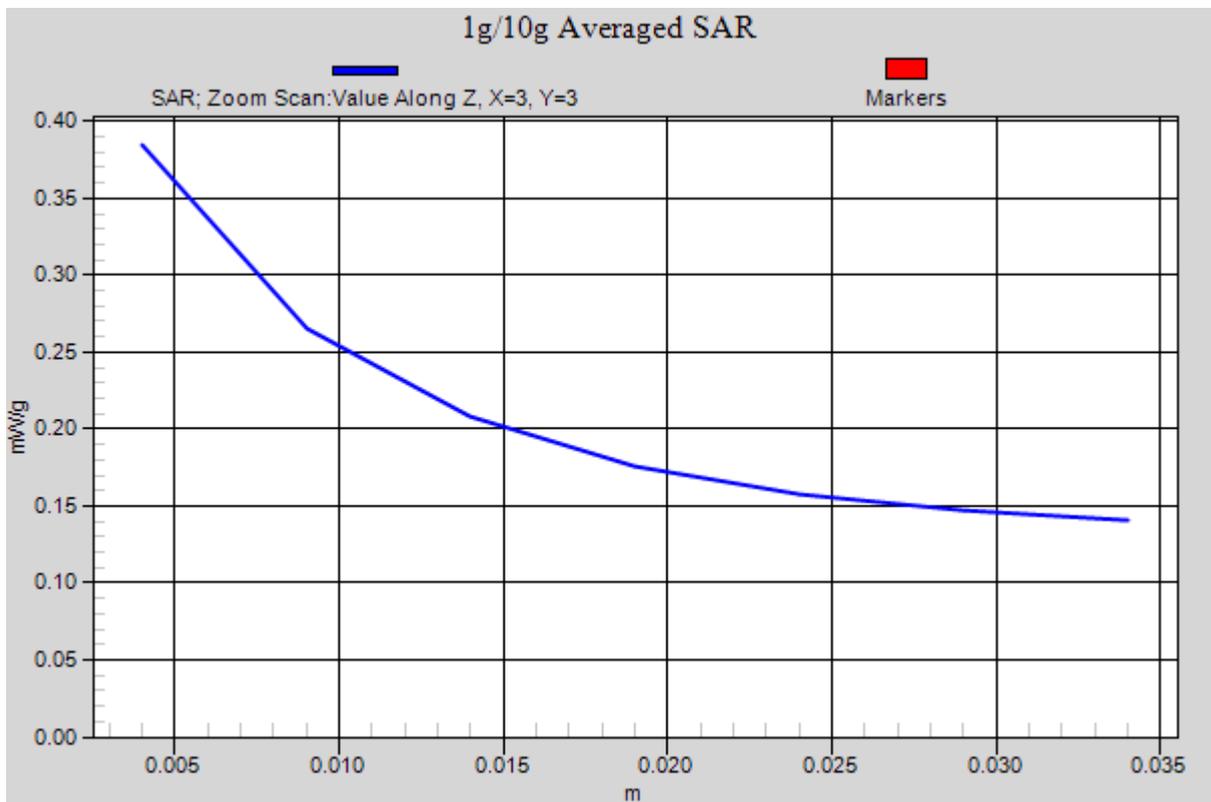
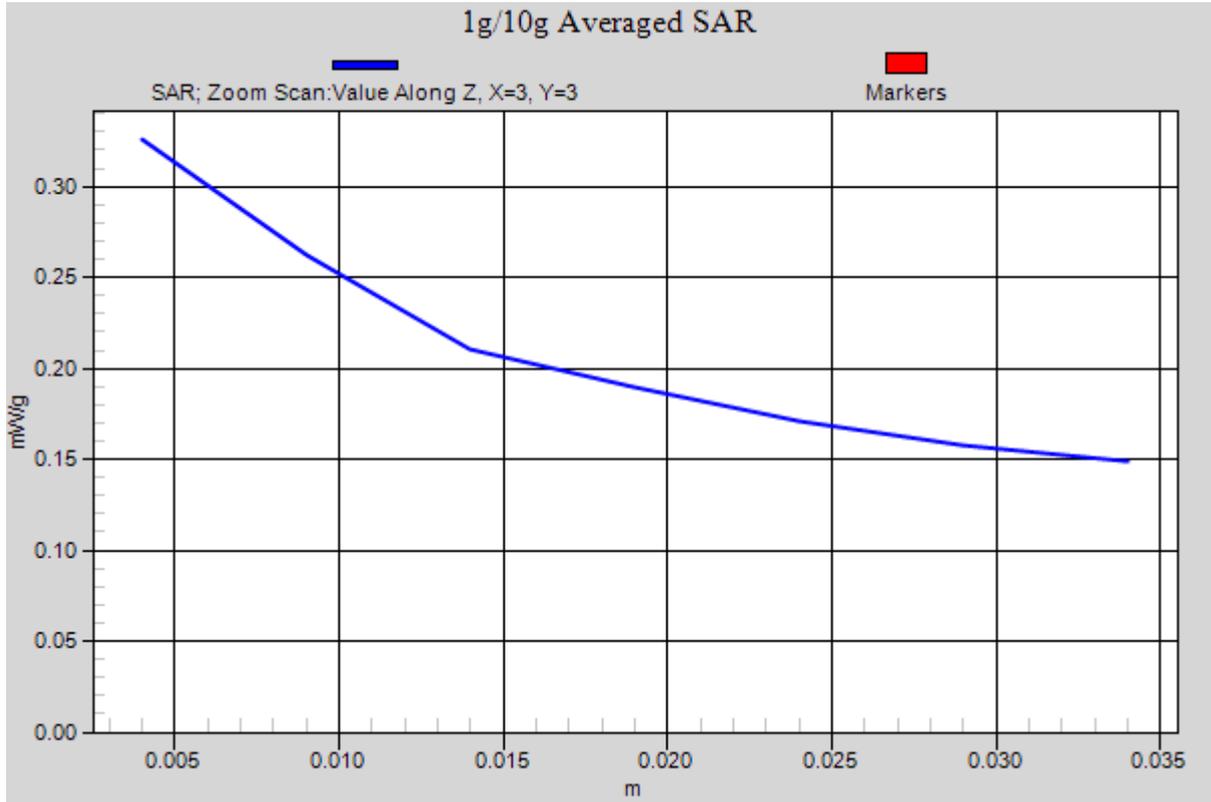


Figure 79 Z-Scan at power reference point [WCDMA Band V +HSDPA with BenQ Joybook R55V
Test Position 4 Channel 4183]

WCDMA Band V +HSUPA with BenQ Joybook R55V Test Position 4 Middle Frequency

Date/Time: 12/25/2009 5:12:14 PM

Communication System: WCDMA Band V+HSUPA; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 837$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

DASY4 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn905; Calibrated: 6/24/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.422 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.5 V/m; Power Drift = -0.139 dB

Peak SAR (extrapolated) = 0.625 W/kg

SAR(1 g) = 0.376 mW/g; SAR(10 g) = 0.268 mW/g

Maximum value of SAR (measured) = 0.407 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.5 V/m; Power Drift = -0.139 dB

Peak SAR (extrapolated) = 0.404 W/kg

SAR(1 g) = 0.315 mW/g; SAR(10 g) = 0.258 mW/g

Maximum value of SAR (measured) = 0.325 mW/g

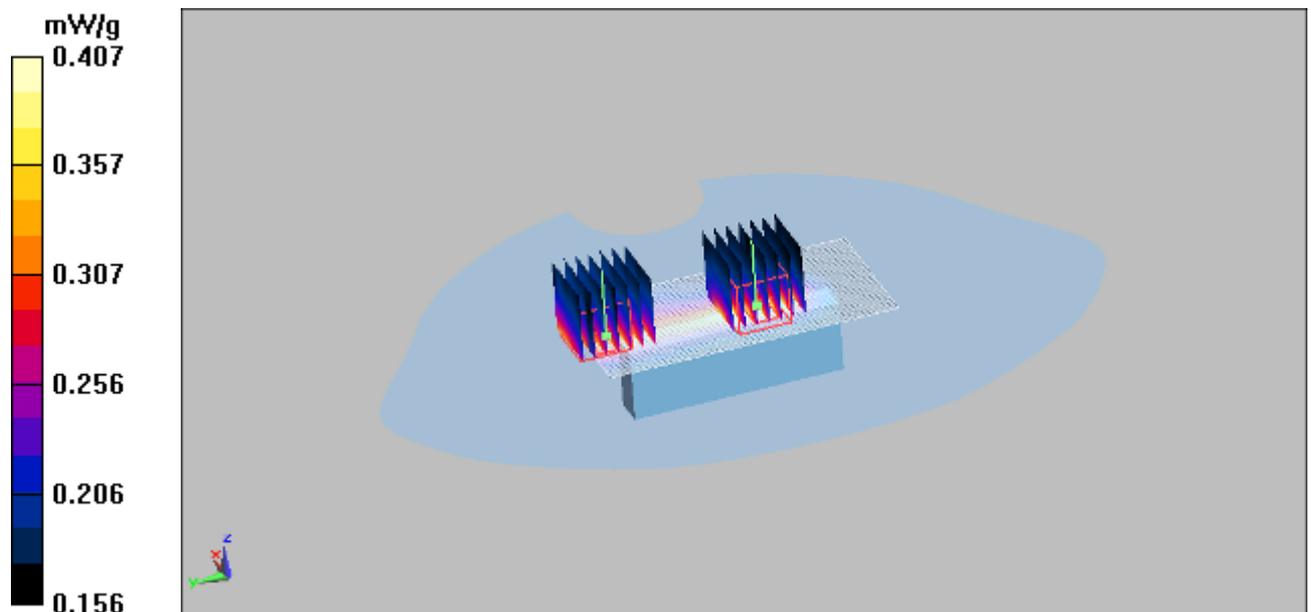


Figure 80 WCDMA Band V +HSUPA with BenQ Joybook R55V Test Position 4 Channel 4183

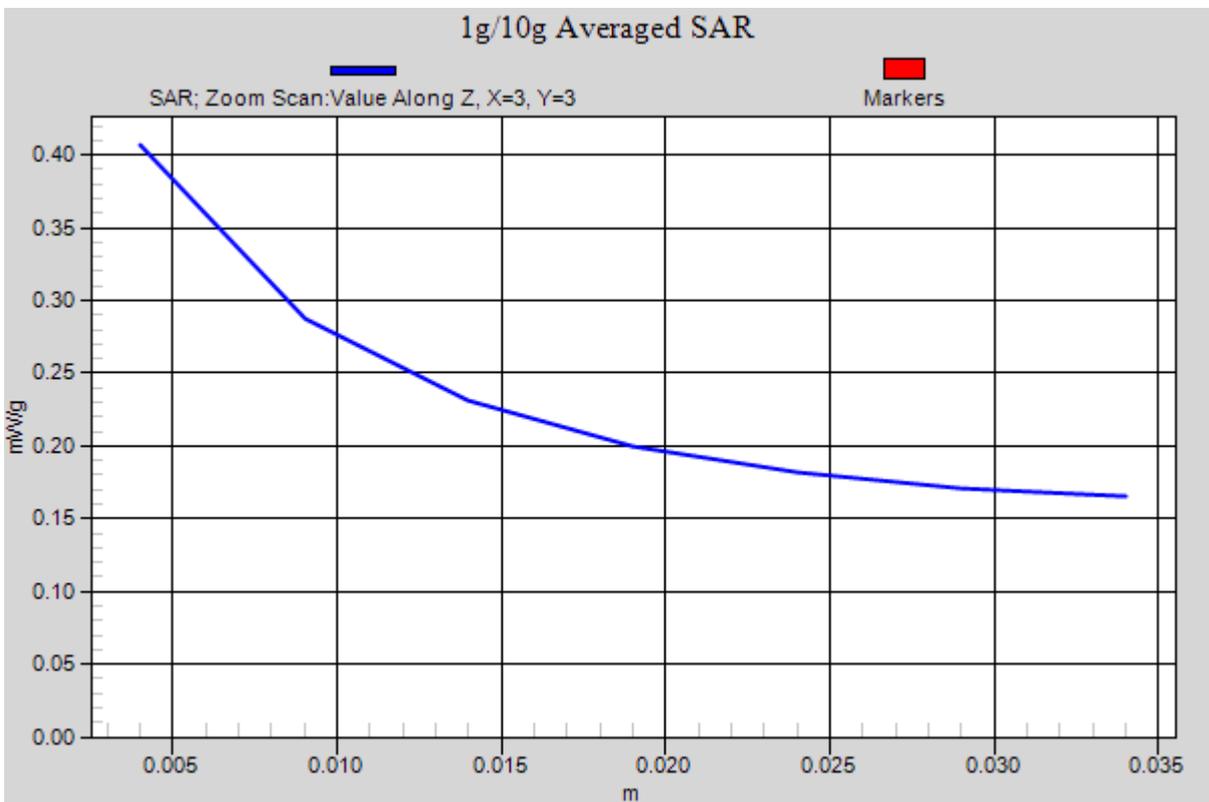
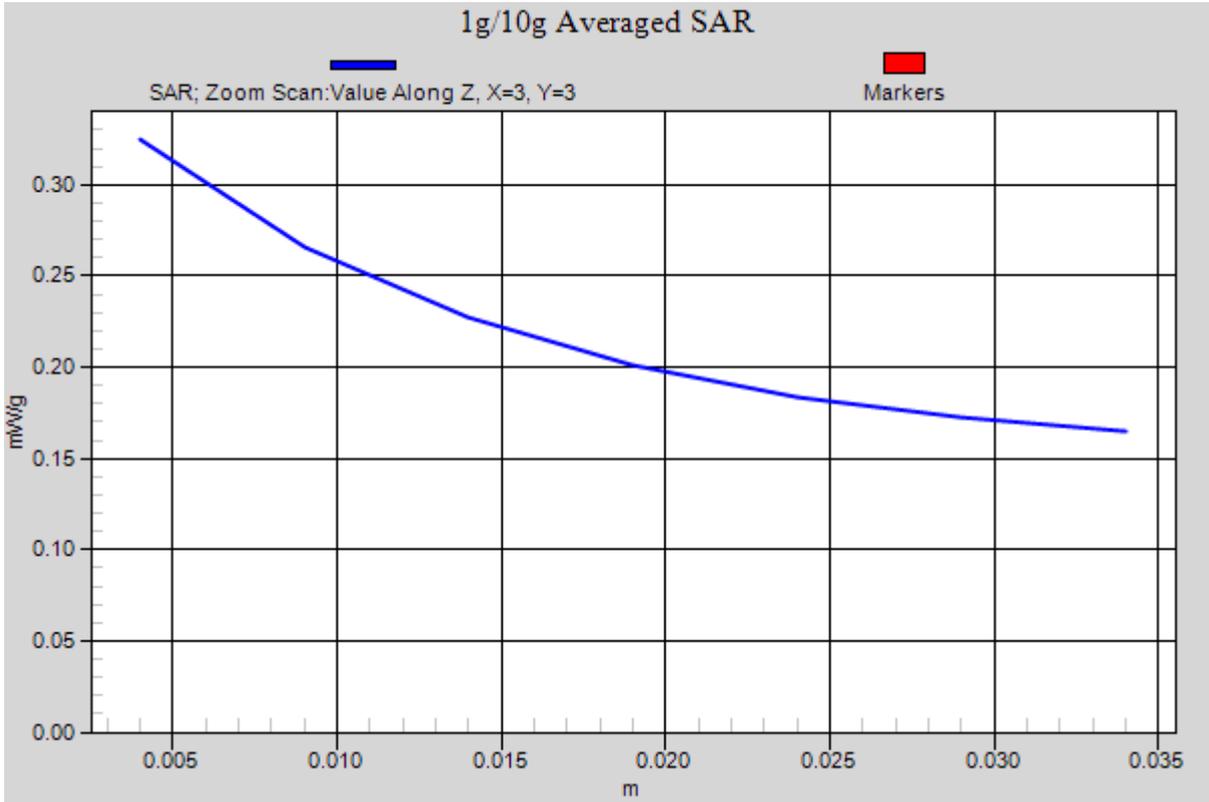


Figure 81 Z-Scan at power reference point [WCDMA Band V +HSUPA with BenQ Joybook R55V
Test Position 4 Channel 4183]

TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2009-1777

Page 121 of 154

ANNEX D: Probe Calibration Certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA (Auden)**

Certificate No: **EX3-3677_Sep09**

CALIBRATION CERTIFICATE																																																			
Object	EX3DV4 - SN:3677																																																		
Calibration procedure(s)	QA CAL-01.v6, QA CAL-12.v5, QA CAL-23.v3 and QA CAL-25.v2 - Calibration procedure for dosimetric E-field probes																																																		
Calibration date:	September 23, 2009																																																		
Condition of the calibrated item	In Tolerance																																																		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Primary Standards</th> <th style="width: 15%;">ID #</th> <th style="width: 30%;">Cal Date (Certificate No.)</th> <th style="width: 25%;">Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter E4419B</td> <td>GB41293874</td> <td>1-Apr-09 (No. 217-01030)</td> <td>Apr-10</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41495277</td> <td>1-Apr-09 (No. 217-01030)</td> <td>Apr-10</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41498087</td> <td>1-Apr-09 (No. 217-01030)</td> <td>Apr-10</td> </tr> <tr> <td>Reference 3 dB Attenuator</td> <td>SN: S5054 (3c)</td> <td>31-Mar-09 (No. 217-01026)</td> <td>Mar-10</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: S5086 (20b)</td> <td>31-Mar-09 (No. 217-01028)</td> <td>Mar-10</td> </tr> <tr> <td>Reference 30 dB Attenuator</td> <td>SN: S5129 (30b)</td> <td>31-Mar-09 (No. 217-01027)</td> <td>Mar-10</td> </tr> <tr> <td>Reference Probe ES3DV2</td> <td>SN: 3013</td> <td>2-Jan-09 (No. ES3-3013_Jan09)</td> <td>Jan-10</td> </tr> <tr> <td>DAE4</td> <td>SN: 660</td> <td>9-Sep-08 (No. DAE4-660_Sep08)</td> <td>Sep-09</td> </tr> </tbody> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Secondary Standards</th> <th style="width: 15%;">ID #</th> <th style="width: 30%;">Check Date (in house)</th> <th style="width: 25%;">Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>RF generator HP 8648C</td> <td>US3642U01700</td> <td>4-Aug-99 (in house check Oct-07)</td> <td>In house check: Oct-09</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585</td> <td>18-Oct-01 (in house check Oct-08)</td> <td>In house check: Oct-09</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10	Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10	Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10	Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10	Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10	Reference 30 dB Attenuator	SN: S5129 (30b)	31-Mar-09 (No. 217-01027)	Mar-10	Reference Probe ES3DV2	SN: 3013	2-Jan-09 (No. ES3-3013_Jan09)	Jan-10	DAE4	SN: 660	9-Sep-08 (No. DAE4-660_Sep08)	Sep-09	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09	Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-08)	In house check: Oct-09
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																																																
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10																																																
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10																																																
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10																																																
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10																																																
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10																																																
Reference 30 dB Attenuator	SN: S5129 (30b)	31-Mar-09 (No. 217-01027)	Mar-10																																																
Reference Probe ES3DV2	SN: 3013	2-Jan-09 (No. ES3-3013_Jan09)	Jan-10																																																
DAE4	SN: 660	9-Sep-08 (No. DAE4-660_Sep08)	Sep-09																																																
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																																
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09																																																
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-08)	In house check: Oct-09																																																
Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature 																																																
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 																																																
			Issued: September 23, 2009																																																
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																																																			

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RZA2009-1777

Page 122 of 154

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

EX3DV4 SN:3677

September 23, 2009

Probe EX3DV4

SN:3677

Manufactured:	September 9, 2008
Last calibrated:	November 7, 2008
Recalibrated:	September 23, 2009

Calibrated for DASY Systems


(Note: non-compatible with DASY2 system!)

EX3DV4 SN:3677

September 23, 2009

Frequency Response of E-Field

(TEM-Cell: ifi110 EXX, Waveguide: R22)


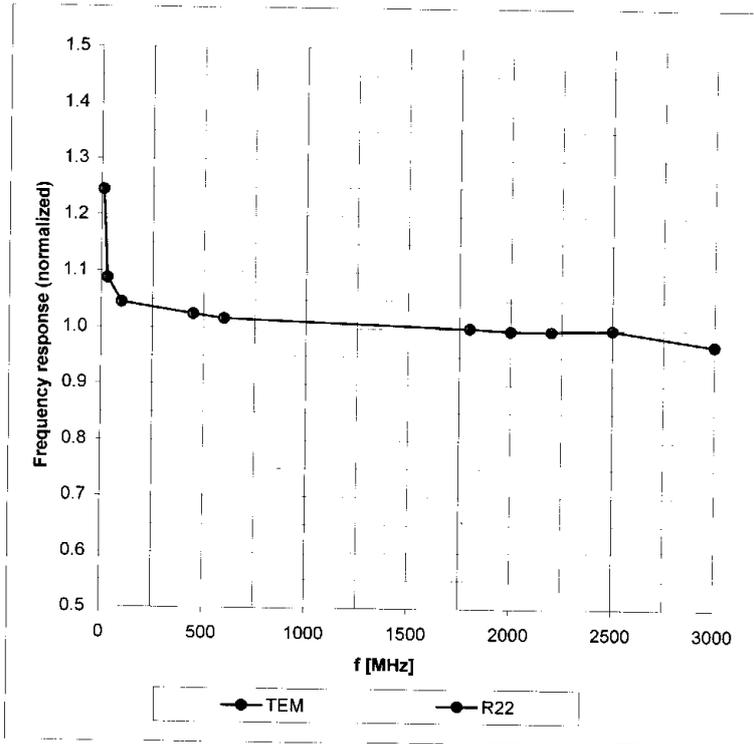


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

EX3DV4 SN:3677

September 23, 2009

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

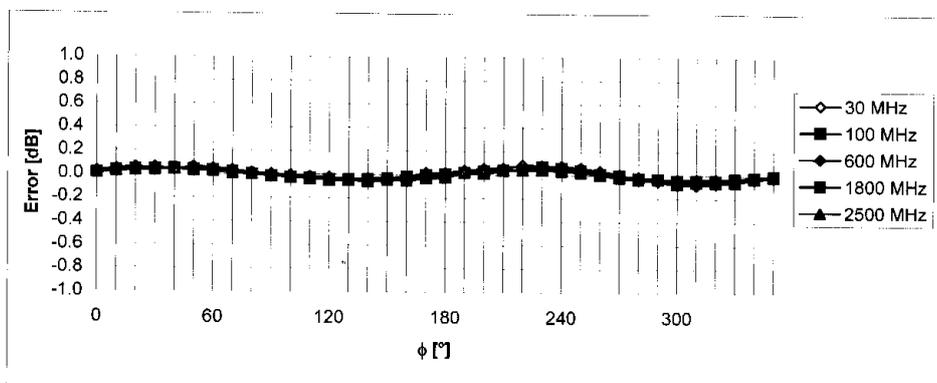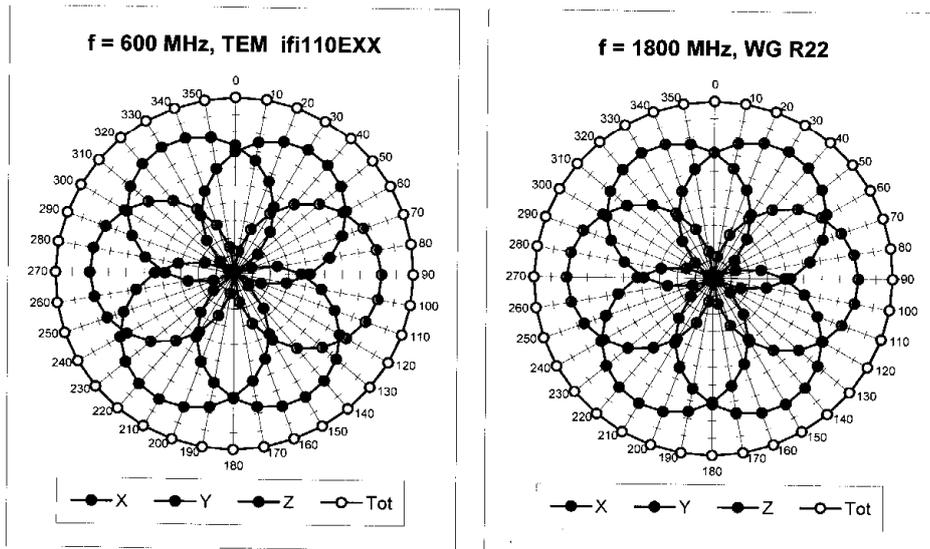


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

EX3DV4 SN:3677

September 23, 2009

Dynamic Range $f(SAR_{head})$
(Waveguide R22, $f = 1800$ MHz)

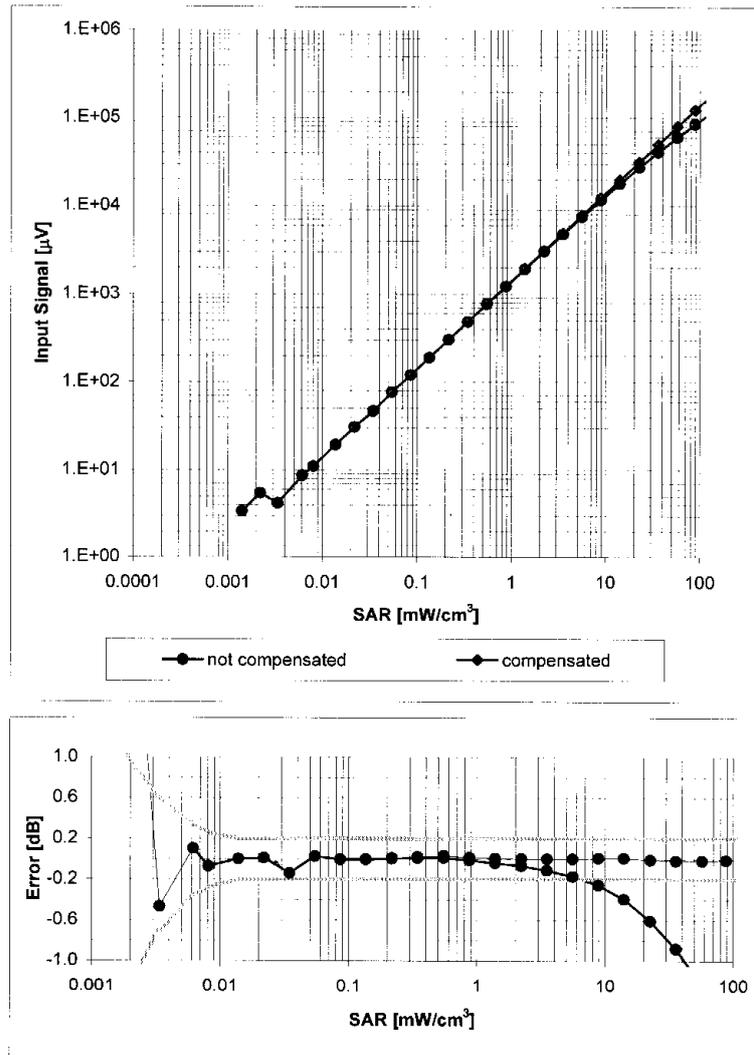


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

EX3DV4 SN:3677

September 23, 2009

Conversion Factor Assessment

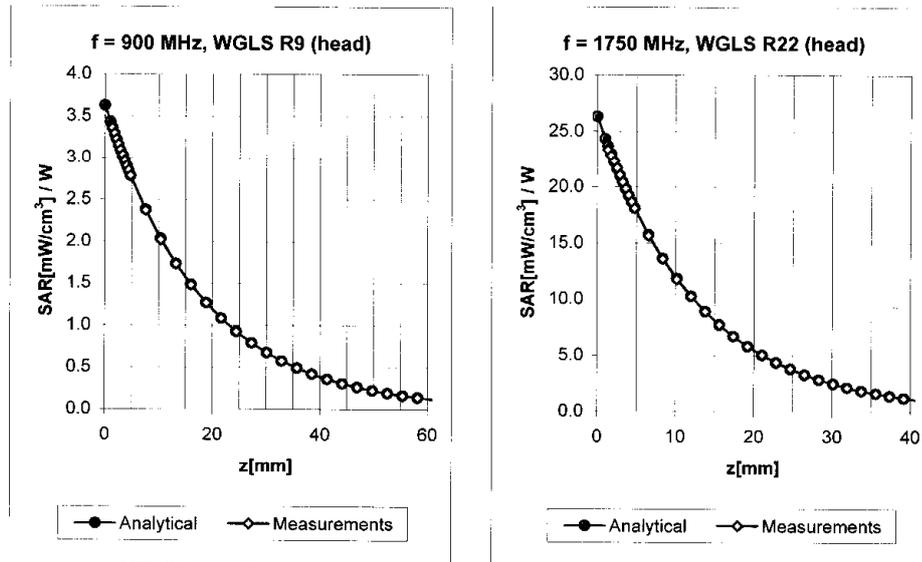

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.68	0.64	9.20 ± 11.0% (k=2)
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.71	0.62	8.91 ± 11.0% (k=2)
1750	± 50 / ± 100	Head	40.1 ± 5%	1.37 ± 5%	0.68	0.62	8.04 ± 11.0% (k=2)
1950	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.70	0.60	7.53 ± 11.0% (k=2)
450	± 50 / ± 100	Body	56.7 ± 5%	0.94 ± 5%	0.32	0.49	10.43 ± 13.3% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.54	0.73	9.11 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.63	0.71	8.89 ± 11.0% (k=2)
1750	± 50 / ± 100	Body	53.4 ± 5%	1.49 ± 5%	0.55	0.74	7.70 ± 11.0% (k=2)
1950	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.30	1.01	7.62 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.56	0.68	7.28 ± 11.0% (k=2)


^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

EX3DV4 SN:3677

September 23, 2009

Deviation from Isotropy in HSL

Error (ϕ , ϑ), $f = 900$ MHz

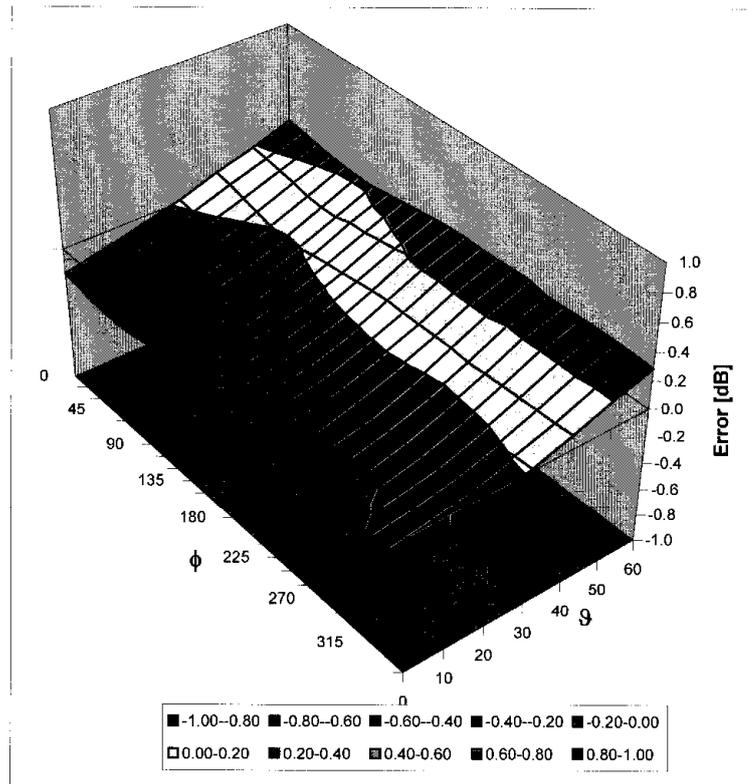

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2009-1777

Page 130 of 154

ANNEX E: D835V2 Dipole Calibration Certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client: **CMCS (Austria)**

Certificate No: **D835V2-4d031_Jan09**

CALIBRATION CERTIFICATE

Object: **D835V2 - SN: 4d031**

Calibration procedure(s): **QA CAL-05.W
Calibration procedure for dipole validation job**

Calibration date: **January 22, 2009**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&E critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	08-Oct-08 (No. 217-00898)	Oct-09
Power sensor HP 8481A	US37292783	05-Oct-08 (No. 217-00898)	Oct-09
Reference 20 dB Attenuator	SN: 5086 (70g)	01-Jul-08 (No. 217-00864)	Jul-09
Type-N mismatch combination	SN: 5047.2 / 06327	01-Jul-08 (No. 217-00867)	Jul-09
Reference Probe ES3DV2	SN: 3025	28-Apr-08 (No. ES3-3025_Apr08)	Apr-09
DAE4	SN: 601	14-Mar-08 (No. DAE4-601_Mar08)	Mar-09
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-07)	In house check: Oct-09
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

	Name	Function	Signature
Calibrated by:	Milica Matic	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: January 27, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

TA Technology (Shanghai) Co., Ltd. Test Report

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.3 ± 6 %	0.91 mho/m ± 6 %
Head TSL temperature during test	(22.4 ± 0.2) °C	—	—

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.44 mW / g
SAR normalized	normalized to 1W	9.76 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	9.68 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.61 mW / g
SAR normalized	normalized to 1W	6.44 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	6.40 mW / g ± 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

TA Technology (Shanghai) Co., Ltd.
Test Report

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.5 ± 6 %	1.00 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.54 mW / g
SAR normalized	normalized to 1W	10.2 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	9.86 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.67 mW / g
SAR normalized	normalized to 1W	6.68 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	6.54 mW / g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

TA Technology (Shanghai) Co., Ltd.
Test Report

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.2 Ω -1.4 j Ω
Return Loss	- 29.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.5 Ω -4.4 j Ω
Return Loss	- 26.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.381 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 17, 2004

DASY5 Validation Report for Head TSL

Date/Time: 22.01.2009 16:51:02

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d031

Communication System: CW-835; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 900 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(5.97, 5.97, 5.97); Calibrated: 28.04.2008
- Sensor-Surface: 3.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 14.03.2008
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45


Pin=250mW; dip=15mm; dist=3.4mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.3 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 3.59 W/kg

SAR(1 g) = 2.44 mW/g; SAR(10 g) = 1.61 mW/g

Maximum value of SAR (measured) = 2.75 mW/g

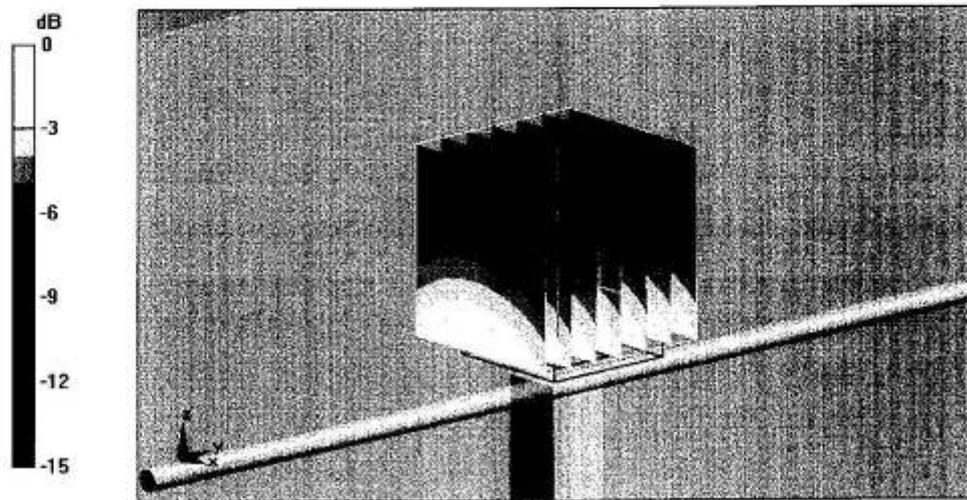


0 dB = 2.75mW/g

TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2009-1777

Page 136 of 154

Impedance Measurement Plot for Head TSL

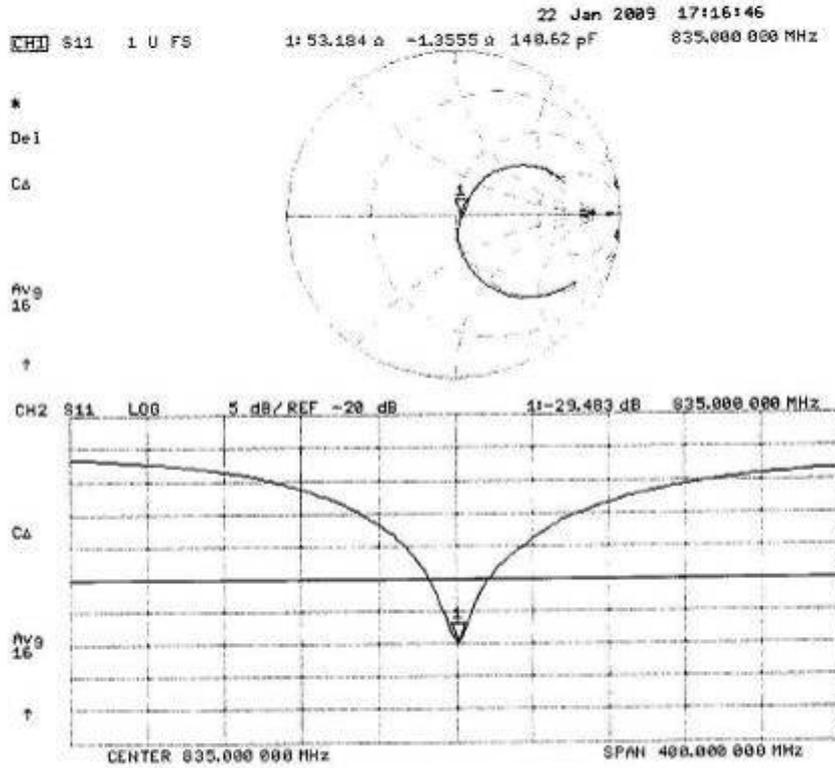

DASY5 Validation Report for Body TSL

Date/Time: 22.01.2009 15:47:21

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d031

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL900

Medium parameters used: $f = 835$ MHz; $\sigma = 1$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(5.9, 5.9, 5.9); Calibrated: 28.04.2008
- Sensor-Surface: 3.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 14.03.2008
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45


Pin = 250mW, d = 15mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.9 V/m; Power Drift = -0.00495 dB

Peak SAR (extrapolated) = 3.68 W/kg


SAR(1 g) = 2.54 mW/g; SAR(10 g) = 1.67 mW/g

Maximum value of SAR (measured) = 2.85 mW/g

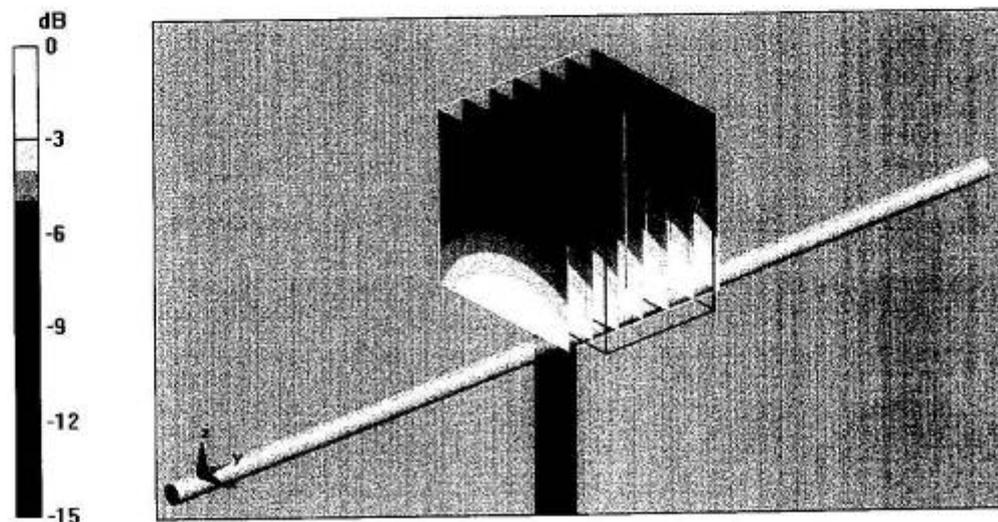

0 dB = 2.85mW/g

Impedance Measurement Plot for Body TSL

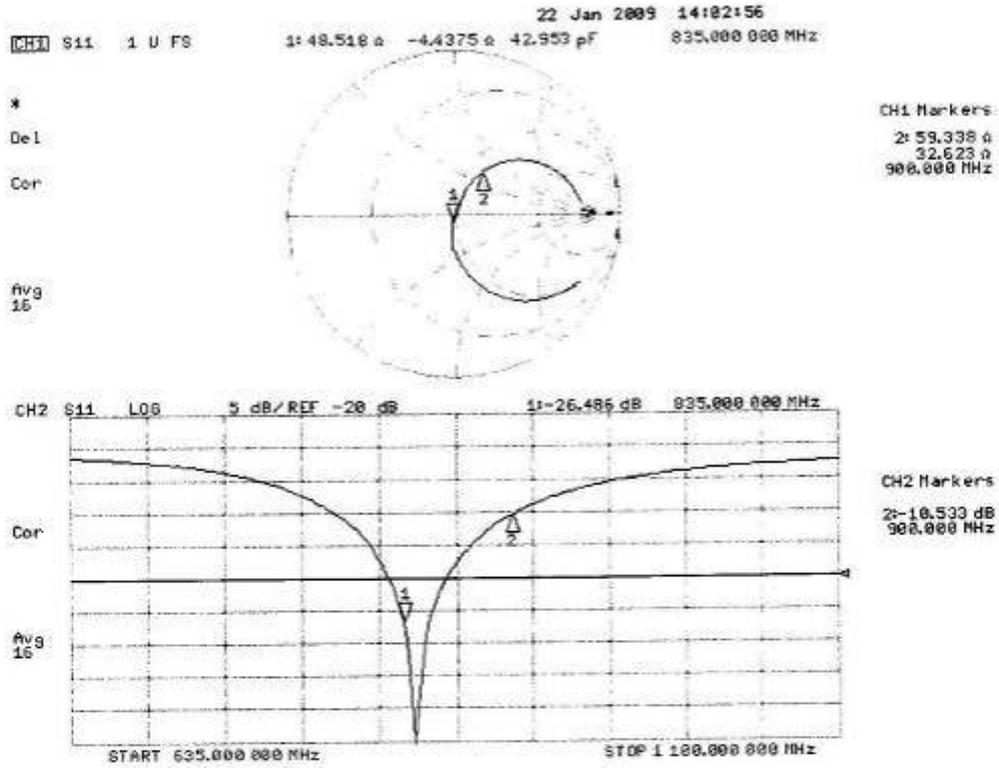

TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2009-1777

Page 139 of 154

ANNEX F: D1900V2 Dipole Calibration Certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Auden**

Certificate No: **D1900V2-5d018-Jun09**

CALIBRATION CERTIFICATE

Object: **D1900V2 - SN: 5d018**

Calibration procedure(s): **QA CAL-05.v7
Calibration procedure for dipole validation kits**

Calibration date: **June 26, 2009**

Condition of the calibrated item: **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3 °C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	08-Oct-08 (No. 217-00898)	Oct-09
Power sensor HP 8481A	US37292783	08-Oct-08 (No. 217-00898)	Oct-09
Reference 20 dB Attenuator	SN: 5096 (20g)	31-Mar-09 (No. 217-01025)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ES3DV2	SN: 3025	30-Apr-09 (No. ES3-3025_Apr09)	Apr-10
DAE4	SN: 601	07-Mar-09 (No. DAE4-601_Mar09)	Mar-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-07)	In house check: Oct-09
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585 54206	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

Calibrated by:	Name Jeton Kastrot	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: June 29, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

TA Technology (Shanghai) Co., Ltd. Test Report

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.0 ± 6 %	1.42 mho/m ± 6 %
Head TSL temperature during test	(22.0 ± 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	condition	
SAR measured	250 mW input power	10.3 mW / g
SAR normalized	normalized to 1W	41.2 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	41.1 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	5.38 mW / g
SAR normalized	normalized to 1W	21.5 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	21.5 mW / g ± 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

TA Technology (Shanghai) Co., Ltd.
Test Report

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.8 Ω + 2.7 j Ω
Return Loss	- 29.9 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.6 Ω + 4.3 j Ω
Return Loss	- 24.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.195 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 04, 2002

DASY5 Validation Report for Head TSL

Date/Time: 26.06.2009 13:05:15

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U11 BB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(4.88, 4.88, 4.88); Calibrated: 30.04.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Pin = 250 mW; dip = 10 mm/Zoom Scan (dist=3.0 mm, probe 0deg) (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.6 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 18.7 W/kg

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.38 mW/g

Maximum value of SAR (measured) = 12.6 mW/g

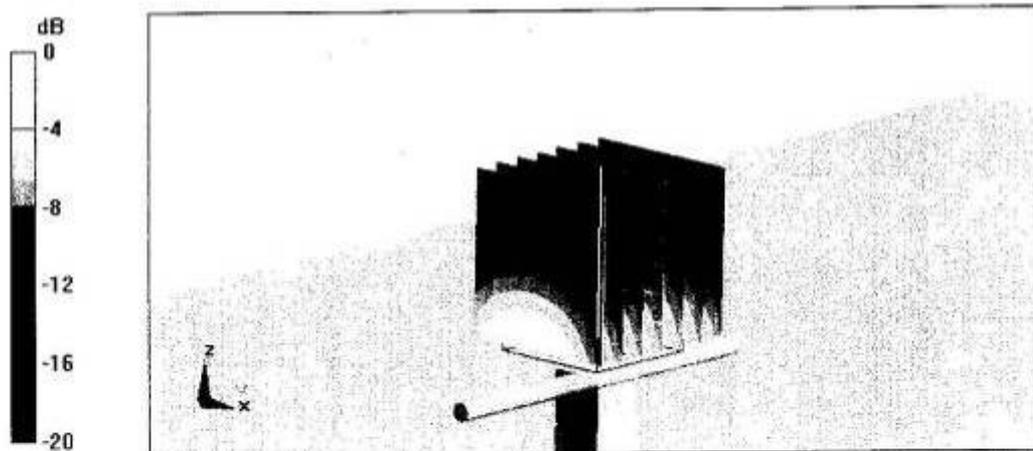


0 dB = 12.6mW/g

TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2009-1777

Page 144 of 154

Impedance Measurement Plot for Head TSL

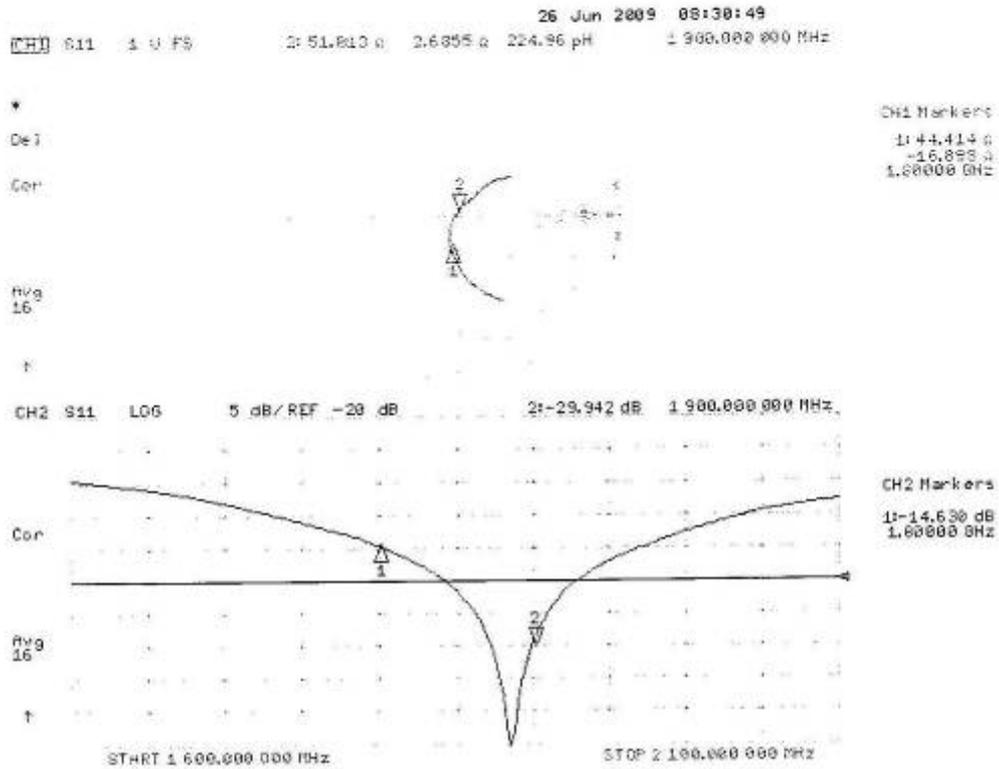

DASY5 Validation Report for Body TSL

Date/Time: 26.06.2009 14:30:50

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC)

DASY5 Configuration:

- Probe: ES3DV2 - SN3025; ConvF(4.46, 4.46, 4.46); Calibrated: 30.04.2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sa601; Calibrated: 07.03.2009
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

Pin = 250 mW; dip = 10 mm/Zoom Scan (dist=3.0mm, probe 0deg) (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.8 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 18.9 W/kg

SAR(1 g) = 10.5 mW/g; SAR(10 g) = 5.52 mW/g

Maximum value of SAR (measured) = 13.3 mW/g

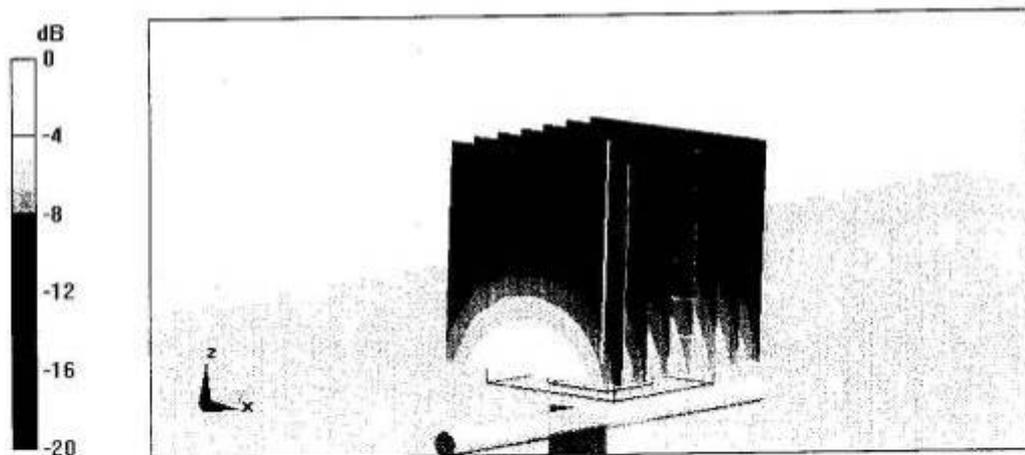


0 dB = 13.3mW/g

TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RZA2009-1777

Page 146 of 154

Impedance Measurement Plot for Body TSL

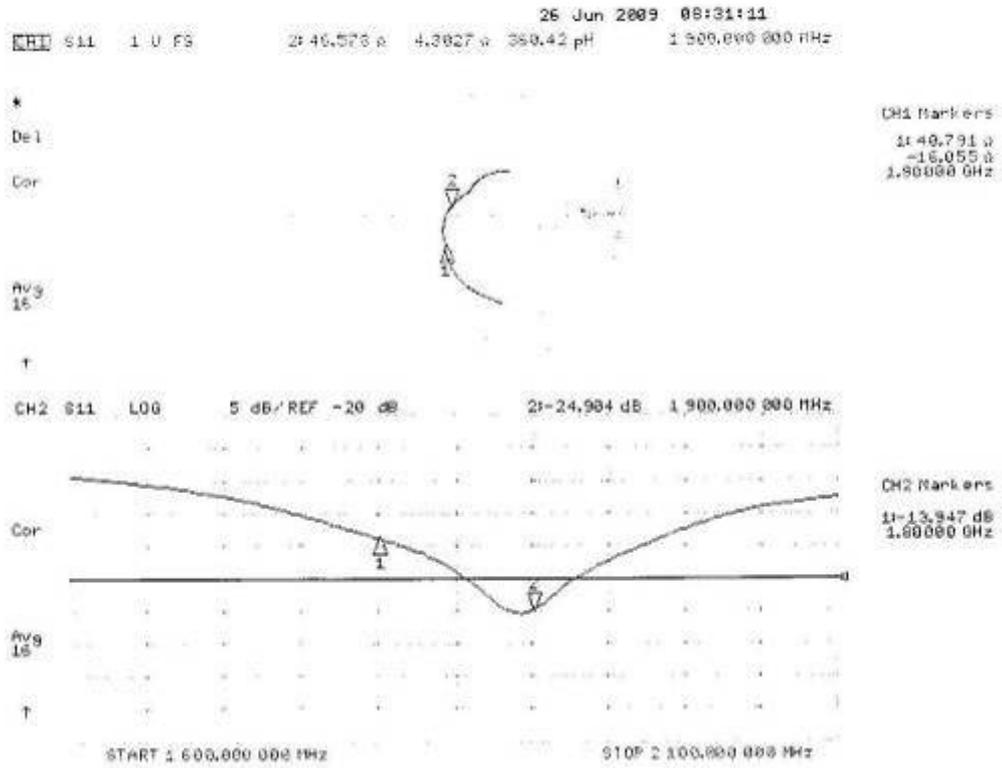

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RZA2009-1777

Page 147 of 154

ANNEX G: DAE4 Calibration Certificate

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Auden**

Certificate No: **DAE4-905_Jun09**

CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BK - SN: 905**

Calibration procedure(s) **QA CAL-06.v12
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **June 24, 2009**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Fluke Process Calibrator Type 702	SN: 6295803	30-Sep-08 (No: 7673)	Sep-09
Keithley Multimeter Type 2001	SN: 0810278	30-Sep-08 (No: 7670)	Sep-09
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMS 006 AB 1004	05-Jun-09 (in house check)	In house check: Jun-10

Calibrated by:	Name Andrea Guntli	Function Technician	Signature
Approved by:	Name Fin Bomholt	Function R&D Director	Signature

Issued: June 24, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- *DC Voltage Measurement*: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle*: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - *DC Voltage Measurement Linearity*: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - *Common mode sensitivity*: Influence of a positive or negative common mode voltage on the differential measurement.
 - *Channel separation*: Influence of a voltage on the neighbor channels not subject to an input voltage.
 - *AD Converter Values with inputs shorted*: Values on the internal AD converter corresponding to zero input voltage
 - *Input Offset Measurement*: Output voltage and statistical results over a large number of zero voltage measurements.
 - *Input Offset Current*: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance*: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - *Low Battery Alarm Voltage*: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - *Power consumption*: Typical value for information. Supply currents in various operating modes.

TA Technology (Shanghai) Co., Ltd.
Test Report

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 μ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.217 \pm 0.1% (k=2)	404.768 \pm 0.1% (k=2)	404.344 \pm 0.1% (k=2)
Low Range	3.96064 \pm 0.7% (k=2)	3.96162 \pm 0.7% (k=2)	3.94181 \pm 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	224 \pm 1 $^{\circ}$
---	------------------------

TA Technology (Shanghai) Co., Ltd.

Test Report

Appendix

1. DC Voltage Linearity

High Range	Input (μV)	Reading (μV)	Error (%)
Channel X + Input	200000	199999.8	0.00
Channel X + Input	20000	20006.37	0.03
Channel X - Input	20000	-20001.53	0.01
Channel Y + Input	200000	200000.2	0.00
Channel Y + Input	20000	20007.65	0.04
Channel Y - Input	20000	-20004.14	0.02
Channel Z + Input	200000	199999.8	0.00
Channel Z + Input	20000	20004.62	0.02
Channel Z - Input	20000	-20006.32	0.03

Low Range	Input (μV)	Reading (μV)	Error (%)
Channel X + Input	2000	2000	0.00
Channel X + Input	200	200.19	0.09
Channel X - Input	200	-199.93	-0.03
Channel Y + Input	2000	1999.9	0.00
Channel Y + Input	200	199.73	-0.13
Channel Y - Input	200	-200.49	0.25
Channel Z + Input	2000	2000.1	0.00
Channel Z + Input	200	199.32	-0.34
Channel Z - Input	200	-201.09	0.55

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	8.73	8.55
	-200	-8.62	-8.40
Channel Y	200	8.12	8.42
	-200	-9.55	-9.70
Channel Z	200	1.20	1.94
	-200	-3.81	-3.79

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	0.64	-0.52
Channel Y	200	0.59	-	3.21
Channel Z	200	-0.99	-1.28	-

TA Technology (Shanghai) Co., Ltd.

Test Report

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15874	16893
Channel Y	16121	14432
Channel Z	16378	17173

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec
Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation (μ V)
Channel X	0.28	-0.63	1.52	0.30
Channel Y	-0.58	-1.70	1.19	0.27
Channel Z	-0.85	-2.59	0.78	0.43

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance

	Zeroing (MOhm)	Measuring (MOhm)
Channel X	0.1999	200.7
Channel Y	0.1999	199.0
Channel Z	0.1999	199.7

8. Low Battery Alarm Voltage (verified during pre test)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6


9. Power Consumption (verified during pre test)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.0	+6	+14
Supply (- Vcc)	-0.01	-8	-9


ANNEX H: The EUT Appearances and Test Configuration



Picture 5: Constituents of the EUT

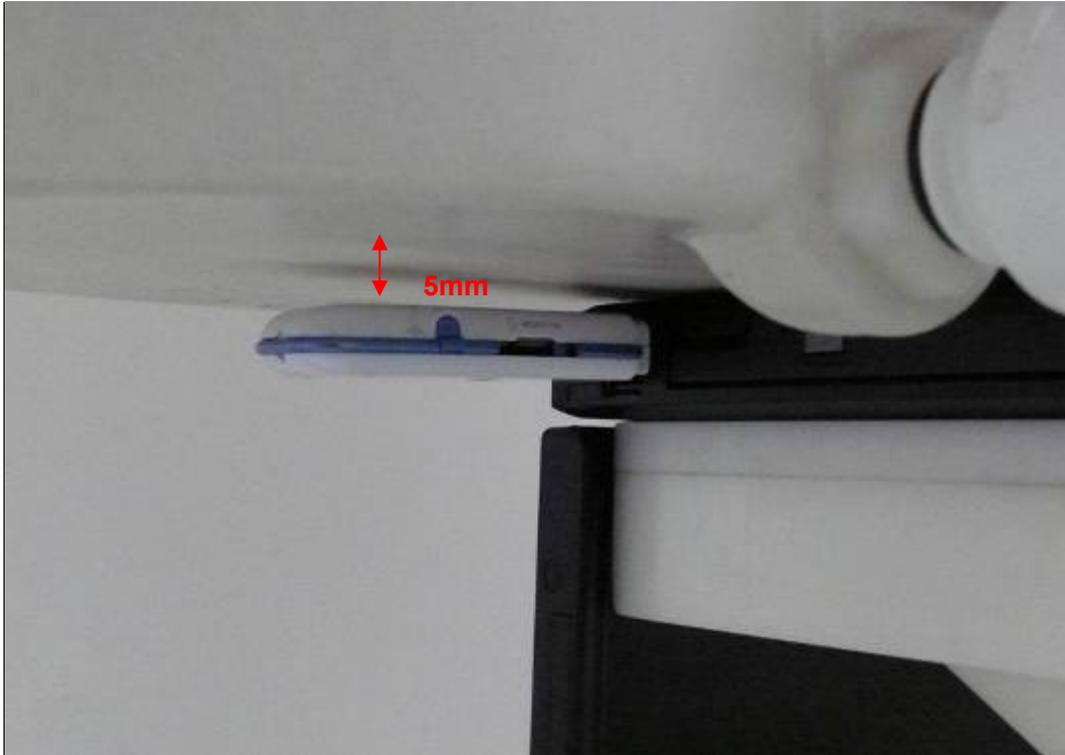

Picture 6: Test position 1

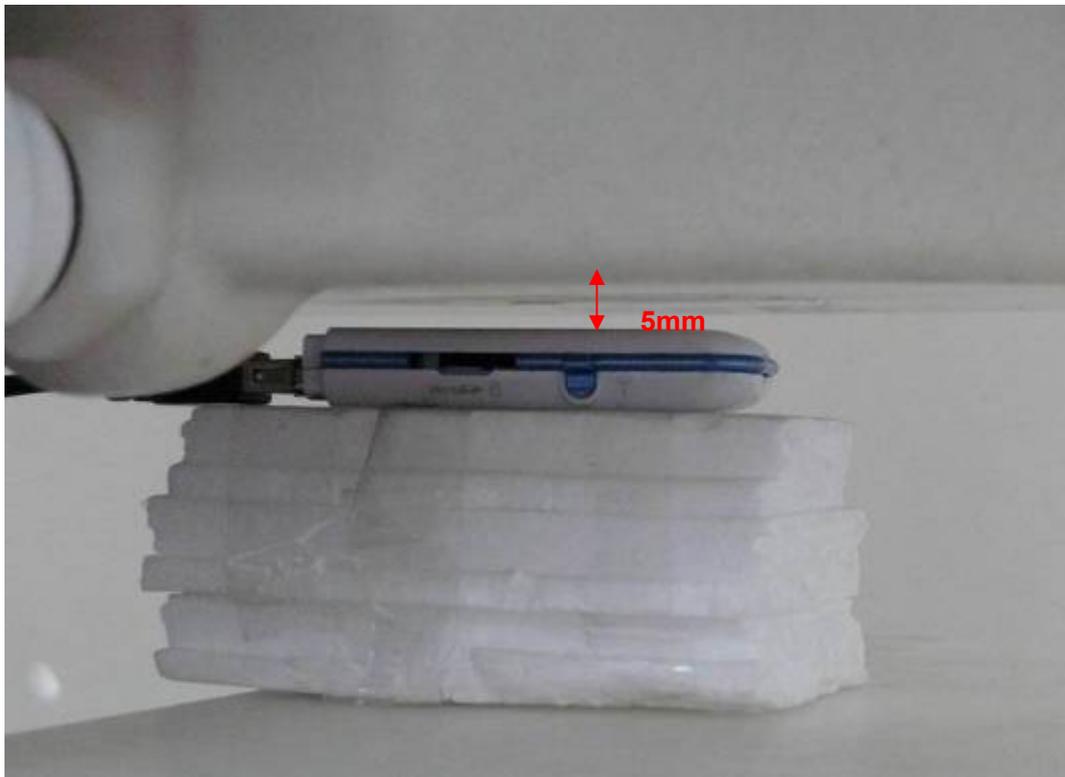

Picture 7: Test position 2



Picture 8: Test Position 3



Picture 9: Test Position 4