

FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA GSM (GPRS) Dual-Mode
Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : Movistar One
FCC ID : Q78-MOVISTARONE
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : Digital Transmission System (DTS)

The product was received on Sep. 20, 2011 and completely tested on Oct. 08, 2011. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Feature of Equipment Under Test	5
1.4 Testing Site.....	6
1.5 Applied Standards	6
1.6 Ancillary Equipment List	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 RF Power	7
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 RF Utility	11
3 TEST RESULT.....	12
3.1 6dB Bandwidth Measurement	12
3.2 Output Power Measurement.....	21
3.3 Band Edges Measurement.....	23
3.4 Spurious Emission Measurement.....	33
3.5 Power Spectral Density Measurement	46
3.6 AC Conducted Emission Measurement.....	55
3.7 Radiated Emission Measurement.....	59
3.8 Antenna Requirements.....	86
4 LIST OF MEASURING EQUIPMENT	87
5 UNCERTAINTY OF EVALUATION.....	88
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR192004B	Rev. 01	Initial issue of report	Oct. 18, 2011

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(d)	Frequency Band Edges	$\leq 20\text{dBc}$	Pass	-
3.4	15.247(d)	Spurious Emission	$< 20\text{ dBc}$	Pass	-
3.5	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}$	Pass	-
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.29 dB at 1.85 MHz
3.7	15.247(d)	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.02 dB at 2389.8 MHz
3.8	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	WCDMA GSM (GPRS) Dual-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	Movistar One
FCC ID	Q78-MOVISTARONE
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	11
Carrier Frequency of Each Channel	2412+(n-1)*5 MHz; n=1~11
Channel Spacing	5 MHz
Maximum Output Power to Antenna	802.11b : 18.97 dBm (0.079 W) 802.11g : 22.57 dBm (0.181 W) 802.11n (BW 20MHz) : 22.92 dBm (0.196 W) 802.11n (BW 40MHz) : 23.11 dBm (0.205 W)
Antenna Type	PIFA Antenna with gain 1.28 dBi
HW Version	WMAB
SW Version	ZTE-CN-W850-W1900-P173A30V0.0.1B01T
Type of Modulation	802.11b : DSSS (BPSK / QPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)
EUT Stage	Production Unit

Remark:

- For other wireless features of this EUT, test report will be issued separately.
- This test report recorded only product characteristics and test results of Digital Transmission System (DTS).
- The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		
	TH01-KS	CO01-KS	03CH01-KS

1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 (Measurement Guidelines of DTS)
- ANSI C63.4-2003

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (Certification), recorded in a separate test report.

1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Signal Generator	R&S	SMR40	N/A	N/A	Unshielded, 1.8 m
3.	Router	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	PP42L	N/A	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A

2 Test Configuration of Equipment Under Test

2.1 RF Power

Preliminary tests were performed in different data rate and recorded the RF power output in the following table:

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	18.97	17.75	18.08	17.78
CH 06	2437 MHz	17.57	17.62	17.45	17.51
CH 11	2462 MHz	17.41	17.38	17.32	17.42

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	22.57	22.19	22.14	21.98	22.47	22.34	22.11	22.23
CH 06	2437 MHz	22.34	21.96	22.13	21.93	22.06	21.95	22.06	22.17
CH 11	2462 MHz	22.27	21.84	21.67	21.27	22.05	22.01	21.89	21.76

Channel	Frequency	2.4GHz 802.11n (BW 20MHz) RF Power (dBm)							
		OFDM Data Rate							
		MCS=0	MCS=1	MCS=2	MCS=3	MCS=4	MCS=5	MCS=6	MCS=7
		6.5 Mbps	13 Mbps	19.5 Mbps	26 Mbps	39 Mbps	52 Mbps	58.5 Mbps	65 Mbps
CH 01	2412 MHz	22.92	22.12	22.07	21.86	22.11	21.97	22.72	22.29
CH 06	2437 MHz	22.79	22.06	21.95	21.73	22.04	21.94	22.69	22.15
CH 11	2462 MHz	22.64	22.04	21.81	21.54	21.93	21.75	22.56	22.01

Channel	Frequency	2.4GHz 802.11n (BW 40MHz) RF Power (dBm)							
		OFDM Data Rate							
		MCS=0	MCS=1	MCS=2	MCS=3	MCS=4	MCS=5	MCS=6	MCS=7
		6.5 Mbps	13 Mbps	19.5 Mbps	26 Mbps	39 Mbps	52 Mbps	58.5 Mbps	65 Mbps
CH 03	2422 MHz	23.11	22.01	21.81	22.36	22.24	22.78	22.05	21.86
CH 06	2437 MHz	23.04	21.96	21.85	22.06	22.15	22.64	22.03	21.77
CH 09	2452 MHz	22.98	21.89	21.81	22.47	22.12	22.56	21.95	21.64

Remark:

1. The data rates of WLAN 802.11b/g/n were set in 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n (BW 20MHz), and 6.5Mbps for 802.11n (BW 40MHz) for all the test cases due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.

2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz), radiated emission (30 MHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations.


The following tables are showing the test modes as the worst cases (H, E1 plane) and recorded in this report.

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases		
Test Item	802.11b (Modulation : DSSS)	802.11g/n (Modulation : OFDM)
Conducted TCs	Mode 1 : 802.11b CH01_2412 MHz Mode 2 : 802.11b CH06_2437 MHz Mode 3 : 802.11b CH11_2462 MHz	Mode 4: 802.11g_CH01_2412 MHz Mode 5: 802.11g_CH06_2437 MHz Mode 6: 802.11g_CH11_2462 MHz Mode 7: 802.11n (BW 20M)_CH01_2412 MHz Mode 8: 802.11n (BW 20M)_CH06_2437 MHz Mode 9: 802.11n (BW 20M)_CH11_2462 MHz Mode 10: 802.11n (BW 40M)_CH03_2422 MHz Mode 11: 802.11n (BW 40M)_CH06_2437 MHz Mode 12: 802.11n (BW 40M)_CH09_2452 MHz
Radiated TCs	Mode 1 : 802.11b CH01_2412 MHz Mode 2 : 802.11b CH06_2437 MHz Mode 3 : 802.11b CH11_2462 MHz	Mode 4: 802.11g_CH01_2412 MHz Mode 5: 802.11g_CH06_2437 MHz Mode 6: 802.11g_CH11_2462 MHz Mode 7: 802.11n (BW 20M)_CH01_2412 MHz Mode 8: 802.11n (BW 20M)_CH06_2437 MHz Mode 9: 802.11n (BW 20M)_CH11_2462 MHz Mode 10: 802.11n (BW 40M)_CH03_2422 MHz Mode 11: 802.11n (BW 40M)_CH06_2437 MHz Mode 12: 802.11n (BW 40M)_CH09_2452 MHz
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WIFI Link + Adapter + Earphone + FM Rx	

2.3 Connection Diagram of Test System

<WLAN Tx Mode>

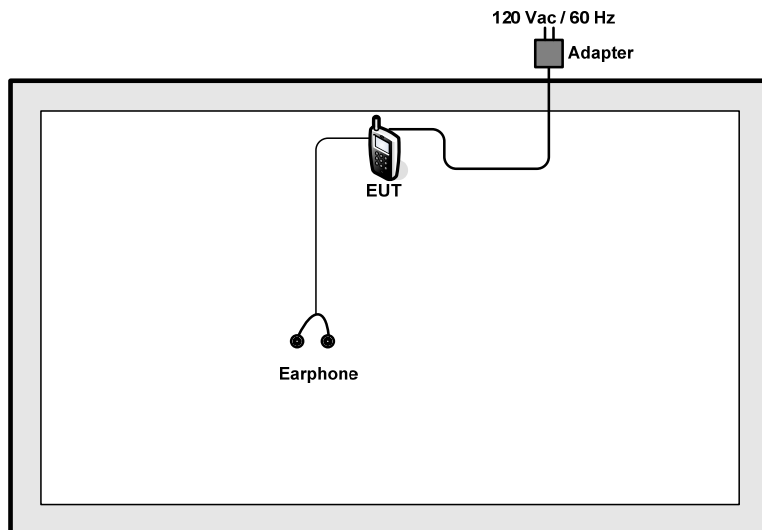

<AC Conducted Emission Mode>

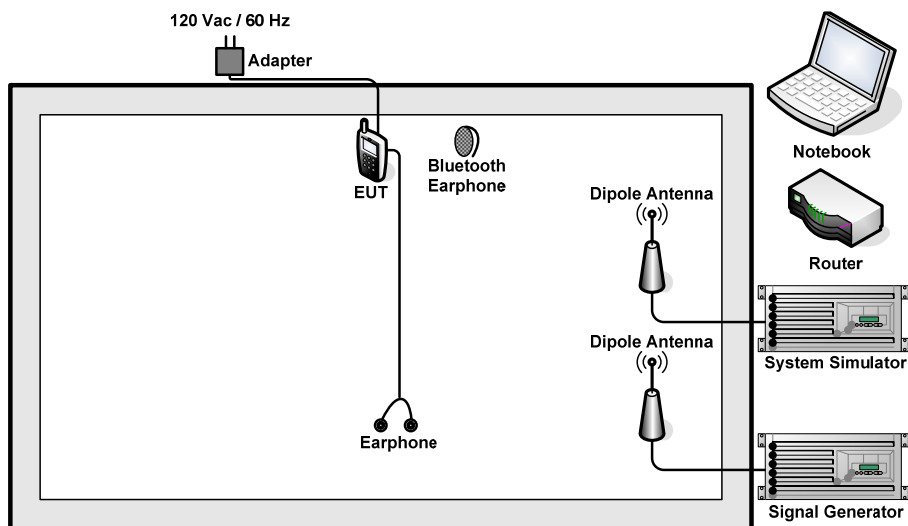

2.4 RF Utility

The programmed RF utility "WIFI Tool" is installed in EUT to provide channel selection, power level, data rate and the application type. RF Utility can send transmitting signal for all testing. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz.
In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.
4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

3.1.4 Test Setup

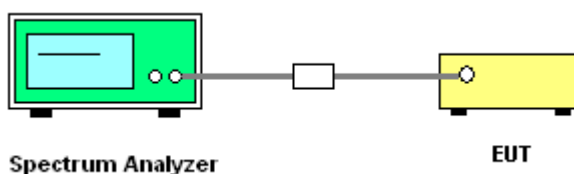



Test Mode :	Mode 1, 2, 3	Temperature :	23~24℃	
Test Engineer :	Jun Liu	Relative Humidity :	45~47%	

Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	10.04	0.5	Pass
06	2437	10.04	0.5	Pass
11	2462	10.04	0.5	Pass

1 PK
MAXH

Ref 20 dBm *Att 20 dB
RBW 100 kHz Delta 1 [T1]
VBW 300 kHz -0.54 dB
SWT 5 ms 10.040000000 MHz


20 Offset 15 4 dB

Marker 1 [T1]
-0.04 dBm
2.407000000 GHz


D1 5.59 dBm
D2 0.4 dBm

Center 2.412 GHz 2 MHz/
Span 20 MHz

Date: 28.SEP.2011 09:20:50

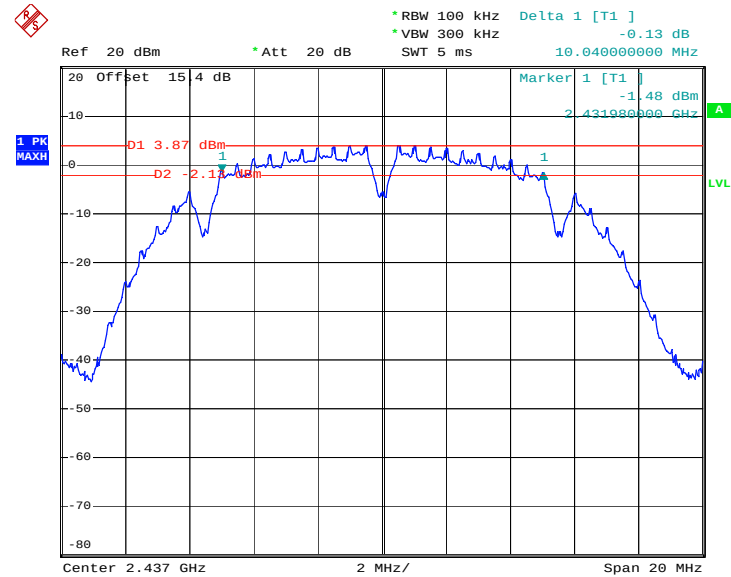Mode 2 : 6 dB Bandwidth Plot on 802.11b Channel 06


Date: 28.SEP.2011 09:52:43

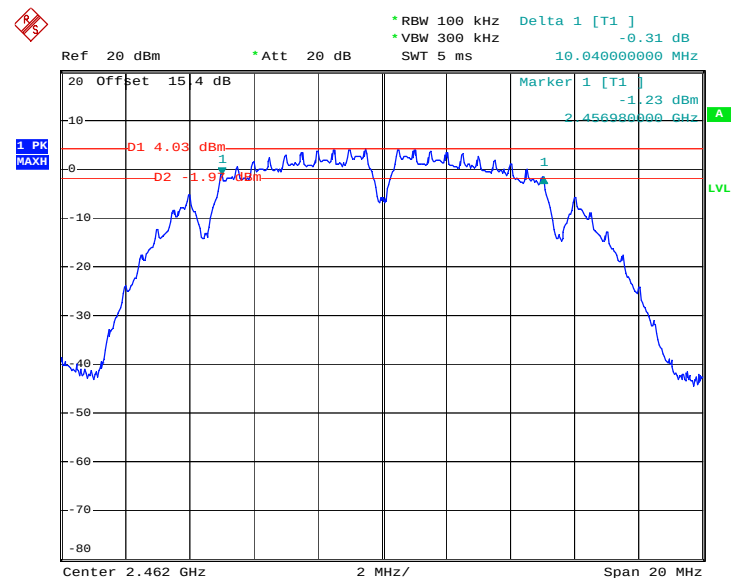Mode 3 : 6 dB Bandwidth Plot on 802.11b Channel 11


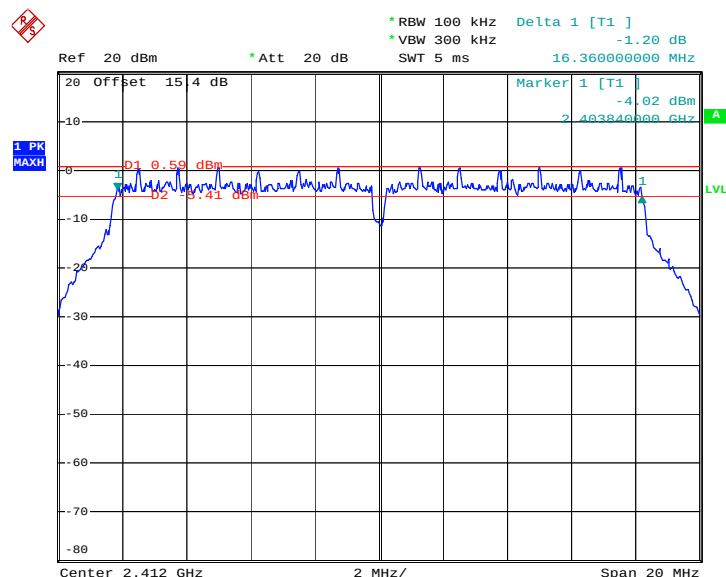
Date: 28.SEP.2011 10:16:07



Test Mode :	Mode 4, 5, 6	Temperature :	23~24°C
Test Engineer :	Jun Liu	Relative Humidity :	45~47%

Channel	Frequency (MHz)	802.11g 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	16.36	0.5	Pass
06	2437	16.32	0.5	Pass
11	2462	16.32	0.5	Pass


Mode 4 : 6 dB Bandwidth Plot on 802.11g Channel 01



Date: 28.SEP.2011 11:22:41




Mode 5 : 6 dB Bandwidth Plot on 802.11g Channel 06

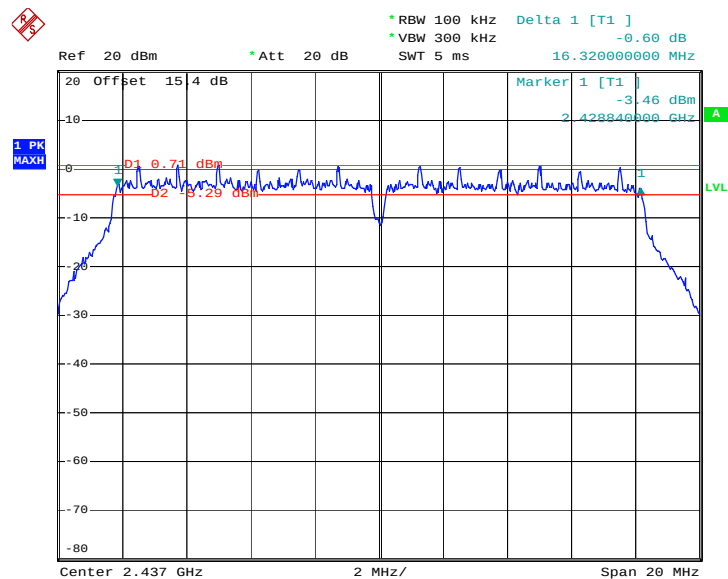

Date: 28.SEP.2011 10:52:19

Mode 6 : 6 dB Bandwidth Plot on 802.11g Channel 11

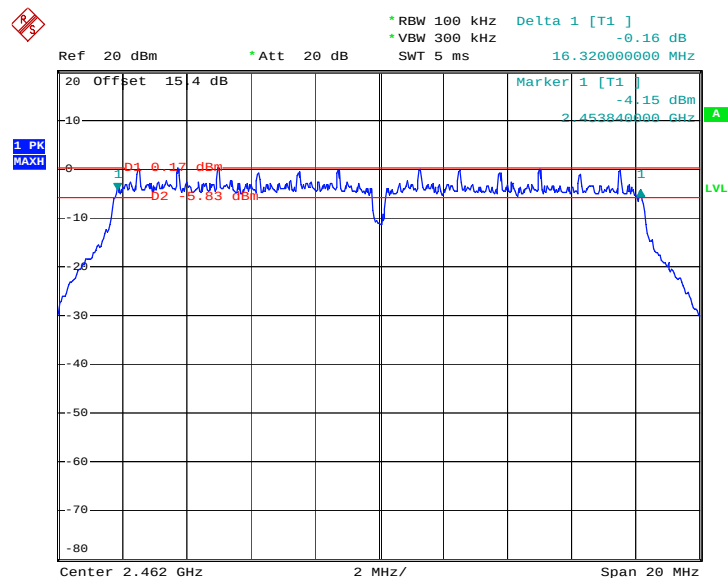


Date: 28.SEP.2011 11:06:57



Test Mode :	Mode 7, 8, 9	Temperature :	23~24°C
Test Engineer :	Jun Liu	Relative Humidity :	45~47%

Channel	Frequency (MHz)	802.11n (BW 20MHz) 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	17.60	0.5	Pass
06	2437	17.60	0.5	Pass
11	2462	17.60	0.5	Pass


Mode 7 : 6 dB Bandwidth Plot on 802.11n(BW 20MHz) Channel 01

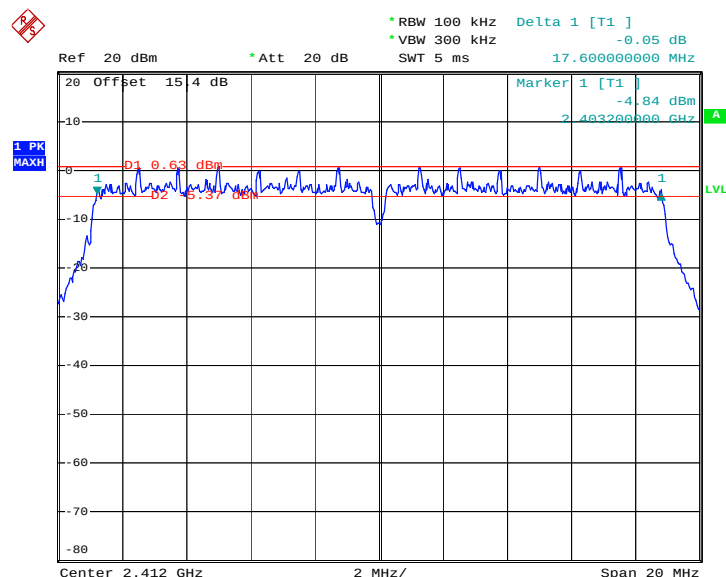

Date: 28.SEP.2011 11:24:59




Mode 8 : 6 dB Bandwidth Plot on 802.11n(BW 20MHz) Channel 06

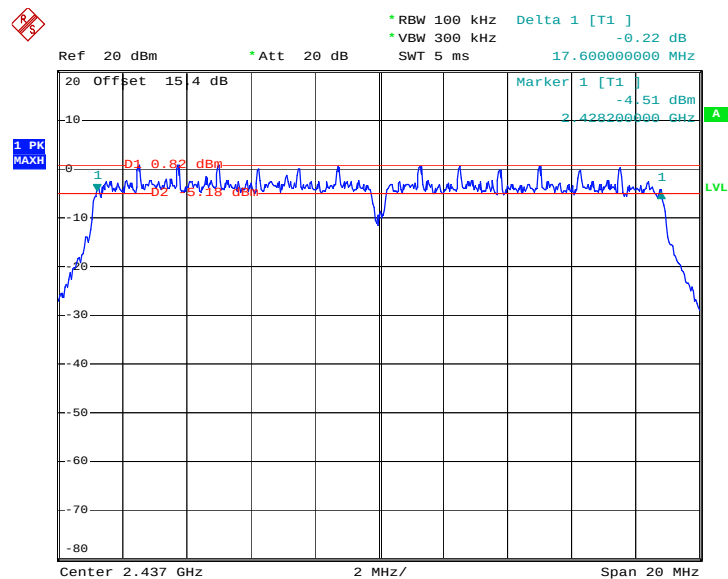

Date: 28.SEP.2011 11:41:45


Mode 9 : 6 dB Bandwidth Plot on 802.11n(BW 20MHz) Channel 11

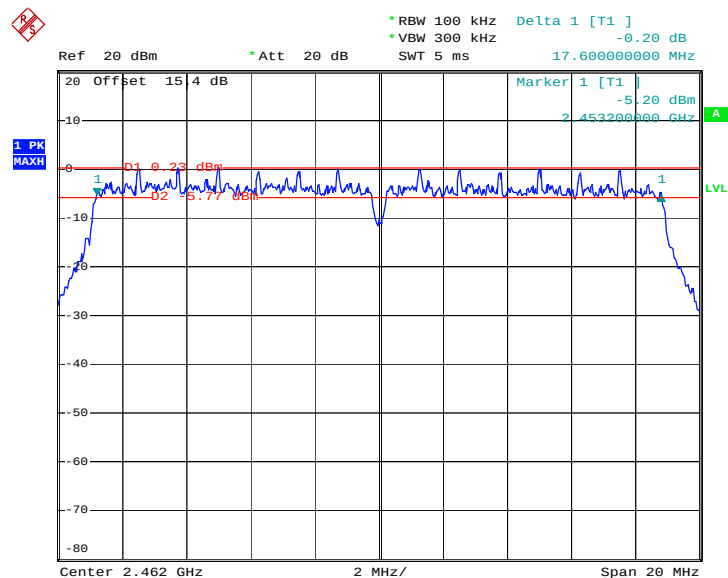

Date: 28.SEP.2011 11:53:34




Mode 11 : 6 dB Bandwidth Plot on 802.11n(BW 40MHz) Channel 06

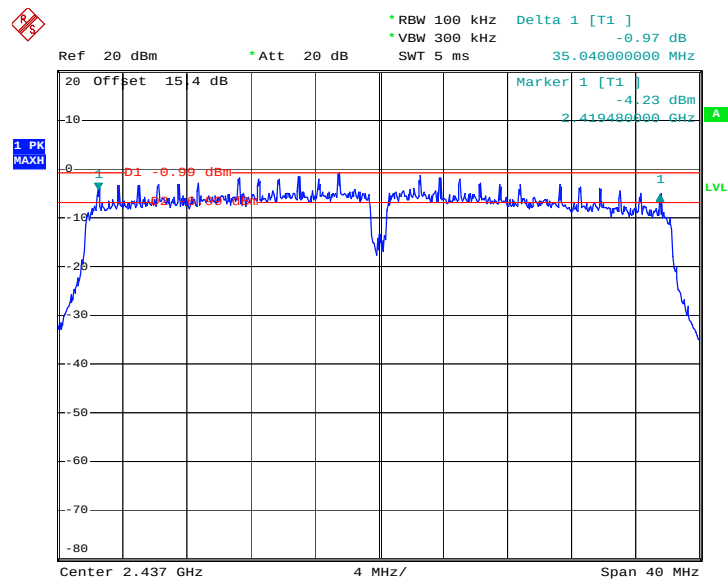

Date: 28.SEP.2011 13:23:39

Mode 12 : 6 dB Bandwidth Plot on 802.11n(BW 40MHz) Channel 09

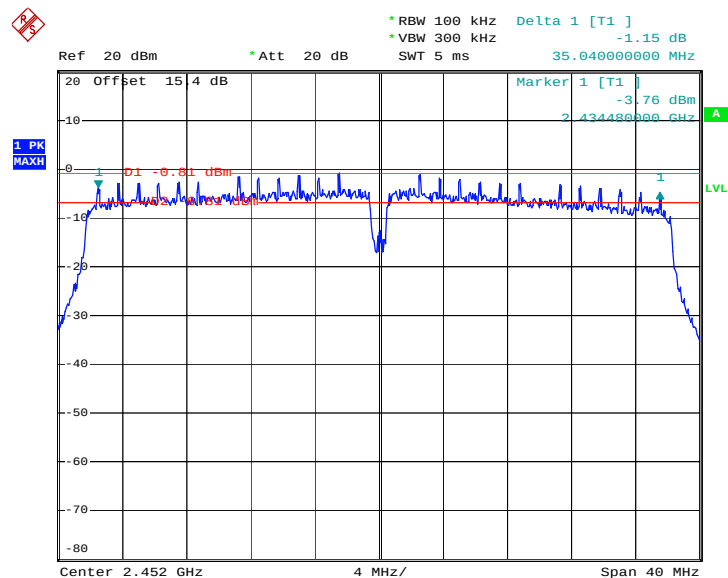

Date: 28.SEP.2011 13:37:33

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the power meter by a low loss cable.
3. Measure the power by power meter.

3.2.4 Test Setup

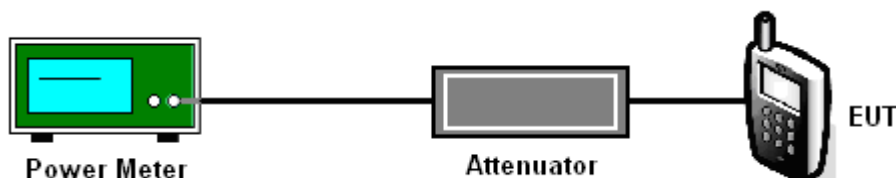

3.2.5 Test Result of Output Power

Test Mode :	Mode 1, 2, 3	Temperature :	23~24℃
Test Engineer :	Jun Liu	Relative Humidity :	45~47%

Channel	Frequency (MHz)	802.11b Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	18.97	30	Pass
06	2437	17.57	30	Pass
11	2462	17.41	30	Pass

Test Mode :	Mode 4, 5, 6	Temperature :	23~24℃
Test Engineer :	Jun Liu	Relative Humidity :	45~47%

Channel	Frequency (MHz)	802.11g Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	22.57	30	Pass
06	2437	22.34	30	Pass
11	2462	22.27	30	Pass

Test Mode :	Mode 7, 8, 9	Temperature :	23~24℃
Test Engineer :	Jun Liu	Relative Humidity :	45~47%

Channel	Frequency (MHz)	802.11n (BW 20MHz) Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	22.92	30	Pass
06	2437	22.79	30	Pass
11	2462	22.64	30	Pass

Test Mode :	Mode 10, 11, 12	Temperature :	23~24
Test Engineer :	Jun Liu	Relative Humidity :	45~47

Channel	Frequency (MHz)	802.11n (BW 40MHz) Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
03	2422	23.11	30	Pass
06	2437	23.04	30	Pass
09	2452	22.98	30	Pass

3.3 Band Edges Measurement

3.3.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB.

3.3.2 Measuring Instruments


See list of measuring instruments of this test report.

3.3.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. Conducted emission test: Set RBW = 100 kHz, Video bandwidth (VBW) $\geq$ RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Apply to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep=Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation as in FCC Section 15.35(b) and (c).

3.3.4 Test Setup

<Radiated Band Edges>

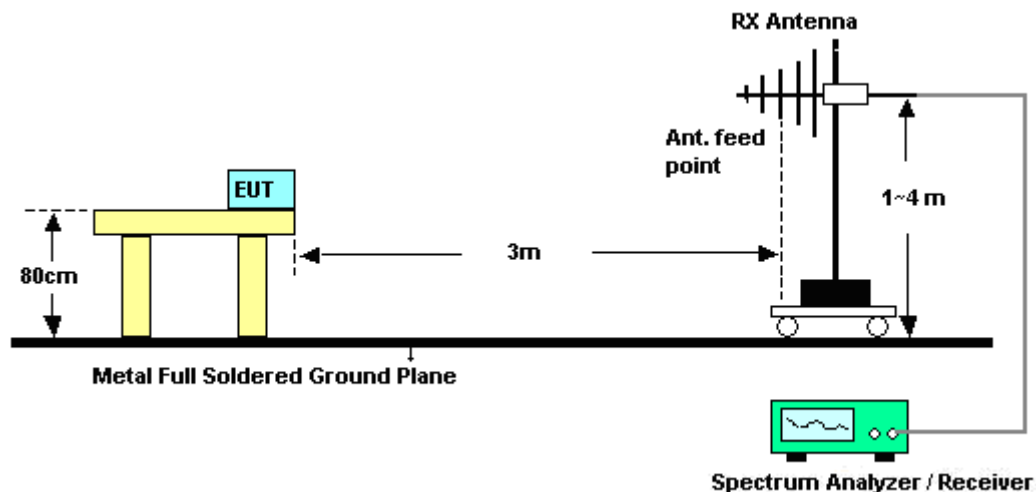

<Conducted Band Edges>

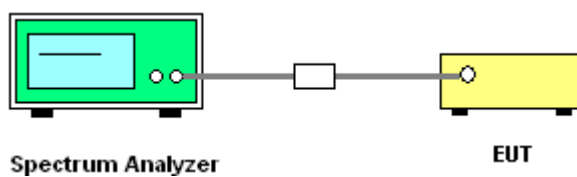

3.3.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	21~22℃
Test Band :	802.11b	Relative Humidity :	41~42%
Test Channel :	01	Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2386.76	57.89	-16.11	74	55.61	32.86	3.47	34.05	166	358	Peak
2386.76	45.62	-8.38	54	43.34	32.86	3.47	34.05	166	358	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2386	54.59	-19.41	74	52.31	32.86	3.47	34.05	100	98	Peak
2386	42.78	-11.22	54	40.5	32.86	3.47	34.05	100	98	Average

Test Mode :	Mode 3	Temperature :	21~22℃
Test Band :	802.11b	Relative Humidity :	41~42%
Test Channel :	11	Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2488.03	54.84	-19.16	74	52.3	33.05	3.72	34.23	110	348	Peak
2488.03	45.37	-8.63	54	42.83	33.05	3.72	34.23	110	348	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	53	-21	74	50.51	33.01	3.68	34.2	112	0	Peak
2483.5	43.19	-10.81	54	40.7	33.01	3.68	34.2	112	0	Average



Test Mode :	Mode 4	Temperature :	21~22℃
Test Band :	802.11g	Relative Humidity :	41~42%
Test Channel :	01	Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.04	58.28	-15.72	74	56	32.86	3.47	34.05	169	3	Peak
2389.04	40.79	-13.21	54	38.51	32.86	3.47	34.05	169	3	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.04	58.67	-15.33	74	56.39	32.86	3.47	34.05	100	15	Peak
2389.04	40.69	-13.31	54	38.41	32.86	3.47	34.05	100	15	Average

Test Mode :	Mode 6	Temperature :	21~22℃
Test Band :	802.11g	Relative Humidity :	41~42%
Test Channel :	11	Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.23	60.16	-13.84	74	57.67	33.01	3.68	34.2	112	31	Peak
2484.23	46.59	-7.41	54	44.1	33.01	3.68	34.2	112	31	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.42	57.04	-16.96	74	54.55	33.01	3.68	34.2	123	67	Peak
2484.42	45.19	-8.81	54	42.7	33.01	3.68	34.2	123	67	Average



Test Mode :	Mode 7	Temperature :	21~22°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	41~42%
Test Channel :	01	Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.8	64.17	-9.83	74	61.89	32.86	3.47	34.05	113	16	Peak
2389.8	49.98	-4.02	54	47.7	32.86	3.47	34.05	113	16	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.28	58.55	-15.45	74	56.27	32.86	3.47	34.05	120	332	Peak
2388.28	45.38	-8.62	54	43.1	32.86	3.47	34.05	120	332	Average

Test Mode :	Mode 9	Temperature :	21~22°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	41~42%
Test Channel :	11	Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	56.42	-17.58	74	53.93	33.01	3.68	34.2	100	23	Peak
2483.5	42.19	-11.81	54	39.7	33.01	3.68	34.2	100	23	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	58.06	-15.94	74	55.57	33.01	3.68	34.2	177	120	Peak
2483.5	43.59	-10.41	54	41.1	33.01	3.68	34.2	177	120	Average



Test Mode :	Mode 10	Temperature :	21~22℃
Test Band :	802.11n (BW 40MHz)	Relative Humidity :	41~42%
Test Channel :	03	Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2387.9	54.42	-19.58	74	52.14	32.86	3.47	34.05	120	100	Peak
2387.9	43.39	-10.61	54	41.11	32.86	3.47	34.05	120	100	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.99	53.9	-20.1	74	51.62	32.86	3.47	34.05	120	0	Peak
2389.99	40.48	-13.52	54	38.2	32.86	3.47	34.05	120	0	Average

Test Mode :	Mode 12	Temperature :	21~22℃
Test Band :	802.11n (BW 40MHz)	Relative Humidity :	41~42%
Test Channel :	09	Test Engineer :	Chenmy Cheng


ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.5	67.42	-6.58	74	64.93	33.01	3.68	34.2	200	172	Peak
2483.5	48.38	-5.62	54	45.89	33.01	3.68	34.2	200	172	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.61	69.07	-4.93	74	66.58	33.01	3.68	34.2	200	19	Peak
2484.61	47.27	-6.73	54	44.78	33.01	3.68	34.2	200	19	Average

3.3.6 Test Plots of Conducted Band Edges


Test Mode :	Mode 1 and 3	Temperature :	23~24°C
Test Band :	802.11b	Relative Humidity :	45~47%
Test Channel :	01 and 11	Test Engineer :	Jun Liu

Low Band Edge Plot on 802.11b Channel 01

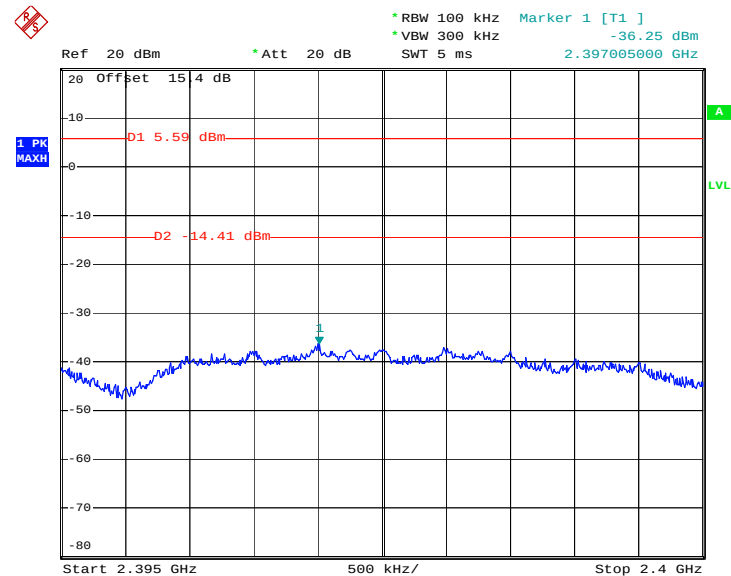

Date: 28.SEP.2011 09:21:59


High Band Edge Plot on 802.11b Channel 11

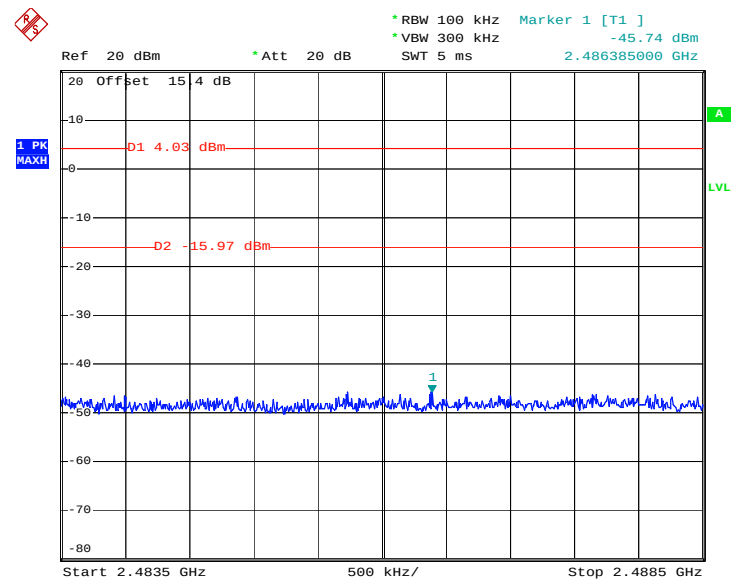


Date: 28.SEP.2011 10:16:54



Test Mode :	Mode 4 and 6	Temperature :	23~24℃
Test Band :	802.11g	Relative Humidity :	45~47%
Test Channel :	01 and 11	Test Engineer :	Jun Liu

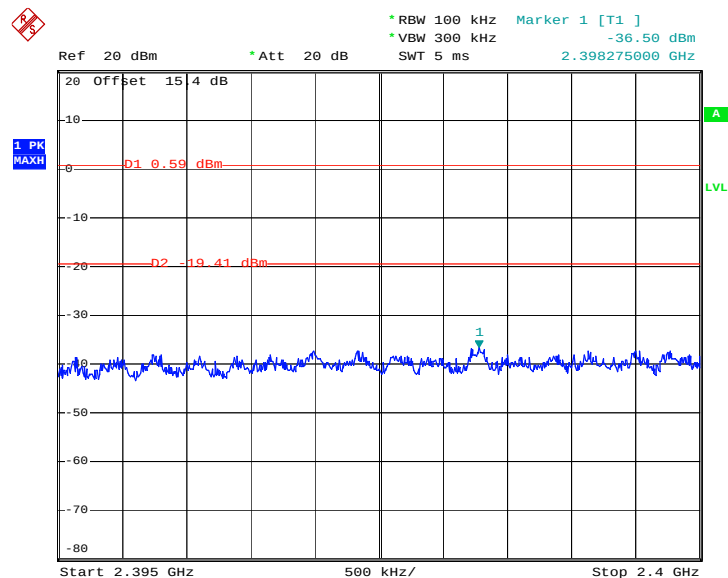Low Band Edge Plot on 802.11g Channel 01


Date: 28.SEP.2011 10:35:24

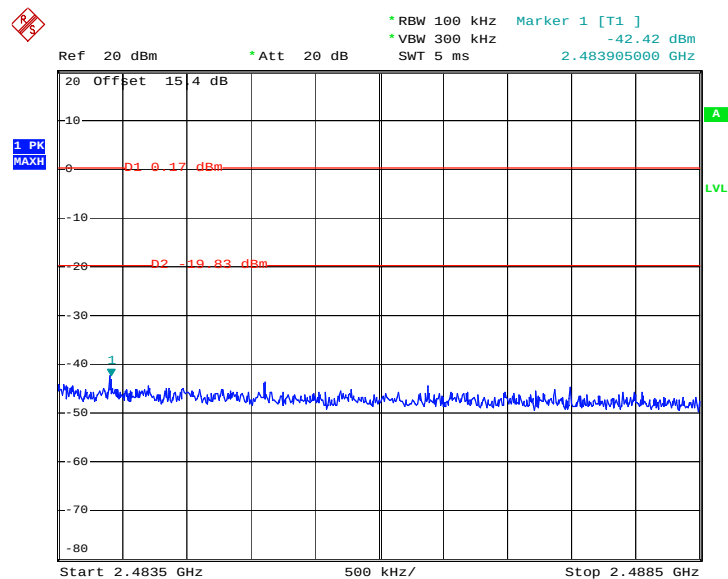High Band Edge Plot on 802.11g Channel 11


Date: 28.SEP.2011 11:07:44



Test Mode :	Mode 7 and 9	Temperature :	23~24℃
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	45~47%
Test Channel :	01 and 11	Test Engineer :	Jun Liu

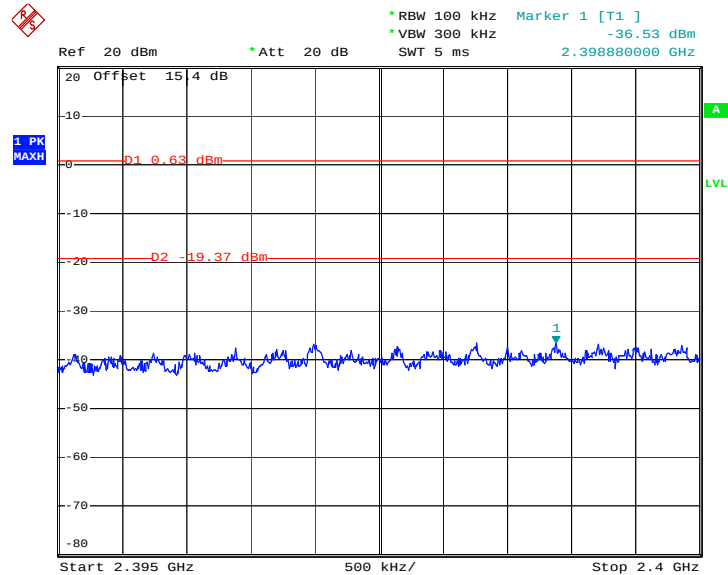Low Band Edge Plot on 802.11n (BW 20MHz) Channel 01

Date: 28.SEP.2011 11:26:14

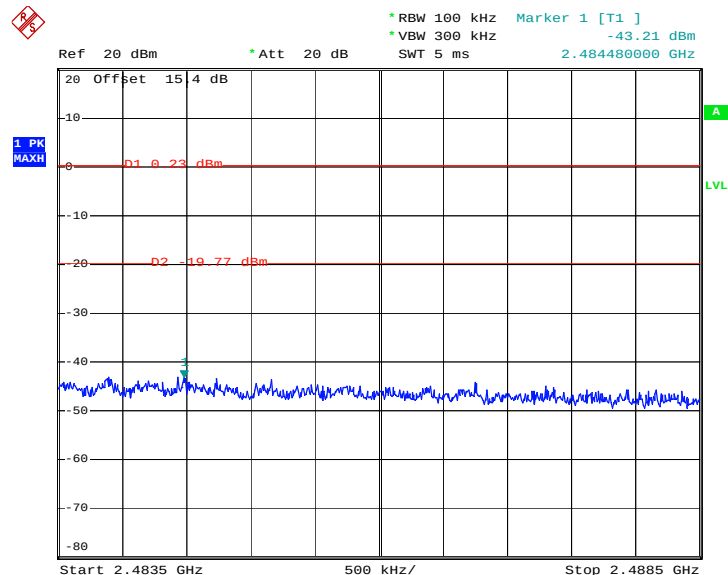
High Band Edge Plot on 802.11n (BW 20MHz) Channel 11

Date: 28.SEP.2011 11:54:21




Test Mode :	Mode 10 and 12	Temperature :	23~24℃
Test Band :	802.11n (BW 40MHz)	Relative Humidity :	45~47%
Test Channel :	03 and 09	Test Engineer :	Jun Liu

Low Band Edge Plot on 802.11n (BW 40MHz) Channel 03

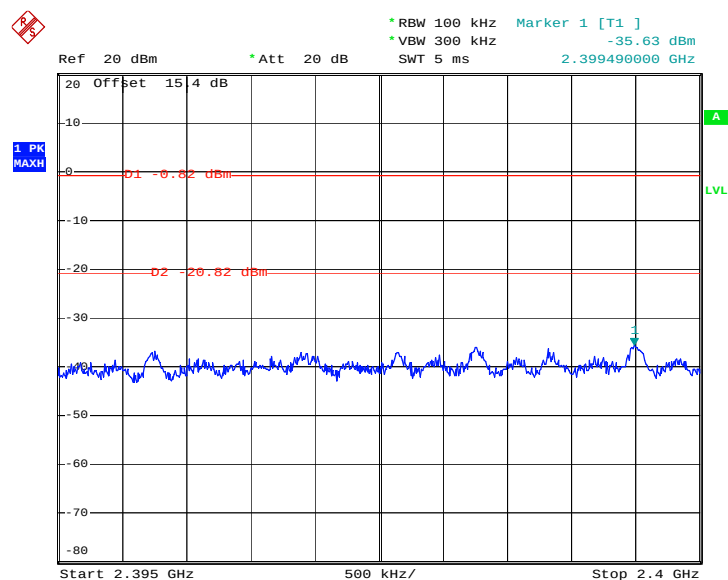

Date: 28.SEP.2011 13:10:12

High Band Edge Plot on 802.11n (BW 40MHz) Channel 09

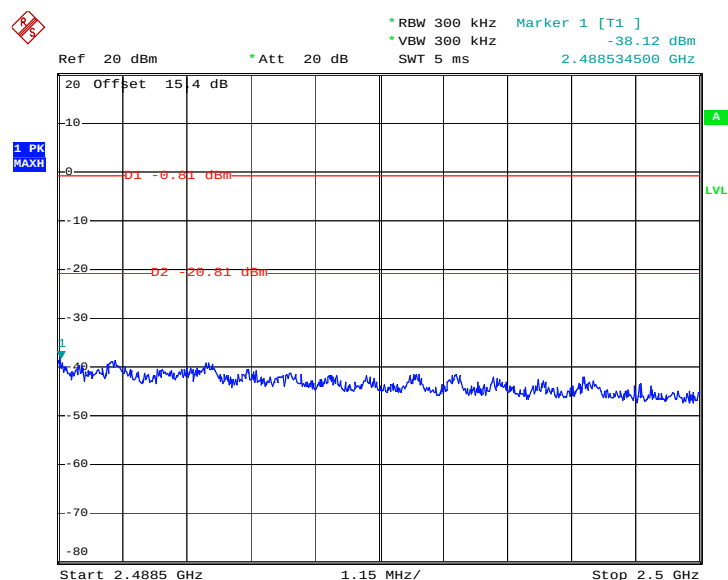

Date: 28.SEP.2011 13:38:27

3.4 Spurious Emission Measurement

3.4.1 Limit of Spurious Emission Measurement

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW) $\geq$ RBW, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.


3.4.4 Test Setup

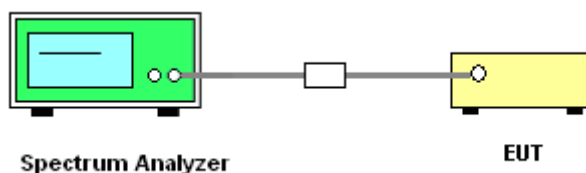

3.4.5 Test Plots of Spurious Emission


Test Mode :	Mode 1	Temperature :	23~24°C
Test Band :	802.11b	Relative Humidity :	45~47%
Test Channel :	01	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

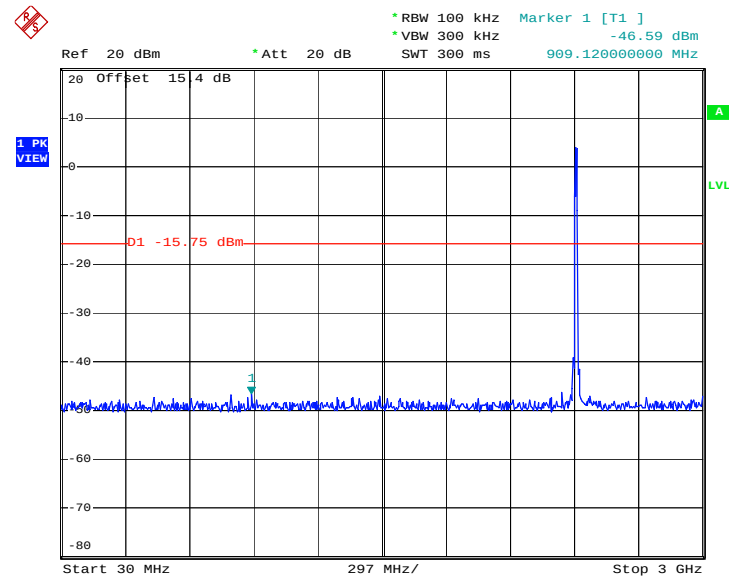

Date: 8.OCT.2011 14:30:37

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

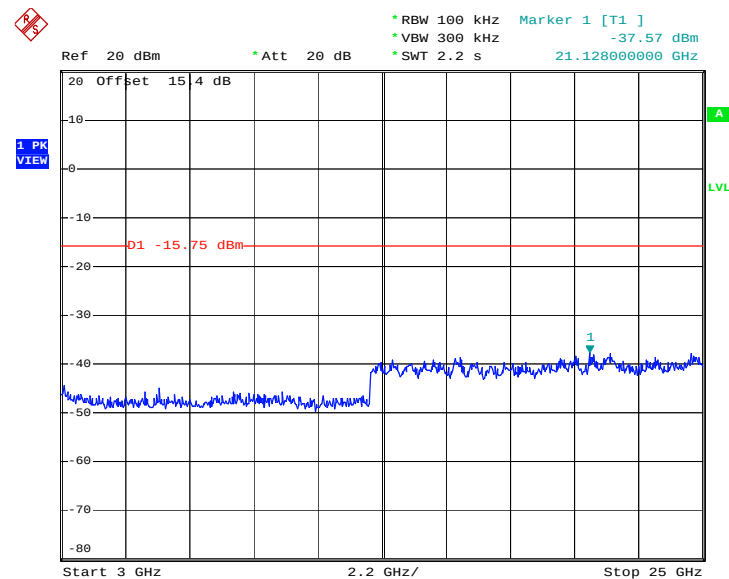


Date: 8.OCT.2011 14:32:01




Test Mode :	Mode 2	Temperature :	23~24℃
Test Band :	802.11b	Relative Humidity :	45~47%
Test Channel :	06	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

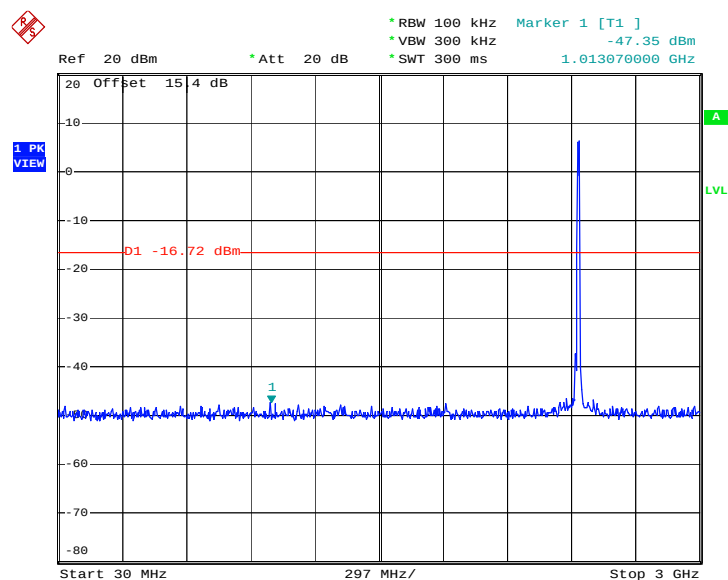

Date: 8.OCT.2011 14:34:26


Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

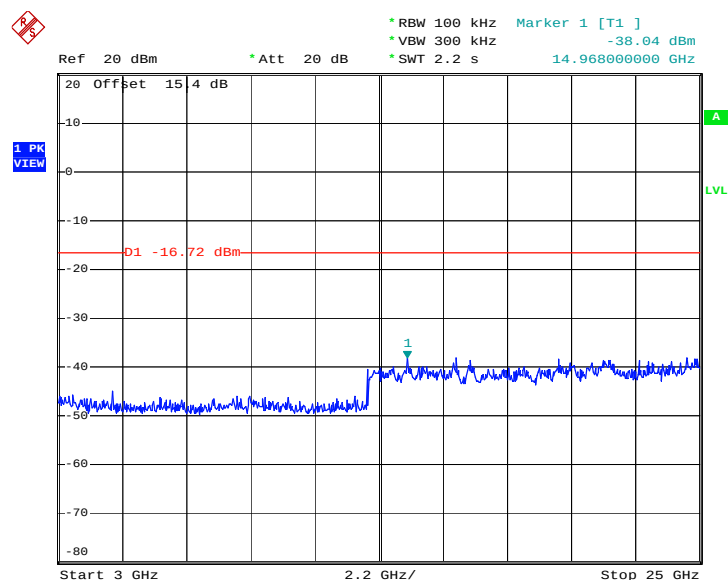


Date: 8.OCT.2011 14:35:29



Test Mode :	Mode 3	Temperature :	23~24℃
Test Band :	802.11b	Relative Humidity :	45~47%
Test Channel :	11	Test Engineer :	Jun Liu

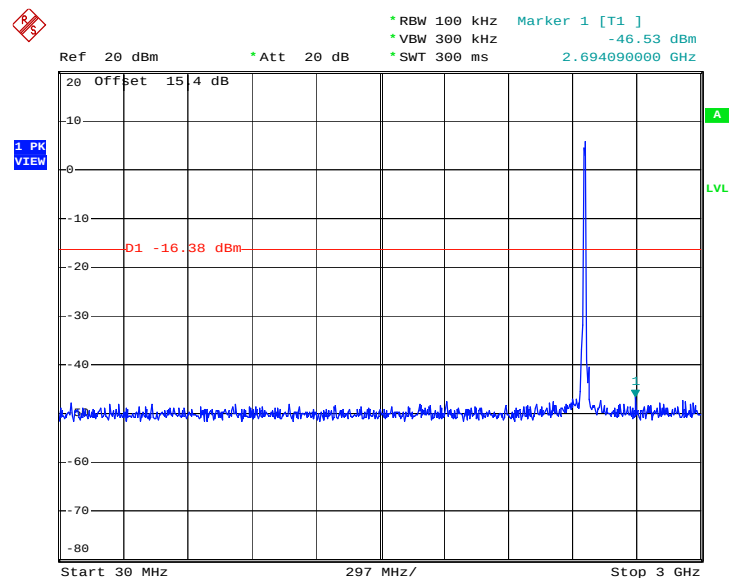Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

Date: 8.OCT.2011 14:40:07

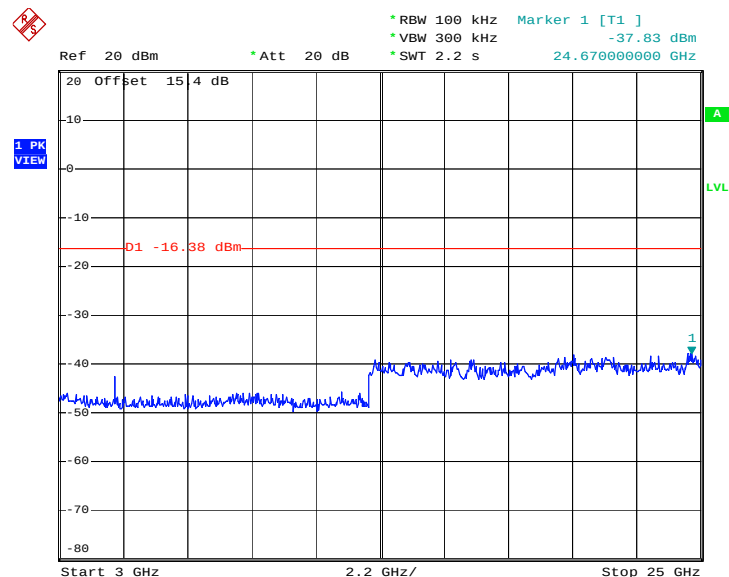
Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

Date: 8.OCT.2011 14:44:27




Test Mode :	Mode 4	Temperature :	23~24℃
Test Band :	802.11g	Relative Humidity :	45~47%
Test Channel :	01	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

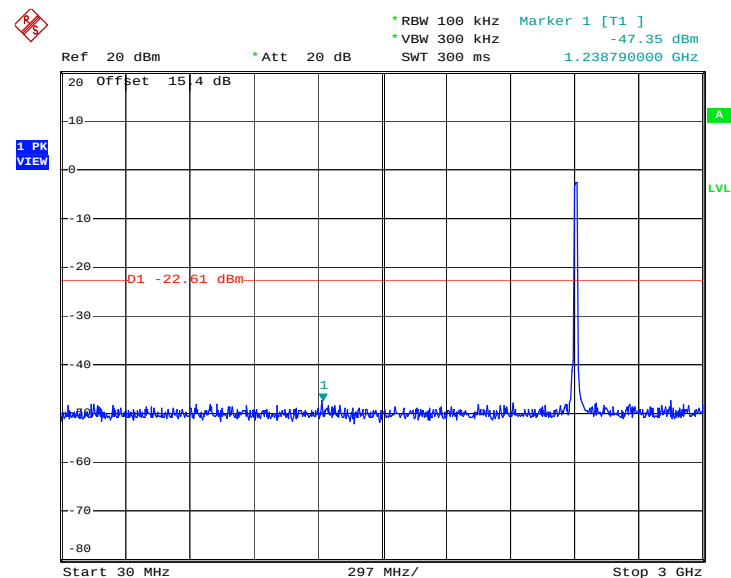

Date: 28.SEP.2011 10:39:05


Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

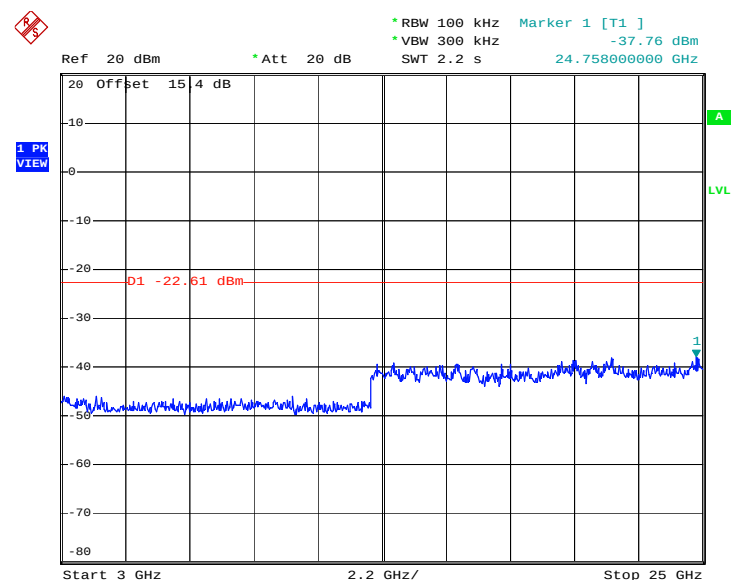


Date: 28.SEP.2011 10:39:22



Test Mode :	Mode 5	Temperature :	23~24
Test Band :	802.11g	Relative Humidity :	45~47
Test Channel :	06	Test Engineer :	Jun Liu

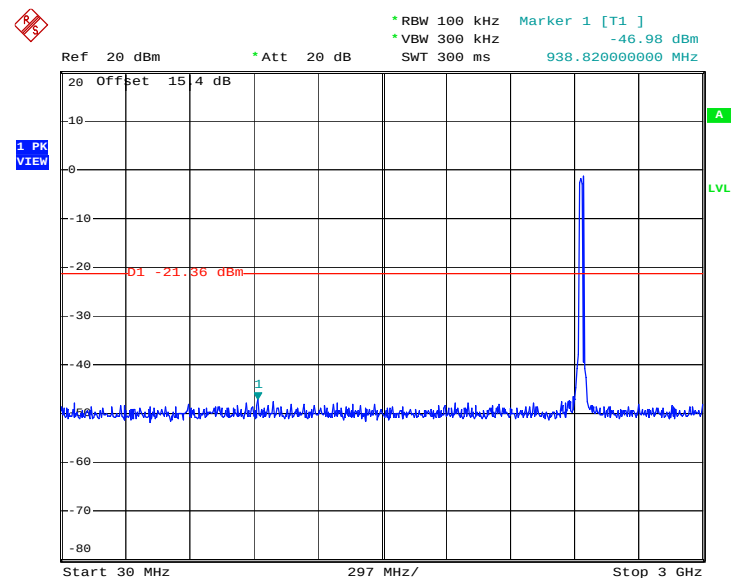Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

Date: 8.OCT.2011 14:59:10

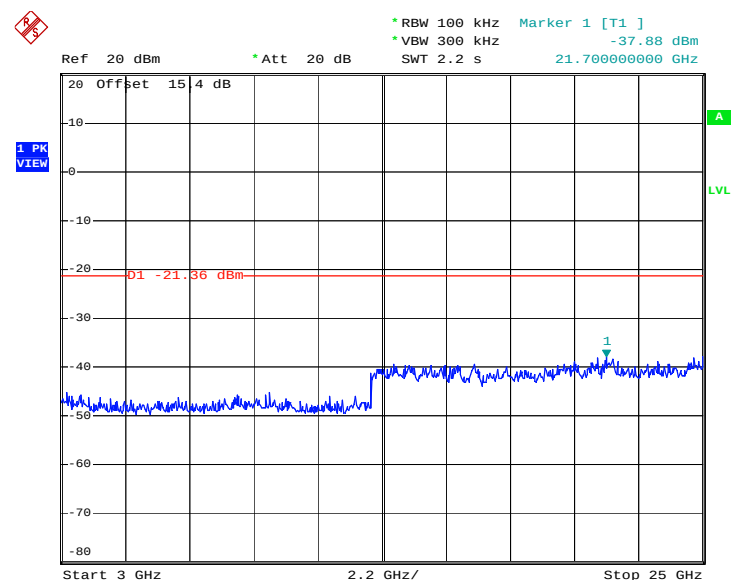
Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

Date: 8.OCT.2011 14:59:27




Test Mode :	Mode 6	Temperature :	23~24℃
Test Band :	802.11g	Relative Humidity :	45~47%
Test Channel :	11	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

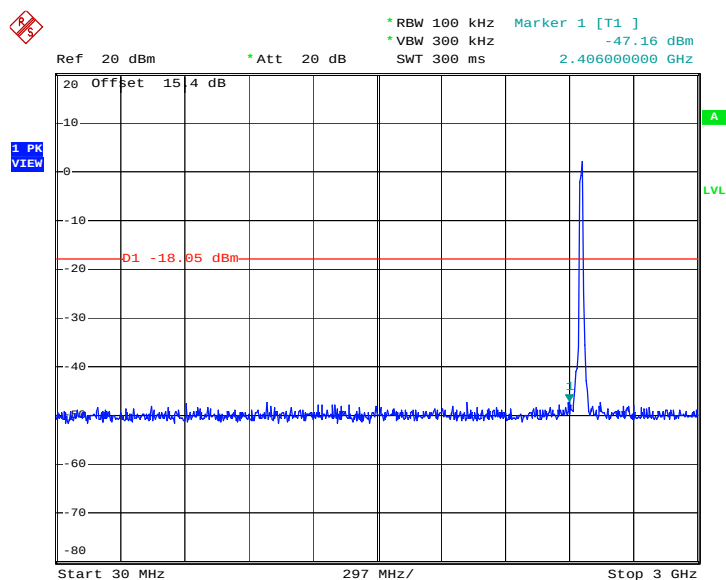

Date: 8.OCT.2011 15:01:08

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

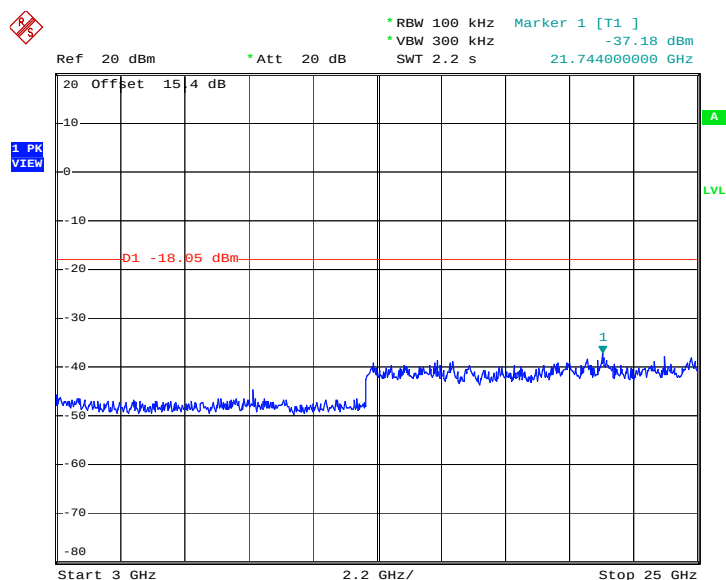


Date: 8.OCT.2011 15:01:25




Test Mode :	Mode 7	Temperature :	23~24℃
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	45~47%
Test Channel :	01	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

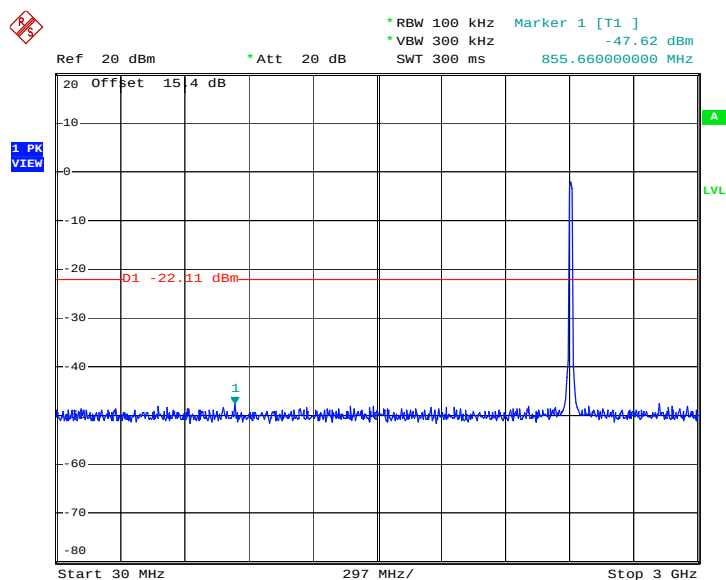

Date: 28.SEP.2011 11:28:42


Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

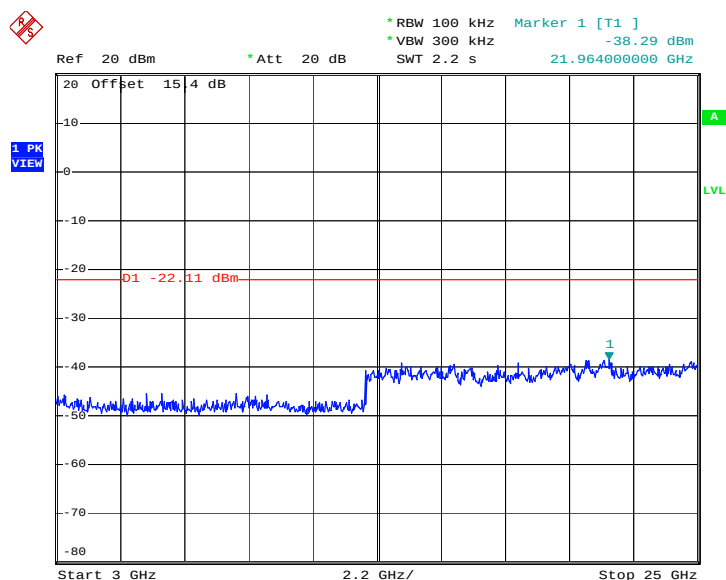


Date: 28.SEP.2011 11:28:59



Test Mode :	Mode 8	Temperature :	23~24℃
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	45~47%
Test Channel :	06	Test Engineer :	Jun Liu

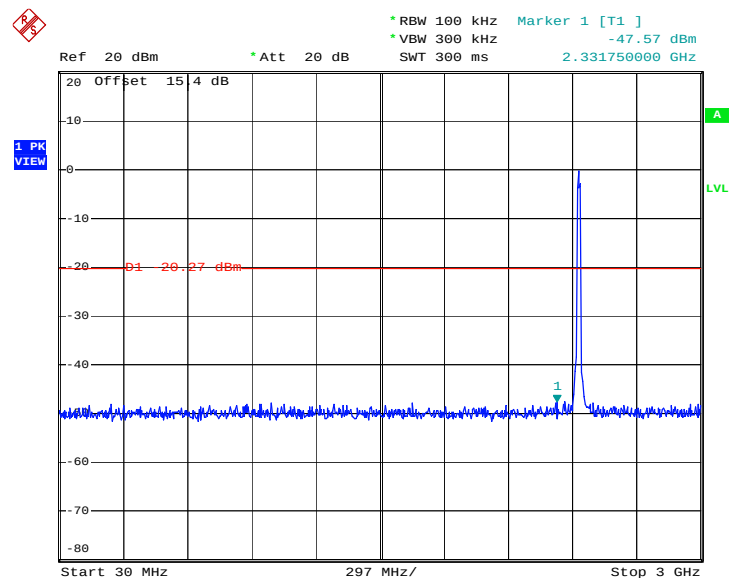Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

Date: 8.OCT.2011 15:05:26

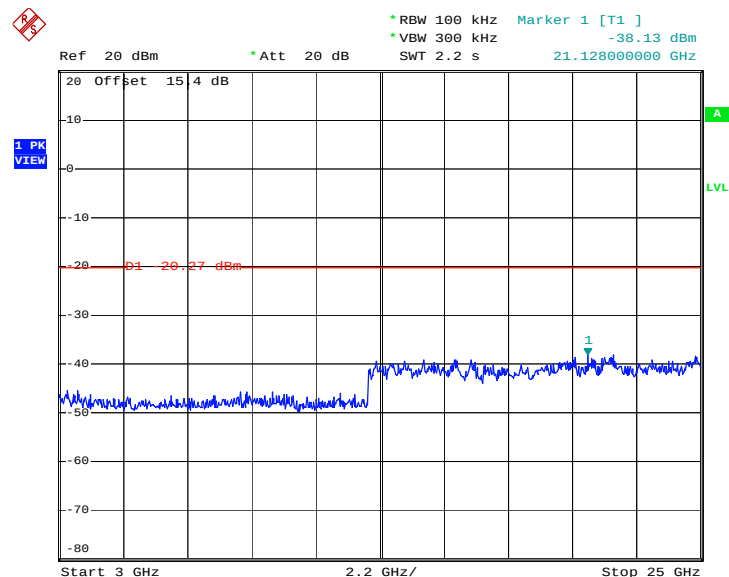
Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

Date: 8.OCT.2011 15:05:43




Test Mode :	Mode 9	Temperature :	23~24℃
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	45~47%
Test Channel :	11	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

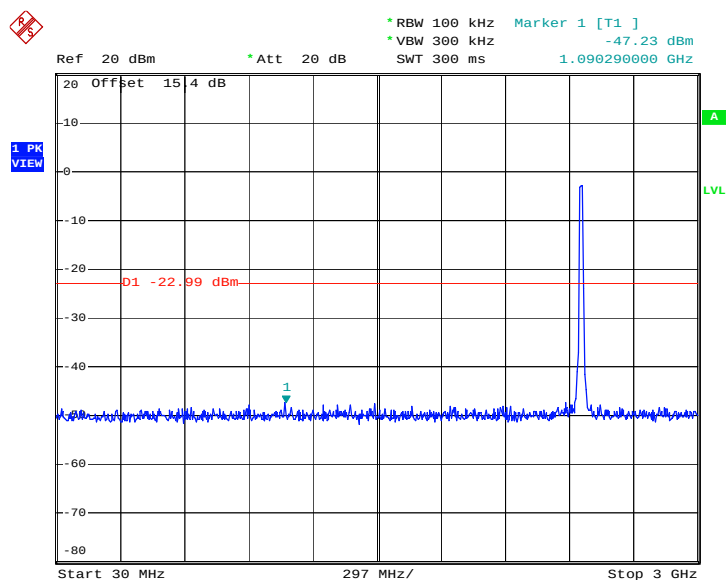

Date: 28.SEP.2011 11:55:49

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

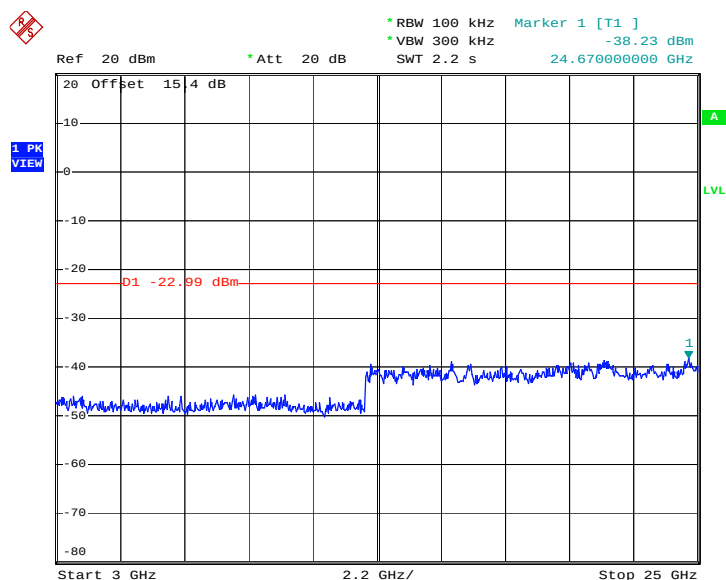


Date: 28.SEP.2011 11:56:06




Test Mode :	Mode 10	Temperature :	23~24℃
Test Band :	802.11n (BW 40MHz)	Relative Humidity :	45~47%
Test Channel :	03	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

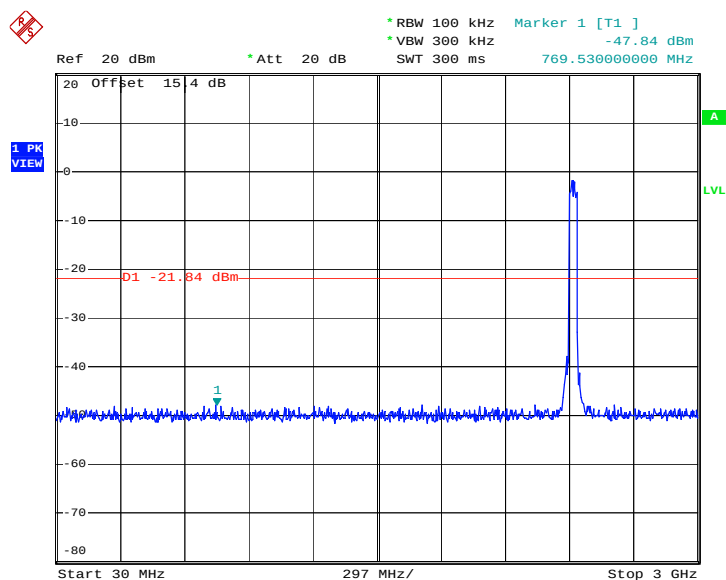

Date: 28.SEP.2011 13:12:22

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

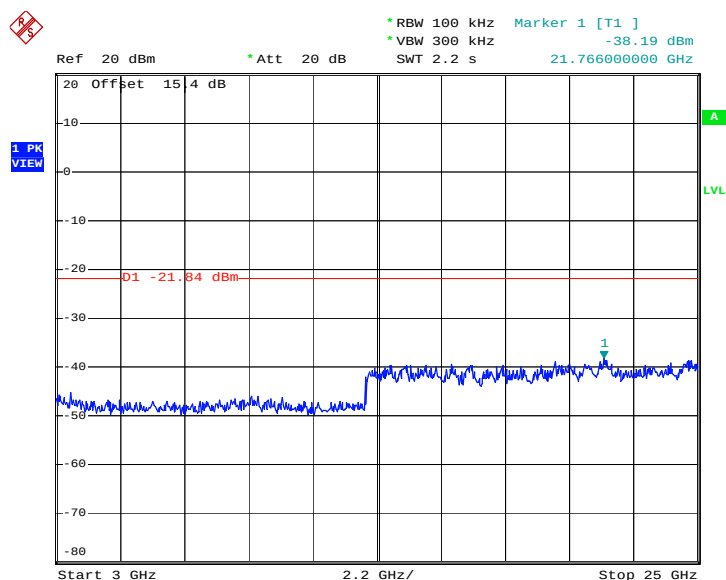


Date: 28.SEP.2011 13:12:39




Test Mode :	Mode 11	Temperature :	23~24℃
Test Band :	802.11n (BW 40MHz)	Relative Humidity :	45~47%
Test Channel :	06	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

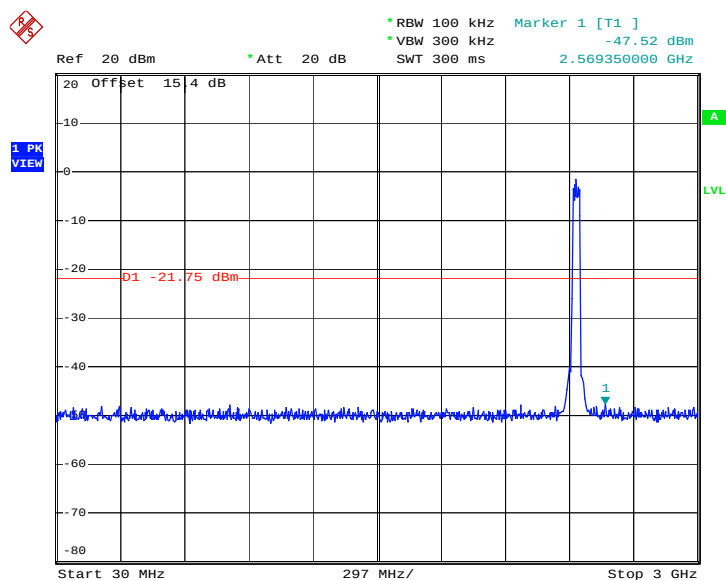

Date: 28.SEP.2011 13:24:32

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

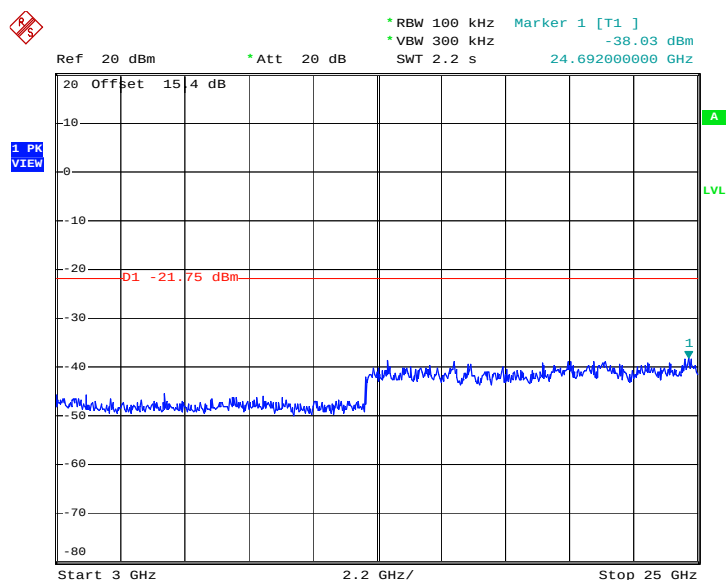


Date: 28.SEP.2011 13:24:49




Test Mode :	Mode 12	Temperature :	23~24℃
Test Band :	802.11n (BW 40MHz)	Relative Humidity :	45~47%
Test Channel :	09	Test Engineer :	Jun Liu

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

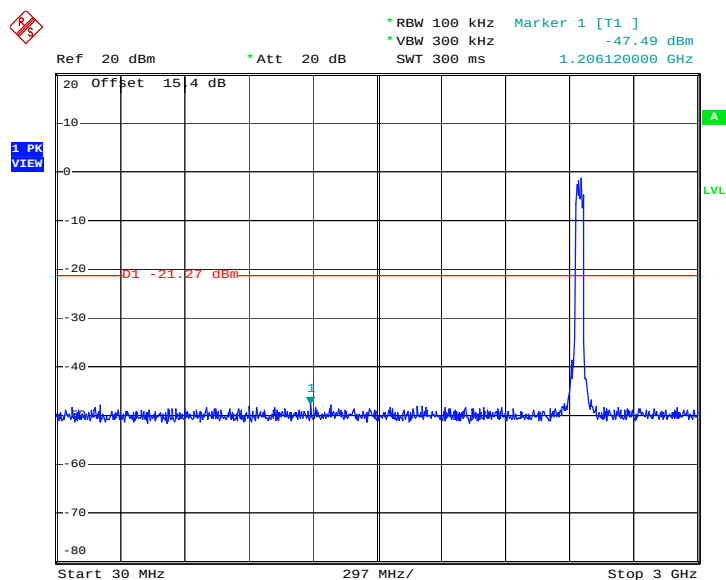

Date: 28.SEP.2011 13:42:50

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

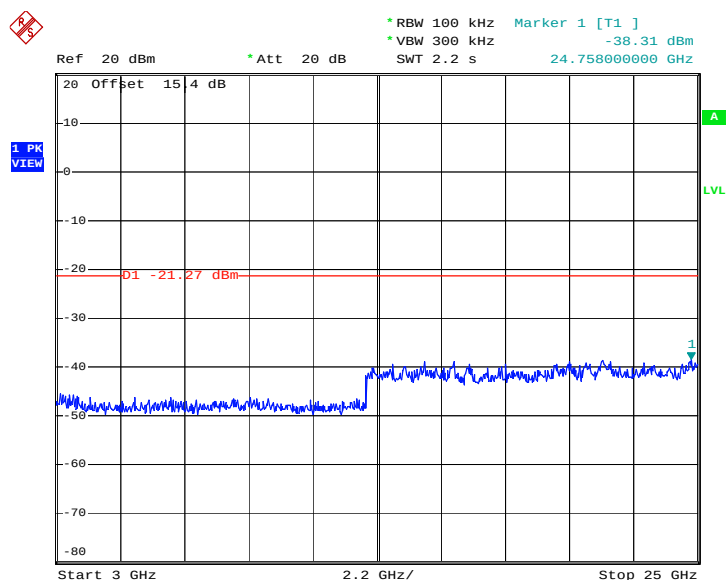

Date: 28.SEP.2011 13:43:07

3.5 Power Spectral Density Measurement

3.5.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The test follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Take the measured data from spectrum analyzer.

3.5.4 Test Setup

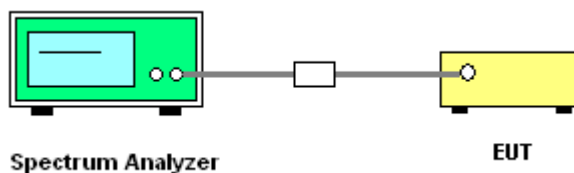


3.5.5 Test Result of Power Spectral Density


Test Mode :	Mode 1, 2, 3	Temperature :	23~24℃
Test Engineer :	Jun Liu	Relative Humidity :	45~47%

Channel	Frequency (MHz)	802.11b Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-10.73	8	Pass
06	2437	-9.47	8	Pass
11	2462	-11.13	8	Pass


Mode 1 : PSD Plot on 802.11b Channel 01

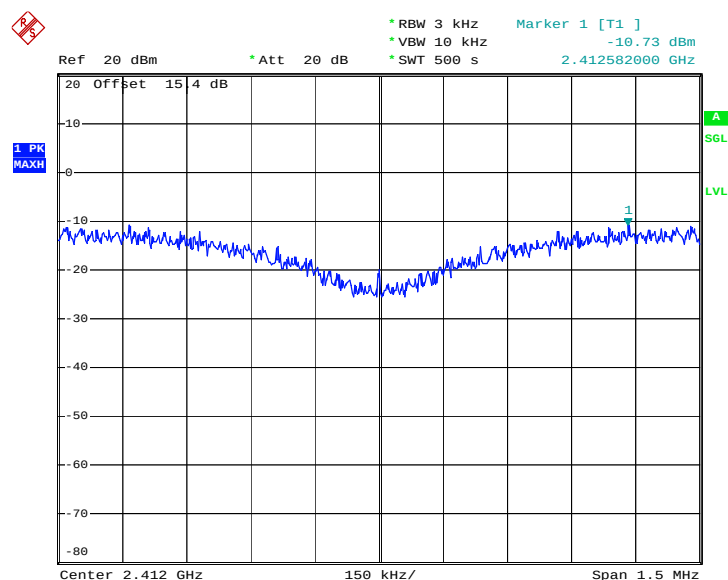

Date: 28.SEP.2011 09:50:29

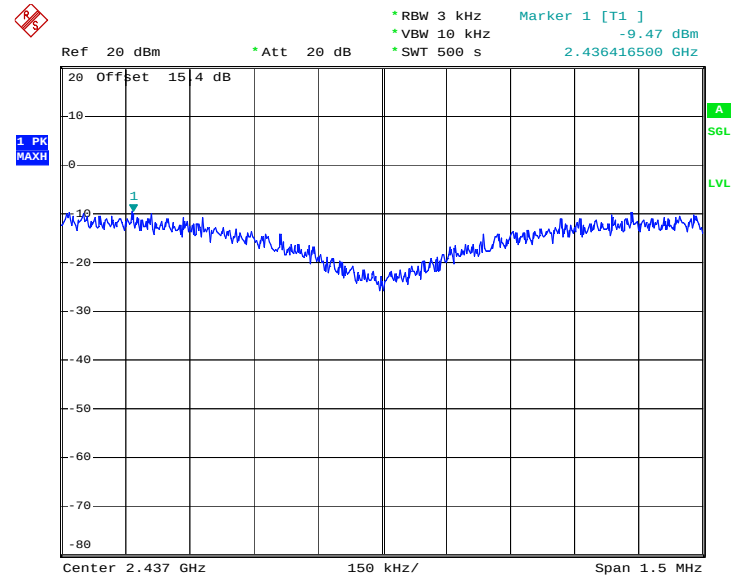Mode 2 : PSD Plot on 802.11b Channel 06


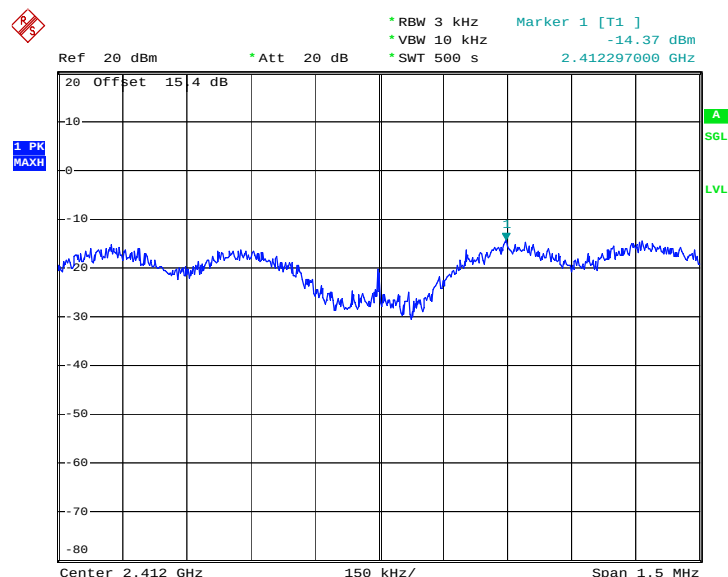
Date: 28.SEP.2011 10:13:24

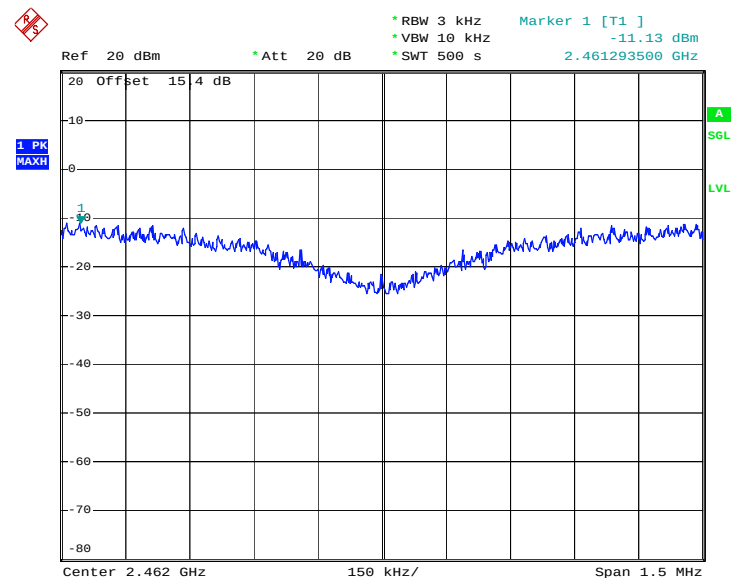Mode 3 : PSD Plot on 802.11b Channel 11


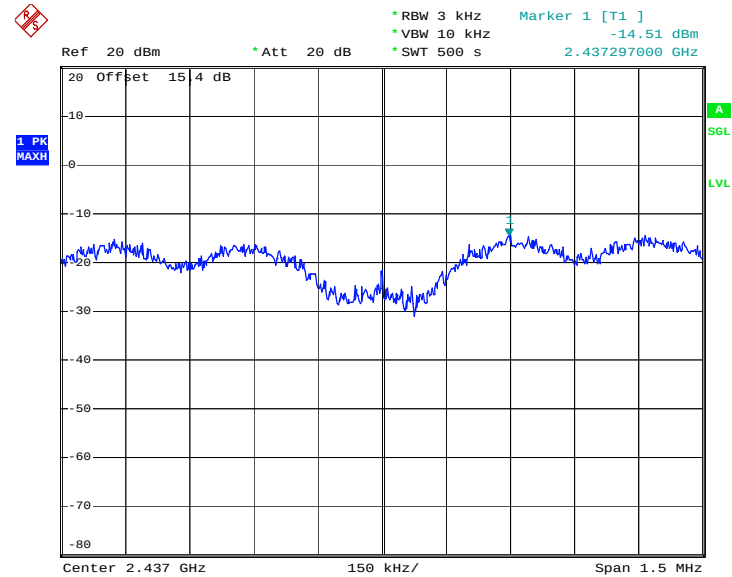
Date: 28.SEP.2011 10:30:33

Test Mode :	Mode 4, 5, 6	Temperature :	23~24℃
Test Engineer :	Jun Liu	Relative Humidity :	45~47%


Channel	Frequency (MHz)	802.11g Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-14.37	8	Pass
06	2437	-14.51	8	Pass
11	2462	-14.94	8	Pass

Mode 4 : PSD Plot on 802.11g Channel 01


Date: 28.SEP.2011 10:49:13

Mode 5 : PSD Plot on 802.11g Channel 06


Date: 28.SEP.2011 11:04:29

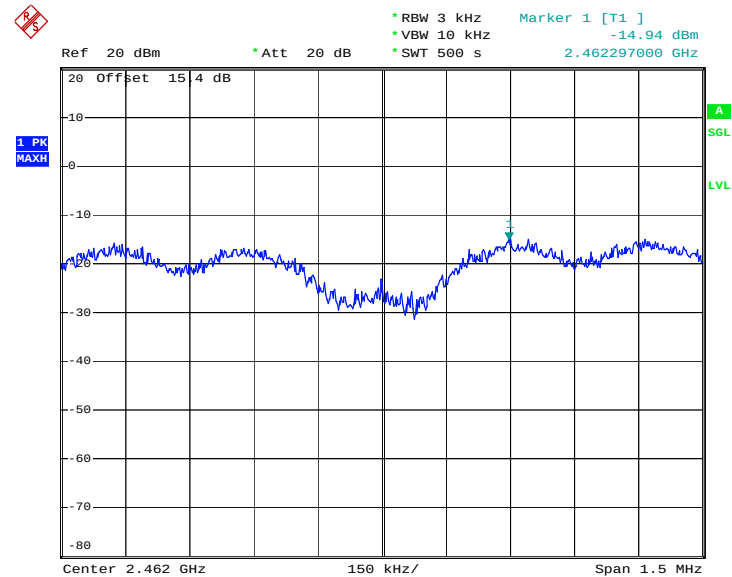Mode 6 : PSD Plot on 802.11g Channel 11


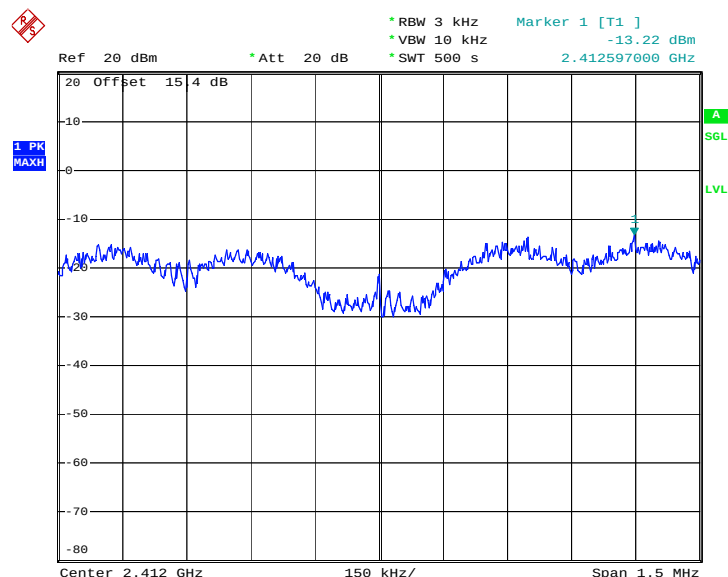
Date: 28.SEP.2011 11:20:45




Test Mode :	Mode 7, 8, 9	Temperature :	23~24℃
Test Engineer :	Jun Liu	Relative Humidity :	45~47%

Channel	Frequency (MHz)	802.11n (BW 20MHz) Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-13.22	8	Pass
06	2437	-13.41	8	Pass
11	2462	-13.78	8	Pass


Mode 7 : PSD Plot on 802.11n (BW 20MHz) Channel 01



Date: 28.SEP.2011 11:39:50

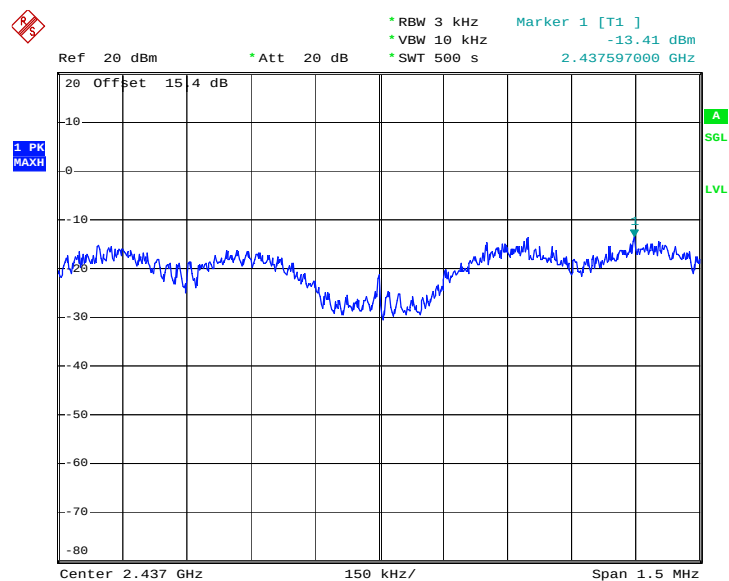Mode 8 : PSD Plot on 802.11n (BW 20MHz) Channel 06


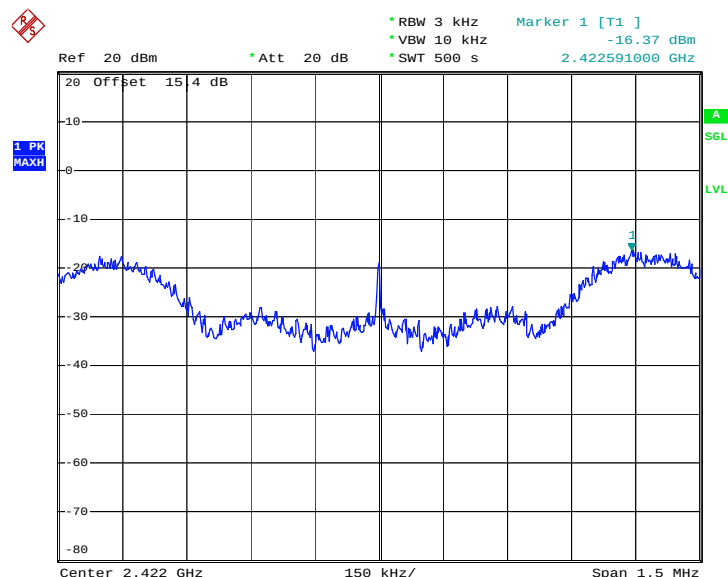
Date: 28.SEP.2011 11:51:32

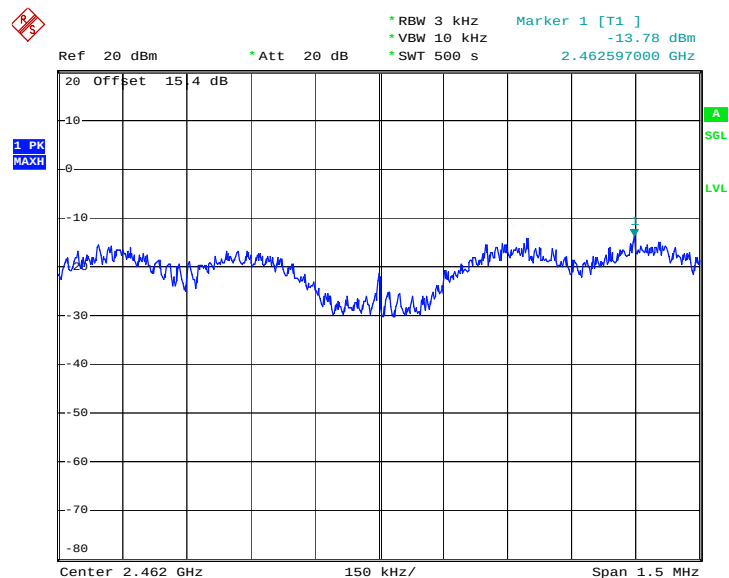Mode 9 : PSD Plot on 802.11n (BW 20MHz) Channel 11


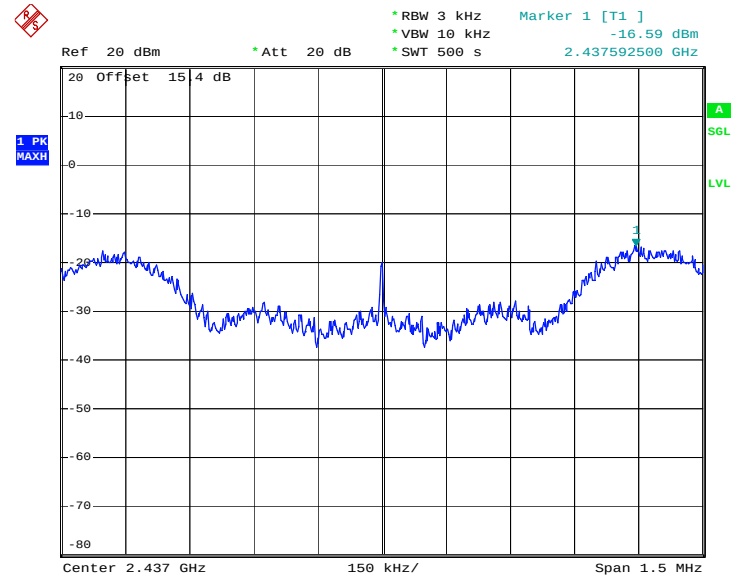
Date: 28.SEP.2011 12:04:43

Test Mode :	Mode 10, 11, 12	Temperature :	23~24
Test Engineer :	Jun Liu	Relative Humidity :	45~47


Channel	Frequency (MHz)	802.11n (BW 40MHz) Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
03	2422	-16.37	8	Pass
06	2437	-16.59	8	Pass
09	2452	-16.17	8	Pass

Mode 10 : PSD Plot on 802.11n (BW 40MHz) Channel 03


Date: 28.SEP.2011 13:21:29

Mode 11 : PSD Plot on 802.11n (BW 40MHz) Channel 06


Date: 28.SEP.2011 13:34:37

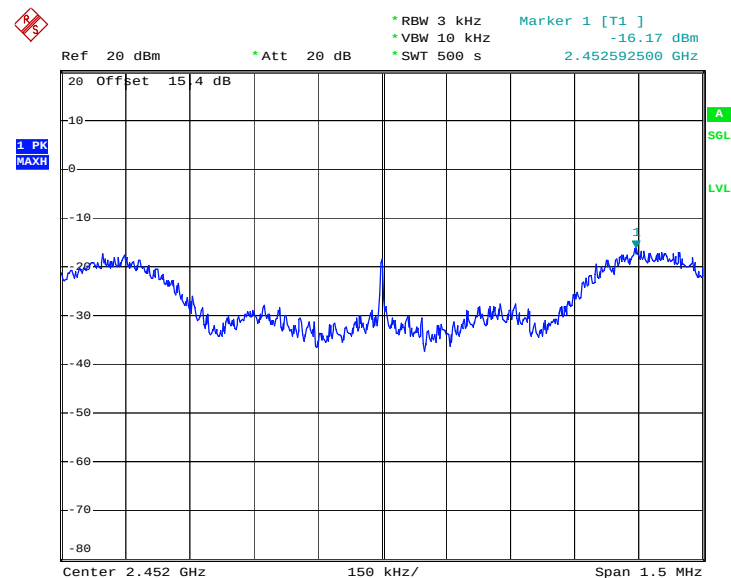Mode 12 : PSD Plot on 802.11n (BW 40MHz) Channel 09


Date: 28.SEP.2011 13:56:17

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

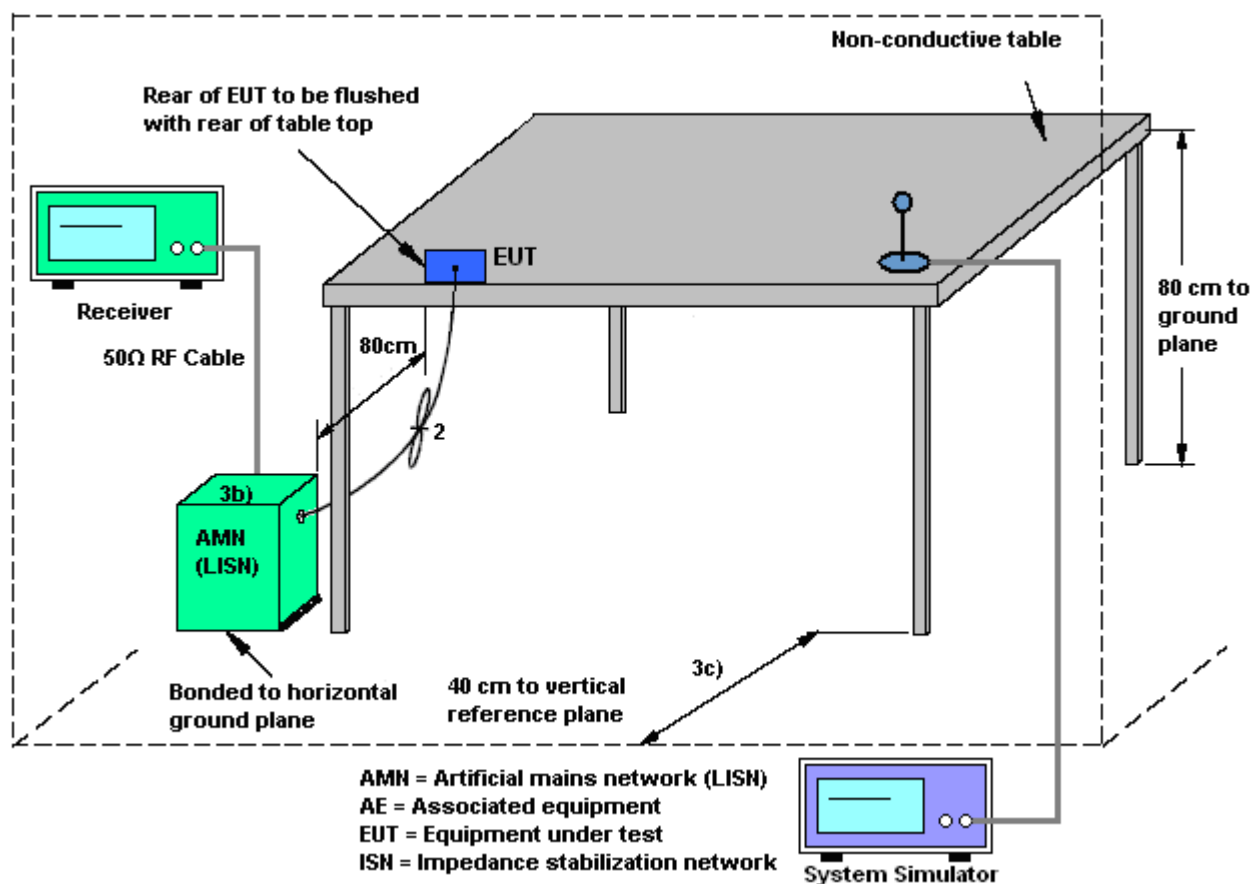

3.6.5 Test Result of AC Conducted Emission


Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Infi Li	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM 850 Idle + Bluetooth Link + WIFI Link + Adapter + Earphone + FM Rx		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

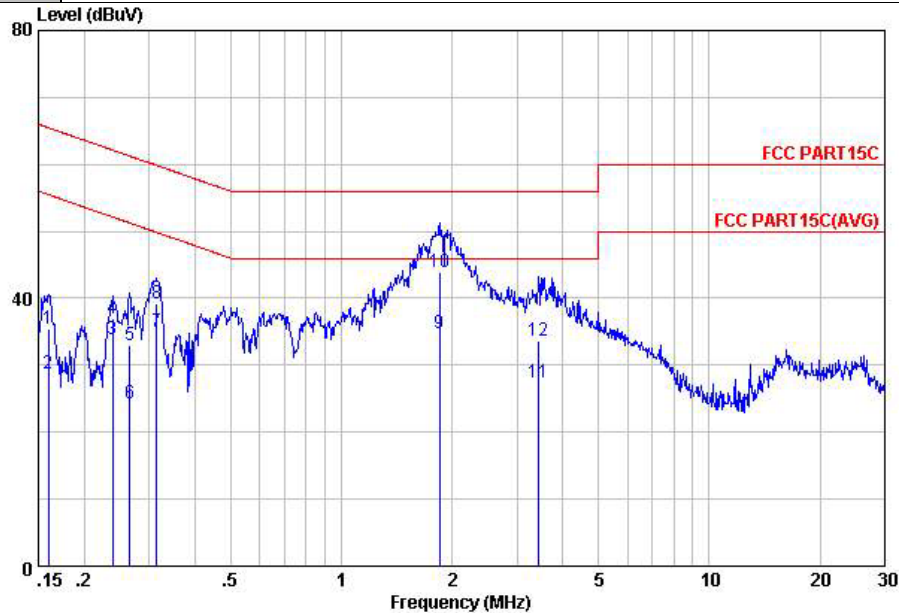

Site : C001-KS
Condition: FCC PART15C LISN-100807 LINE
Project : (FR) 192004
mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.16	35.47	-30.00	65.47	25.40	-0.07	10.14	QP
2	0.16	28.67	-26.80	55.47	18.60	-0.07	10.14	Average
3	0.24	33.89	-18.24	52.13	23.80	-0.07	10.16	Average
4	0.24	36.99	-25.14	62.13	26.90	-0.07	10.16	QP
5	0.27	32.89	-28.36	61.25	22.80	-0.07	10.16	QP
6	0.27	24.29	-26.96	51.25	14.20	-0.07	10.16	Average
7	0.31	34.90	-14.94	49.84	24.81	-0.08	10.17	Average
8	0.31	39.20	-20.64	59.84	29.11	-0.08	10.17	QP
9	1.85	34.71	-11.29	46.00	24.50	-0.11	10.32	Average
10	1.85	43.81	-12.19	56.00	33.60	-0.11	10.32	QP
11	3.44	27.46	-18.54	46.00	17.20	-0.12	10.38	Average
12	3.44	33.56	-22.44	56.00	23.30	-0.12	10.38	QP

Test Mode :	Mode 1	Temperature :	21~22°C
Test Engineer :	Infi Li	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM 850 Idle + Bluetooth Link + WIFI Link + Adapter + Earphone + FM Rx		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

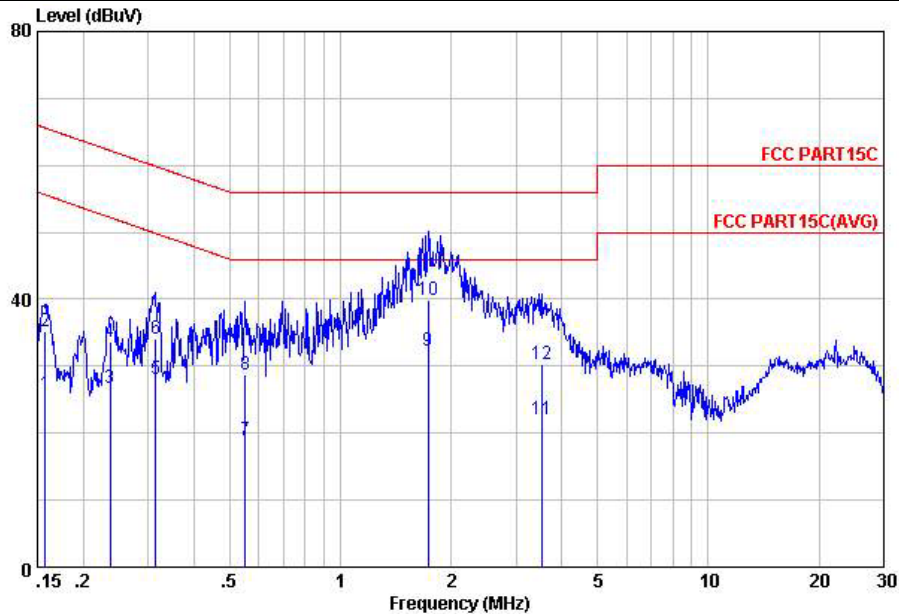

Site : C001-KS
 Condition: FCC PART15C LISN-100807 NEUTRAL
 Project : (FR) 192004
 mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.16	25.95	-29.65	55.60	15.90	-0.09	10.14	Average
2	0.16	35.25	-30.35	65.60	25.20	-0.09	10.14	QP
3	0.24	26.69	-25.53	52.22	16.60	-0.07	10.16	Average
4	0.24	33.59	-28.63	62.22	23.50	-0.07	10.16	QP
5	0.31	28.00	-21.84	49.84	17.91	-0.08	10.17	Average
6	0.31	34.10	-25.74	59.84	24.01	-0.08	10.17	QP
7	0.55	19.04	-26.96	46.00	8.90	-0.08	10.22	Average
8	0.55	28.74	-27.26	56.00	18.60	-0.08	10.22	QP
9	1.73	32.31	-13.69	46.00	22.11	-0.11	10.31	Average
10	1.73	39.81	-16.19	56.00	29.61	-0.11	10.31	QP
11	3.53	22.06	-23.94	46.00	11.80	-0.12	10.38	Average
12	3.53	30.26	-25.74	56.00	20.00	-0.12	10.38	QP

3.7 Radiated Emission Measurement

3.7.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.7.2 Measuring Instruments


See list of measuring instruments of this test report.

3.7.3 Test Procedures


- The testing follows the guidelines in FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
- Use the following spectrum analyzer settings:
 - Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
 - Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.
Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB)
- Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.7.4 Test Setup


For radiated emissions below 30MHz

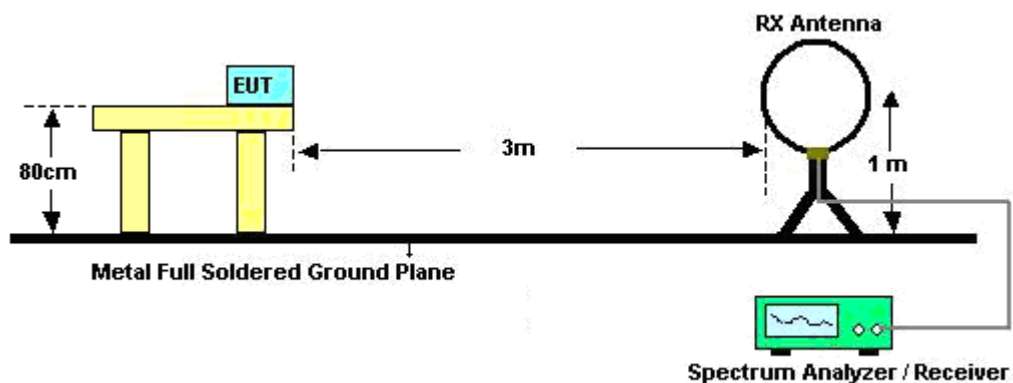

For radiated emissions from 30MHz to 1GHz

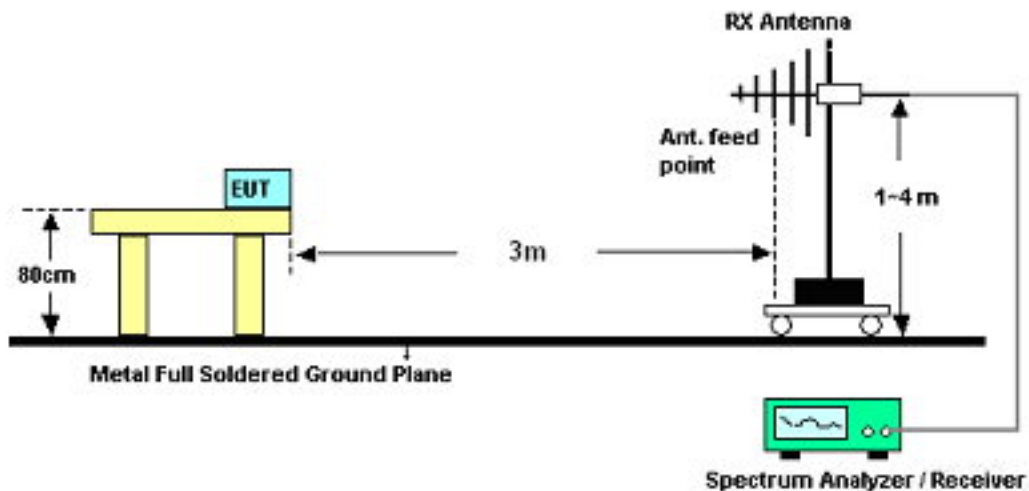

For radiated emissions above 1GHz

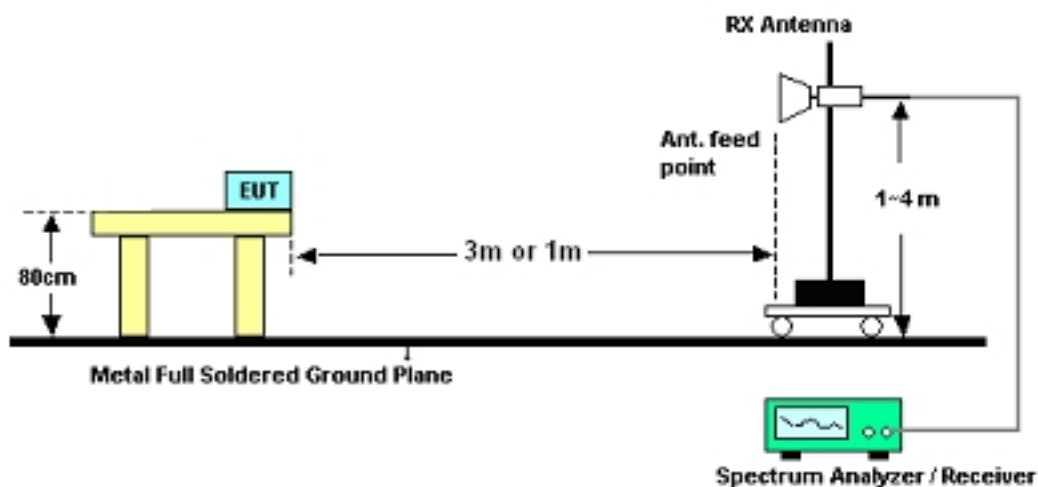

3.7.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Chenmy Cheng	Temperature :	21~22℃	
		Relative Humidity :	41~42%	

Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.7.6 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	Mode 1	Temperature :	21~22℃
Test Channel :	01	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
33.51	24.58	-15.42	40	38.88	15.56	0.23	30.09	100	102	Peak
93.45	15.83	-27.67	43.5	35.9	9.51	0.4	29.98	-	-	Peak
119.64	16.27	-27.23	43.5	33.99	11.8	0.45	29.97	-	-	Peak
871.9	26.79	-19.21	46	34.6	20.49	1.29	29.59	-	-	Peak
944.7	29.25	-24.75	54	36.75	20.71	1.33	29.54	-	-	Peak
960.1	26.73	-27.27	54	34.14	20.79	1.34	29.54	-	-	Peak
2386.76	57.89	-16.11	74	55.61	32.86	3.47	34.05	166	358	Peak
2386.76	45.62	-8.38	54	43.34	32.86	3.47	34.05	166	358	Average
2412	106.24	-	-	103.91	32.89	3.52	34.08	118	357	Peak
2412	100.17	-	-	97.84	32.89	3.52	34.08	118	357	Average
2484.42	51.86	-22.14	74	49.37	33.01	3.68	34.2	100	0	Peak
2484.42	42.05	-11.95	54	39.56	33.01	3.68	34.2	100	0	Average

Test Mode :	Mode 1	Temperature :	21~22℃
Test Channel :	01	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
37.29	28.03	-11.97	40	44.15	13.7	0.24	30.06	100	163	Peak
42.96	23.29	-16.71	40	42.64	10.48	0.26	30.09	-	-	Peak
80.49	19.74	-20.26	40	42.83	6.6	0.35	30.04	-	-	Peak
871.9	25.47	-20.53	46	33.28	20.49	1.29	29.59	-	-	Peak
936.3	28.29	-17.71	46	35.83	20.67	1.32	29.53	-	-	Peak
960.1	26.43	-27.57	54	33.84	20.79	1.34	29.54	-	-	Peak
2386	54.59	-19.41	74	52.31	32.86	3.47	34.05	100	98	Peak
2386	42.78	-11.22	54	40.5	32.86	3.47	34.05	100	98	Average
2412	102.97	-	-	100.64	32.89	3.52	34.08	100	101	Peak
2412	96.43	-	-	94.1	32.89	3.52	34.08	100	101	Average
2483.5	49.15	-24.85	74	46.66	33.01	3.68	34.2	100	0	Peak
2483.5	41.47	-12.53	54	38.98	33.01	3.68	34.2	100	0	Average

Test Mode :	Mode 2	Temperature :	21~22℃
Test Channel :	06	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.97	24.69	-15.31	40	38.5	16.04	0.24	30.09	100	119	Peak
93.18	17.23	-26.27	43.5	37.3	9.51	0.4	29.98	-	-	Peak
246	16.92	-29.08	46	34.24	11.84	0.67	29.83	-	-	Peak
871.9	27.09	-18.91	46	34.9	20.49	1.29	29.59	-	-	Peak
944.7	30.91	-23.09	54	38.41	20.71	1.33	29.54	-	-	Peak
960.1	27.2	-26.8	54	34.61	20.79	1.34	29.54	-	-	Peak
2390	51.37	-22.63	74	49.09	32.86	3.47	34.05	100	0	Peak
2390	42.59	-11.41	54	40.31	32.86	3.47	34.05	100	0	Average
2437	105.17	-	-	102.77	32.95	3.6	34.15	192	0	Peak
2437	100.83	-	-	98.43	32.95	3.6	34.15	192	0	Average
2483.5	49.94	-24.06	74	47.45	33.01	3.68	34.2	100	0	Peak
2483.5	42.27	-11.73	54	39.78	33.01	3.68	34.2	100	0	Average

Test Mode :	Mode 2	Temperature :	21~22℃
Test Channel :	06	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
36.75	26.67	-13.33	40	42.31	14.19	0.24	30.07	100	122	Peak
81.03	19.65	-20.35	40	42.47	6.87	0.35	30.04	-	-	Peak
122.61	17.17	-26.33	43.5	34.91	11.78	0.45	29.97	-	-	Peak
871.9	25.84	-20.16	46	33.65	20.49	1.29	29.59	-	-	Peak
944.7	29.34	-24.66	54	36.84	20.71	1.33	29.54	-	-	Peak
960.1	26.7	-27.3	54	34.11	20.79	1.34	29.54	-	-	Peak
2390	49.1	-24.9	74	46.82	32.86	3.47	34.05	100	0	Peak
2390	41.16	-12.84	54	38.88	32.86	3.47	34.05	100	0	Average
2437	102.83	-	-	100.43	32.95	3.6	34.15	172	360	Peak
2437	98.77	-	-	96.37	32.95	3.6	34.15	172	360	Average
2483.5	50.14	-23.86	74	47.65	33.01	3.68	34.2	100	0	Peak
2483.5	41.99	-12.01	54	39.5	33.01	3.68	34.2	100	0	Average

Test Mode :	Mode 3	Temperature :	21~22℃
Test Channel :	11	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.97	24.92	-15.08	40	38.73	16.04	0.24	30.09	100	330	Peak
93.18	18.06	-25.44	43.5	38.13	9.51	0.4	29.98	-	-	Peak
123.15	16.9	-26.6	43.5	34.64	11.77	0.46	29.97	-	-	Peak
871.2	27.09	-18.91	46	34.9	20.49	1.29	29.59	-	-	Peak
936.3	28.86	-17.14	46	36.4	20.67	1.32	29.53	-	-	Peak
944.7	28.94	-25.06	54	36.44	20.71	1.33	29.54	-	-	Peak
2390	51.08	-22.92	74	48.8	32.86	3.47	34.05	100	0	Peak
2390	40.26	-13.74	54	37.98	32.86	3.47	34.05	100	0	Average
2462	103.79	-	-	101.34	32.98	3.64	34.17	189	0	Peak
2462	99.1	-	-	96.65	32.98	3.64	34.17	189	0	Average
2488.03	54.84	-19.16	74	52.3	33.05	3.72	34.23	110	348	Peak
2488.03	45.37	-8.63	54	42.83	33.05	3.72	34.23	110	348	Average

Test Mode :	Mode 3	Temperature :	21~22℃
Test Channel :	11	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
36.48	27.71	-12.29	40	43.35	14.19	0.24	30.07	112	0	Peak
43.77	23.45	-16.55	40	43.26	10.03	0.27	30.11	-	-	Peak
81.3	20.12	-19.88	40	42.94	6.87	0.35	30.04	-	-	Peak
871.9	25.67	-20.33	46	33.48	20.49	1.29	29.59	-	-	Peak
944.7	28.94	-25.06	54	36.44	20.71	1.33	29.54	-	-	Peak
960.1	26.65	-27.35	54	34.06	20.79	1.34	29.54	-	-	Peak
2390	49	-25	74	46.72	32.86	3.47	34.05	100	0	Peak
2390	39.17	-14.83	54	36.89	32.86	3.47	34.05	100	0	Average
2462	101.14	-	-	98.69	32.98	3.64	34.17	200	330	Peak
2462	96.33	-	-	93.88	32.98	3.64	34.17	200	330	Average
2483.5	53	-21	74	50.51	33.01	3.68	34.2	112	0	Peak
2483.5	43.19	-10.81	54	40.7	33.01	3.68	34.2	112	0	Average

Test Mode :	Mode 4	Temperature :	21~22℃
Test Channel :	01	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.43	23.24	-16.76	40	37.05	16.04	0.24	30.09	100	223	Peak
93.18	18.8	-24.7	43.5	38.87	9.51	0.4	29.98	-	-	Peak
135.3	17.18	-26.32	43.5	35.48	11.21	0.48	29.99	-	-	Peak
871.9	26.56	-19.44	46	34.37	20.49	1.29	29.59	-	-	Peak
944.7	29.38	-24.62	54	36.88	20.71	1.33	29.54	-	-	Peak
960.1	28.07	-25.93	54	35.48	20.79	1.34	29.54	-	-	Peak
2389.04	58.28	-15.72	74	56	32.86	3.47	34.05	169	3	Peak
2389.04	40.79	-13.21	54	38.51	32.86	3.47	34.05	169	3	Average
2412	99.76	-	-	97.43	32.89	3.52	34.08	104	350	Peak
2412	91.44	-	-	89.11	32.89	3.52	34.08	104	350	Average
2484.8	49.74	-24.26	74	47.25	33.01	3.68	34.2	100	360	Peak
2484.8	36.75	-17.25	54	34.26	33.01	3.68	34.2	100	360	Average

Test Mode :	Mode 4	Temperature :	21~22℃
Test Channel :	01	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
36.75	26.78	-13.22	40	42.42	14.19	0.24	30.07	100	26	Peak
81.03	20.1	-19.9	40	42.92	6.87	0.35	30.04	-	-	Peak
244.92	17.58	-28.42	46	34.96	11.79	0.66	29.83	-	-	Peak
871.9	27.41	-18.59	46	35.22	20.49	1.29	29.59	-	-	Peak
944.7	28.42	-25.58	54	35.92	20.71	1.33	29.54	-	-	Peak
960.1	26.95	-27.05	54	34.36	20.79	1.34	29.54	-	-	Peak
2389.04	58.67	-15.33	74	56.39	32.86	3.47	34.05	100	15	Peak
2389.04	40.69	-13.31	54	38.41	32.86	3.47	34.05	100	15	Average
2412	99.81	-	-	97.48	32.89	3.52	34.08	100	195	Peak
2412	89.13	-	-	86.8	32.89	3.52	34.08	100	195	Average
2487.27	48.42	-25.58	74	45.93	33.01	3.68	34.2	117	262	Peak
2487.27	34.86	-19.14	54	32.37	33.01	3.68	34.2	117	262	Average

Test Mode :	Mode 5	Temperature :	21~22℃
Test Channel :	06	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.43	24.59	-15.41	40	38.4	16.04	0.24	30.09	100	28	Peak
93.45	18.38	-25.12	43.5	38.45	9.51	0.4	29.98	-	-	Peak
96.42	18.14	-25.36	43.5	37.8	9.91	0.4	29.97	-	-	Peak
871.2	27.05	-18.95	46	34.86	20.49	1.29	29.59	-	-	Peak
936.3	28.16	-17.84	46	35.7	20.67	1.32	29.53	-	-	Peak
944.7	28.06	-25.94	54	35.56	20.71	1.33	29.54	-	-	Peak
2389.8	49.58	-24.42	74	47.3	32.86	3.47	34.05	200	12	Peak
2389.8	39.08	-14.92	54	36.8	32.86	3.47	34.05	200	12	Average
2437	103.95	-	-	101.55	32.95	3.6	34.15	107	344	Peak
2437	92.66	-	-	90.26	32.95	3.6	34.15	107	344	Average
2484.99	50.58	-23.42	74	48.09	33.01	3.68	34.2	120	355	Peak
2484.99	39.69	-14.31	54	37.2	33.01	3.68	34.2	120	355	Average

Test Mode :	Mode 5	Temperature :	21~22℃
Test Channel :	06	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
37.02	26.1	-13.9	40	41.74	14.19	0.24	30.07	100	323	Peak
81.03	20.32	-19.68	40	43.14	6.87	0.35	30.04	-	-	Peak
224.67	21.44	-24.56	46	40.25	10.5	0.63	29.94	-	-	Peak
871.9	26.52	-19.48	46	34.33	20.49	1.29	29.59	-	-	Peak
944.7	29.55	-24.45	54	37.05	20.71	1.33	29.54	-	-	Peak
960.1	26.26	-27.74	54	33.67	20.79	1.34	29.54	-	-	Peak
2385.05	50.06	-23.94	74	47.82	32.83	3.42	34.01	145	337	Peak
2385.05	36.04	-17.96	54	33.8	32.83	3.42	34.01	145	337	Average
2437	85.12	-	-	82.72	32.95	3.6	34.15	100	101	Average
2437	101.36	-	-	98.96	32.95	3.6	34.15	100	101	Peak
2484.99	47.33	-26.67	74	44.84	33.01	3.68	34.2	200	120	Peak
2484.99	34.89	-19.11	54	32.4	33.01	3.68	34.2	200	120	Average

Test Mode :	Mode 6	Temperature :	21~22℃
Test Channel :	11	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.97	24.61	-15.39	40	38.42	16.04	0.24	30.09	100	222	Peak
36.48	22.34	-17.66	40	37.98	14.19	0.24	30.07	-	-	Peak
93.45	19.91	-23.59	43.5	39.98	9.51	0.4	29.98	-	-	Peak
871.2	27.3	-18.7	46	35.11	20.49	1.29	29.59	-	-	Peak
936.3	26.8	-19.2	46	34.34	20.67	1.32	29.53	-	-	Peak
944	26.88	-27.12	54	34.37	20.71	1.33	29.53	-	-	Peak
2377.26	48.86	-25.14	74	46.62	32.83	3.42	34.01	106	334	Peak
2377.26	36.04	-17.96	54	33.8	32.83	3.42	34.01	106	334	Average
2462	104.67	-	-	102.22	32.98	3.64	34.17	104	345	Peak
2462	91.41	-	-	88.96	32.98	3.64	34.17	104	345	Average
2484.23	60.16	-13.84	74	57.67	33.01	3.68	34.2	112	31	Peak
2484.23	46.59	-7.41	54	44.1	33.01	3.68	34.2	112	31	Average

Test Mode :	Mode 6	Temperature :	21~22℃
Test Channel :	11	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
37.02	26.39	-13.61	40	42.03	14.19	0.24	30.07	100	220	Peak
80.76	20.27	-19.73	40	43.36	6.6	0.35	30.04	-	-	Peak
122.61	17.1	-26.4	43.5	34.84	11.78	0.45	29.97	-	-	Peak
871.9	25.69	-20.31	46	33.5	20.49	1.29	29.59	-	-	Peak
944.7	27.98	-26.02	54	35.48	20.71	1.33	29.54	-	-	Peak
960.1	27.15	-26.85	54	34.56	20.79	1.34	29.54	-	-	Peak
2377.64	48.74	-25.26	74	46.5	32.83	3.42	34.01	109	14	Peak
2377.64	36.94	-17.06	54	34.7	32.83	3.42	34.01	109	14	Average
2462	100.98	-	-	98.53	32.98	3.64	34.17	100	332	Peak
2462	87.91	-	-	85.46	32.98	3.64	34.17	100	332	Average
2484.42	57.04	-16.96	74	54.55	33.01	3.68	34.2	123	67	Peak
2484.42	45.19	-8.81	54	42.7	33.01	3.68	34.2	123	67	Average

Test Mode :	Mode 7	Temperature :	21~22℃
Test Channel :	01	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.35	25.25	-14.75	40	37.79	17.29	0.25	30.08	100	23	Peak
93.45	19.98	-23.52	43.5	40.05	9.51	0.4	29.98	-	-	Peak
136.11	18.11	-25.39	43.5	36.41	11.21	0.48	29.99	-	-	Peak
849.5	26.28	-19.72	46	34.15	20.51	1.28	29.66	-	-	Peak
871.9	26.16	-19.84	46	33.97	20.49	1.29	29.59	-	-	Peak
944.7	29.61	-24.39	54	37.11	20.71	1.33	29.54	-	-	Peak
2389.8	64.17	-9.83	74	61.89	32.86	3.47	34.05	113	16	Peak
2389.8	49.98	-4.02	54	47.7	32.86	3.47	34.05	113	16	Average
2412	104.26	-	-	101.93	32.89	3.52	34.08	106	8	Peak
2412	91.35	-	-	89.02	32.89	3.52	34.08	106	8	Average
2484.61	49.21	-24.79	74	46.72	33.01	3.68	34.2	131	349	Peak
2484.61	36.19	-17.81	54	33.7	33.01	3.68	34.2	131	349	Average

Test Mode :	Mode 7	Temperature :	21~22℃
Test Channel :	01	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
37.02	25.86	-14.14	40	41.5	14.19	0.24	30.07	100	202	Peak
78.06	20.06	-19.94	40	43.42	6.34	0.35	30.05	-	-	Peak
226.29	18.32	-27.68	46	37.04	10.59	0.63	29.94	-	-	Peak
849.5	27.78	-18.22	46	35.65	20.51	1.28	29.66	-	-	Peak
871.9	27.06	-18.94	46	34.87	20.49	1.29	29.59	-	-	Peak
944.7	29.58	-24.42	54	37.08	20.71	1.33	29.54	-	-	Peak
2388.28	58.55	-15.45	74	56.27	32.86	3.47	34.05	120	332	Peak
2388.28	45.38	-8.62	54	43.1	32.86	3.47	34.05	120	332	Average
2412	101	-	-	98.67	32.89	3.52	34.08	103	347	Peak
2412	87.82	-	-	85.49	32.89	3.52	34.08	103	347	Average
2486.32	47.05	-26.95	74	44.56	33.01	3.68	34.2	104	120	Peak
2486.32	35.29	-18.71	54	32.8	33.01	3.68	34.2	104	120	Average

Test Mode :	Mode 8	Temperature :	21~22℃
Test Channel :	06	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.35	24.38	-15.62	40	36.92	17.29	0.25	30.08	100	329	Peak
109.65	15.13	-28.37	43.5	32.87	11.8	0.43	29.97	-	-	Peak
255.45	15.24	-30.76	46	32.35	12.07	0.67	29.85	-	-	Peak
871.9	24.97	-21.03	46	32.78	20.49	1.29	29.59	-	-	Peak
944.7	28.84	-25.16	54	36.34	20.71	1.33	29.54	-	-	Peak
960.1	26.06	-27.94	54	33.47	20.79	1.34	29.54	-	-	Peak
2384.48	52.39	-21.61	74	50.15	32.83	3.42	34.01	194	29	Peak
2384.48	40.34	-13.66	54	38.1	32.83	3.42	34.01	194	29	Average
2437	91.67	-	-	89.27	32.95	3.6	34.15	102	10	Average
2437	103.75	-	-	101.35	32.95	3.6	34.15	102	10	Peak
2493.92	51.08	-22.92	74	48.54	33.05	3.72	34.23	105	120	Peak
2493.92	39.64	-14.36	54	37.1	33.05	3.72	34.23	105	120	Average

Test Mode :	Mode 8	Temperature :	21~22℃
Test Channel :	06	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
36.48	24.94	-15.06	40	40.58	14.19	0.24	30.07	100	11	Peak
78.06	19.21	-20.79	40	42.57	6.34	0.35	30.05	-	-	Peak
135.84	16.23	-27.27	43.5	34.53	11.21	0.48	29.99	-	-	Peak
533.1	25.03	-20.97	46	35.59	18.14	0.99	29.69	-	-	Peak
871.9	26.4	-19.6	46	34.21	20.49	1.29	29.59	-	-	Peak
944.7	28.33	-25.67	54	35.83	20.71	1.33	29.54	-	-	Peak
2383.53	49.01	-24.99	74	46.77	32.83	3.42	34.01	141	337	Peak
2383.53	35.94	-18.06	54	33.7	32.83	3.42	34.01	141	337	Average
2437	88.68	-	-	86.28	32.95	3.6	34.15	161	18	Average
2437	101.54	-	-	99.14	32.95	3.6	34.15	161	18	Peak
2483.66	49.28	-24.72	74	46.79	33.01	3.68	34.2	188	122	Peak
2483.66	36.89	-17.11	54	34.4	33.01	3.68	34.2	188	122	Average

Test Mode :	Mode 9	Temperature :	21~22℃
Test Channel :	11	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.08	23.61	-16.39	40	36.15	17.29	0.25	30.08	100	62	Peak
93.99	19.45	-24.05	43.5	39.37	9.66	0.4	29.98	-	-	Peak
136.11	17.99	-25.51	43.5	36.29	11.21	0.48	29.99	-	-	Peak
849.5	26.91	-19.09	46	34.78	20.51	1.28	29.66	-	-	Peak
871.9	25.82	-20.18	46	33.63	20.49	1.29	29.59	-	-	Peak
944.7	28.85	-25.15	54	36.35	20.71	1.33	29.54	-	-	Peak
2386.38	49.42	-24.58	74	47.14	32.86	3.47	34.05	120	100	Peak
2386.38	36.18	-17.82	54	33.9	32.86	3.47	34.05	120	100	Average
2462	101.01	-	-	98.56	32.98	3.64	34.17	103	13	Peak
2462	86.82	-	-	84.37	32.98	3.64	34.17	103	13	Average
2483.5	56.42	-17.58	74	53.93	33.01	3.68	34.2	100	23	Peak
2483.5	42.19	-11.81	54	39.7	33.01	3.68	34.2	100	23	Average

Test Mode :	Mode 9	Temperature :	21~22℃
Test Channel :	11	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2462 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
36.48	24.71	-15.29	40	40.35	14.19	0.24	30.07	100	338	Peak
39.99	23.69	-16.31	40	41.16	12.3	0.25	30.02	-	-	Peak
84	18.6	-21.4	40	40.72	7.53	0.37	30.02	-	-	Peak
849.5	25.55	-20.45	46	33.42	20.51	1.28	29.66	-	-	Peak
871.2	25.91	-20.09	46	33.72	20.49	1.29	29.59	-	-	Peak
944.7	27.4	-26.6	54	34.9	20.71	1.33	29.54	-	-	Peak
2389.04	49.03	-24.97	74	46.75	32.86	3.47	34.05	194	49	Peak
2389.04	35.68	-18.32	54	33.4	32.86	3.47	34.05	194	49	Average
2462	101	-	-	98.55	32.98	3.64	34.17	200	329	Peak
2462	87.46	-	-	85.01	32.98	3.64	34.17	200	329	Average
2483.5	58.06	-15.94	74	55.57	33.01	3.68	34.2	177	120	Peak
2483.5	43.59	-10.41	54	41.1	33.01	3.68	34.2	177	120	Average

Test Mode :	Mode 10	Temperature :	21~22℃
Test Channel :	03	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2422 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
36.48	21.57	-18.43	40	37.21	14.19	0.24	30.07	100	306	Peak
93.72	21.73	-21.77	43.5	41.65	9.66	0.4	29.98	-	-	Peak
135.84	17.22	-26.28	43.5	35.52	11.21	0.48	29.99	-	-	Peak
871.9	25.98	-20.02	46	33.79	20.49	1.29	29.59	-	-	Peak
936.3	27.42	-18.58	46	34.96	20.67	1.32	29.53	-	-	Peak
960.1	27.43	-26.57	54	34.84	20.79	1.34	29.54	-	-	Peak
2387.9	54.42	-19.58	74	52.14	32.86	3.47	34.05	120	100	Peak
2387.9	43.39	-10.61	54	41.11	32.86	3.47	34.05	120	100	Average
2422	103.78	-	-	101.42	32.92	3.56	34.12	100	0	Peak
2422	90.95	-	-	88.59	32.92	3.56	34.12	100	0	Average
2486.13	48.45	-25.55	74	45.96	33.01	3.68	34.2	113	29	Peak
2486.13	35.19	-18.81	54	32.7	33.01	3.68	34.2	113	29	Average

Test Mode :	Mode 10	Temperature :	21~22℃
Test Channel :	03	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2422 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
36.48	25.41	-14.59	40	41.05	14.19	0.24	30.07	100	112	Peak
78.33	19.7	-20.3	40	43.06	6.34	0.35	30.05	-	-	Peak
123.15	17.63	-25.87	43.5	35.37	11.77	0.46	29.97	-	-	Peak
871.2	24.75	-21.25	46	32.56	20.49	1.29	29.59	-	-	Peak
944.7	27.64	-26.36	54	35.14	20.71	1.33	29.54	-	-	Peak
960.1	25.9	-28.1	54	33.31	20.79	1.34	29.54	-	-	Peak
2389.99	53.9	-20.1	74	51.62	32.86	3.47	34.05	120	0	Peak
2389.99	40.48	-13.52	54	38.2	32.86	3.47	34.05	120	0	Average
2422	90.97	-	-	88.61	32.92	3.56	34.12	100	360	Average
2422	103.84	-	-	101.48	32.92	3.56	34.12	100	360	Peak
2483.66	49.1	-24.9	74	46.61	33.01	3.68	34.2	107	108	Peak
2483.66	36.09	-17.91	54	33.6	33.01	3.68	34.2	107	108	Average

Test Mode :	Mode 11	Temperature :	21~22℃
Test Channel :	06	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.16	21.97	-18.03	40	35.27	16.55	0.24	30.09	100	226	Peak
93.72	21.97	-21.53	43.5	41.89	9.66	0.4	29.98	-	-	Peak
135.84	18.5	-25	43.5	36.8	11.21	0.48	29.99	-	-	Peak
848.8	23.55	-22.45	46	31.43	20.5	1.28	29.66	-	-	Peak
871.2	25.12	-20.88	46	32.93	20.49	1.29	29.59	-	-	Peak
943.3	28.09	-25.91	54	35.58	20.71	1.33	29.53	-	-	Peak
2379.73	52.2	-21.8	74	49.96	32.83	3.42	34.01	120	120	Peak
2379.73	38.04	-15.96	54	35.8	32.83	3.42	34.01	120	120	Average
2437	104.42	-	-	102.02	32.95	3.6	34.15	100	360	Peak
2437	92.03	-	-	89.63	32.95	3.6	34.15	100	360	Average
2483.5	49.78	-24.22	74	47.29	33.01	3.68	34.2	200	120	Peak
2483.5	37.19	-16.81	54	34.7	33.01	3.68	34.2	200	120	Average

Test Mode :	Mode 11	Temperature :	21~22℃
Test Channel :	06	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2437 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.43	23.86	-16.14	40	37.67	16.04	0.24	30.09	100	263	Peak
40.26	22.04	-17.96	40	40.2	11.64	0.25	30.05	-	-	Peak
81.57	19.41	-20.59	40	42.23	6.87	0.35	30.04	-	-	Peak
848.8	27.6	-18.4	46	35.48	20.5	1.28	29.66	-	-	Peak
871.9	26.45	-19.55	46	34.26	20.49	1.29	29.59	-	-	Peak
944.7	29.98	-24.02	54	37.48	20.71	1.33	29.54	-	-	Peak
2389.23	48.17	-25.83	74	45.89	32.86	3.47	34.05	178	120	Peak
2389.23	34.48	-19.52	54	32.2	32.86	3.47	34.05	178	120	Average
2437	90.1	-	-	87.7	32.95	3.6	34.15	200	16	Average
2437	102.57	-	-	100.17	32.95	3.6	34.15	200	16	Peak
2494.11	49.36	-24.64	74	46.82	33.05	3.72	34.23	154	0	Peak
2494.11	36.14	-17.86	54	33.6	33.05	3.72	34.23	154	0	Average

Test Mode :	Mode 12	Temperature :	21~22℃
Test Channel :	09	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2452 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.16	22.77	-17.23	40	36.07	16.55	0.24	30.09	100	20	Peak
93.45	21.6	-21.9	43.5	41.67	9.51	0.4	29.98	-	-	Peak
135.84	18.96	-24.54	43.5	37.26	11.21	0.48	29.99	-	-	Peak
871.2	24.57	-21.43	46	32.38	20.49	1.29	29.59	-	-	Peak
944.7	27.91	-26.09	54	35.41	20.71	1.33	29.54	-	-	Peak
960.1	25.99	-28.01	54	33.4	20.79	1.34	29.54	-	-	Peak
2388.28	52.11	-21.89	74	49.83	32.86	3.47	34.05	152	168	Peak
2388.28	38.88	-15.12	54	36.6	32.86	3.47	34.05	152	168	Average
2452	100.67	-	-	98.27	32.95	3.6	34.15	161	173	Peak
2452	86.58	-	-	84.18	32.95	3.6	34.15	161	173	Average
2483.5	67.42	-6.58	74	64.93	33.01	3.68	34.2	200	172	Peak
2483.5	48.38	-5.62	54	45.89	33.01	3.68	34.2	200	172	Average

Test Mode :	Mode 12	Temperature :	21~22℃
Test Channel :	09	Relative Humidity :	41~42%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2452 MHz is Fundamental Signals which can be ignored.		

Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
33.24	22.69	-17.31	40	36.5	16.04	0.24	30.09	126	332	Peak
40.53	22.21	-17.79	40	40.37	11.64	0.25	30.05	-	-	Peak
77.79	17.92	-22.08	40	41.42	6.2	0.35	30.05	-	-	Peak
871.9	24.74	-21.26	46	32.55	20.49	1.29	29.59	-	-	Peak
944.7	27.61	-26.39	54	35.11	20.71	1.33	29.54	-	-	Peak
960.1	25.35	-28.65	54	32.76	20.79	1.34	29.54	-	-	Peak
2389.61	51.33	-22.67	74	49.05	32.86	3.47	34.05	178	120	Peak
2389.61	39.68	-14.32	54	37.4	32.86	3.47	34.05	178	120	Average
2452	101.25	-	-	98.85	32.95	3.6	34.15	100	336	Peak
2452	83.53	-	-	81.13	32.95	3.6	34.15	100	336	Average
2484.61	47.27	-6.73	54	44.78	33.01	3.68	34.2	200	19	Average
2484.61	69.07	-4.93	74	66.58	33.01	3.68	34.2	200	19	Peak

3.8 Antenna Requirements

3.8.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.8.2 Antenna Connected Construction

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

3.8.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Jan. 07, 2011	Jan. 06, 2012	Conducted (TH01-KS)
System Simulator	R&S	CMU200	837587/066	Full-Band	Jan. 07, 2011	Jan. 06, 2012	Conducted (TH01-KS)
DC Power Supply	TOPWARD	GPS-3030D	E1884515	N/A	Aug. 23, 2011	Aug. 22, 2012	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Jan. 17, 2011	Jan. 16, 2012	Conducted (TH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Jun. 02, 2011	Jun. 01, 2012	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Jan. 07, 2011	Jan. 06, 2012	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Jan. 07, 2011	Jan. 06, 2012	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	N/A	Nov. 10, 2010	Nov. 09, 2011	Conduction (CO01-KS)
System Simulator	R&S	CMU200	837587/066	Full-Band	Jan. 07, 2011	Jan. 06, 2012	Conduction (CO01-KS)
Signal Generator	R&S	SMR40	100455	10MHz~40GHz	Jan. 06, 2011	Jan. 05, 2012	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 16, 2010	Nov. 15, 2011	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Jan. 07, 2011	Jan. 06, 2012	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 07, 2010	Dec. 06, 2011	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Jan. 07, 2011	Jan. 06, 2012	Radiation (03CH01-KS)
Amplifier	Wireless	FPA-6592G	060004	30MHz~2GHz	Dec. 09, 2010	Dec. 08, 2011	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Jan. 07, 2011	Jan. 06, 2012	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz -18GHz	Nov. 09, 2010	Nov. 08, 2011	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz -40GHz	Oct. 15, 2010	Oct.14, 2011	Radiation (03CH01-KS)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $U_c(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal ($k=2$)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal ($k=2$)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal ($k=2$)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\log(1-\Gamma_1\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				



Appendix A. Photographs of EUT

Please refer to Sporton report number EP192004 as below.