

SAR TEST REPORT

No. 2011SAR070

FCC ID: Q78-MOVISTARVEGA

Applicant: ZTE CORPORATION

Product: GSM Dual-Band GPRS

Digital Mobile Phone

Model: Movistar Vega

Issued Date: 2011-09-06

Test Laboratory:

Shanghai Tejet Communications Technology Co., Ltd Testing Center.

Room 6205-6208, Building 6, No.399 Cailun Rd. Zhangjiang Hi-Tech Park, Shanghai, China 210203

Tel: +86-21-61650880

Fax: +86-21-61650881

www.tejet.cn


Note:

The following test results relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of the test laboratory.

General Information

Product Name	GSM Dual-Band GPRS Digital Mobile Phone	Model Name	Movistar Vega
Applicant	ZTE CORPORATION		
Manufacturer	ZTE CORPORATION		
Reference Standard	ANSI/IEEE C95.1-2005 SAFETY LEVELS WITH RESPECT TO HUMAN EXPOSURE TO RADIO FREQUENCY ELECTROMAGNETIC FIELDS. 3 KHZ TO 300 GHZ		
	IEEE Std 1528™-2003: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques		
	OET Bulletin 65-(Edition 97-01) Supplement C (edition01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields---Additional Supplement C (Edition 01-01)Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions		
	ANSI/IEEE C95.3-2002 RECOMMENDED PRACTICE FOR MEASUREMENTS AND COMPUTATIONS OF RADIO FREQUENCY ELECTROMAGNETIC FIELDS WITH RESPECT TO HUMAN EXPOSURE TO SUCH FIELDS. 100 KHZ-300 GHZ		
Test Results	Pass		

Prepared by


Yin Xiaoming

Date

2011.9.6

Reviewed by


Xue Jianguo

Date

2011.9.6

Approved by


GM of Tejet
Wang Jianrong

Date

2011.9.6

(Stamp)



CONTENTS:

1. TEST LABORATORY	5
1.1 TESTING LOCATION:	5
1.2 LABORATORY ENVIRONMENT	5
1.3 TESTING DATE	5
2. CLIENT INFORMATION	6
2.1 APPLICANT INFORMATION	6
2.2 MANUFACTURER INFORMATION	6
3.EQUIPMENT UNDER TEST (EUT) AND ACCESSORY EQUIPMENT (AE)	7
3.1 INFORMATION OF EUT	7
3.2 INFORMATION OF AE	7
4. REFERENCE DOCUMENTS	9
4.1 REFERENCE DOCUMENTS FOR TESTING	9
5. OPERATIONAL CONDITIONS DURING TEST	11
5.1 GENERAL DESCRIPTION OF TEST PROCEDURES	11
5.2 GSM TEST CONFIGURATION	11
6. SAR MEASUREMENTS SYSTEM CONFIGURATION	13
6.1 SAR MEASUREMENT SET-UP	13
6.2. DASY5 E-FIELD PROBE SYSTEM	14
6.2.1. Ex3DV3 Probe Specification	14
6.2.2. E-field Probe Calibration	15
6.3. OTHER TEST EQUIPMENT	16
6.3.1. Device Holder for Transmitters	16
6.3.2. Phantom	16
6.4. SCANNING PROCEDURE	17
6.5. DATA STORAGE AND EVALUATION	19
6.5.1. Data Storage	19
6.5.2. Data Evaluation by SEMCAD	19
6.6. SYSTEM CHECK	21
6.7. EQUIVALENT TISSUES	22
7. CHARACTERISTICS OF THE TEST	24
7.1. APPLICABLE LIMIT REGULATIONS	24
7.2. APPLICABLE MEASUREMENT STANDARDS	24
8. CONDUCTED OUTPUT POWER MEASUREMENT	25
8.1. SUMMARY	25
8.2. CONDUCTED POWER RESULTS	25
9 TEST RESULTS	26

9.1. DIELECTRIC PERFORMANCE.....	26
9.2. SYSTEM CHECK RESULTS	26
9.3. TEST RESULTS.....	27
9.3.1. Summary of Measurement Results (GSM850)	27
9.3.2. Summary of Measurement Results (GSM1900)	28
9.4. CONCLUSION	29
ANNEX A: EUT PHOTOGRAPH	30
ANNEX B: MEASUREMENT UNCERTAINTY	36
ANNEX C: MAIN TEST INSTRUMENTS.....	38
ANNEX D: TEST LAYOUT.....	39
ANNEX E: SYSTEM CHECK RESULTS	42
ANNEX F: GRAPH RESULT.....	46
ANNEX G: PROBE CALIBRATION CERTIFICATE.....	46
ANNEX H:DAE4 CALIBRATION CERTIFICATE	89
ANNEX I: D835V2 CALIBRATION CERTIFICATE	94
ANNEX J: D1900V2 CALIBRATION CERTIFICATE	103

1. Test Laboratory

1.1 Testing Location:

Company: Shanghai Tejet Communications Technology Co., Ltd Testing Center.
Address: Room 6205-6208, Building 6, No.399 Cailun Rd. Zhangjiang Hi-Tech Park,
Shanghai, China
Post Code : 210203
Tel: +86-21-61650880
Fax: +86-21-61650881
Website: www.tejet.cn

1.2 Laboratory Environment

Temperature 20° C ~ 25 ° C

Relative humidity 20% ~ 70%

Ground system resistance < 0.5 Ω

Ambient noise is checked and found very low and in compliance with requirement of standards.

Reflection of surrounding objects is minimized and in compliance with requirement of standards

1.3 Testing date

The test is performed on Sep 2th ~ Sep 5th 2011.

2. Client Information

2.1 Applicant information

Company Name: ZTE Corporation
Address: #68 Zijin Hua Road Nanjing, Jiangsu Province, China
contact : Fang yanbo
email: Fang yanbo@zte.com.cn
Tel: +8613770690695

2.2 Manufacturer Information

Company Name: ZTE Corporation
Address: #68 Zijin Hua Road Nanjing, Jiangsu Province, China
contact : Fang yanbo
email: Fang yanbo@zte.com.cn
Tel: +8613770690695

3.Equipment Under Test (EUT) and Accessory Equipment (AE)

3.1 Information of EUT

Device type	Portable device		
Product name	GSM Dual-Band GPRS Digital Mobile Phone		
Exposure category	Uncontrolled environment / general population		
Device operation configuration:			
Operating mode(s):	GSM850		
	GSM1900		
Test modulation	(GSM)GMSK		
GPRS Class	12		
DTM support	N/A		
Rated output power	GSM 850:33dBm		
	GSM1900: 30dBm		
Antenna type:	Internal antenna		
Operating frequency range(s):	Band	Tx(MHz)	Rx(MHz)
	GSM850	824.2~848.8	869.2~893.8
	GSM1900	1850.2~1909.8	1930.2~1989.8
Power class	GSM850: 4,test with power level 5		
	GSM1900: 1,test with power level 0		
HW Version	gavA		
SW Version	SE-ES-TME-P130D11V0.0.0B01		

Note: Equipment under test (EUT) is GSM Dual- Mode Digital Mobile Phone with internal antenna. It consists of mobile phone ,battery and adaptor and the detail about these is in this report. SAR is tested for GSM850 , GSM1900 ,

3.2 Information Of AE

AE ID*	Description
AE1	Battery
AE2	Travel Adaptor

AE3 Earphone

AE1

Model	Li3708T42P3h453756-NTC
Manufacturer	ZTE CORPORATION
Capacitance	800mAh
Nominal Voltage	3.7V

AE2

Model	STC-A22O50I700M5-C
Manufacturer	RUIDE
Length of DC line	185cm

AE3

Model	HMZ1-OMTP-3.5
Manufacturer	ZTE CORPORATION
Length of DC line	120cm

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1 Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title
IEEE Std 1528™-2003	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
EN 62209-1-2006	Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures – Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)
YD/T 1643-2007	Technical Specification and Testing Methods for compatibility between wireless communication devices and hearing aids
YD/T 1644.1-2007	Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures Part1:procedure to determine the specific absorption rate (sar)for hand-held devices used in close proximity to the ear (frequency range of 300MHz~3GHz)
EN 50360-2001	Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)
IEC 62209-2-2010	Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices -Human models, Instrumentation, and Procedures -Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)
OET Bulletin 65-(Edition 97-01) Supplement C (edition01-01)	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields---Additional Supplement C (Edition 01-01)Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions

47 CFR Ch. I- Hearing aid-compatible mobile handsets.

ANSI/IEEE C95.1-2005 SAFETY LEVELS WITH RESPECT TO HUMAN EXPOSURE TO RADIO FREQUENCY ELECTROMAGNETIC FIELDS. 3 KHZ TO 300 GHZ

ANSI/IEEE C95.3-2002 RECOMMENDED PRACTICE FOR MEASUREMENTS AND COMPUTATIONS OF RADIO FREQUENCY ELECTROMAGNETIC FIELDS WITH RESPECT TO HUMAN EXPOSURE TO SUCH FIELDS. 100 KHZ-300 GHZ

ANSI C63.19-2007 Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids -Test Plan for Hearing Aid Compatibility-2006 Revision 1.0-Test Plan for Hearing Aid Compatibility

RSS-102-2005 Spectrum Management and Telecommunications Radio Standards Specification Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands)

5. Operational Conditions During Test

5.1 General description of test procedures

A communication link is set up with a system simulator by air link, and a call is established. The absolute radio frequency channel number (ARFCN) is allocated to 128, 190 and 251 respectively in the case of GSM 850, to 512, 661 and 810 respectively in the case of GSM 1900. The EUT is commanded to operate at maximum transmitting power.

Connection to the EUT is established via air interface with CMU200, and the EUT is set to maximum output power by CMU200. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

5.2 GSM Test Configuration


SAR test for GSM 850 and GSM 1900, a communication link is set up with a system simulator by air link. Using CMU200 the power level is set to "5" in SAR of GSM850, set to "0" in SAR of GSM1900. The tests in the band of GSM850 and GSM 1900 are performed in the mode of speech transfer function and GPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink. DTM is not supported, so the testing of GPRS with head is not required.

5.3 Bluetooth Test Configuration

The Bluetooth transmitter of the device under test can be excluded from stand-alone and simultaneous SAR evaluation, per the requirements from FCC KDB 648474, as follows:

1. The separation between the Bluetooth antenna and the main antenna is $5\text{cm} \geq 5\text{cm}$.
2. The maximum conducted output power of Bluetooth is $6.72\text{mW} < 2 \cdot P(\text{Ref}) = 24\text{mW}$.

According to FCC KDB648474, stand alone SAR and Simultaneous Transmission SAR are not required.

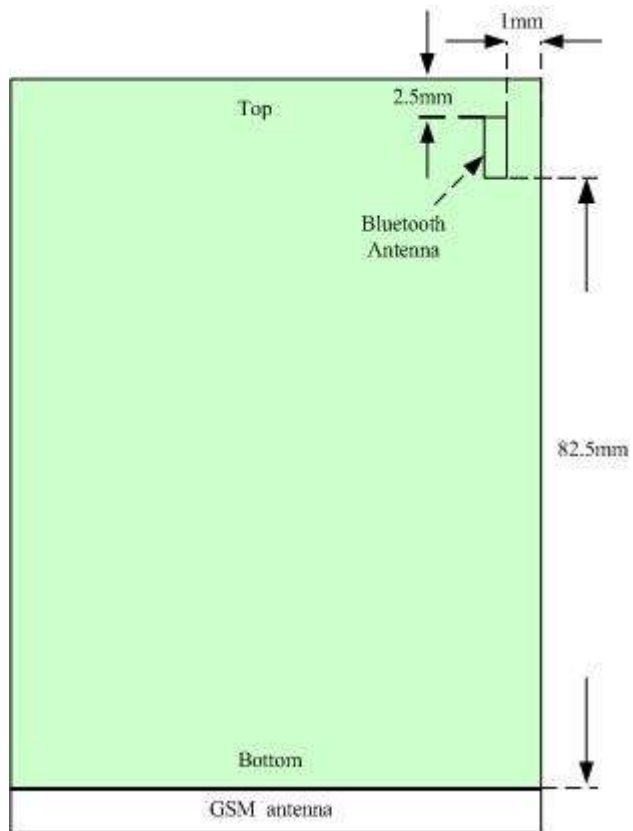

Picture: position of antenna

6. SAR Measurements system configuration

6.1 SAR Measurement set-up

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic _field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

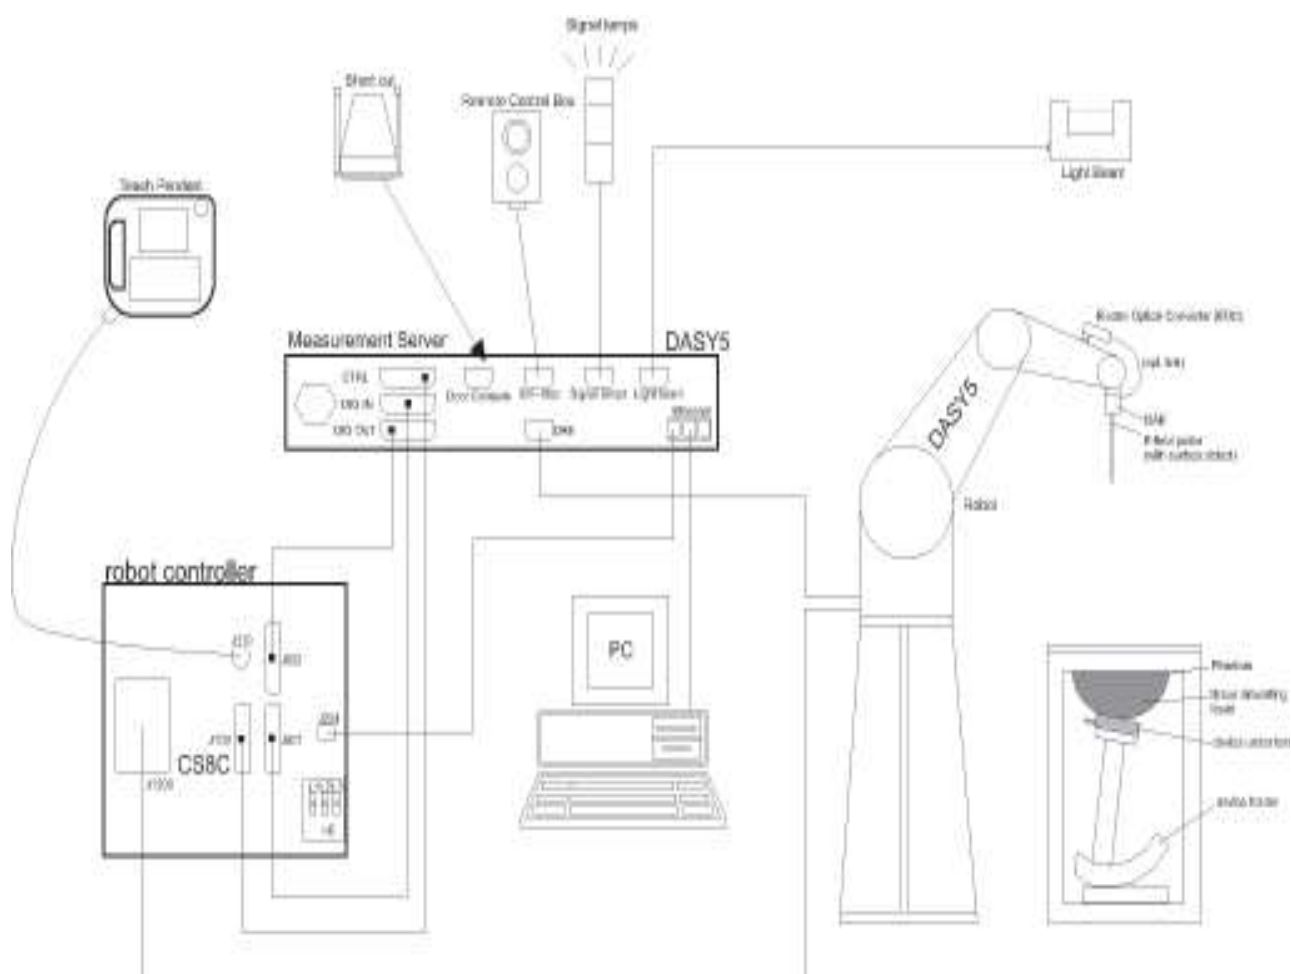


Figure 1. SAR Lab Test Measurement Set-up

6.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

6.2.1. Ex3DV3 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 850 and HSL 1750 Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material

	(rotation normal to probe axis)
Dynamic Range	10 µW/g to > 100 mW/g Linearity: ± 0.2dB (noise: typically < 1 µW/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



Figure 2.ES3DV3 E-field Probe



Figure 3. ES3DV3 E-field probe

6.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than ±10%. The spherical isotropy was evaluated and found to be better than ± 0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

Or

$$SAR = \frac{|E|^2 \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

6.3. Other Test Equipment

6.3.1. Device Holder for Transmitters

The DASY5 device holder is designed to cope with the die rent positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the inference of the clamp on the test results could thus be lowered.



Figure 4. Device Holder

6.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on

the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



Figure 5. Generic Twin Phantom

6.4. Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. $\pm 5\%$.
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

- Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- Zoom Scan

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space.

They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

6.5. Data Storage and Evaluation

6.5.1. Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DA4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

6.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvFi
	- Diode compression point	Dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	
	- Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With V_i = compensated signal of channel i (i = x, y, z)

$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)

[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

= equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

6.6. System check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulates were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulates, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the 9.1 and 9.2.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the DASY 5 system.

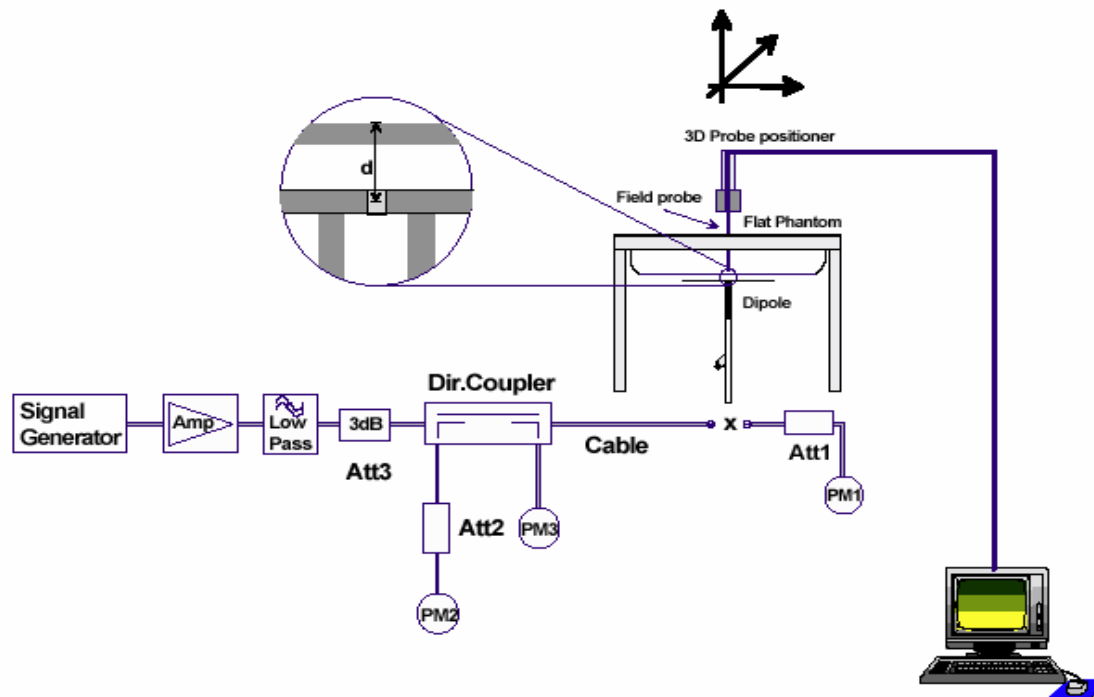


Figure 6. System Check Set-up

6.7. Equivalent Tissues

The liquid is consisted of water, salt, Glycol, Sugar, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 1 and Table 2 show the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the OET 65.

MIXTURE%	FREQUENCY(head) 835MHz
Water	41.45
Sugar	56
Salt	1.45
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=41.5$ $\sigma=0.9$
MIXTURE%	FREQUENCY(head)1900MHz
Water	55.242
Glycol monobutyl	44.452
Salt	0.306
Dielectric Parameters Target Value	f=1950MHz $\epsilon=40.0$ $\sigma=1.40$

MIXTURE%	FREQUENCY(body) 835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$
MIXTURE%	FREQUENCY(body)1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1950MHz $\epsilon=53.3$ $\sigma=1.52$

7. Characteristics of the Test

7.1. Applicable Limit Regulations

ANSI/IEEE C95.1-2005 SAFETY LEVELS WITH RESPECT TO HUMAN EXPOSURE TO RADIO FREQUENCY ELECTROMAGNETIC FIELDS. 3 KHZ TO 300 GHZ

7.2. Applicable Measurement Standards

IEEE Std 1528™-2003: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques

OET Bulletin 65-(Edition 97-01) Supplement C(edition01-01) Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields---Additional Supplement C (Edition 01-01)Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions

ANSI/IEEE C95.3-2002 RECOMMENDED PRACTICE FOR MEASUREMENTS AND COMPUTATIONS OF RADIO FREQUENCY ELECTROMAGNETIC FIELDS WITH RESPECT TO HUMAN EXPOSURE TO SUCH FIELDS. 100 KHZ-300 GHZ

8. Conducted Output Power Measurement

8.1. Summary

The DUT is tested using an CMU200 communications tester as controller unit to set test channels

and maximum output power to the DUT, as well as for measuring the conducted power. Conducted output power was measured using an integrated RF connector and attached RF cable.

This result contains conducted output power for the EUT.

8.2. Conducted Power Results

GSM850	Conducted power		
	Channel 128	Channel 190	Channel 251
Results (dBm)	32.0	32.1	32.1
GSM1900	Conducted power		
	Channel 512	Channel 661	Channel 810
Results (dBm)	29.1	28.8	28.8

GSM850+GPRS	CONDUCTED POWER						
	Ch 128	Ch 190	Ch251	(dB)	Ch 128	Ch190	Ch251
1 TX-slot result	31.40	31.50	31.50	-9.03	22.37	22.47	22.47
2 TX-slot result	30.45	30.54	30.53	-6.02	24.43	24.52	24.51
3 TX-slot result	29.42	29.50	29.47	-4.26	25.16	25.24	25.21
4 TX-slot result	28.21	28.32	28.30	-3.01	25.20	25.31	25.29
GSM1900+GPRS	CONDUCTED POWER						
	Ch 512	Ch 661	Ch 810	(dB)	Ch 512	Ch 661	Ch 810
1 TX-slot result	29.00	28.70	28.70	-9.03	19.97	19.67	19.67
2 TX-slot result	28.05	27.74	27.73	-6.02	22.03	21.72	21.71
3 TX-slot result	27.02	26.70	26.67	-4.26	22.76	22.44	22.41
4 TX-slot result	25.81	25.52	25.50	-3.01	22.80	22.51	22.49

9 Test Results

9.1. Dielectric Performance

Dielectric Performance of Head and body Tissue Simulating Liquid

Frequency	Description	Dielectric Parameters ϵ_r	σ (s/m)	temp °C
835MHz (head)	Target value 5% window	41.5 39.42-43.57	0.9 0.85— 0.945	/
	Measurement value 2011-09-02	41.7	0.88	21.6
1900MHz (head)	Target value 5% window	40.0 38-42	1.40 1.33 — 1.47	/
	Measurement value 2011-09-05	39.1	1.36	21.6
835MHz (body)	Target value 5% window	55.2 52.44-57.96	0.97 0.92-1.02	/
	Measurement value 2011-09-05	54.1	0.967	21.6
1900MHz (body)	Target value 5% window	53.3 50.63-55.96	1.52 1.44 — 1.60	/
	Measurement value 2011-09-05	52.3	1.5	21.6

9.2. System Check Results

System Check for Head and body tissue simulation liquid

Frequency	Description	SAR(W/kg)		Dielectric Parameters ϵ_r	σ (s/m)	Temp °C
		10g	1g			
835 MHz(head)	Recommended result $\pm 10\%$ window	1.53 1.38-1.69	2.37 2.13-2.61	41.5	0.9	/
	Measurement value 2011-09-02	1.68	2.6	41.7	0.88	21.4
1900MHz(head)	Recommended result $\pm 10\%$ window	5.27 4.73-5.79	10 8.93-10.91	40.0	1.40	/
	Measurement value 2011-09-05	5.16	10.1	39.12	1.44	21.4

835MHz(body)	Recommended result ±10% window	1.59 1.43-1.75	2.45 2.20-2.70	55.2	0.97	/
	Measurement value 2011-09-05	1.7	2.58	54.1	0.967	21.4
1900MH z(body)	Recommended result ±10% window	5.14 4.63-5.65	9.75 8.78-10.74	53.3	1.52	/
	Measurement value 2011-09-05	5.18	9.95	52.3	1.5	21.4

Note: 1. the graph results see ANNEX D.

2 .Recommended Values used derive from the calibration certificate and 250 mW is used as feeding power to the calibrated dipole.

9.3. Test Results

9.3.1. Summary of Measurement Results (GSM850)

SAR Values (GSM850)

Test Case		Measurement Result(W/kg)		Power Drift(dB)	Note
Different Test Position	Channel	10 g	1 g		
		Average	Average		
Test position of Head					
Right head, Touch cheek	middle	0.768	1.13	-0.101	
Right head, Tilt 15 Degree	middle	0.388	0.519	0.082	
Right head, Touch cheek	low	0.763	1.12	-0.011	
	high	0.802	1.18	0.052	Max
Left head, Touch cheek	middle	0.714	1.01	0.029	
Left head, Tilt 15 Degree	middle	0.333	0.443	0.059	
Left head, Touch cheek	low	0.677	0.950	0.035	
	high	0.746	1.06	0.165	
Test position of Body (Distance 15mm)					
Towards phantom	middle	0.359	0.489	0.081	
Towards Ground	middle	0.358	0.497	0.033	

Towards Ground	low	0.328	0.454	0.012	
	high	0.380	0.529	0.064	
Test position of Body with earphone(Distance 15mm)					
Towards Ground	high	0.241	0.336	0.052	
Test position of Body with GPRS(4up)(Distance 15mm)					
Towards Ground	high	0.676	0.960	-0.093	Max

Note: 1.The value with blue color is the maximum SAR Value of test case of head and body in each test band.

2. Upper and lower frequencies were measured at the worst position.

3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit ($< 0.8\text{W/kg}$), testing at the high and low channels is optional.

9.3.2. Summary of Measurement Results (GSM1900)

SAR Values (GSM1900)

Test Case		Measurement Result(W/kg)		Power Drift(dB)	Note
Different Test Position	Channel	10 g	1 g		
		Average	Average		
Test position of Head					
Right head, Touch cheek	middle	0.416	0.755	-0.189	
Right head, Tilt 15 Degree	middle	0.158	0.257	0.163	
Left head, Touch cheek	middle	0.612	1.23	-0.191	
Left head, Tilt 15 Degree	middle	0.163	0.259	0.054	
Left head, Touch cheek	low	0.571	1.15	-0.00423	
	High	0.669	1.36	-0.069	max
Test position of Body (Distance 15mm)					
Towards phantom	middle	0.173	0.306	-0.00217	
Towards Ground	middle	0.139	0.247	-0.065	

Towards phantom	low	0.156	0.274	0.137	
	high	0.188	0.335	0.157	
Test position of Body with earphone(Distance 15mm)					
Towards phantom	high	0.187	0.336	-0.00945	max
Test position of Body with GPRS(4up)(Distance 15mm)					
Towards phantom	high	0.172	0.305	0.032	

Note: 1.The value with blue color is the maximum SAR Value of test case of head and body in each test band.

- Upper and lower frequencies were measured at the worst position.
- The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit ($< 0.8\text{W/kg}$), testing at the high and low channels is optional.

9.4. Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR_{1g} of **GSM 850** is **1.18** W/kg (head) and **0.960** W/kg (body), and maximum localized SAR_{1g} of **GSM 1900** is **1.36** W/kg (head) and **0.336** W/kg (body) , they are below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

General Judgment: PASS

ANNEX A: EUT Photograph



EUT



Battery




Travel Adaptor



Earphone




POSITION OF LEFT HEAD TOUCH

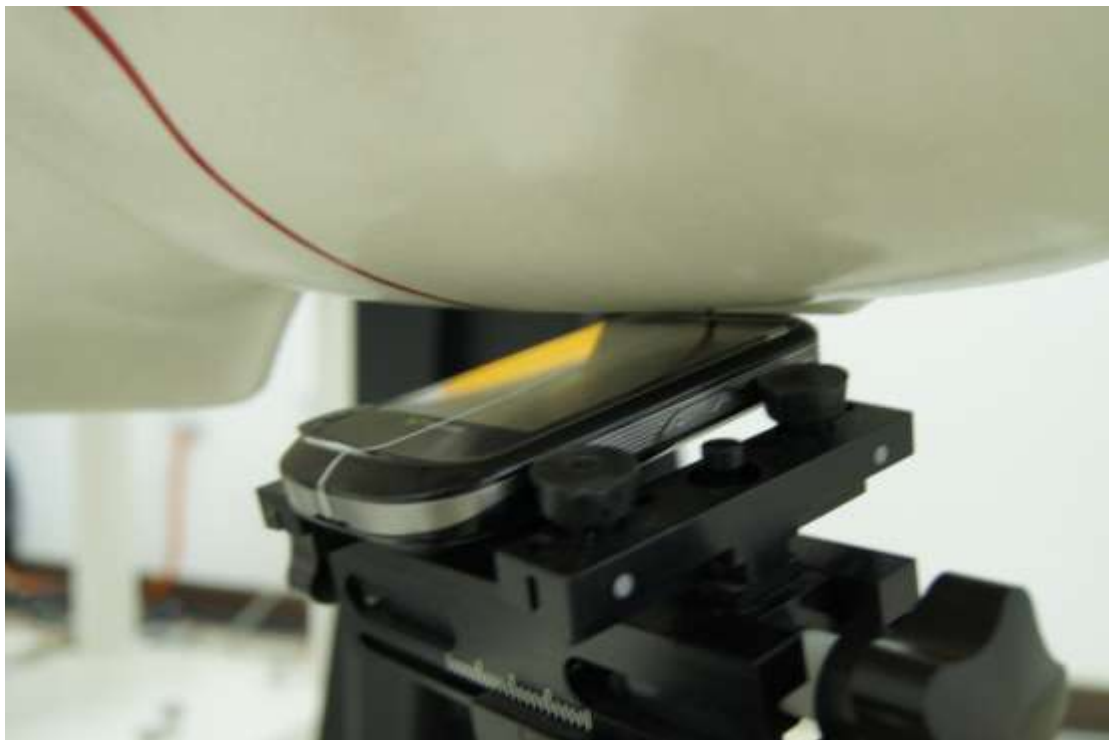

POSITION OF LEFT HEAD TILT



POSITION OF RIGHT HEAD TOUCH

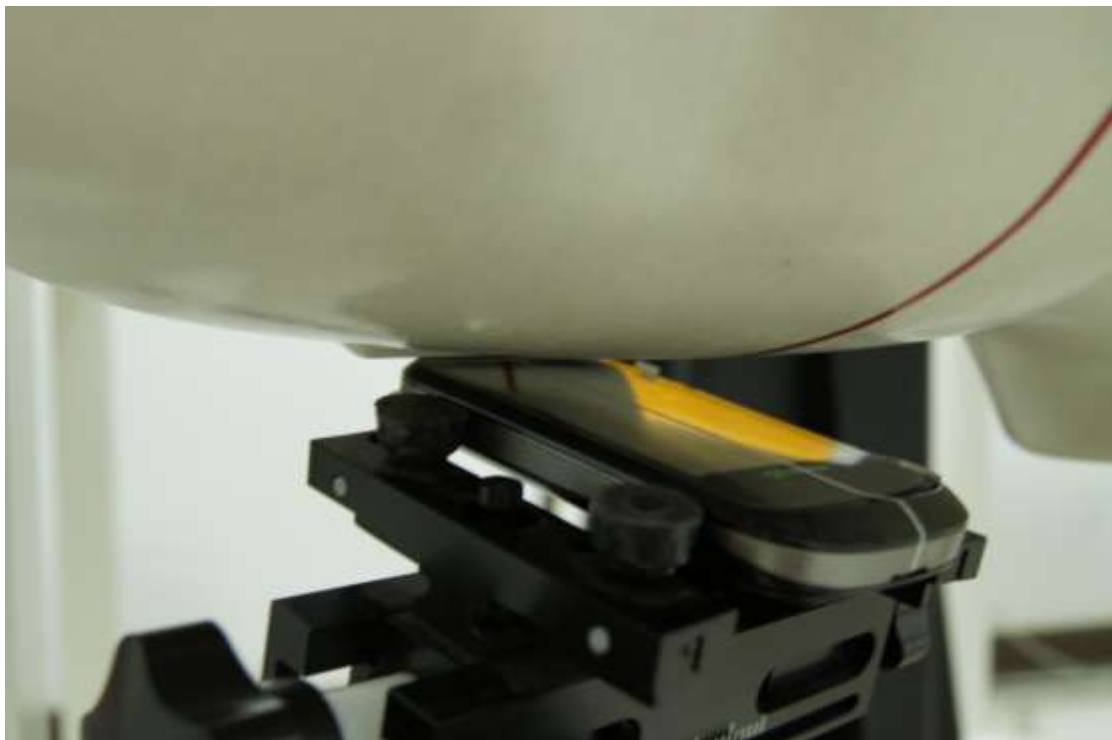

POSITION OF RIGHTHEAD TILT



POSITION OF BODY TOWARDS PHANTOM WITH 15mm DISTANCE



POSITION OF BODY TOWARDS GROUND WITH 15mm DISTANCE



POSITION OF BODY with earphone With 15mm DISTANCE

ANNEX B: Measurement Uncertainty

No.	source	type	Uncertainty Value (%)	Probability Distribution	k	c_i	Standard uncertainty u_i (%)	Degree of freedom V_{eff} or v_i
1	-System repetivity	A	0.3	N	1	1	0.3	9
Measurement system								
2	—probe calibration	B	7	N	2	1	3.5	∞
3	—axial isotropy of the probe	B	4.7	R	$\sqrt{3}$	0.5	4.3	∞
4	— Hemispherical isotropy of the probe	B	9.4	R	$\sqrt{3}$			
5	—probe linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞
6	— System detection limits	B	1.0	R	$\sqrt{3}$	1	0.6	∞
7	—boundary effect	B	11.0	R	$\sqrt{3}$	1	6.4	∞
8	—response time	B	0	R	$\sqrt{3}$	1	0	∞
9	—noise	B	0	N	$\sqrt{3}$	1	0	∞
10	—integration time	B	5.0	R	$\sqrt{3}$	1	2.9	∞
11	—readout Electronics	B	0.4	R	$\sqrt{3}$	1	0.2	∞
12	—-phantom	B	2.9	R	$\sqrt{3}$	1	1.7	∞
13	—Probe Positioning with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	∞
14	—Device Holder Uncertainty	A	4.9	R	1	1	4.9	5
物理参数								
15	-liquid density	B	0	R	$\sqrt{3}$	1	0	∞
16	-liquid conductivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.5	2.9	∞
17	-liquid conductivity (measurement uncertainty)	A	0.23	N	1	1	0.23	9

18	-liquid permittivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.5	2.9	∞
19	-liquid permittivity (measurement uncertainty)	A	0.46	N	1	1	0.46	9
20	— Probe Positioner Mechanical Tolerance	B	5.0	R	$\sqrt{3}$	1	2.9	∞
21	— Environment	B	3.0	R	$\sqrt{3}$	1	1.7	∞
22	— Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	∞
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$					11.2	83.4
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		N	K=2	22.4		

ANNEX C: Main Test Instruments

No.	Name	Type	Calibration Date	Valid Period
01	Network analyzer	Agilent E5071E	Dec 23 th , 2010	One year
02	Dielectric Probe Kit	Agilent 85070E	No Calibration Requested	
03	Power meter	Agilent E4418B	Sep 19 th , 2010	One year
04	Power sensor	Agilent E9200B	Aug 4 th , 2011	One year
05	Signal Generator	Agilent N5182A	Nov 30 th , 2010	One year
06	Amplifier	ZHL-42W	No Calibration Requested	
07	BTS	CMU200	Oct 1 st , 2010	One year
08	E-field Probe	ES3DV3	June 22 th , 2011	One year
09	DAE	DAE4	June 13 th , 2011	One year
10	Validation Kit 835MHz	D835V2	June14 th , 2011	One year
11	Validation Kit 1950MHz	D1950V3	June17 th , 2011	One year


ANNEX D: Test Layout




Picture 1: Specific Absorption Rate Test Layout



Picture 2: Liquid depth in the flat Phantom (900MHz) (17.5cm deep)

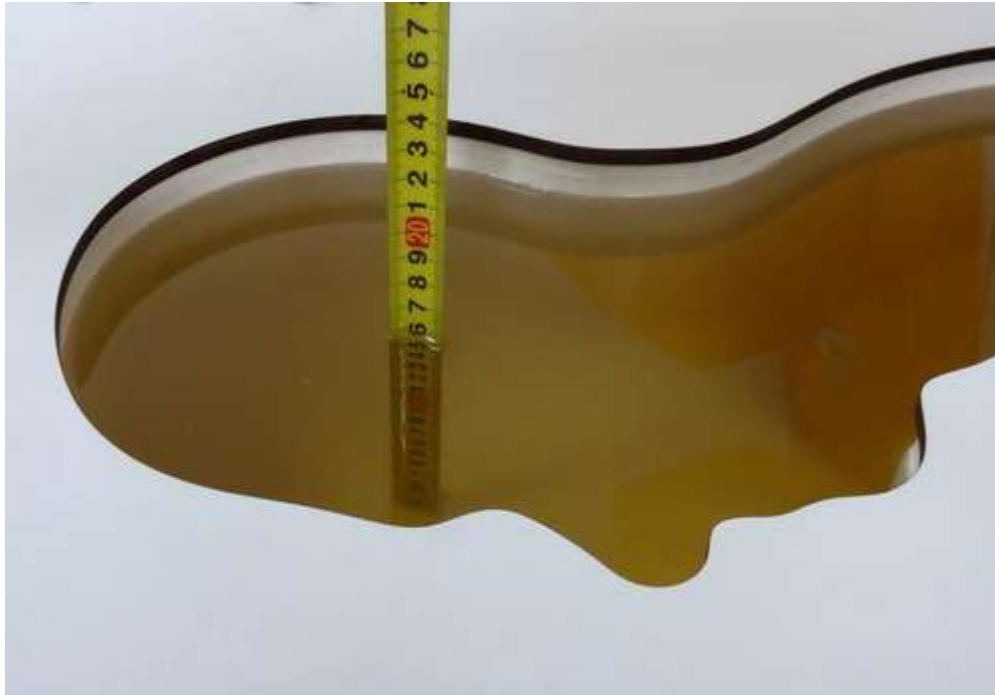

Picture 3: Liquid depth in the head Phantom (900MHz) (16cm deep)

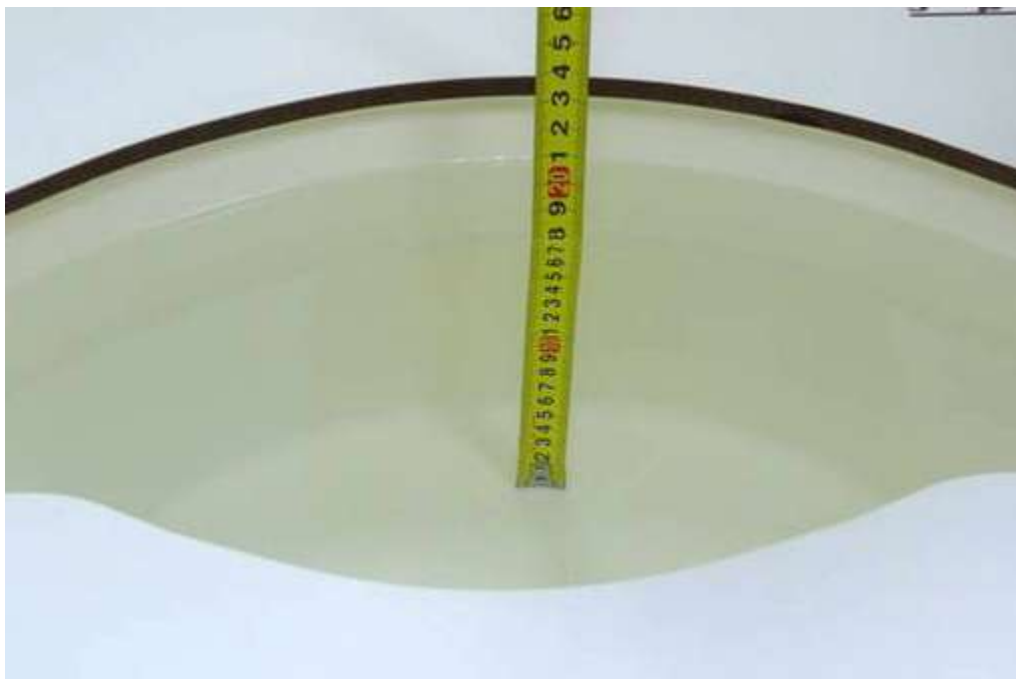

Picture 4: Liquid depth in the flat Phantom (1900 MHz) (16cm deep)



Picture 5: liquid depth in the head Phantom (1900 MHz) (15.2cm deep)

ANNEX E: System Check Results

system check 835Mhz head

Date/Time:9/2/2011 10:45:02 AM

Communication System: CW; Communication System Band: D835 (835.0 MHz);

Frequency: 835 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 835$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3241; ConvF(6.13, 6.13, 6.13); Calibrated: 6/13/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2Version 14.2.2 (1685) (Deployment Build)

Configuration/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)

Head/Area Scan (41x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 3.01 mW/g

Configuration/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)


Head/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.8 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 3.97 W/kg

SAR(1 g) = 2.6 mW/g; SAR(10 g) = 1.68 mW/g

Maximum value of SAR (measured) = 3.07 mW/g

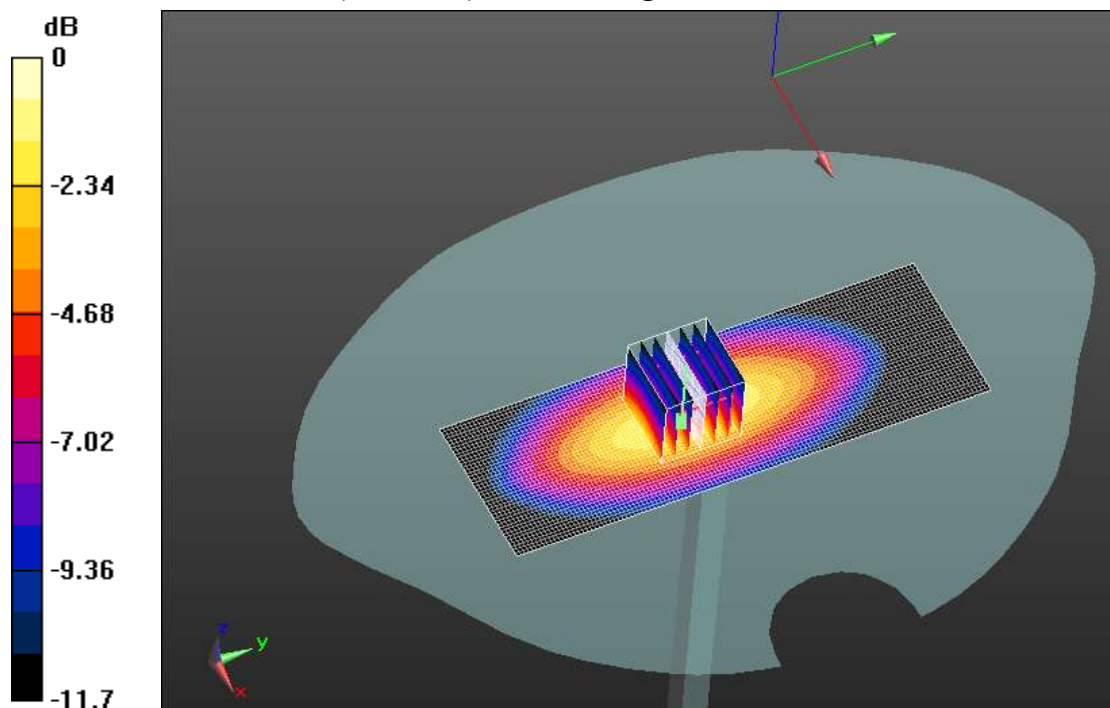

0 dB = 3.97mW/g

system check 835Mhz body Date/Time: 9/5/2011 9:03:04 AM

Communication System: CW; Communication System Band: D835 (835.0 MHz);
Frequency: 835 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 835$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3241; ConvF(6.11, 6.11, 6.11); Calibrated: 6/13/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASYS2, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

Configuration 2/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)

Body/Area Scan (41x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 3.02 mW/g

Configuration 2/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)


Body/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.4 V/m; Power Drift = 0.00538 dB

Peak SAR (extrapolated) = 3.86 W/kg

SAR(1 g) = 2.58 mW/g; SAR(10 g) = 1.7 mW/g

Maximum value of SAR (measured) = 3.04 mW/g

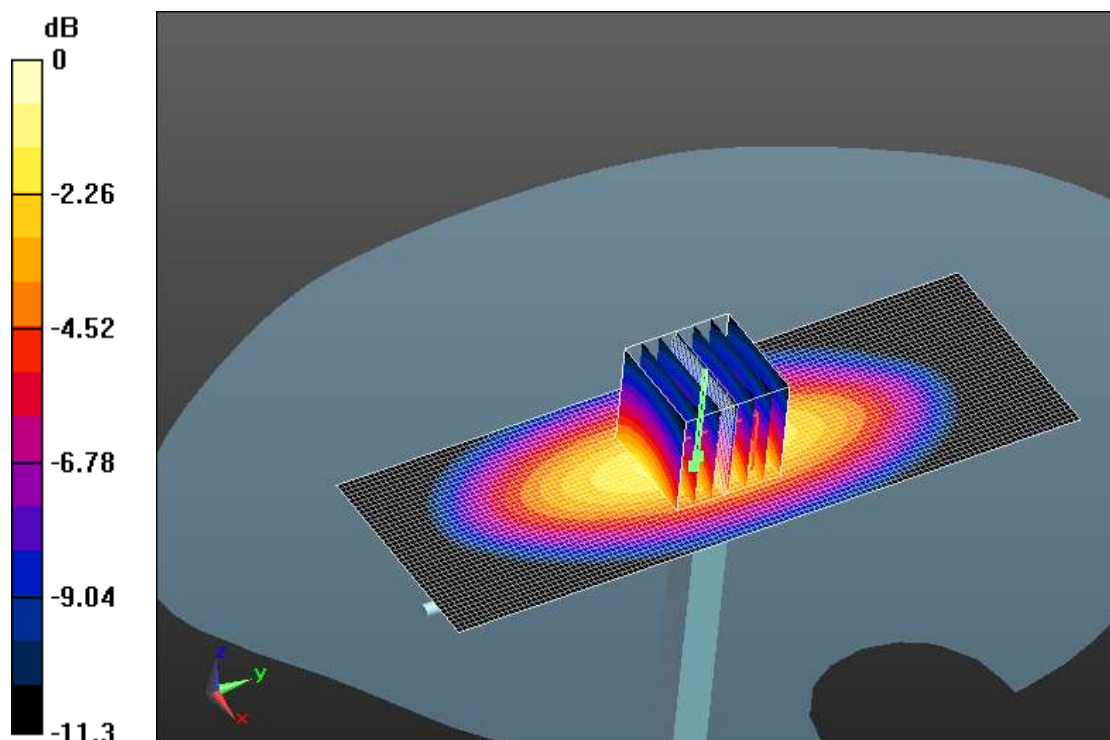

0 dB = 3.86mW/g

system check 1900MHz Head Date/Time: 9/5/2011 8:05:04 AM

Communication System: CW; Communication System Band: D1900 (1900.0 MHz);
Frequency: 1900 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3241; ConvF(4.96, 4.96, 4.96); Calibrated: 6/13/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM2; Type: SAM; Serial: TP-1575
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

1900/head d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 13.5 mW/g


1900/head d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 77.9 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 18.8 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.16 mW/g

Maximum value of SAR (measured) = 13 mW/g

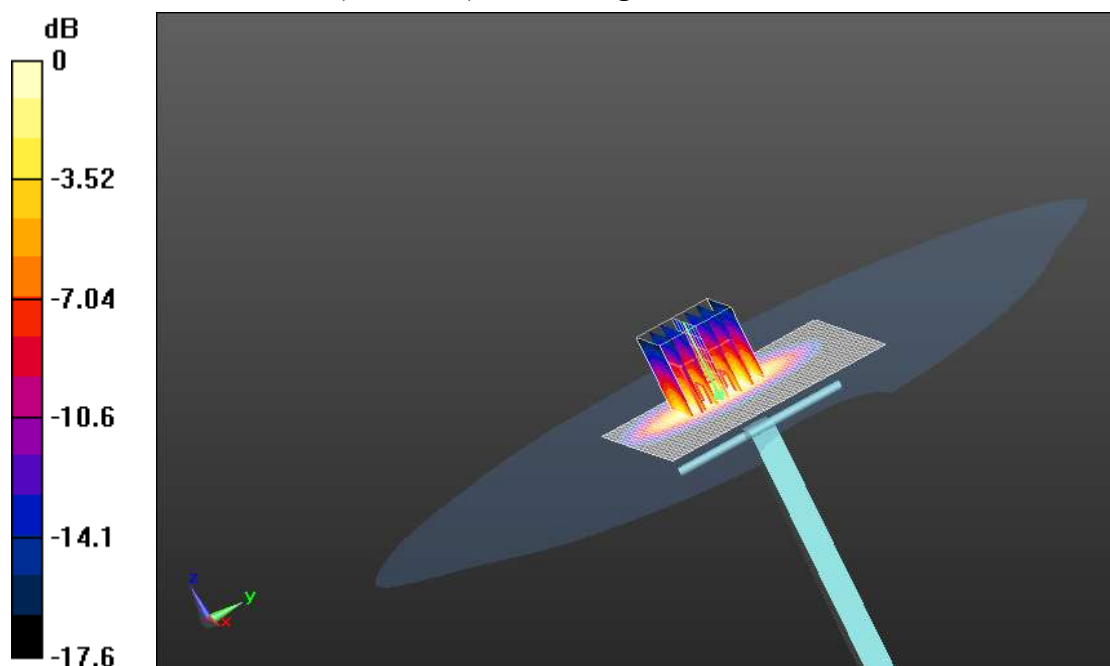

0 dB = 13mW/g

System Check 1900MHz Body Date/Time: 9/5/2011 4:31:23 PM

Communication System: CW; Communication System Band: D1900 (1900.0 MHz);
Frequency: 1900 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3241; ConvF(4.51, 4.51, 4.51); Calibrated: 6/13/2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM2; Type: SAM; Serial: TP-1575
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

1900body/ d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan

(61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.7 mW/g

1900body/ d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan


(7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 68.7 V/m; Power Drift = 0.080 dB

Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 9.95 mW/g; SAR(10 g) = 5.18 mW/g

Maximum value of SAR (measured) = 12.7 mW/g

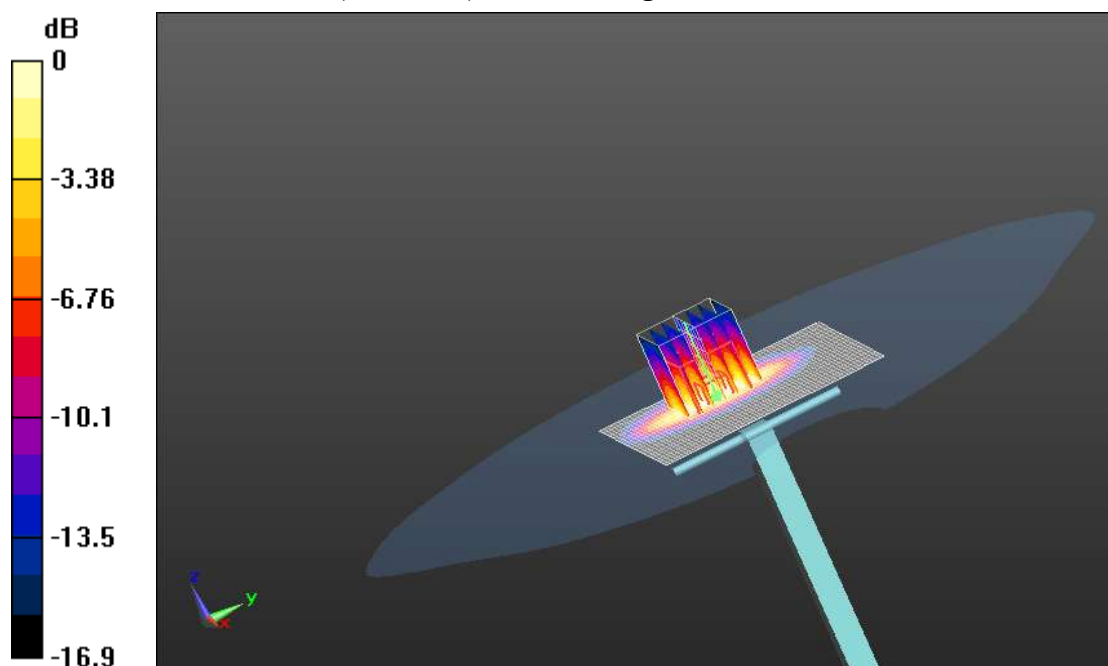

0 dB = 12.7mW/g

ANNEX F: Graph Result

GSM850 right touch mid Date/Time: 9/2/2011 4:22:06 PM

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 9.191 dB
Medium parameters used : $f = 836.6$ MHz; $\sigma = 0.883$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.78, 5.78, 5.78); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

right/850 -Touch Position - Mid/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 1.22 mW/g


right/850 -Touch Position - Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.3 V/m; Power Drift = -0.101 dB

Peak SAR (extrapolated) = 1.67 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.768 mW/g

Maximum value of SAR (measured) = 1.19 mW/g

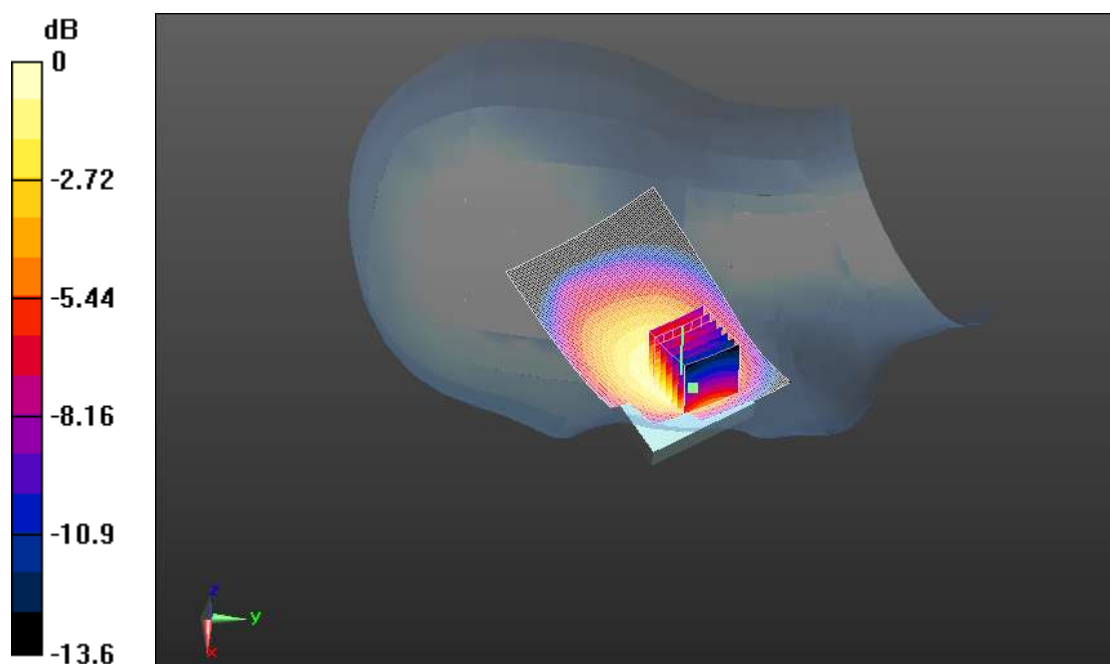

0 dB = 1.19mW/g

GSM850 right tilt mid

Date/Time: 9/2/2011 5:09:32 PM

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 9.191 dB
Medium parameters used : $f = 836.6$ MHz; $\sigma = 0.883$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.78, 5.78, 5.78); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

right/850 -Tilt Position - Mid/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 0.548 mW/g


right/850 -Tilt Position - Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.1 V/m; Power Drift = 0.082 dB

Peak SAR (extrapolated) = 0.656 W/kg

SAR(1 g) = 0.519 mW/g; SAR(10 g) = 0.388 mW/g

Maximum value of SAR (measured) = 0.548 mW/g

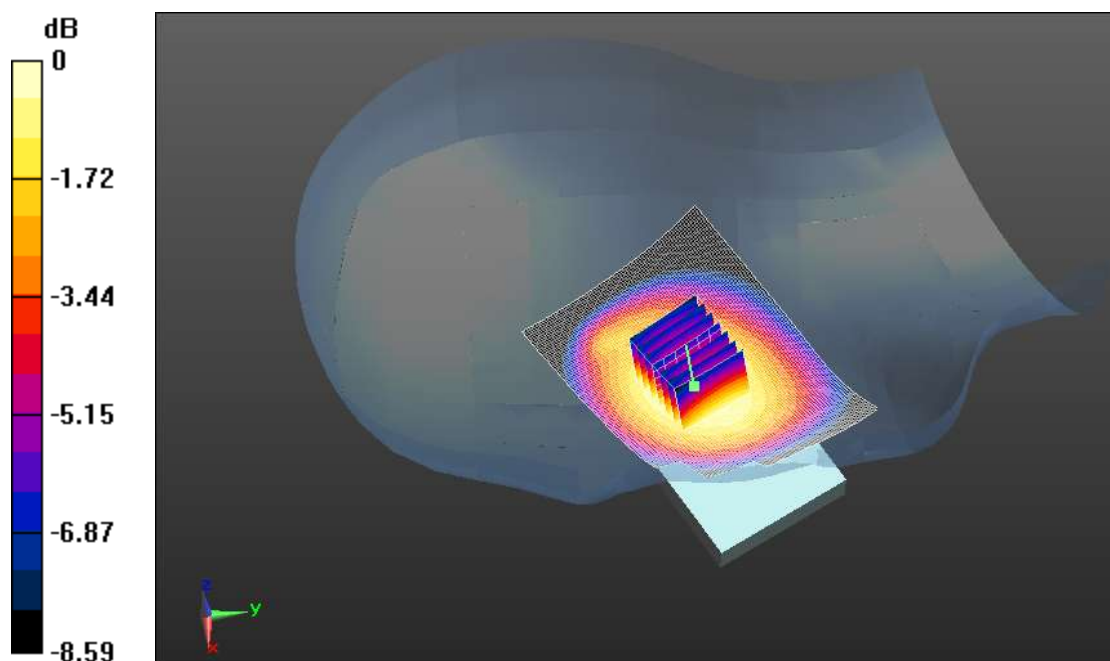

0 dB = 0.548mW/g

GSM850 right touch low

Date/Time: 9/2/2011 5:43:48 PM

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 824.2 MHz; Communication System PAR: 9.191 dB
Medium parameters used : $f = 824.2$ MHz; $\sigma = 0.871$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.78, 5.78, 5.78); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2Version 14.2.2 (1685) (Deployment Build)

right/850 -Touch Position - LOW/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 1.21 mW/g

right/850 -Touch Position - LOW/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.763 mW/g

Maximum value of SAR (measured) = 1.19 mW/g

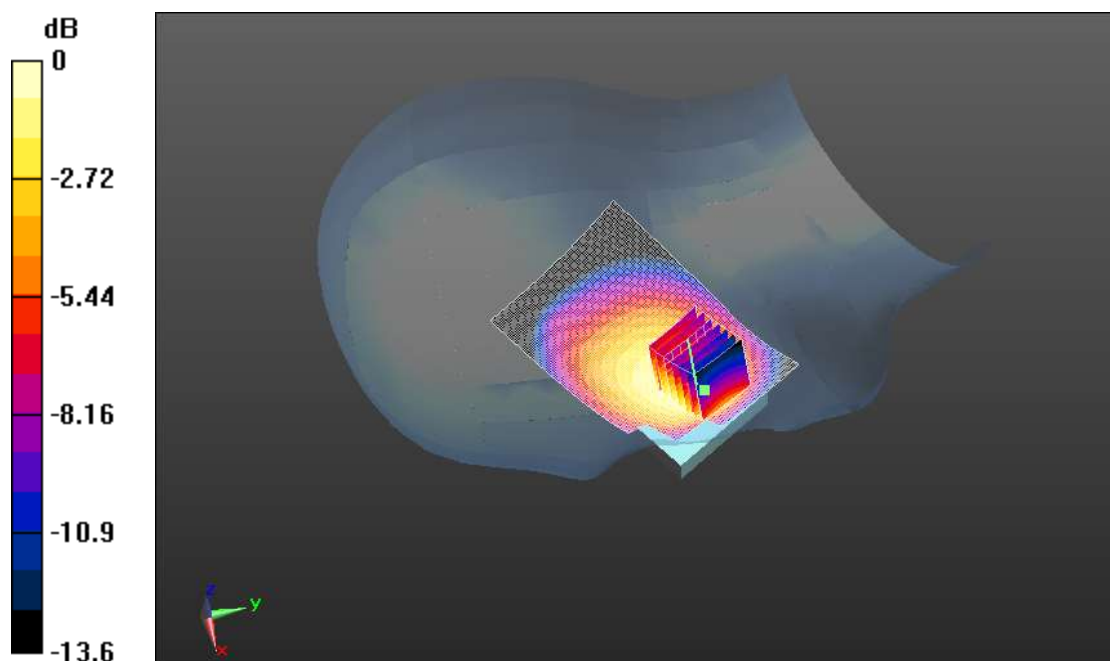

0 dB = 1.19mW/g

GSM850 right touch high

Date/Time: 9/2/2011 4:47:03 PM

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 848.6 MHz; Communication System PAR: 9.191 dB
Medium parameters used : $f = 848.6$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.78, 5.78, 5.78); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2Version 14.2.2 (1685) (Deployment Build)

right/850 -Touch Position -HIGH/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 1.26 mW/g

right/850 -Touch Position -HIGH/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = 0.052 dB


Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.802 mW/g

Maximum value of SAR (measured) = 1.26 mW/g

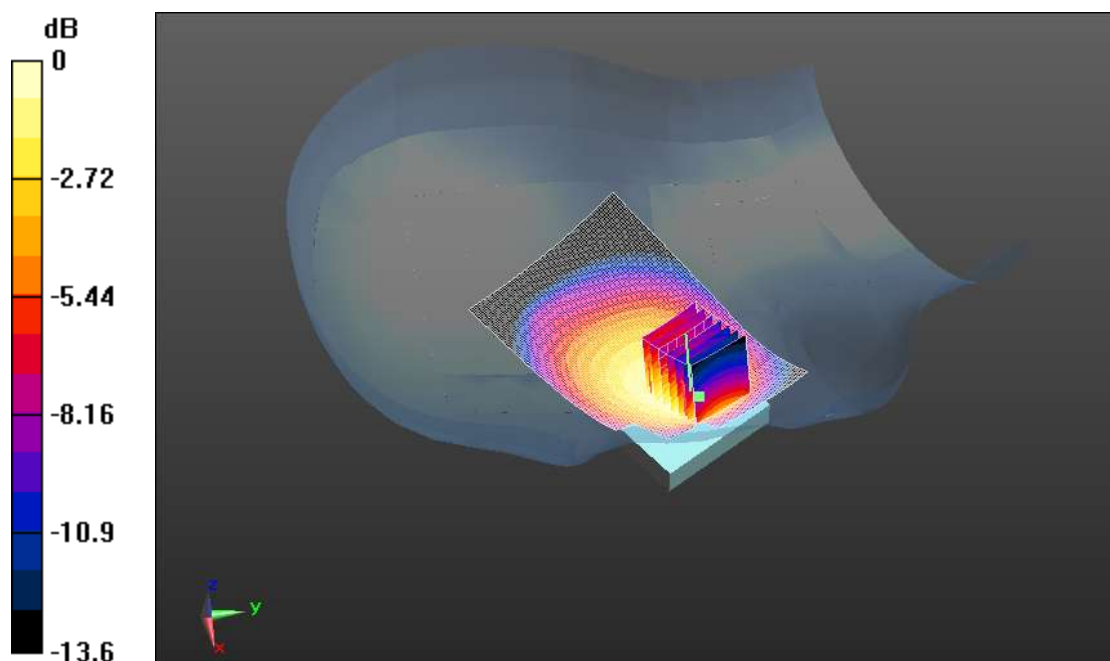

0 dB = 1.26mW/g

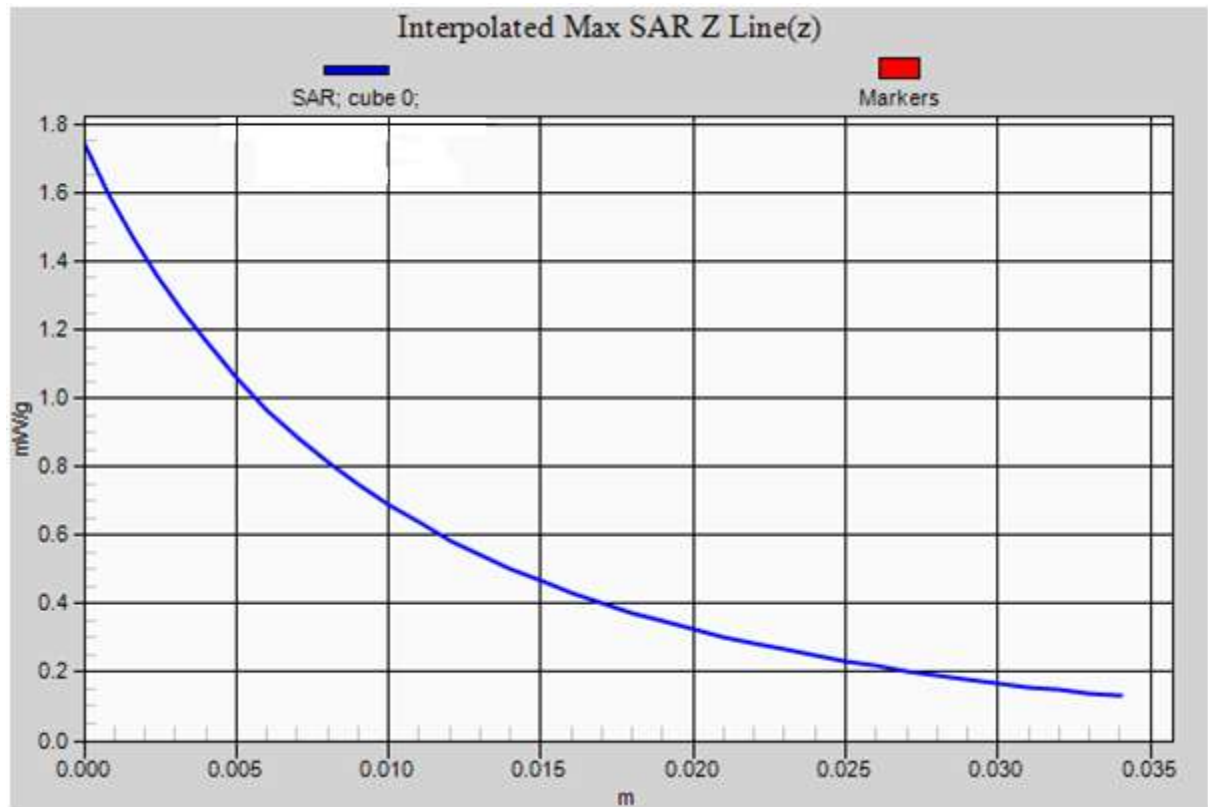

GSM850 left touch mid

Date/Time: 9/2/2011 2:25:19 PM

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 9.191 dB
Medium parameters used : $f = 836.6$ MHz; $\sigma = 0.883$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.78, 5.78, 5.78); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

left/850 Touch Position - Mid/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 1.08 mW/g


left/850 Touch Position - Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.8 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.714 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

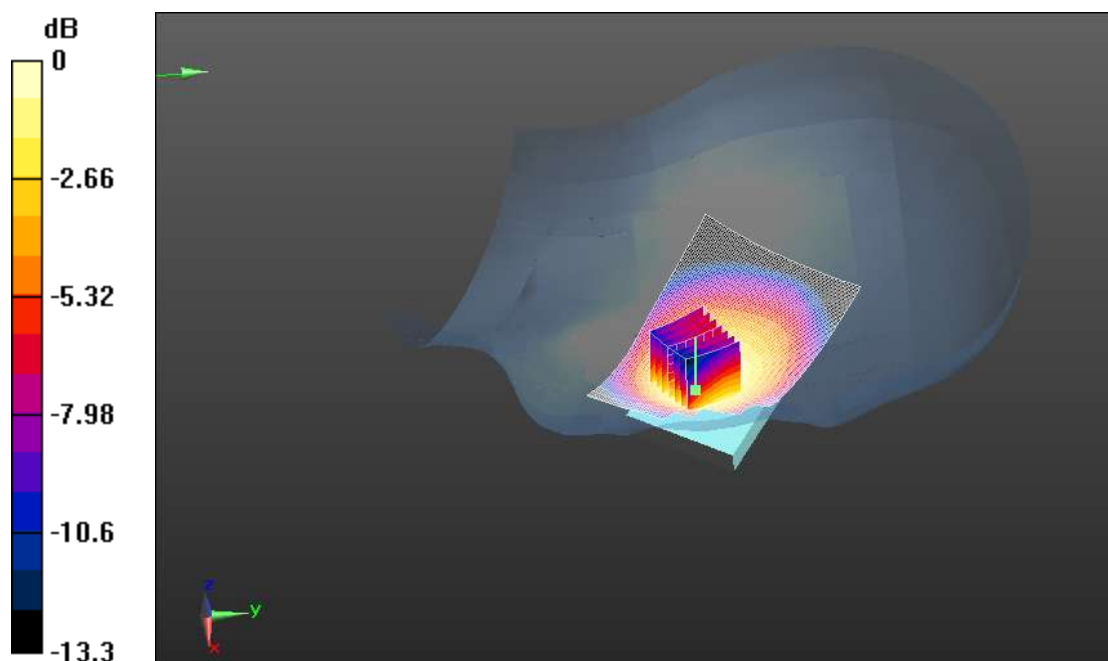

0 dB = 1.07mW/g

GSM850 left tilt mid

Date/Time: 9/2/2011 3:50:09 PM

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 9.191 dB
Medium parameters used : $f = 836.6$ MHz; $\sigma = 0.883$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.78, 5.78, 5.78); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

left/850 -Tilt Position - Mid/Area Scan (81x121x1): Measurement grid:
dx=10mm, dy=10mm

Maximum value of SAR = 0.466 mW/g


left/850 -Tilt Position - Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid:
dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.3 V/m; Power Drift = 0.059 dB

Peak SAR (extrapolated) = 0.564 W/kg

SAR(1 g) = 0.443 mW/g; SAR(10 g) = 0.333 mW/g

Maximum value of SAR (measured) = 0.465 mW/g

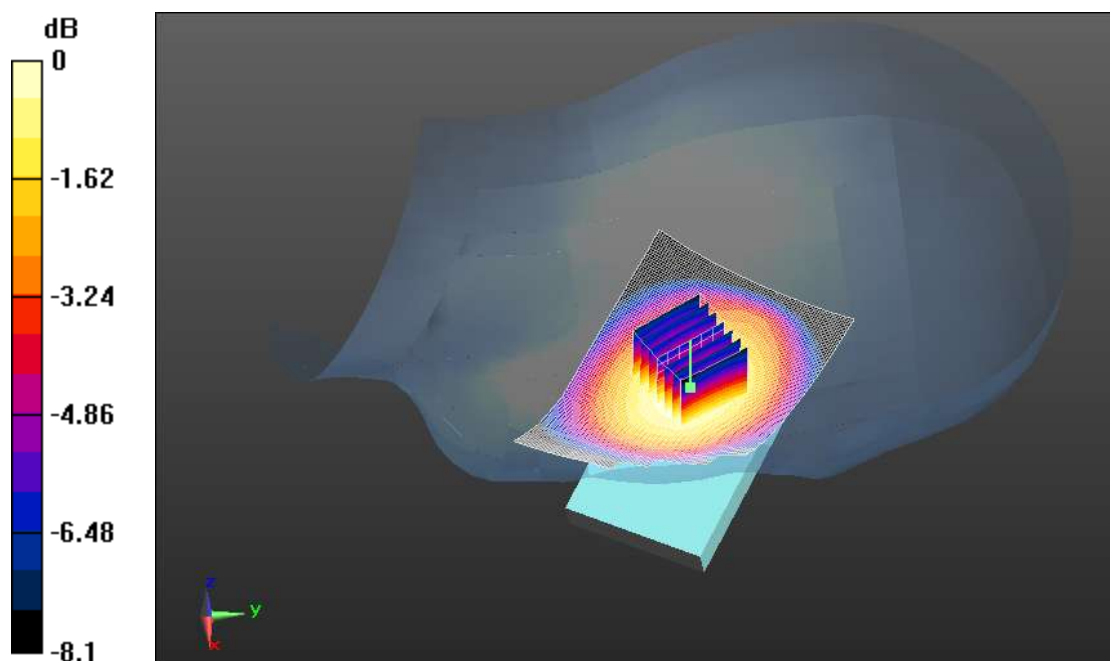

0 dB = 0.465mW/g

GSM850 left touch low

Date/Time: 9/2/2011 3:21:12 PM

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 824.2 MHz; Communication System PAR: 9.191 dB
Medium parameters used : $f = 824.2$ MHz; $\sigma = 0.871$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.78, 5.78, 5.78); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2Version 14.2.2 (1685) (Deployment Build)

left/850 Touch Position - low/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 1.02 mW/g


left/850 Touch Position - low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.950 mW/g; SAR(10 g) = 0.677 mW/g

Maximum value of SAR (measured) = 0.999 mW/g

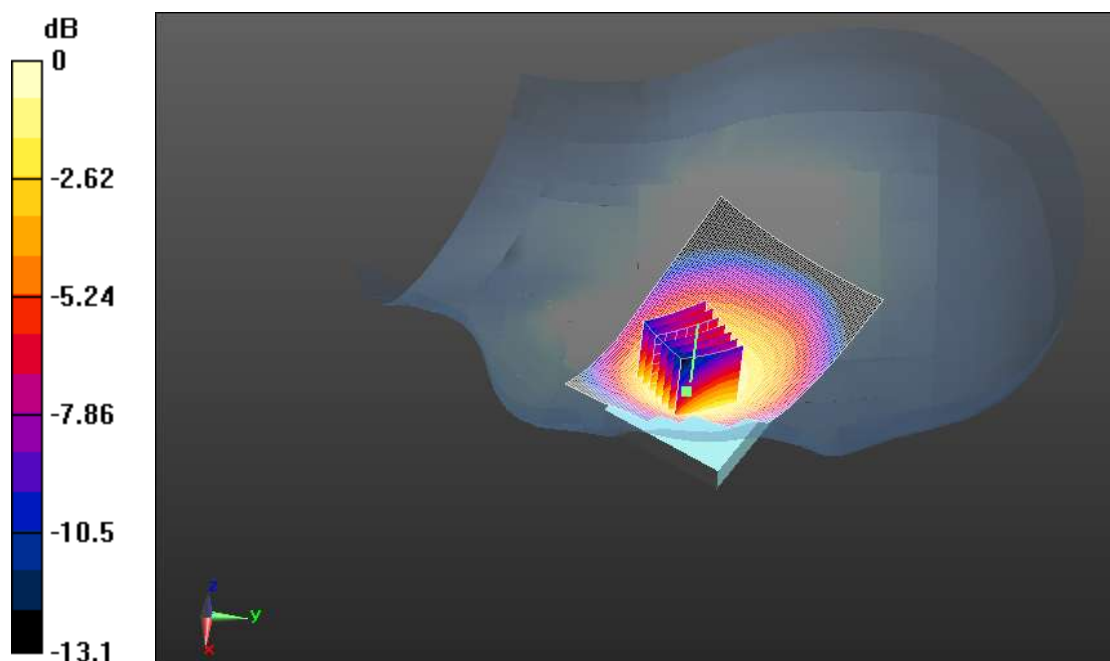

0 dB = 0.999mW/g

GSM850 left touch high

Date/Time: 9/2/2011 2:53:29 PM

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 848.6 MHz; Communication System PAR: 9.191 dB
Medium parameters used : $f = 848.6$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.78, 5.78, 5.78); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

left/850 Touch Position - high/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 1.14 mW/g


left/850 Touch Position - high/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.3 V/m; Power Drift = 0.165 dB

Peak SAR (extrapolated) = 1.4 W/kg

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.746 mW/g

Maximum value of SAR (measured) = 1.12 mW/g

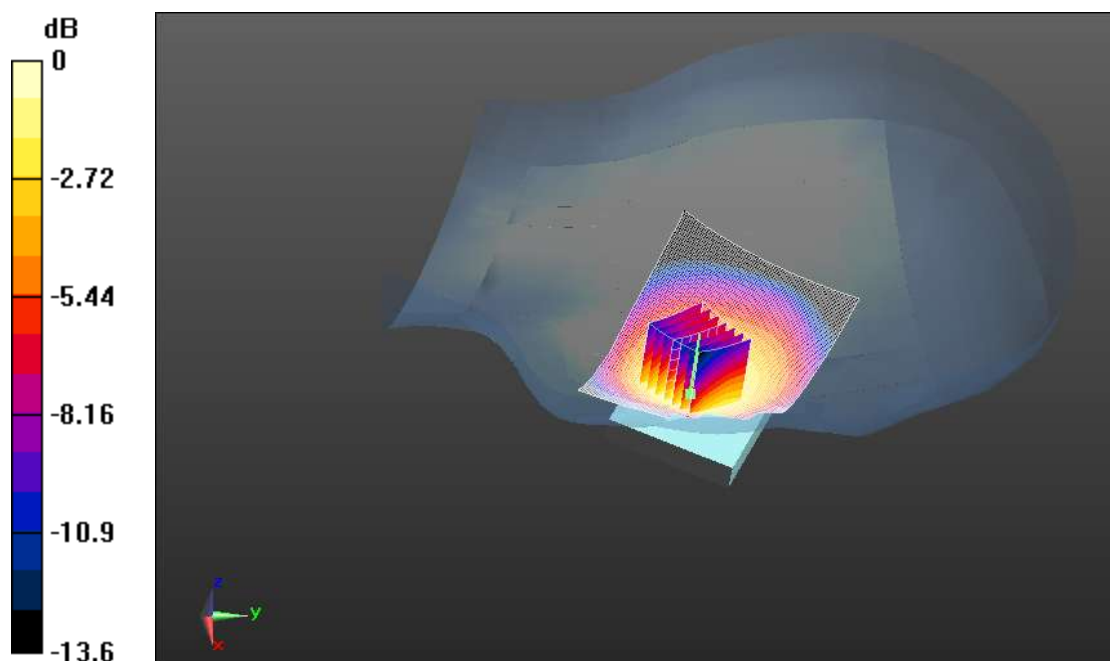

0 dB = 1.12mW/g

GSM850 Towards Phantom - Mid

Date/Time: 9/5/2011 2:15:41 PM

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 9.191 dB

Medium parameters used: $f = 837$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.68, 5.68, 5.68); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

FLAT/850 Towards Phantom - Mid/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 0.513 mW/g

FLAT/850 Towards Phantom - Mid/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.2 V/m; Power Drift = 0.081 dB

Peak SAR (extrapolated) = 0.621 W/kg

SAR(1 g) = 0.489 mW/g; SAR(10 g) = 0.359 mW/g

Maximum value of SAR (measured) = 0.516 mW/g

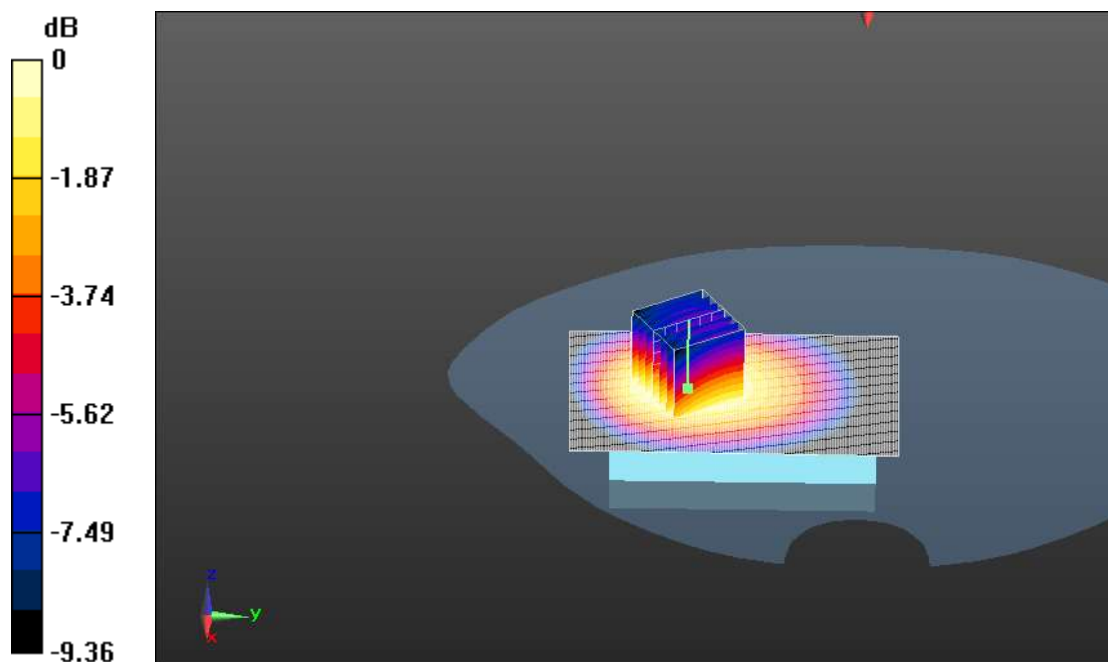

0 dB = 0.516mW/g

GSM850 Towards ground - Mid

Date/Time: 9/5/2011 2:49:45 PM

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Communication System PAR: 9.191 dB

Medium parameters used: $f = 837$ MHz; $\sigma = 0.951$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.68, 5.68, 5.68); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

FLAT/850 Towards ground - Mid/Area Scan (81x121x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR = 0.525 mW/g

FLAT/850 Towards ground - Mid/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.3 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.662 W/kg

SAR(1 g) = 0.497 mW/g; SAR(10 g) = 0.358 mW/g

Maximum value of SAR (measured) = 0.528 mW/g

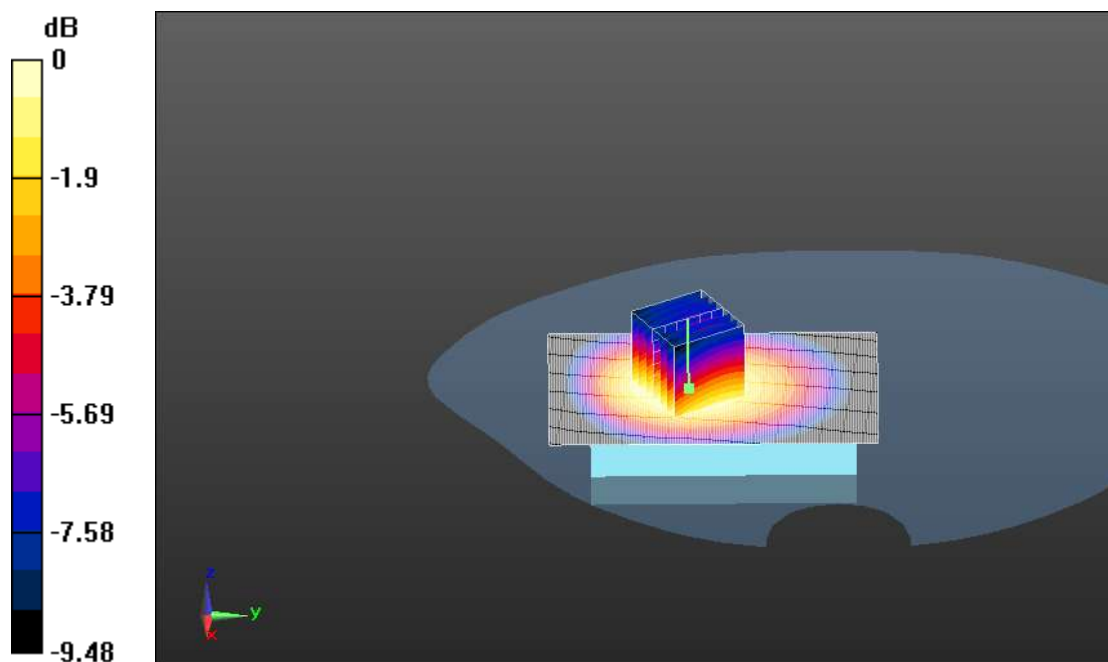

0 dB = 0.528mW/g

GSM850 Towards ground - low

Date/Time: 9/5/2011 3:19:49 PM

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 824.2 MHz; Communication System PAR: 9.191 dB
Medium parameters used : $f = 824.2$ MHz; $\sigma = 0.933$ mho/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.68, 5.68, 5.68); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

FLAT/850 Towards ground - low/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 0.478 mW/g

FLAT/850 Towards ground - low/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.8 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.600 W/kg

SAR(1 g) = 0.454 mW/g; SAR(10 g) = 0.328 mW/g

Maximum value of SAR (measured) = 0.483 mW/g

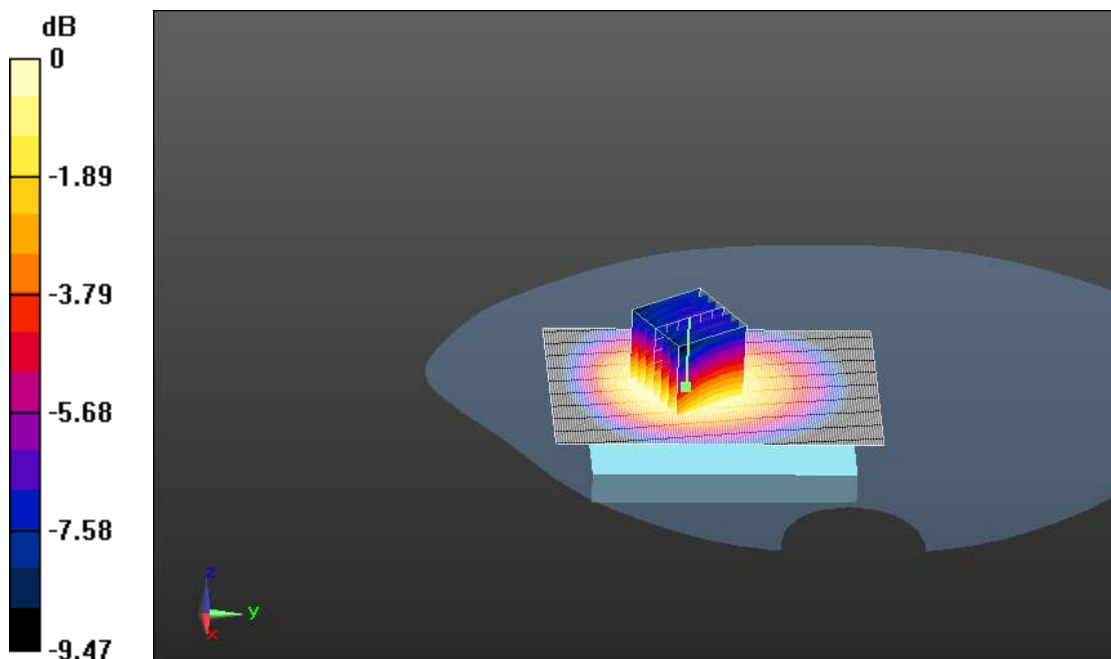

0 dB = 0.483mW/g

GSM850 Towards ground - high

Date/Time: 9/5/2011 3:49:17 PM

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 848.6 MHz; Communication System PAR: 9.191 dB

Medium parameters used: $f = 849$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.68, 5.68, 5.68); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

FLAT/850 Towards ground - high/Area Scan (81x121x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR = 0.560 mW/g

FLAT/850 Towards ground - high/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.7 V/m; Power Drift = 0.064 dB

Peak SAR (extrapolated) = 0.703 W/kg

SAR(1 g) = 0.529 mW/g; SAR(10 g) = 0.380 mW/g

Maximum value of SAR (measured) = 0.563 mW/g

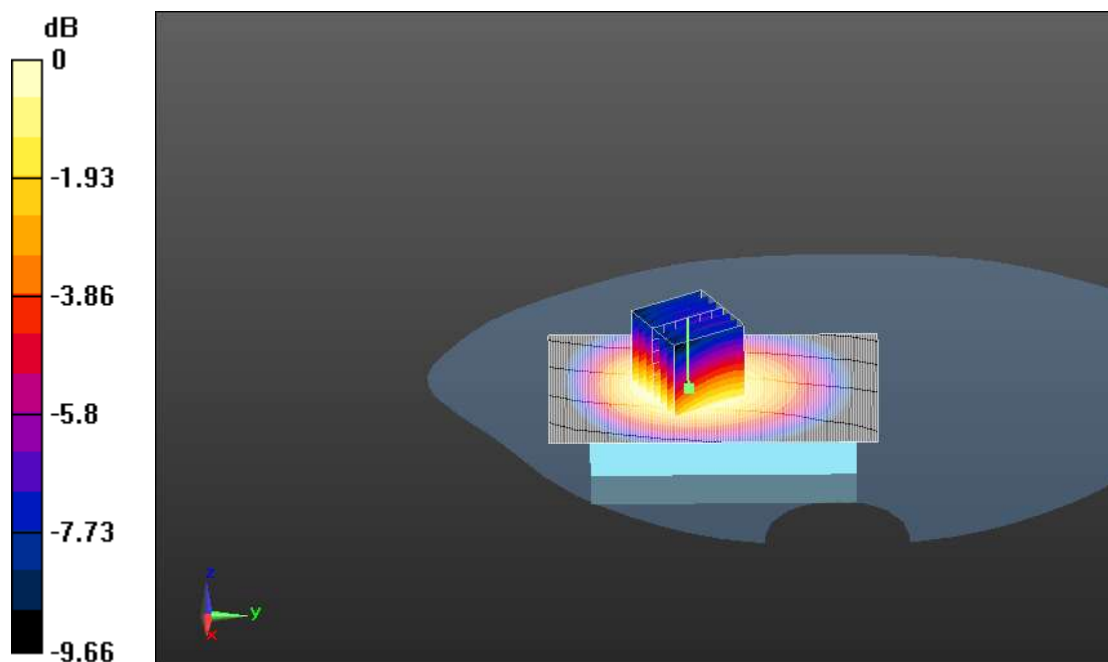

0 dB = 0.563mW/g

GSM850 Towards ground with earphone - high

Date/Time: 9/5/2011 4:49:33 PM

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 848.6 MHz; Communication System PAR: 9.191 dB

Medium parameters used: $f = 849$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.68, 5.68, 5.68); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

FLAT/850 Towards ground with earphone - high/Area Scan (81x161x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 0.357 mW/g


FLAT/850 Towards ground with earphone - high/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.8 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 0.452 W/kg

SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.241 mW/g

Maximum value of SAR (measured) = 0.357 mW/g

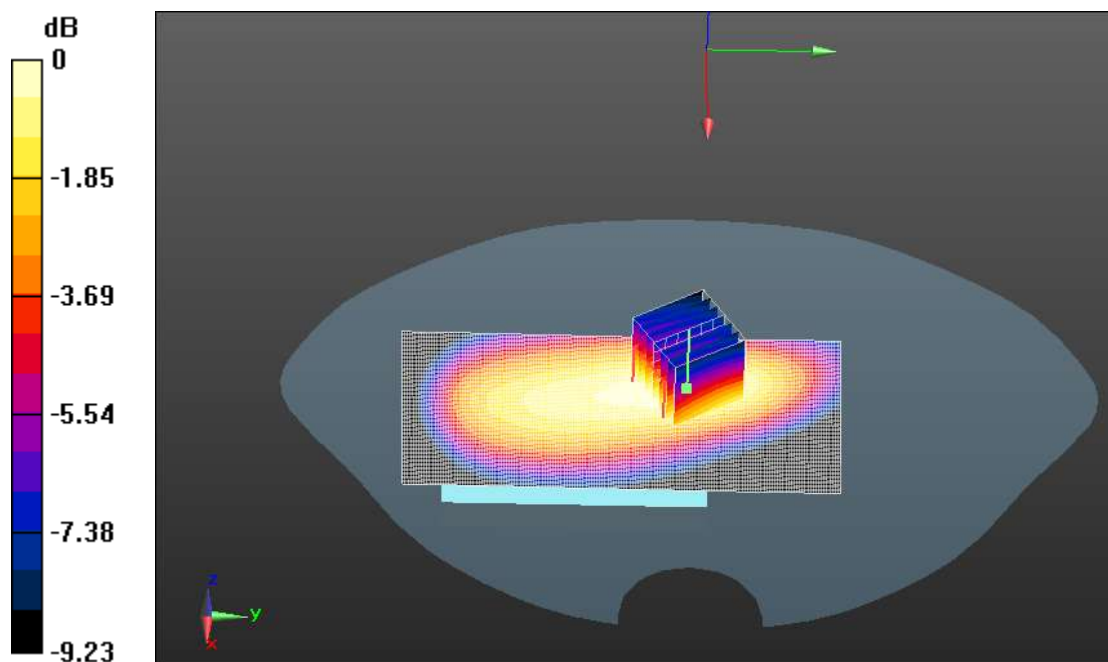

0 dB = 0.357mW/g

GSM850 Towards ground with GPRS 4up - high

Date/Time: 9/5/2011 5:58:52 PM

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 848.6 MHz; Communication System PAR: 9.191 dB

Medium parameters used: $f = 849$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 54.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(5.68, 5.68, 5.68); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM1; Type: SAM; Serial: TP1576
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

FLAT/850 Towards ground with GPRS 4up - high/Area Scan (81x121x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 1.03 mW/g


FLAT/850 Towards ground with GPRS 4up - high/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.5 V/m; Power Drift = -0.093 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.960 mW/g; SAR(10 g) = 0.676 mW/g

Maximum value of SAR (measured) = 1.06 mW/g

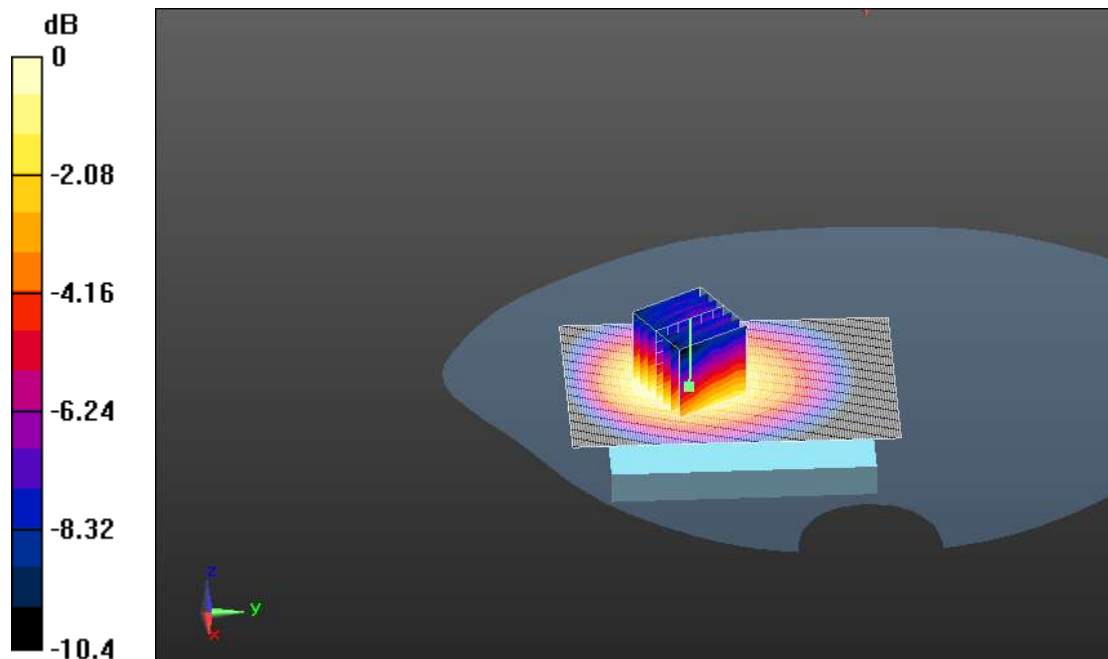

0 dB = 1.06mW/g

GSM1900 right touch mid

Date/Time: 9/5/2011 8:44:39 AM

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Communication System PAR: 9.191 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.83, 4.83, 4.83); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM2; Type: SAM; Serial: TP-1575
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

RIGHT/1900 -Touch Position - Mid/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 0.836 mW/g

RIGHT/1900 -Touch Position - Mid/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = -0.189 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.755 mW/g; SAR(10 g) = 0.416 mW/g

Maximum value of SAR (measured) = 0.858 mW/g

RIGHT/1900 -Touch Position - Mid/Zoom Scan (7x7x7)/Cube 1:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = -0.189 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.589 mW/g; SAR(10 g) = 0.346 mW/g

Maximum value of SAR (measured) = 0.663 mW/g

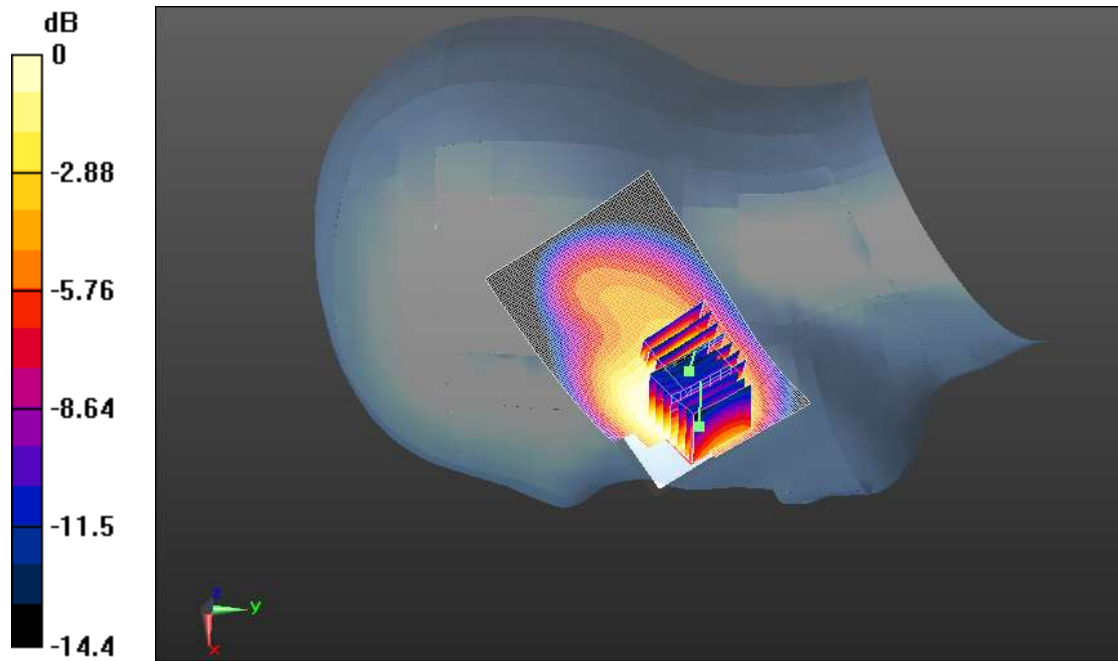

0 dB = 0.663mW/g

GSM1900 right tilt mid

Date/Time: 9/5/2011 9:24:17 AM

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Communication System PAR: 9.191 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.83, 4.83, 4.83); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM2; Type: SAM; Serial: TP-1575
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2Version 14.2.2 (1685) (Deployment Build)

RIGHT/1900 -Tilt Position - Mid/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 0.281 mW/g

RIGHT/1900 -Tilt Position - Mid/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.3 V/m; Power Drift = 0.163 dB

Peak SAR (extrapolated) = 0.398 W/kg

SAR(1 g) = 0.257 mW/g; SAR(10 g) = 0.158 mW/g

Maximum value of SAR (measured) = 0.280 mW/g

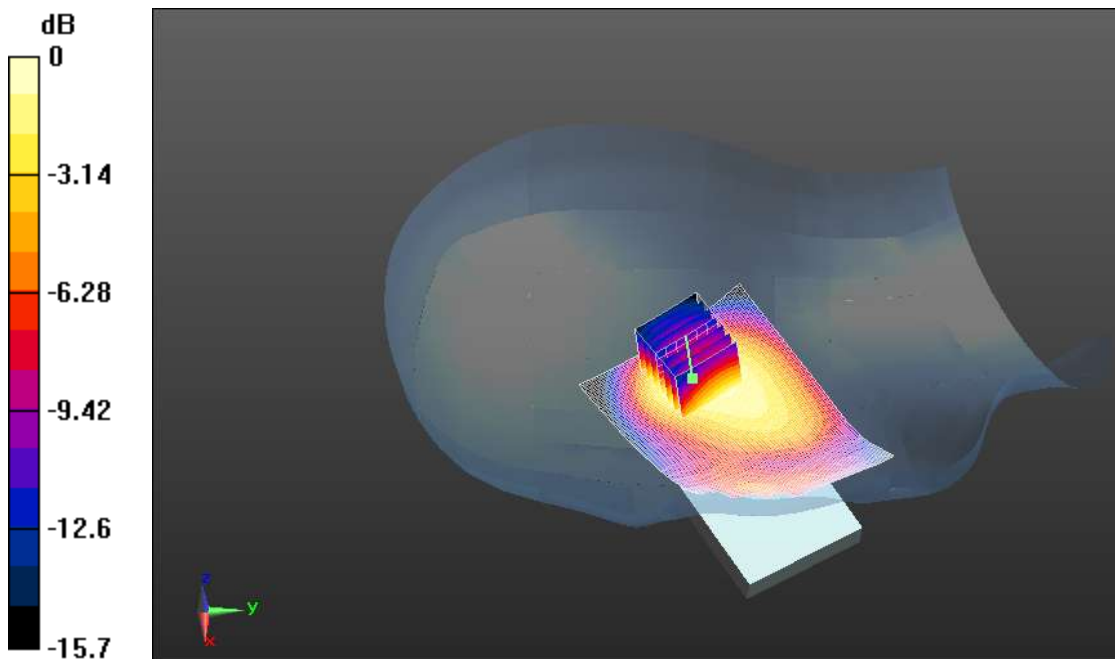

0 dB = 0.280mW/g

GSM1900 left touch mid

Date/Time: 9/5/2011 10:51:15 AM

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Communication System PAR: 9.191 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.83, 4.83, 4.83); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM2; Type: SAM; Serial: TP-1575
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

LEFT/1900 Touch Position - Mid/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 1.42 mW/g

LEFT/1900 Touch Position - Mid/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12 V/m; Power Drift = -0.191 dB

Peak SAR (extrapolated) = 2.28 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.612 mW/g

Maximum value of SAR (measured) = 1.39 mW/g

LEFT/1900 Touch Position - Mid/Zoom Scan (7x7x7)/Cube 1:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12 V/m; Power Drift = -0.191 dB

Peak SAR (extrapolated) = 2.42 W/kg

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.598 mW/g

Maximum value of SAR (measured) = 1.36 mW/g

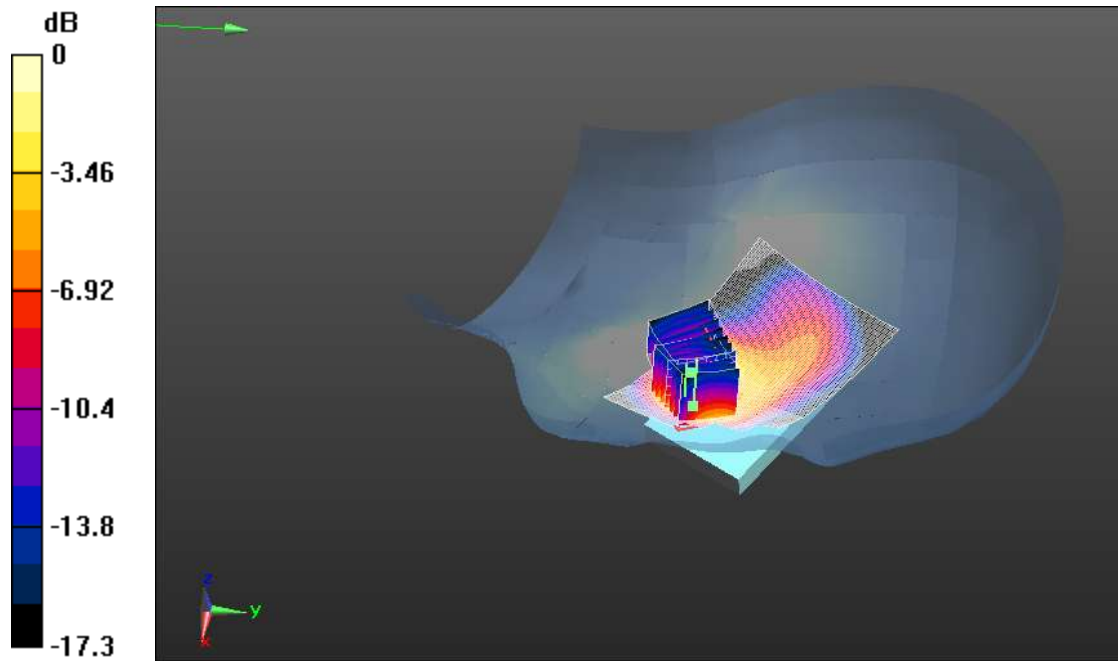

0 dB = 1.36mW/g

GSM1900 left tilt mid

Date/Time: 9/5/2011 1:17:14 PM

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Communication System PAR: 9.191 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.36$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.83, 4.83, 4.83); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM2; Type: SAM; Serial: TP-1575
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2Version 14.2.2 (1685) (Deployment Build)

LEFT/1900 -Tilt Position - Mid/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 0.285 mW/g


LEFT/1900 -Tilt Position - Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.3 V/m; Power Drift = 0.054 dB

Peak SAR (extrapolated) = 0.382 W/kg

SAR(1 g) = 0.259 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.278 mW/g

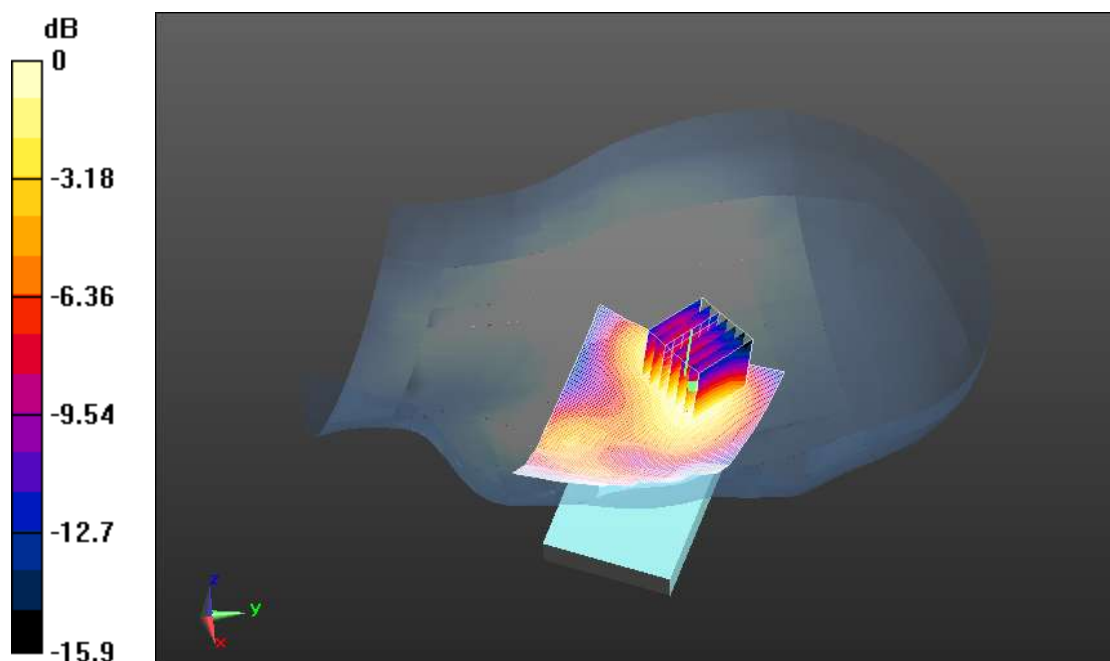

0 dB = 0.278mW/g

GSM1900 left touch low

Date/Time: 9/5/2011 11:32:31 AM

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1850.2 MHz; Communication System PAR: 9.191 dB

Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 39.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.83, 4.83, 4.83); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM2; Type: SAM; Serial: TP-1575
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

LEFT/1900 Touch Position -low/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 1.32 mW/g

LEFT/1900 Touch Position -low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = -0.00423 dB

Peak SAR (extrapolated) = 2.14 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.571 mW/g

Maximum value of SAR (measured) = 1.3 mW/g


LEFT/1900 Touch Position -low/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = -0.00423 dB

Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.560 mW/g

Maximum value of SAR (measured) = 1.28 mW/g

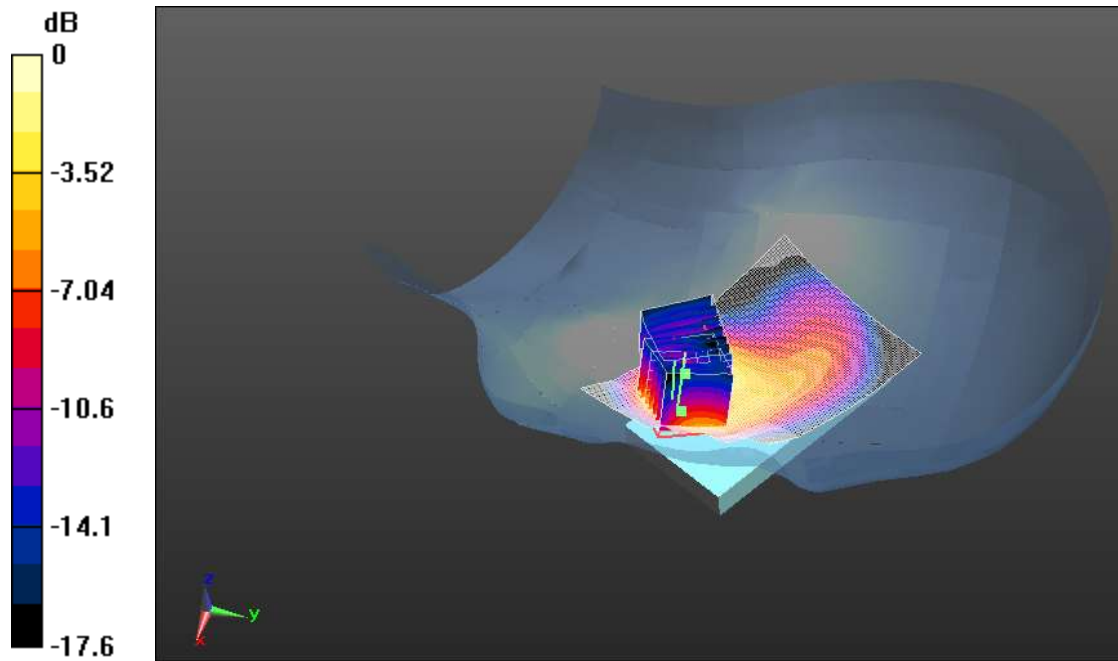

0 dB = 1.28mW/g

GSM1900 left touch high

Date/Time: 9/5/2011 12:15:34 PM

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1909.8 MHz; Communication System PAR: 9.191 dB

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 39$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.83, 4.83, 4.83); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM2; Type: SAM; Serial: TP-1575
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

LEFT/1900 Touch Position -high/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 1.57 mW/g

LEFT/1900 Touch Position -high/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 2.52 W/kg

SAR(1 g) = 1.36 mW/g; SAR(10 g) = 0.669 mW/g

Maximum value of SAR (measured) = 1.53 mW/g

LEFT/1900 Touch Position -high/Zoom Scan (7x7x7)/Cube 1:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.069 dB


Peak SAR (extrapolated) = 2.56 W/kg

SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.643 mW/g

Maximum value of SAR (measured) = 1.49 mW/g

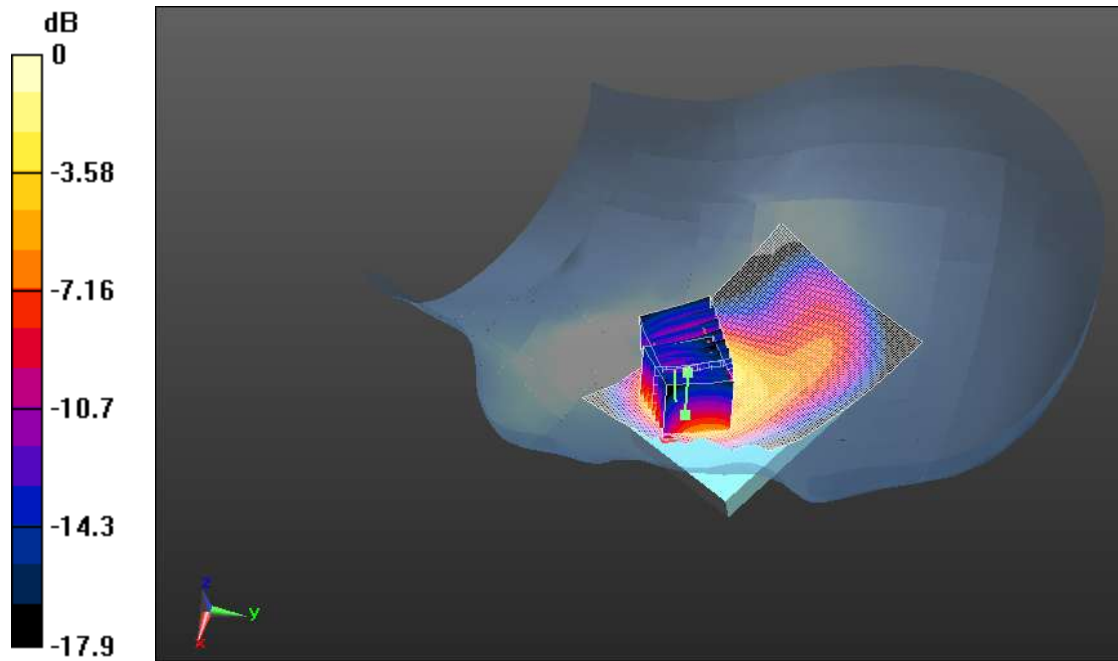

0 dB = 1.49mW/g

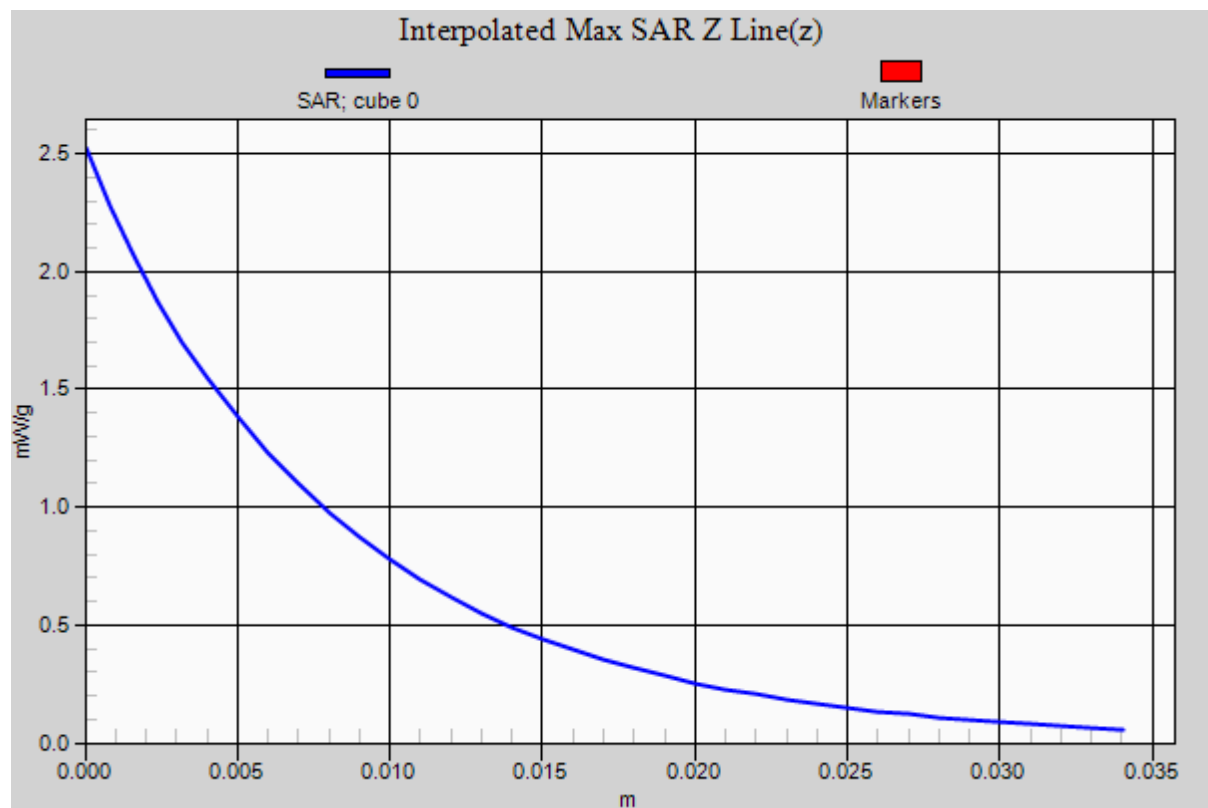

GSM1900 Towards phantom - MID

Date/Time: 9/5/2011 7:04:59 PM

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Communication System PAR: 9.191 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.32, 4.32, 4.32); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM2; Type: SAM; Serial: TP-1575
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

body/1900 -Towards phantom - MID/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 0.347 mW/g

body/1900 -Towards phantom - MID/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.96 V/m; Power Drift = -0.00217 dB

Peak SAR (extrapolated) = 0.499 W/kg

SAR(1 g) = 0.306 mW/g; SAR(10 g) = 0.173 mW/g

Maximum value of SAR (measured) = 0.343 mW/g

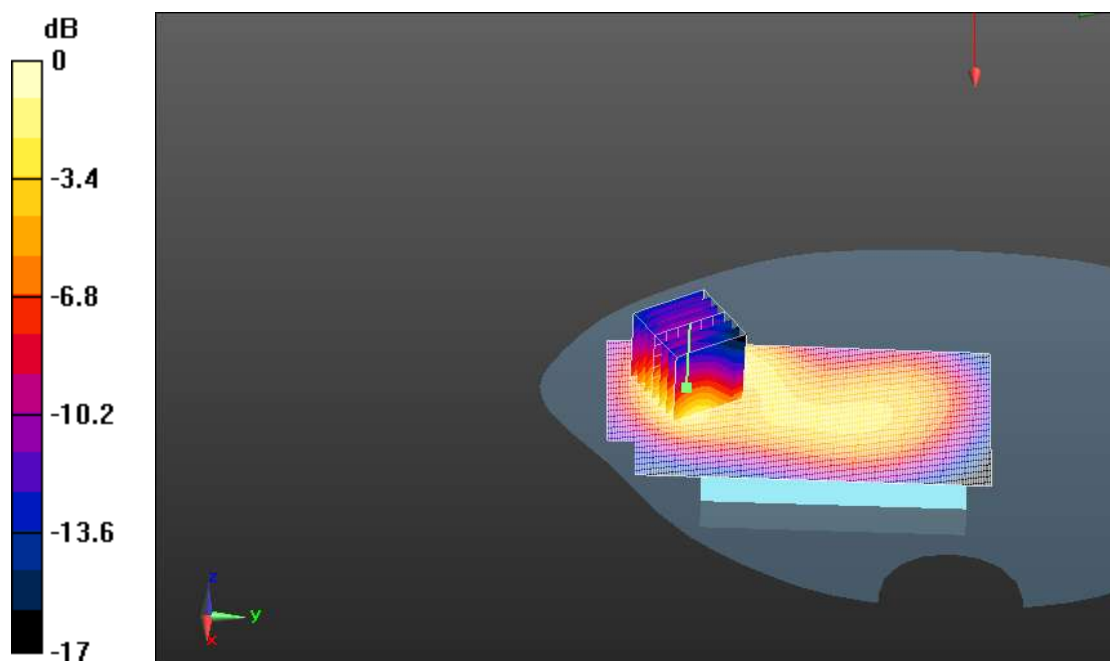

0 dB = 0.343mW/g

GSM1900 Towards ground - MID

Date/Time: 9/5/2011 6:32:35 PM

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Communication System PAR: 9.191 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.32, 4.32, 4.32); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM2; Type: SAM; Serial: TP-1575
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

body/1900 -Towards ground - MID/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 0.275 mW/g

body/1900 -Towards ground - MID/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.69 V/m; Power Drift = -0.065 dB

Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.139 mW/g

Maximum value of SAR (measured) = 0.275 mW/g

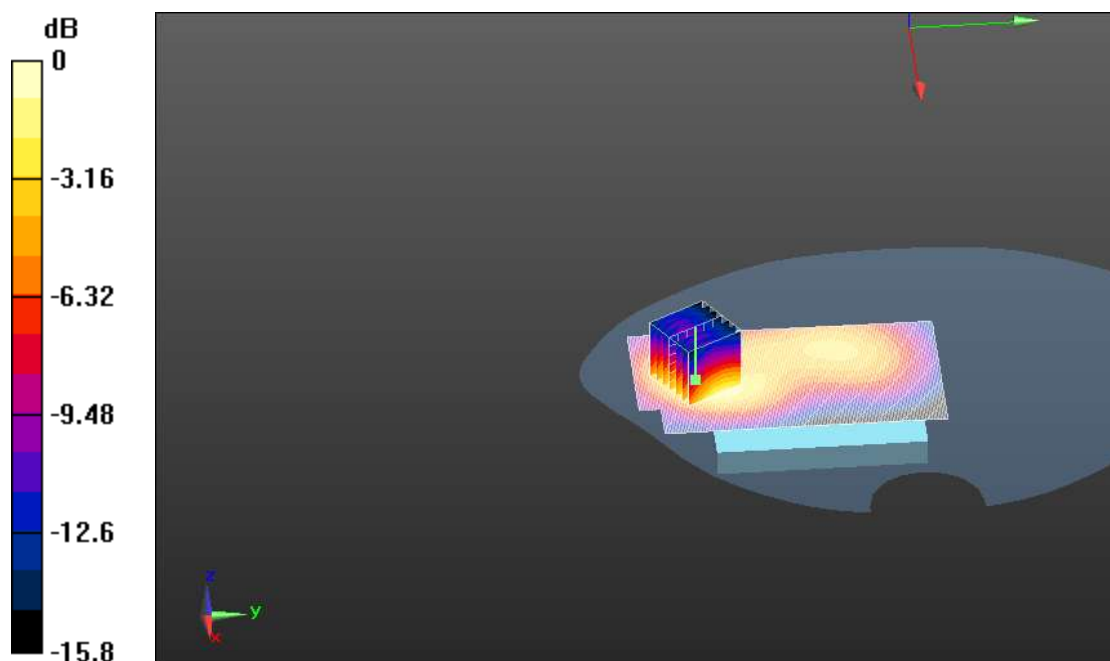

0 dB = 0.275mW/g

GSM1900 Towards Phantom - low

Date/Time: 9/5/2011 7:34:43 PM

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1850.2 MHz; Communication System PAR: 9.191 dB

Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.32, 4.32, 4.32); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM2; Type: SAM; Serial: TP-1575
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2Version 14.2.2 (1685) (Deployment Build)

body/1900 -Towards Phantom - low/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 0.308 mW/g

body/1900 -Towards Phantom - low/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.49 V/m; Power Drift = 0.137 dB

Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.274 mW/g; SAR(10 g) = 0.156 mW/g

Maximum value of SAR (measured) = 0.306 mW/g

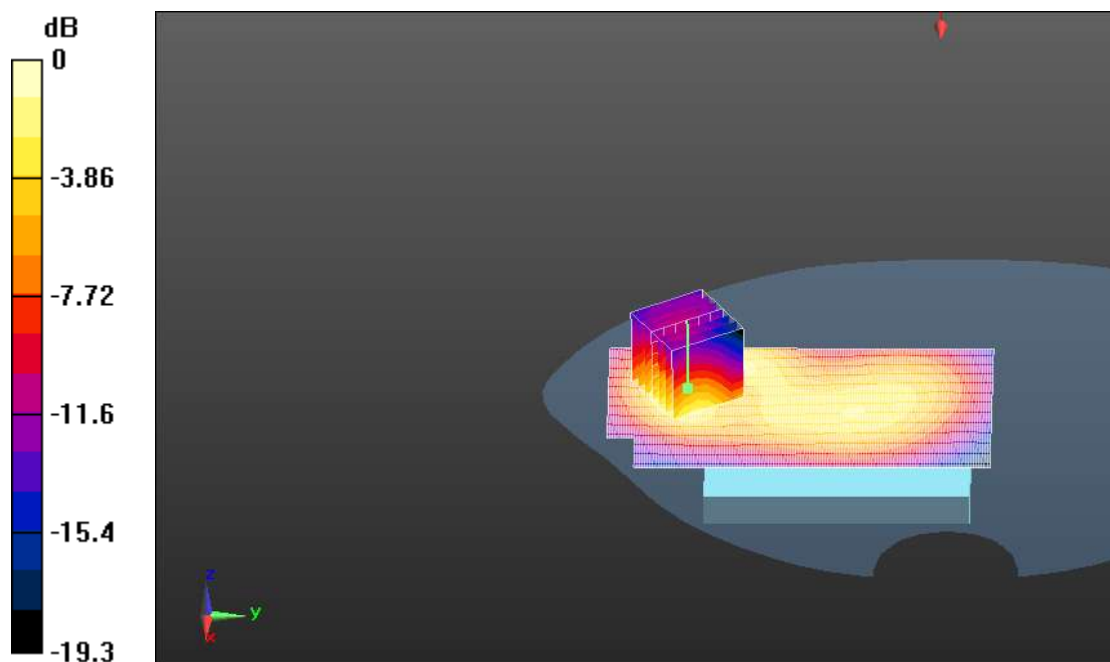

0 dB = 0.306mW/g

GSM1900 Towards Phantom - high

Date/Time: 9/5/2011 8:06:11 PM

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1909.8 MHz; Communication System PAR: 9.191 dB

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.32, 4.32, 4.32); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM2; Type: SAM; Serial: TP-1575
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

body/1900 -Towards Phantom - high/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 0.378 mW/g

body/1900 -Towards Phantom - high/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.12 V/m; Power Drift = 0.157 dB

Peak SAR (extrapolated) = 0.551 W/kg

SAR(1 g) = 0.335 mW/g; SAR(10 g) = 0.188 mW/g

Maximum value of SAR (measured) = 0.375 mW/g

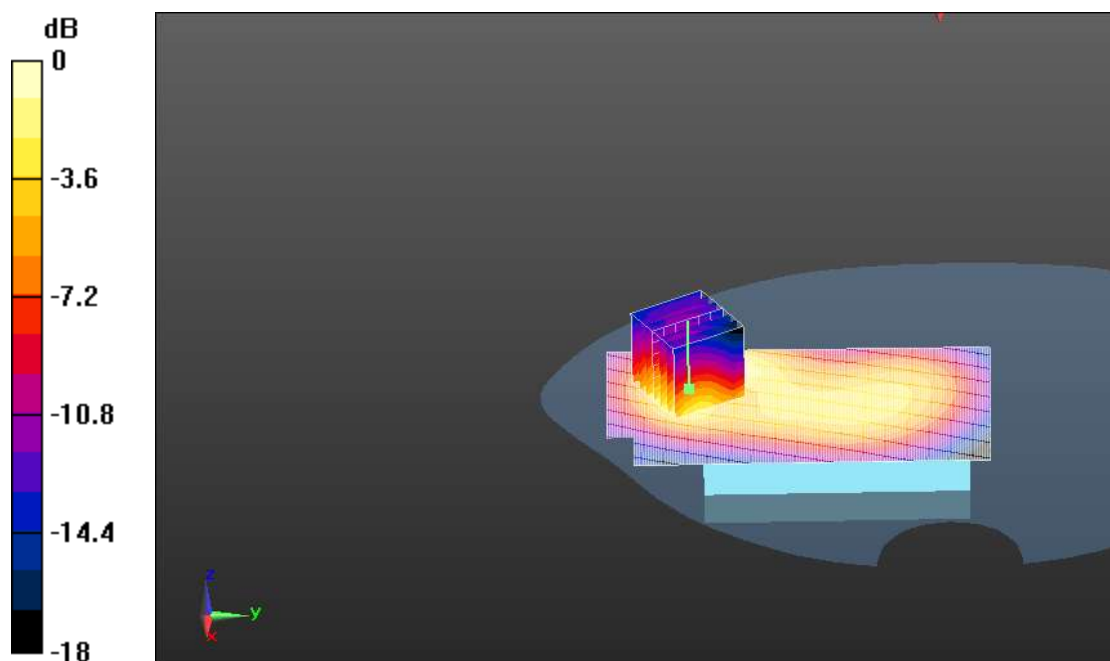

0 dB = 0.375mW/g

GSM1900 Towards Phantom with earphone - high

Date/Time: 9/5/2011 8:36:44 PM

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1909.8 MHz; Communication System PAR: 9.191 dB

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.32, 4.32, 4.32); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM2; Type: SAM; Serial: TP-1575
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

body/1900 -Towards Phantom with earphone - high/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 0.379 mW/g

body/1900 -Towards Phantom with earphone - high/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.39 V/m; Power Drift = -0.00945 dB

Peak SAR (extrapolated) = 0.557 W/kg

SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.187 mW/g

Maximum value of SAR (measured) = 0.376 mW/g


body/1900 -Towards Phantom with earphone - high/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.39 V/m; Power Drift = -0.00945 dB

Peak SAR (extrapolated) = 0.359 W/kg

SAR(1 g) = 0.234 mW/g; SAR(10 g) = 0.151 mW/g

Maximum value of SAR (measured) = 0.251 mW/g

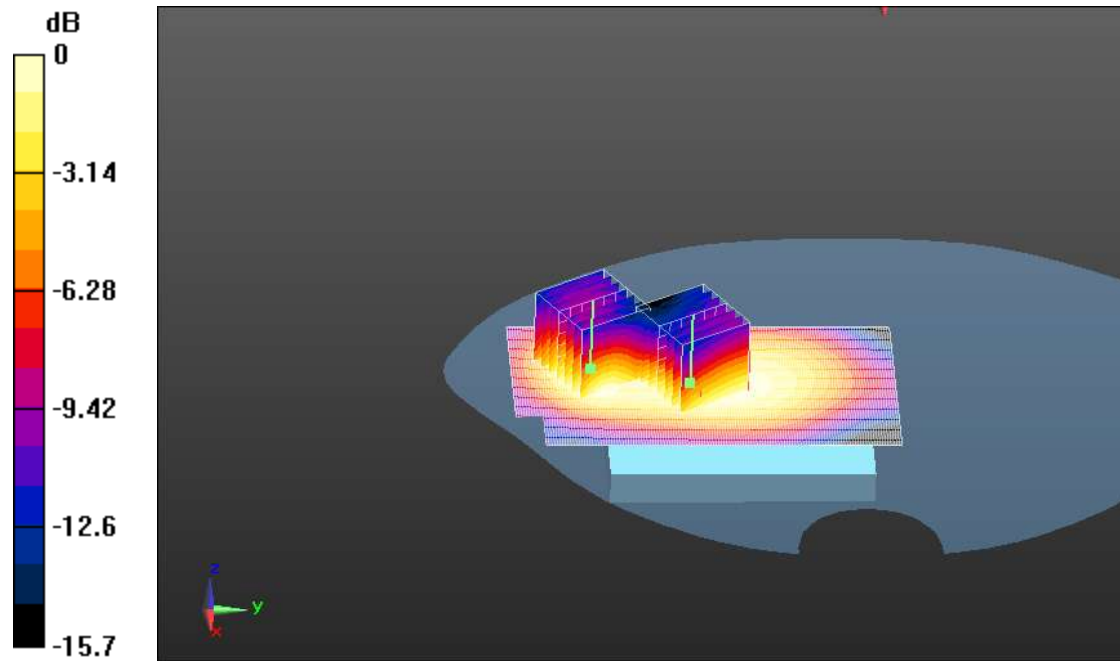

0 dB = 0.251mW/g

GSM1900 Towards Phantom with GPRS 4up- high

Date/Time: 9/5/2011 9:22:37 PM

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1909.8 MHz; Communication System PAR: 9.191 dB

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(4.32, 4.32, 4.32); Calibrated: 6/22/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1226; Calibrated: 6/13/2011
- Phantom: SAM2; Type: SAM; Serial: TP-1575
- Measurement SW: DASY52, V52.2 Build 0; Postprocessing SW: SEMCAD X, V14.2 Build 2 Version 14.2.2 (1685) (Deployment Build)

body/1900 -Towards Phantom with GPRS 4up- high/Area Scan (81x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR = 0.344 mW/g


body/1900 -Towards Phantom with GPRS 4up- high/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.56 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.499 W/kg

SAR(1 g) = 0.305 mW/g; SAR(10 g) = 0.172 mW/g

Maximum value of SAR (measured) = 0.339 mW/g

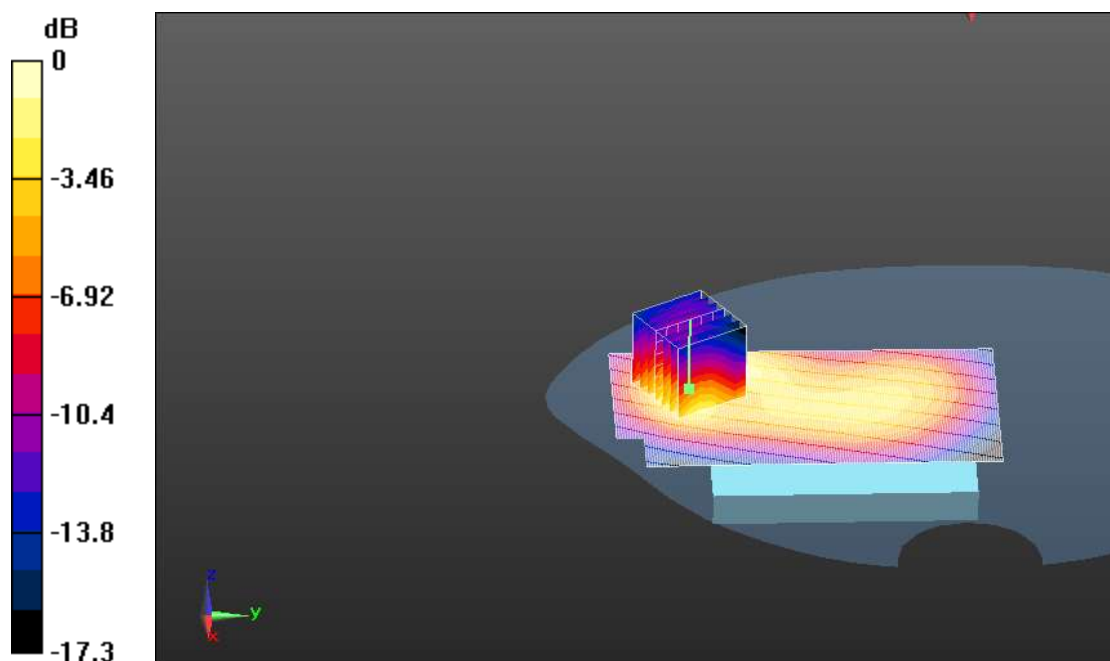

0 dB = 0.339mW/g

ANNEX G: Probe Calibration Certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client

Auden

Certificate No. ES3-3071_Jun11

CALIBRATION CERTIFICATE

Object

ES3DV3 - SN: 3071

Calibration procedure(s)

QA-CAL-01.v8; QA-CAL-23.v4; QA-CAL-25.v4
Calibration procedure for dosimetric E-field probes

Calibration date:


June 22, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	31-Mar-11 (No. 217-01372)	Apr-12
Power sensor E4412A	MY41498087	31-Mar-11 (No. 217-01372)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	29-Mar-11 (No. 217-01369)	Apr-12
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Reference 30 dB Attenuator	SN: S5129 (30b)	29-Mar-11 (No. 217-01370)	Apr-12
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013 Dec10)	Dec-11
DAE4	SN: 654	3-May-11 (No. DAE4-654 May11)	May-12
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Ueton Kastrali	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	
Issued: June 23, 2011			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; VR_{x,y,z}**: A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ES3DV3 – SN:3071

June 22, 2011

Probe ES3DV3

SN:3071

Manufactured: December 14, 2004
Calibrated: June 22, 2011

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

ES3DV3- SN:3071

June 22, 2011

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3071

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	1.12	1.21	0.96	$\pm 10.1 \%$
DCP (mV) ^B	101.2	101.2	97.4	

Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	102.4	$\pm 3.0 \%$
			Y	0.00	0.00	1.00	110.9	
			Z	0.00	0.00	1.00	130.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3071

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	41.9	0.89	6.00	6.00	6.00	0.90	1.10	± 12.0 %
835	41.5	0.90	5.78	5.78	5.78	0.90	1.10	± 12.0 %
900	41.5	0.97	5.67	5.67	5.67	0.90	1.10	± 12.0 %
1450	40.5	1.20	5.22	5.22	5.22	0.83	1.23	± 12.0 %
1750	40.1	1.37	5.03	5.03	5.03	0.90	1.15	± 12.0 %
1900	40.0	1.40	4.83	4.83	4.83	0.86	1.19	± 12.0 %
2000	40.0	1.40	4.80	4.80	4.80	0.89	1.14	± 12.0 %
2450	39.2	1.80	4.19	4.19	4.19	0.74	1.29	± 12.0 %

^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: ES3DV3- SN:3071

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
750	55.5	0.96	5.78	5.78	5.78	0.80	1.20	± 12.0 %
835	55.2	0.97	5.68	5.68	5.68	0.80	1.20	± 12.0 %
900	55.0	1.05	5.63	5.63	5.63	0.90	1.10	± 12.0 %
1450	54.0	1.30	5.22	5.22	5.22	1.00	1.21	± 12.0 %
1750	53.4	1.49	4.66	4.66	4.66	0.72	1.43	± 12.0 %
1900	53.3	1.52	4.32	4.32	4.32	0.72	1.37	± 12.0 %
2000	53.3	1.52	4.29	4.29	4.29	0.74	1.30	± 12.0 %
2450	52.7	1.95	3.89	3.89	3.89	0.75	1.22	± 12.0 %


^C Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

ES3DV3- SN:3071

June 22, 2011


Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

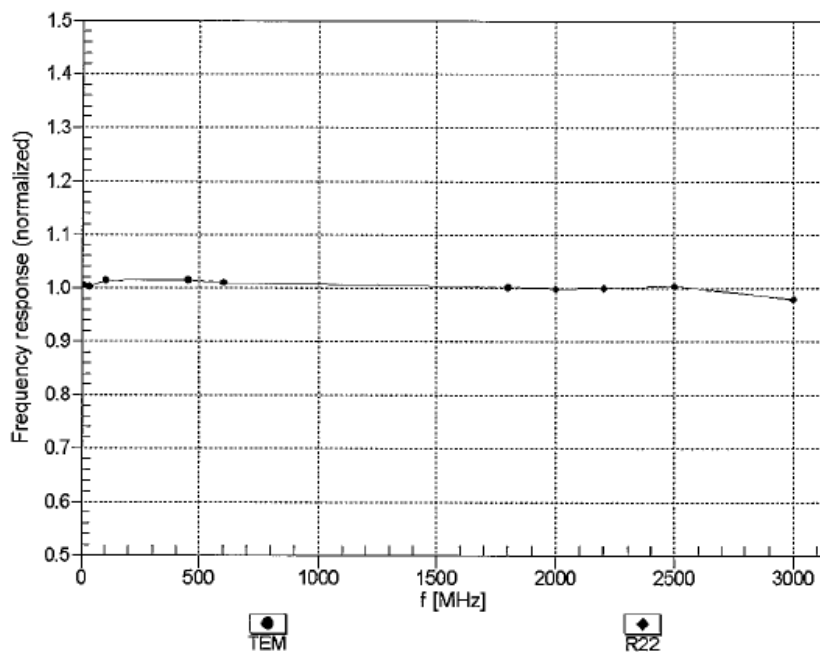



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM


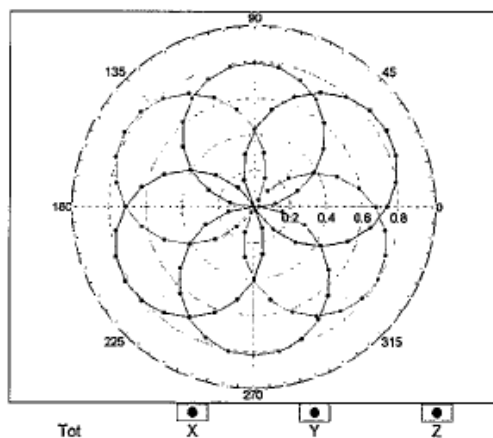


f=1800 MHz,R22

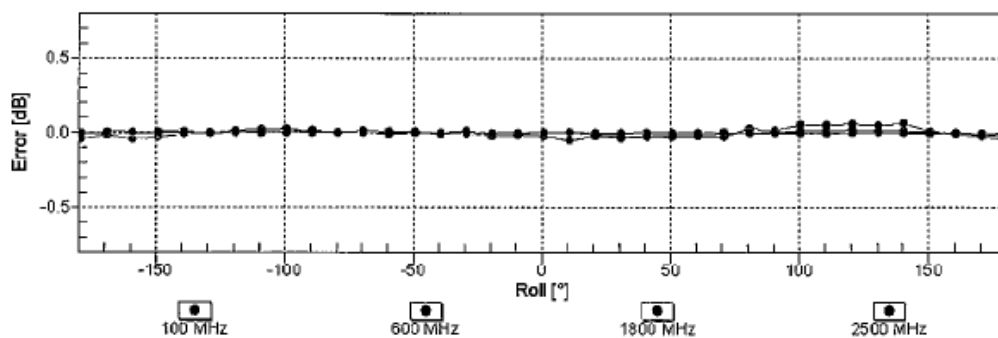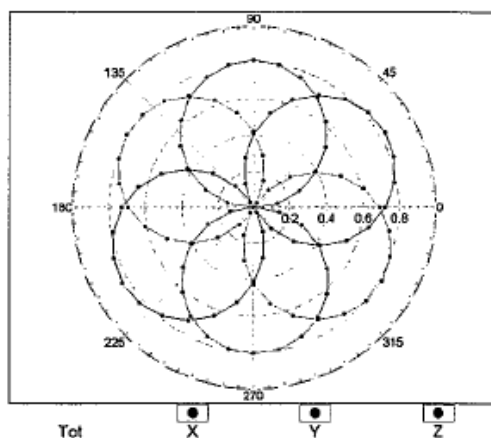

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range f(SAR_{head}) (TEM cell , f = 900 MHz)

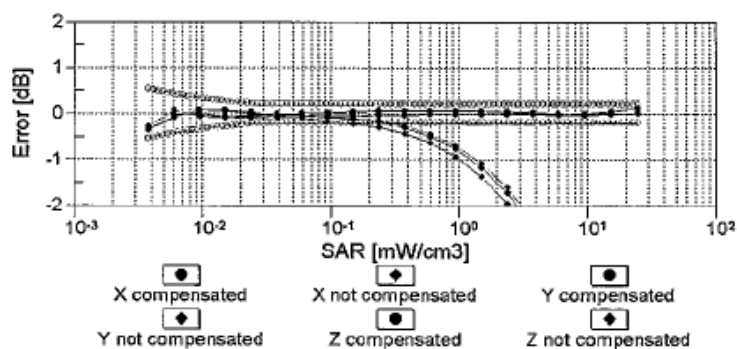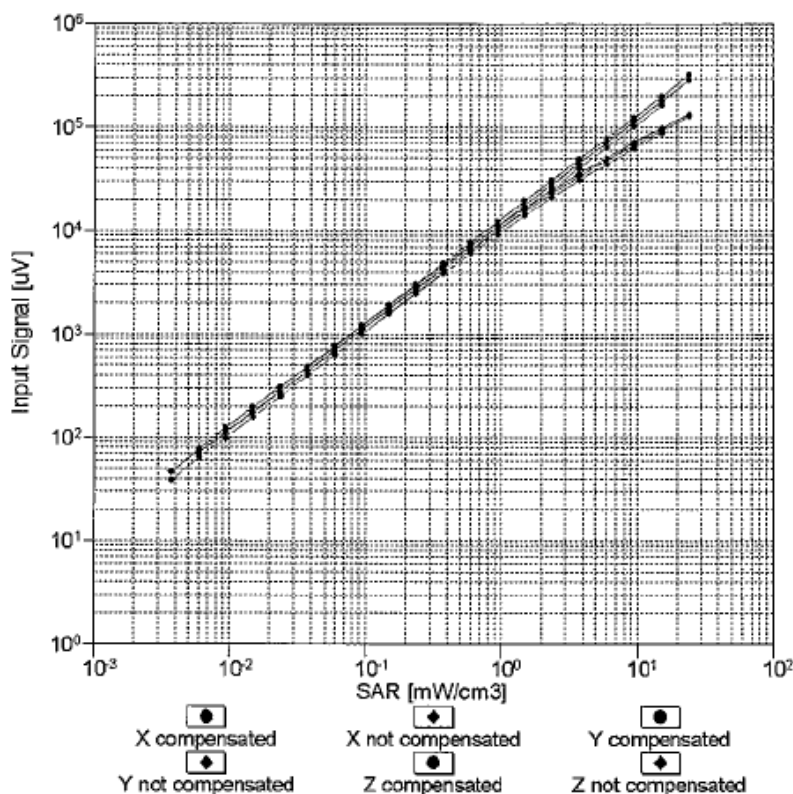


Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

ES3DV3- SN:3071


June 22, 2011

Conversion Factor Assessment

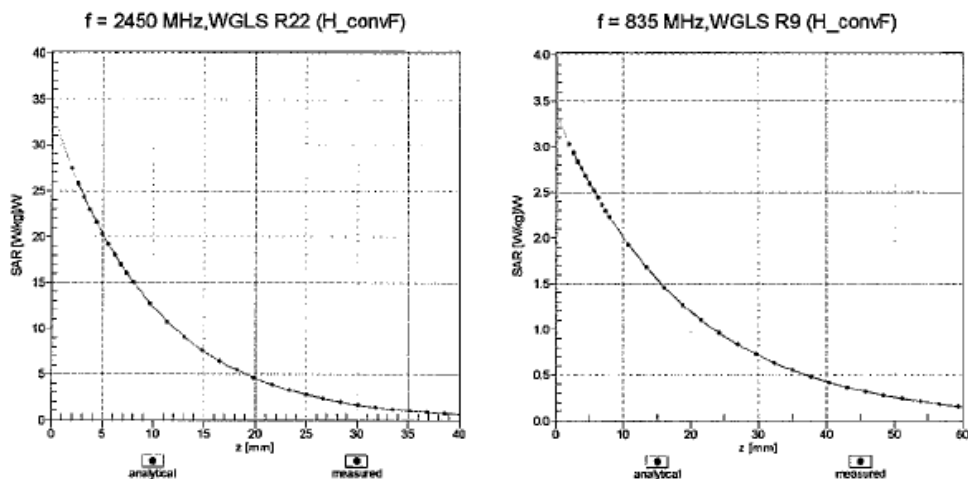

Deviation from Isotropy in Liquid

Error (ϕ , θ), $f = 900 \text{ MHz}$

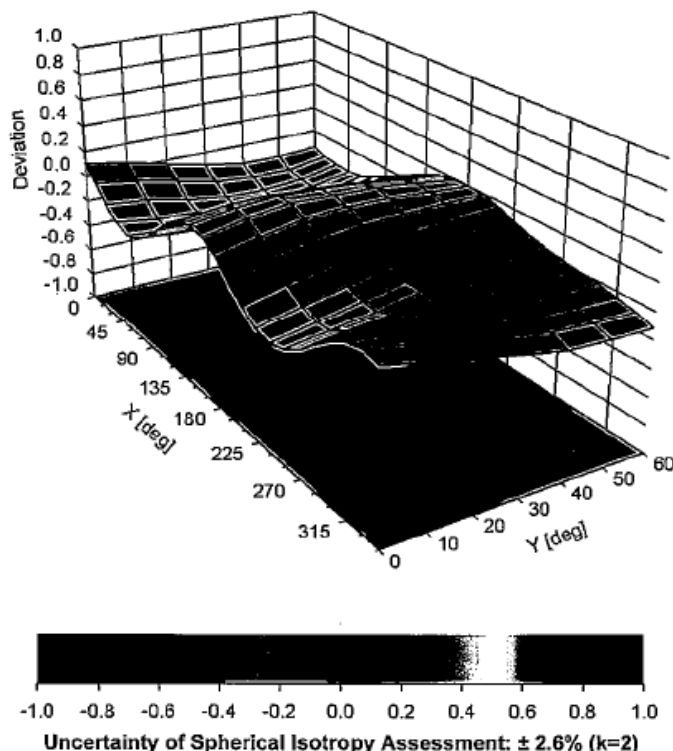


ES3DV3- SN:3071

June 22, 2011

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3071**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm

ANNEX H:DAE4 Calibration Certificate

工业和信息化部通信计量中心 Telecommunication Metrology Center of MIIT		  
Add: No.52 Huanyuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2079 Fax: +86-10-62304793 E-mail: Info@emcrite.com Http://www.emcrite.com		校准 CNAS L0442
Client	Tejet	Certificate No: DAE4-1226_Jun11
CALIBRATION CERTIFICATE		
Object	DAE4 - SN: 1226	
Calibration Procedure(s)	TMC-XZ-01-029 Calibration procedure for the data acquisition electronics (DAE)	
Calibration date:	June 13, 2011	
Condition of the calibrated item	In Tolerance	
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.		
All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)℃ and humidity<70%.		
Calibration Equipment used (M&TE critical for calibration)		
Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)
Multimeter 3458A	MY45041463	12-Nov-10 (TMC, No: DLsc2010-1115)
DC POWER SUPPLY 66321D	MY43001657	12-Nov-10 (TMC, No: JZ10-290)
Secondary Standards	ID #	Check Date (in house)
Calibrator Box	/	18-Jun-10 (TMC, in house check)
		Scheduled Calibration
		Nov-11
		Nov-11
		Scheduled Check
		In house check Jun-11
Calibrated by:	Name	Function
	Lin Hao	SAR Test Engineer
Reviewed by:	Qi Dianyuan	SAR Project Leader
Approved by:	Xiao Li	Deputy Director of the laboratory
		Signature
		
		
		
Issued: June 13, 2011		
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.		
Certificate No: DAE4-1226_Jun11		Page 1 of 5

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304793
E-mail: info@emcite.com [Http://www.emcite.com](http://www.emcite.com)

Glossary:

DAE	data acquisition electronics
Connector angle	information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters:

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters contain technical information as a result from the performance test and require no uncertainty.
- DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
- Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
- Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage.
- AD Converter Values with inputs shorted: Values on the internal AD converter corresponding to zero input voltage.
- Input Offset Measurement: Output voltage and statistical results over a large number of zero voltage measurements.

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304793
E-mail: info@emcite.com [Http://www.emcite.com](http://www.emcite.com)

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = $6.1 \mu\text{V}$, full range = -100...+300 mV

Low Range: 1LSB = 61nV , full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	$405.837 \pm 0.1\% (k=2)$	$405.272 \pm 0.1\% (k=2)$	$405.326 \pm 0.1\% (k=2)$
Low Range	$3.99601 \pm 0.7\% (k=2)$	$4.01768 \pm 0.7\% (k=2)$	$4.02083 \pm 0.7\% (k=2)$

Connector Angle

Connector Angle to be used in DASY system	$112.5^\circ \pm 1^\circ$
---	---------------------------

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304793
E-mail: Info@emcite.com Http://www.emcite.com

Appendix

1. DC Voltage Linearity

High Range	Input (μ V)	Reading (μ V)	Error (%)
Channel X + Input	200000	200000	0.00
Channel X + Input	20000	20003.91	0.03
Channel X - Input	20000	-20002.26	0.01
Channel Y + Input	200000	200000	0.00
Channel Y + Input	20000	20004.30	0.02
Channel Y - Input	20000	-20001.84	0.01
Channel Z + Input	200000	200000.6	0.00
Channel Z + Input	20000	20002.05	0.01
Channel Z - Input	20000	-20003.32	0.02

Low Range	Input (μ V)	Reading (μ V)	Error (%)
Channel X + Input	2000	1999.9	0.00
Channel X + Input	200	199.61	-0.19
Channel X - Input	200	-200.68	0.36
Channel Y + Input	2000	1999.9	0.00
Channel Y + Input	200	199.40	-0.29
Channel Y - Input	200	-200.46	0.23
Channel Z + Input	2000	2000	0.00
Channel Z + Input	200	199.33	-0.34
Channel Z - Input	200	-201.29	0.66

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (μ V)	Low Range Average Reading (μ V)
Channel X	200	3.40	3.47
	- 200	-2.47	-3.10
Channel Y	200	0.15	-0.51
	- 200	-0.60	-1.12
Channel Z	200	-9.89	-10.17
	- 200	7.71	8.15

Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304793
E-mail: info@emcite.com Http://www.emcite.com

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μ V)	Channel Y (μ V)	Channel Z (μ V)
Channel X	200	-	2.59	-0.31
Channel Y	200	0.57	-	2.47
Channel Z	200	-1.89	0.23	-

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16128	16441
Channel Y	15957	16202
Channel Z	15979	16032

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M Ω

	Average (μ V)	min. Offset (μ V)	max. Offset (μ V)	Std. Deviation(μ V)
Channel X	0.57	-1.05	2.02	0.41
Channel Y	-1.02	-1.96	-0.02	0.39
Channel Z	1.15	-0.07	1.94	0.34



6. Input Offset Current

Nominal Input Circuitry offset current on all channels: <25fA

7. Input Resistance

	Zeroing (MOhm)	Measuring (MOhm)
Channel X	0.2000	200.0
Channel Y	0.2000	200.0
Channel Z	0.2000	200.0

ANNEX I: D835V2 Calibration Certificate

工业和信息化部通信计量中心 Telecommunication Metrology Center of MIIT		TMC	IAC-MRA	CNAS
Client	Tejet	Certificate No: D835V2-4d100_Jun11		
CALIBRATION CERTIFICATE				
Object	D835V2 - SN: 4d100			
Calibration Procedure(s)	TMC-XZ-01-027 Calibration procedure for dipole validation kits			
Calibration date:	June 14, 2011			
Condition of the calibrated item	In Tolerance			
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)℃ and humidity<70%. Calibration Equipment used (M&TE critical for calibration)				
Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)		Scheduled Calibration
Power Meter NRVD	101253	03-Sep-10 (TMC, No.JZ10-248)		Sep-11
Power sensor NRV-Z5	100333	03-Sep-10 (TMC, No. JZ10-248)		Sep-11
Reference Probe ES3DV3	SN 3149	25-Sep-10(SPEAG, No.ES3-3149_Sep10)		Sep-11
DAE4	SN 771	21-Nov-10(SPEAG, No.DAE4-771_Nov10)		Nov-11
RF generator E4438C	MY45092879	17-Jun-10(TMC, No.JZ10-302)		Jun-11
Network Analyzer 8753E	US38433212	28-Aug-10(TMC, No.JZ10-056)		Aug-11
Calibrated by:	Name Lin Hao	Function SAR Test Engineer	Signature 	
Reviewed by:	Qi Dianyuan	SAR Project Leader		
Approved by:	Xiao Li	Deputy Director of the laboratory		
Issued: July 5, 2011				
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.				

Certificate No: D835V2-4d100_Jun11 Page 1 of 9

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM _{x,y,z}
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) For hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V5.0
Extrapolation	Advanced Extrapolation	
Phantom	2mm Oval Phantom ELI4	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.4 $\pm$ 6 %	0.89mho/m $\pm$ 6 %
Head TSL temperature during test	(21.7 $\pm$ 0.2) °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.37 mW / g
SAR normalized	normalized to 1W	9.48 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	9.53 mW /g $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.53 mW / g
SAR normalized	normalized to 1W	6.12 mW / g
SAR for nominal Head TSL parameters ¹	normalized to 1W	6.14 mW /g $\pm$ 16.5 % (k=2)

¹ Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.8 ± 6%	1.00mho/m ± 6 %
Body TSL temperature during test	(21.9 ± 0.2) °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.45 mW / g
SAR normalized	normalized to 1W	9.80 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	9.47 mW /g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	1.59 mW / g
SAR normalized	normalized to 1W	6.36 mW / g
SAR for nominal Body TSL parameters ²	normalized to 1W	6.21 mW /g ± 16.5 % (k=2)

² Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

Appendix**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	$47.8\Omega + 0.22\text{ j}\Omega$
Return Loss	- 32.8dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	$45.9\Omega + 3.6\text{ j}\Omega$
Return Loss	- 24.9dB

General Antenna Parameters and Design

Electrical Delay (one direction)	2.983 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 9, 2010

DASY5 Validation Report for Head TSL

Date/Time: 2011-6-14 8:57:36

Test Laboratory: TMC, Beijing, China

DUT: Dipole 835 MHz; Type: D835V2; Serial: SN: 4d100

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Medium: Head 835MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3149; ConvF(6.56, 6.56, 6.56); Calibrated: 25.09.10
- Electronics: DAE4 Sn771; Calibration: 21.11.10
- Phantom: 2mm Oval Phantom ELI4; Type: QDOVA001BB
- Measurement SW: DASY5, V5.0 Build 119.9; Postprocessing SW: SEMCAD, V13.2 Build 87

Pin=250mW; d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.1 V/m; Power Drift = 0.096 dB


Peak SAR (extrapolated) = 3.45 W/kg

SAR(1 g) = 2.37 mW/g; SAR(10 g) = 1.53 mW/g

Maximum value of SAR (measured) = 2.54 mW/g

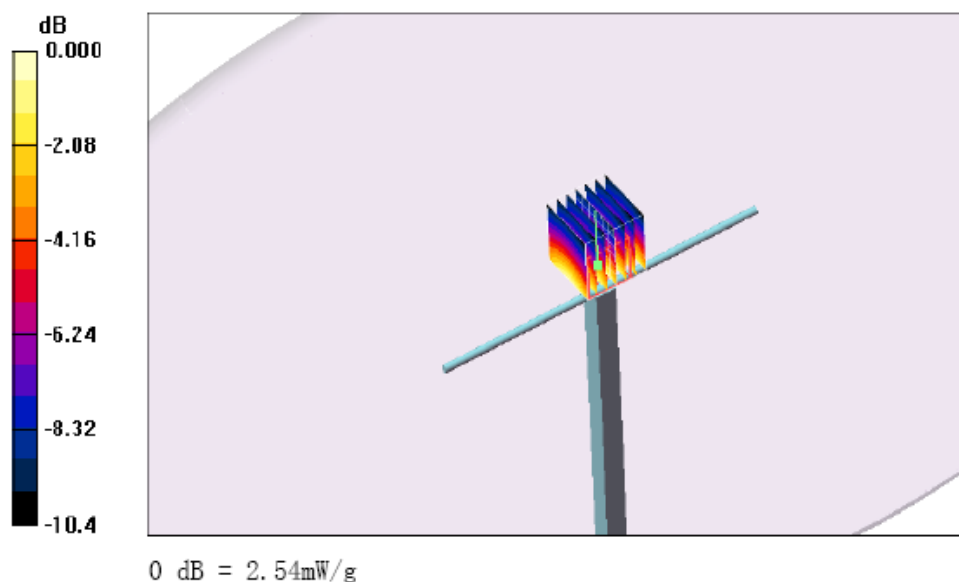

Impedance Measurement Plot for Head TSL

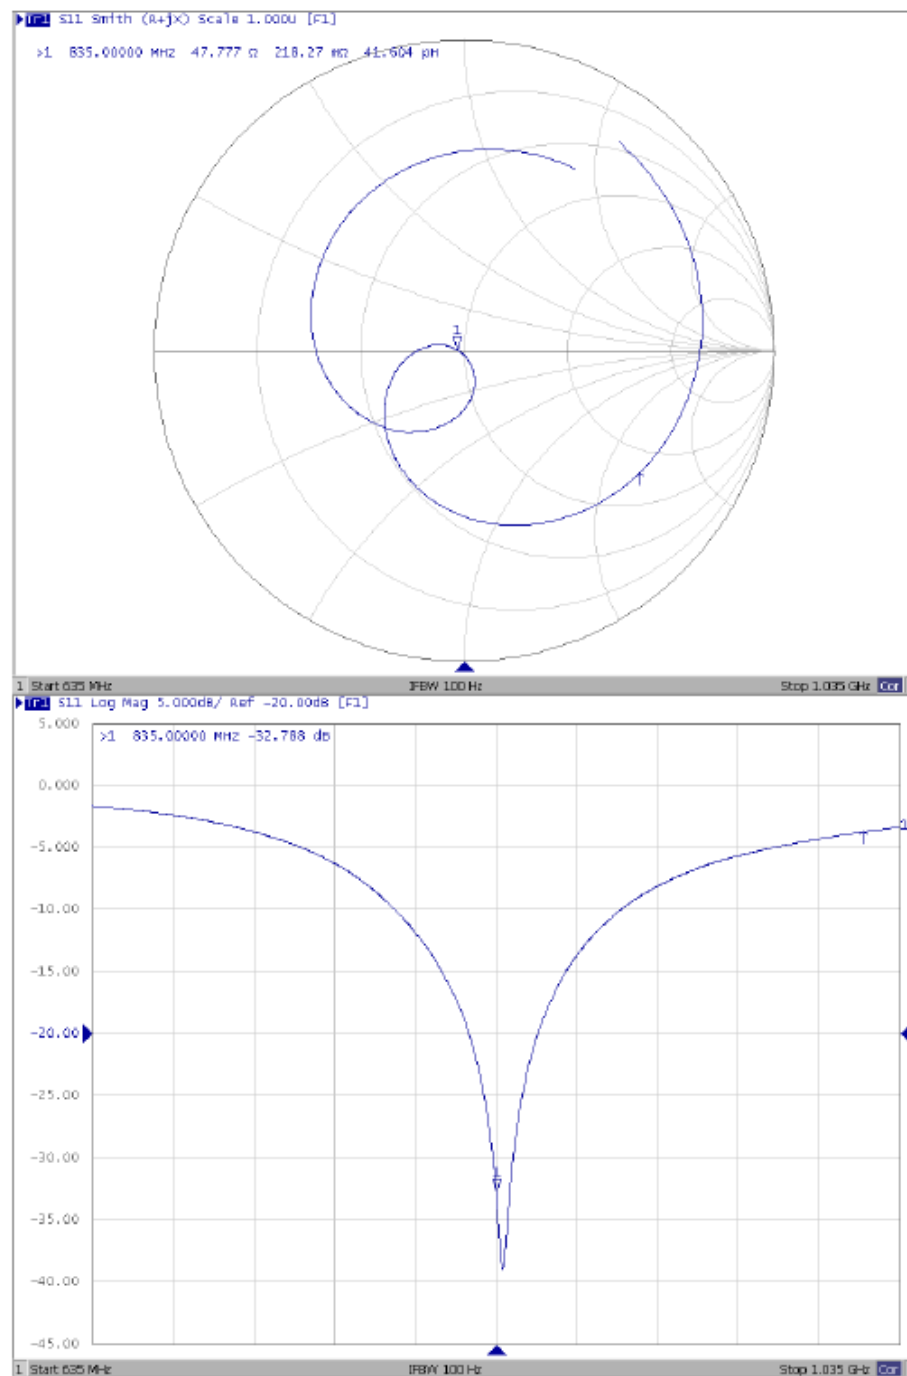

DASY5 Validation Report for Body TSL

Date/Time: 2011-6-14 9:52:23

Test Laboratory: TMC, Beijing, China

DUT: Dipole 835 MHz; Type: D835V2; Serial: SN: 4d100

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Medium: Body 835MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.00 \text{ mho/m}$; $\epsilon_r = 53.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3149; ConvF(6.22, 6.22, 6.22); Calibrated: 25.09.10
- Electronics: DAE4 Sn771; Calibration: 21.11.10
- Phantom: 2mm Oval Phantom ELI4; Type: QDOVA001BB
- Measurement SW: DASY5, V5.0 Build 119.9; Postprocessing SW: SEMCAD, V13.2 Build 87

Pin=250mW; d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 41.3 V/m; Power Drift = -0.084 dB

Peak SAR (extrapolated) = 3.52 W/kg


SAR(1 g) = 2.45 mW/g; SAR(10 g) = 1.59 mW/g

Maximum value of SAR (measured) = 2.66 mW/g



0 dB = 2.66mW/g

Impedance Measurement Plot for Body TSL

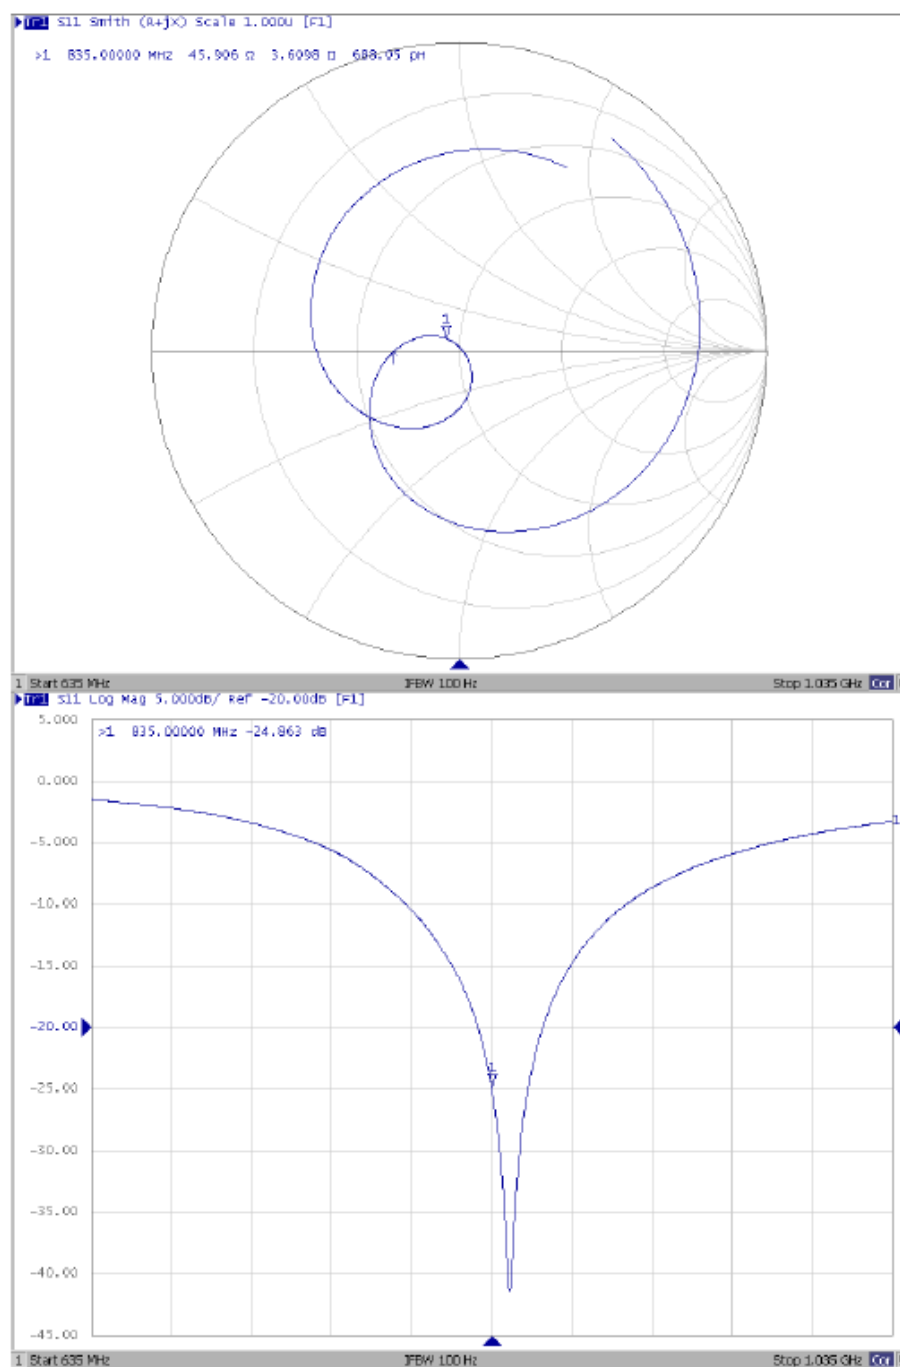

ANNEX J: D1950V3 Calibration Certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **Tejet (Auden)**

Certificate No: D1950V3-1139_Jun11

CALIBRATION CERTIFICATE

Object: D1950V3 - SN1139

Calibration procedure(s): QA CAL-05.v8
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: June 17, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: S5086 (20b)	29-Mar-11 (No. 217-01367)	Apr-12
Type-N mismatch combination	SN: 5047.2 / 06327	29-Mar-11 (No. 217-01371)	Apr-12
Reference Probe ES3DV3	SN: 3205	29-Apr-11 (No. ES3-3205_Apr11)	Apr-12
DAE4	SN: 601	8-Jun-11 (No. DAE4-601_Jun11)	Jun-12

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: June 17, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D1950V3-1139_Jun11

Page 1 of 8

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

- d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1950 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.9 $\pm$ 6 %	1.34 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.0 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	41.0 mW / g $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.27 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	21.3 mW / g $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	53.1 $\pm$ 6 %	1.49 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.75 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	39.4 mW / g $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.14 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	20.7 mW / g $\pm$ 16.5 % (k=2)

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.6 Ω - 3.0 j Ω
Return Loss	- 30.3 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.2 Ω - 3.0 j Ω
Return Loss	- 26.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.195 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 04, 2009

DASY5 Validation Report for Head TSL

Date: 17.06.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1950 MHz; Type: D1950V3; Serial: D1950V3 - SN1139

Communication System: CW; Frequency: 1950 MHz

Medium: HSL BB1.9

Medium parameters used: $f = 1950$ MHz; $\sigma = 1.34$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.86, 4.86, 4.86); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 08.06.2011
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.975 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 17.741 W/kg

SAR(1 g) = 10 mW/g; SAR(10 g) = 5.27 mW/g

Maximum value of SAR (measured) = 12.442 mW/g

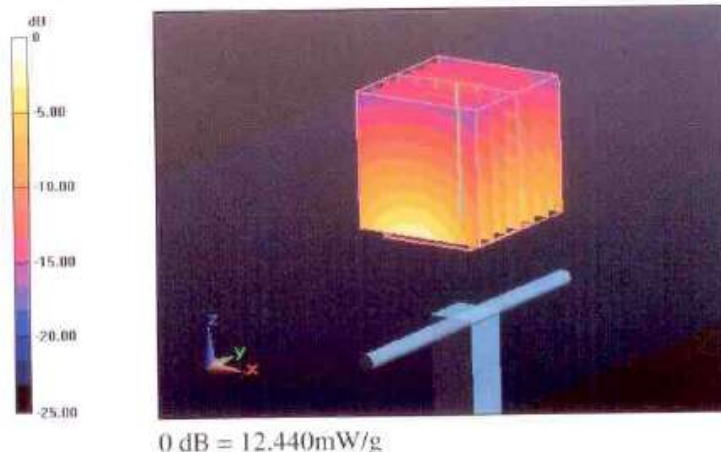

Impedance Measurement Plot for Head TSL

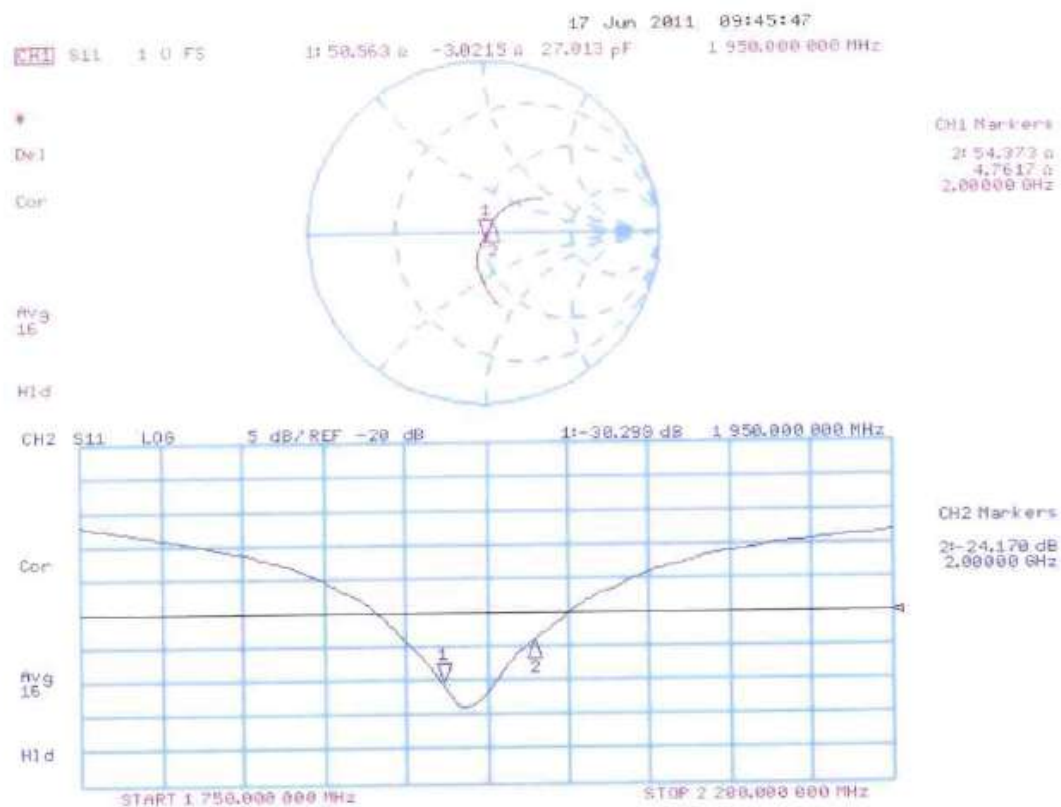

DASY5 Validation Report for Body TSL

Date: 17.06.2011

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1950 MHz; Type: D1950V3; Serial: D1950V3 - SN1139

Communication System: CW; Frequency: 1950 MHz

Medium: MSL BB1.9

Medium parameters used; $f = 1950$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.73, 4.73, 4.73); Calibrated: 29.04.2011
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 08.06.2011
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.6.2(482); SEMCAD X 14.4.5(3634)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.484 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 17.095 W/kg

SAR(1 g) = 9.75 mW/g; SAR(10 g) = 5.14 mW/g

Maximum value of SAR (measured) = 12.262 mW/g

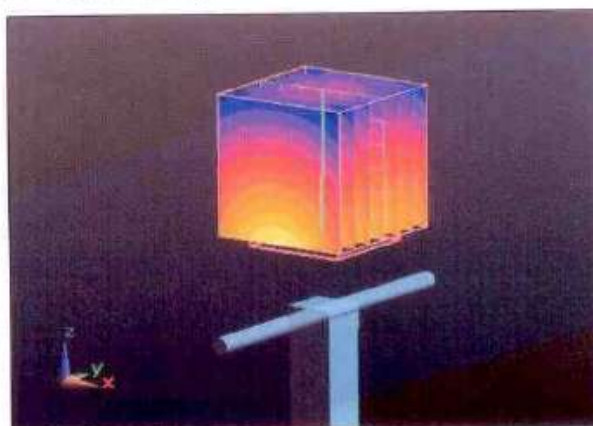

0 dB = 12.260mW/g

Impedance Measurement Plot for Body TSL

