

FCC RF Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : CDMA 1X/EVDO Phone
BRAND NAME : ZTE
MODEL NAME : N850L
FCC ID : Q78-N850L
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Nov. 09, 2012 and completely tested on Nov. 30, 2012. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Testing Site 6

 1.6 Applied Standards 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1 Carrier Frequency Channel 7

 2.2 Pre-Scanned RF Power 8

 2.3 Test Mode 9

 2.4 Connection Diagram of Test System 10

 2.5 Support Unit used in test configuration and system 11

 2.6 RF Utility 11

 2.7 Measurement Results Explanation Example 12

3 TEST RESULT 13

 3.1 6dB Bandwidth Measurement 13

 3.2 Output Power Measurement..... 20

 3.3 Power Spectral Density Measurement 23

 3.4 Conducted Band Edges and Spurious Emission Measurement 37

 3.5 Radiated Emission Measurement..... 50

 3.6 AC Conducted Emission Measurement..... 75

 3.7 Antenna Requirements 79

4 LIST OF MEASURING EQUIPMENT 80

5 UNCERTAINTY OF EVALUATION 81

APPENDIX A. PHOTOGRAPHS OF EUT

APPENDIX B. SETUP PHOTOGRAPHS

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	A8.4	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	A8.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	A8.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.41 dB at 2483.500 MHz
3.6	15.207	Gen 7.2.4	AC Conducted Emission	15.207(a)	Pass	Under limit 7.58 dB at 0.440 MHz
3.7	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

1 General Description

1.1 Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.2 Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	CDMA 1X/EVDO Phone
Brand Name	ZTE
Model Name	N850L
FCC ID	Q78-N850L
EUT supports Radios application	CDMA/EV-DO/ WLAN 11bgn/Bluetooth 2.1 EDR/Bluetooth 3.0 EDR
HW Version	c9dA
SW Version	N850LV1.0.0B01
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2412 MHz ~ 2462 MHz
Number of Channels	11
Carrier Frequency of Each Channel	2412+(n-1)*5 MHz; n=1~11
Maximum Output Power to Antenna	802.11b : 16.33 dBm (0.0430 W) 802.11g : 23.05 dBm (0.2018 W) 802.11n HT20 : 22.65 dBm (0.1841 W)
Antenna Type	PIFA Antenna with gain 4.00 dBi
Type of Modulation	802.11b : DSSS (BPSK / QPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Testing Site

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC/IC Registration No.
	TH01-KS	CO01-KS	03CH01-KS	149928/4086E-1

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
- ♦ ANSI C63.4-2003 and ANSI C63.10-2009
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3
- ♦ NOTICE 2012-DRS0126

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, “ Receivers Excluded from Industry Canada Requirements”, only radiocommunication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 KHz to 30 MHz) and radiated emission (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and antenna configurations as following table and the highest power data rates were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	15.07	15.08	15.04	15.26
CH 06	2437 MHz	15.79	15.85	15.94	16.03
CH 11	2462 MHz	16.33	16.18	16.21	16.31

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	21.95	22.39	22.33	22.52	21.93	22.56	22.52	22.36
CH 06	2437 MHz	22.68	22.72	22.62	22.61	22.49	22.25	22.59	22.62
CH 11	2462 MHz	23.05	23.05	22.86	22.78	22.98	22.87	22.91	22.93

Channel	Frequency	2.4GHz 802.11n HT20 RF Power (dBm)							
		OFDM Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412 MHz	22.32	21.52	22.25	21.71	21.73	21.26	21.69	22.12
CH 06	2437 MHz	22.36	22.26	22.51	22.29	21.95	22.28	22.39	22.35
CH 11	2462 MHz	22.65	22.62	22.36	22.44	22.61	22.53	22.37	22.41


2.3 Test Mode

Final results of test modes, data rates and test channels are shown as following table.


Test Cases				
	Test Items	Mode	Data Rate	Test Channel
Conducted TCs	6dB BW Power Spectral Density	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
	Output Power	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
	Conducted Band EDGE	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
Conducted Spurious Emission	802.11b	1 Mbps	1/6/11	
	802.11g	6 Mbps	1/6/11	
	802.11n HT20	6.5 Mbps	1/6/11	
Radiated TCs	Radiated Band EDGE	802.11b	1 Mbps	1/11
		802.11g	6 Mbps	1/11
		802.11n HT20	6.5 Mbps	1/11
	Radiated Spurious Emission	802.11b	1 Mbps	1/6/11
		802.11g	6 Mbps	1/6/11
		802.11n HT20	6.5 Mbps	1/6/11
AC Conducted Emission	Mode 1 : CDMA2000 BC0 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone			

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

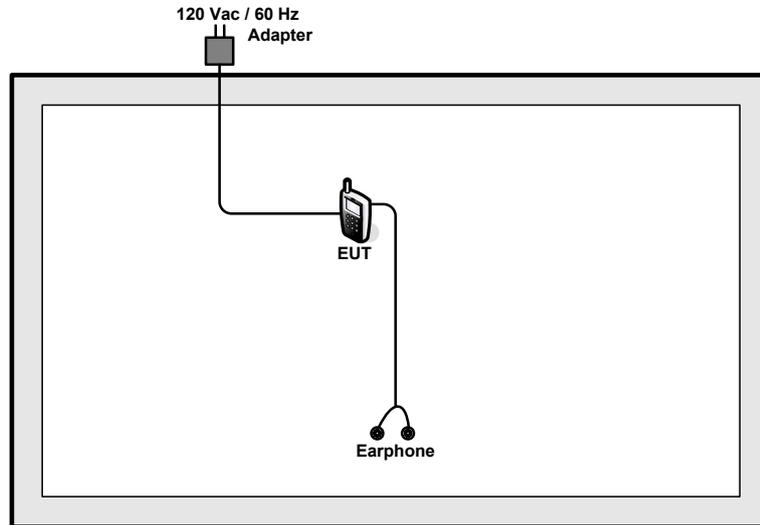

<AC Conducted Emission Mode>

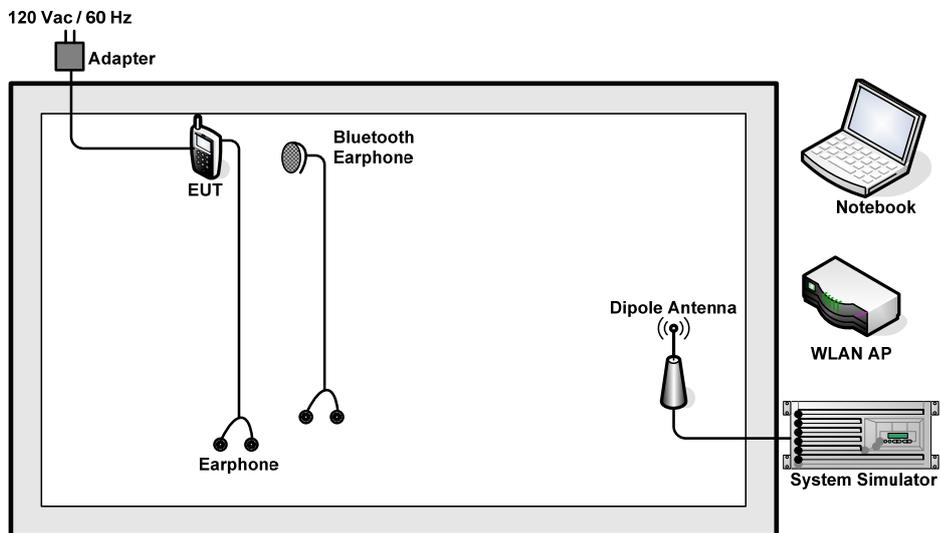

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A

2.6 RF Utility

For WLAN function, programmed RF utility, execute “ADB” to make the EUT provides functions like channel selection and power level for continuous transmitting and receiving signals.



2.7 Measurement Results Explanation Example

For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and 10dB attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and 10dB attenuator factor.

Offset = RF cable loss + attenuator factor.

Following table shows an offset computation example with cable loss 5.6 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.6 + 10 = 15.6 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 KHz.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.
5. Measure and record the results in the test report.

3.1.4 Test Setup

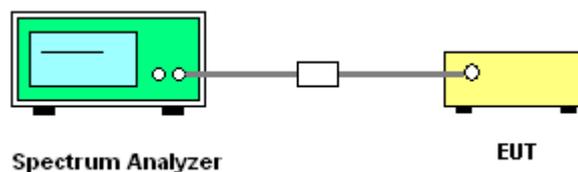


3.1.5 Test Result of 6dB Bandwidth

Test Mode :	802.11b	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	8.04	0.5	Pass
06	2437	7.56	0.5	Pass
11	2462	8.04	0.5	Pass


6 dB Bandwidth Plot on 802.11b Channel 01

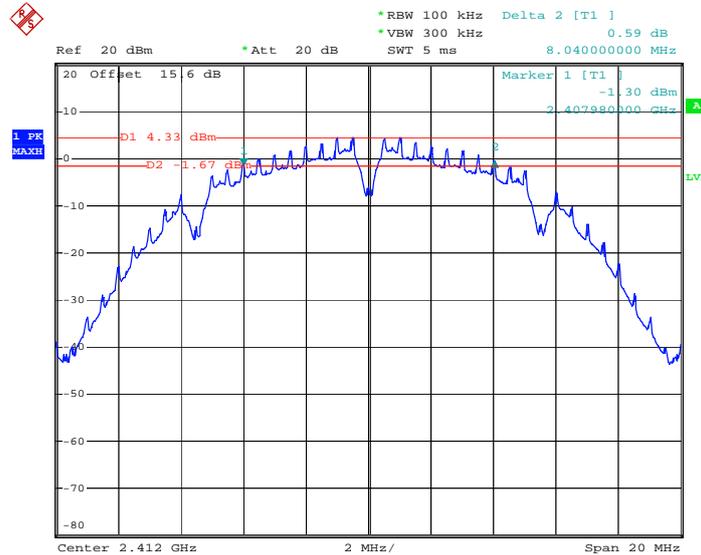

Date: 27.NOV.2012 11:09:41




6 dB Bandwidth Plot on 802.11b Channel 06

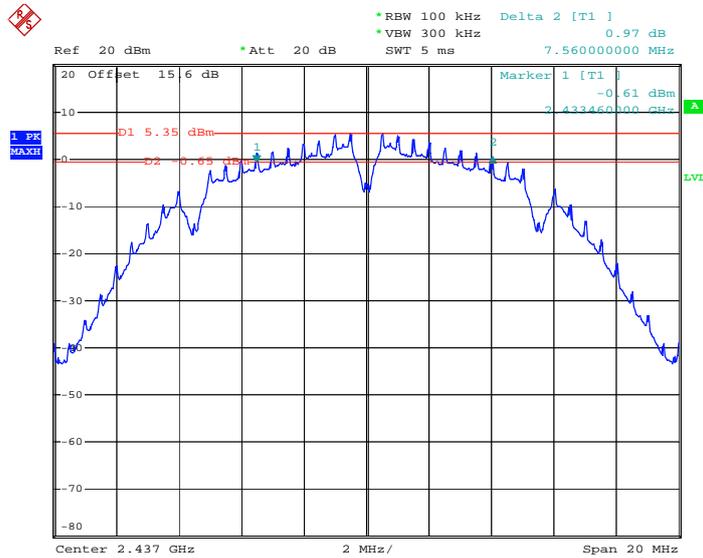

Date: 27.NOV.2012 11:13:09

6 dB Bandwidth Plot on 802.11b Channel 11

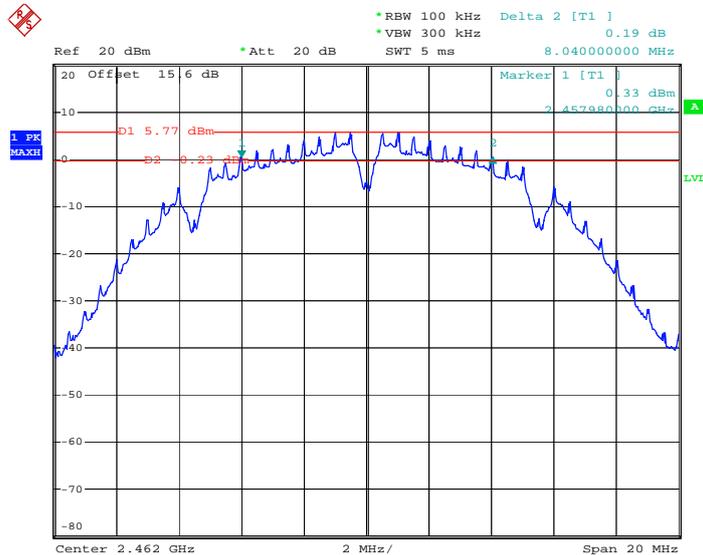


Date: 27.NOV.2012 11:15:53



Test Mode :	802.11g	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	802.11g 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	15.08	0.5	Pass
06	2437	15.12	0.5	Pass
11	2462	15.08	0.5	Pass


6 dB Bandwidth Plot on 802.11g Channel 01

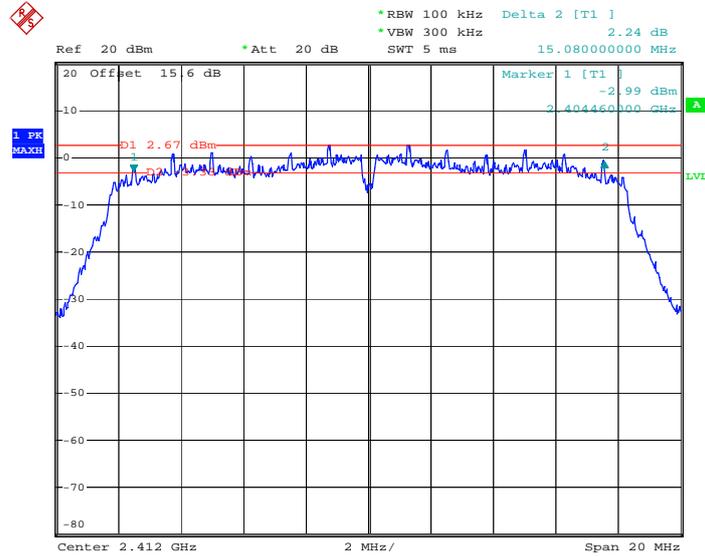

Date: 27.NOV.2012 11:19:37




6 dB Bandwidth Plot on 802.11g Channel 06

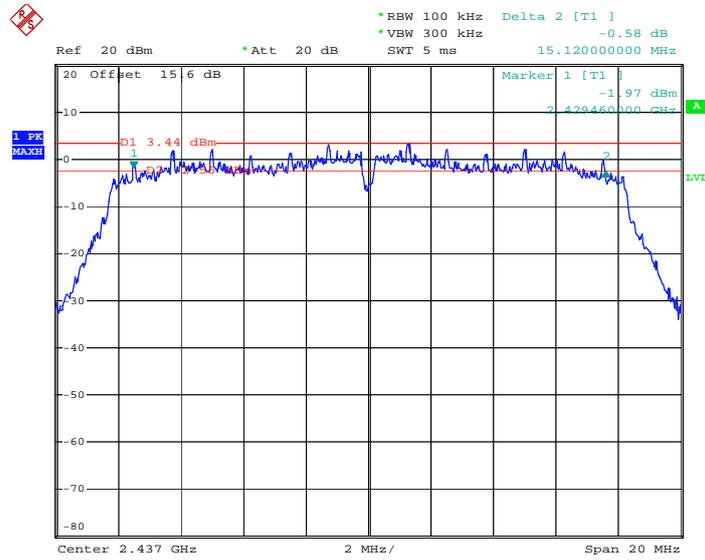

Date: 27.NOV.2012 11:22:14

6 dB Bandwidth Plot on 802.11g Channel 11

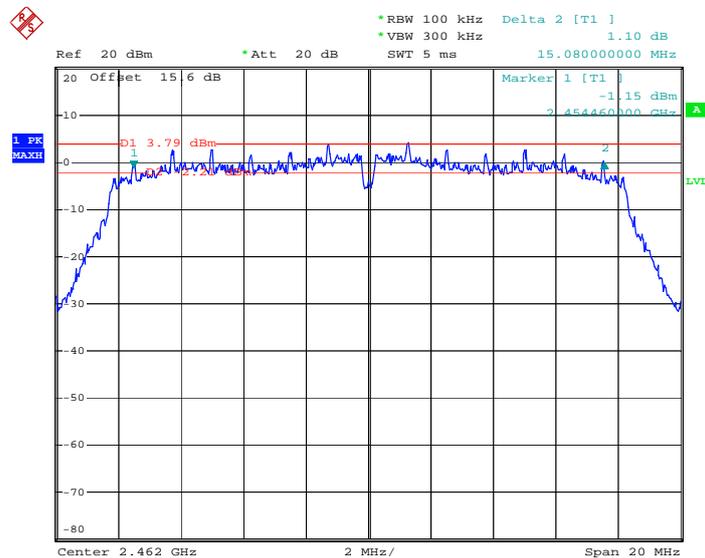


Date: 27.NOV.2012 11:31:13



Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	15.12	0.5	Pass
06	2437	15.08	0.5	Pass
11	2462	15.08	0.5	Pass


6 dB Bandwidth Plot on 802.11n HT20 Channel 01

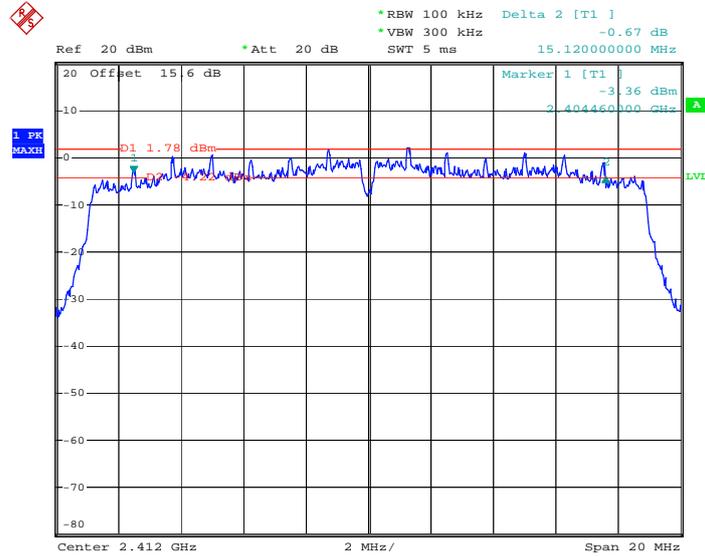

Date: 27.NOV.2012 11:37:34




6 dB Bandwidth Plot on 802.11n HT20 Channel 06

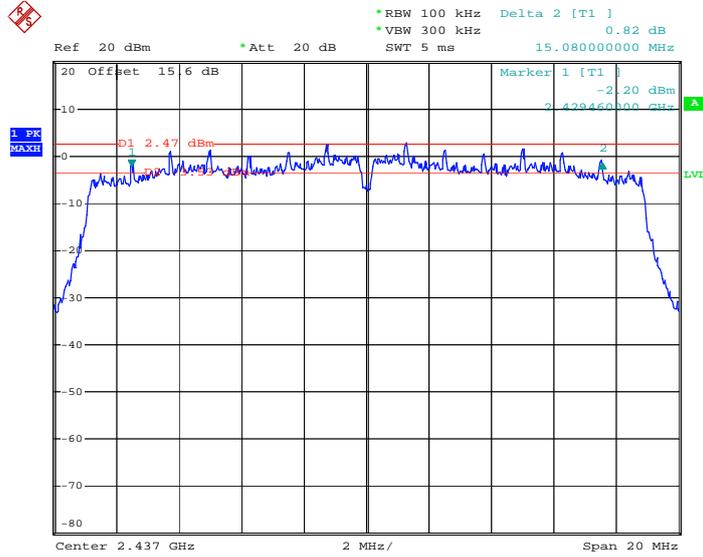

Date: 27.NOV.2012 11:40:30

6 dB Bandwidth Plot on 802.11n HT20 Channel 11

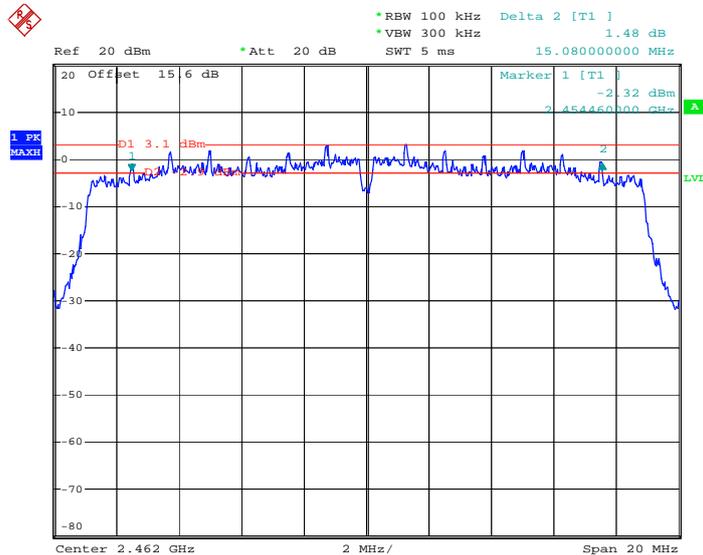

Date: 27.NOV.2012 11:44:02

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the power meter by a low loss cable
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

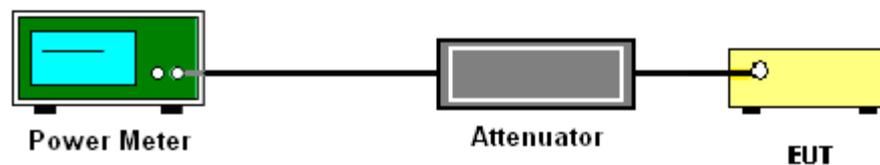

3.2.5 Test Result of Peak Output Power

Test Mode :	802.11b	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	802.11b Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	15.07	30	Pass
06	2437	15.79	30	Pass
11	2462	16.33	30	Pass

Test Mode :	802.11g	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	802.11g Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	21.95	30	Pass
06	2437	22.68	30	Pass
11	2462	23.05	30	Pass

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	2.4GHz 802.11n HT20 Peak Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	22.32	30	Pass
06	2437	22.36	30	Pass
11	2462	22.65	30	Pass



3.2.6 Test Result of Average output Power (Reporting Only)

Test Mode :	802.11b	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%
Duty Cycle:	98.59%	Duty Factor:	0.06dB

Channel	Frequency (MHz)	802.11b Average Output Power (dBm)
01	2412	12.22
06	2437	13.02
11	2462	13.48

Test Mode :	802.11g	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%
Duty Cycle:	92.67%	Duty Factor:	0.33dB

Channel	Frequency (MHz)	802.11g Average Output Power (dBm)
01	2412	12.95
06	2437	13.84
11	2462	14.31

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%
Duty Cycle:	66.84%	Duty Factor:	1.75dB

Channel	Frequency (MHz)	802.11n HT20 Average Output Power (dBm)
01	2412	12.44
06	2437	13.26
11	2462	13.59

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3KHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 9.1 Option 1 of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Record the measurement data derived from spectrum analyzer.

3.3.4 Test Setup

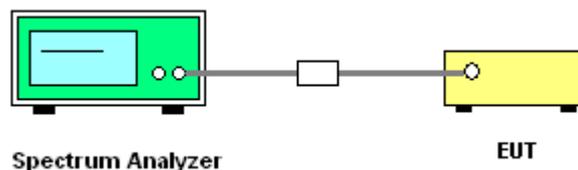

3.3.5 Test Result of Power Spectral Density

Test Mode :	802.11b	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	802.11b Power Density		Max. Limits (dBm)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	4.36	-9.48	8	Pass
06	2437	5.28	-8.43	8	Pass
11	2462	5.57	-8.44	8	Pass

Test Mode :	802.11g	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	802.11g Power Density		Max. Limits (dBm)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	2.08	-11.34	8	Pass
06	2437	3.30	-10.78	8	Pass
11	2462	3.66	-10.32	8	Pass

Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	802. 11n HT20 Power Density		Max. Limits (dBm)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	1.77	-11.90	8	Pass
06	2437	2.46	-11.74	8	Pass
11	2462	3.15	-10.72	8	Pass

Note:


1. Measured power density (dBm) has offset with cable loss.
2. Measured power density (dBm)/ 100KHz is for 20dBc reference only



3.3.6 Test Result of Power Spectral Density Plots (100KHz)


<802.11b>

PSD 100KHz Plot on 802.11b Channel 01

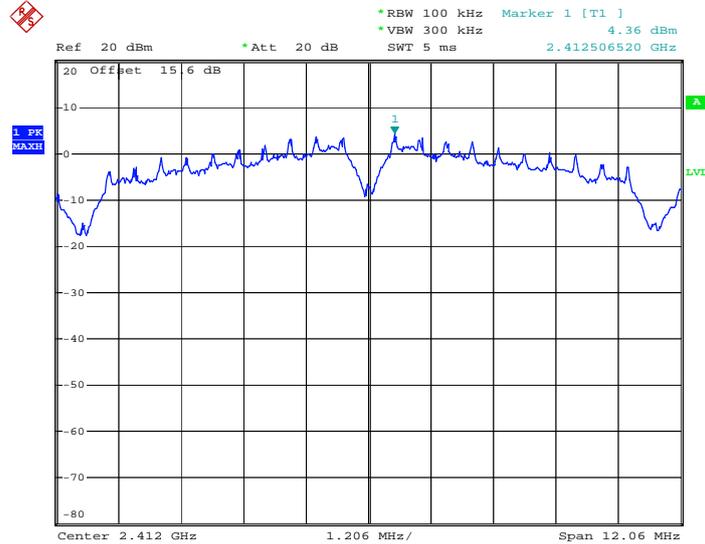

Date: 27.NOV.2012 11:10:11


PSD 100KHz Plot on 802.11b Channel 06

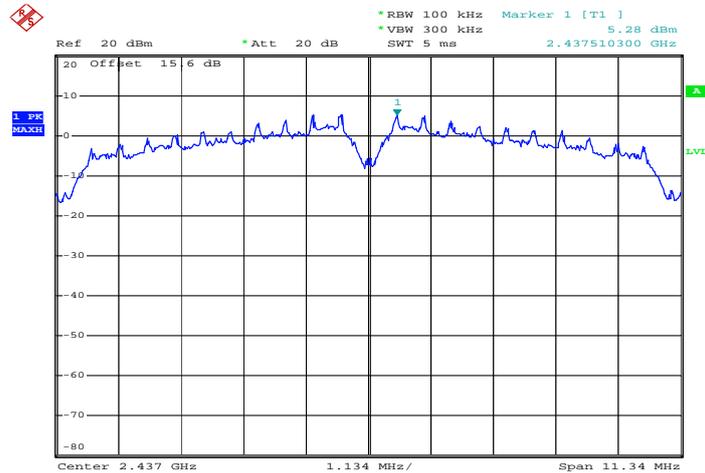

Date: 27.NOV.2012 11:13:39



PSD 100KHz Plot on 802.11b Channel 11

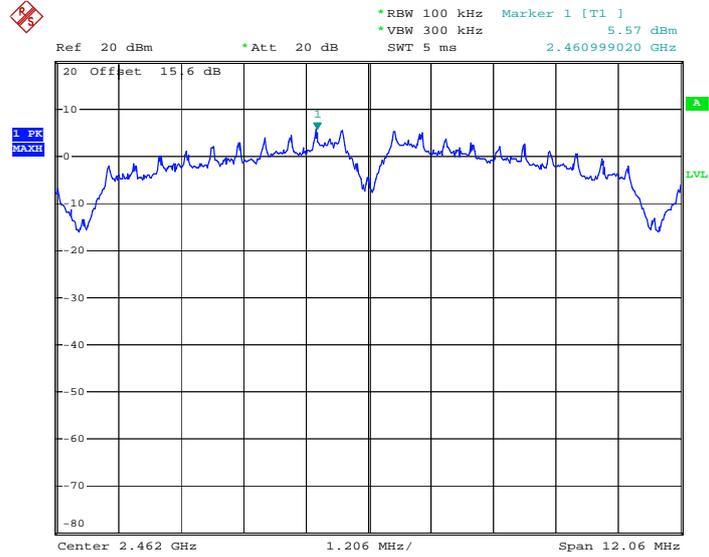


Date: 27.NOV.2012 11:16:21




<802.11g>

PSD 100KHz Plot on 802.11g Channel 01

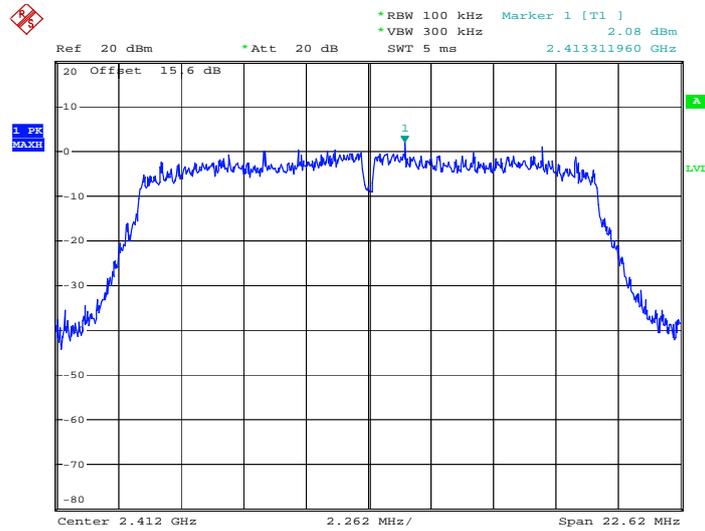

Date: 27.NOV.2012 11:20:07


PSD 100KHz Plot on 802.11g Channel 06

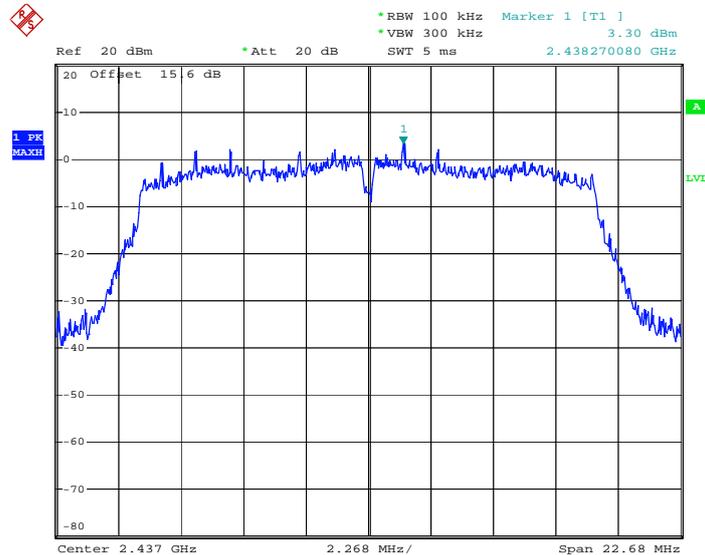

Date: 27.NOV.2012 11:22:45



PSD 100KHz Plot on 802.11g Channel 11

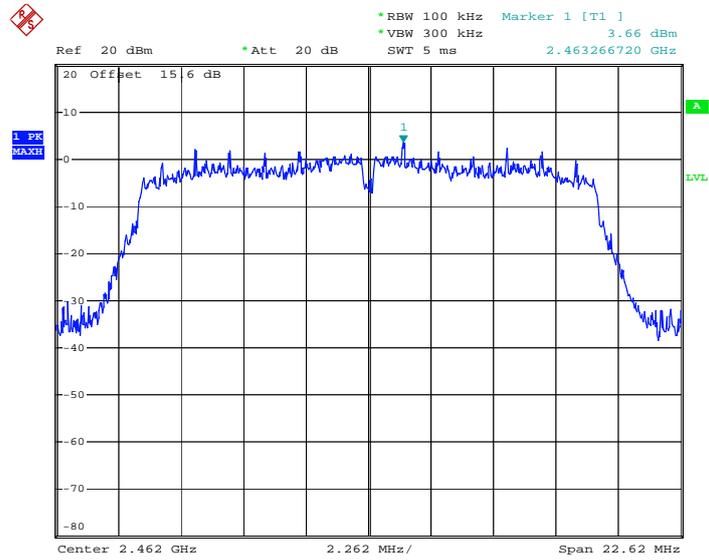


Date: 27.NOV.2012 11:31:51




<2.4GHz 802.11n HT-20>

PSD 100KHz Plot on 2.4G 802.11n HT20 Channel 01

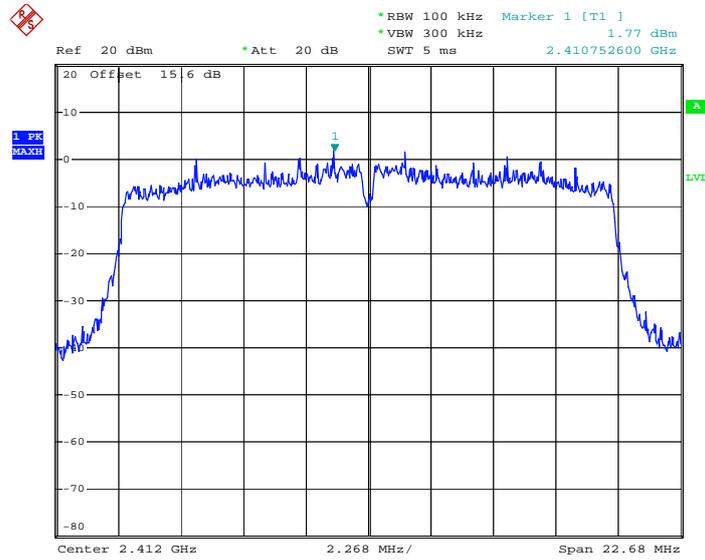

Date: 27.NOV.2012 11:38:05


PSD 100KHz Plot on 2.4G 802.11n HT20 Channel 06

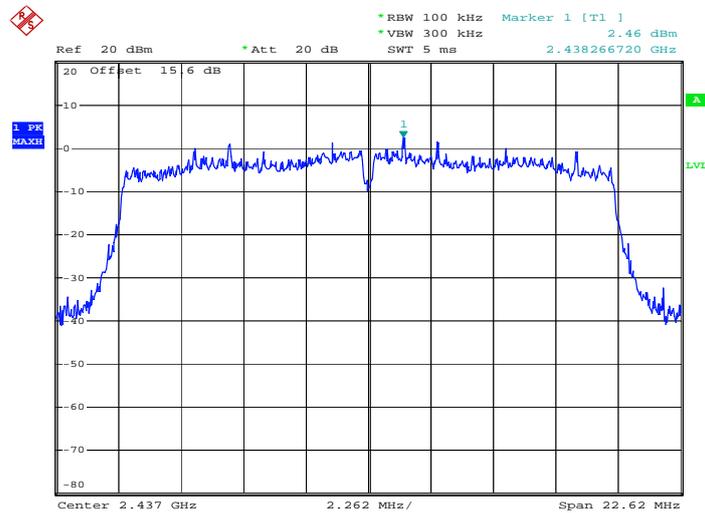

Date: 27.NOV.2012 11:41:00



PSD 100KHz Plot on 2.4G 802.11n HT20 Channel 11

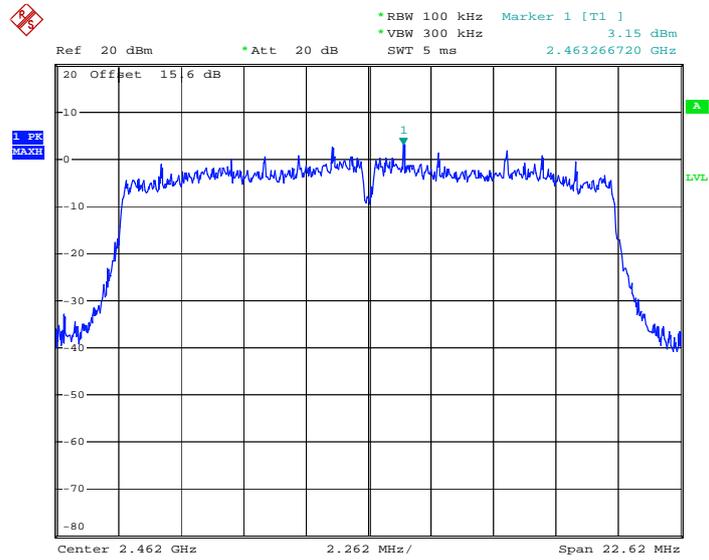


Date: 27.NOV.2012 11:44:33



3.3.7 Test Result of Power Spectral Density Plots (3KHz)


<802.11b>

PSD 3KHz Plot on 802.11b Channel 01

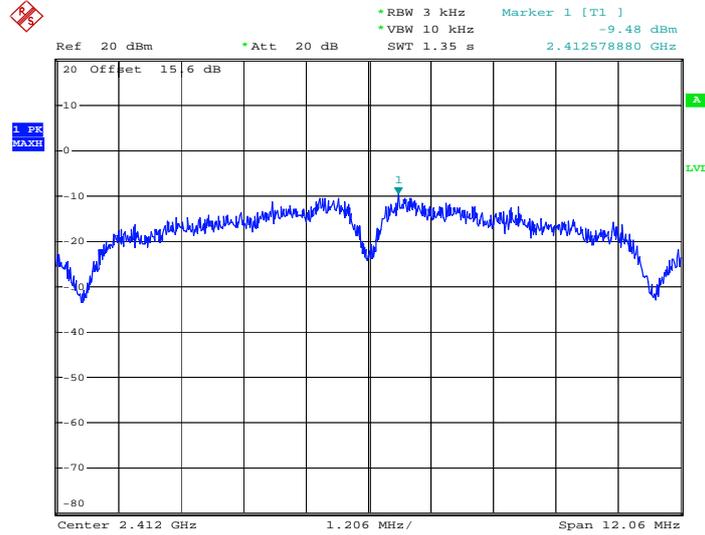

Date: 27.NOV.2012 11:10:02


PSD 3KHz Plot on 802.11b Channel 06

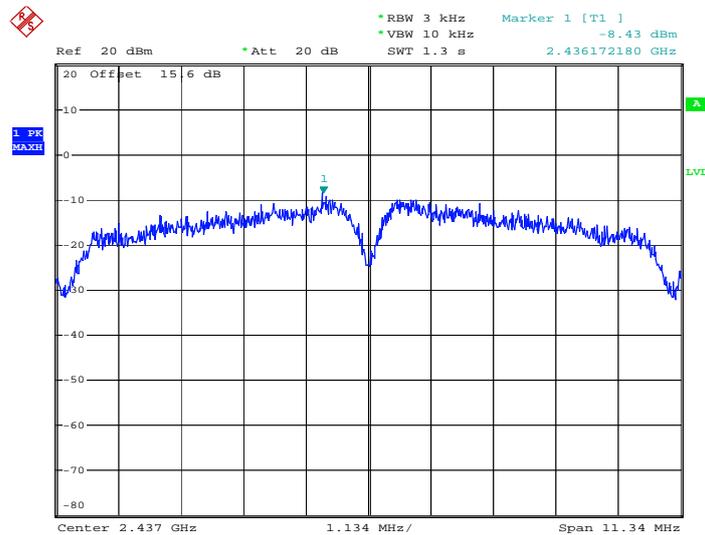

Date: 27.NOV.2012 11:13:29



PSD 3KHz Plot on 802.11b Channel 11

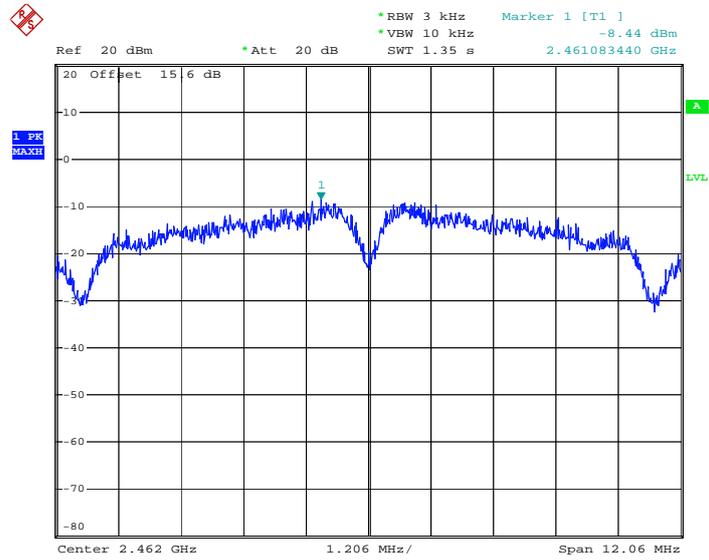


Date: 27.NOV.2012 11:16:13




<802.11g>

PSD 3KHz Plot on 802.11g Channel 01

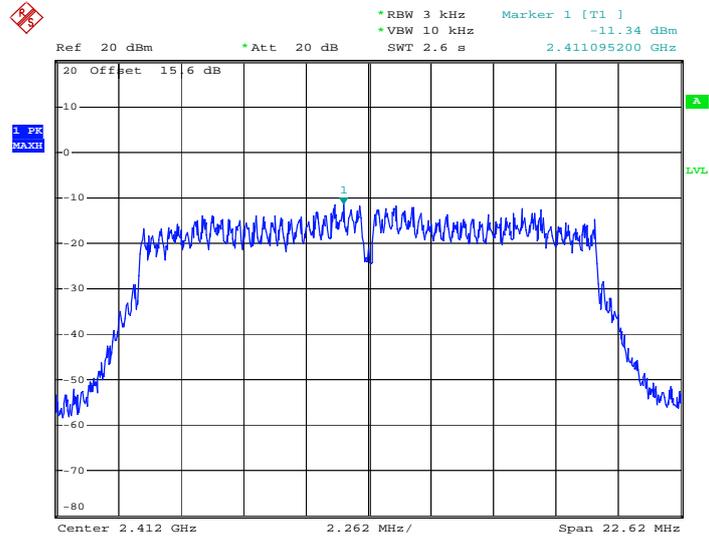

Date: 27.NOV.2012 11:19:58


PSD 3KHz Plot on 802.11g Channel 06

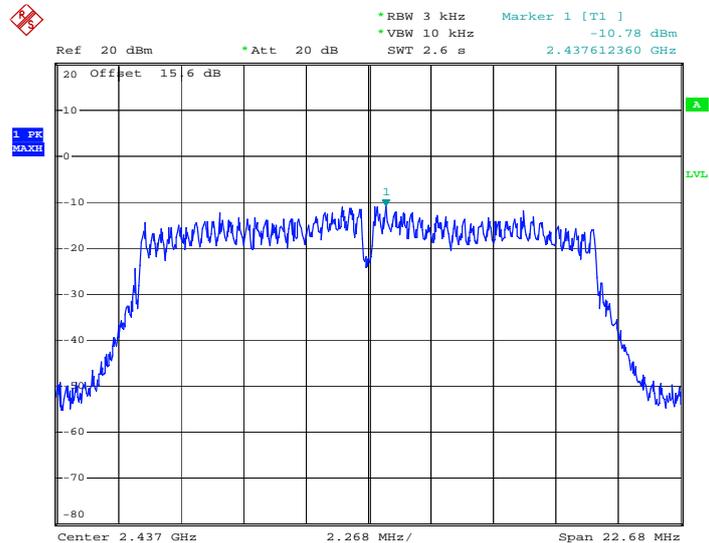

Date: 27.NOV.2012 11:22:35



PSD 3KHz Plot on 802.11g Channel 11

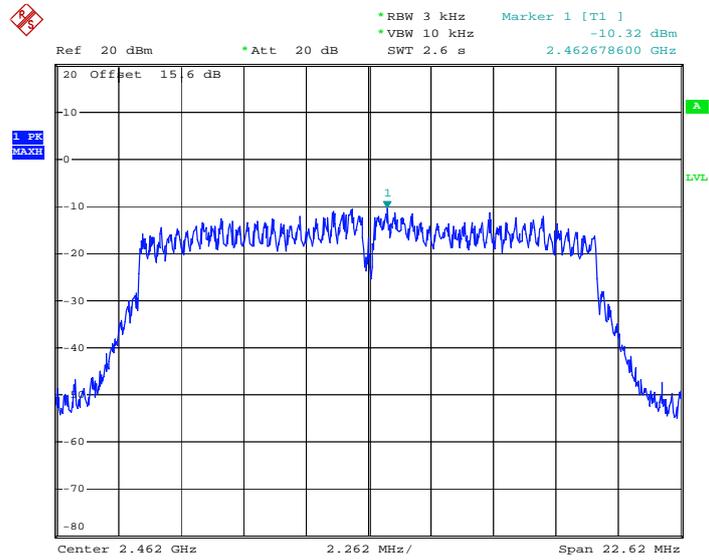


Date: 27.NOV.2012 11:31:42




<2.4GHz 802.11n HT-20>

PSD 3KHz Plot on 2.4G 802.11n HT20 Channel 01

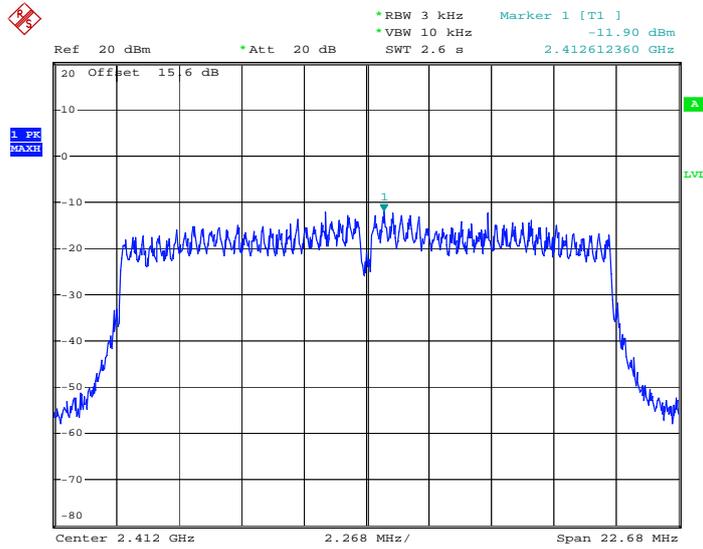

Date: 27.NOV.2012 11:37:55


PSD 3KHz Plot on 2.4G 802.11n HT20 Channel 06

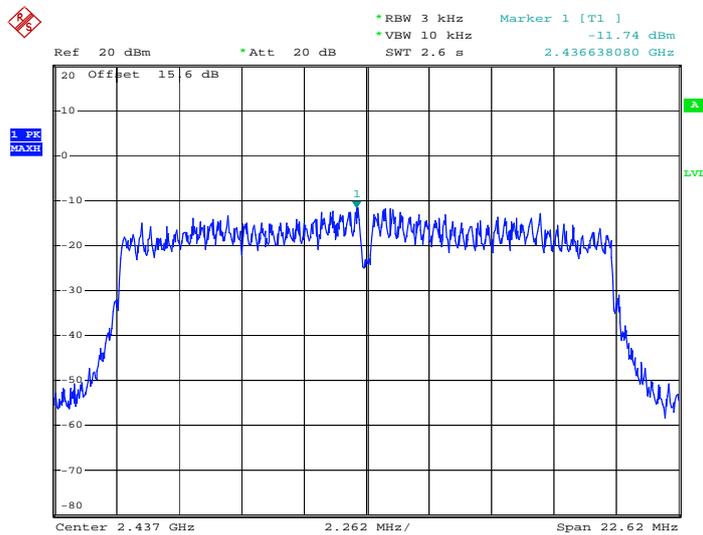

Date: 27.NOV.2012 11:40:51



PSD 3KHz Plot on 2.4G 802.11n HT20 Channel 11

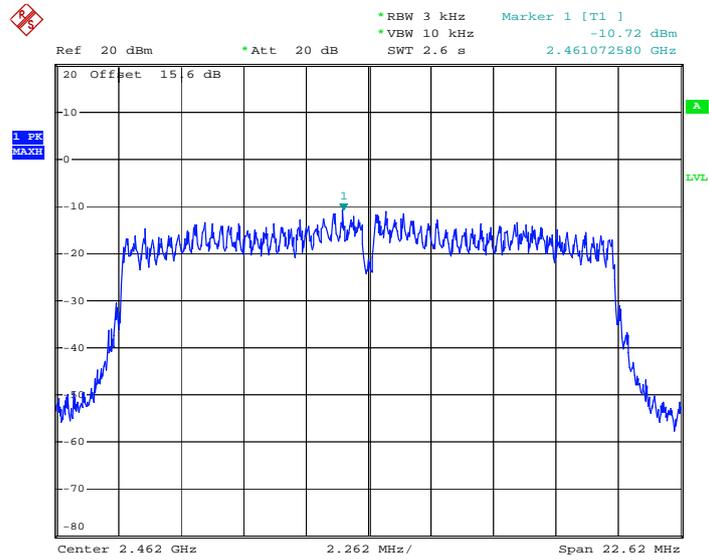

Date: 27.NOV.2012 11:44:23

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows the guidelines in the Measurement Procedure of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance and TCB Workshop 2012, April.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100 KHz, VBW=300 KHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz, when maximum peak conducted output power procedure is used. The attenuation is set to 30dB, when maximum conducted output power procedure is used.
4. Measure and record the results in the test report.


3.4.4 Test Setup

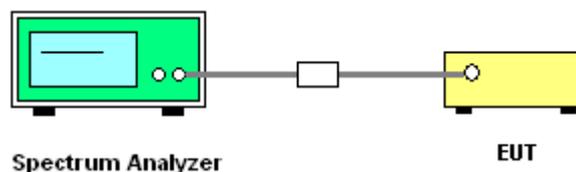

3.4.5 Test Plots of Conducted Band Edges


Test Mode :	802.11b	Temperature :	21~22°C
Test Band :	Low and High	Relative Humidity :	41~42%
Test Channel :	01 and 11	Test Engineer :	Cloud Peng

Low Band Edge Plot on 802.11b Channel 01

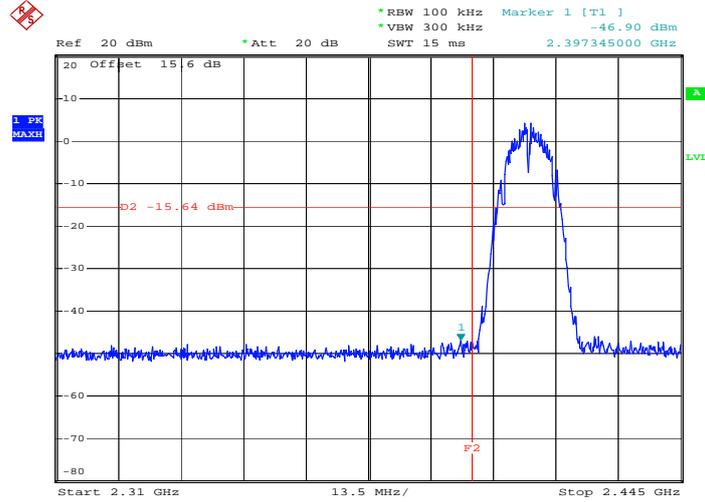

Date: 27.NOV.2012 11:10:28

High Band Edge Plot on 802.11b Channel 11

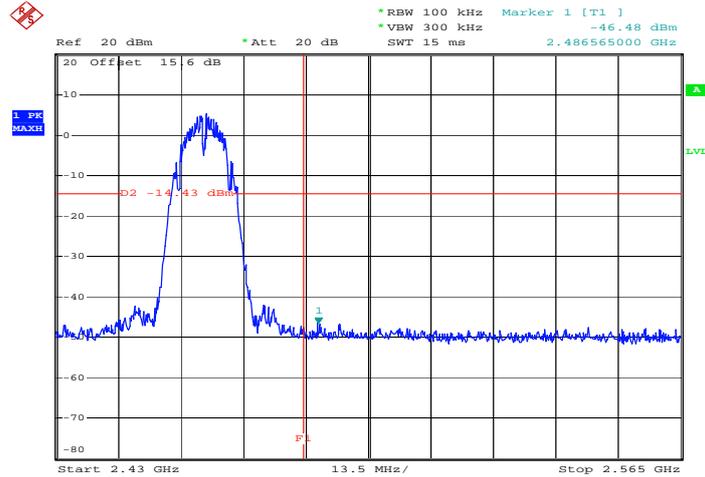


Date: 27.NOV.2012 11:16:38




Test Mode :	802.11g	Temperature :	21~22°C
Test Band :	Low and High	Relative Humidity :	41~42%
Test Channel :	01 and 11	Test Engineer :	Cloud Peng

Low Band Edge Plot on 802.11g Channel 01

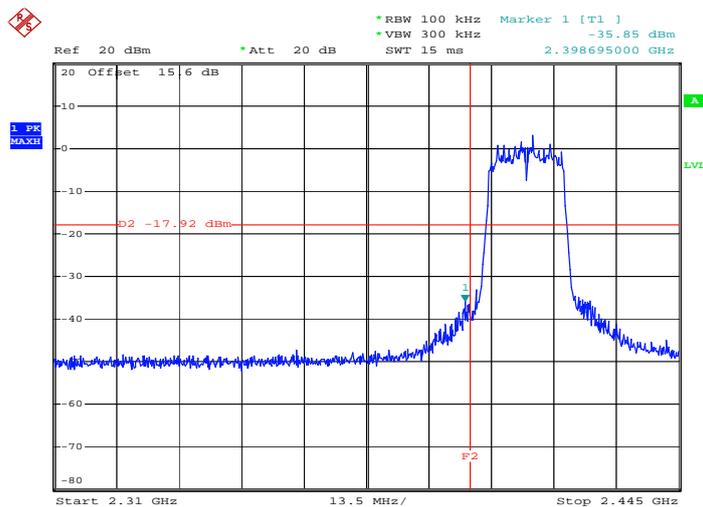

Date: 27.NOV.2012 11:20:24

High Band Edge Plot on 802.11g Channel 11

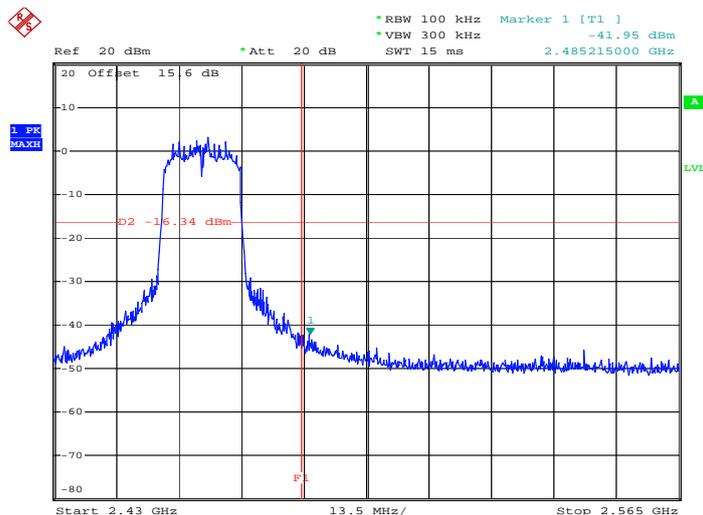


Date: 27.NOV.2012 11:32:07




Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Band :	Low and High	Relative Humidity :	41~42%
Test Channel :	01 and 11	Test Engineer :	Cloud Peng

Low Band Edge Plot on 802.11n HT20 Channel 01

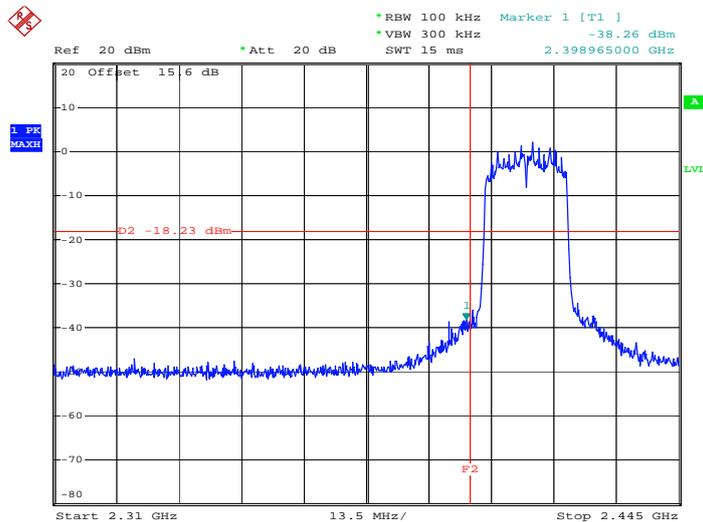

Date: 27.NOV.2012 11:38:21

High Band Edge Plot on 802.11n HT20 Channel 11

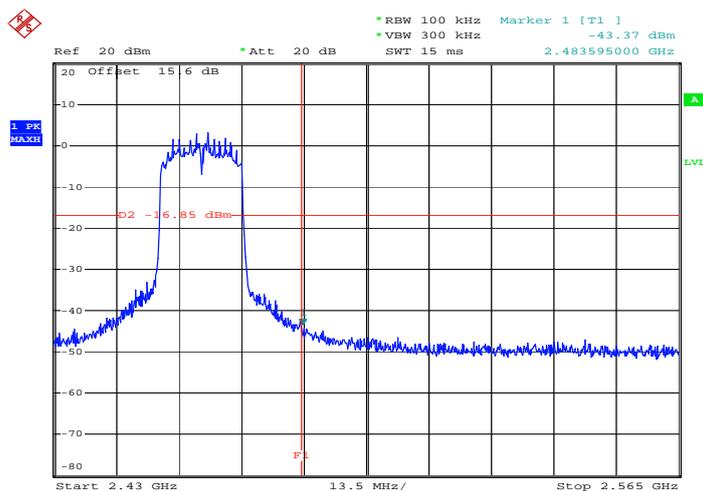


Date: 27.NOV.2012 11:44:49

3.4.6 Test Plots of Spurious Emission

Test Mode :	802.11b	Temperature :	21~22°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	41~42%
Test Channel :	01, 06, 11	Test Engineer :	Cloud Peng

802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

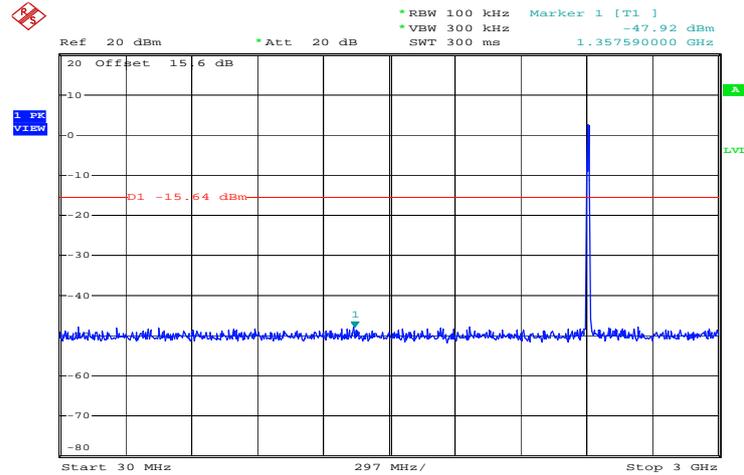

Date: 27.NOV.2012 11:10:49

802.11b 2 GHz~25 GHz


Conducted Spurious Emission Plot on Channel 01

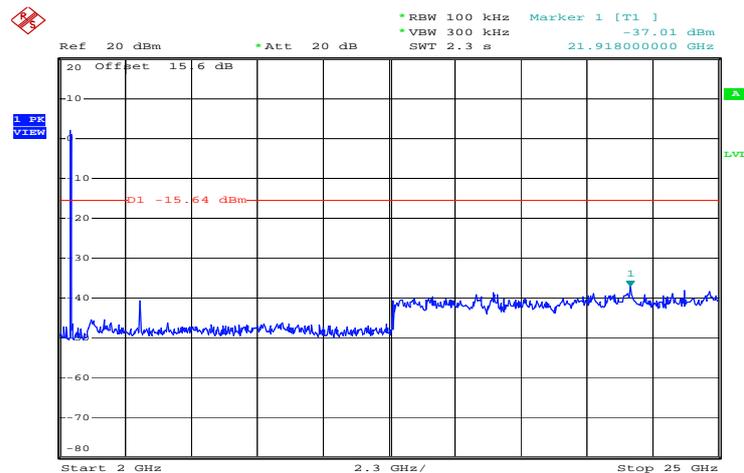

Date: 27.NOV.2012 11:11:07

802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

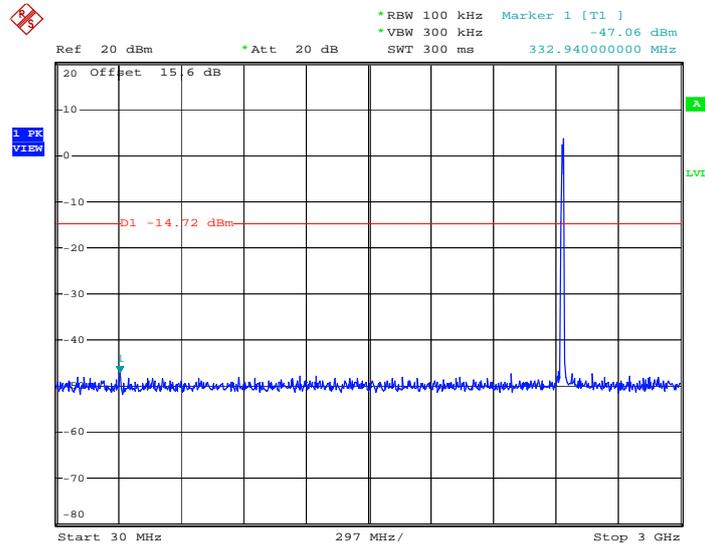

Date: 27.NOV.2012 11:14:06

802.11b 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

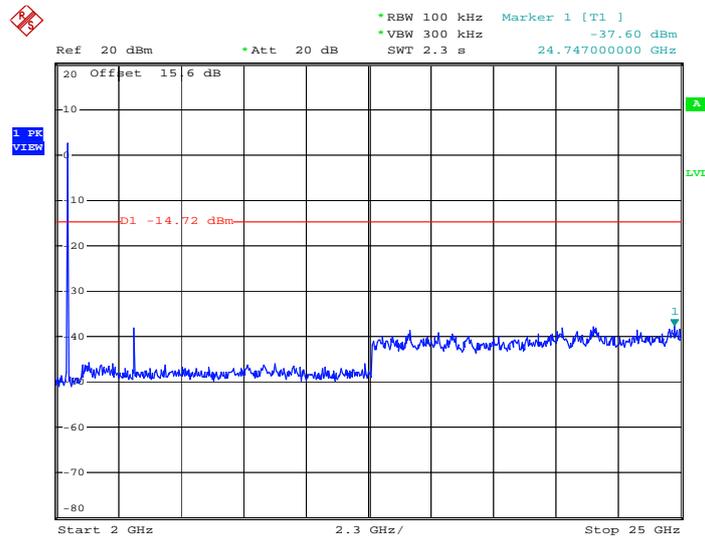


Date: 27.NOV.2012 11:14:25



802.11b 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11

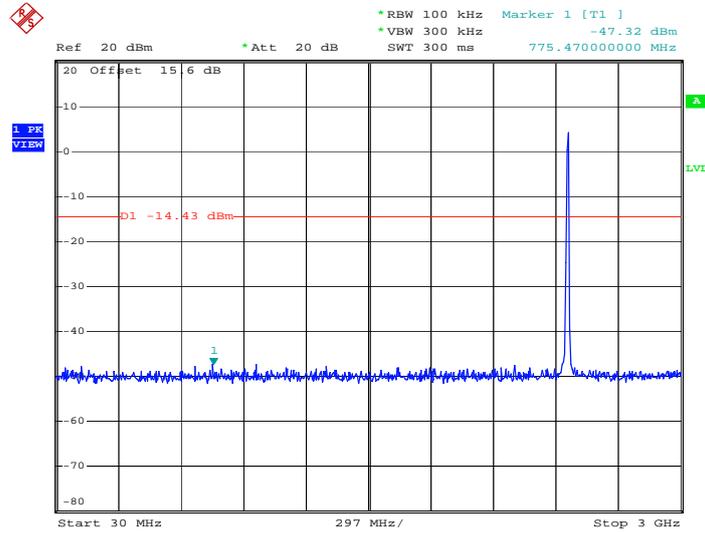

Date: 27.NOV.2012 11:16:59

802.11b 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

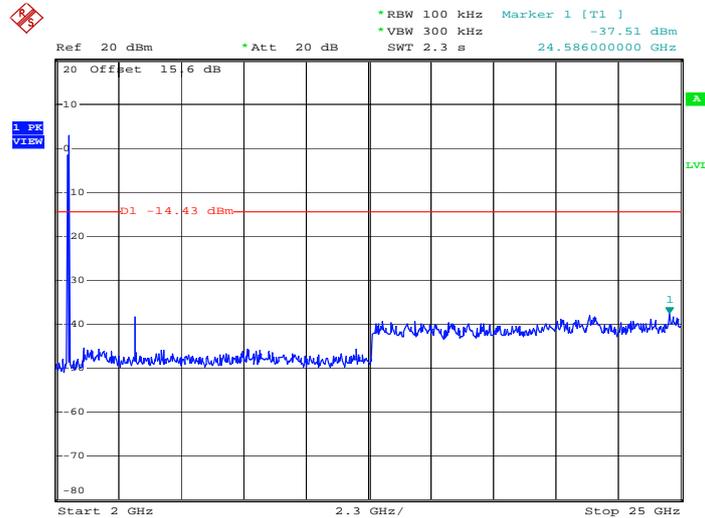


Date: 27.NOV.2012 11:17:18



Test Mode :	802.11g	Temperature :	21~22°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	41~42%
Test Channel :	01, 06, 11	Test Engineer :	Cloud Peng

802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

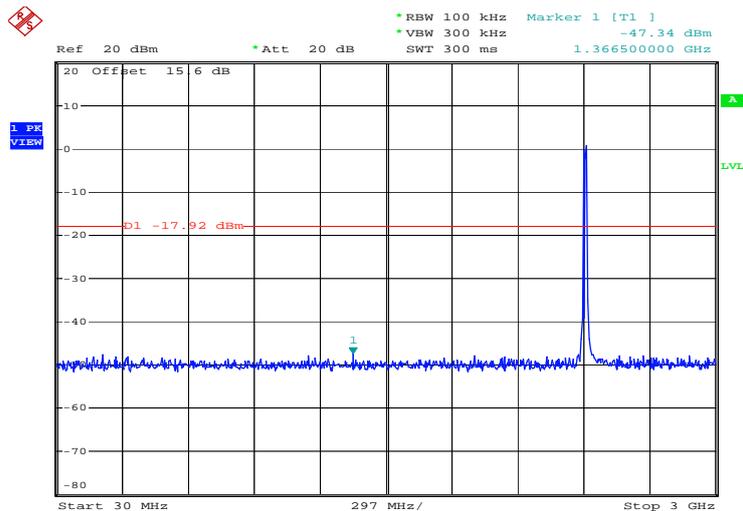

Date: 27.NOV.2012 11:20:42

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 01

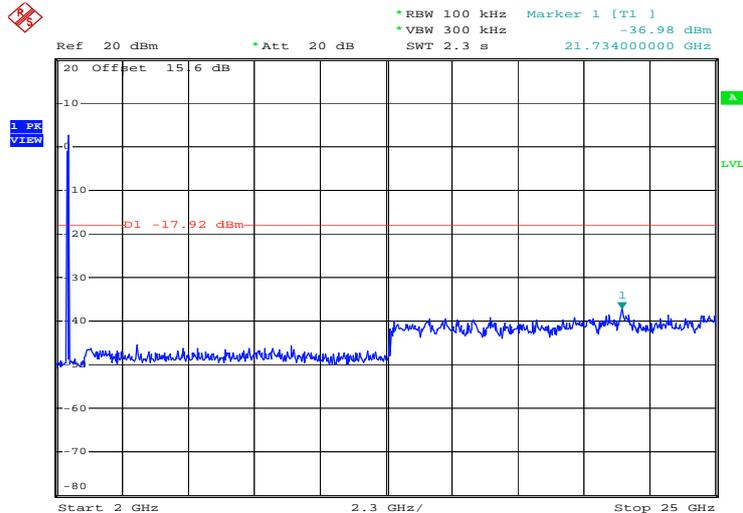


Date: 27.NOV.2012 11:21:00



802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

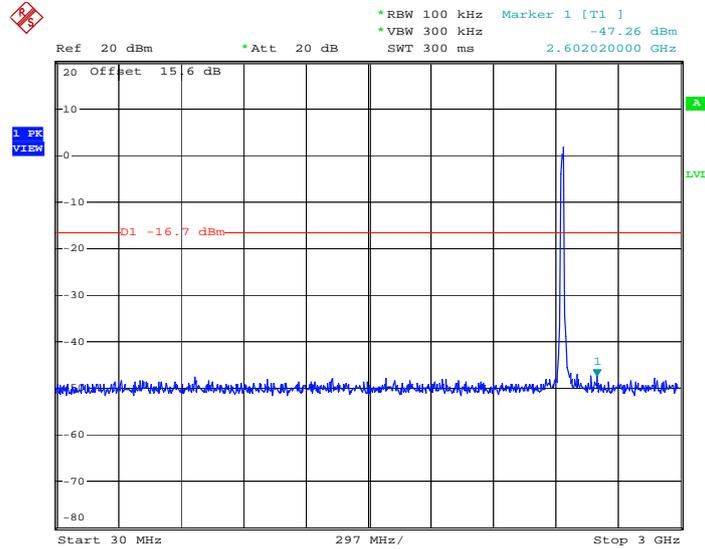

Date: 27.NOV.2012 11:23:06

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

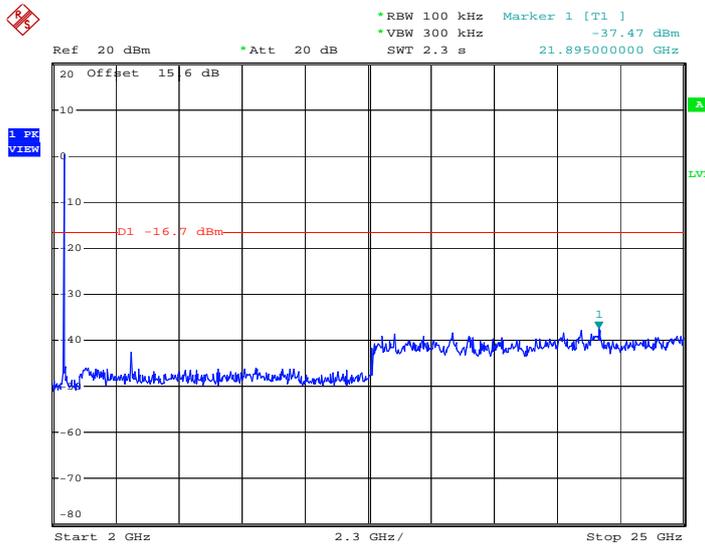


Date: 27.NOV.2012 11:23:24



802.11g 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11

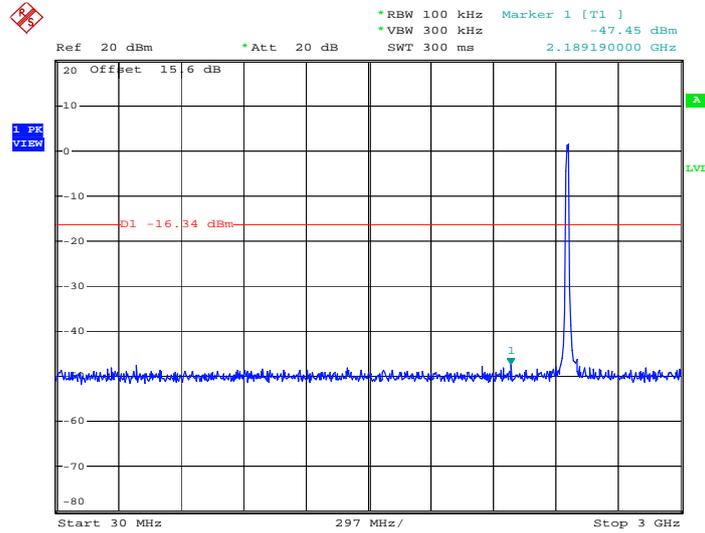

Date: 27.NOV.2012 11:34:50

802.11g 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

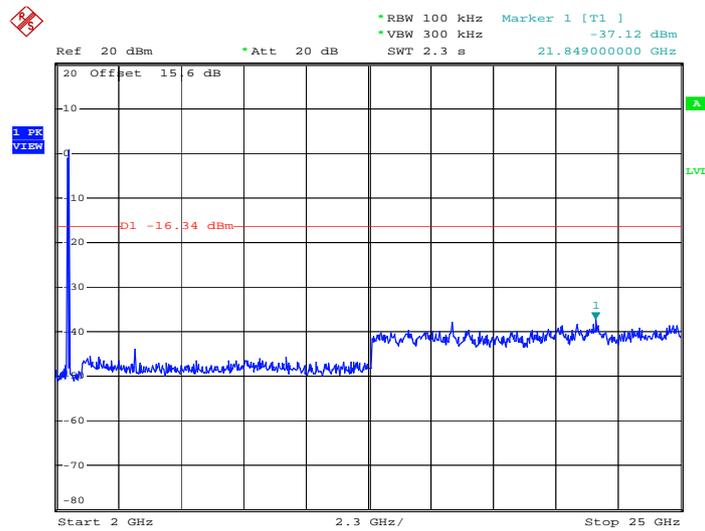


Date: 27.NOV.2012 11:35:08



Test Mode :	802.11n HT20	Temperature :	21~22°C
Test Band :	30MHz-3GHz and 2G-25GHz	Relative Humidity :	41~42%
Test Channel :	01, 06, 11	Test Engineer :	Cloud Peng

802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 01

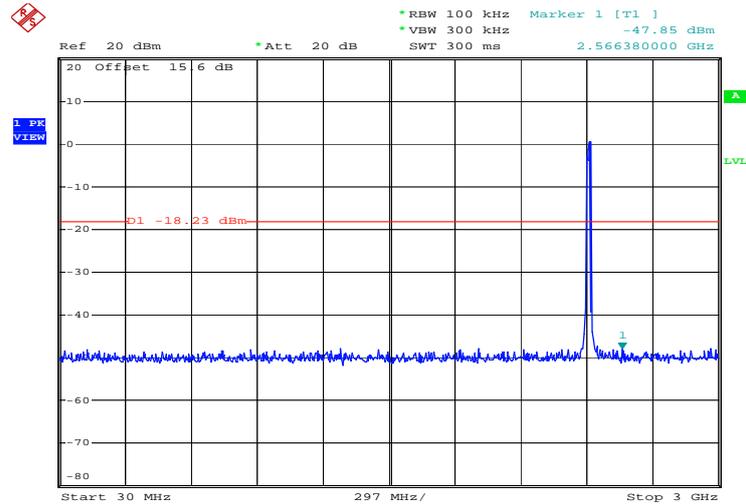

Date: 27.NOV.2012 11:38:39

802.11n HT20 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 01

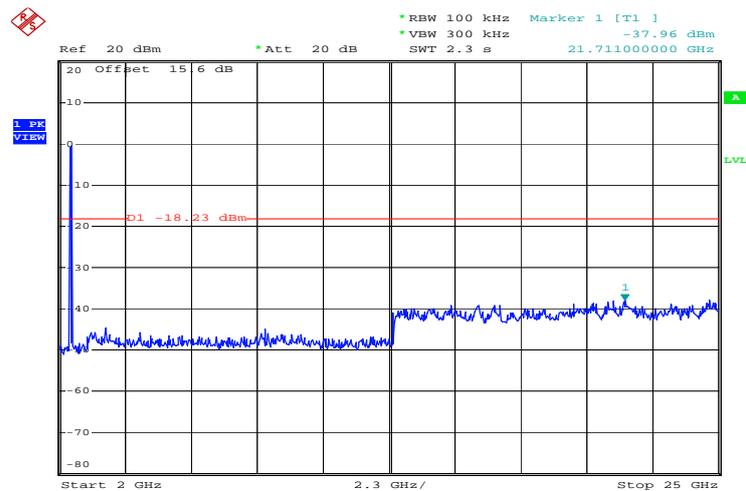


Date: 27.NOV.2012 11:38:57



802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 06

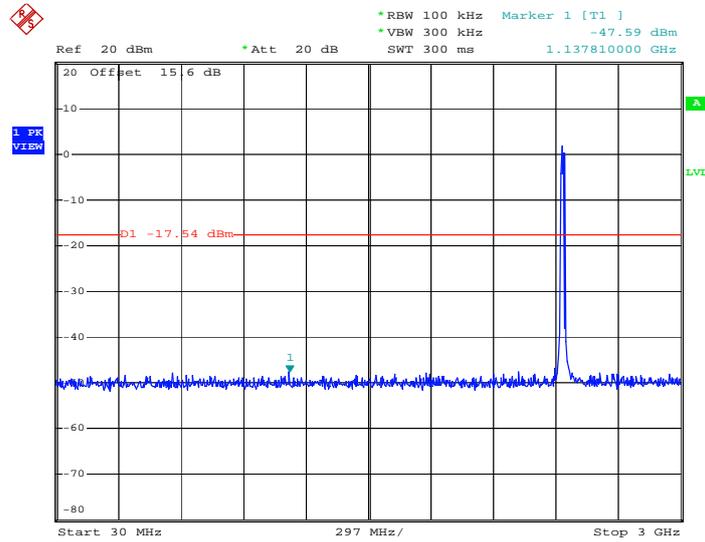

Date: 27.NOV.2012 11:42:32

802.11n HT20 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 06

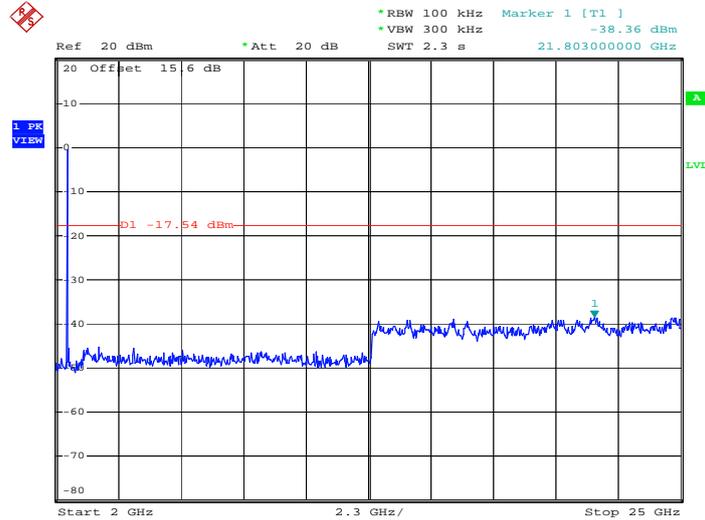


Date: 27.NOV.2012 11:42:51



802.11n HT20 30 MHz~3 GHz


Conducted Spurious Emission Plot on Channel 11

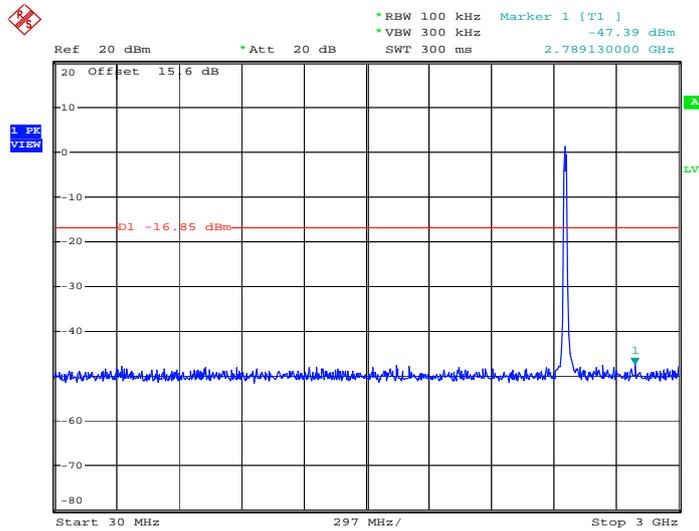

Date: 27.NOV.2012 11:45:07

802.11n HT20 2 GHz~25 GHz

Conducted Spurious Emission Plot on Channel 11

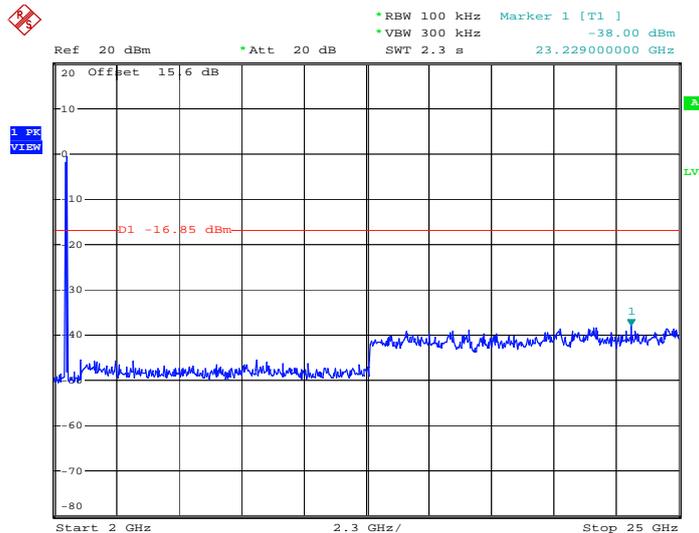

Date: 27.NOV.2012 11:45:26

3.5 Radiated Emission Measurement

3.5.1 Limit of Radiated Emission

In any 100 KHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures


1. The testing follows the guidelines in ANSI C63. 10-2009
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 KHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for Peak measurement:
 For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(ms)	1/T(KHz)	VBW Setting
802.11b	98.59	-	-	10Hz
802.11g	92.67	1.39	0.72	1KHz
2.4G 802.11n HT20	91.29	1.3	0.77	1KHz


Note: For average measurement with duty cycle < 98%, use reduced VBW measurement method 4.2.3.2.3 in ANSI C63.10.

3.5.4 Test Setup


For radiated emissions below 30MHz

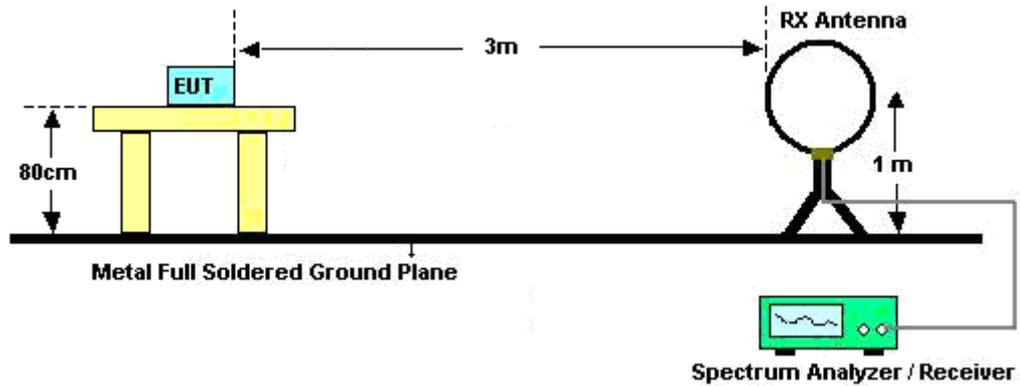

For radiated emissions from 30MHz to 1GHz

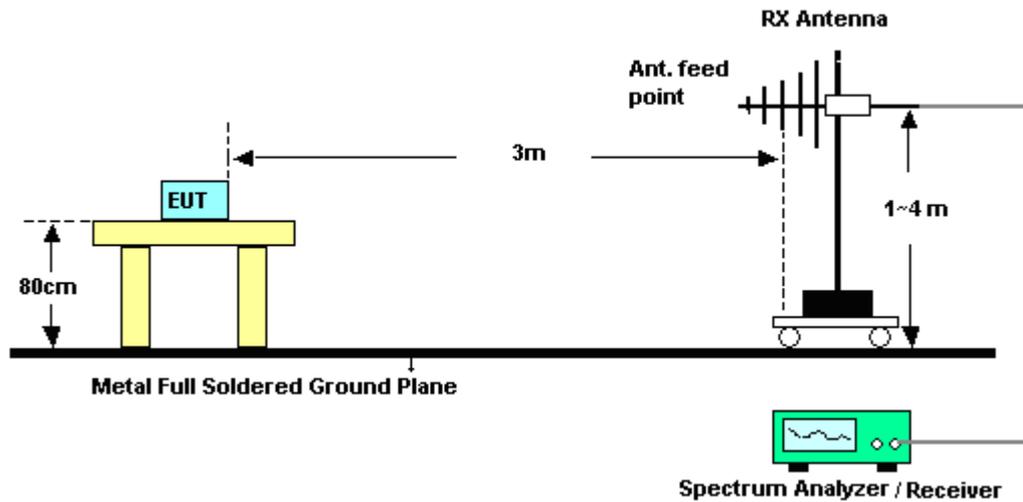

For radiated emissions above 1GHz

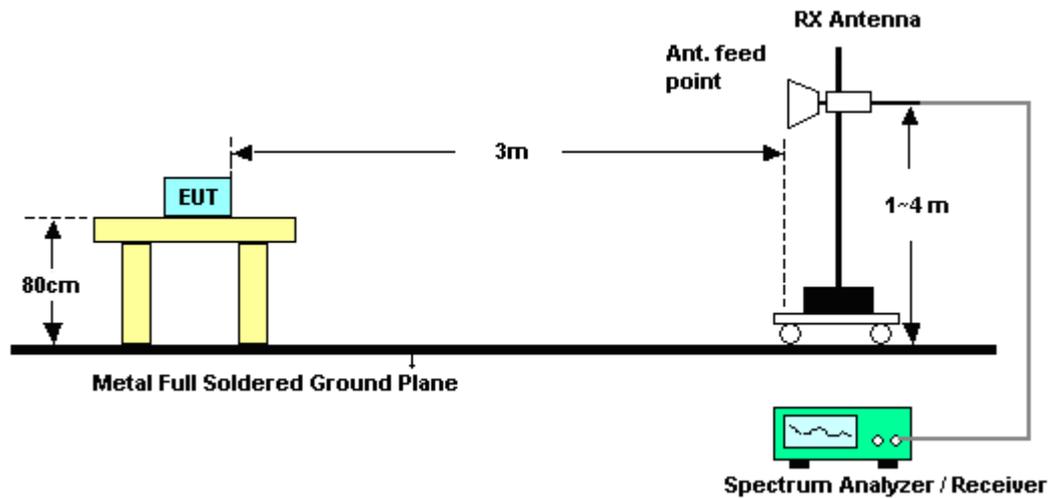

3.5.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Band Edges

Test Mode :	802.11b	Temperature :	21~24°C
Test Band :	Low	Relative Humidity :	45~46%
Test Channel :	01	Test Engineer :	Allen Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2382.54	49.95	-24.05	74	46.54	32.83	2.09	31.51	100	16	Peak
2382.63	38.34	-15.66	54	34.93	32.83	2.09	31.51	100	16	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2382.72	48.24	-25.76	74	44.83	32.83	2.09	31.51	100	32	Peak
2383.08	36.59	-17.41	54	33.18	32.83	2.09	31.51	100	32	Average

Test Mode :	802.11b	Temperature :	21~24°C
Test Band :	High	Relative Humidity :	45~46%
Test Channel :	11	Test Engineer :	Allen Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2491.82	52.89	-21.11	74	49.18	33.05	2.17	31.51	100	169	Peak
2491.46	41.19	-12.81	54	37.48	33.05	2.17	31.51	100	169	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2491.28	48.85	-25.15	74	45.19	33.01	2.16	31.51	100	30	Peak
2483.5	35.24	-18.76	54	31.58	33.01	2.16	31.51	100	30	Average



Test Mode :	802.11g	Temperature :	21~24°C
Test Band :	Low	Relative Humidity :	45~46%
Test Channel :	01	Test Engineer :	Allen Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.84	55.46	-18.54	74	52	32.86	2.11	31.51	100	66	Peak
2390	41.59	-12.41	54	38.13	32.86	2.11	31.51	100	66	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2385.87	52.92	-21.08	74	49.46	32.86	2.11	31.51	100	332	Peak
2390	40.02	-13.98	54	36.56	32.86	2.11	31.51	100	332	Average

Test Mode :	802.11g	Temperature :	21~24°C
Test Band :	High	Relative Humidity :	45~46%
Test Channel :	11	Test Engineer :	Allen Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.62	68.57	-5.43	74	64.91	33.01	2.16	31.51	100	69	Peak
2483.5	50.59	-3.41	54	46.93	33.01	2.16	31.51	100	69	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.64	62.73	-11.27	74	59.07	33.01	2.16	31.51	200	280	Peak
2483.5	44.53	-9.47	54	40.87	33.01	2.16	31.51	200	280	Average



Test Mode :	802.11n HT20	Temperature :	21~24°C
Test Band :	Low	Relative Humidity :	45~46%
Test Channel :	01	Test Engineer :	Allen Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2388.93	56.2	-17.8	74	52.74	32.86	2.11	31.51	100	36	Peak
2390	39.98	-14.02	54	36.52	32.86	2.11	31.51	100	36	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.47	52.7	-21.3	74	49.24	32.86	2.11	31.51	100	102	Peak
2390	37.98	-16.02	54	34.52	32.86	2.11	31.51	100	102	Average

Test Mode :	802.11n HT20	Temperature :	21~24°C
Test Band :	High	Relative Humidity :	45~46%
Test Channel :	11	Test Engineer :	Allen Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2484.26	67.25	-6.75	74	63.59	33.01	2.16	31.51	100	166	Peak
2483.64	50.11	-3.89	54	46.45	33.01	2.16	31.51	100	39	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.52	62.96	-11.04	74	59.3	33.01	2.16	31.51	110	261	Peak
2483.5	45.88	-8.12	54	42.22	33.01	2.16	31.51	110	282	Average

3.5.7 Test Result of Radiated Emission (30 MHz ~ 10th Harmonic)

Test Mode :	802.11b	Temperature :	21~24°C
Test Channel :	01	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
41.567	24.63	-15.37	40	46.92	10.95	0.4	33.64	100	22	Peak
93.768	20.33	-23.17	43.5	43.73	9.66	0.56	33.62	-	-	Peak
156.458	23.91	-19.59	43.5	46.99	9.76	0.74	33.58	-	-	Peak
287.99	19.22	-26.78	46	38.81	12.82	0.98	33.39	-	-	Peak
343.18	18.01	-27.99	46	35.93	14.35	1.09	33.36	-	-	Peak
938.833	28.19	-17.81	46	38.2	20.68	1.75	32.44	-	-	Peak
2412	102.12	-	-	98.62	32.89	2.12	31.51	108	50	Peak
2412	97.39	-	-	93.89	32.89	2.12	31.51	108	50	Average



Test Mode :	802.11b	Temperature :	21~24°C
Test Channel :	01	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
44.12	20.18	-19.82	40	43.79	9.6	0.41	33.62	-	-	Peak
71.581	16.01	-23.99	40	43.61	5.46	0.53	33.59	-	-	Peak
98.142	16.9	-26.6	43.5	39.8	10.15	0.57	33.62	-	-	Peak
129.015	17.41	-26.09	43.5	38.62	11.71	0.67	33.59	-	-	Peak
543.274	20.18	-25.82	46	33.51	18.37	1.33	33.03	-	-	Peak
942.131	28.29	-17.71	46	38.28	20.7	1.75	32.44	100	0	Peak
2412	99.12	-	-	95.62	32.89	2.12	31.51	100	39	Peak
2412	93.68	-	-	90.18	32.89	2.12	31.51	100	39	Average



Test Mode :	802.11b	Temperature :	21~24°C
Test Channel :	06	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
44.12	14.94	-25.06	40	38.55	9.6	0.41	33.62	-	-	Peak
157.007	21.87	-21.63	43.5	45	9.71	0.74	33.58	-	-	Peak
171.393	19.83	-23.67	43.5	43.55	9.08	0.77	33.57	-	-	Peak
284.977	19.1	-26.9	46	38.76	12.76	0.97	33.39	-	-	Peak
365.539	17.41	-28.59	46	34.77	14.88	1.11	33.35	-	-	Peak
942.131	27.44	-18.56	46	37.43	20.7	1.75	32.44	100	122	Peak
2437	102.09	-	-	98.51	32.95	2.14	31.51	100	60	Peak
2437	97.2	-	-	93.62	32.95	2.14	31.51	100	60	Average



Test Mode :	802.11b	Temperature :	21~24°C
Test Channel :	06	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.067	26.2	-13.8	40	42.88	16.55	0.35	33.58	100	112	Peak
40.135	21.48	-18.52	40	42.44	12.3	0.39	33.65	-	-	Peak
44.12	21.06	-18.94	40	44.67	9.6	0.41	33.62	-	-	Peak
109.796	19.52	-23.98	43.5	40.73	11.8	0.6	33.61	-	-	Peak
537.589	21.35	-24.65	46	34.82	18.24	1.33	33.04	-	-	Peak
942.131	28.65	-17.35	46	38.64	20.7	1.75	32.44	-	-	Peak
2437	99.35	-	-	95.77	32.95	2.14	31.51	100	32	Peak
2437	93.74	-	-	90.16	32.95	2.14	31.51	100	32	Average



Test Mode :	802.11b	Temperature :	21~24°C
Test Channel :	11	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.399	18.11	-21.89	40	34.06	17.29	0.34	33.58	-	-	Peak
157.007	21.74	-21.76	43.5	44.87	9.71	0.74	33.58	-	-	Peak
170.793	18.79	-24.71	43.5	42.46	9.14	0.76	33.57	-	-	Peak
283.979	19.37	-26.63	46	39.05	12.74	0.97	33.39	-	-	Peak
341.979	17.37	-28.63	46	35.31	14.33	1.09	33.36	-	-	Peak
938.833	28.53	-17.47	46	38.54	20.68	1.75	32.44	100	132	Peak
2462	104.79	-	-	101.17	32.98	2.15	31.51	100	50	Peak
2462	99.15	-	-	95.53	32.98	2.15	31.51	100	50	Average



Test Mode :	802.11b	Temperature :	21~24°C
Test Channel :	11	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.179	18.56	-21.44	40	35.24	16.55	0.35	33.58	-	-	Peak
44.12	19.51	-20.49	40	43.12	9.6	0.41	33.62	-	-	Peak
71.581	15.55	-24.45	40	43.15	5.46	0.53	33.59	-	-	Peak
100.934	17.31	-26.19	43.5	39.72	10.62	0.58	33.61	-	-	Peak
129.015	16.54	-26.96	43.5	37.75	11.71	0.67	33.59	-	-	Peak
942.131	27.05	-18.95	46	37.04	20.7	1.75	32.44	100	281	Peak
2462	101.88	-	-	98.26	32.98	2.15	31.51	117	166	Peak
2462	96.23	-	-	92.61	32.98	2.15	31.51	117	166	Average



Test Mode :	802.11g	Temperature :	21~24°C
Test Channel :	01	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
33.211	17.45	-22.55	40	34.65	16.04	0.35	33.59	-	-	Peak
55.027	16.16	-23.84	40	43.08	6.2	0.46	33.58	-	-	Peak
159.784	19.7	-23.8	43.5	42.94	9.6	0.74	33.58	-	-	Peak
285.978	19.13	-26.87	46	38.77	12.78	0.97	33.39	-	-	Peak
344.386	17.58	-28.42	46	35.48	14.37	1.09	33.36	-	-	Peak
938.833	28.29	-17.71	46	38.3	20.68	1.75	32.44	100	0	Peak
2412	104.02	-	-	100.52	32.89	2.12	31.51	100	66	Peak
2412	94.01	-	-	90.51	32.89	2.12	31.51	100	66	Average



Test Mode :	802.11g	Temperature :	21~24°C
Test Channel :	01	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
44.12	20.36	-19.64	40	43.97	9.6	0.41	33.62	-	-	Peak
71.581	15.45	-24.55	40	43.05	5.46	0.53	33.59	-	-	Peak
100.934	16.03	-27.47	43.5	38.44	10.62	0.58	33.61	-	-	Peak
129.015	16.08	-27.42	43.5	37.29	11.71	0.67	33.59	-	-	Peak
547.098	20.12	-25.88	46	33.36	18.45	1.33	33.02	-	-	Peak
938.833	28.08	-17.92	46	38.09	20.68	1.75	32.44	100	265	Peak
2412	100.6	-	-	97.1	32.89	2.12	31.51	100	332	Peak
2412	89.8	-	-	86.3	32.89	2.12	31.51	100	332	Average



Test Mode :	802.11g	Temperature :	21~24°C
Test Channel :	06	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.955	17.73	-22.27	40	34.41	16.55	0.35	33.58	-	-	Peak
144.842	18.96	-24.54	43.5	41.37	10.45	0.72	33.58	-	-	Peak
156.458	19.66	-23.84	43.5	42.74	9.76	0.74	33.58	-	-	Peak
290.017	19.67	-26.33	46	39.22	12.85	0.98	33.38	-	-	Peak
550.948	18.37	-27.63	46	31.55	18.5	1.33	33.01	-	-	Peak
938.833	30.38	-15.62	46	40.39	20.68	1.75	32.44	100	119	Peak
2437	108.63	-	-	105.05	32.95	2.14	31.51	182	63	Peak
2437	97.77	-	-	94.19	32.95	2.14	31.51	182	63	Average



Test Mode :	802.11g	Temperature :	21~24°C
Test Channel :	06	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
44.12	20.04	-19.96	40	43.65	9.6	0.41	33.62	-	-	Peak
71.581	16.08	-23.92	40	43.68	5.46	0.53	33.59	-	-	Peak
100.934	15.47	-28.03	43.5	37.88	10.62	0.58	33.61	-	-	Peak
129.015	17.21	-26.29	43.5	38.42	11.71	0.67	33.59	-	-	Peak
556.774	20.64	-25.36	46	33.8	18.51	1.34	33.01	-	-	Peak
938.833	30.38	-15.62	46	40.39	20.68	1.75	32.44	100	189	Peak
2437	105	-	-	101.42	32.95	2.14	31.51	100	340	Peak
2437	93.7	-	-	90.12	32.95	2.14	31.51	100	340	Average



Test Mode :	802.11g	Temperature :	21~24°C
Test Channel :	11	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
31.399	18.14	-21.86	40	34.09	17.29	0.34	33.58	-	-	Peak
148.441	19.11	-24.39	43.5	41.82	10.14	0.73	33.58	-	-	Peak
169.599	19.09	-24.41	43.5	42.7	9.2	0.76	33.57	-	-	Peak
287.99	19.11	-26.89	46	38.7	12.82	0.98	33.39	-	-	Peak
346.809	16.82	-29.18	46	34.64	14.44	1.1	33.36	-	-	Peak
938.833	30.25	-15.75	46	40.26	20.68	1.75	32.44	100	183	Peak
2462	111.64	-	-	108.02	32.98	2.15	31.51	100	69	Peak
2462	100.23	-	-	96.61	32.98	2.15	31.51	100	69	Average



Test Mode :	802.11g	Temperature :	21~24°C
Test Channel :	11	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
44.12	19.9	-20.1	40	43.51	9.6	0.41	33.62	-	-	Peak
71.581	15.02	-24.98	40	42.62	5.46	0.53	33.59	-	-	Peak
94.428	16.04	-27.46	43.5	39.44	9.66	0.56	33.62	-	-	Peak
129.015	17.05	-26.45	43.5	38.26	11.71	0.67	33.59	-	-	Peak
228.49	23.56	-22.44	46	45.34	10.83	0.88	33.49	-	-	Peak
938.833	29.55	-16.45	46	39.56	20.68	1.75	32.44	100	201	Peak
2462	100.72	-	-	97.1	32.98	2.15	31.51	200	333	Peak
2462	91.3	-	-	87.68	32.98	2.15	31.51	200	333	Average



Test Mode :	802.11n-HT20	Temperature :	21~24°C
Test Channel :	01	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.406	17.77	-22.23	40	34.45	16.55	0.35	33.58	-	-	Peak
44.12	13.82	-26.18	40	37.43	9.6	0.41	33.62	-	-	Peak
152.13	22.61	-20.89	43.5	45.53	9.93	0.73	33.58	-	-	Peak
171.393	19.4	-24.1	43.5	43.12	9.08	0.77	33.57	-	-	Peak
293.084	18.97	-27.03	46	38.47	12.9	0.98	33.38	-	-	Peak
938.833	29.59	-16.41	46	39.6	20.68	1.75	32.44	100	281	Peak
2412	105.99	-	-	102.49	32.89	2.12	31.51	108	36	Peak
2412	94.71	-	-	91.21	32.89	2.12	31.51	108	36	Average



Test Mode :	802.11n-HT20	Temperature :	21~24°C
Test Channel :	01	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2412 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
33.328	22.52	-17.48	40	39.72	16.04	0.35	33.59	-	-	Peak
38.346	24.84	-15.16	40	45.11	12.98	0.39	33.64	100	296	Peak
50.057	22.25	-17.75	40	47.99	7.4	0.44	33.58	-	-	Peak
58.613	18	-22	40	45.52	5.59	0.47	33.58	-	-	Peak
129.015	16.37	-27.13	43.5	37.58	11.71	0.67	33.59	-	-	Peak
938.833	30.6	-15.4	46	40.61	20.68	1.75	32.44	-	-	Peak
2412	99.78	-	-	96.28	32.89	2.12	31.51	100	35	Peak
2412	89.65	-	-	86.15	32.89	2.12	31.51	100	35	Average



Test Mode :	802.11n-HT20	Temperature :	21~24°C
Test Channel :	06	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.179	17.97	-22.03	40	34.65	16.55	0.35	33.58	-	-	Peak
51.481	15.65	-24.35	40	41.58	7.21	0.44	33.58	-	-	Peak
55.221	16.58	-23.42	40	43.5	6.2	0.46	33.58	-	-	Peak
162.611	20.19	-23.31	43.5	43.53	9.49	0.75	33.58	-	-	Peak
289.002	19.31	-26.69	46	38.88	12.84	0.98	33.39	-	-	Peak
938.833	29.82	-16.18	46	39.83	20.68	1.75	32.44	100	200	Peak
2437	94.23	-	-	90.65	32.95	2.14	31.51	108	39	Average
2437	105.3	-	-	101.72	32.95	2.14	31.51	108	39	Peak



Test Mode :	802.11n-HT20	Temperature :	21~24°C
Test Channel :	06	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2437 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
32.067	26.11	-13.89	40	42.79	16.55	0.35	33.58	100	315	Peak
38.888	24.08	-15.92	40	44.35	12.98	0.39	33.64	-	-	Peak
44.12	19.94	-20.06	40	43.55	9.6	0.41	33.62	-	-	Peak
53.131	26.04	-13.96	40	52.37	6.8	0.45	33.58	-	-	Peak
129.015	17.11	-26.39	43.5	38.32	11.71	0.67	33.59	-	-	Peak
938.833	29.79	-16.21	46	39.8	20.68	1.75	32.44	-	-	Peak
2437	89.44	-	-	85.86	32.95	2.14	31.51	100	36	Average
2437	99.94	-	-	96.36	32.95	2.14	31.51	100	36	Peak



Test Mode :	802.11n-HT20	Temperature :	21~24°C
Test Channel :	11	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Horizontal
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
30.745	18.42	-21.58	40	34.37	17.29	0.34	33.58	-	-	Peak
155.91	19.52	-23.98	43.5	42.6	9.76	0.74	33.58	-	-	Peak
170.793	19.21	-24.29	43.5	42.88	9.14	0.76	33.57	-	-	Peak
289.002	19.21	-26.79	46	38.78	12.84	0.98	33.39	-	-	Peak
343.18	17.49	-28.51	46	35.41	14.35	1.09	33.36	-	-	Peak
938.833	30.45	-15.55	46	40.46	20.68	1.75	32.44	100	306	Peak
2462	106.34	-	-	102.72	32.98	2.15	31.51	108	35	Peak
2462	96.13	-	-	92.51	32.98	2.15	31.51	108	35	Average



Test Mode :	802.11n-HT20	Temperature :	21~24°C
Test Channel :	11	Relative Humidity :	45~46%
Test Engineer :	Allen Cheng	Polarization :	Vertical
Remark :	1. 2462 MHz is fundamental signal which can be ignored. 2. Test result of emissions which are 20 dB lower than the limit is not reported and considered that's already beyond the background noise floor per15.31.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
36.001	26.07	-13.93	40	44.67	14.65	0.37	33.62	100	30	Peak
44.12	20.46	-19.54	40	44.07	9.6	0.41	33.62	-	-	Peak
70.832	16.36	-23.64	40	44.05	5.38	0.52	33.59	-	-	Peak
129.015	17.92	-25.58	43.5	39.13	11.71	0.67	33.59	-	-	Peak
893.857	28.22	-17.78	46	38.45	20.46	1.76	32.45	-	-	Peak
938.833	29.57	-16.43	46	39.58	20.68	1.75	32.44	-	-	Peak
2462	101.4	-	-	97.78	32.98	2.15	31.51	110	276	Peak
2462	90.55	-	-	86.93	32.98	2.15	31.51	110	276	Average

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The testing follows the guidelines in FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
2. ANSI C63.4-2003 and ANSI C63.10-2009.
3. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
4. Connect EUT to the power mains through a line impedance stabilization network (LISN).
5. All the support units are connecting to the other LISN.
6. The LISN provides 50 ohm coupling impedance for the measuring instrument.
7. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
8. Both sides of AC line were checked for maximum conducted interference.
9. The frequency range from 150 KHz to 30 MHz was searched.
10. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.6.4 Test Setup

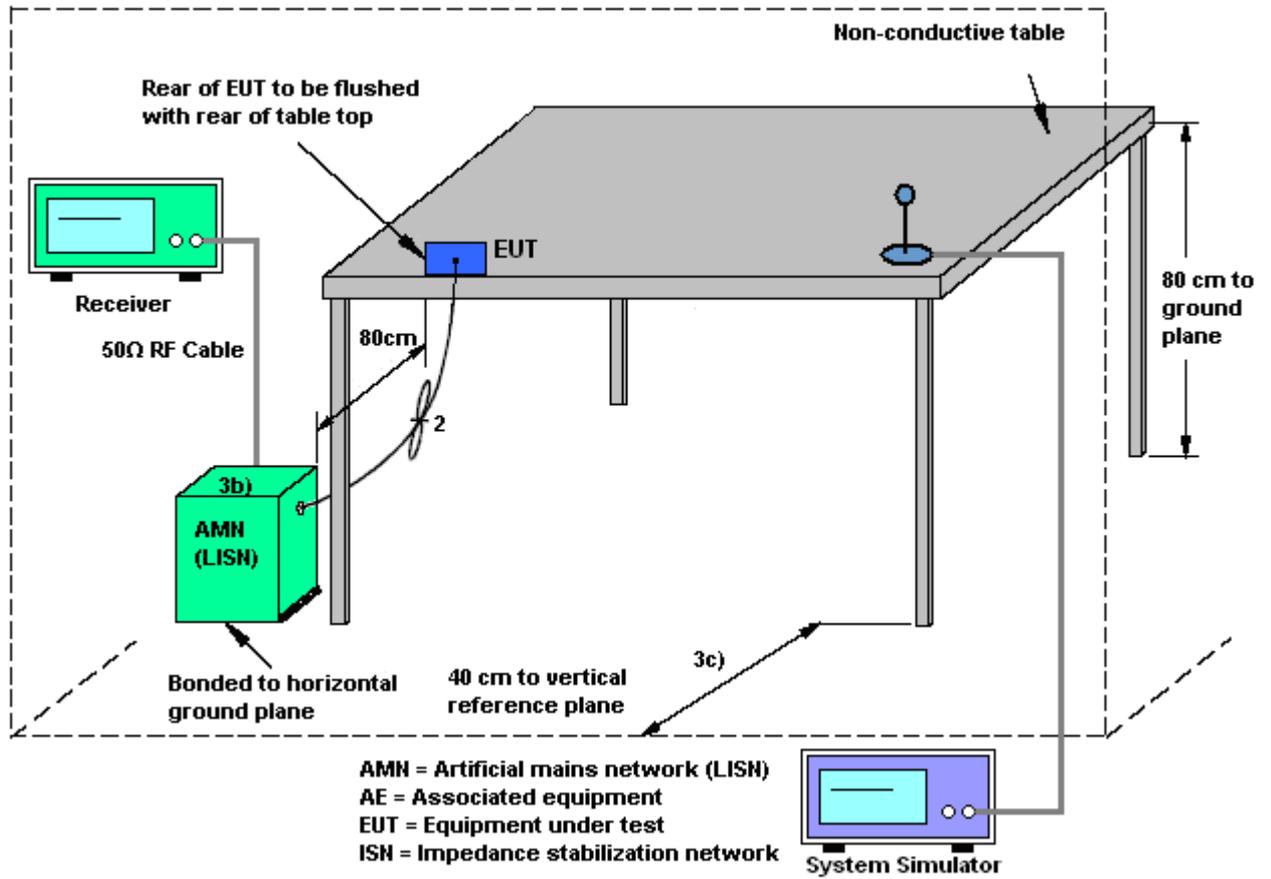

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	CDMA2000 BC0 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

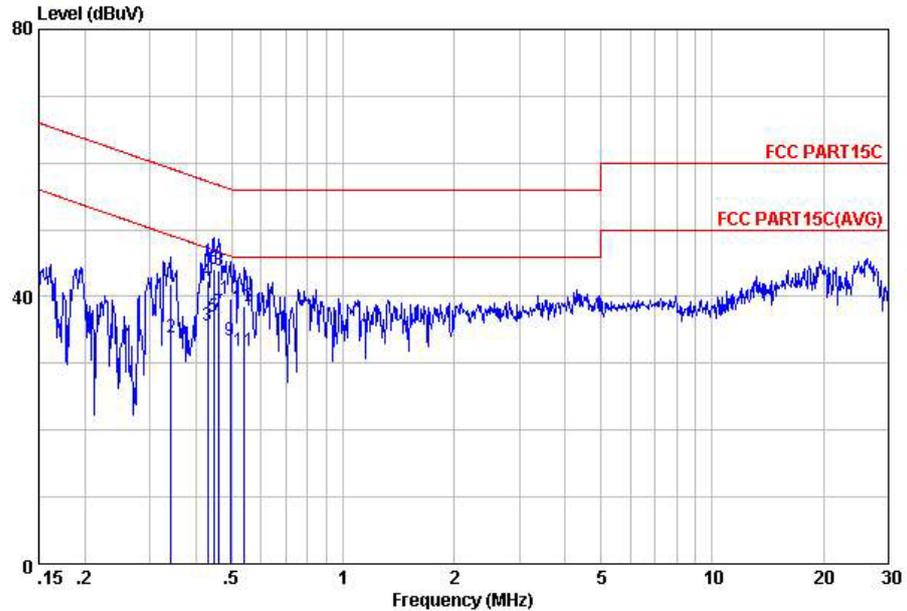


Site : C001-KS
 Condition: FCC PART15C LISN-111230 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.34	41.87	-17.26	59.13	31.70	-0.08	10.25	QP
2	0.34	33.97	-15.16	49.13	23.80	-0.08	10.25	Average
3	0.43	35.67	-11.57	47.24	25.50	-0.08	10.25	Average
4	0.43	42.27	-14.97	57.24	32.10	-0.08	10.25	QP
5	0.45	37.07	-9.86	46.93	26.90	-0.08	10.25	Average
6	0.45	44.07	-12.86	56.93	33.90	-0.08	10.25	QP
7	0.46	37.57	-9.10	46.67	27.40	-0.08	10.25	Average
8	0.46	43.87	-12.80	56.67	33.70	-0.08	10.25	QP
9	0.49	33.47	-12.63	46.10	23.30	-0.08	10.25	Average
10	0.49	39.77	-16.33	56.10	29.60	-0.08	10.25	QP
11	0.54	31.87	-14.13	46.00	21.69	-0.08	10.26	Average
12	0.54	38.57	-17.43	56.00	28.39	-0.08	10.26	QP



Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	CDMA2000 BC0 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

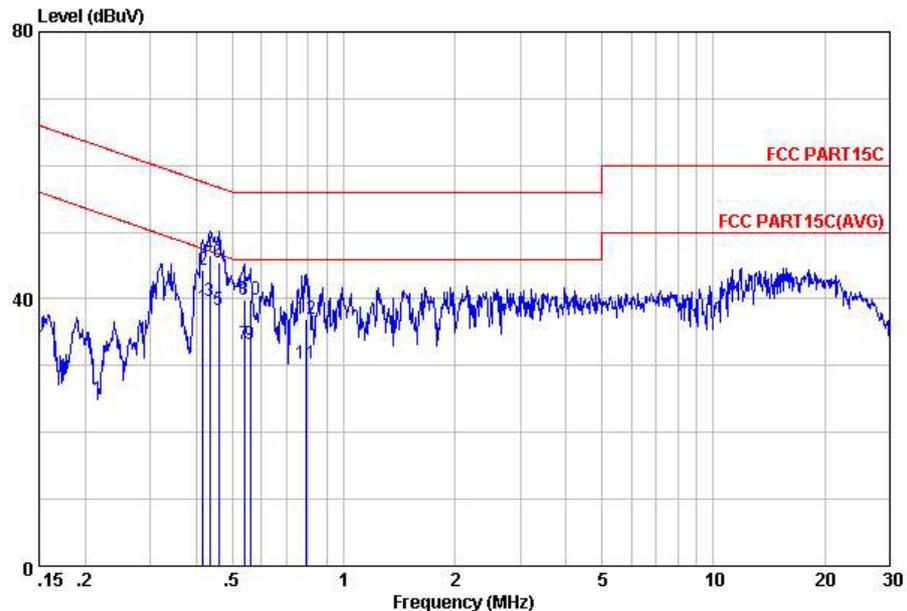

Site : C001-KS
 Condition: FCC PART15C LISN-111230 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.42	38.77	-8.74	47.51	28.60	-0.08	10.25	Average
2	0.42	44.37	-13.14	57.51	34.20	-0.08	10.25	QP
3	0.44	39.57	-7.58	47.15	29.40	-0.08	10.25	Average
4	0.44	46.67	-10.48	57.15	36.50	-0.08	10.25	QP
5	0.46	38.27	-8.44	46.71	28.10	-0.08	10.25	Average
6	0.46	45.47	-11.24	56.71	35.30	-0.08	10.25	QP
7	0.54	33.18	-12.82	46.00	23.00	-0.08	10.26	Average
8	0.54	39.88	-16.12	56.00	29.70	-0.08	10.26	QP
9	0.56	33.18	-12.82	46.00	23.00	-0.08	10.26	Average
10	0.56	39.88	-16.12	56.00	29.70	-0.08	10.26	QP
11	0.79	30.29	-15.71	46.00	20.09	-0.08	10.28	Average
12	0.79	37.09	-18.91	56.00	26.89	-0.08	10.28	QP



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Connected Construction

Non-standard connector used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Nov. 20, 2012 ~ Nov. 27, 2012	Dec. 29, 2012	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Aug. 22, 2012	Nov. 20, 2012 ~ Nov. 27, 2012	Aug. 21, 2013	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	N/A	Aug. 22, 2012	Nov. 20, 2012 ~ Nov. 27, 2012	Aug. 21, 2013	Conducted (TH01-KS)
DC Power Supply	GWINSTEK	GPS-3030D	E1884515	N/A	Aug. 22, 2012	Nov. 20, 2012 ~ Nov. 27, 2012	Aug. 21, 2013	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 08, 2012	Nov. 29, 2012 ~ Nov. 30, 2012	Nov. 07, 2013	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Nov. 29, 2012 ~ Nov. 30, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 08, 2011	Nov. 29, 2012 ~ Nov. 30, 2012	Dec. 07, 2012	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/ 001	9 kHz~30 MHz	Jul. 03, 2012	Nov. 29, 2012 ~ Nov. 30, 2012	Jul. 02, 2014	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Jan. 06, 2012	Nov. 29, 2012 ~ Nov. 30, 2012	Jan. 05, 2013	Radiation (03CH01-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1GHz	Jun. 01, 2012	Nov. 29, 2012 ~ Nov. 30, 2012	May 31, 2013	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 30, 2011	Nov. 29, 2012 ~ Nov. 30, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz~18GHz	Nov. 06, 2012	Nov. 29, 2012 ~ Nov. 30, 2012	Nov. 05, 2013	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Nov. 23, 2012	Nov. 29, 2012 ~ Nov. 30, 2012	Nov. 22, 2013	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Jun. 01, 2012	Nov. 21, 2012	May 31, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Dec. 30, 2011	Nov. 21, 2012	Dec. 29, 2012	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Dec. 30, 2011	Nov. 21, 2012	Dec. 29, 2012	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	N/A	Nov. 15, 2012	Nov. 21, 2012	Nov. 14, 2013	Conduction (CO01-KS)
System Simulator	R&S	CMU200	837587/066	2G Full-Band	Dec. 30, 2011	Nov. 21, 2012	Dec. 29, 2012	Conduction (CO01-KS)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.72
---	------



Appendix A. Photographs of EUT

Please refer to Sporton report number EP2N0901 as below.