

#01 HAC_T-Coil_CDMA2000 BC0_RC1+SO3_Ch1013_Axial (Z)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 8.33 dB A/m



Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):



ABM1/ABM2 = 42.32 dB

ABM1 comp = 8.33 dB A/m

Location: 0, 0, 3.7 mm

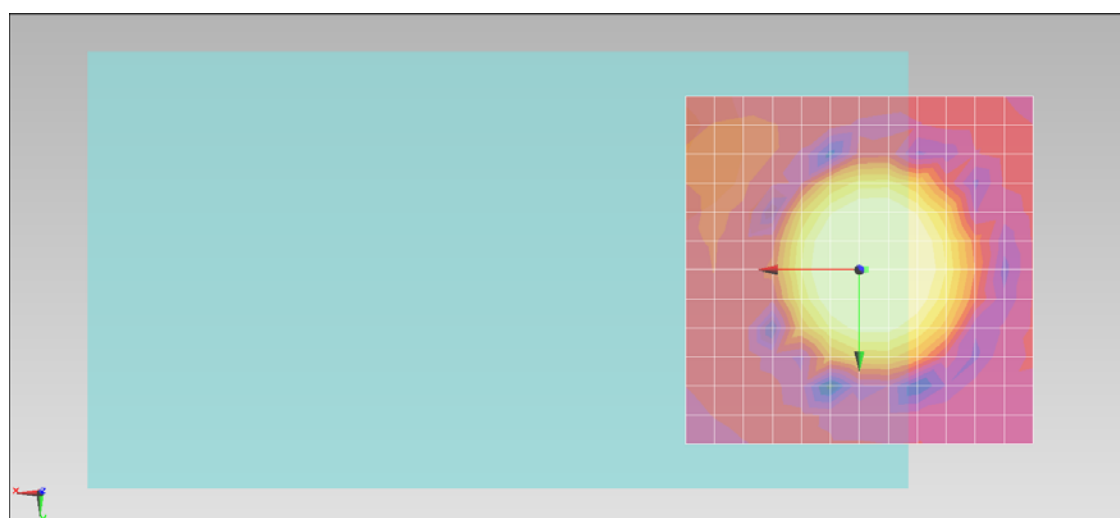

0 dB = 1.000 A/m = 0.00 dB A/m

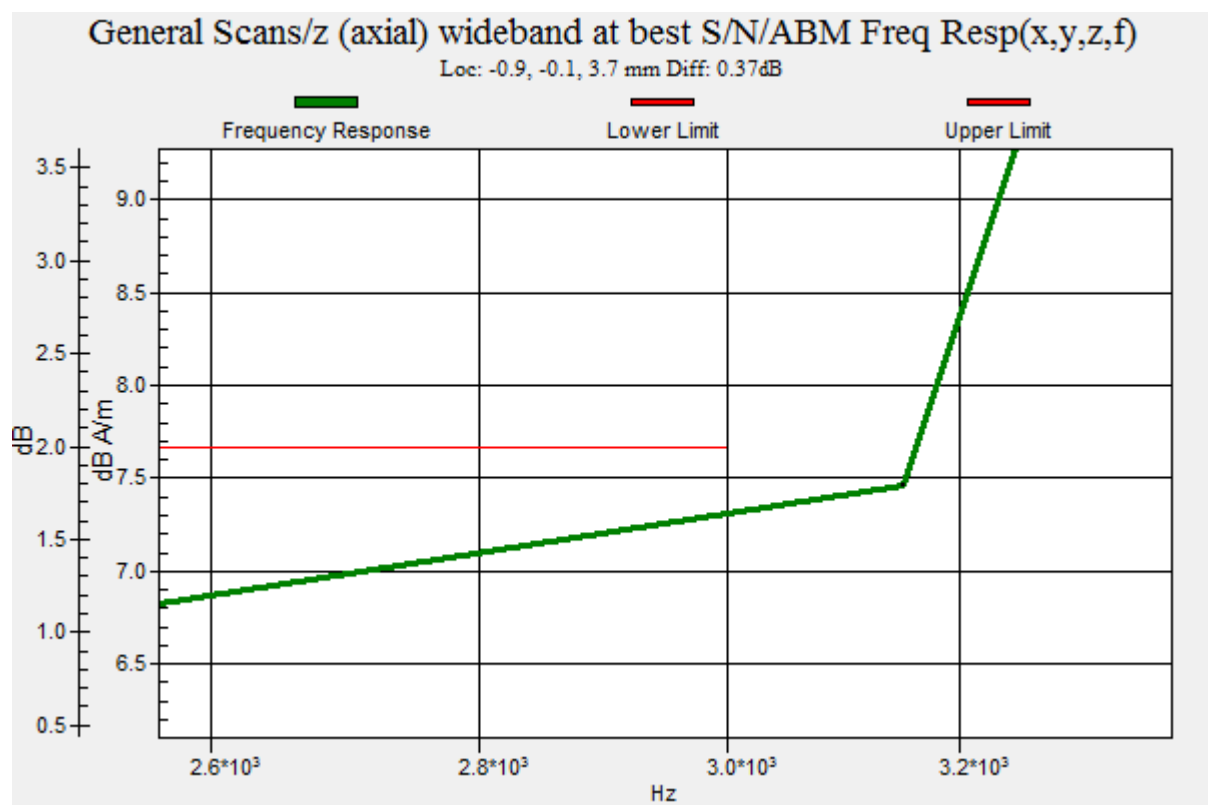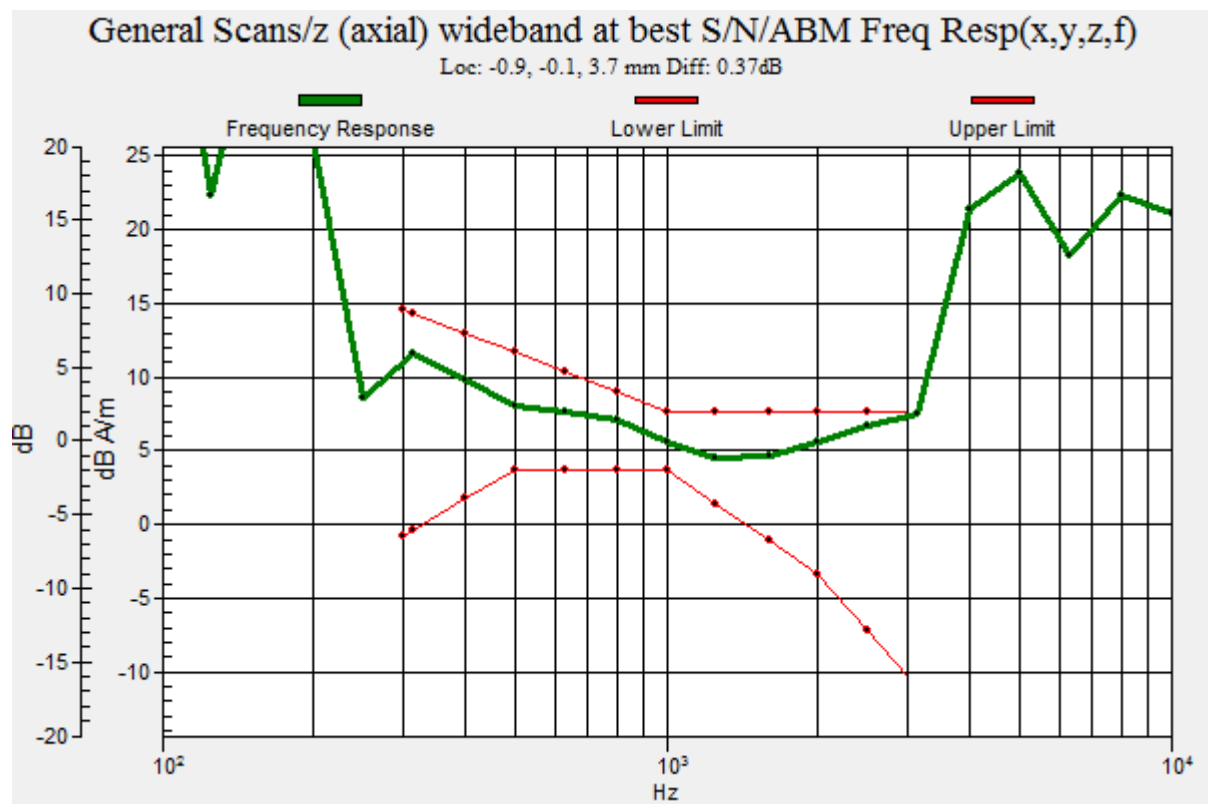

#01 HAC_T-Coil_CDMA2000 BC0_RC1+SO3_Ch1013_Transversal (Y)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 1.08 dB A/m


Location: 0, -8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 36.49 dB

ABM1 comp = 0.77 dB A/m

Location: 0, 8.3, 3.7 mm

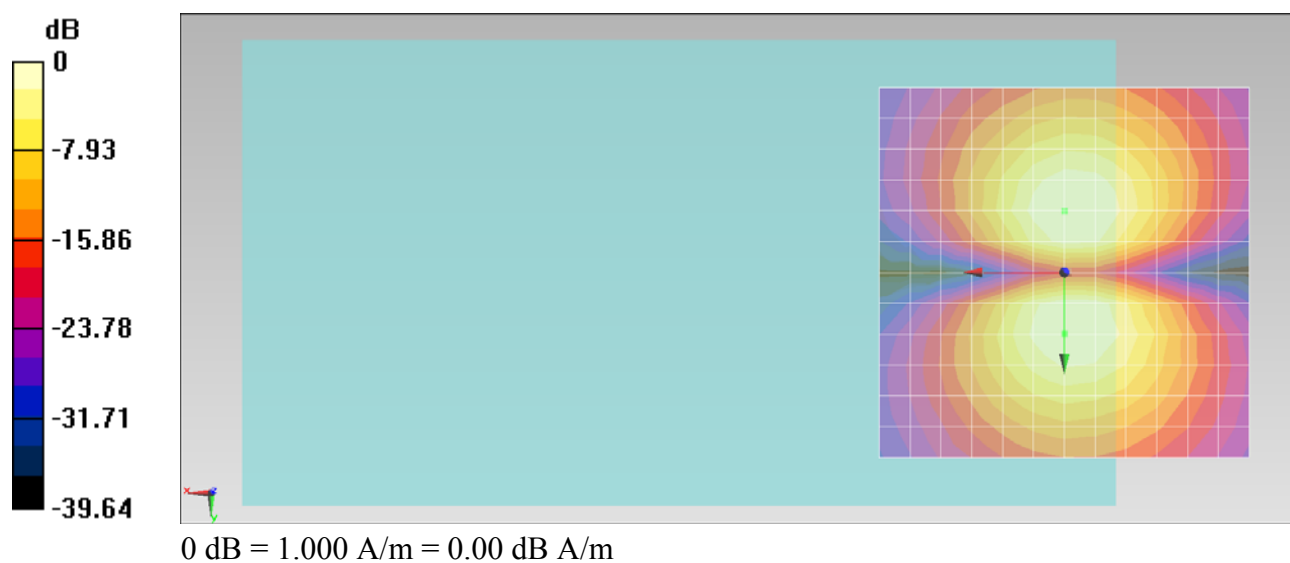

#02 HAC_T-Coil_CDMA2000 BC0_RC1+SO3_Ch384_Axial (Z)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 8.07 dB A/m



Location: -4.2, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 42.35 dB

ABM1 comp = 8.07 dB A/m


Location: -4.2, 0, 3.7 mm

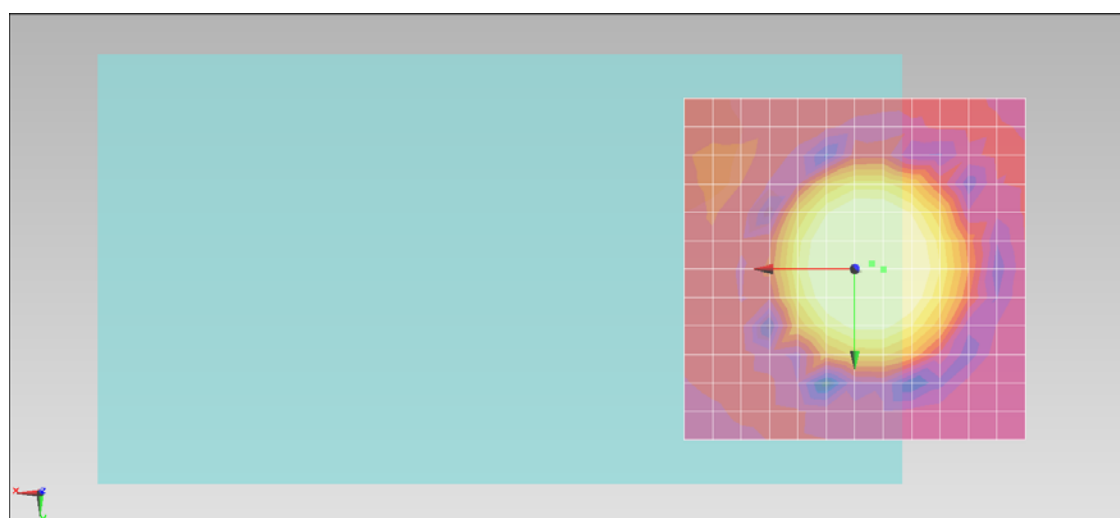

0 dB = 1.000 A/m = 0.00 dB A/m

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -2.5, -0.8, 3.7 mm Diff: 1.26dB

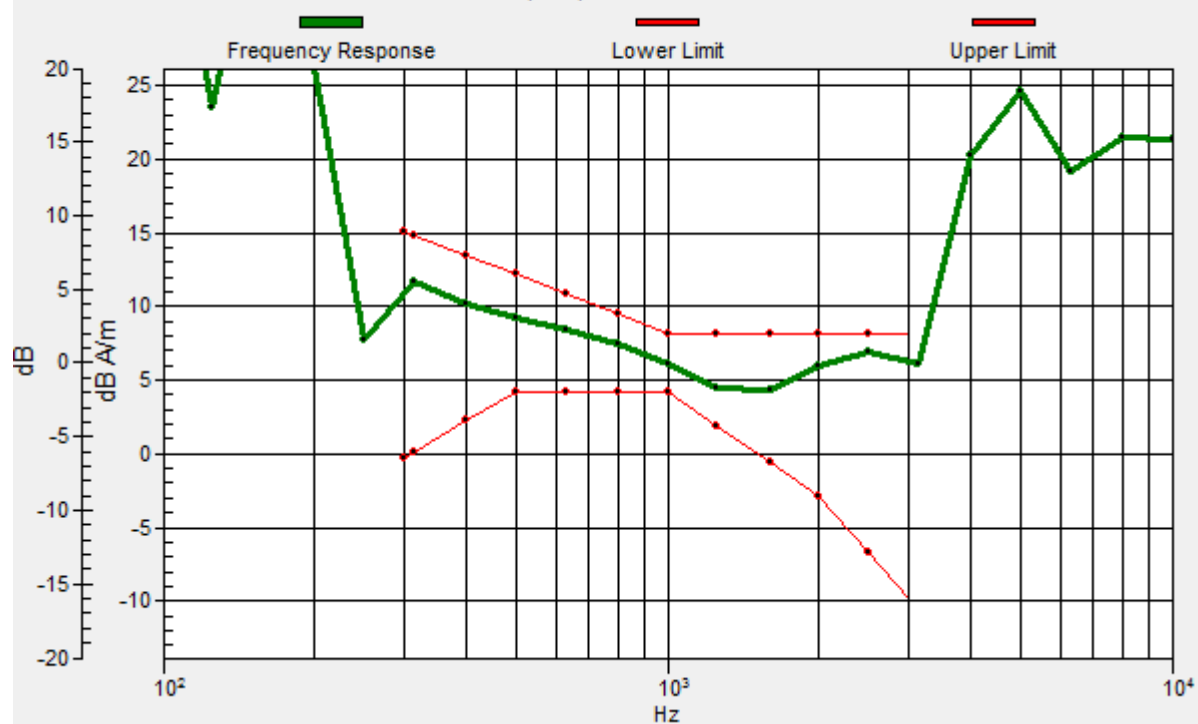

#02 HAC_T-Coil_CDMA2000 BC0_RC1+SO3_Ch384_Transversal (Y)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 1.27 dB A/m


Location: 0, -8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 37.31 dB

ABM1 comp = 0.88 dB A/m

Location: 0, 8.3, 3.7 mm

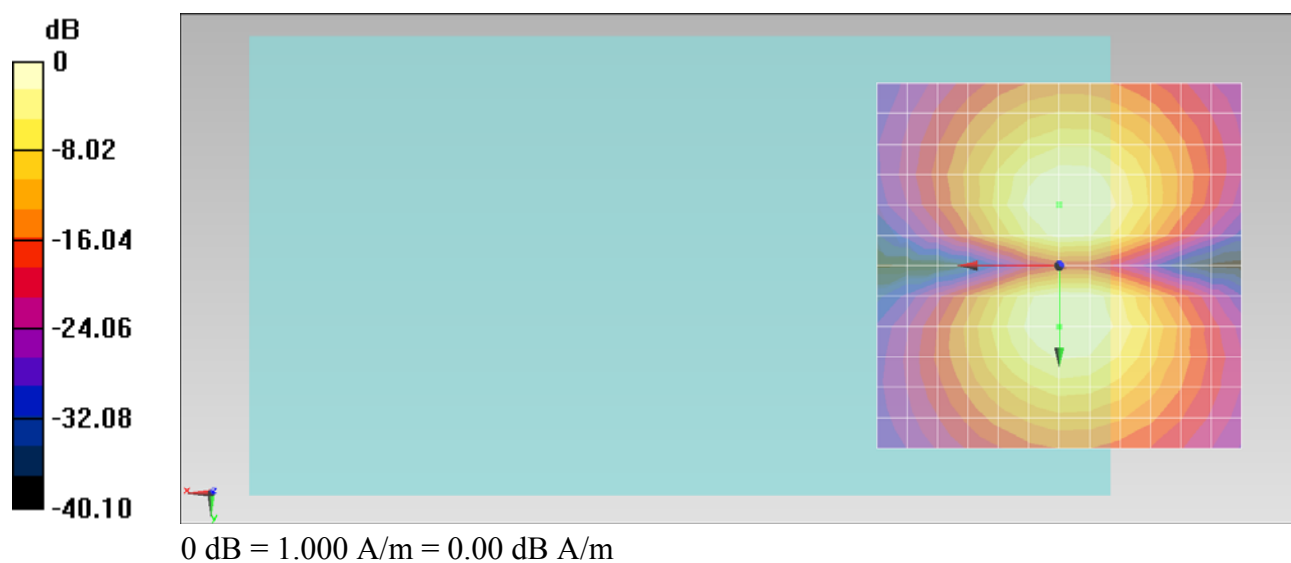

#03 HAC_T-Coil_CDMA2000 BC0_RC1+SO3_Ch777_Axial (Z)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 8.07 dB A/m



Location: -4.2, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 42.35 dB

ABM1 comp = 8.07 dB A/m


Location: -4.2, 0, 3.7 mm

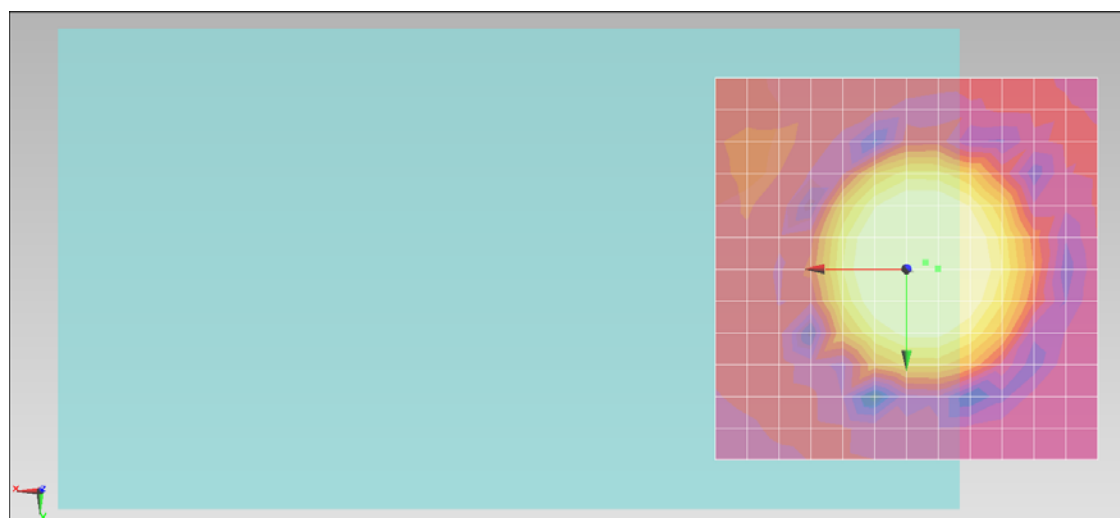

0 dB = 1.000 A/m = 0.00 dB A/m

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -2.5, -0.8, 3.7 mm Diff: 1.26dB

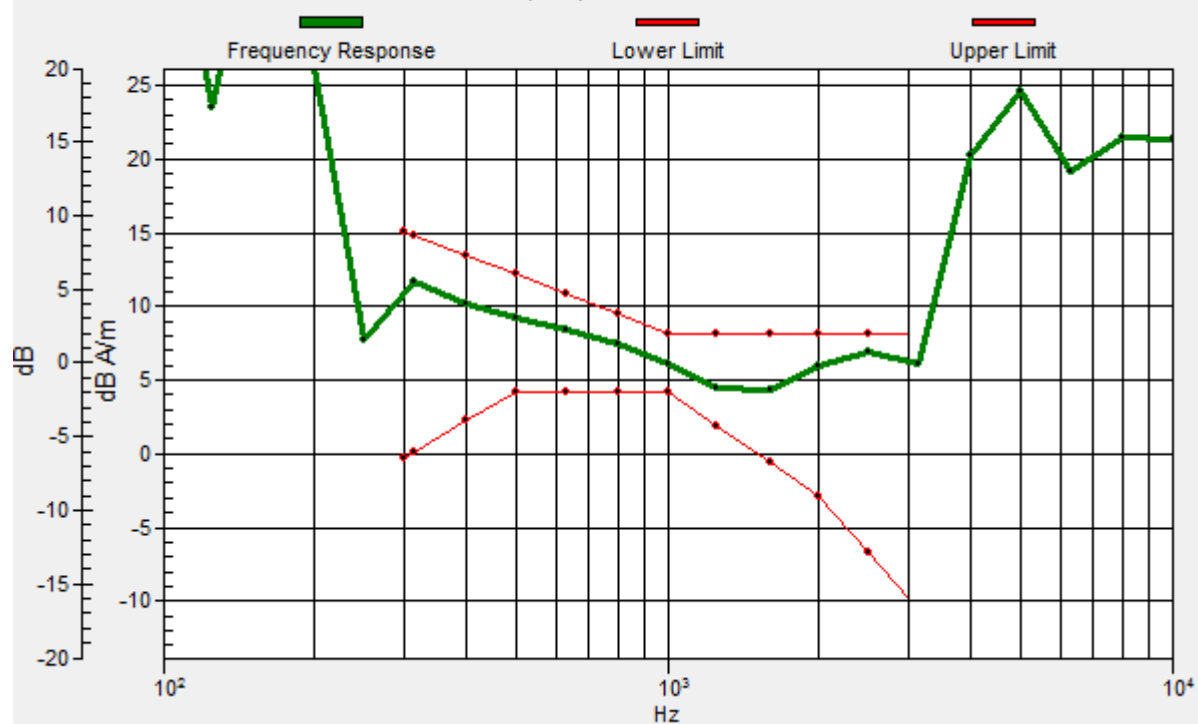

#03 HAC_T-Coil_CDMA2000 BC0_RC1+SO3_Ch777_Transversal (Y)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 1.27 dB A/m


Location: 0, -8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 37.31 dB

ABM1 comp = 0.88 dB A/m

Location: 0, 8.3, 3.7 mm

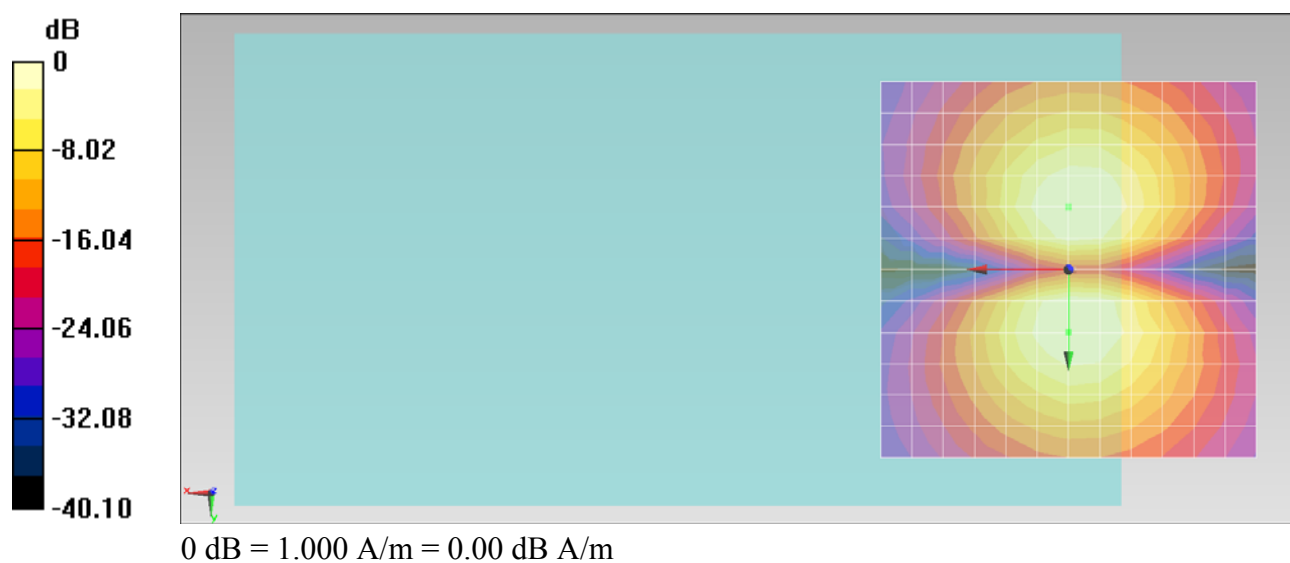

#07 HAC_T-Coil_CDMA2000 BC15_RC1+SO3_Ch25_Axial (Z)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 1711.25 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 8.86 dB A/m



Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):



ABM1/ABM2 = 42.97 dB

ABM1 comp = 8.86 dB A/m

Location: 0, 0, 3.7 mm

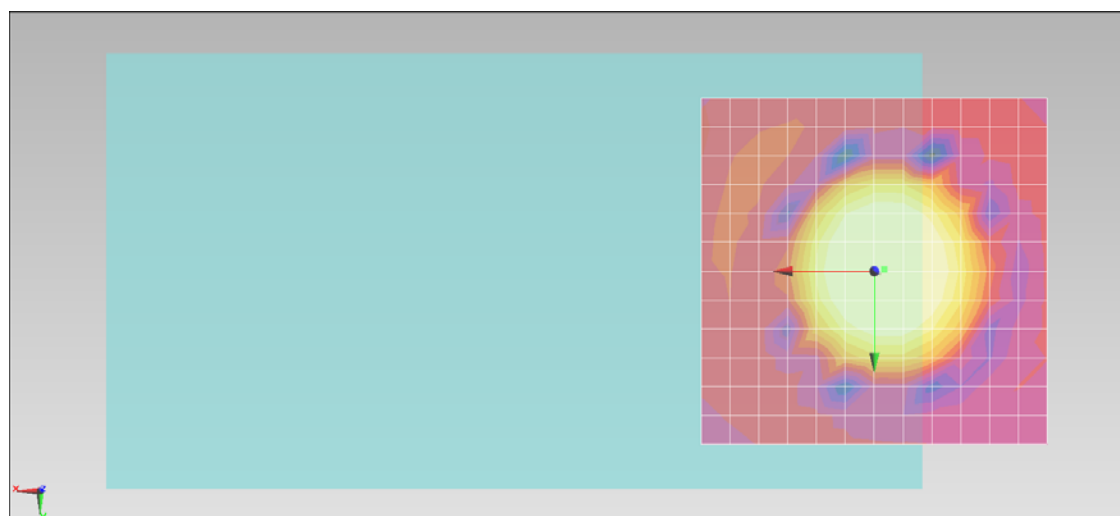

0 dB = 1.000 A/m = 0.00 dB A/m

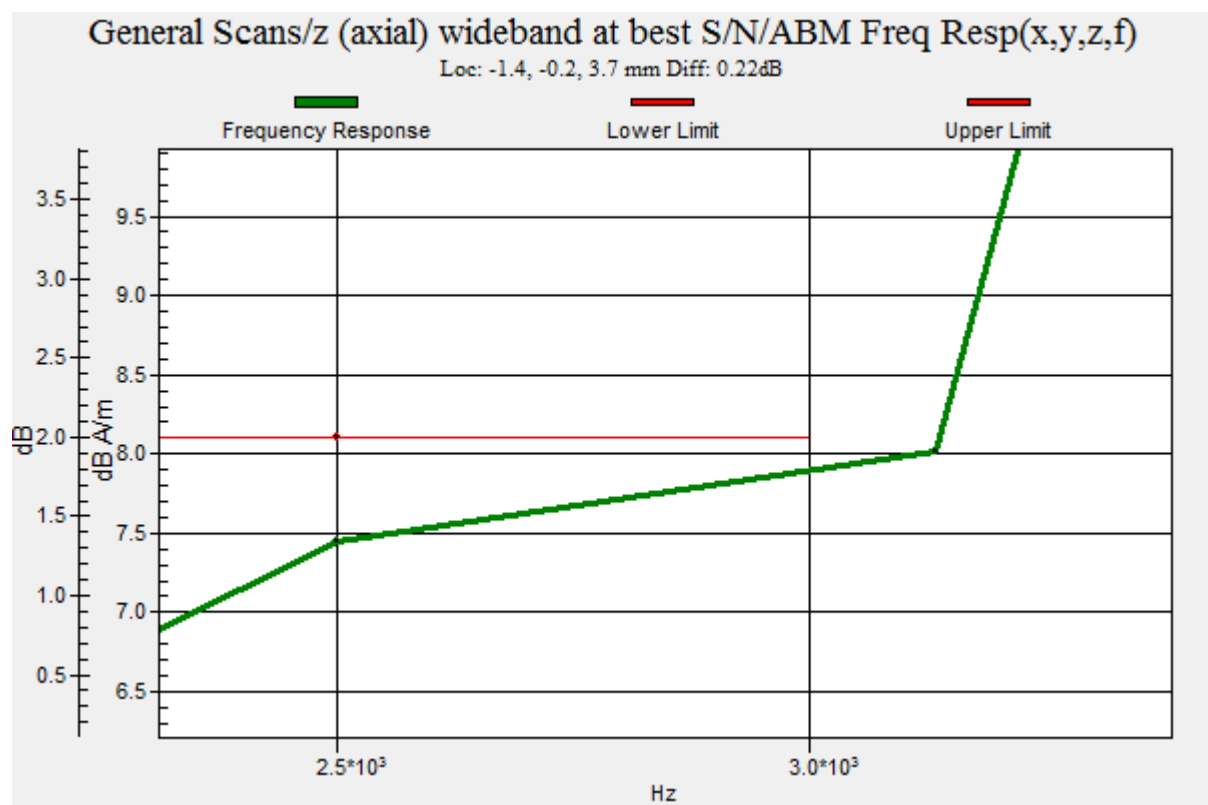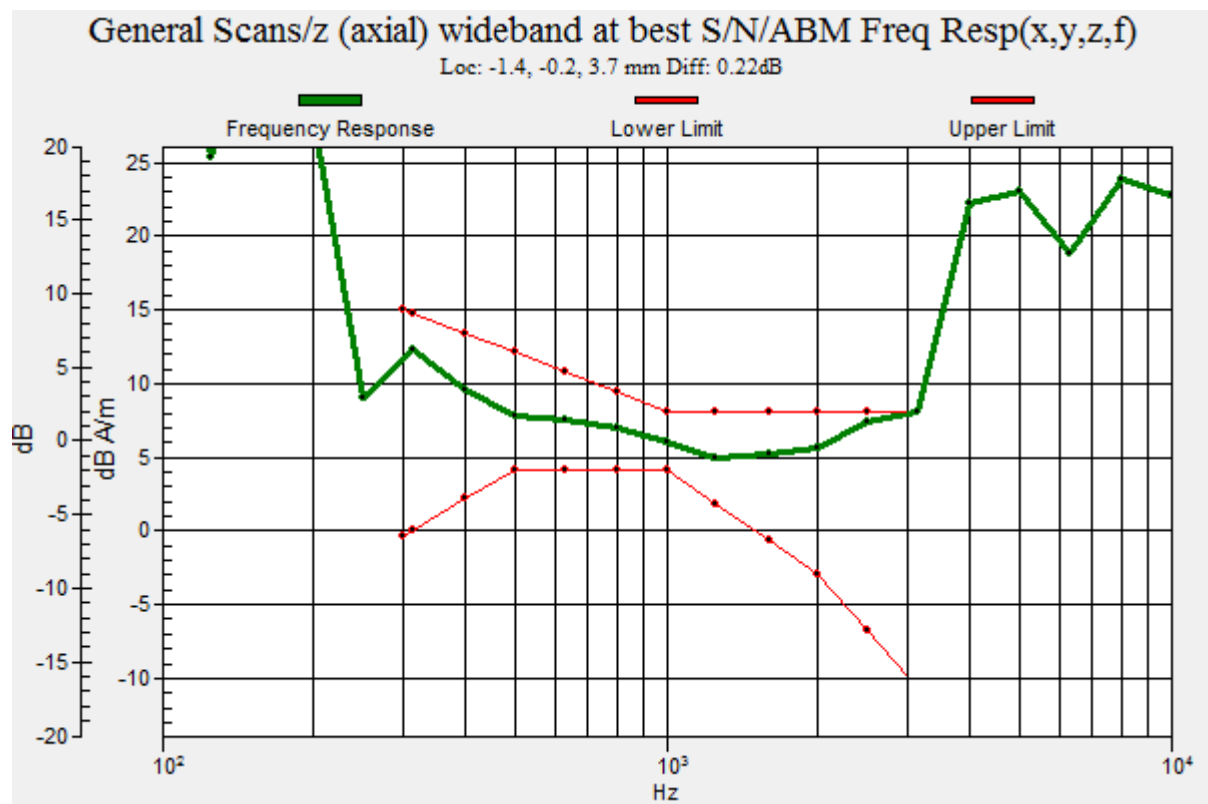

#07 HAC_T-Coil_CDMA2000 BC15_RC1+SO3_Ch25_Transversal (Y)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 1711.25 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 1.26 dB A/m


Location: 0, -8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 39.20 dB

ABM1 comp = 0.82 dB A/m

Location: 0, 8.3, 3.7 mm

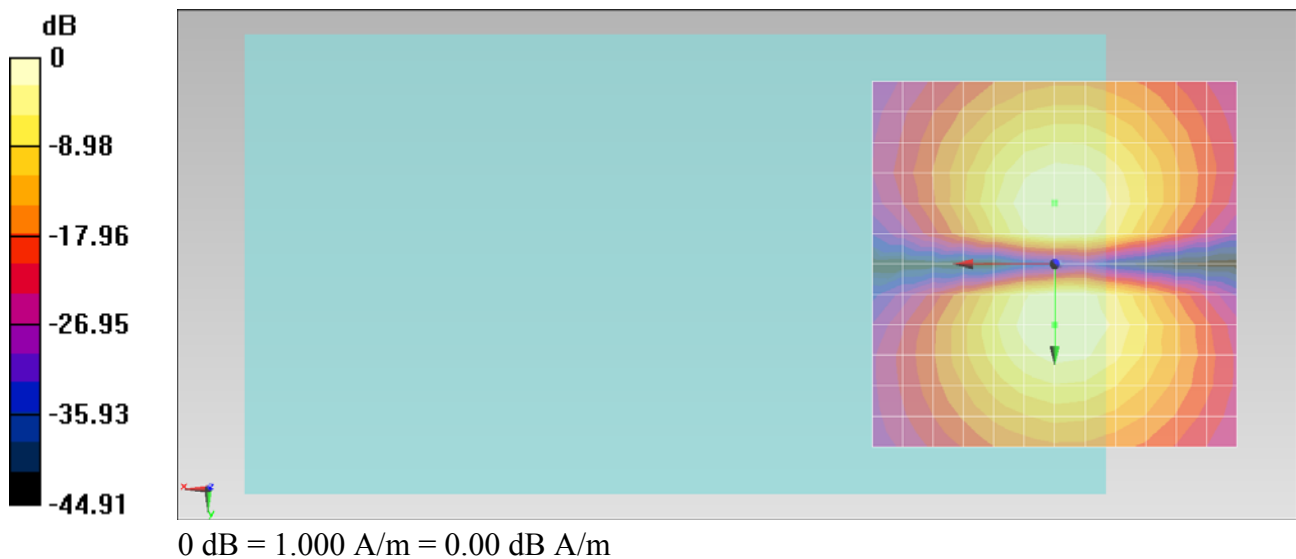

#08 HAC_T-Coil_CDMA2000 BC15_RC1+SO3_Ch425_Axial (Z)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 1731.25 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 8.76 dB A/m



Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 43.34 dB

ABM1 comp = 8.33 dB A/m


Location: -4.2, 0, 3.7 mm

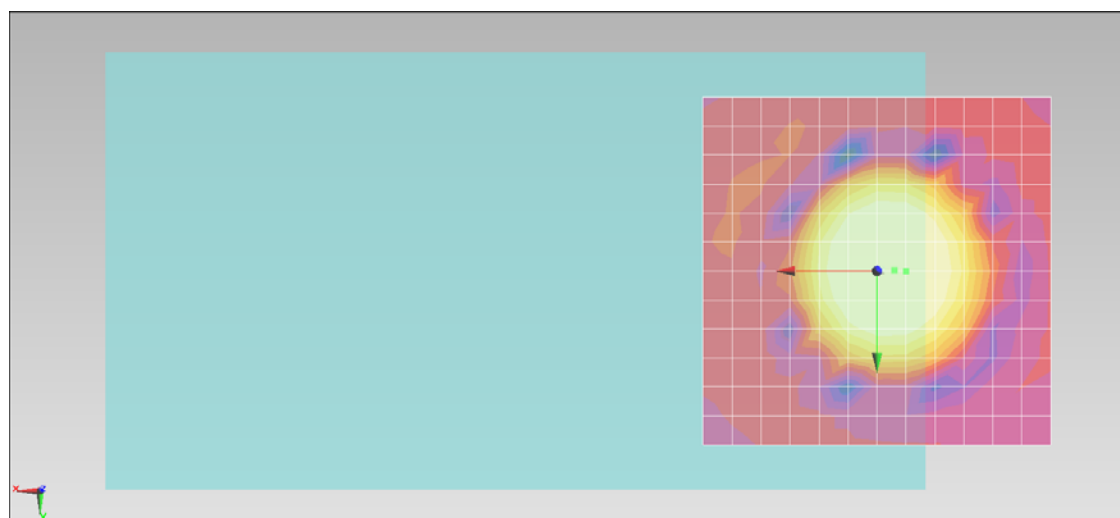

0 dB = 1.000 A/m = 0.00 dB A/m

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -2.5, -0.1, 3.7 mm Diff: 0.38dB

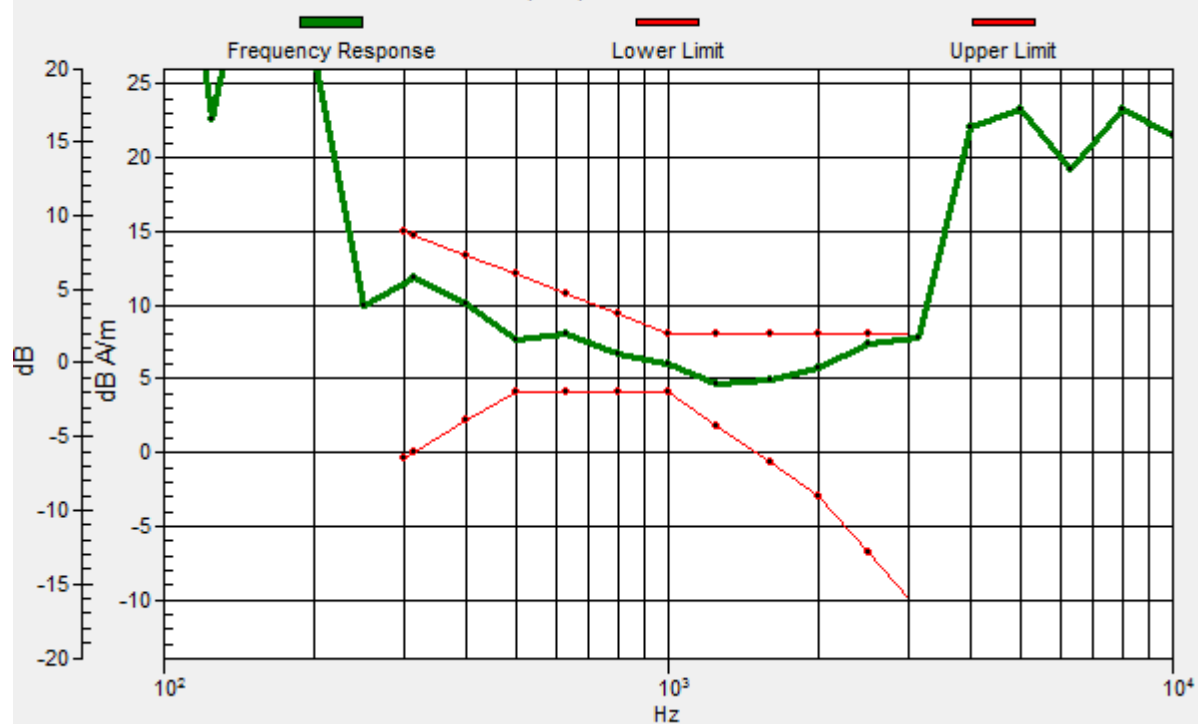

#08 HAC_T-Coil_CDMA2000 BC15_RC1+SO3_Ch425_Transversal (Y)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 1731.25 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 1.26 dB A/m


Location: 0, -8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 39.86 dB

ABM1 comp = 0.94 dB A/m

Location: 0, 8.3, 3.7 mm

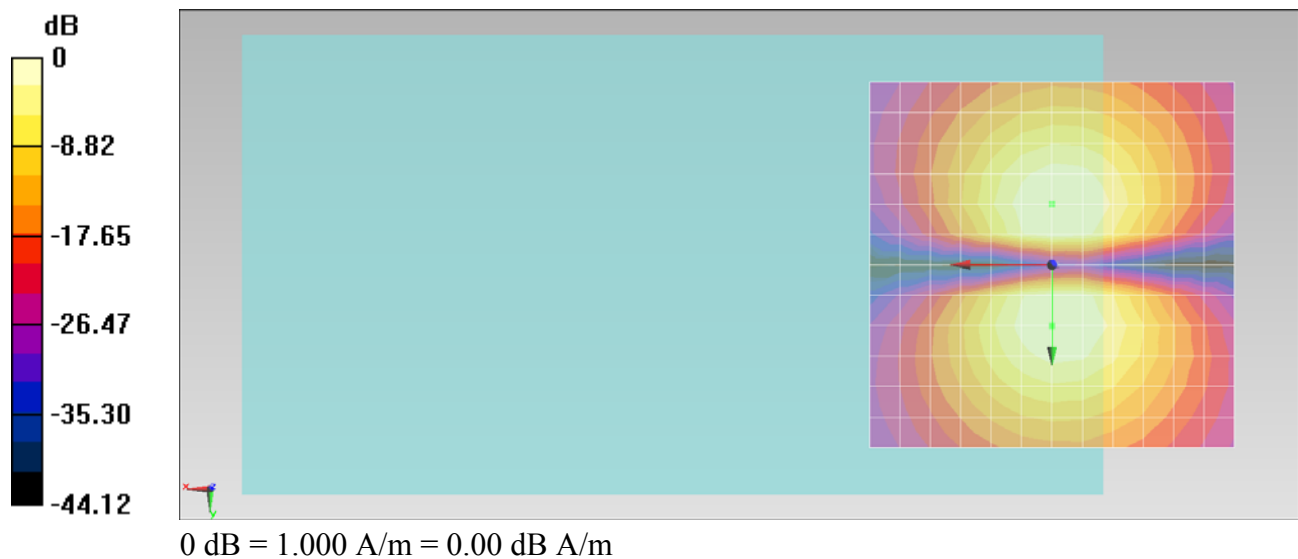

#09 HAC_T-Coil_CDMA2000 BC15_RC1+SO3_Ch875_Axial (Z)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 1753.75 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 8.69 dB A/m


Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 43.13 dB


ABM1 comp = 8.69 dB A/m

Location: 0, 0, 3.7 mm

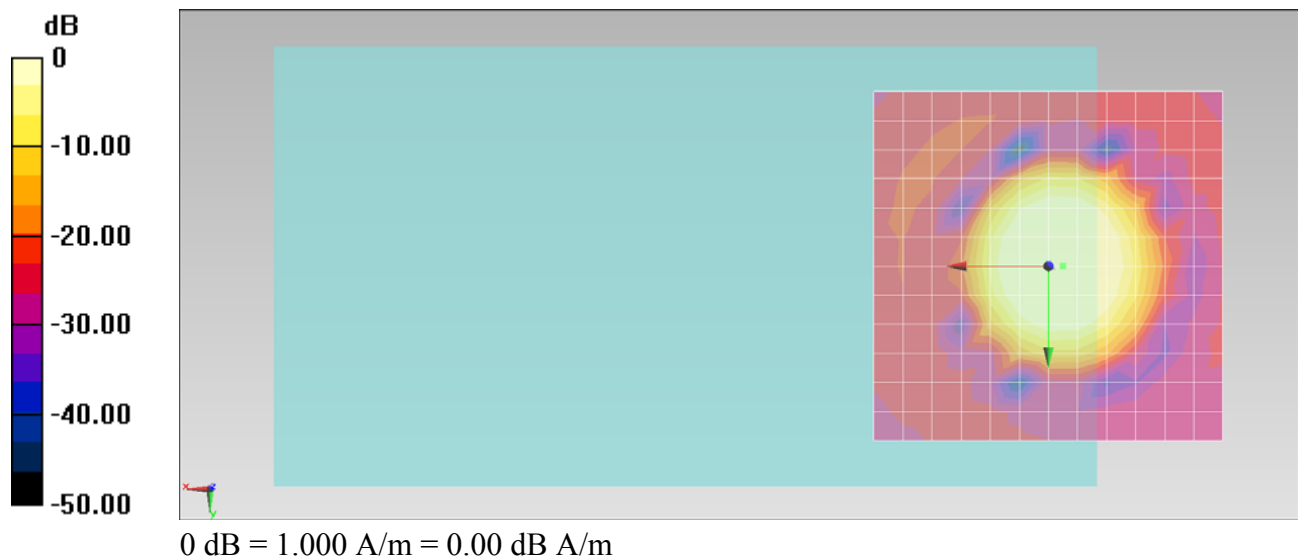

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -2, 0, 3.7 mm Diff: 0.72dB

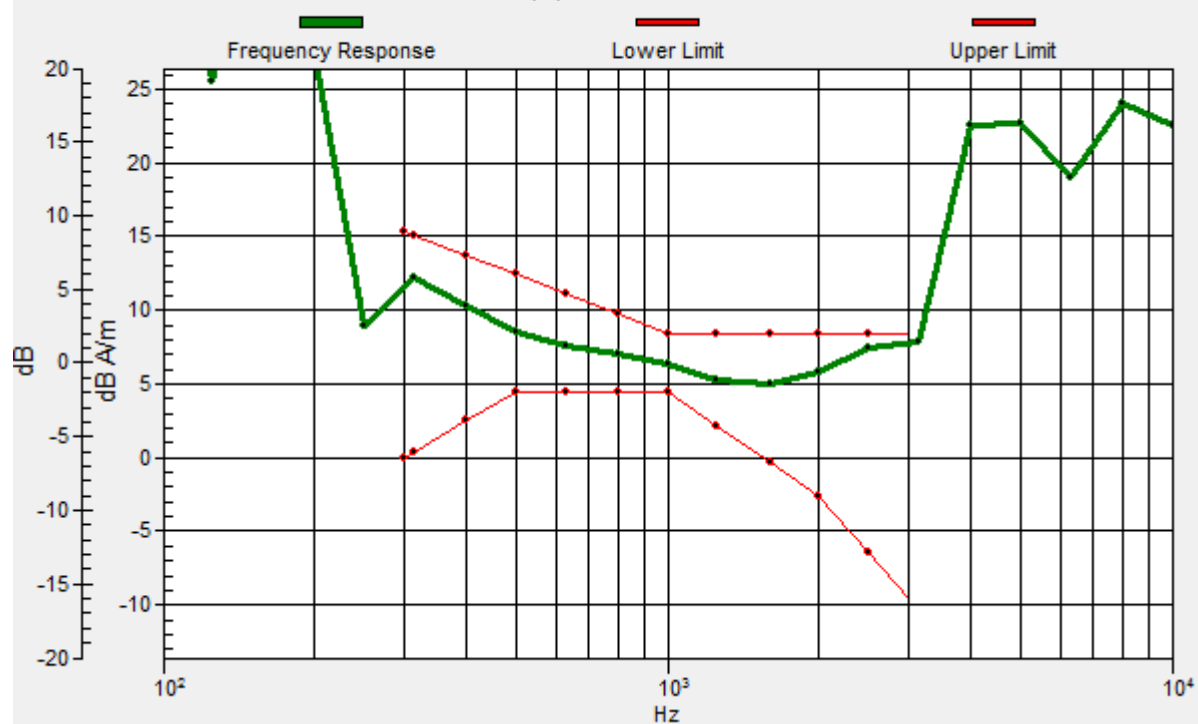

#09 HAC_T-Coil_CDMA2000 BC15_RC1+SO3_Ch875_Transversal (Y)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 1753.75 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 1.22 dB A/m


Location: 0, -8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 38.98 dB

ABM1 comp = 0.97 dB A/m

Location: 0, 8.3, 3.7 mm

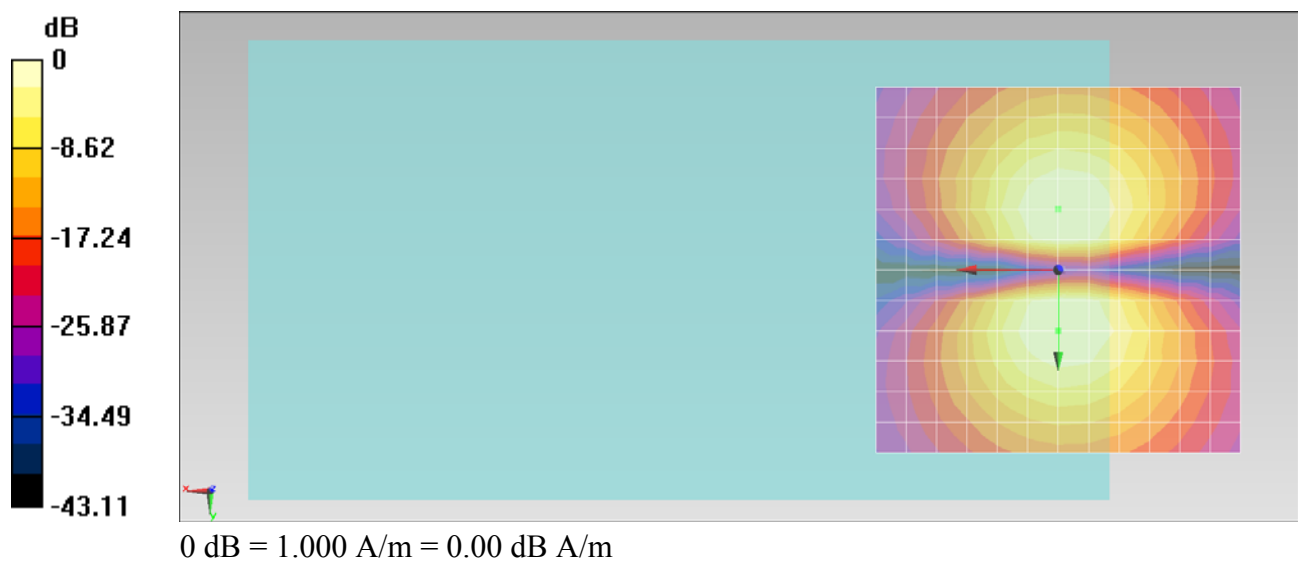

#04 HAC_T-Coil_CDMA2000 BC1_RC1+SO3_Ch25_Axial (Z)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 8.21 dB A/m



Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 42.53 dB

ABM1 comp = 7.99 dB A/m


Location: -4.2, 0, 3.7 mm

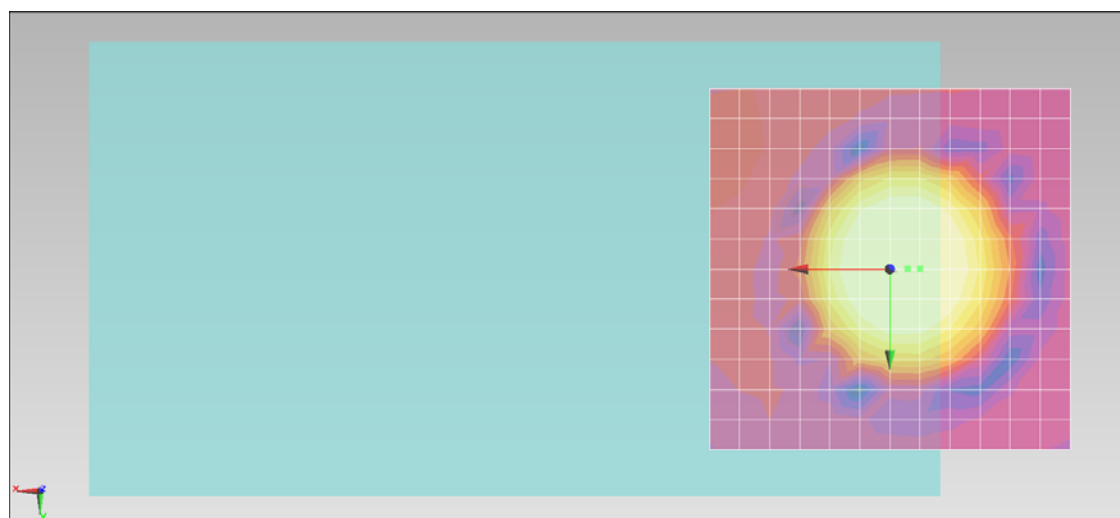

0 dB = 1.000 A/m = 0.00 dB A/m

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -2.4, 0, 3.7 mm Diff: 1.08dB

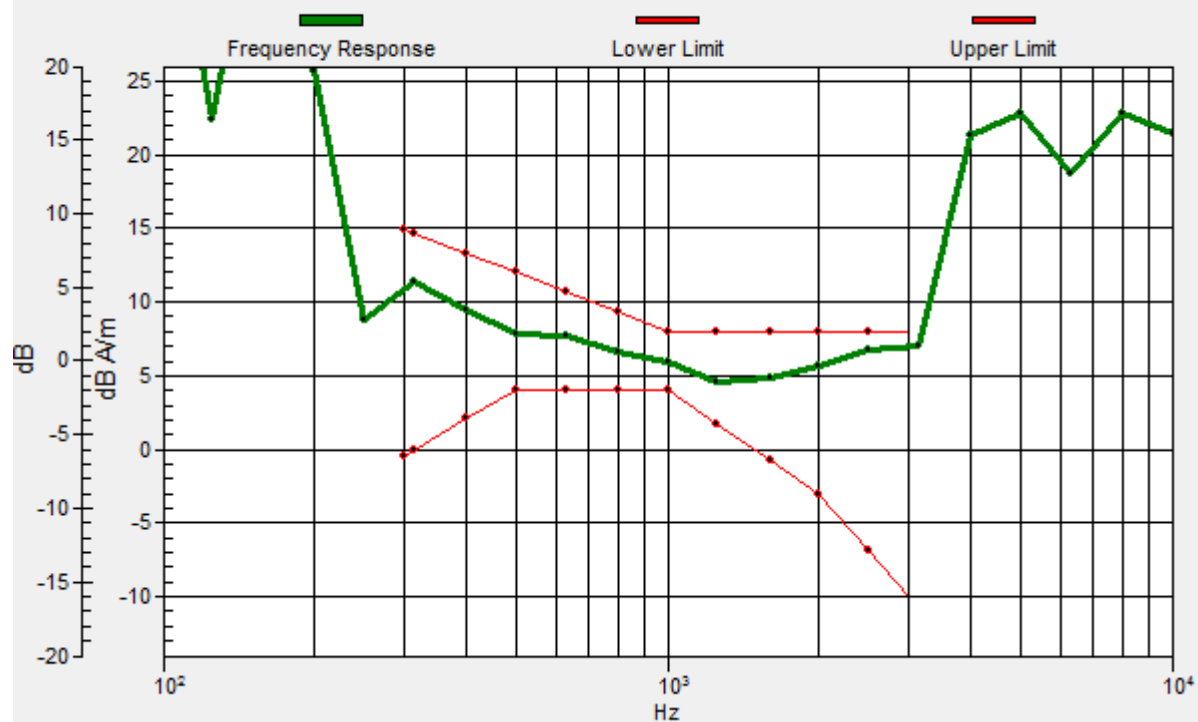

#04 HAC_T-Coil_CDMA2000 BC1_RC1+SO3_Ch25_Transversal (Y)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 1851.25 MHz;Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 1.07 dB A/m


Location: 0, -8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 38.44 dB

ABM1 comp = 0.68 dB A/m

Location: 0, 8.3, 3.7 mm

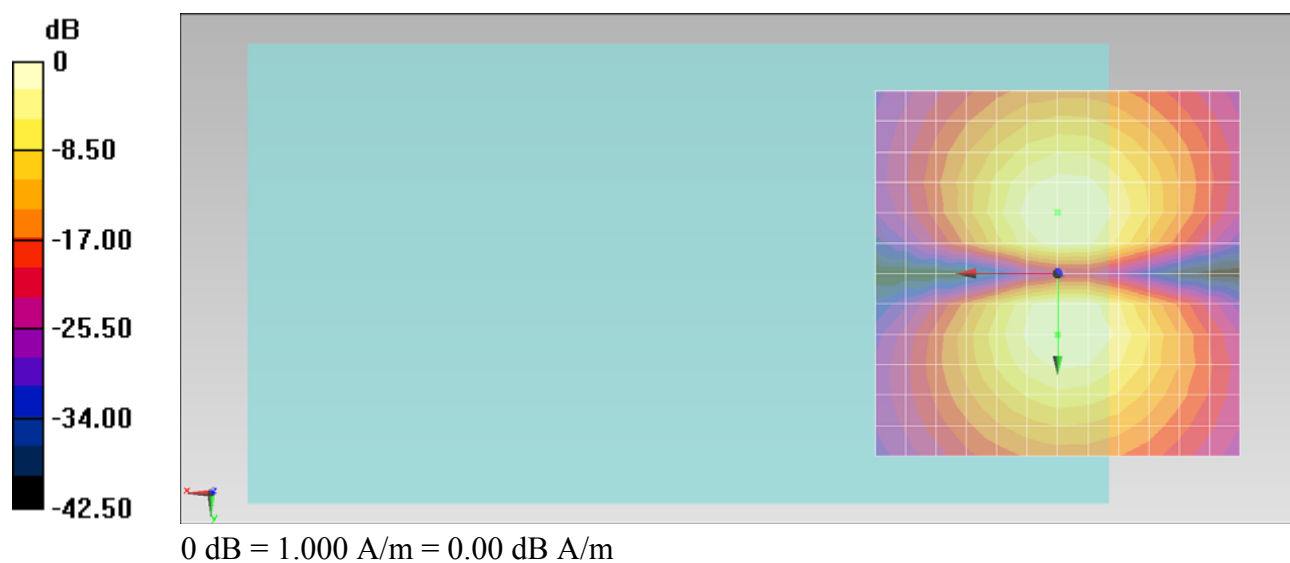

#05 HAC_T-Coil_CDMA2000 BC1_RC1+SO3_Ch600_Axial (Z)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 8.17 dB A/m



Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 42.53 dB

ABM1 comp = 7.83 dB A/m


Location: -4.2, 0, 3.7 mm

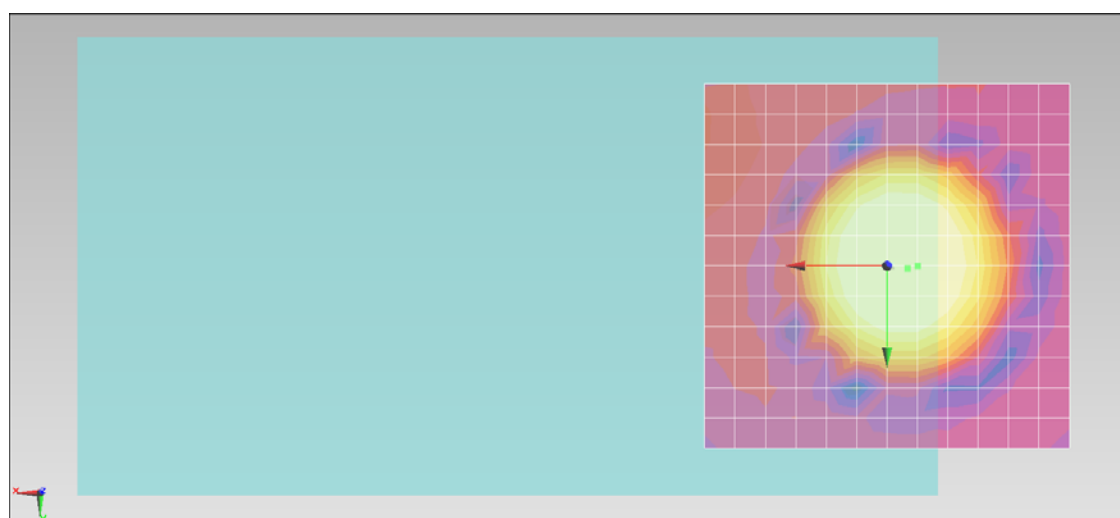

0 dB = 1.000 A/m = 0.00 dB A/m

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -2.9, 0.3, 3.7 mm Diff: 0.8dB

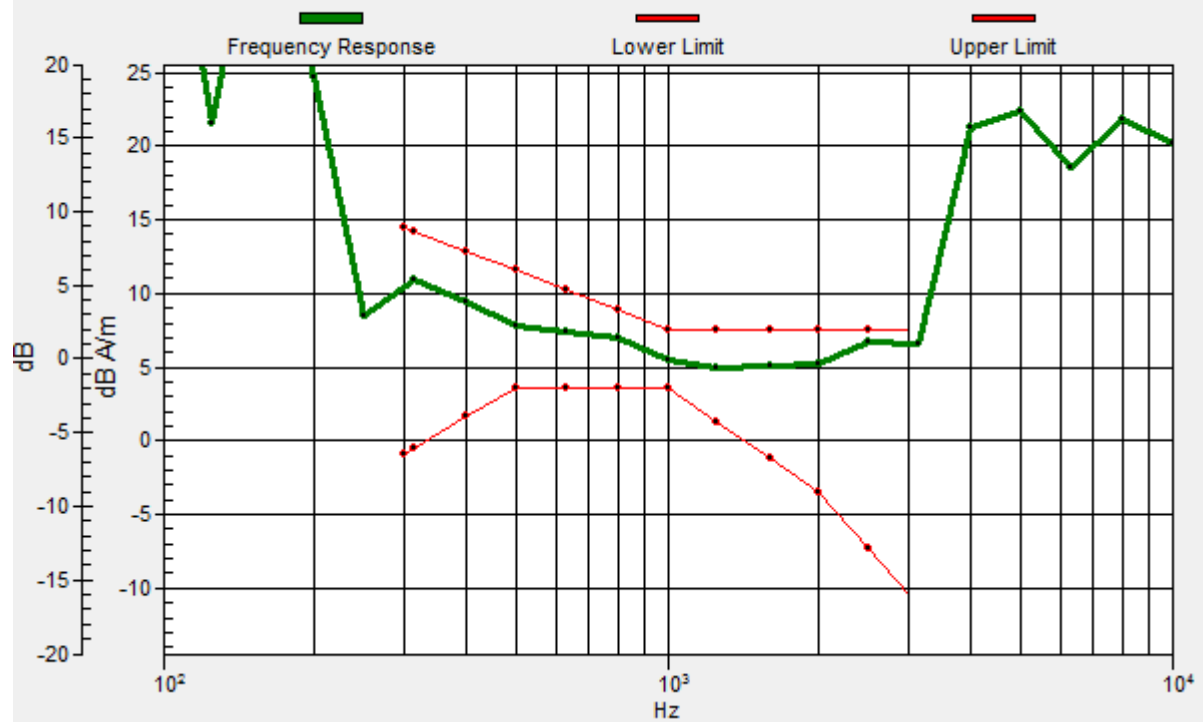

#05 HAC_T-Coil_CDMA2000 BC1_RC1+SO3_Ch600_Transversal (Y)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 0.86 dB A/m


Location: 0, -8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 37.80 dB

ABM1 comp = -0.12 dB A/m

Location: -4.2, 8.3, 3.7 mm

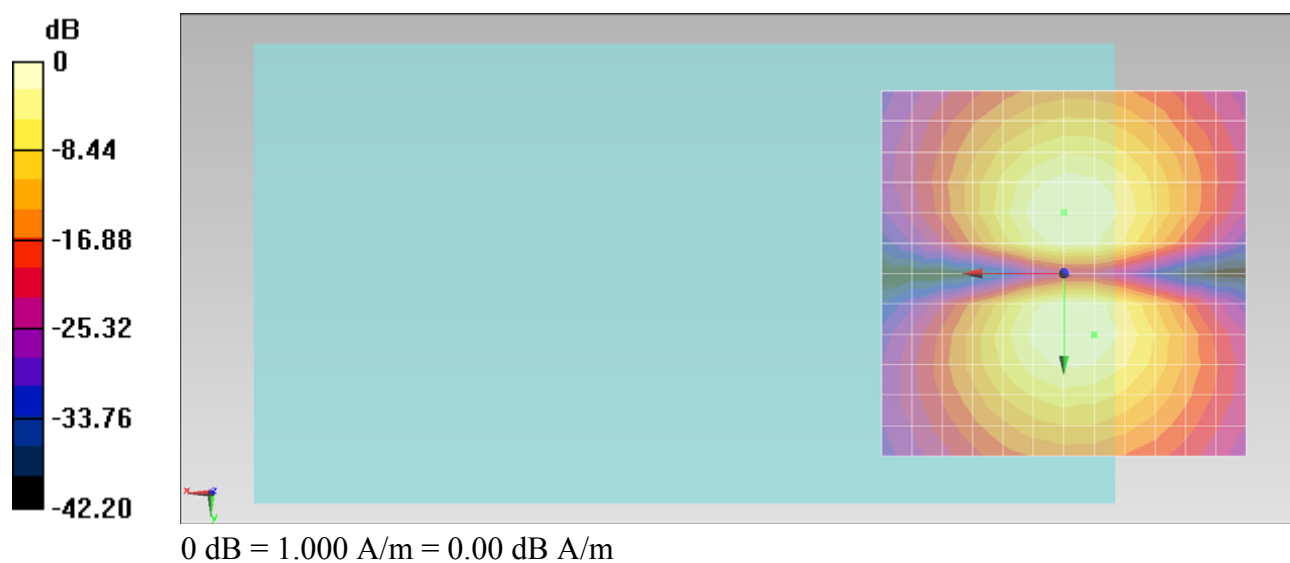

#06 HAC_T-Coil_CDMA2000 BC1_RC1+SO3_Ch1175_Axial (Z)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 8.15 dB A/m


Location: 0, 0, 3.7 mm

General Scans/z (axial) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 42.62 dB


ABM1 comp = 7.91 dB A/m

Location: -4.2, 0, 3.7 mm

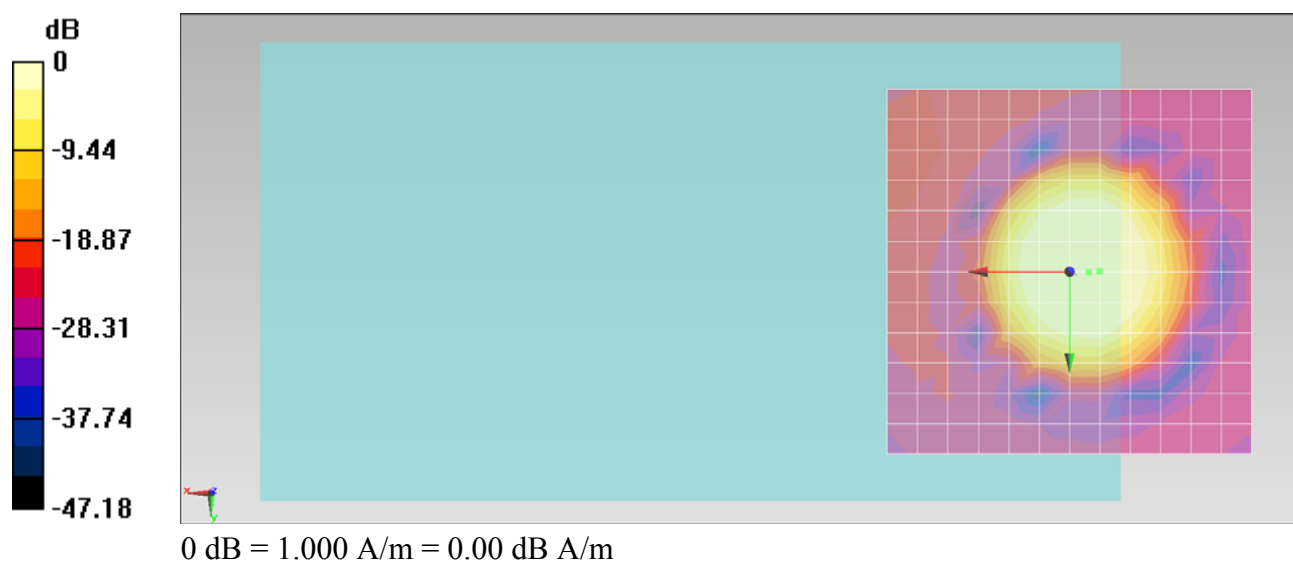

General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -2.6, 0.1, 3.7 mm Diff: 1.15dB

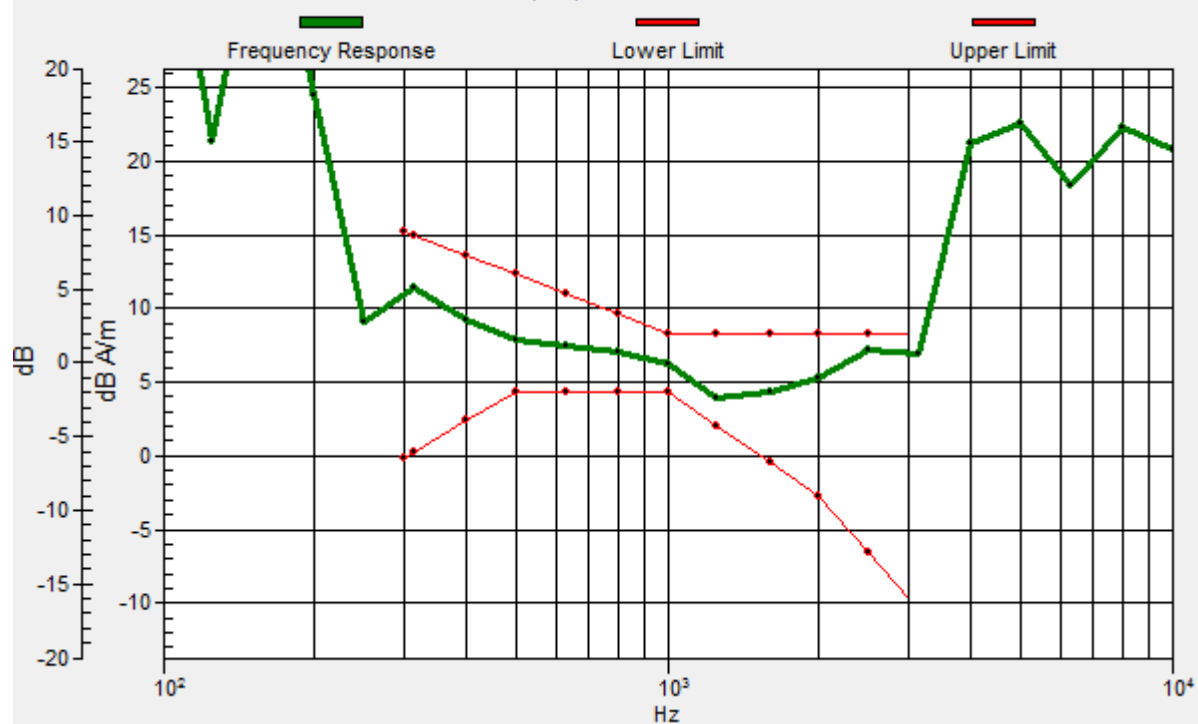

#06 HAC_T-Coil_CDMA2000 BC1_RC1+SO3_Ch1175_Transversal (Y)**DUT: 2N1414**

Communication System: CDMA ; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 22.6 °C

DASY5 Configuration:

- Probe: AM1DV2 - 1038; ; Calibrated: 2012/1/23
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn778; Calibrated: 2012/8/27
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6477)

General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):

ABM1 comp = 1.10 dB A/m

Location: 0, -8.3, 3.7 mm

General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):

ABM1/ABM2 = 38.53 dB

ABM1 comp = 0.63 dB A/m

Location: 0, 8.3, 3.7 mm

