








RF 15M(LTE 15M) -Port 0-1960MHz

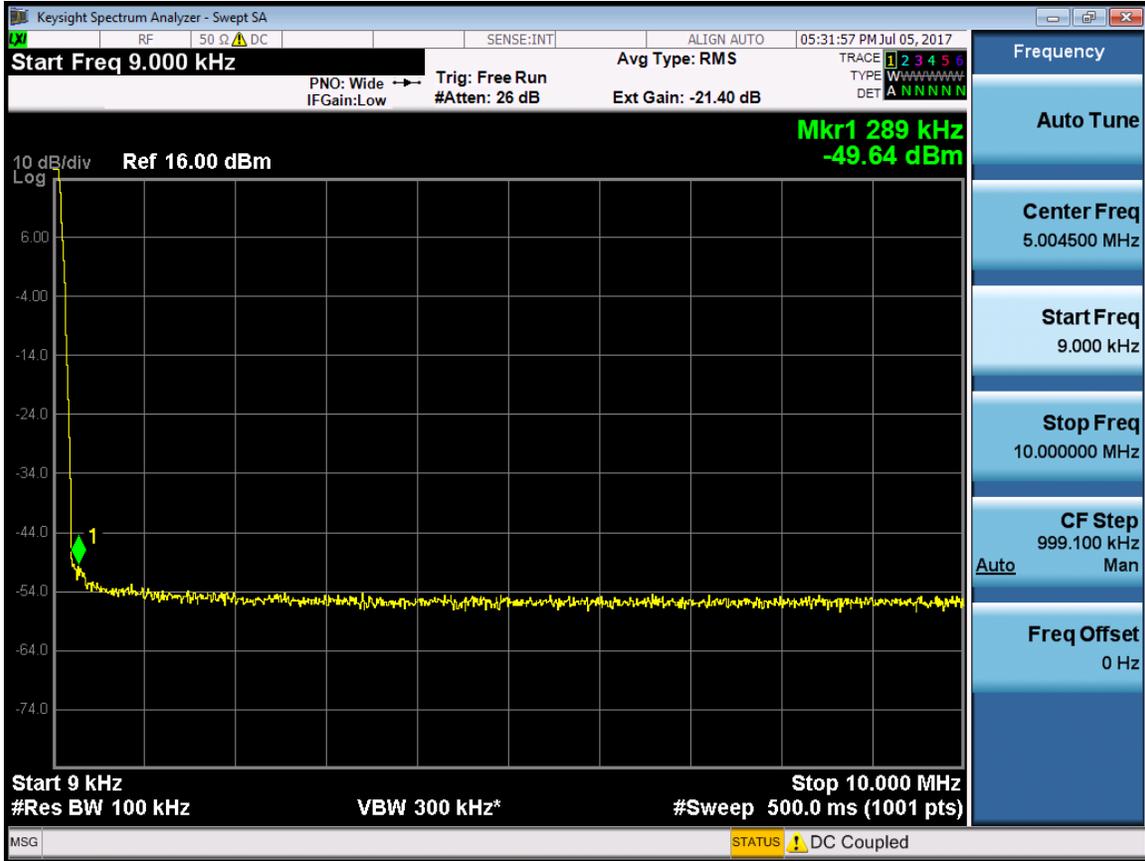

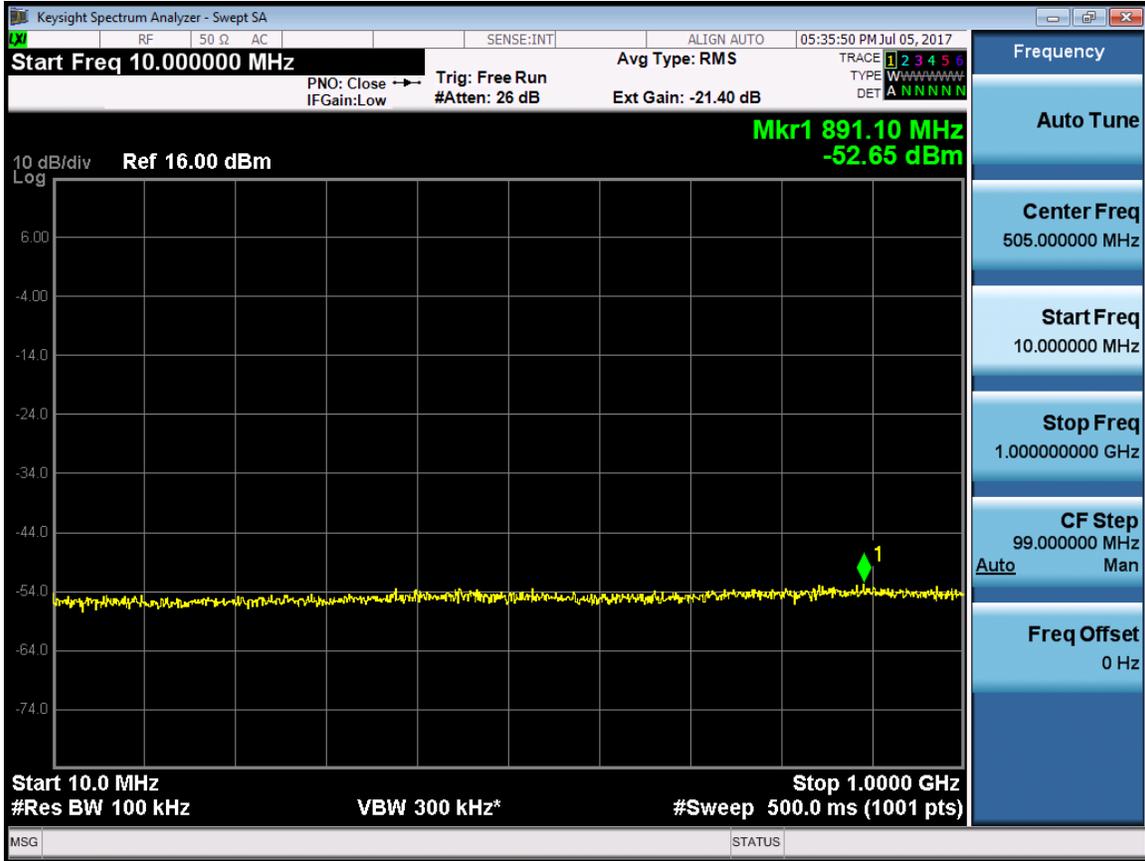

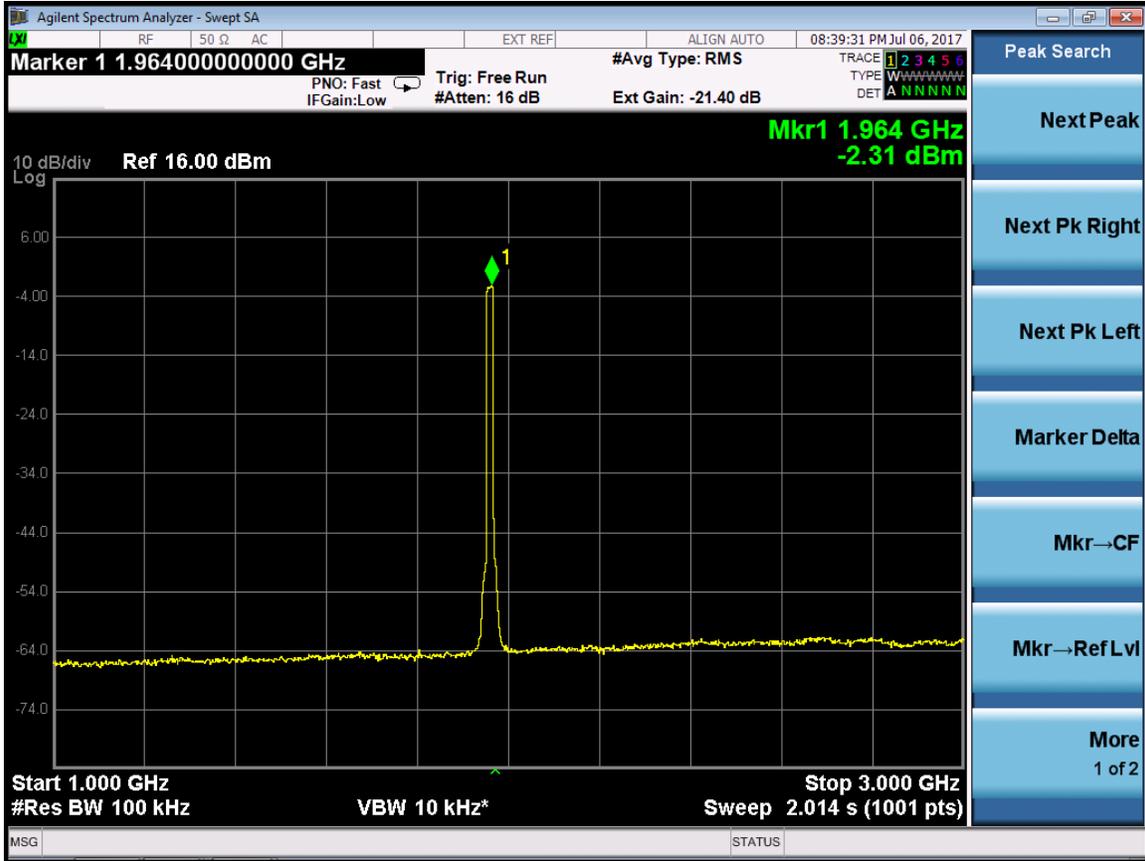


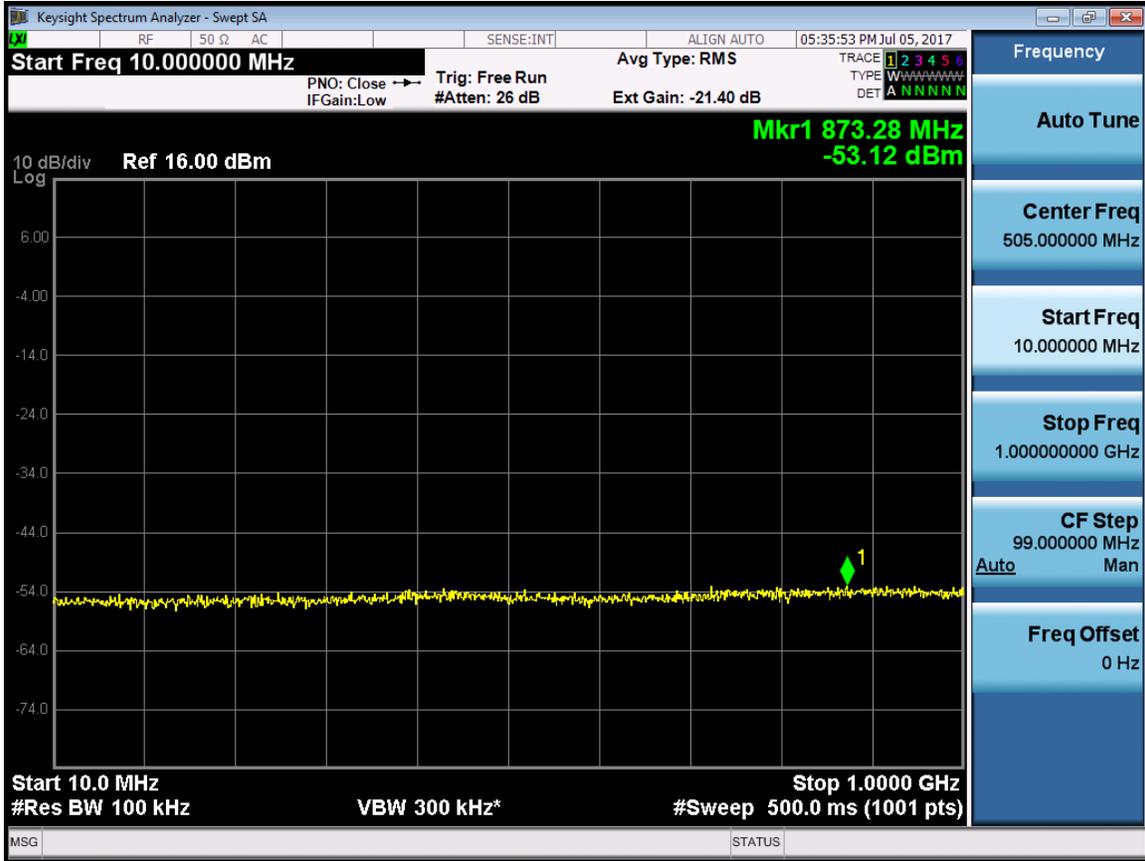


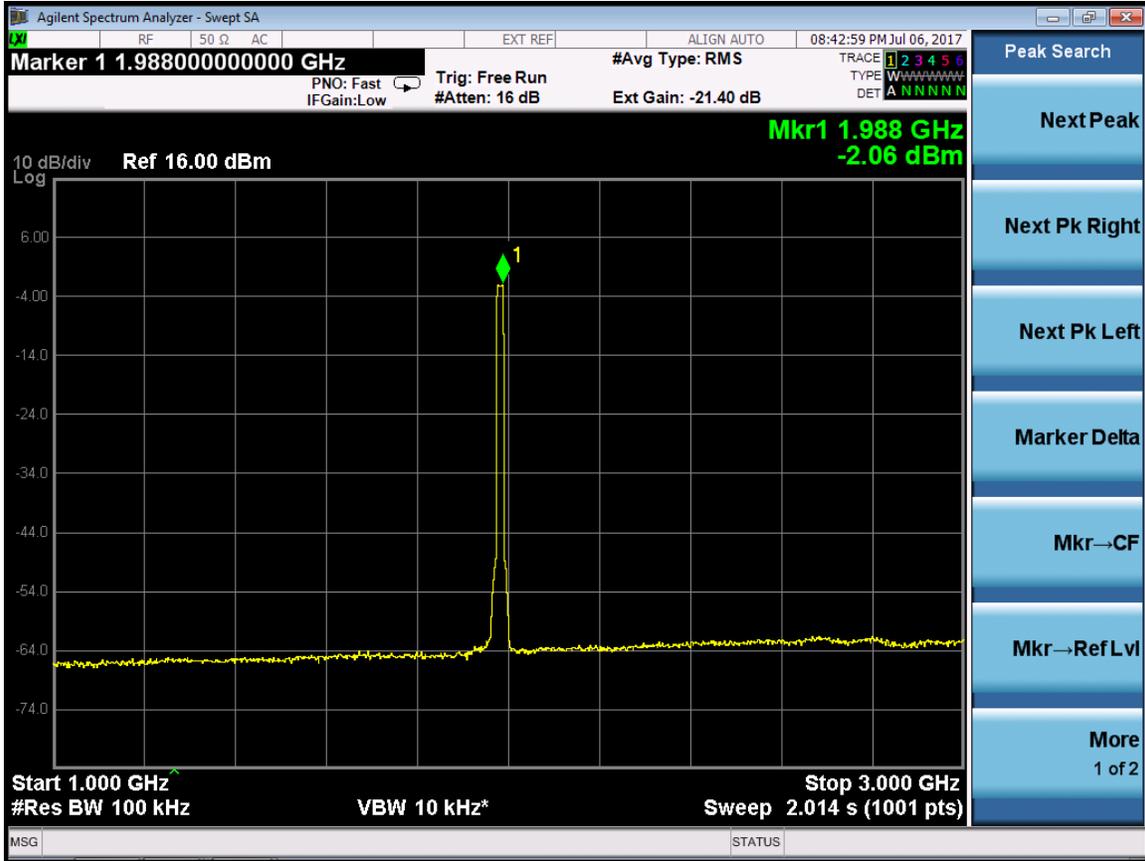





RF 15M(LTE 15M) -Port 1-1937.5MHz

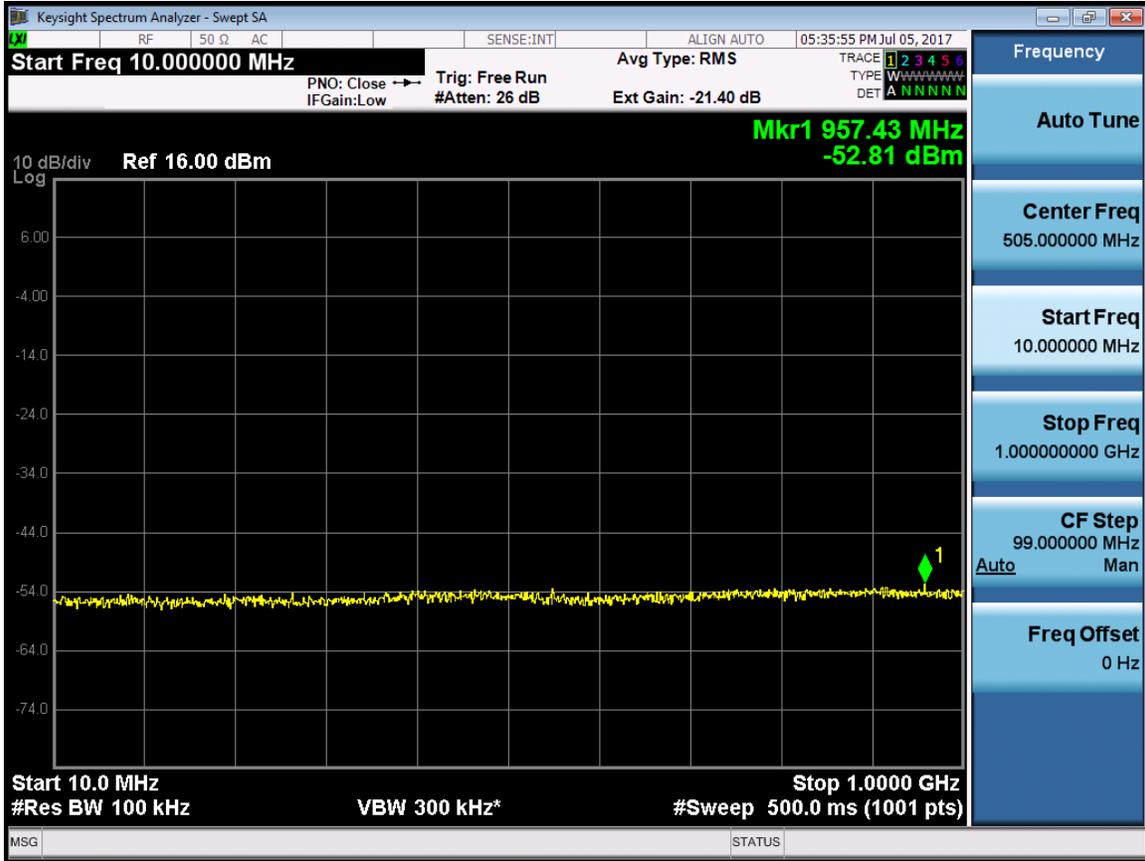


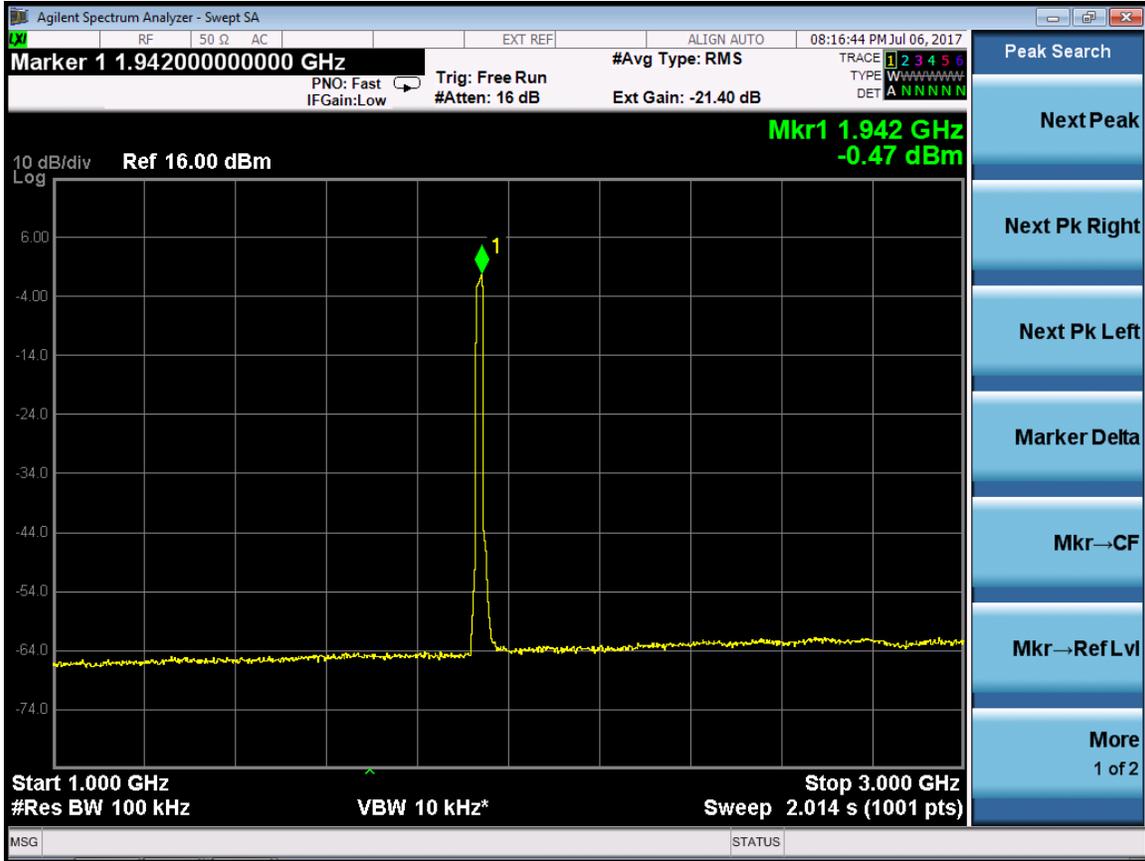


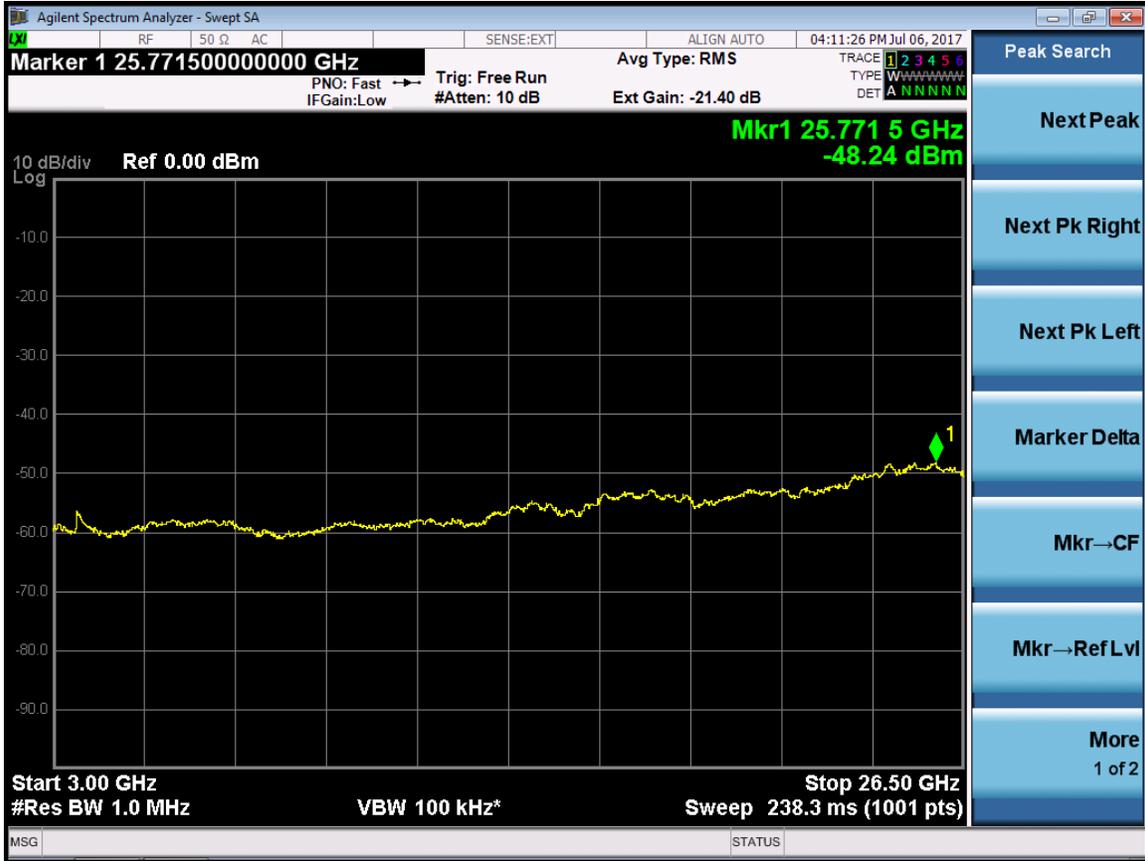

RF 15M(LTE 15M) -Port 1-1960MHz

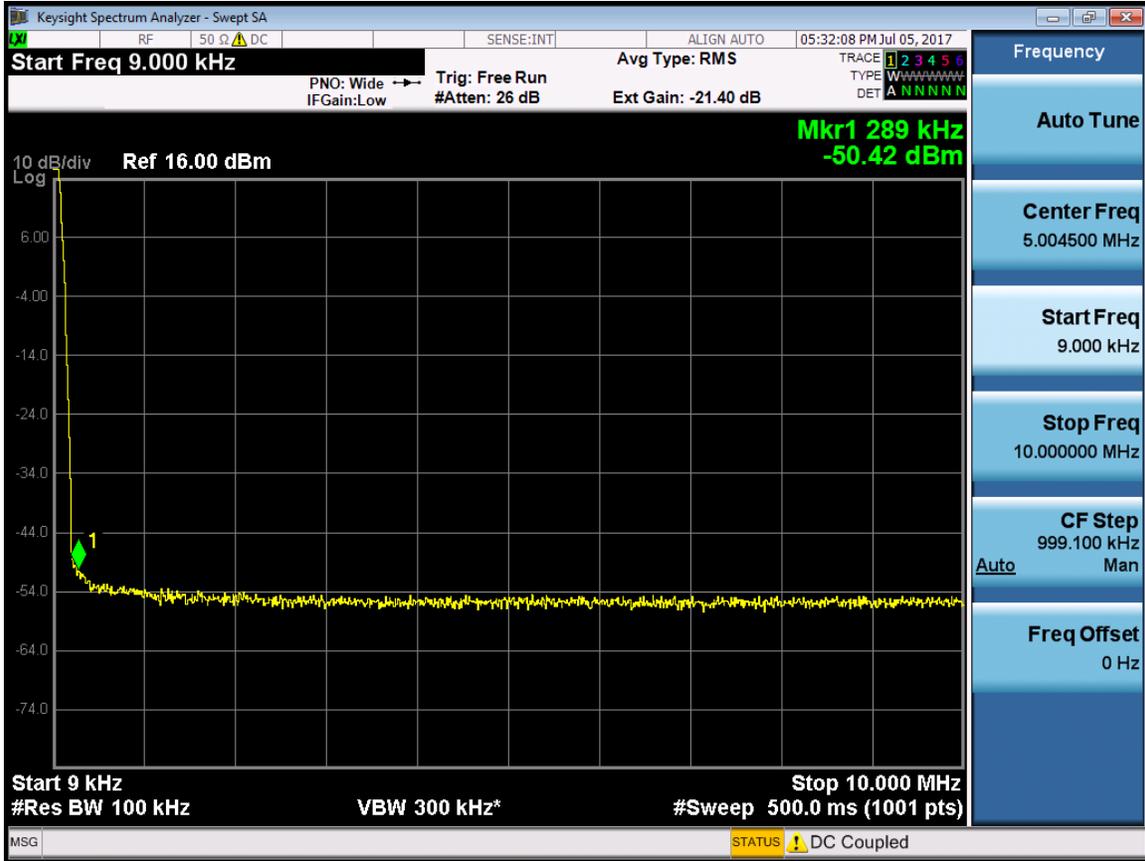


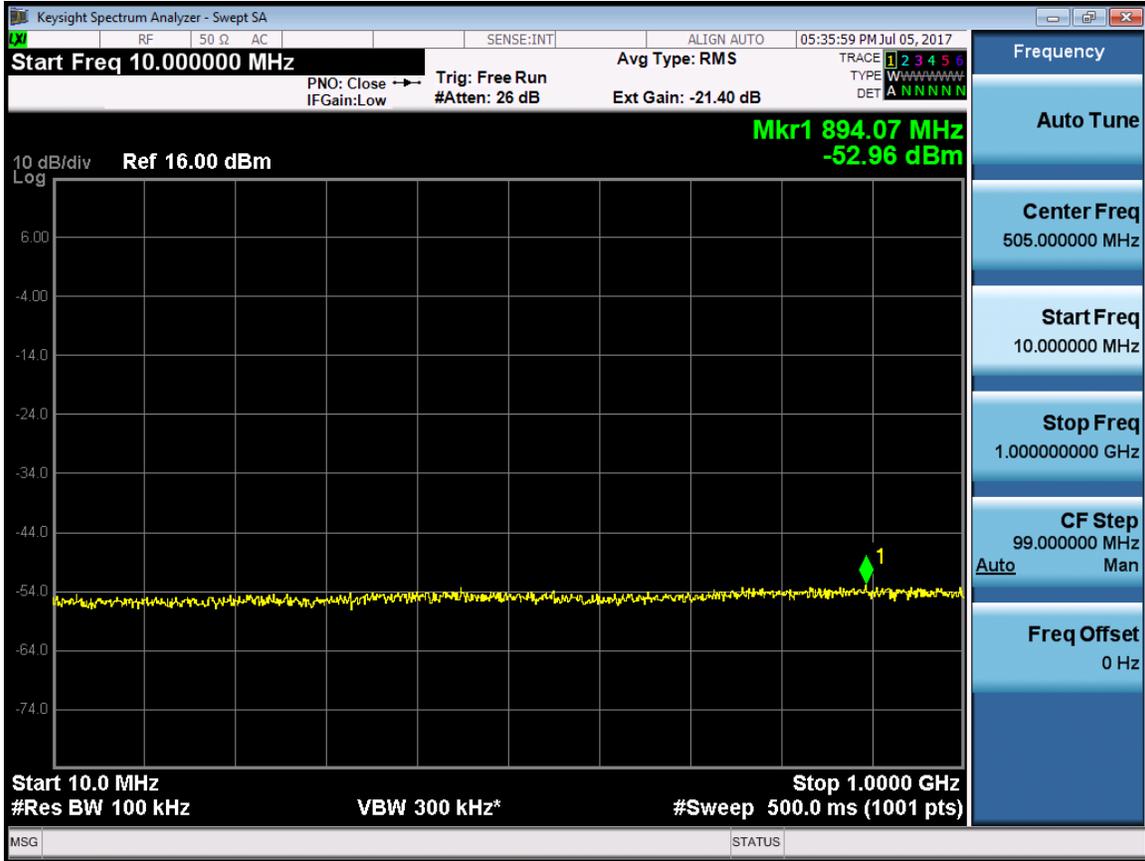


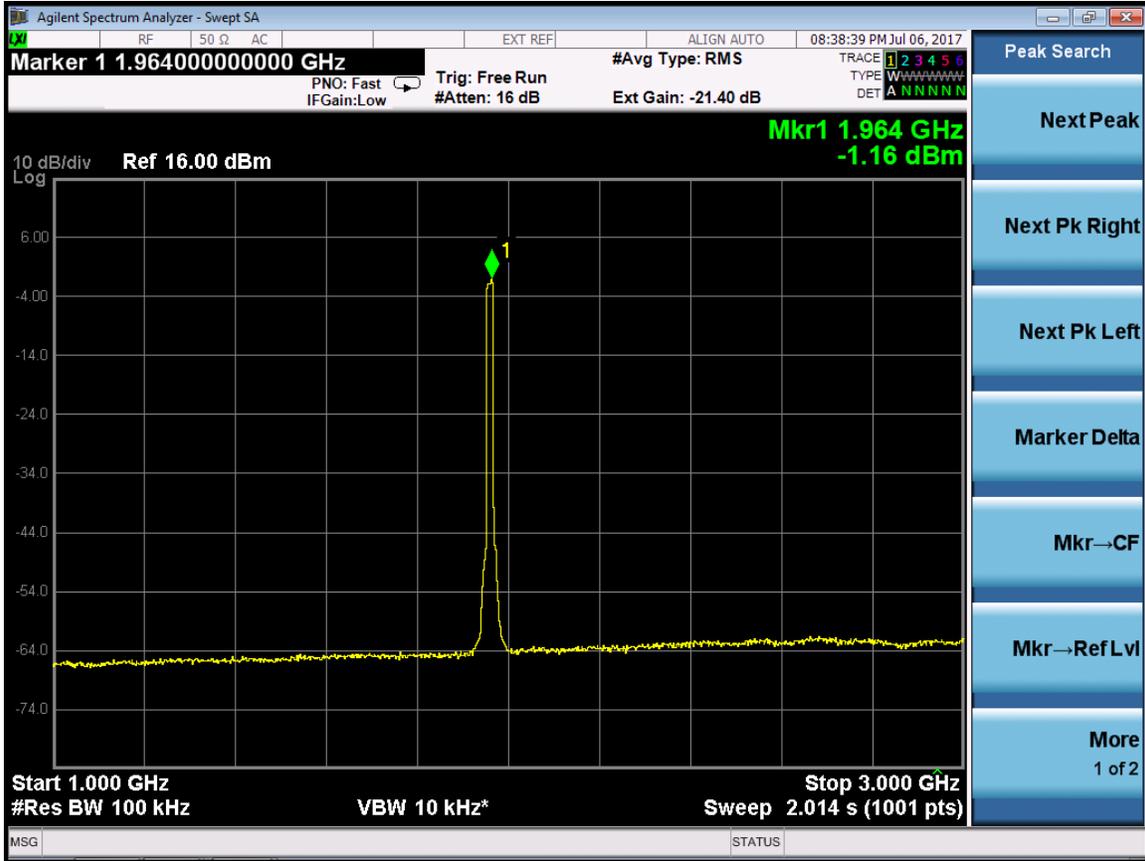




RF 15M(LTE 15M) -Port 1-1982.5MHz

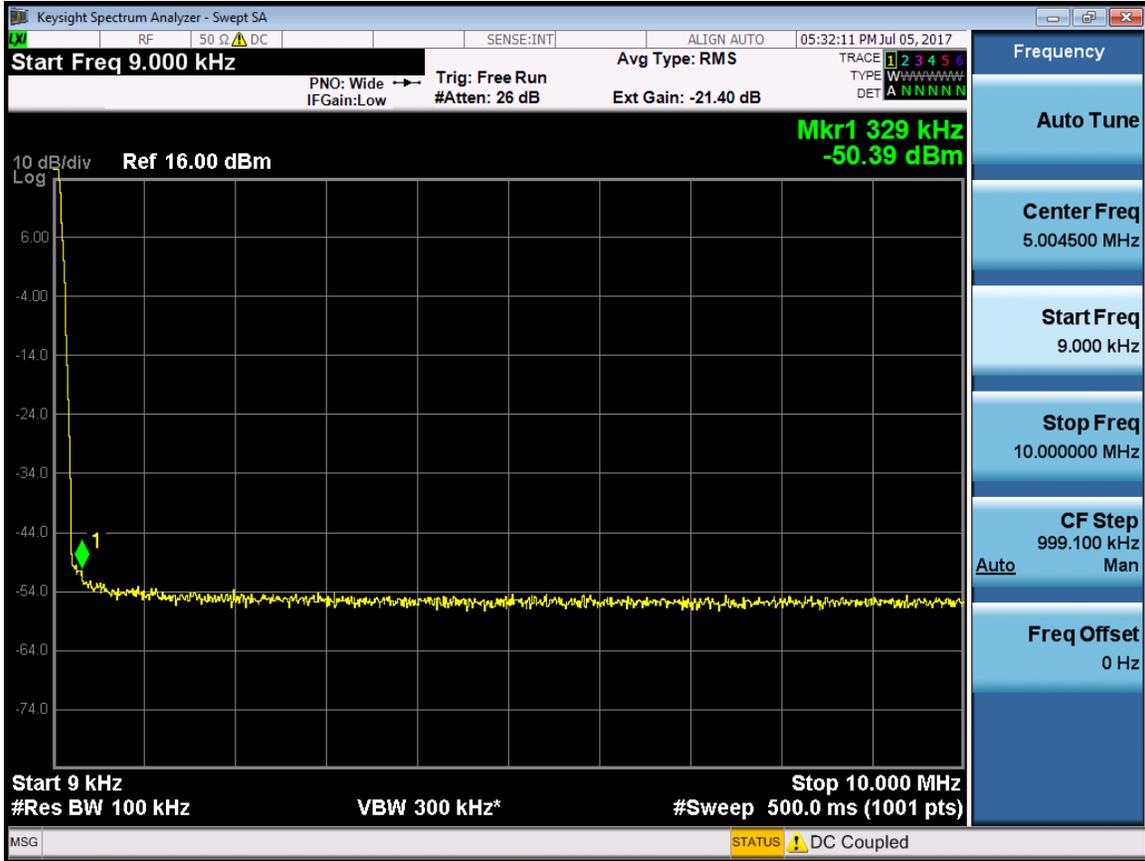


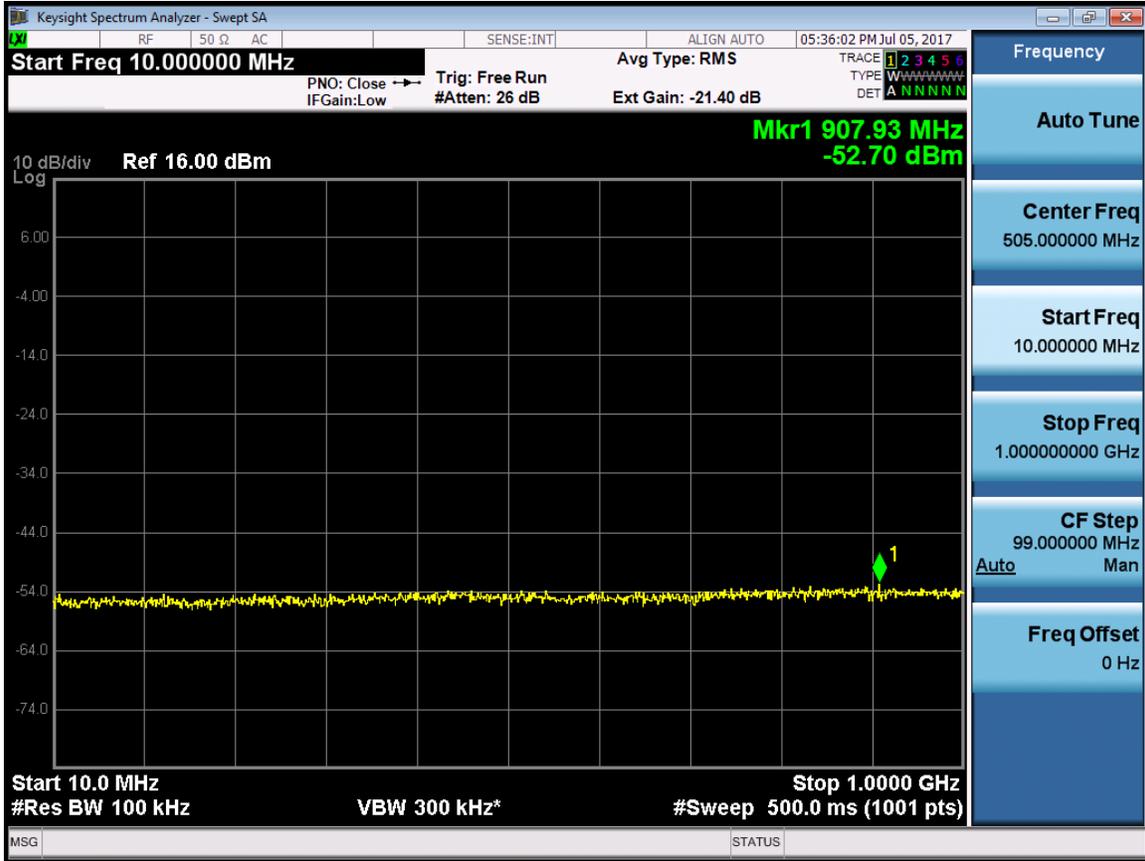




RF 10M(LTE 10M) -Port 0-1935MHz

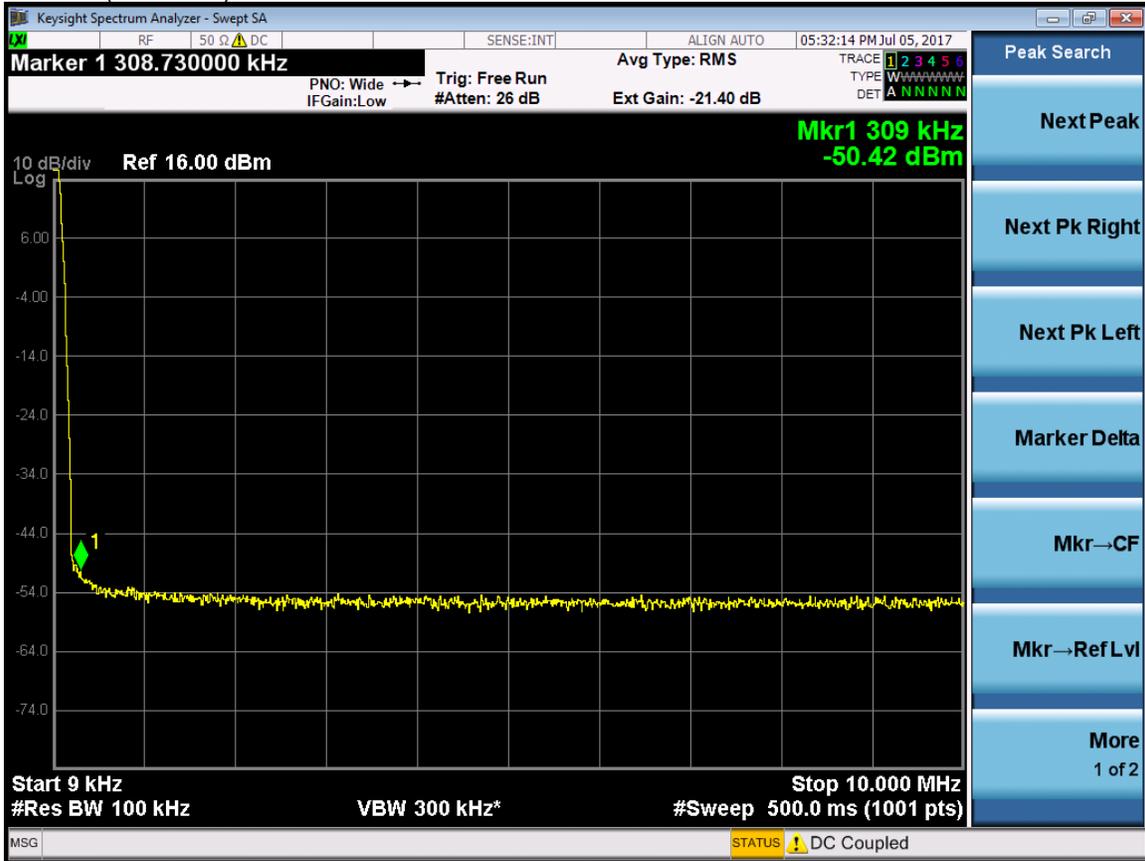


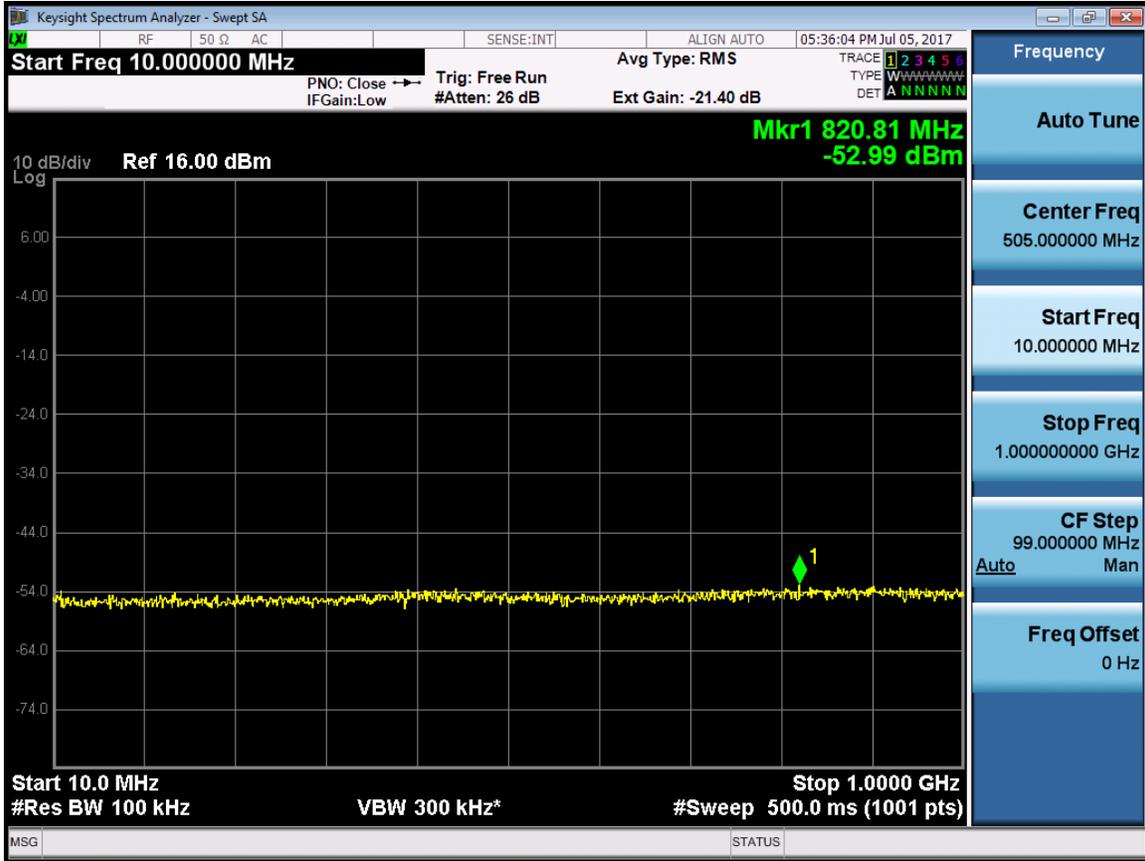


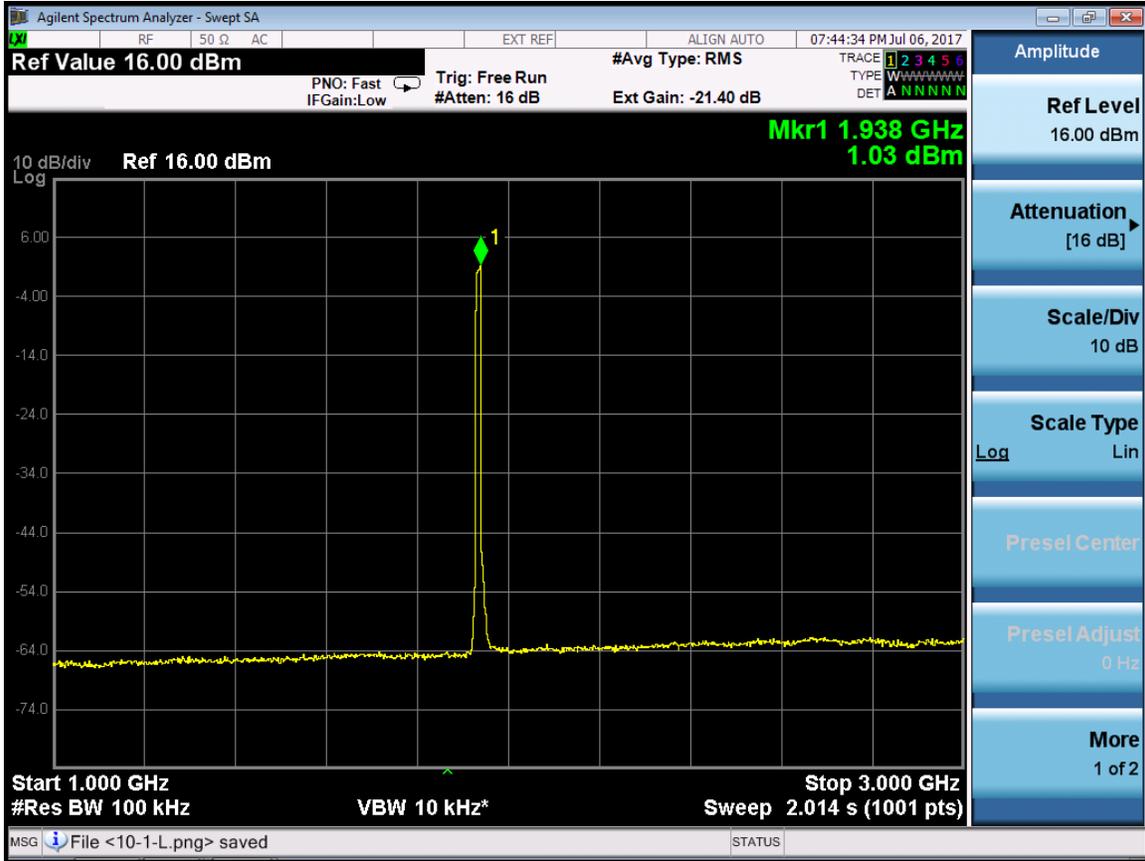




RF 10M(LTE 10M) -Port 0-1960MHz

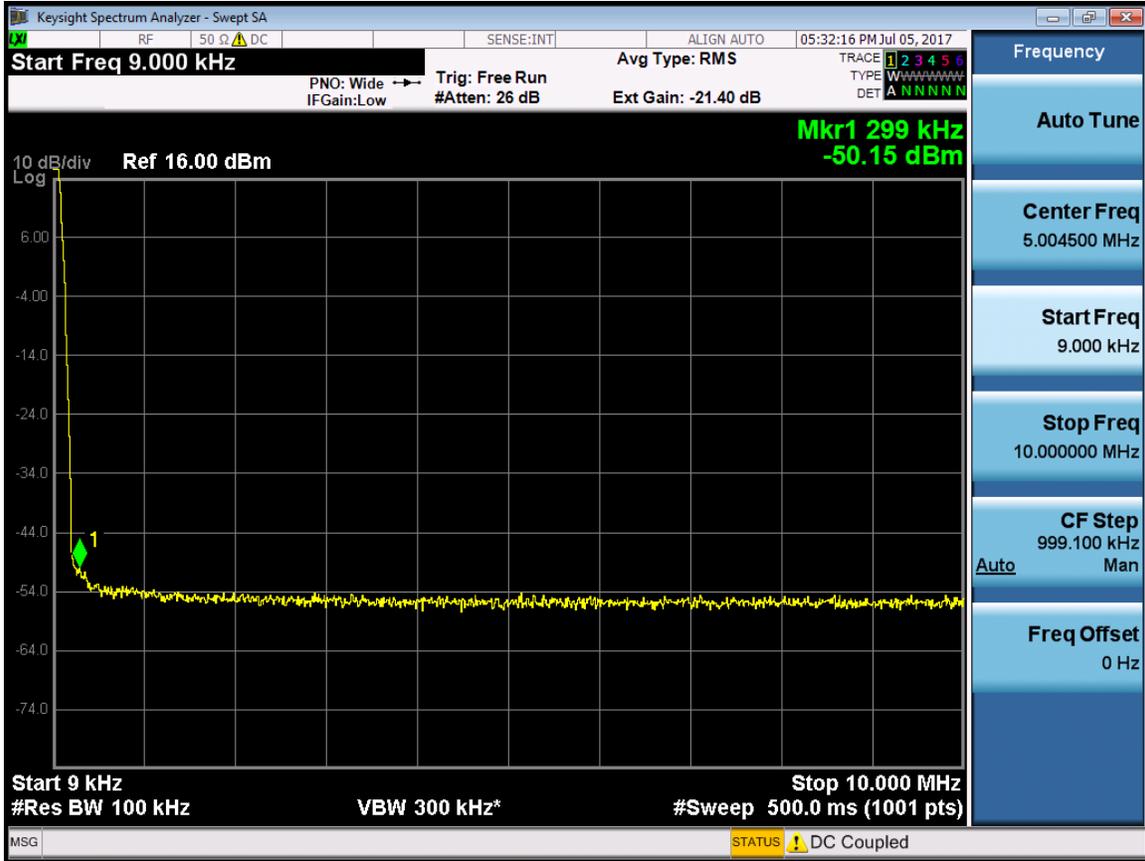


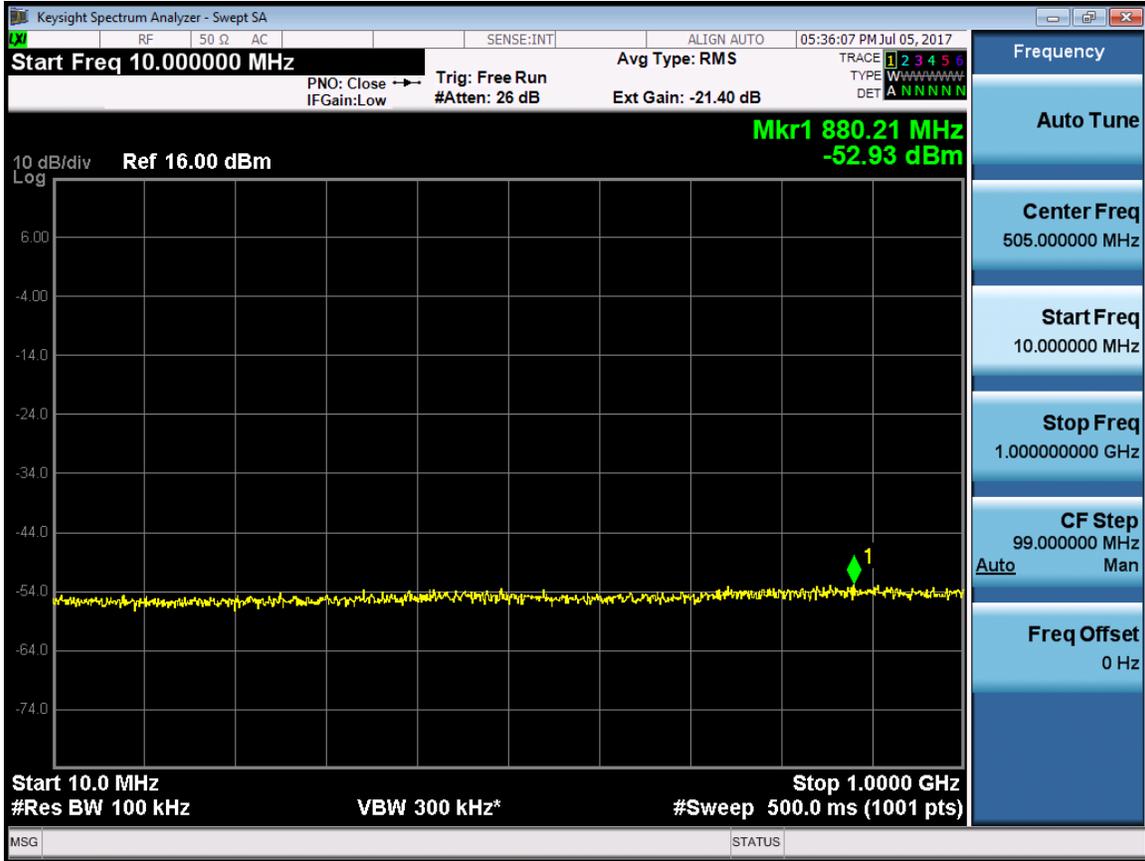


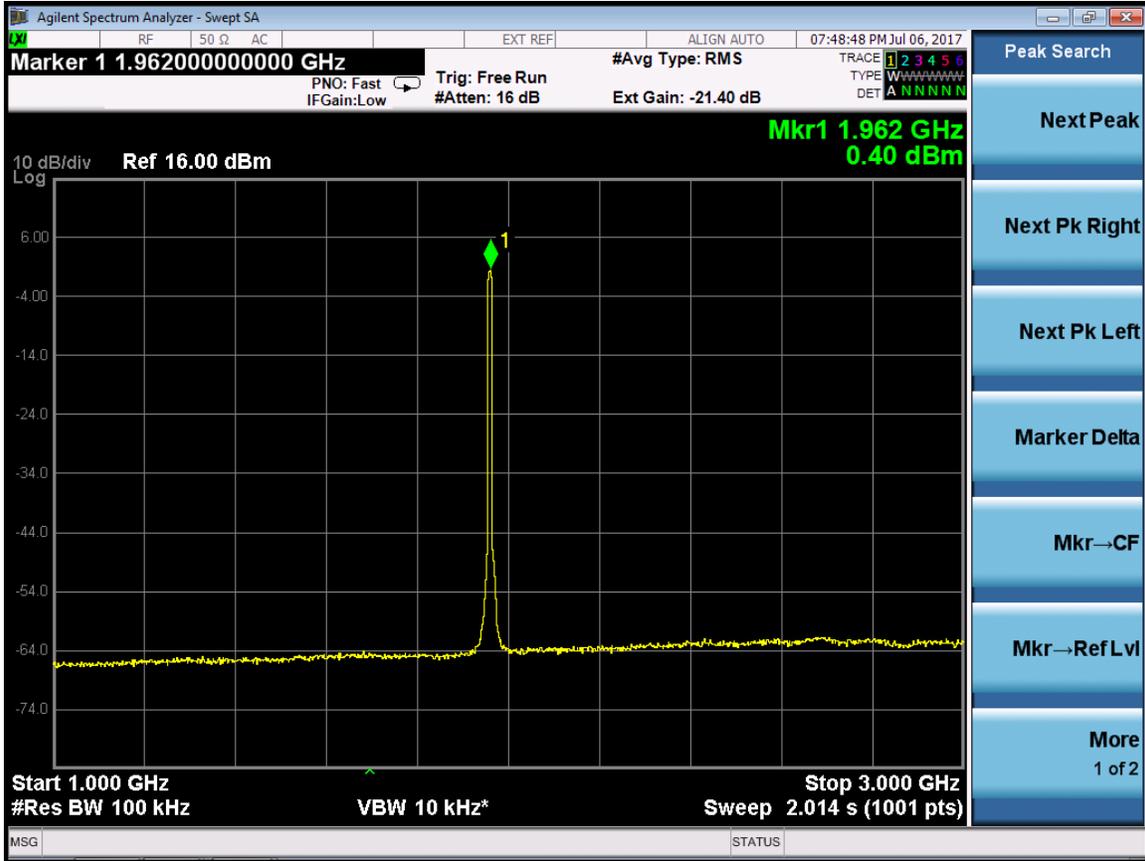




RF 10M(LTE 10M) -Port 0-1985MHz

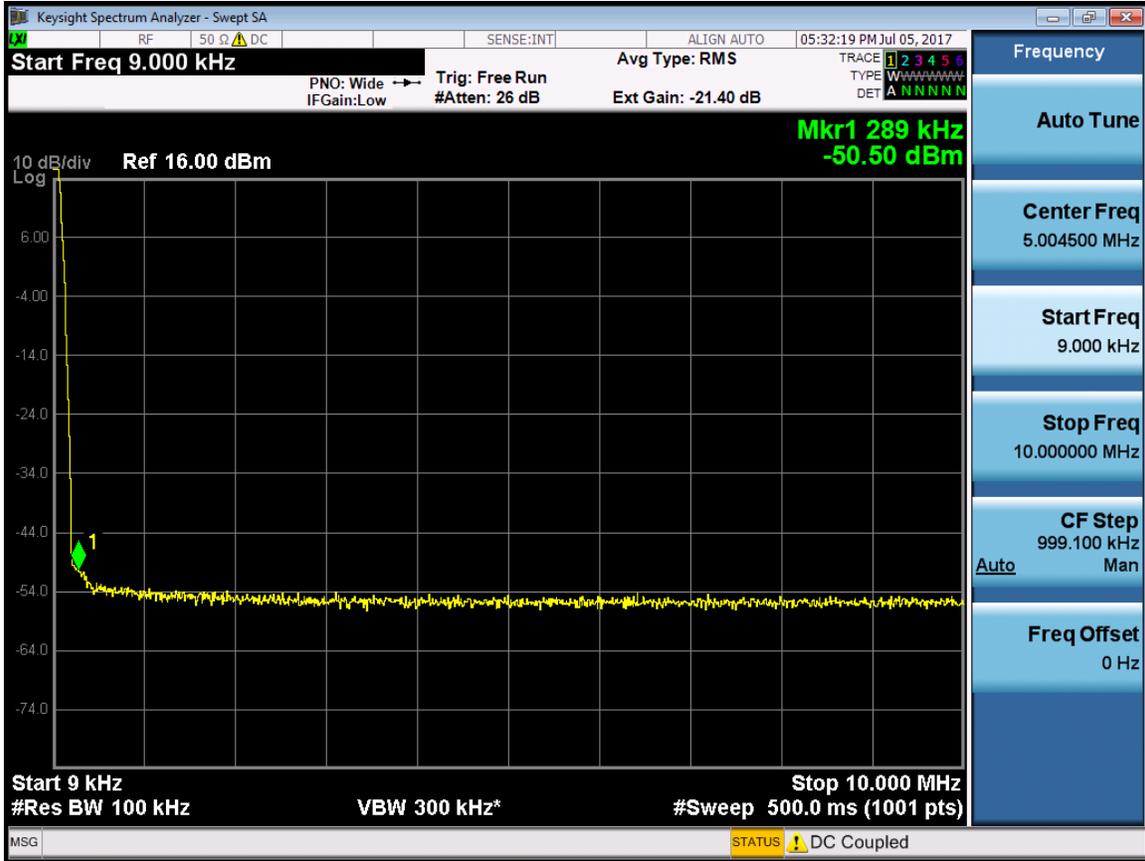


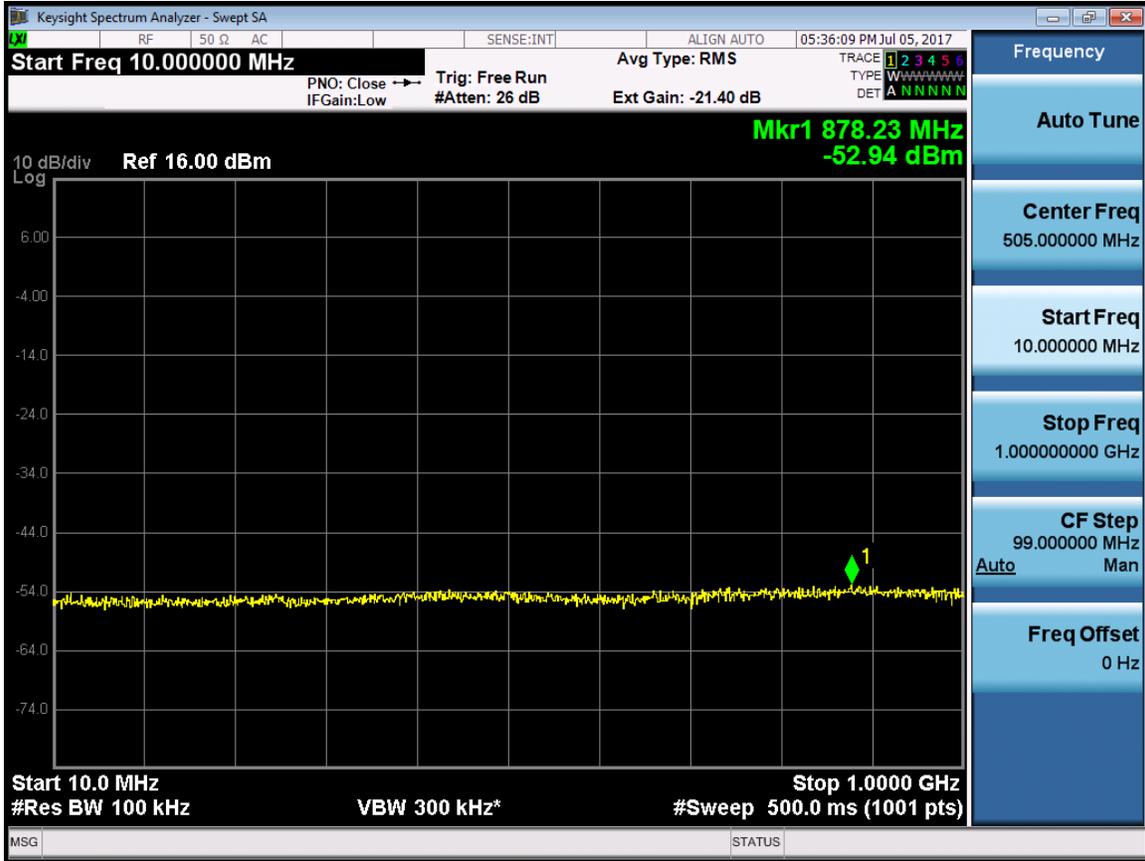

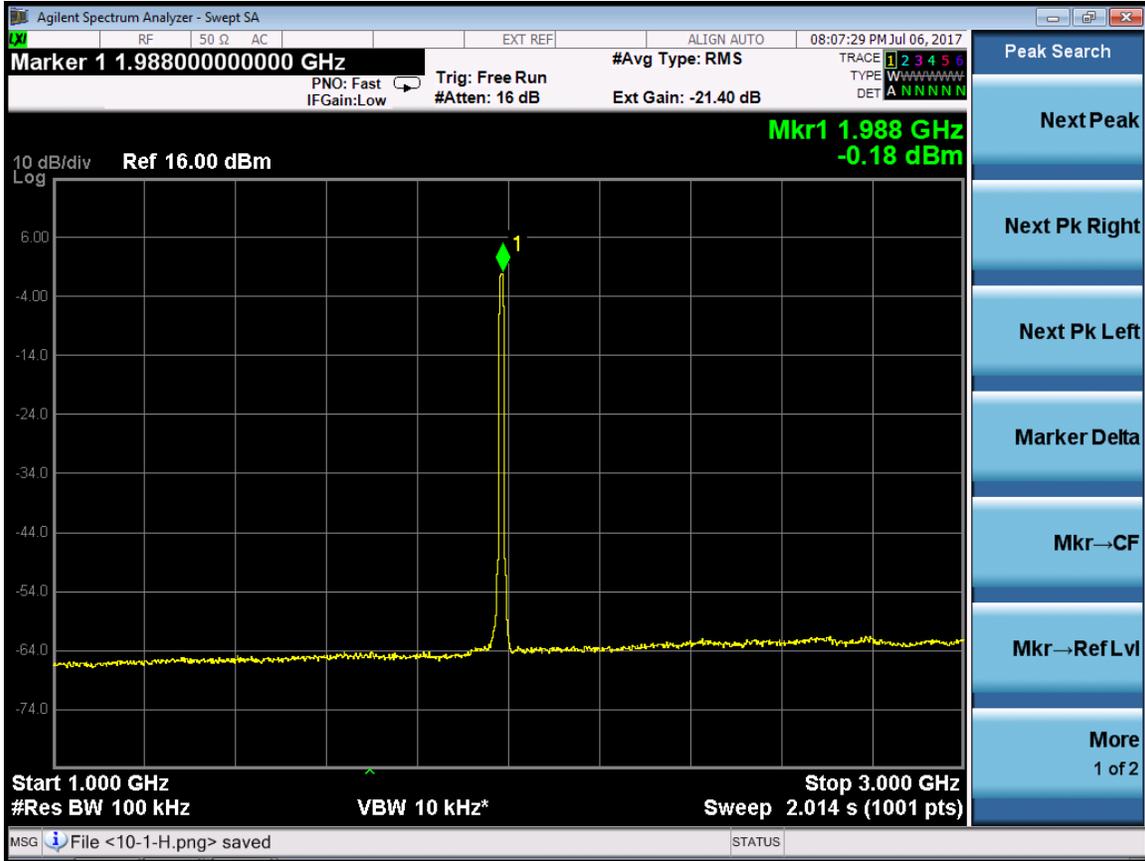





RF 10M(LTE 10M) -Port 1-1935MHz

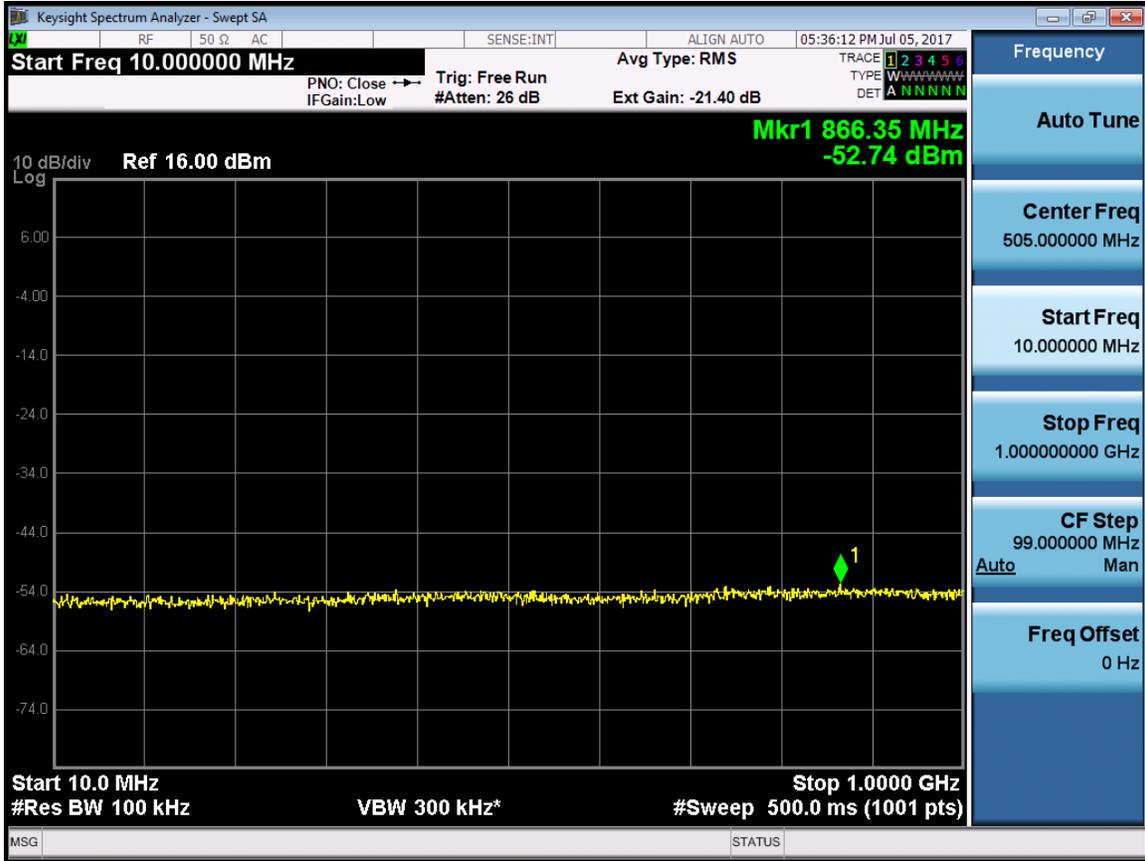




RF 10M(LTE 10M) -Port 1-1960MHz

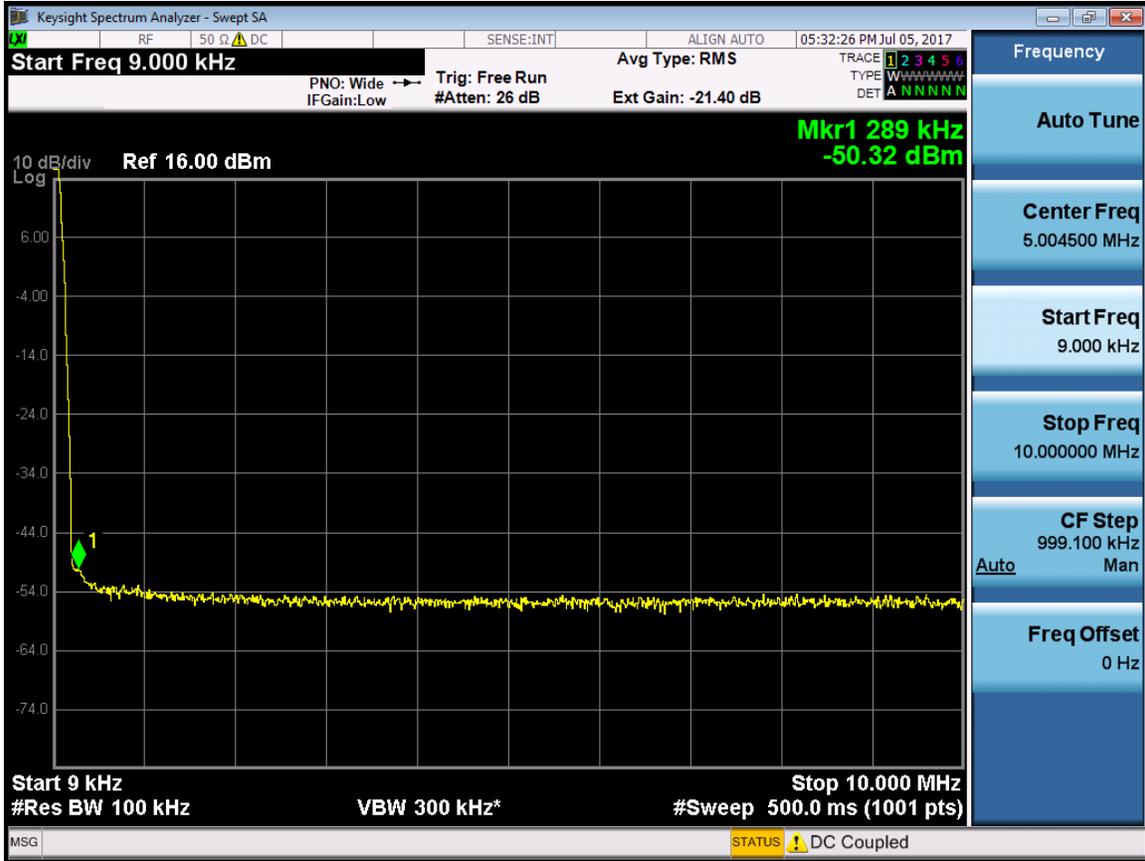


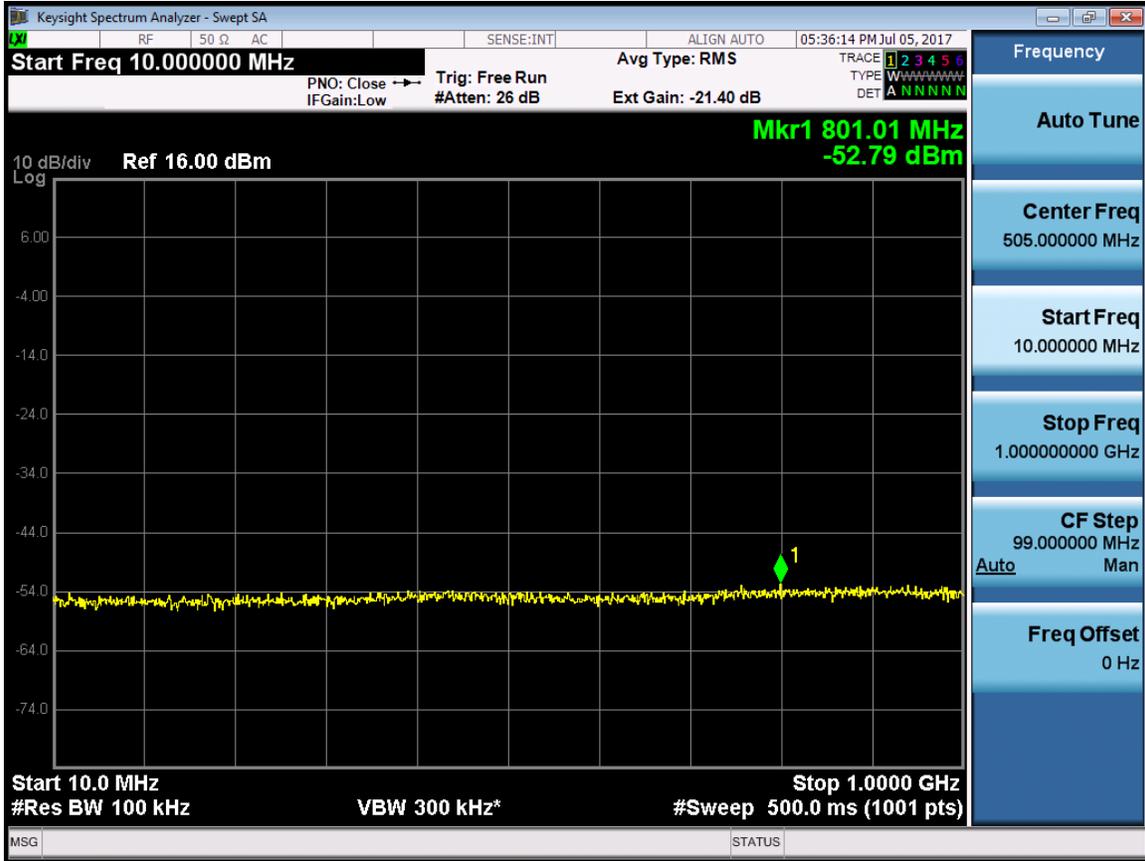


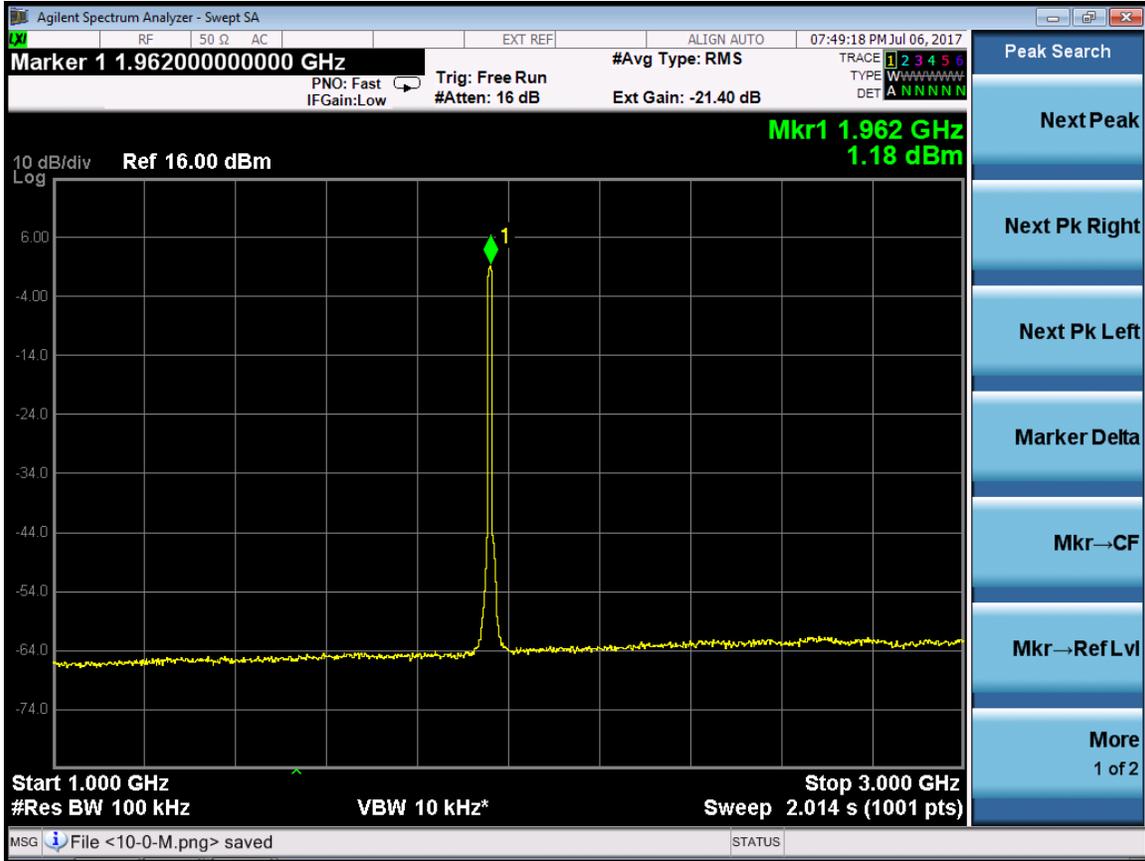




RF 10M(LTE 10M) -Port 1-1985MHz

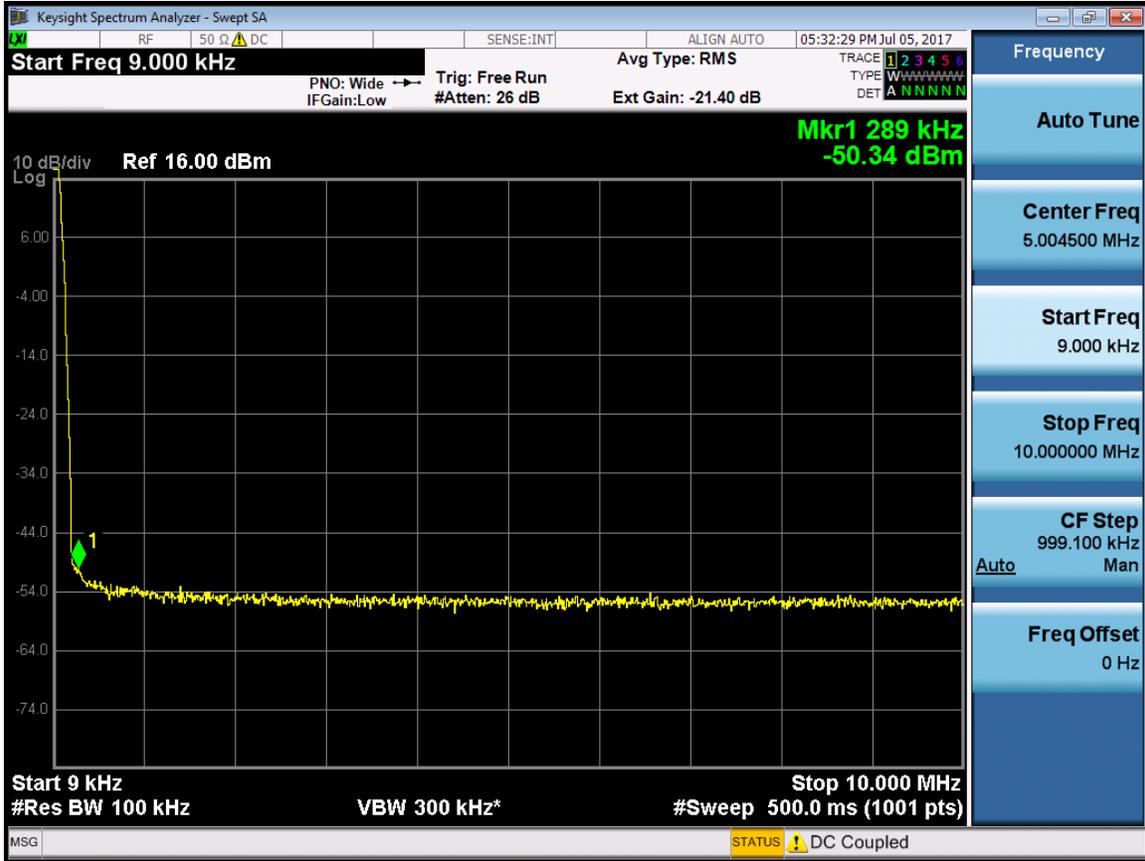


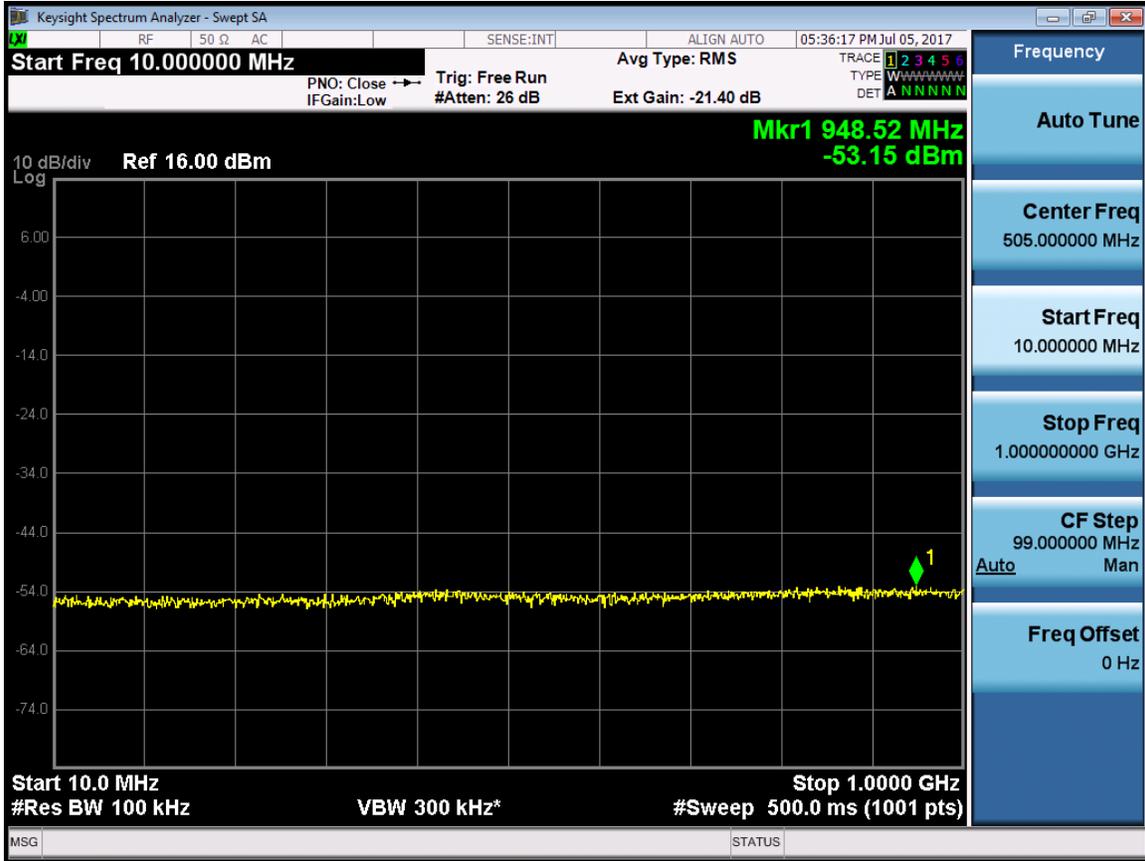




RF 5M(LTE 5M) -Port 0-1932.5MHz

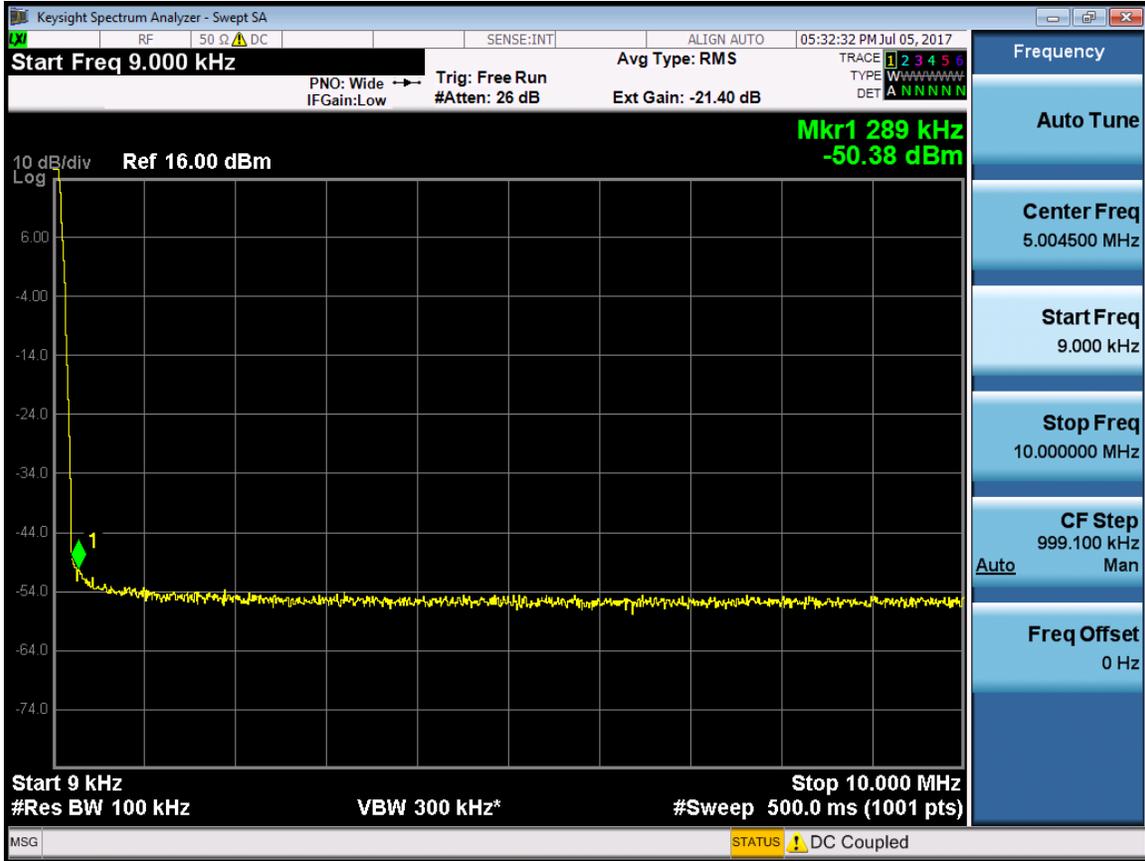


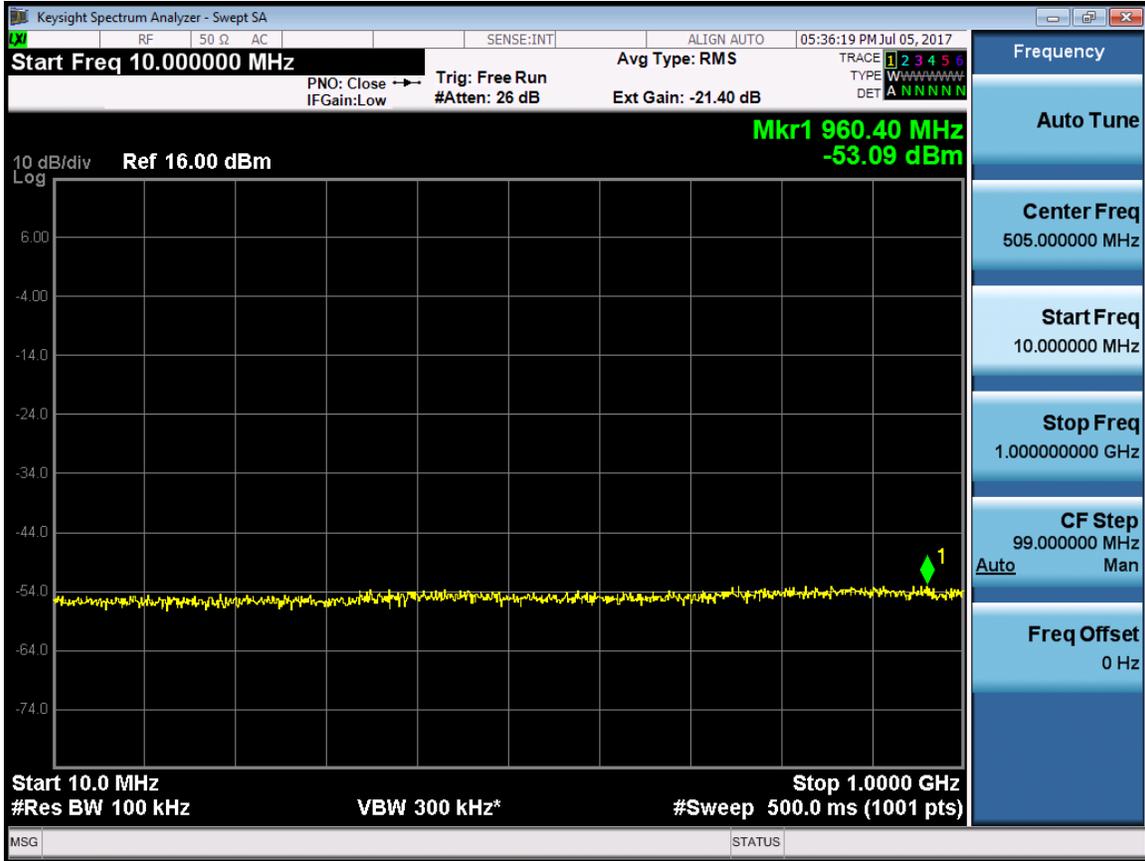


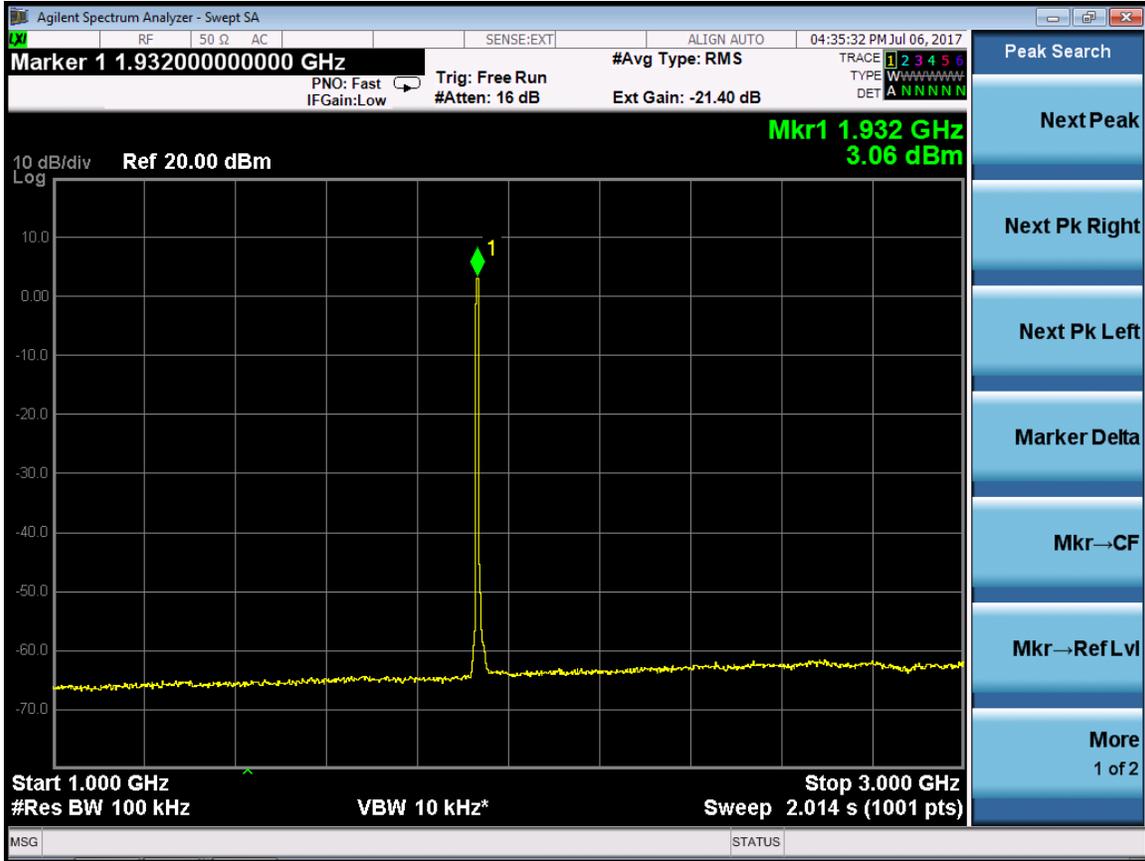




RF 5M(LTE 5M) -Port 0-1960MHz

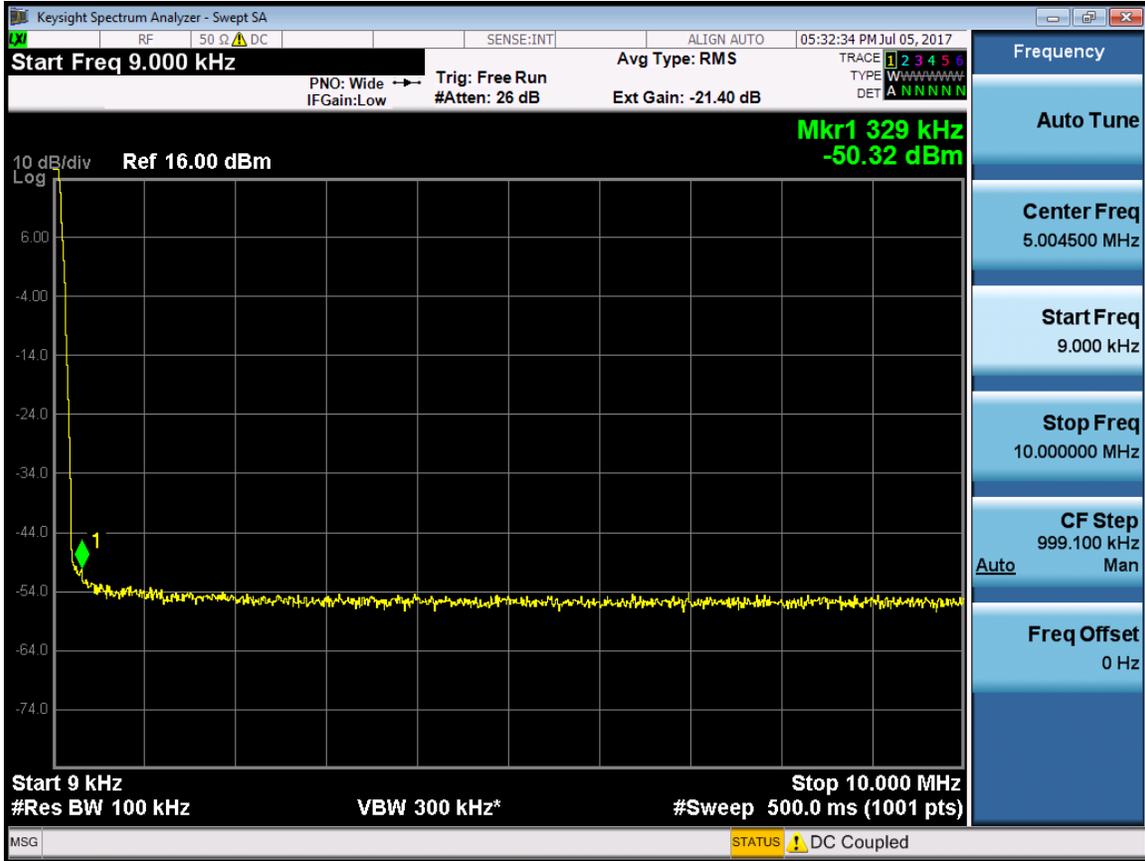


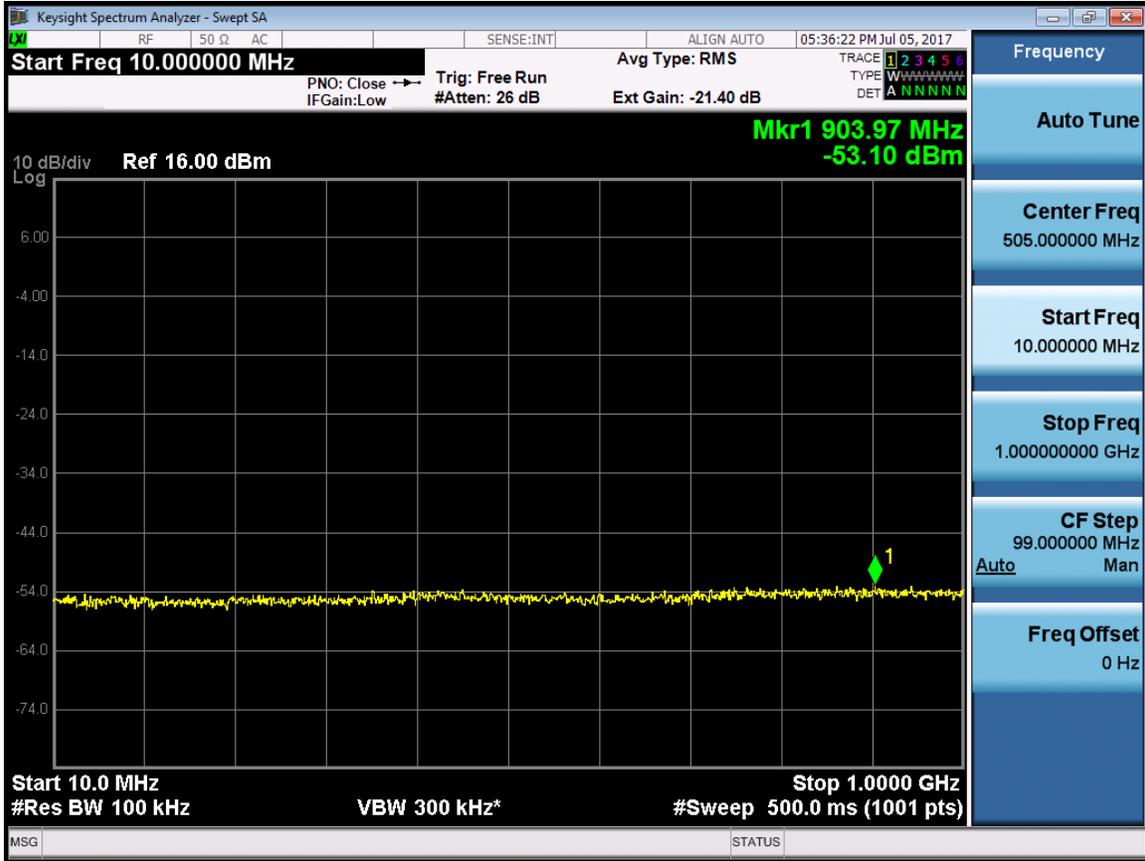


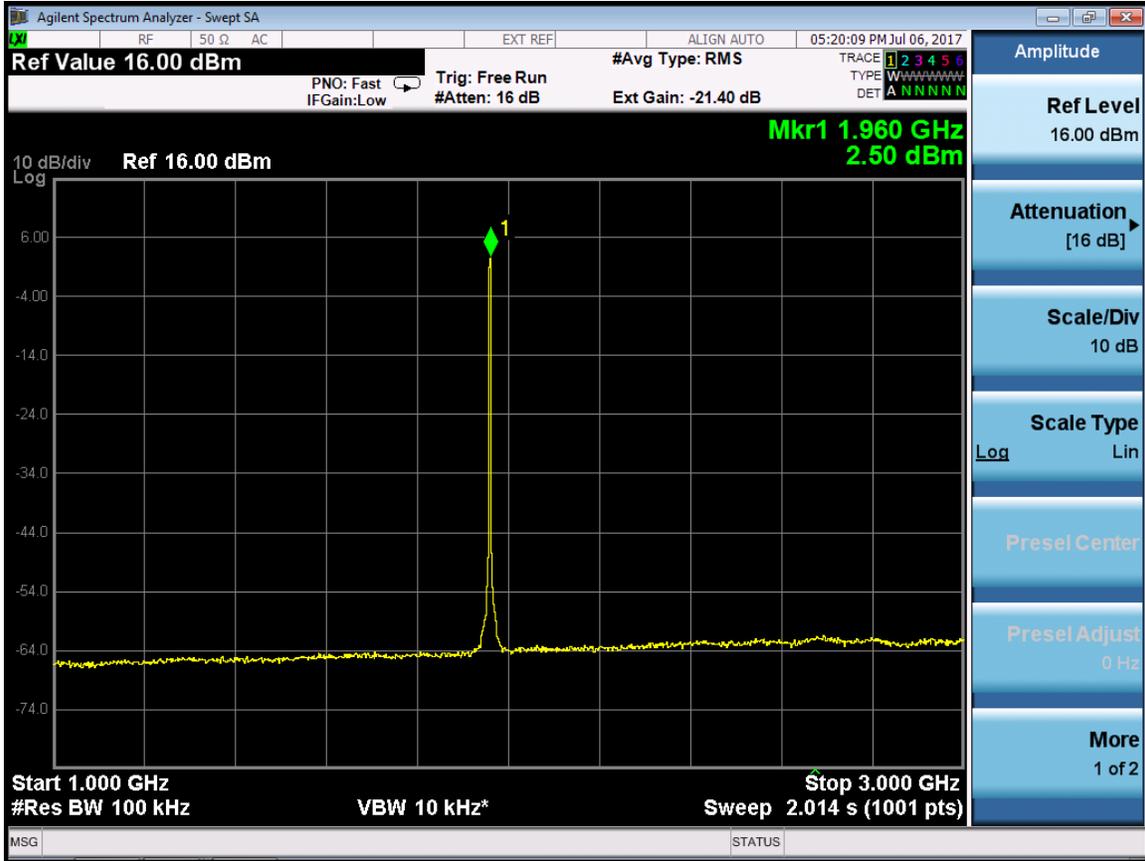




RF 5M(LTE 5M) -Port 0-1987.5MHz

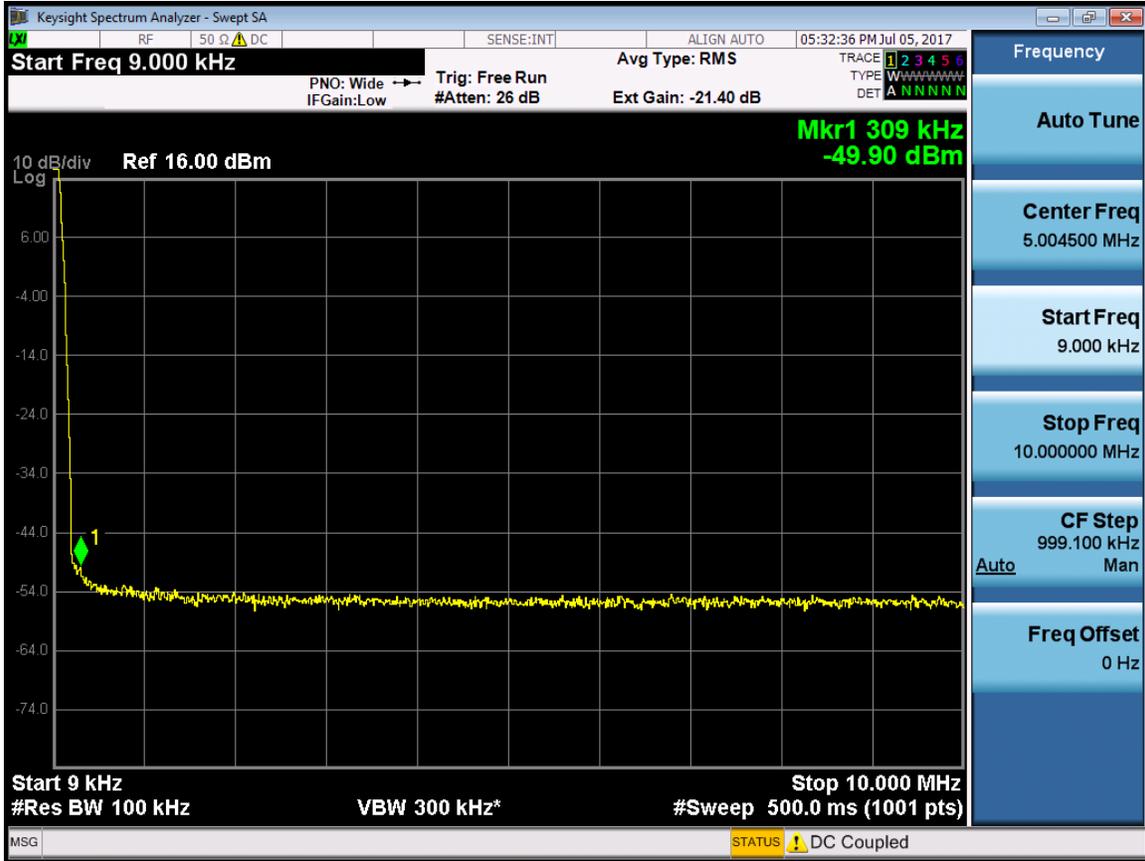


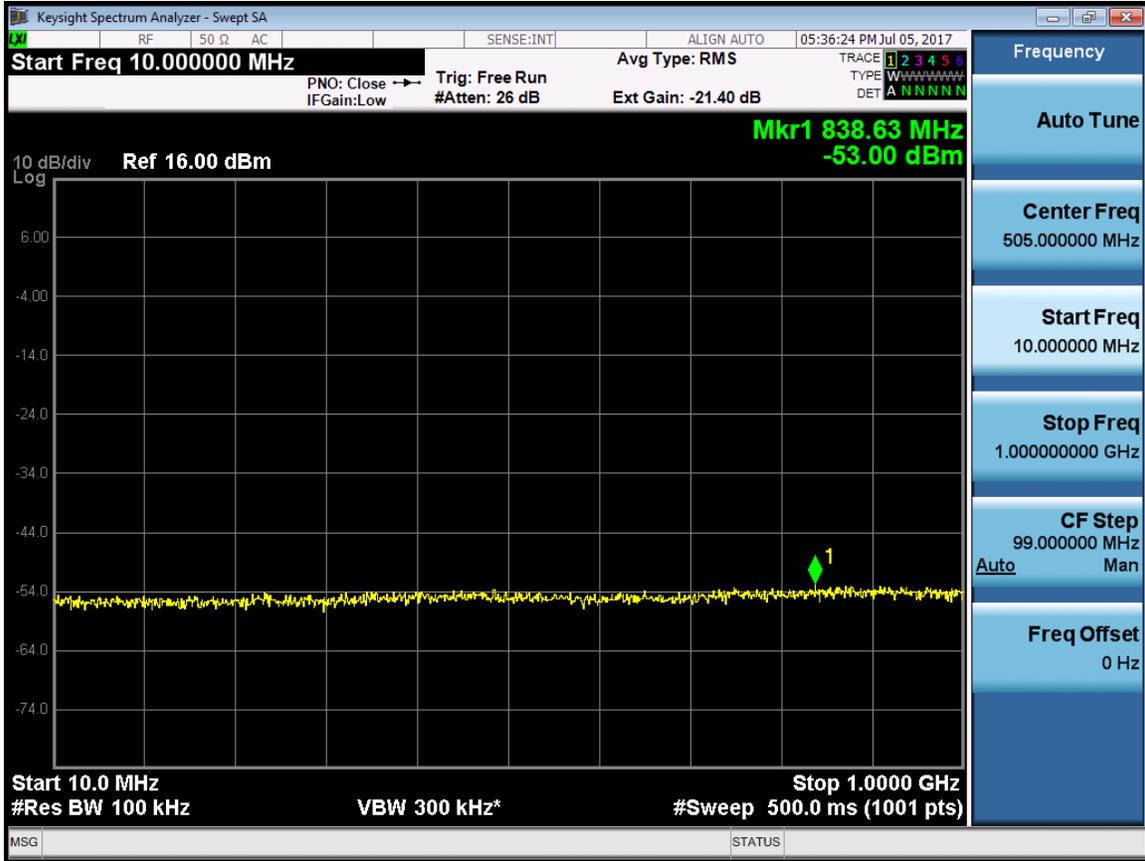


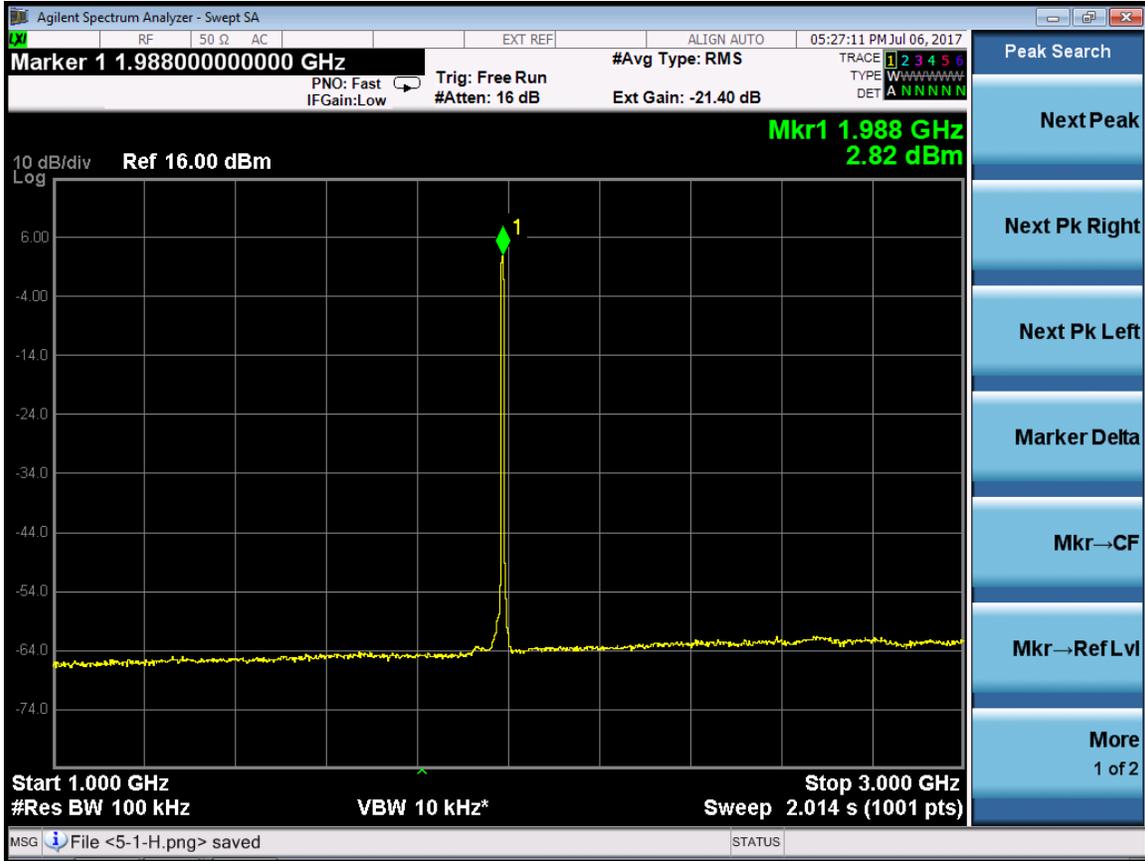




RF 5M(LTE 5M) -Port 1-1932.5MHz

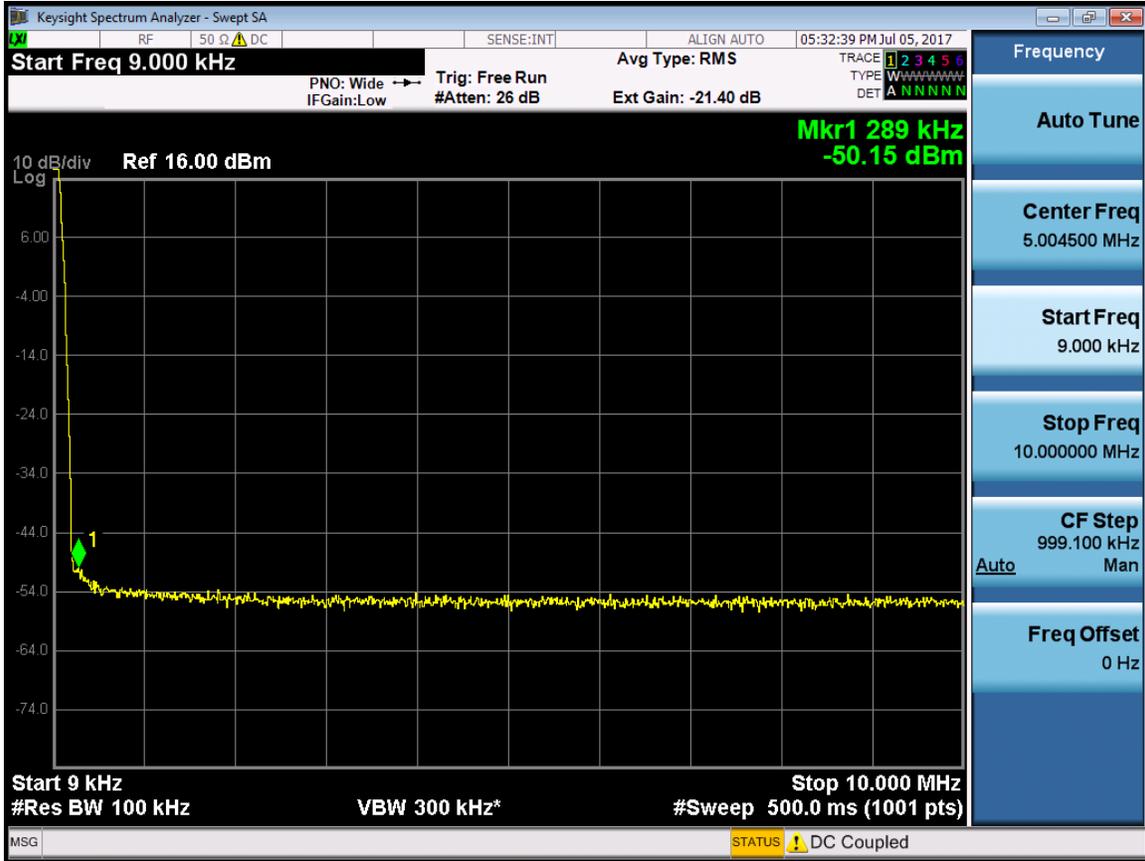


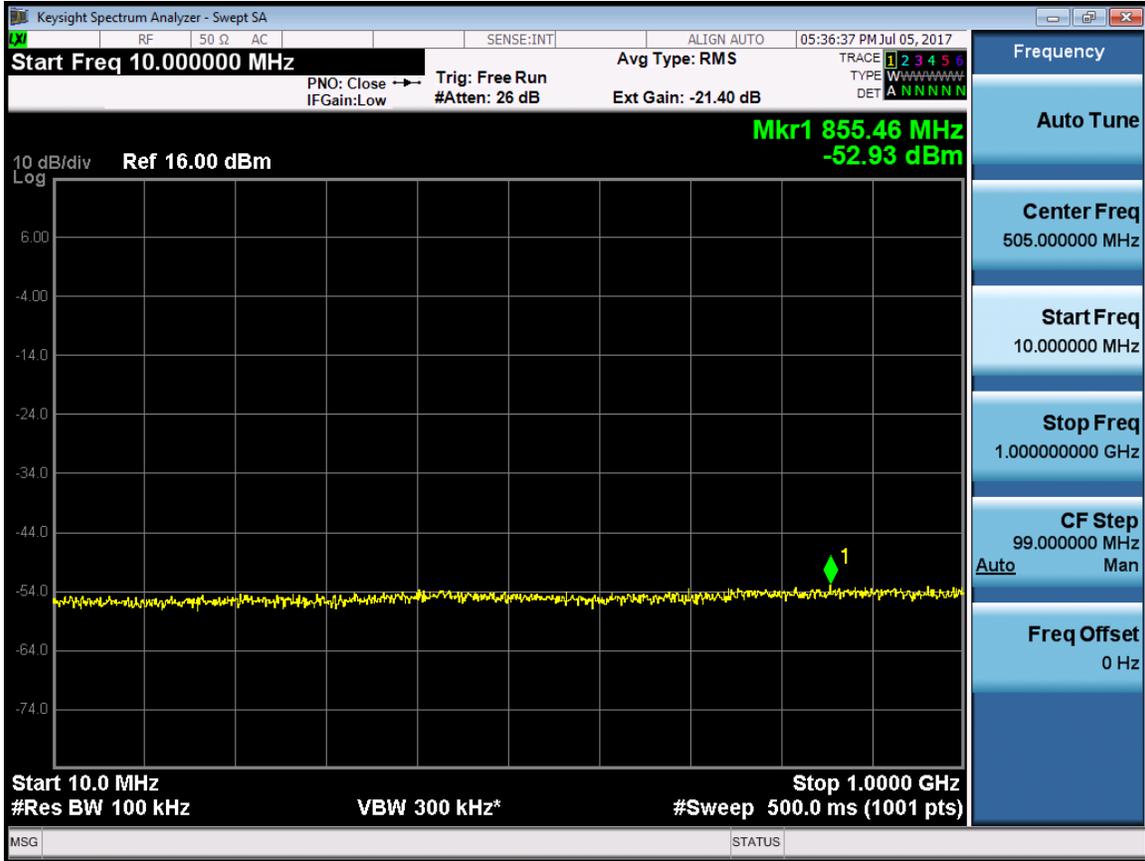


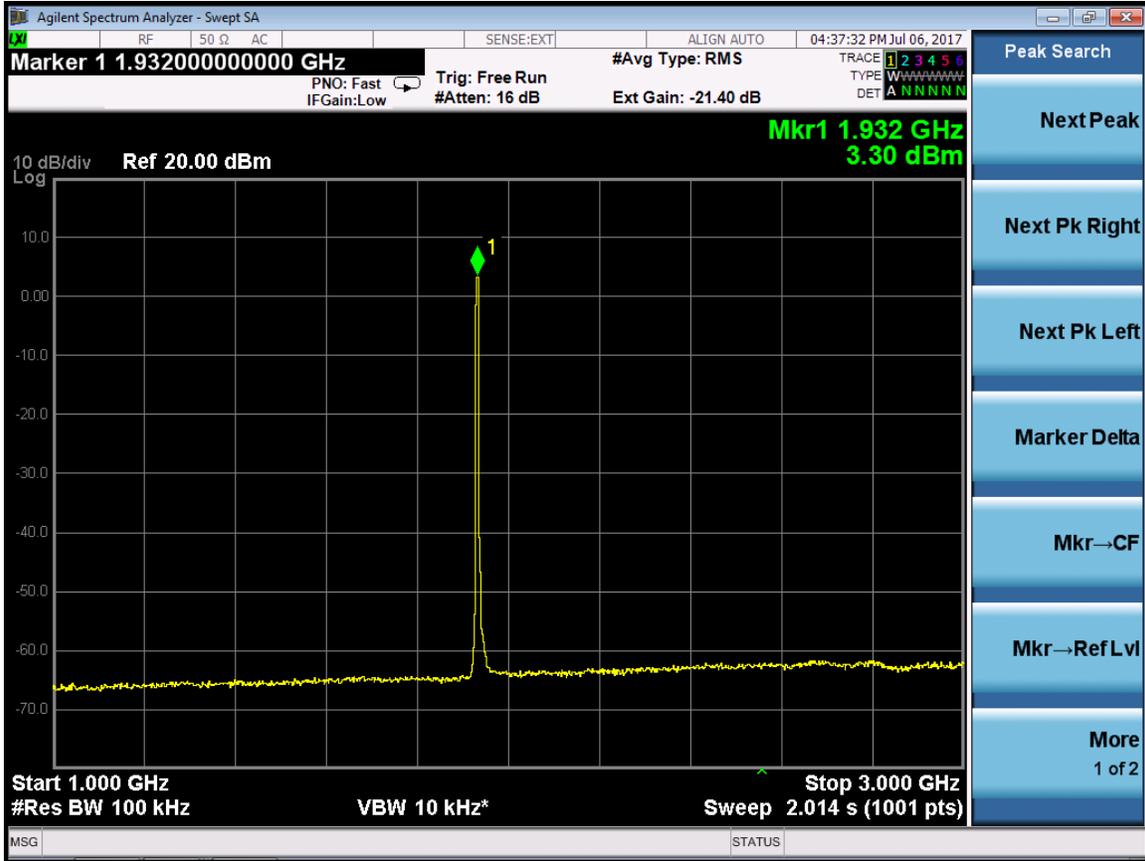





RF 5M(LTE 5M) -Port 1-1960MHz

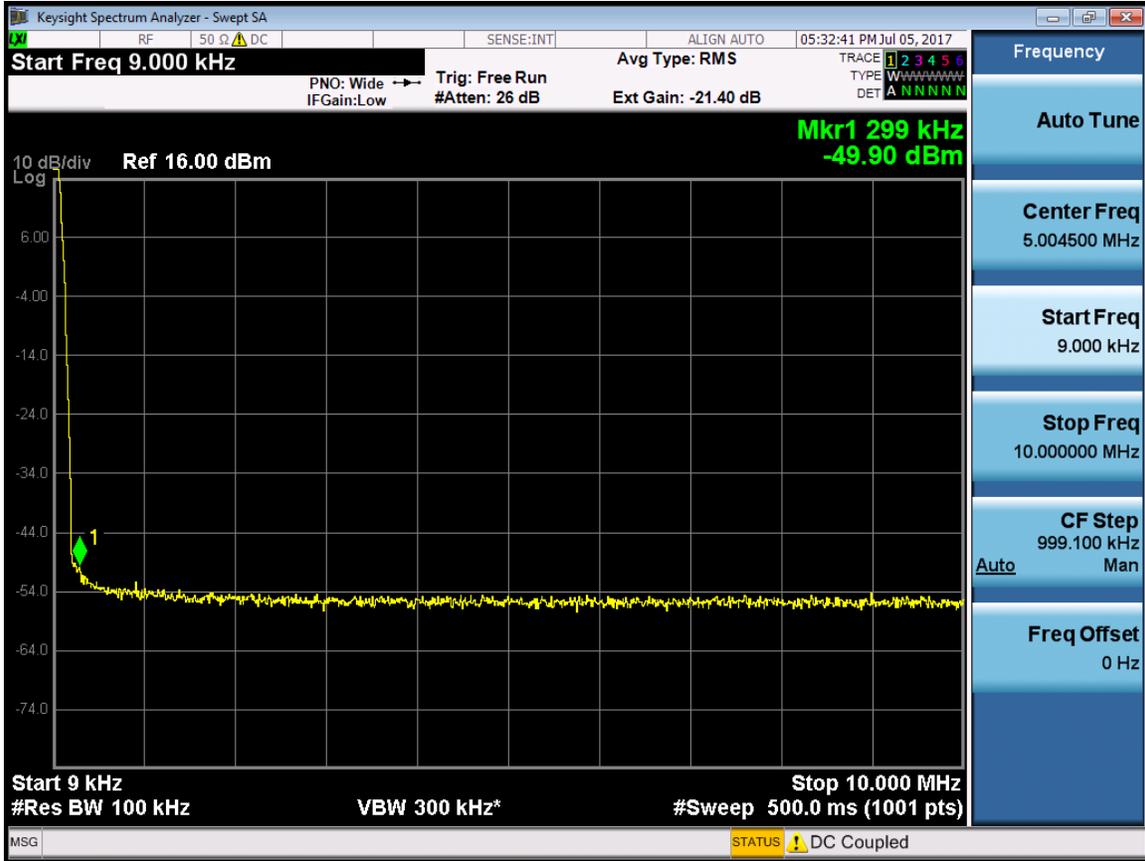


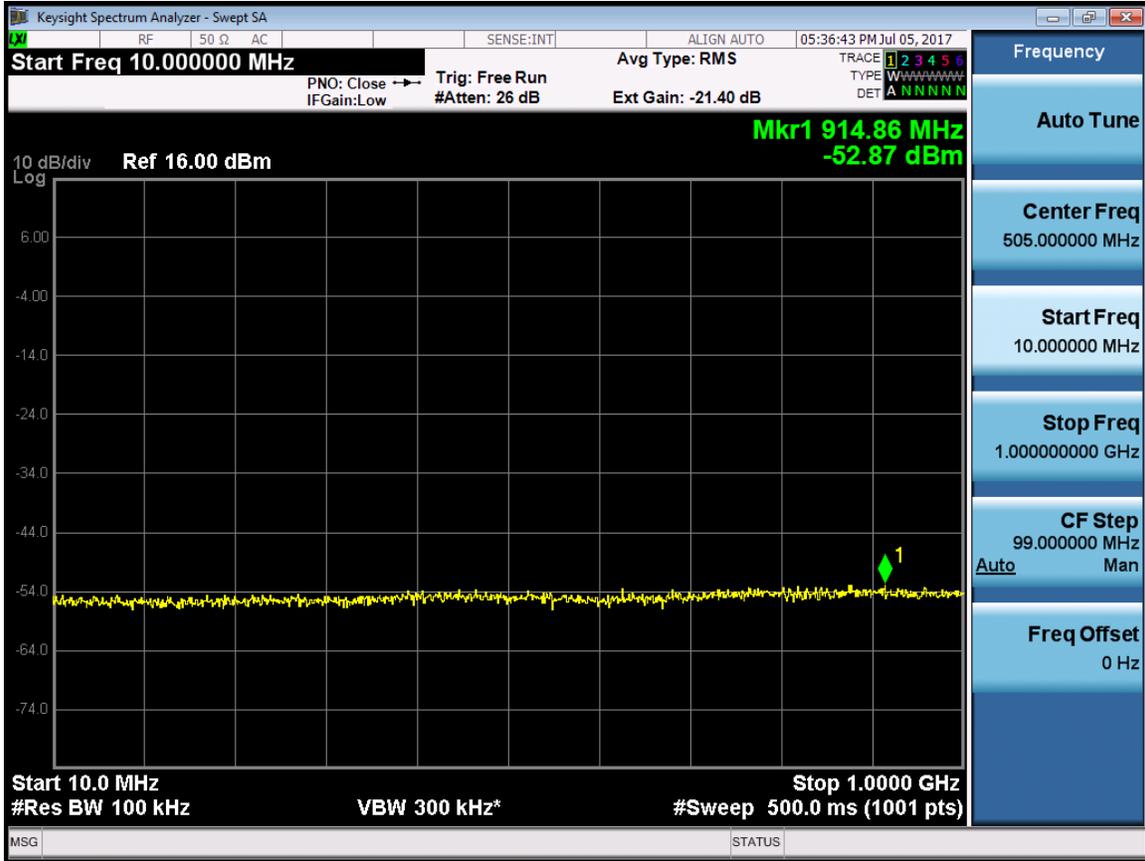


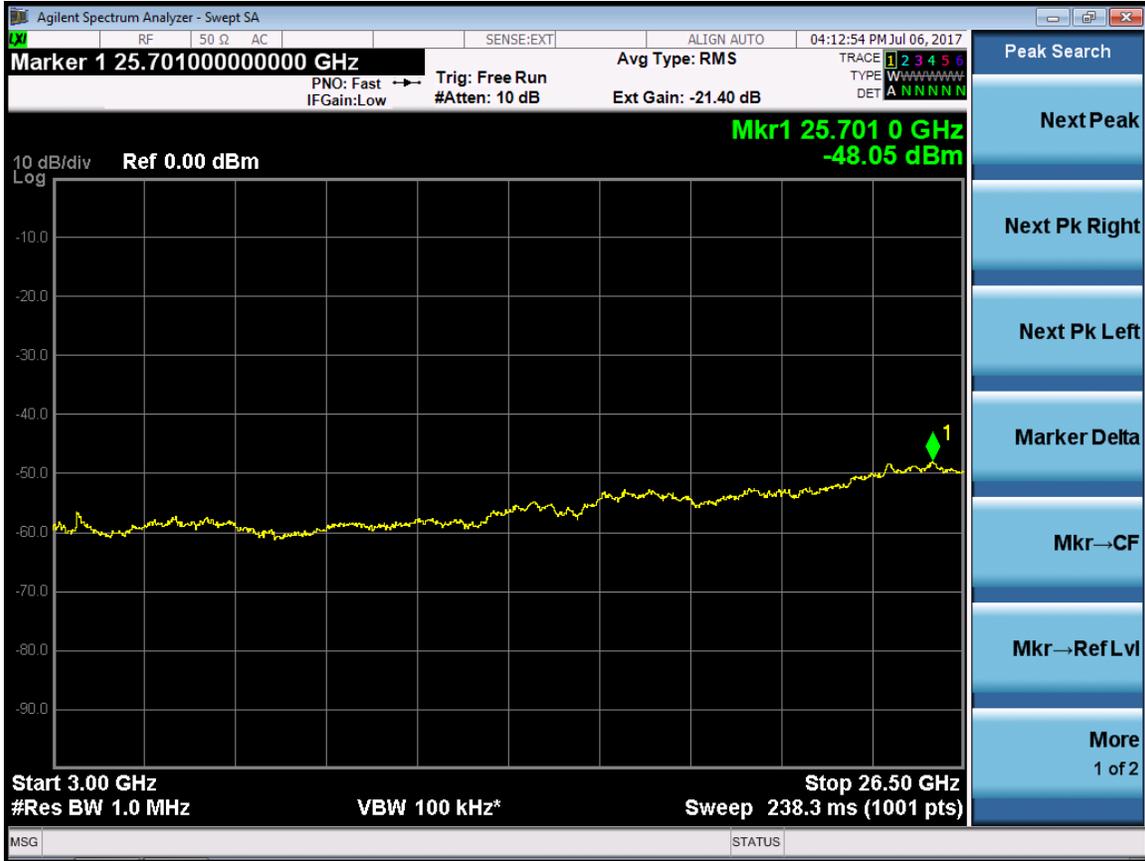

RF 5M(LTE 5M) -Port 1-1987.5MHz

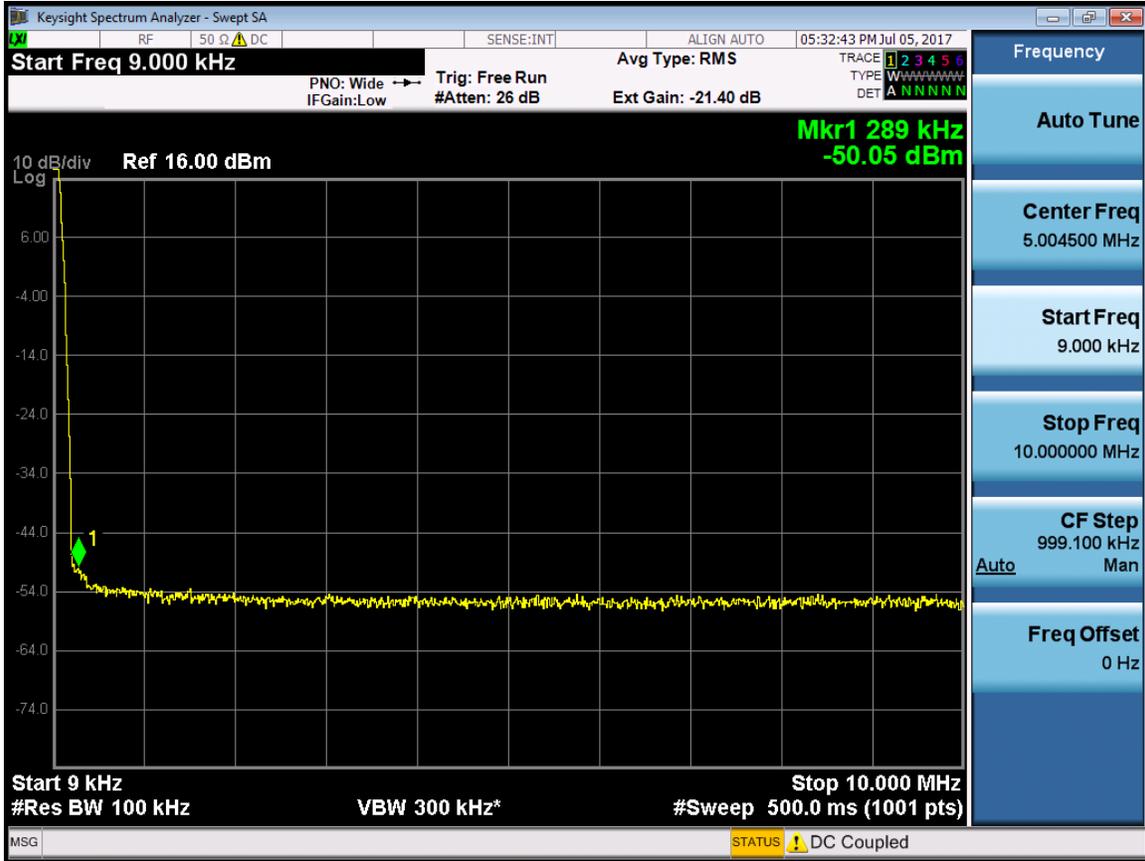

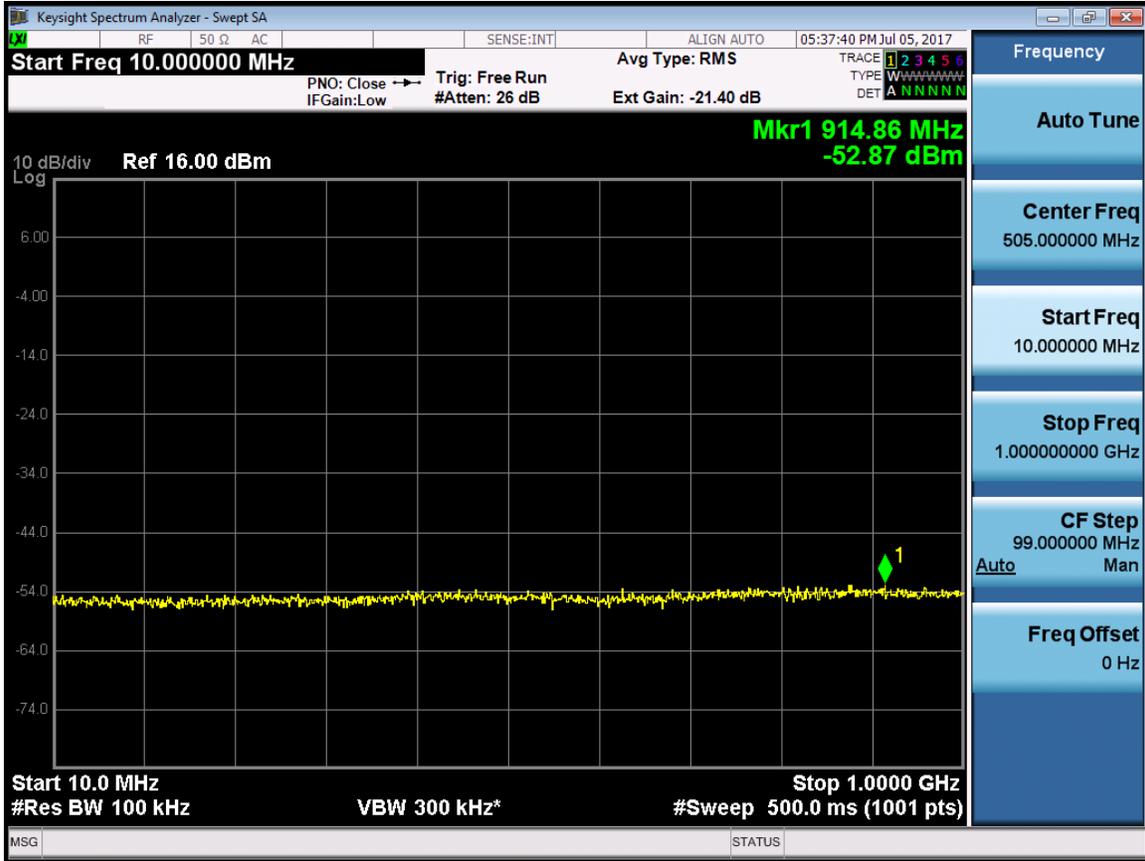

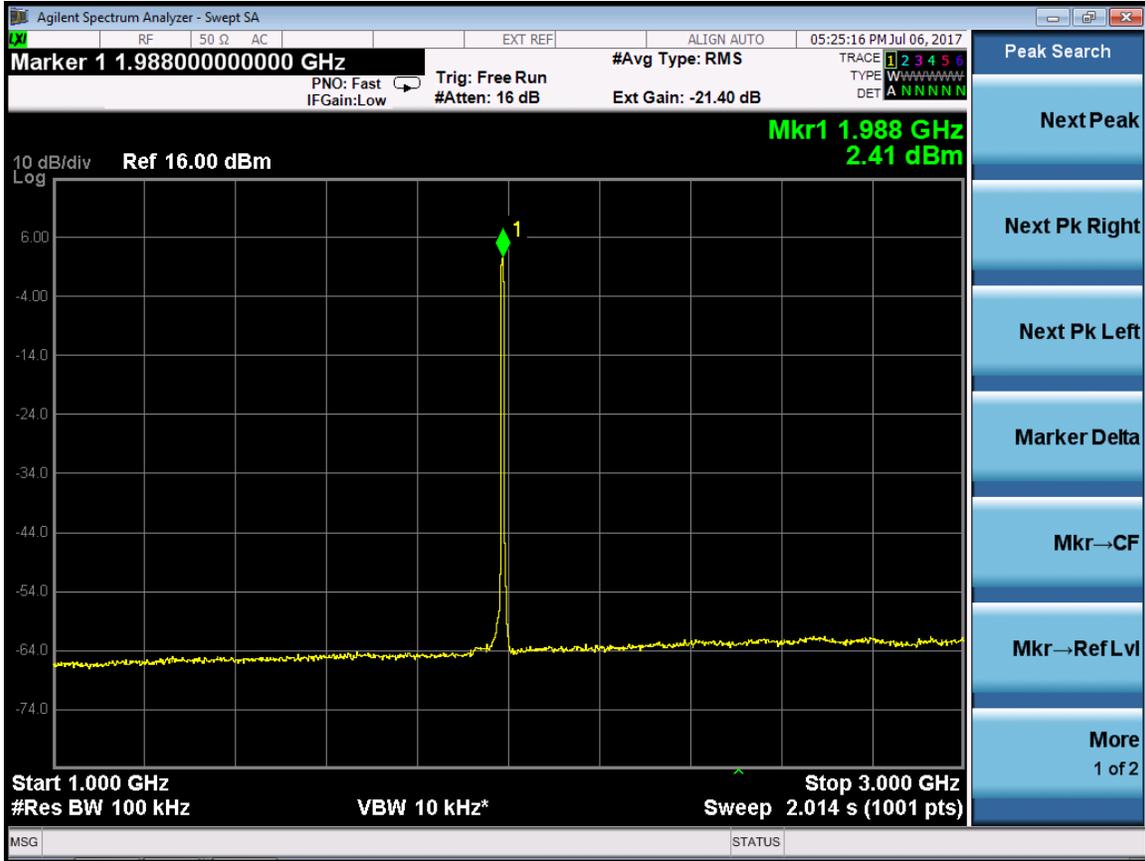



10 OCCUPIED BANDWIDTH

Applicable Standard: FCC §2.1049

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9030A	MY49431143	2016.09.12	2017.09.12
DTS	DTS 20dB Attenuator	DTS50-20-3-1	09112005	2016.09.12	2017.09.12

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

The RF out of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. 99%Power bandwidth was recorded.

Environmental Conditions

Temperature:	20 ° C
Relative Humidity:	53%
ATM Pressure:	1009mbar

Test Result: Pass


Test Mode: Transmitting LTE

Test Data


RF Bandwidth :IBW 20M(LTE 20M)

Port	RF Center Freq. (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
0	1940	17.81324	20M
	1960	17.85181	20M
	1980	17.87221	20M
1	1940	17.80532	20M
	1960	17.85845	20M
	1980	17.86238	20M


Port 0 -1940MHz

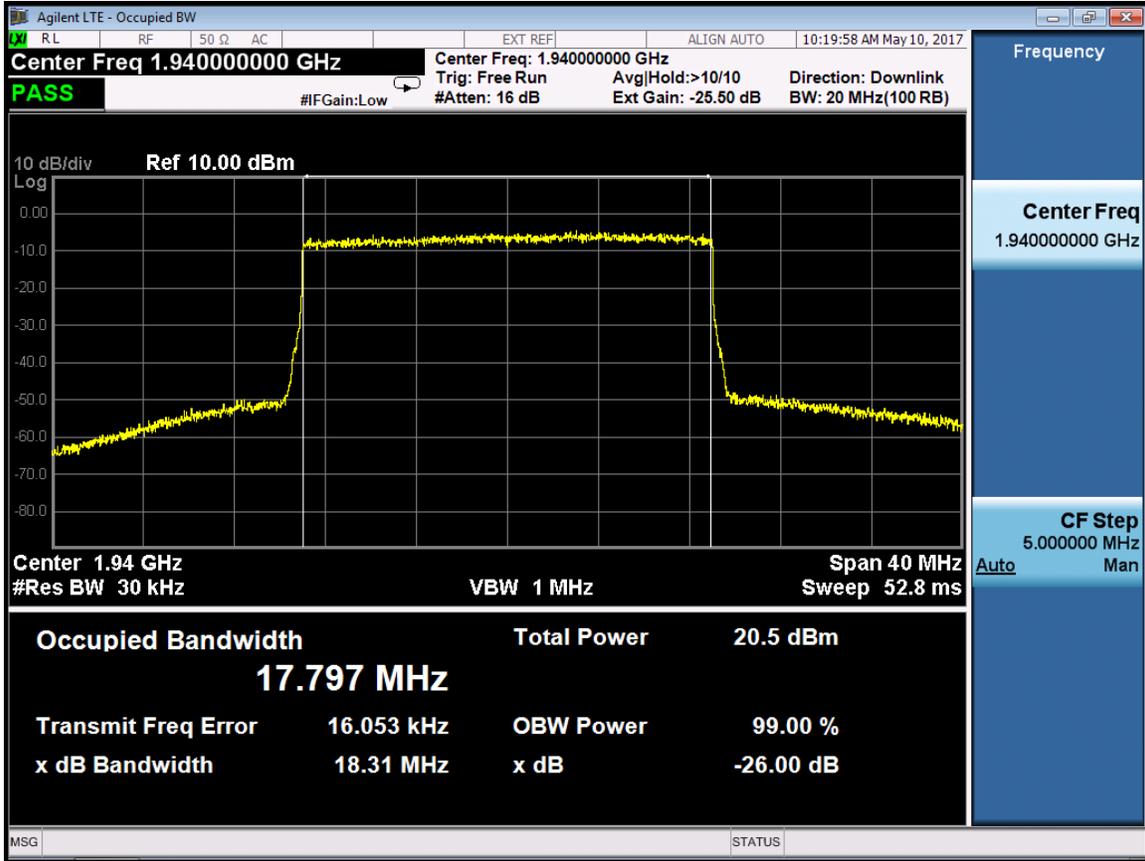


Port 0 -1960MHz

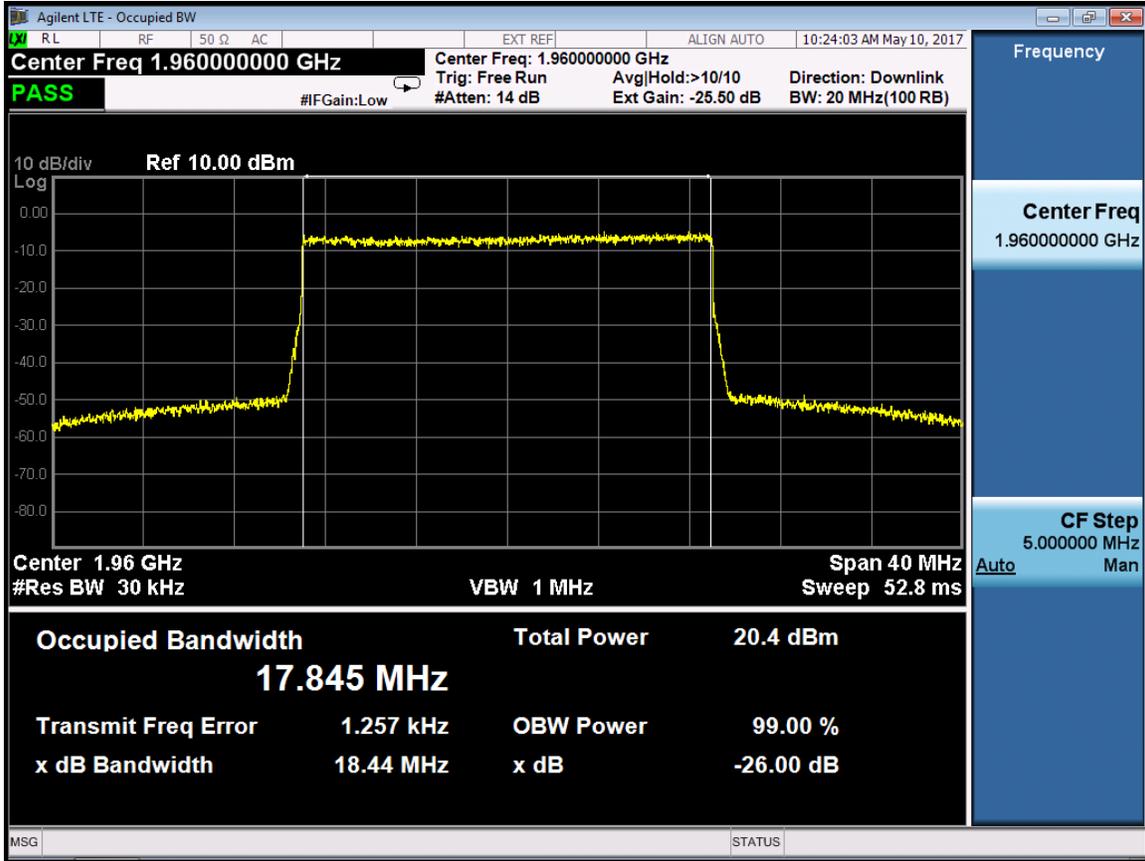


Port 0 -1980MHz

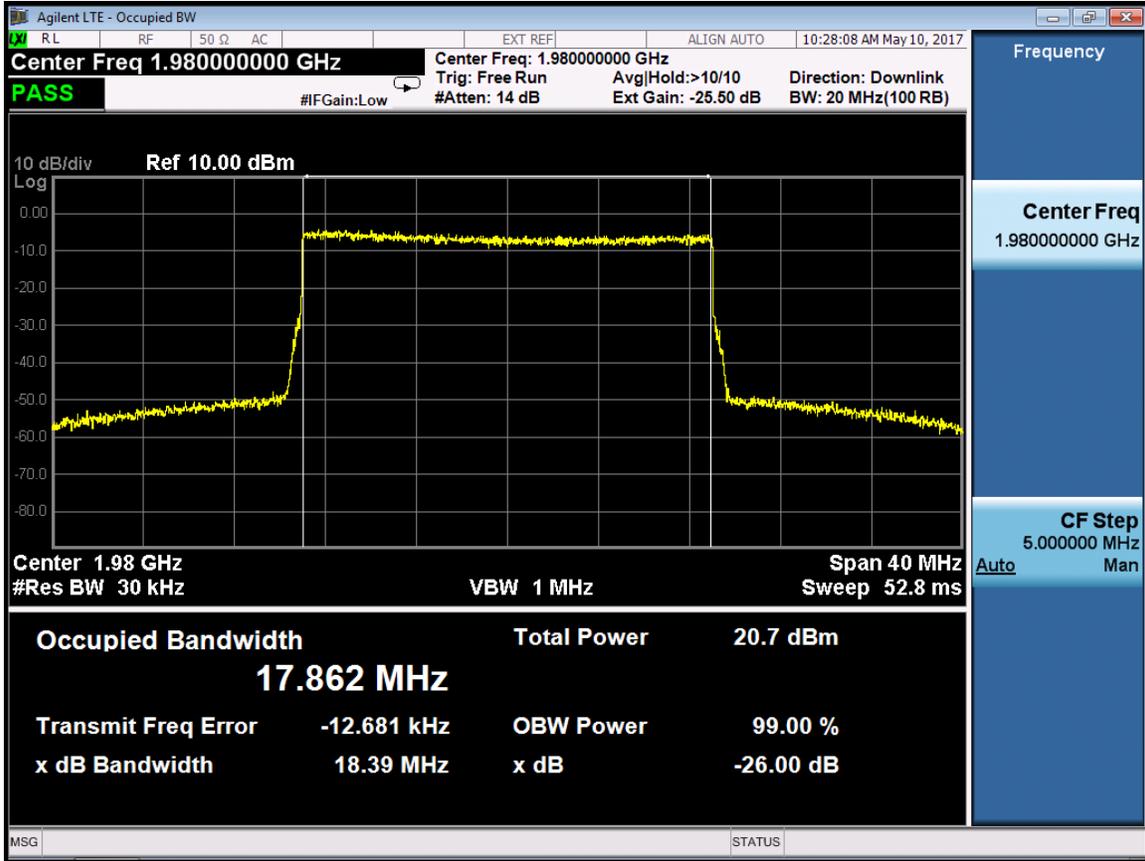


Port 1 -1940MHz

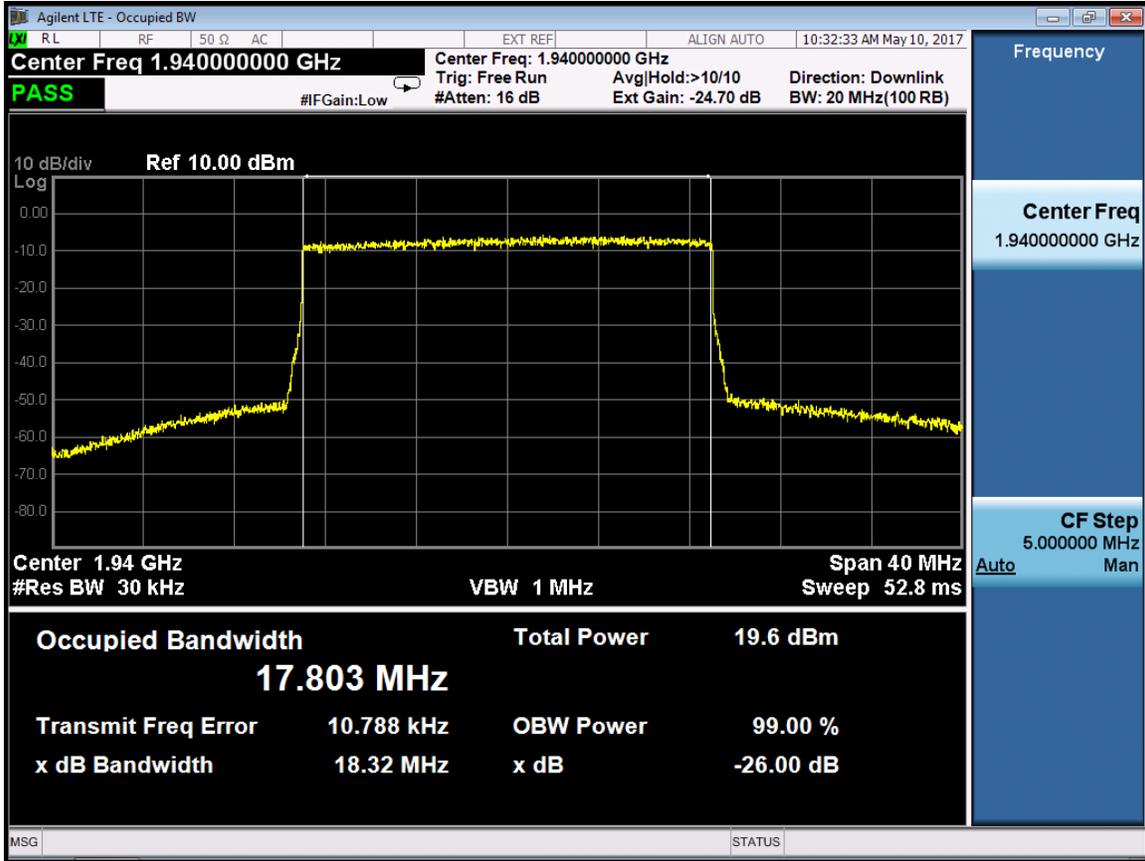

Port 1 -1960MHz

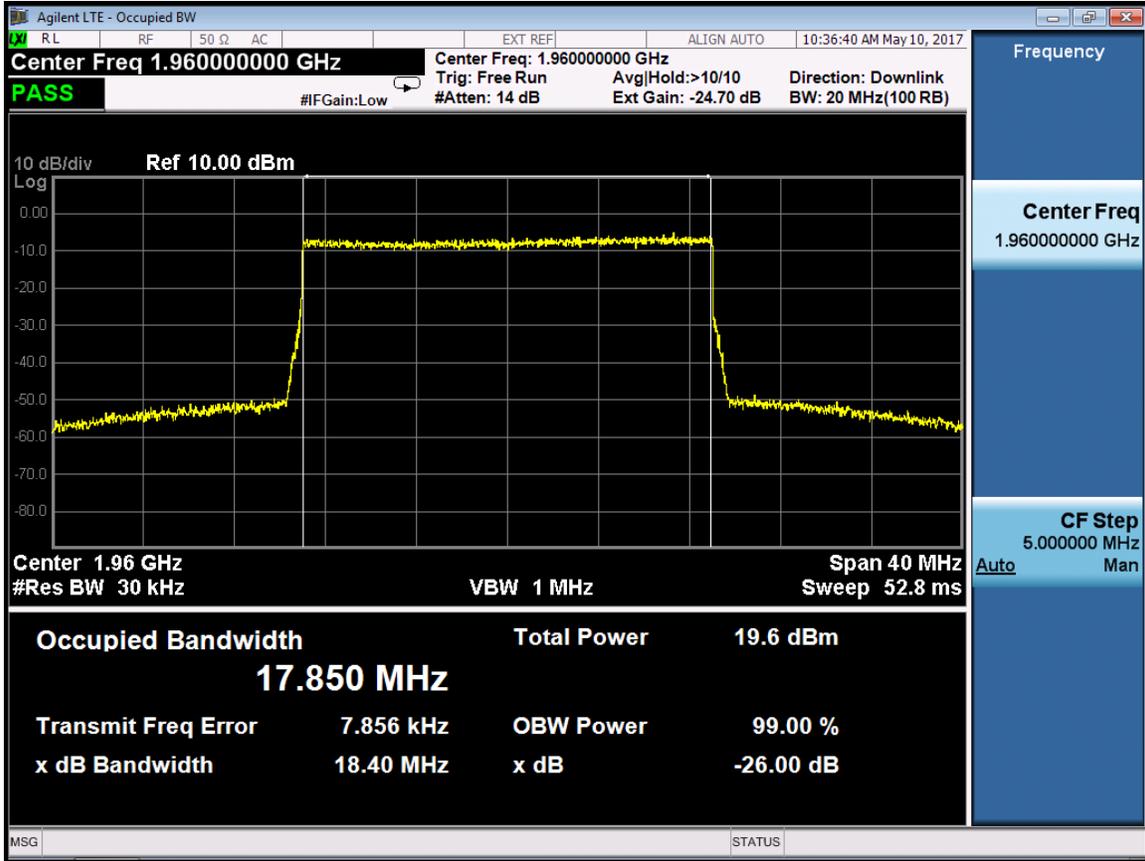


Port 1 -1980MHz

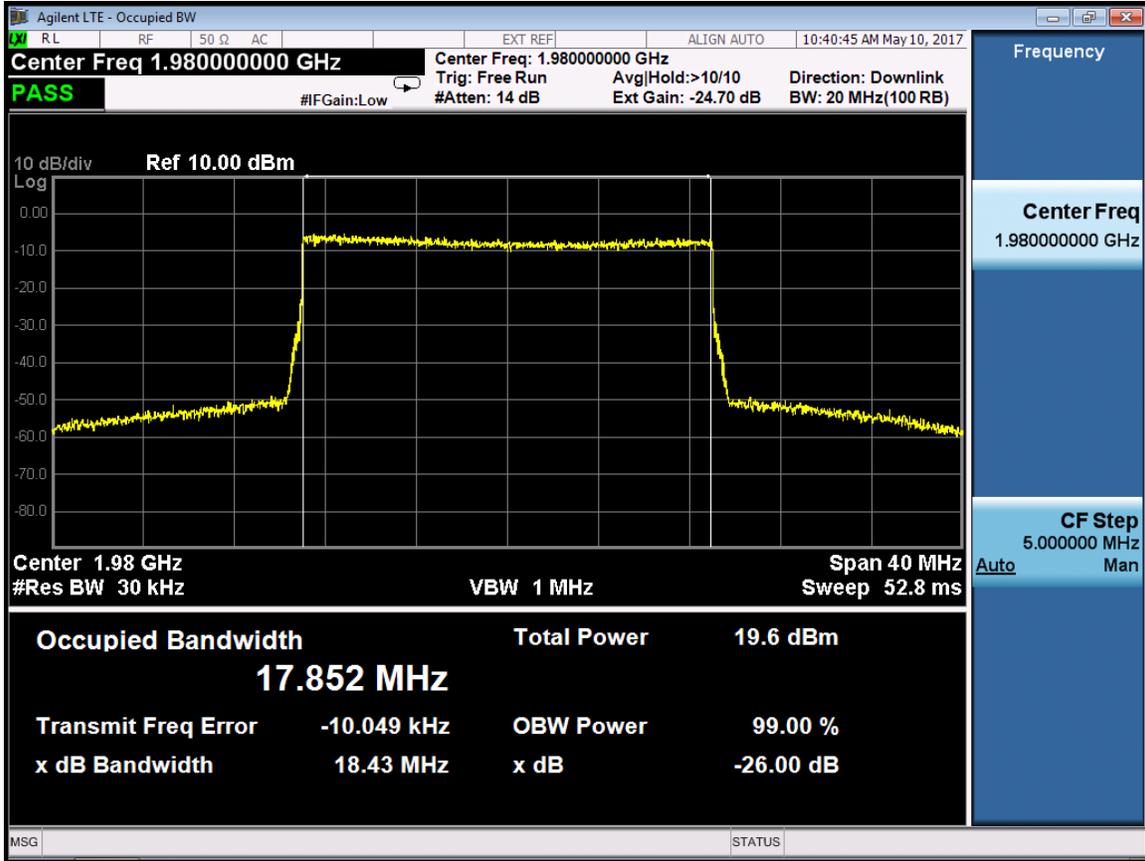

RF Bandwidth :IBW 15M(LTE 15M)

Port	RF Center Freq. (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
0	1937.5	13.364	15M
	1960	13.396	15M
	1982.5	13.393	15M
1	1937.5	13.373	15M
	1960	13.380	15M
	1982.5	13.403	15M

Port 0 -1937.5MHz

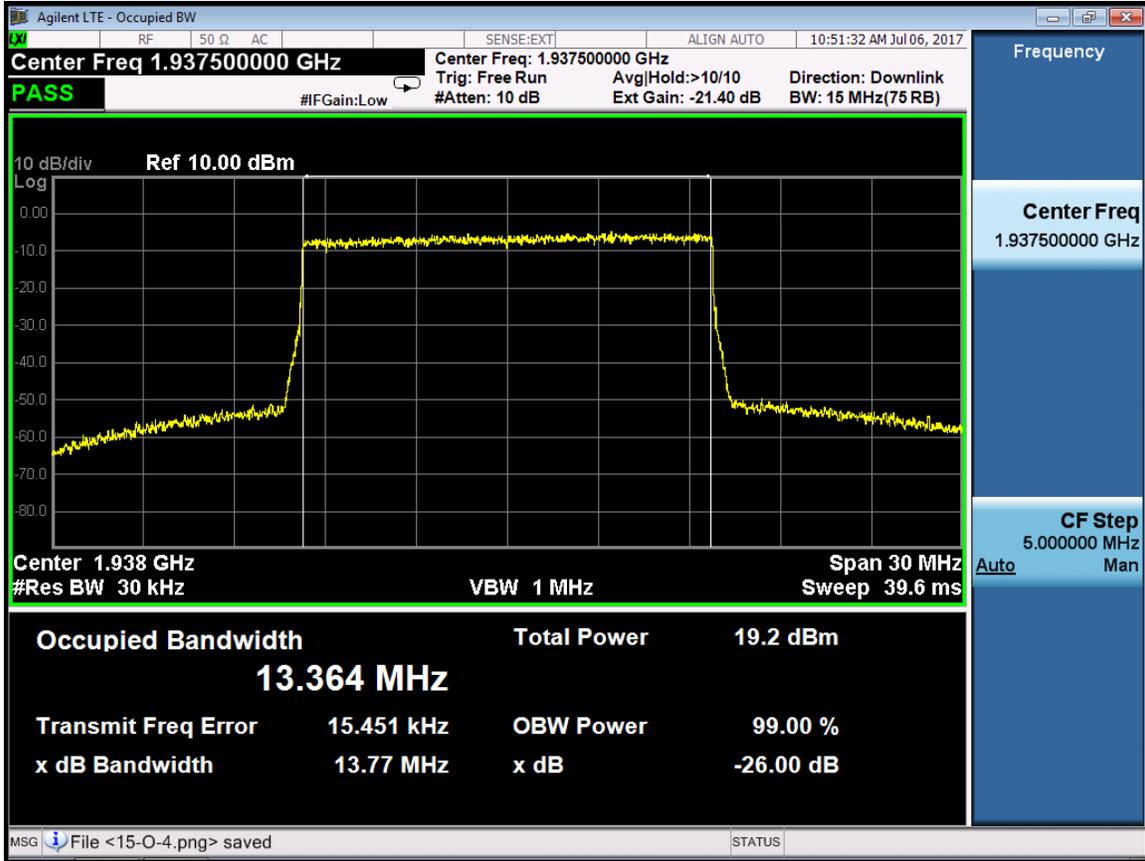

Port 0 -1960MHz