

FCC&IC MEASUREMENT AND TEST REPORT

For

ZTE Corporation

ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen,
Guangdong, China 518057

FCC ID: Q78-R8860C196

IC: 5200A-8860C196

Aug 26, 2009

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: CDMA Remote Radio Unit
<p>Test Engineer: </p> <p>Report No.: FCC-2009-014</p> <p>Test Date: Aug 20 – Sep 2, 2009</p> <p>Reviewed By: </p> <p>Prepared By: ZTE Corporation.</p> <p>ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen, Guangdong, China 518057, P.R.China Tel: +86-755-26770000 Fax: +86-755-26771999</p>	

Note: The test report is specially limited to the above company and this particular sample only. It may not be duplicated without prior written consent of ZTE Corporation. This report must not be used by the client to claim product certification, approval, or endorsement by any agency of the US Government.

1 TABLE OF CONTENTS

1	TABLE OF CONTENTS	2
2	GENERAL INFORMATION.....	4
	Product Description for Equipment Under Test (EUT).....	4
	Objective.....	5
	Related Submittal(s)/Grant(s).....	5
	Test Methodology	5
	Test Facility.....	5
3	SYSTEM TEST CONFIGURATION.....	6
	Description of Test Configuration	6
4	SUMMARY OF TEST RESULTS	7
5	TRANSMITTER OUTPUT POWER.....	8
	Applicable Standard: FCC §2.1046 §24.232 and IC § RSS 133 6.4 §SRSP 510 5.1.2.....	8
	Test Equipment List and Details.....	8
	Test Procedure.....	8
	Environmental Conditions	9
	Test Result: Pass.....	9
	Test Mode: Transmitting CDMA	9
	Test Data:.....	9
6	RF EXPLOSURE	22
	Applicable standard: FCC §2.1091 §1.1037 and IC §RSS 102 2.5.2	22
	Limit.....	22
	Test Data.....	22
	Limit.....	23
	Test Data.....	23
7	MODULATION CHARACTERISTIC	24
	Applicable Standard: FCC §2.1047 and IC §RSS 133 6.2.....	24
	Test Equipment List and Details.....	24
	Test Procedure.....	24
	Test Data Environmental Conditions	24
	Test Result: Pass.....	25
	Test Mode: Transmitting CDMA	25
	Test Data:.....	25
8	SPURIOUS RADIATED EMISSIONS	28
	Applicable Standard: FCC CFR 47, §2.1053 and IC RSS133 §6.5,Rss Gen §4.9	28
	Test Equipment List and Details.....	28
	Test Procedure.....	29
	Test Results Summary: PASS	29
	Environmental Conditions	29
	Test data	30
9	SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	33
	Applicable Standard: FCC§2.1051, §24.238 IC §RSS 133 6.5.....	33
	Test Equipment List and Details.....	33
	Test Procedure.....	33
	Test Data Environmental Conditions	34
	Test Result: Pass.....	34
	Test Mode: Transmitting CDMA	34
	Test Data:.....	34
10	OCCUPIED BANDWIDTH.....	53

Applicable Standard: FCC §2.1049 §24.229 §24.238 IC § RSS Gen 4.6.1 53
 Test Equipment List and Details : 53
 Test Procedure..... 53
 Environmental Conditions 53
 Test Result: Pass..... 54
 Test Mode: Transmitting CDMA 54
 Test Data..... 54
 11 BAND EDGES 56
 Applicable Standard: FCC §24.238 IC §RSS 133 6.5 56
 Test Equipment List and Details..... 56
 Test Procedure..... 56
 Test Data Environmental Conditions 56
 Test Result: Pass..... 57
 Test Mode: Transmitting CDMA 57
 Test Data..... 57
 12 FREQUENCY STABILITY 61
 Applicable Standard: FCC § 2.1055 § 24.235 IC §RSS 133 6.3 §RSS Gen 4.7 61
 Test Equipment List and Details..... 61
 Test Procedure..... 61
 Environmental Conditions 62
 Test Result: Pass..... 62
 Test Mode: Transmitting CDMA 62
 Test Data..... 62
 Frequency Stability Versus Temperature 62
 Frequency Stability Versus Voltage 64
 13 RECEIVER SPURIOUS EMISSION 65
 Applicable Standard: IC §RSS Gen 6 §RSS 133 6. 6. 65
 Test Equipment List and Details..... 65
 Test Procedure..... 66
 Test Results Summary: PASS 66
 Environmental Conditions 67
 Test Result: Pass..... 67
 Test Mode: Receiving CDMA..... 67
 Test Data..... 68

2 GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The ZTE Corporation's product, model number: ZXSDR R8860 C196 or the "EUT" as referred to in this report is a CDMA Remote Radio Unit.

Technical specification:

Size: 500 mm × 320 mm × 172 mm(H x W x D)

Input voltage: -57 ~ -40Vdc

Frequency range: 1980MHz to 1995MHz,


(Bottom frequency is about 1980.65MHz, Middle frequency is about 1987.50MHz, Top frequency is about 1994.35MHz).

Max RF output power: 48dBm

Gain of the antenna: 13dBi

Modulation type of emission: CDMA

Appearance of EUT:

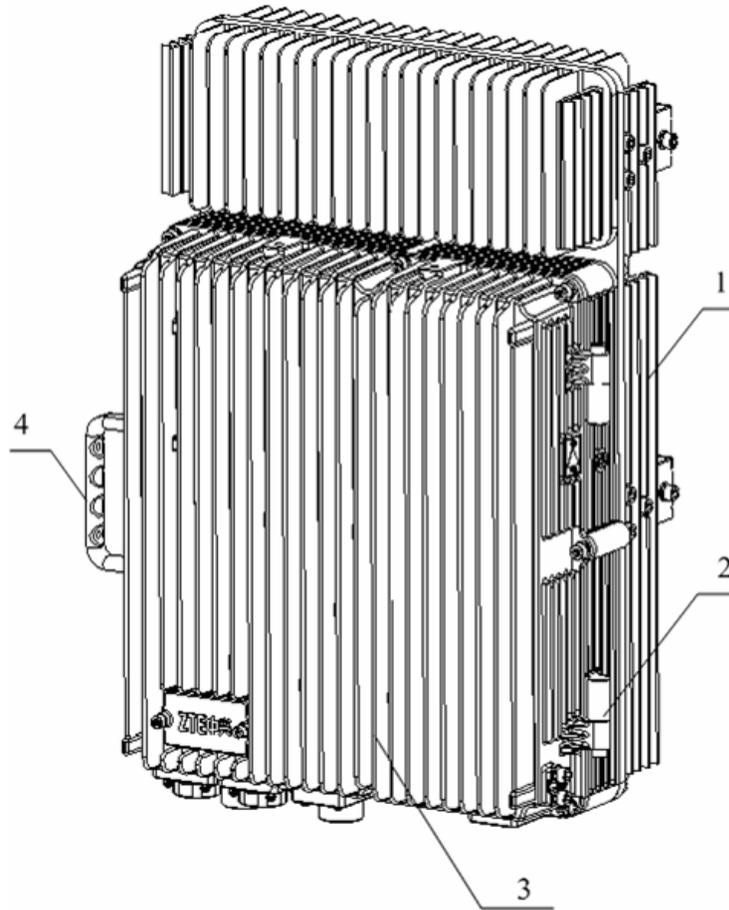

Objective

This Type approval report is prepared on behalf of ZTE Corporation in accordance with Part 2, Part 24 of the Federal Communication Commissions rules and ICES-003, RSS-133, RSS-102 of industry Canada.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2 and RSS-Gen of industry Canada. as well as the following parts:
Part 24 Wireless Communication Services
RSS 133 2 GHz Personal Communications Services

Applicable Standards: TIA EIA 137-A, TIA EIA 97-D, TIA/EIA 603-C, Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

All radiated and conducted measurement was performed at ZTE Corporation Reliability Testing Center. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by ZTE Corporation to collect test data is located in the ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China, Tel: +86-755-26770000, Fax: +86-755-26771999. Test site at ZTE Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 0007895832. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

3 SYSTEM TEST CONFIGURATION

Description of Test Configuration


Justification

The EUT was configured for testing according to TIA/ELA-603-C.

The final qualification test was performed with EUT operating at normal mode.

Equipment Modifications

ZTE Corporation has not done any modification on the EUT.

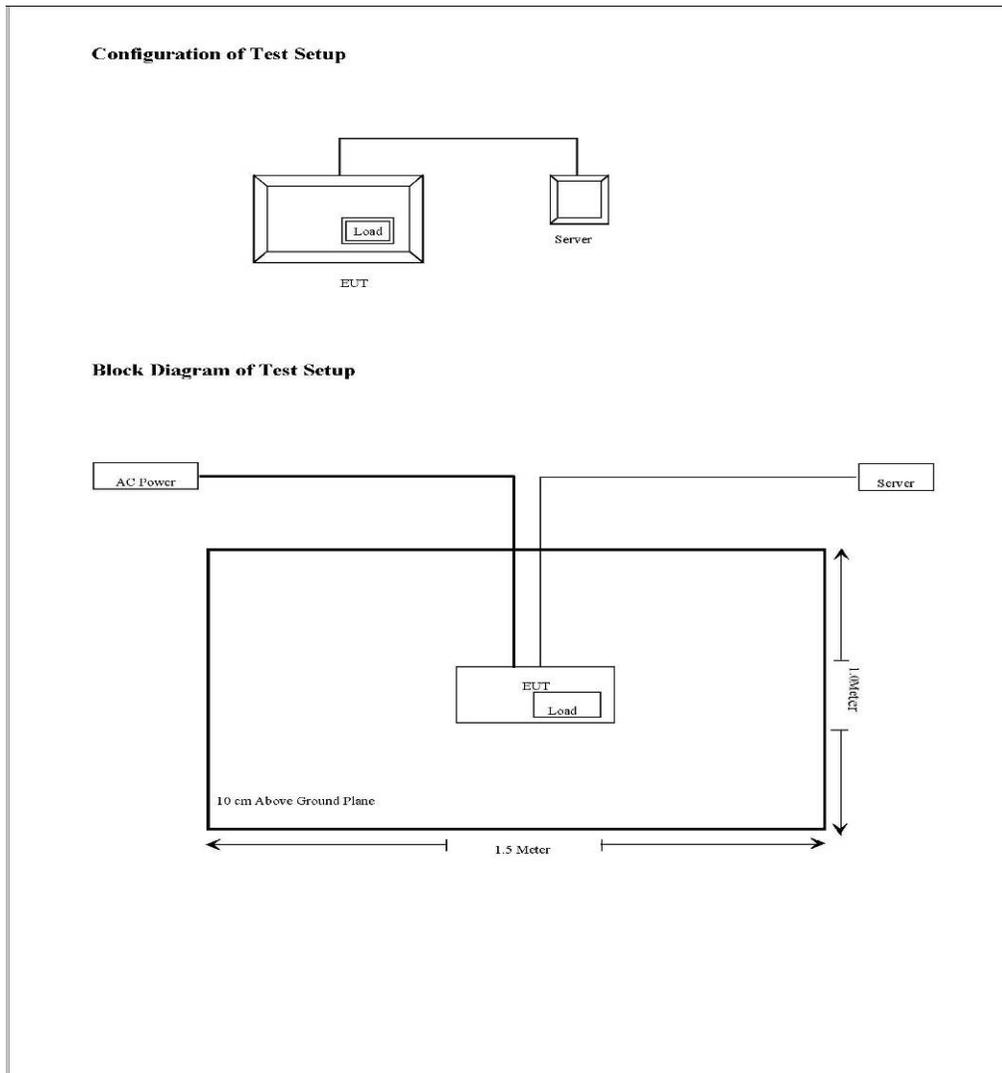

4 SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§2.1046 §24.232 § RSS 133 6.4 §SRSP 510 5.1.2	Transmitter output Power	Compliant
§2.1091 §1.1037 §RSS 102 2.5.2	RF Exposure	Compliant
§2.1047 §RSS 133 6.2	Modulation characteristic	Compliant
§2.1053 §RSS 133 6.5 §SRSP 510 5.1	Spurious Radiated Emissions	Compliant
§2.1051, §24.238 §RSS 133 6.5	Spurious Emissions AT Antenna Terminals	Compliant
§2.1049 §24.229 §24.238 § RSS Gen 4.6.1	Occupied Bandwidth	Compliant
§24.238 §RSS 133 6.5	Band Edge	Compliant
§ 2.1055 § 24.235 §RSS 133 6.3 §RSS Gen 4.7	Frequency stability	Compliant
§RSS Gen 6 §RSS 133 6. 6	Receiver Spurious emission	Compliant

5 TRANSMITTER OUTPUT POWER

Applicable Standard: FCC §2.1046, §24.232 and IC § RSS 133 6.4 §SRSP 510

5.1.1

According to FCC §2.1046 &24.232, the EIRP(equivalent isotropically radiated power) must not exceed 1640 Watts.


According to RSS-133, SRSP 510 5.1 .1the EIRP(equivalent isotropically radiated power) must not exceed 3280Watts/MHz for base station transmitters operating in the band of 1930 MHz to 1995MHz with the antenna height above average terrain up to 300 meters. If used in urban area ,the limit should be 1640Watts/MHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2009-4-10	2010-4-9
DTS	DTS100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

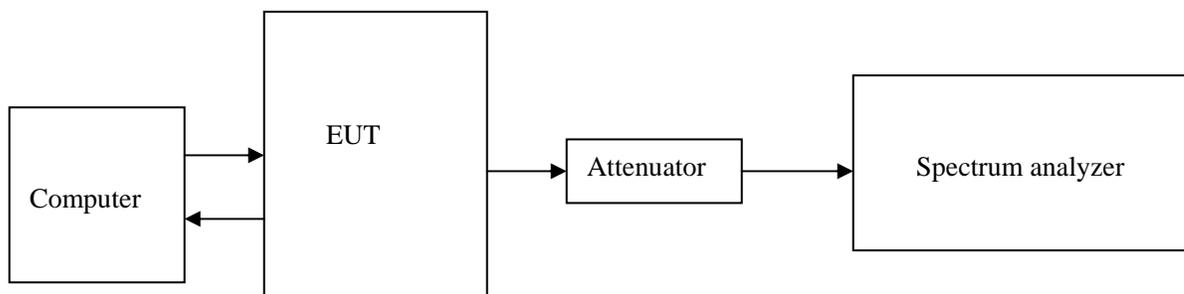

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. External attenuation Loss is 40 dB, Cable Loss is about 3 dB.

Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar

The testing was performed by Wei bin on Aug 20, 2009


Test Result: Pass


Test Mode: Transmitting CDMA


Test Data:

Four Carriers (near top frequency and bottom frequency)

Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm	Antenna gain dBi	Total Power in W
1982.525	1980.65/1981.90/1983.15/1984.4	47.19	13	1044.72
1987.825	1985.95/1987.2/1988.45/1989.7	47.74	13	1185.77
1992.475	1990.6/1991.85/1993.10/1994.35	47.44	13	1106.62

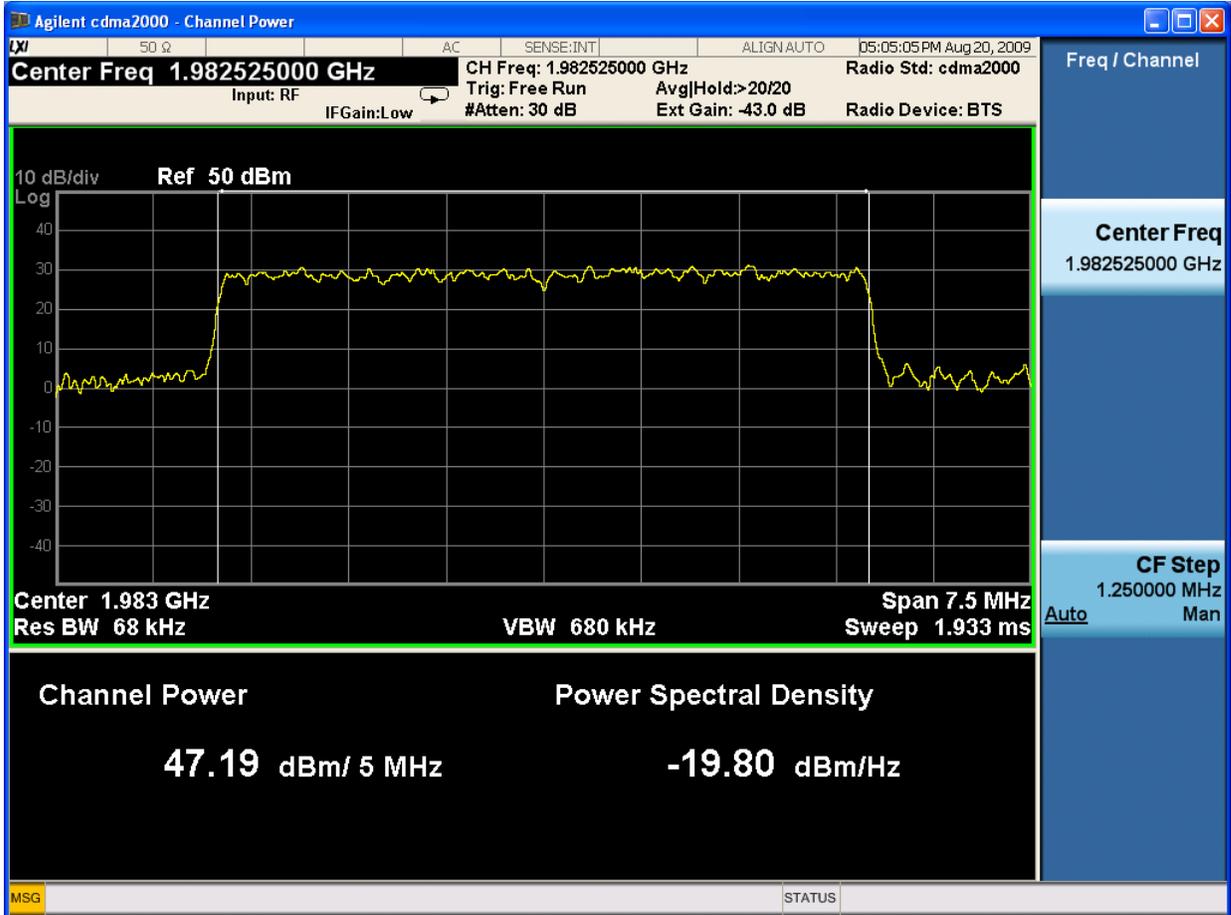


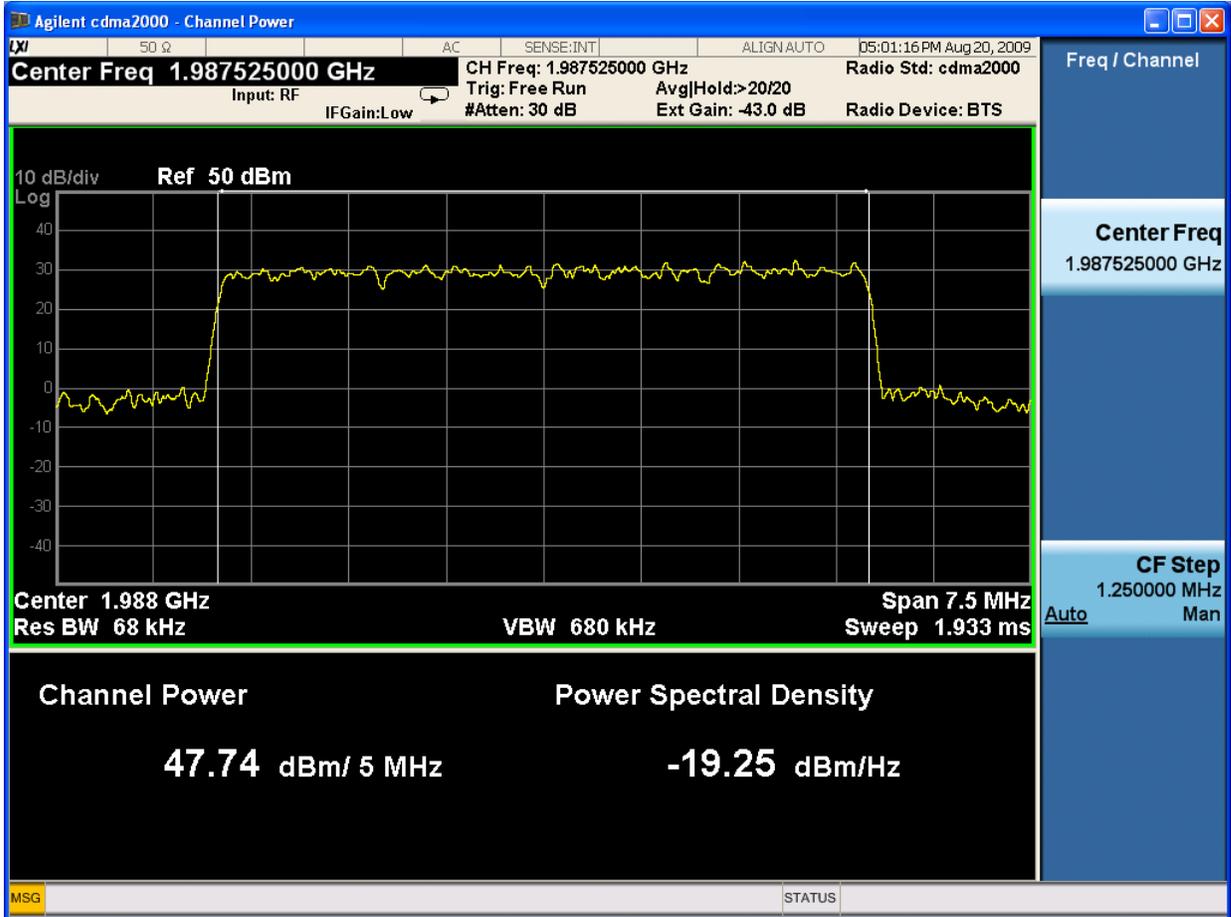


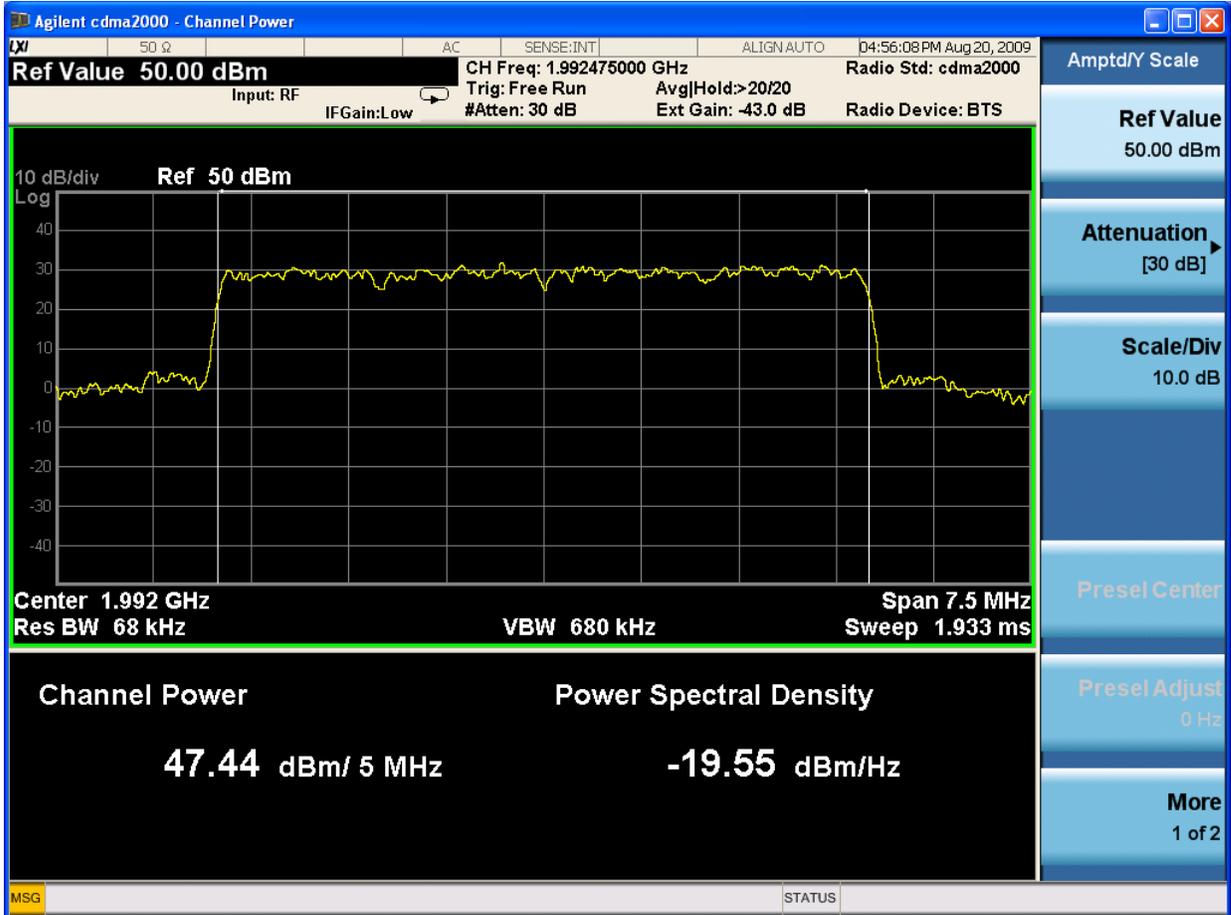


Three carriers

Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm	Antenna gain dBi	Total Power in W				
1981.9	1980.65/1981.9/1983.15	47.90	13	1230.27				
1987.5	1986.25/1987.5/1988.75	47.65	1161.45	1993.1	1991.85/1993.1/1994.35	47.60	13	1148.15
1993.1	1991.85/1993.1/1994.35	47.60	13	1148.15				

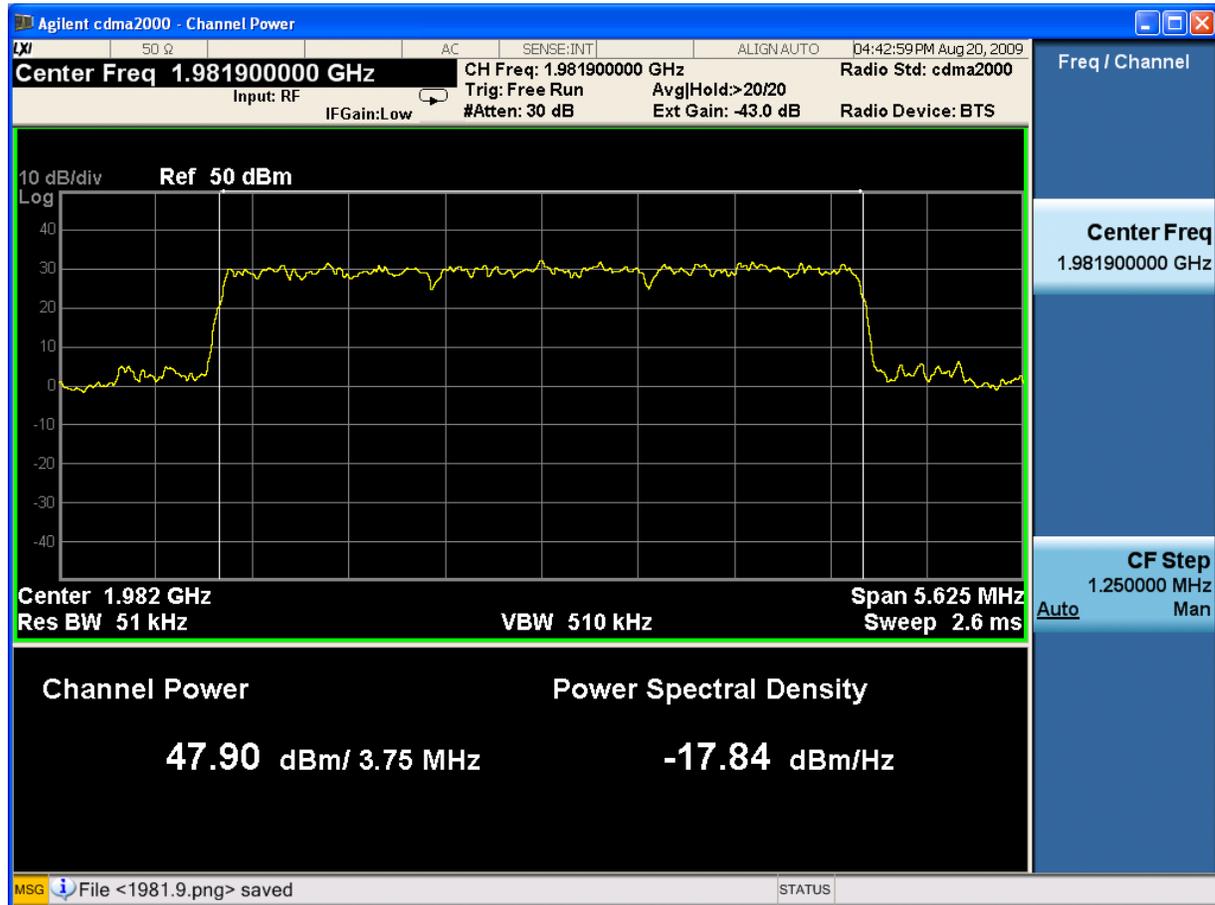


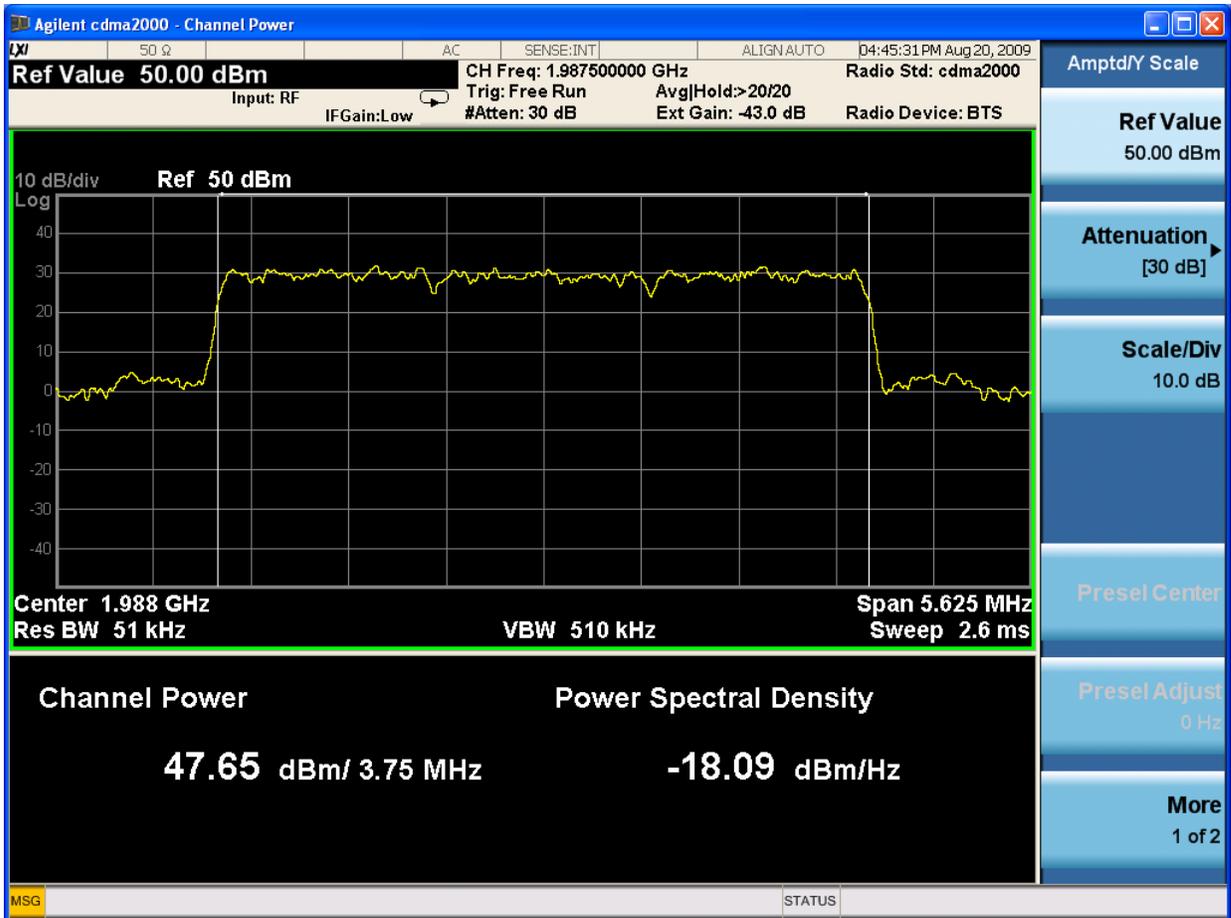


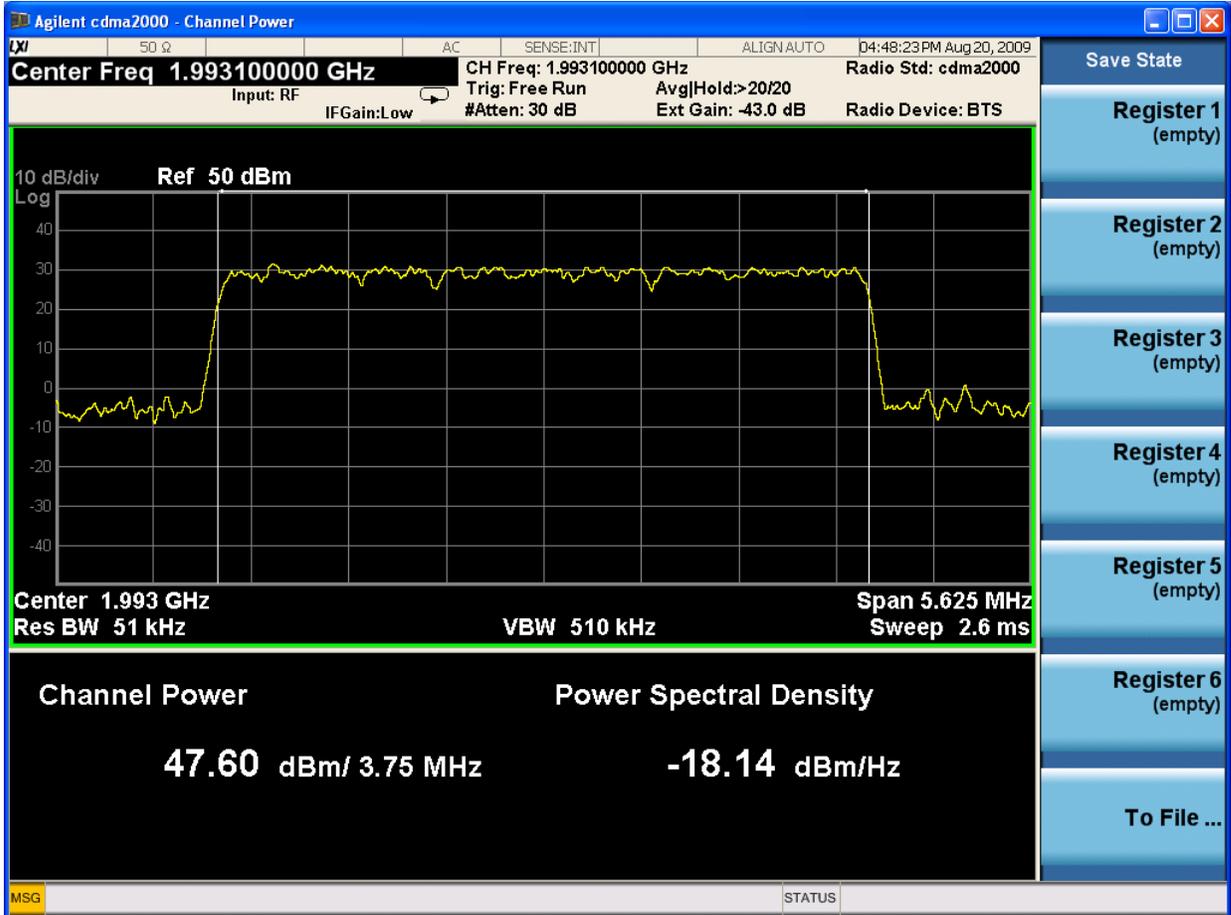


Two carriers

Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm	Antenna gain dBi	Total Power in W				
1981.275	1980.65/1981.90	47.77	13	1193.99				
1987.525	1986.90/1988.15	47.33	1078.95	1993.725	1993.10/1994.35	47.48	13	1116.86
1993.725	1993.10/1994.35	47.48	13	1116.86				

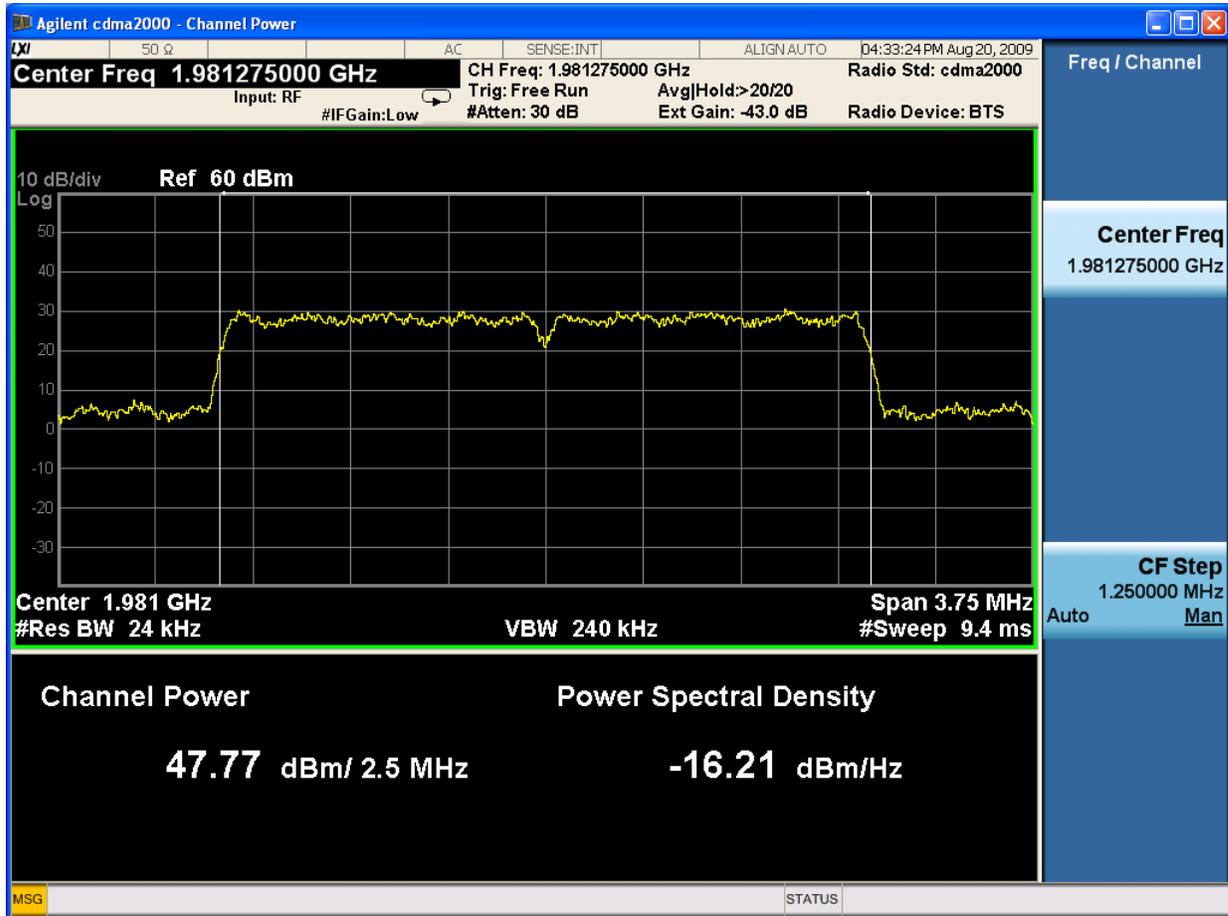


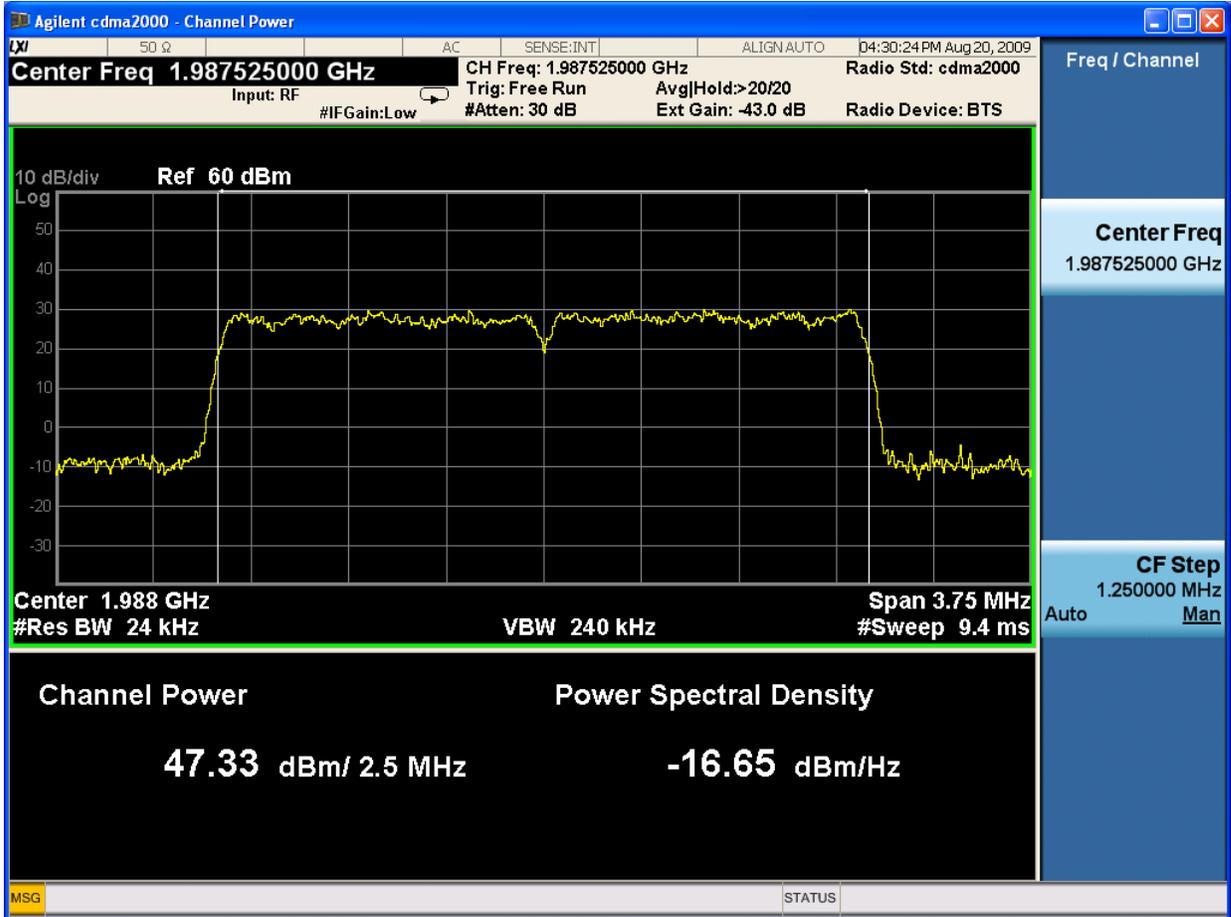


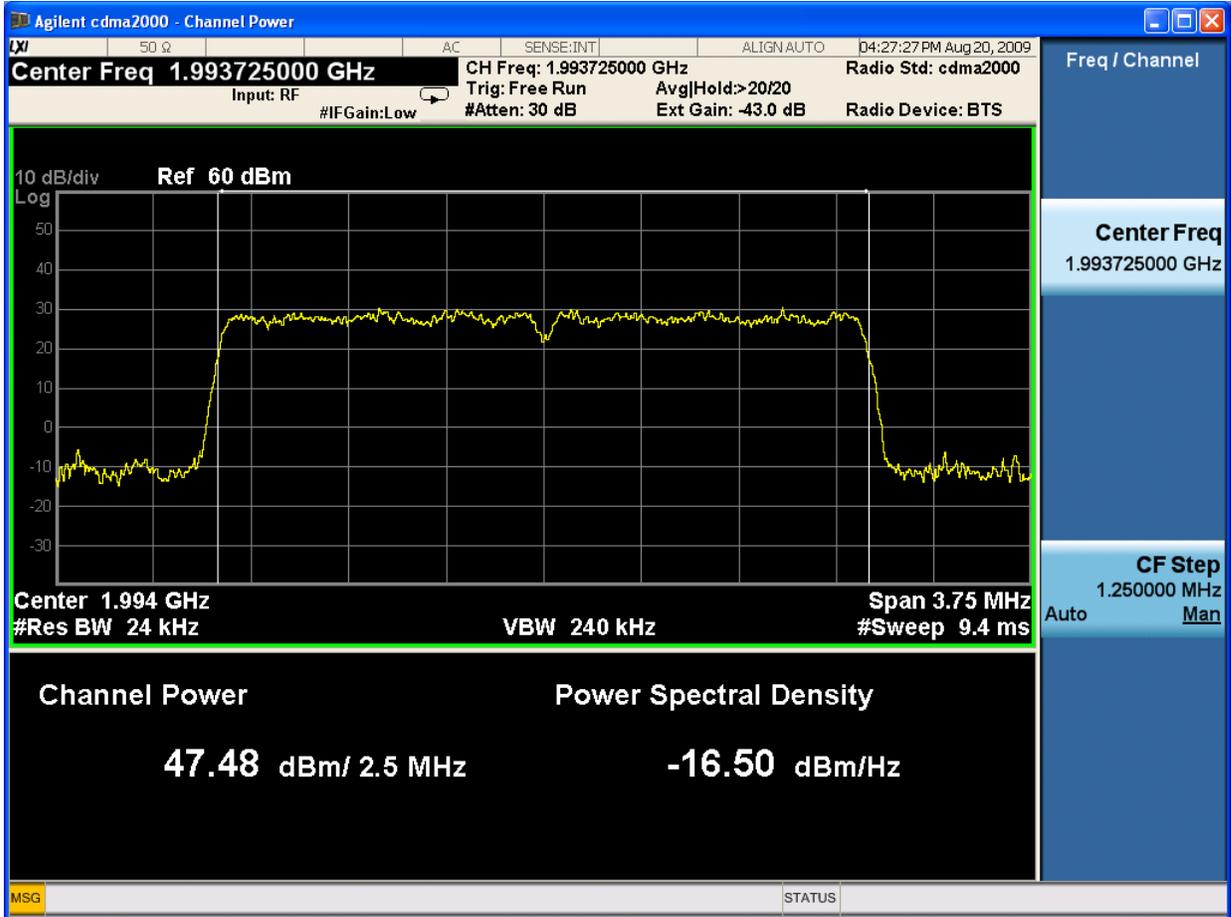


One carrier

Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm	Antenna gain dBi	Total Power in W
1980.65	1980.65	47.84	13	1213.39
1987.50	1987.50	47.77	13	1193.99
1994.35	1994.35	47.65	13	1163.45

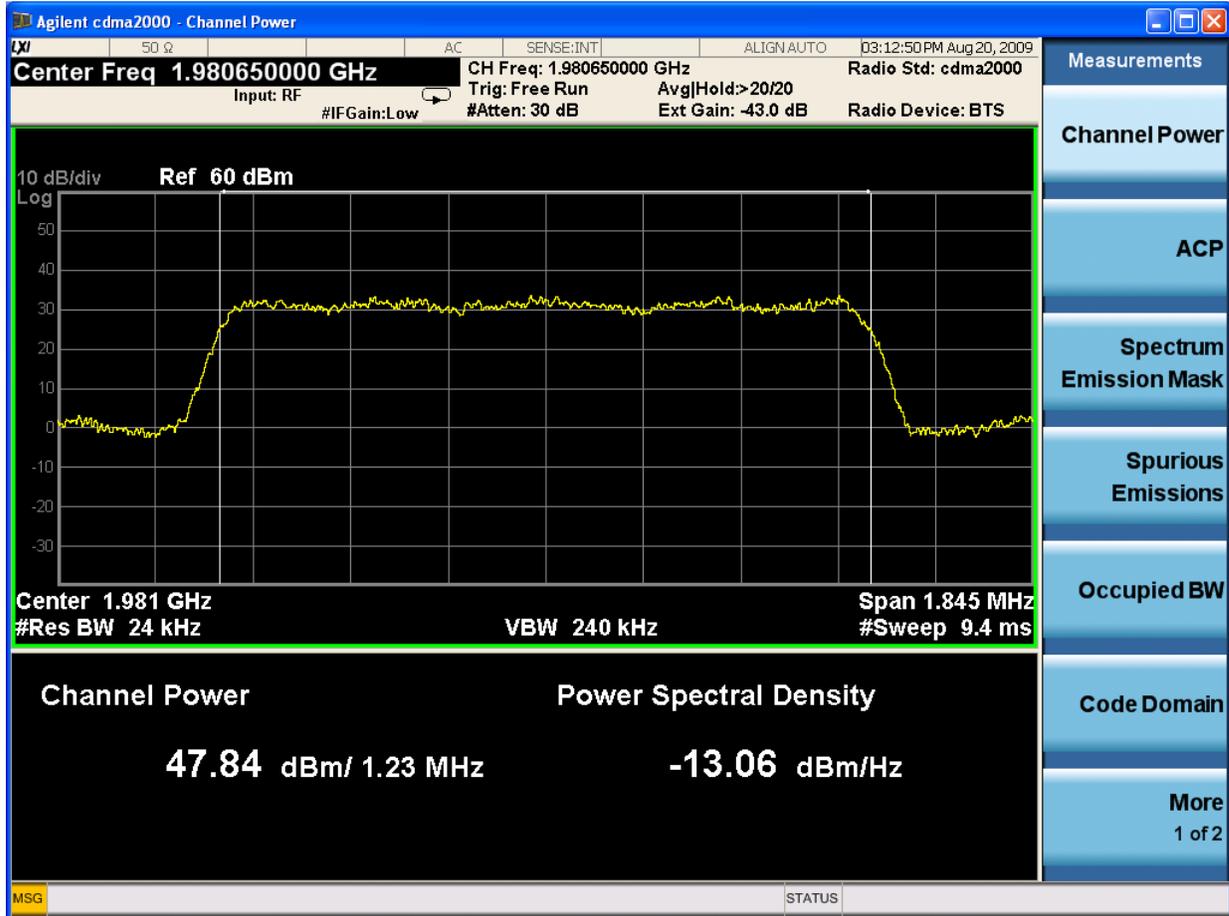

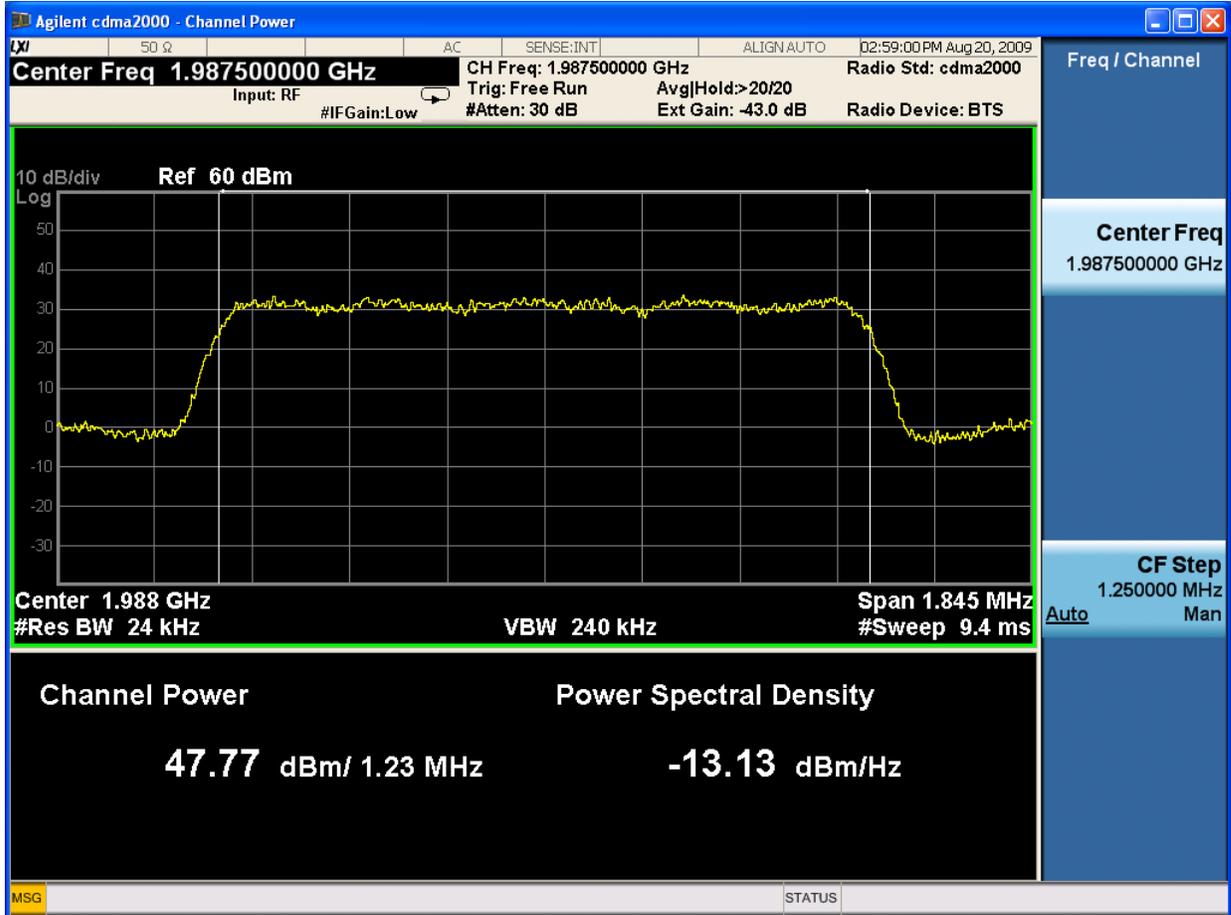

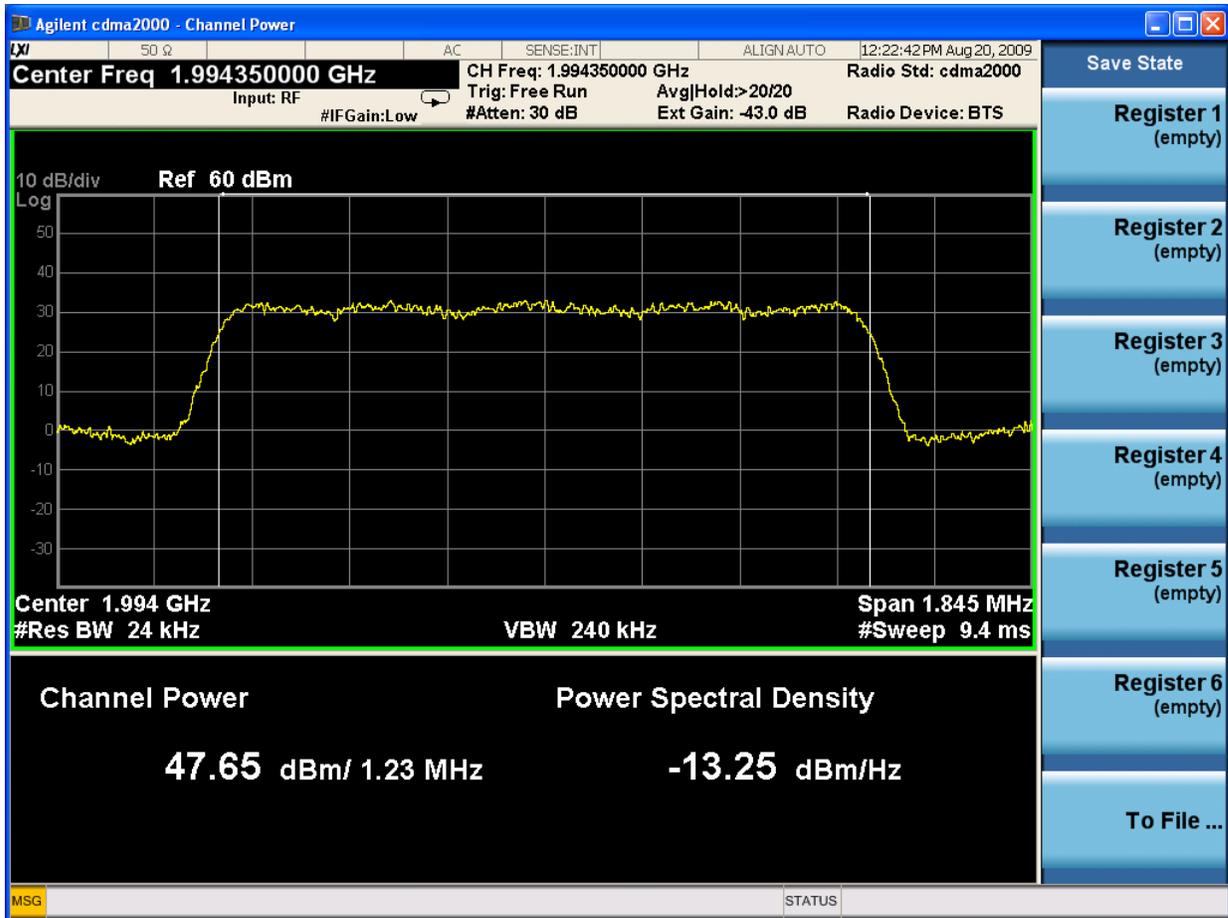

6 RF EXPOSURE

Applicable standard: FCC §2.1091, §1.1037 and IC §RSS 102 2.5.2

Limit

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated. Limits for Maximum Permissible Exposure (MPE)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

Test Data

Predication of MPE limit at a given distance
Equation from page 18 of OET Bulletin 65, Edition 97-01
 $S = PG / 4\pi R^2$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal: 47.90 (dBm) Maximum peak output power at antenna input terminals: 61.66(W)

Prediction distance: 400 (cm)

Predication frequency: 1987.5 (MHz)

Antenna Gain (typical): 13 (dBi)

Power density at predication frequency at 400 cm: 0.612(mW/cm²)

MPE limit for uncontrolled exposure at prediction frequency: 1.0 (mW/cm²)

Test Result: pass

Limit

According to RSS-102 4.2 RF exposure limit for general uncontrolled use device

Frequency Range (MHz)	Electric Field (V/M rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Time Averaging (min)
0.003-1	280	2.19	-	6
1-10	280 / f	2.19 / f	-	6
10-30	28	2.19 / f	-	6
30-300	28	0.073	2*	6
300-1 500	1.585 $f^{0.5}$	0.0042 $f^{0.5}$	$f / 150$	6
1 500-15 000	61.4	0.163	10	6
15 000-150 000	61.4	0.163	10	616000 / $f^{1.2}$
150 000-300 000	0.158 $f^{0.5}$	4.21 x 10 ⁻⁴ $f^{0.5}$	6.67 x 10 ⁻⁵ f	616000 / $f^{1.2}$

Note: f is frequency in MHz

* Power density limit is applicable at frequencies greater than 100 MHz

Test Data

Predication of MPE limit at a given distance
Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal: 47.95 (dBm) Maximum peak output power at antenna input terminals: 61.66(W)

Prediction distance: 4 (m)

Predication frequency: 1987.5 (MHz)

Antenna Gain (typical): 13 (dBi)

Power density at predication frequency at 4 m: 6.122(W/m2)

MPE limit for uncontrolled exposure at prediction frequency: 10 (W/m2)

Test Result: pass

7 MODULATION CHARACTERISTIC

Applicable Standard: FCC §2.1047 and IC §RSS 133 6.2

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2009-4-10	2010-4-9
DTS	DTS100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

CDMA digital mode is used by EUT.

Test Data Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar


The testing was performed by Wei bin on Aug 20, 2009


Test Result: Pass


Test Mode: Transmitting CDMA

Test Data:

Frequency (MHz)	Rho
1994.35	0.99284
1987.50	0.99182
1980.65	0.99255

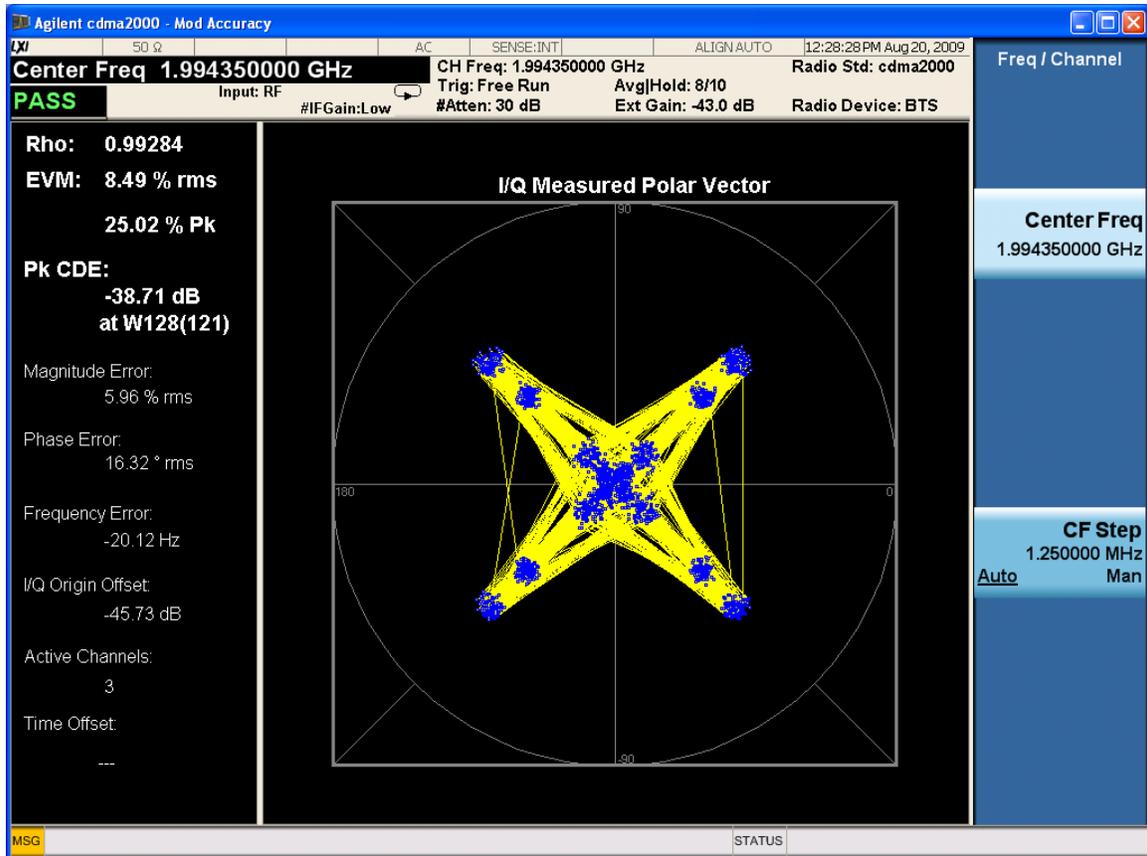

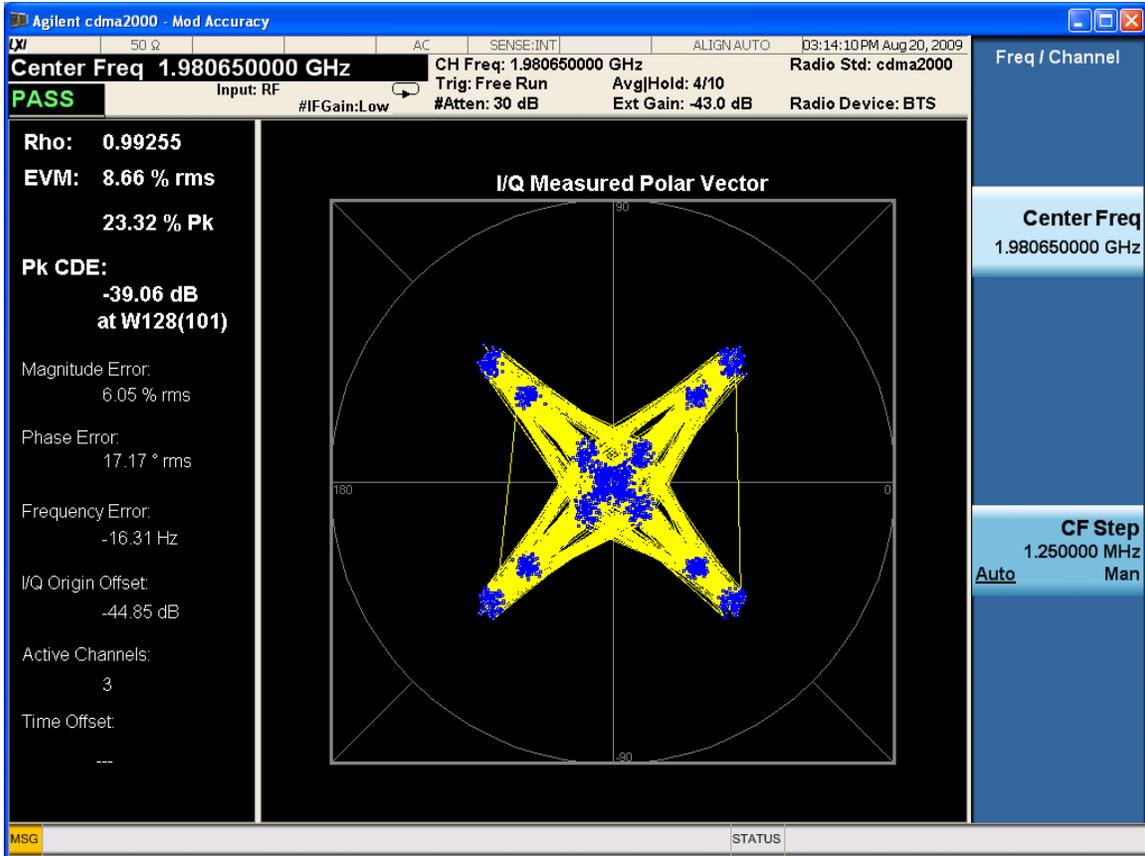

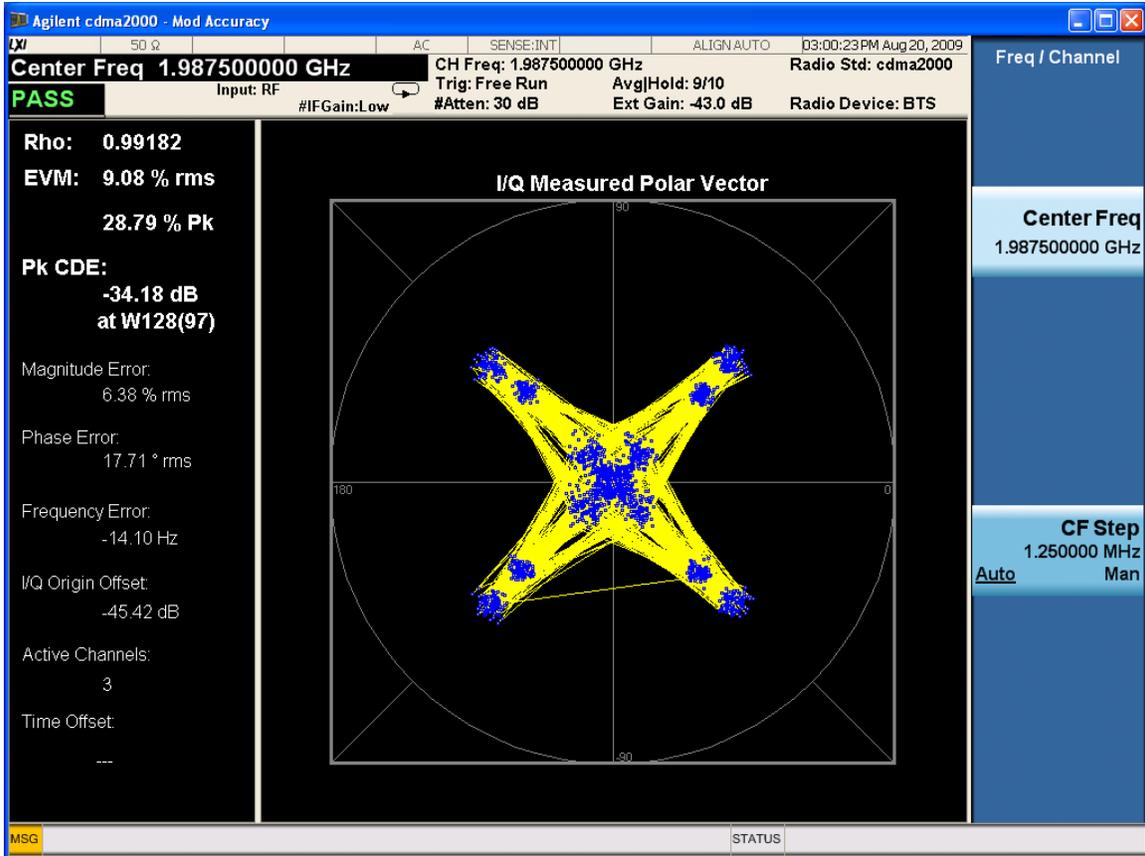

8 SPURIOUS RADIATED EMISSIONS

Applicable Standard: FCC CFR 47, §2.1053 and IC RSS133 §6.5,Rss Gen

§4.9

Test Equipment List and Details

Manufacturer	Equipment	Model	Serial Number	Last Cal.	Cal. Interval
Sunol Sciences	Horn Antenna	DRH-118	A052604	2008-09-25	1 Year
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2009-03-11	1 Year
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2008-08-28	1 Year
HP	Preamplifier	8449B	3008A00277	2008-09-12	1 Year
HP	Signal Generator	HP8657A	2849U00982	2008-10-16	1 Year
HP	Amplifier	HP8447D	2944A09795	2009-08-02	1 Year
HP	Synthesized Sweeper	8341B	2624A00116	2008-11-07	1 Year
COM POWER	Dipole Antenna	AD-100	041000	2008-09-25	1 Year
A.H. System	Horn Antenna	SAS-200/57 1	135	2009-05-17	1 Year
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	1100.0008.02	2008-09-26	1 Year


***statement of traceability:** BACL Corporation Testing lab attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiated emissions measurement at the EMC lab of BACL Corp. is 3.6dB.

EUT Setup

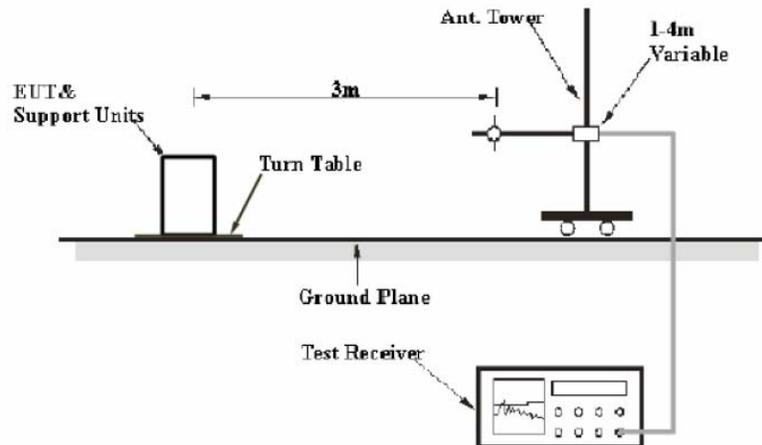

The radiated emission tests were performed in the 3-meter Chamber, using the setup accordance with the TIA-603-C. The specification used were the FCC Part 24E limits and IC RSS 133 clause 6.5 limits.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TX pwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 43+10 Lg P (power out in Watts)

The resolution bandwidth of the spectrum analyzer was set at 100KHz for 30MHz to 1GHz scanning, set at 1MHz or 3MHz for 1GHz to 20GHz scanning.

Test Results Summary: PASS

Environmental Conditions

Temperature:	26°C
Relative Humidity:	60 %
ATM Pressure:	1009 mbar

The testing was performed by BACL corporation on 2009-8-10 and 2009-8-17.

Test data

Indicated		Table	Test Antenna		Substituted			Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	Amp. (dBuV)	Angle Degree	Height (M)	Polar H/V	Frequency (MHz)	Level (dBm)	Antenna Gain Correction				
900.14	33.31	60	1.0	V	900.15	-65.3	0	1.69	-66.99	-13	53.99
528.25	29.95	180	1.5	V	528.25	-67.6	0	1.21	-68.81	-13	55.81
78.96	27.06	45	1.5	V	78.96	-65.3	0	0.60	-65.90	-13	52.90
893.85	42.62	45	1.5	H	893.85	-54.6	0	1.69	-56.29	-13	43.29
229.29	23.71	60	1.5	H	229.29	-72.3	0	0.72	-73.02	-13	60.02
122.83	23.79	180	1.6	H	122.83	-72.6	0	0.60	-73.20	-13	60.20

Radiation emission spurious below 1GHz in bottom frequency

Indicated		Table	Test Antenna		Substituted			Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	Amp. (dBuV)	Angle Degree	Height (M)	Polar H/V	Frequency (MHz)	Level (dBm)	Antenna Gain Correction				
3961.30	43.52	60	1.0	V	3961.30	-51.7	6.6	3.70	-48.80	-13	35.80
5941.95	49.76	180	1.5	V	5941.95	-41.5	8.2	4.40	-37.70	-13	24.70
1104.30	43.35	45	1.5	V	1104.30	-53.3	6.3	1.85	-48.85	-13	35.85
3961.30	43.27	45	1.5	H	3961.30	-51.9	6.6	3.70	-49.00	-13	36.00
5941.95	45.14	60	1.5	H	5941.95	-46.2	8.2	4.40	-42.40	-13	29.40
1120.28	47.65	180	1.6	H	1120.28	-49.0	6.3	1.85	-44.55	-13	31.55

Radiation emission spurious above 1GHz in bottom frequency

Indicated		Table	Test Antenna		Substituted			Cable Loss dB	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	Amp. (dBuV)	Angle Degree	Height (M)	Polar H/V	Frequency (MHz)	Level (dBm)	Antenna Gain Correction				
900.14	36.05	60	1.0	V	900.14	-62.6	0	1.69	-64.29	-13	51.29
215.27	21.79	93	1.5	V	215.27	-79.2	0	0.72	-79.92	-13	66.92
295.15	21.79	60	1.0	V	295.15	-79.5	0	0.87	-80.37	-13	67.37
900.14	43.43	180	1.5	H	900.14	-57.3	0	1.69	-58.99	-13	45.99
374.62	29.60	0	1.5	H	374.62	-70.8	0	0.96	-71.76	-13	58.76
175.65	30.41	180	1.0	H	175.65	-69.8	0	0.65	-70.45	-13	57.45

Radiation emission spurious below 1GHz in middle frequency

Indicated		Table	Test Antenna		Substituted			Cable Loss dB	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	Amp. (dBuV)	Angle Degree	Height (M)	Polar H/V	Frequency (MHz)	Level (dBm)	Antenna Gain Correction				
3975.00	42.16	60	1.0	V	3975.00	-53.1	6.6	3.70	-50.20	-13	37.20
5962.50	45.21	93	1.5	V	5962.50	-47.3	8.2	4.40	-43.50	-13	30.50
1798.35	51.35	60	1.0	V	1798.35	-44.3	6.1	2.42	-40.62	-13	27.62
3975.00	43.44	180	1.5	H	3975.00	-51.9	6.6	3.70	-49.00	-13	36.00
5962.50	45.91	0	1.5	H	5962.50	-46.8	8.2	4.40	-43.00	-13	30.00
1778.5	47.68	180	1.0	H	1778.5	-48.2	6.1	2.42	-44.52	-13	31.52

Radiation emission spurious above 1GHz in middle frequency

Indicated		Table	Test Antenna		Substituted			Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	Amp. (dBuV)	Angle Degree	Height (M)	Polar H/V	Frequency (MHz)	Level (dBm)	Antenna Gain Correction				
912.86	51.71	45	1.5	V	912.86	-47.5	0	1.69	-49.19	-13	36.19
60.92	28.73	90	1.5	V	60.92	-64.3	0	0.60	-64.90	-13	51.90
31.73	25.31	120	1.6	V	31.73	-67.8	0	0.60	-68.40	-13	55.40
912.86	44.64	240	1.6	H	912.86	-54.6	0	1.69	-56.29	-13	43.29
410.38	30.31	60	1.5	H	410.38	-71.6	0	1.05	-72.65	-13	59.65
219.84	26.58	135	1.5	H	219.84	-75.8	0	.072	-75.87	-13	62.87

Radiation emission spurious below 1GHz in top frequency

Indicated		Table	Test Antenna		Substituted			Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	Amp. (dBuV)	Angle Degree	Height (M)	Polar H/V	Frequency (MHz)	Level (dBm)	Antenna Gain Correction				
3988.70	42.77	45	1.5	V	3988.70	-53.2	6.6	3.70	-50.30	-13	37.30
5983.65	46.48	90	1.5	V	5983.65	-46.3	8.2	4.40	-42.50	-13	29.50
1132.3	46.58	120	1.6	V	1132.3	-49.6	6.3	1.85	-45.15	-13	32.15
3988.70	45.31	240	1.6	H	3988.70	-49.7	6.6	3.70	-46.80	-13	33.80
5983.65	51.33	60	1.5	H	5983.65	-41.5	8.2	4.40	-37.70	-13	24.70
1132.3	46.54	135	1.5	H	1132.3	-49.6	6.3	1.85	-45.15	-13	32.15

Radiation emission spurious above 1GHz in top frequency

9 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard: FCC§2.1051, §24.238 IC §RSS 133 6.5

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified .


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2009-4-10	2010-4-9
DST	DST100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

EUT Setup:

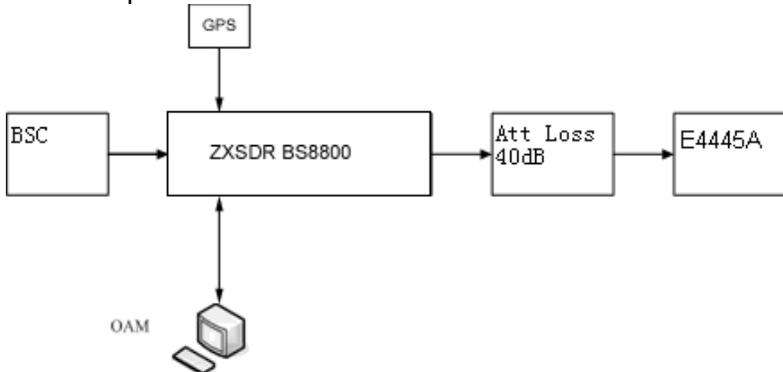

REMARKS: Attenuator loss (dB)=40dB, Cable Loss (dB)=3dB.

The RF output of the transceiver was connected to a spectrum analyzer through appropriate

attenuation. The resolution bandwidth of the spectrum analyzer was set at 1 kHz for 9KHz to 150KHz scanning, set at 10KHz for 150KHz to 30MHz scanning ,set at 100KHz for 30MHz to 1GHz scanning, set at 1MHz or 3MHz for 1GHz to 22GHz scanning. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Data Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar

The testing was performed by Wei bin on Aug 20 to Aug 31,2009


Test Result: Pass


Test Mode: Transmitting CDMA

Test Data:

Four Carriers (working in bottom frequency)





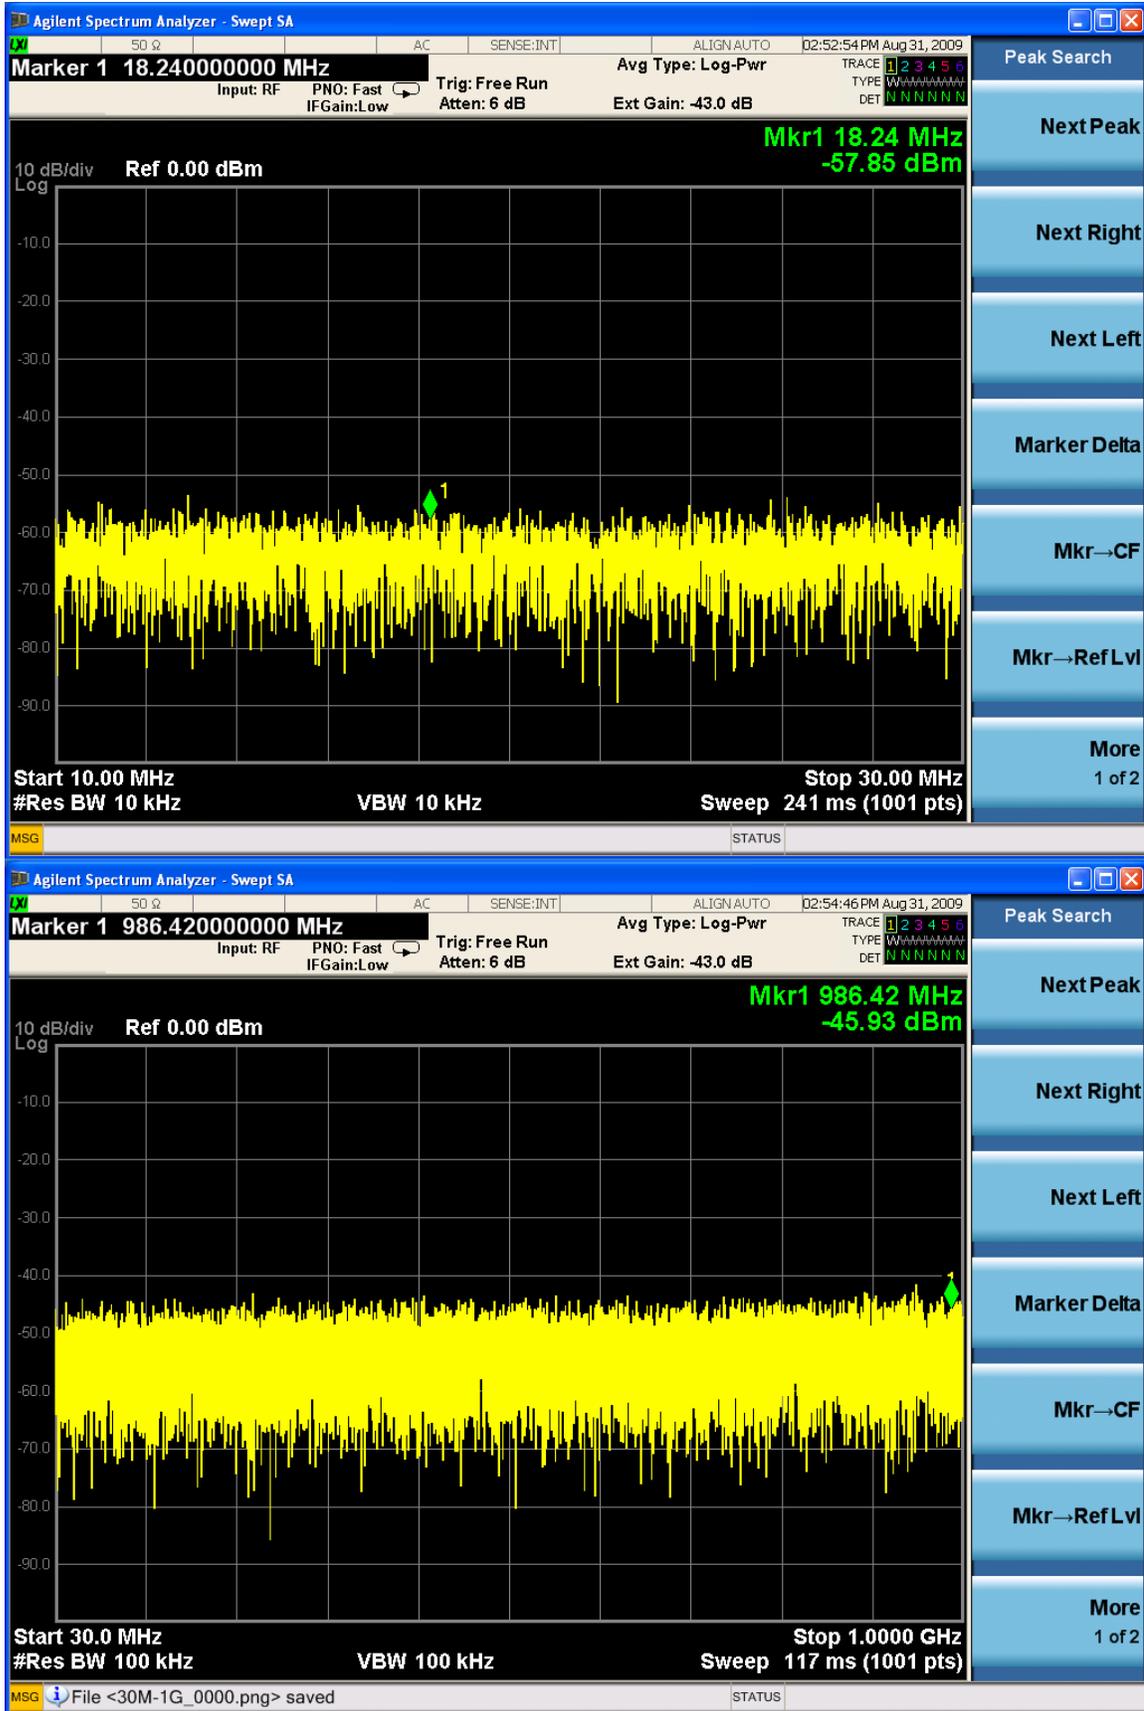



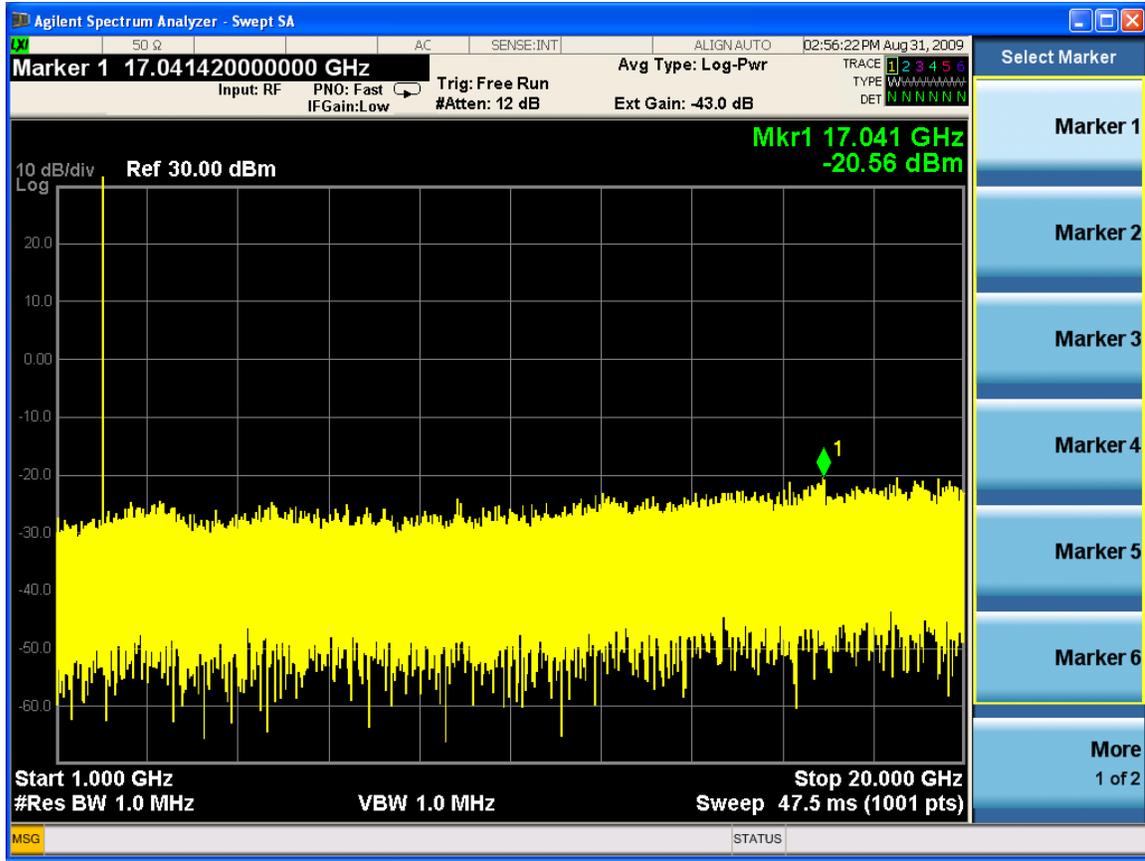


* The highest point is in working frequency block


Four carriers (working in top frequency)


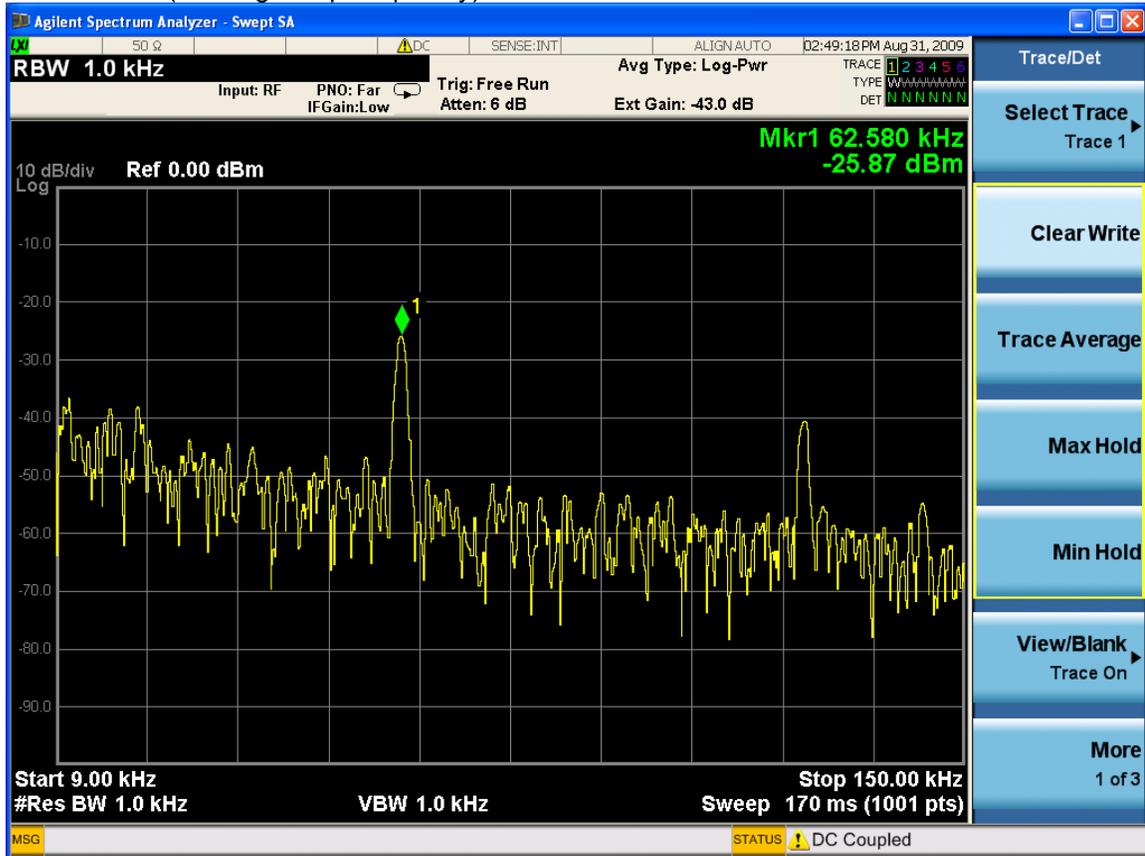


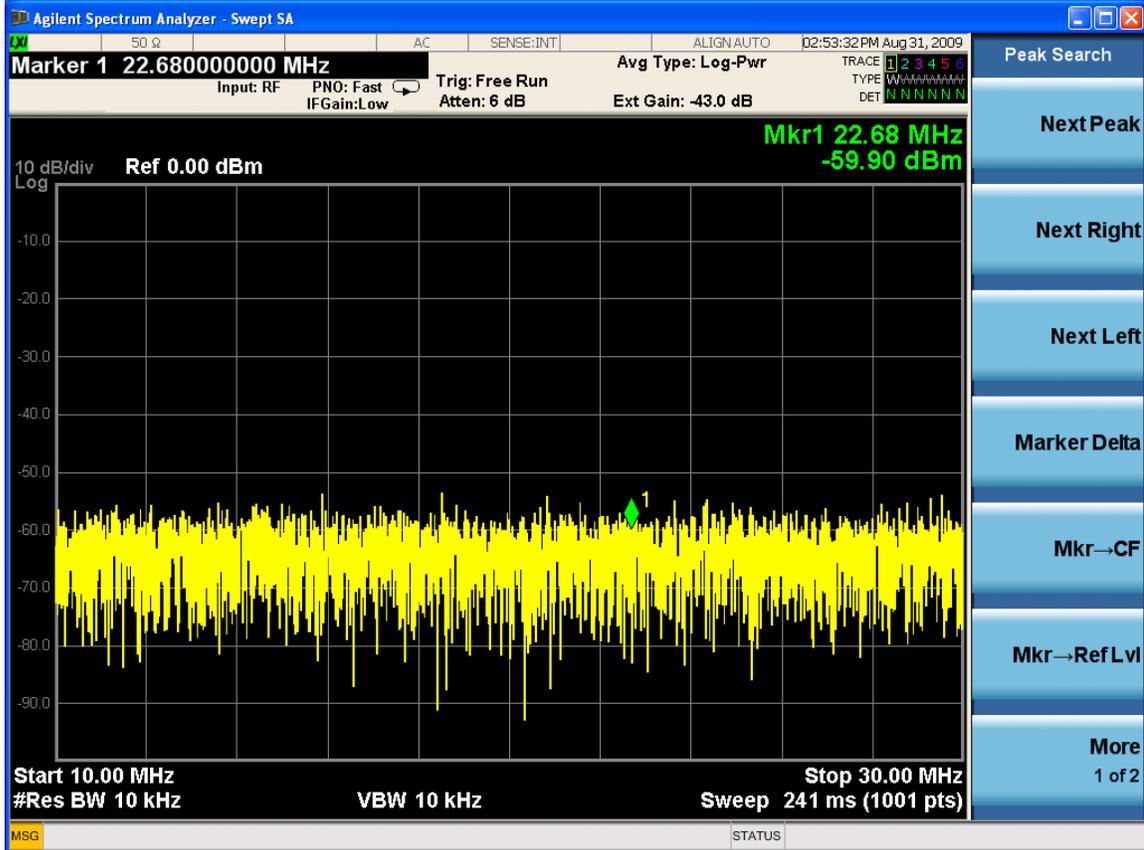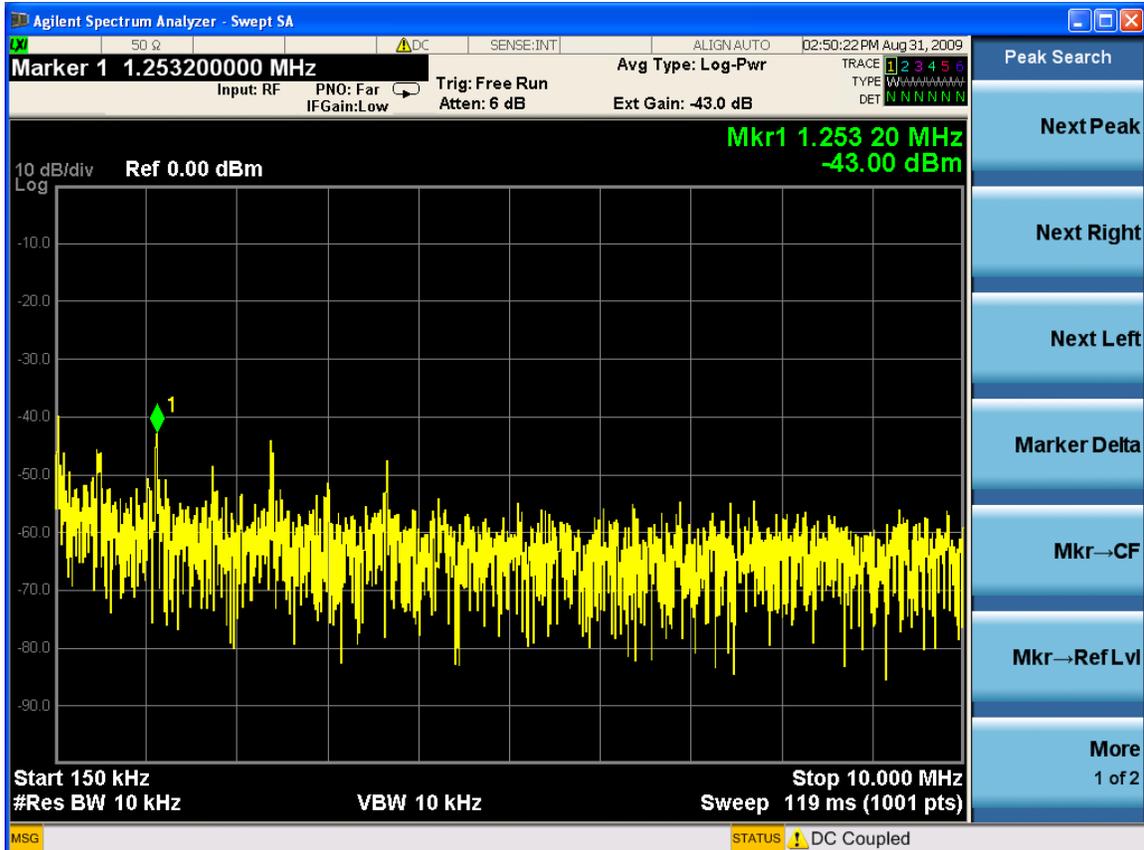

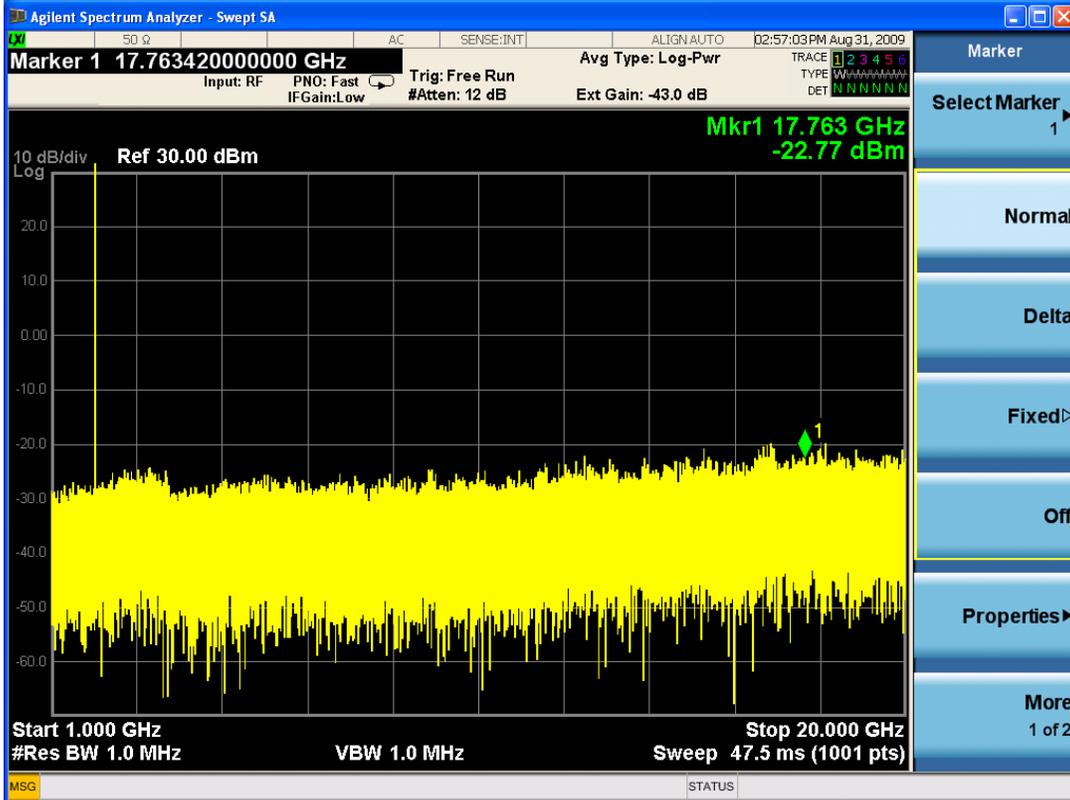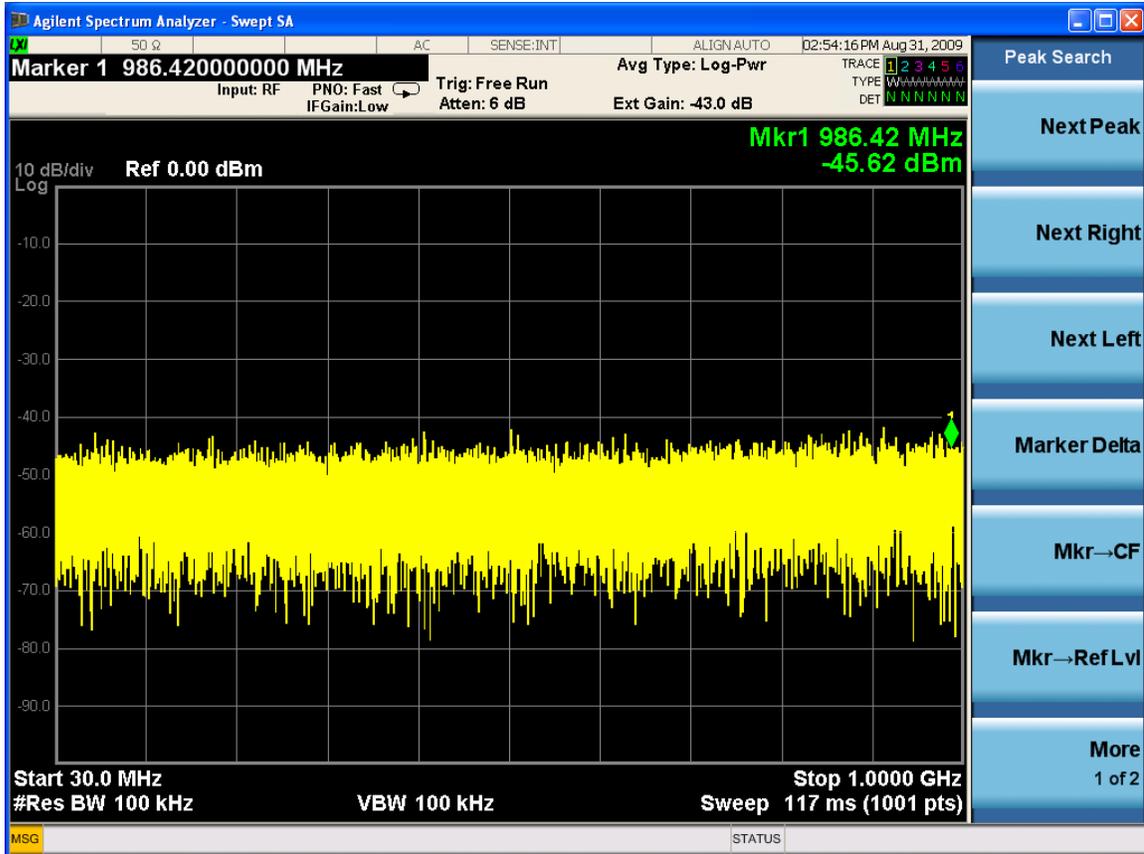


* The highest point is in working frequency block

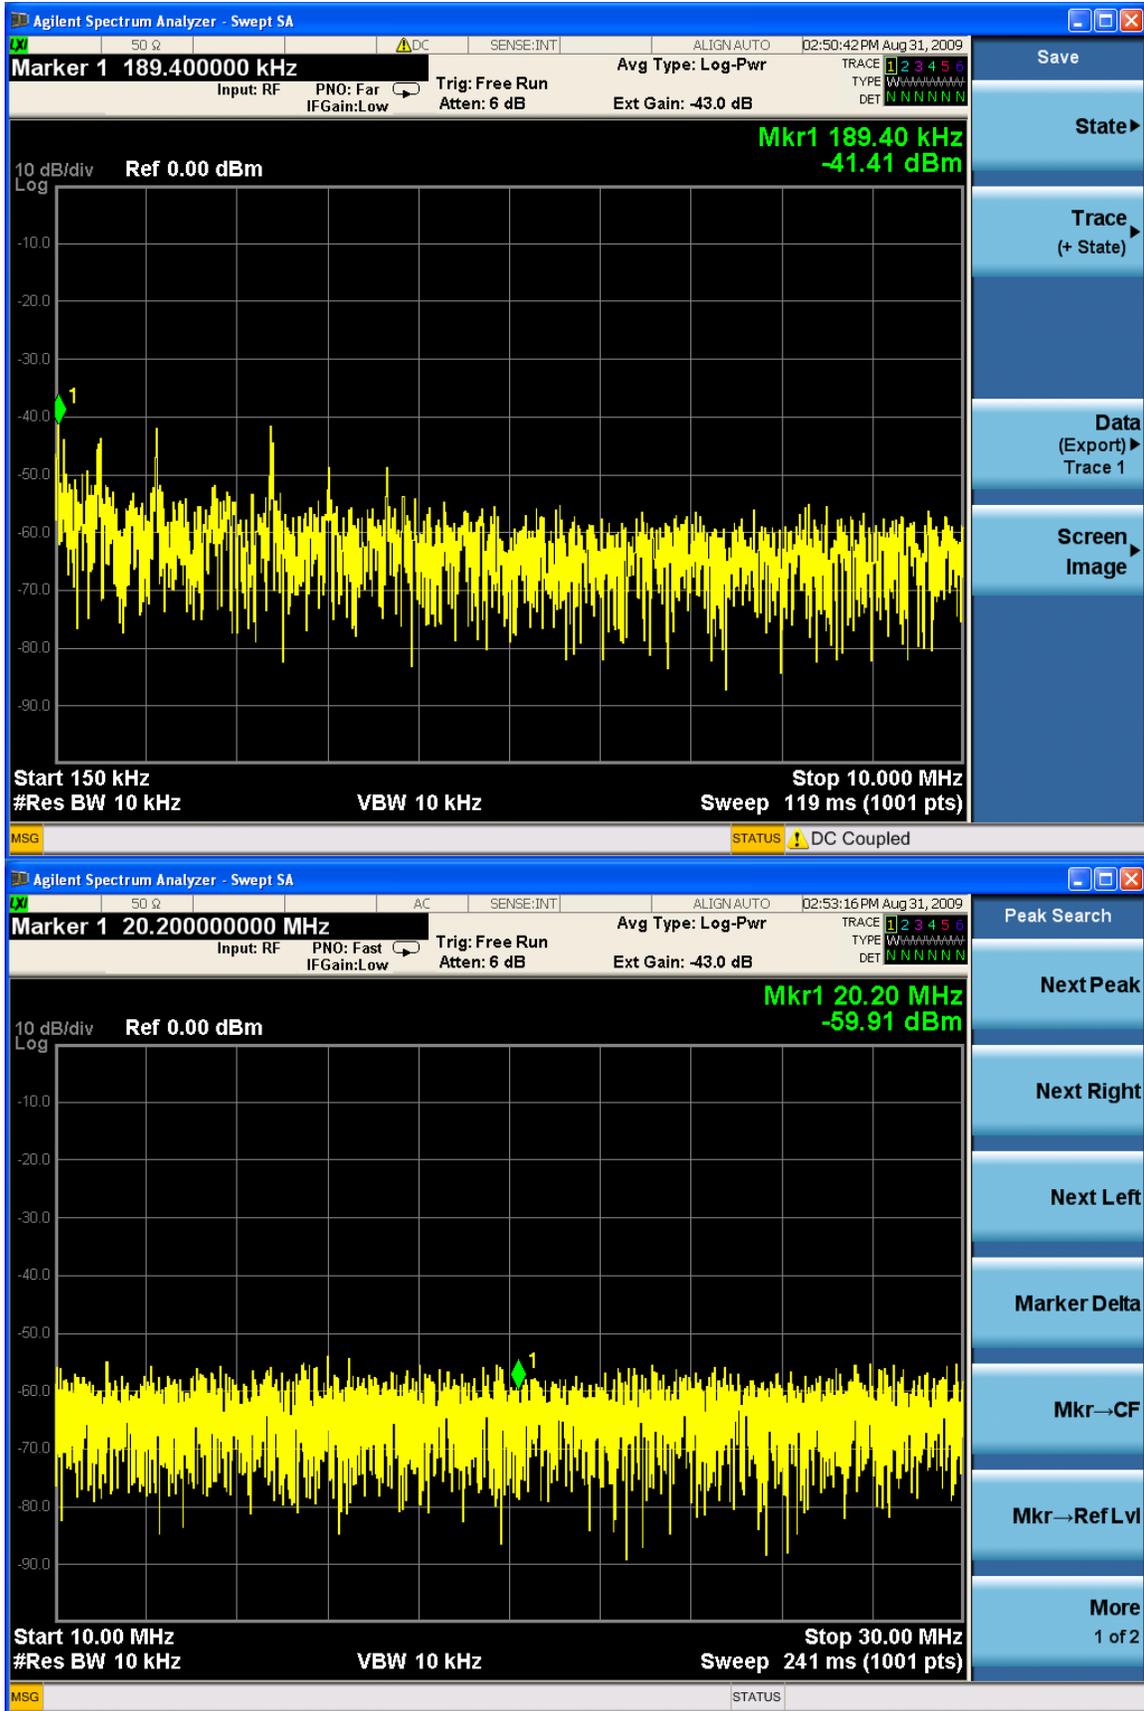


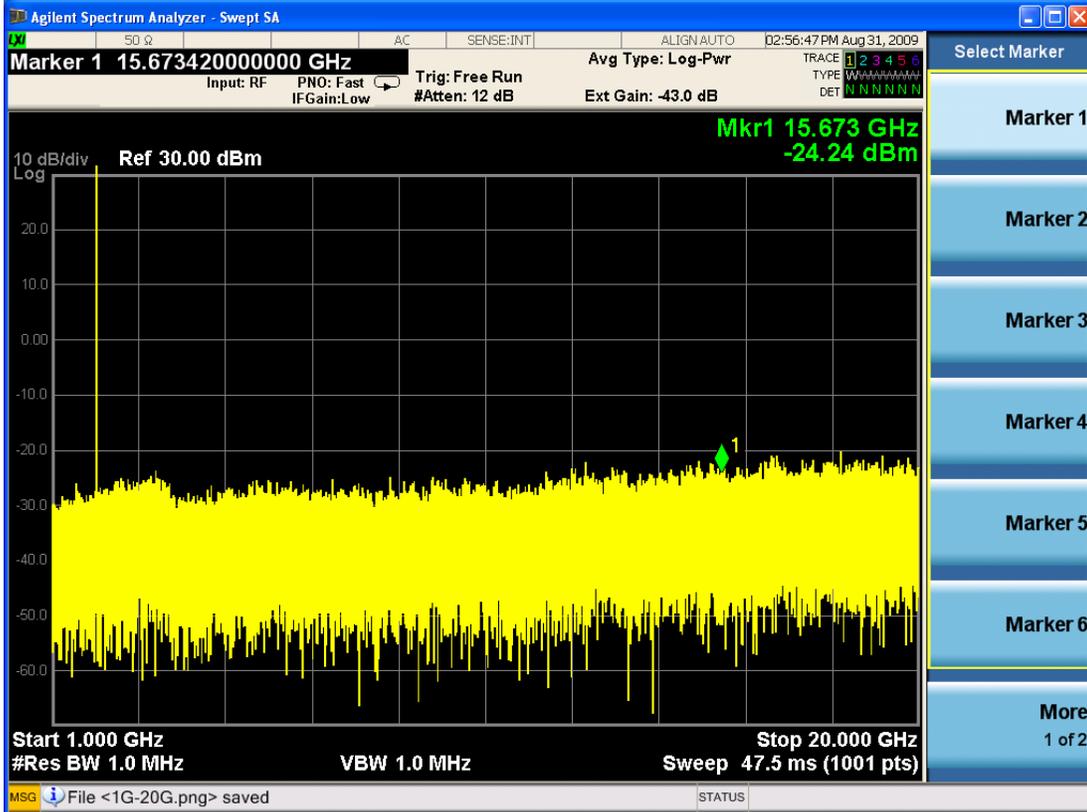
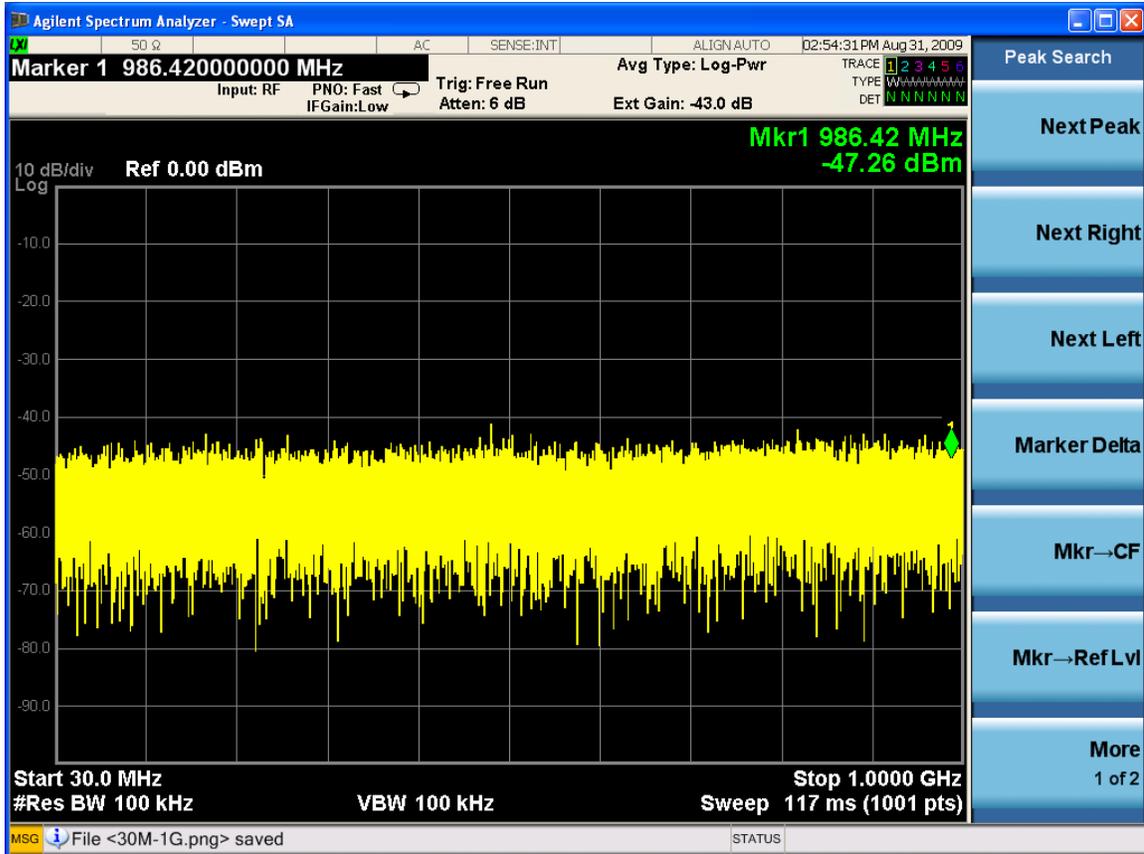


* The highest point is in working frequency block

One carrier (working in bottom frequency)

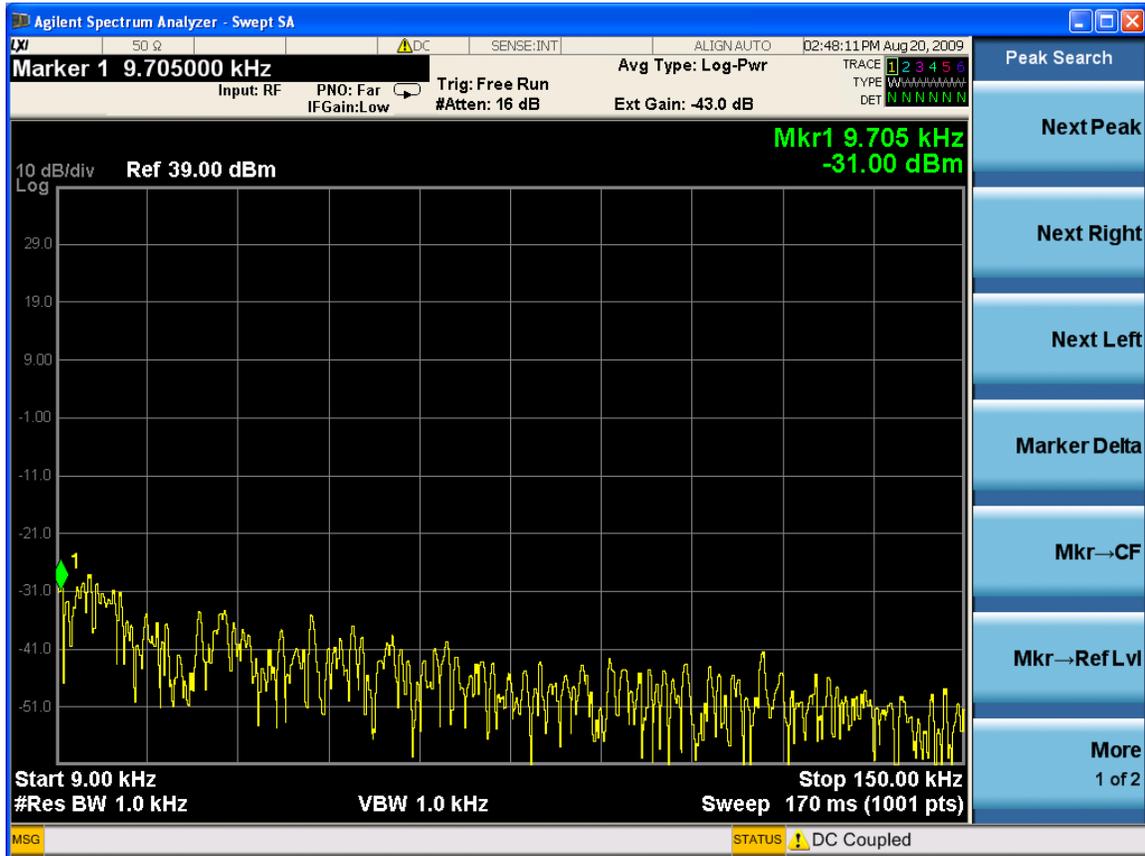


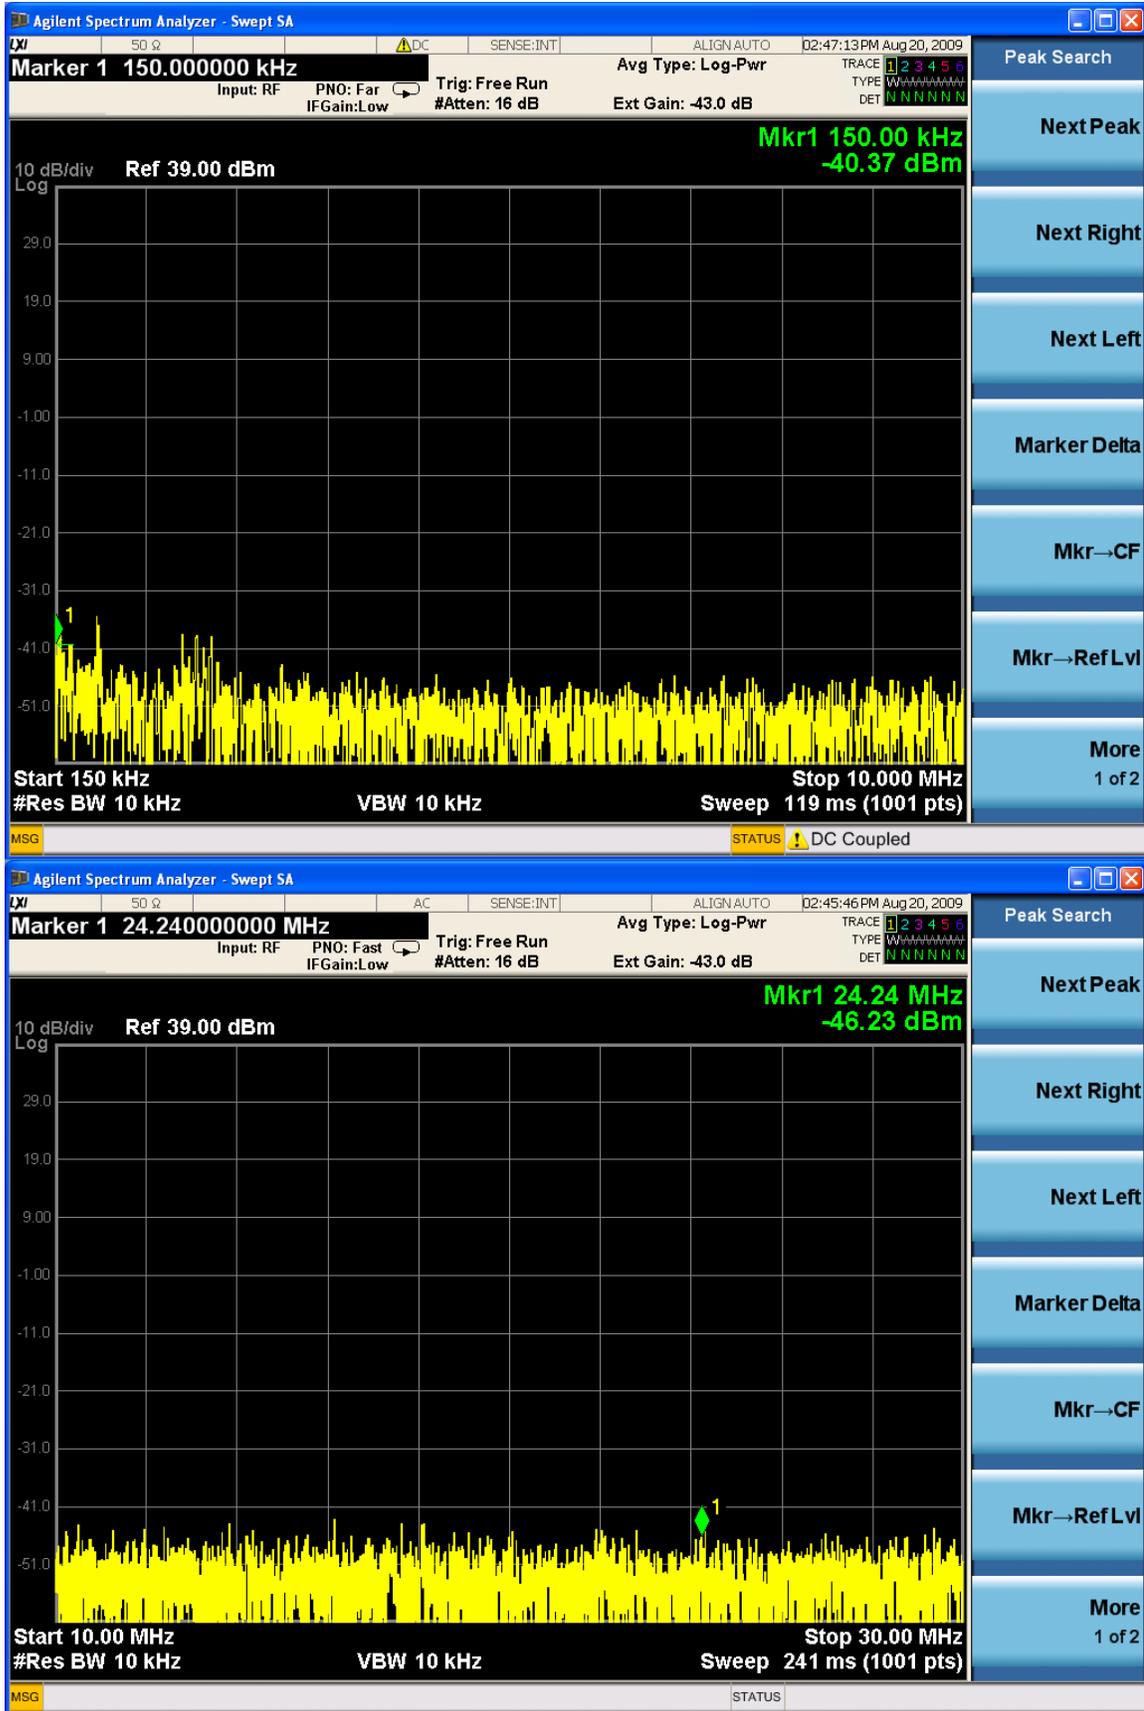


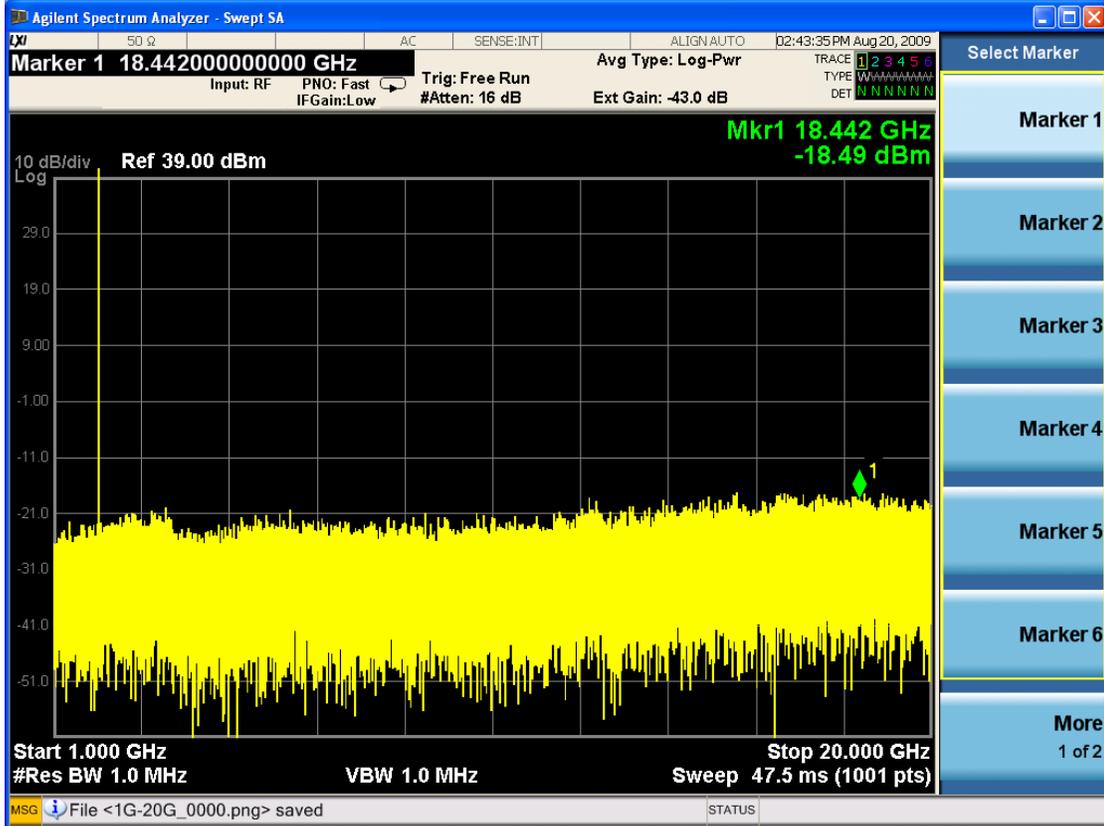
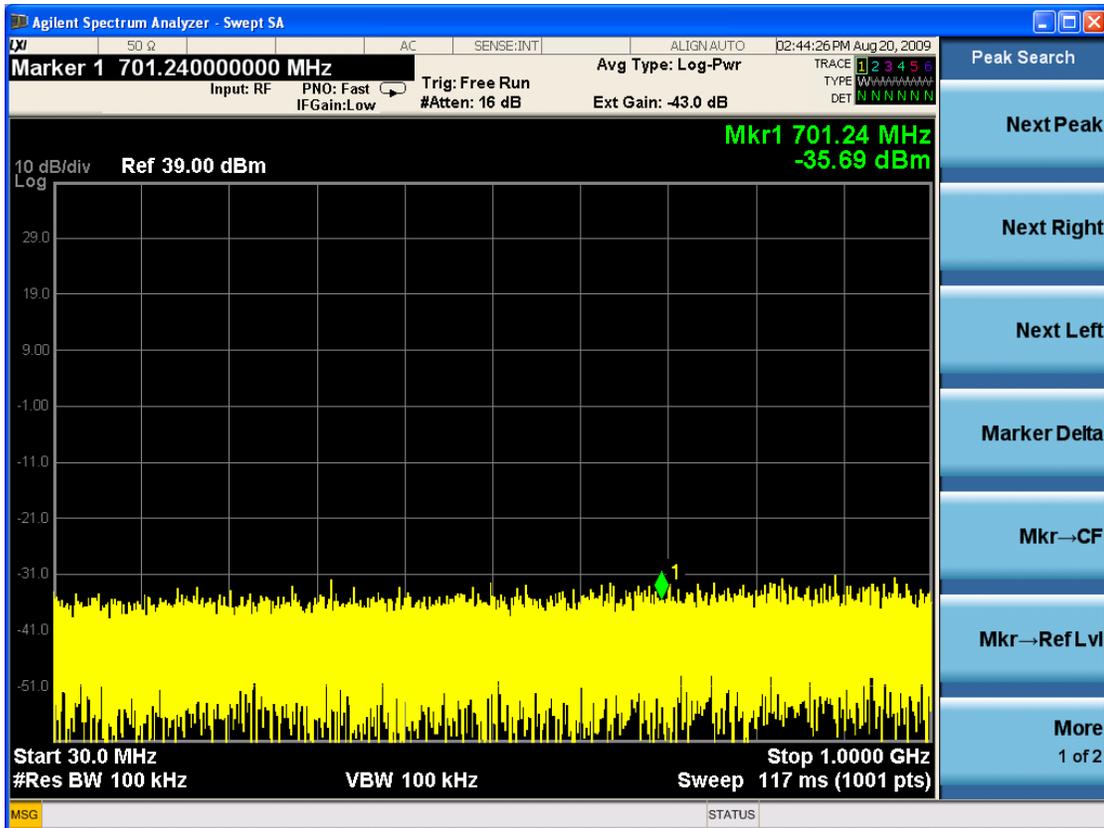


* The highest point is in working frequency block

One carrier (working in middle frequency)

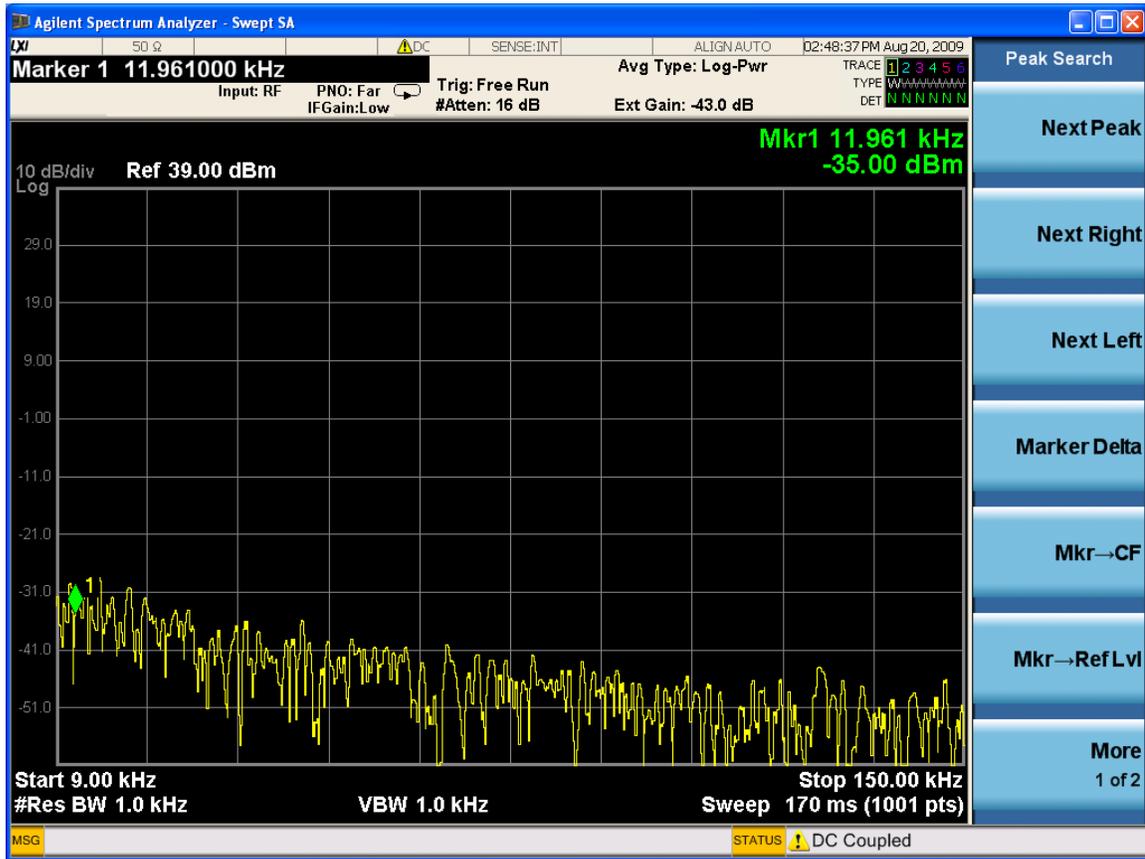



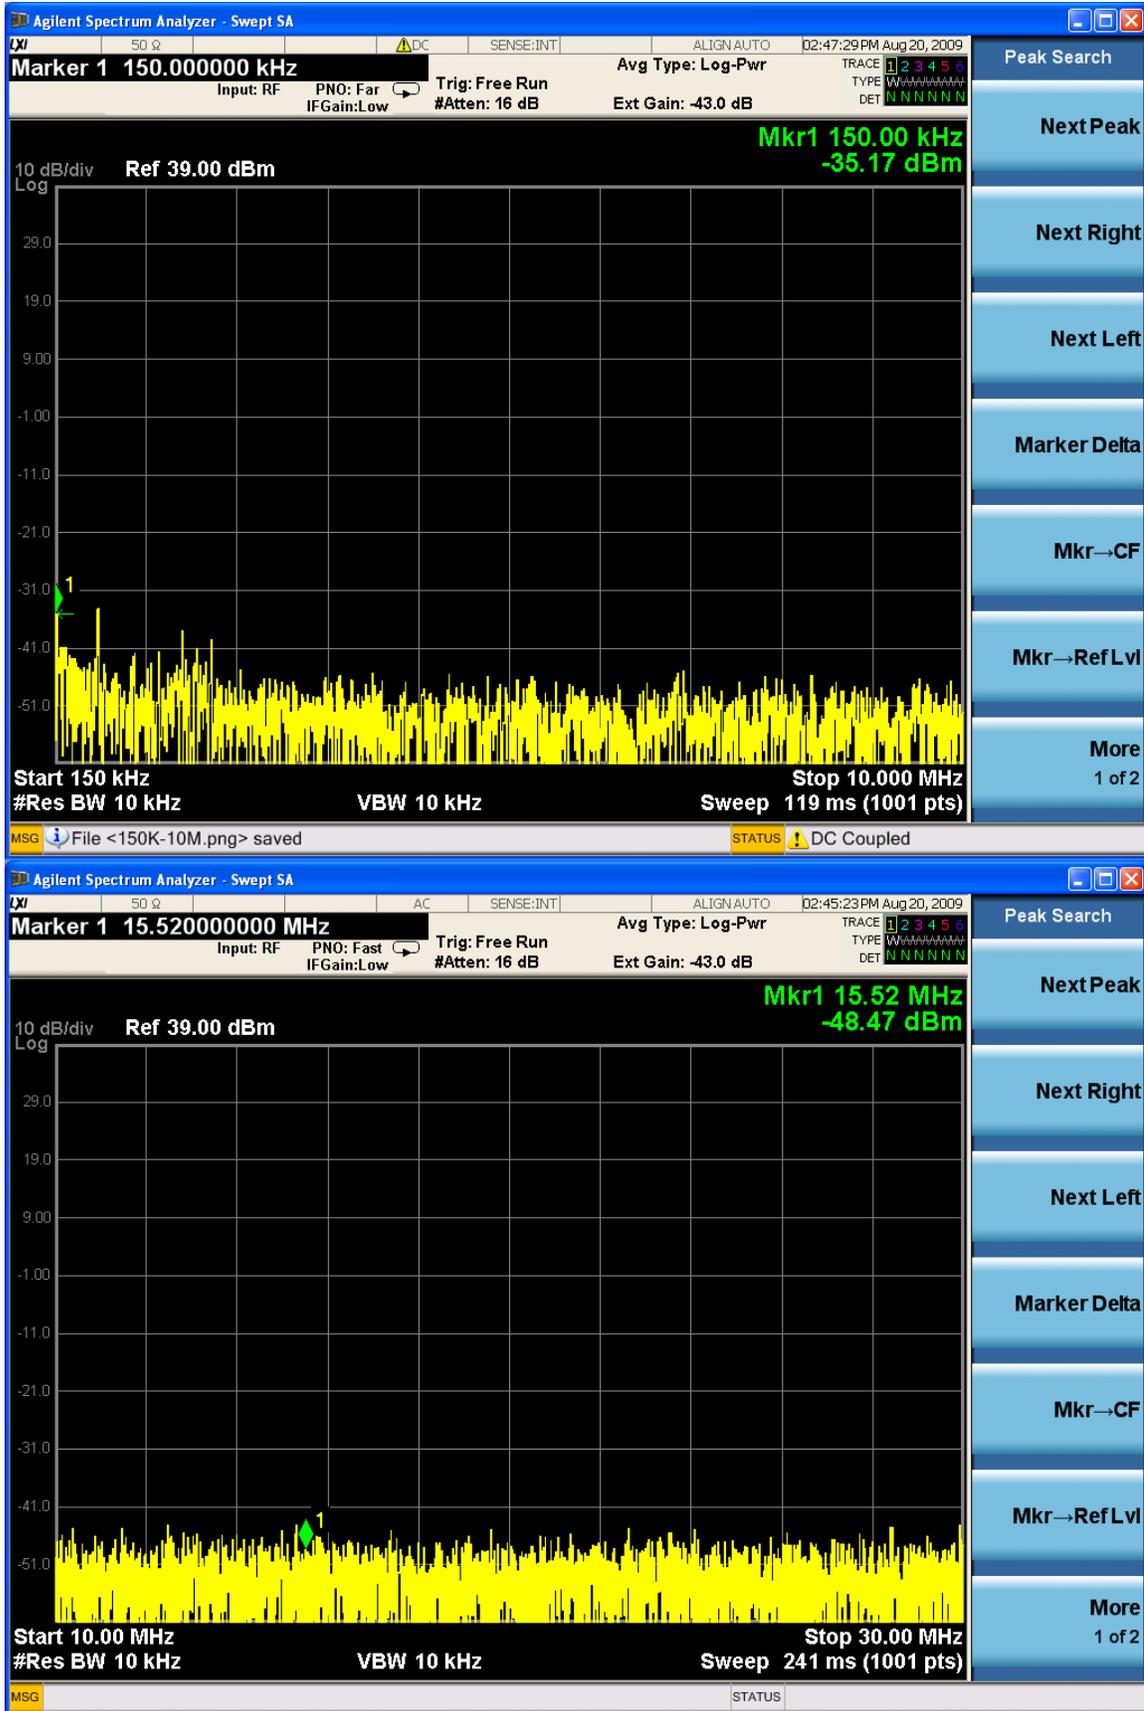


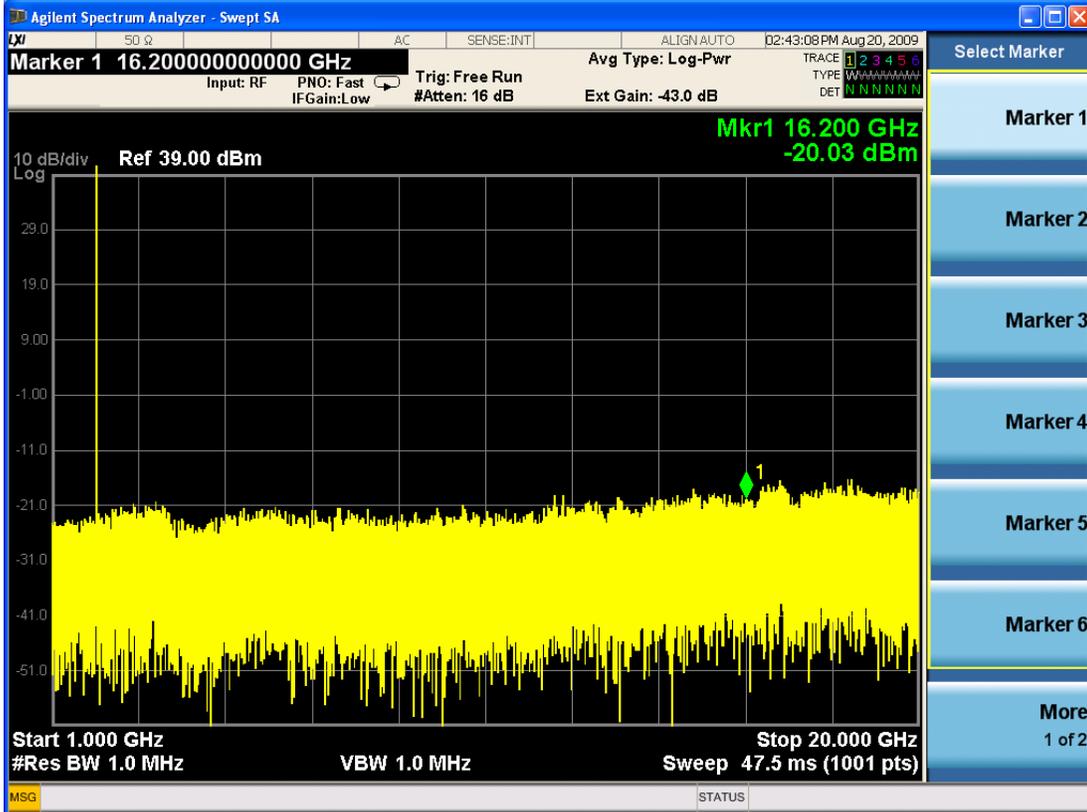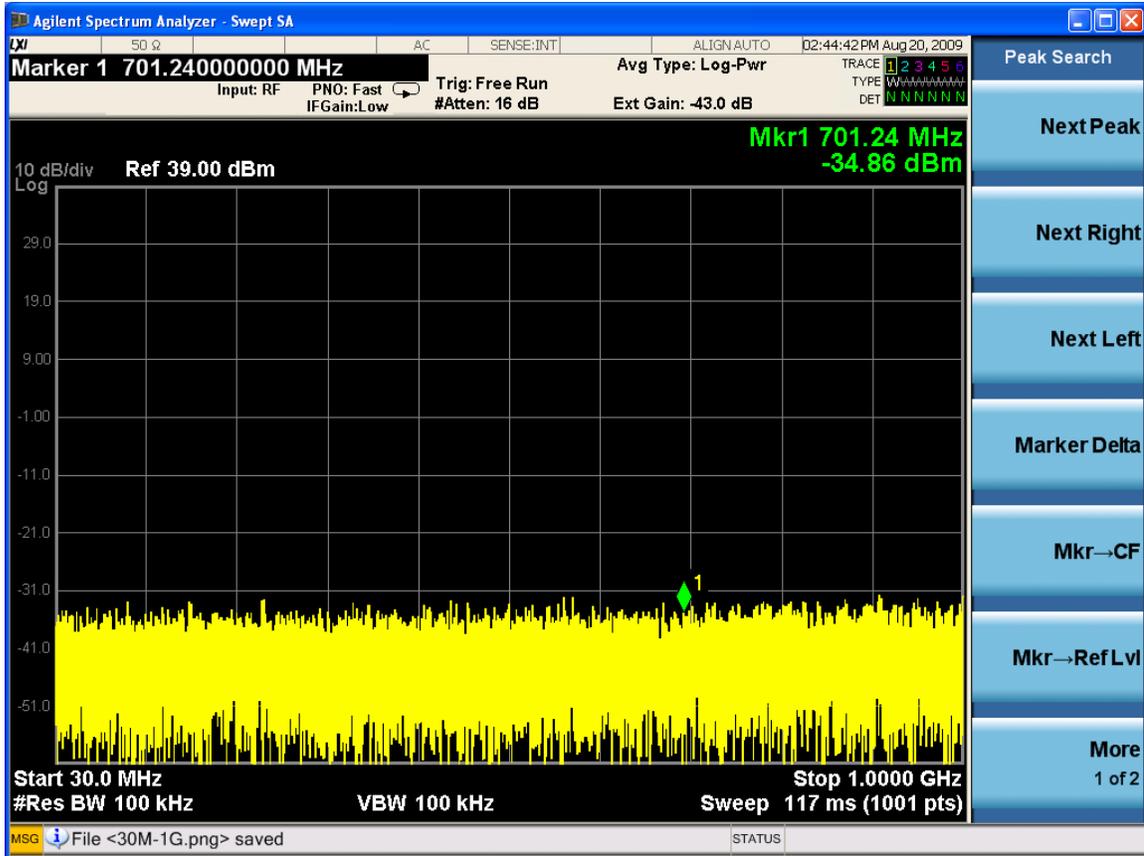


* The highest point is in working frequency block

One carrier (working in top frequency)

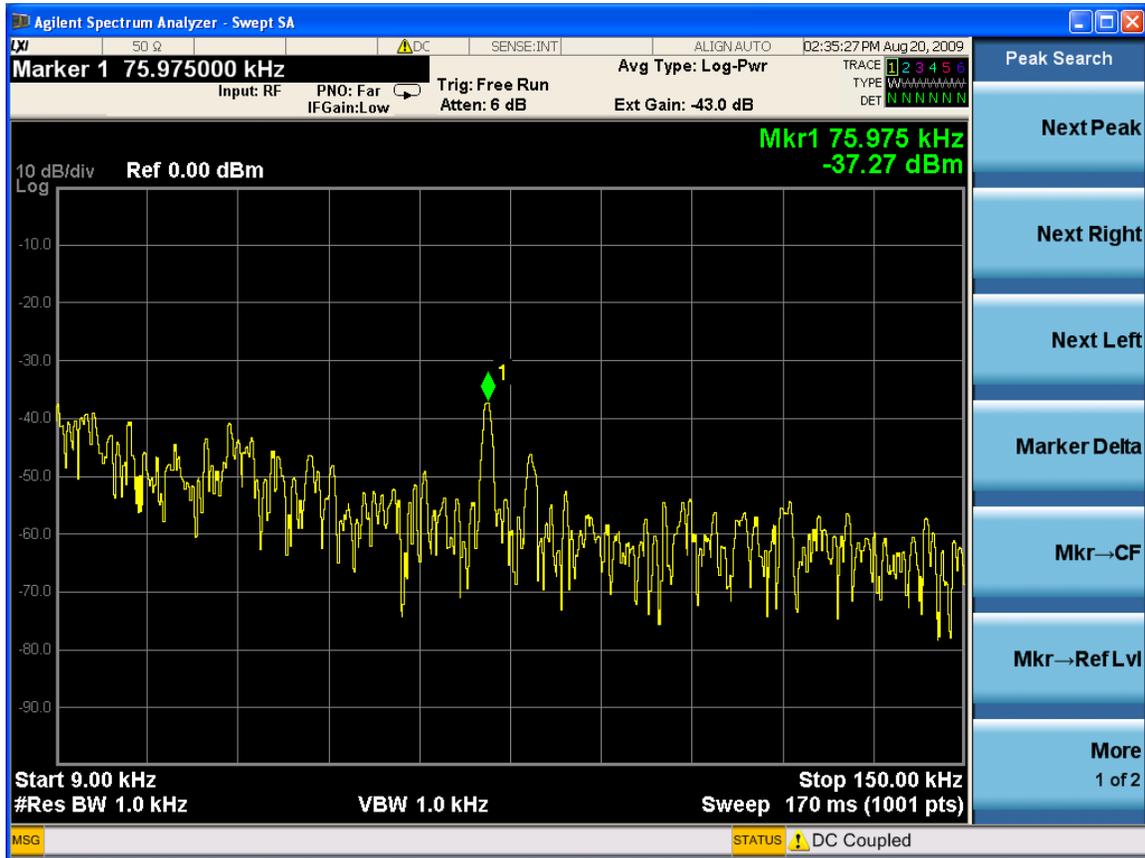

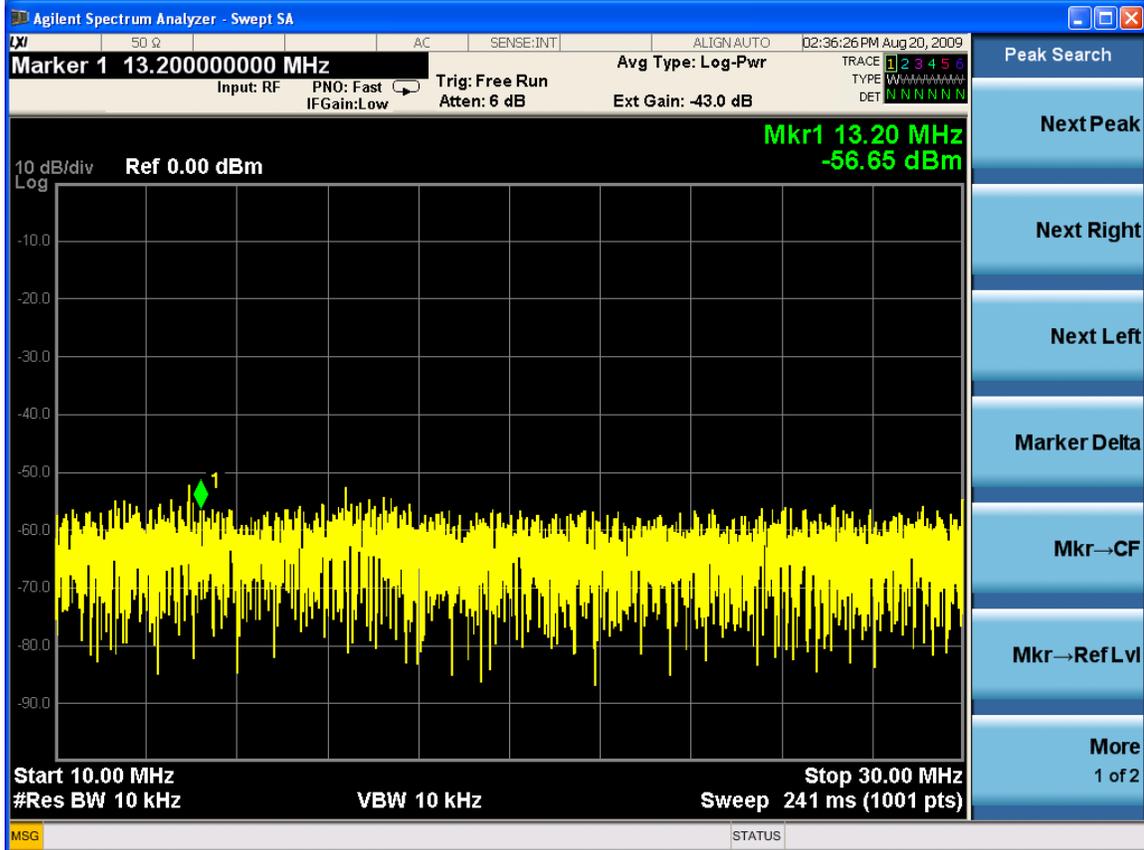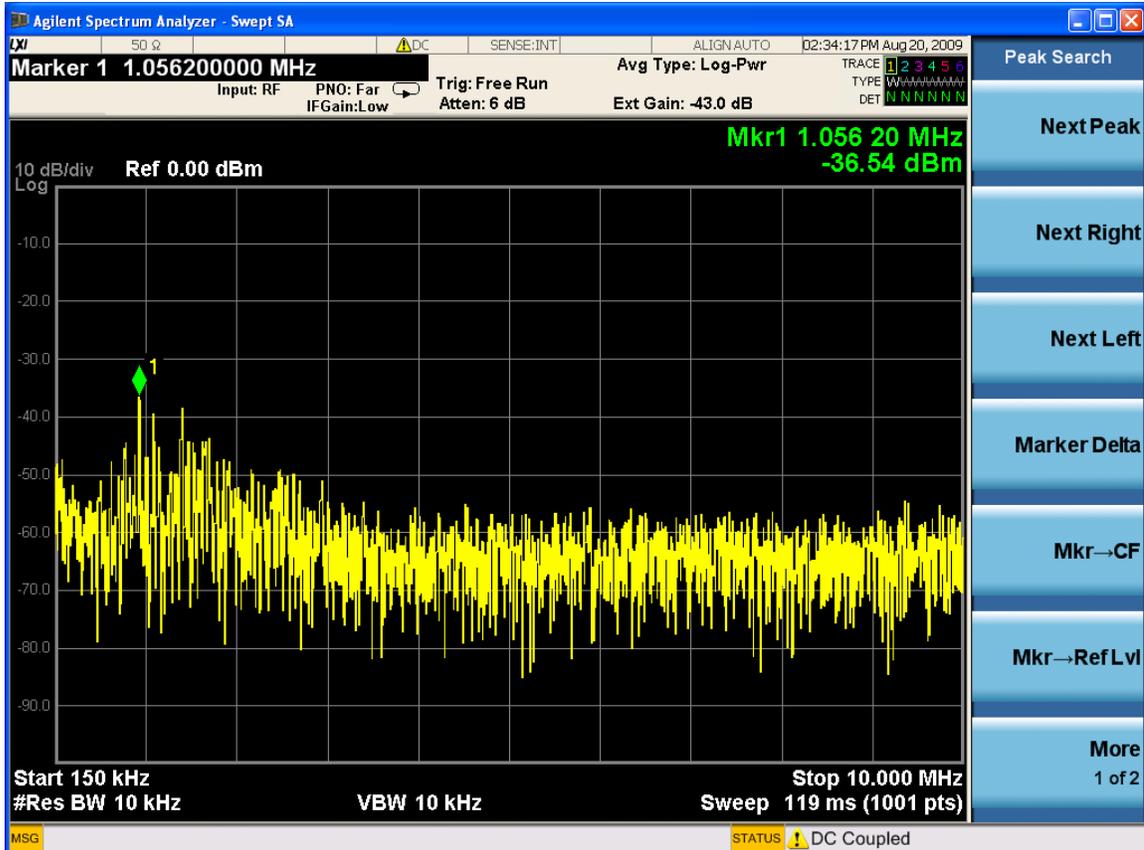

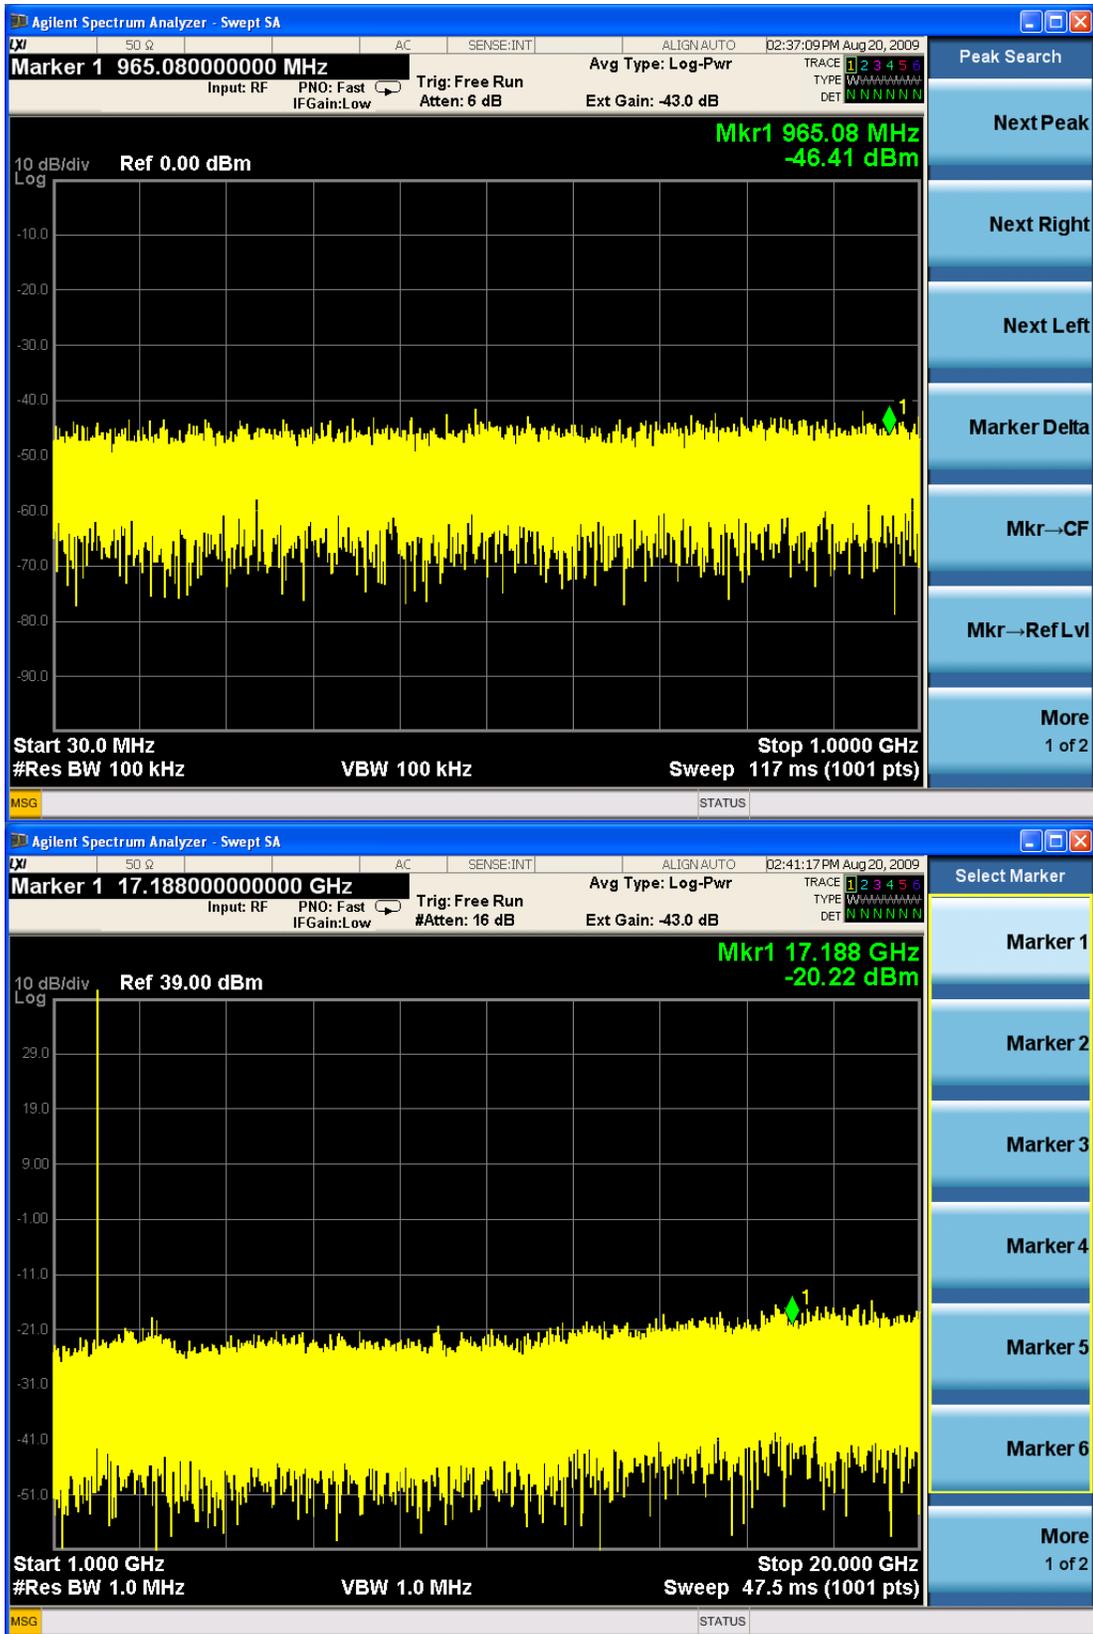

* The highest point is in working frequency block

10 OCCUPIED BANDWIDTH

Applicable Standard: FCC §2.1049 §24.229 §24.238 IC § RSS Gen 4.6.1

Test Equipment List and Details :

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2009-4-10	2010-4-9
DST	DST100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

The RF out of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. The resolution bandwidth of the spectrum analyzer was set at 1% of the span or higher and 99%Power bandwidth was recorded.

Environmental Conditions

Temperature:	20 ° C
Relative Humidity:	53%
ATM Pressure:	1009mbar


The testing was performed by Wei bin on Aug 20, 2009.



Test Result: Pass

Test Mode: Transmitting CDMA

Test Data

Frequency (MHz)	Channel	99% Power Bandwidth (MHz)	Limit (MHz)
1980.65/1987.5/1994.35	1013/1150/1287	1.2065/1.2104/1.2034	<1.25

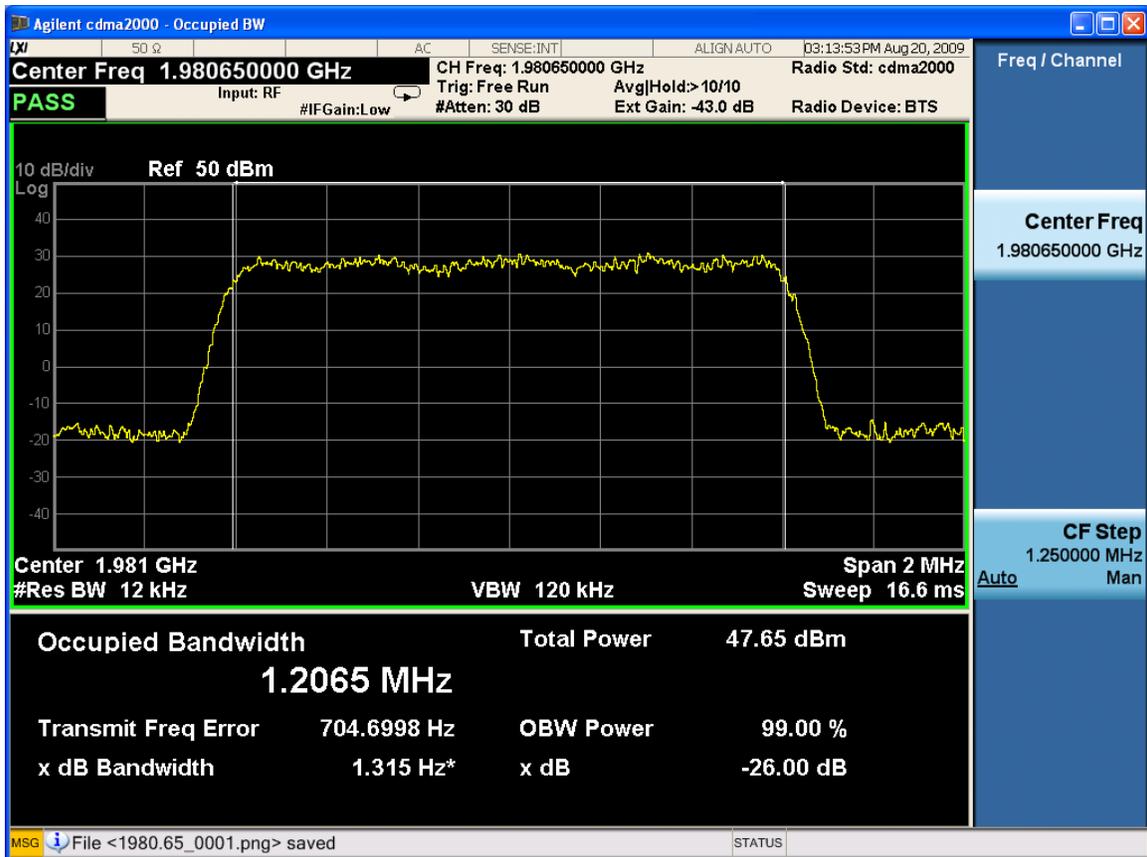

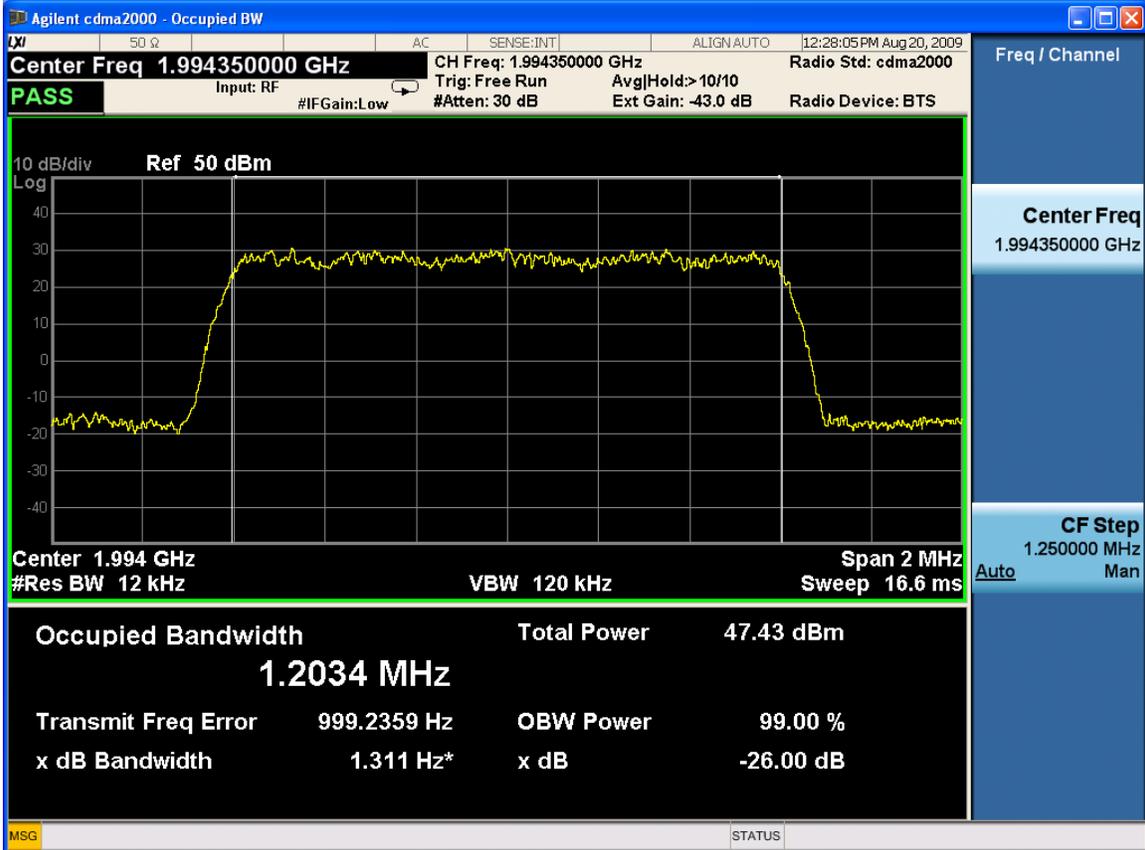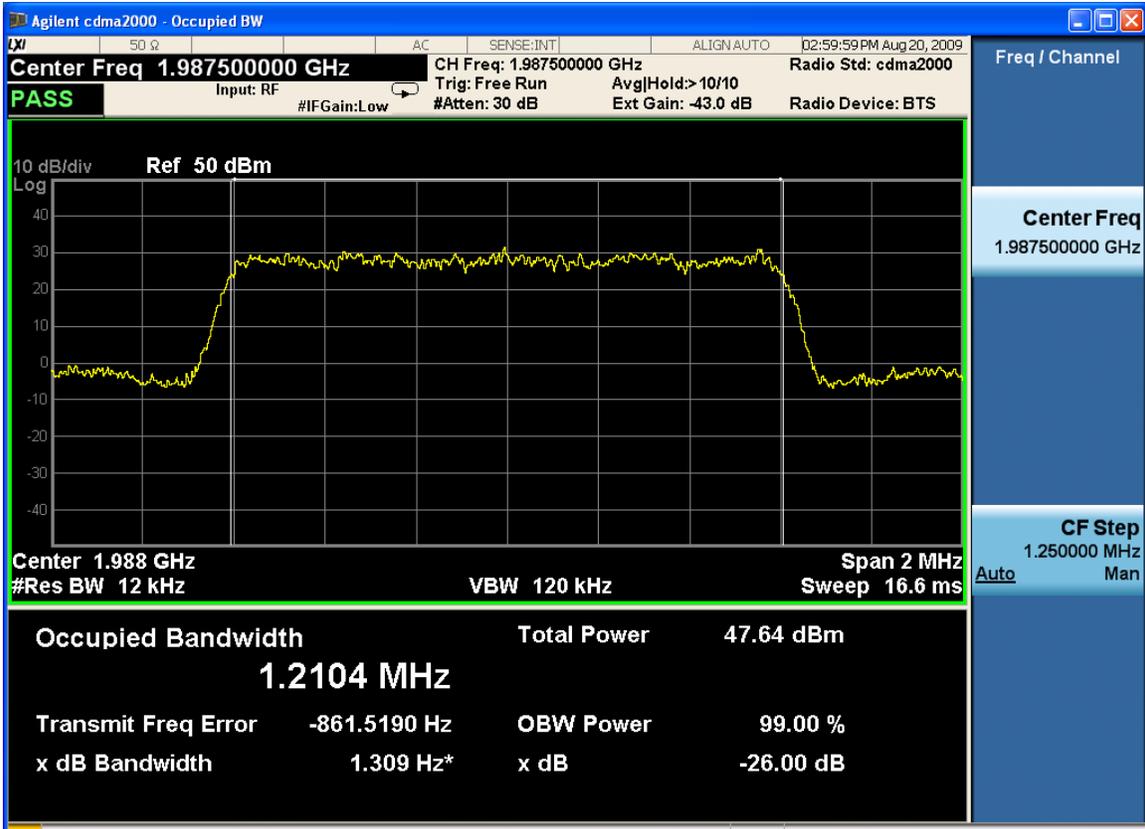

11 BAND EDGES

Applicable Standard: FCC §24.238 IC §RSS 133 6.5

According to §2.1051 and §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (p) by a factor of at least $43 + 10 \log(p)$ dB. The limit (dBm) should $< P - (43 + 10 \log(P)) = -13 \text{dBm}$.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2009-4-10	2010-4-9
DST	DST100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

Test Data Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53%
ATM Pressure:	1009mbar

The testing was performed by Wei bin on Aug 31, 2009


Test Result: Pass

Test Mode: Transmitting CDMA

Test Data


four carriers

Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1980.65/1981.90/1983.15/1984.4	-26.404	-13.00
1985.95/1987.2/1988.45/1989.7	-17.567	-13.00
1990.6/1991.85/1993.10/1994.35	-26.106	-13.00

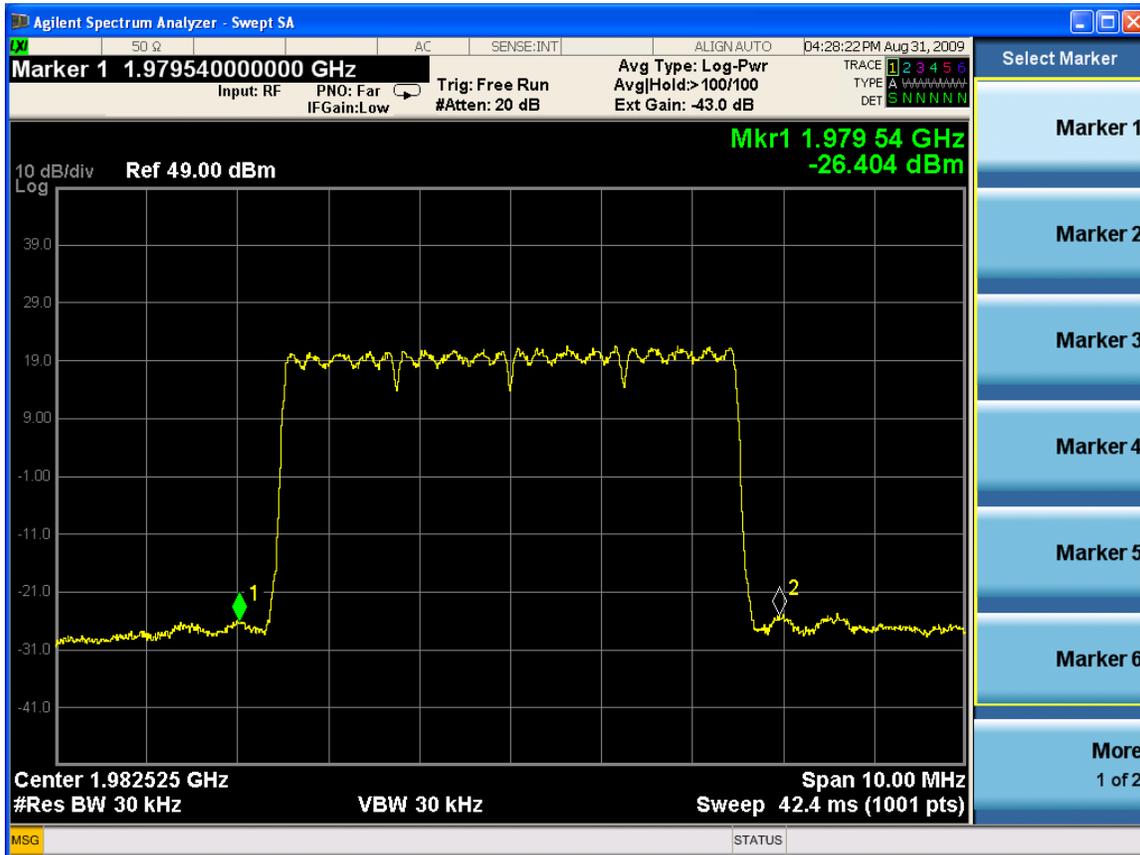

one carriers

Frequency channel	Channel	Max bandedge Emission (dBm)	Limit (dBm)
1980.65	1013	-21.505	-13.00
1987.50	1150	-23.097	-13.00
1994.35	1287	-27.082	-13.00

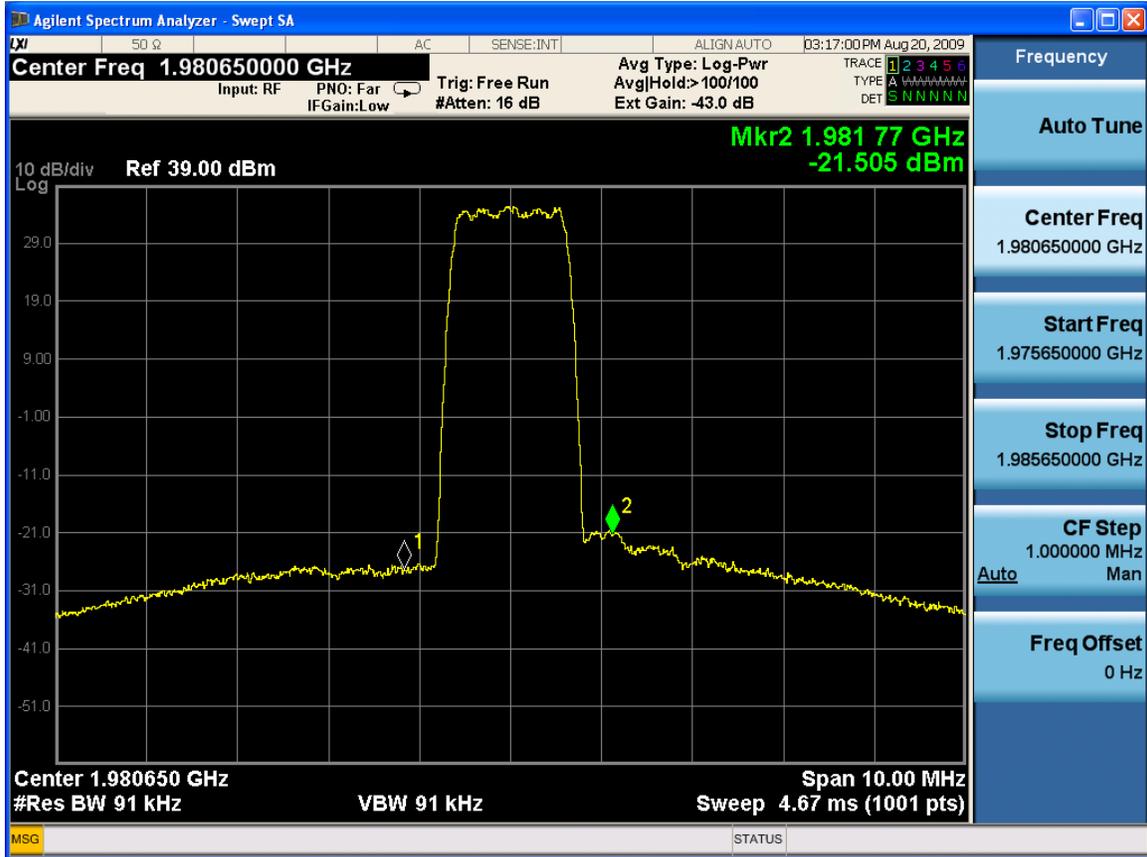

12 FREQUENCY STABILITY

Applicable Standard: FCC § 2.1055 § 24.235 IC §RSS 133 6.3 §RSS Gen 4.7

Requirements: FCC § 2.1055 (a)(d), Part24.235 and IC RSS 133 §6.3, RSS Gen §4.7
The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
GZ-ESPEC	Temperature Chamber	GRW-120	00020268	2009-3-8	2010-3-7
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2009-4-10	2010-4-9
DST	DST100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Spectrum Analyzer via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 150 minutes, the frequency output was recorded from the counter.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

Environmental Conditions

Normal condition:	25° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

The testing was performed by Wei bin on Aug 20, 2009.

Test Result: Pass

Test Mode: Transmitting CDMA

Test Data**Frequency Stability Versus Temperature**

Frequency Stability vs. Temperature				
Temperature °C	Power Supplied Vac	Frequency Measure Error Hz	Error ppm	Limit 0.02ppm
f=1980.65 MHz Channel 1013				
-40	-48	-13.4	-0.00676	PASS
-30	-48	-13.1	-0.00614	PASS
-20	-48	-12.9	-0.00651	PASS
-10	-48	-12.7	-0.00641	PASS
0	-48	-11.2	-0.00565	PASS
10	-48	-10.4	-0.00525	PASS
20	-48	-9.8	-0.00495	PASS
30	-48	-9.1	-0.00459	PASS
40	-48	-9.1	-0.00459	PASS
50	-48	-9.1	-0.00459	PASS
55	-48	-9.1	-0.00459	PASS
f=1987.5 MHz Channel 1150				
-40	-48	-7.8	-0.00392	PASS

-30	-48	-10.5	-0.00528	PASS
-20	-48	-12.0	-0.00604	PASS
-10	-48	-12.0	-0.00604	PASS
0	-48	-10.2	-0.00513	PASS
10	-48	-10.2	-0.00513	PASS
20	-48	-11.2	-0.00564	PASS
30	-48	-12.7	-0.00639	PASS
40	-48	-12.6	-0.00634	PASS
50	-48	-11.7	-0.00589	PASS
55	-48	-10.6	-0.00533	PASS
f=1994.35 MHz Channel 1287				
-40	-48	-10.9	-0.00547	PASS
-30	-48	-10.9	-0.00547	PASS
-20	-48	-10.9	-0.00547	PASS
-10	-48	-11.3	-0.00567	PASS
0	-48	-12.6	-0.00632	PASS
10	-48	-13.2	-0.00662	PASS
20	-48	-12.7	-0.00637	PASS
30	-48	-10.9	-0.00547	PASS
40	-48	-10.7	-0.00537	PASS
50	-48	-12.5	-0.00627	PASS
55	-48	-13.7	-0.00687	PASS

Frequency Stability Versus Voltage

Frequency Stability vs. Voltage				
VoltageVac	Temperature °C	Frequency Measure Error Hz	Error ppm	Limit 0.02ppm
f=1980.65 MHz Channel 1013				
-40	25	-14.8	-0.00747	PASS
-44	25	-14.6	-0.00737	PASS
-48	25	-10.8	-0.00545	PASS
-52	25	-14.2	-0.00717	PASS
-57	25	-13.6	-0.00687	PASS
f=1987.5 MHz Channel 1150				
-40	25	-9.7	-0.00488	PASS
-44	25	-13.1	-0.00659	PASS
-48	25	-11.5	-0.00579	PASS
-52	25	-11.1	-0.00558	PASS
-57	25	-10.9	-0.00548	PASS
f=1994.35 MHz Channel 1287				
-40	25	-13.3	-0.00667	PASS
-44	25	-9.5	-0.00476	PASS
-48	25	-7.2	-0.00361	PASS
-52	25	-12.0	-0.00602	PASS
-57	25	-11.5	-0.00577	PASS

13 RECEIVER SPURIOUS EMISSION

Applicable Standard: IC §RSS Gen 6 §RSS 133 6. 6.

Test Equipment List and Details

Manufacturer	Equipment	Model	Serial Number	Last Cal.	Cal. Interval
Sunol Sciences	Horn Antenna	DRH-118	A052604	2008-09-25	1 Year
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2009-03-11	1 Year
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2008-08-28	1 Year
HP	Preamplifier	8449B	3008A00277	2008-09-12	1 Year
HP	Signal Generator	HP8657A	2849U00982	2008-10-16	1 Year
HP	Amplifier	HP8447D	2944A09795	2009-08-02	1 Year
HP	Synthesized Sweeper	8341B	2624A00116	2008-11-07	1 Year
COM POWER	Dipole Antenna	AD-100	041000	2008-09-25	1 Year
A.H. System	Horn Antenna	SAS-200/57 1	135	2009-05-17	1 Year
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	1100.0008.02	2008-09-26	1 Year


***statement of traceability:** BACL Corporation attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiated emissions measurement at the EMC lab of BACL Corp. is 3.6dB.

EUT Setup

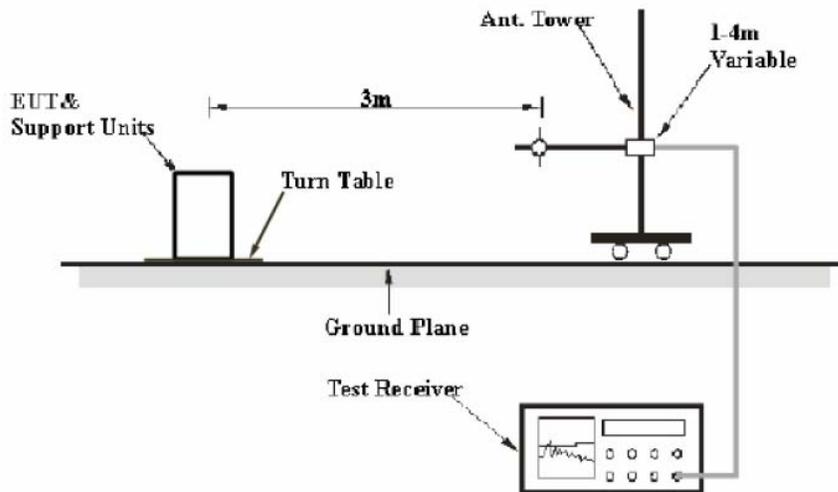

The radiated emission tests were performed in the 3-meter Chamber, using the setup accordance with the TIA/EIA 603-C. The specification used were IC RSS 133 clause 6.6 limits and RSS Gen §6.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable. (During the test, the transmitter keeping turn off)

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

Limit for receiver spurious emission as below:

Spurious Frequency (MHz)	Field Strength (microvolt/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960	500

Test Results Summary: PASS

Environmental Conditions


Temperature:	26°C
Relative Humidity:	60 %
ATM Pressure:	1009 mbar

The testing was performed by BACL corporation on 2009-8-10 and 2009-8-17.

Test Result: Pass

Test Mode: Receiving CDMA

Test Data

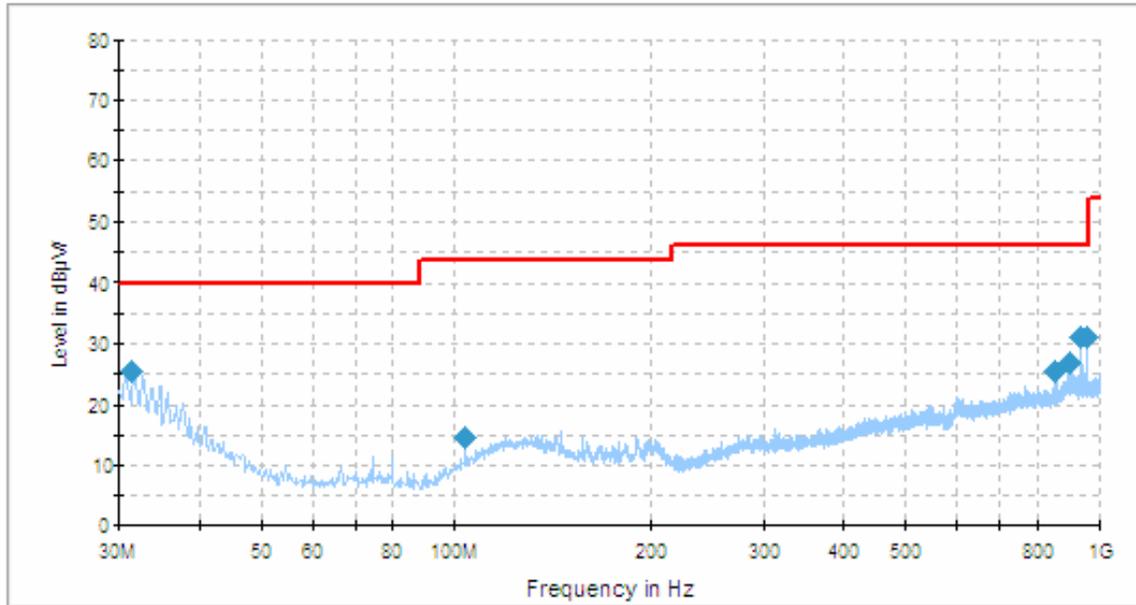

Frequency (MHz)	QuasiPeak (dB µ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB µ V/m)
935.980000	31.3	3000.00	120.000	131.0	H	242.0	-9.7	14.7	46.0
953.682500	31.2	3000.00	120.000	131.0	H	265.0	-9.6	14.8	46.0
850.377500	25.4	3000.00	120.000	156.0	H	50.0	-9.6	20.6	46.0
31.387500	25.3	3000.00	120.000	298.0	H	278.0	-9.5	14.7	40.0
103.720000	14.6	3000.00	120.000	400.0	H	37.0	-9.5	28.9	43.5
901.300000	27.0	3000.00	120.000	145.0	H	136.0	-9.5	19.0	46.0

Receiving spurious emission (vertical and horizontal)