

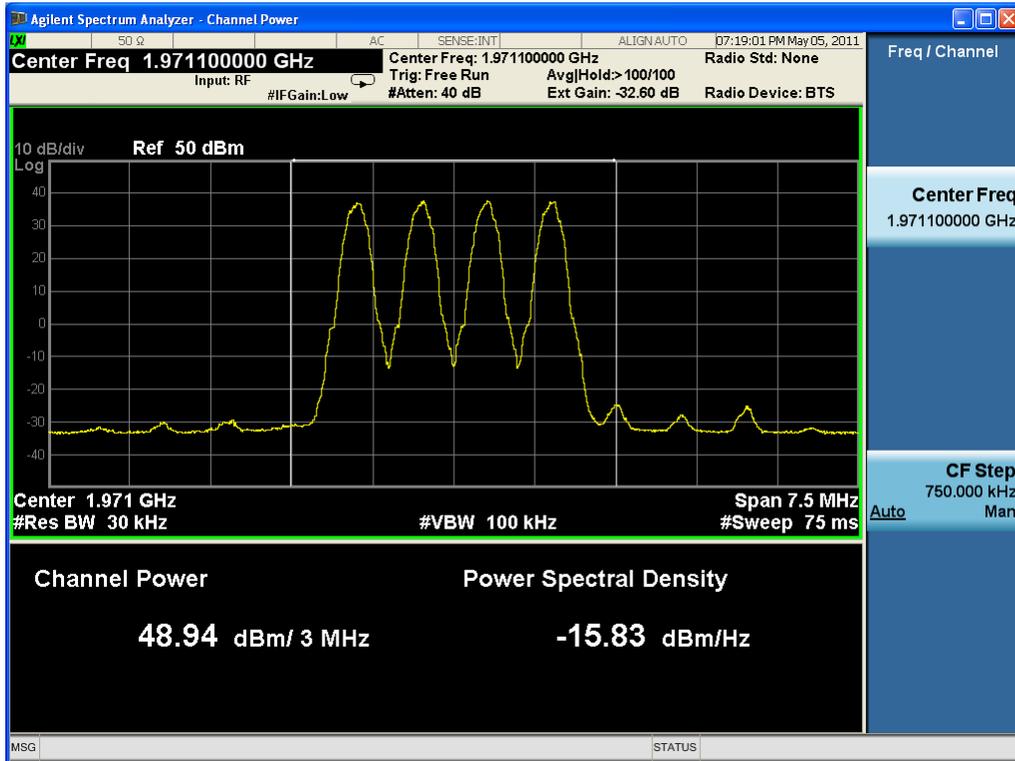




Modulation	Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
GMSK	1951.1	1950.2/1950.8/1951.4/1952	48.97
	1971.1	1970.2/1970.8/1971.4/1972	48.94
	1988.9	1988/1988.6/1989.2/1989.8	48.99

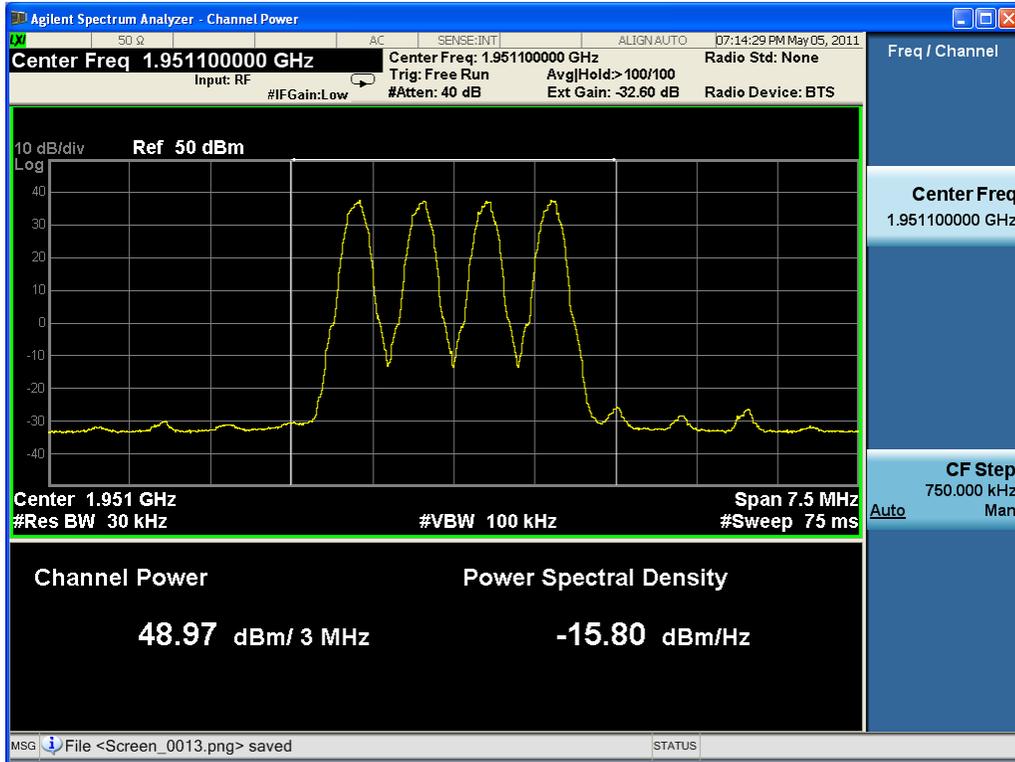


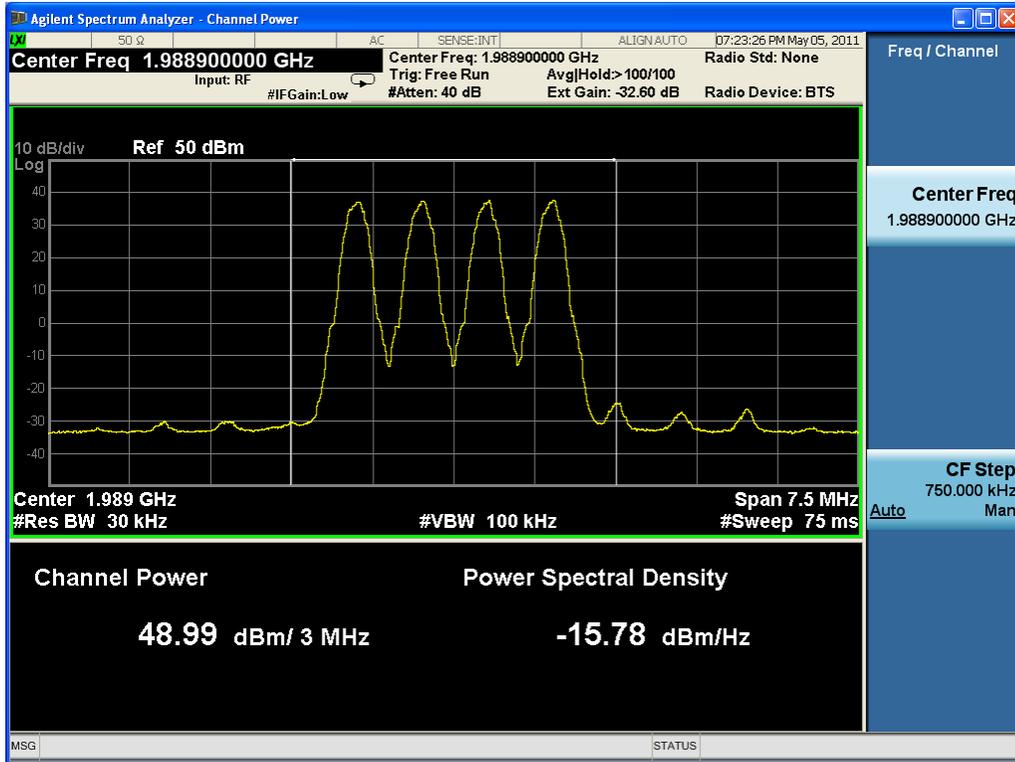



Three carriers


Modulation	Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
8PSK	1950.8	1950.2/1950.8/1951.4	47.02
	1970.8	1970.2/1970.8/1971.4	47.03
	1989.2	1988.6/1989.2/1989.8	47.03

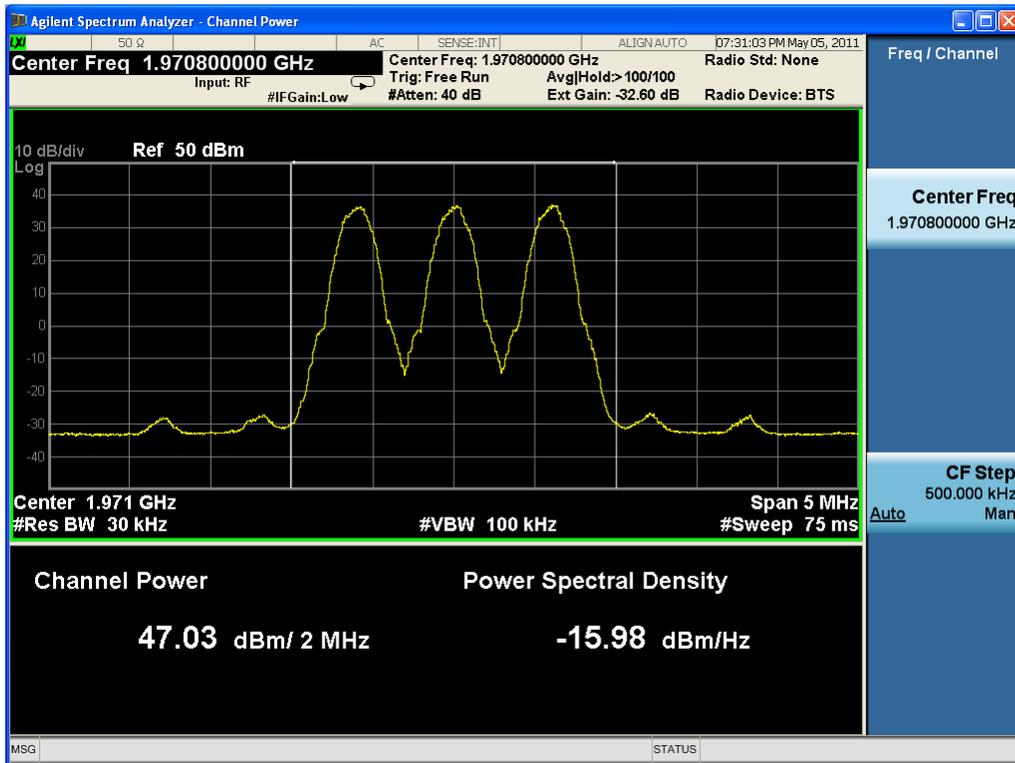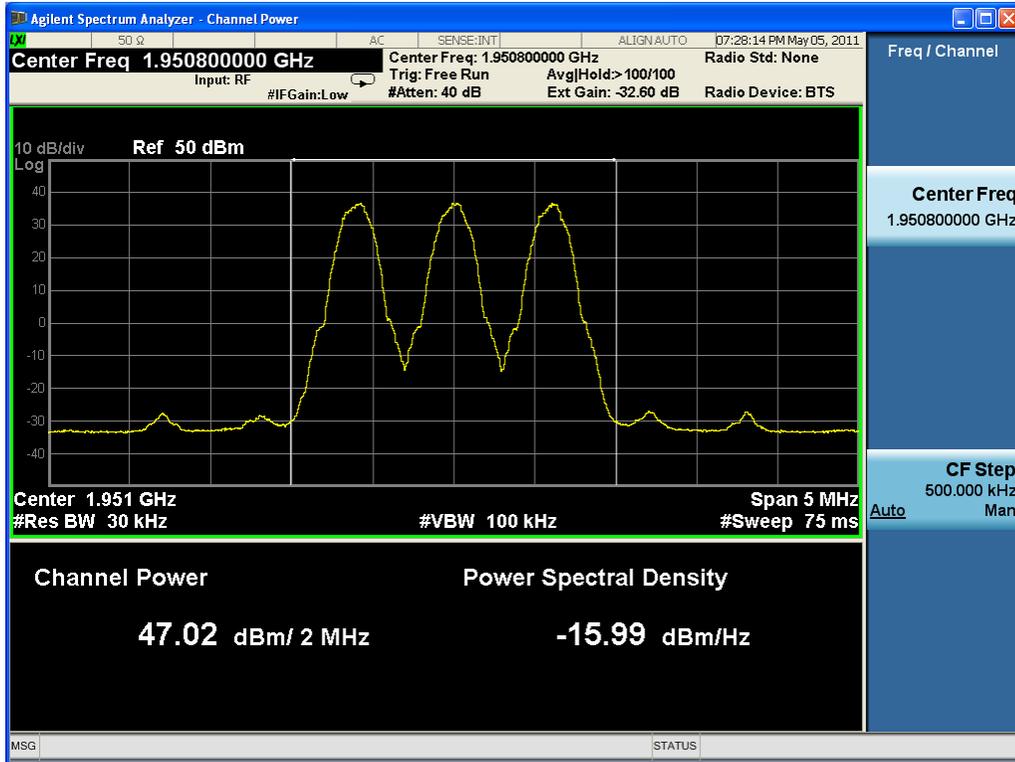

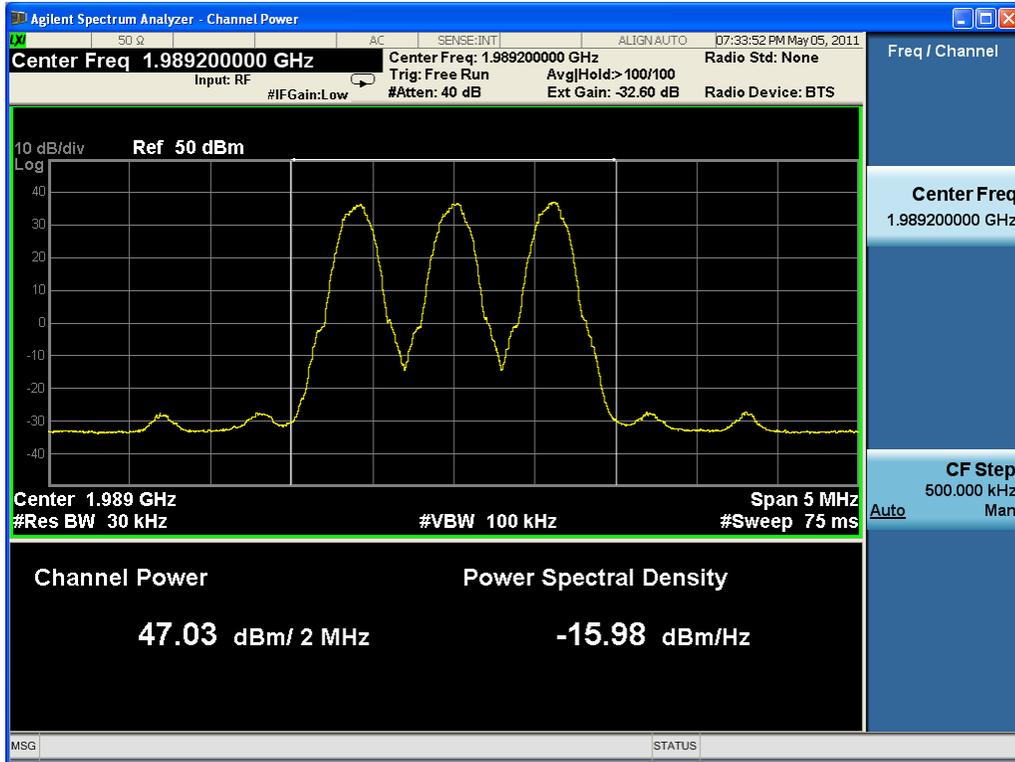



Modulation	Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
GMSK	1950.8	1950.2/1950.8/1951.4	48.95
	1970.8	1970.2/1970.8/1971.4	48.95
	1989.2	1988.6/1989.2/1989.8	49.05

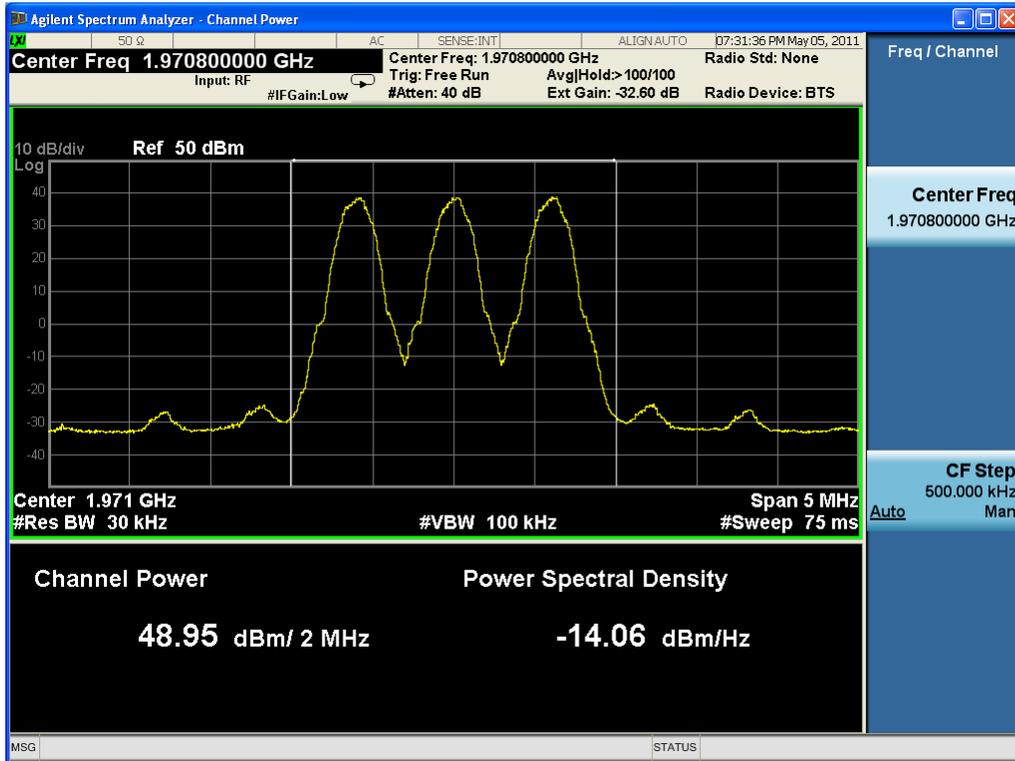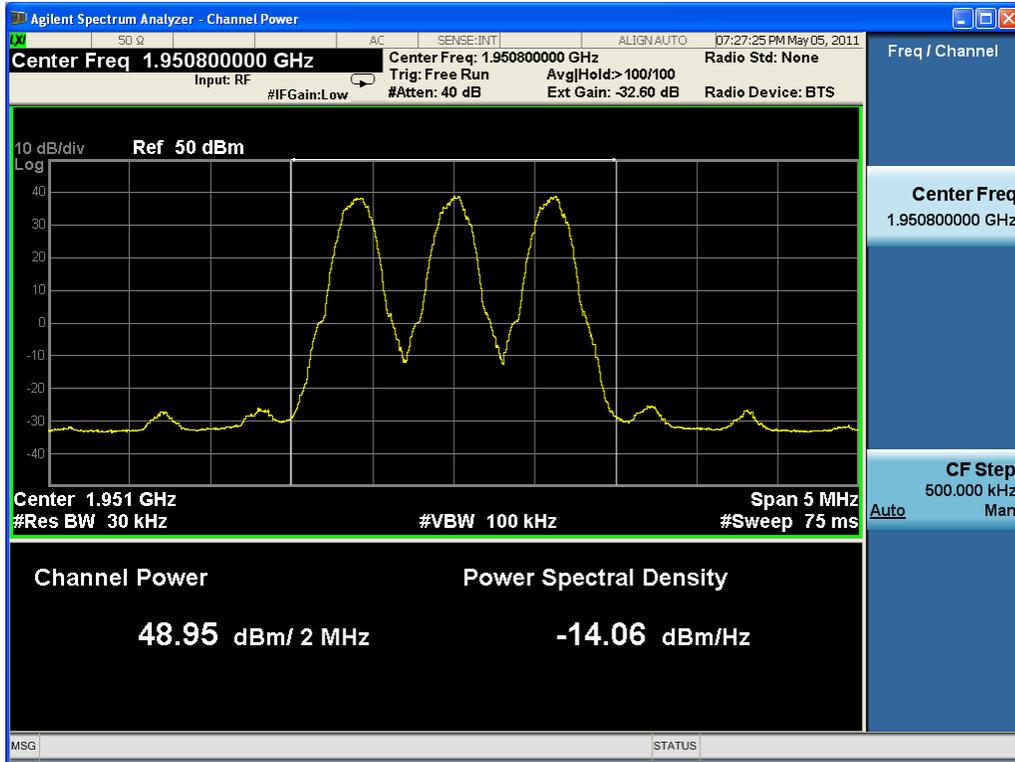


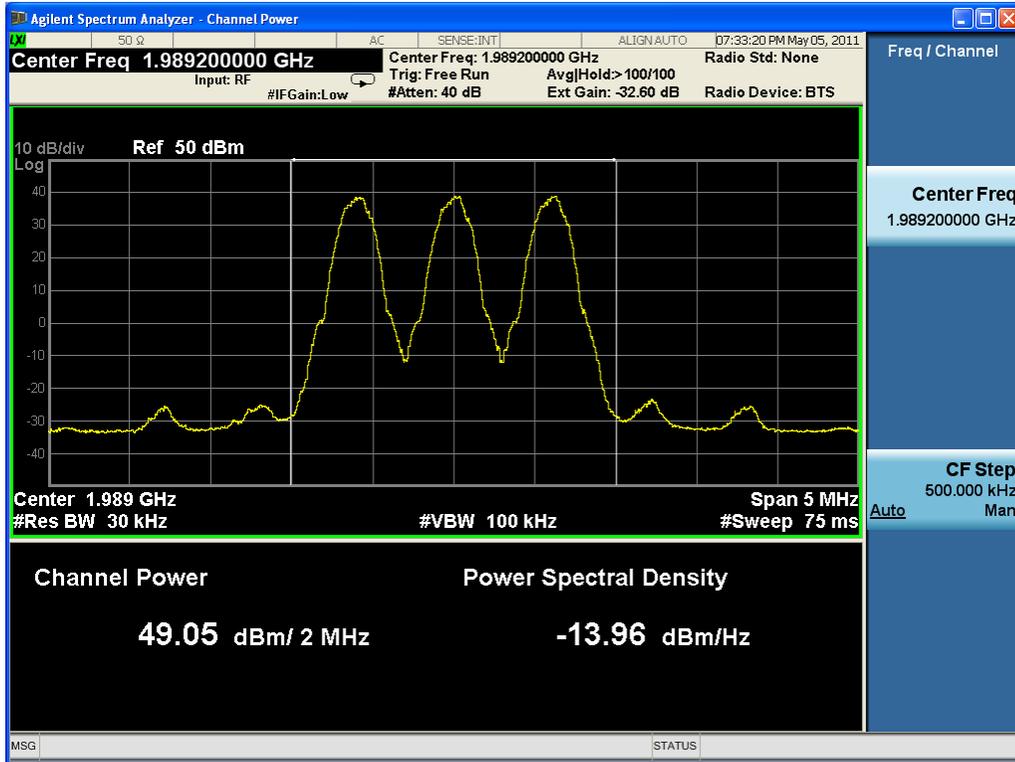



Two carriers


Modulation	Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
8PSK	1950.5	1950.2/1950.8	47.04
	1970.5	1970.2/1970.8	47.04
	1989.5	1989.2/1989.8	47.01

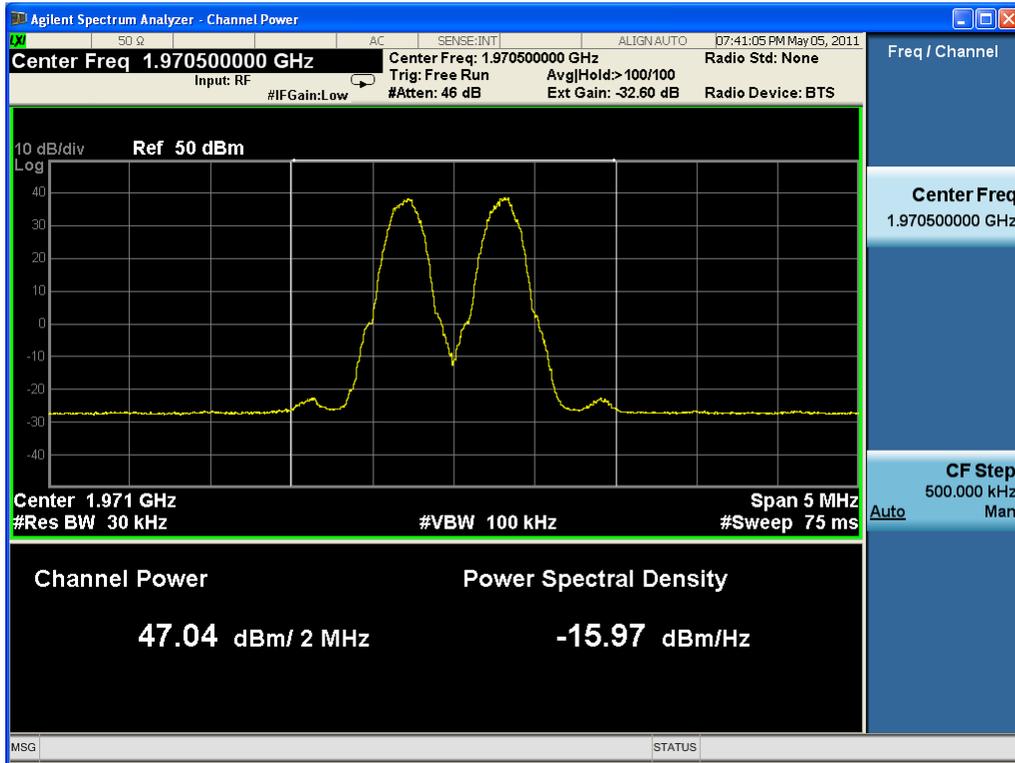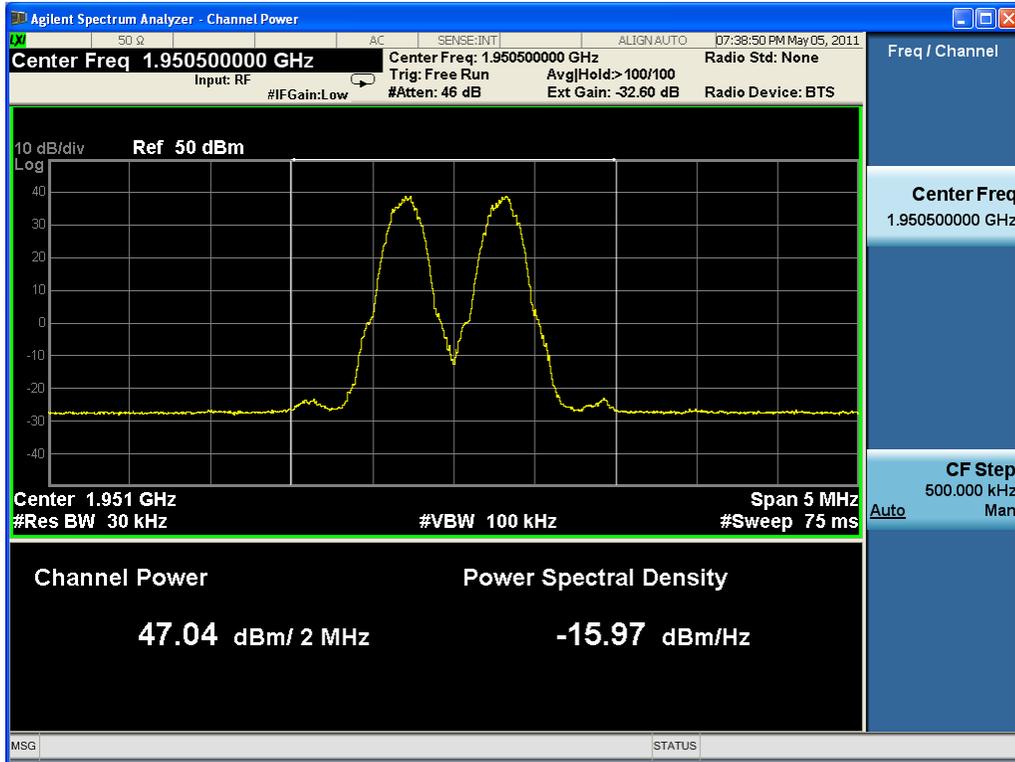

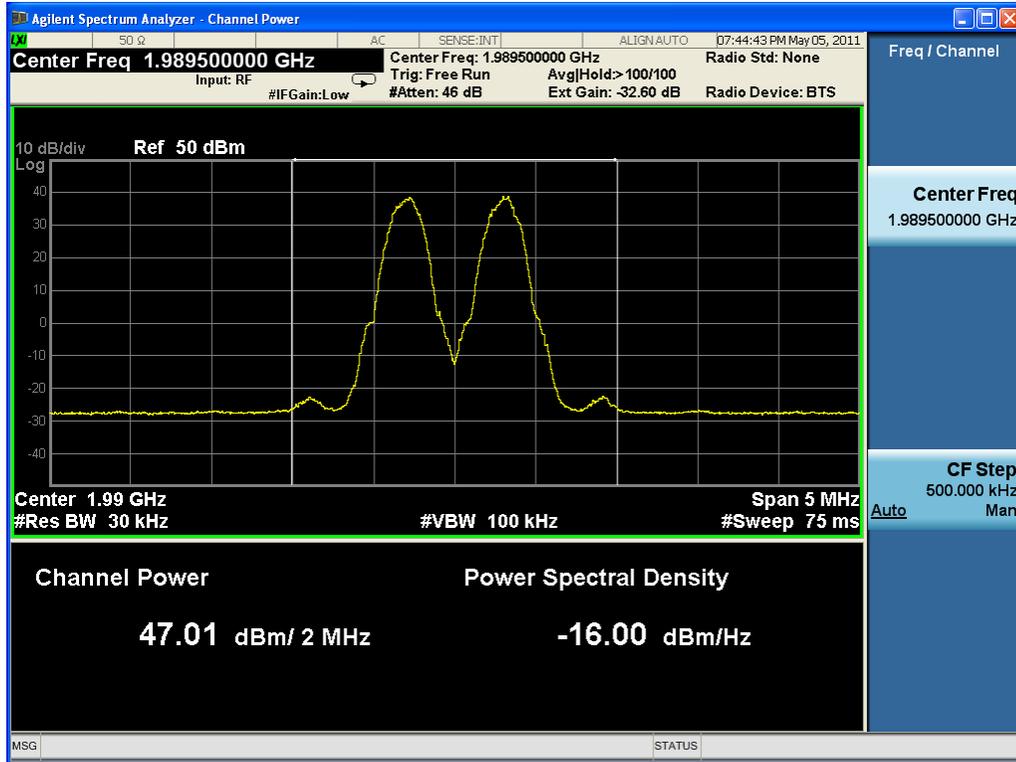



Modulation	Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
GMSK	1950.5	1950.2/1950.8	48.95
	1970.5	1970.2/1970.8	49.02
	1989.5	1989.2/1989.8	49.02

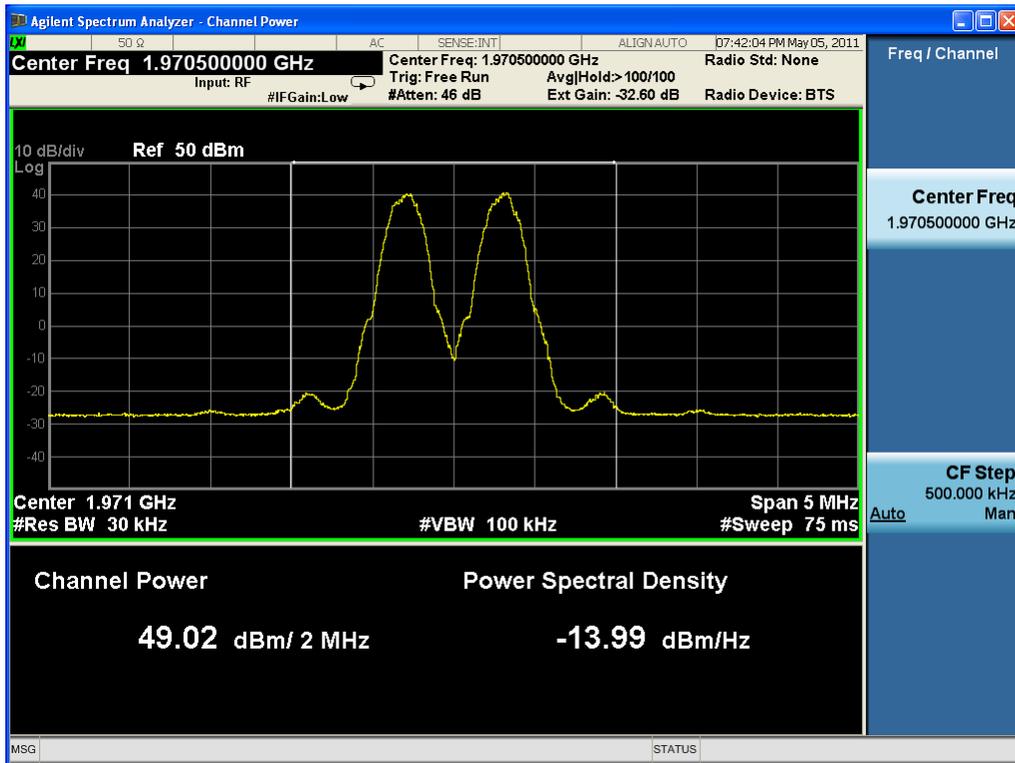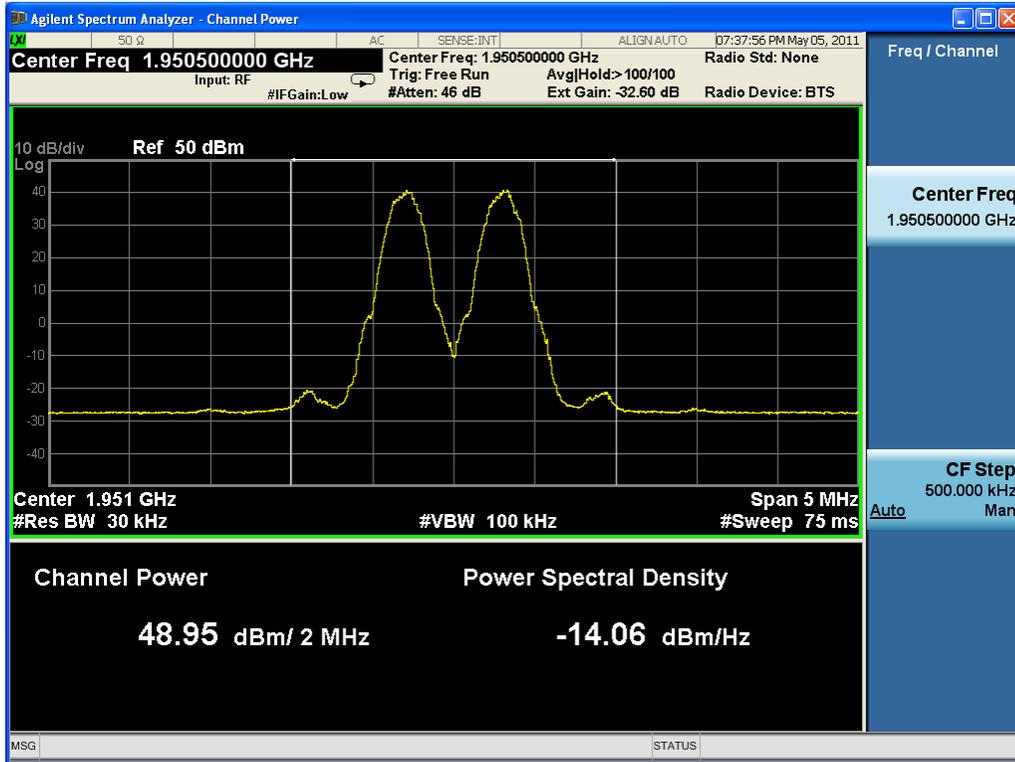


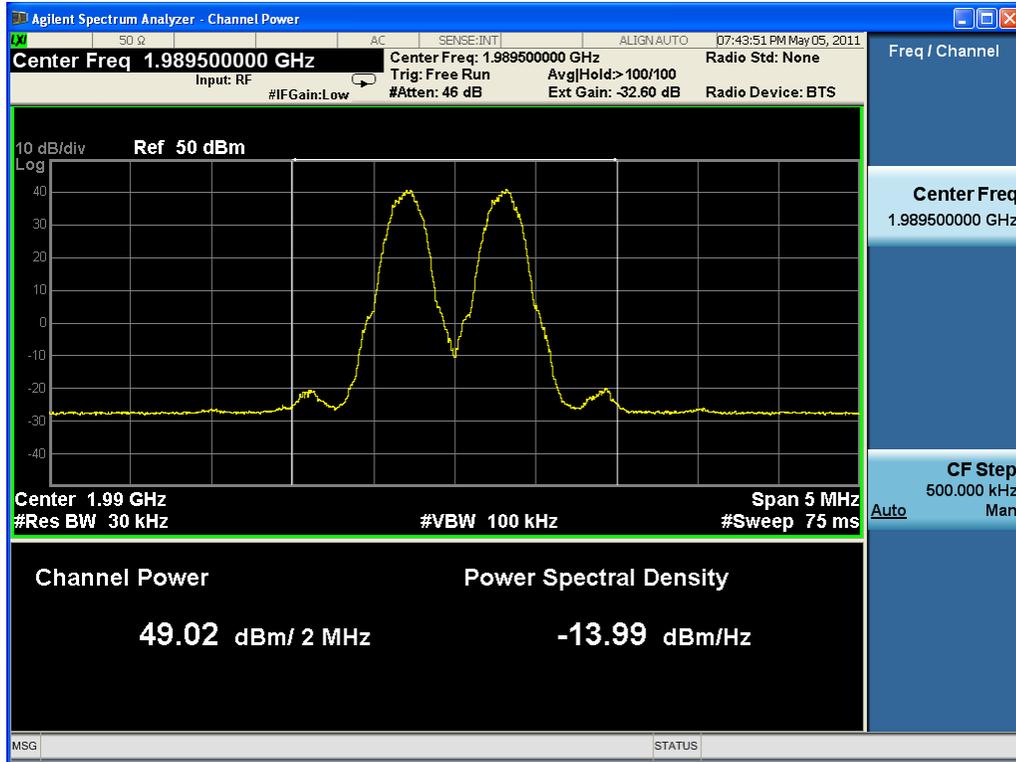



One carrier


Modulation	Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
8PSK	1950.2	1950.2	46.93
	1970.2	1970.2	47.05
	1989.8	1989.8	47.07

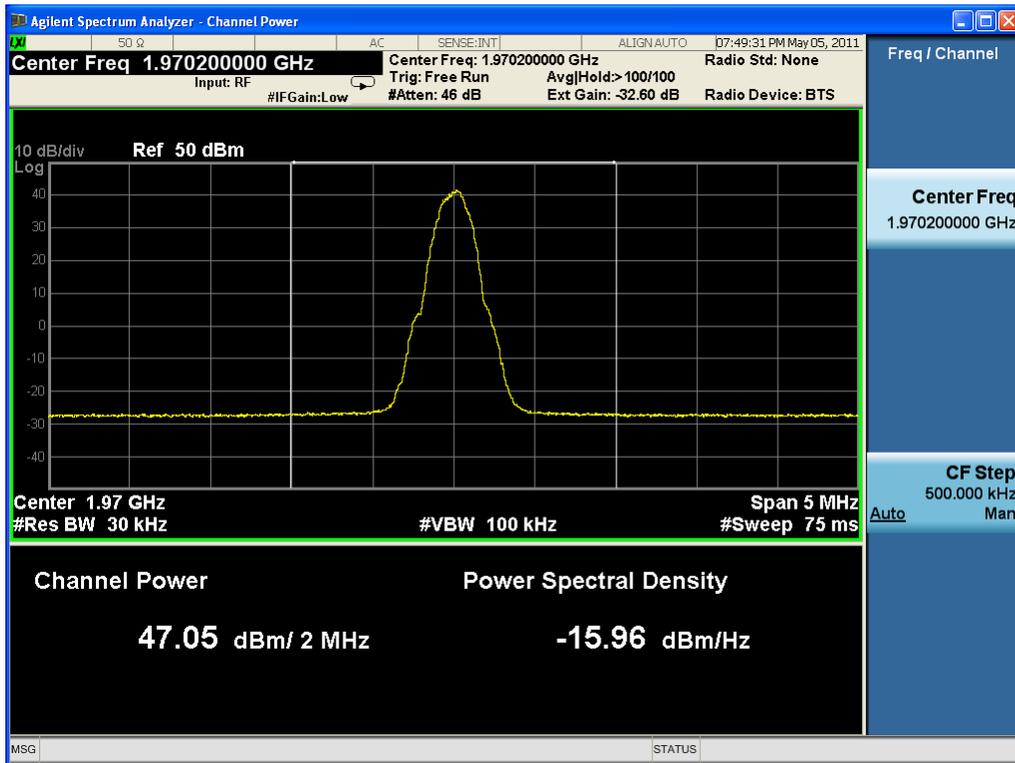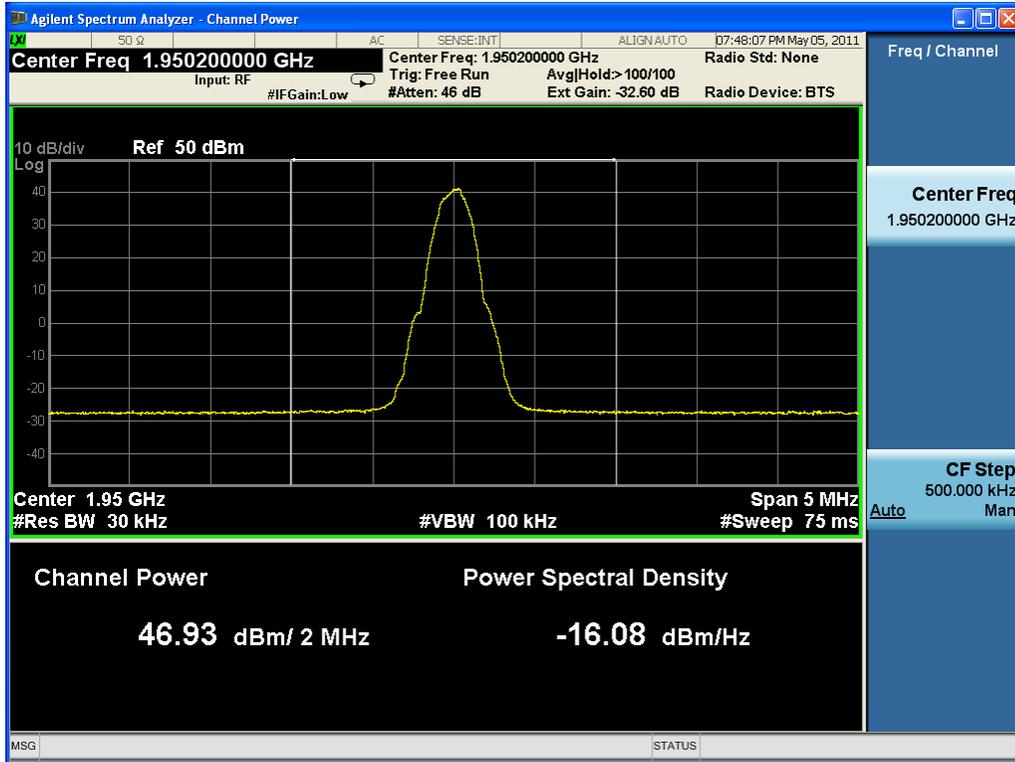

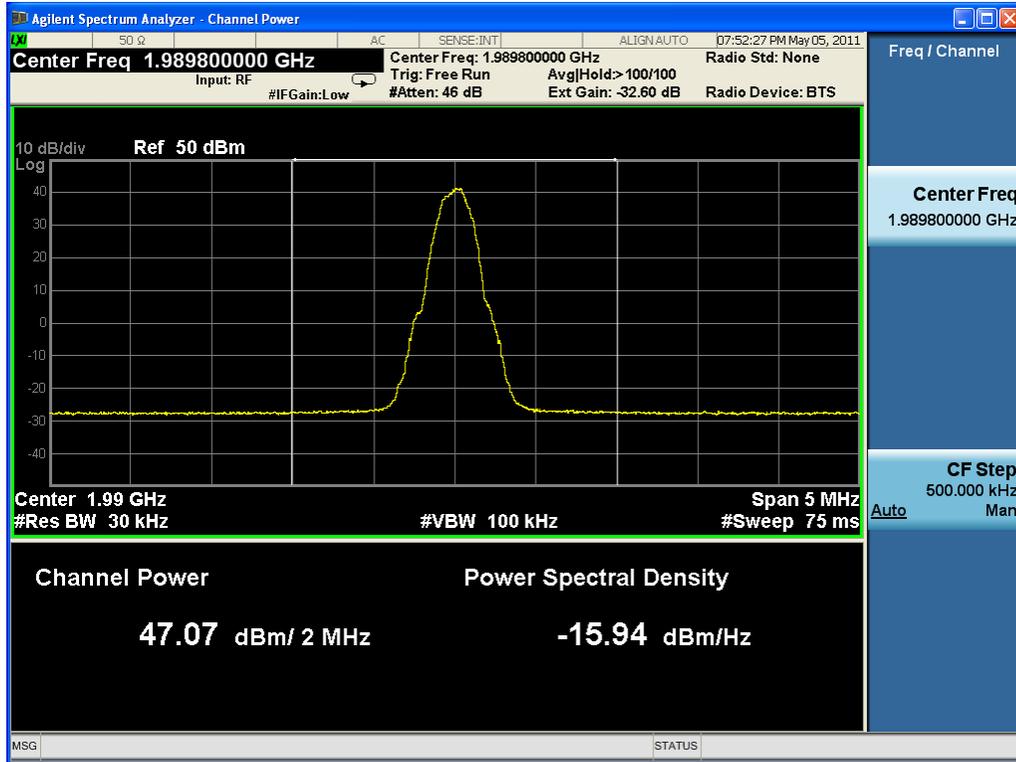

Modulation	Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
GMSK	1950.2	1950.2	48.97
	1970.2	1970.2	49.03
	1989.8	1989.8	49.06

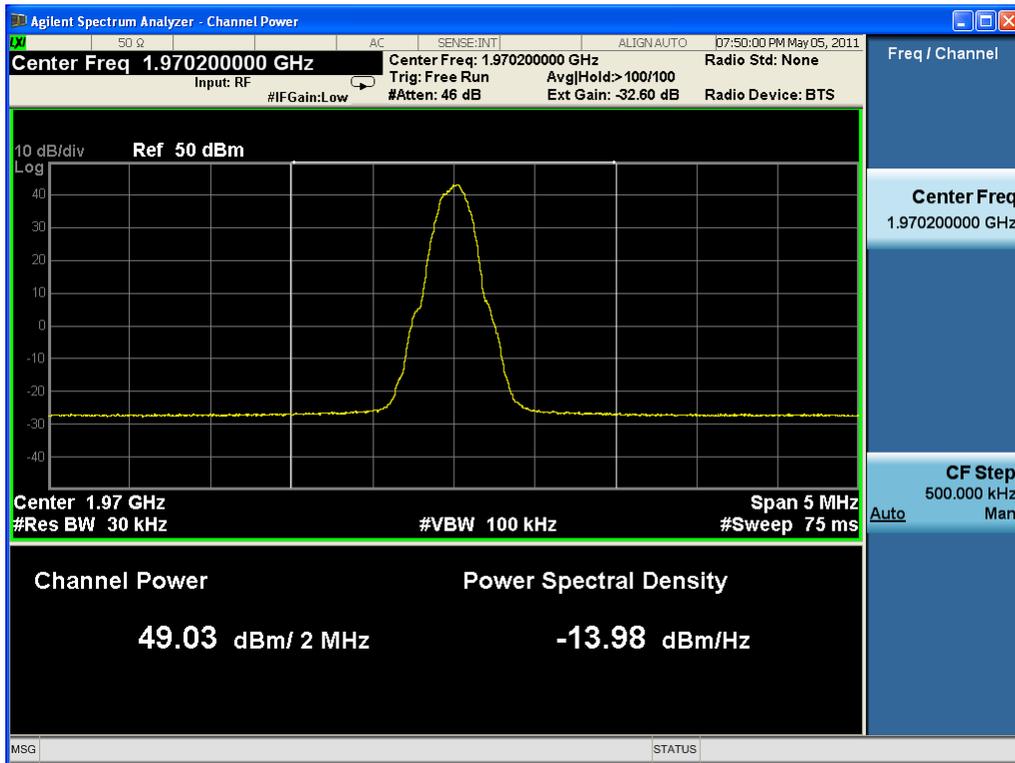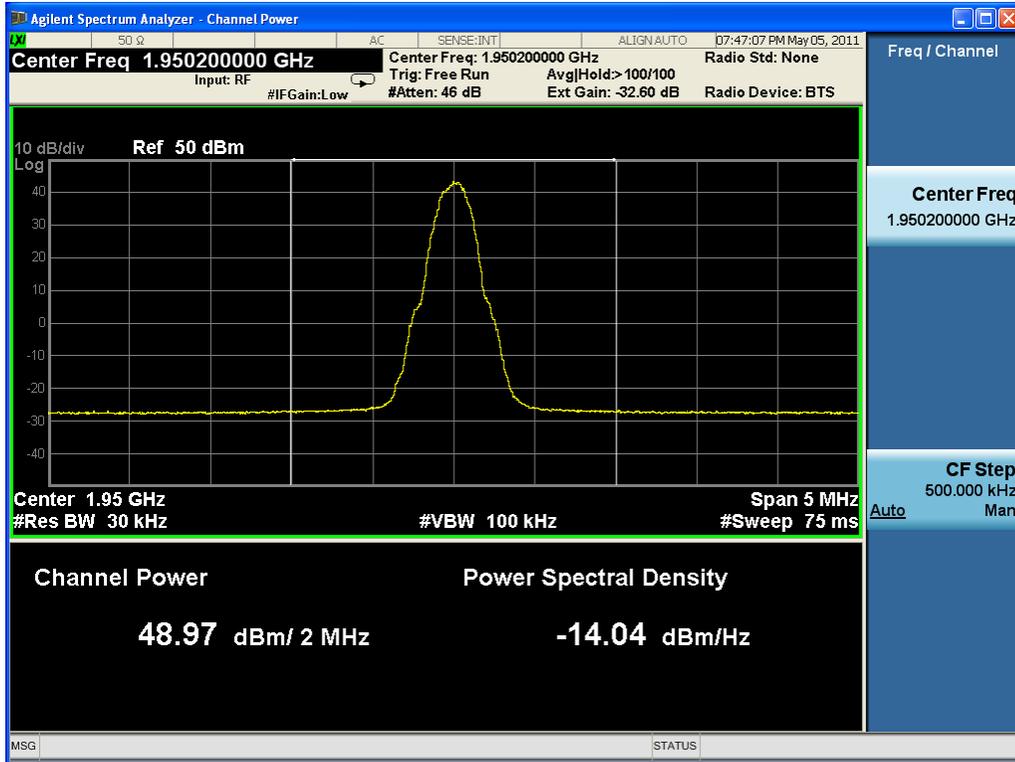

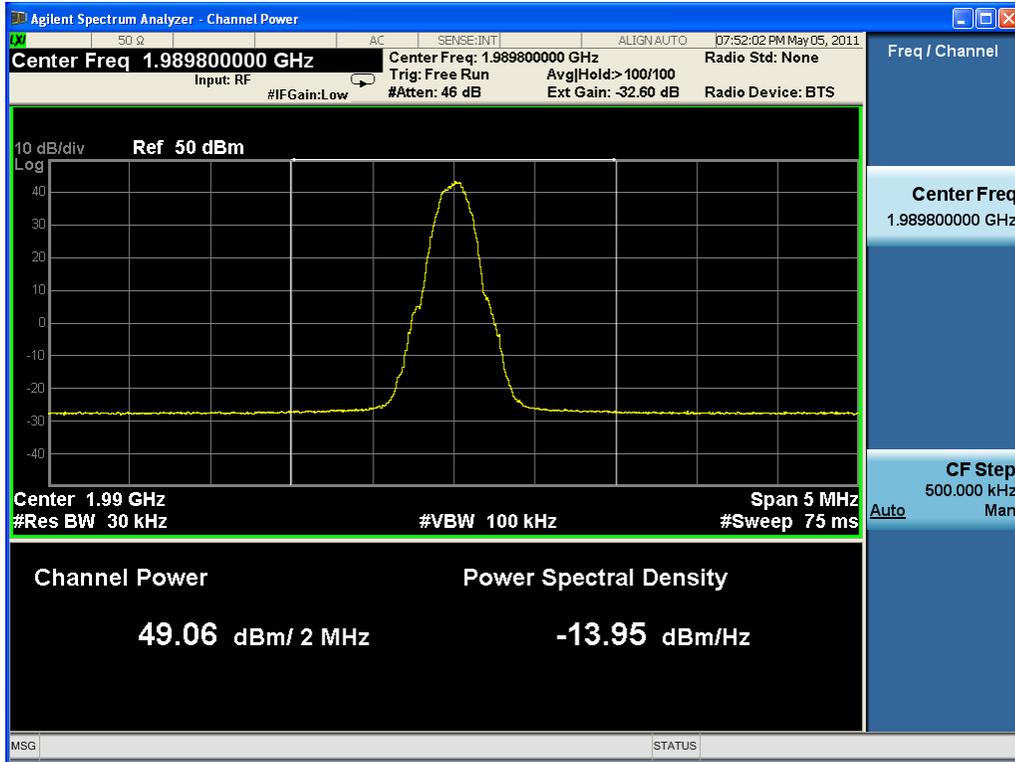

4.2 RF EXPOSURE

Applicable standard: FCC §2.1091 and §1.1037

Limit

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated. Limits for Maximum Permissible Exposure (MPE)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

Test Data

Predication of MPE limit at a given distance
 Equation from page 18 of OET Bulletin 65, Edition 97-01
 $S = EIRP / 4\pi R^2$

Where: S = power density

EIRP= equivalent isotropically radiated power=ERP+2.15dB

R = distance to the center of radiation of the antenna= [(ERP+2.15dB)/4πS]^{1/2}

Maximum EIRP, In general, the equivalent isotropically radiated power (EIRP) of base transmitters and cellular repeaters must not exceed 1640 Watts.

Frequency is between 1500MHz and 100000MHz, and the Maximum S=1.0mW/cm²
 R=3.61m.

This equipment should be installed and operated with minimum distance 3.61m between the radiator& your body.

Test Result: pass

4.3 MODULATION CHARACTERISTIC

Applicable Standard: FCC §2.1047

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
DTS	DTS100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

GSM digital mode is used by EUT.

Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar

Test Result: Pass


Test Mode: Transmitting GSM

Test Data:


Modulation	Frequency (MHz)	Phase Error(°)	Frequency Error(Hz)
8PSK	1950.2	4.048%	0.66
	1970.2	3.844%	0.73
	1989	4.278%	0.017

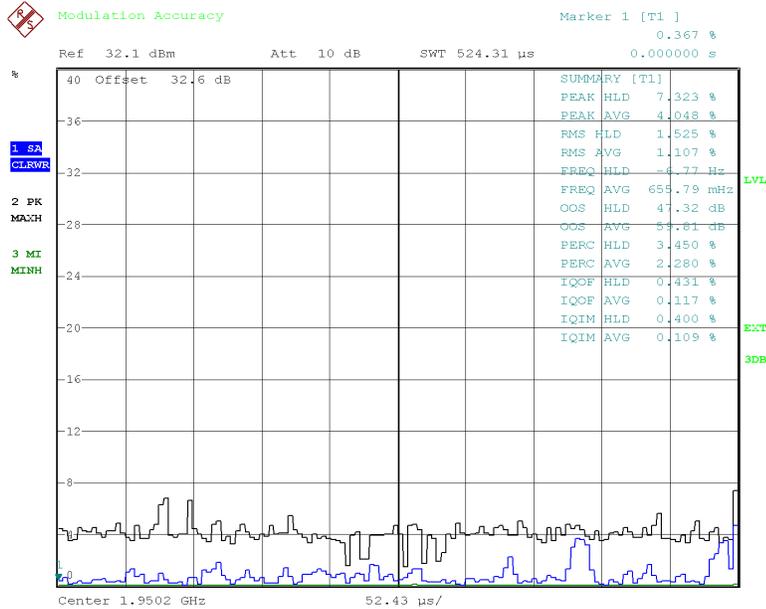

DEMO-BORD-46M-76DB
 Date: 13.MAY.2011 15:41:13

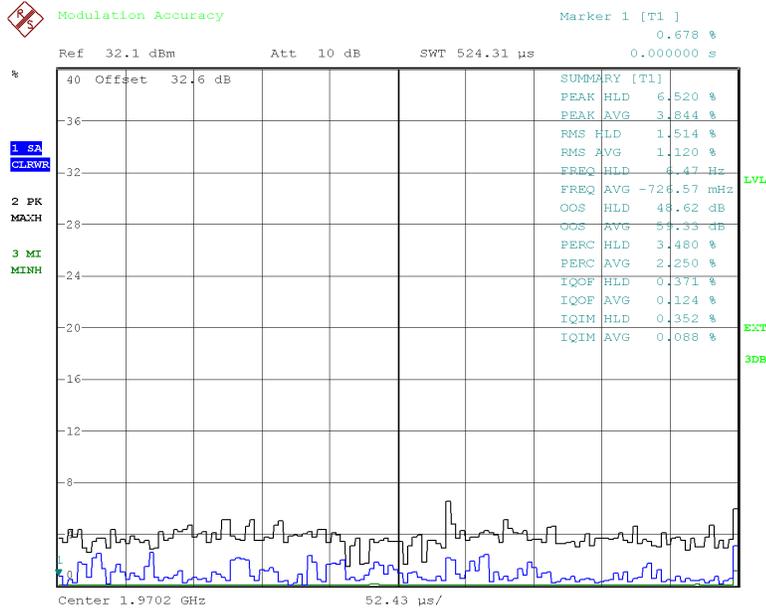


DEMO-BORD-46M-76DB
 Date: 13.MAY.2011 15:46:35

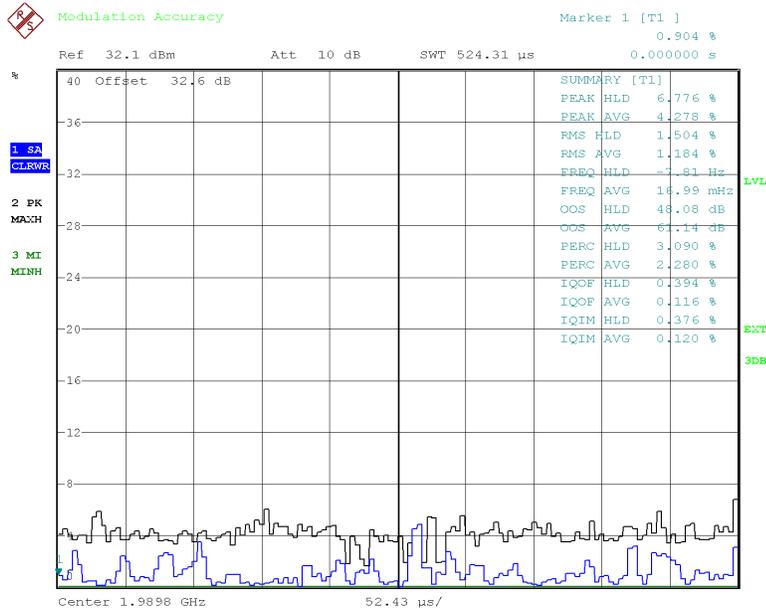


DEMO-BORD-46M-76DB
 Date: 13.MAY.2011 15:48:43


Modulation	Frequency (MHz)	Phase Error(°)	Frequency Error(Hz)
GMSK	1950.2	1.89	0.18
	1970.2	1.78	0.06
	1989.8	1.86	0.05

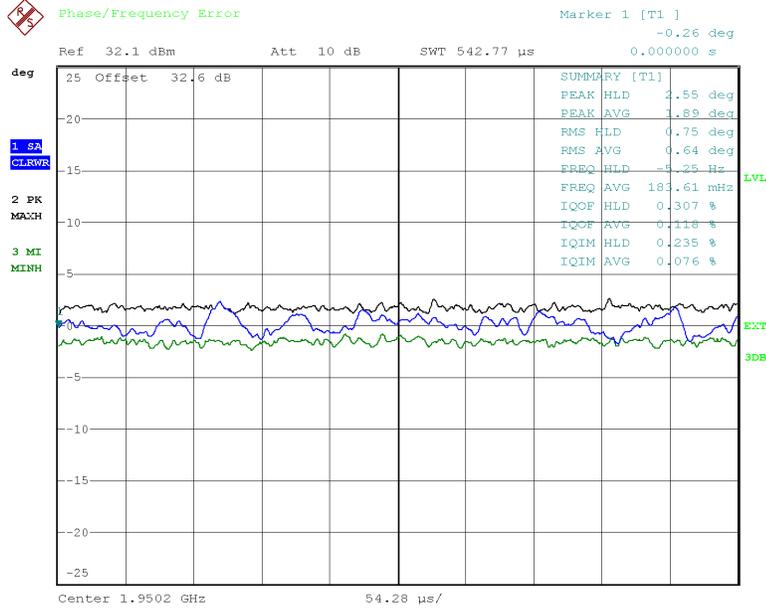

DEMO-BORD-46M-76DB
Date: 13.MAY.2011 15:42:52

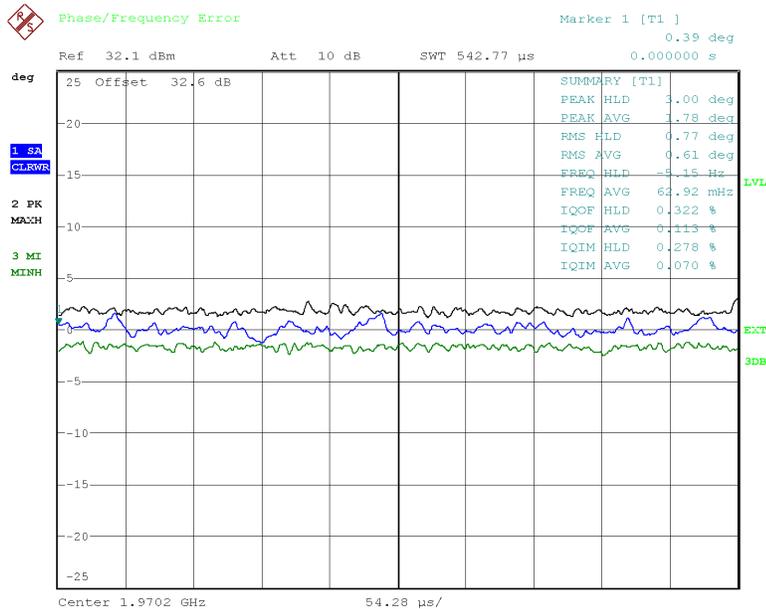

DEMO-BORD-46M-76DB
Date: 13.MAY.2011 15:45:30

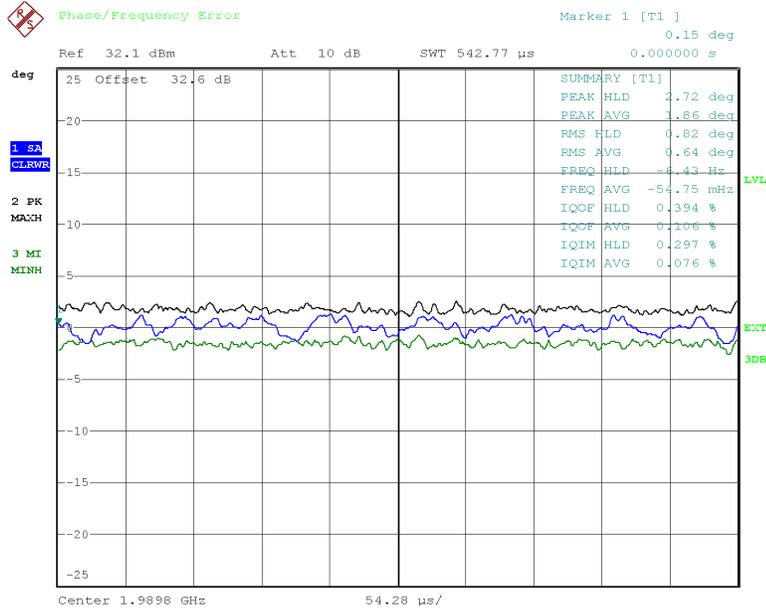

DEMO-BORD-46M-76DB
 Date: 13.MAY.2011 15:49:36

4.4 SPURIOUS RADIATED EMISSIONS

Applicable Standard: FCC CFR 47, §2.1053

Test Equipment List and Details

Manufacturer	Equipment	Model	Serial Number	Last Cal.	Cal. Interval
Albatross	Anechoic Chamber	3m Site	A00017354	2010-6-30	1 year
R&S	EMI Test Receiver	ESI26	100058	2010-10-29	1 year
R&S	Log periodic Antenna	HL562	100022	2010-8-5	1 year
R&S	Double-Ridged Waveguide Horn Antenna	HF906 TX	100032	2010-8-5	1 year


***statement of traceability:** ZTE Corporation Testing lab attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiated emissions measurement at the EMC lab of ZTE Corp. is 3.6dB.

EUT Setup

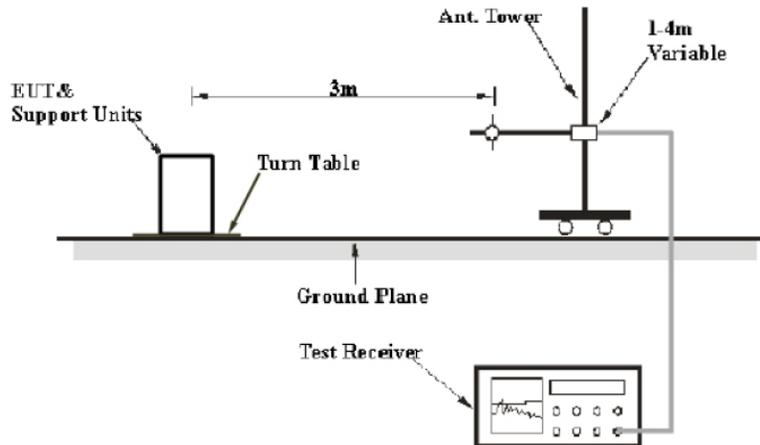

The radiated emission tests were performed in the 3-meter Chamber, using the setup accordance with the FCC part 2.1053. The specification used was the FCC 2.1053 limits.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TX pwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 43 + 10 Lg P (power out in Watts)

The resolution bandwidth of the spectrum analyzer was set at 100KHz for 30MHz to 1GHz scanning, set at 1MHz or 3MHz for 1GHz to 20GHz scanning.

Test Results Summary: PASS

Environmental Conditions

Temperature:	26°C
Relative Humidity:	60 %
ATM Pressure:	1009 mbar

Test data

Indicated		Table	Test Antenna		Substituted		Cable Loss (dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (GHz)	Amp. (dBuV)	Angle Degree	Height(M)	Polar H/V	Level (dBm)	Antenna Gain Correction						
57.214429	46.53	39.20	1	V	-20.67	-29.52	0.5	-50.69	2.15	-52.84	-13	39.84
220.501002	44.88	39.20	1	V	-53.19	1.42	1.2	-52.97	2.15	-55.12	-13	42.12
980.561122	43.46	0.70	2	V	-52.65	-4.1	2.6	-59.35	2.15	-61.5	-13	48.5
1380.76152	47.78	69.50	2	V	-56.01	4.25	3.1	-54.86	2.15	-57.01	-13	44.01
1981.96393	88.57	205.80	1	V	-18.95	6.55	3.8	-16.2	2.15	-18.35	-13	5.35
2807.61523	60.43	321.40	2	V	-41.82	7.95	4.5	-38.37	2.15	-40.52	-13	27.52
216.613226	49.2	70.50	2	H	-50.19	1.23	1.2	-50.16	2.15	-52.31	-13	39.31
576.232465	38.27	0.70	2	H	-58.38	-1.21	2	-61.59	2.15	-63.74	-13	50.74
984.448898	44.01	153.60	2	H	-52.54	-4.1	2.6	-59.24	2.15	-61.39	-13	48.39
1220.44088	47.91	70.50	2	H	-57.49	4.25	2.9	-56.14	2.15	-58.29	-13	45.29
1981.96393	83.95	153.60	2	H	-22.65	6.55	3.8	-19.9	2.15	-22.05	-13	9.05
3000	60.78	0.70	2	H	-43.33	7.75	4.6	-40.18	2.15	-42.33	-13	29.33

Radiation emission spurious below 3GHz

Indicated		Table	Test Antenna		Substituted		Cable Loss (dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (GHz)	Amp. (dBuV)	Angle Degree	Height(M)	Polar H/V	Level (dBm)	Antenna Gain Correction						
3961.92385	53.62	188.20	2	V	-52.47	7.75	5.3	-50.02	2.15	-52.17	-13	39.17
5637.27455	48.3	256.80	2	V	-58.33	9.05	6.5	-55.78	2.15	-57.93	-13	44.93
5949.8998	65.78	237.40	1	V	-37.7	9.05	6.6	-35.25	2.15	-37.4	-13	24.4
9917.83567	59.72	188.20	2	V	-49.1	9.95	8.7	-47.85	2.15	-50	-13	37
14164.3287	63.05	52.60	2	V	-46.47	9.65	10.7	-47.52	2.15	-49.67	-13	36.67
3961.92385	57.37	187.10	2	H	-46.03	7.75	5.3	-43.58	2.15	-45.73	-13	32.73
5589.17836	48.11	100.10	1	H	-50.5	9.05	6.4	-47.85	2.15	-50	-13	37
5949.8998	67.22	169.30	1	H	-31.39	9.05	6.6	-28.94	2.15	-31.09	-13	18.09
10204.4088	59.32	50.80	2	H	-49.62	11.35	8.9	-47.17	2.15	-49.32	-13	36.32
14398.7976	63.66	305.30	1	H	-41.66	9.65	10.8	-42.81	2.15	-44.96	-13	31.96

Radiation emission spurious above 3GHz

4.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard: FCC§2.1051, §24.238

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
DST	DST100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

EUT Setup:

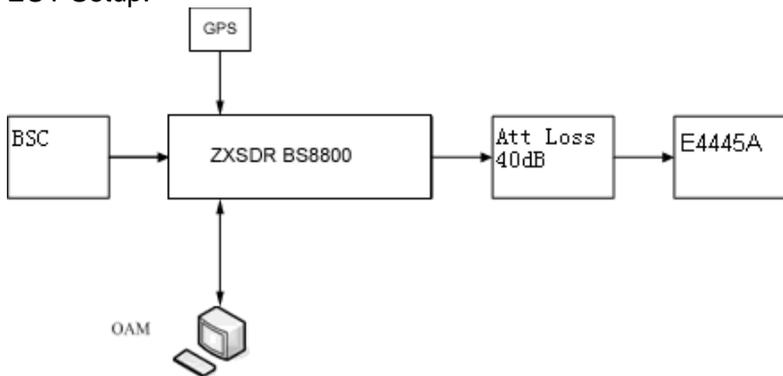

REMARKS: Attenuator loss (dB)=40dB, Cable Loss (dB)=3dB.

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1 kHz for 9KHz to 150KHz scanning, set at 10KHz for 150KHz to 30MHz scanning ,set at 100KHz for 30MHz to 1GHz scanning, set at 1MHz or 3MHz for 1GHz to 22GHz scanning. Sufficient scans were

taken to show any out of band emissions up to 10th harmonic.

Test Data Environmental Conditions



Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar



Test Result: Pass


Test Mode: Transmitting GSM

Test Data:



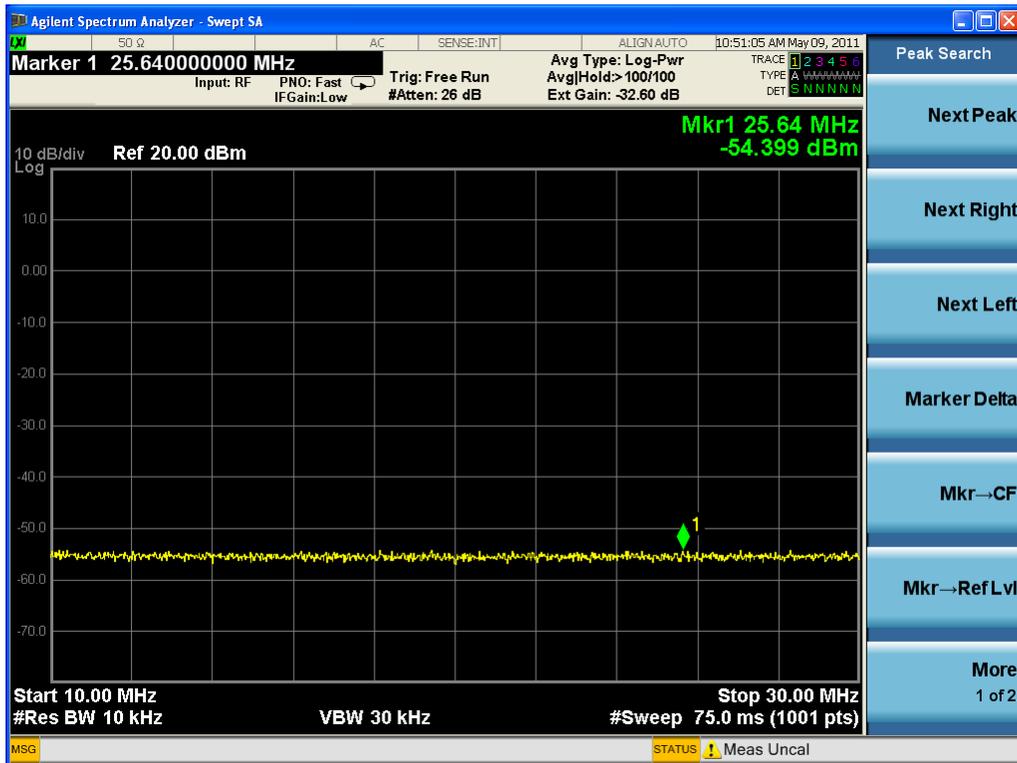
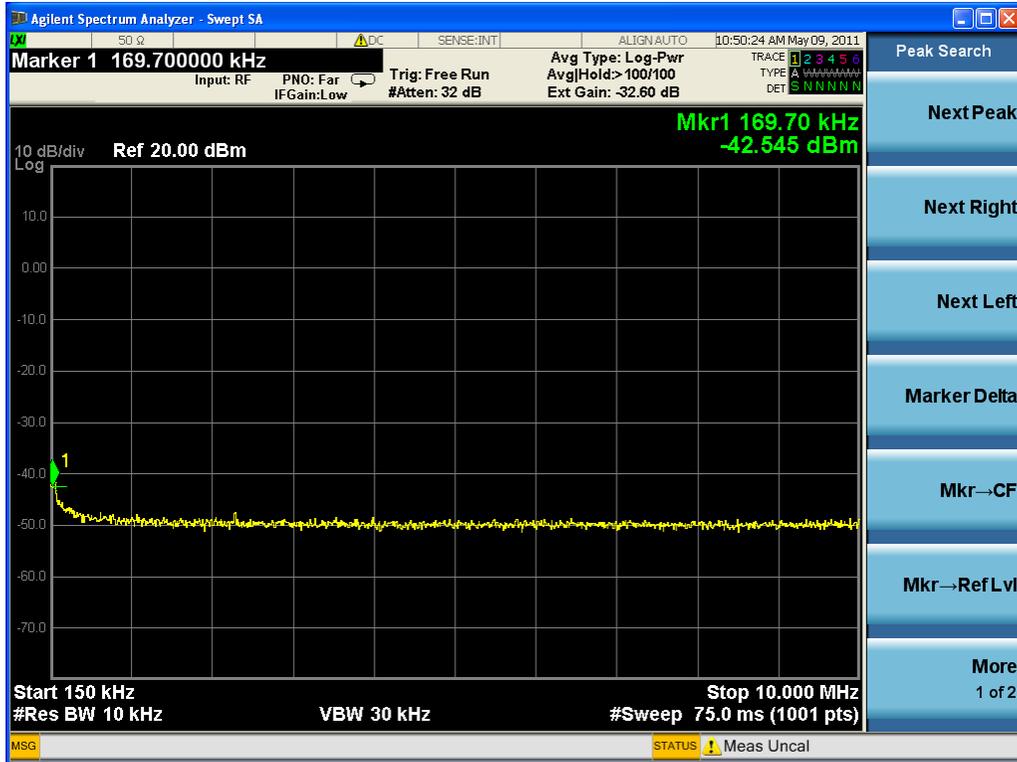


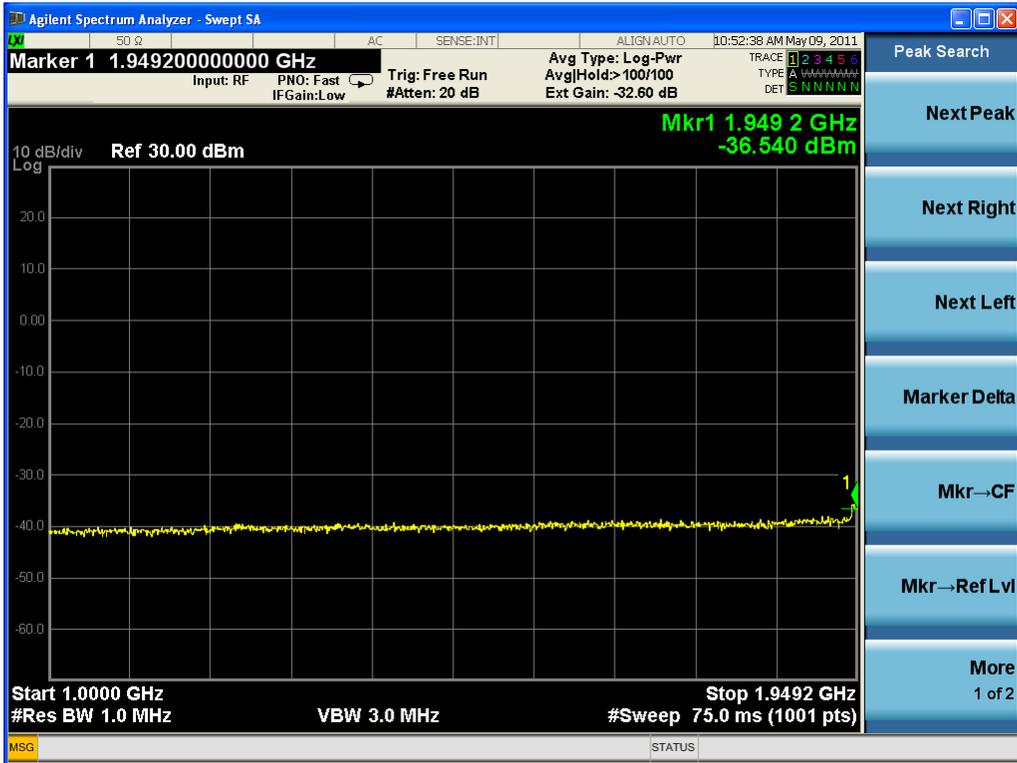
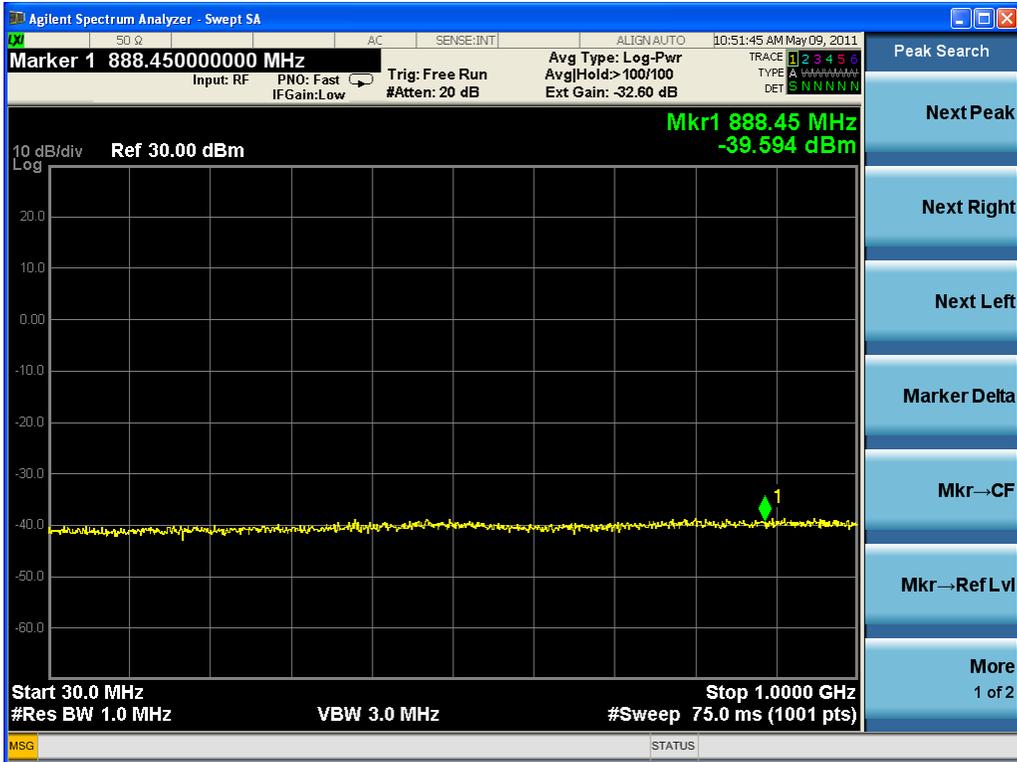


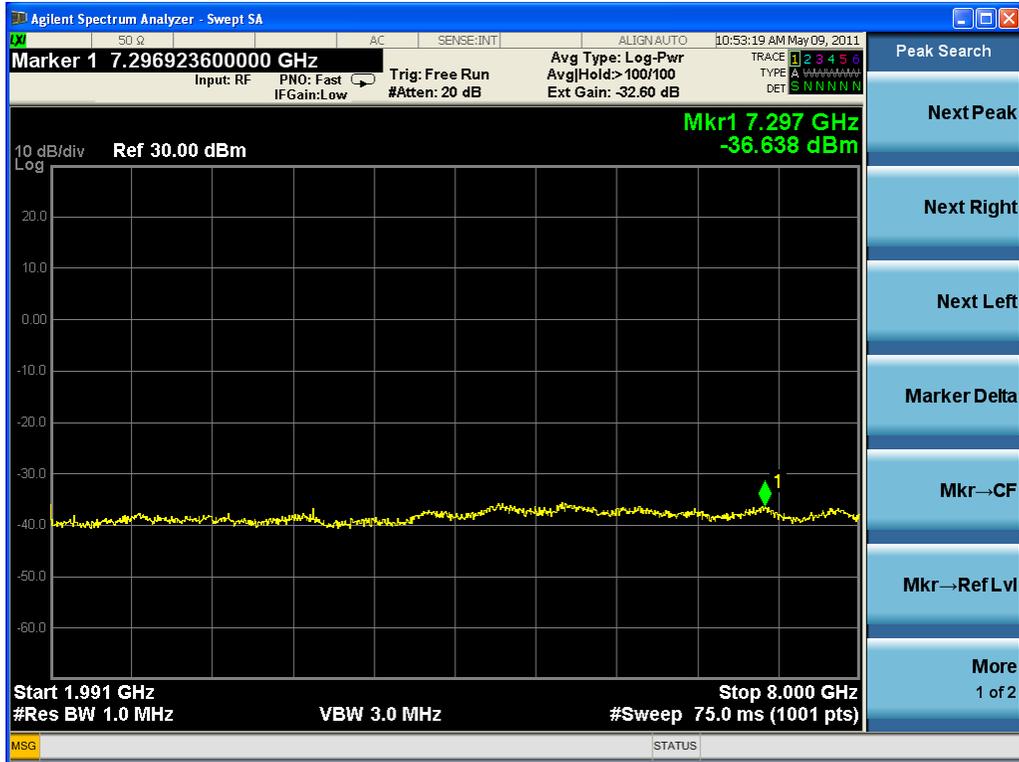


Five carriers



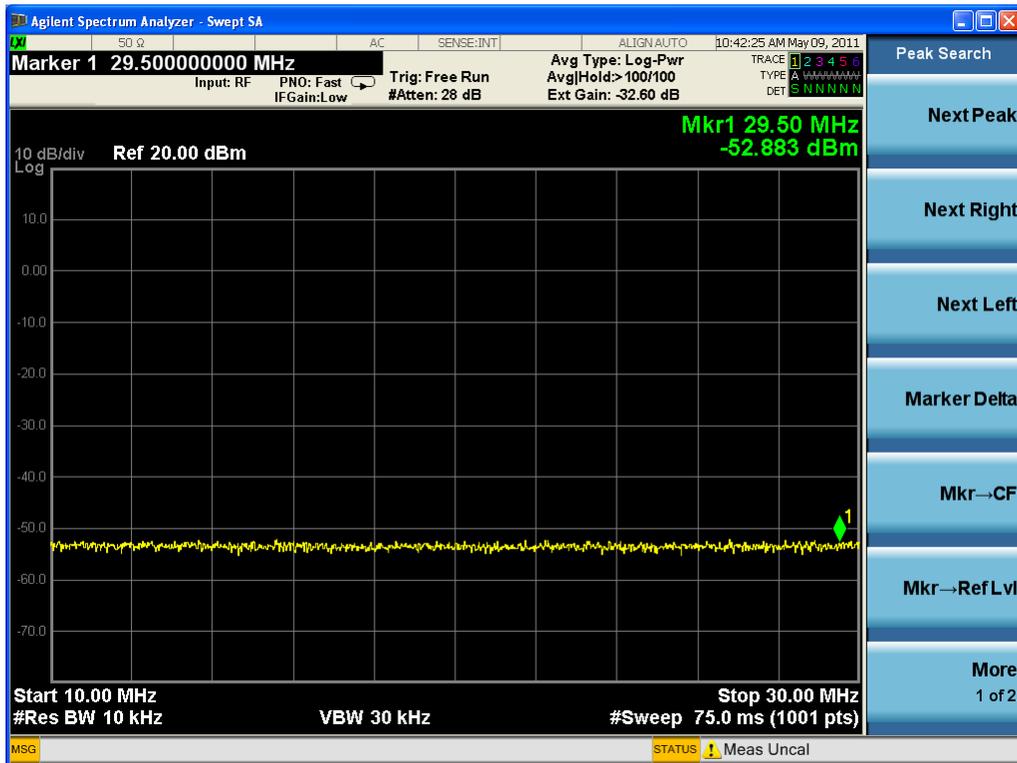
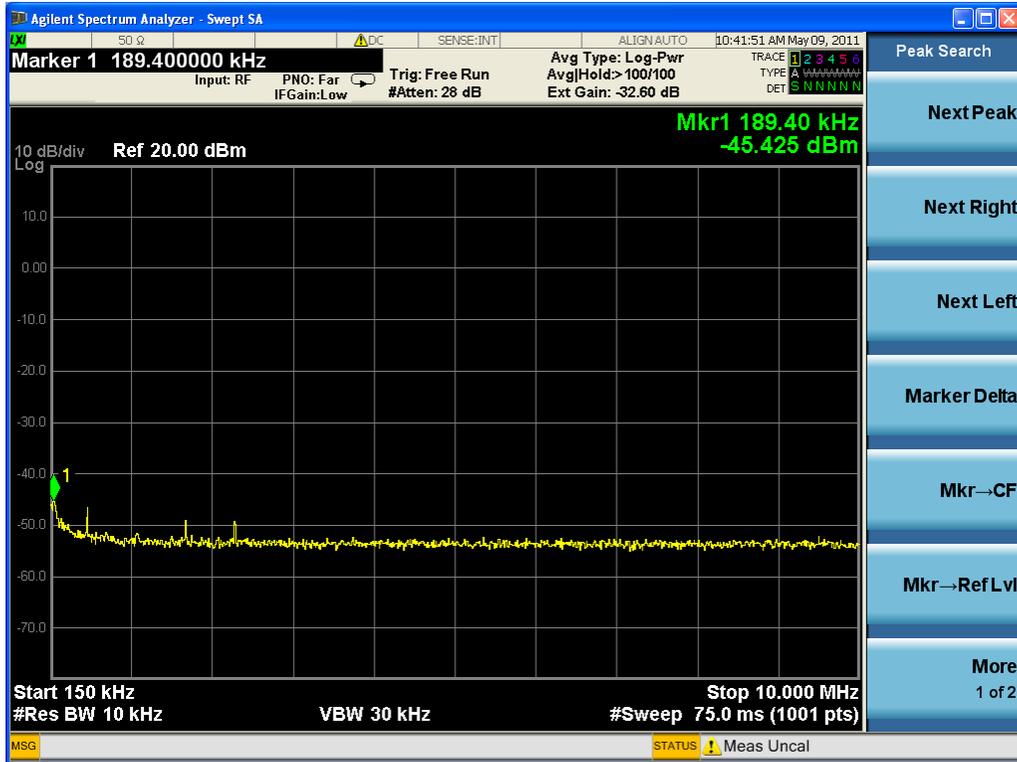


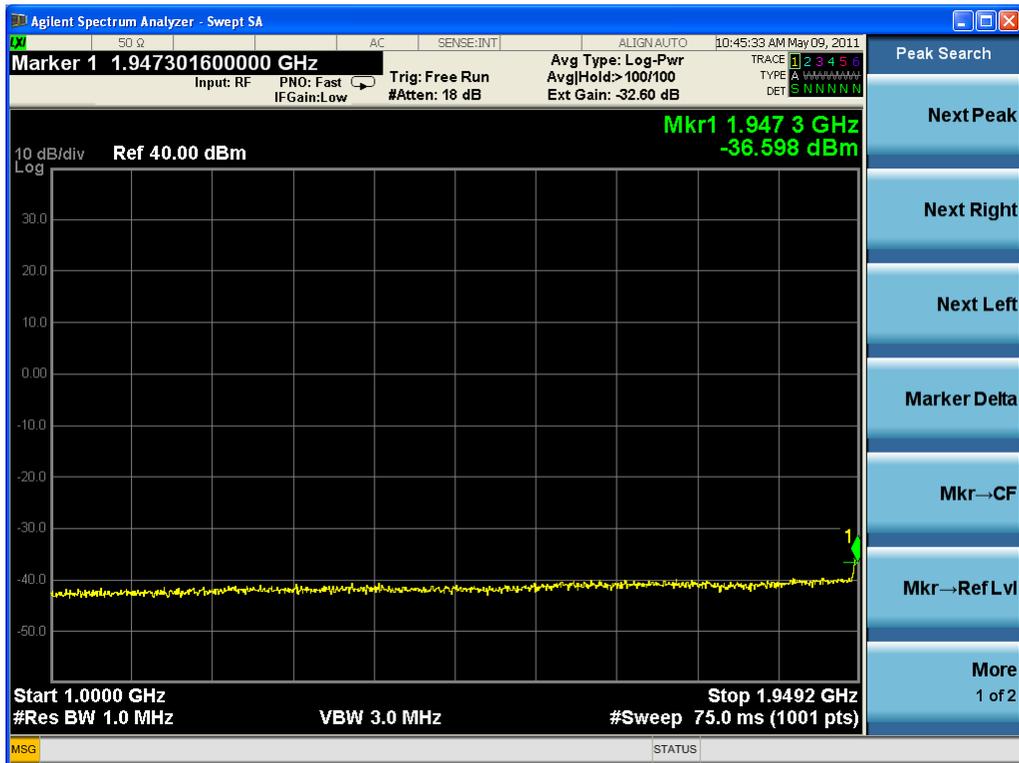
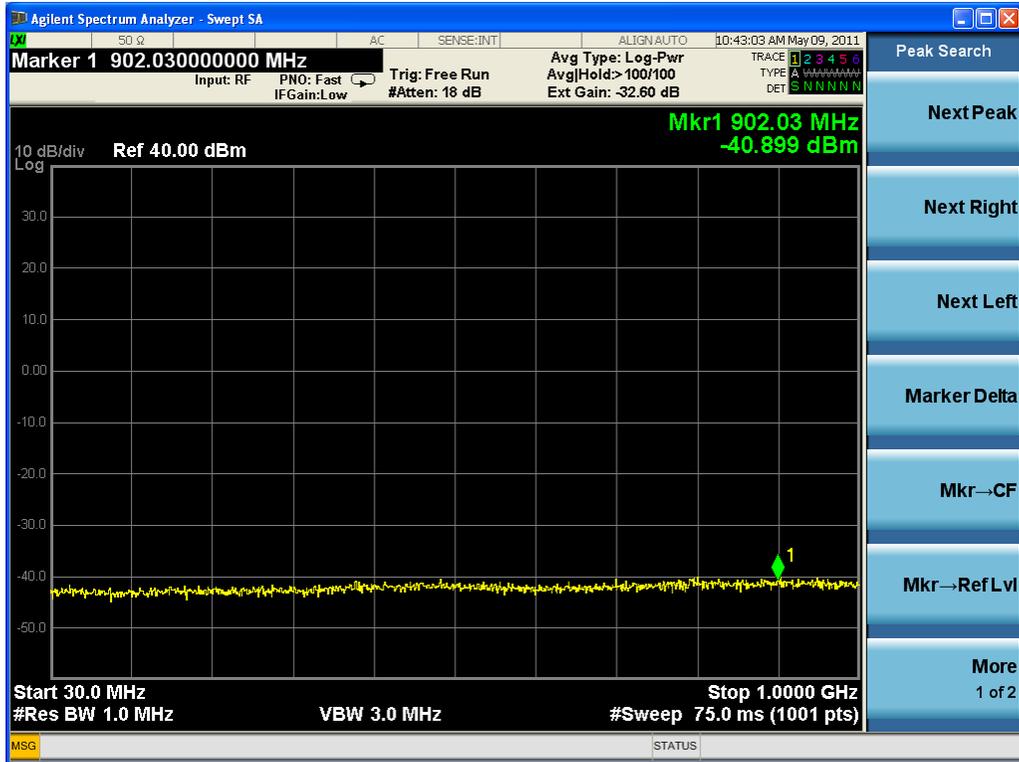


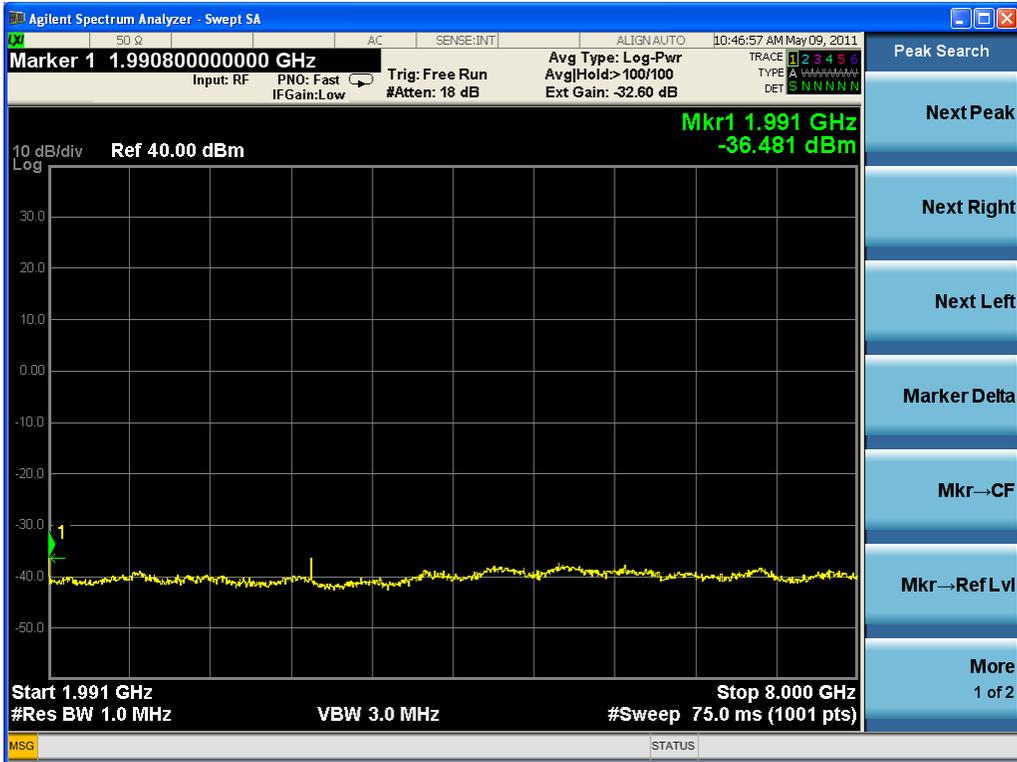


Four Carriers



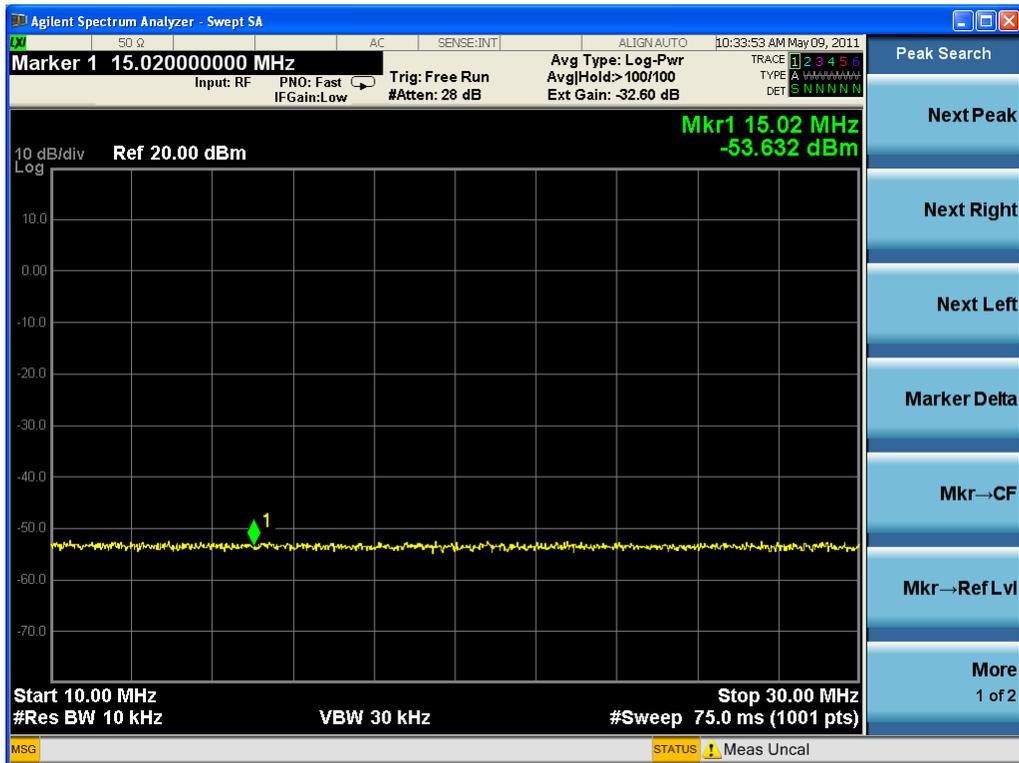
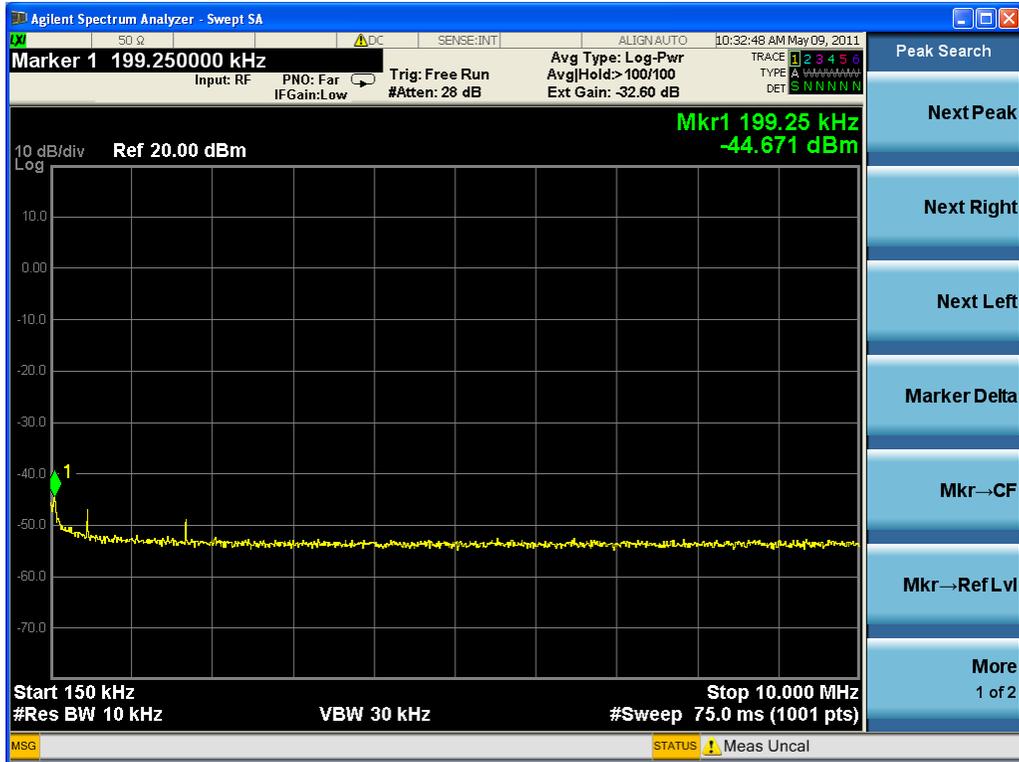


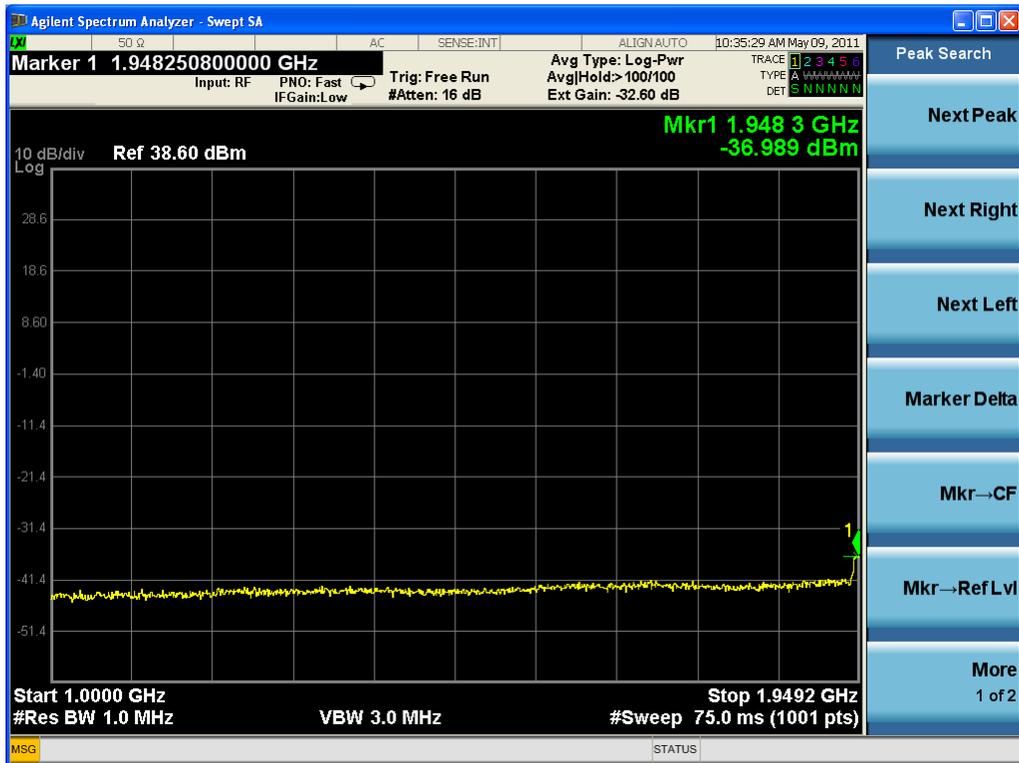
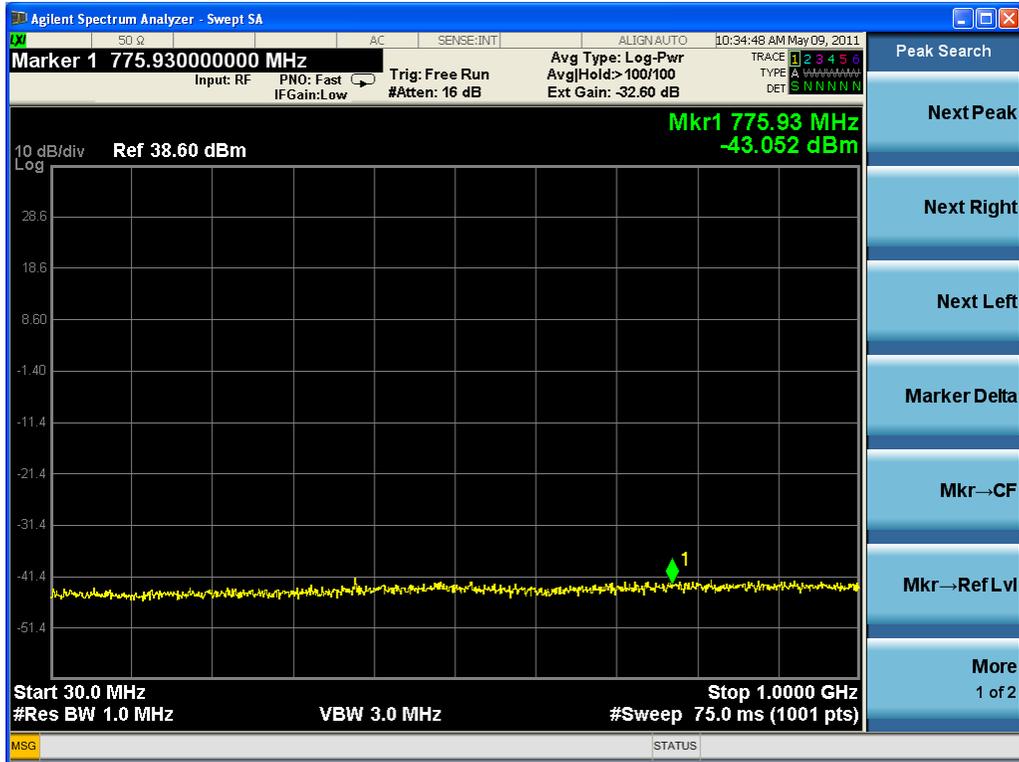


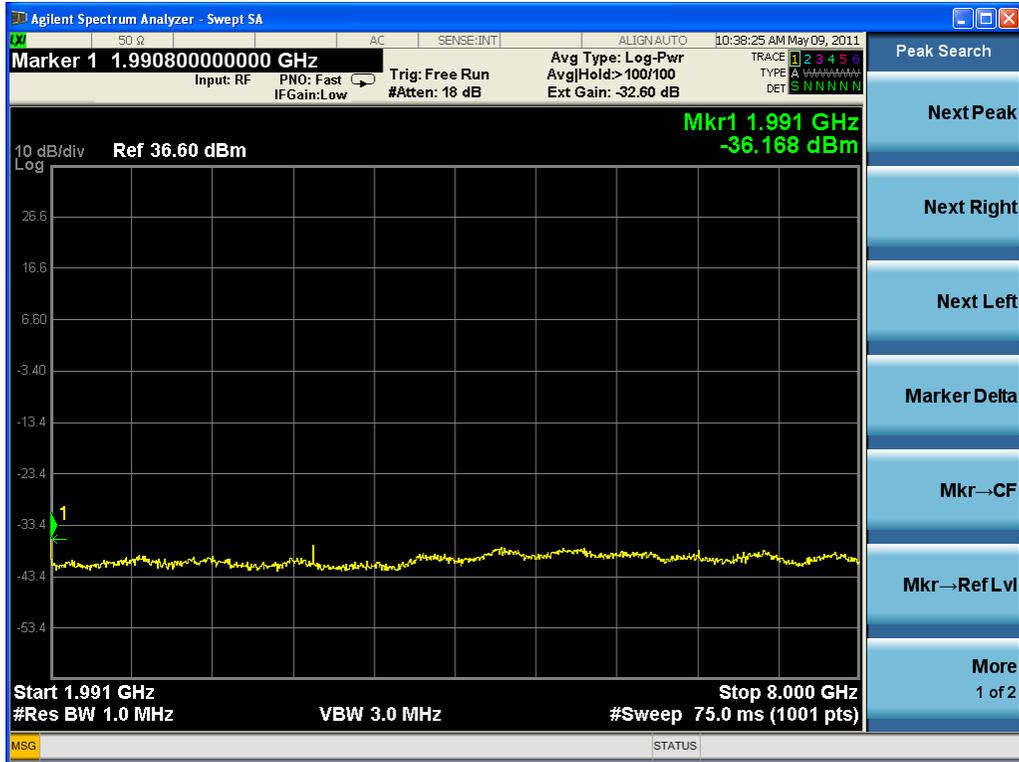


Three carriers



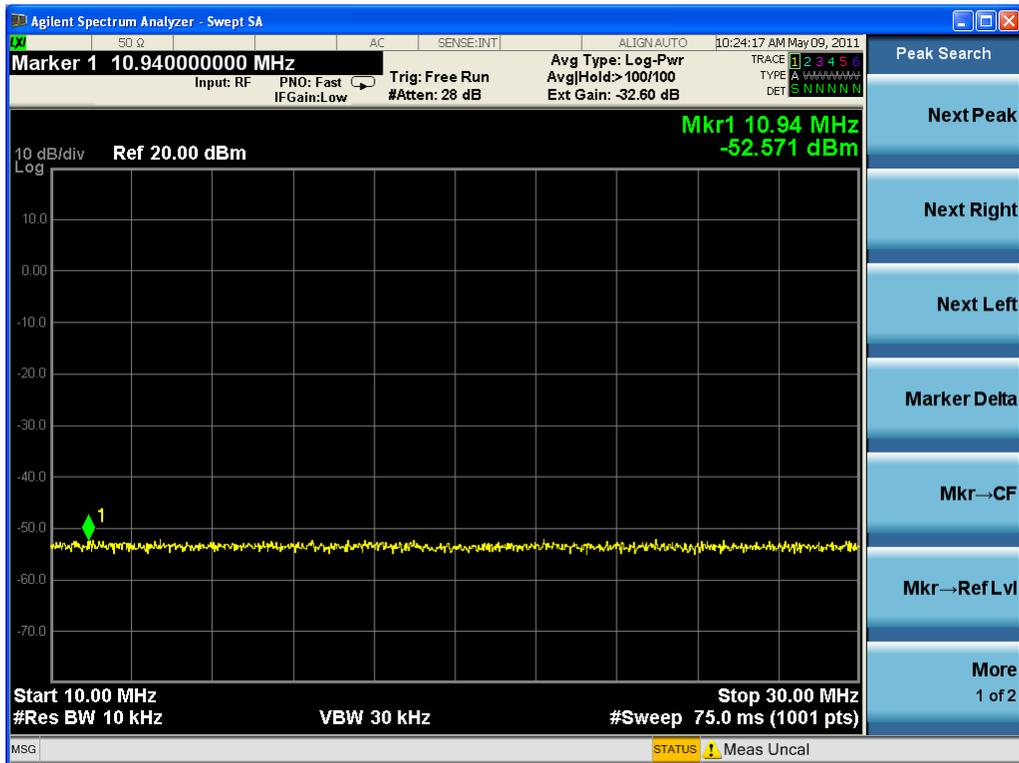
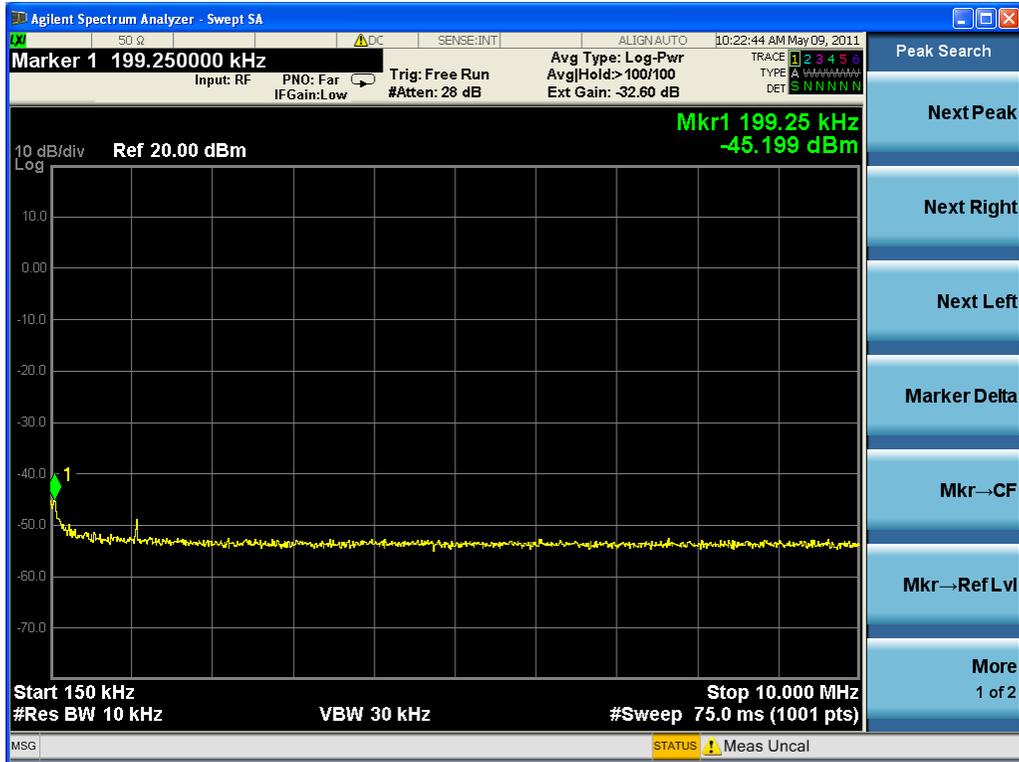


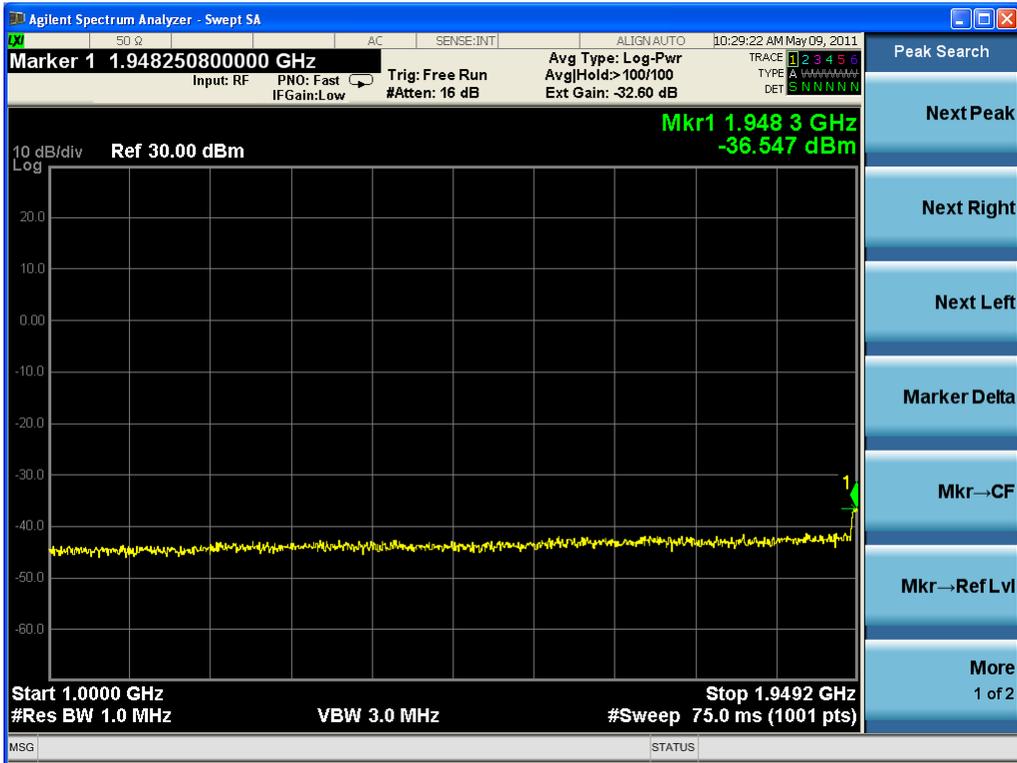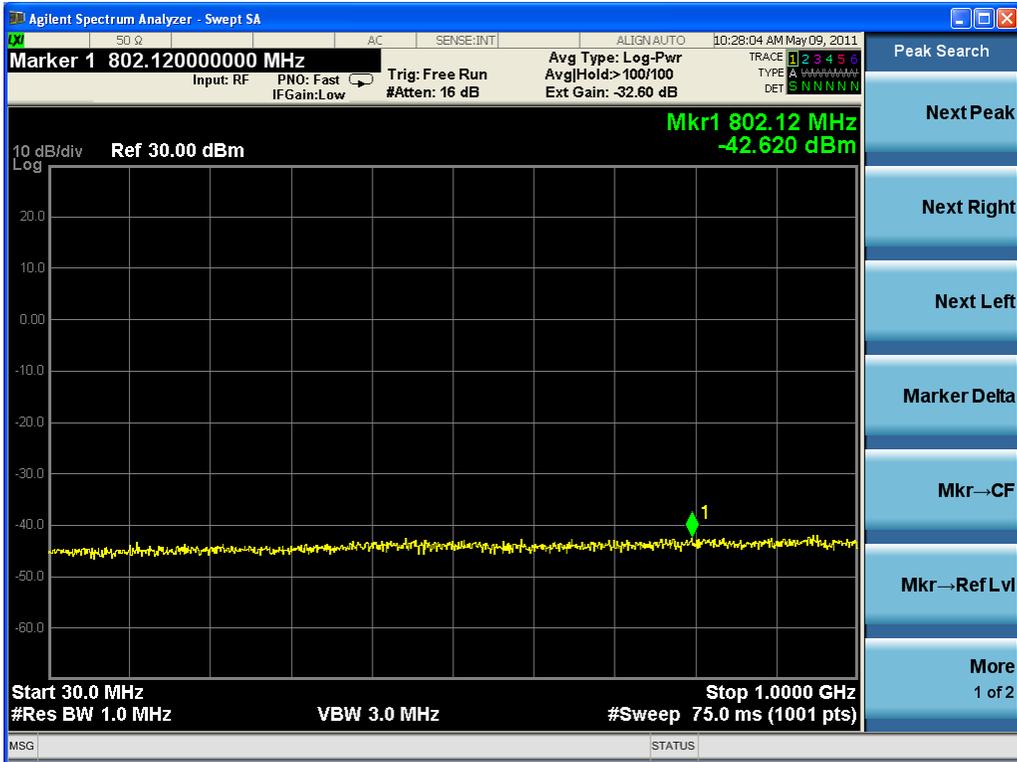


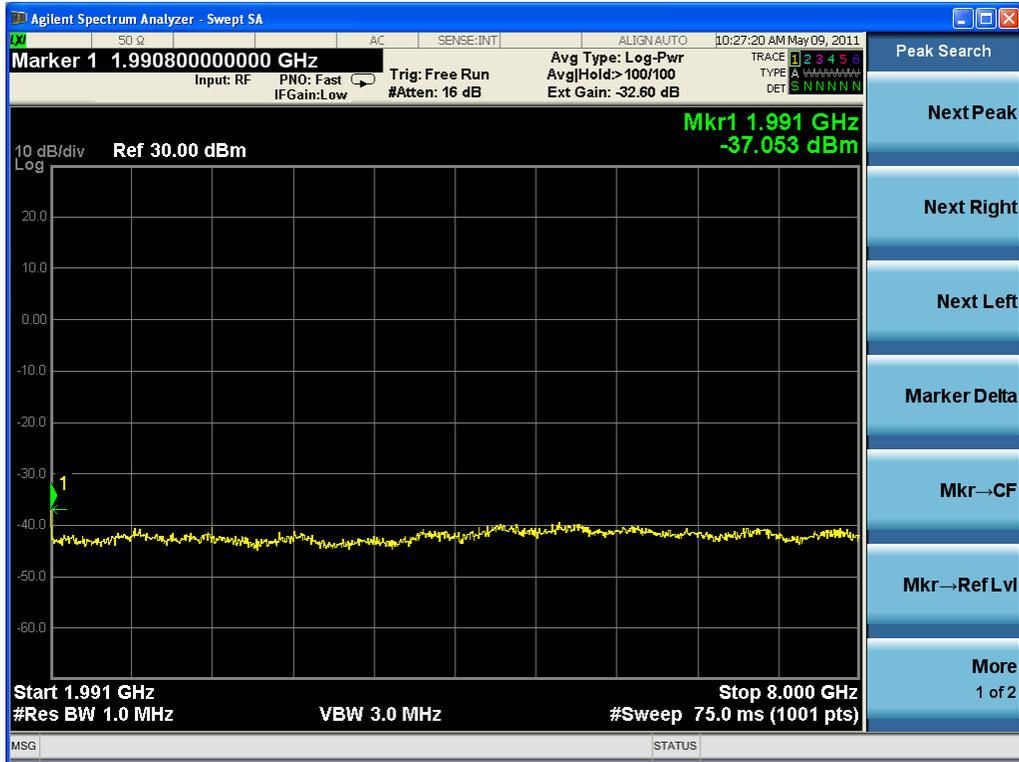

Two carriers



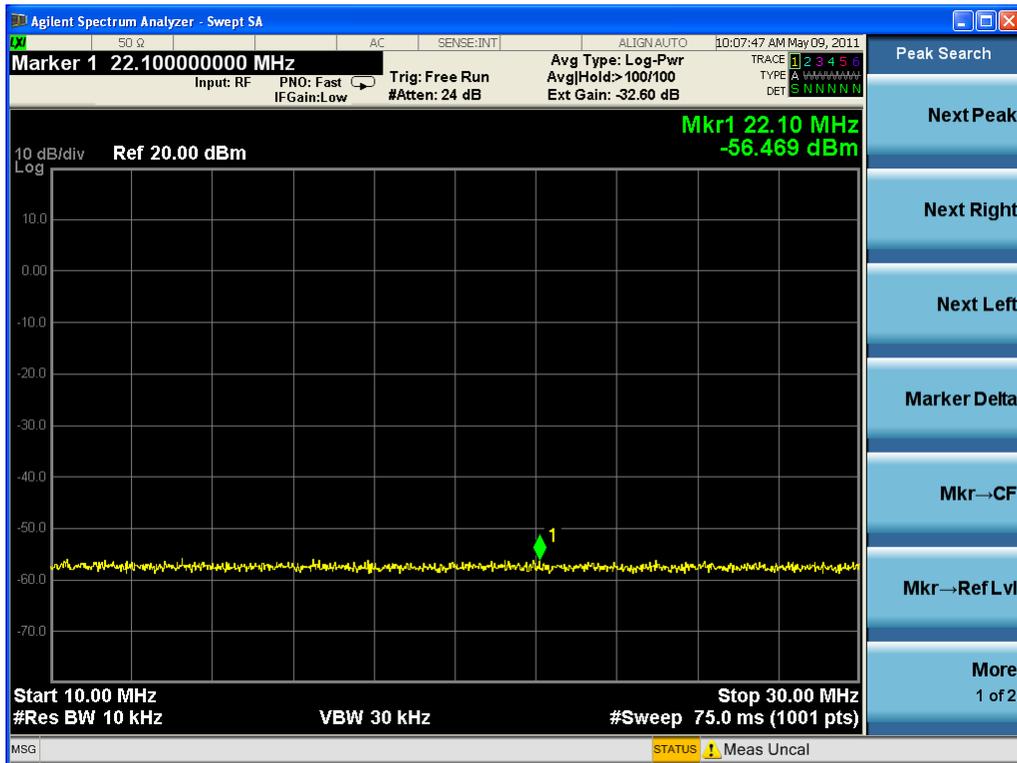
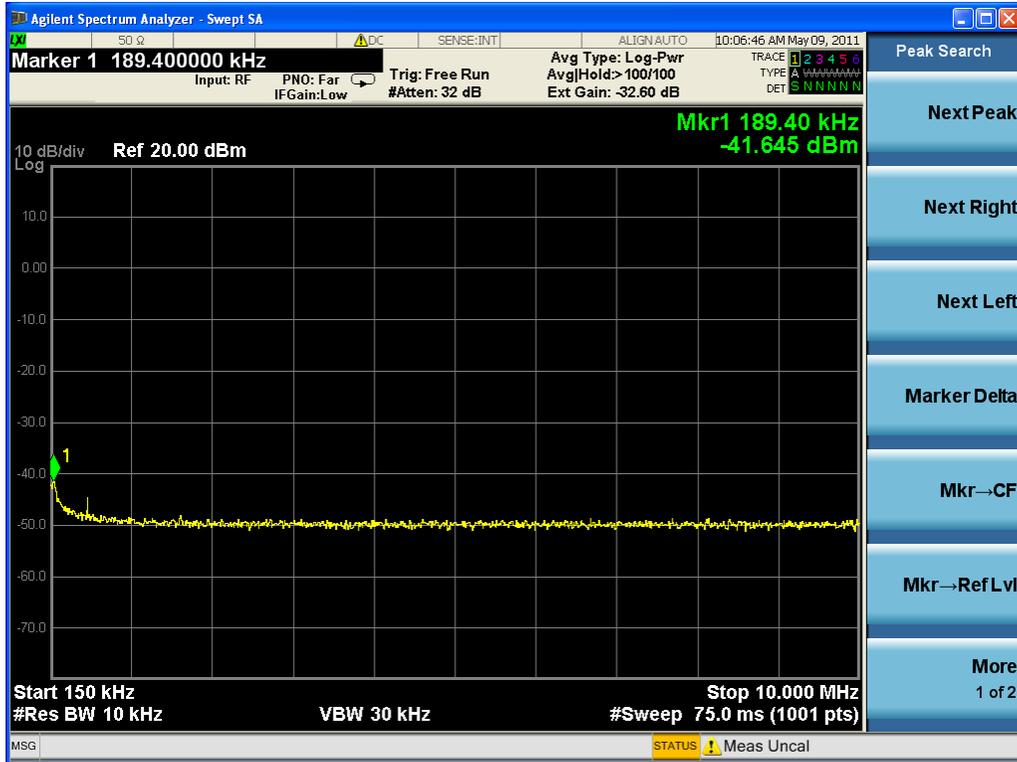


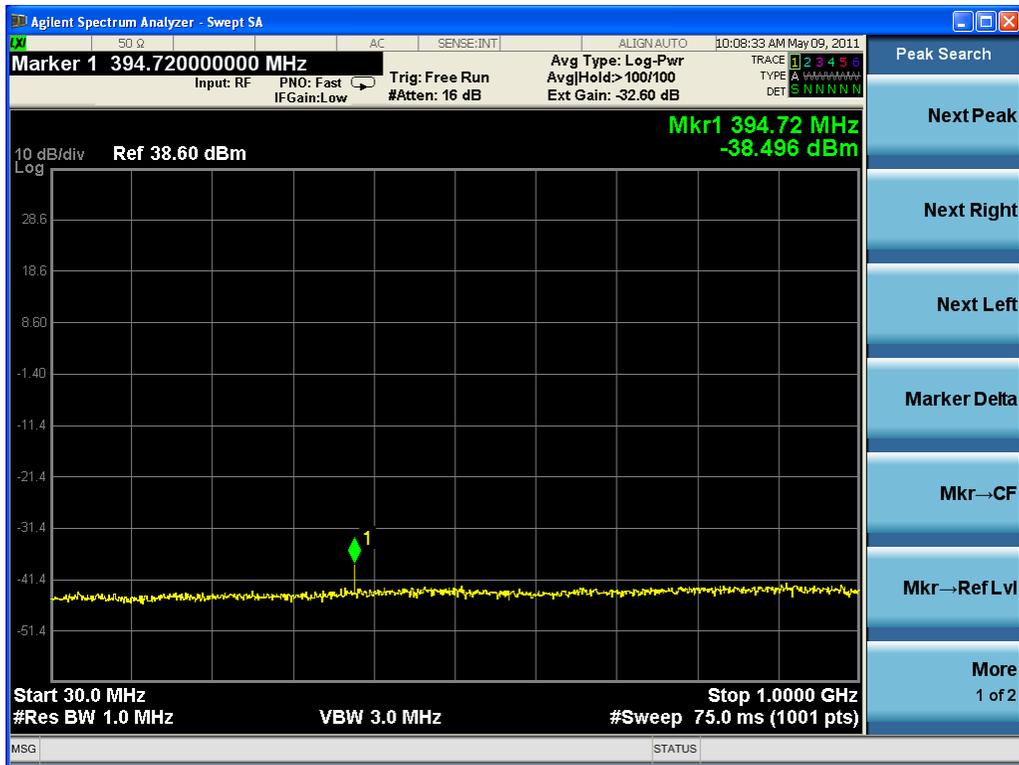




One carrier (working in bottom frequency)



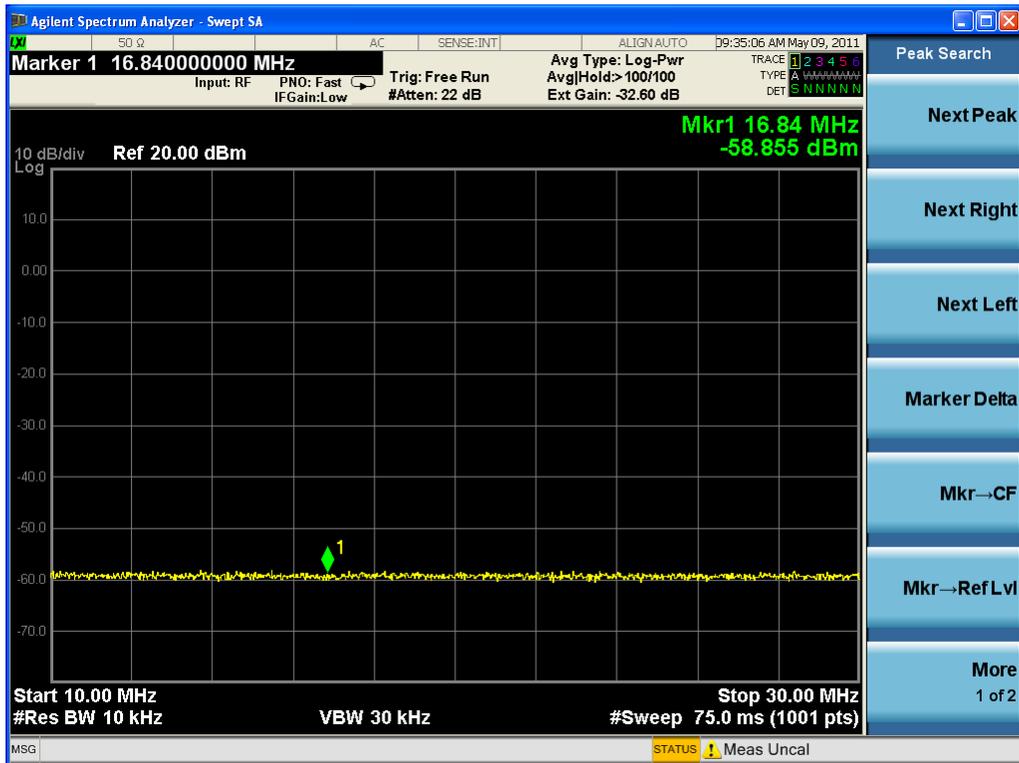
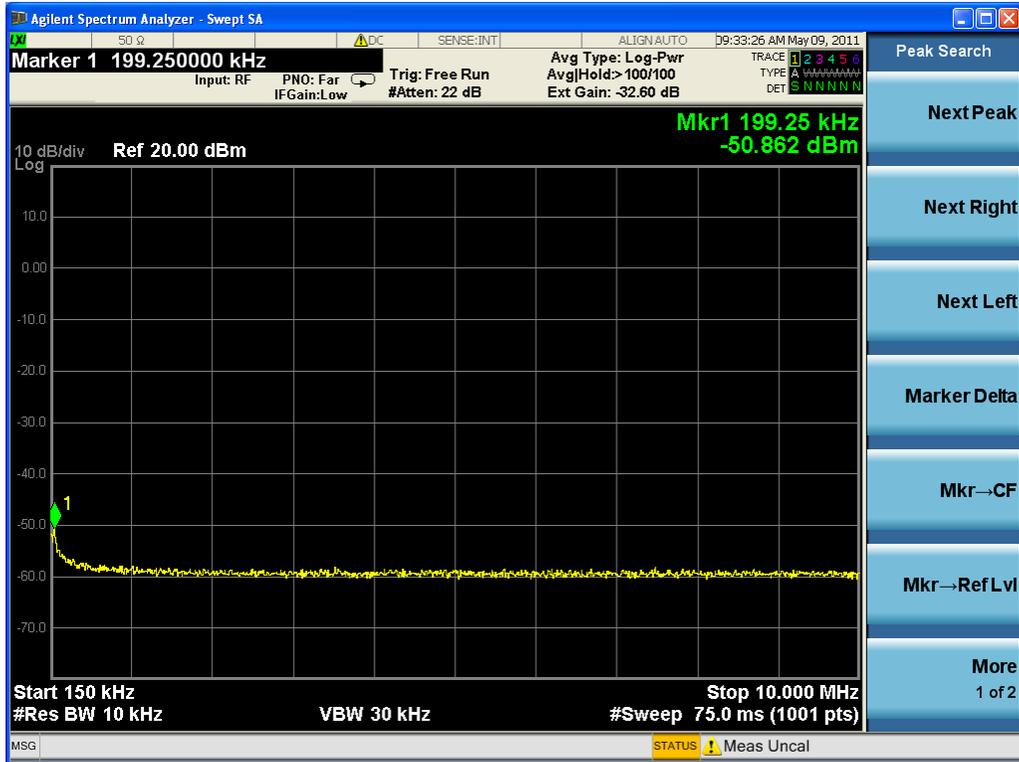



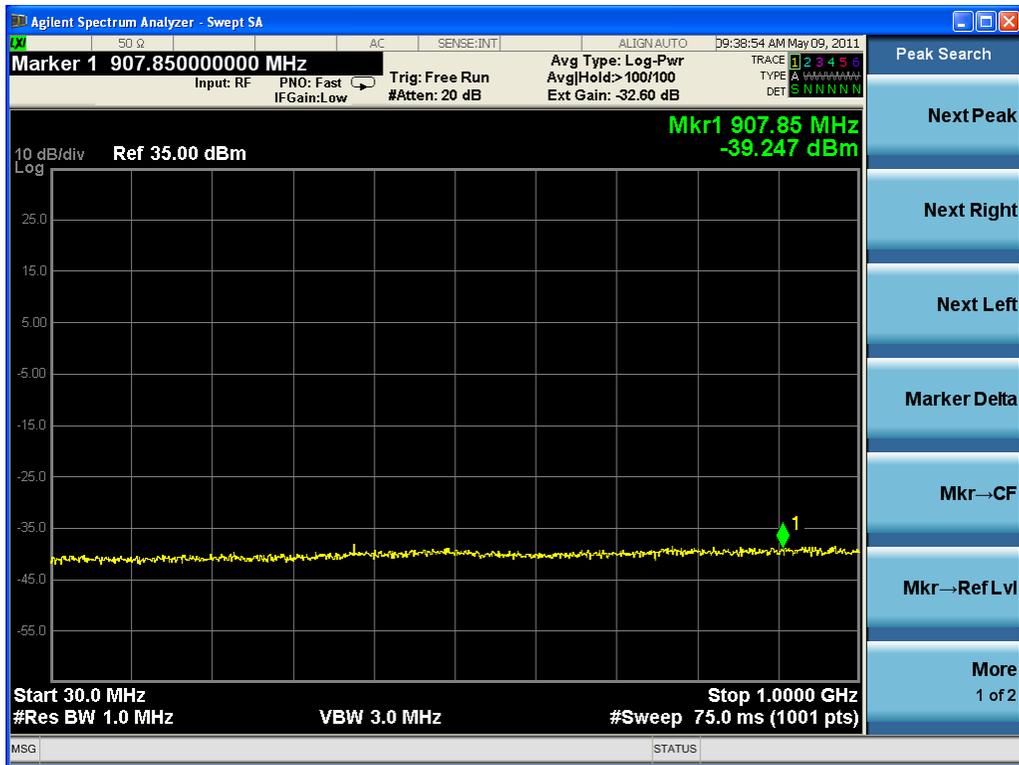




One carrier (working in middle frequency)



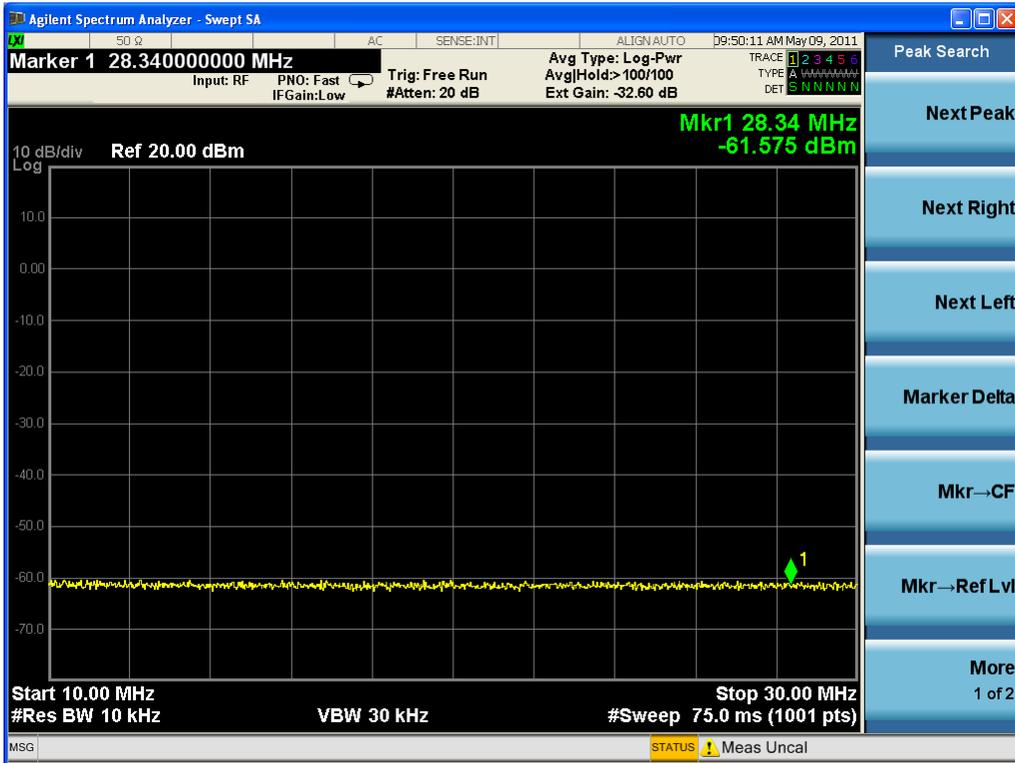
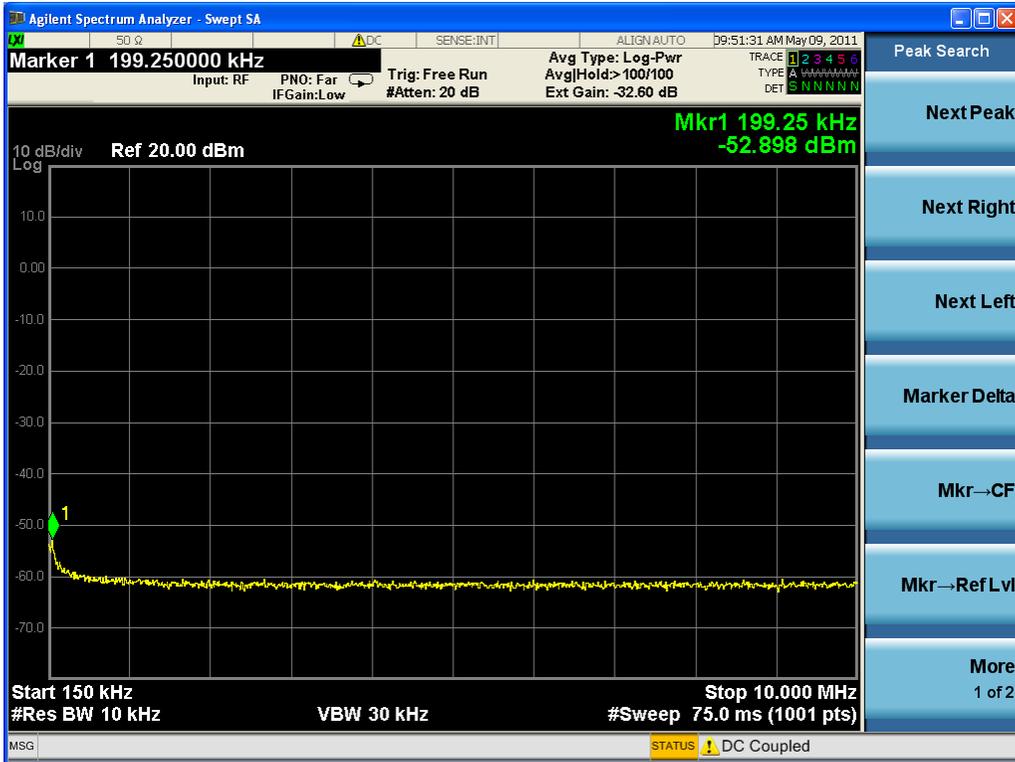


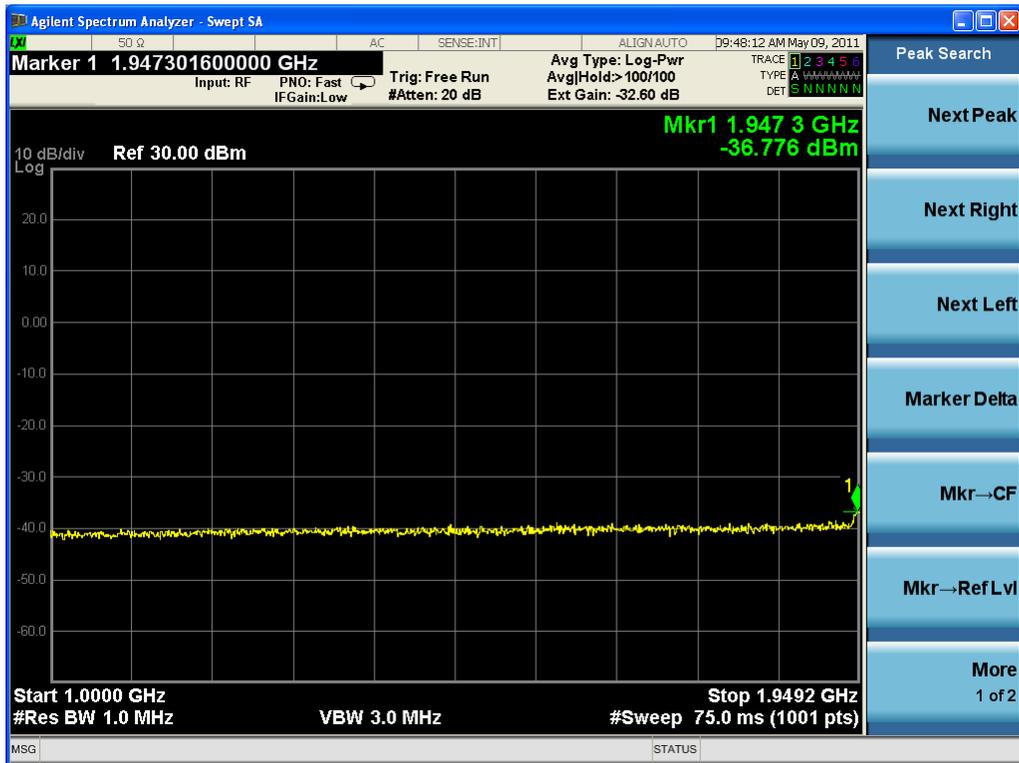
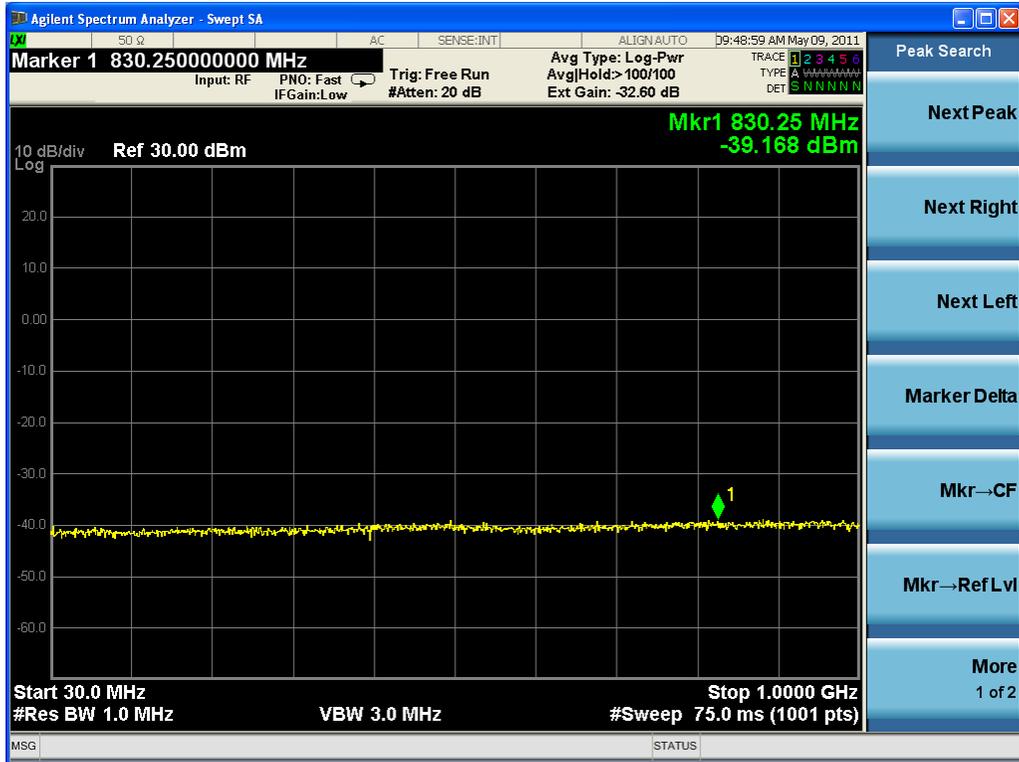





One carrier (working in top frequency)



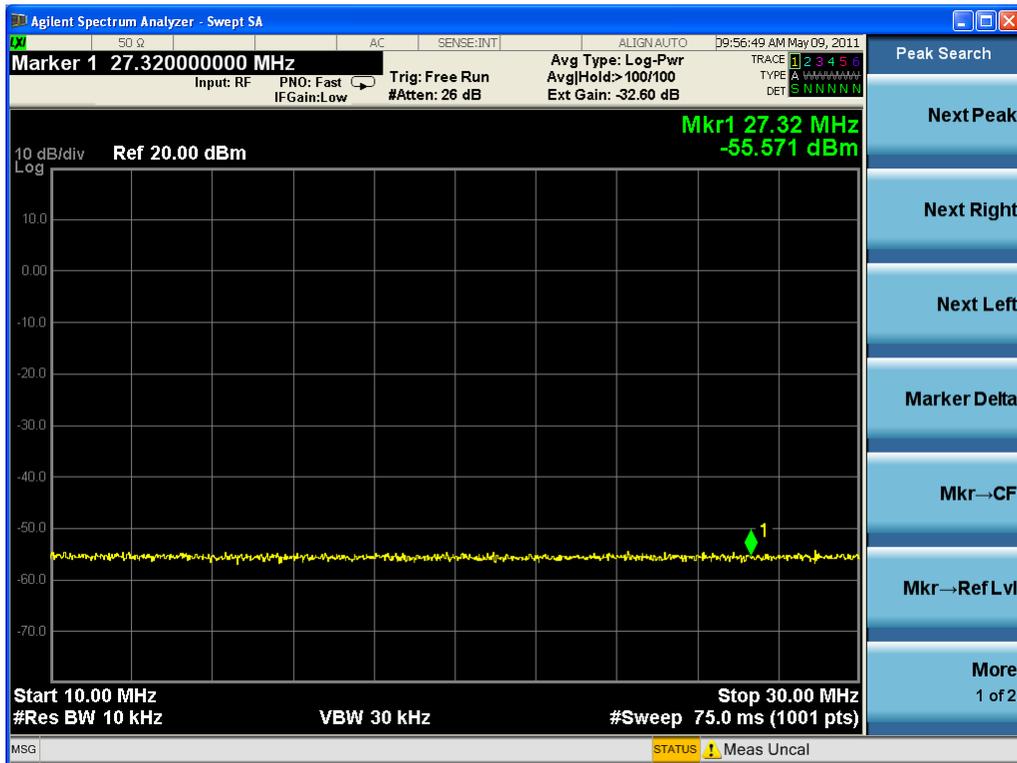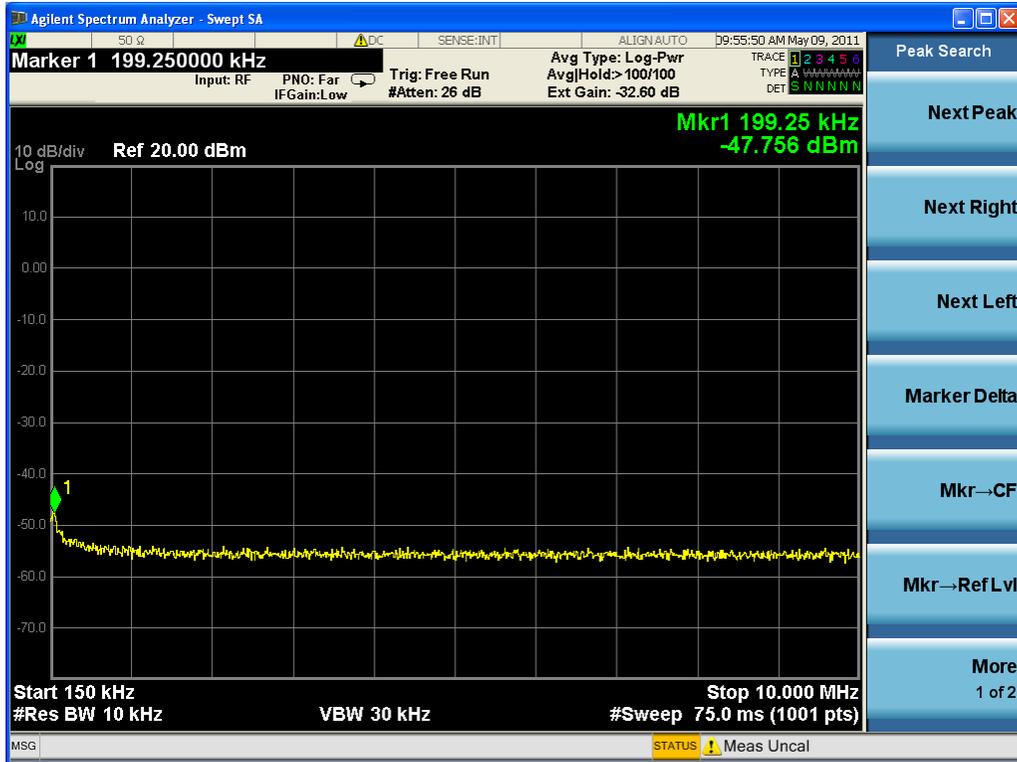

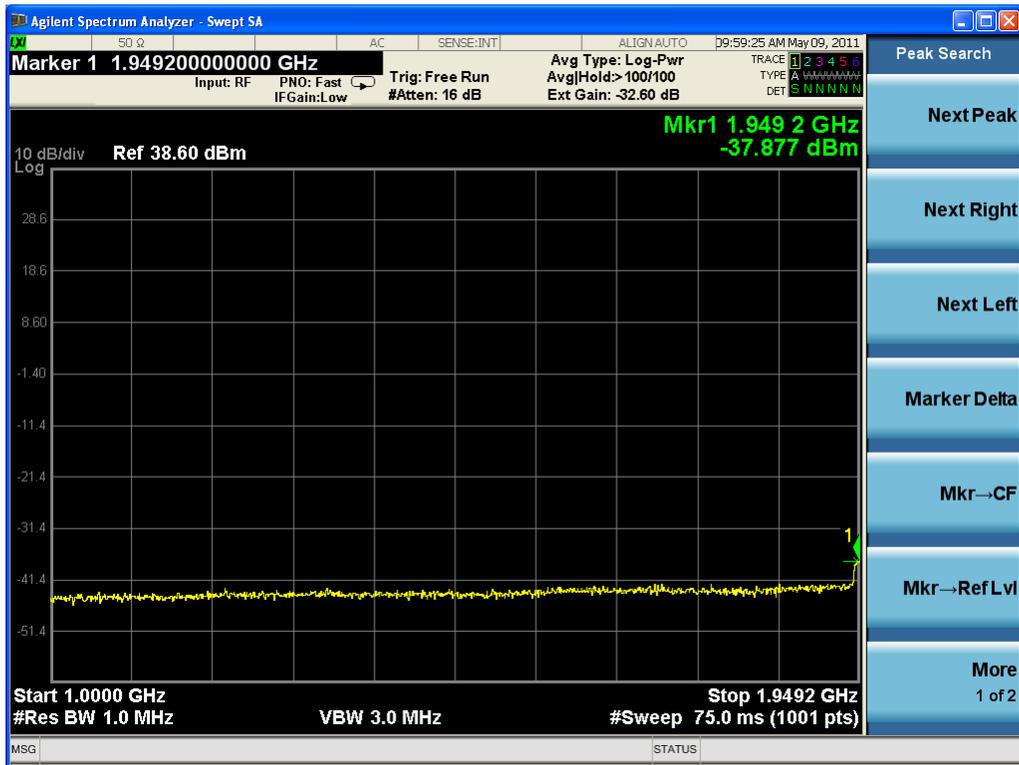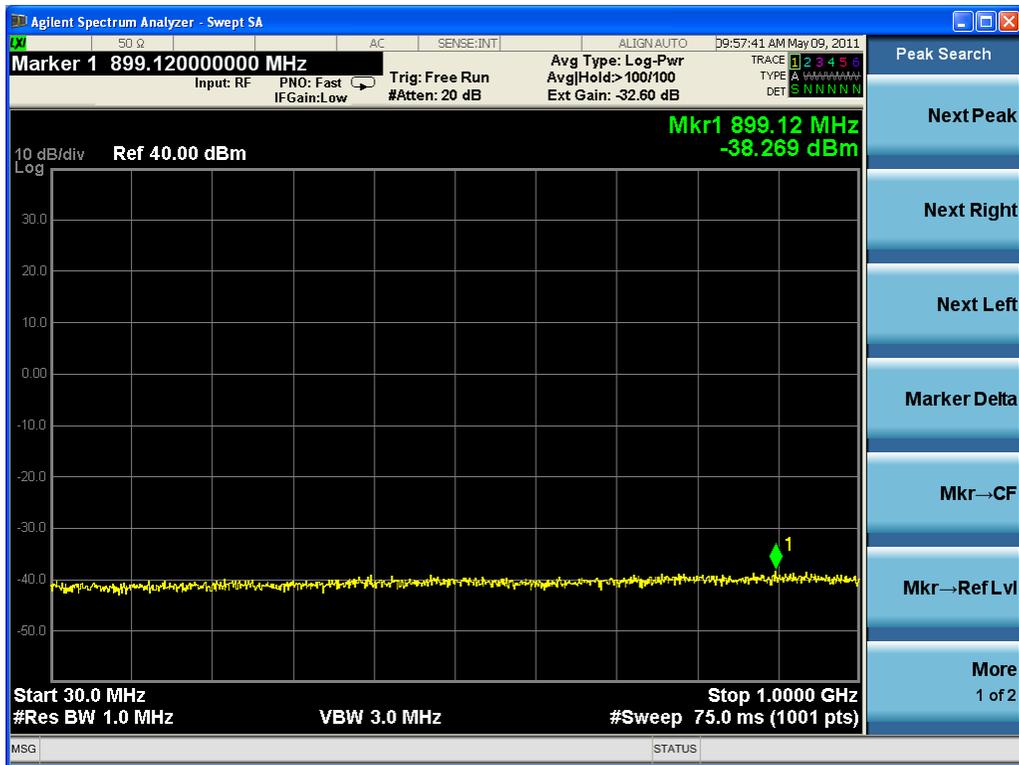

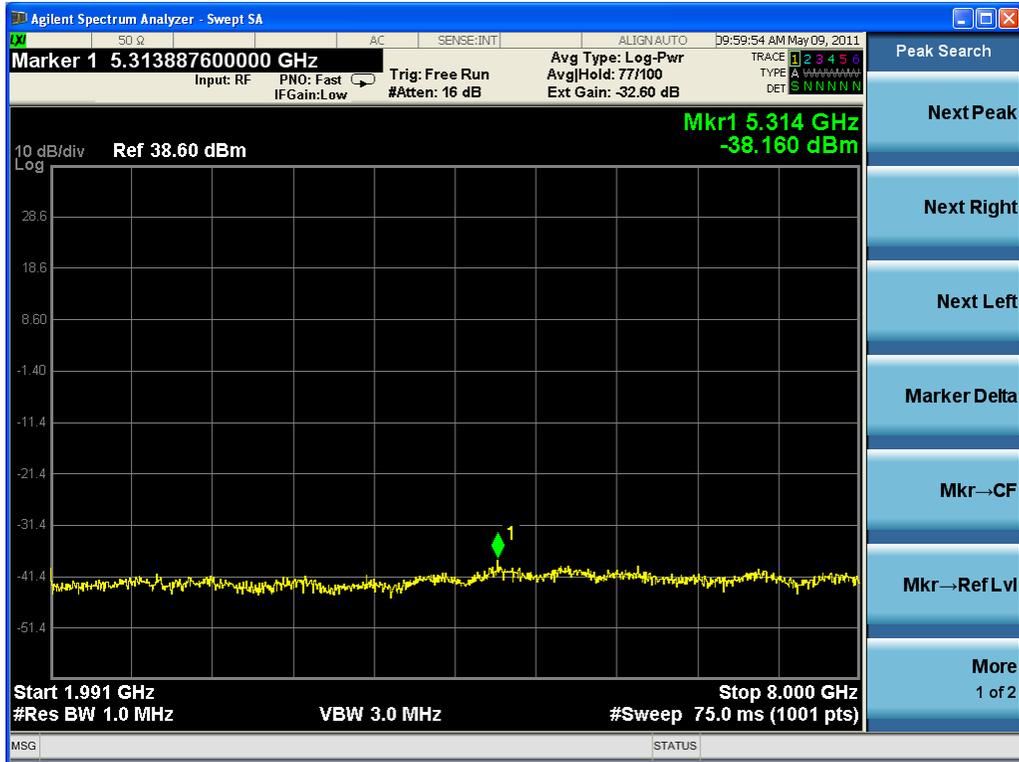

4.6 OCCUPIED BANDWIDTH

Applicable Standard: FCC§2.1049, §24.229, §24.238

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
DST	DST100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

The RF out of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. The resolution bandwidth of the spectrum analyzer was set at 1% of the span or higher and 99%Power bandwidth was recorded.

Environmental Conditions


Temperature:	20 ° C
Relative Humidity:	53%
ATM Pressure:	1009mbar



Test Result: Pass

Test Mode: Transmitting GSM



Test Data


Modulation	Frequency (MHz)	99% Power Bandwidth (kHz)	Limit (kHz)
8PSK	1950.2/1970.2/1989.8	243.24/244.30/243.00	250

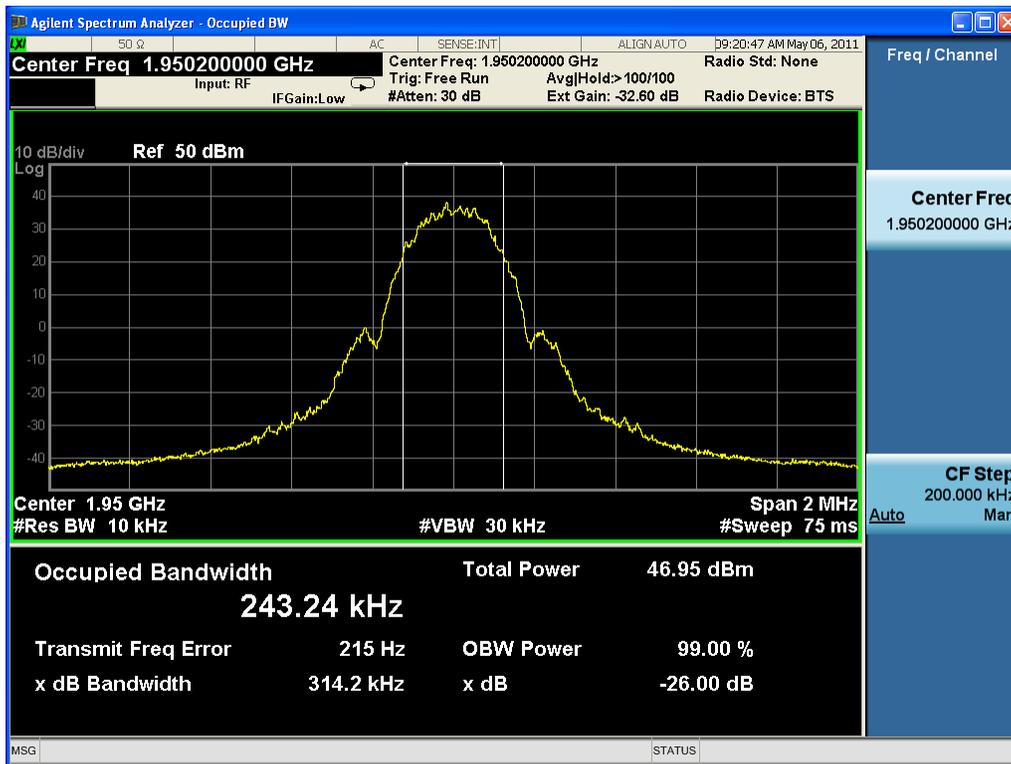

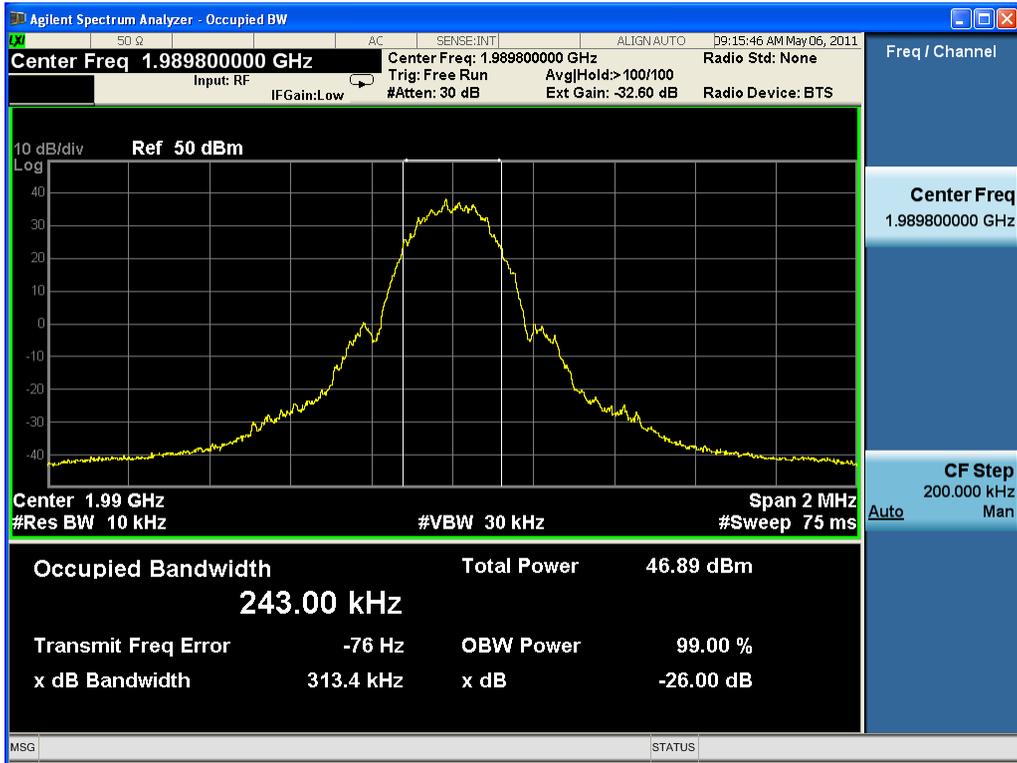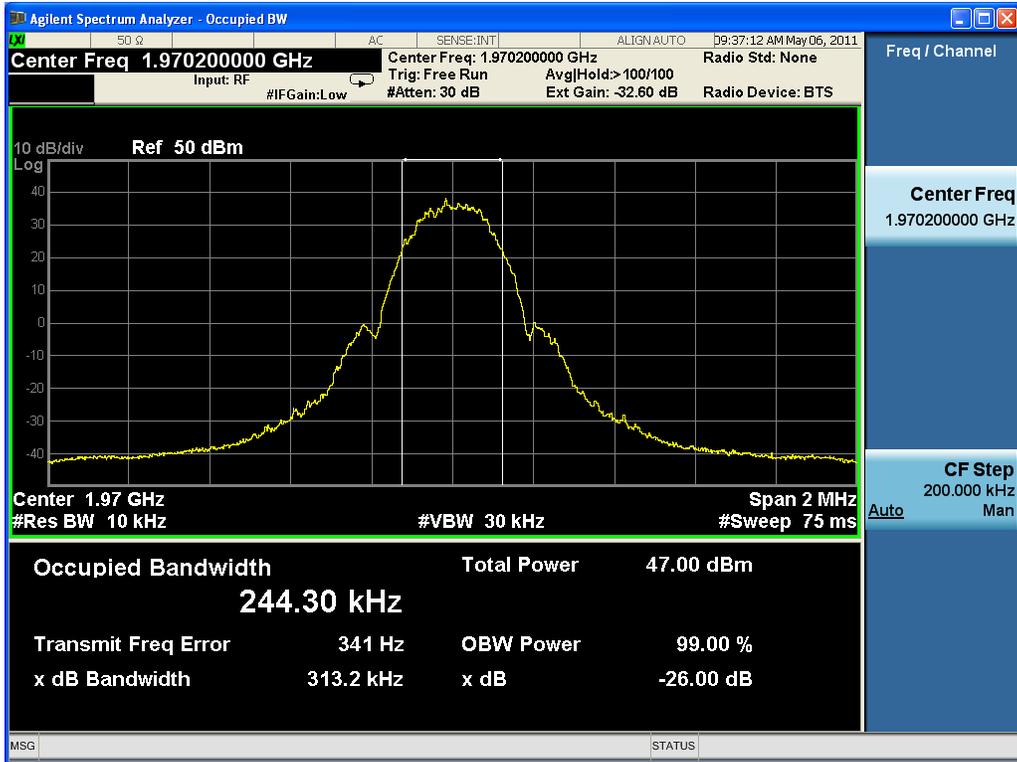

Modulation	Frequency (MHz)	99% Power Bandwidth (kHz)	Limit (kHz)
GMSK	1950.2/1970.2/1989.8	249.20/249.03/249.33	250

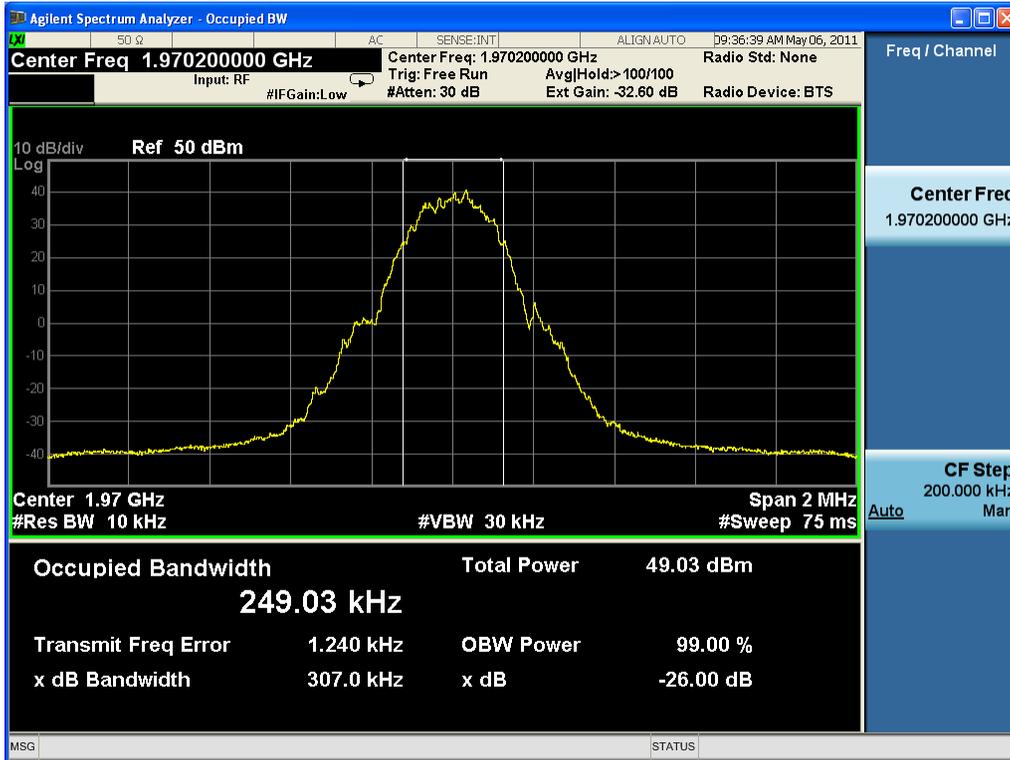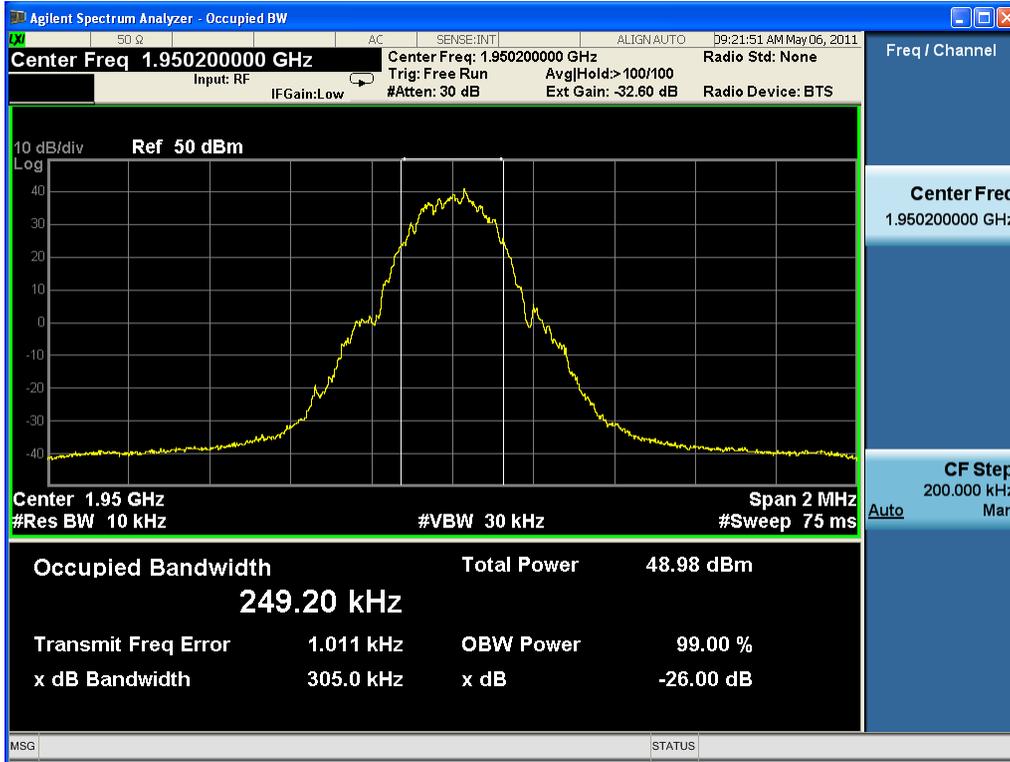

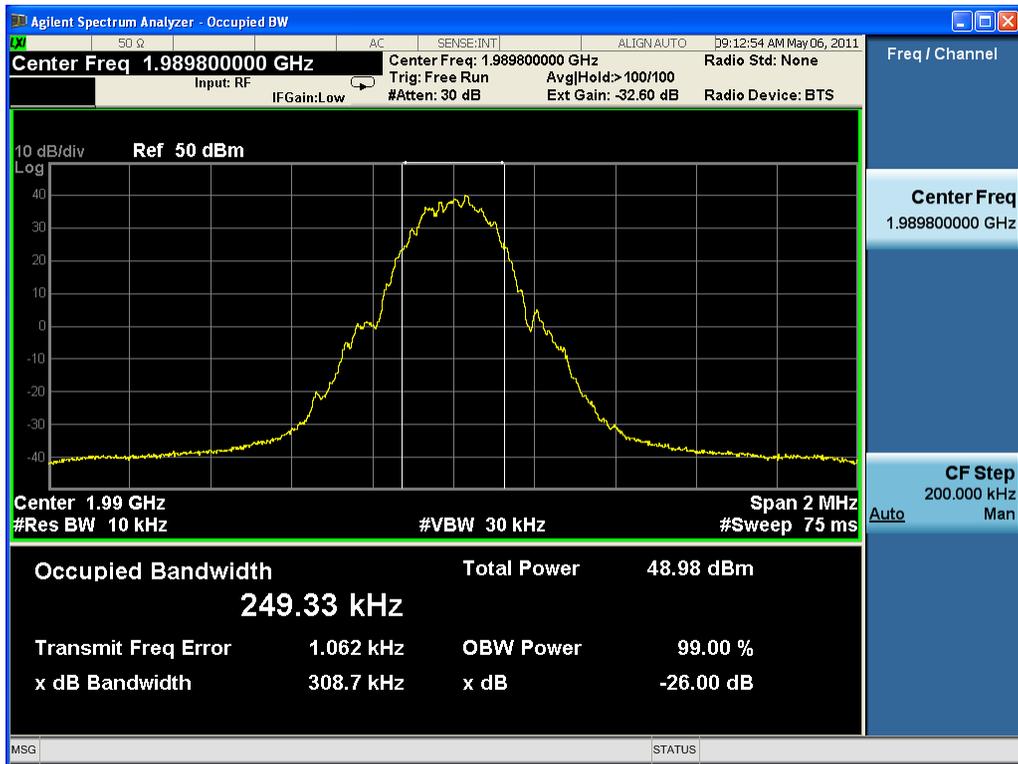

4.7 BAND EDGES

Applicable Standard: FCC §2.1051 §24.238

According to §2.1051 and §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (p) by a factor of at least $43 + 10 \log(p)$ dB. The limit (dBm) should $< P - (43 + 10 \log(P)) = -13 \text{dBm}$.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
DST	DST100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

Test Data Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53%
ATM Pressure:	1009mbar


Test Result: Pass

Test Mode: Transmitting GSM

Test Data

Six carriers

Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1950.2/1950.8/1951.4/1952/1952.6/1953.2	-14.883	-13.00
1986.8/1987.4/1988/1988.6/1989.2/1989.8	-13.633	-13.00

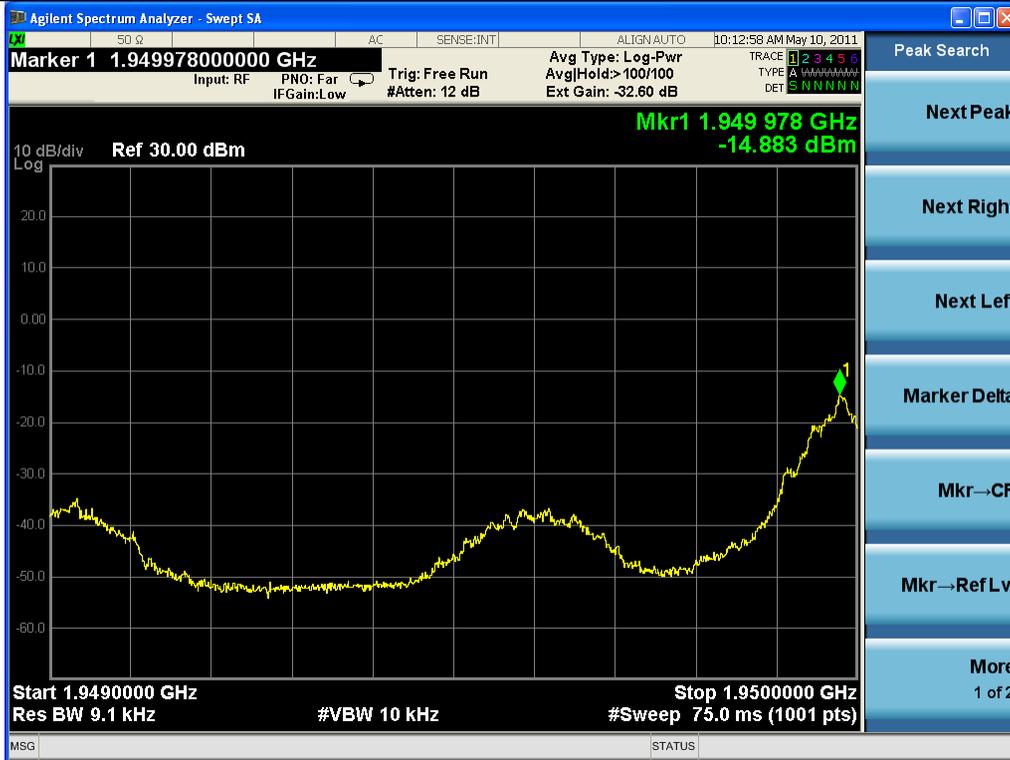



Five carriers

Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1950.2/1950.8/1951.4/1952/1952.6	-14.614	-13.00
1987.4/1988/1988.6/1989.2/1989.8	-13.736	-13.00



Four carriers

Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1950.2/1950.8/1951.4/1952	-14.201	-13.00
1988/1988.6/1989.2/1989.8	-14.194	-13.00



Three carriers

Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1950.2/1950.8/1951.4	-14.898	-13.00
1988.6/1989.2/1989.8	-14.048	-13.00



Two carriers

Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1950.2/1950.8	-14.630	-13.00
1989.2/1989.8	-13.659	-13.00



One carrier

Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1950.2	-14.420	-13.00
1988.6	-13.841	-13.00



4.8 FREQUENCY STABILITY

Applicable Standard: FCC § 2.1055

Requirements: FCC § 2.1055 (a)(d),

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
GZ-ESPEC	Temperature Chamber	EW0470	06113028	2011-1-26	2012-1-26
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
DST	DST100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Spectrum Analyzer via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 150 minutes, the frequency output was recorded from the counter.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

Environmental Conditions

Normal condition:	25° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Test Result: Pass**Test Mode:** Transmitting GSM**Test Data****Frequency Stability Versus Temperature**

Frequency Stability vs. Temperature (1950-1990M)					
B(1950.2M)					
Temperature	Power Supplied Vdc	Frequency Measure Error Hz	Error ppm	Limit ppm	Result
-40	-48	-12.09	-0.006	0.02	PASS
-30	-48	8.82	0.005	0.02	PASS
-20	-48	-11.2	-0.006	0.02	PASS
-10	-48	7.9	0.004	0.02	PASS
0	-48	-7.01	-0.004	0.02	PASS
10	-48	-5.95	-0.003	0.02	PASS
20	-48	9.92	0.005	0.02	PASS
30	-48	-9.47	-0.005	0.02	PASS
40	-48	10.06	0.005	0.02	PASS
50	-48	13.13	0.007	0.02	PASS
55	-48	-10.24	-0.005	0.02	PASS
M(1970.2M)					
-40	-48	7.90	0.004	0.02	PASS
-30	-48	5.32	0.003	0.02	PASS
-20	-48	7.69	0.004	0.02	PASS
-10	-48	-9.26	-0.005	0.02	PASS

0	-48	-6.66	-0.003	0.02	PASS
10	-48	-4.70	-0.002	0.02	PASS
20	-48	-6.44	-0.003	0.02	PASS
30	-48	-7.07	-0.004	0.02	PASS
40	-48	-8.19	-0.004	0.02	PASS
50	-48	8.30	0.004	0.02	PASS
55	-48	-8.49	-0.004	0.02	PASS
T(1989.8M)					
-40	-48	-5.86	-0.003	0.02	PASS
-30	-48	8.28	0.004	0.02	PASS
-20	-48	-6.14	-0.003	0.02	PASS
-10	-48	-8.69	-0.004	0.02	PASS
0	-48	-9.78	-0.005	0.02	PASS
10	-48	-9.15	-0.005	0.02	PASS
20	-48	9.32	0.005	0.02	PASS
30	-48	-7.97	-0.004	0.02	PASS
40	-48	-8.02	-0.004	0.02	PASS
50	-48	8.20	0.004	0.02	PASS
55	-48	-11.82	-0.006	0.02	PASS

Frequency Stability Versus Voltage

Frequency Stability vs. Voltage (1950-1990M)					
B(1950.2M)					
Voltage Vac	Temperature	Frequency Measure Error Hz	Error ppm	Limit ppm	Result
-37	20	-8.00	-0.004	0.02	PASS
-39	20	-9.12	-0.005	0.02	PASS
-41	20	8.49	0.004	0.02	PASS
-43	20	6.35	0.003	0.02	PASS
-45	20	-8.03	-0.004	0.02	PASS
-47	20	8.12	0.004	0.02	PASS
-49	20	-9.10	-0.005	0.02	PASS
-51	20	-6.43	-0.003	0.02	PASS
-53	20	0.21	0.000	0.02	PASS
-55	20	5.37	0.003	0.02	PASS
-57	20	-7.62	-0.004	0.02	PASS
-59	20	-3.00	-0.002	0.02	PASS
-61	20	-5.72	-0.003	0.02	PASS
-62	20	-8.75	-0.004	0.02	PASS

T(1970.2M)					
-37	20	-8.14	-0.004	0.02	PASS
-39	20	-6.49	-0.003	0.02	PASS
-41	20	-7.81	-0.004	0.02	PASS
-43	20	-5.59	-0.003	0.02	PASS
-45	20	-5.72	-0.003	0.02	PASS
-47	20	-11.29	-0.006	0.02	PASS
-49	20	8.69	0.004	0.02	PASS
-51	20	-8.22	-0.004	0.02	PASS
-53	20	-5.76	-0.003	0.02	PASS
-55	20	-5.49	-0.003	0.02	PASS
-57	20	-9.14	-0.005	0.02	PASS
-59	20	-5.77	-0.003	0.02	PASS
-61	20	-10.73	-0.005	0.02	PASS
-62	20	9.06	0.005	0.02	PASS
T(1989.8M)					
-37	20	-9.12	-0.005	0.02	PASS
-39	20	-5.33	-0.003	0.02	PASS
-41	20	-8.5	-0.004	0.02	PASS
-43	20	-8.65	-0.004	0.02	PASS
-45	20	-11.73	-0.006	0.02	PASS
-47	20	-6.3	-0.003	0.02	PASS
-49	20	-3.64	-0.002	0.02	PASS
-51	20	7.03	0.004	0.02	PASS
-53	20	5.74	0.003	0.02	PASS
-55	20	-10.63	-0.005	0.02	PASS
-57	20	-6.91	-0.003	0.02	PASS
-59	20	-9.26	-0.005	0.02	PASS
-61	20	-7.9	-0.004	0.02	PASS
-62	20	11.9	0.006	0.02	PASS

5 DUAL-MODE OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§2.1046 §24.232	Transmitter output Power	Compliant
§2.1091 §1.1037	RF Exposure	Compliant
§2.1053	Spurious Radiated Emissions	Compliant
§2.1051, §24.238	Spurious Emissions AT Antenna Terminals	Compliant
§2.1049 §24.229 §24.238	Occupied Bandwidth	Compliant
§2.1051, §24.238	Band Edge	Compliant

5.1 TRANSMITTER OUTPUT POWER

According to FCC §2.1046 & 24.232, the EIRP (equivalent isotropically radiated power) must not exceed 1640 Watts.

According to RSS-133, SRSP 510 5.1.1 the EIRP (equivalent isotropically radiated power) must not exceed 3280 Watts/MHz for base station transmitters operating in the band of 1930 MHz to 1995 MHz with the antenna height above average terrain up to 300 meters. If used in urban area, the limit should be 1640 Watts/MHz.


Applicable Standard: FCC §2.1046 §24.232

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
DTS	DTS100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

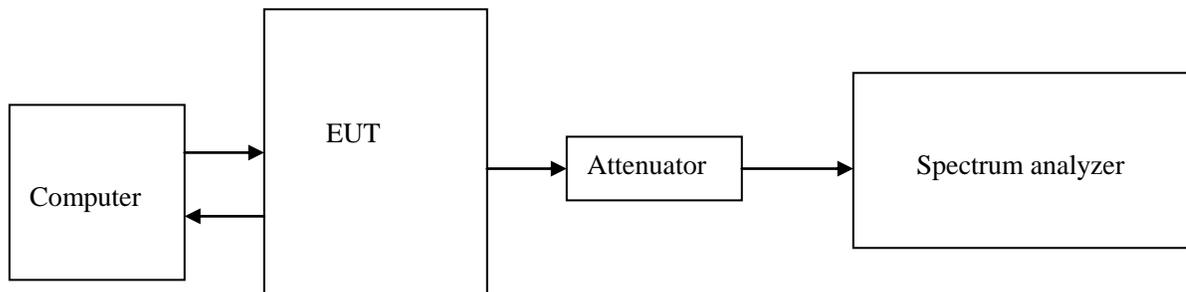

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. External attenuation Loss is 40dB, Cable Loss is about 3dB

Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar


Test Result: Pass

Test Mode: Transmitting 2GSMTRX and 2UMTS carriers and 4GSM TRX and 1UMTS carriers

Test Data:


2GSMTRX and 2UMTS carriers

Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
1970	1970	48.64

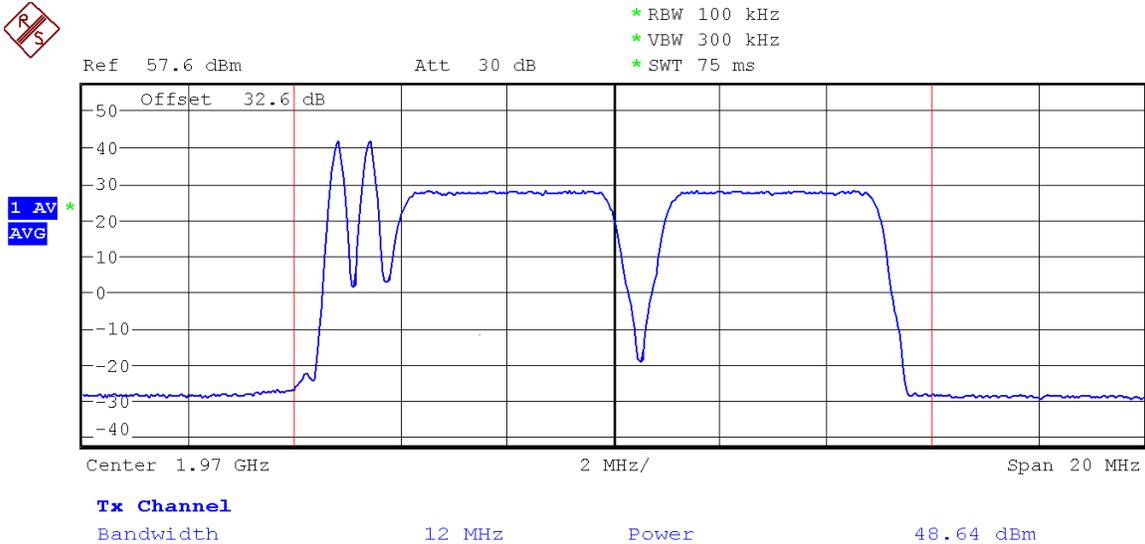

4GSM TRX and 1UMTS carriers

Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
1970	1970	48.58

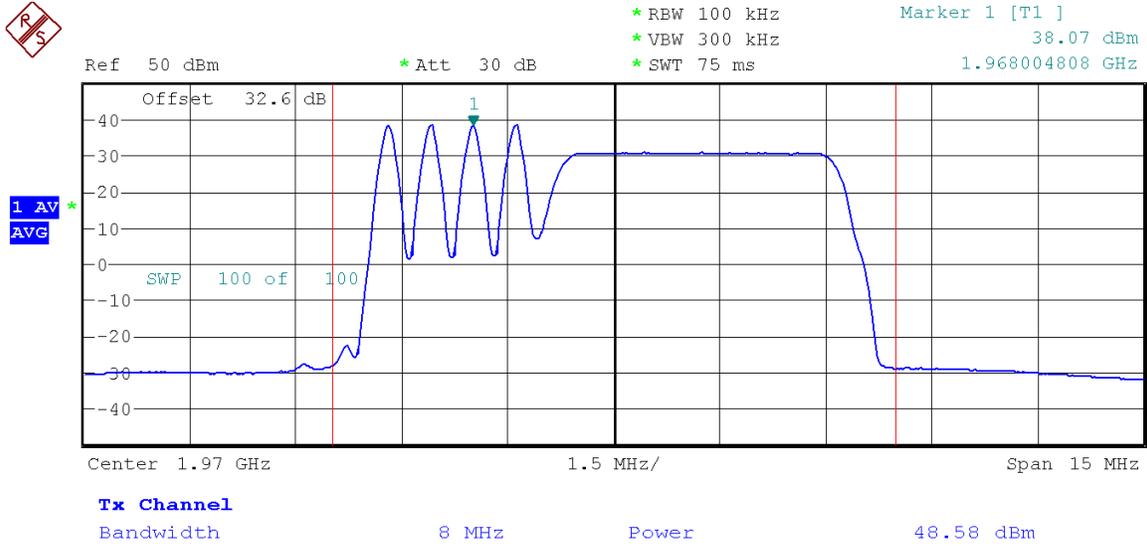

5.2 RF EXPOSURE

Applicable standard: FCC §2.1091 and §1.1037

Limit

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated. Limits for Maximum Permissible Exposure (MPE)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

Test Data

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = EIRP / 4\pi R^2$$

Where: S = power density

EIRP= equivalent isotropically radiated power=ERP+2.15dB

R = distance to the center of radiation of the antenna= [(ERP+2.15dB)/4πS]^{1/2}

Maximum EIRP, In general, the equivalent isotropically radiated power (ERP) of base transmitters and cellular repeaters must not exceed 1640 Watts.

Frequency is between 1500MHz and 100000MHz, and the Maximum S=1.0mW/cm²
R=3.61m.

This equipment should be installed and operated with minimum distance 3.61m between the radiator& your body.

Test Result: pass

5.3 SPURIOUS RADIATED EMISSIONS

Applicable Standard: FCC CFR 47, §2.1053

Test Equipment List and Details

Manufacturer	Equipment	Model	Serial Number	Last Cal.	Cal. Interval
Albatross	Anechoic Chamber	3m Site	A00017354	2010-6-30	1 year
R&S	EMI Test Receiver	ES126	100058	2010-10-29	1 year
R&S	Log periodic Antenna	HL562	100022	2010-8-5	1 year
R&S	Double-Ridged Waveguide Horn Antenna	HF906 TX	100032	2010-8-5	1 year


***statement of traceability:** ZTE Corporation Testing lab attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiated emissions measurement at the EMC lab of ZTE Corp. is 3.6dB.

EUT Setup

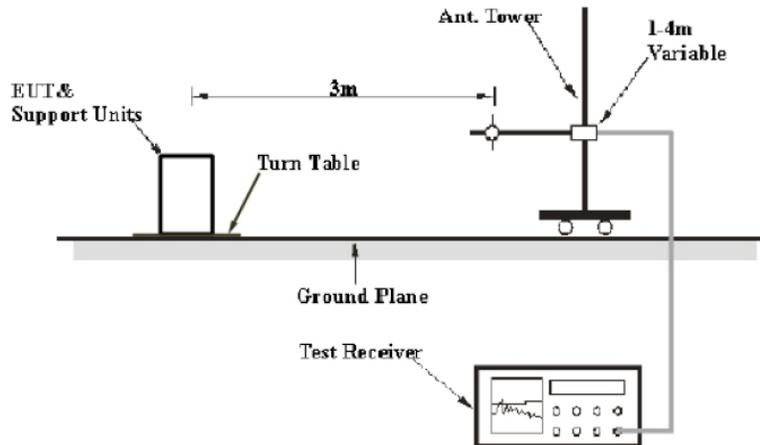

The radiated emission tests were performed in the 3-meter Chamber, using the setup accordance with the FCC part 2.1053. The specification used was the FCC 2.1053 limits.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TX pwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 43 + 10 lg P (power out in Watts)

The resolution bandwidth of the spectrum analyzer was set at 100KHz for 30MHz to 1GHz scanning, set at 1MHz or 3MHz for 1GHz to 20GHz scanning.

Test Results Summary: PASS

Environmental Conditions

Temperature:	26°C
Relative Humidity:	60 %
ATM Pressure:	1009 mbar

Test data

Indicated		Table	Test Antenna		Substituted		Cable Loss (dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (GHz)	Amp. (dBuV)	Angle Degree	Height(M)	Polar H/V	Level (dBm)	Antenna Gain Correction						
59.158317	46.83	38.60	1	V	-20.37	-29.52	0.5	-50.39	2.15	-52.54	-13	39.54
64.98998	43.39	38.60	1	V	-23.81	-27.24	0.6	-51.65	2.15	-53.8	-13	40.8
220.501002	46.08	38.60	1	V	-51.99	1.42	1.2	-51.77	2.15	-53.92	-13	40.92
1372.74549	48.52	359.30	1	V	-55.27	4.25	3.1	-54.12	2.15	-56.27	-13	43.27
1981.96393	88.05	206.10	1	V	-19.47	6.55	3.8	-16.72	2.15	-18.87	-13	5.87
2659.31864	60.48	206.10	1	V	-47.05	7.95	4.3	-43.4	2.15	-45.55	-13	32.55
214.669339	50.74	69.20	2	H	-48.65	1.23	1.2	-48.62	2.15	-50.77	-13	37.77
632.60521	38.09	0.60	2	H	-62.8	-1.09	2.1	-65.99	2.15	-68.14	-13	55.14
988.336673	43.32	237.10	2	H	-48.68	-2.59	2.7	-53.97	2.15	-56.12	-13	43.12
1388.77756	48.93	69.20	2	H	-57.17	4.25	3.1	-56.02	2.15	-58.17	-13	45.17
1981.96393	83.53	153.20	2	H	-23.07	6.55	3.8	-20.32	2.15	-22.47	-13	9.47
2971.94389	60.26	123.50	1	H	-43.85	7.95	4.6	-40.5	2.15	-42.65	-13	29.65

Radiation emission spurious below 3GHz

Indicated		Table	Test Antenna		Substituted		Cable Loss (dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (GHz)	Amp. (dBuV)	Angle Degree	Height(M)	Polar H/V	Level (dBm)	Antenna Gain Correction						
3969.93988	53.53	187.20	1	V	-52.56	7.75	5.3	-50.11	2.15	-52.26	-13	39.26
5565.13026	48.16	306.00	1	V	-58.47	9.05	6.4	-55.82	2.15	-57.97	-13	44.97
5957.91583	63.29	118.50	1	V	-40.19	9.05	6.7	-37.84	2.15	-39.99	-13	26.99
10490.982	58.44	306.00	1	V	-49.79	11.35	9.1	-47.54	2.15	-49.69	-13	36.69
14529.0581	63.3	324.50	1	V	-49.95	9.15	11	-51.8	2.15	-53.95	-13	40.95
3961.92385	56.88	183.30	2	H	-46.52	7.75	5.3	-44.07	2.15	-46.22	-13	33.22
5492.98597	48.11	359.30	2	H	-52.79	8.55	6.4	-50.64	2.15	-52.79	-13	39.79
5949.8998	65.93	168.90	2	H	-32.68	9.05	6.6	-30.23	2.15	-32.38	-13	19.38
10204.4088	58.52	359.30	2	H	-50.42	11.35	8.9	-47.97	2.15	-50.12	-13	37.12
14372.7455	63.38	0.00	2	H	-41.94	9.65	10.8	-43.09	2.15	-45.24	-13	32.24

Radiation emission spurious above 3GHz

5.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard: FCC§2.1051, §24.238

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified .


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
DST	DST100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

EUT Setup:

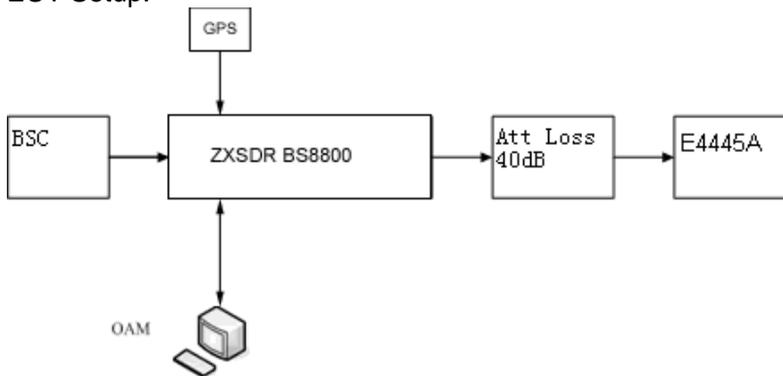

REMARKS: Attenuator loss (dB)=40dB, Cable Loss (dB)=3dB.

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1 kHz for 9KHz to 150KHz scanning, set at 10KHz for 150KHz to 30MHz scanning ,set at 100KHz for 30MHz to 1GHz scanning, set at 1MHz or 3MHz for 1GHz to 22GHz scanning. Sufficient scans were

taken to show any out of band emissions up to 10th harmonic.

Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar

Test Result: Pass


Test Mode: Transmitting 2GSMTRX and 2UMTS carriers and 4GSM TRX and 1UMTS carriers

Test Data:


2GSMTRX and 2UMTS carriers

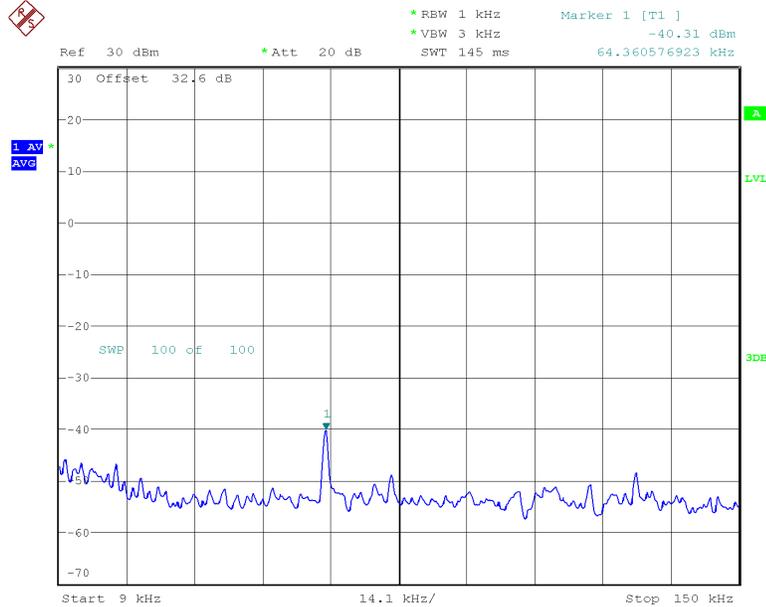


DEMO-BORD-46M-76DB
 Date: 12.MAY.2011 16:12:16

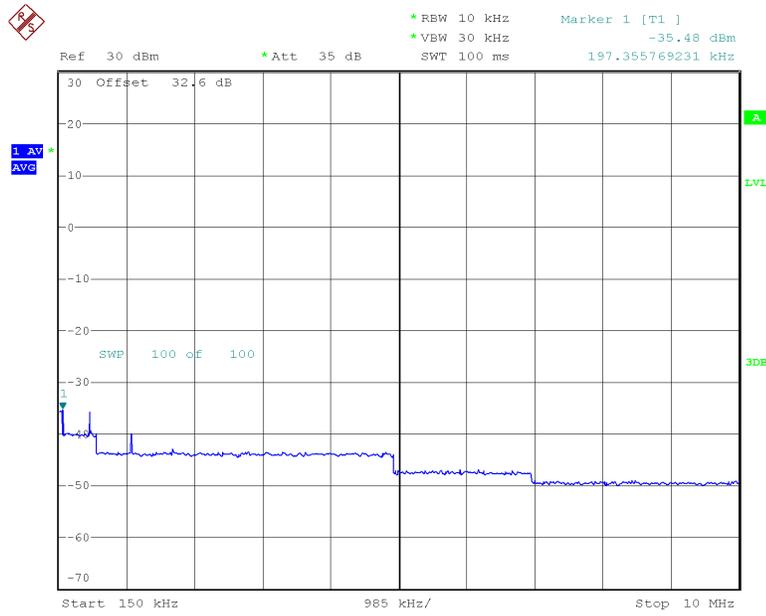


DEMO-BORD-46M-76DB
Date: 12.MAY.2011 16:15:03

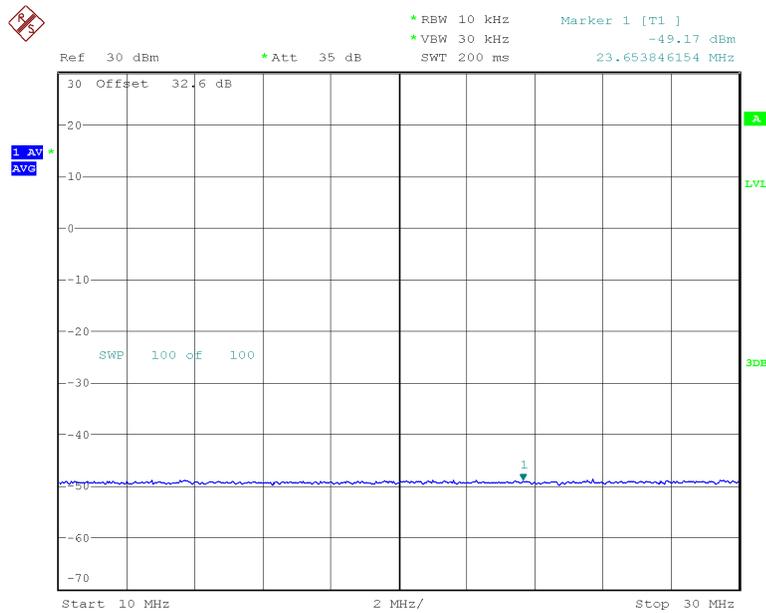


DEMO-BORD-46M-76DB
Date: 12.MAY.2011 16:16:31

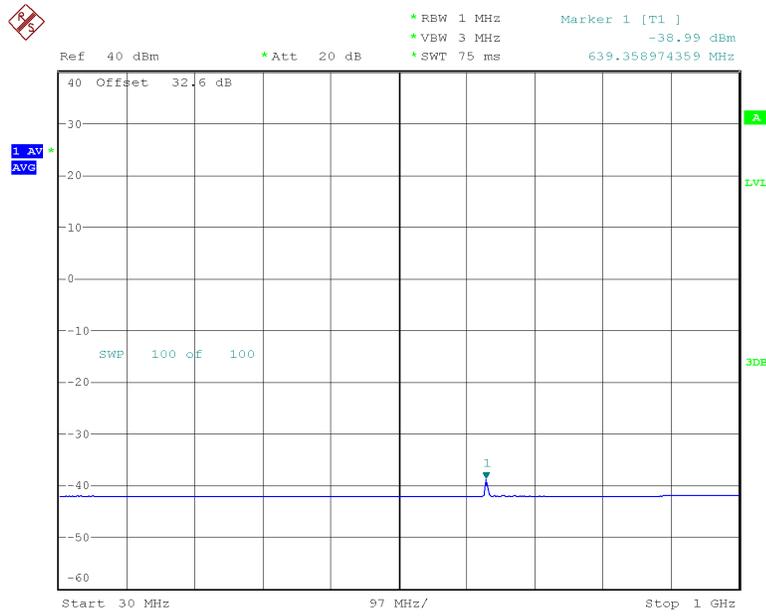

DEMO-BORD-46M-76DB
Date: 12.MAY.2011 16:19:34

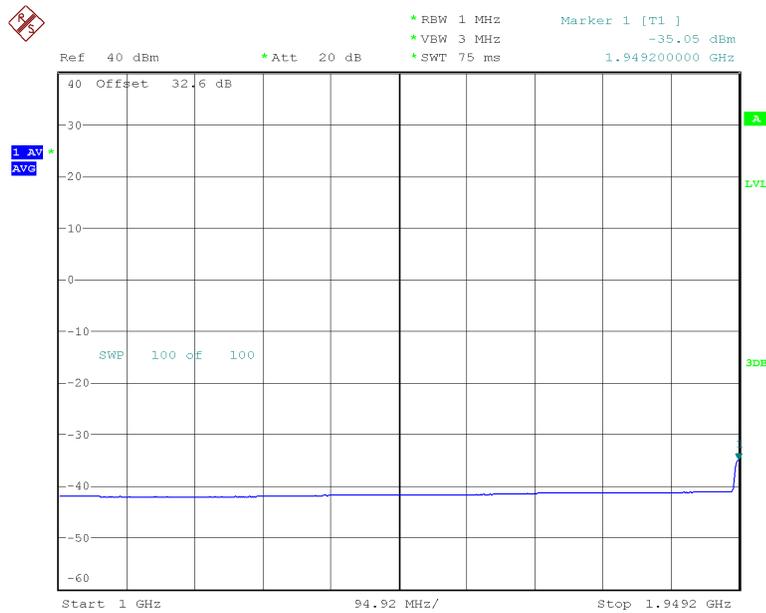


DEMO-BORD-46M-76DB
Date: 12.MAY.2011 16:22:09

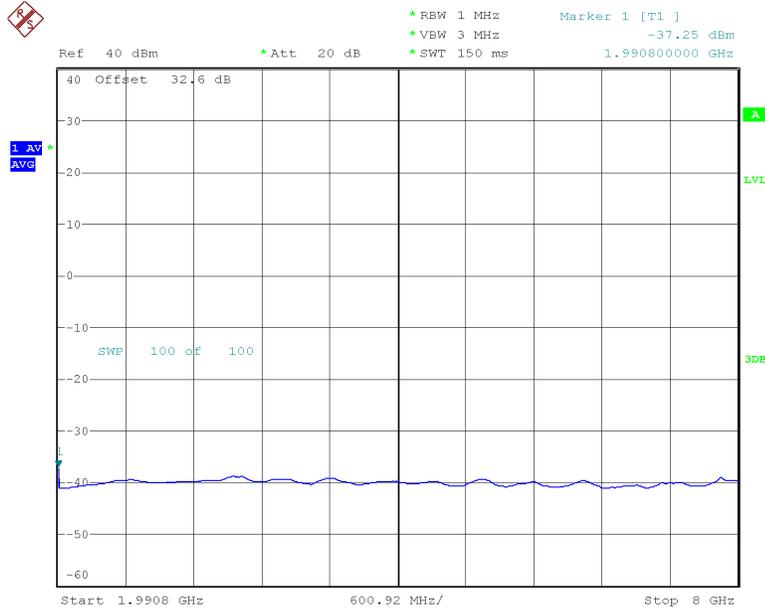


DEMO-BORD-46M-76DB
Date: 12.MAY.2011 16:23:14


4GSM TRX and 1UMTS carriers

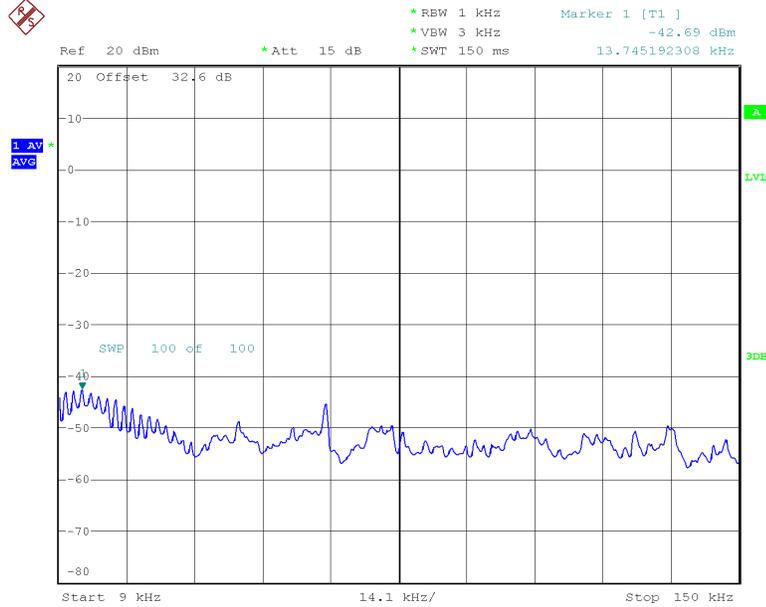


DEMO-BORD-46M-76DB
Date: 12.MAY.2011 14:59:39

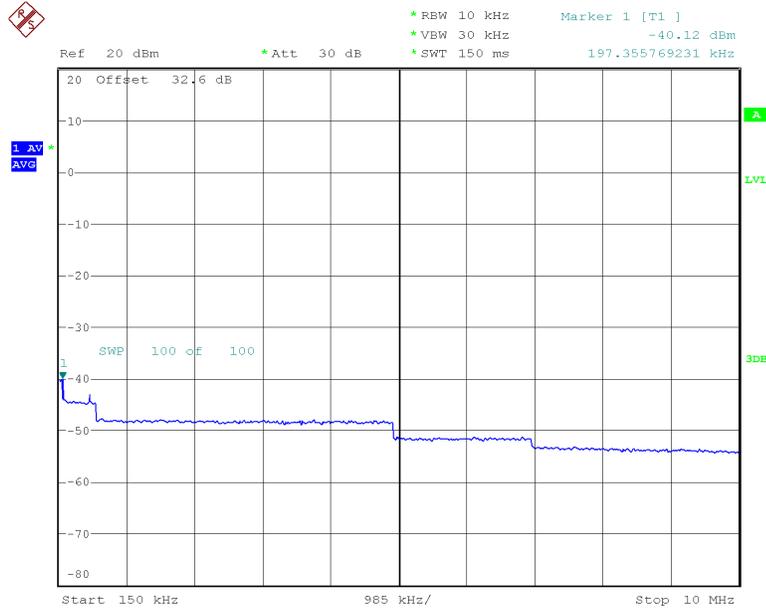


DEMO-BORD-46M-76DB
Date: 12.MAY.2011 15:08:12

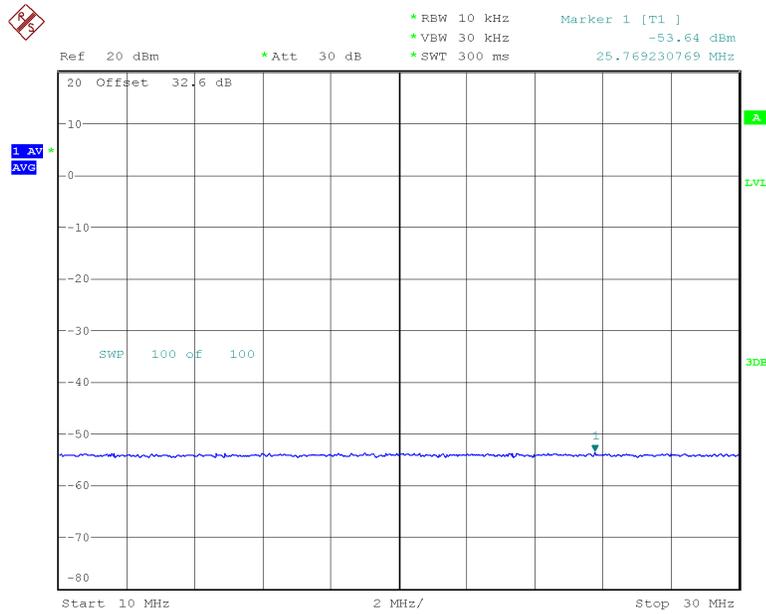


DEMO-BORD-46M-76DB
Date: 12.MAY.2011 15:10:10

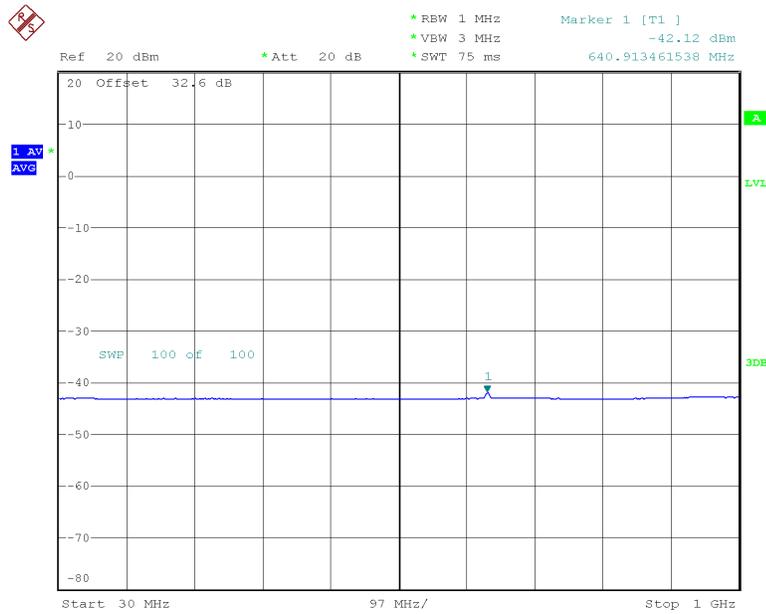

DEMO-BORD-46M-76DB
Date: 12.MAY.2011 15:14:35

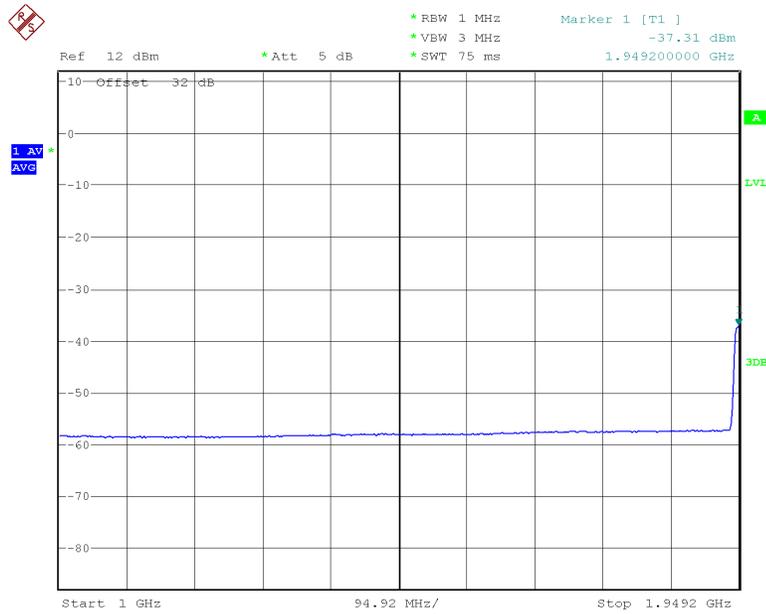

DEMO-BORD-46M-76DB
Date: 12.MAY.2011 15:33:47

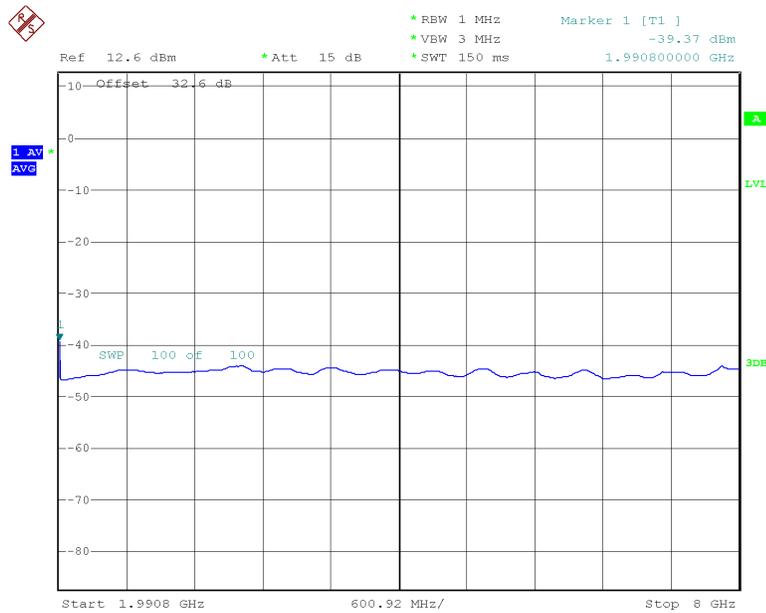

DEMO-BORD-46M-76DB
Date: 12.MAY.2011 15:37:40

5.5 BAND EDGES

Applicable Standard: FCC §2.1051

According to §2.1051, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (p) by a factor of at least $43 + 10 \log(p)$ dB. The limit (dBm) should $< P - (43 + 10 \log(P)) = -13 \text{dBm}$.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
DST	DST100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

Test Data Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53%
ATM Pressure:	1009mbar


Test Result: Pass

Test Mode: Transmitting 2GSMTRX and 2UMTS carriers and 4GSM TRX and 1UMTS carriers


Test Data

2GSMTRX and 2UMTS carriers

Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1949~1950	-15.82	-13.00
1990~1991	-12.88	-13.00

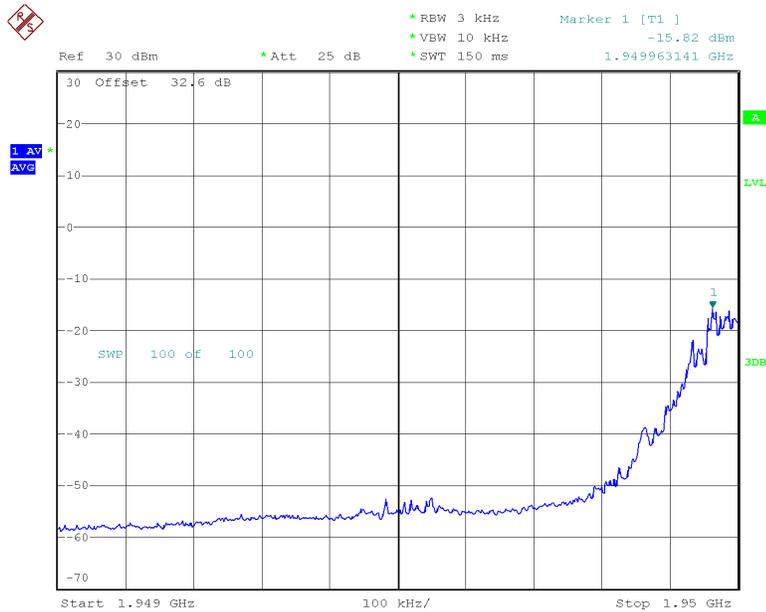


DEMO-BORD-46M-76DB
 Date: 12.MAY.2011 16:39:09

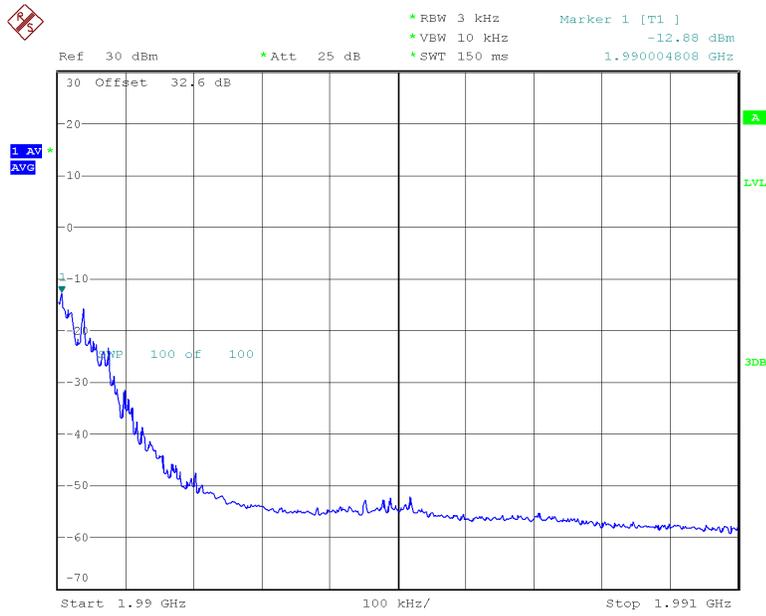


DEMO-BORD-46M-76DB
Date: 12.MAY.2011 16:36:32

4GSM TRX and 1UMTS carriers

Frequency	Max bandedge Emission (dBm)	Limit (dBm)
1949~1950	-15.60	-13.00
1990~1991	-14.14	-13.00

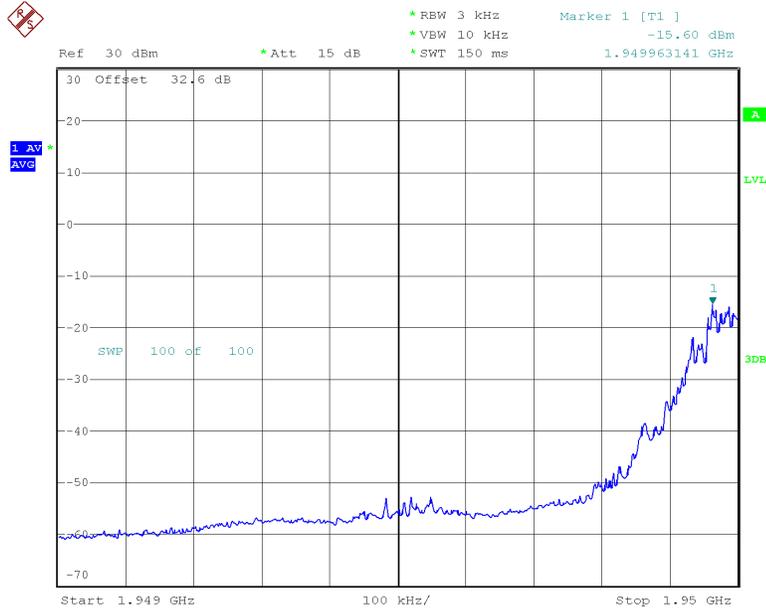

DEMO-BORD-46M-76DB
Date: 12.MAY.2011 16:33:15

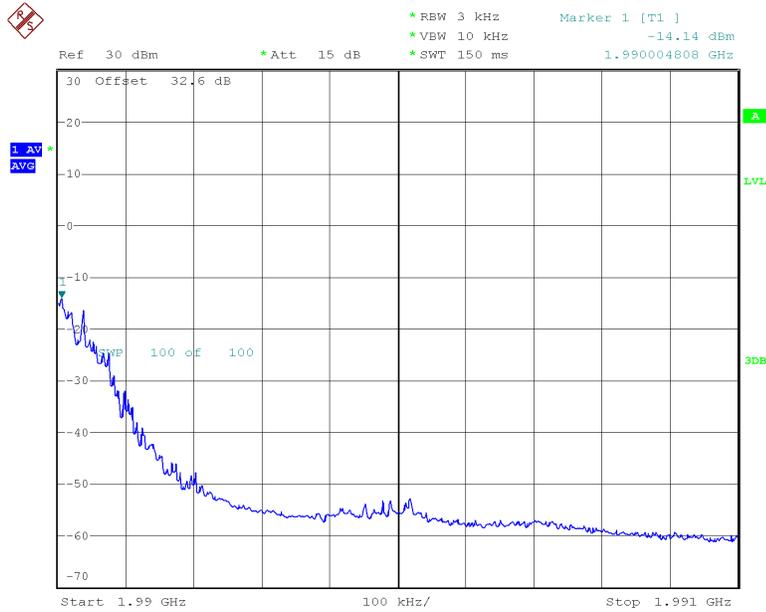

DEMO-BORD-46M-76DB
Date: 12.MAY.2011 16:35:24

5.6 OCCUPIED BANDWIDTH

Applicable Standard: FCC §2.1049 §24.229 §24.238

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
DST	DST100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

The RF out of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. The resolution bandwidth of the spectrum analyzer was set at 1% of the span or higher and 99%Power bandwidth was recorded.

Environmental Conditions

Temperature:	20 ° C
Relative Humidity:	53%
ATM Pressure:	1009mbar


Test Result: Pass

Test Mode: Transmitting 2GSMTRX and 2UMTS carriers and 4GSM TRX and 1UMTS carriers

Test Data

2GSMTRX and 2UMTS carriers


Frequency (MHz)	99% Power Bandwidth (MHz)
1970	10.1923

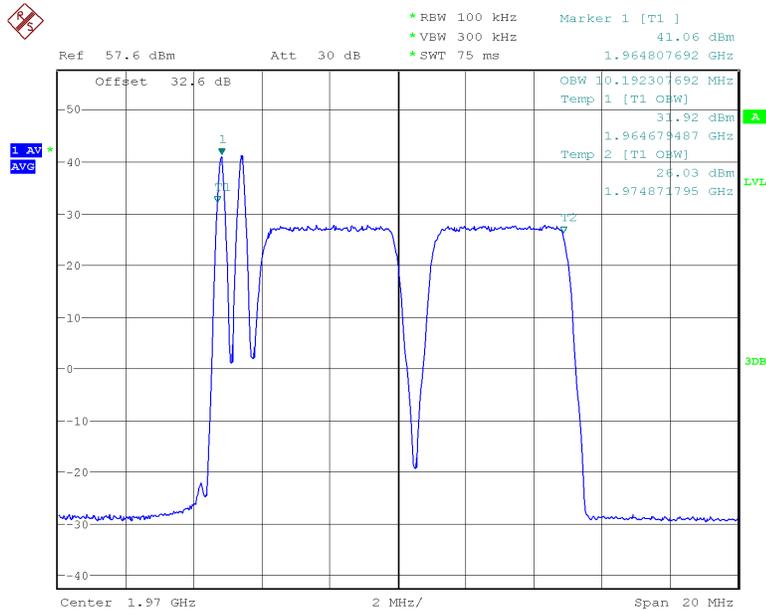

DEMO-BORD-46M-76DB
 Date: 12.MAY.2011 14:50:55

4GSM TRX and 1UMTS carriers

Frequency (MHz)	99% Power Bandwidth (MHz)
1970	6.4423

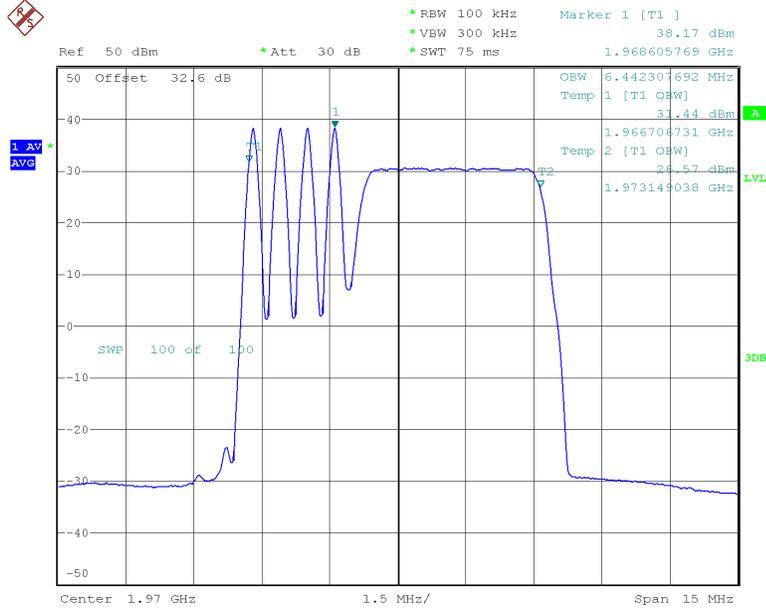

DEMO-BORD-46M-76DB
 Date: 12.MAY.2011 16:10:43