


FCC MEASUREMENT AND TEST REPORT

For

ZTE Corporation

ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen,
Guangdong, China 518057

FCC ID: Q78-R8882L268

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: LTE Remote Radio Unit
<p>Test Engineer: Jennie.He</p> <p>Report No.: FCC-2011-031</p> <p>Test Date: OCT 25 – OCT 30, 2012</p> <p>Reviewed By: </p> <p>Prepared By: ZTE Corporation.</p> <p>ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen, Guangdong, China 518057, P.R.China Tel: +86-755-26770000 Fax: +86-755-26771999</p>	

Note: The test report is specially limited to the above company and this particular sample only. It may not be duplicated without prior written consent of ZTE Corporation. This report must not be used by the client to claim product certification 、 approval 、 or endorsement by any agency of the US Government.

1 TABLE OF CONTENTS

1	TABLE OF CONTENTS	2
2	GENERAL INFORMATION.....	4
	Product Description for Equipment Under Test (EUT).....	4
	Objective.....	4
	Related Submittal(s)/Grant(s).....	5
	Test Methodology	5
	Test Facility.....	5
3	SYSTEM TEST CONFIGURATION.....	6
	Description of Test Configuration	6
4	SUMMARY OF TEST RESULTS	7
5	TRANSMITTER OUTPUT POWER	8
	Applicable Standard: FCC §2.1046 ,§27.50	8
	Test Equipment List and Details.....	8
	Test Procedure.....	8
	Environmental Conditions	8
	Test Result: Pass.....	9
	Test Mode: Transmitting LTE	9
	Test Data:.....	9
6	RF EXPOSURE.....	33
	Applicable standard: FCC §2.1091 §1.1037	33
	Limit.....	33
	Test Data.....	34
	Test Result: pass.....	34
7	MODULATION CHARACTERISTIC.....	34
	Applicable Standard: FCC §2.1047	34
	Test Equipment List and Details.....	34
	Test Procedure.....	35
	Test Data Environmental Conditions	35
	Test Result: Pass.....	35
	Test Mode: Transmitting LTE	35
	Test Data:.....	35
8	SPURIOUS RADIATED EMISSIONS	131
	Applicable Standard: FCC CFR 47 §2.1053.....	131
	Test Equipment List and Details.....	131
	Test Procedure.....	132
	Test Results Summary: PASS	133
	Environmental Conditions	133
	Test data	133
9	SPURIOUS EMISSIONS AT ANTENNA TERMINALS	134
	Applicable Standard: FCC§2.1051, §27.53	134
	Test Equipment List and Details.....	134
	Test Procedure.....	134
	Test Data Environmental Conditions	135
	Test Result: Pass.....	135
	Test Mode: Transmitting LTE	135
	Test Data:.....	135
10	OCCUPIED BANDWIDTH.....	206
	Applicable Standard: FCC §2.1049	206

Test Equipment List and Details:.....206
Test Procedure.....207
Environmental Conditions207
Test Result: Pass.....207
Test Mode: Transmitting LTE207
Test Data.....207
11 BAND EDGES231
Applicable Standard: FCC §2.1051 ,§27.53.....231
Test Equipment List and Details.....231
Test Procedure.....232
Test Data Environmental Conditions232
Test Result: Pass.....232
Test Mode: Transmitting LTE232
Test Data.....232
12 FREQUENCY STABILITY256
Applicable Standard: FCC § 2.1055,256
Test Equipment List and Details.....256
Test Procedure.....257
Environmental Conditions257
Test Result: Pass.....258
Test Mode: Transmitting LTE258
Test Data.....258
Frequency Stability Versus Temperature.....258
Frequency Stability Versus Voltage.....287

2 GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The ZTE Corporation's product, model number: ZXSDR R8882 L268 or the "EUT" as referred to in this report is a LTE Remote Radio Unit.

Technical specification:

Size: 380 mm x 320 mm x 140 mm (HxWxD)

Input voltage: -37V~-57V

Frequency range: 2620MHz~2690 MHz

(Bottom frequency is about 2620.25MHz, Middle frequency is about 2655MHz,Top frequency is about 2689.75MHz).

Max RF output power: 46dBm

Gain of the antenna: 15dBi

Modulation type of emission: LTE

Appearance of EUT:

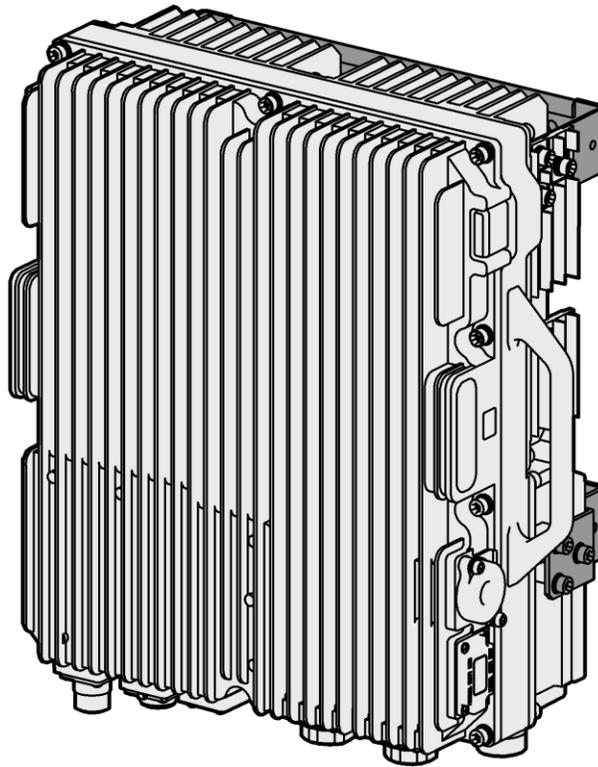


FIGURE 1 APPEARANCE OF ZXSDR R8882 L268

Objective

This Type approval report is prepared on behalf of ZTE Corporation in accordance with Part 2, Part 15, Part

27 of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2. as well as the following parts:

Part 24 Wireless Communication Services

Applicable Standards: TIA EIA 137-A, TIA EIA 97-D, TIA/EIA 603-C, Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

All radiated and conducted measurement was performed at ZTE Corporation Reliability Testing Center. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by ZTE Corporation to collect test data is located in the 1/F,B2 Wing, ZTE Plaza, Keji Road South, Shenzhen, Guangdong, 518057, P.R.China, Tel: +86-755-26771609,Fax: +86-755-26770347. Test site at ZTE Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 373926. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

3 SYSTEM TEST CONFIGURATION

Description of Test Configuration


Justification

The EUT was configured for testing according to TIA/EIA-603C.

The final qualification test was performed with EUT operating at normal mode.

Equipment Modifications

ZTE Corporation has not done any modification on the EUT.

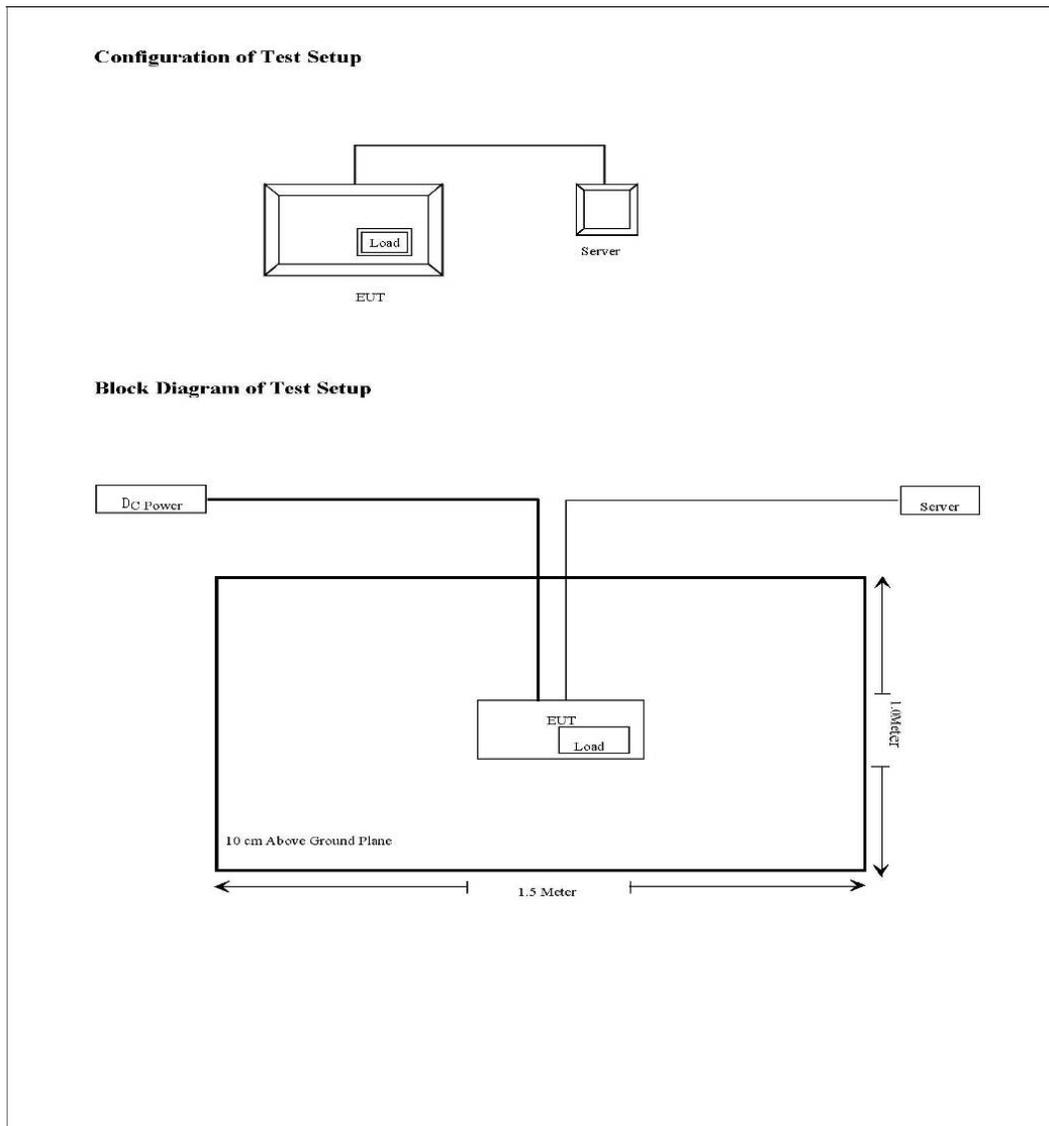

4 SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§ 2.1046 , , §27.50	Transmitter output Power	Compliant
§ 2.1091 , §1.1037	RF Exposure	Compliant
§ 2.1047	Modulation Characteristic	Compliant
§ 2.1053, §27.53	Spurious Radiated Emissions	Compliant
§ 2.1051, §27.53	Spurious Emissions AT Antenna Terminals	Compliant
§ 2.1049, §27.53	Occupied Bandwidth	Compliant
§ 2.1051, §27.53	Band Edge	Compliant
§2.1055	Frequency stability	Compliant

5 TRANSMITTER OUTPUT POWER

Applicable Standard: FCC §2.1046 ,§27.50

According to FCC §2.1046 &27.50, the ERP(equivalent radiated power) must not exceed 1000 Watts.


Note: ERP= Max output Power+ Antenna gain-Cable loss-2.15

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9030A	MY49431143	2012.09.25	2013.09.25
DTS	DTS 40dB Attenuator	DTS100-40-3-1	09112005	2012.09.26	2013.09.26
Silverline	Silverline RF Cable	SLA18-NMN1T	100311-04-0001	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attests that all calibration has been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

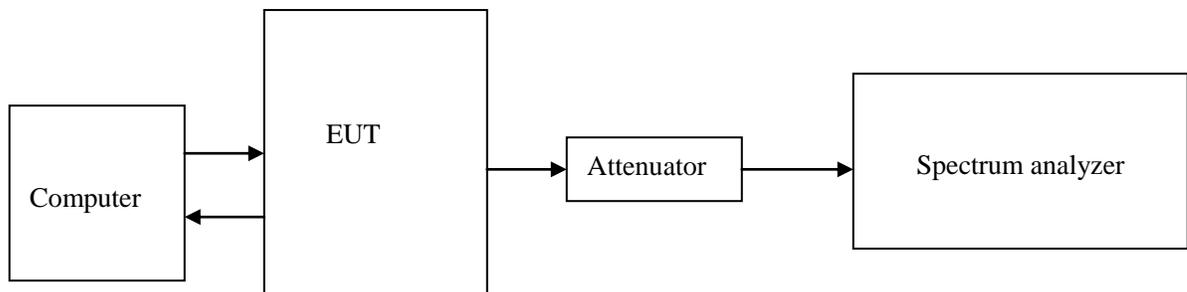

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. External attenuation Loss is 40dB, Cable Loss is about 1.5dB

Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar

Test Result: Pass


Test Mode: Transmitting LTE

Test Data:

Channel Bandwidth :20M

Port	Center Freq. (MHz)	Max output Power in dBm	Antenna gain dBi	Cable Loss dB	Dipole Antenna	Equivalent radiated power dBm Of single antenna	Total Power in W Of single antenna
1	2630	46.19	15	3	2.15	56.04	401.79
	2655	46.06	15	3	2.15	55.91	389.94
	2680	46.06	15	3	2.15	55.91	389.94
2	2630	46.40	15	3	2.15	56.25	421.70
	2655	46.03	15	3	2.15	55.88	387.26
	2680	46.20	15	3	2.15	56.05	402.72


20M -Port 1 -2630MHz

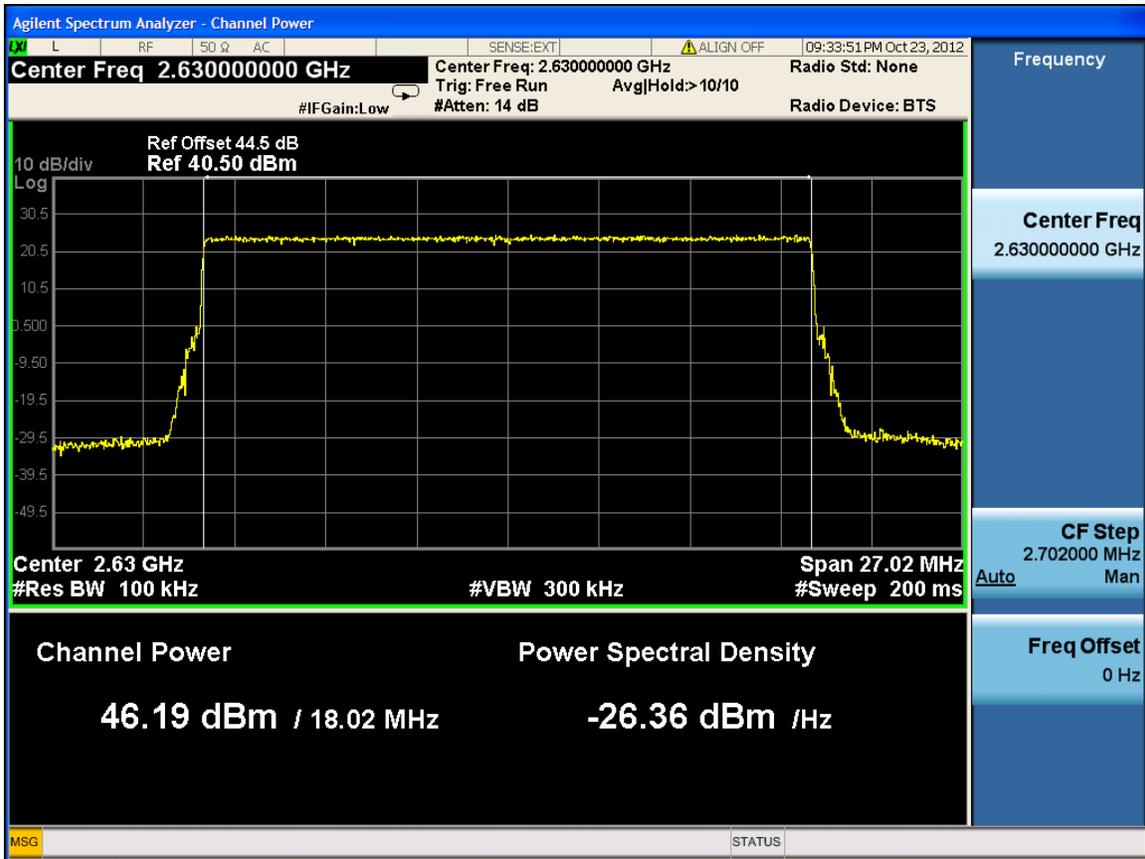


20M-Port 1 -2655MHz




20M-Port 1 -2680MHz

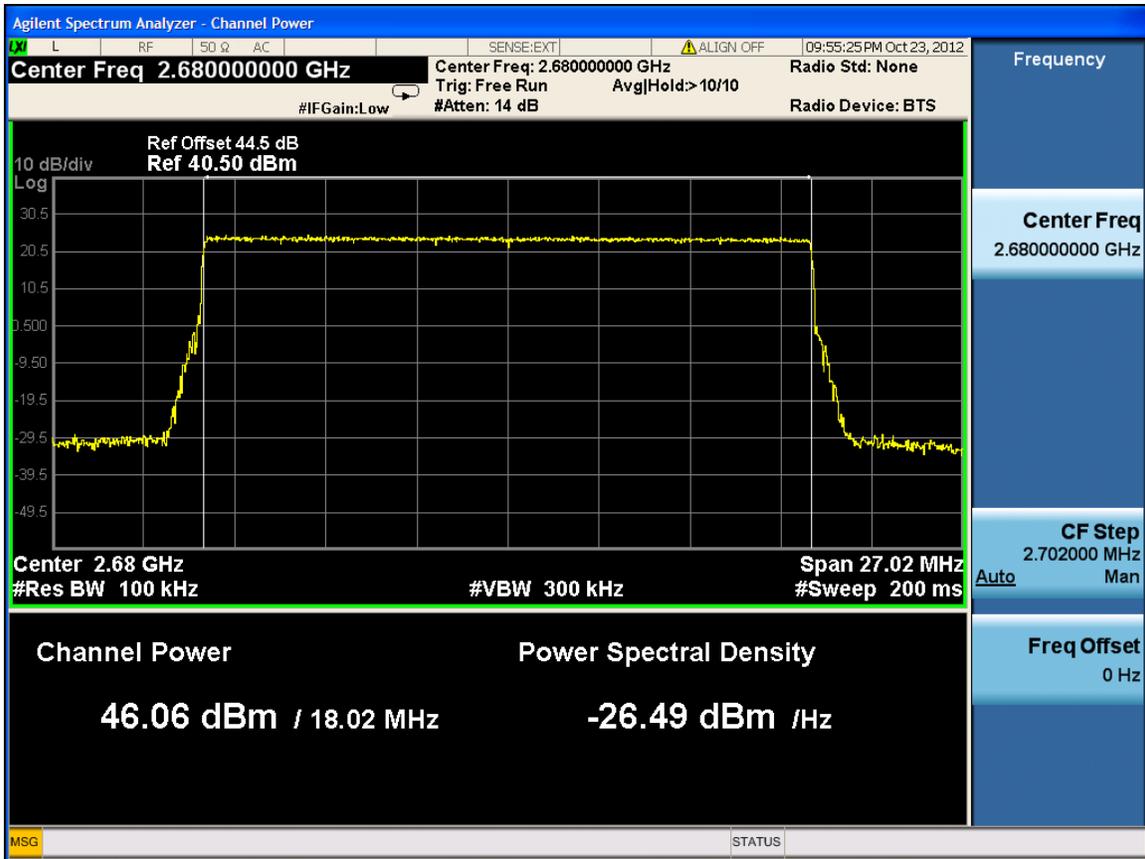

20M -Port 2 -2630MHz

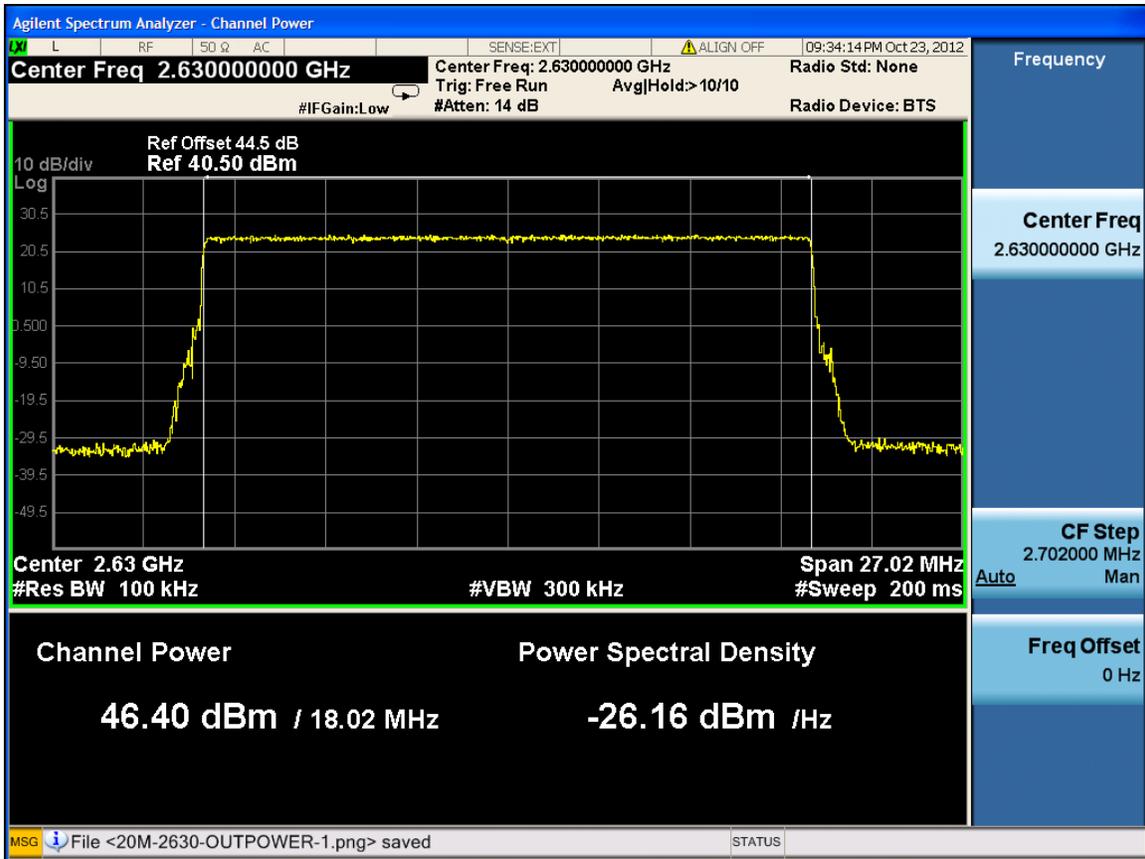

20M-Port 2 -2655MHz

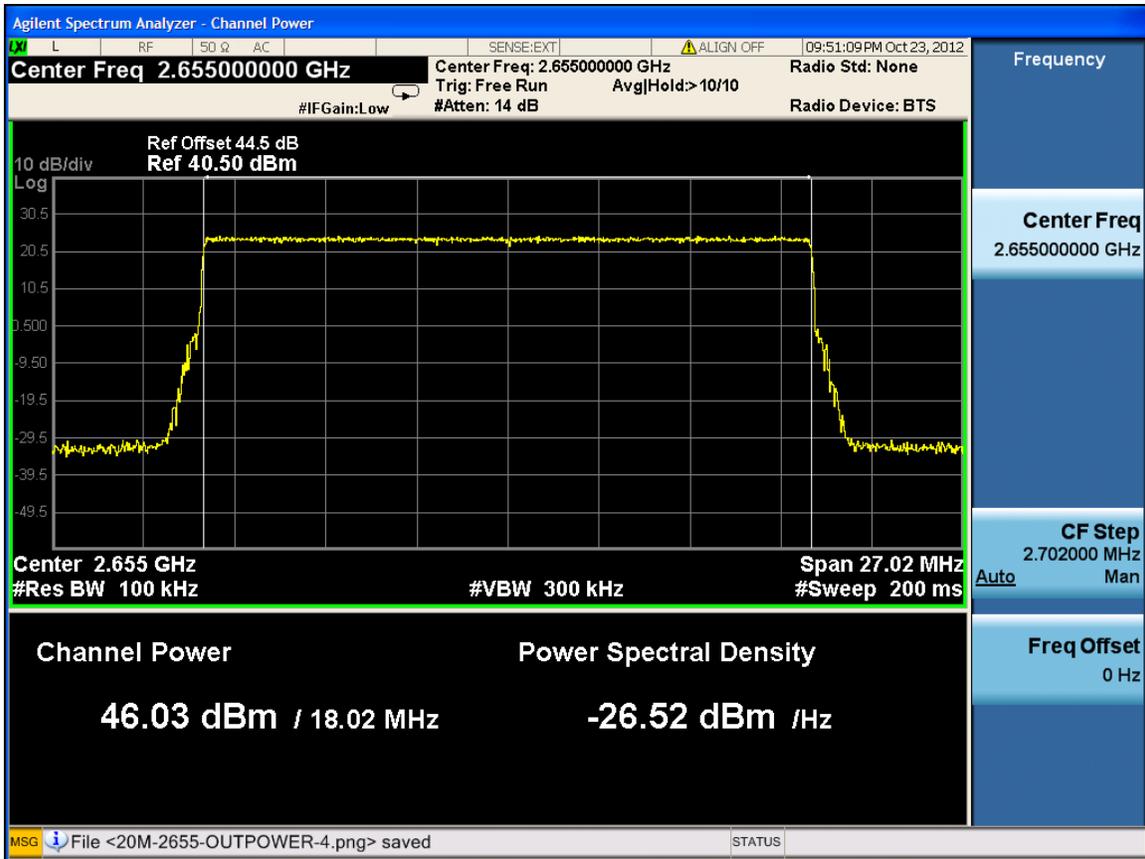


20M-Port 2 -2680MHz




Channel Bandwidth :15M

Port	Center Freq. (MHz)	Max output Power in dBm	Antenn a gain dBi	Cable Loss dB	Dipole Antenn a	Equivalent radiated power dBm Of single antenna	Total Power in W Of single antenna
1	2627.5	46.16	15	3	2.15	56.01	399.03
	2655	46.15	15	3	2.15	56.00	398.11
	2682.5	46.20	15	3	2.15	56.05	402.72
2	2627.5	46.20	15	3	2.15	56.05	402.72
	2655	46.17	15	3	2.15	56.02	399.95
	2682.5	46.23	15	3	2.15	56.08	405.51

15M-Port 1-2627.5MHz

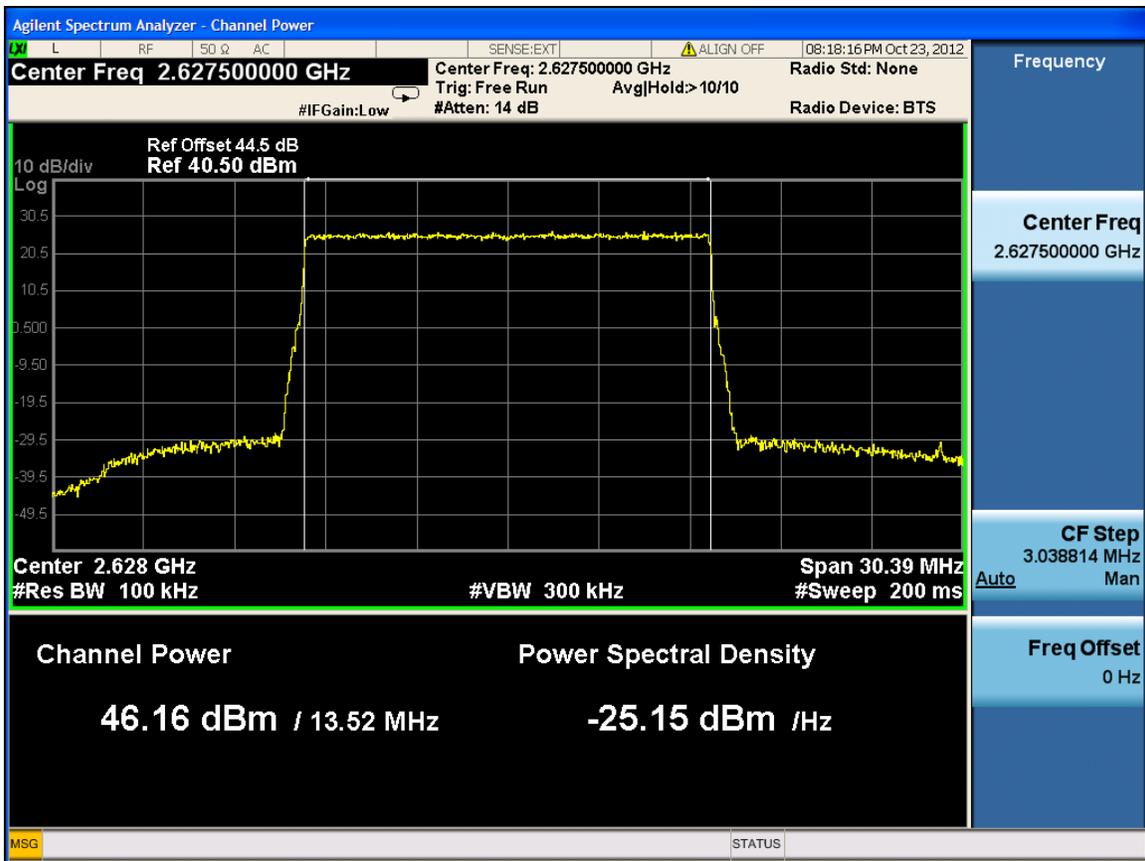


15M-Port 1-2655MHz

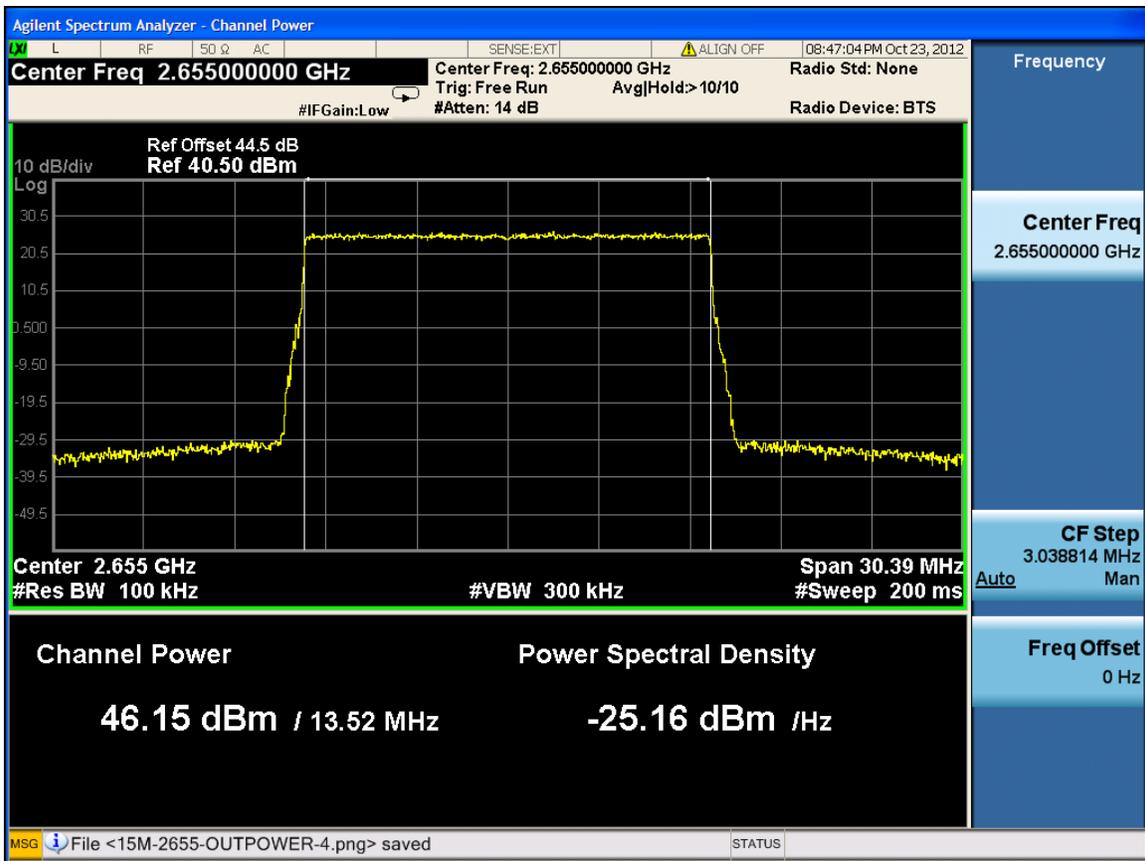


15M-Port 1 -2682.5MHz




15M-Port 2-2627.5MHz

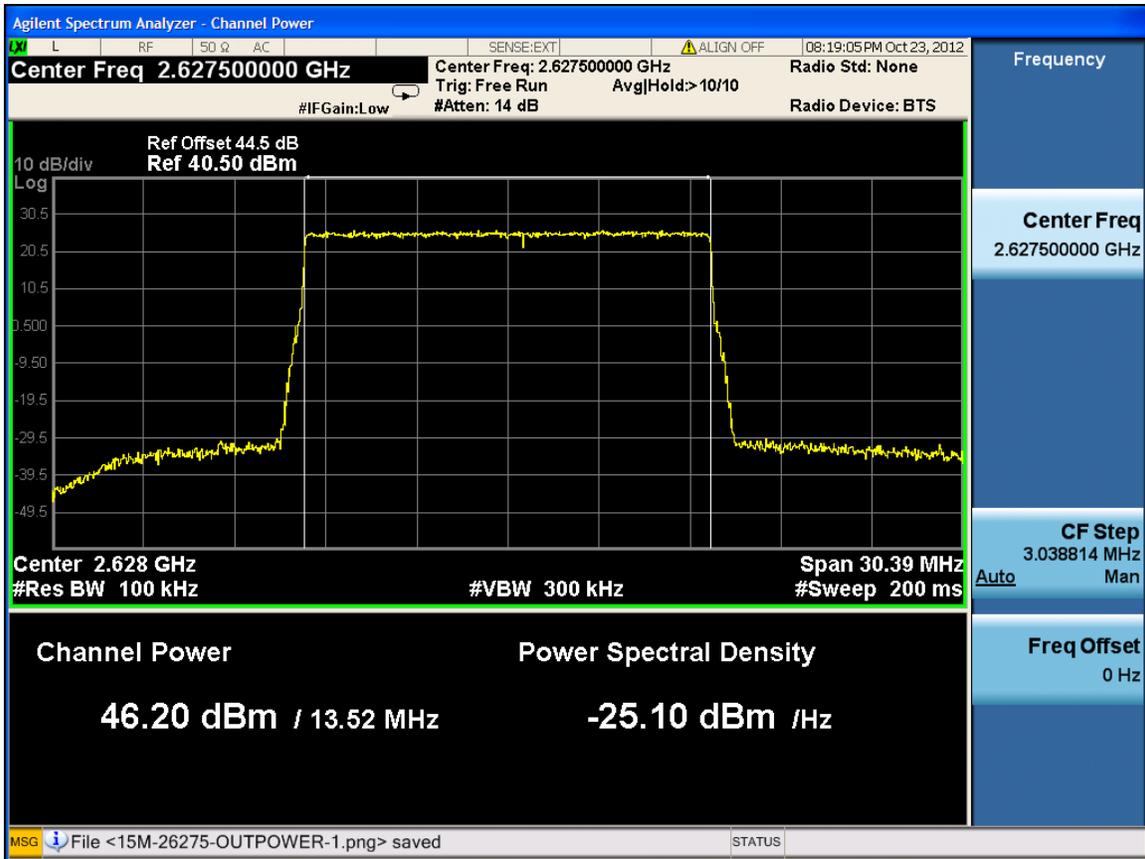

15M-Port 2 -2655MHz

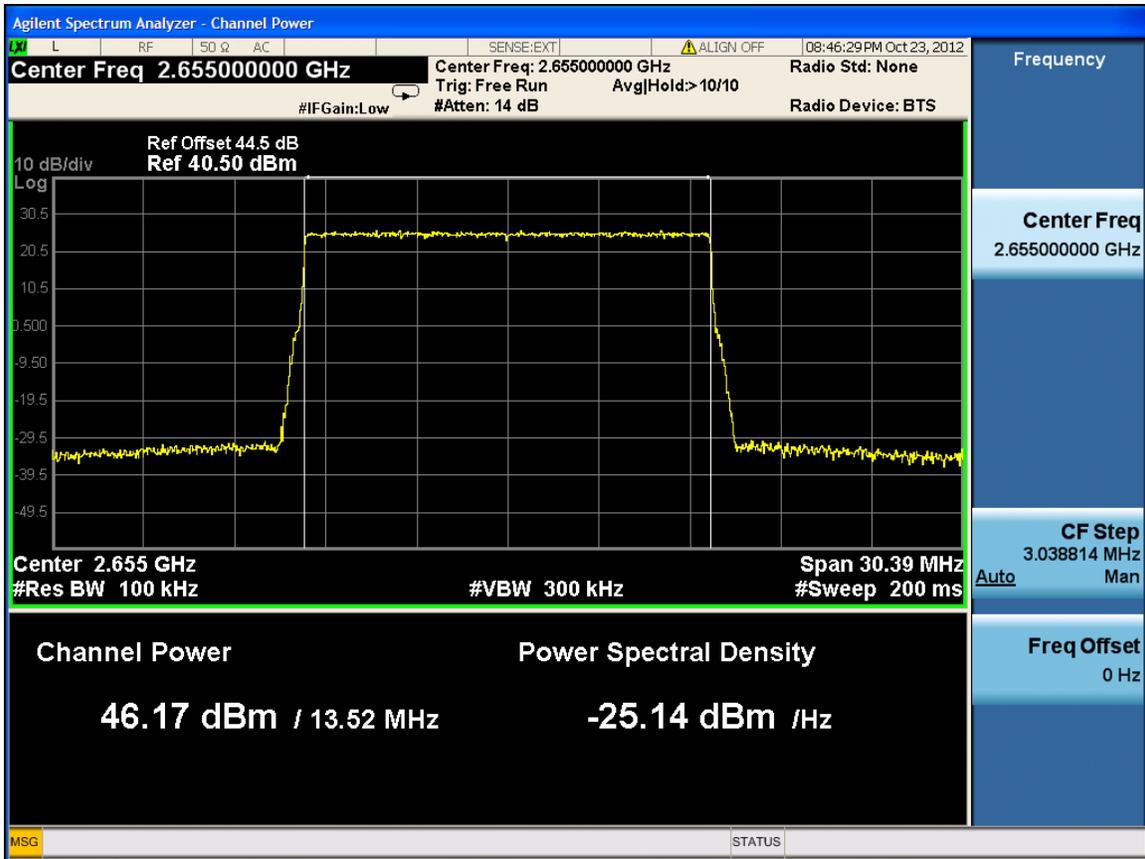


15M-Port 2 -2682.5MHz

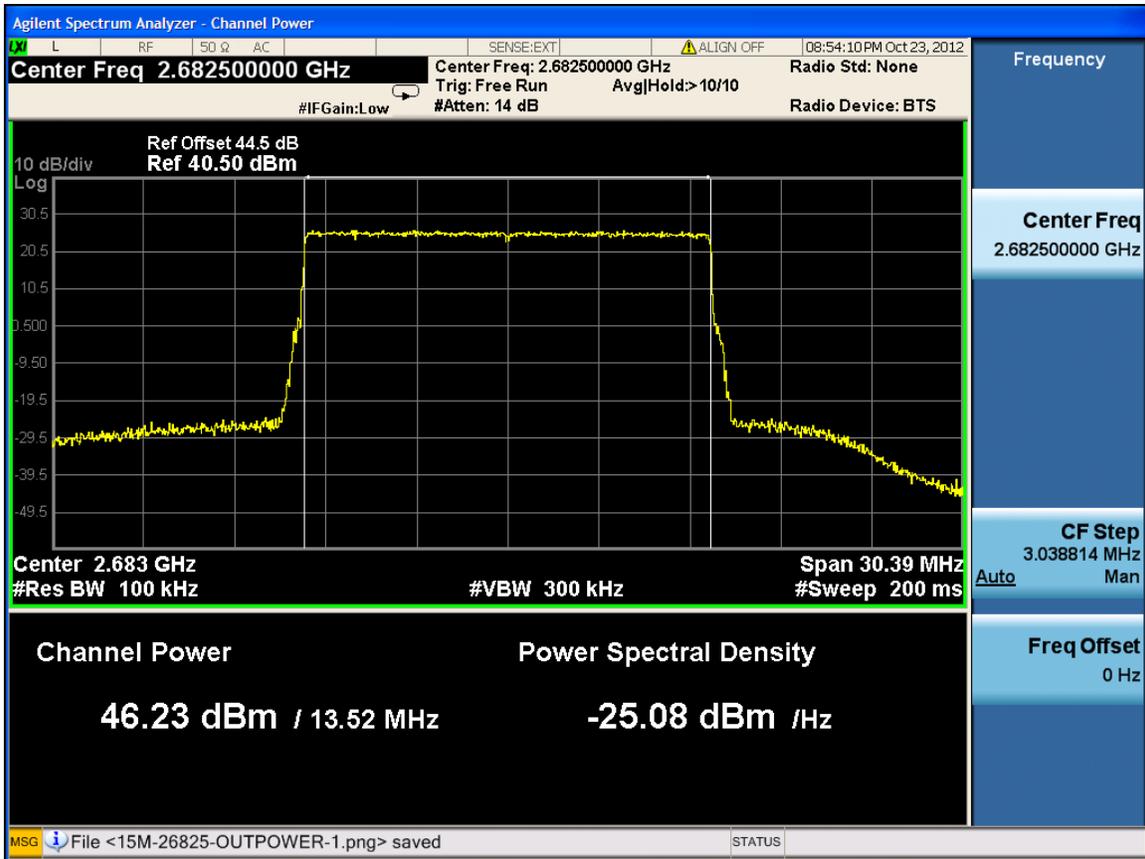


Channel Bandwidth :10M

Port	Center Freq. (MHz)	Max output Power in dBm	Antenn a gain dBi	Cable Loss dB	Dipole Antenn a	Equivalent radiated power dBm Of single antenna	Total Power in W Of single antenna
1	2625	46.22	15	3	2.15	56.07	404.57
	2655	46.10	15	3	2.15	55.95	393.55
	2685	46.24	15	3	2.15	56.09	406.44
2	2625	46.39	15	3	2.15	56.24	420.73
	2655	46.16	15	3	2.15	56.01	399.03
	2685	46.39	15	3	2.15	56.24	420.73


10M-Port 1 -2625MHz

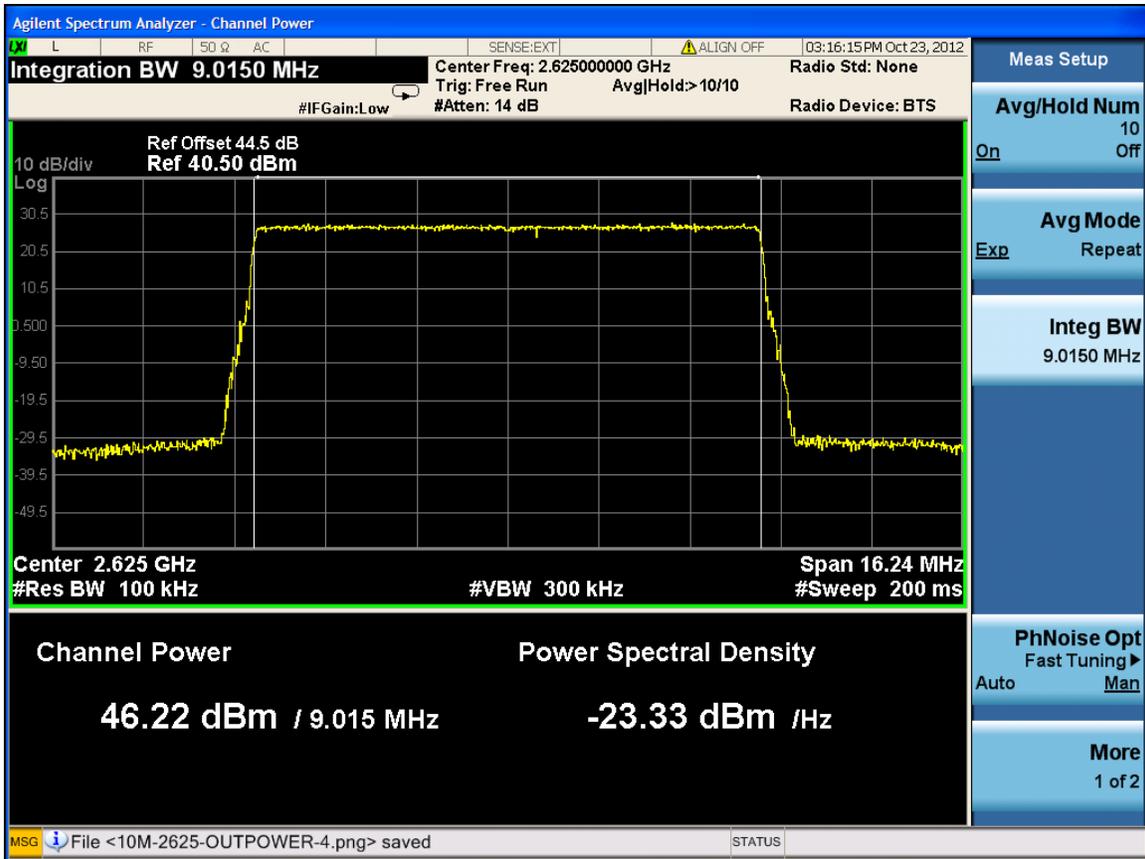


10M-Port 1 -2655MHz

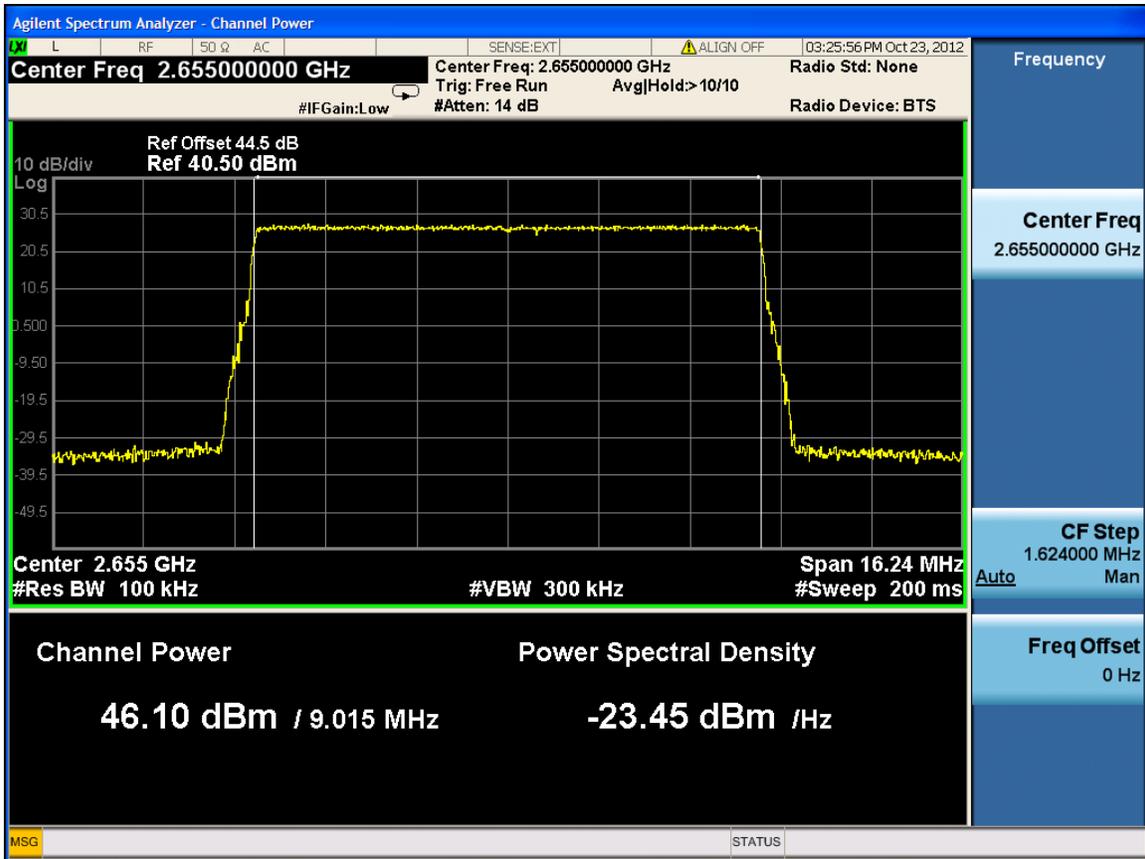


10M-Port 1 -2685MHz

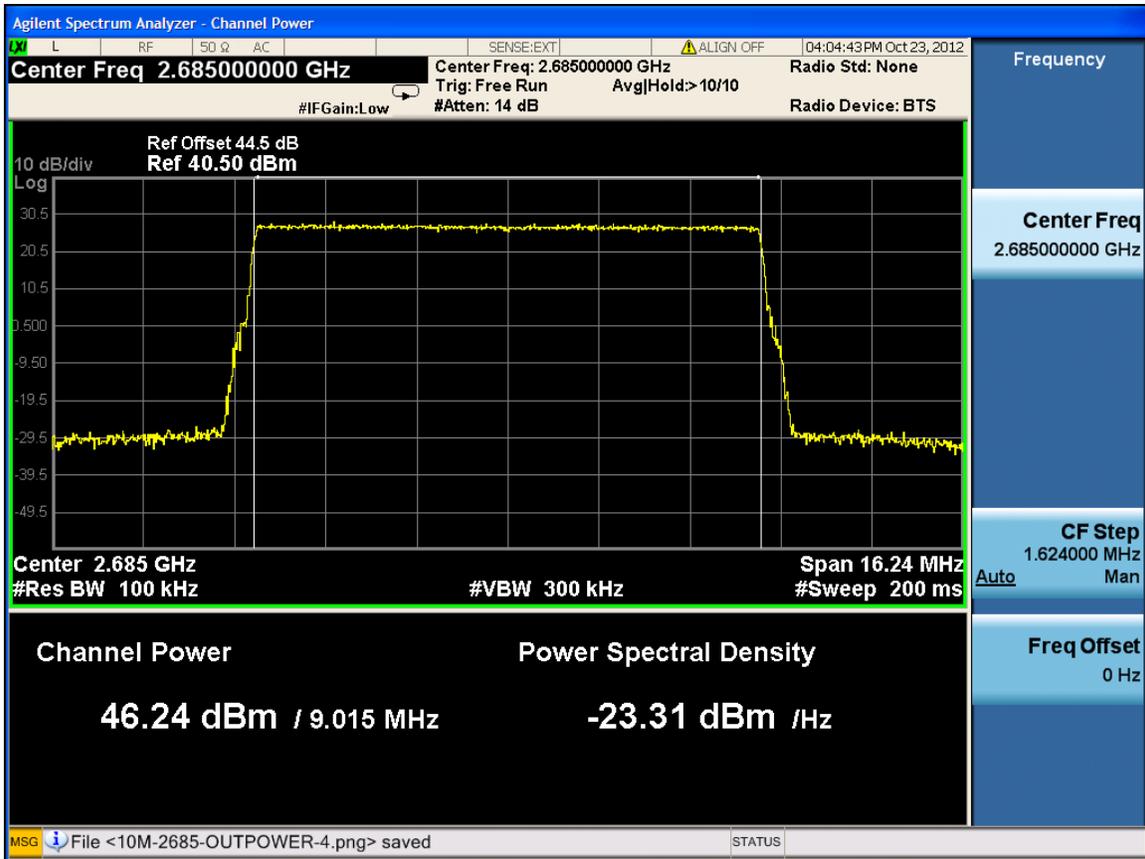


10M-Port 2 -2625MHz

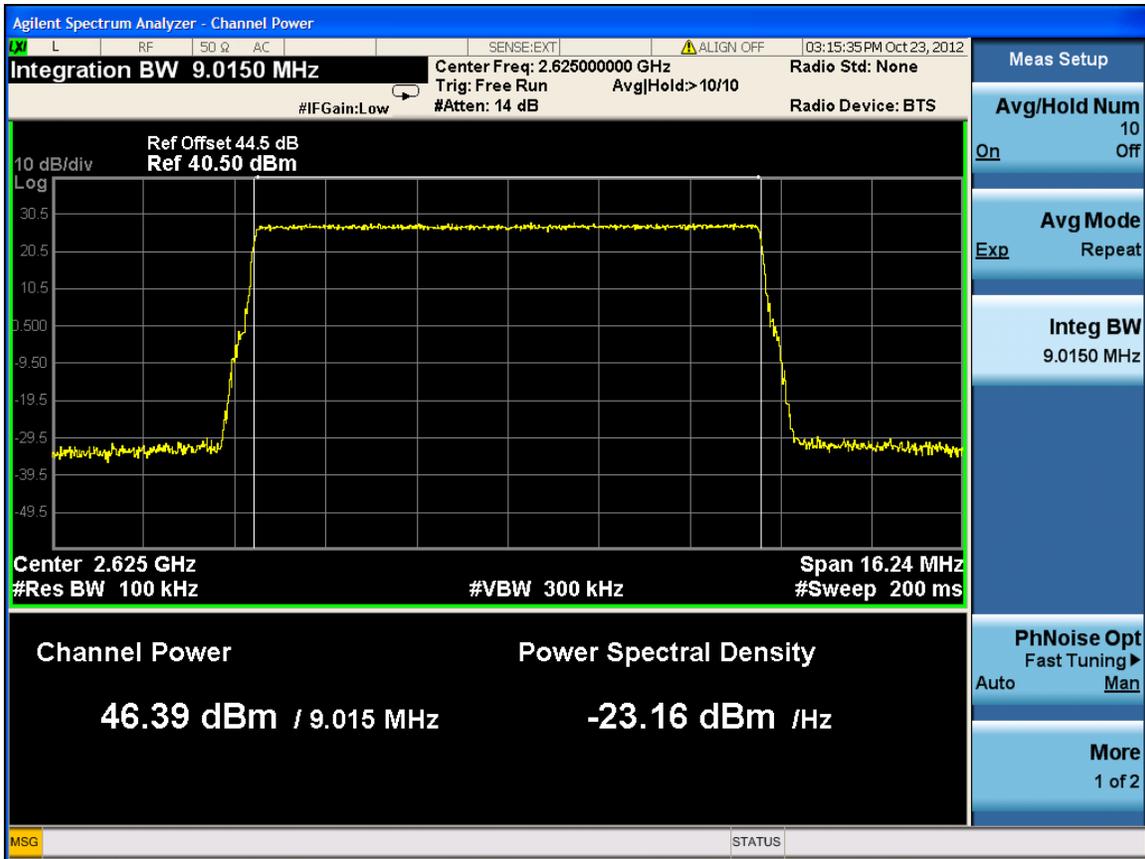

10M-Port 2 -2655MHz

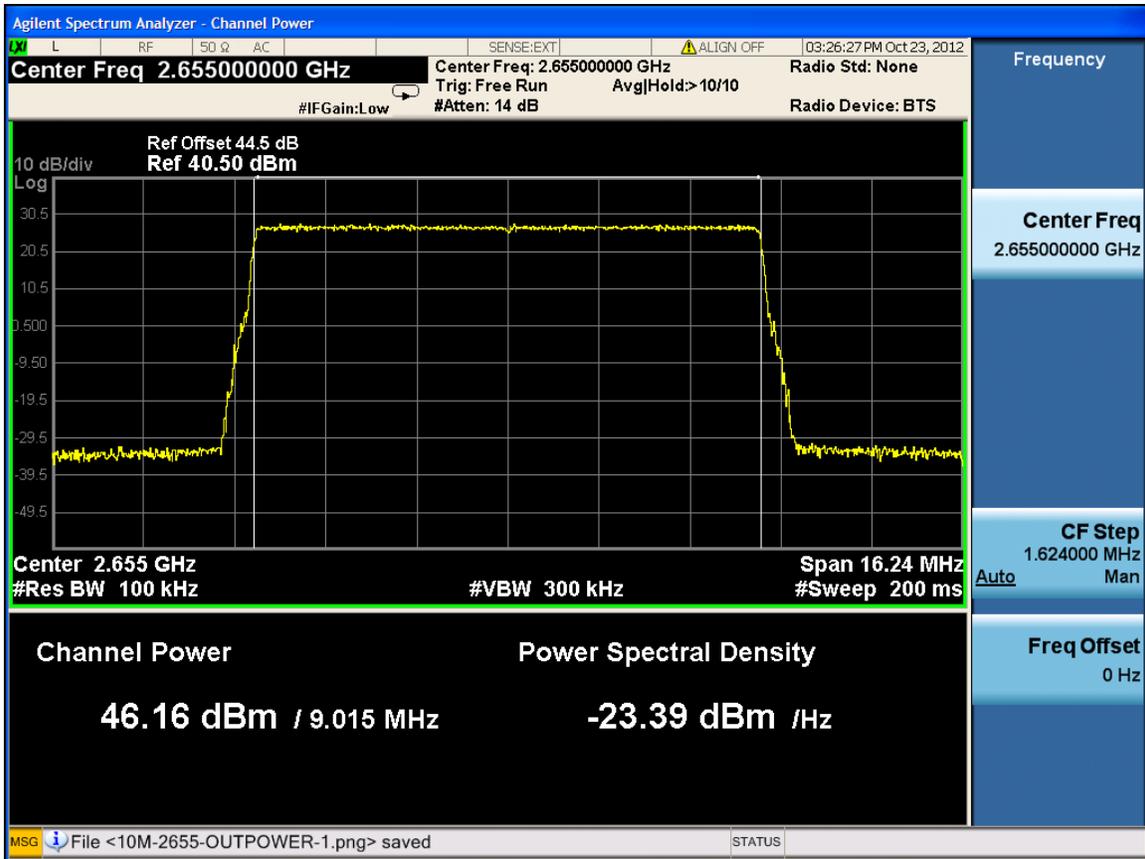


10M-Port 2 -2685MHz

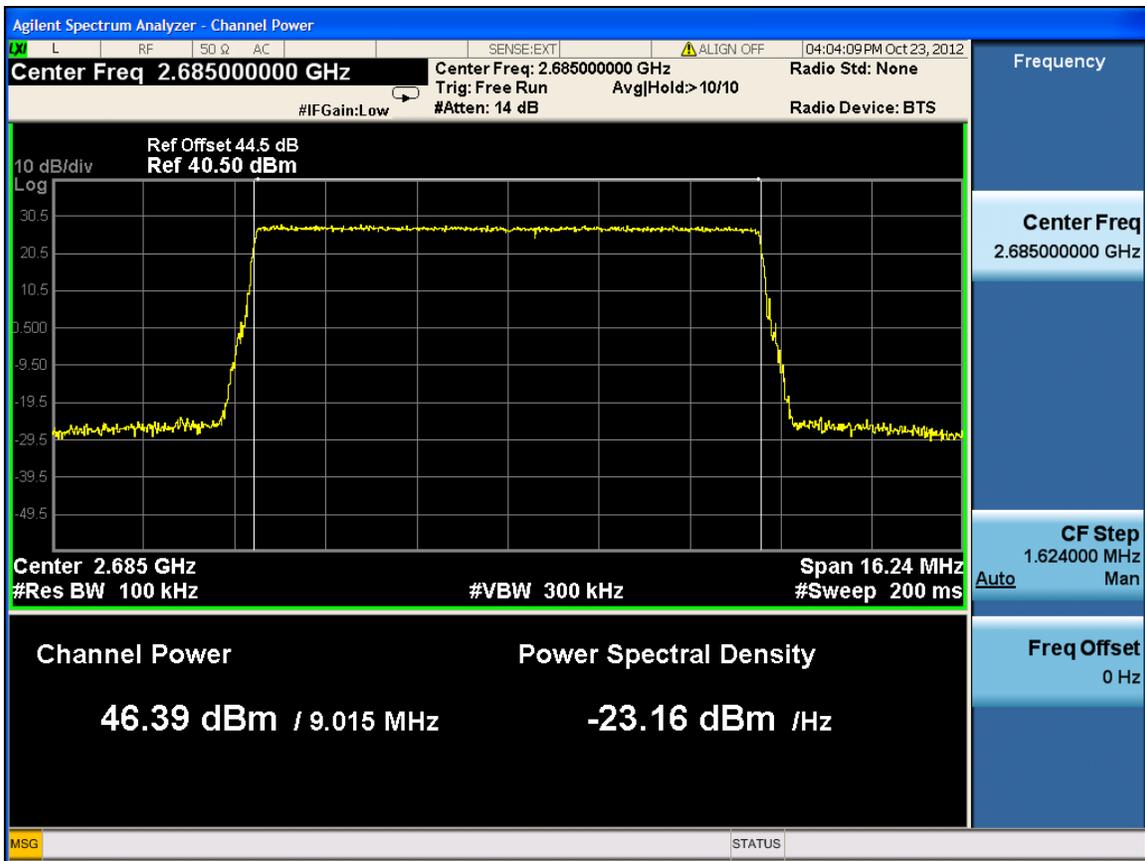


Channel Bandwidth :5M

Port	Center Freq. (MHz)	Max output Power in dBm	Antenn a gain dBi	Cable Loss dB	Dipole Antenn a	Equivalent radiated power dBm Of single antenna	Total Power in W Of single antenna
1	2622.5	46.14	15	3	2.15	55.99	397.19
	2655	46.05	15	3	2.15	55.90	389.05
	2687.5	46.14	15	3	2.15	55.99	397.19
2	2622.5	46.17	15	3	2.15	56.02	399.95
	2655	46.02	15	3	2.15	55.87	386.37
	2687.5	46.17	15	3	2.15	56.02	399.95

5M-Port 1 -2622.5MHz

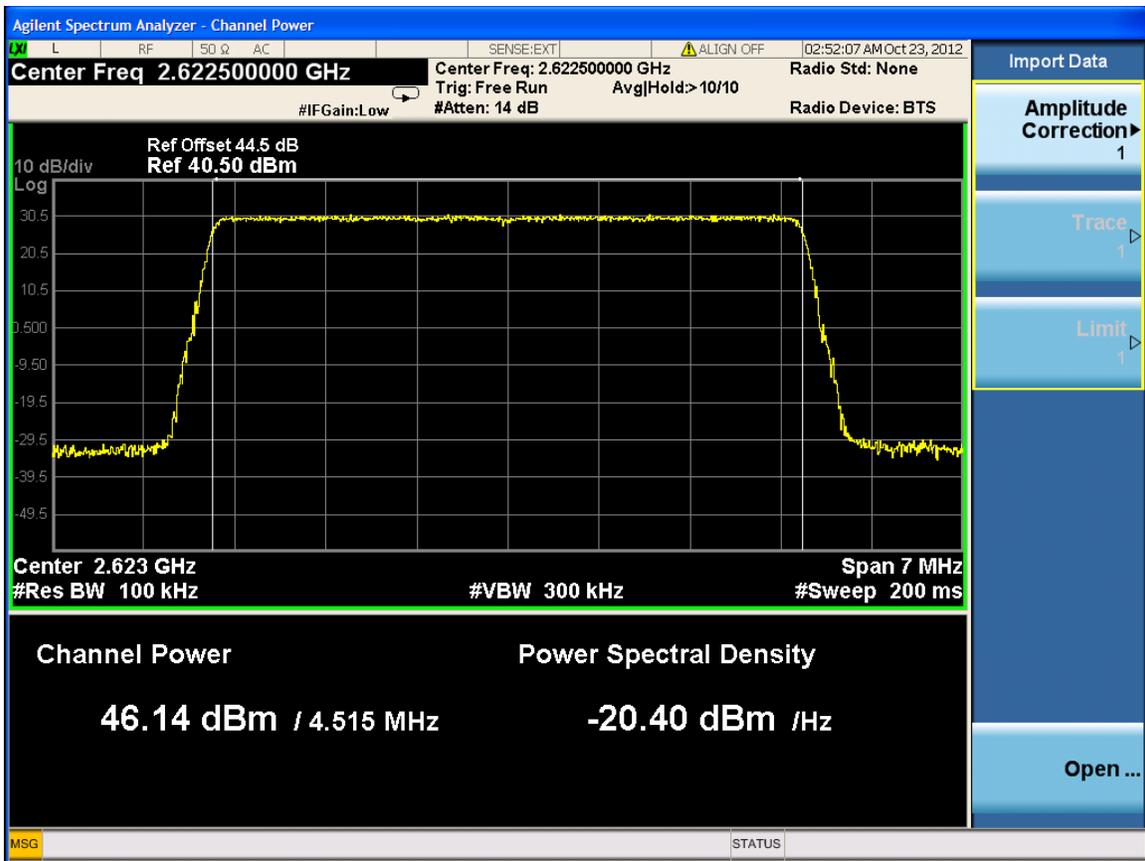


5M-Port 1 -2655MHz

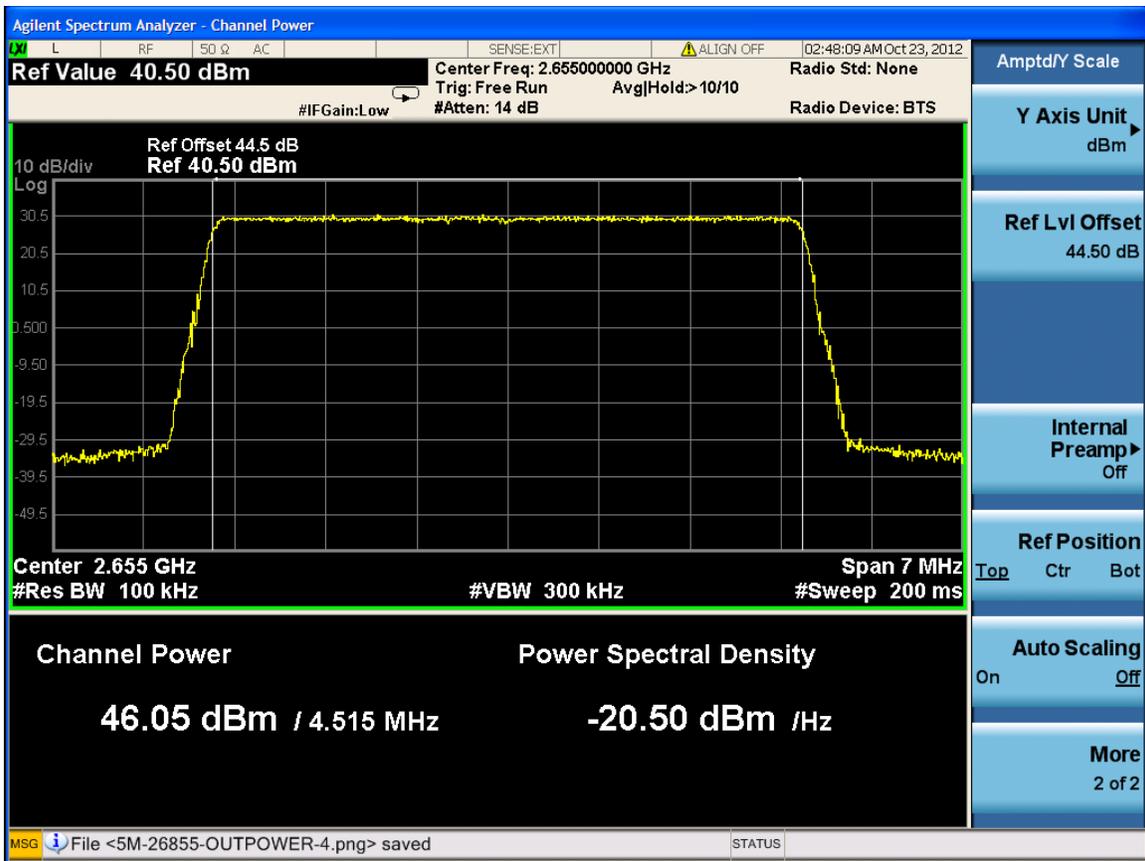


5M-Port 1 -2687.5MHz




5M-Port 2 -2622.5MHz

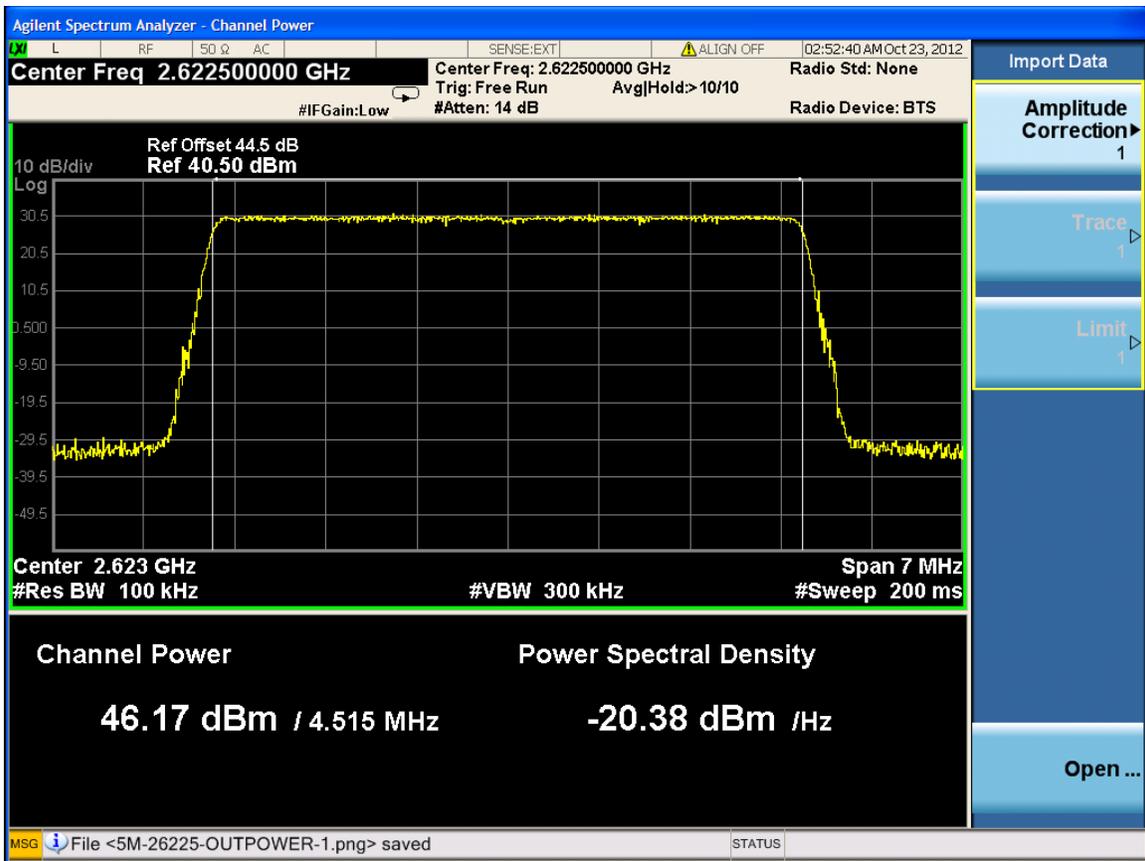

5M-Port 2 -2655MHz

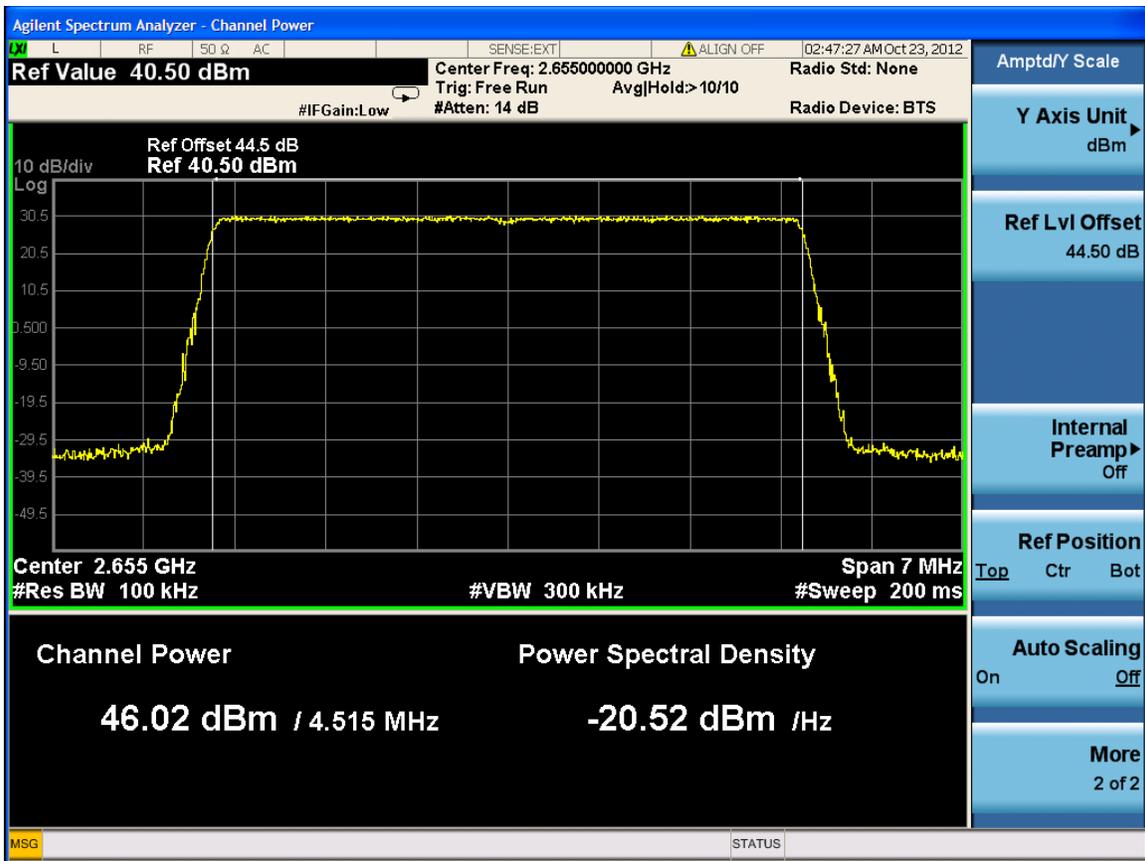

5M-Port 2 -2687.5MHz

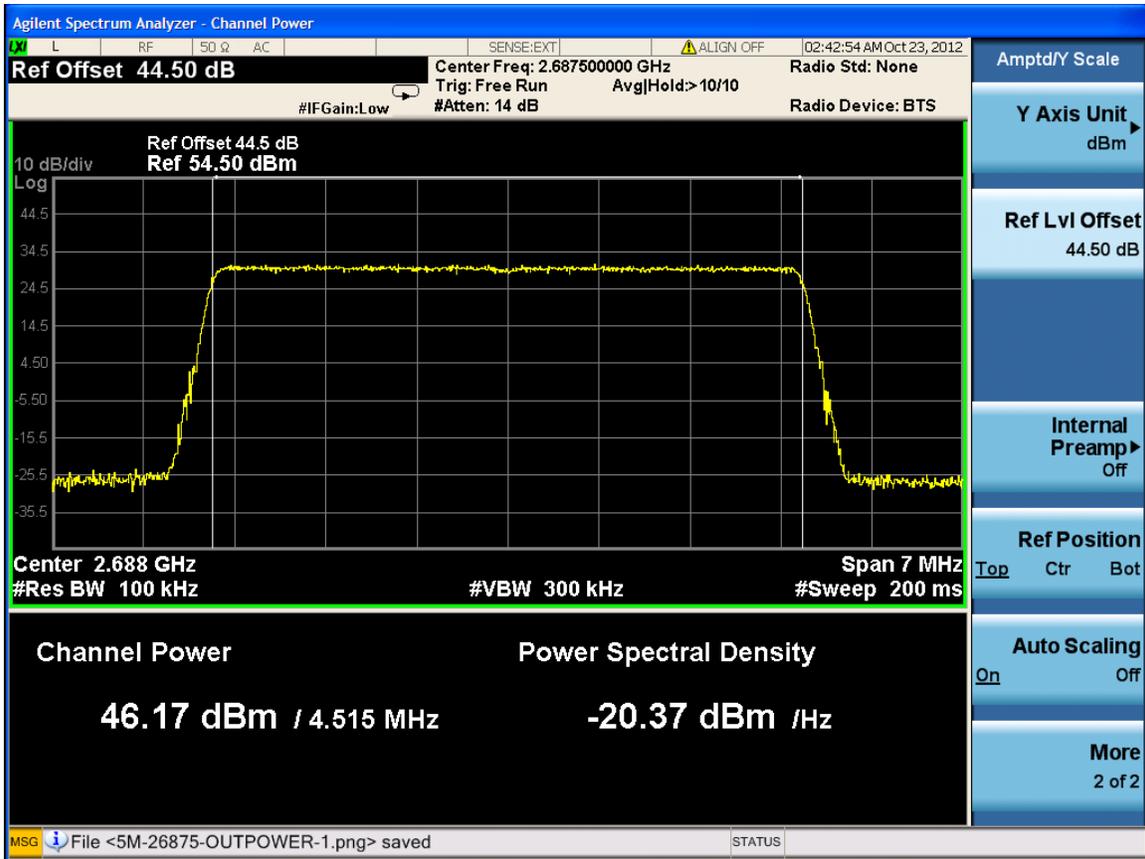

6 RF EXPOSURE

Applicable standard: FCC §2.1091 §1.1037

Limit

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated. Limits for Maximum Permissible Exposure (MPE)

(B) Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

Test Data

Predication of MPE limit at a given distance
Equation from page 18 of OET Bulletin 65, Edition 97-01
 $S = PG / 4\pi R^2$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal: 46.40(dBm) Maximum peak output power at antenna input terminals: 43.652 (W), the cable loss is 3dB

Prediction distance: 400 (cm)

Predication frequency: 2620 (MHz)

Antenna Gain (typical): 15 (dBi)

Power density at predication frequency at 400 cm: 0.344 (mW/cm²)

MPE limit for uncontrolled exposure at prediction frequency: 1(mW/cm²)

Test Result: pass

7 MODULATION CHARACTERISTIC

Applicable Standard: FCC §2.1047

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum	N9030A	MY49431143	2012.09.25	2013.09.25

	Analyzer				
DTS	DTS 40dB Attenuator	DTS100-40-3-1	09112005	2012.09.26	2013.09.26
Silverline	Silverline RF Cable	SLA18-NMN1T	100311-04-0001	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

LTE digital mode is used by EUT.

Test Data Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar

Test Result: Pass


Test Mode: Transmitting LTE

Test Data:


Channel Bandwidth :20M			
Port	Frequency (MHz)	Test mode	EVM
1	2630	TM2.0	1.9171%
		TM3.1	6.0624%
		TM3.2	8.4648%
		TM3.3	11.8100%
	2655	TM2.0	1.9842%
		TM3.1	6.1276%
		TM3.2	8.5069%
		TM3.3	11.8400%
	2680	TM2.0	1.7812%
		TM3.1	6.0622%

2	2630	TM3.2	8.4798%
		TM3.3	11.7870%
		TM2.0	1.8047%
		TM3.1	6.0370%
		TM3.2	8.4645%
		TM3.3	11.8300%
	2655	TM2.0	2.0719%
		TM3.1	6.1289%
		TM3.2	8.5240%
	2680	TM3.3	11.8190%
		TM2.0	1.7304%
		TM3.1	6.0622%
		TM3.2	8.4639%
		TM3.3	11.7900%


20M-Port 1 -2630MHz-TM2.0

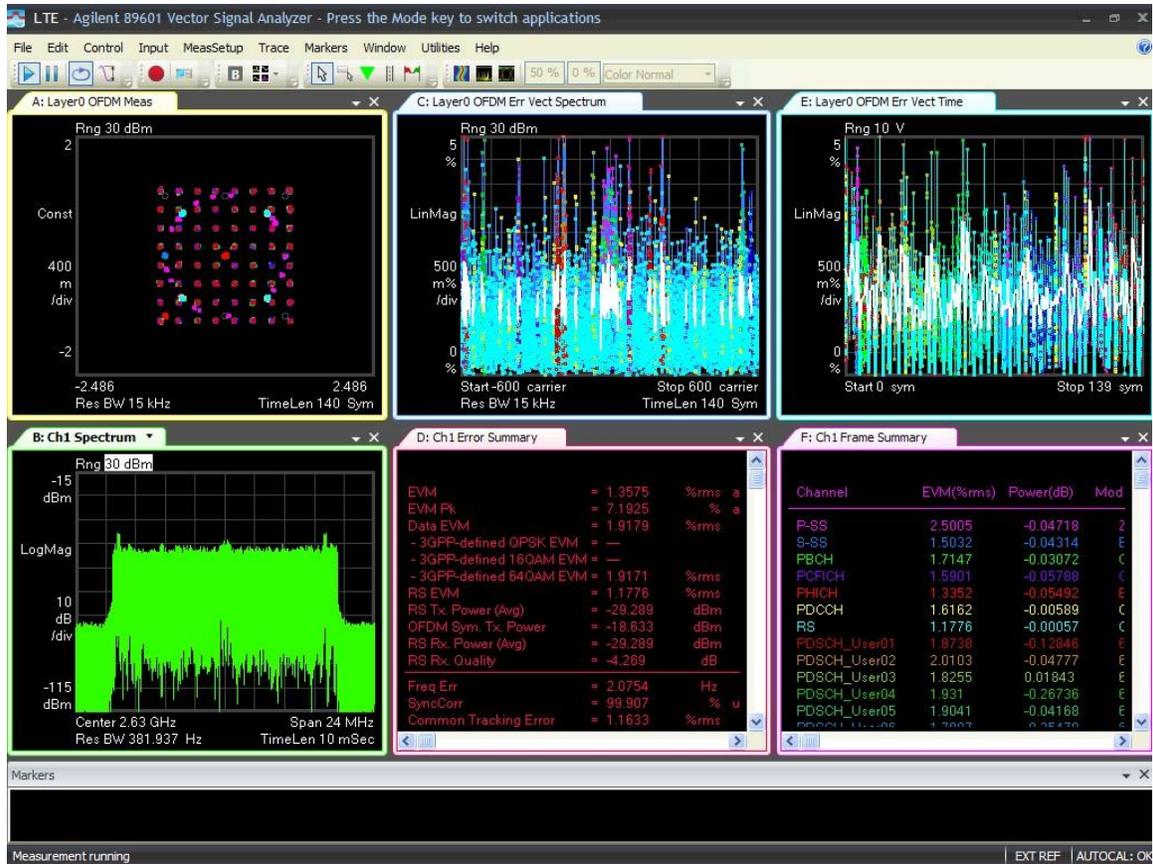


20M-Port 1 -2630MHz -TM3.1

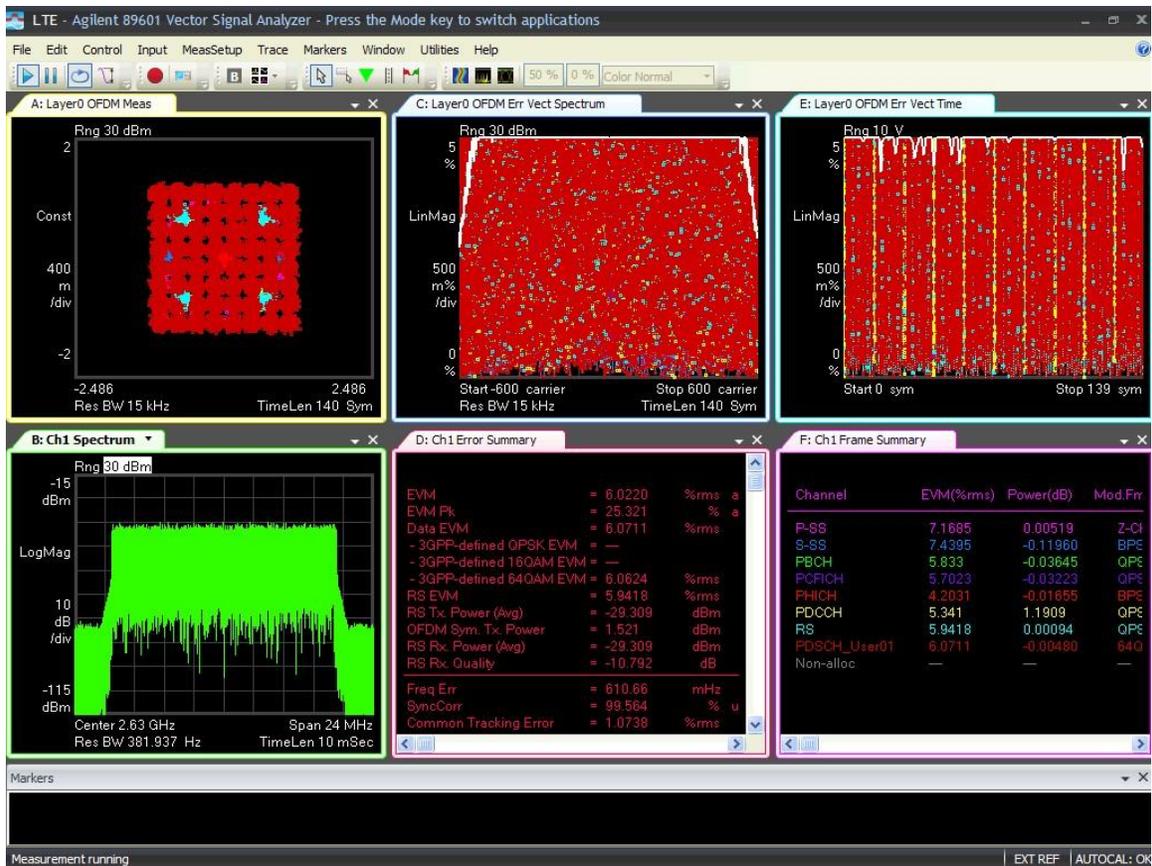


20M-Port 1 -2630MHz -TM3.2

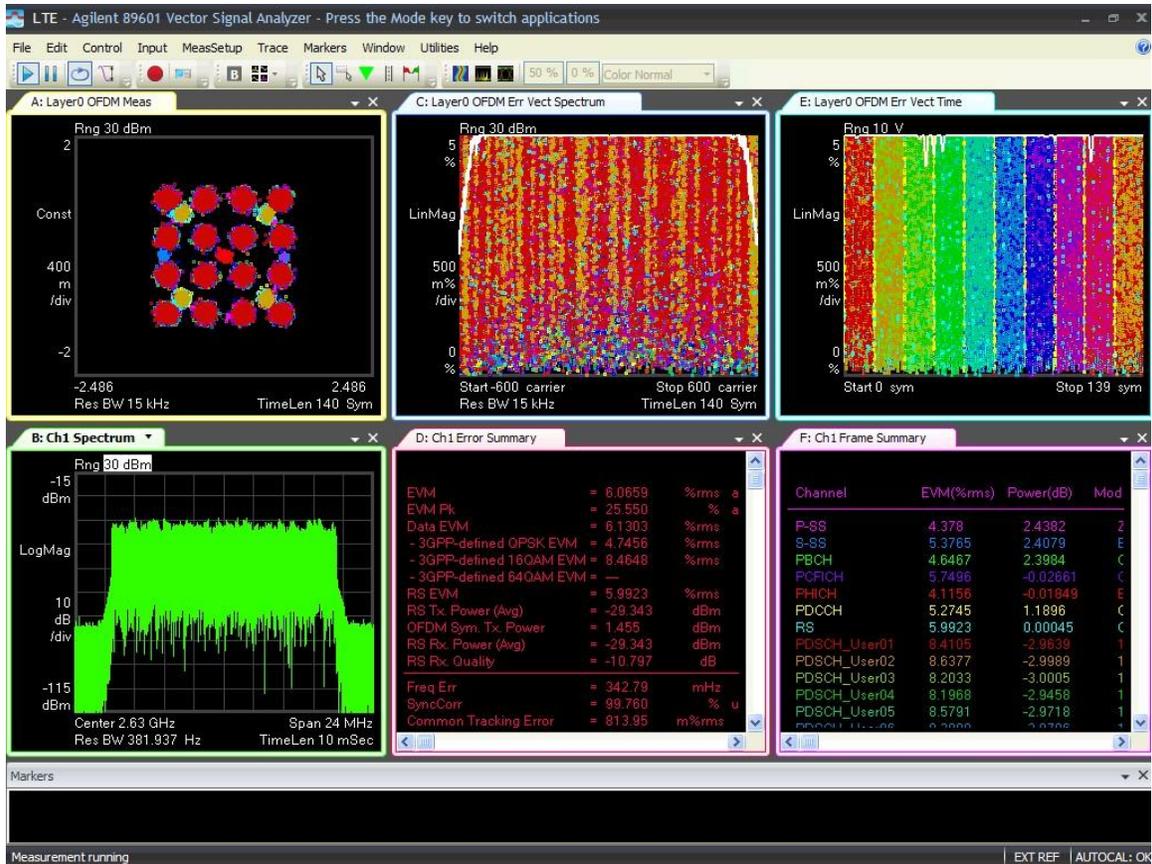


20M-Port 1 -2630MHz -TM3.3

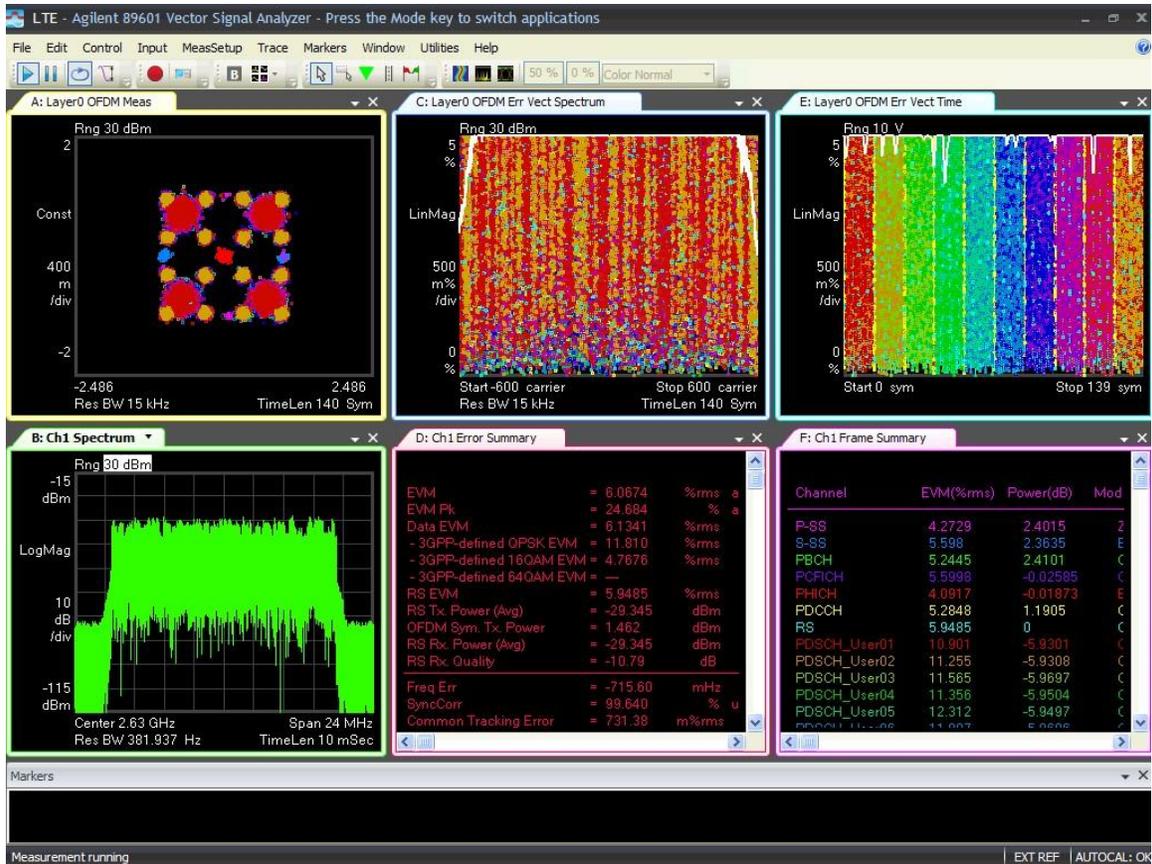


20M-Port 1 -2655MHz-TM2.0

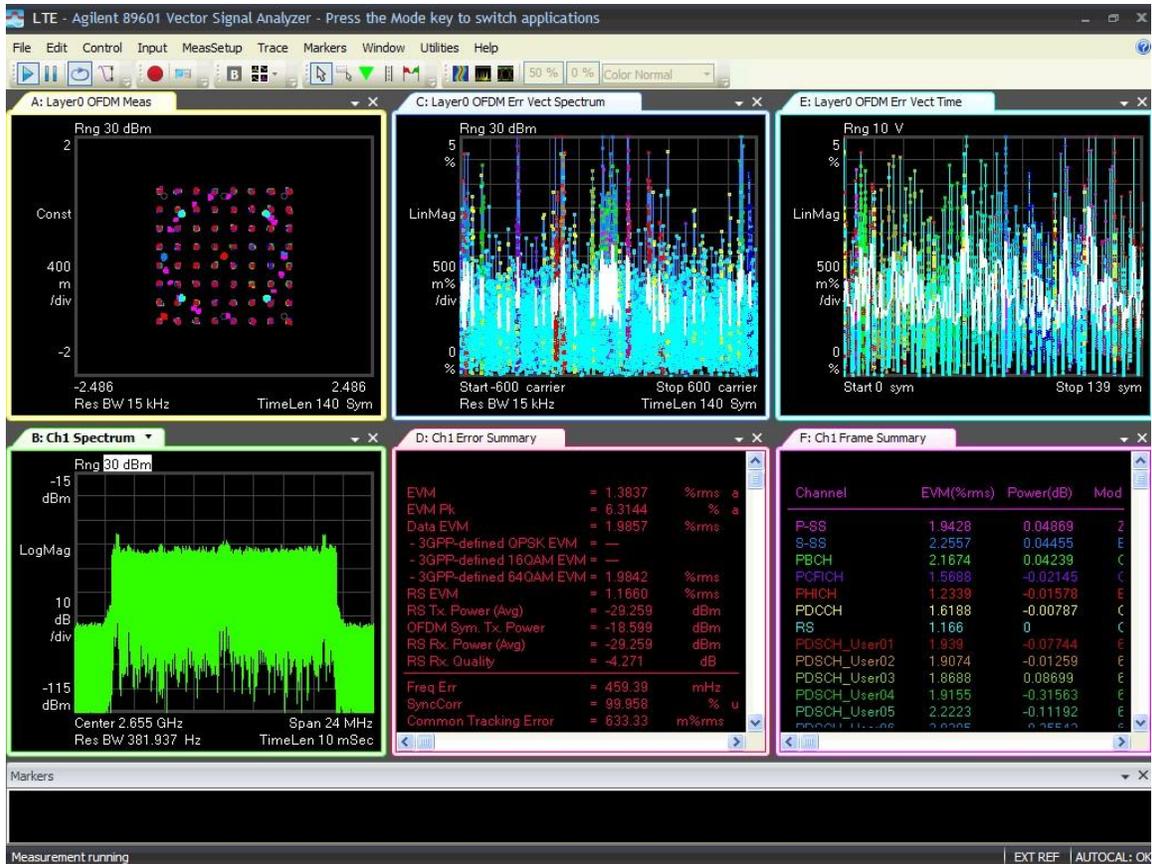


20M-Port 1 -2655MHz-TM3.1

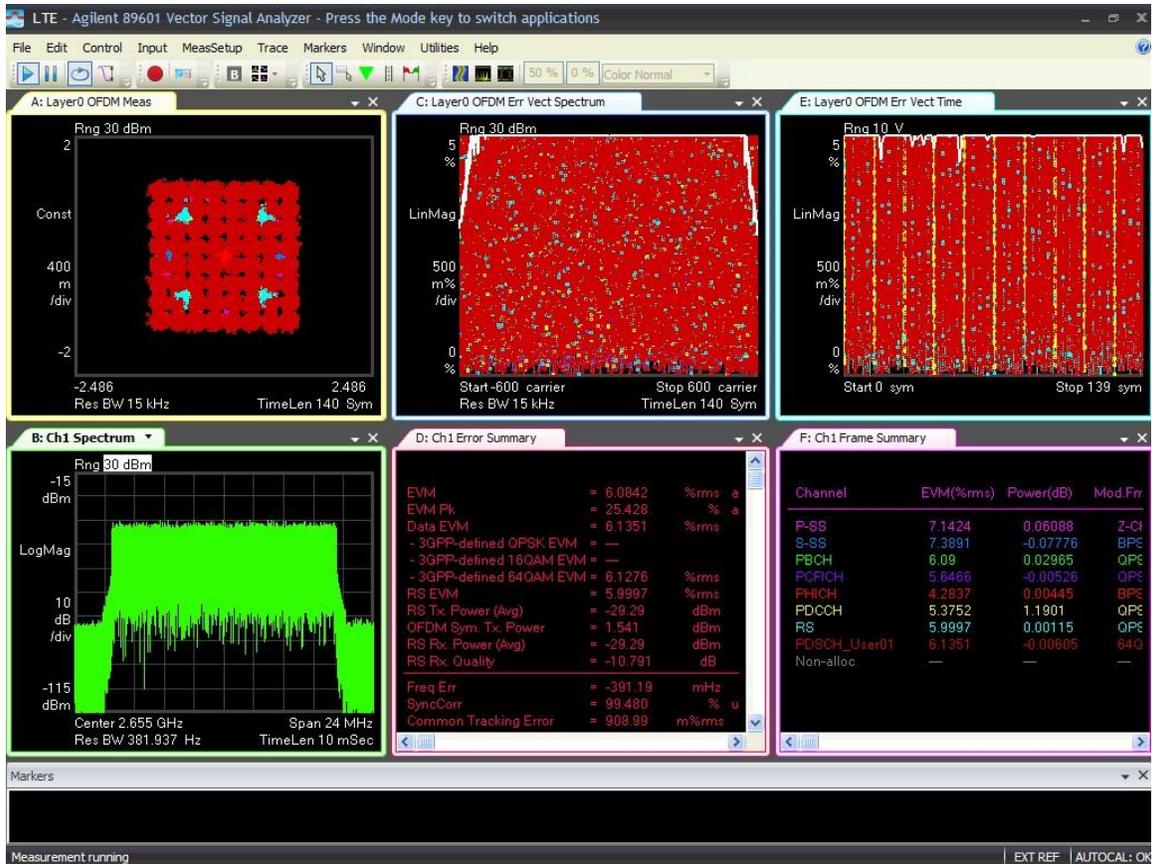


20M-Port 1 -2655MHz-TM3.2

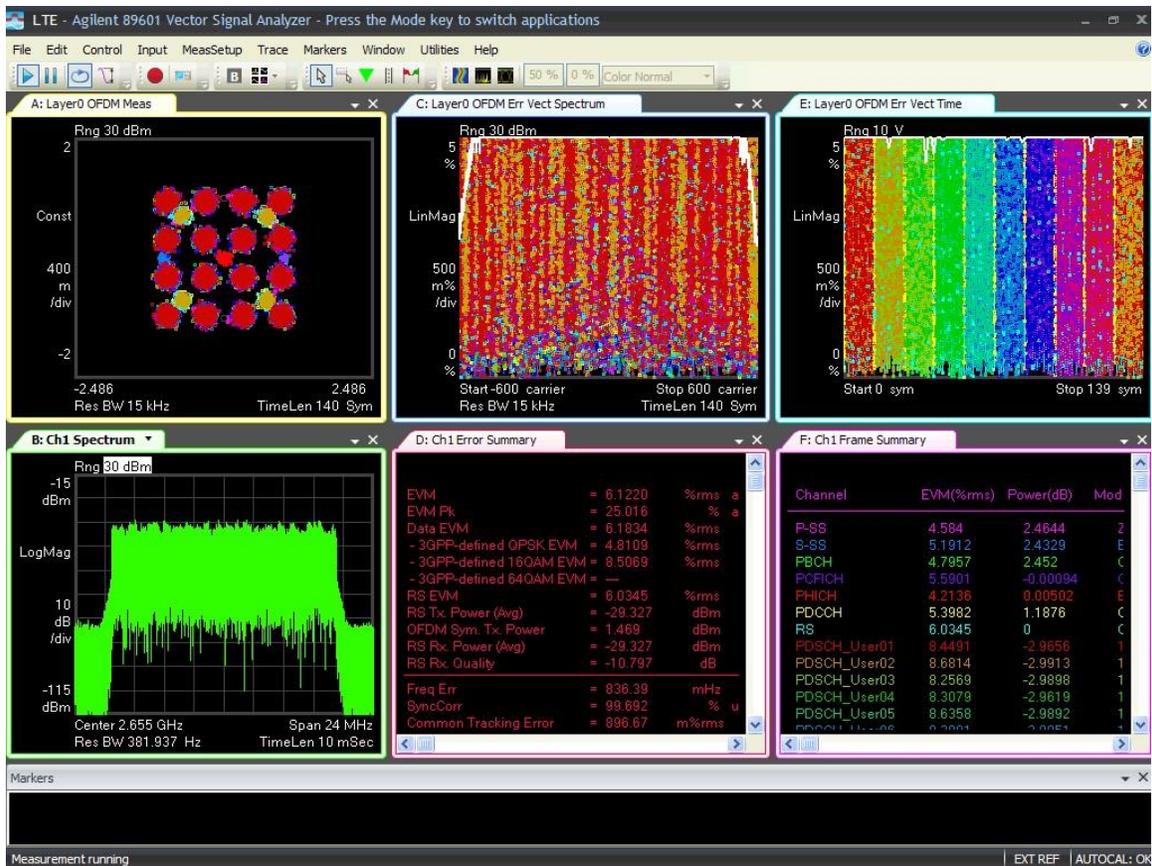


20M-Port 1 -2655MHz-TM3.3

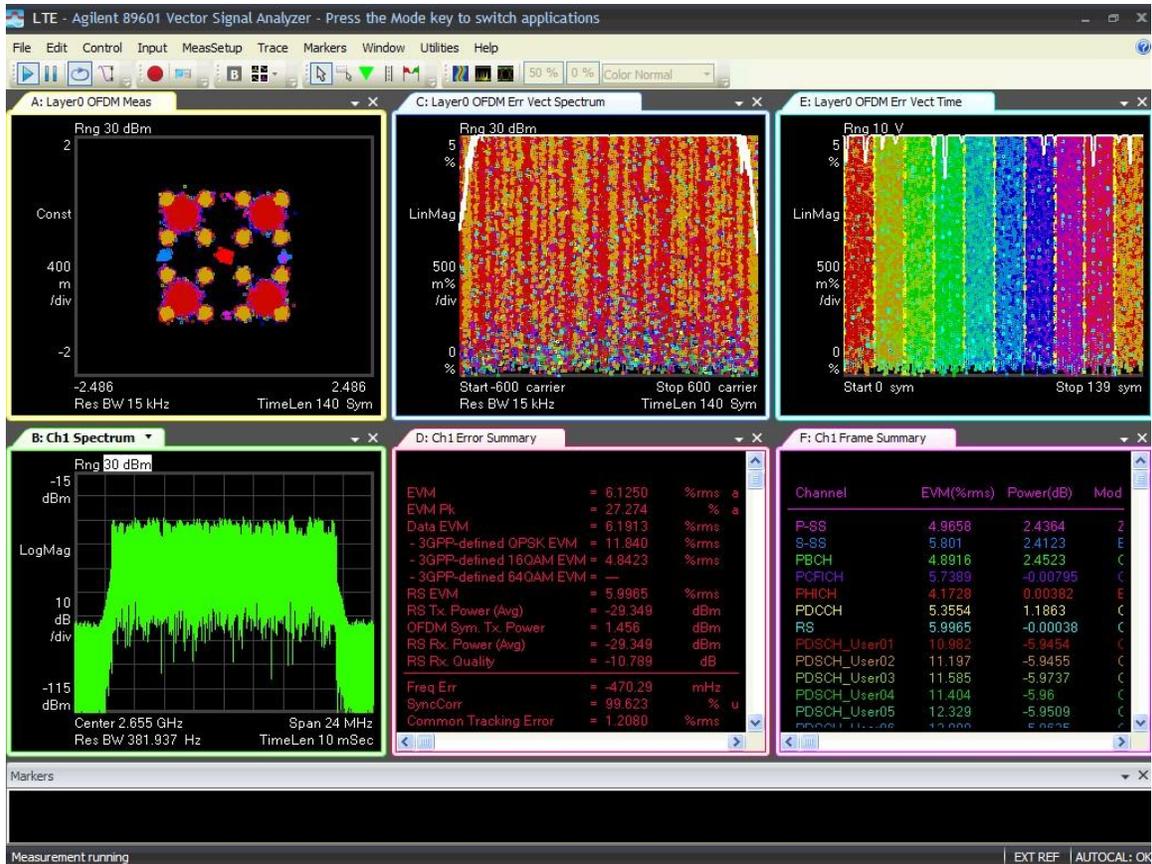


20M-Port 1 -2680MHz-TM2.0

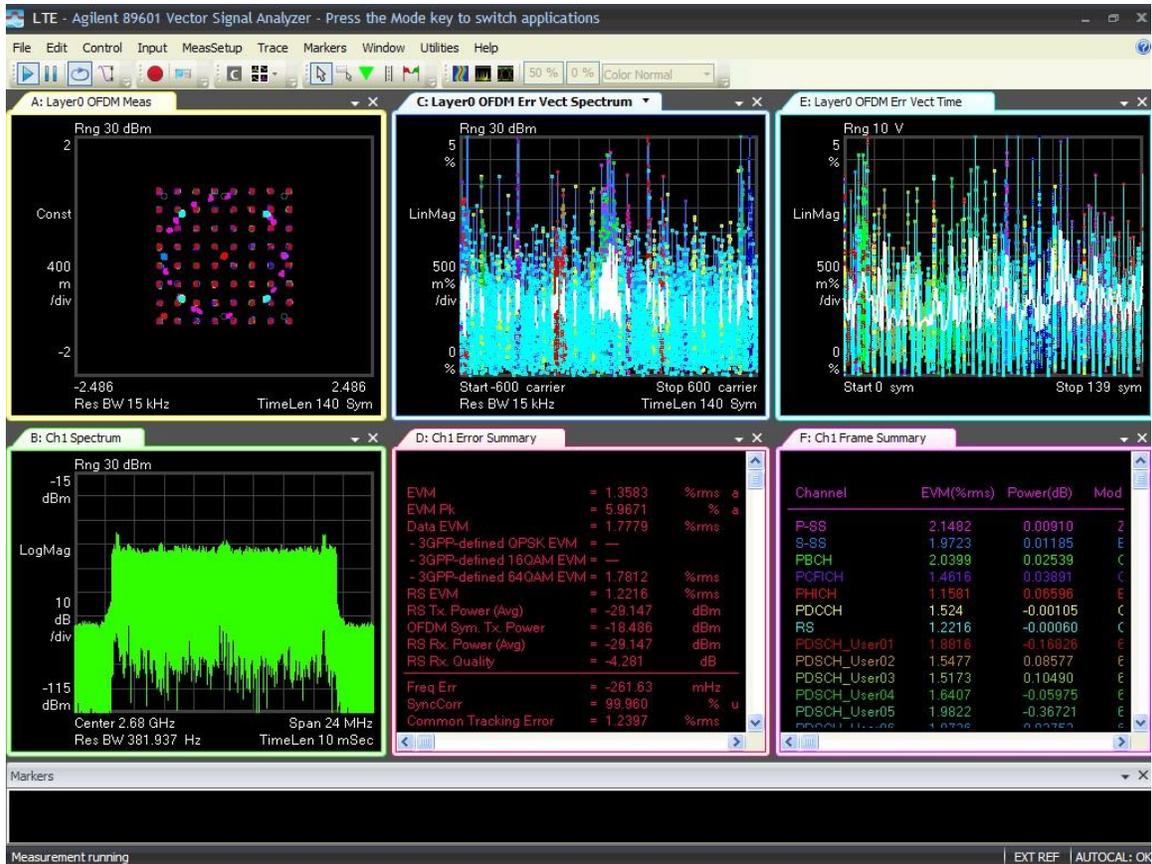


20M-Port 1 -2680MHz-TM3.1

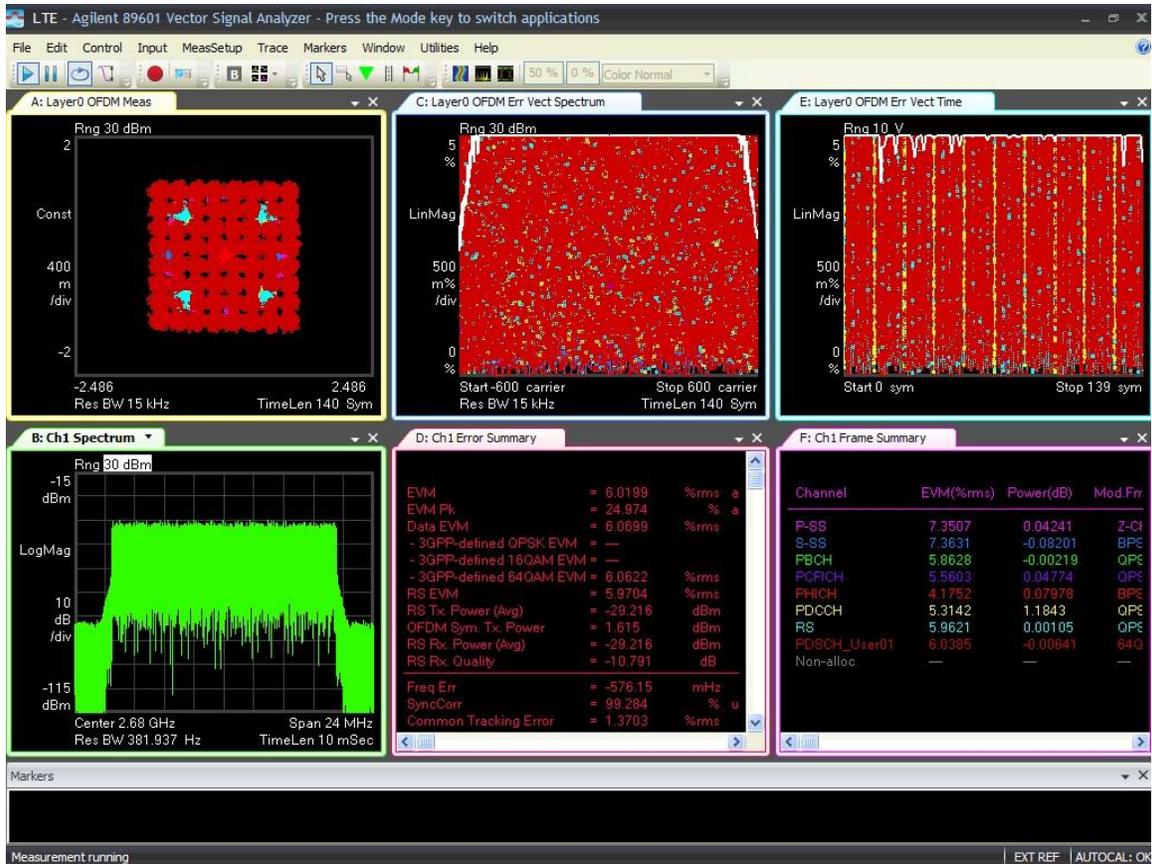

20M-Port 1 -2680MHz-TM3.2

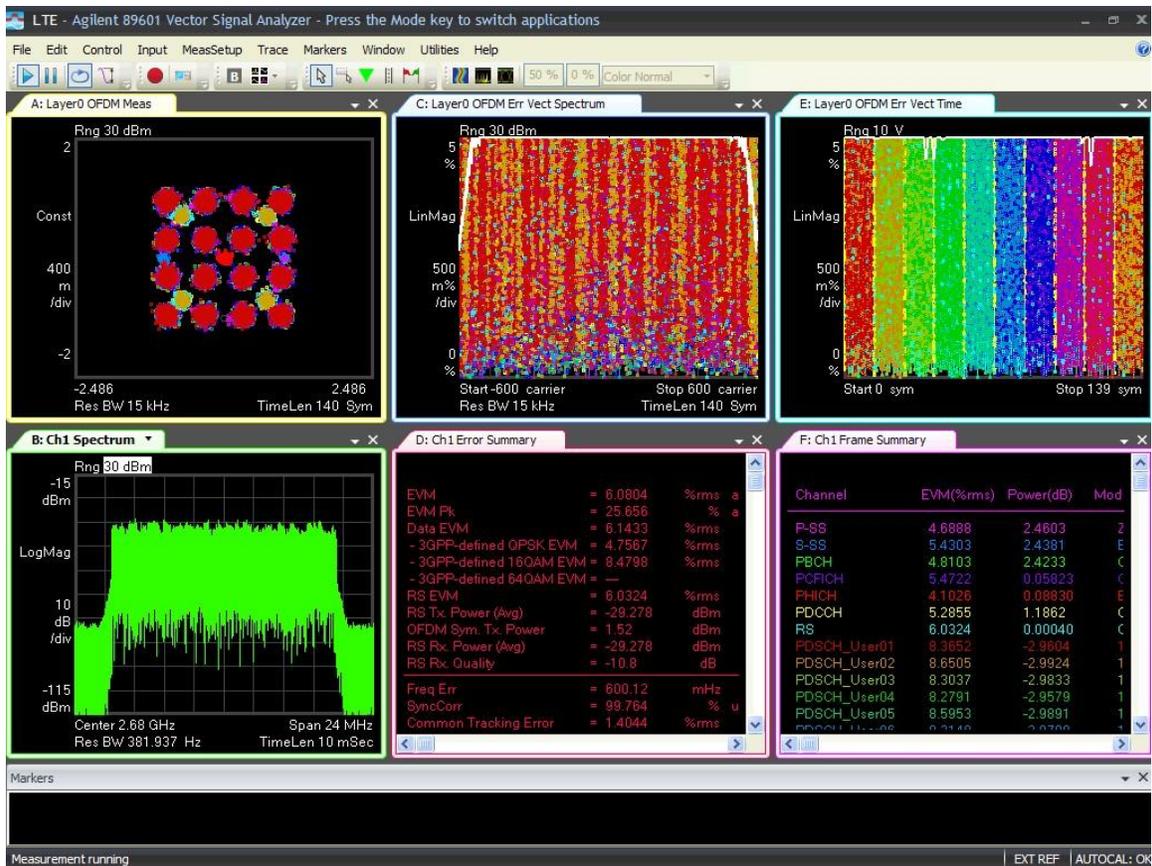


20M-Port 1 -2680MHz-TM3.3

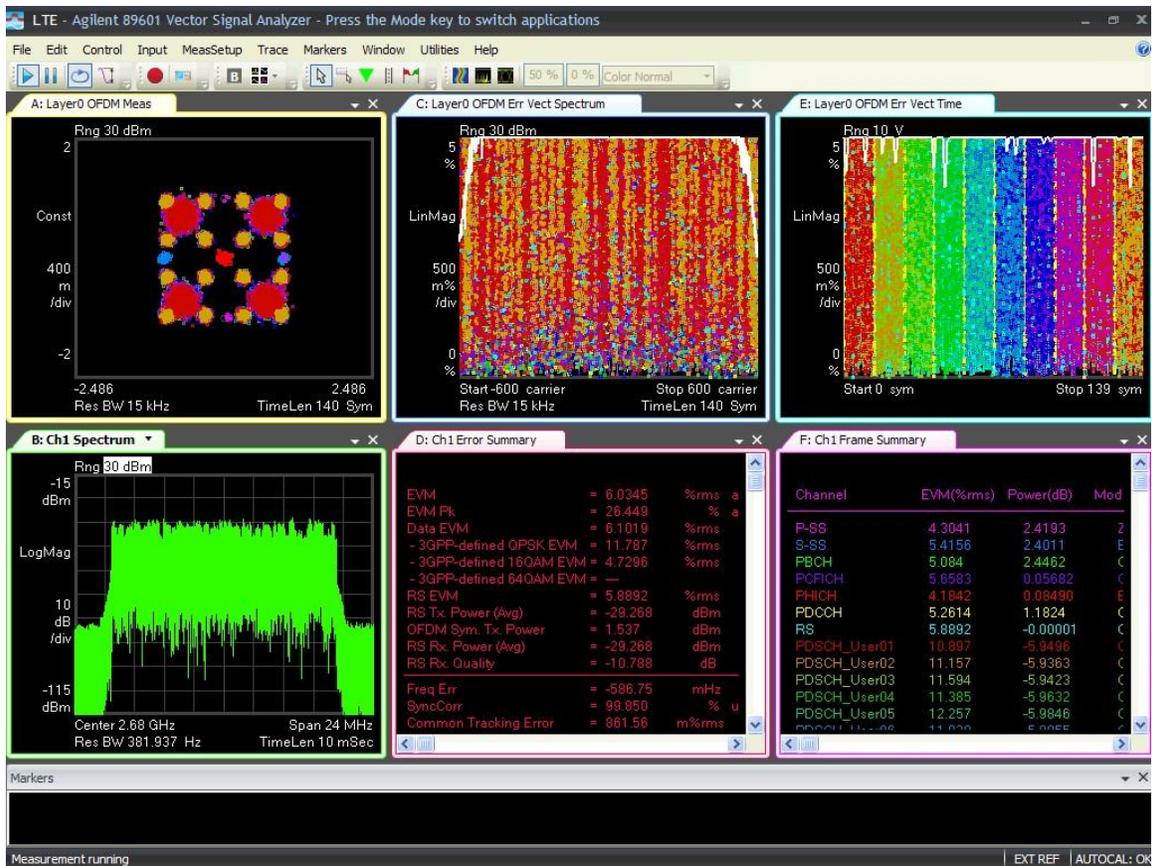


20M-Port 2 -2630MHz-TM2.0



20M-Port 2 -2630MHz -TM3.1

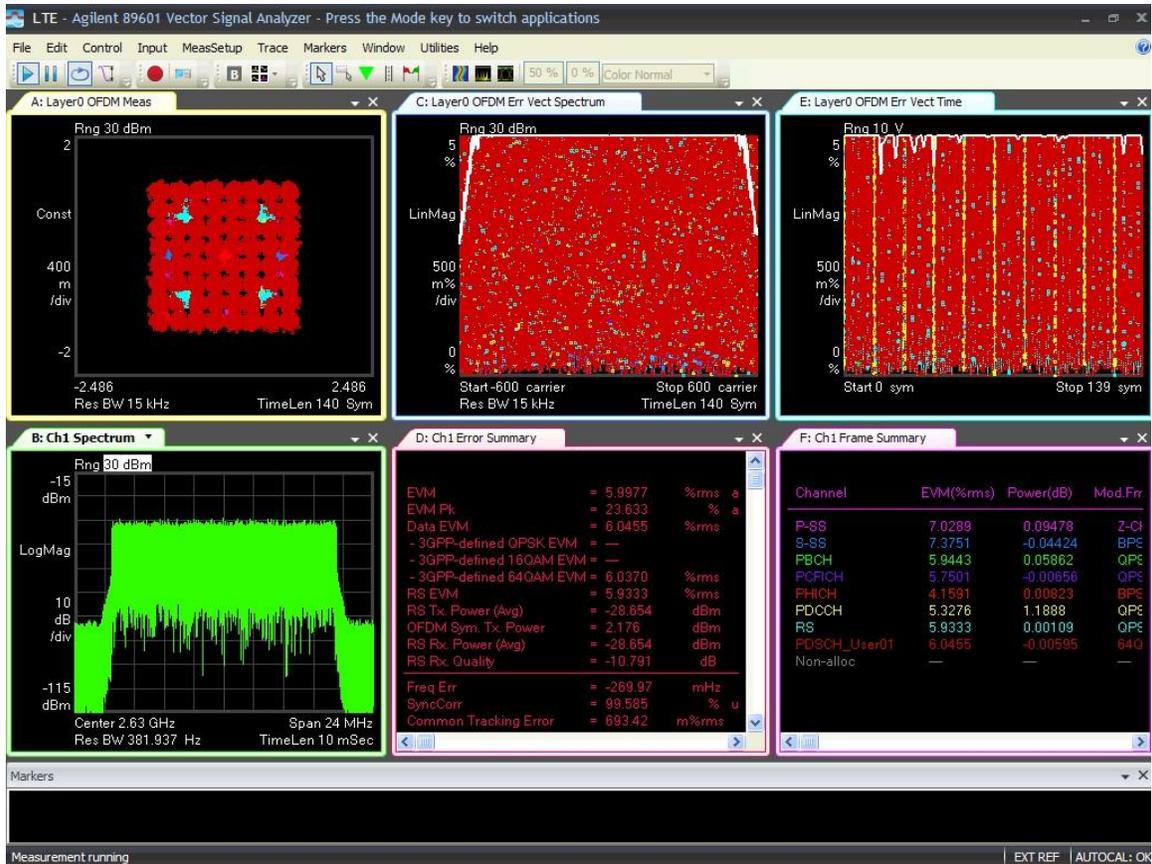

20M-Port 2 -2630MHz -TM3.2

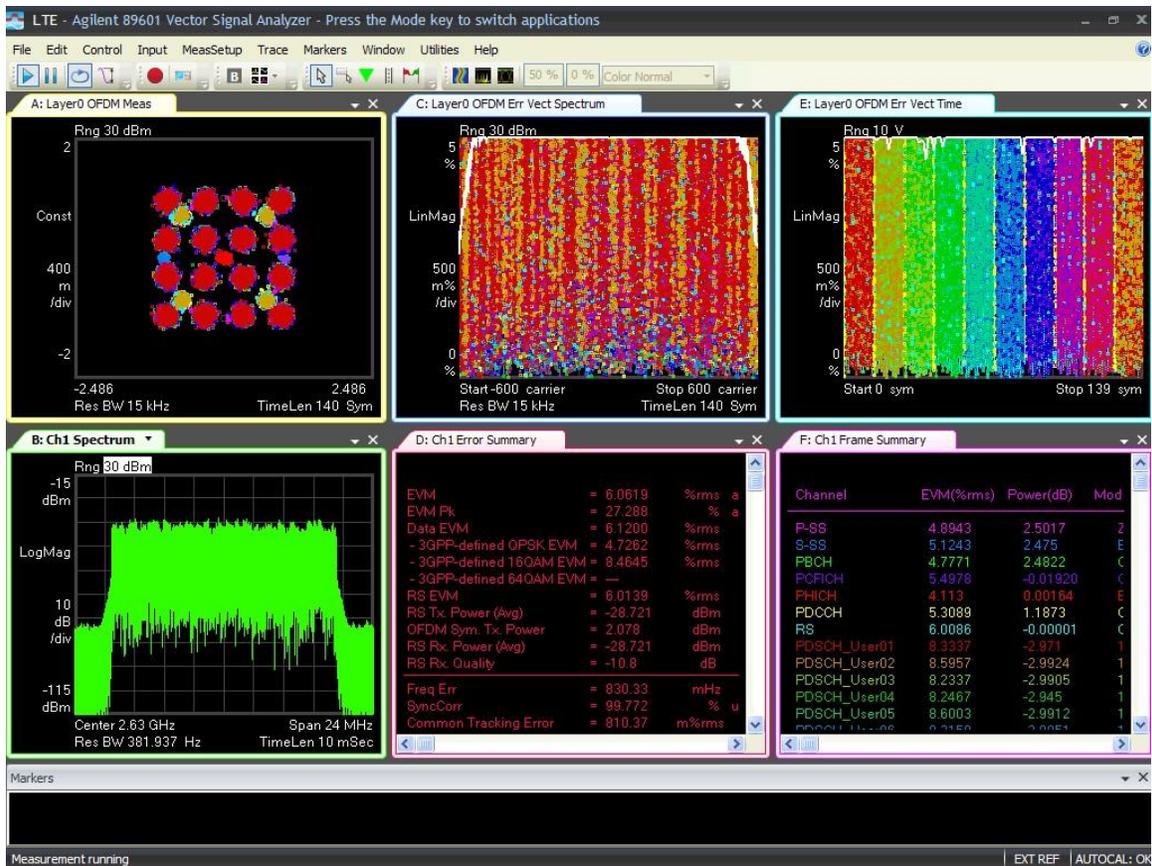

20M-Port 2 -2630MHz -TM3.3