

FCC MEASUREMENT AND TEST REPORT

For

ZTE Corporation

ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen,
Guangdong, China 518057

FCC ID: Q78-R8882S1900

Apr 10, 2012

This Report Concerns: ☒ Original Report		Equipment Type: Macro Radio Remote Unit
Test Engineer:	Bloom <i>Bloom</i>	
Report No.:	FCC-2011-086	
Test Date:	Apr 10 – Apr 22, 2012	
Reviewed By:	Xie Yuming <i>Xie Yuming</i>	
Prepared By:	ZTE Corporation.	
ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen, Guangdong, China 518057, P.R.China Tel: +86-755-26770000 Fax: +86-755-26771999		

Note: The test report is specially limited to the above company and this particular sample only. It may not be duplicated without prior written consent of ZTE Corporation. This report must not be used by the client to claim product certification 、 approval 、 or endorsement by any agency of the US Government.

TABLE OF CONTENTS

TABLE OF CONTENTS	2
1 GENERAL INFORMATION.....	7
Product Description for Equipment Under Test (EUT).....	7
Objective.....	8
Related Submittal(s)/Grant(s).....	8
Test Methodology	8
Test Facility.....	8
2 SYSTEM TEST CONFIGURATION.....	9
Description of Test Configuration	9
3 CDMA OF TEST RESULTS.....	10
3.1 TRANSMITTER OUTPUT POWER	11
Applicable Standard: FCC §2.1046 §24.232	11
Test Equipment List and Details.....	11
Test Procedure.....	11
Environmental Conditions	12
Test Result: Pass.....	12
Test Mode: Transmitting CDMA	12
Test Data:.....	12
3.2 RF EXPOSURE	21
Applicable standard: FCC §2.1091 and §1.1037	21
Limit.....	21
Test Data.....	21
3.3 MODULATION CHARACTERISTIC.....	22
Applicable Standard: FCC §2.1047	22
Test Equipment List and Details.....	22
Test Procedure.....	22
Test Data Environmental Conditions	22
Test Result: Pass.....	22
Test Mode: Transmitting CDMA	22
Test Data:.....	23
3.4 SPURIOUS RADIATED EMISSIONS.....	25
Applicable Standard: FCC CFR 47, §2.1053	25
Test Equipment List and Details.....	25
Test Procedure.....	26
Test Results Summary: PASS	26
Environmental Conditions	26
Test data	27
3.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	28
Applicable Standard: FCC§2.1051, §24.238.....	28
Test Equipment List and Details.....	28
Test Procedure.....	28
Test Data Environmental Conditions	29
Test Result: Pass.....	29
Test Mode: Transmitting CDMA	29
Test Data:.....	29
3.6 OCCUPIED BANDWIDTH.....	54
Applicable Standard: FCC §2.1049 §24.229 §24.238	54
Test Equipment List and Details:.....	54
Test Procedure.....	54

Environmental Conditions	54
Test Result: Pass.....	55
Test Mode: Transmitting CDMA	55
Test Data.....	55
3.7 BAND EDGES.....	63
Applicable Standard: FCC §2.1051 §24.238.....	63
Test Equipment List and Details.....	63
Test Procedure.....	63
Test Data Environmental Conditions	63
Test Result: Pass.....	64
Test Mode: Transmitting CDMA	64
Test Data.....	64
3.8 FREQUENCY STABILITY	70
Applicable Standard: FCC § 2.1055 § 24.235.....	70
Test Equipment List and Details.....	70
Test Procedure.....	70
Environmental Conditions	70
Test Result: Pass.....	71
Test Mode: Transmitting CDMA	71
Test Data.....	71
Frequency Stability Versus Temperature	71
Frequency Stability Versus Voltage	73
4 UMTS OF TEST RESULTS	74
4.1 TRANSMITTER OUTPUT POWER	75
Applicable Standard: FCC §2.1046 §24.232	75
Test Equipment List and Details.....	75
Test Procedure.....	75
Environmental Conditions	76
Test Result: Pass.....	76
Test Mode: Transmitting UMTS.....	76
Test Data:.....	76
4.2 RF EXPOSURE	85
Applicable standard: FCC §2.1091 and §1.1037	85
Limit.....	85
Test Data.....	85
4.3 MODULATION CHARACTERISTIC.....	86
Applicable Standard: FCC §2.1047	86
Test Equipment List and Details.....	86
Test Procedure.....	86
Test Data Environmental Conditions	86
Test Result: Pass.....	86
Test Mode: Transmitting UMTS.....	86
Test Data:.....	87
4.4 SPURIOUS RADIATED EMISSIONS.....	89
Applicable Standard: FCC CFR 47, §2.1053	89
Test Equipment List and Details.....	89
Test Procedure.....	90
Test Results Summary: PASS	90
Environmental Conditions	90
Test data	91
4.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	92
Applicable Standard: FCC§2.1051, §24.238.....	92
Test Equipment List and Details.....	92

Test Procedure.....	92
Test Data Environmental Conditions	93
Test Result: Pass.....	93
Test Mode: Transmitting UMTS.....	93
Test Data:.....	93
4.6 OCCUPIED BANDWIDTH.....	112
Applicable Standard: FCC §2.1049 §24.229 §24.238	112
Test Equipment List and Details:.....	112
Test Procedure.....	112
Environmental Conditions	112
Test Result: Pass.....	113
Test Mode: Transmitting UMTS.....	113
Test Data.....	113
4.7 BAND EDGES.....	115
Applicable Standard: FCC §2.1051 §24.238.....	115
Test Equipment List and Details.....	115
Test Procedure.....	115
Test Data Environmental Conditions	115
Test Result: Pass.....	116
Test Mode: Transmitting UMTS.....	116
Test Data.....	116
4.8 FREQUENCY STABILITY	122
Applicable Standard: FCC § 2.1055 § 24.235.....	122
Test Equipment List and Details.....	122
Test Procedure.....	122
Environmental Conditions	122
Test Result: Pass.....	123
Test Mode: Transmitting UMTS.....	123
Test Data.....	123
Frequency Stability Versus Temperature	123
Frequency Stability Versus Voltage	125
5 GSM OF TEST RESULTS	126
5.1 TRANSMITTER OUTPUT POWER.....	127
Applicable Standard: FCC §2.1046 §24.232	127
Test Equipment List and Details.....	127
Test Procedure.....	127
Environmental Conditions	128
Test Result: Pass.....	128
Test Mode: Transmitting GSM	128
Test Data:.....	128
5.2 RF EXPOSURE	153
Applicable standard: FCC §2.1091 and §1.1037	153
Limit.....	153
Test Data.....	153
5.3 MODULATION CHARACTERISTIC.....	154
Applicable Standard: FCC §2.1047	154
Test Equipment List and Details.....	154
Test Procedure.....	154
Test Data Environmental Conditions	154
Test Result: Pass.....	154
Test Mode: Transmitting GSM	154
Test Data:.....	155
5.4 SPURIOUS RADIATED EMISSIONS.....	159

Applicable Standard: FCC CFR 47, §2.1053	159
Test Equipment List and Details	159
Test Procedure.....	160
Test Results Summary: PASS	160
Environmental Conditions	160
Test data	161
5.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	162
Applicable Standard: FCC§2.1051, §24.238.....	162
Test Equipment List and Details.....	162
Test Procedure.....	162
Test Data Environmental Conditions	163
Test Result: Pass.....	163
Test Mode: Transmitting GSM	163
Test Data:.....	163
5.6 OCCUPIED BANDWIDTH.....	173
Applicable Standard: FCC§2.1049, §24.229, §24.238	173
Test Equipment List and Details:.....	173
Test Procedure.....	173
Environmental Conditions	173
Test Result: Pass.....	174
Test Mode: Transmitting GSM	174
Test Data.....	174
5.7 BAND EDGES.....	178
Applicable Standard: FCC §2.1051 §24.238.....	178
Test Equipment List and Details.....	178
Test Procedure.....	178
Test Data Environmental Conditions	178
Test Result: Pass.....	179
Test Mode: Transmitting GSM	179
Test Data.....	179
5.8 FREQUENCY STABILITY	188
Applicable Standard: FCC § 2.1055	188
Test Equipment List and Details.....	188
Test Procedure.....	188
Environmental Conditions	188
Test Result: Pass.....	189
Test Mode: Transmitting GSM	189
Test Data.....	189
Frequency Stability Versus Temperature	189
Frequency Stability Versus Voltage	190
6 DUAL-MODE OF TEST RESULTS.....	192
6.1 TRANSMITTER OUTPUT POWER	193
Applicable Standard: FCC §2.1046 §24.232	193
Test Equipment List and Details.....	193
Test Procedure.....	193
Environmental Conditions	194
Test Result: Pass.....	194
Test Mode: Transmitting 2GSMTRX and 2UMTS carriers and 4GSM TRX and 1UMTS carriers	194
Test Data:.....	194
5.2 RF EXPOSURE	197
Applicable standard: FCC §2.1091 and §1.1037	197
Limit	197
Test Data.....	197

5.3 SPURIOUS RADIATED EMISSIONS.....	198
Applicable Standard: FCC CFR 47, §2.1053	198
Test Equipment List and Details.....	198
Test Procedure.....	199
Test Results Summary: PASS	199
Environmental Conditions	199
Test data	200
5.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	201
Applicable Standard: FCC§2.1051, §24.238.....	201
Test Equipment List and Details.....	201
Test Procedure.....	201
Test Data Environmental Conditions	202
Test Result: Pass.....	202
Test Mode: Transmitting 2GSMTRX and 2UMTS carriers and 4GSM TRX and 1UMTS carriers	202
Test Data:.....	202
5.5 BAND EDGES.....	206
Applicable Standard: FCC §2.1051, §24.238.....	206
Test Equipment List and Details.....	206
Test Procedure.....	206
Test Data Environmental Conditions	206
Test Result: Pass.....	207
Test Mode: Transmitting 2GSMTRX and 2UMTS carriers and 4GSM TRX and 1UMTS carriers	207
Test Data.....	207
5.6 OCCUPIED BANDWIDTH.....	210
Applicable Standard: FCC §2.1049 §24.229 §24.238	210
Test Equipment List and Details:.....	210
Test Procedure.....	210
Environmental Conditions	210
Test Result: Pass.....	211
Test Mode: Transmitting 2GSMTRX and 2UMTS carriers and 4GSM TRX and 1UMTS carriers	211
Test Data.....	211

1 GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The ZXSDR R8882 S1900 is a multi-mode remote RF unit that supports 2T4R FDD. It supports GSM, UMTS, and CDMA communications systems and features compact structure, large capacity, and easy installation.

Technical specification:

Size: 480 mm × 320 mm × 150 mm(H x W x D)

Input voltage: -48Vdc

Frequency range: 1930MHz to 1990MHz

Max RF output power: 47dBm

Gain of the antenna: 13dBi

Modulation type of emission: the modulation of CDMA is QPSK; UMTS 4 Carriers; GSM 6 TRX; 4 GSM TRX and 1 UMTS carriers or 2 GSM TRX and 2 UMTS carriers

Appearance of EUT:



Objective

This Type approval report is prepared on behalf of ZTE Corporation in accordance with Part 2:2011,Part 15:2011,Part 24:2011 of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2. as well as the following parts:

Part 24 Wireless Communication Services

Applicable Standards: TIA EIA 137-A, TIA EIA 97-D, TIA/EIA 603-C, Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

All radiated and conducted measurement was performed at ZTE Corporation Reliability Testing Center. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by ZTE Corporation to collect test data is located in the 1/F,B2 Wing, ZTE Plaza, Keji Road South, Shenzhen, Guangdong, 518057, P.R.China, Tel: +86-755-26771609,Fax: +86-755-26770347. Test site at ZTE Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC). ZTE Corporation EMC Lab was certificated by CNAS and the registration number was L0611. The FCC registration number of ZTE corporation EMC lab is 373926. The IC registration number of ZTE corporation EMC lab is 5200A. The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 0009043175. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

2 SYSTEM TEST CONFIGURATION

Description of Test Configuration


Justification

The EUT was configured for testing according to TIA/EIA-603C.

The final qualification test was performed with EUT operating at normal mode.

Equipment Modifications

ZTE Corporation has not done any modification on the EUT.

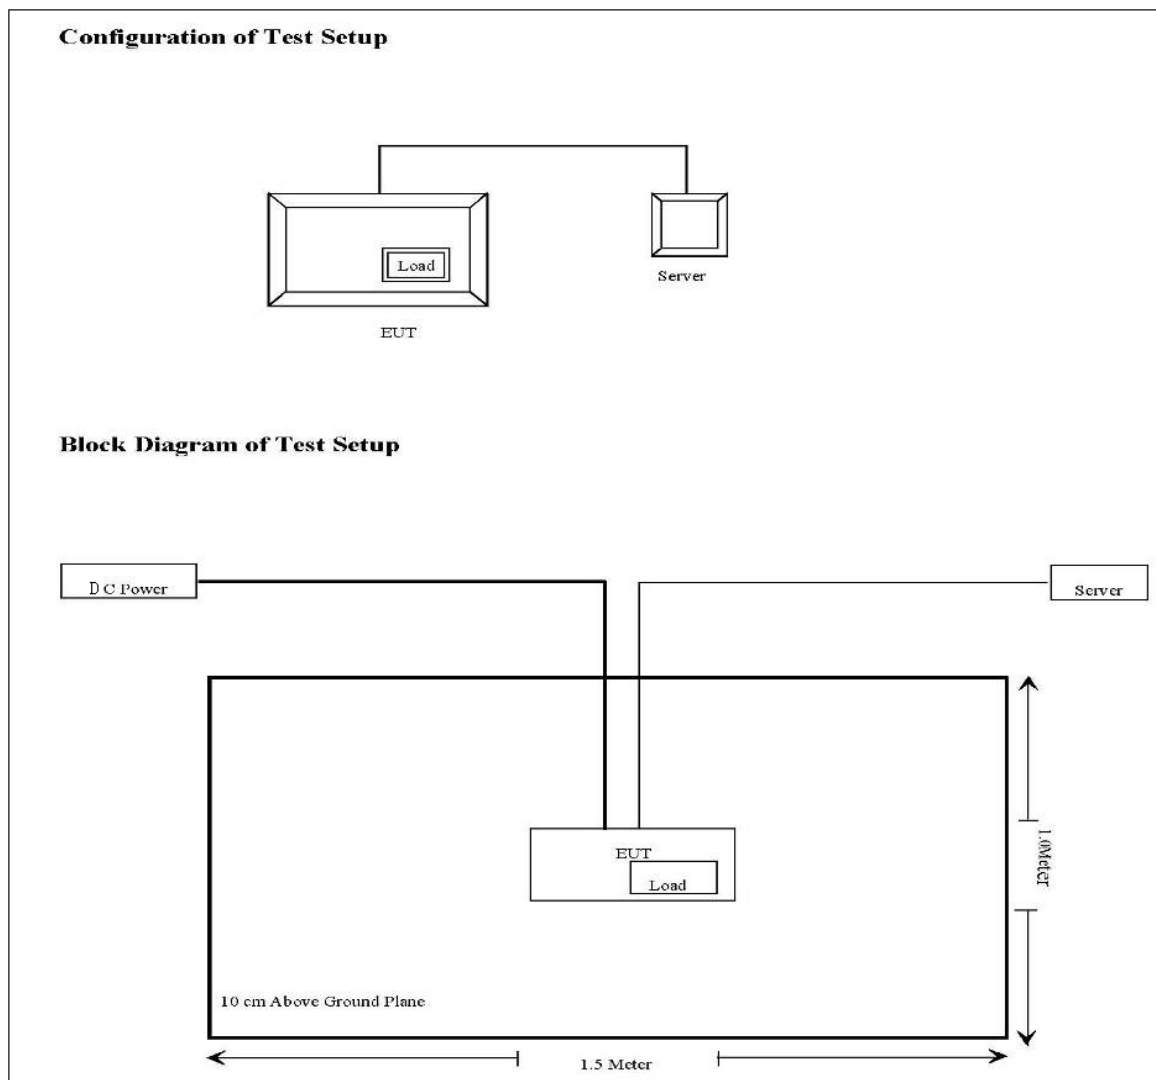

3 CDMA OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§2.1046 §24.232	Transmitter output Power	Compliant
§2.1091 §1.1037	RF Exposure	Compliant
§2.1047	Modulation Characteristic	Compliant
§2.1053	Spurious Radiated Emissions	Compliant
§2.1051, §24.238	Spurious Emissions AT Antenna Terminals	Compliant
§2.1049 §24.229 §24.238	Occupied Bandwidth	Compliant
§2.1051, §24.238	Band Edge	Compliant
§ 2.1055 § 24.235	Frequency stability	Compliant

3.1 TRANSMITTER OUTPUT POWER

Applicable Standard: FCC §2.1046 §24.232

According to FCC §2.1046 & 24.232, the EIRP (equivalent isotropically radiated power) must not exceed 1640 Watts.

According to RSS-133, SRSP 510 5.1.1 the EIRP (equivalent isotropically radiated power) must not exceed 3280 Watts/MHz for base station transmitters operating in the band of 1930 MHz to 1995 MHz with the antenna height above average terrain up to 300 meters. If used in urban area, the limit should be 1640 Watts/MHz.


Note: EIRP = Max output Power + Antenna gain - Cable Loss

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2012-4-10	2013-4-9
Atten	30dB Attenuator	ATSI150-4-30	11300110201221	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	005	1054	2012-4-9	2013-4-8

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

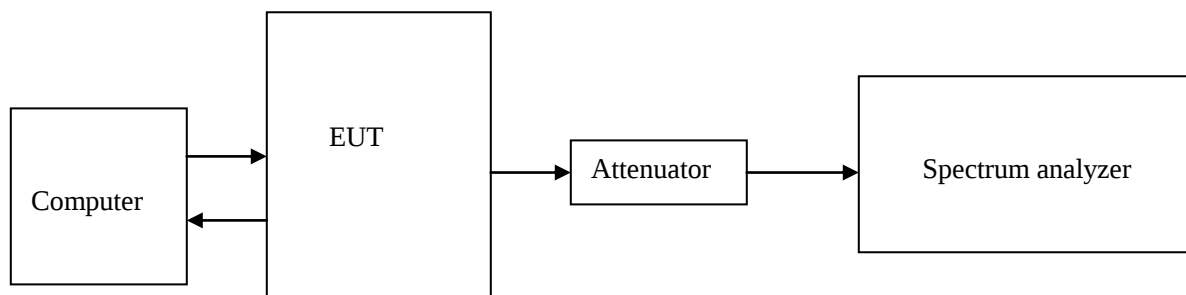

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. External attenuation Loss is 30dB, Cable Loss is about 5dB.

Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar



Test Result: Pass


Test Mode: Transmitting CDMA

Test Data:

Four carriers



Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
1932.675	1930.8/1932.05/1933.3/1934.55	46.64
1959.975	1958.1/1959.35/1960.6/1961.85	46.64
1987.325	1985.45/1986.7/1987.95/1989.2	47.12

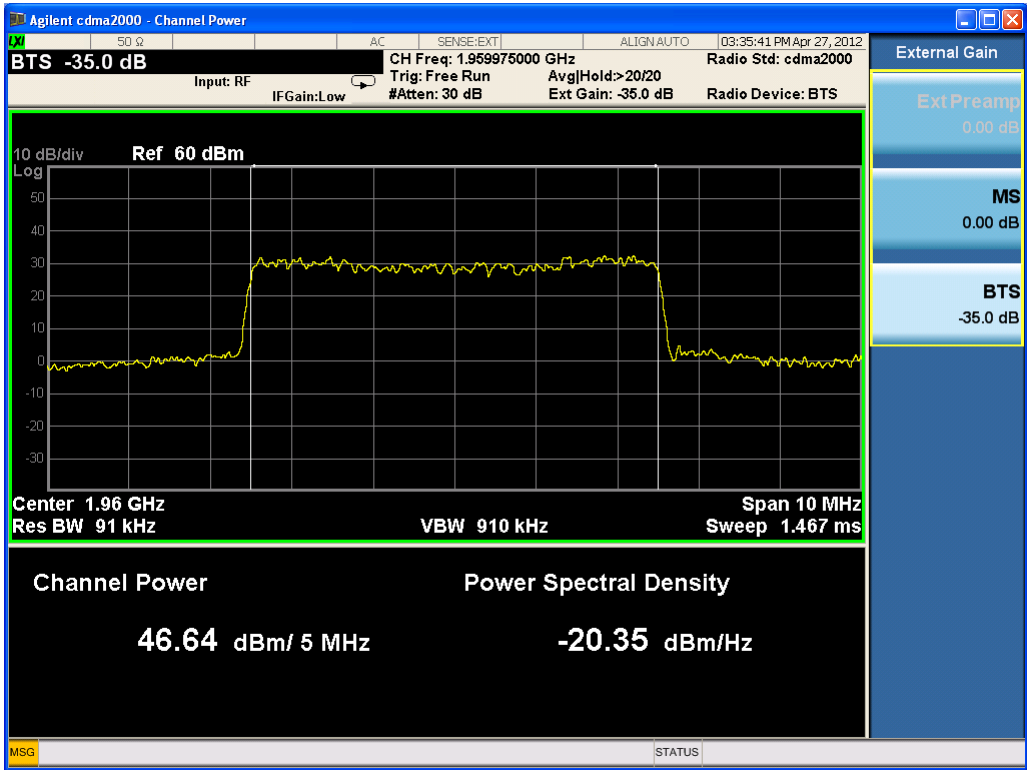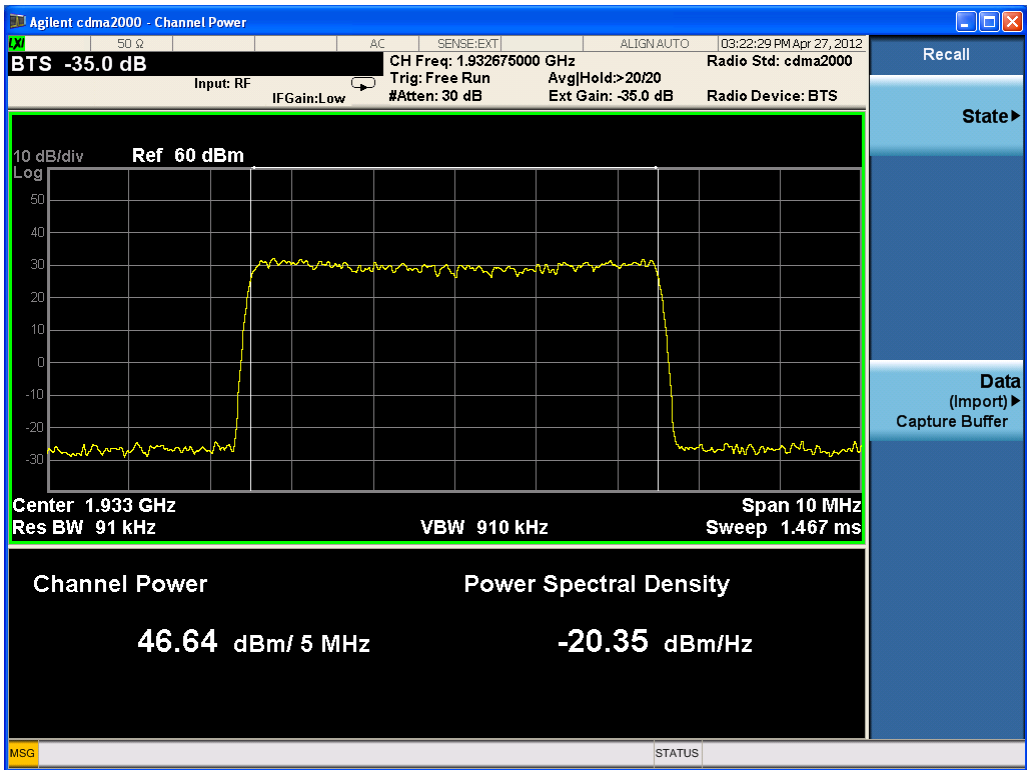


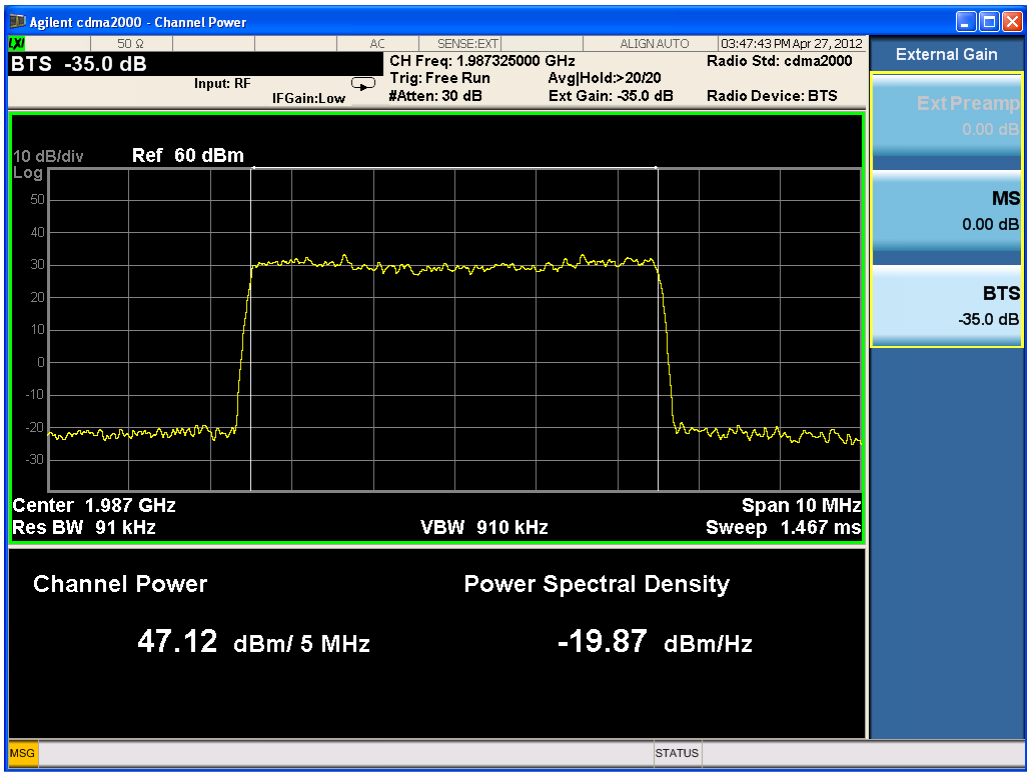

Three carriers



Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
1932.05	1930.8/1932.05/1933.3	47.05
1960	1958.75/1960/1961.25	47.22
1987.95	1986.7/1987.95/1989.2	46.72

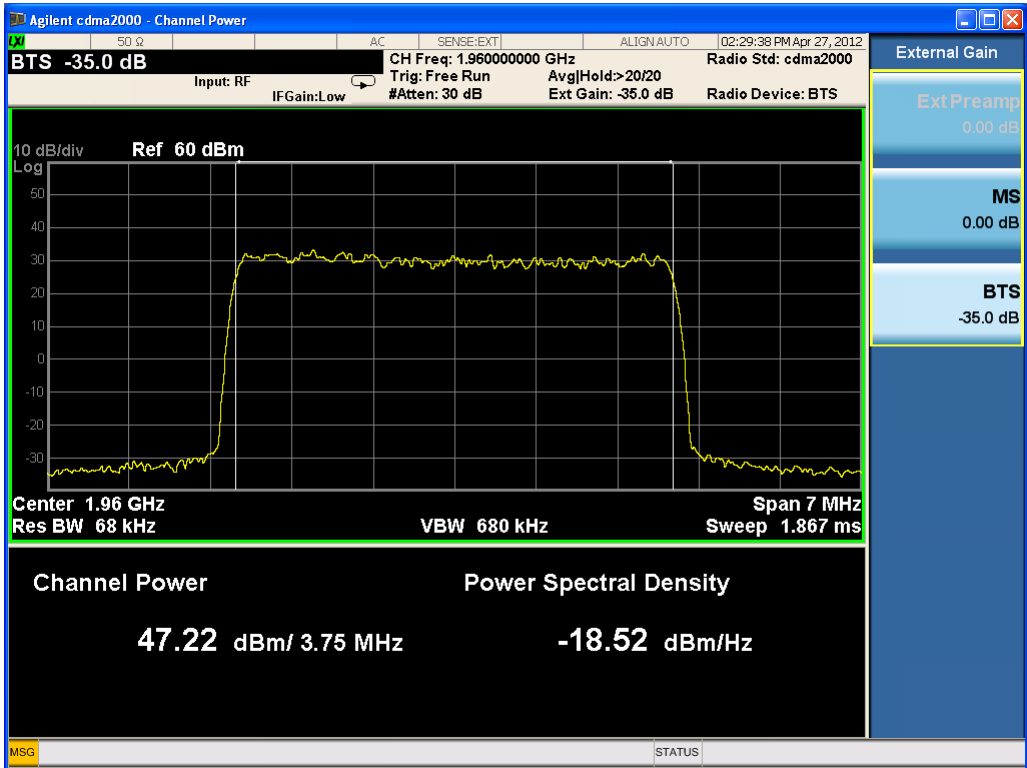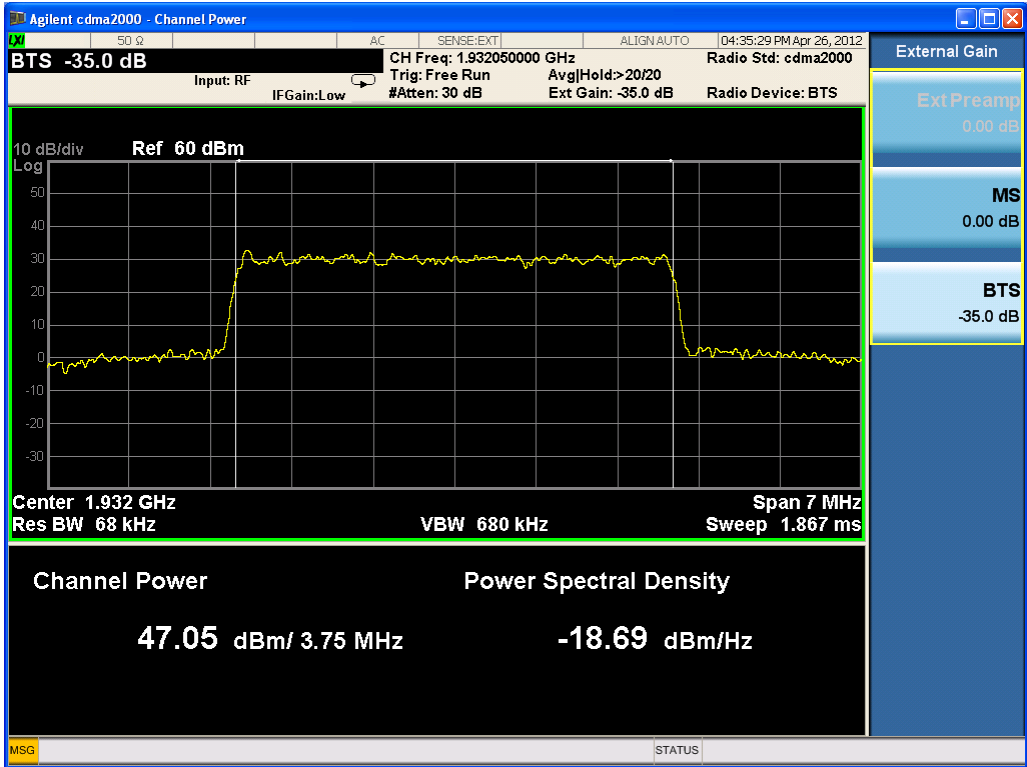


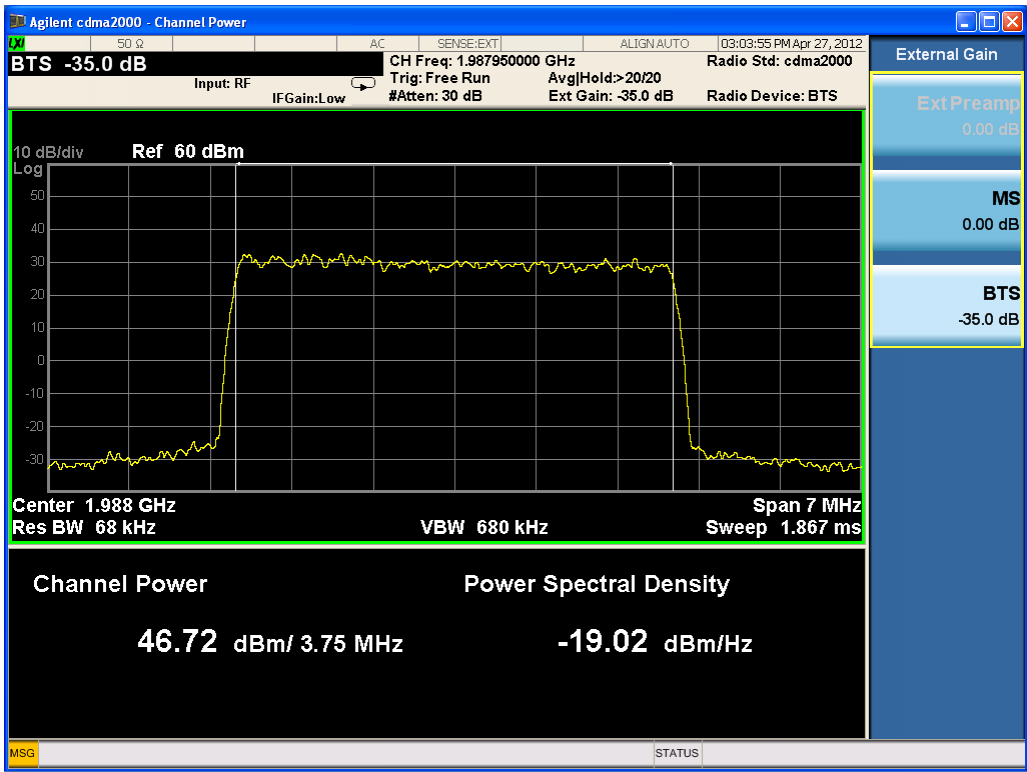

Two carriers



Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
1931.425	1930.8/1932.05	46.91
1959.975	1959.35/1960.6	47.06
1988.575	1987.95/1989.2	47.05

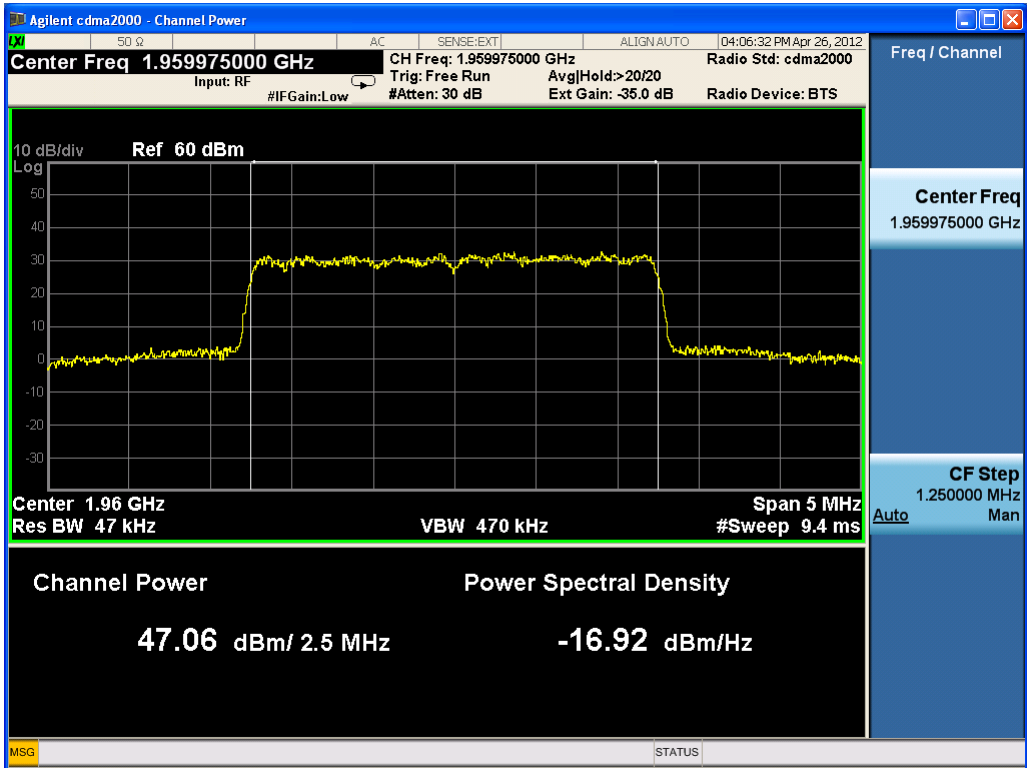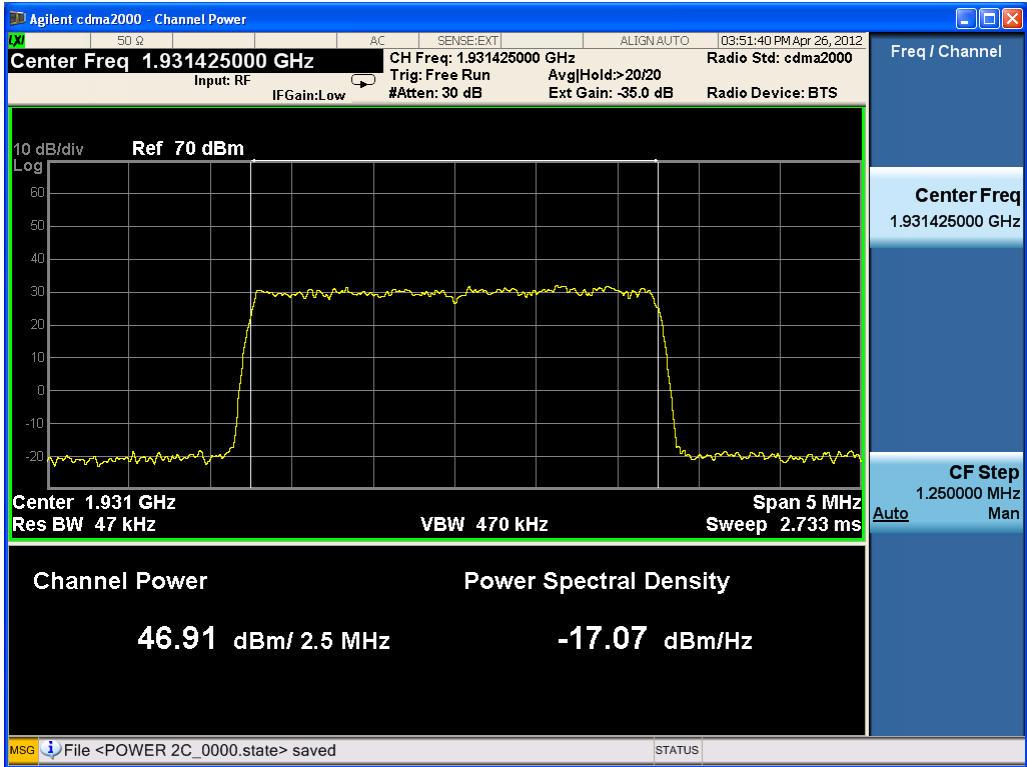


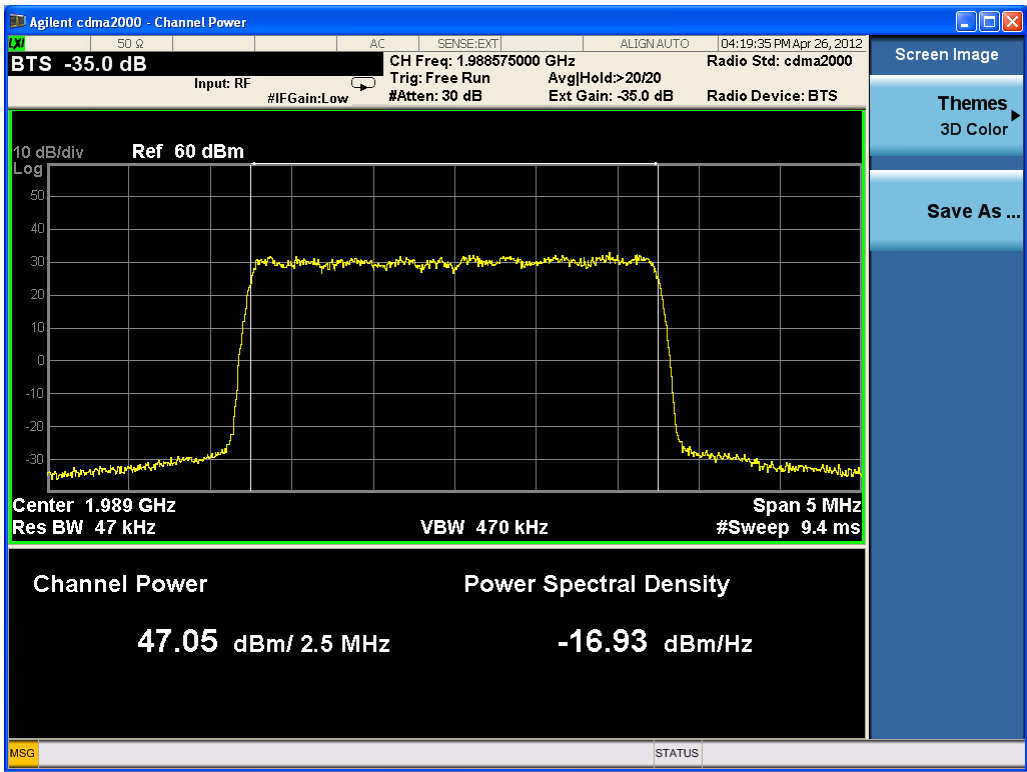

One carrier

Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
1930.8	1930.8	46.81
1960	1960	46.72
1989.2	1989.2	46.94

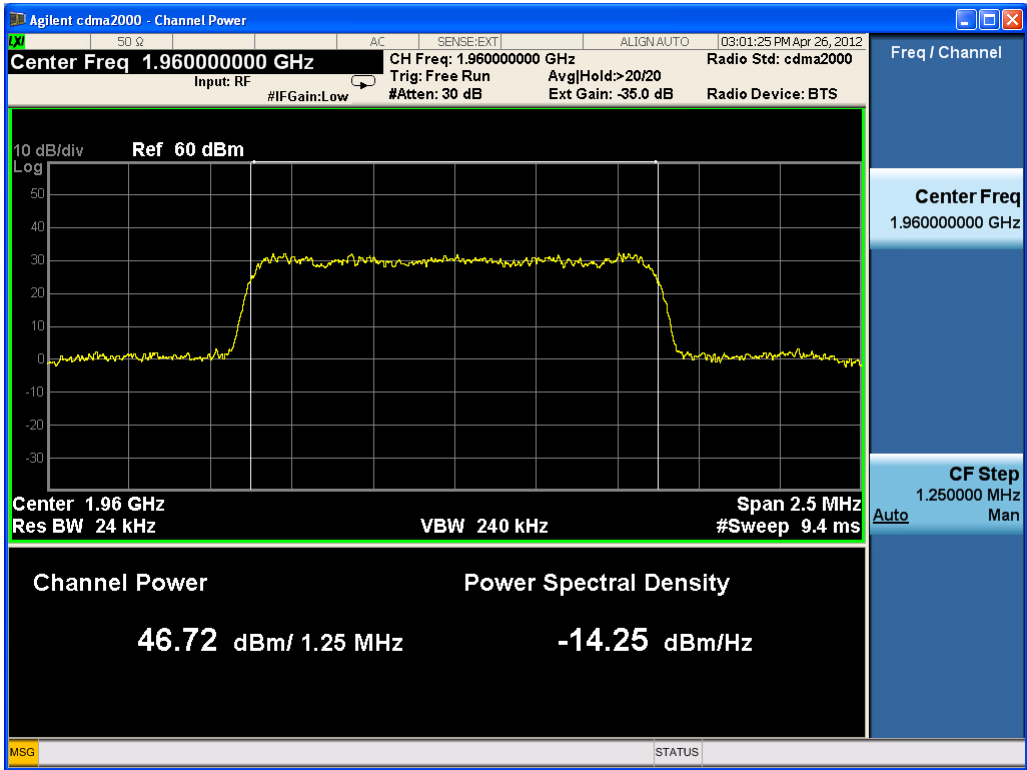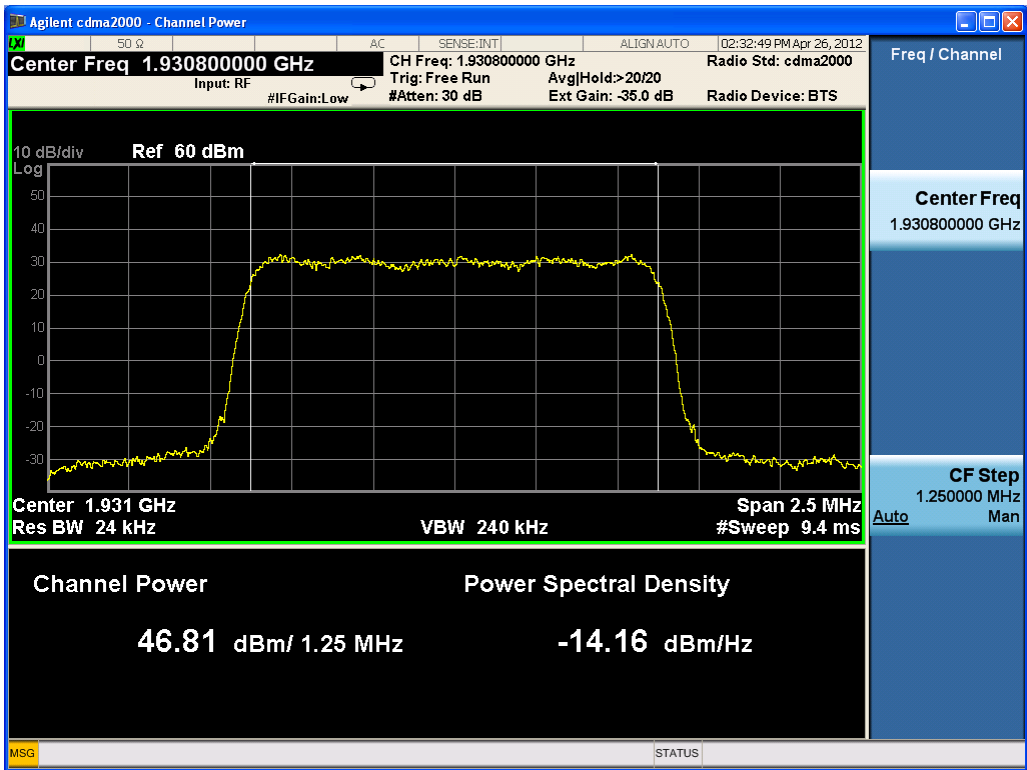

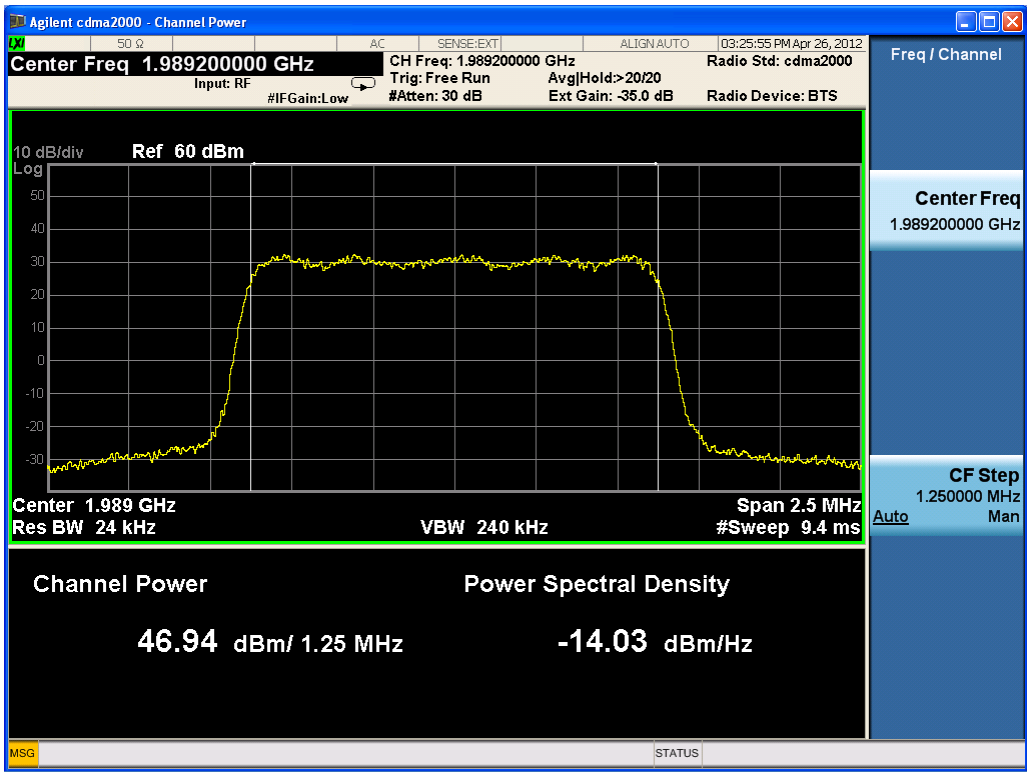

3.2 RF EXPOSURE

Applicable standard: FCC §2.1091 and §1.1037

Limit

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated. Limits for Maximum Permissible Exposure (MPE)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

Test Data

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = \text{EIRP} / 4\pi R^2$$

Where: S = power density

EIRP = equivalent isotropically radiated power=ERP+2.15dB

R = distance to the center of radiation of the antenna=[(ERP+2.15 dB)/ 4πS]^{1/2}

Maximum EIRP, In general, the equivalent isotropically radiated power (EIRP) of base transmitters and cellular repeaters must not exceed 1640 Watts.

Frequency is between 1500MHz and 100,000MHz, and the Maximum S=1.0mW/cm², so

R=3.61m.

This equipment should be installed and operated with minimum distance 3.61m between the radiator& your body.

Test Result: pass

3.3 MODULATION CHARACTERISTIC

Applicable Standard: FCC §2.1047

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2012-4-10	2013-4-9
Atten	30dB Attenuator	ATSI150-4-30	11300110201221	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	005	1054	2012-4-9	2013-4-8

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

CDMA digital mode is used by EUT.

Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar



Test Result: Pass

Test Mode: Transmitting CDMA

Test Data:

Frequency (MHz)	Rho
1930.8	0.99677
1960	0.99681
1989.2	0.99684

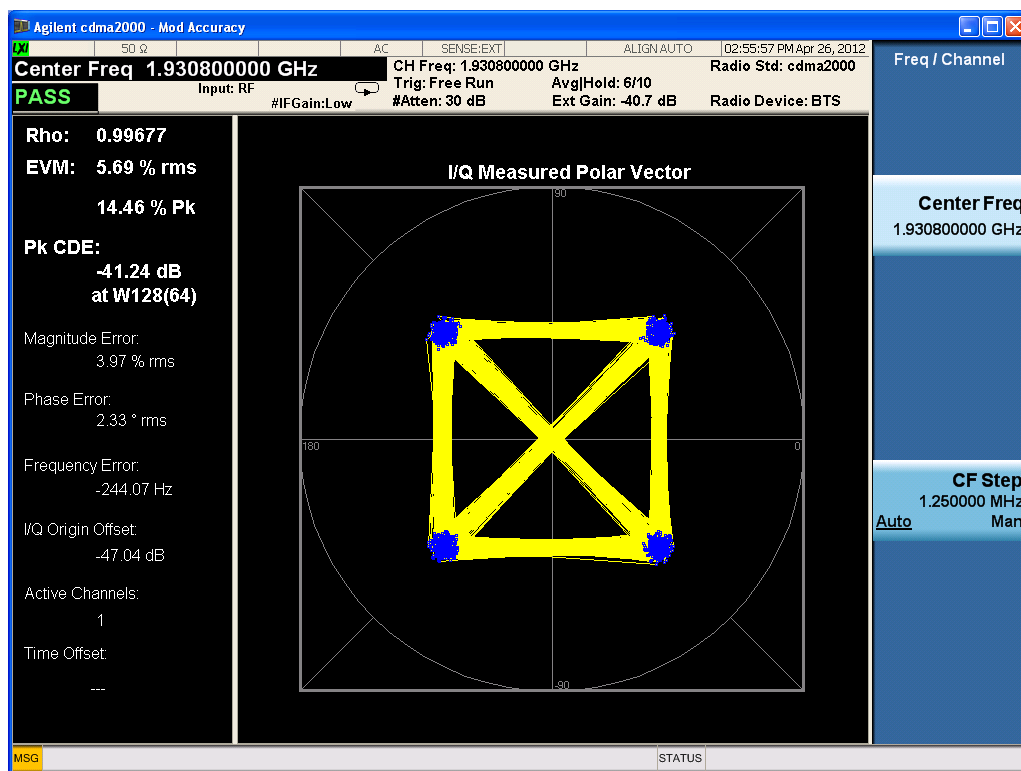

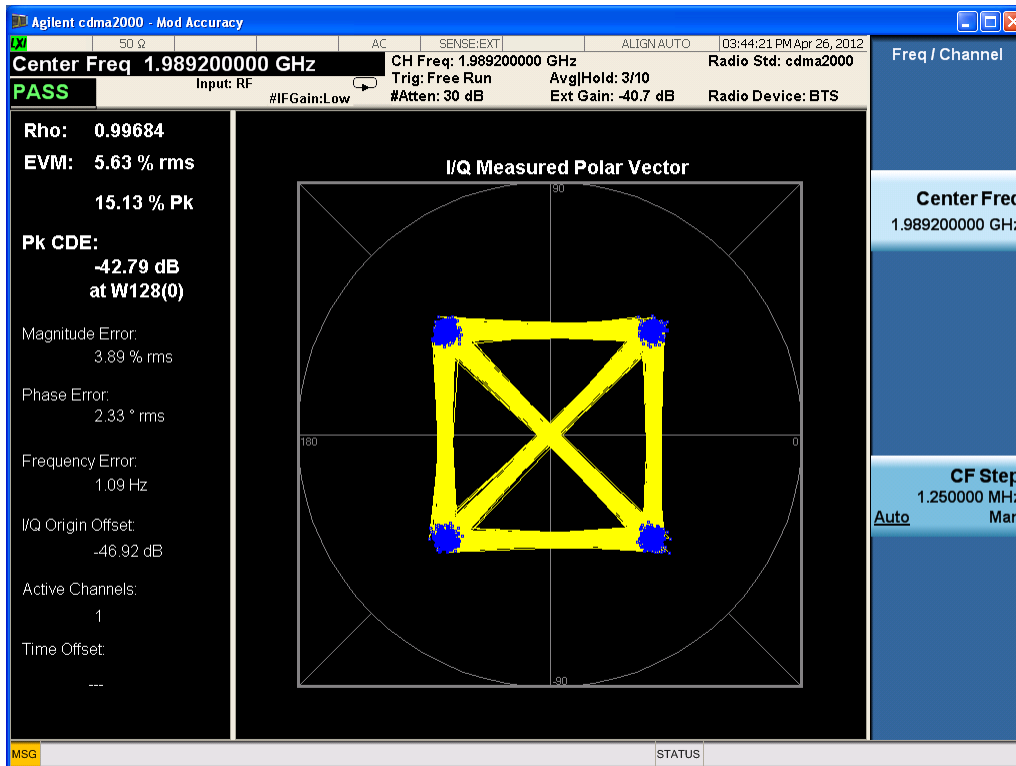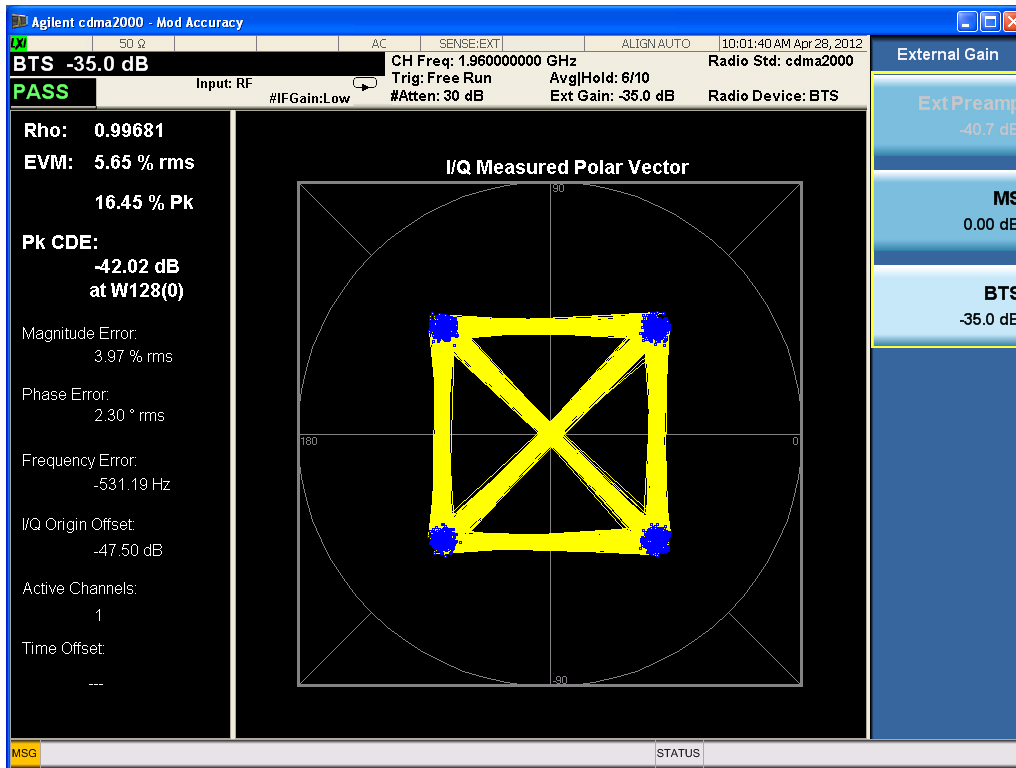

3.4 SPURIOUS RADIATED EMISSIONS

Applicable Standard: FCC CFR 47, §2.1053

Test Equipment List and Details

Manufacturer	Equipment	Model	Serial Number	Last Cal.	Cal. Interval
R&S	SIGNAL GENERATOR	SMR20	A00017351	2011-9-26	1 year
Albatross	Anechoic Chamber	3m Site	A00017354	2011-11-2	1 year
R&S	EMI Test Receiver	ESIB26	100058	2011-10-29	1 year
R&S	Ultra Breitband Antennas	HL562	100022	2011-7-29	1 year
R&S	Double-Ridged Waveguide Horn Antenna	HF906	100032	2011-7-29	1 year
R&S	Double-Ridged Waveguide Horn Antenna	HF906	100446	2011-7-29	1 year
SCHWARZ-BECK	Biconical Antenna	VUBA9117	9117-122	2011-7-29	1 year


***statement of traceability:** ZTE Corporation Testing lab attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiated emissions measurement at the EMC lab of ZTE Corp. is 3.6dB.

EUT Setup

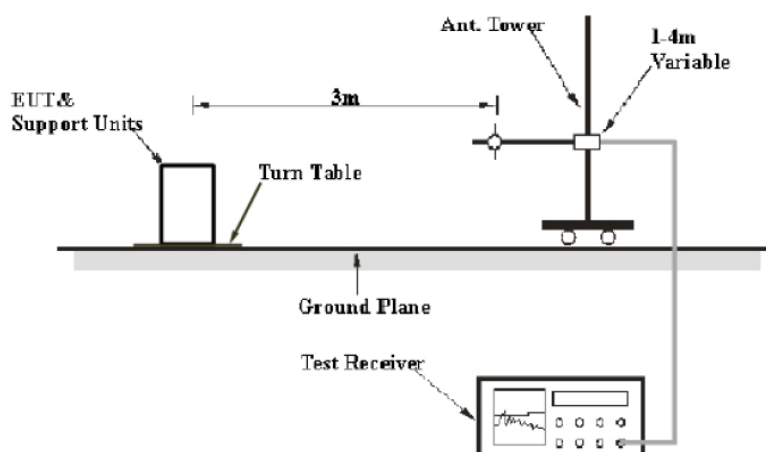

The radiated emission tests were performed in the 3-meter Chamber, using the setup accordance with the FCC part 2.1053. The specification used was the FCC 2.1053 limits.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg(\text{TX pwr in Watts}/0.001)$ - the absolute level

Spurious attenuation limit in dB = $43 + 10 \lg P$ (power out in Watts)

The resolution bandwidth of the spectrum analyzer was set at 100KHz for 30MHz to 1GHz scanning, set at 1MHz or 3MHz for 1GHz to 20GHz scanning.

Test Results Summary: PASS

Environmental Conditions

Temperature:	26°C
Relative Humidity:	60 %
ATM Pressure:	1009 mbar

Test data

Indicated		Test Antenna	Substituted		Cable Loss(dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (GHz)	Amp. (dB μ V)	Polar H/V	Level (dBm)	Antenna Gain Correction						
63.046092	26.01	V	-70.1	-27.24	0.6	-97.94	2.15	-100.09	-13	87.09
634.549098	26.43	V	-69.68	-1.09	2.1	-72.87	2.15	-75.02	-13	62.02
974.729459	31.16	V	-72.63	-2.82	2.6	-78.05	2.15	-80.2	-13	67.2
1384.76954	46.62	V	-60.9	4.25	3.1	-59.75	2.15	-61.9	-13	48.9
2991.98397	58.48	V	-52.49	7.95	4.6	-49.14	2.15	-51.29	-13	38.29
169.95992	23.09	H	-80.17	-3.24	1.1	-84.51	2.15	-86.66	-13	73.66
607.334669	27.78	H	-73.12	-1.39	2	-76.51	2.15	-78.66	-13	65.66
992.224449	31.09	H	-72.3	-2.59	2.7	-77.59	2.15	-79.74	-13	66.74
1388.77756	46.41	H	-62.22	4.25	3.1	-61.07	2.15	-63.22	-13	50.22
1981.96393	90.64	H	-18.3	6.55	3.8	-15.55	2.15	-17.7	-13	4.7
2963.92786	57.49	H	-48.71	7.95	4.6	-45.36	2.15	-47.51	-13	34.51

Radiation emission spurious below 3GHz

Indicated		Test Antenna	Substituted		Cable Loss(dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (GHz)	Amp. (dB μ V)	Polar H/V	Level (dBm)	Antenna Gain Correction						
3953.90782	49.47	V	-46.64	7.75	5.3	-44.19	2.15	-46.34	-13	33.34
5276.55311	45.53	V	-50.58	8.55	6.2	-48.23	2.15	-50.38	-13	37.38
5941.88377	58.8	V	-44.99	9.05	6.6	-42.54	2.15	-44.69	-13	31.69
9755.51102	54.47	V	-53.05	9.95	9	-52.1	2.15	-54.25	-13	41.25
13282.5651	59.36	V	-42.38	11.85	10.2	-40.73	2.15	-42.88	-13	29.88
17933.8677	72.31	V	-38.66	8.95	12.2	-41.91	2.15	-44.06	-13	31.06
3961.92385	50.92	H	-52.34	7.75	5.3	-49.89	2.15	-52.04	-13	39.04
5268.53707	45.53	H	-55.37	8.55	6.2	-53.02	2.15	-55.17	-13	42.17
5941.88377	54.63	H	-48.76	9.05	6.6	-46.31	2.15	-48.46	-13	35.46
9843.68738	53.43	H	-55.2	9.95	8.9	-54.15	2.15	-56.3	-13	43.3
13348.6974	58.86	H	-50.08	11.85	10.2	-48.43	2.15	-50.58	-13	37.58
17867.7355	72.1	H	-34.1	8.95	12.2	-37.35	2.15	-39.5	-13	26.5

Radiation emission spurious above 3GHz

3.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard: FCC§2.1051, §24.238

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2012-4-10	2013-4-9
Atten	30dB Attenuator	ATSI150-4-30	11300110201221	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	005	1054	2012-4-9	2013-4-8

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

EUT Setup:

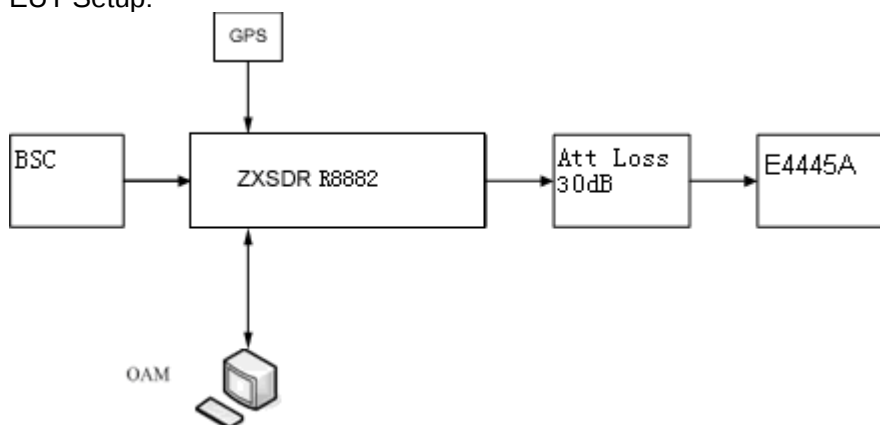

REMARKS: Attenuator loss (dB)=30dB, Cable Loss (dB)=5dB.

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100KHz for 30MHz to 1GHz scanning, set at 1MHz for 1GHz to 5GHz scanning, set at 1MHz for 5GHz to

10GHz scanning, set at 1MHz for 10GHz to 20GHz scanning. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar



Test Result: Pass

Test Mode: Transmitting CDMA

Test Data:


Four Carriers (working in bottom frequency)

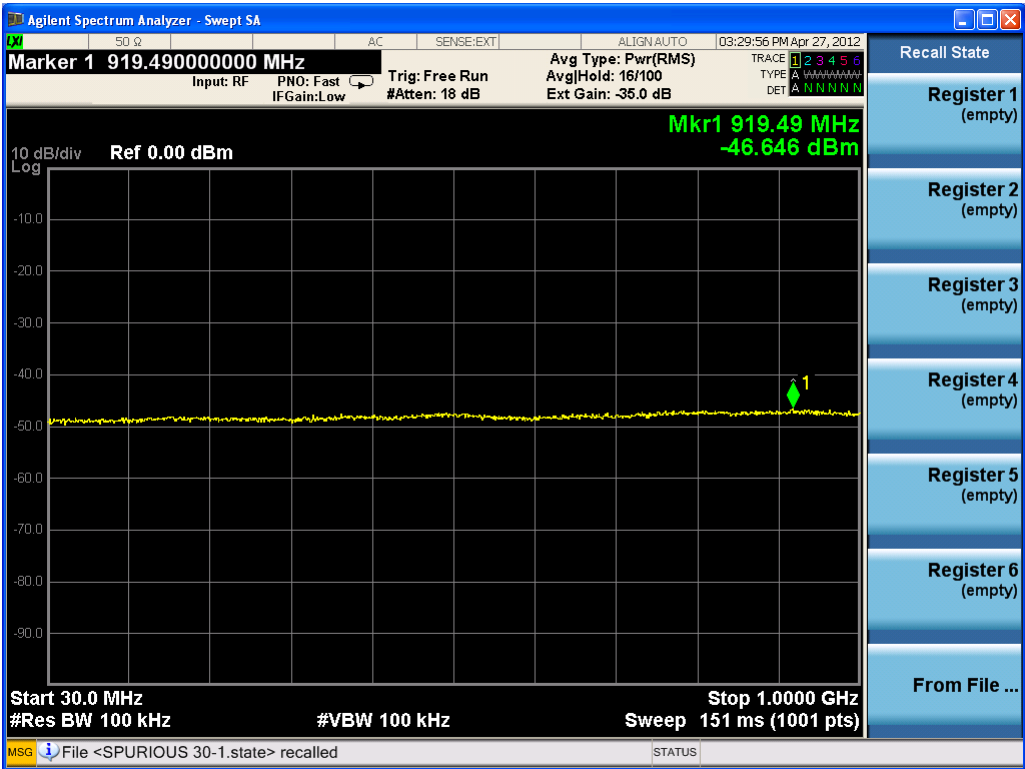


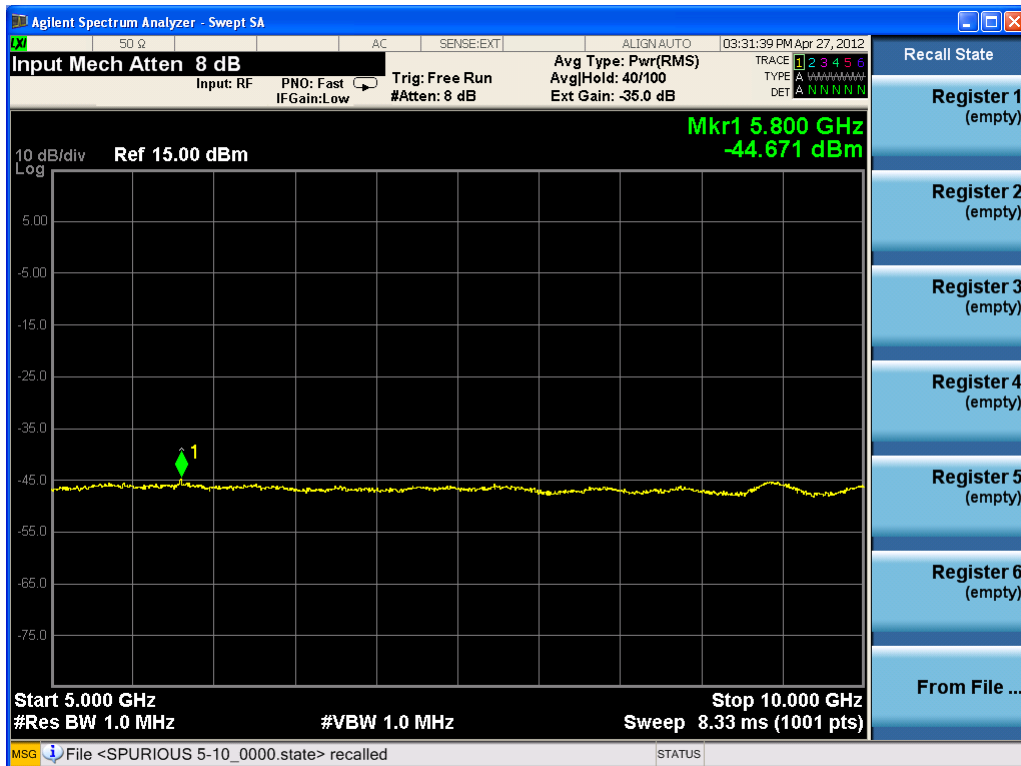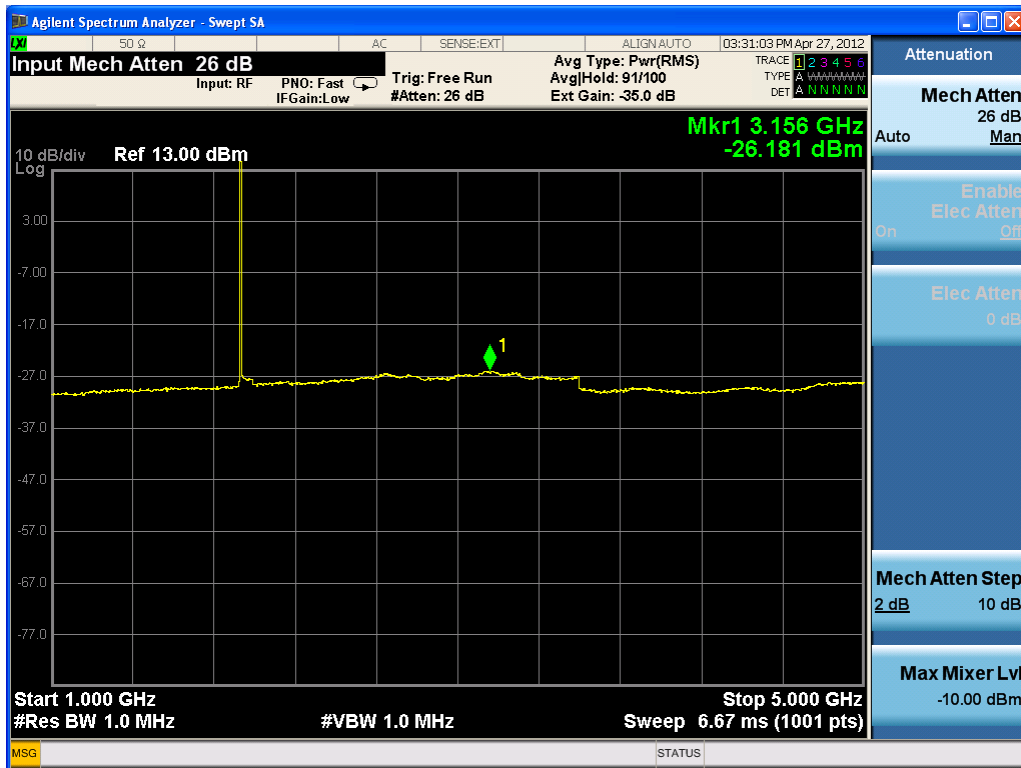





Four carriers (working in middle frequency)

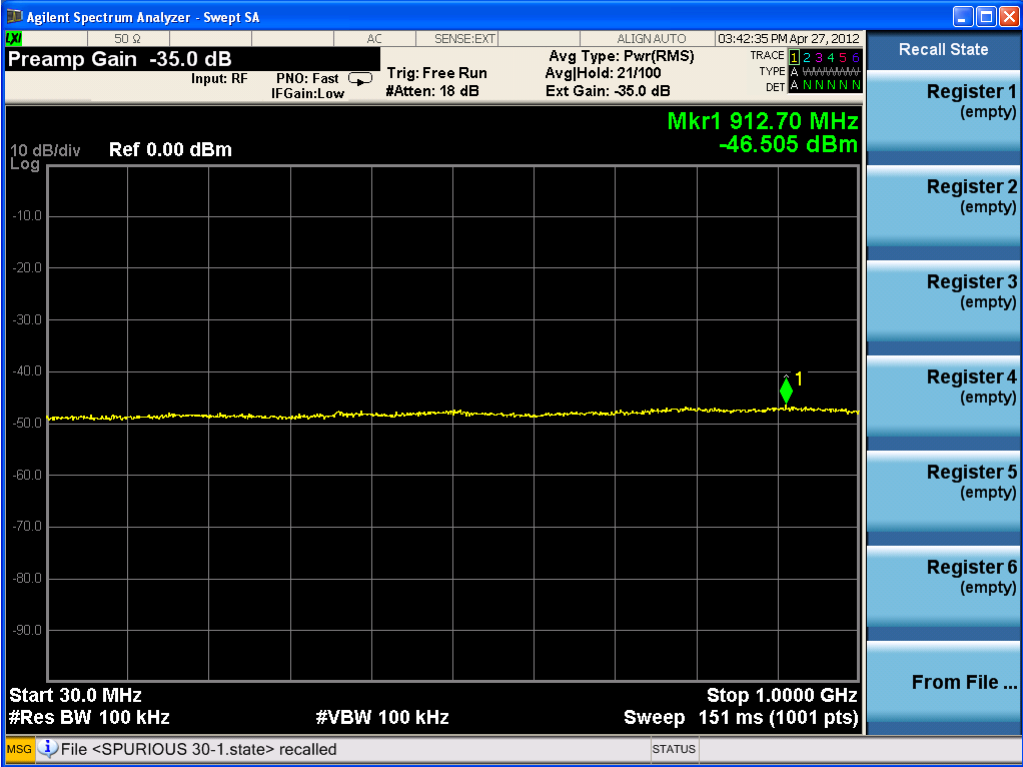


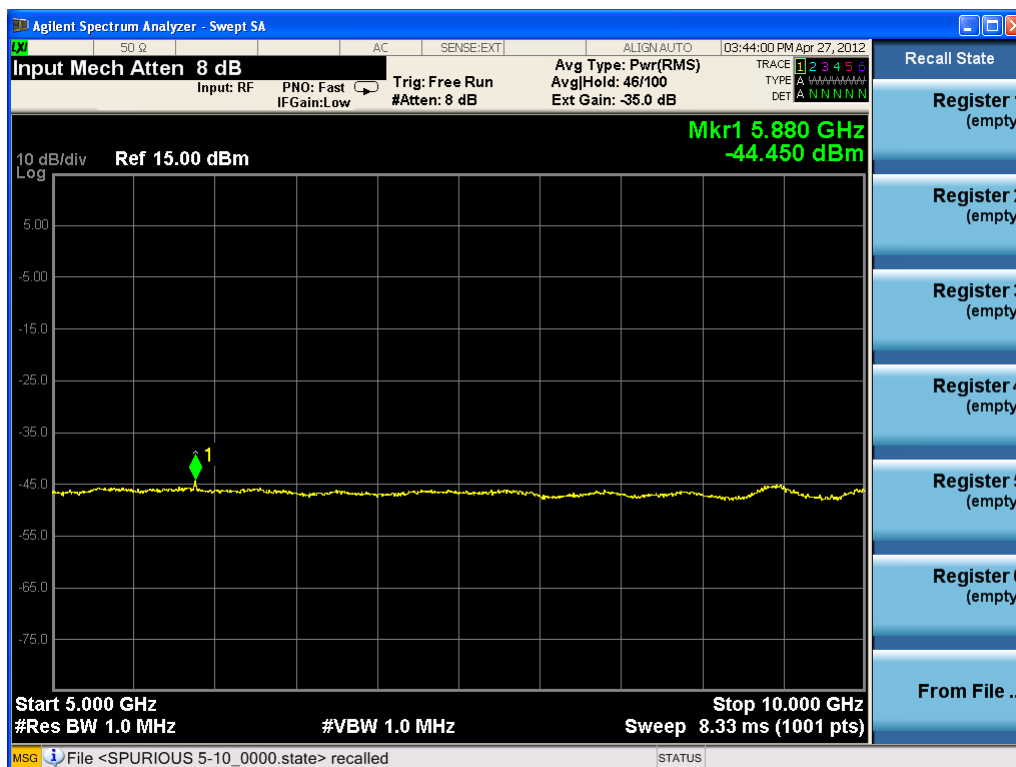



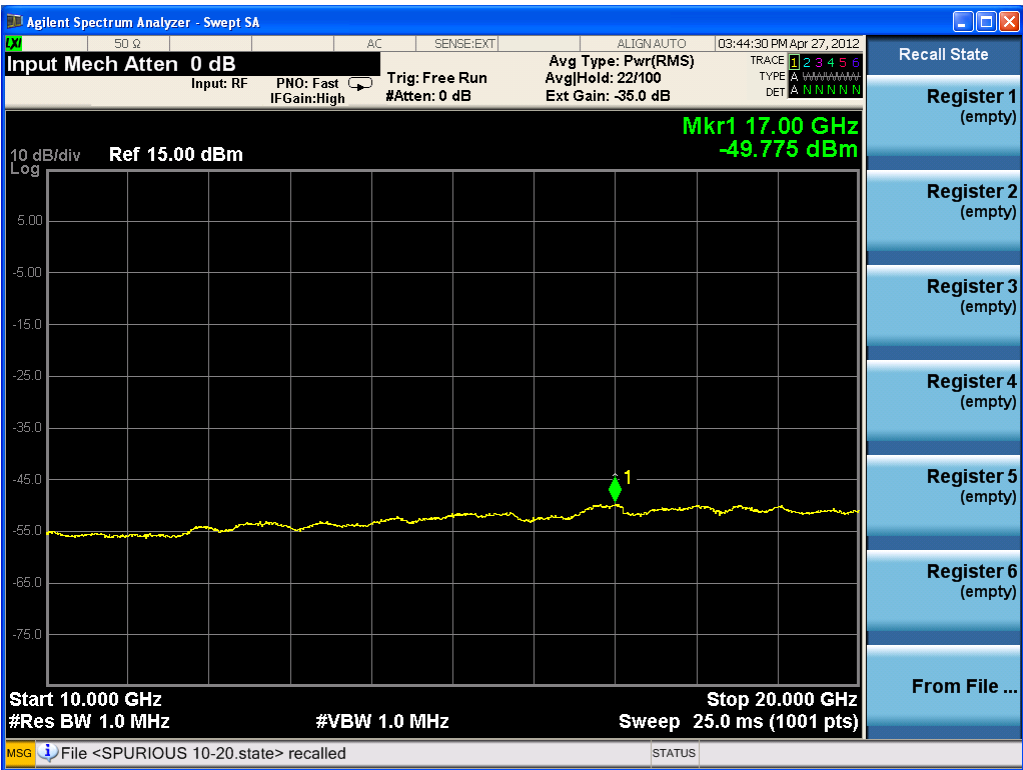



Four Carriers (working in top frequency)

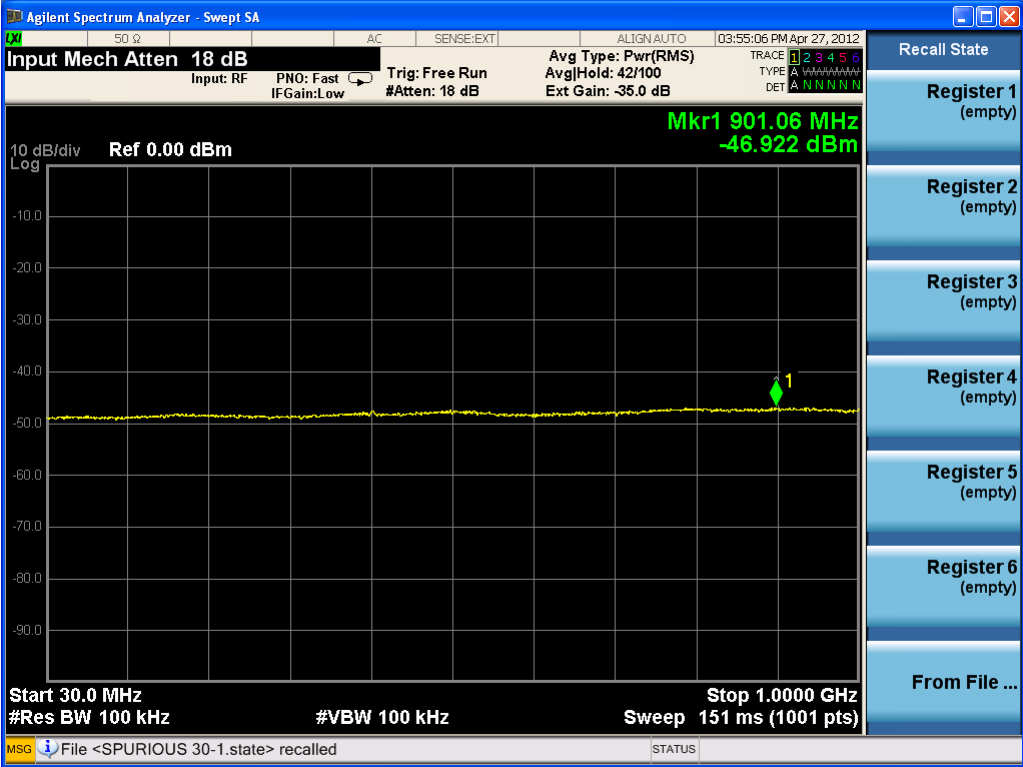

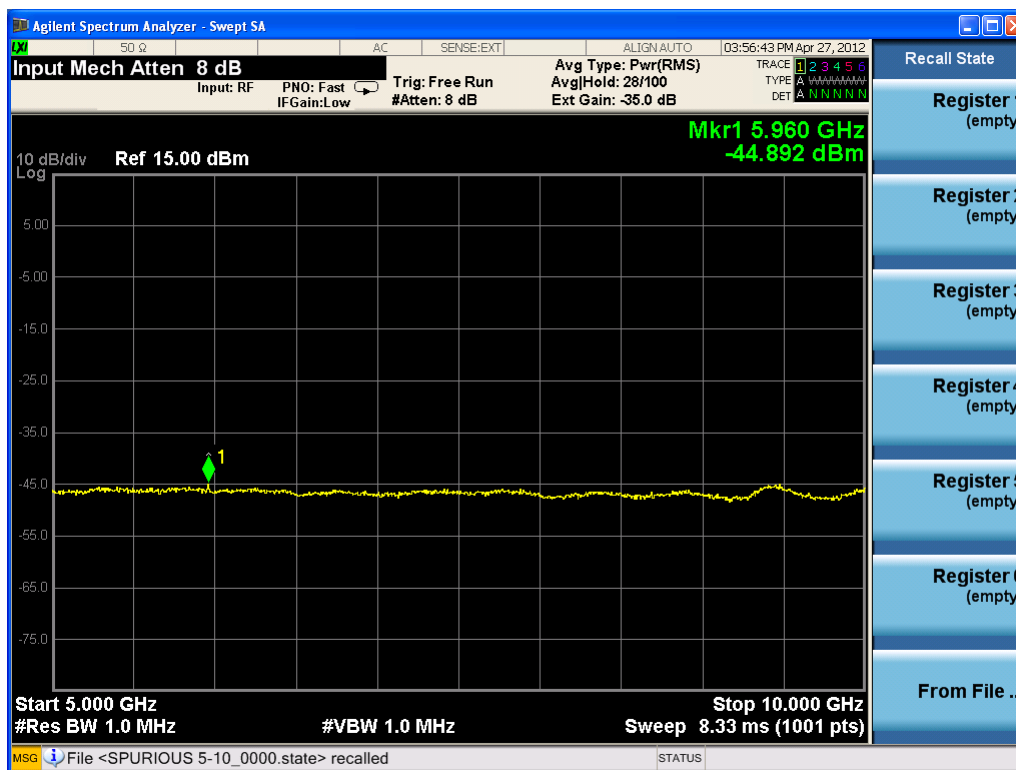






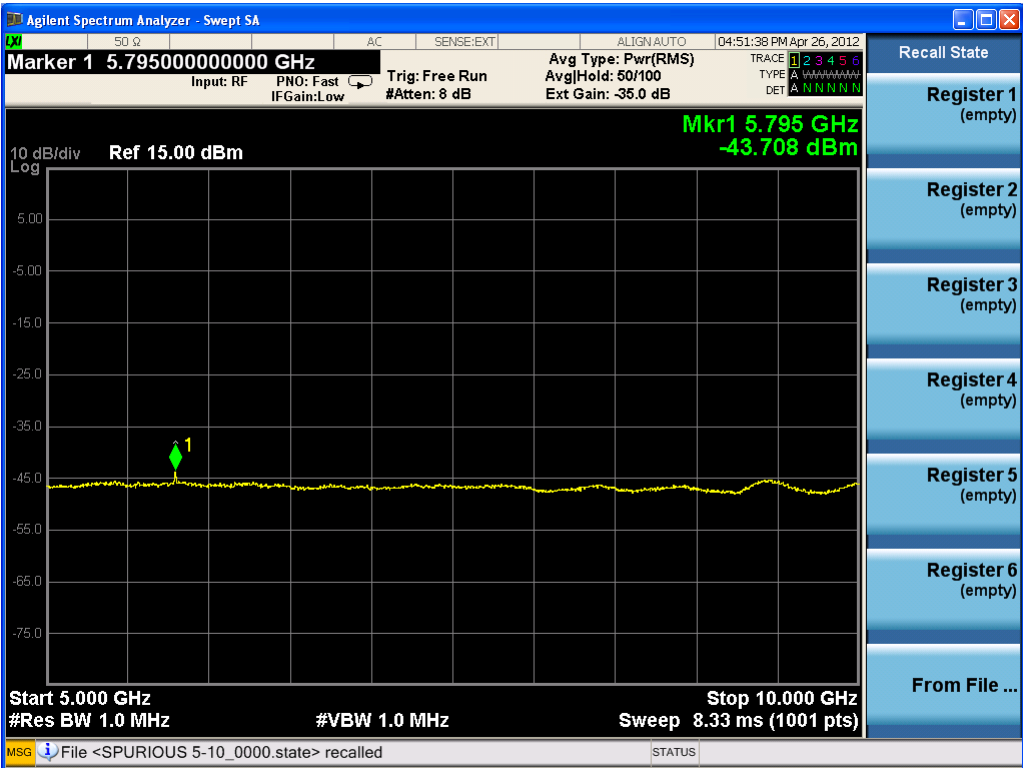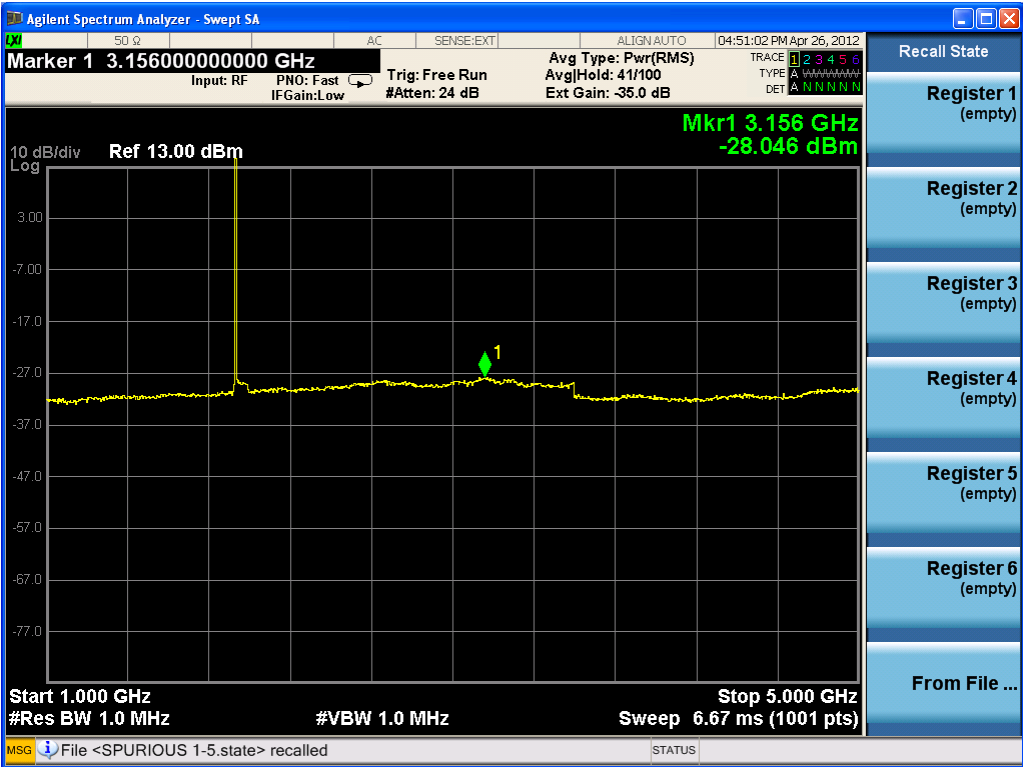



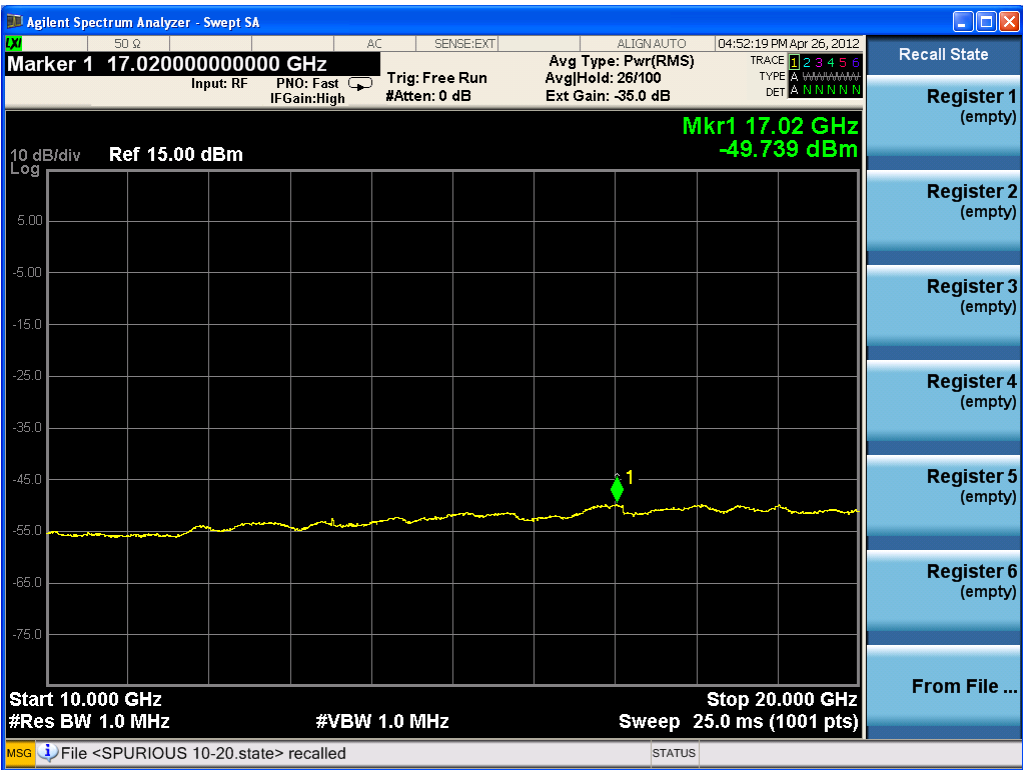



Three carriers (working in middle frequency)

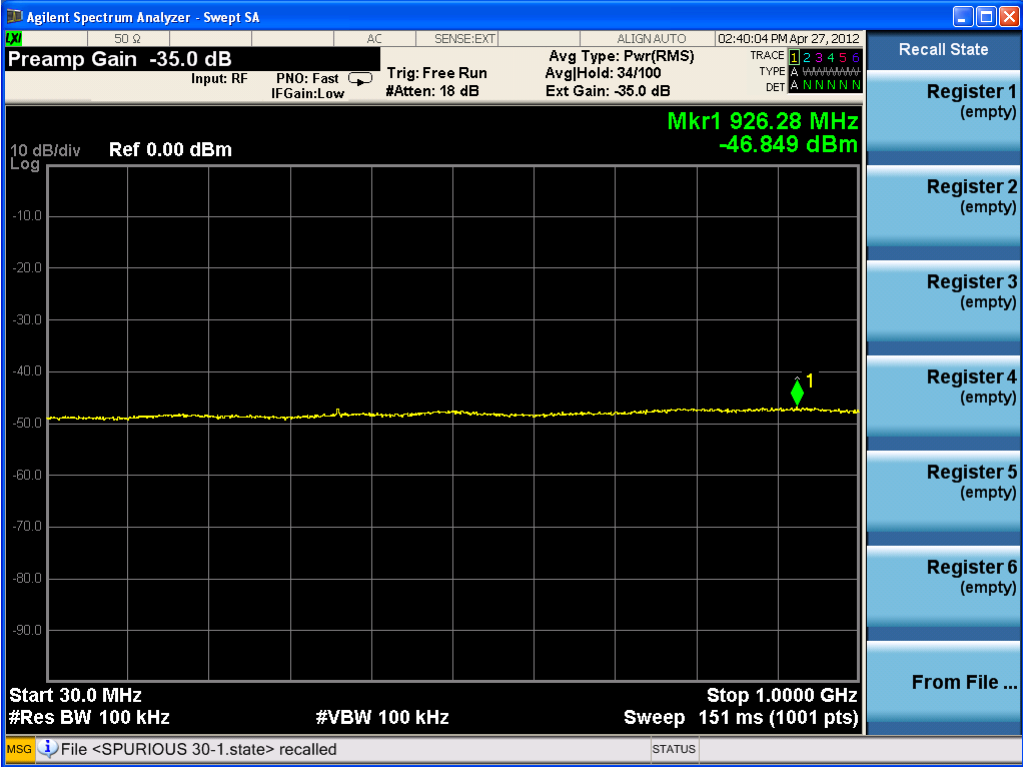

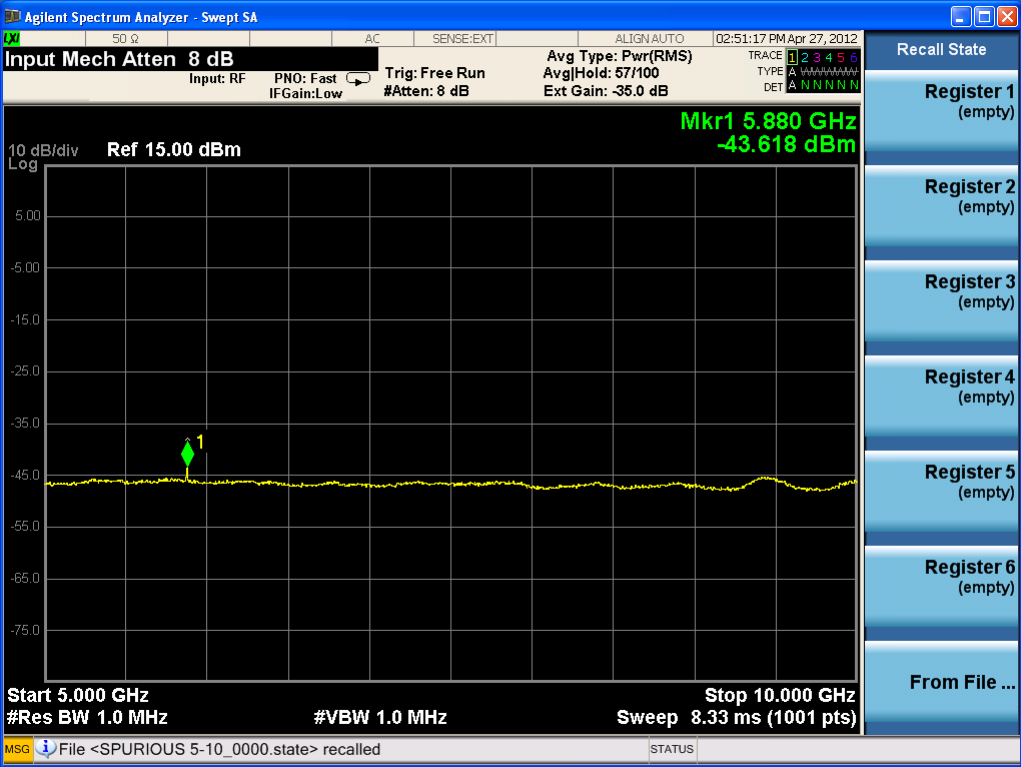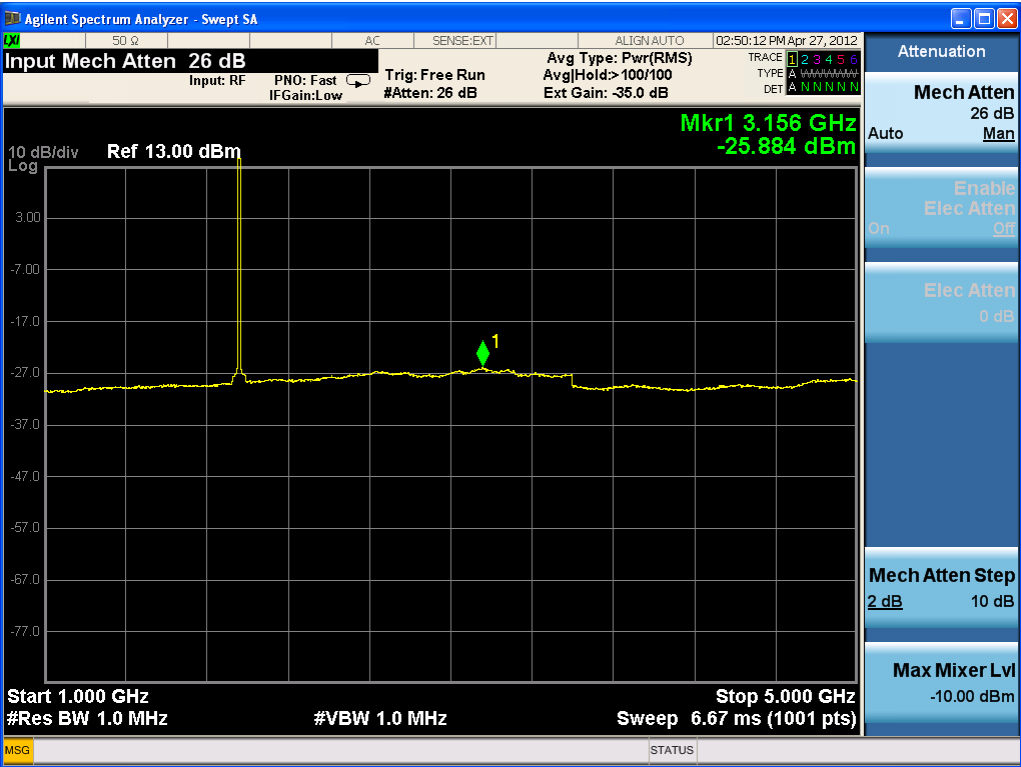






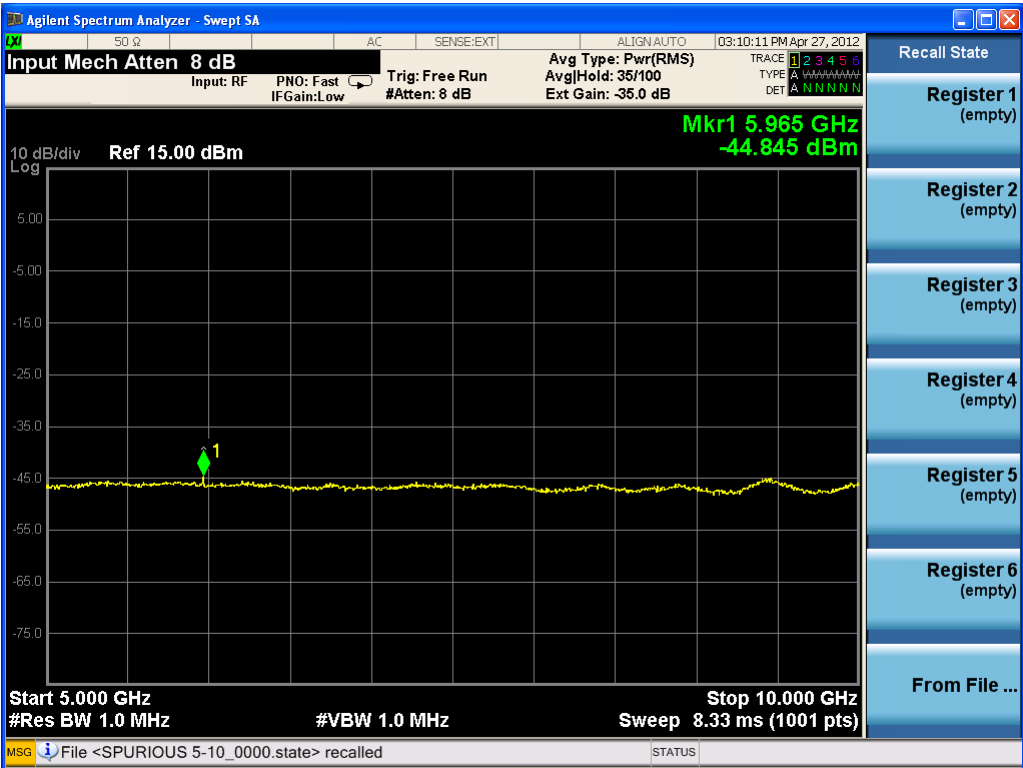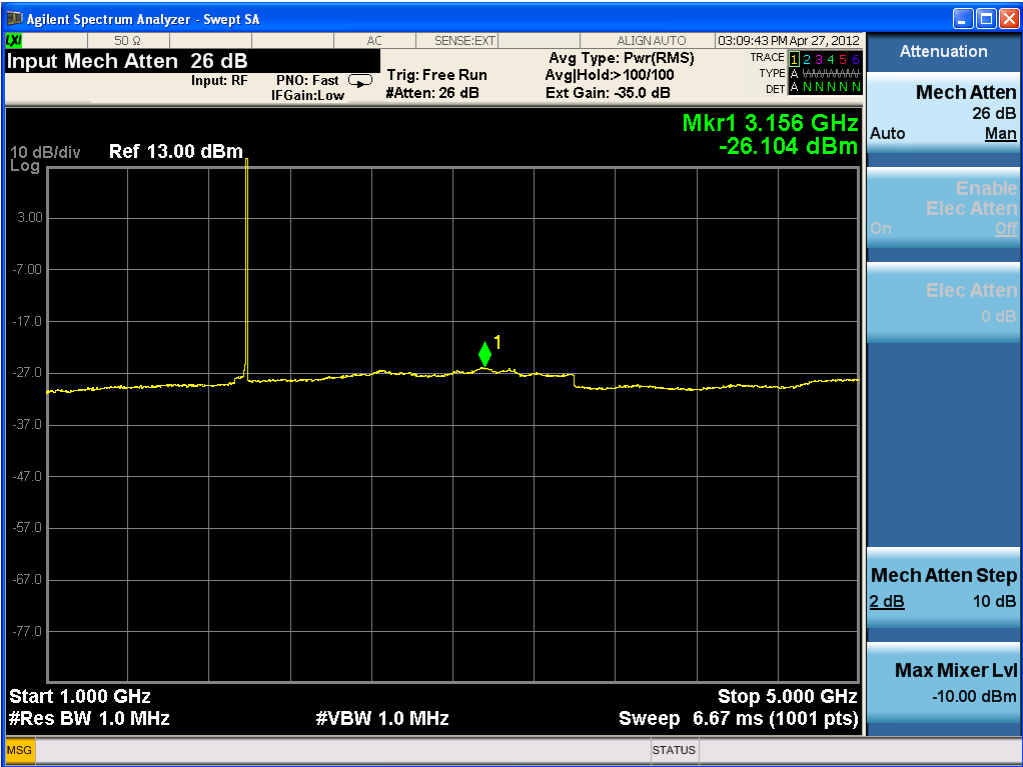

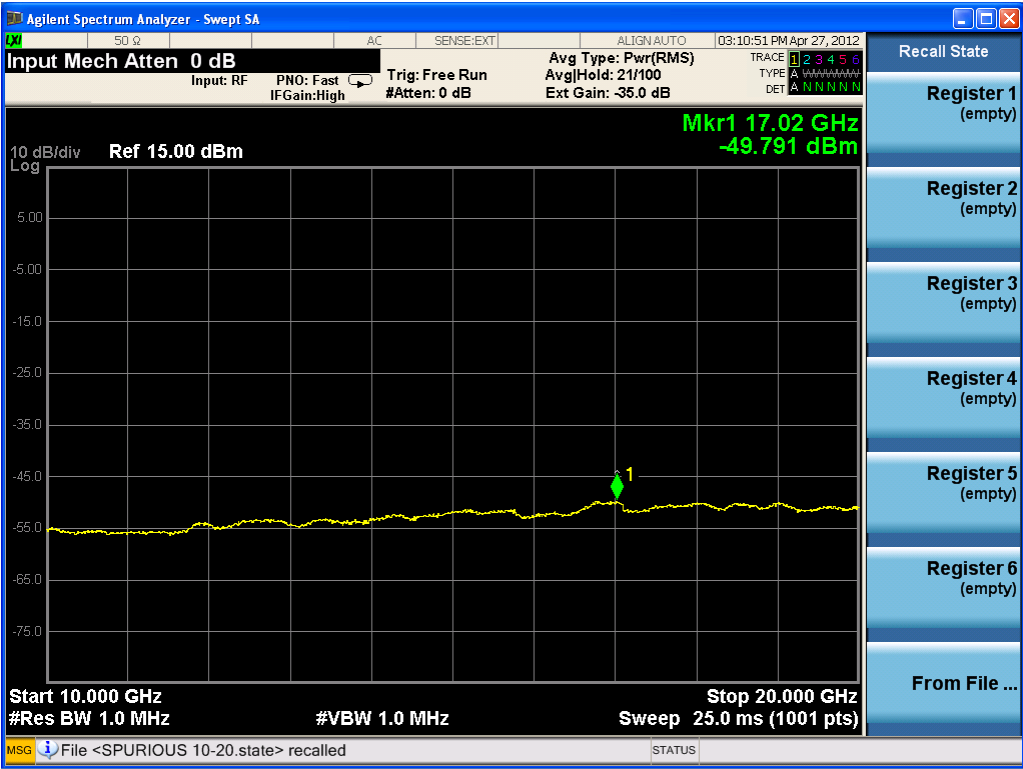


Two carriers (working in bottom frequency)


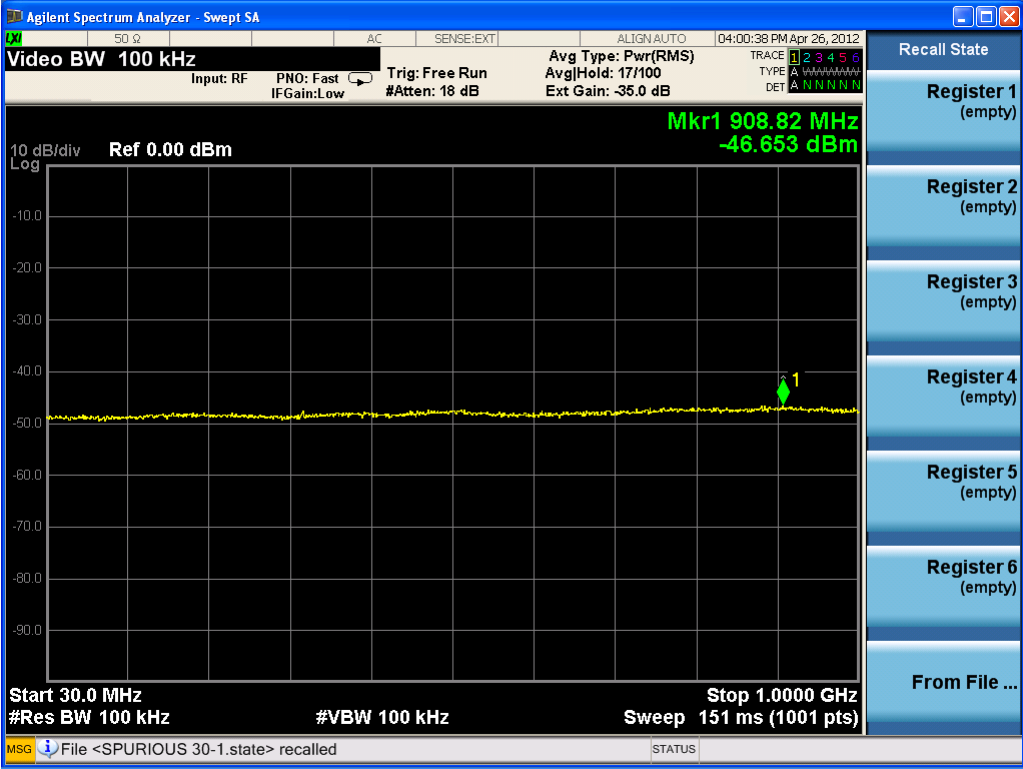


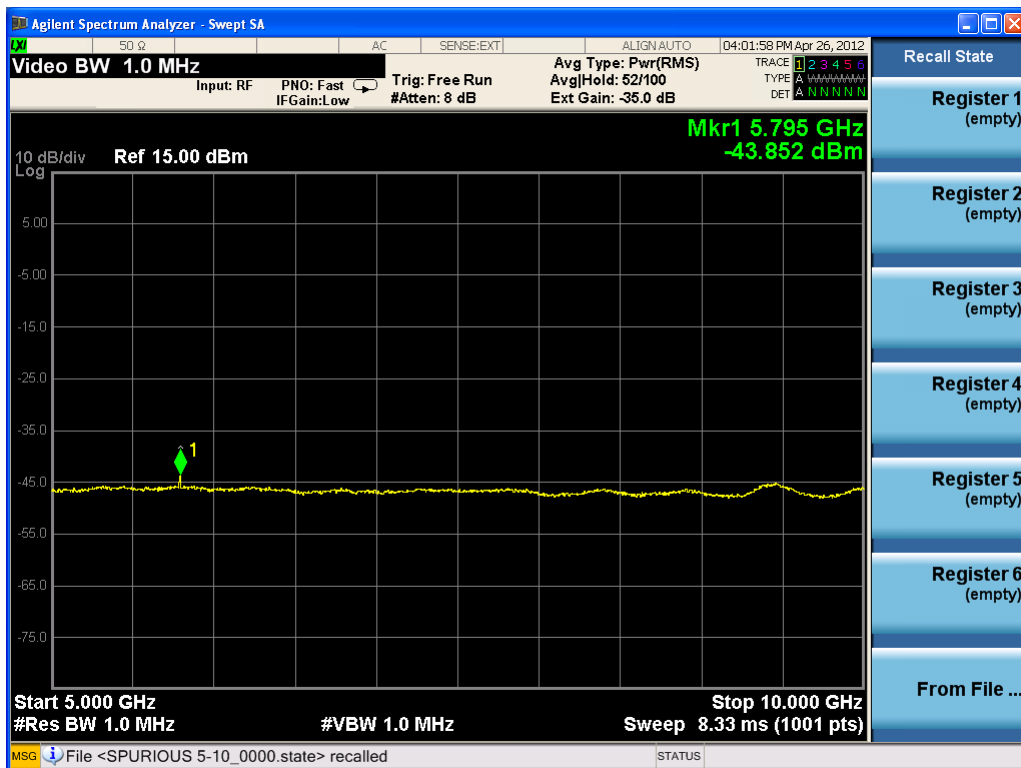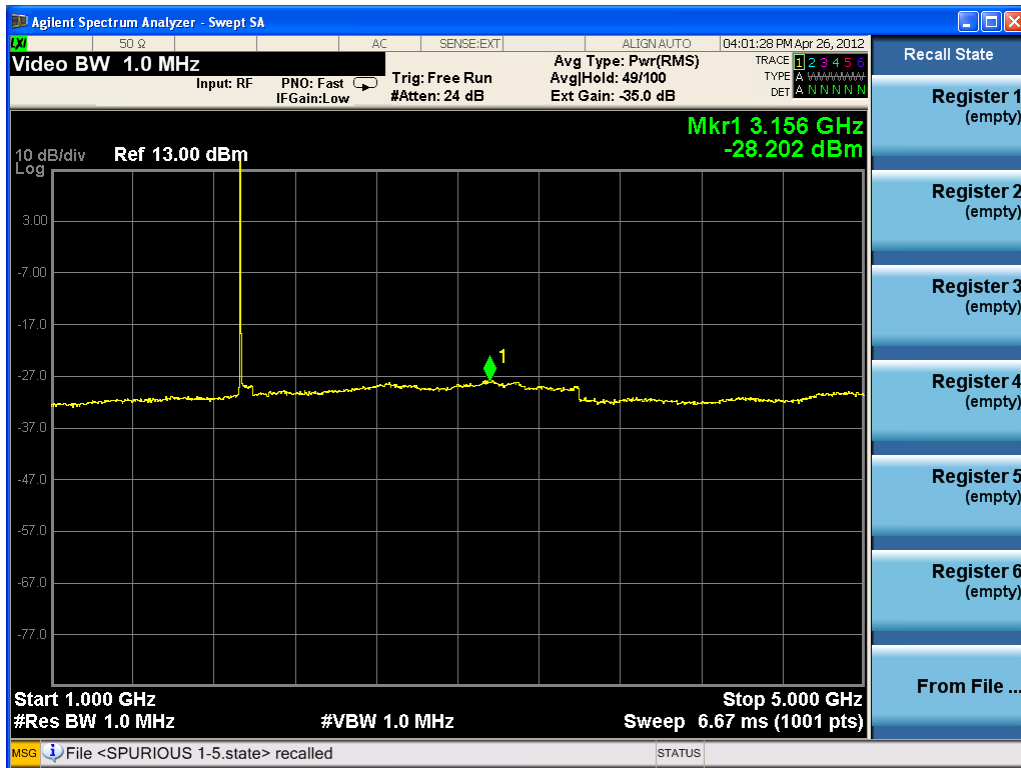




Two carriers (working in middle frequency)

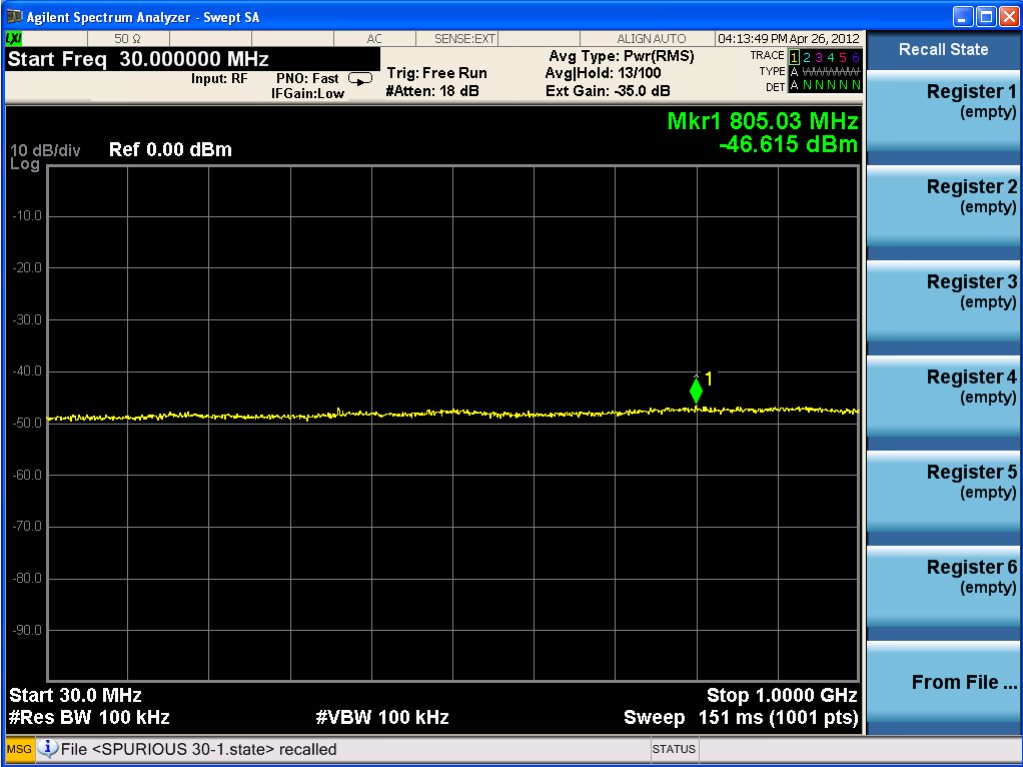


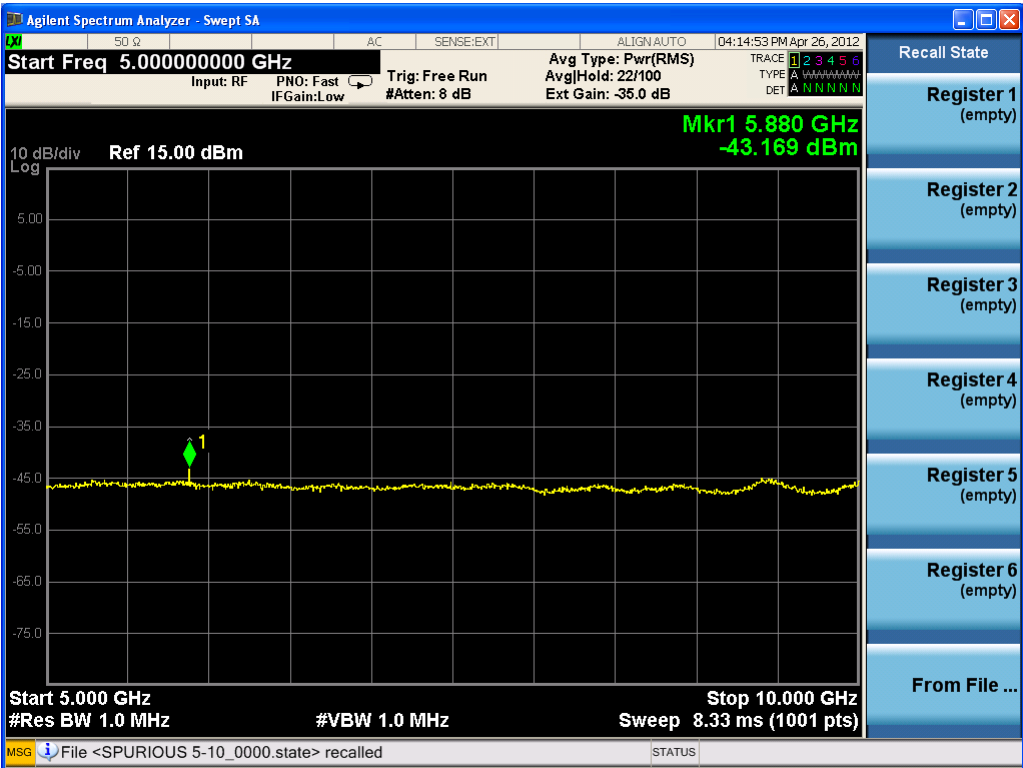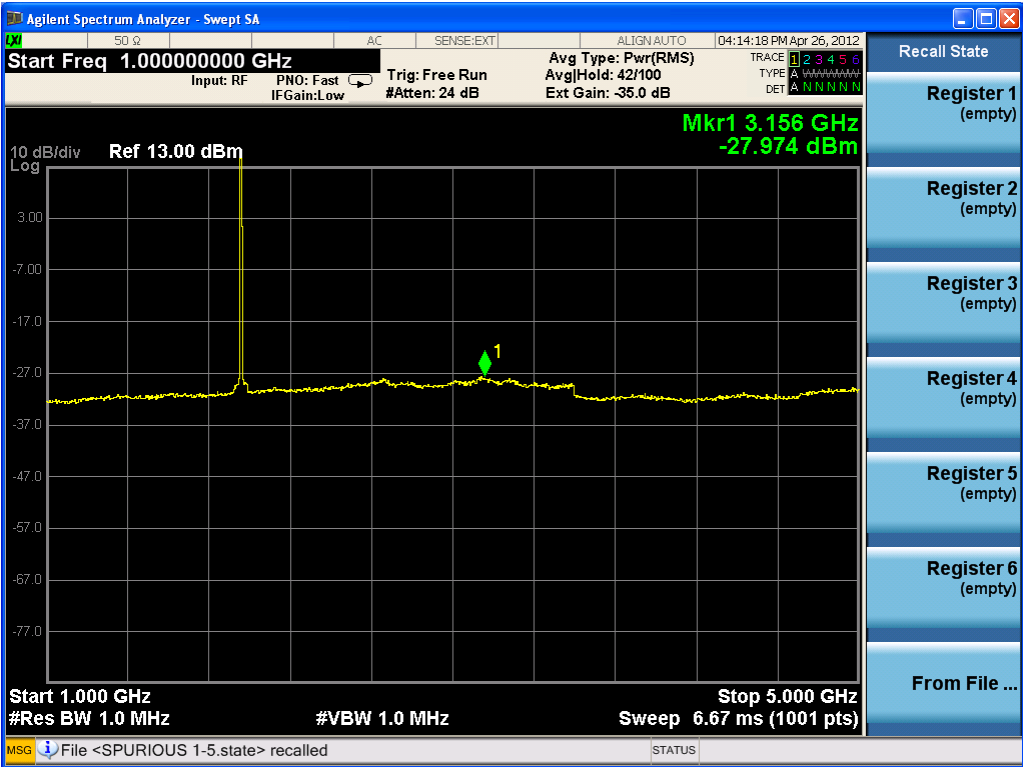




Two carriers (working in top frequency)


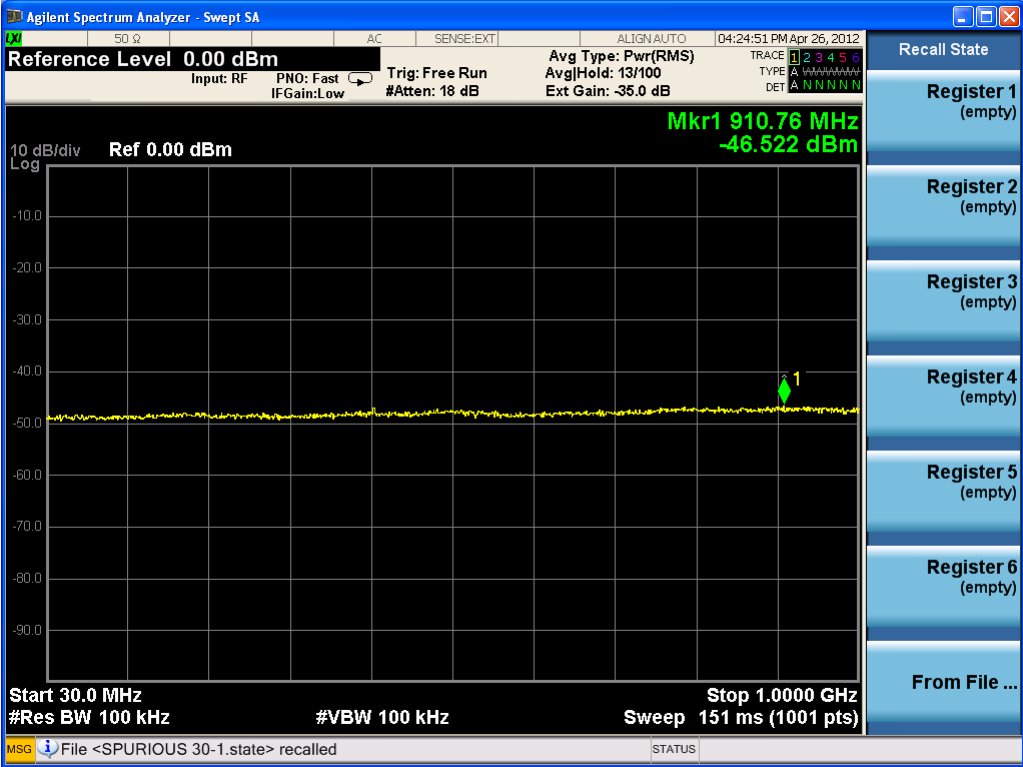


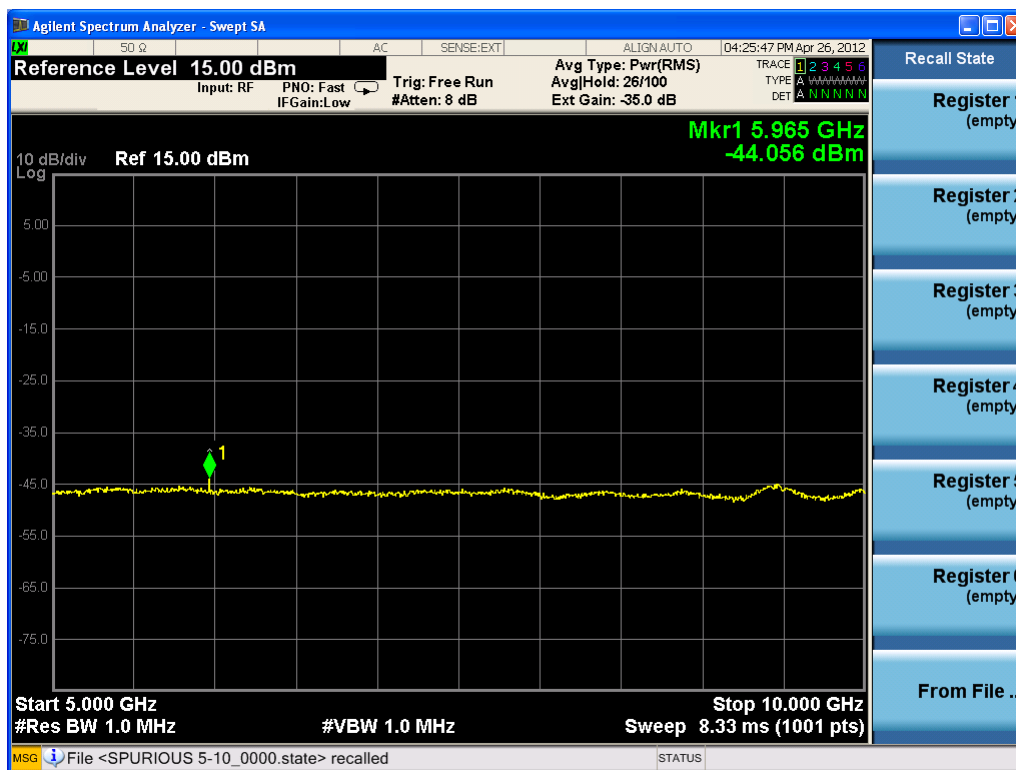





One carrier (working in bottom frequency)


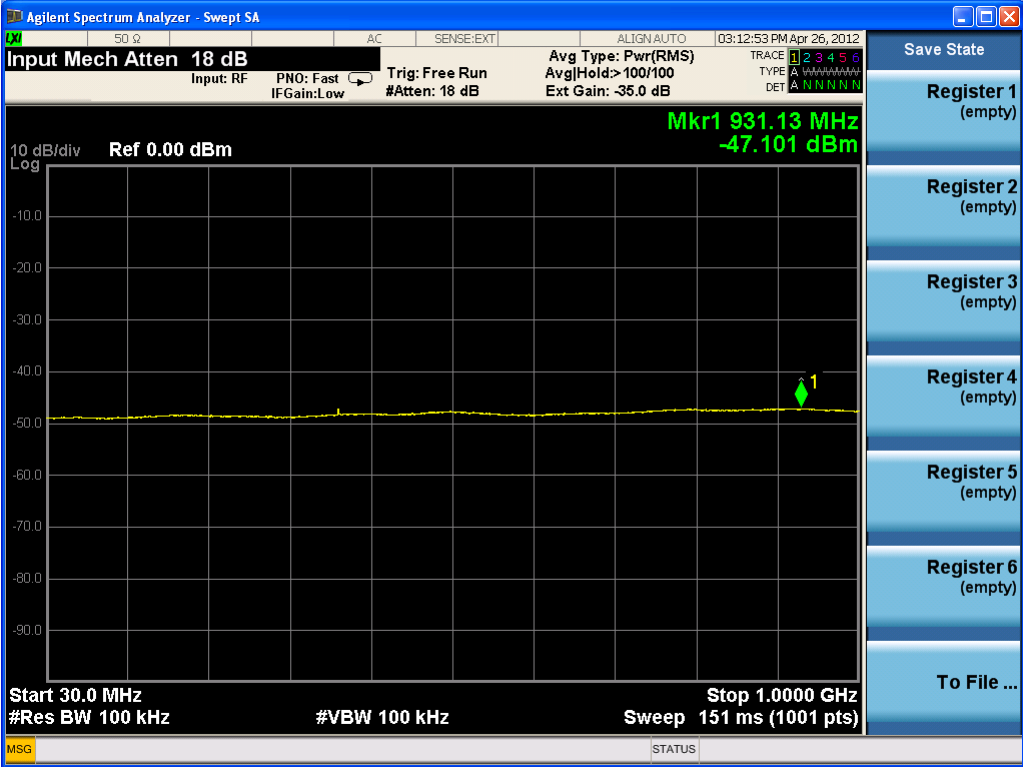


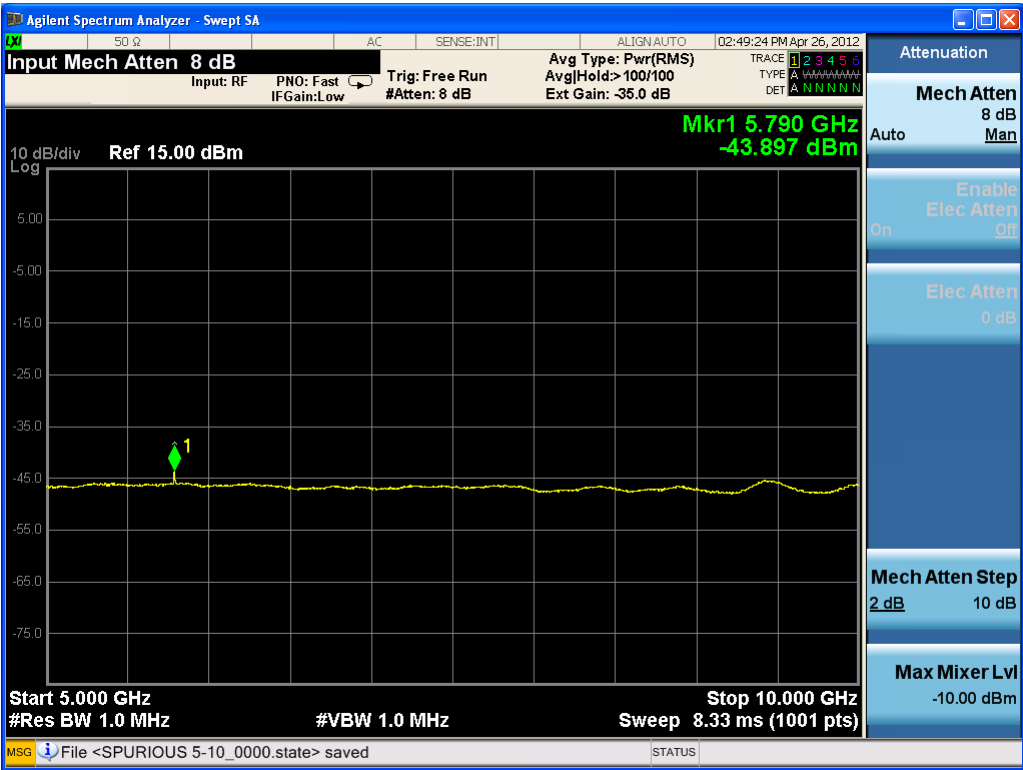
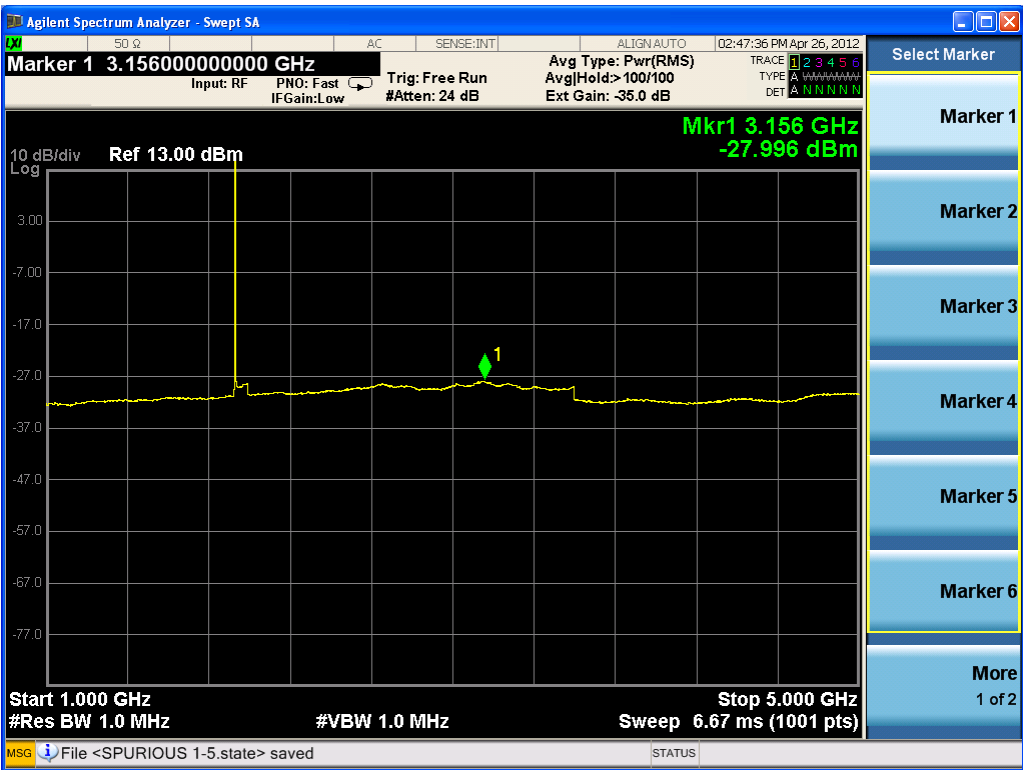



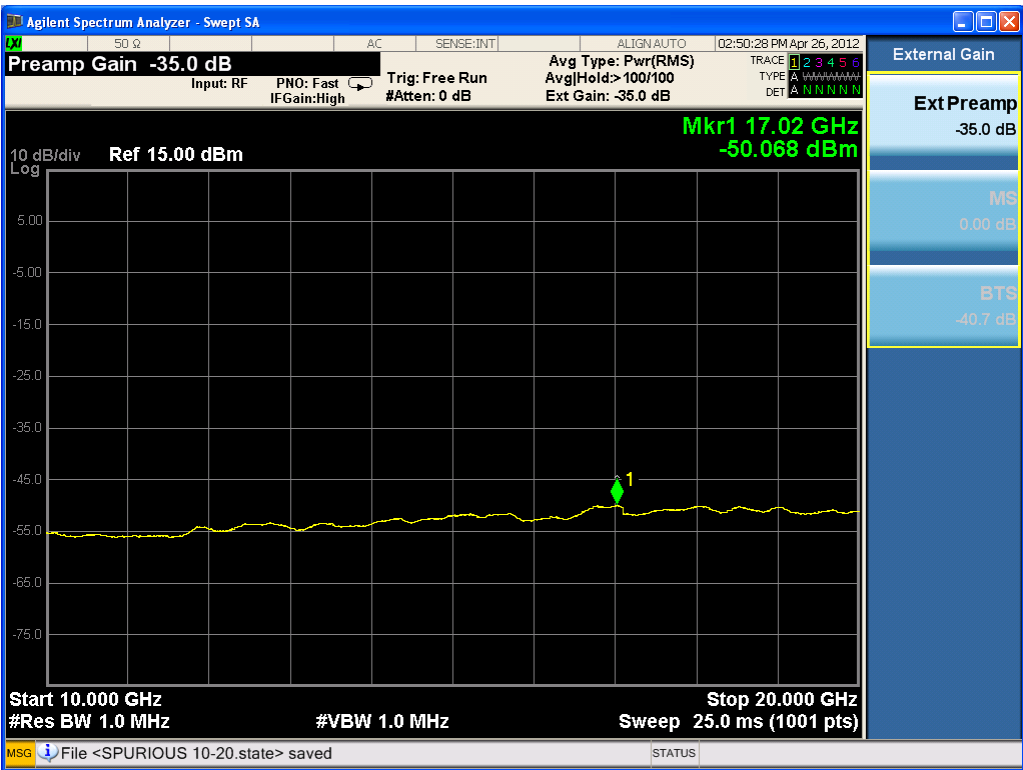



One carrier (working in middle frequency)

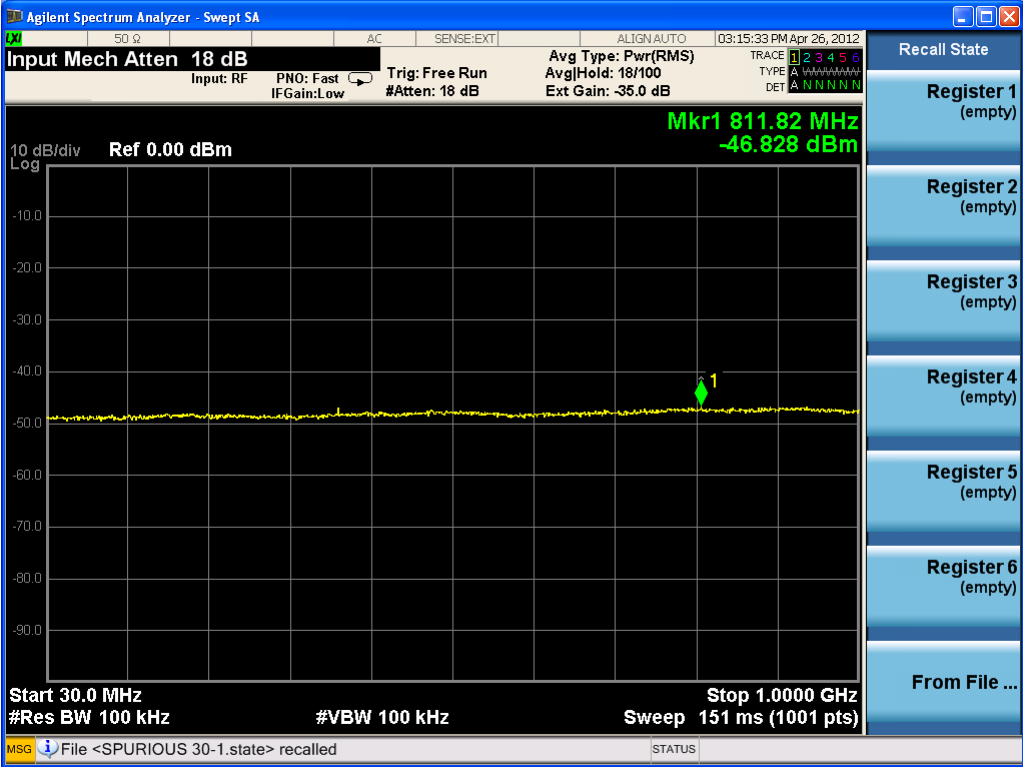

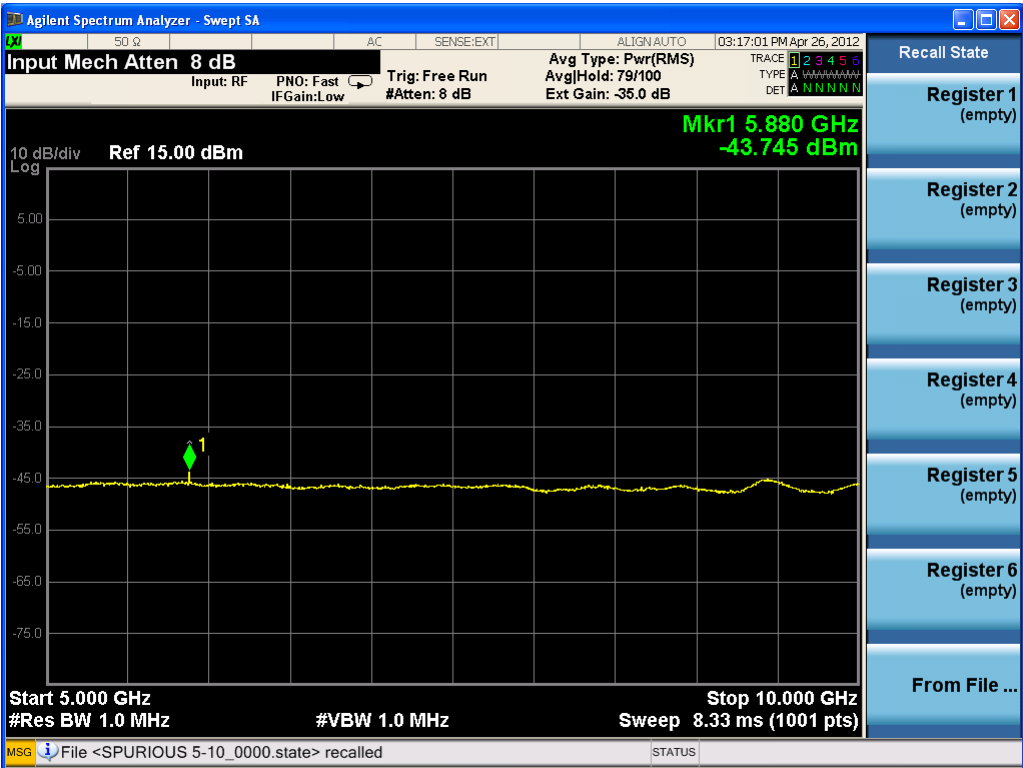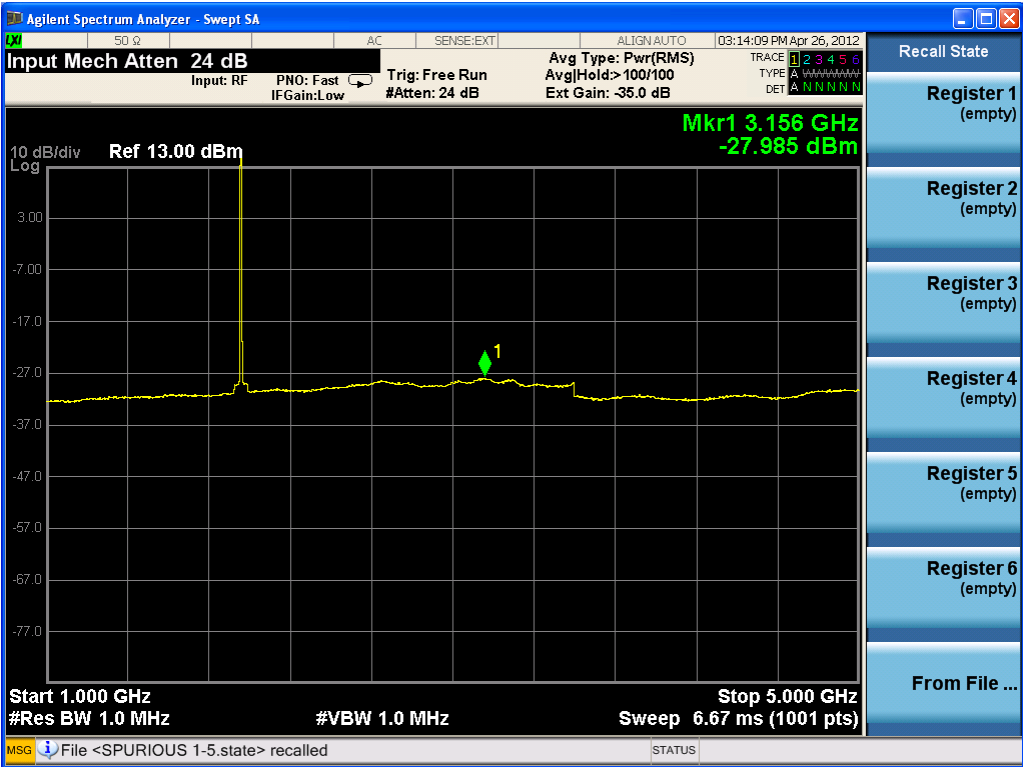



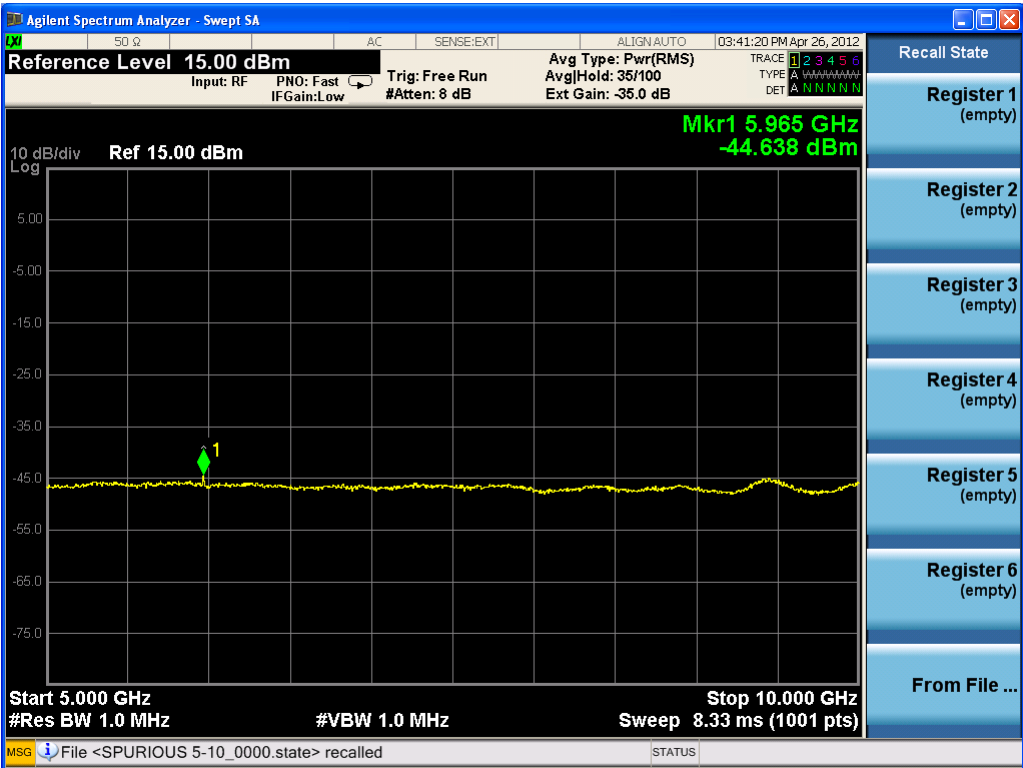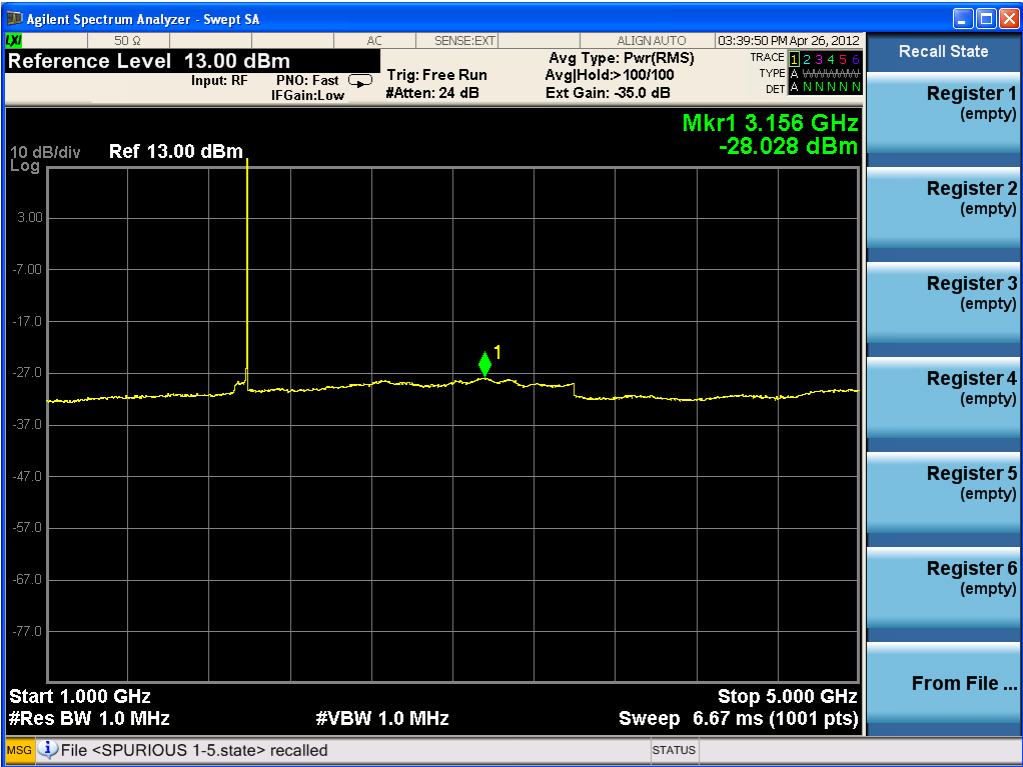

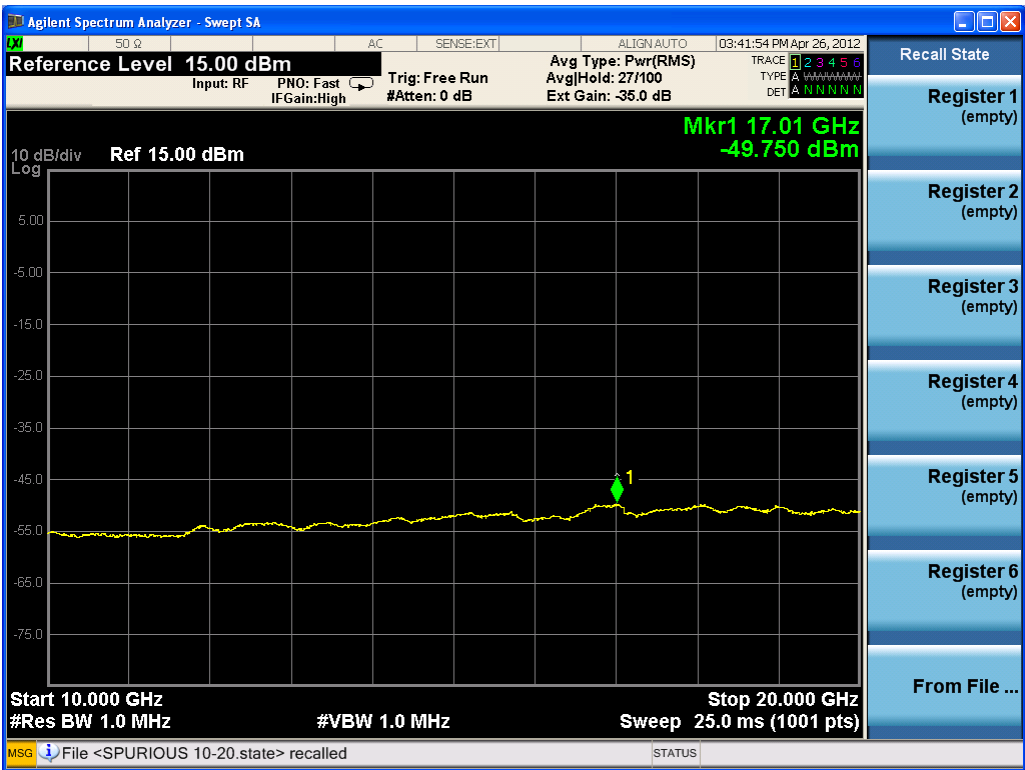

3.6 OCCUPIED BANDWIDTH

Applicable Standard: FCC §2.1049 §24.229 §24.238

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2012-4-10	2013-4-9
Atten	30dB Attenuator	ATSI150-4-30	11300110201221	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	005	1054	2012-4-9	2013-4-8

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

The RF out of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. The resolution bandwidth of the spectrum analyzer was set at 1% of the span or higher and 99%Power bandwidth was recorded.


Environmental Conditions



Temperature:	20 ° C
Relative Humidity:	53%
ATM Pressure:	1009mbar

Test Result: Pass**Test Mode:** Transmitting CDMA**Test Data**

For four carries:


Frequency (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
1930.8/1932.05/1933.3/1934.55	4.9648	<5.00
1958.1/1959.35/1960.6/1961.85	4.9567	<5.00
1985.45/1986.7/1987.95/1989.2	4.9532	<5.00


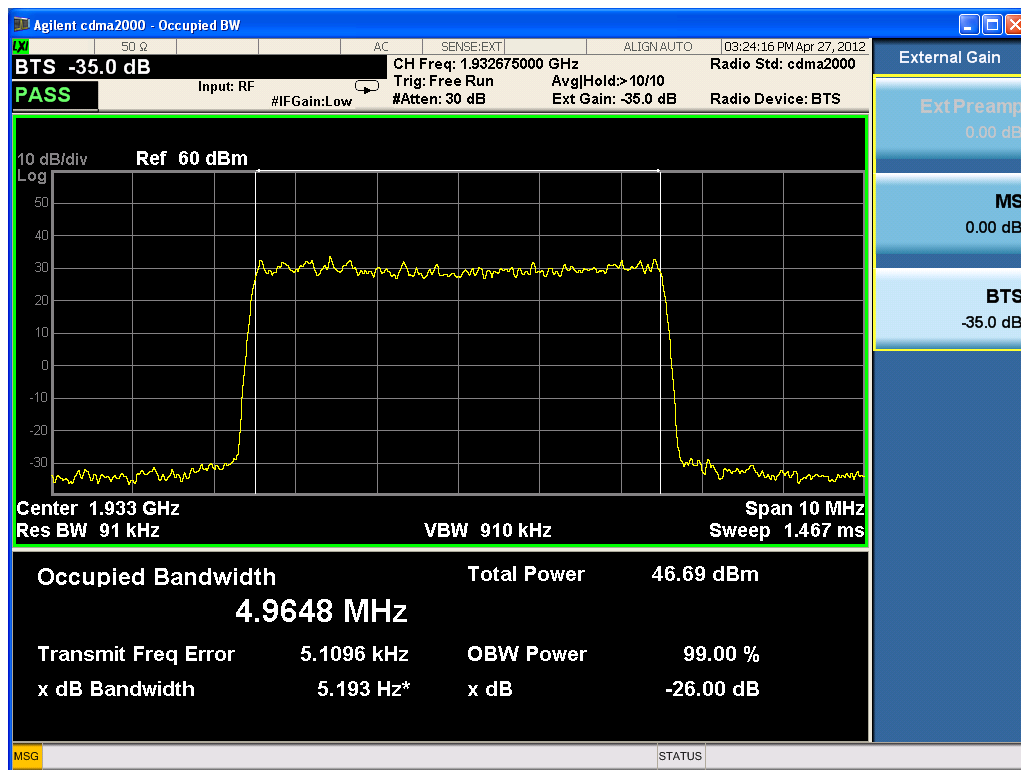


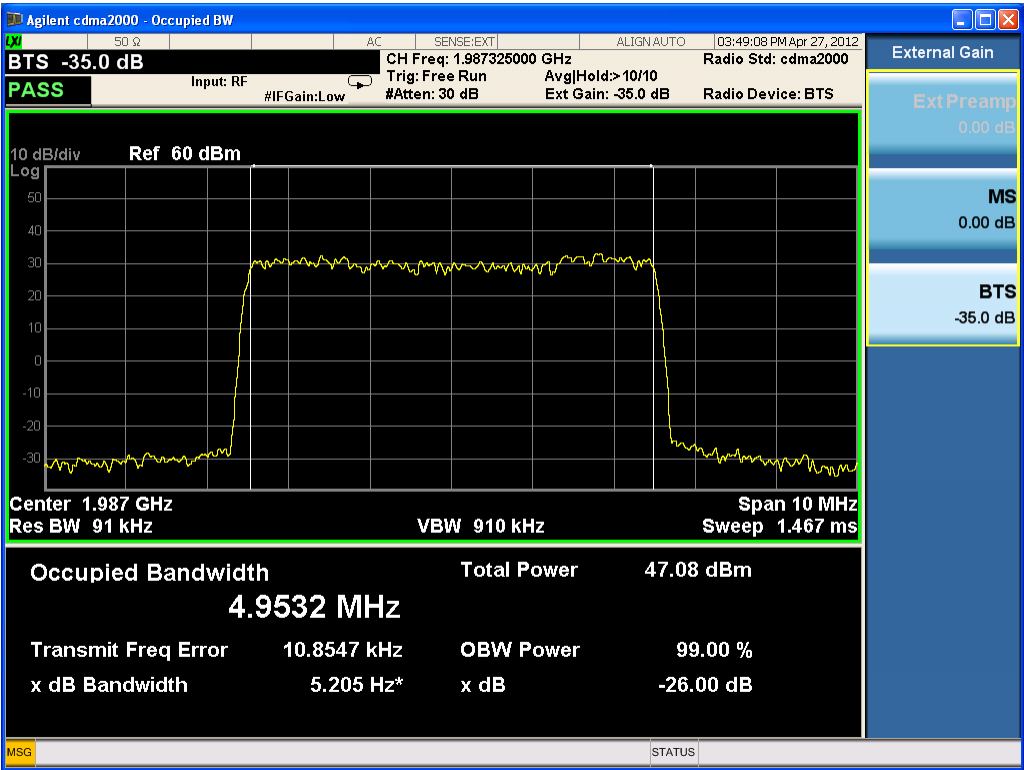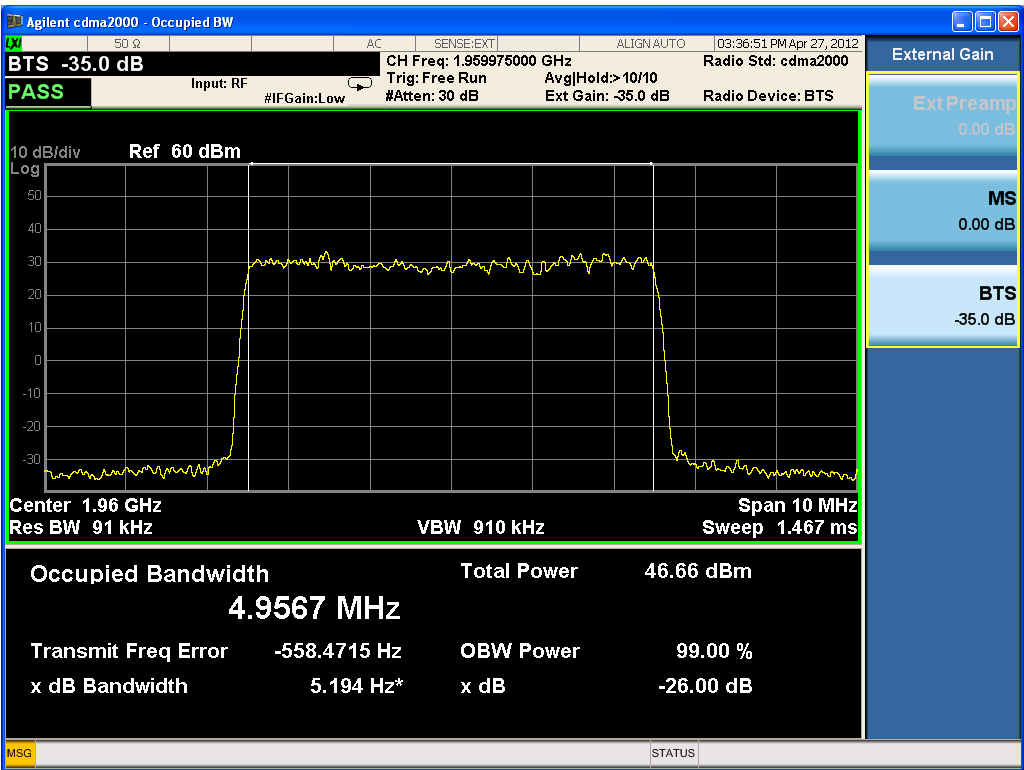

For three carries:


Frequency (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
1930.8/1932.05/1933.3	3.7053	<3.75
1958.75/1960/1961.25	3.7014	<3.75
1986.7/1987.95/1989.2	3.7154	<3.75


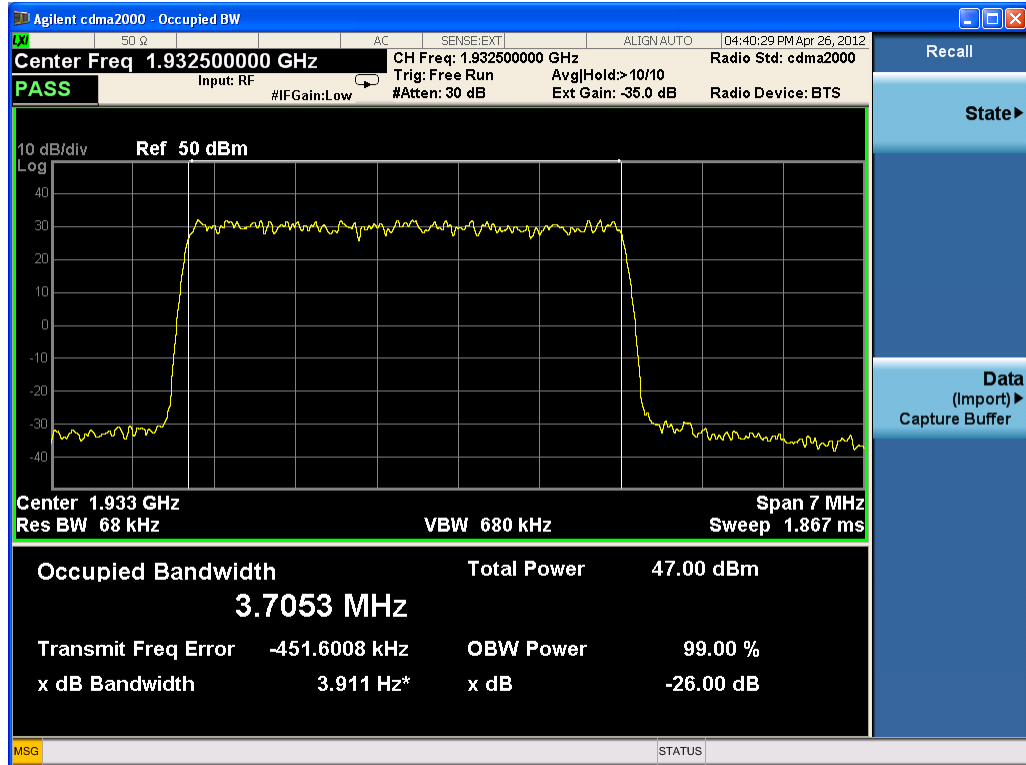


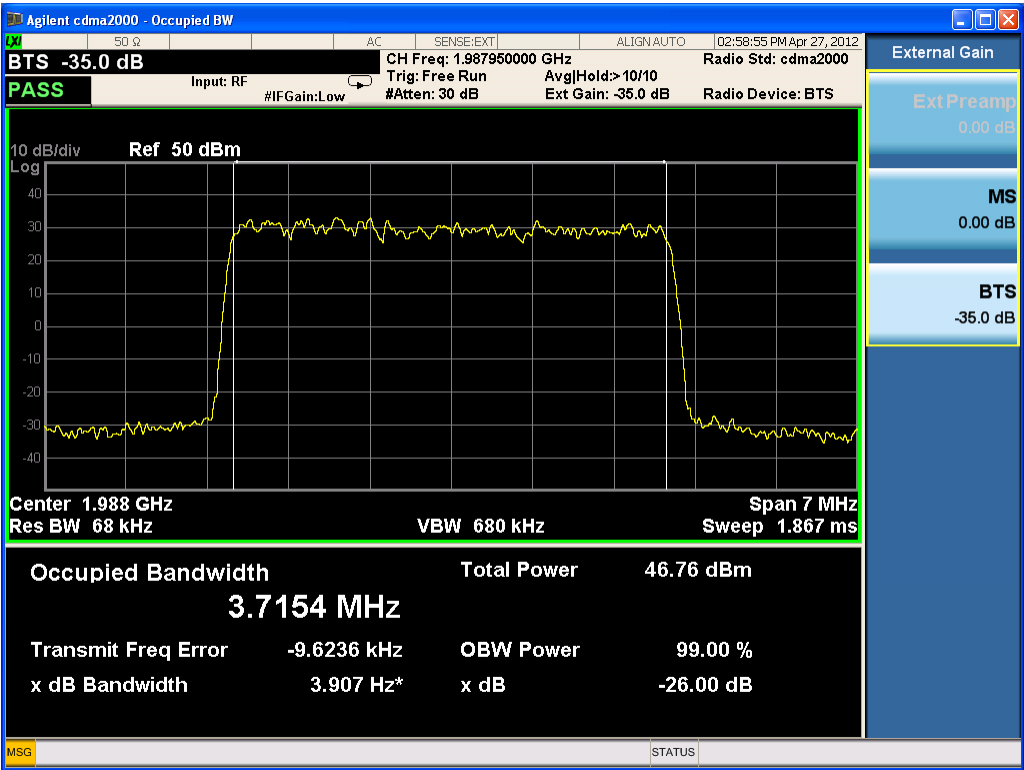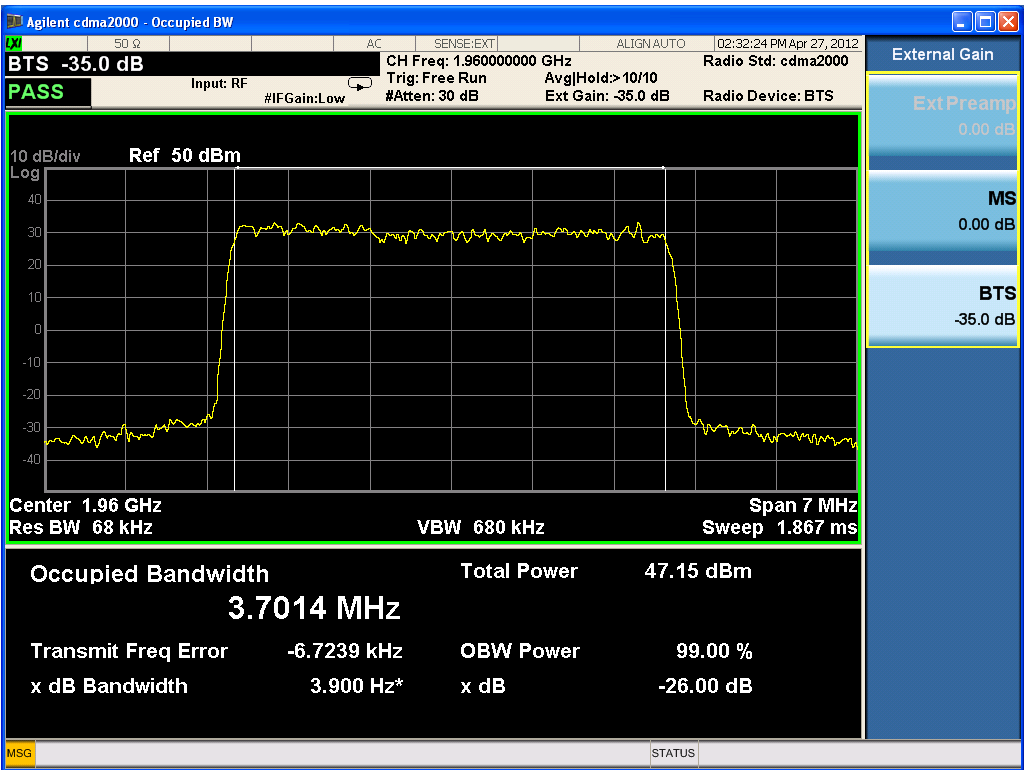

For two carries:


Frequency (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
1930.8/1932.05	2.4648	<2.5
1959.35/1960.6	2.4647	<2.5
1987.95/1989.2	2.4596	<2.5


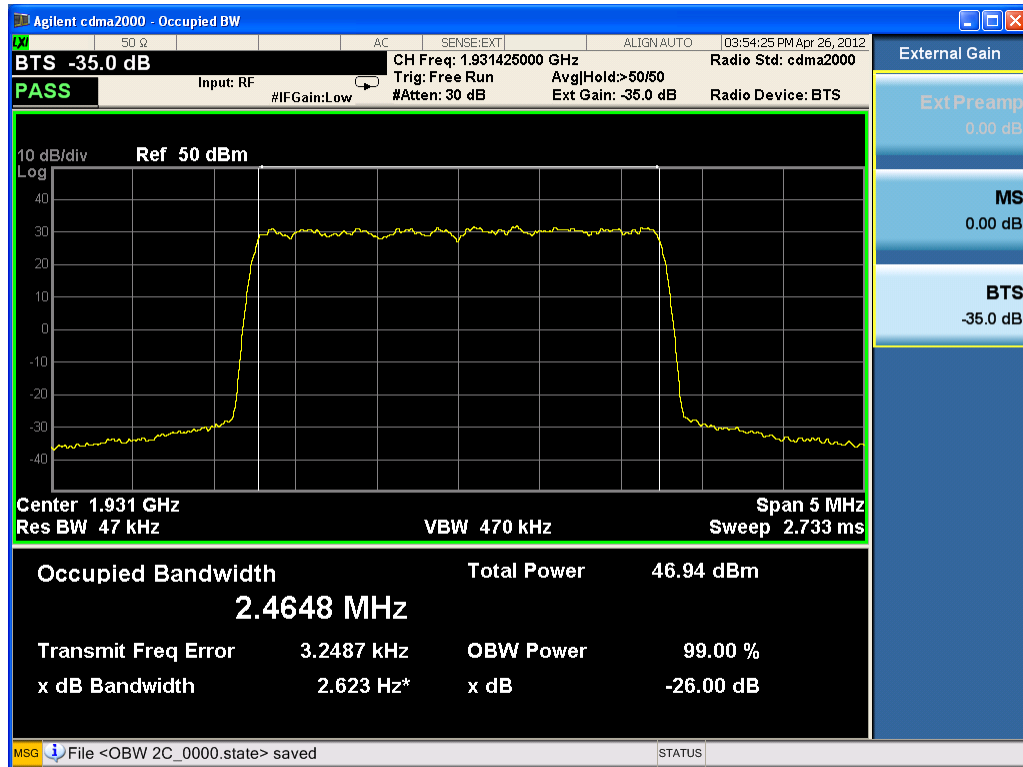


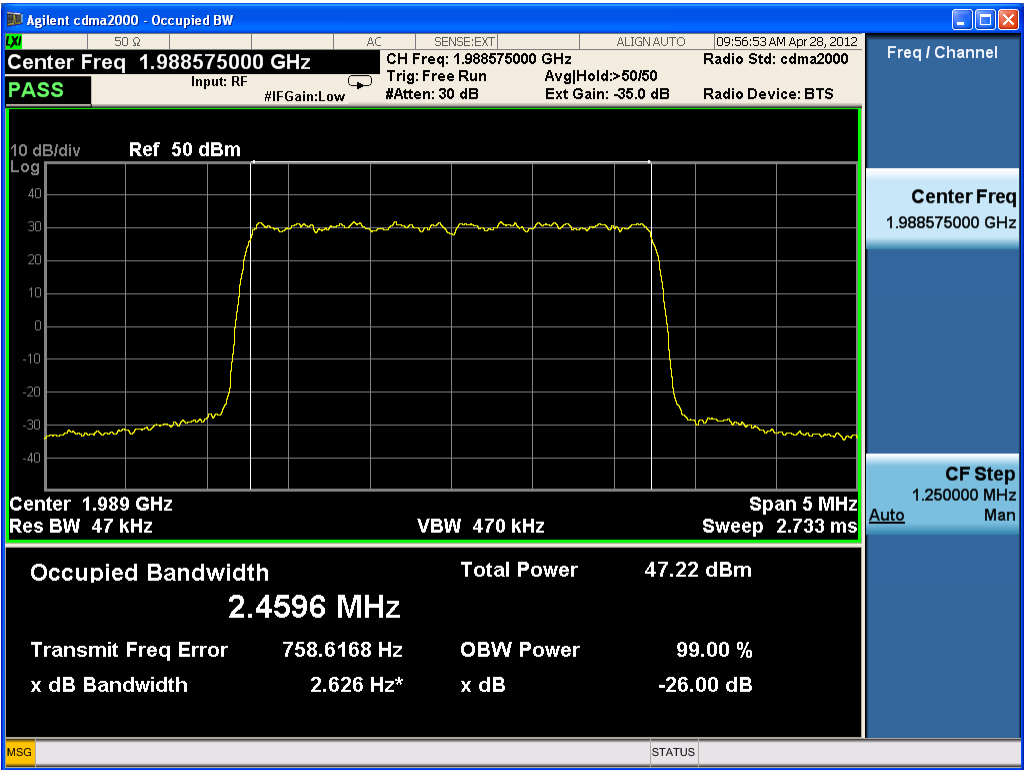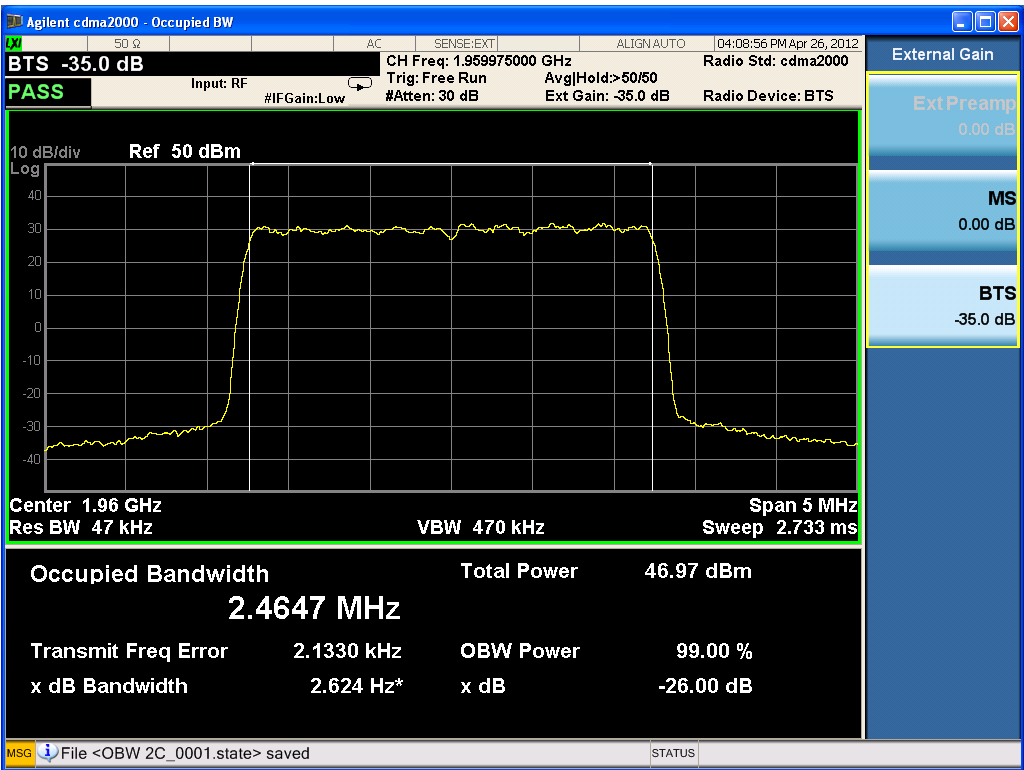

For one carrier:

Frequency (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
1930.8	1.2286	<1.25
1960	1.2296	<1.25
1989.2	1.2304	<1.25

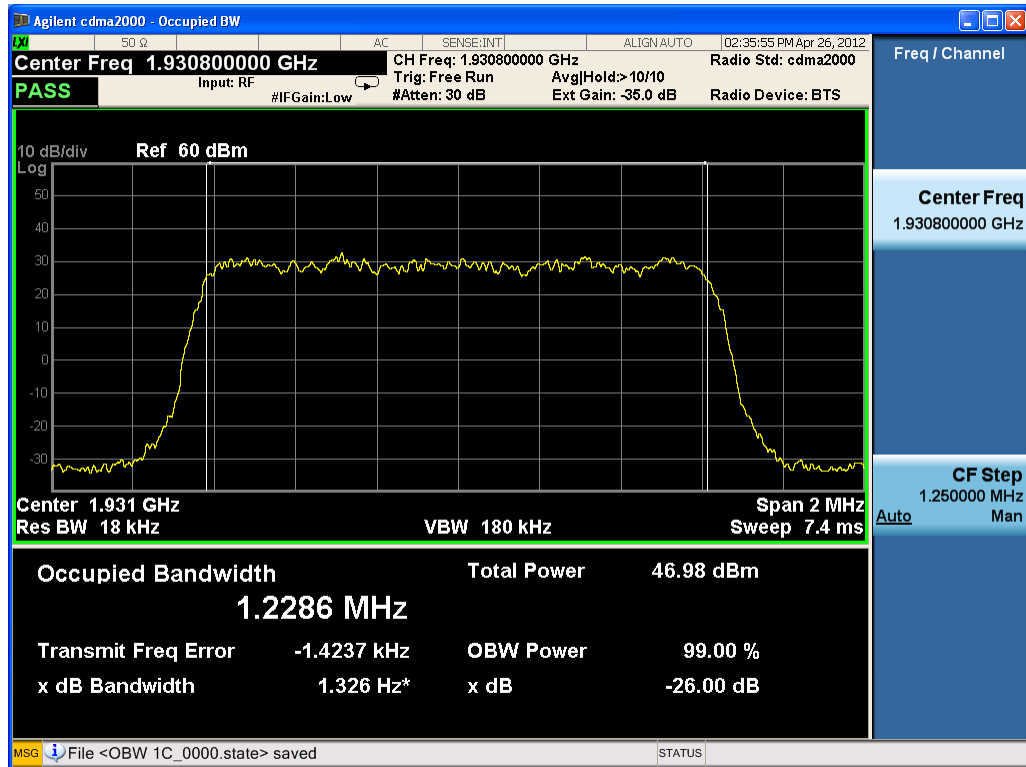

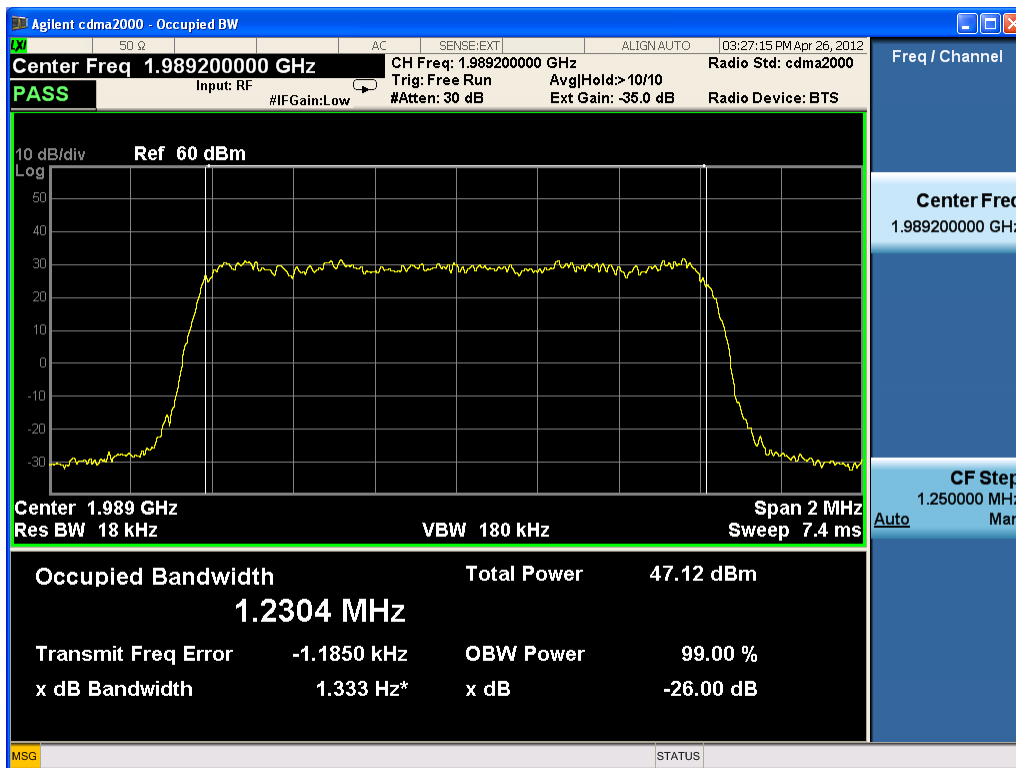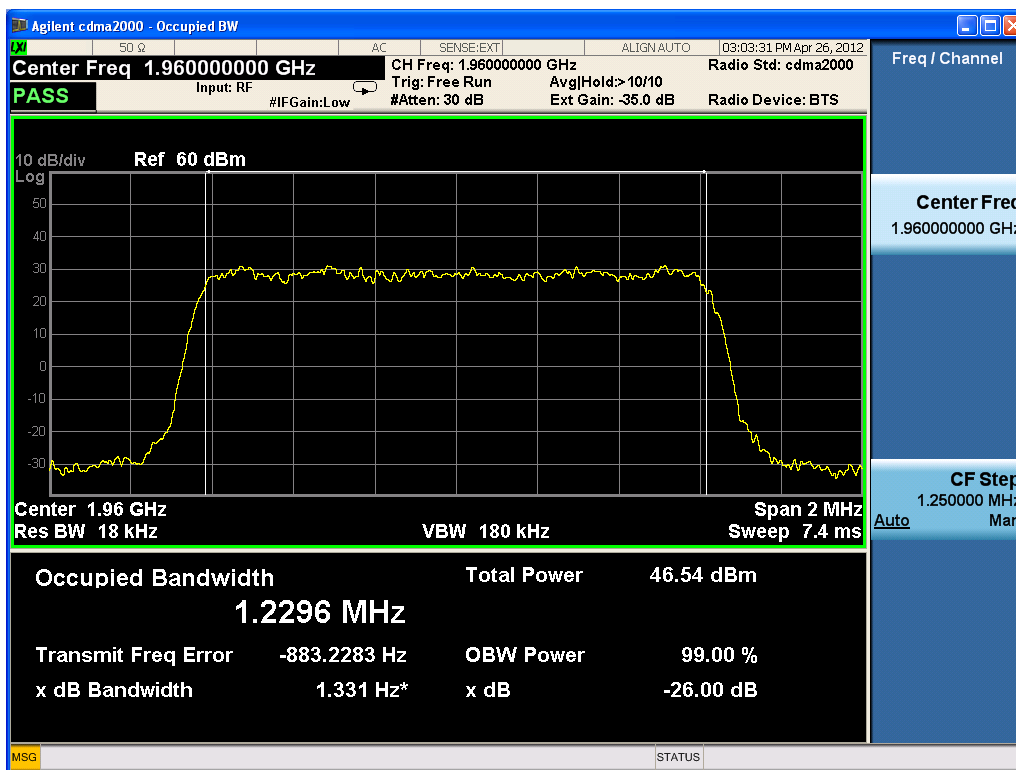

3.7 BAND EDGES

Applicable Standard: FCC §2.1051 §24.238

According to §2.1051 and §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (p) by a factor of at least $43 + 10 \log(p)$ dB. The limit (dBm) should $< P - (43 + 10 \log(P)) = -13 \text{ dBm}$.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2012-4-10	2013-4-9
Atten	30dB Attenuator	ATSI150-4-30	11300110201221	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	005	1054	2012-4-9	2013-4-8

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

Test Data Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53%
ATM Pressure:	1009mbar


Test Result: Pass


Test Mode: Transmitting CDMA

Test Data

Four carriers



Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1930.8/1932.05/1933.3/1934.55	-22.276	-13.00
1985.45/1986.7/1987.95/1989.2	-23.691	-13.00

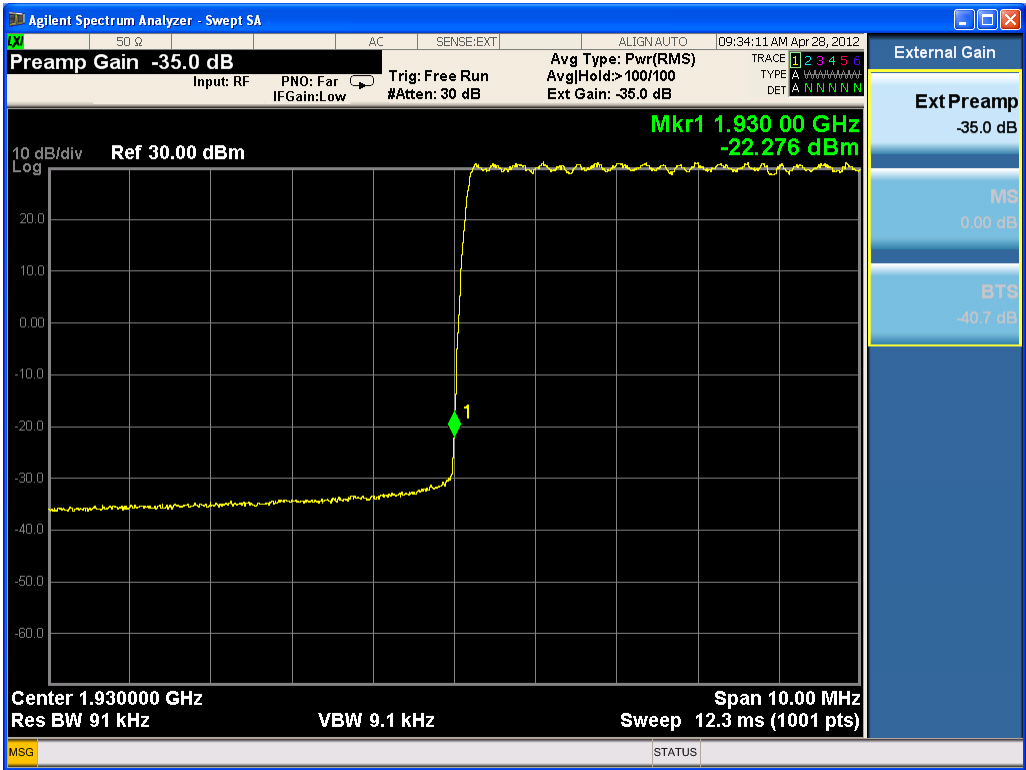

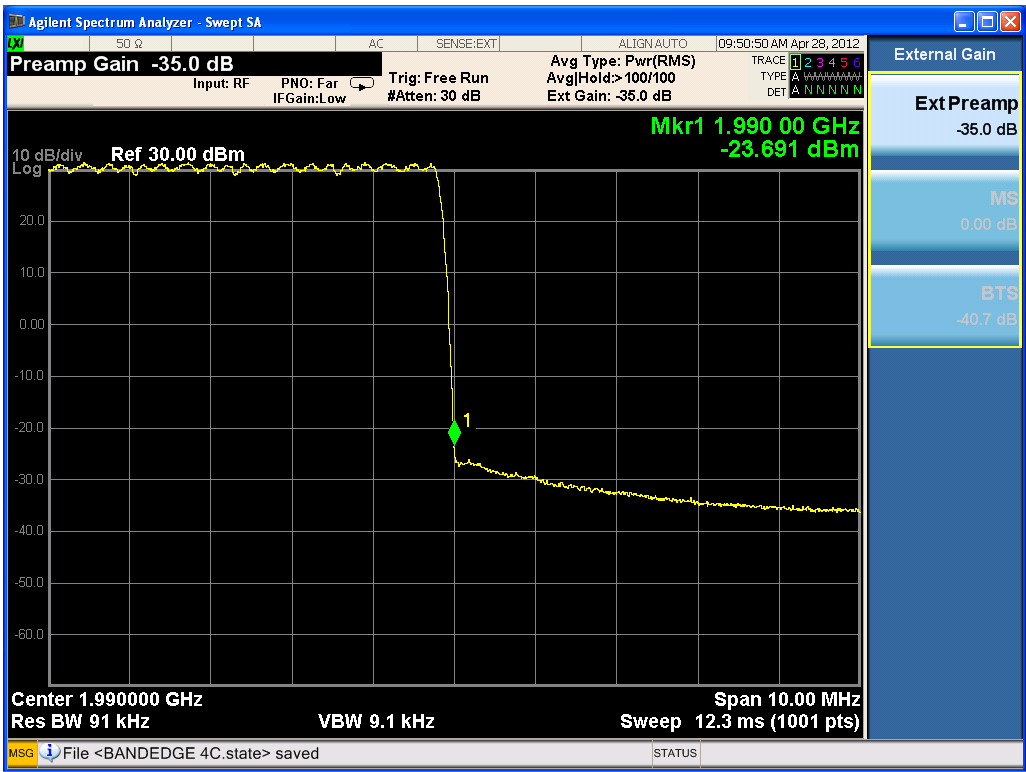


Three carriers


Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1930.8/1932.05/1933.3	-32.478	-13.00
1986.7/1987.95/1989.2	-26.941	-13.00

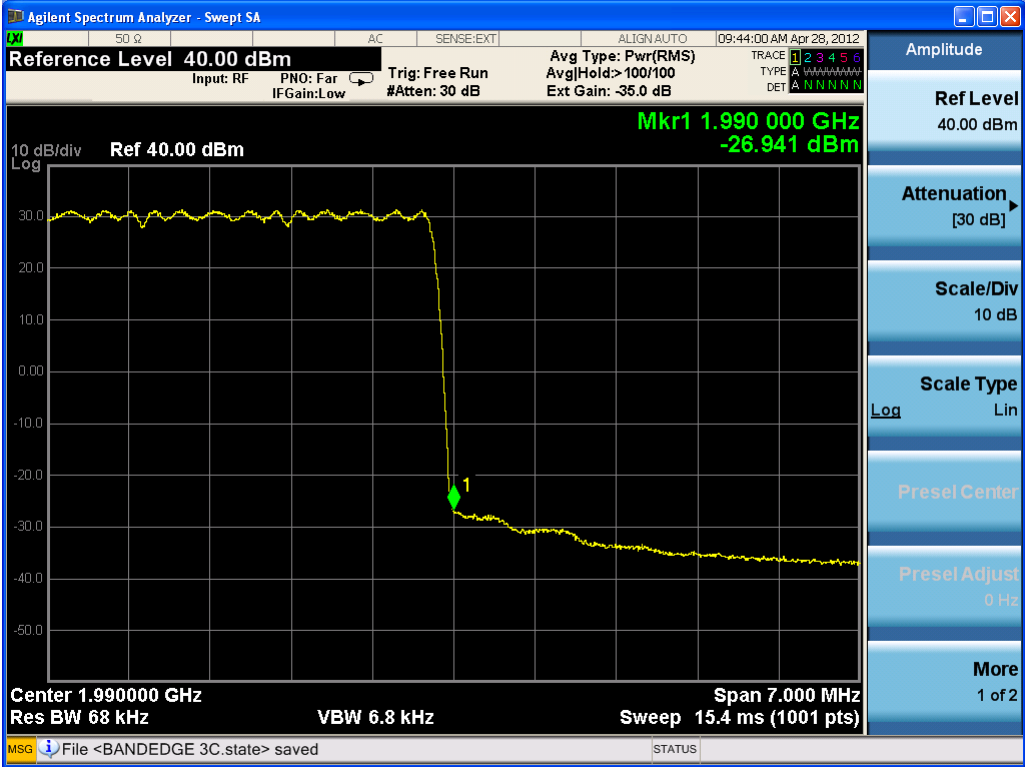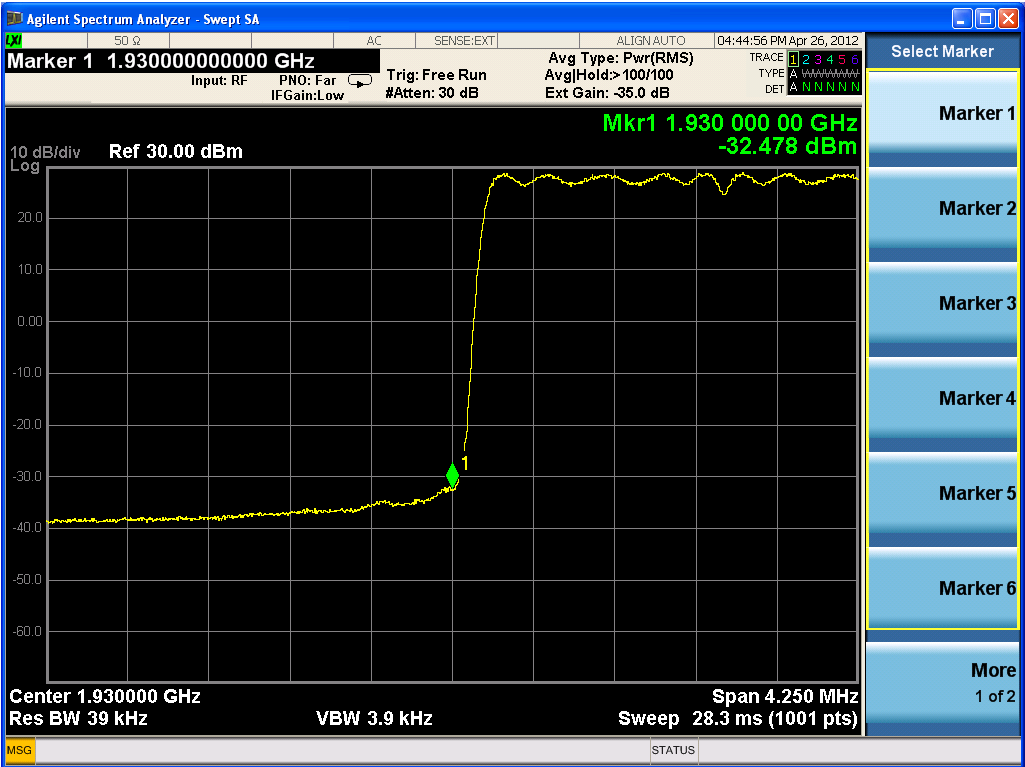



Two carriers

Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1930.8/1932.05	-29.765	-13.00
1987.95/1989.2	-27.203	-13.00

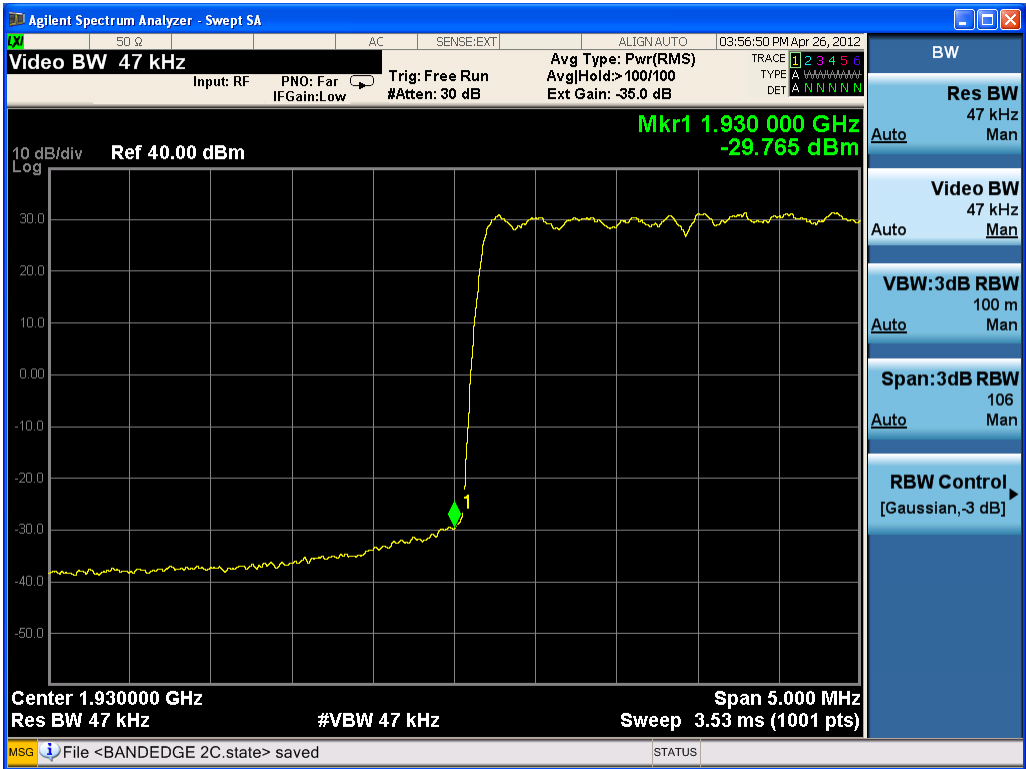



Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1930.8	-29.787	-13.00
1989.2	-26.201	-13.00

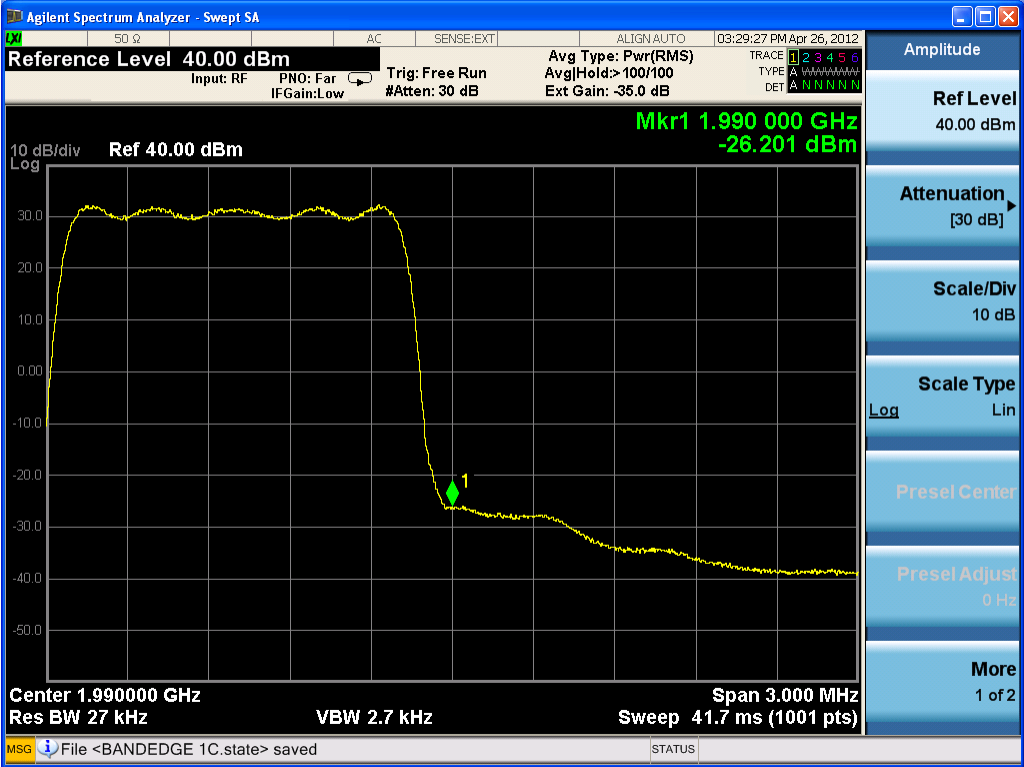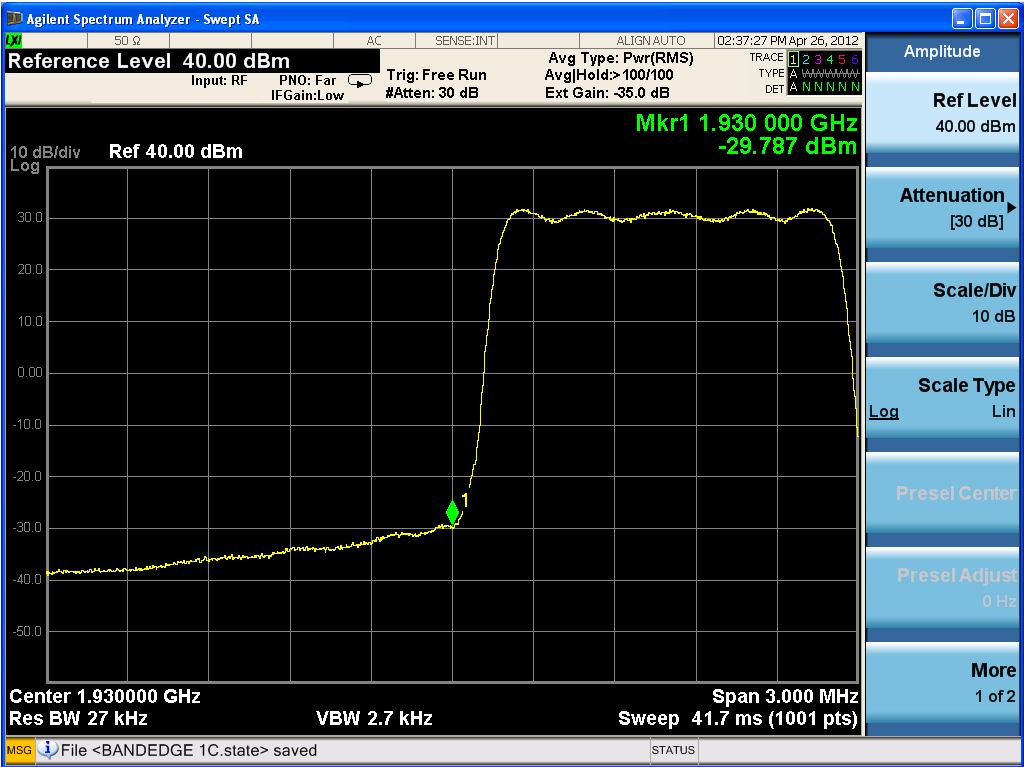

3.8 FREQUENCY STABILITY

Applicable Standard: FCC § 2.1055 § 24.235

Requirements: FCC § 2.1055 (a)(d) .The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
GZ-ESPEC	Temperature Chamber	EW0470	06113028	2012-1-26	2013-1-26
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2012-4-10	2013-4-9
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	002	1034	2012-4-9	2013-4-8

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Spectrum Analyzer via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 150 minutes, the frequency output was recorded from the counter.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

Environmental Conditions

Normal condition:	25° C
-------------------	-------

Relative Humidity:	54%
ATM Pressure:	1011 mbar

Test Result: Pass

Test Mode: Transmitting CDMA

Test Data

Frequency Stability Versus Temperature

Frequency Stability vs. Temperature					
Temperature °C	Power Supplied VDC	Frequency Measure Error Hz	Error ppm	Limit ppm	Result
B(1930.8MHz)					
-40	-48	1.4	0.001	0.02	PASS
-30	-48	1.2	0.001	0.02	PASS
-20	-48	1.1	0.001	0.02	PASS
-10	-48	1.4	0.001	0.02	PASS
0	-48	1.5	0.001	0.02	PASS
10	-48	1.2	0.001	0.02	PASS
20	-48	1.2	0.001	0.02	PASS
30	-48	1.1	0.001	0.02	PASS
40	-48	1.6	0.001	0.02	PASS
50	-48	1.1	0.001	0.02	PASS
55	-48	1.2	0.001	0.02	PASS
M(1960MHz)					
-40	-48	1	0.001	0.02	PASS
-30	-48	1.1	0.001	0.02	PASS
-20	-48	1.3	0.001	0.02	PASS
-10	-48	1.4	0.001	0.02	PASS
0	-48	1.1	0.001	0.02	PASS
10	-48	1.1	0.001	0.02	PASS

20	-48	1.7	0.001	0.02	PASS
30	-48	1.2	0.001	0.02	PASS
40	-48	1.1	0.001	0.02	PASS
50	-48	1.2	0.001	0.02	PASS
55	-48	1.4	0.001	0.02	PASS
T (1989.2MHz)					
-40	-48	1.2	0.001	0.02	PASS
-30	-48	1.1	0.001	0.02	PASS
-20	-48	1.2	0.001	0.02	PASS
-10	-48	1.4	0.001	0.02	PASS
0	-48	1.1	0.001	0.02	PASS
10	-48	1.2	0.001	0.02	PASS
20	-48	1.4	0.001	0.02	PASS
30	-48	1.2	0.001	0.02	PASS
40	-48	1.2	0.001	0.02	PASS
50	-48	1.1	0.001	0.02	PASS
55	-48	1.1	0.001	0.02	PASS

Frequency Stability Versus Voltage

Frequency Stability vs. Voltage					
Voltage Vac	Temperature	Frequency Measure Error Hz	Error ppm	Limit ppm	Result
B(1930.8MHz)					
40	20	1.2	0.001	0.02	PASS
44	20	1.3	0.001	0.02	PASS
47	20	1.2	0.001	0.02	PASS
50	20	1.1	0.001	0.02	PASS
53	20	1.2	0.001	0.02	PASS
56	20	1.4	0.001	0.02	PASS
57	20	1.2	0.001	0.02	PASS
M(1960MHz)					
40	20	1.2	0.001	0.02	PASS
44	20	1.5	0.001	0.02	PASS
47	20	1.1	0.001	0.02	PASS
50	20	1.3	0.001	0.02	PASS
53	20	1.1	0.001	0.02	PASS
56	20	1.2	0.001	0.02	PASS
57	20	1.2	0.001	0.02	PASS
T(1989.2MHz)					
40	20	1.2	0.001	0.02	PASS
44	20	1.1	0.001	0.02	PASS
47	20	1.2	0.001	0.02	PASS
50	20	1.1	0.001	0.02	PASS
53	20	1.3	0.001	0.02	PASS
56	20	1.4	0.001	0.02	PASS
57	20	1.2	0.001	0.02	PASS

4 UMTS OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§2.1046 §24.232	Transmitter output Power	Compliant
§2.1091 §1.1037	RF Exposure	Compliant
§2.1047	Modulation Characteristic	Compliant
§2.1053	Spurious Radiated Emissions	Compliant
§2.1051, §24.238	Spurious Emissions AT Antenna Terminals	Compliant
§2.1049 §24.229 §24.238	Occupied Bandwidth	Compliant
§2.1051, §24.238	Band Edge	Compliant
§ 2.1055 § 24.235	Frequency stability	Compliant

4.1 TRANSMITTER OUTPUT POWER

Applicable Standard: FCC §2.1046 §24.232

According to FCC §2.1046 & 24.232, the EIRP (equivalent isotropically radiated power) must not exceed 1640 Watts.

According to RSS-133, SRSP 510 5.1.1 the EIRP (equivalent isotropically radiated power) must not exceed 3280 Watts/MHz for base station transmitters operating in the band of 1930 MHz to 1995 MHz with the antenna height above average terrain up to 300 meters. If used in urban area, the limit should be 1640 Watts/MHz.


Note: EIRP = Max output Power + Antenna gain - Cable Loss

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2012-4-10	2013-4-9
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	002	1034	2012-4-9	2013-4-8

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

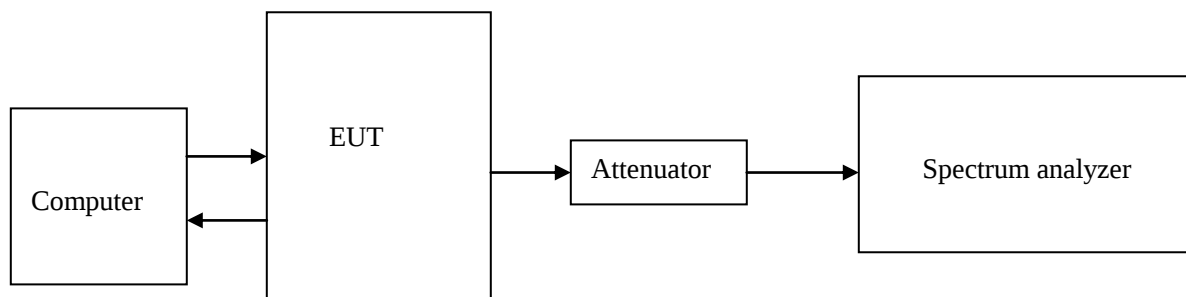

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. External attenuation Loss is 40dB, Cable Loss is about 2dB.

Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar



Test Result: Pass


Test Mode: Transmitting UMTS

Test Data:

Four carriers



Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
1940.1	1932.6/1937.6/1942.6/1947.6	46.54
1960.1	1952.6/1957.6/1962.6/1967.6	46.83
1979.9	1972.4/1977.4/1982.4/1987.4	46.77

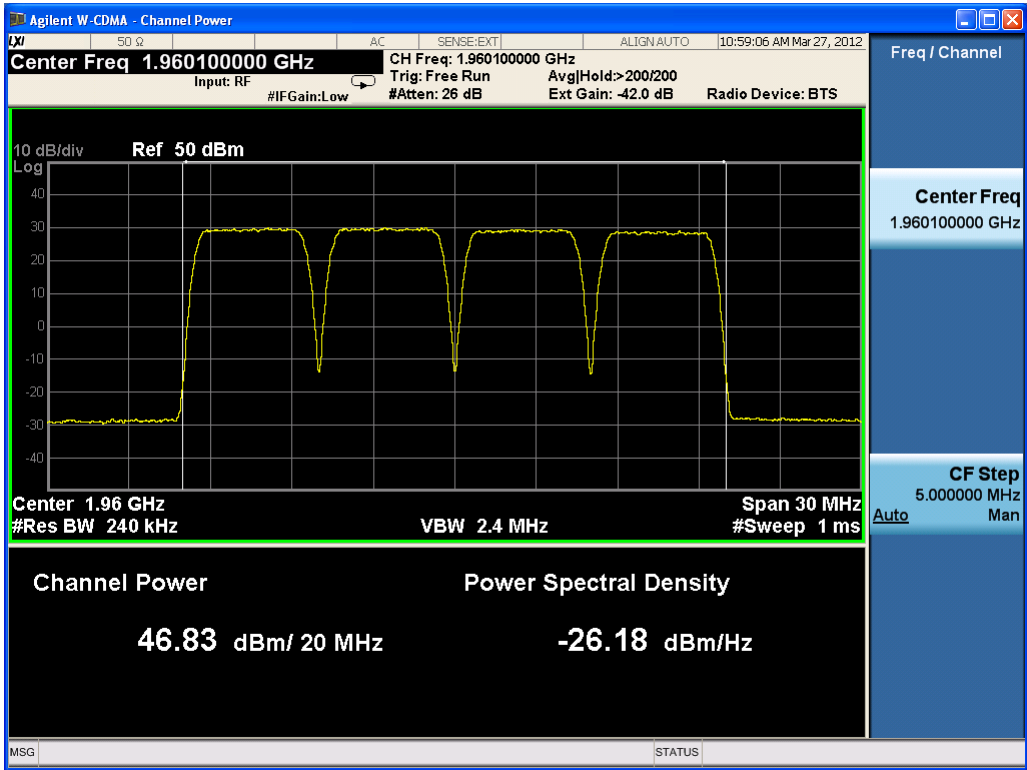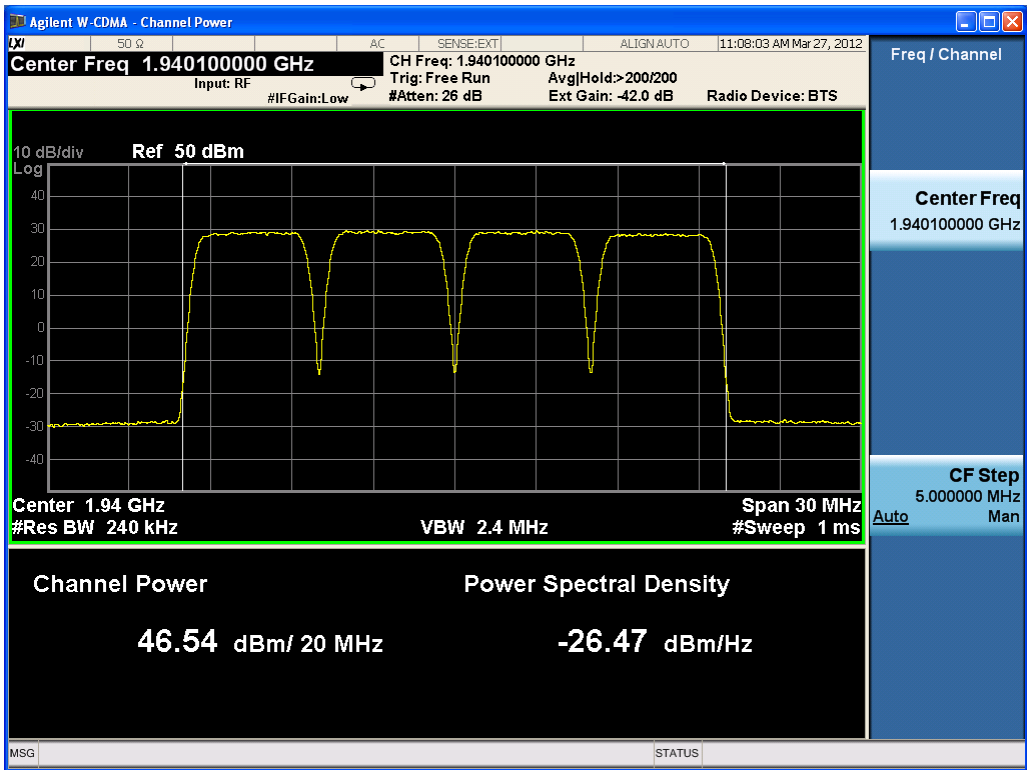


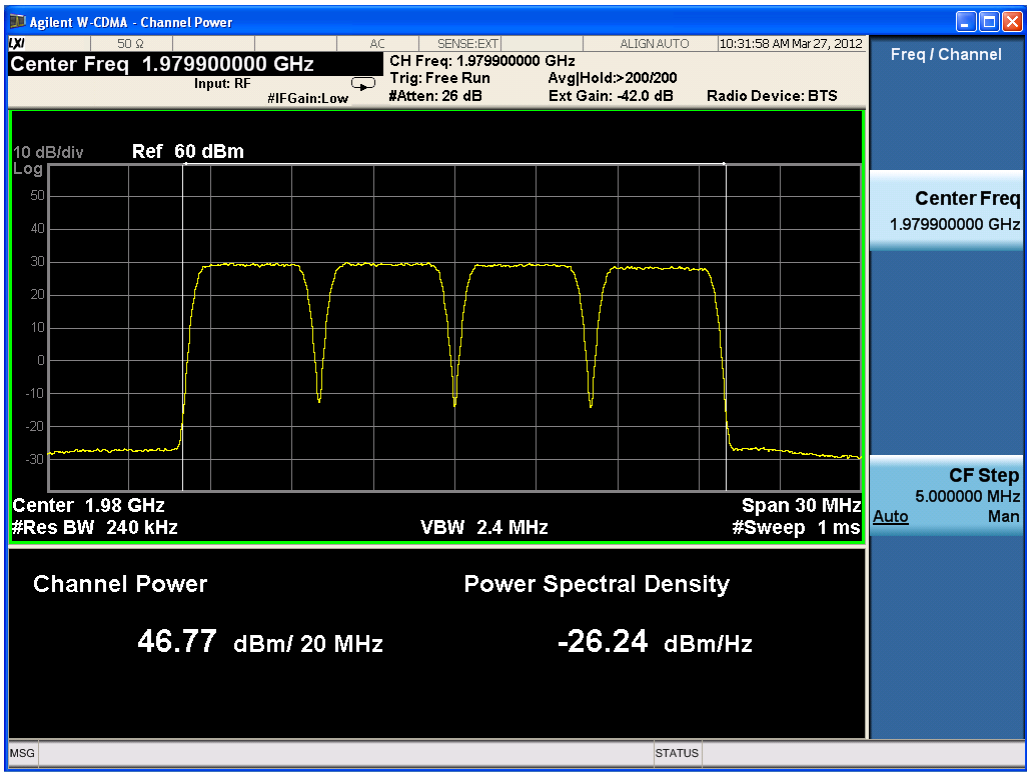

Three carriers



Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
1937.6	1932.6/1937.6/1942.6	46.65
1960	1955/1960/1965	47.01
1982.4	1977.4/1982.4/1987.4	46.81

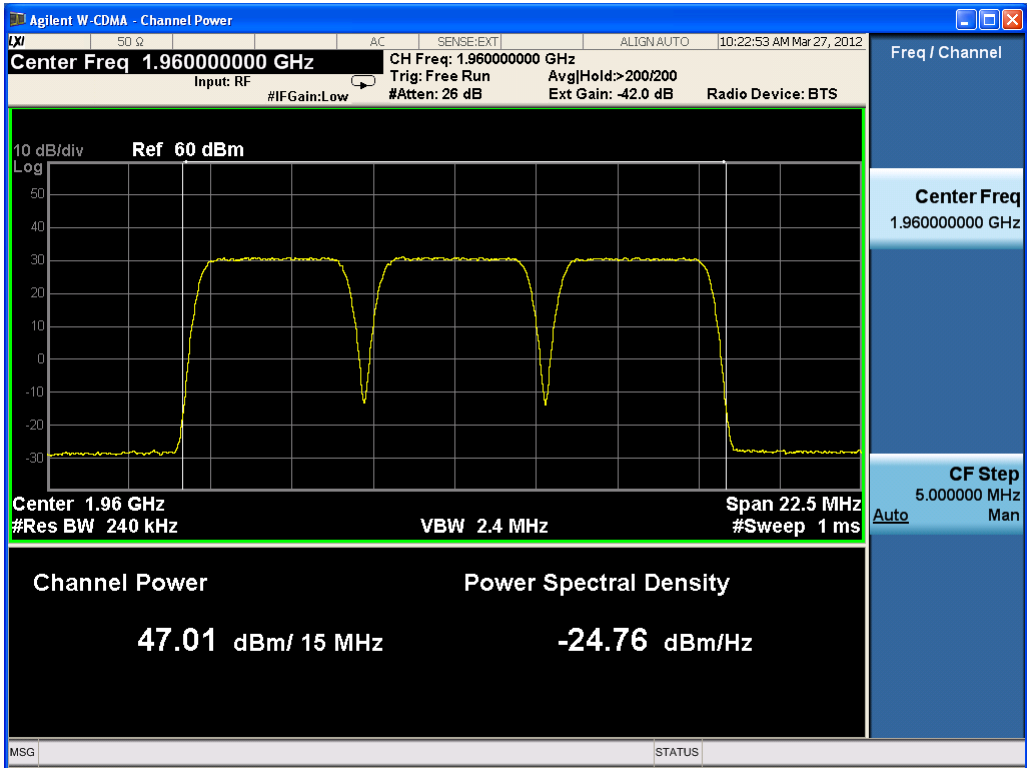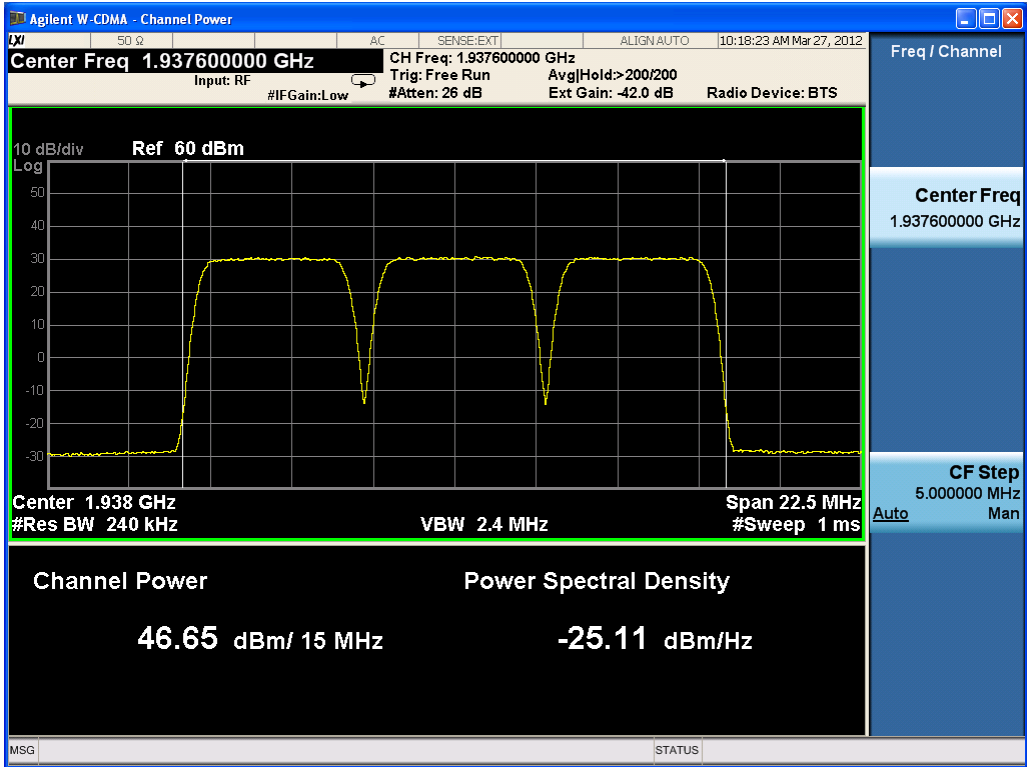


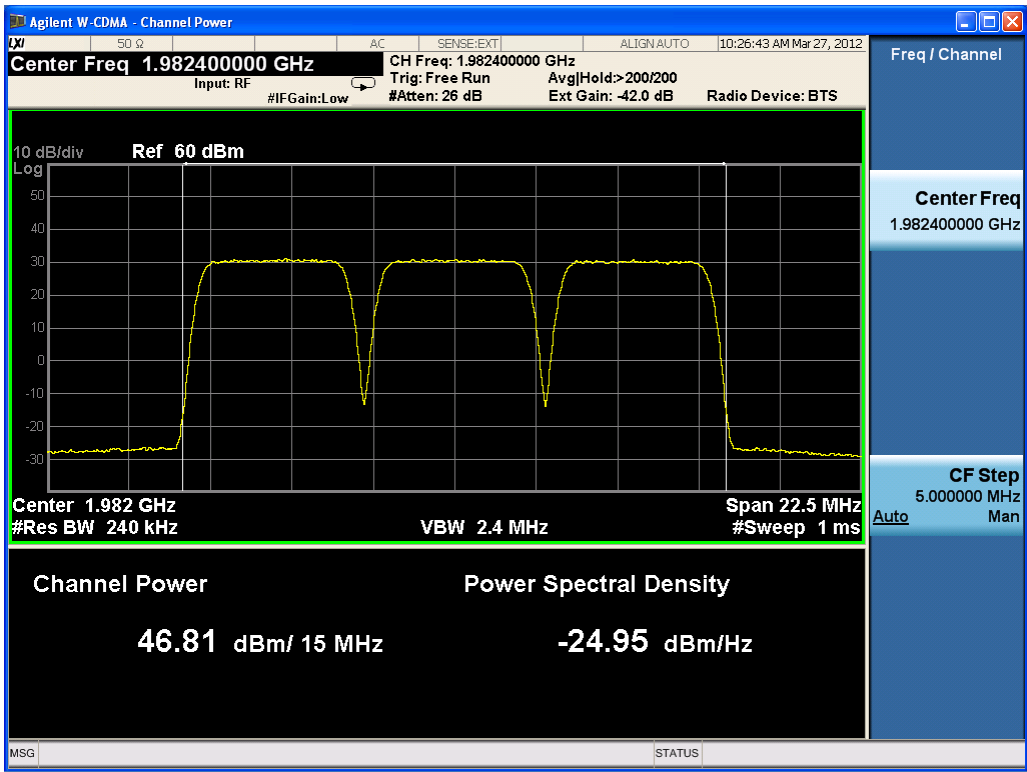

Two carriers



Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
1935.1	1932.6/1937.6	47.20
1960.1	1957.6/1962.6	47.18
1984.9	1982.4/1987.4	47.01

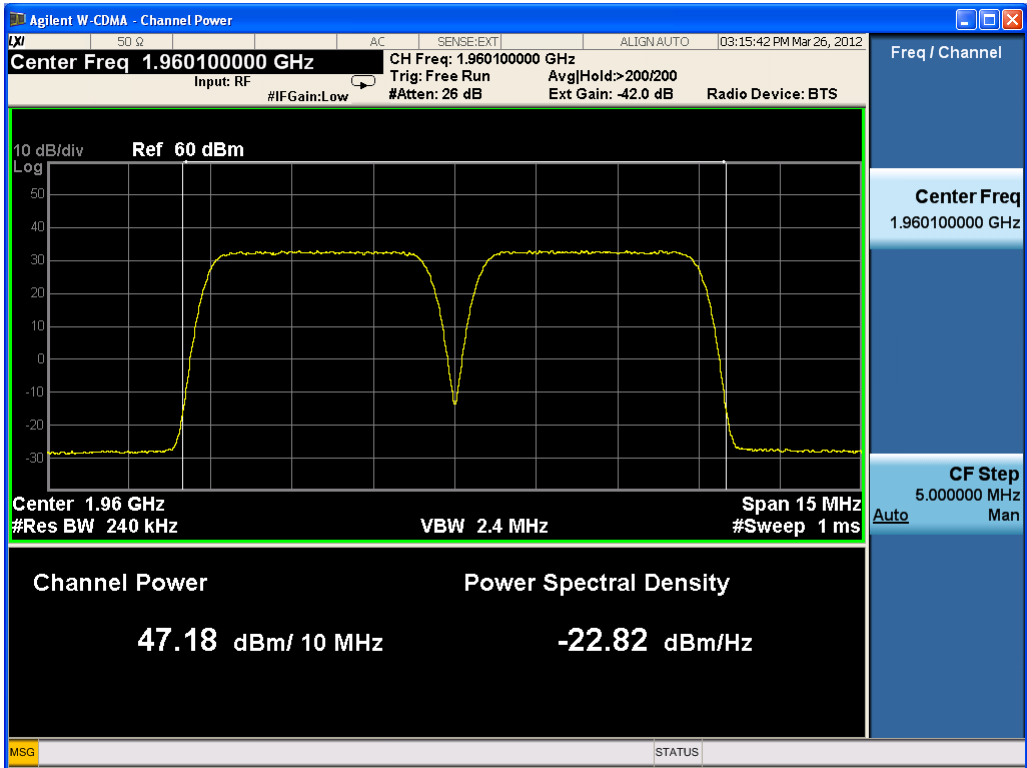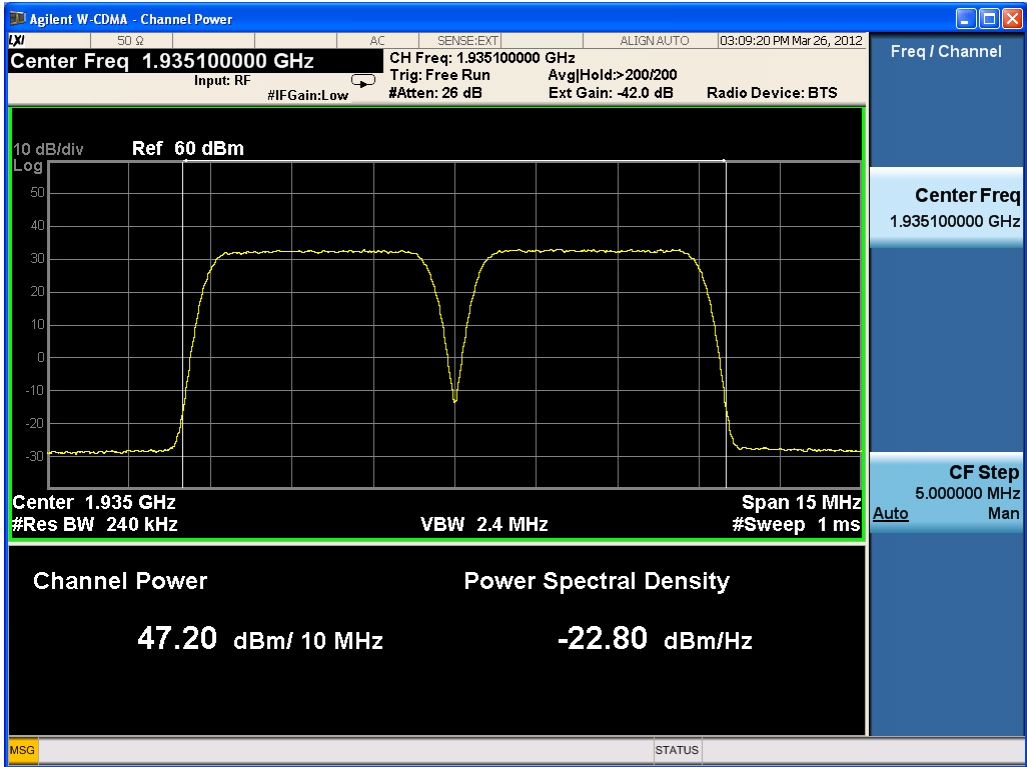


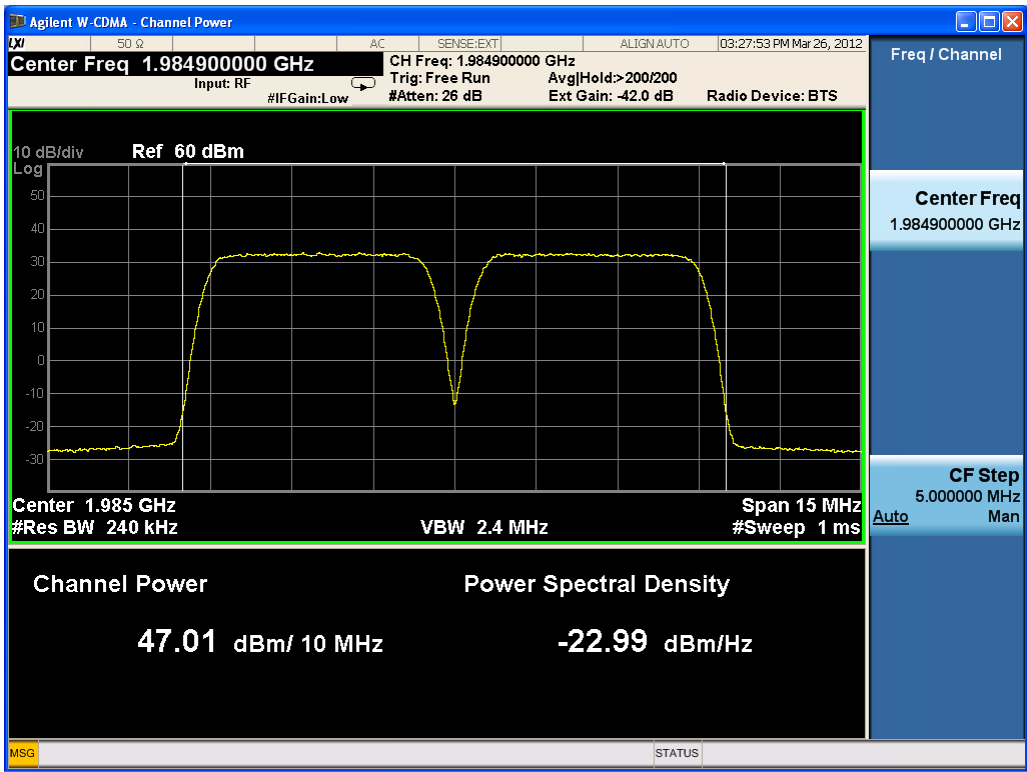

One carrier

Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm
1932.6	1932.6	46.94
1960	1960	47.24
1987.4	1987.4	46.93

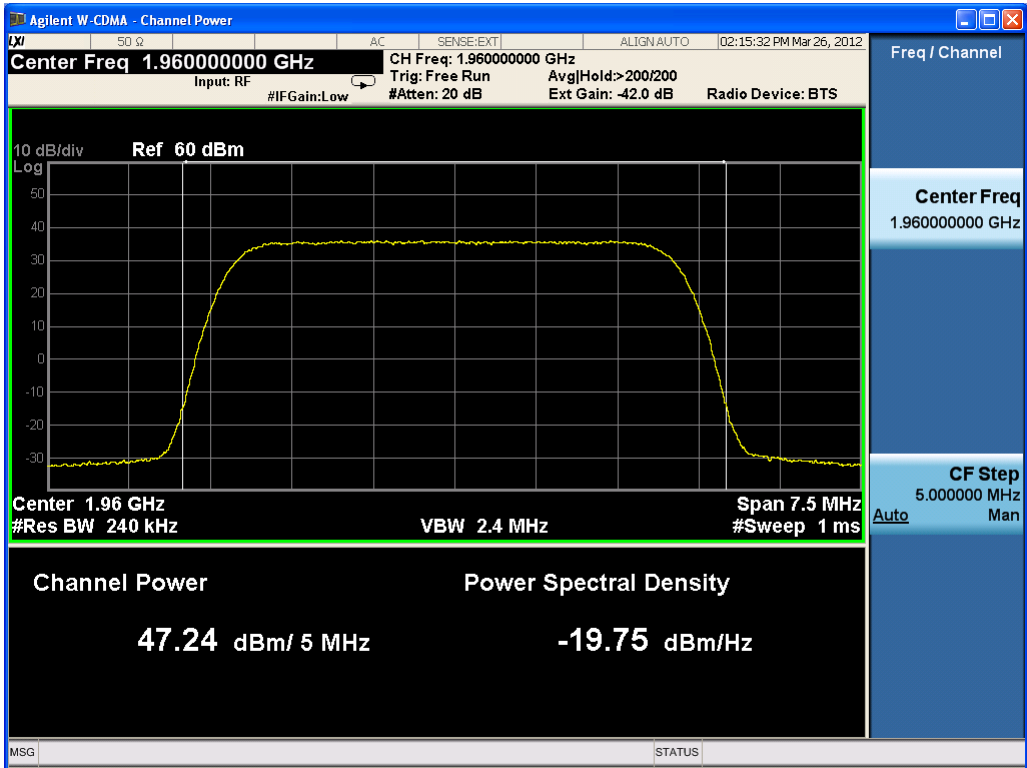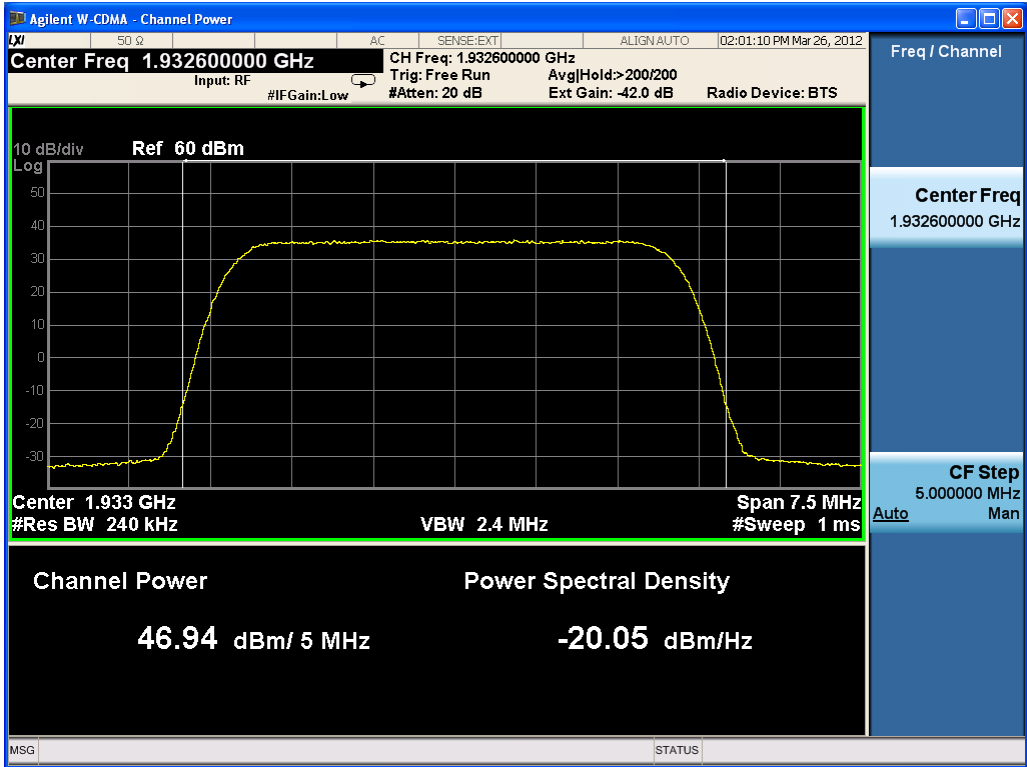

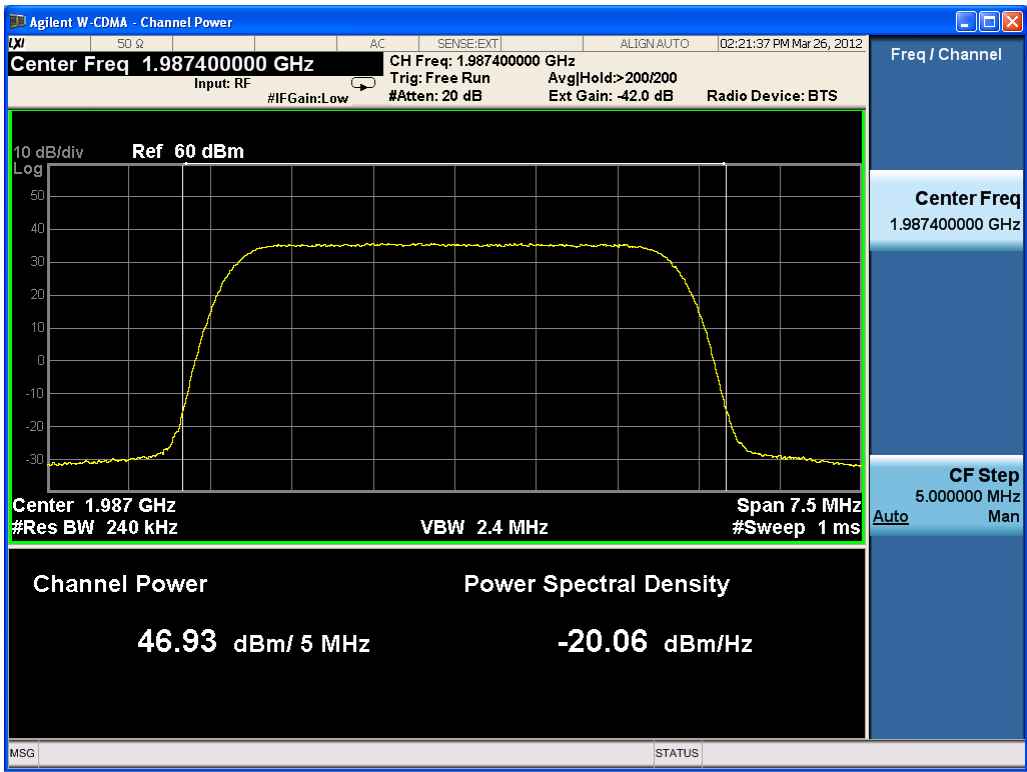

4.2 RF EXPOSURE

Applicable standard: FCC §2.1091 and §1.1037

Limit

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated. Limits for Maximum Permissible Exposure (MPE)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

Test Data

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = \text{EIRP} / 4\pi R^2$$

Where: S = power density

EIRP = equivalent isotropically radiated power=ERP+2.15dB

R = distance to the center of radiation of the antenna=[(ERP+2.15 dB)/ 4πS]^{1/2}

Maximum EIRP, In general, the equivalent isotropically radiated power (EIRP) of base transmitters and cellular repeaters must not exceed 1640 Watts.

Frequency is between 1500MHz and 100,000MHz, and the Maximum S=1.0mW/cm², so

R=3.61m.

This equipment should be installed and operated with minimum distance 3.61m between the radiator& your body.

Test Result: pass

4.3 MODULATION CHARACTERISTIC

Applicable Standard: FCC §2.1047

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2012-4-10	2013-4-9
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	002	1034	2012-4-9	2013-4-8

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

UMTS digital mode is used by EUT.

Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar



Test Result: Pass

Test Mode: Transmitting UMTS

Test Data:

Frequency (MHz)	Rho
1932.6	0.99707
1960	0.99634
1987.4	0.99626

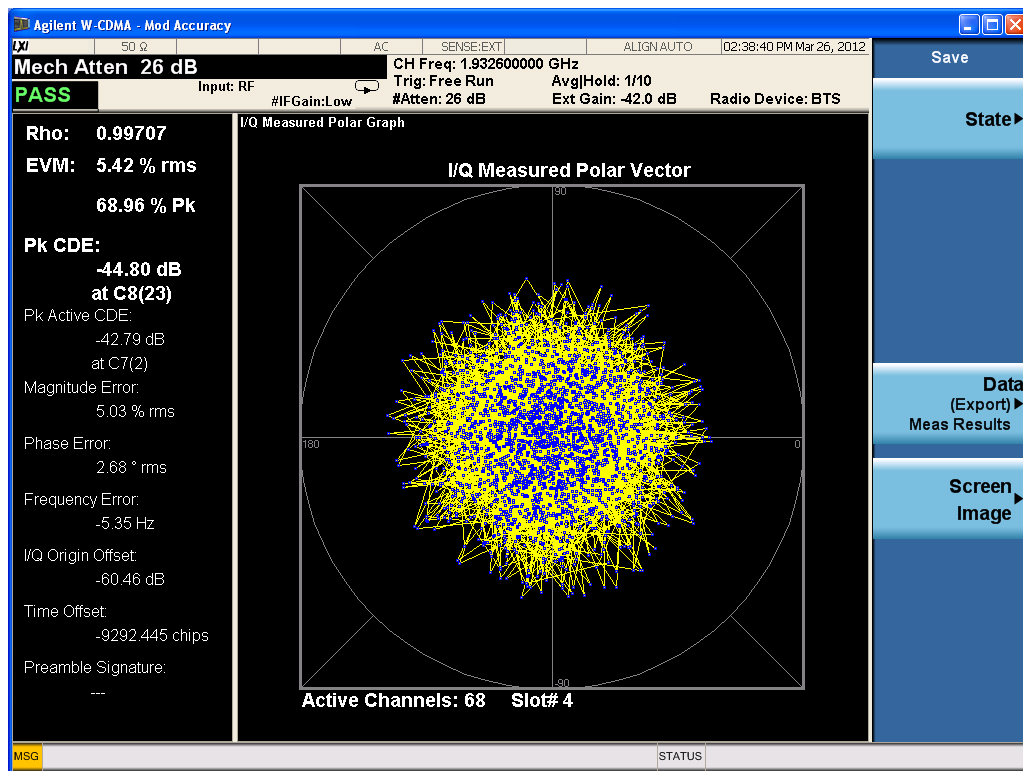

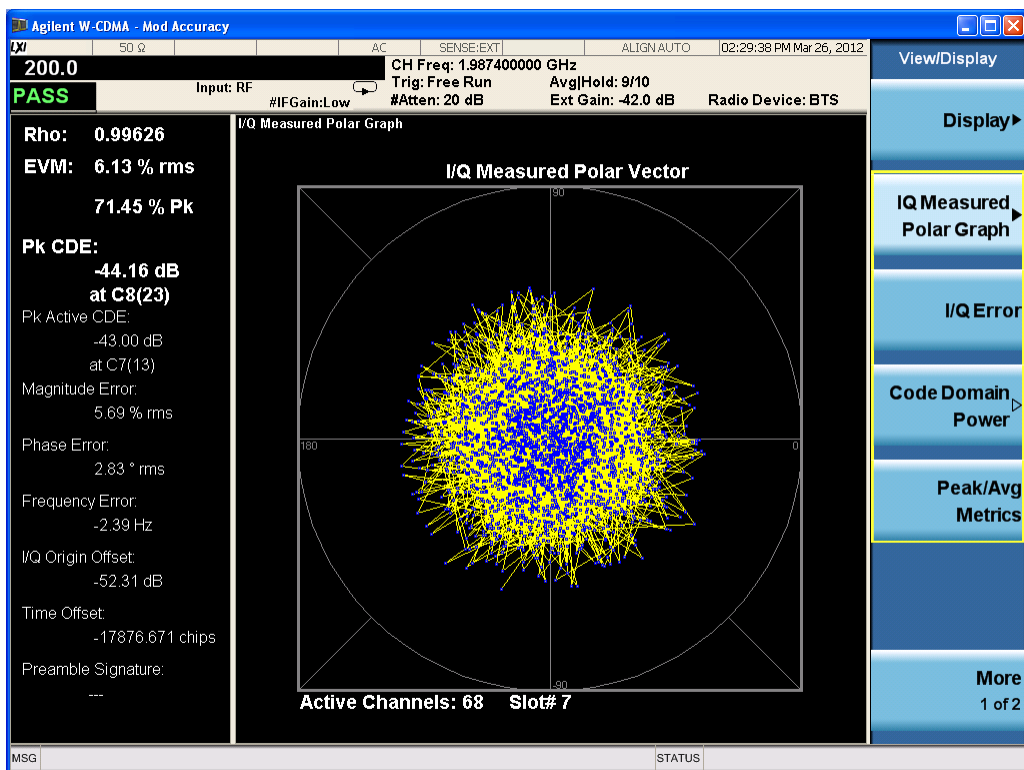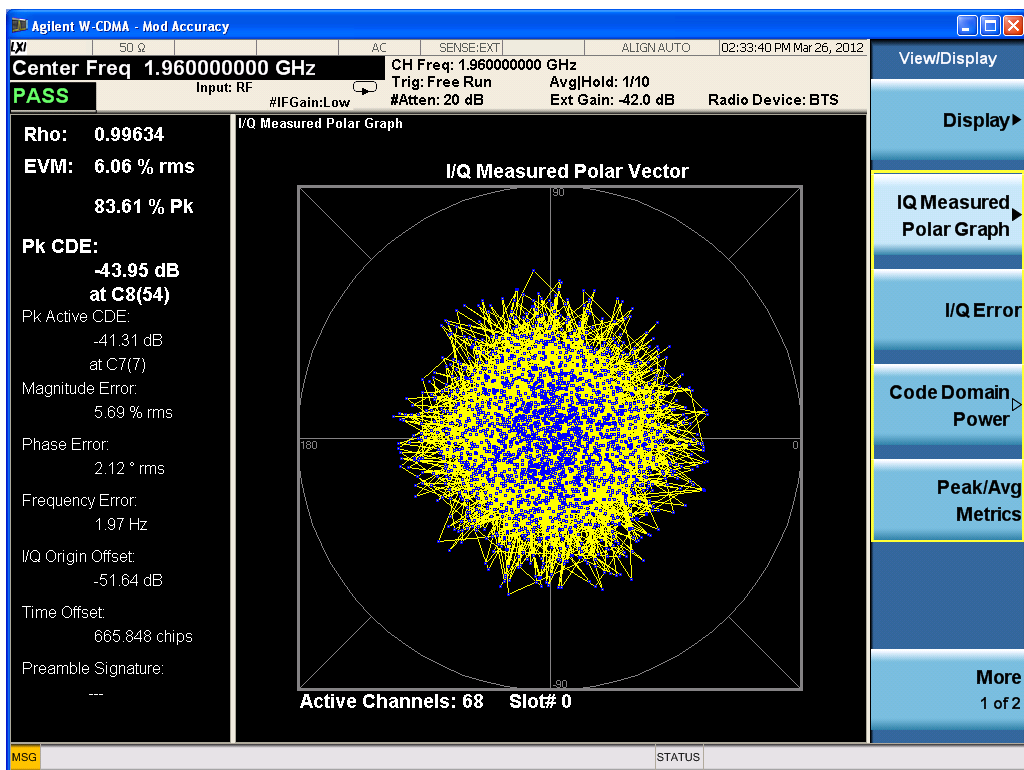

4.4 SPURIOUS RADIATED EMISSIONS

Applicable Standard: FCC CFR 47, §2.1053

Test Equipment List and Details

Manufacturer	Equipment	Model	Serial Number	Last Cal.	Cal. Interval
R&S	SIGNAL GENERATOR	SMR20	A00017351	2011-9-26	1 year
Albatross	Anechoic Chamber	3m Site	A00017354	2011-11-2	1 year
R&S	EMI Test Receiver	ESIB26	100058	2011-10-29	1 year
R&S	Ultra Breitband Antennas	HL562	100022	2011-7-29	1 year
R&S	Double-Ridged Waveguide Horn Antenna	HF906	100032	2011-7-29	1 year
R&S	Double-Ridged Waveguide Horn Antenna	HF906	100446	2011-7-29	1 year
SCHWARZ-BECK	Biconical Antenna	VUBA9117	9117-122	2011-7-29	1 year


***statement of traceability:** ZTE Corporation Testing lab attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiated emissions measurement at the EMC lab of ZTE Corp. is 3.6dB.

EUT Setup

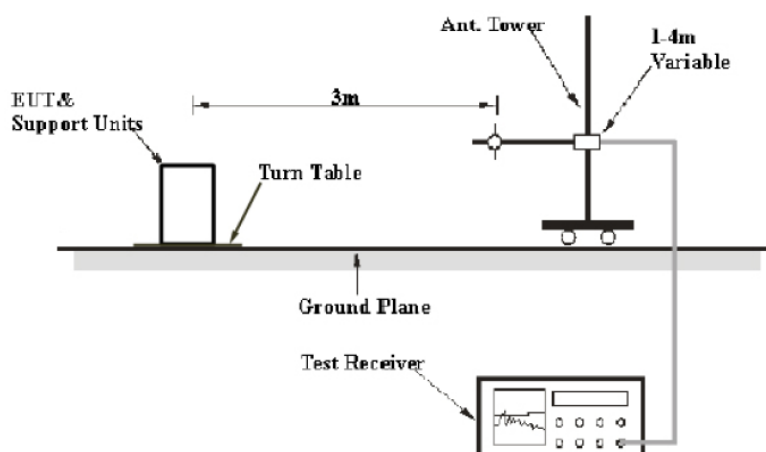

The radiated emission tests were performed in the 3-meter Chamber, using the setup accordance with the FCC part 2.1053. The specification used was the FCC 2.1053 limits.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TX pwr in Watts}/0.001)$ - the absolute level

Spurious attenuation limit in dB = $43 + 10 \lg P$ (power out in Watts)

The resolution bandwidth of the spectrum analyzer was set at 100KHz for 30MHz to 1GHz scanning, set at 1MHz or 3MHz for 1GHz to 20GHz scanning.

Test Results Summary: PASS

Environmental Conditions

Temperature:	26°C
Relative Humidity:	60 %
ATM Pressure:	1009 mbar

Test data

Indicated		Test Antenna	Substituted		Cable Loss(dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (GHz)	Amp. (dB μ V)	Polar H/V	Level (dBm)	Antenna Gain Correction						
63.046092	26.01	V	-70.1	-27.24	0.6	-97.94	2.15	-100.09	-13	87.09
634.549098	26.43	V	-69.68	-1.09	2.1	-72.87	2.15	-75.02	-13	62.02
974.729459	31.16	V	-72.63	-2.82	2.6	-78.05	2.15	-80.2	-13	67.2
1384.76954	46.62	V	-60.9	4.25	3.1	-59.75	2.15	-61.9	-13	48.9
2991.98397	58.48	V	-52.49	7.95	4.6	-49.14	2.15	-51.29	-13	38.29
169.95992	23.09	H	-80.17	-3.24	1.1	-84.51	2.15	-86.66	-13	73.66
607.334669	27.78	H	-73.12	-1.39	2	-76.51	2.15	-78.66	-13	65.66
992.224449	31.09	H	-72.3	-2.59	2.7	-77.59	2.15	-79.74	-13	66.74
1388.77756	46.41	H	-62.22	4.25	3.1	-61.07	2.15	-63.22	-13	50.22
1981.96393	90.64	H	-18.3	6.55	3.8	-15.55	2.15	-17.7	-13	4.7
2963.92786	57.49	H	-48.71	7.95	4.6	-45.36	2.15	-47.51	-13	34.51

Radiation emission spurious below 3GHz

Indicated		Test Antenna	Substituted		Cable Loss(dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (GHz)	Amp. (dB μ V)	Polar H/V	Level (dBm)	Antenna Gain Correction						
3953.90782	49.47	V	-46.24	7.75	5.3	-43.79	2.15	-45.94	-13	32.94
5276.55311	45.53	V	-50.55	8.55	6.2	-48.2	2.15	-50.35	-13	37.35
5941.88377	58.8	V	-45.29	9.05	6.6	-42.84	2.15	-44.99	-13	31.99
9755.51102	54.47	V	-53.45	9.95	9	-52.5	2.15	-54.65	-13	41.65
13282.5651	59.36	V	-41.68	11.85	10.2	-40.03	2.15	-42.18	-13	29.18
17933.8677	72.31	V	-38.96	8.95	12.2	-42.21	2.15	-44.36	-13	31.36
3961.92385	50.92	H	-51.84	7.75	5.3	-49.39	2.15	-51.54	-13	38.54
5268.53707	45.53	H	-55.77	8.55	6.2	-53.42	2.15	-55.57	-13	42.57
5941.88377	54.63	H	-49.16	9.05	6.6	-46.71	2.15	-48.86	-13	35.86
9843.68738	53.43	H	-55.52	9.95	8.9	-54.47	2.15	-56.62	-13	43.62
13348.6974	58.86	H	-50.58	11.85	10.2	-48.93	2.15	-51.08	-13	38.08
17867.7355	72.1	H	-34.51	8.95	12.2	-37.76	2.15	-39.91	-13	26.91

Radiation emission spurious above 3GHz

4.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard: FCC§2.1051, §24.238

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2012-4-10	2013-4-9
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	002	1034	2012-4-9	2013-4-8

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

EUT Setup:

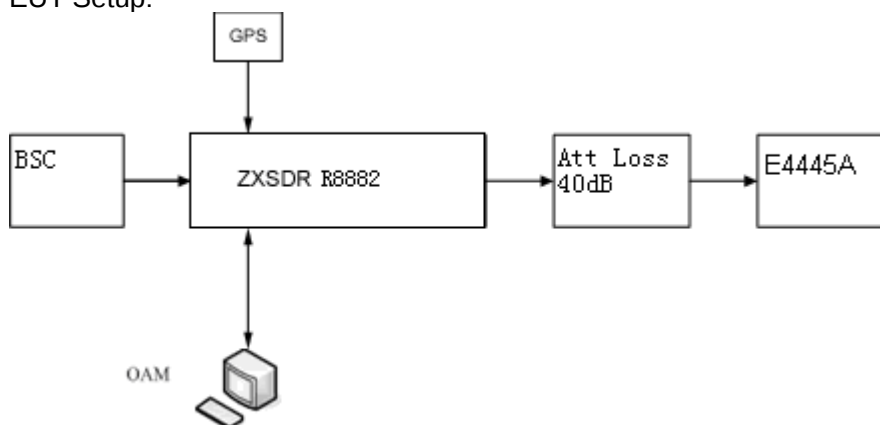

REMARKS: Attenuator loss (dB)=40dB, Cable Loss (dB)=2dB.

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz for 30MHz to 1GHz scanning, set at 1MHz for 1GHz to 20GHz scanning. Sufficient scans were taken to

show any out of band emissions up to 10th harmonic.

Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar



Test Result: Pass

Test Mode: Transmitting UMTS

Test Data:

Four Carriers (working in bottom frequency)

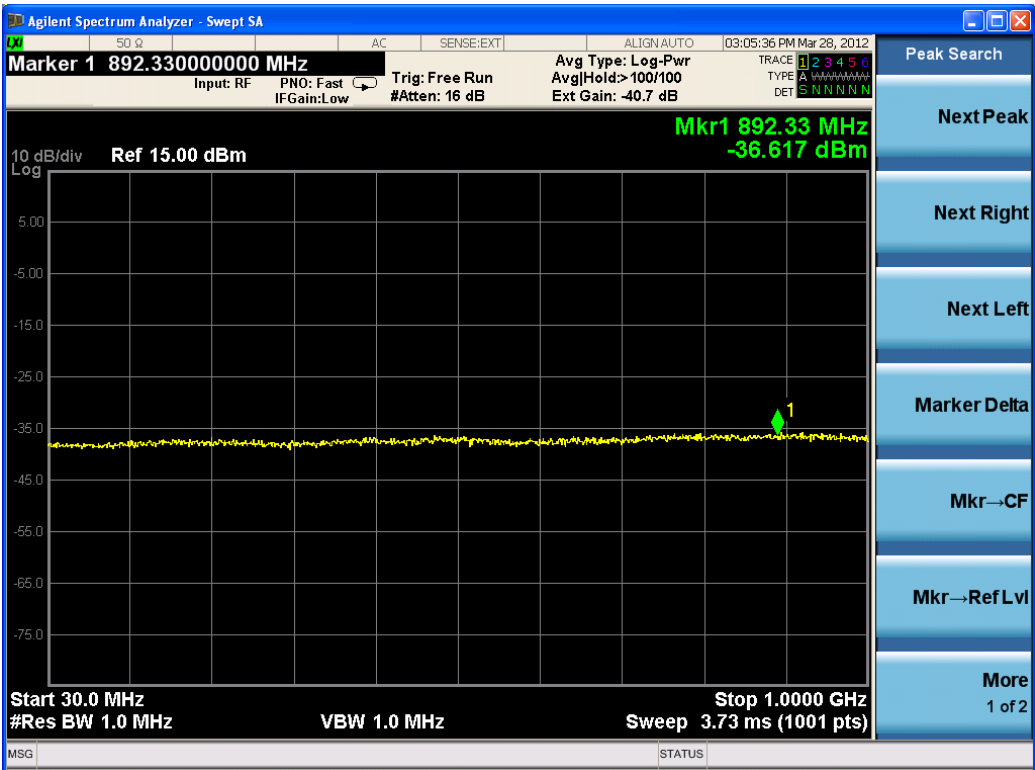

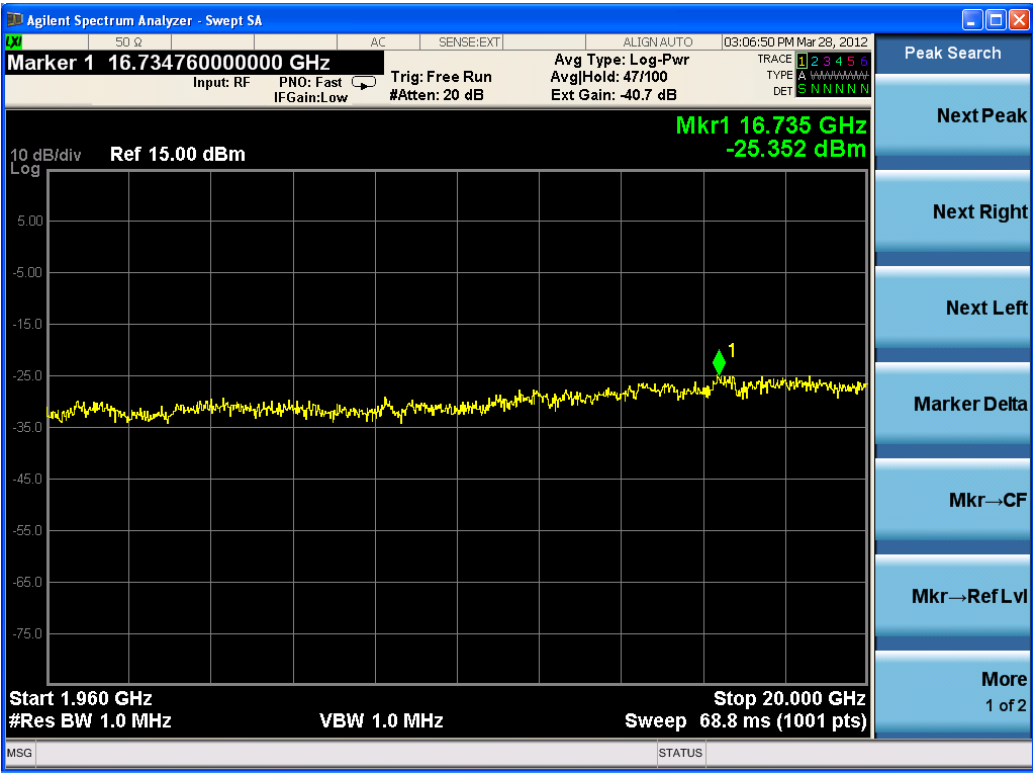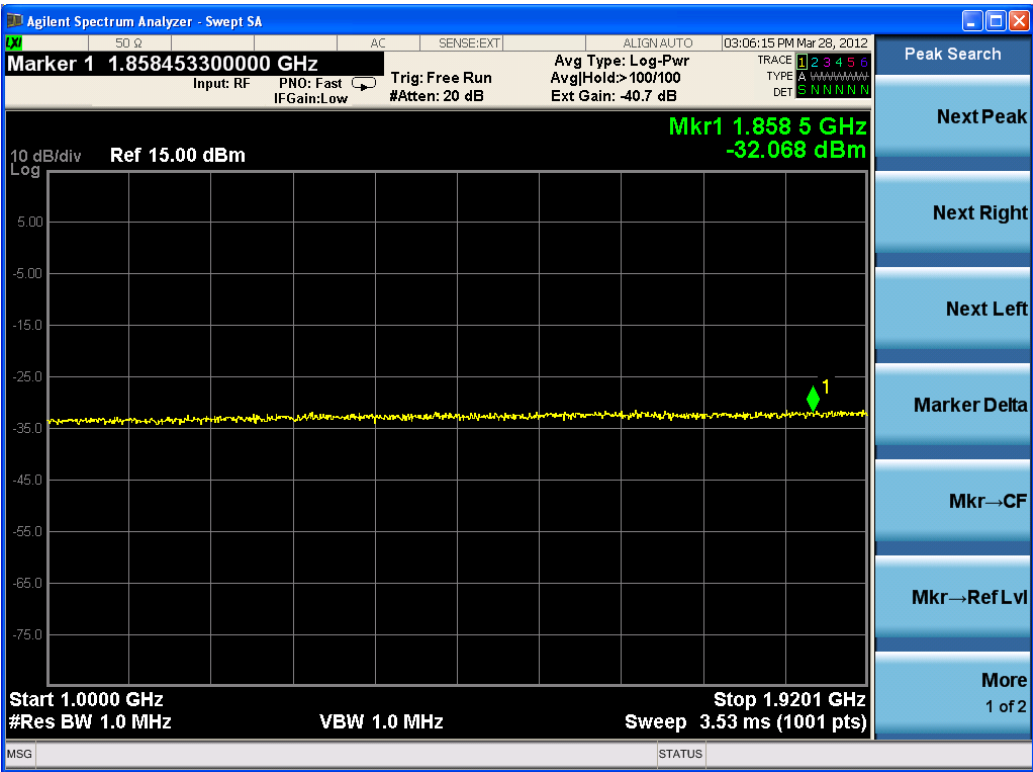

Agilent Spectrum Analyzer - Swept SA

50 Ω AC SENSE:EXT ALIGN:AUTO 03:10:37 PM Mar 28, 2012

Marker 1 781.75000000 MHz

Input: RF PNO: Fast IF Gain: Low Trig: Free Run #Atten: 16 dB

Avg Type: Log-Pwr Avg/Hold: > 100/100 Ext Gain: -40.7 dB

TRACE 1 2 3 4 5 6
TYPE A W W W W W W
DET E N N N N N

Peak Search

Next Peak

Next Right

Next Left

Marker Delta

Mkr → CF

Mkr → Ref Lvl

More

1 of 2

The image shows a screenshot of an Agilent Spectrum Analyzer. The main display area is a grid with a horizontal axis representing frequency and a vertical axis representing power in dBm. A yellow trace shows the swept spectrum, which is relatively flat at approximately -37 dBm. A green marker labeled '1' is positioned at 781.75 MHz. The top of the screen displays various settings: 50 Ω impedance, AC coupling, SENSE:EXT, ALIGN:AUTO, and the date/time 03:10:37 PM Mar 28, 2012. Below these, the marker frequency 781.75000000 MHz is shown. Further down, input settings (Input: RF, PNO: Fast, IF Gain: Low), trigger settings (Trig: Free Run, #Atten: 16 dB), and averaging settings (Avg Type: Log-Pwr, Avg/Hold: > 100/100, Ext Gain: -40.7 dB) are visible. On the right side, there is a 'Peak Search' button and a list of navigation options: 'Next Peak', 'Next Right', 'Next Left', 'Marker Delta', 'Mkr → CF', 'Mkr → Ref Lvl', and 'More'. The bottom of the screen shows the sweep range from 30.0 MHz to 1.000 GHz, a resolution bandwidth of 1.0 MHz, a video bandwidth of 1.0 MHz, and a sweep time of 3.73 ms (1001 pts).

10 dB/div Ref 15.00 dBm

Log

5.00

-5.00

-15.0

-25.0

-35.0

-45.0

-55.0

-65.0


-75.0


Mkr1 781.75 MHz
-37.175 dBm

1


Start 30.0 MHz Stop 1.000 GHz
#Res BW 1.0 MHz VBW 1.0 MHz Sweep 3.73 ms (1001 pts)


MSG STATUS

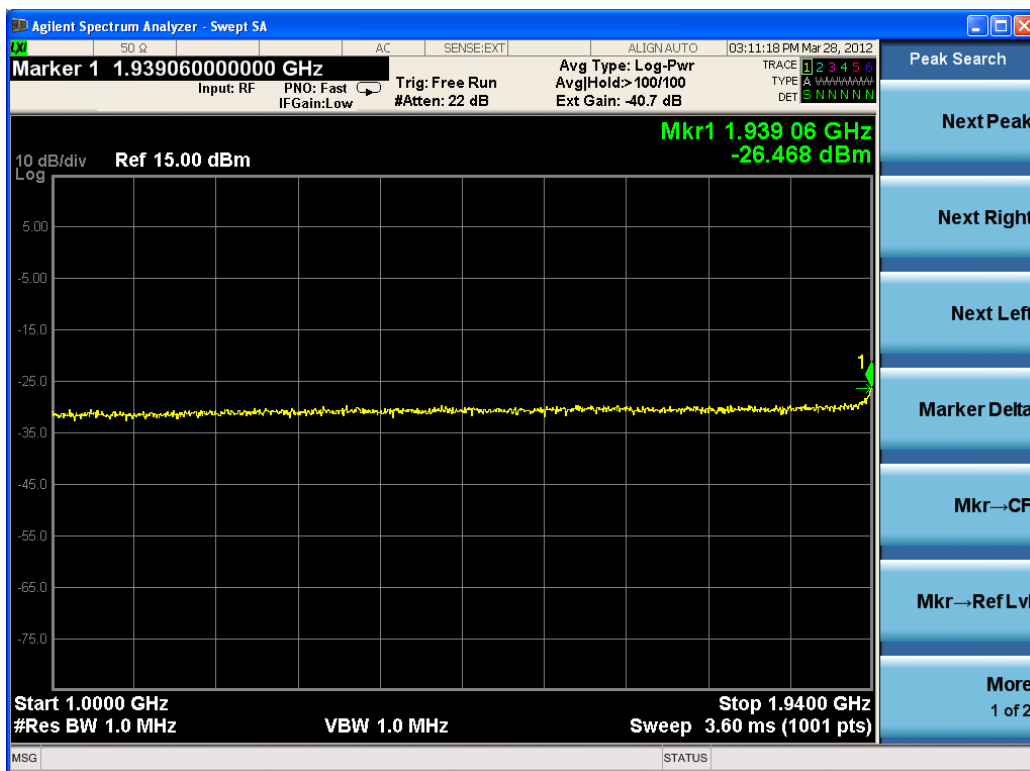


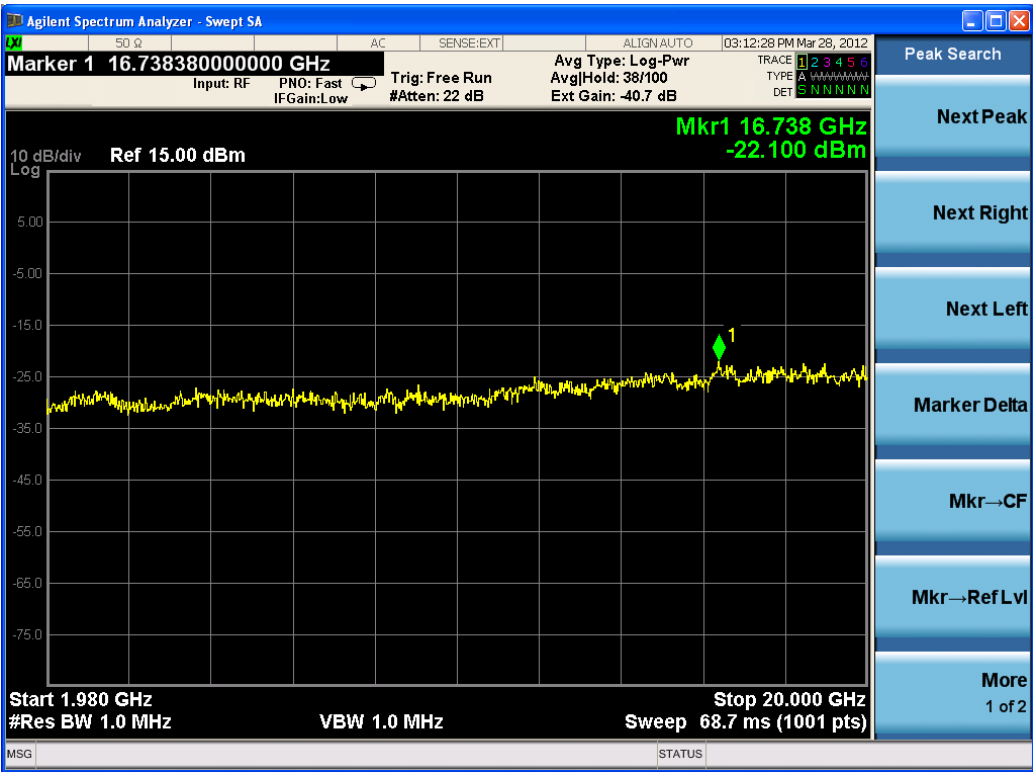


Four Carriers (working in top frequency)

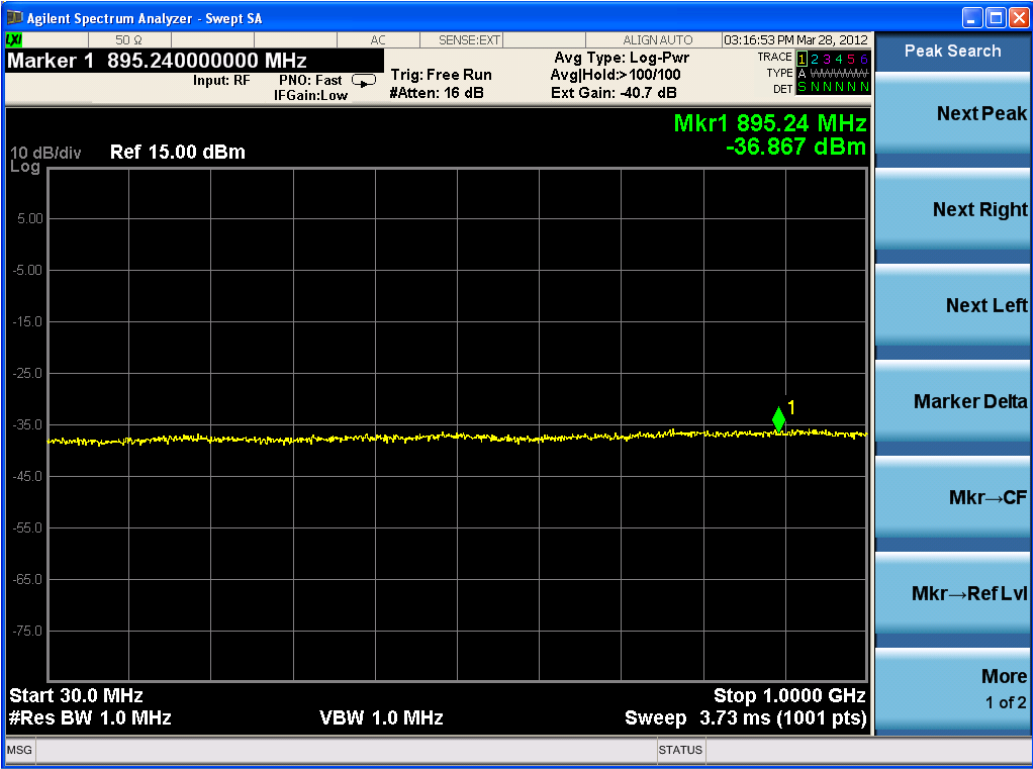

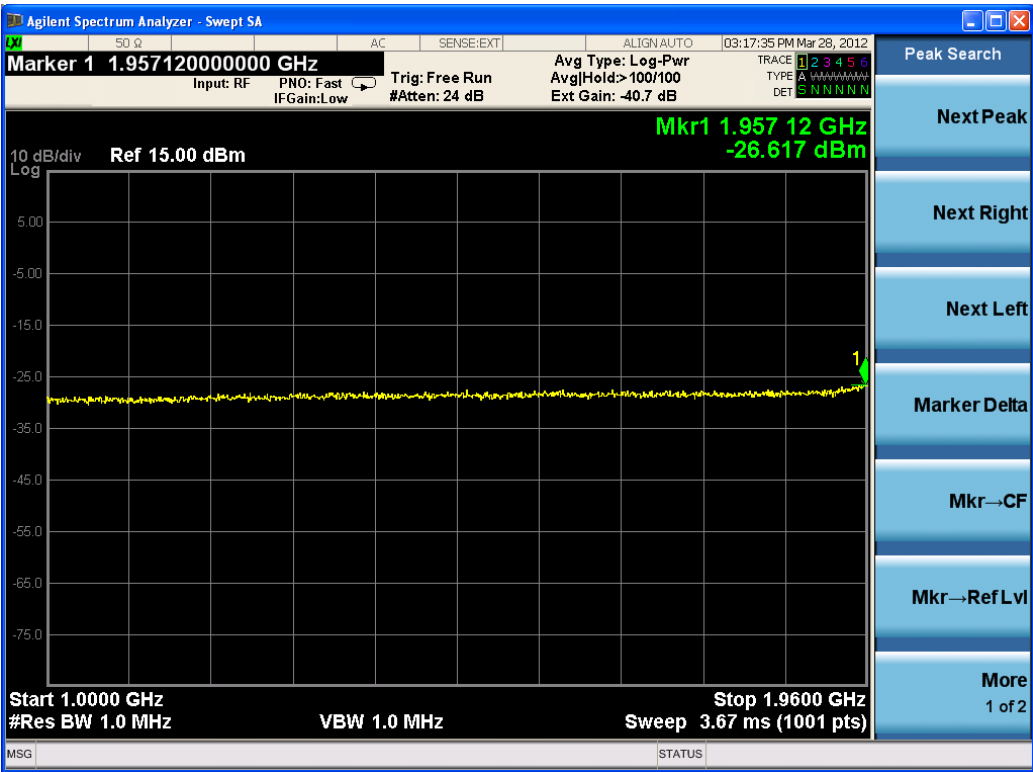

Three carriers (working in bottom frequency)

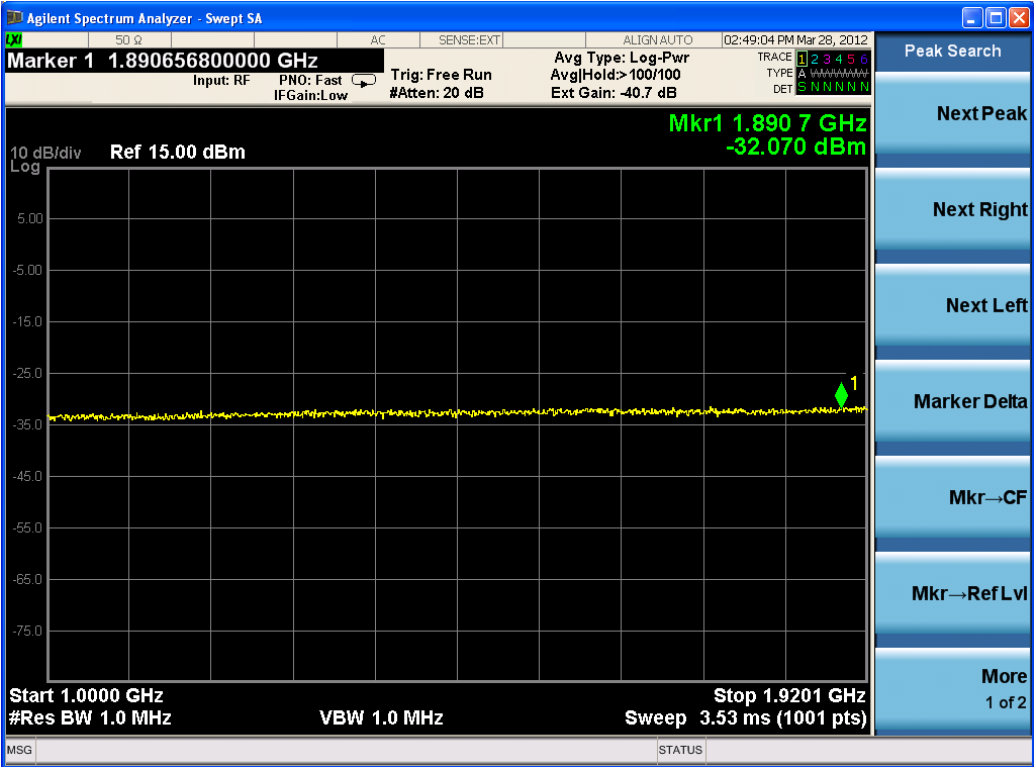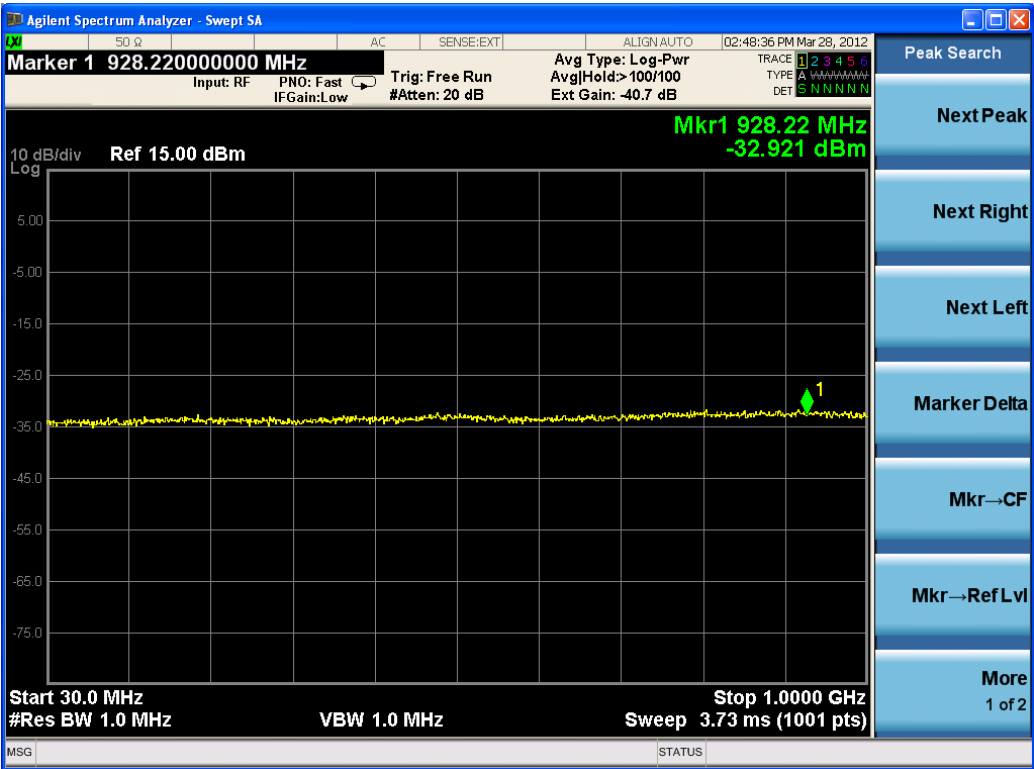



Three carriers (working in middle frequency)

