




15M+15M -Port 1 -carry1-2657.5MHz

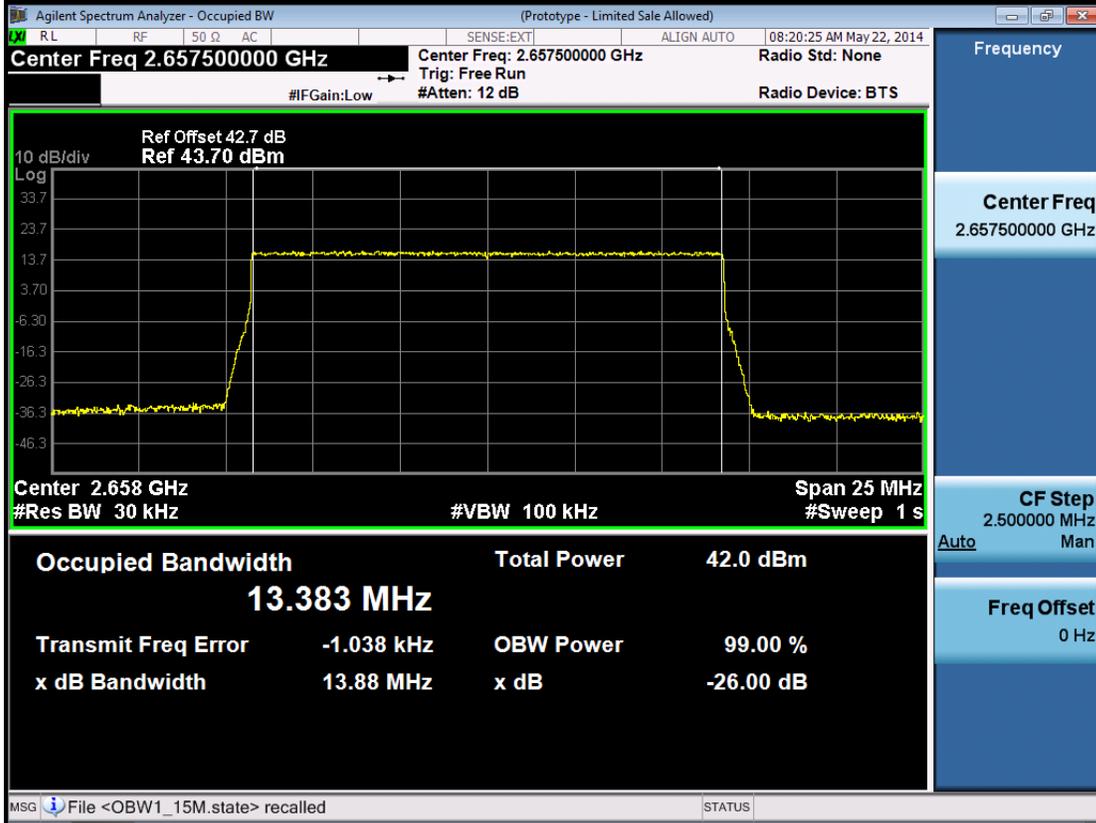


15M+15M -Port 1 –carry2-2682.5MHz

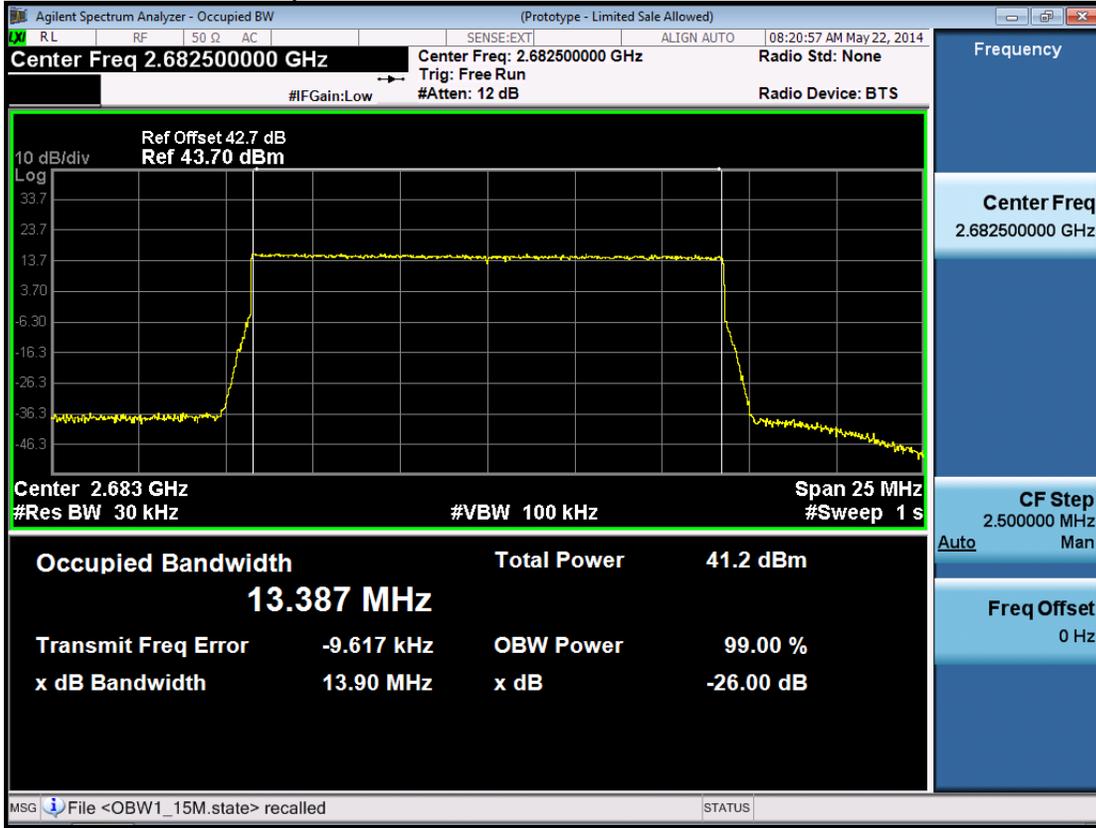


15M+15M -Port 2 –carry1-2627.5MHz

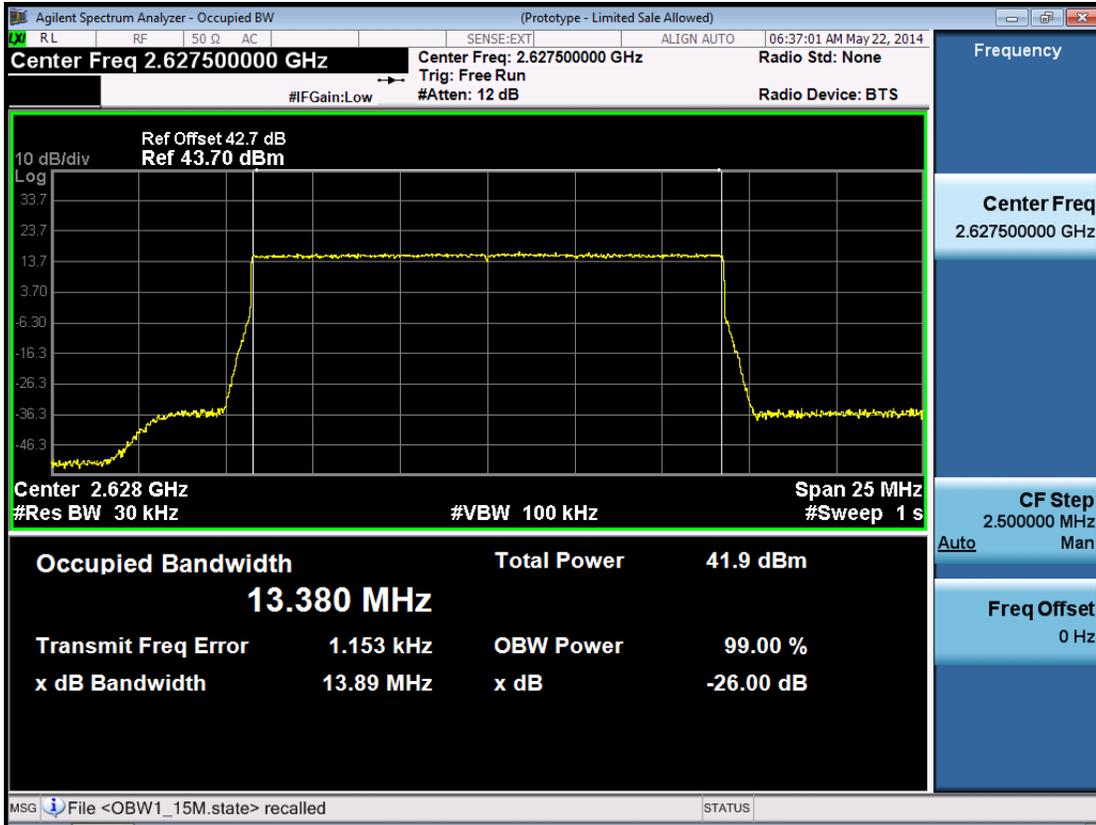


15M+15M -Port 2 -carry2-2652.5MHz

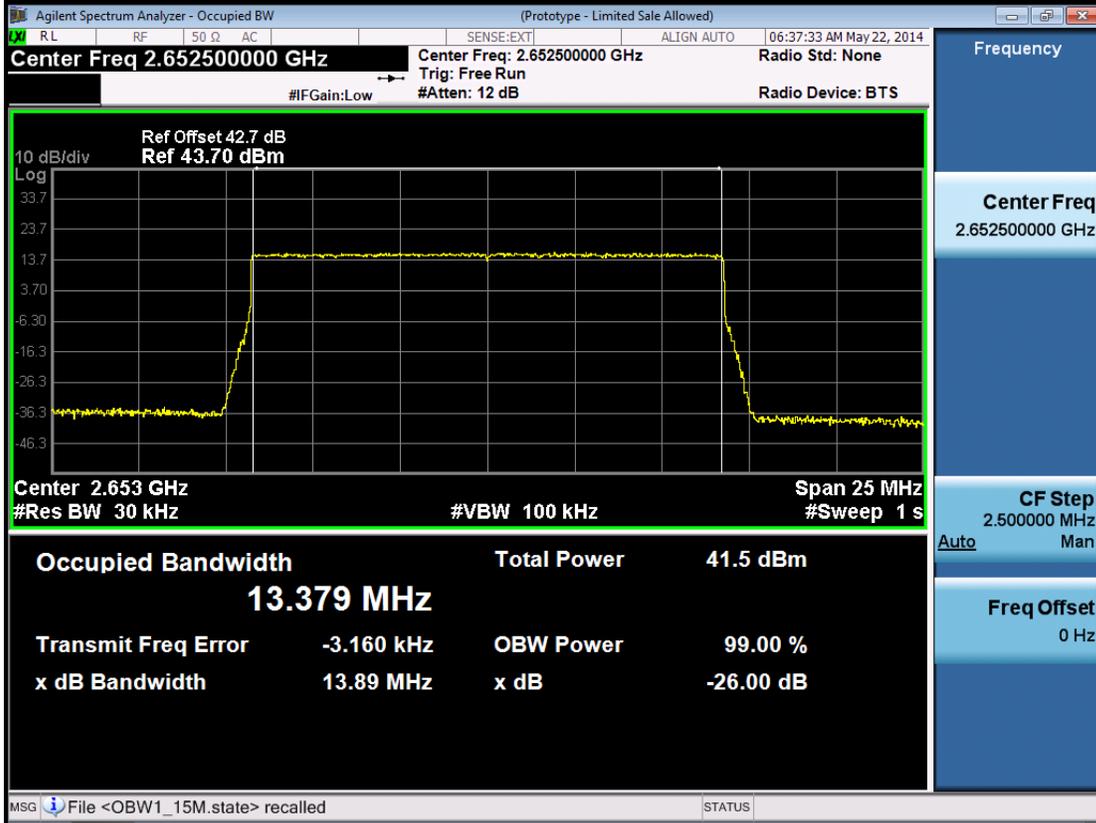


15M+15M -Port 2 –carry1-2642.5MHz

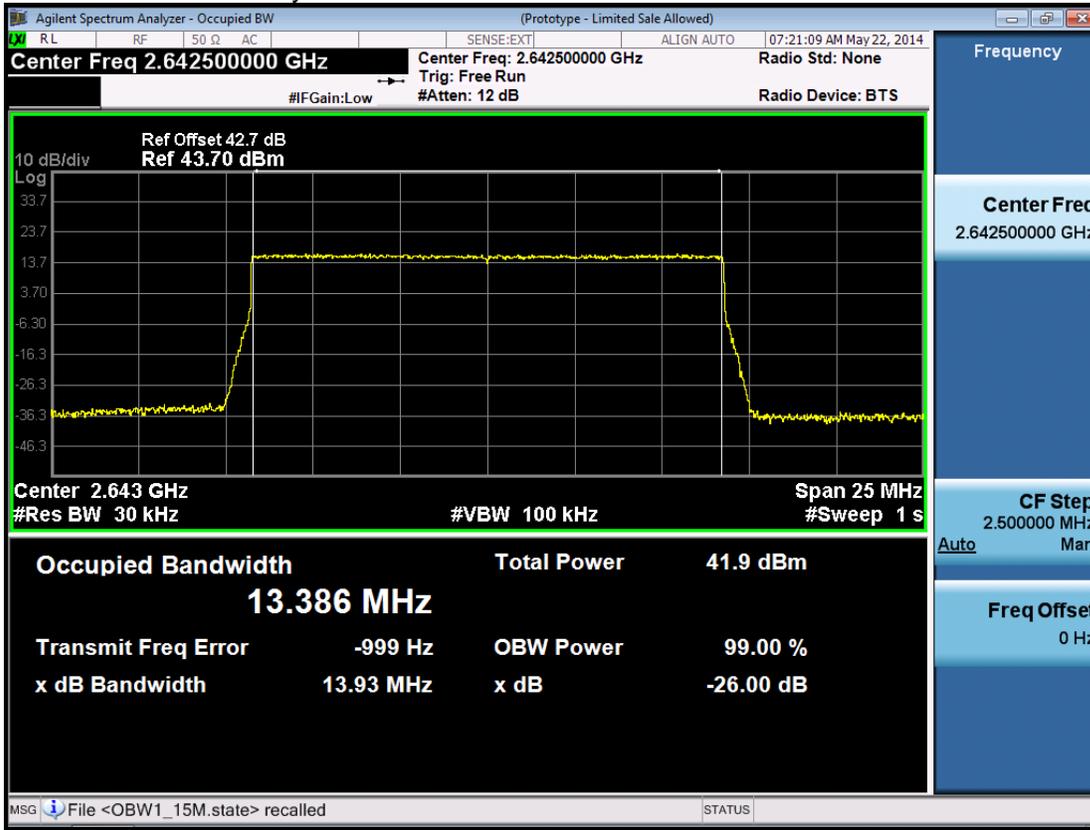


15M+15M -Port 2 –carry2-2667.5MHz

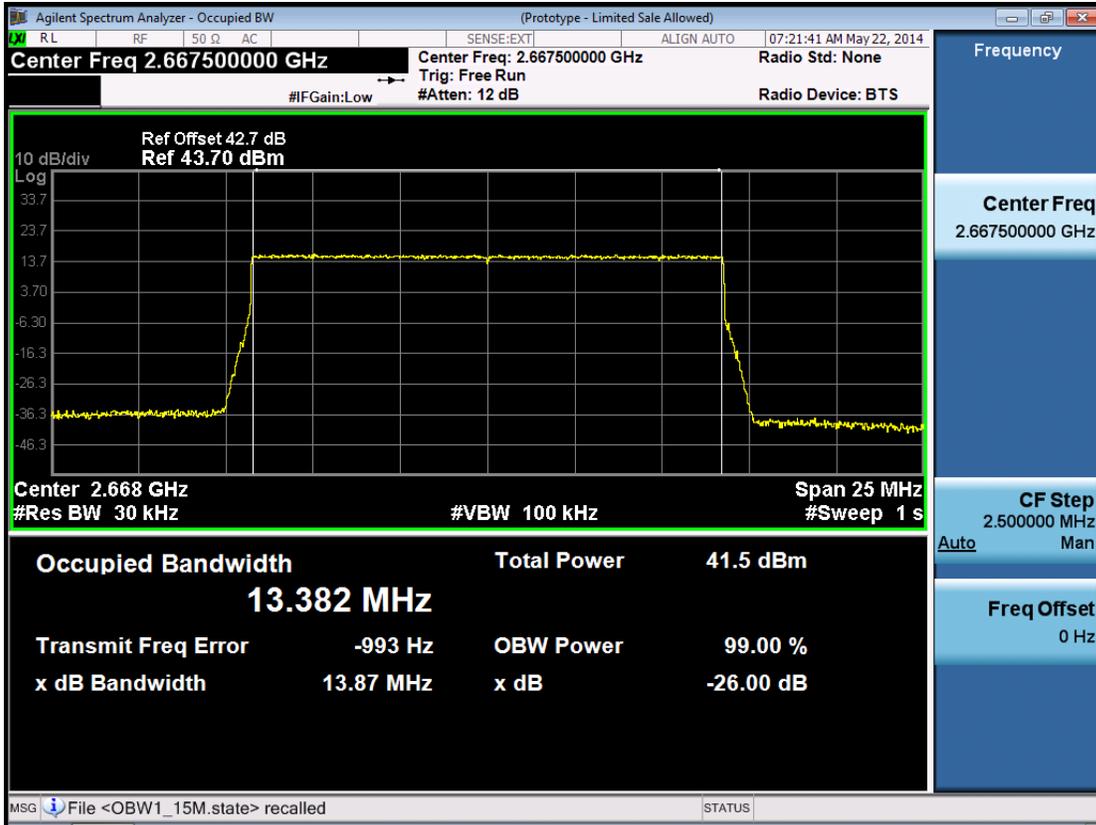

15M+15M -Port 2 -carry1-2657.5MHz

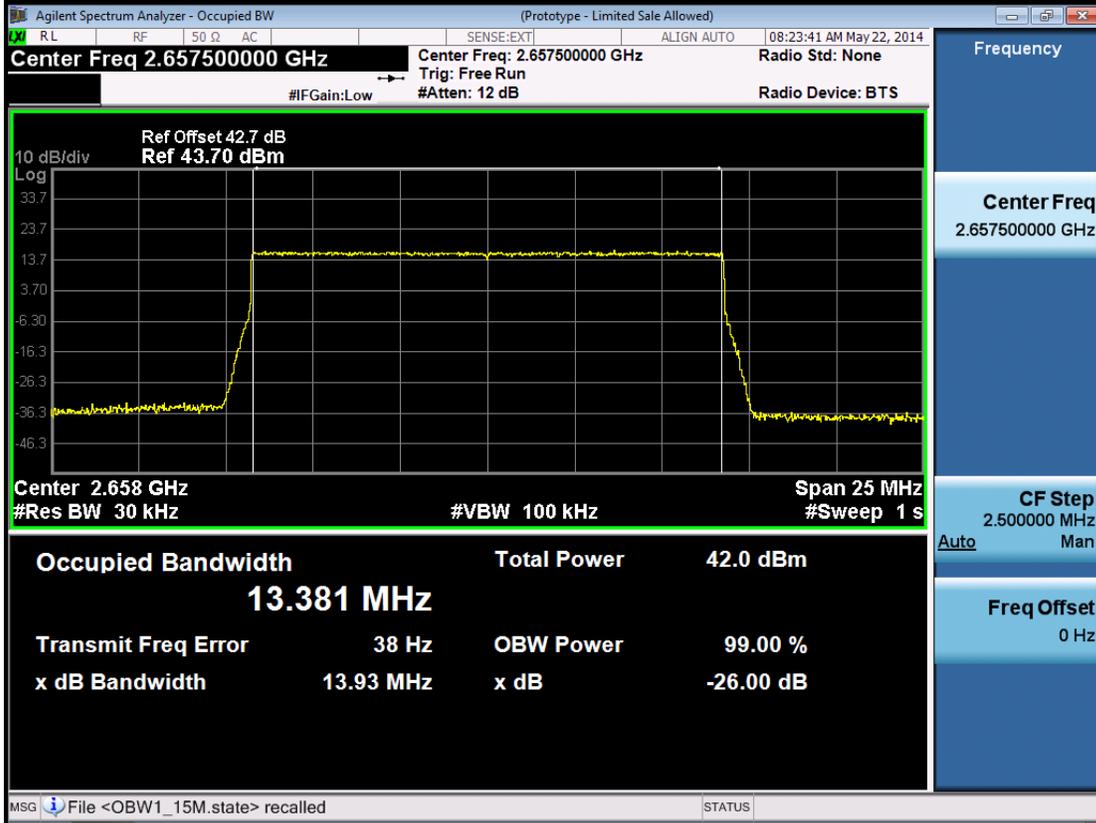


15M+15M -Port 2 –carry2-2682.5MHz

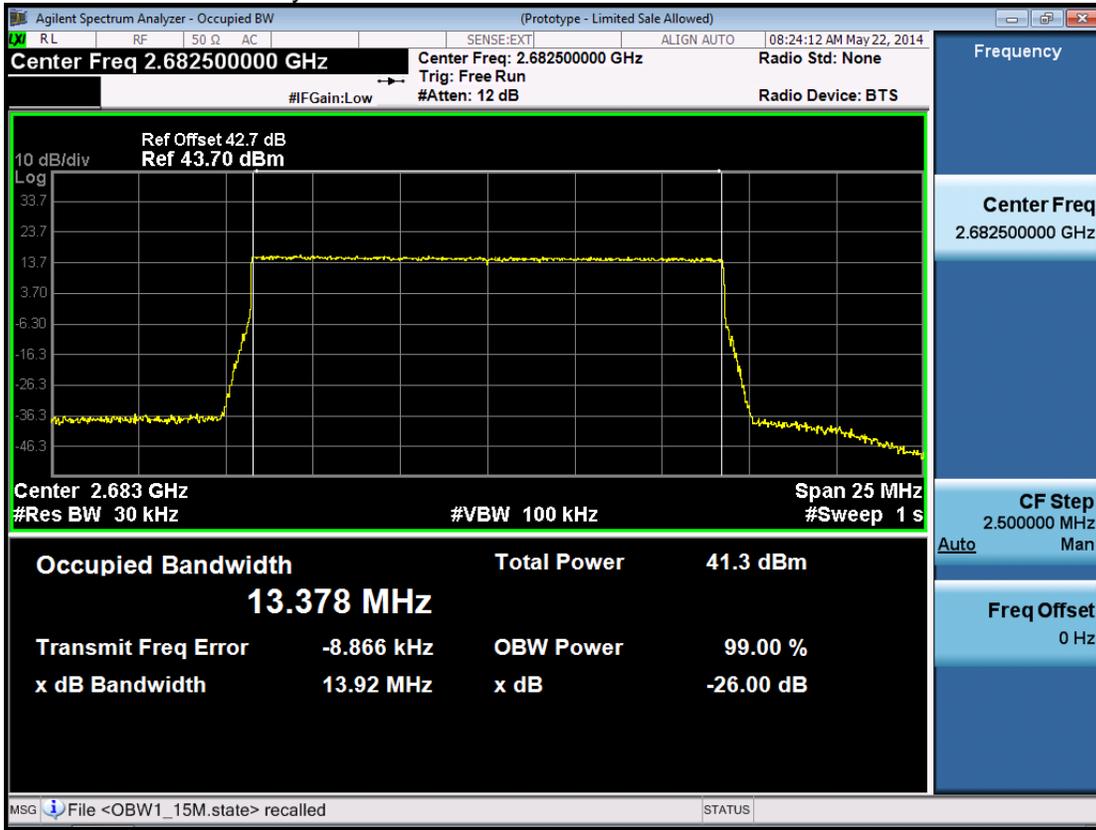


Channel Bandwidth :20M+20M

Port	Carry1 Center Freq. (MHz)	Carry1 99% Power Bandwidth (MHz)	Carry2 Center Freq. (MHz)	Carry2 99% Power Bandwidth (MHz)	Limit (MHz)
1	2630	17.835	2650	17.840	20M
	2645	17.842	2665	17.845	20M
	2660	17.840	2680	17.835	20M
2	2630	17.837	2650	17.843	20M
	2645	17.842	2665	17.842	20M
	2660	17.837	2680	17.837	20M


20M+20M -Port 1 –carry1-2630MHz

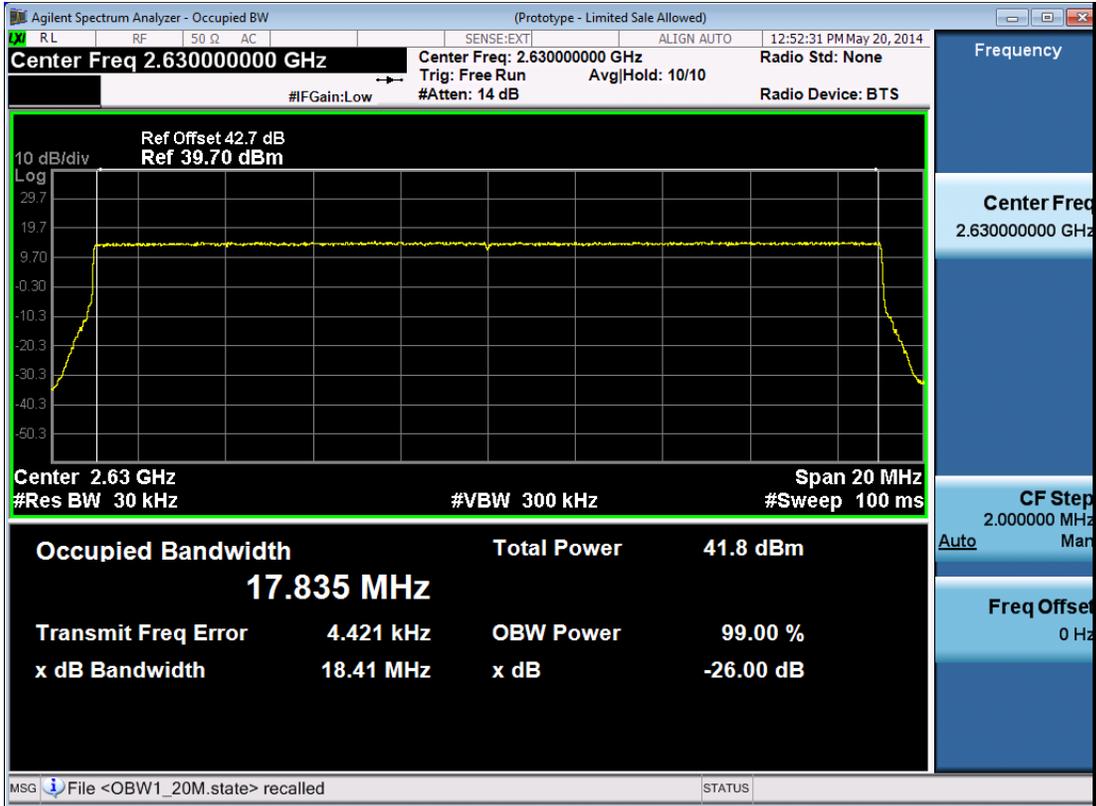


20M+20M -Port 1 -carry2-2650MHz

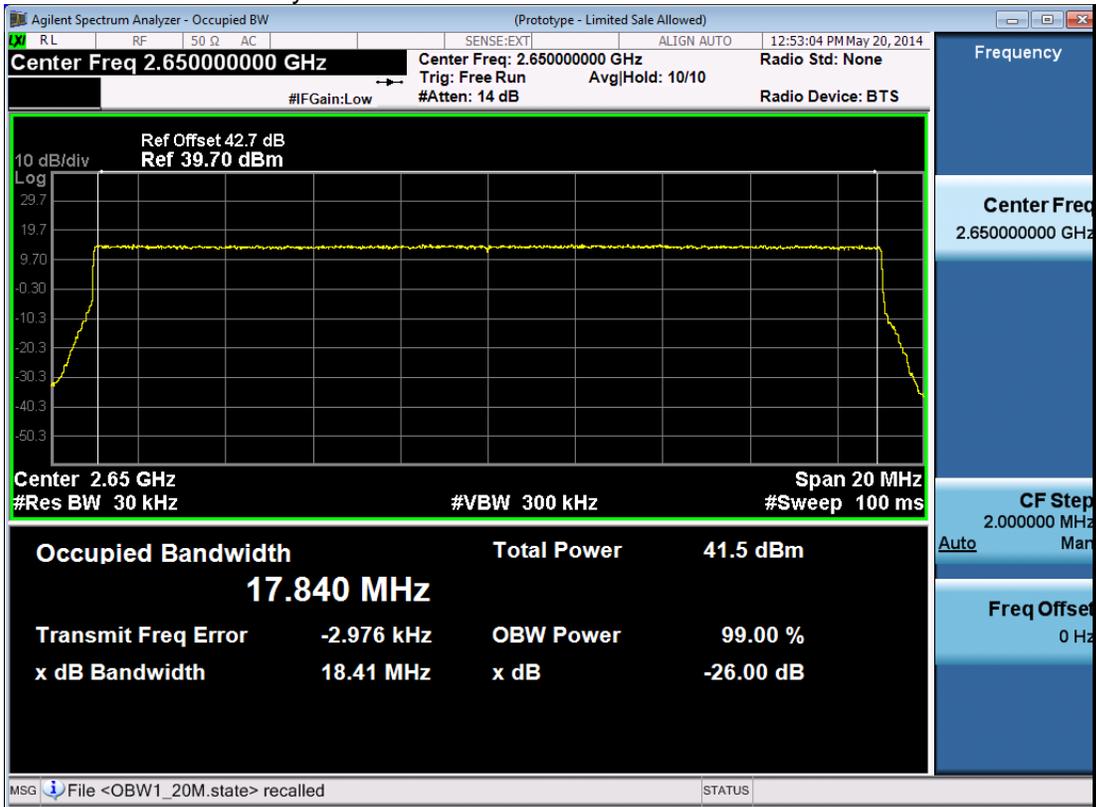


20M+20M -Port 1 -carry1-2645MHz

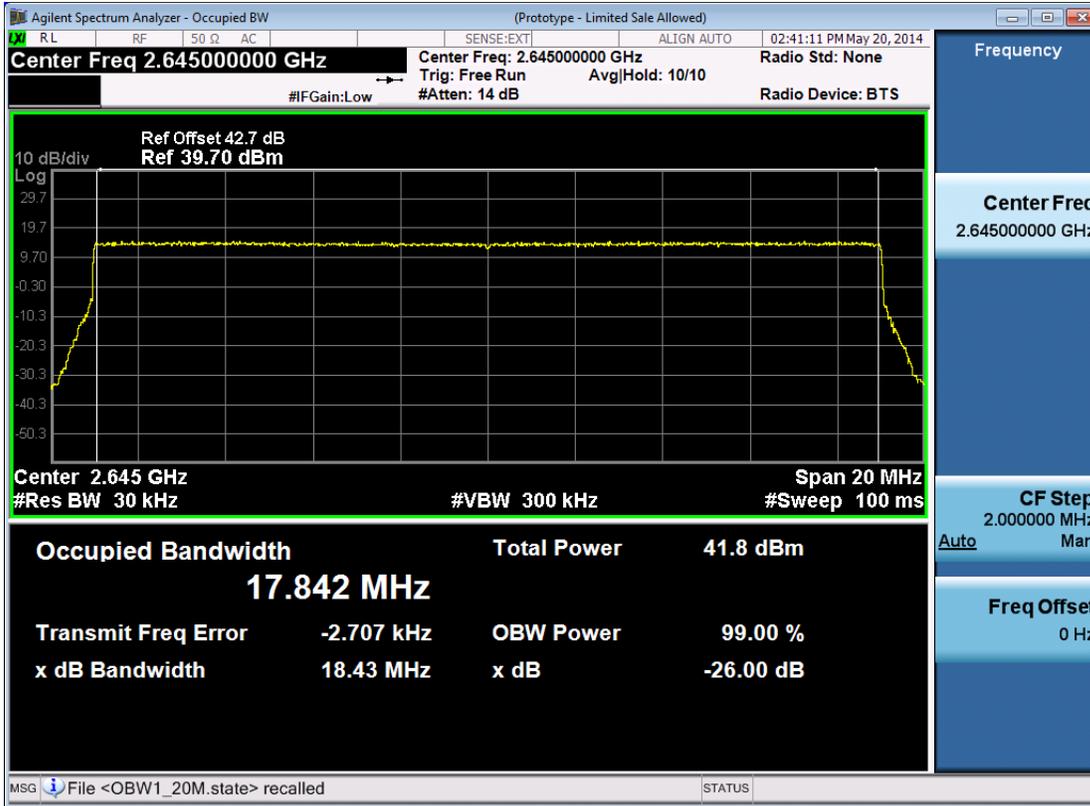


20M+20M -Port 1 –carry2-2665MHz

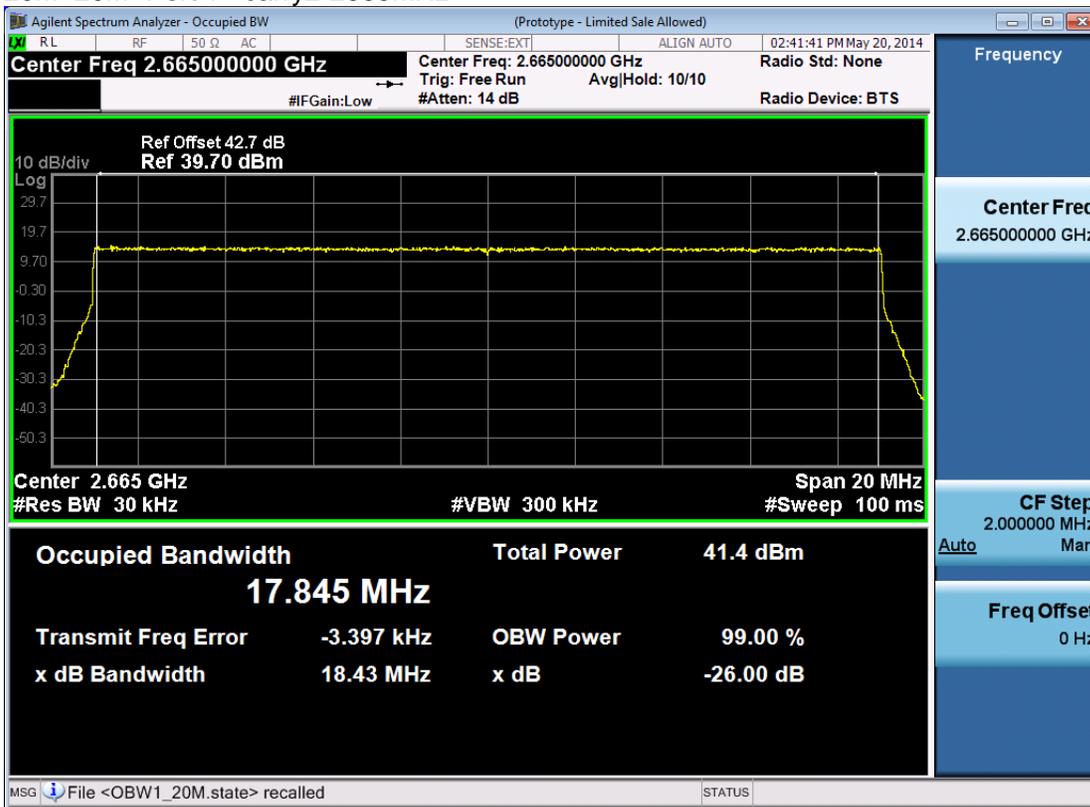


20M+20M -Port 1 –carry1-2660MHz

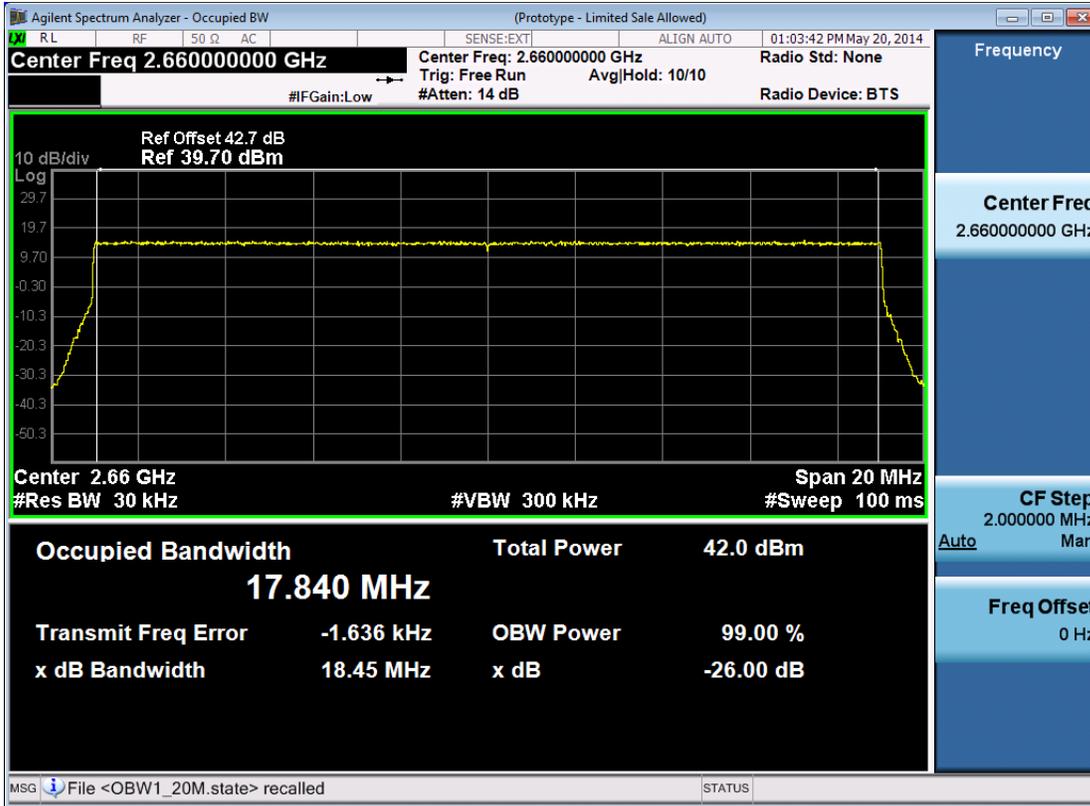


20M+20M -Port 1 -carry2-2680MHz

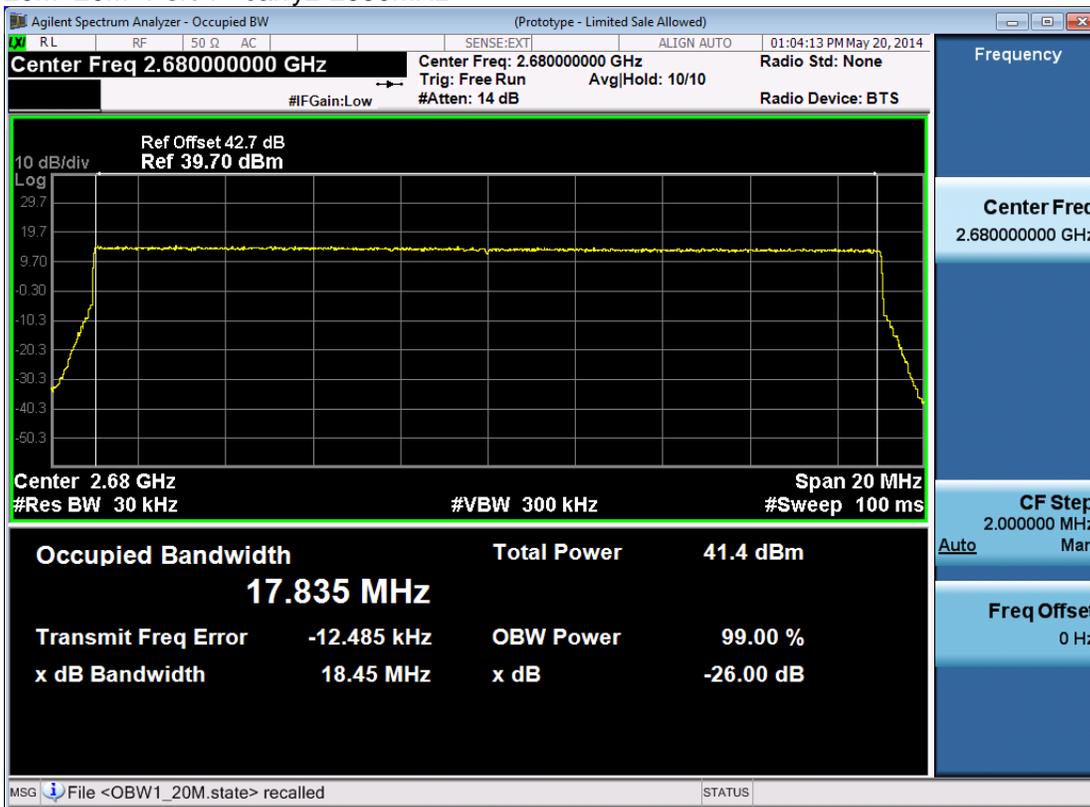


20M+20M -Port 2 -carry1-2630MHz

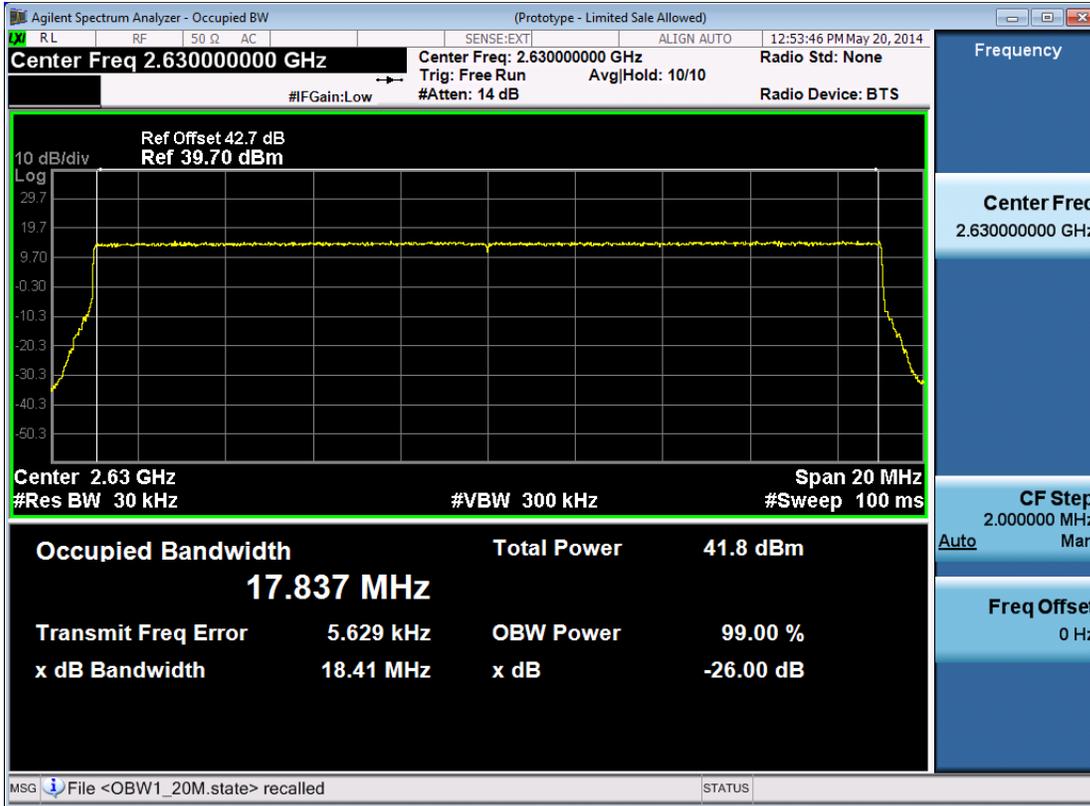


20M+20M -Port 2 -carry2-2650MHz

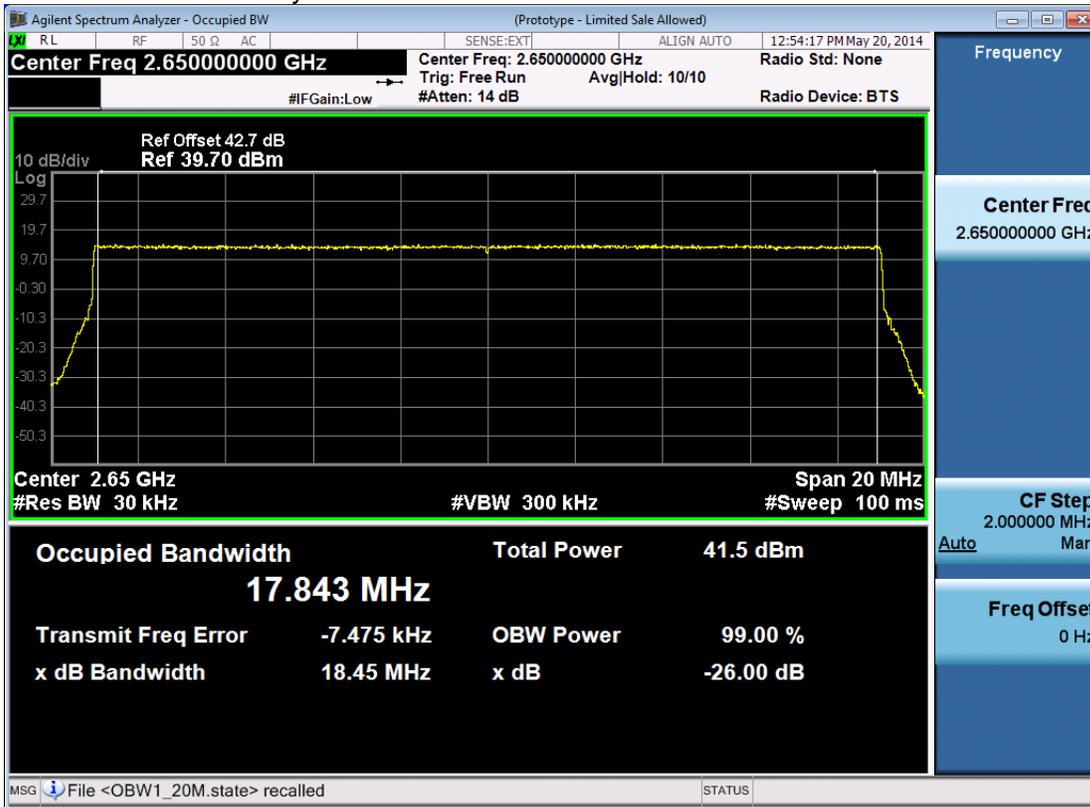


20M+20M -Port 2 -carry1-2645MHz

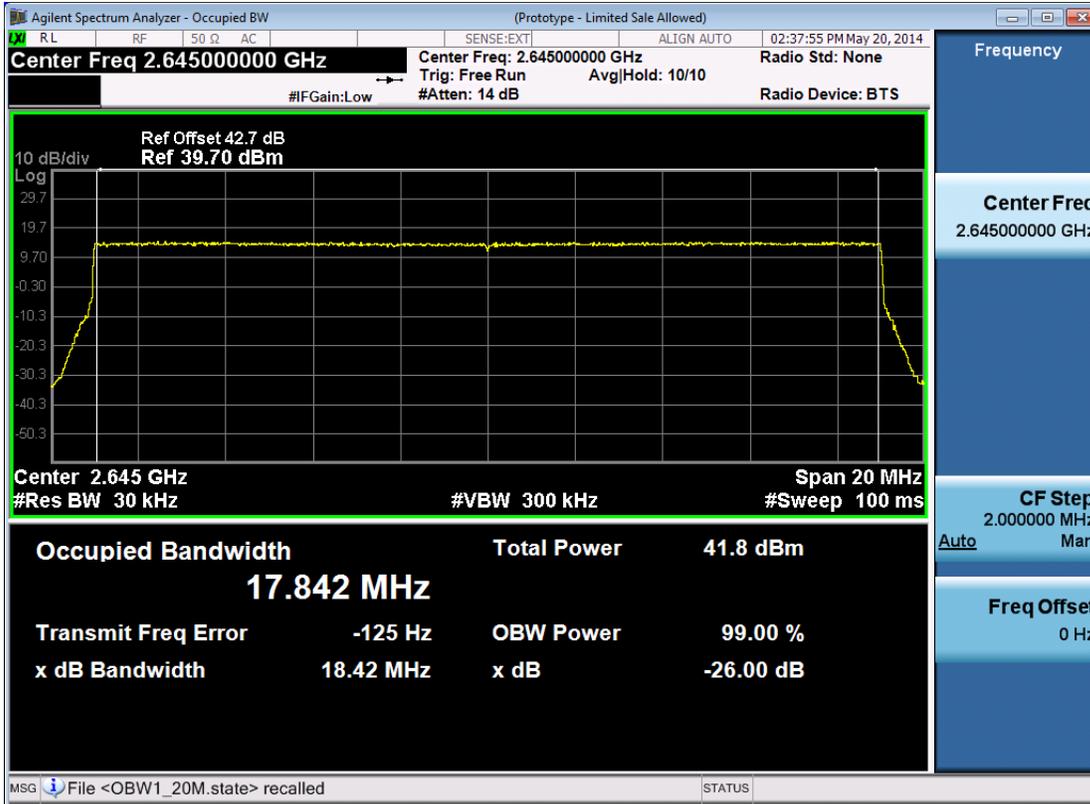


20M+20M -Port 2 -carry2-2665MHz

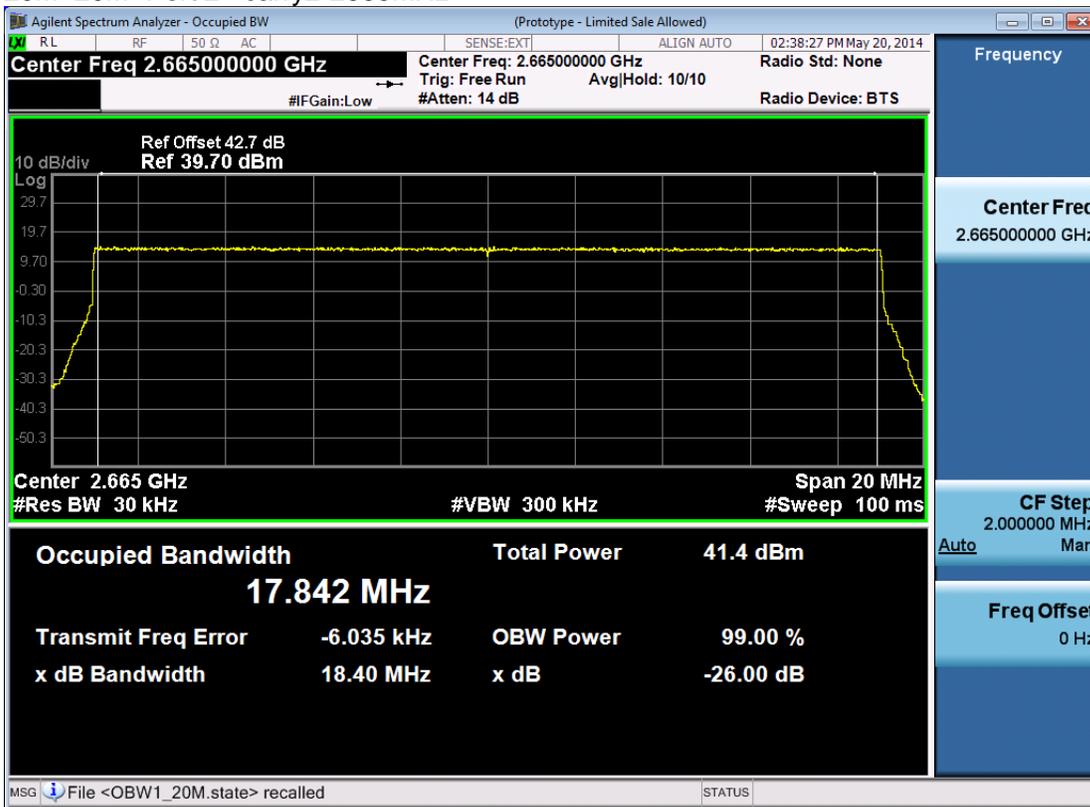

20M+20M -Port 2 -carry1-2660MHz

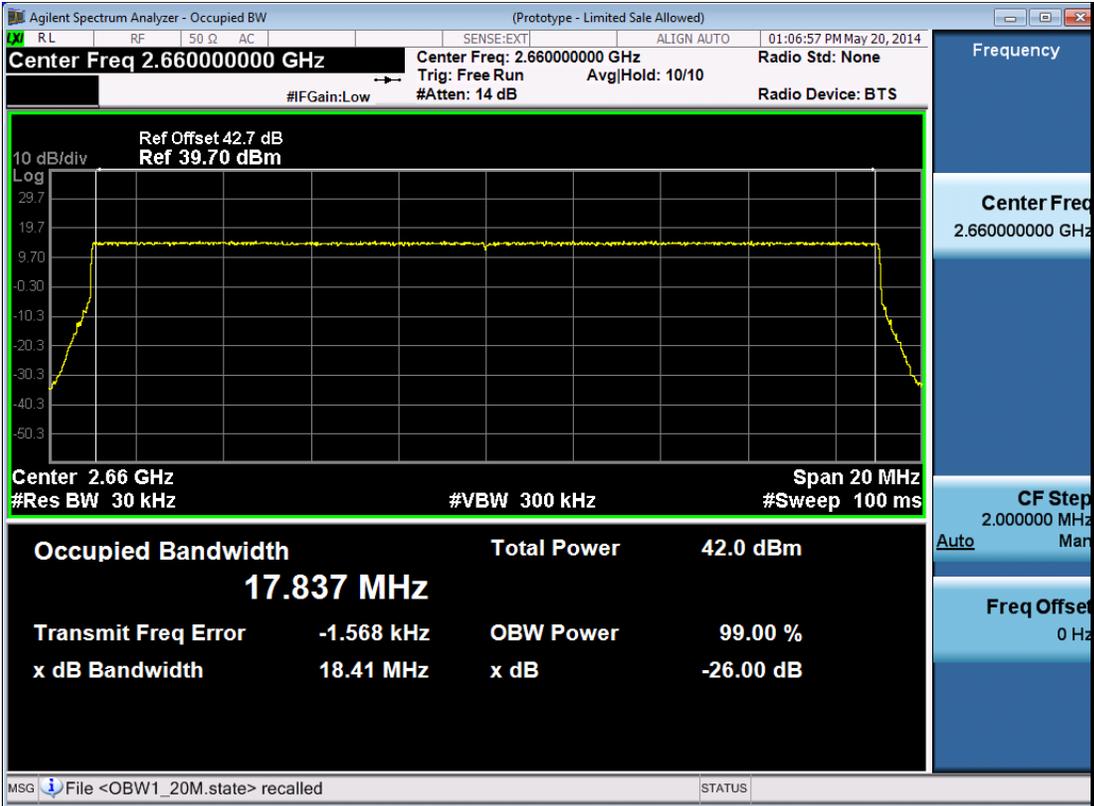

20M+20M -Port 2 -carry2-2680MHz

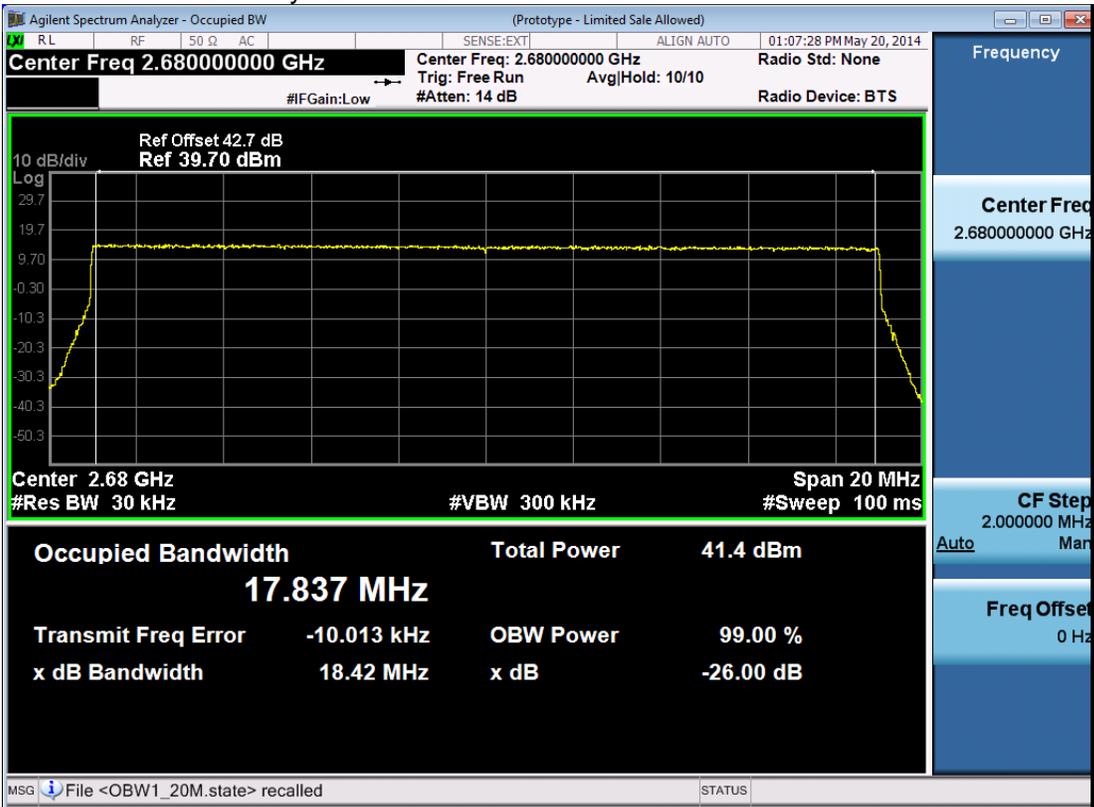

11 BAND EDGES

Applicable Standard: FCC §2.1051, §27.53

According to §2.1051, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (p) by a factor of at least $43 + 10 \log(p)$ dB. The limit (dBm) should $< P - (43 + 10 \log(P)) = -13 \text{dBm}$.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9030A	MY49431143	2013.06.18	2014.06.18
DTS	DTS 40dB Attenuator	DTS100-40-3-1	09112005	2013.07.19	2014.07.19

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

Test Data Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53%
ATM Pressure:	1009mbar

Test Result: Pass

Test Mode: Transmitting LTE


Test Data

Single Carrier:


Channel Bandwidth :5M

Port	Center Freq. (MHz)	Max bandedge Emission (dBm)	Limit (dBm)
1	2622.5	-19.65	-13
	2655	-24.81	-13
	2687.5	-24.70	-13
2	2622.5	-23.16	-13
	2655	-24.80	-13
	2687.5	-25.04	-13


5M -Port 1 -2622.5MHz

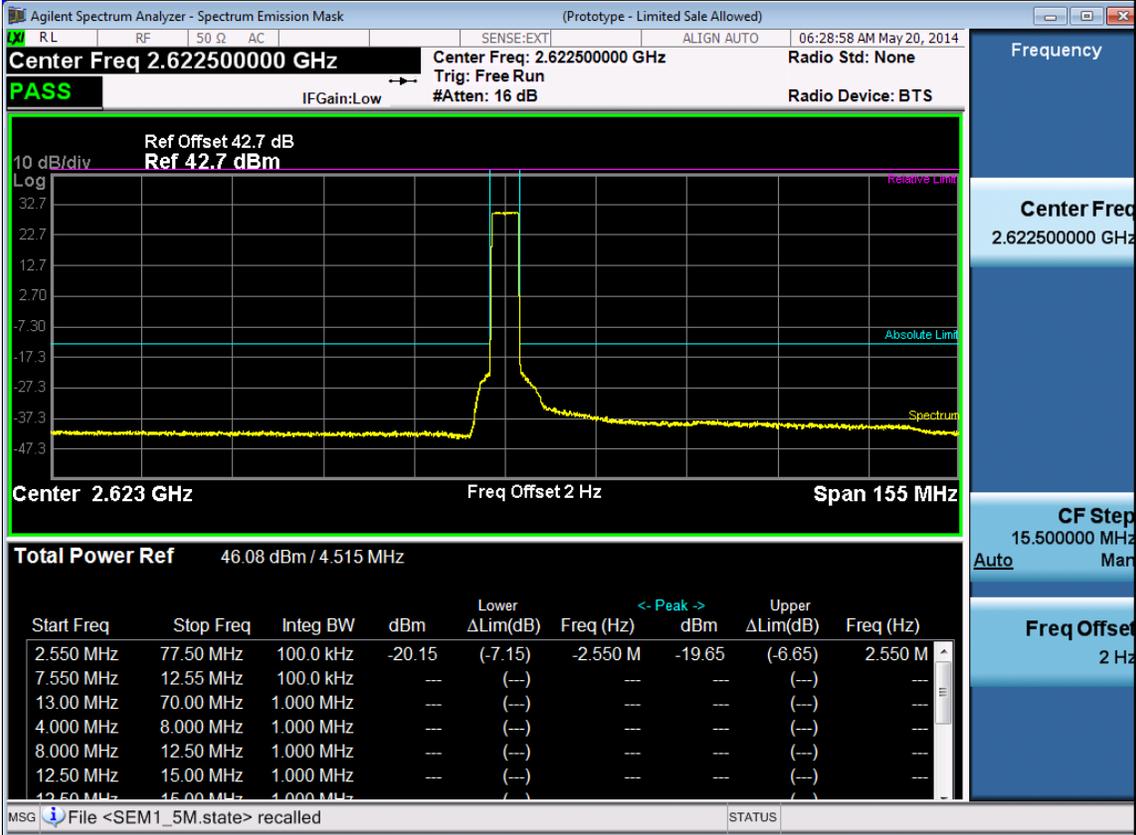


5M -Port 1 -2655MHz

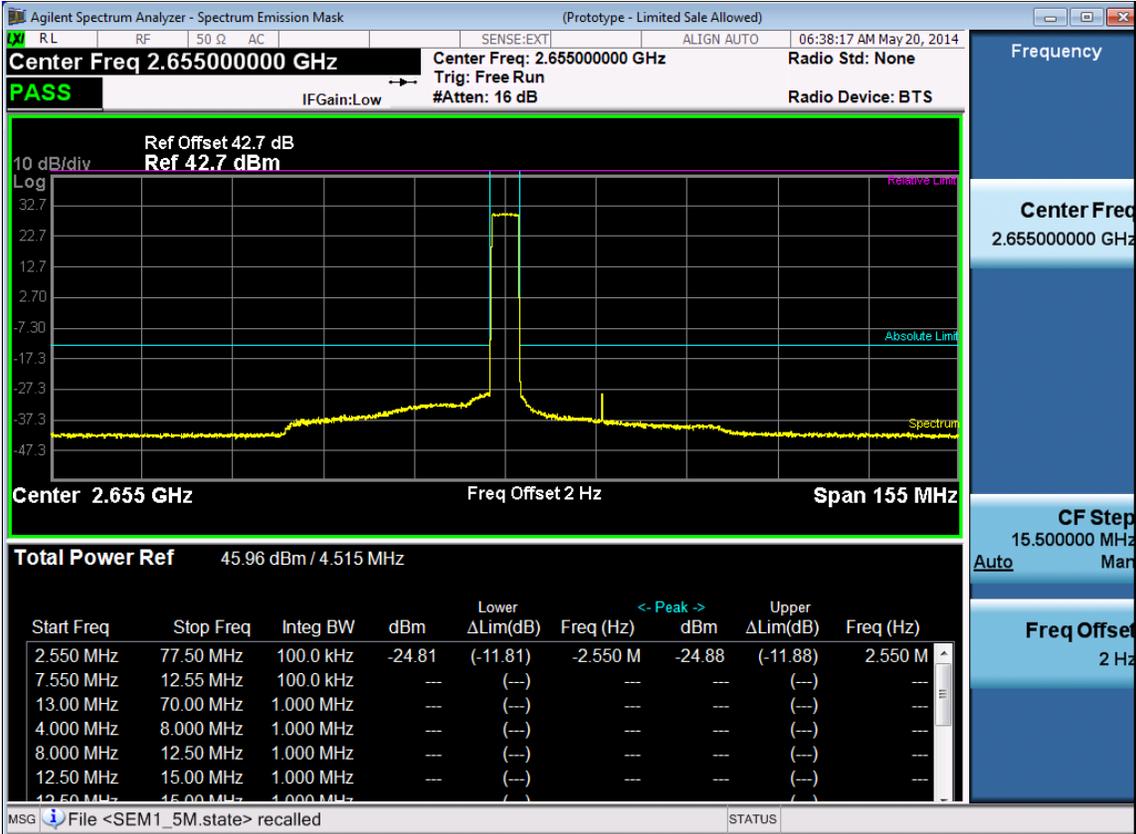


5M -Port 1 -2687.5MHz

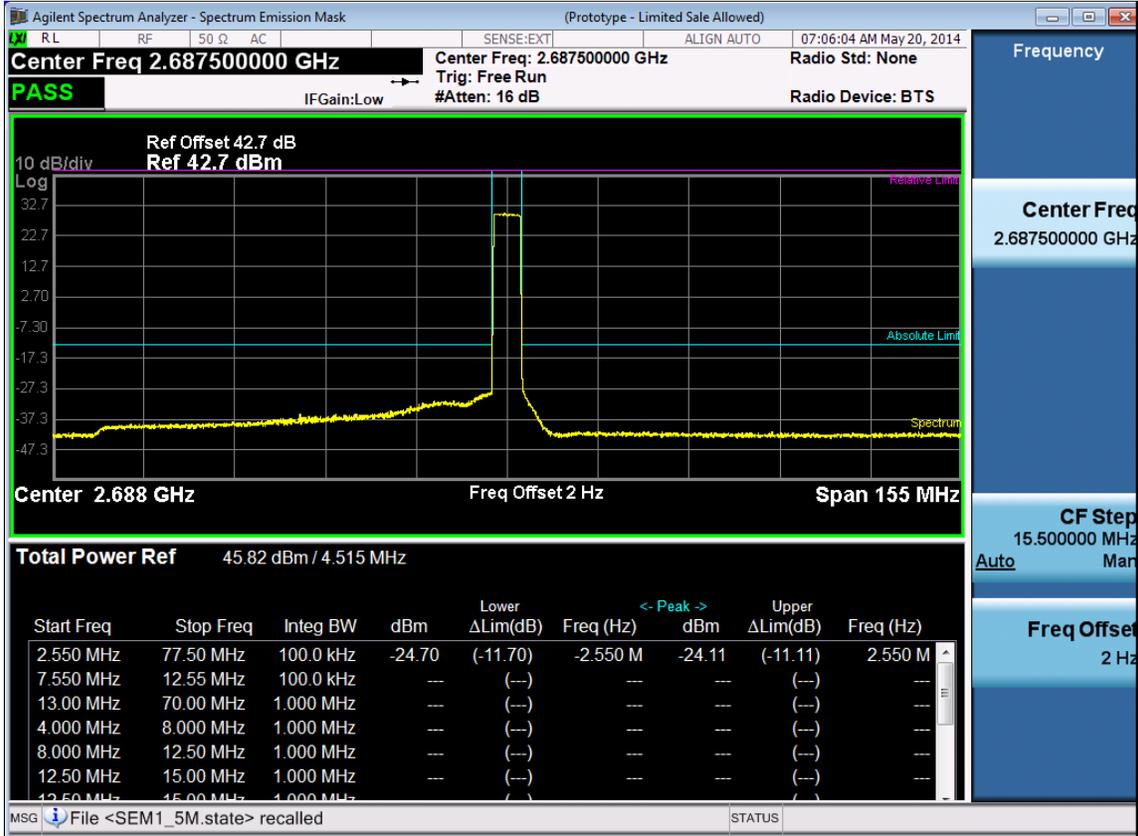


5M -Port 2 -2622.5MHz

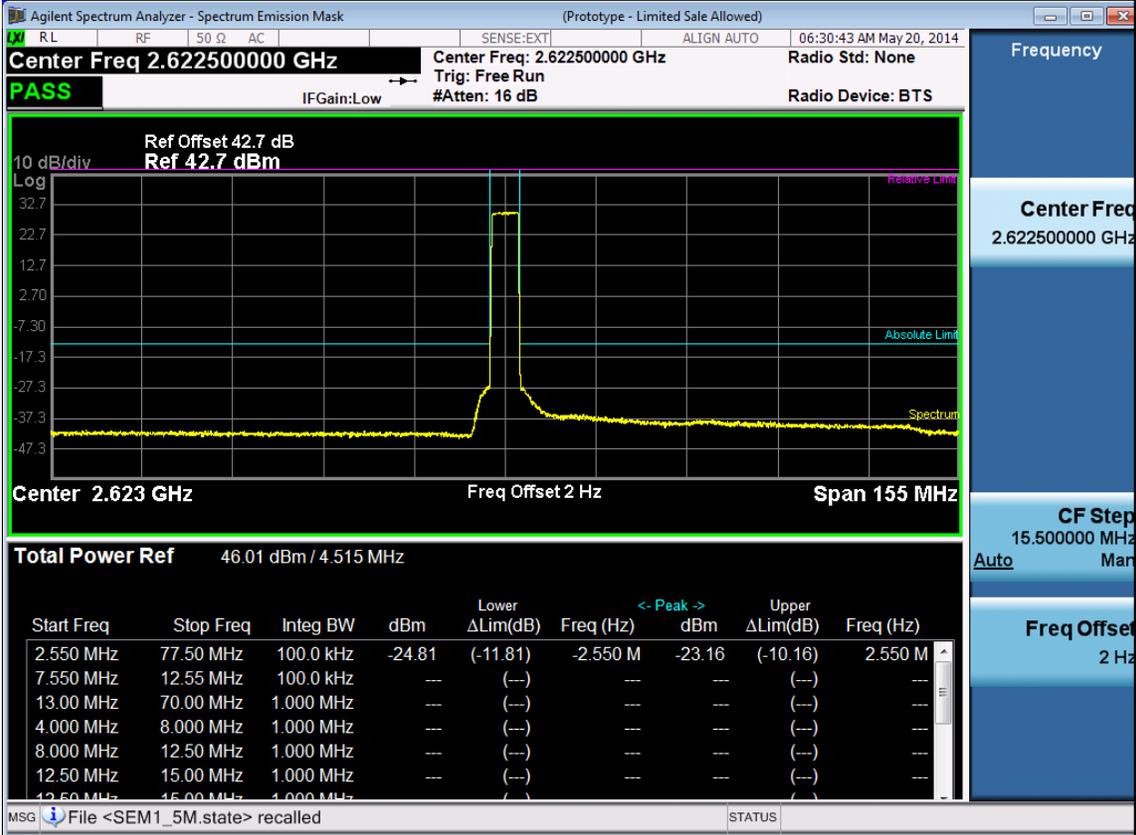

5M -Port 2 -2655MHz

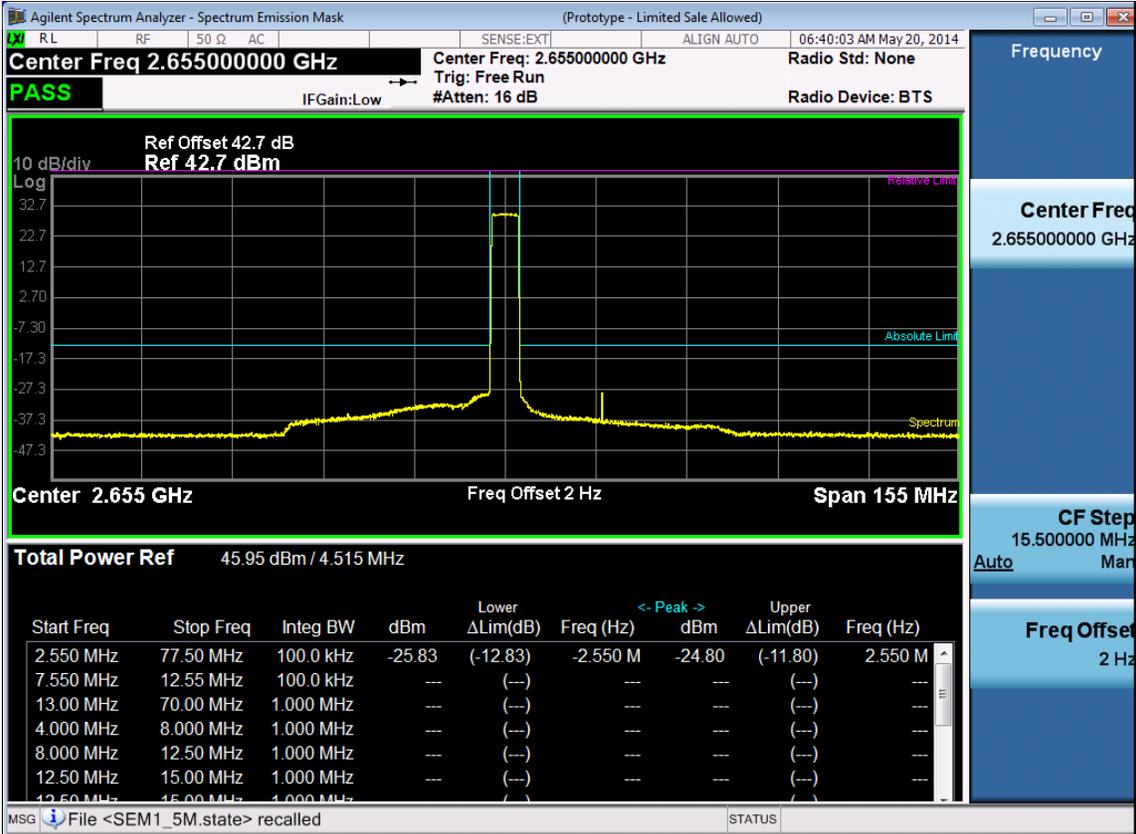


5M -Port 2 -2687.5MHz

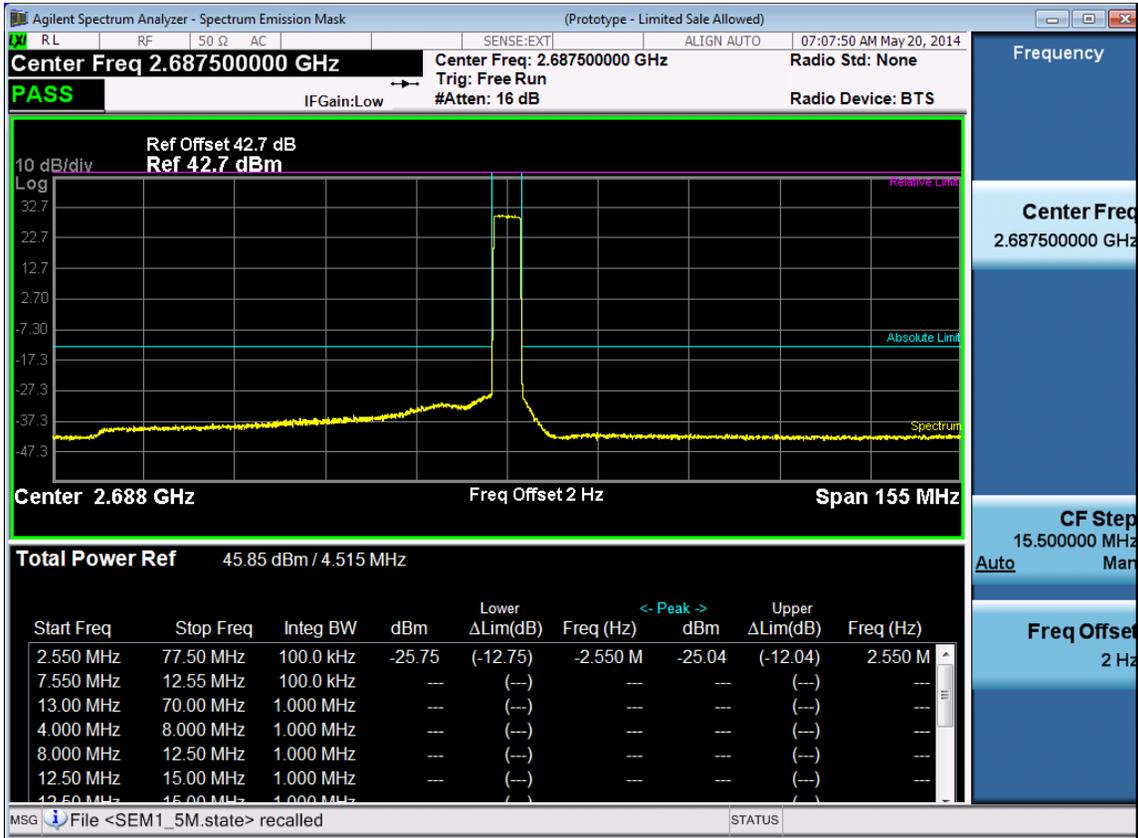


Channel Bandwidth :10M

Port	Center Freq. (MHz)	Max bandedge Emission (dBm)	Limit (dBm)
1	2625	-19.96	-13
	2655	-22.16	-13
	2685	-22.55	-13
2	2625	-22.15	-13
	2655	-22.69	-13
	2685	-21.84	-13


10M -Port 1 -2625MHz

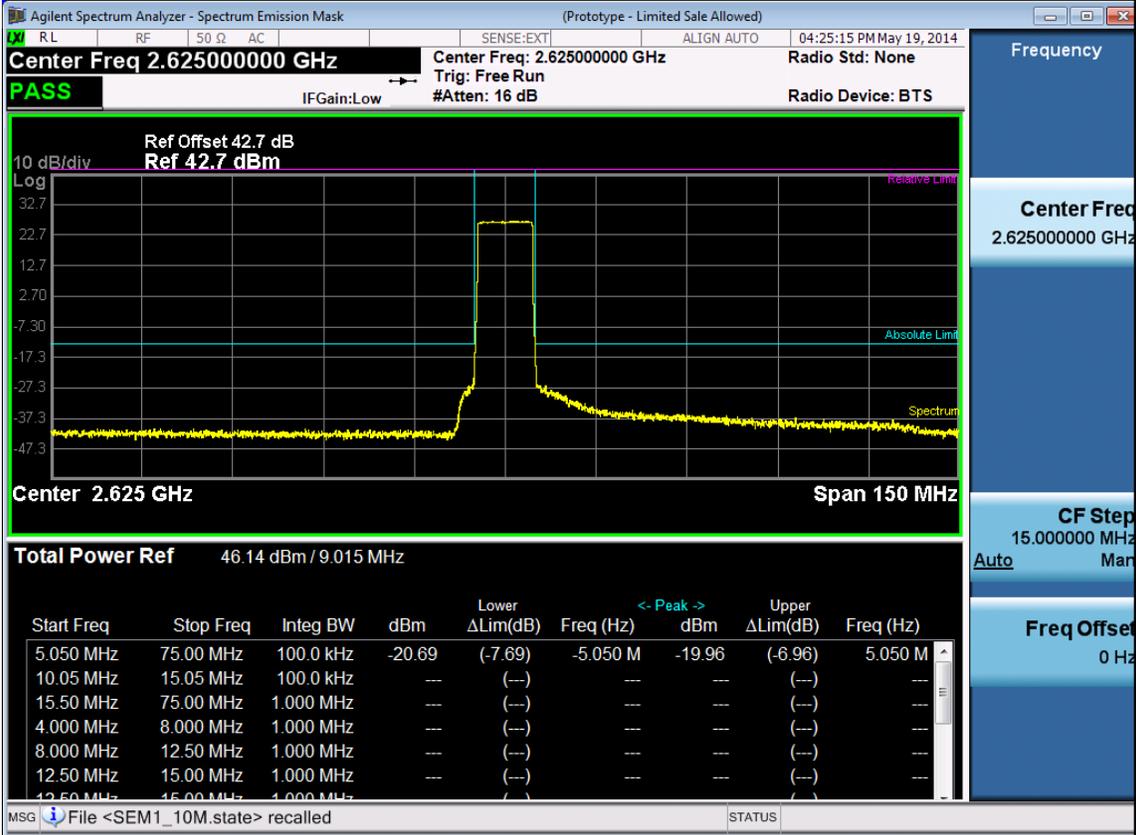


10M -Port 1 -2655MHz

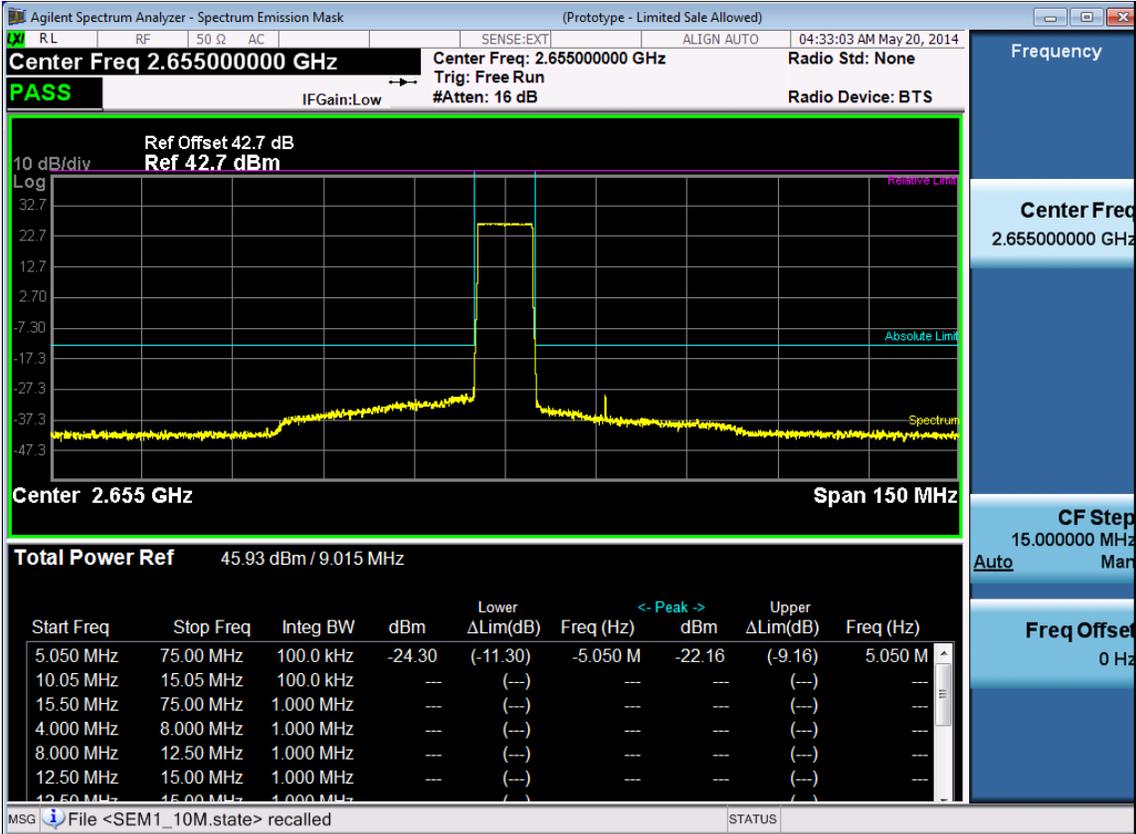


10M -Port 1 -2685MHz

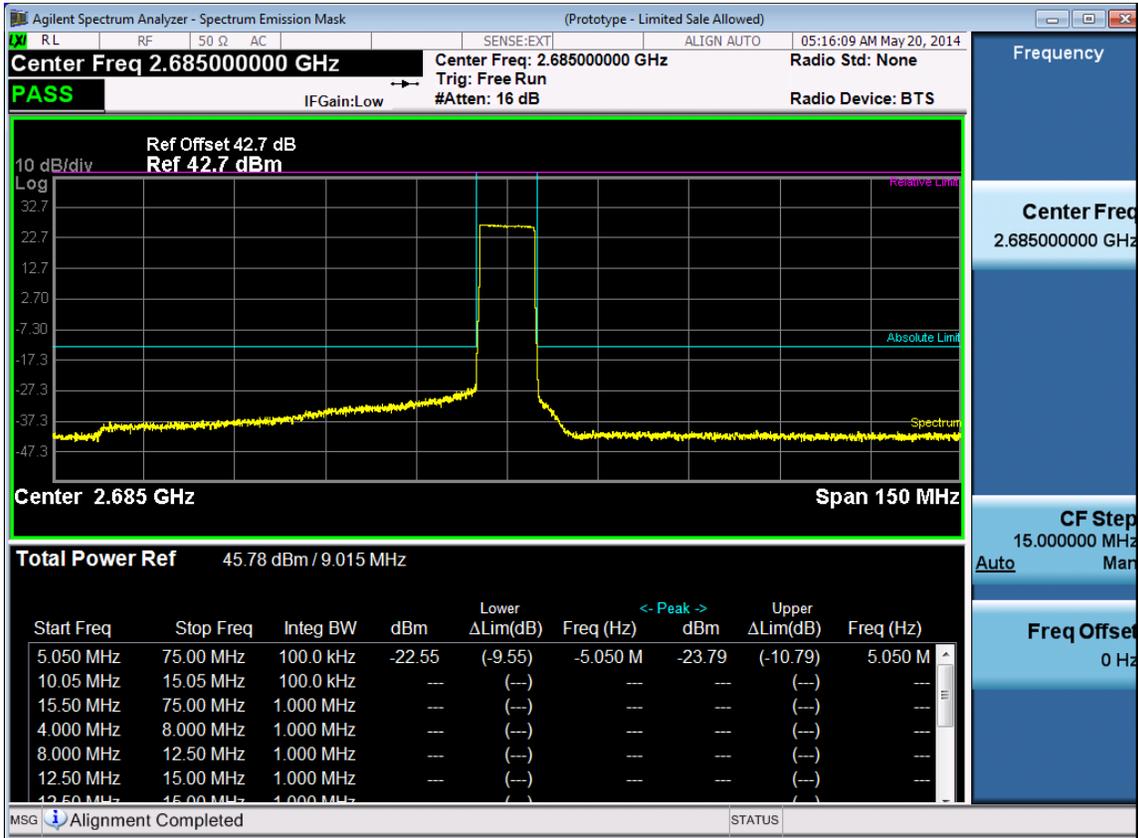

10M -Port 2 -2625MHz

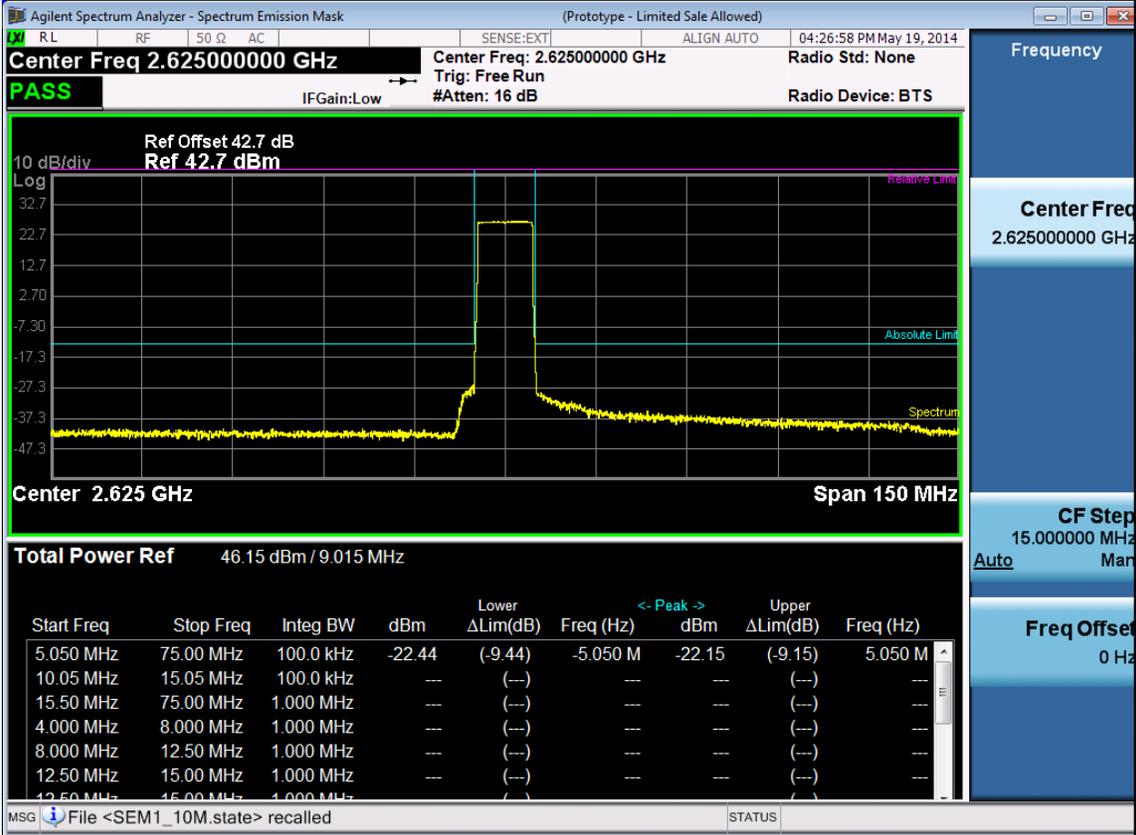

10M -Port 2 -2655MHz

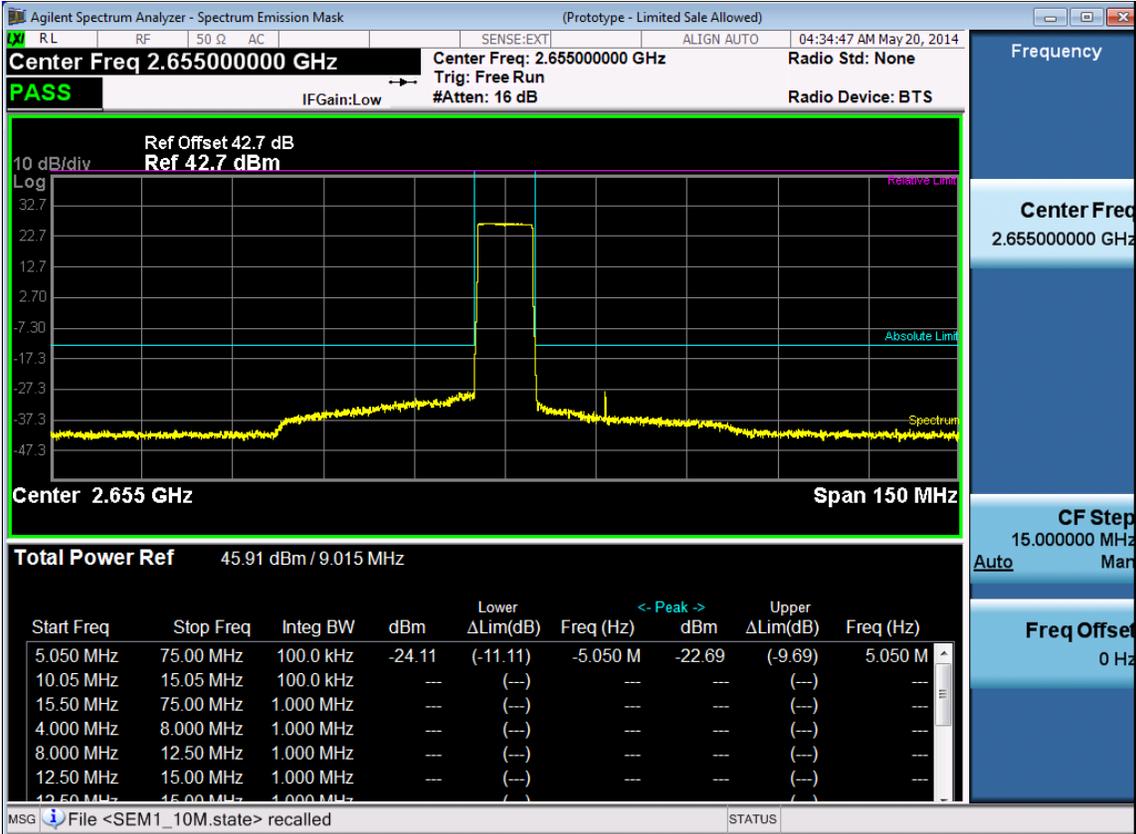


10M -Port 2 -2685MHz




Channel Bandwidth :15M

Port	Center Freq. (MHz)	Max bandedge Emission (dBm)	Limit (dBm)
1	2627.5	-25.09	-13
	2655	-24.57	-13
	2682.5	-23.82	-13
2	2627.5	-25.41	-13
	2655	-25.45	-13
	2682.5	-22.94	-13


15M -Port 1 -2627.5MHz

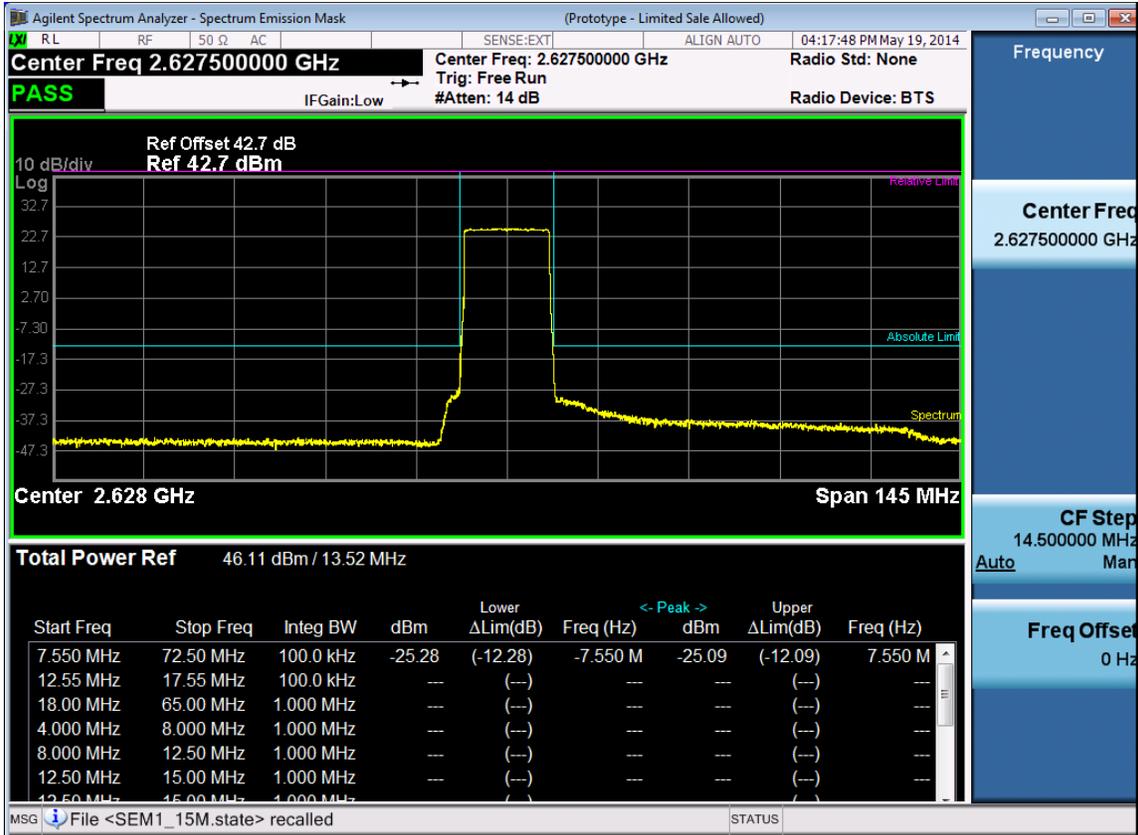


15M -Port 1 -2655MHz

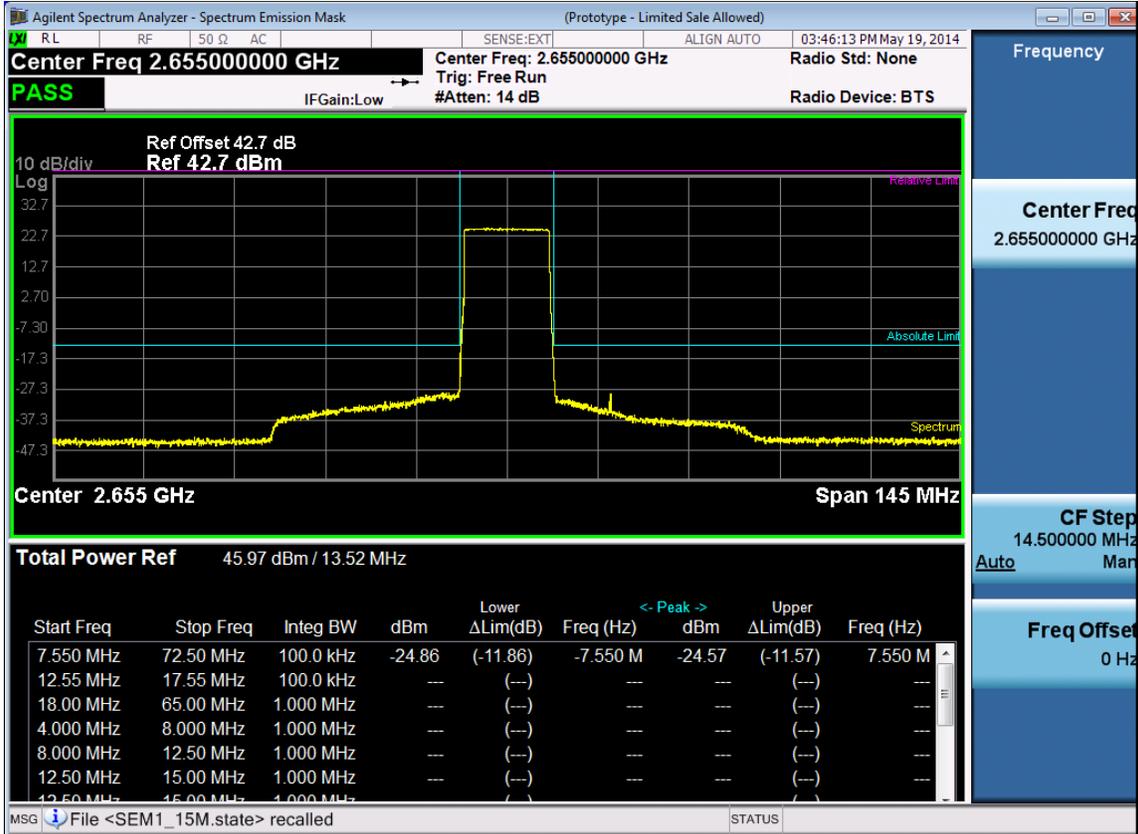


15M -Port 1 -2682.5MHz

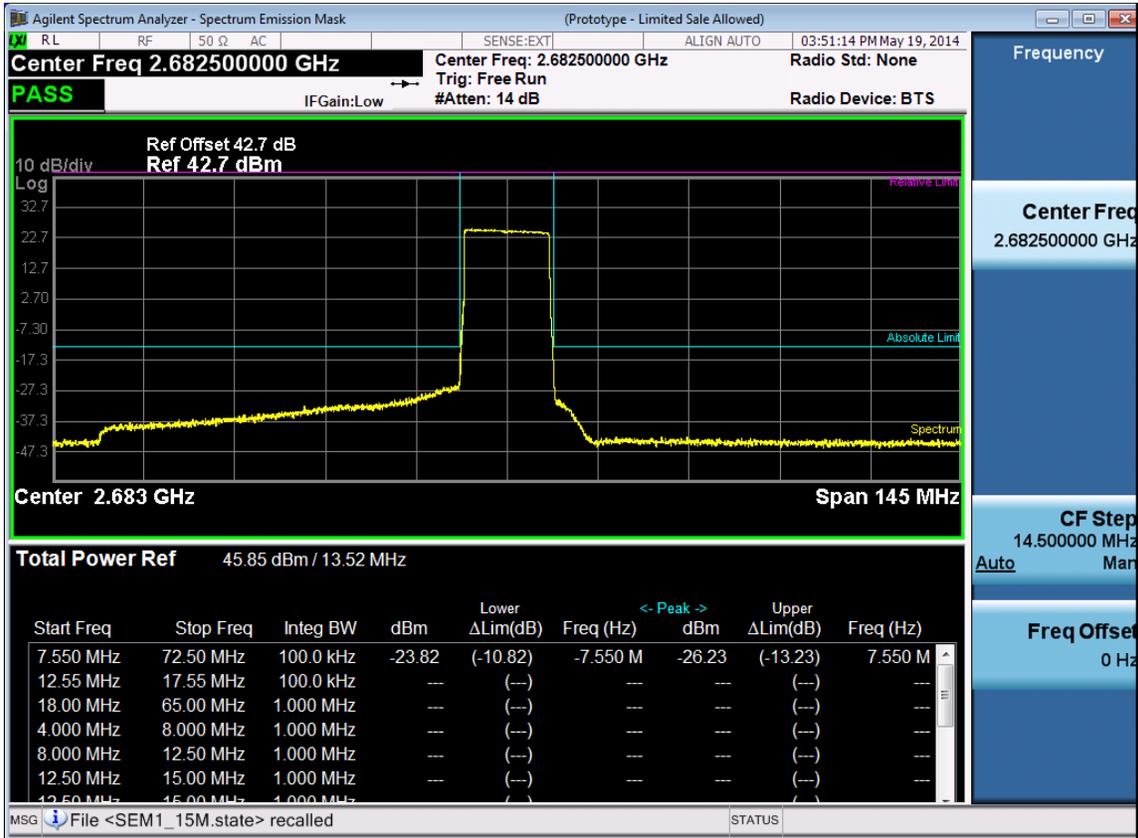


15M -Port 2 -2627.5MHz

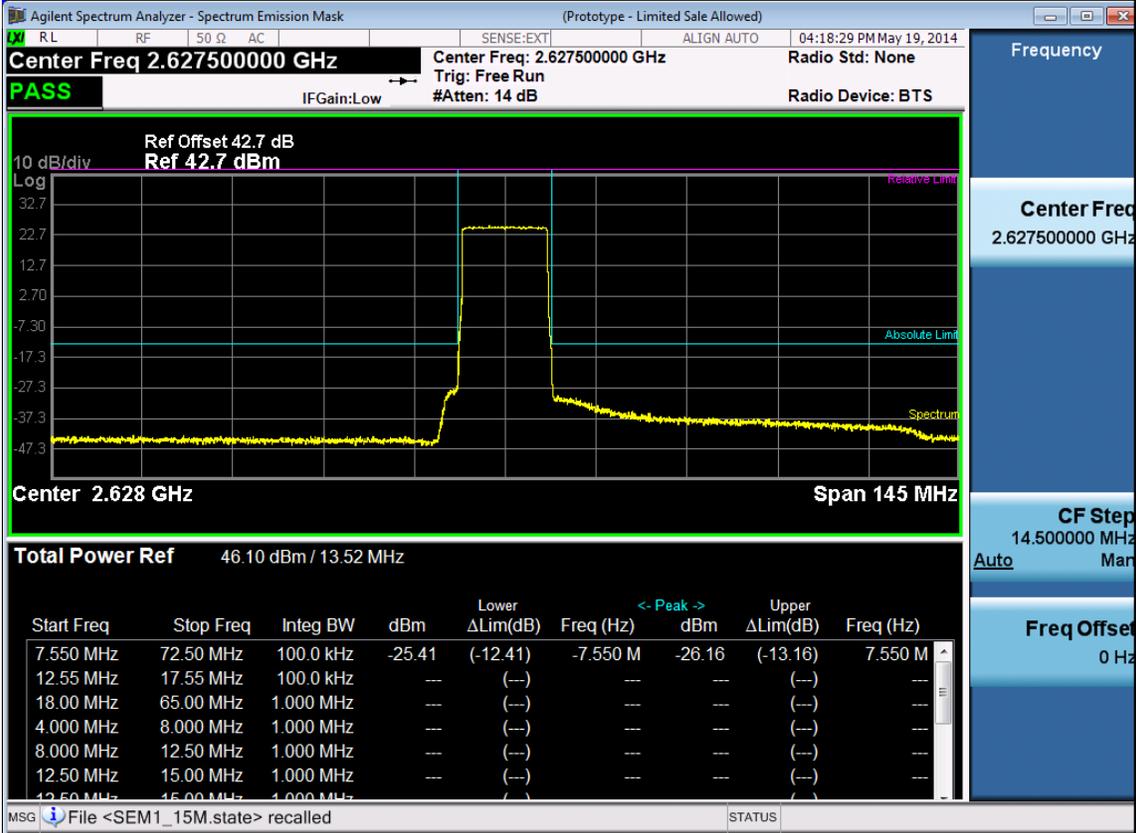

15M -Port 2 -2655MHz

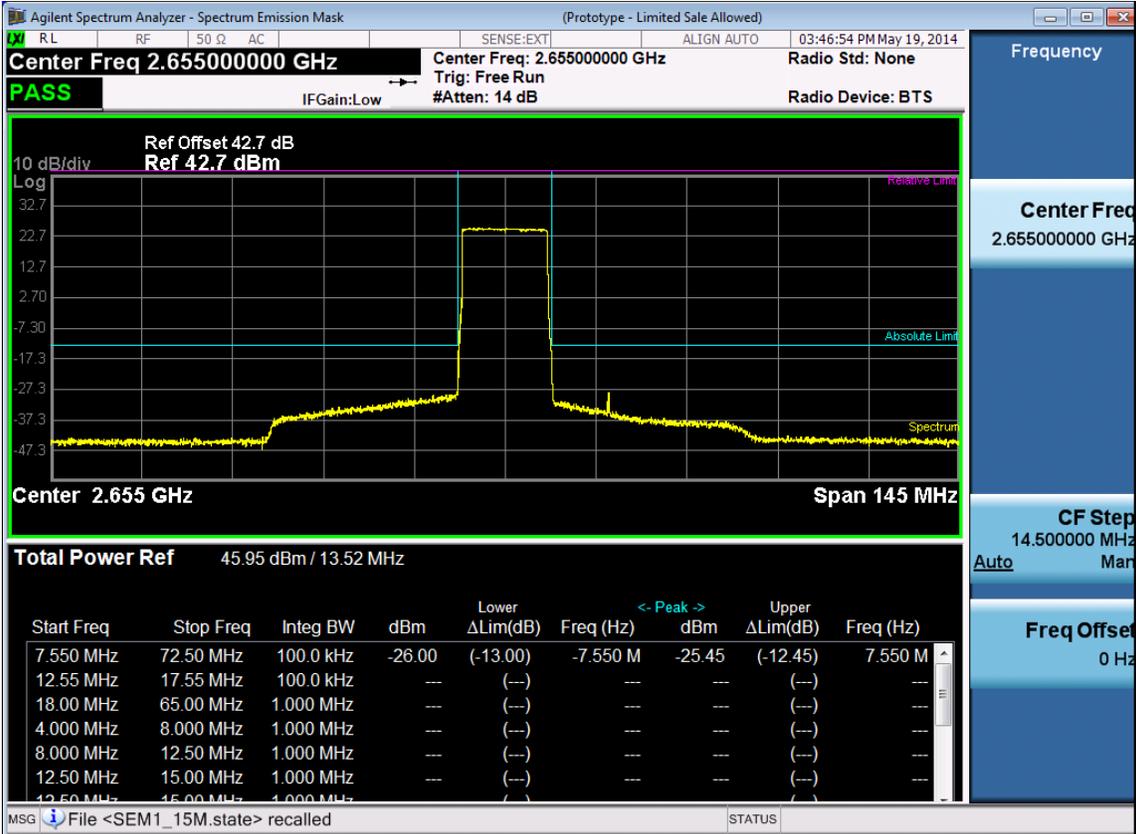


15M -Port 2 -2682.5MHz

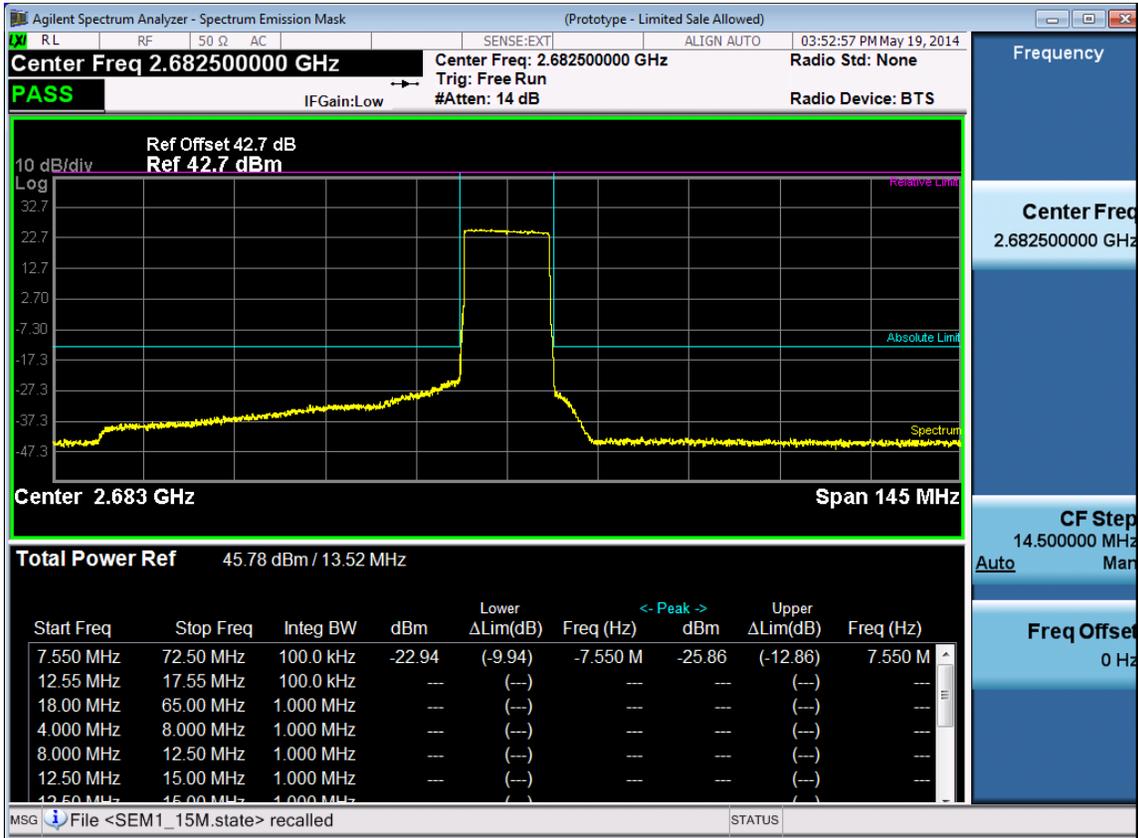

Channel Bandwidth :20M

Port	Center Freq. (MHz)	Max bandedge Emission (dBm)	Limit (dBm)
1	2630	-28.72	-13
	2655	-26.84	-13
	2680	-26.56	-13
2	2630	-28.07	-13
	2655	-27.74	-13
	2680	-26.50	-13


20M -Port 1 -2630MHz

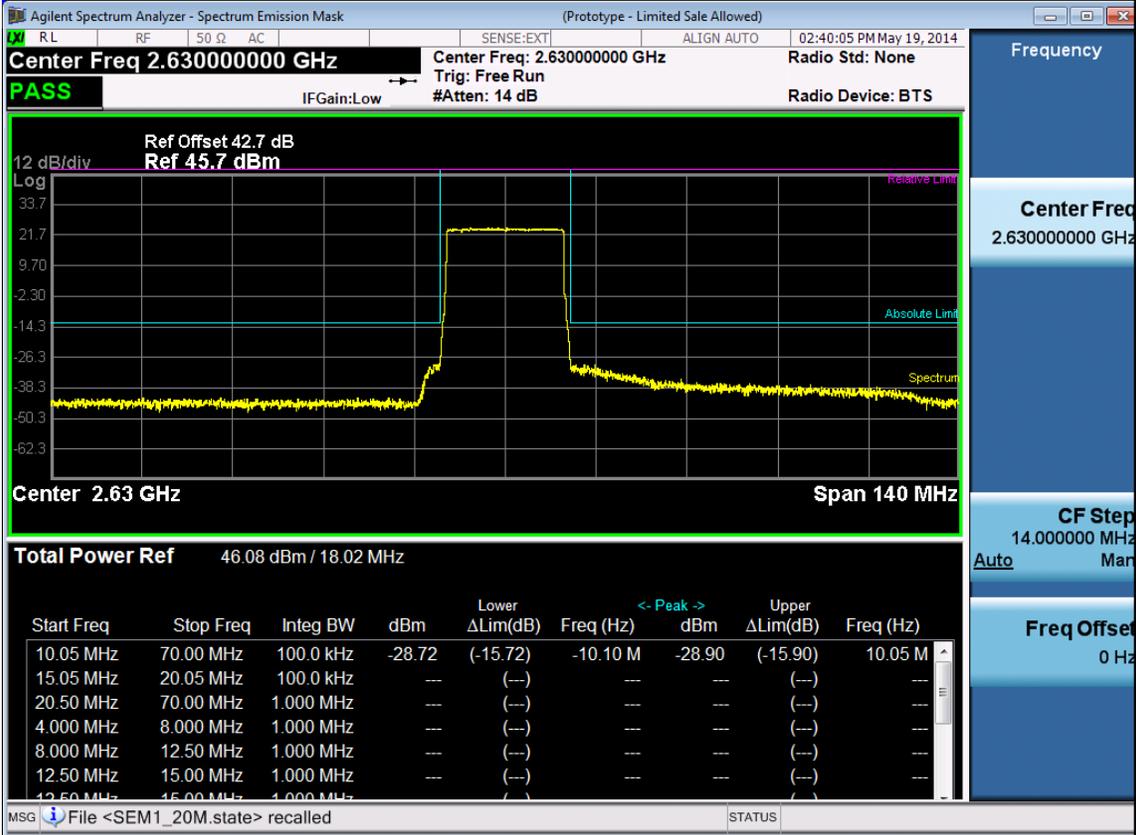


20M -Port 1 -2655MHz




20M -Port 1 -2680MHz

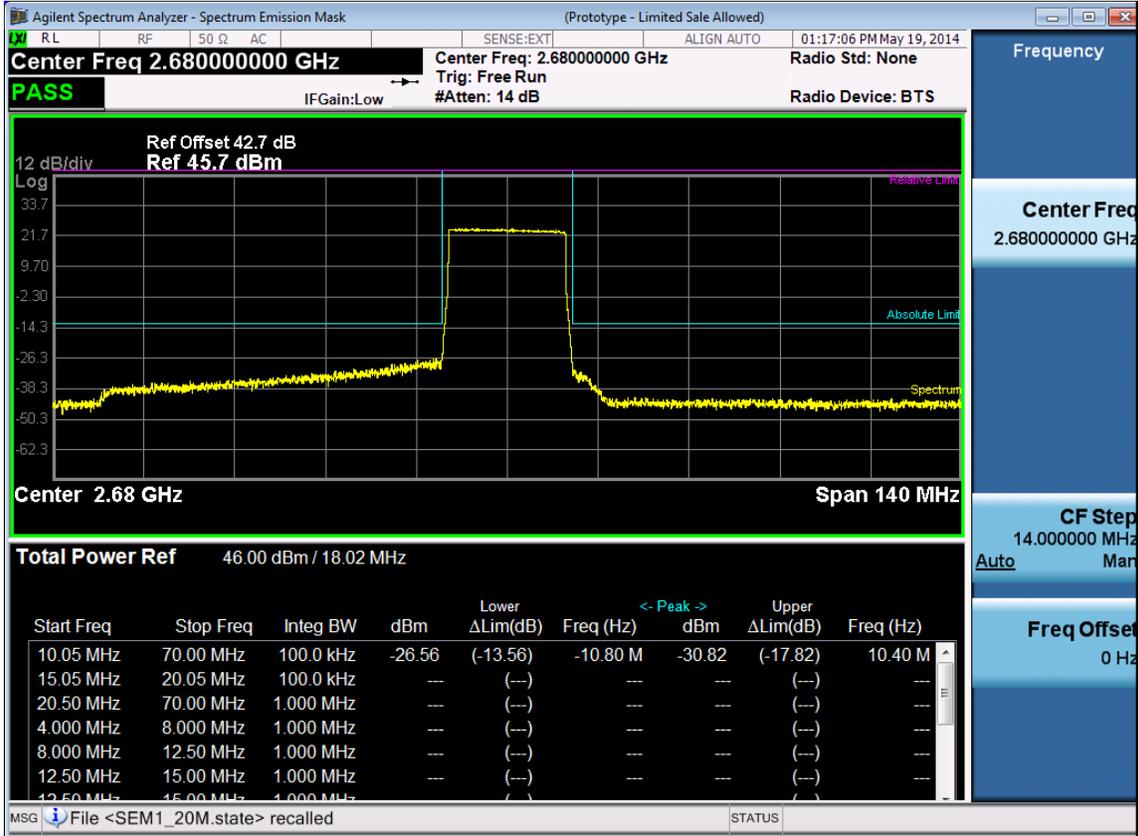


20M -Port 2 -2630MHz

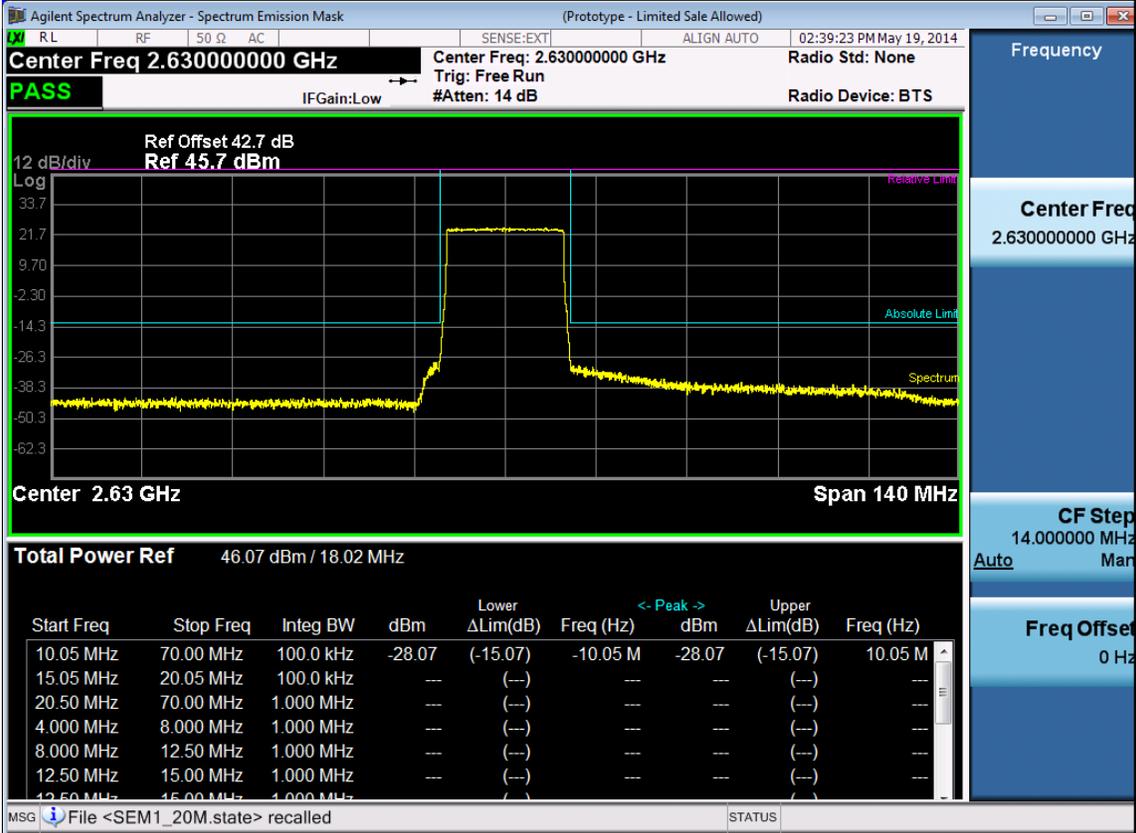

20M -Port 2 -2655MHz

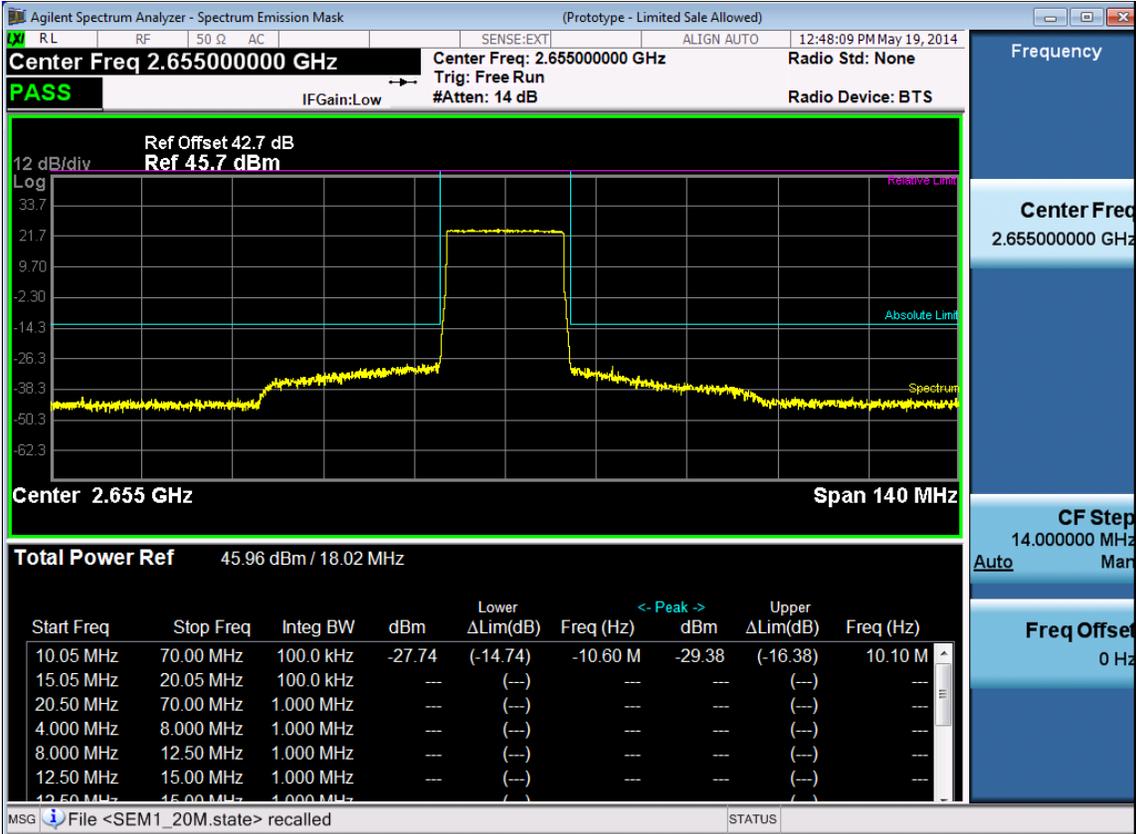

20M -Port 2 -2680MHz

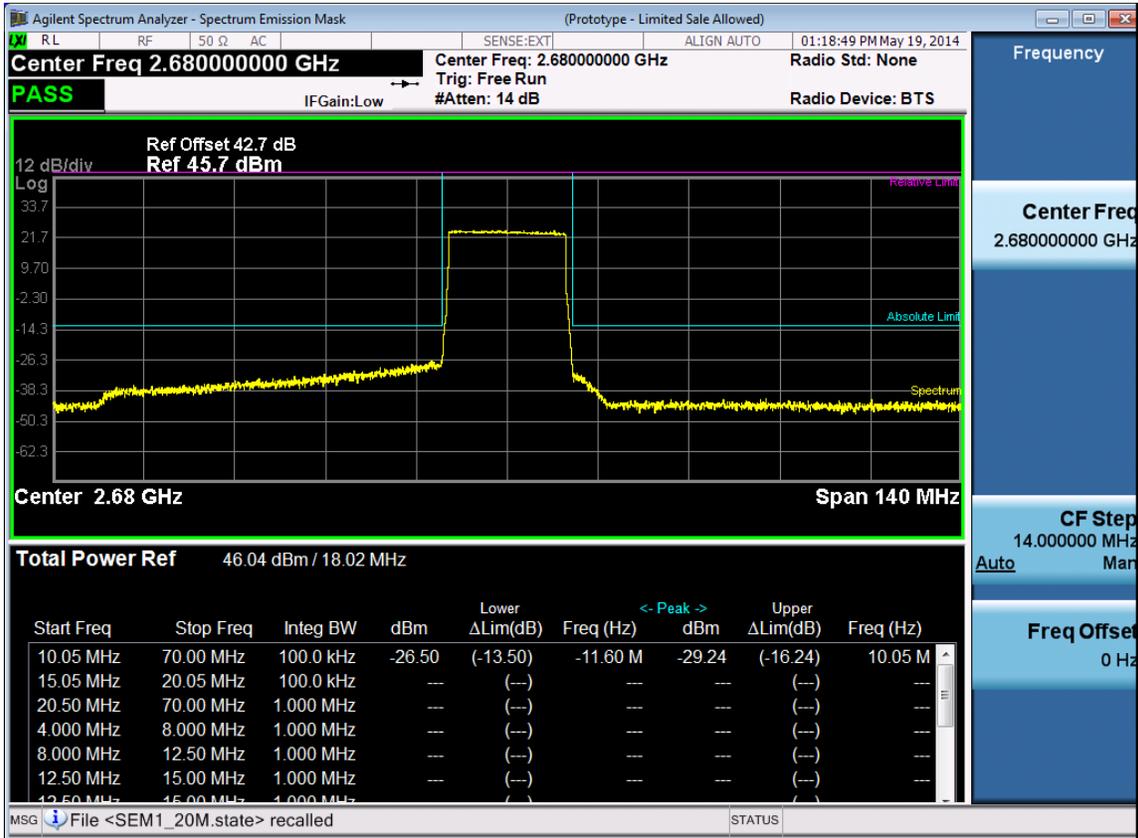


Double Carrier:


Channel Bandwidth :10M+10M

Port	RF Carrier Center Frequency. (MHz)	Max bandedge Emission (dBm)	Limit (dBm)
1	2640	-25.92	-13
	2655	-25.45	-13
	2670	-25.28	-13
2	2640	-26.81	-13
	2655	-26.26	-13
	2670	-25.76	-13


10M+10M -Port 1 -2640MHz

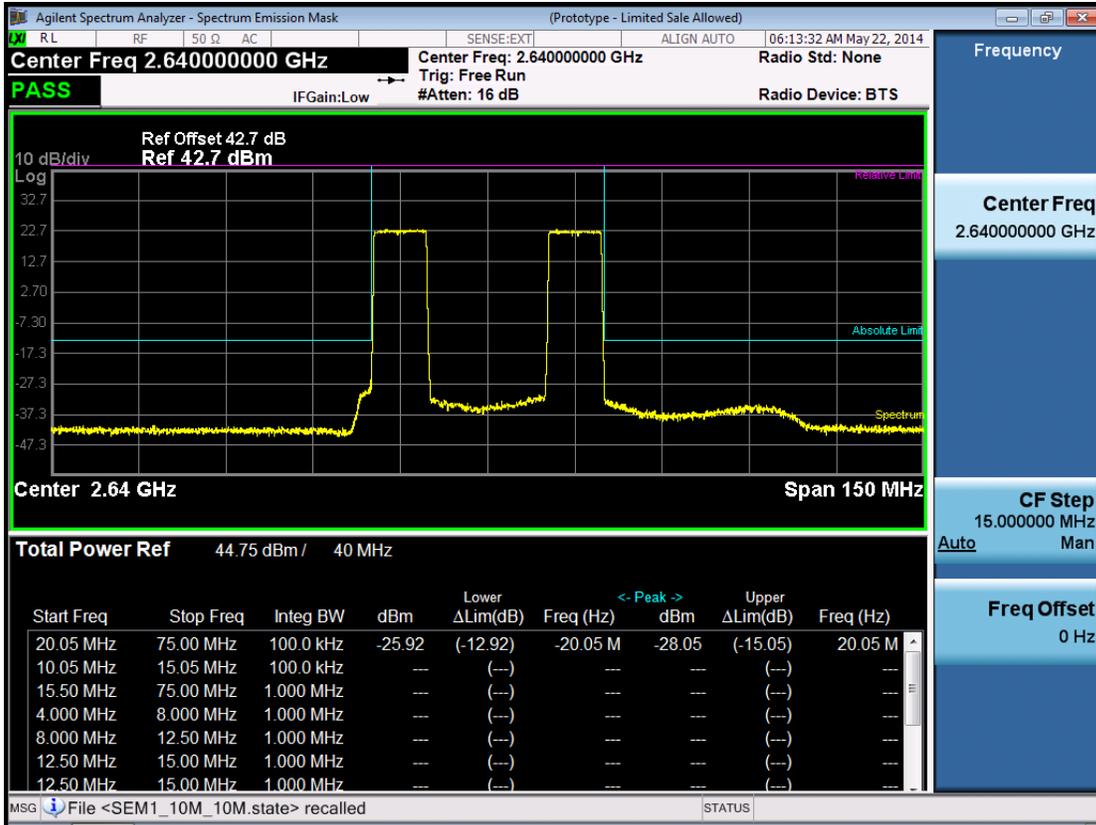


10M+10M -Port 1 -2655MHz

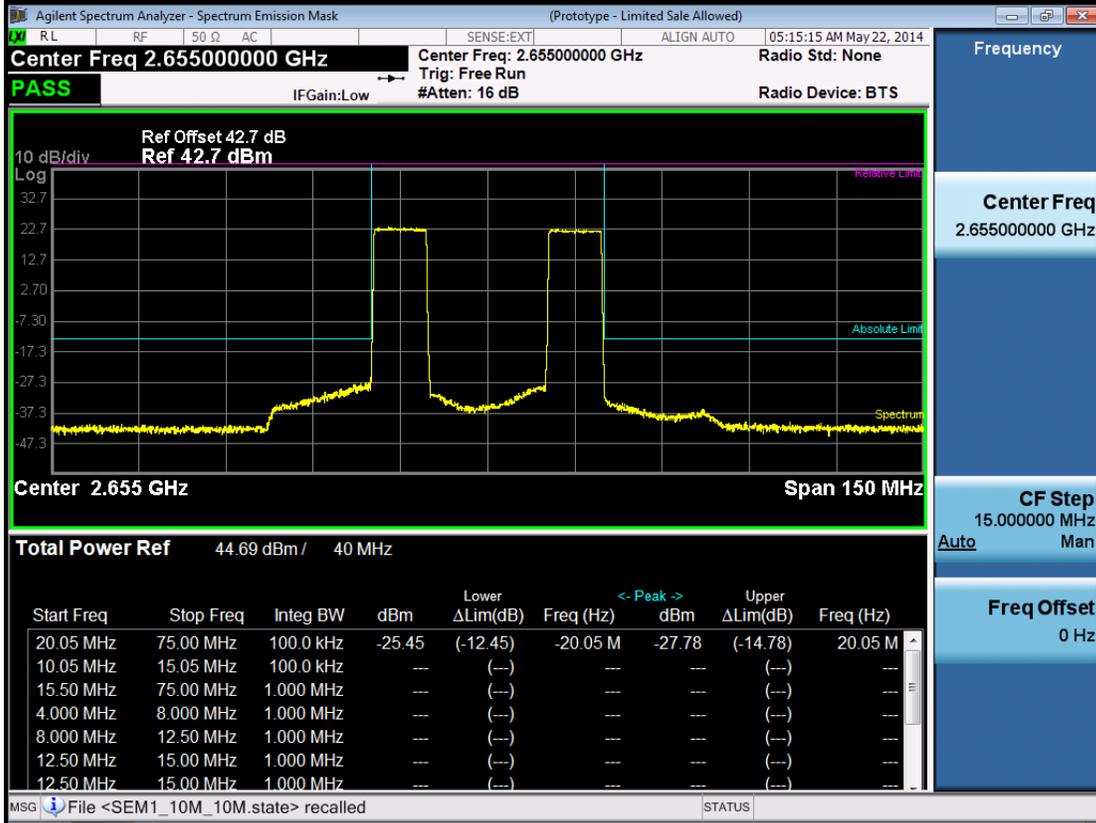


10M+10M -Port 1 -2670MHz

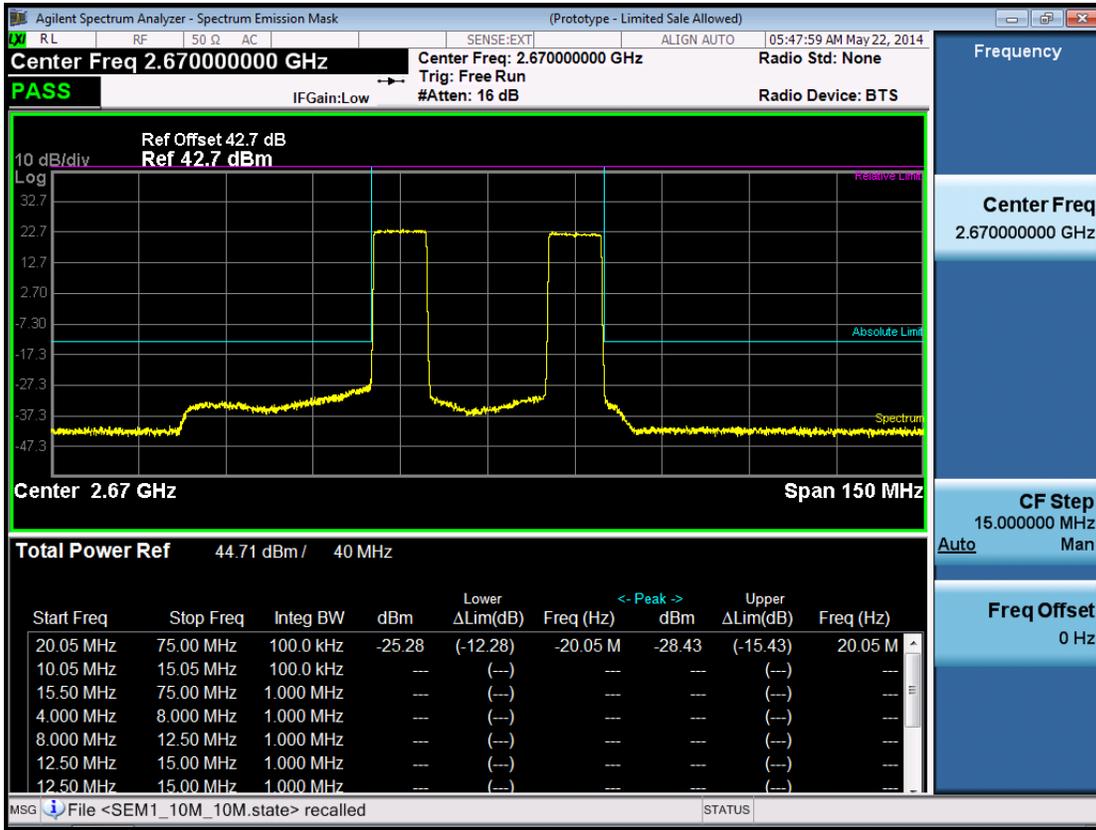


10M+10M -Port 2 -2640MHz

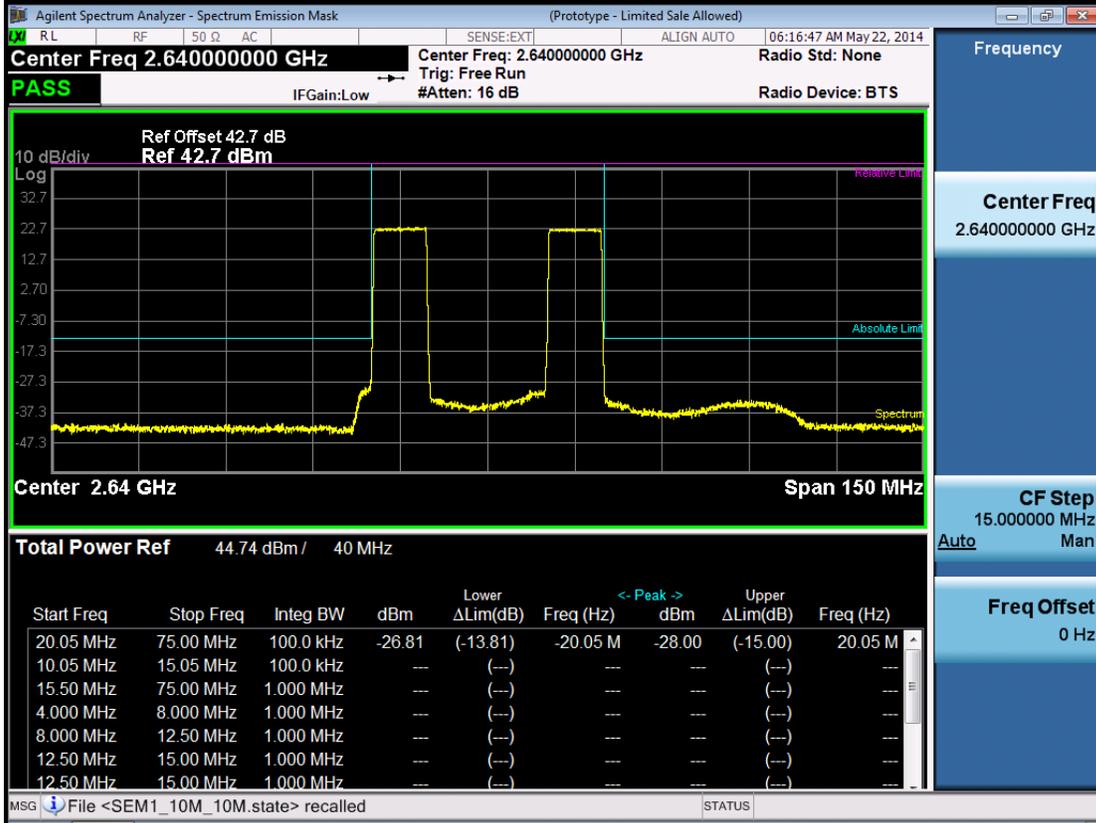

10M+10M -Port 2 -2655MHz

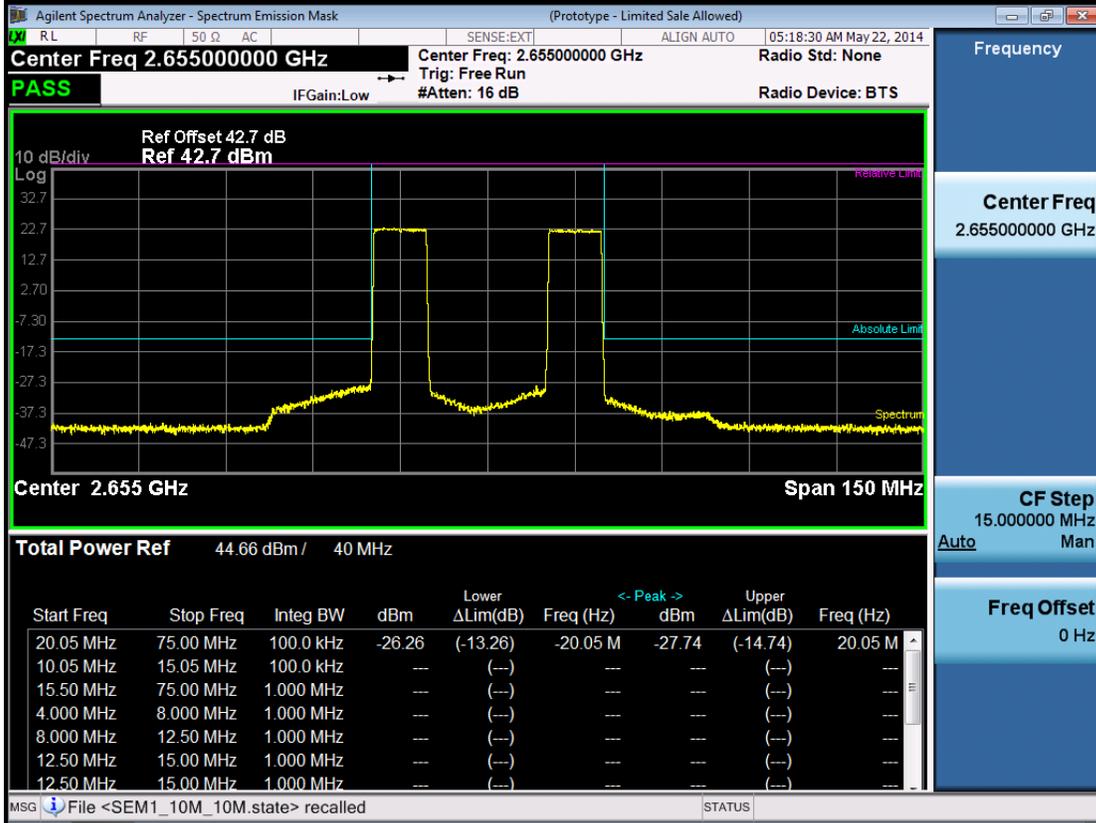


10M+10M -Port 2 -2670MHz

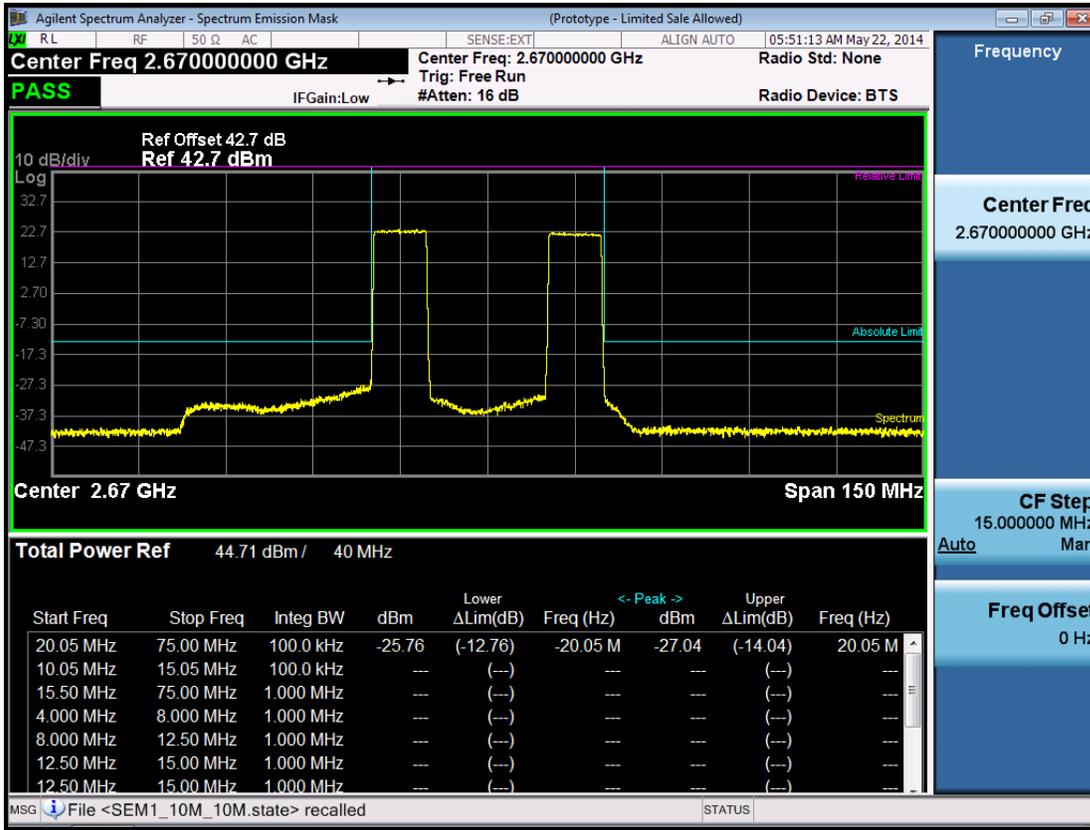


Channel Bandwidth :15M+15M

Port	RF Carrier Center Frequency. (MHz)	Max bandedge Emission (dBm)	Limit (dBm)
1	2640	-29.47	-13
	2655	-27.91	-13
	2670	-27.45	-13
2	2640	-29.68	-13
	2655	-27.78	-13
	2670	-27.96	-13


15M+15M -Port 1 -2640MHz

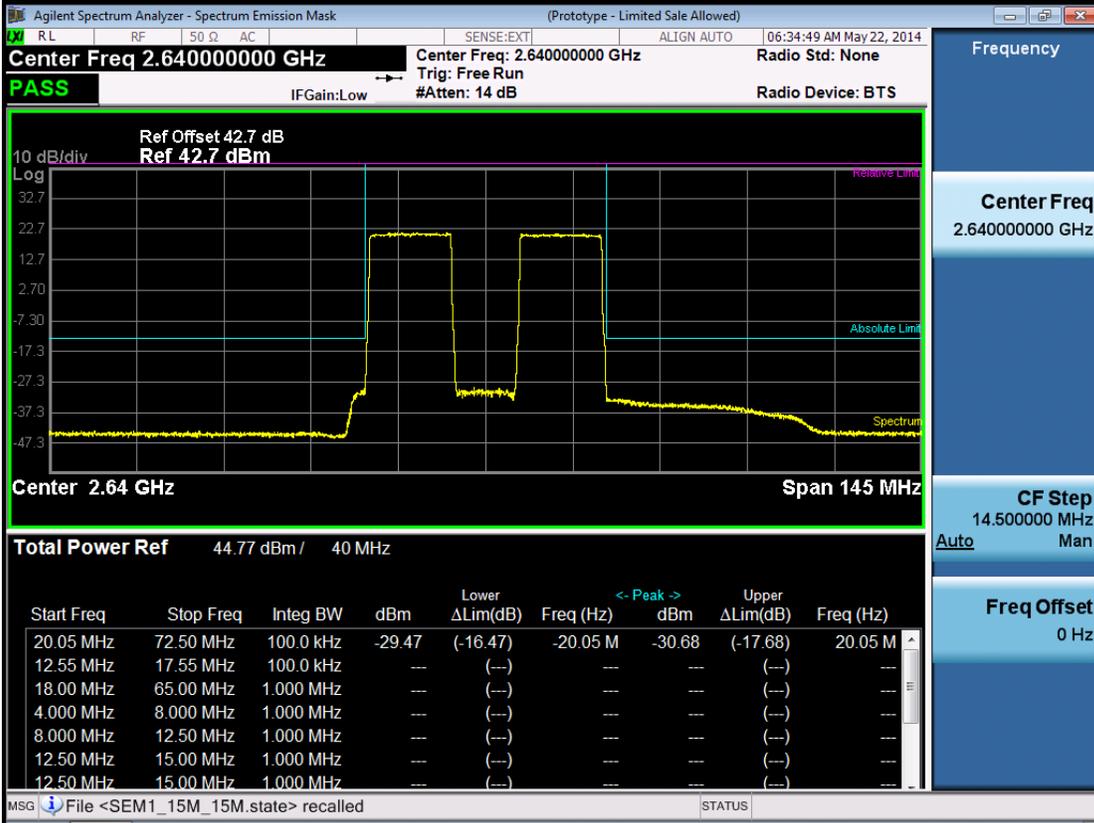


15M+15M -Port 1 -2655MHz

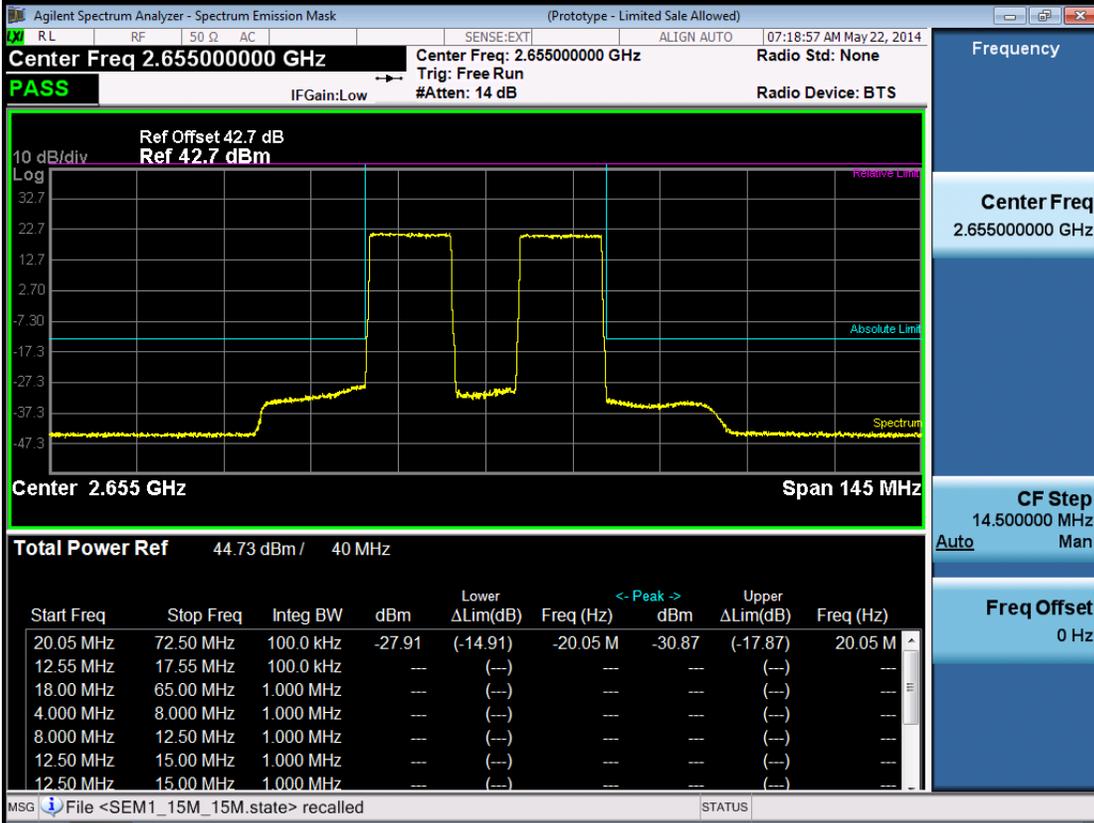


15M+15M -Port 1 -2670MHz

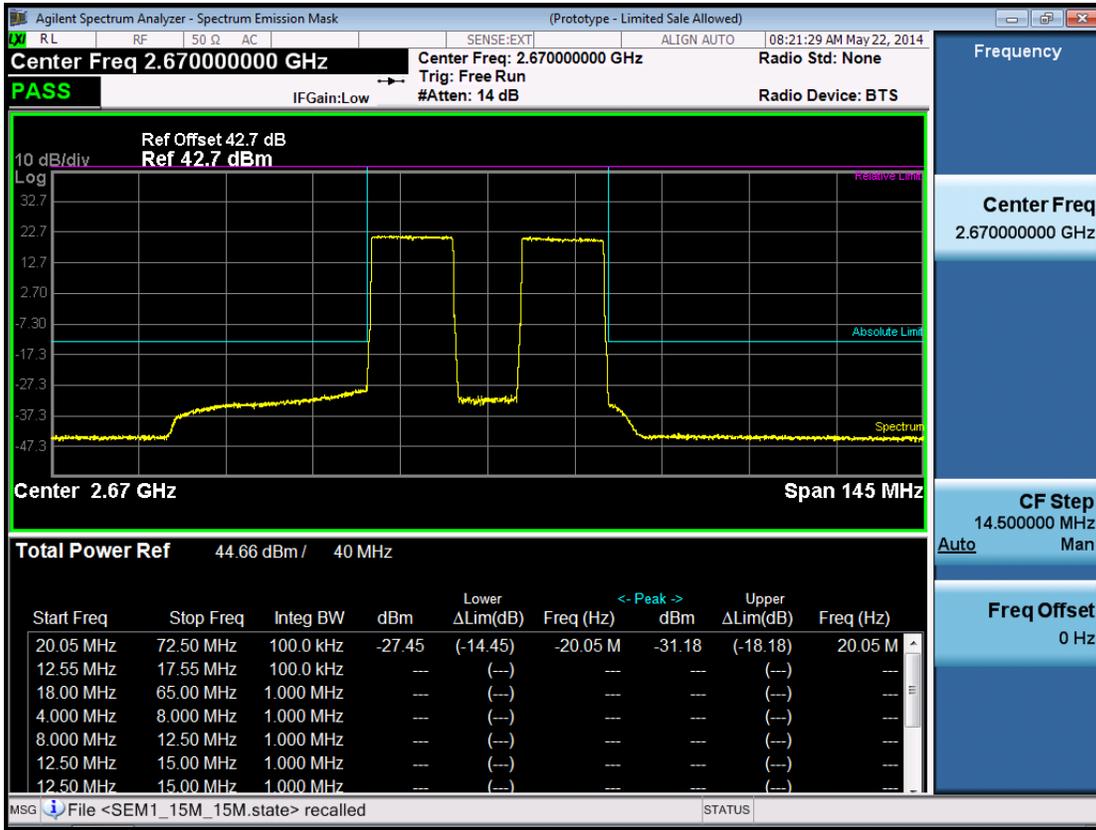


15M+15M -Port 2 -2640MHz

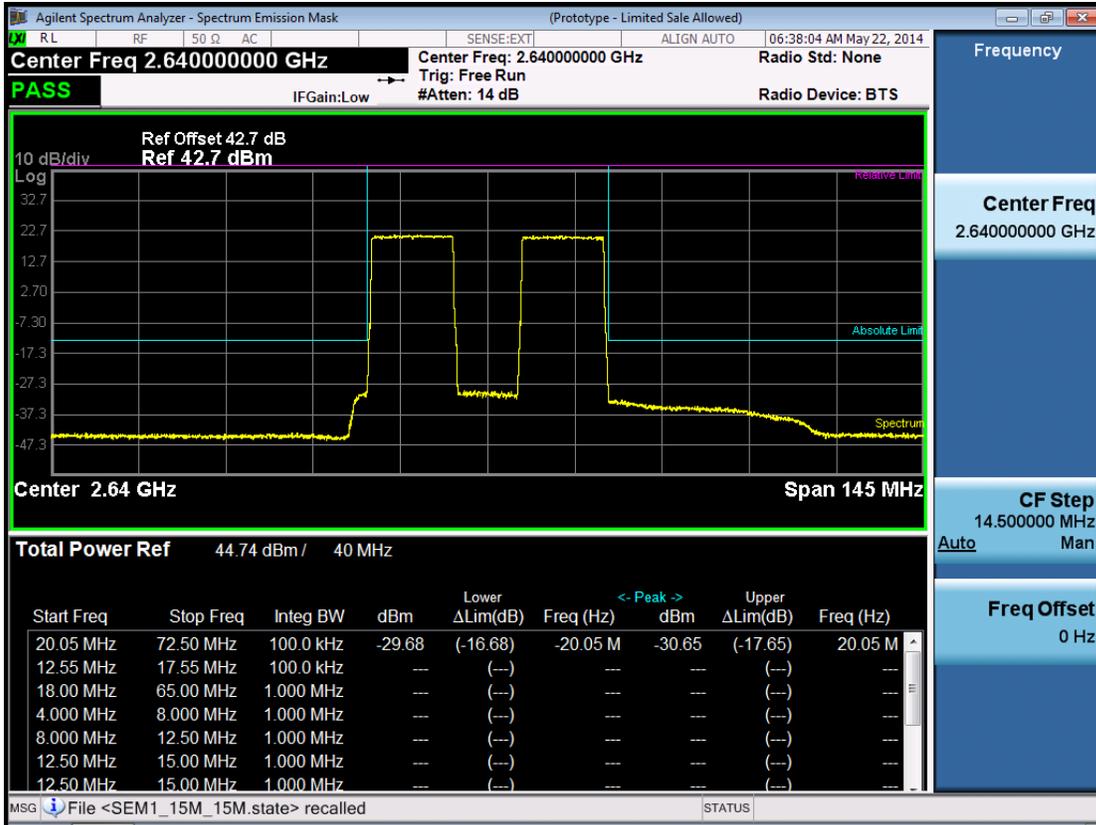

15M+15M -Port 2 -2655MHz

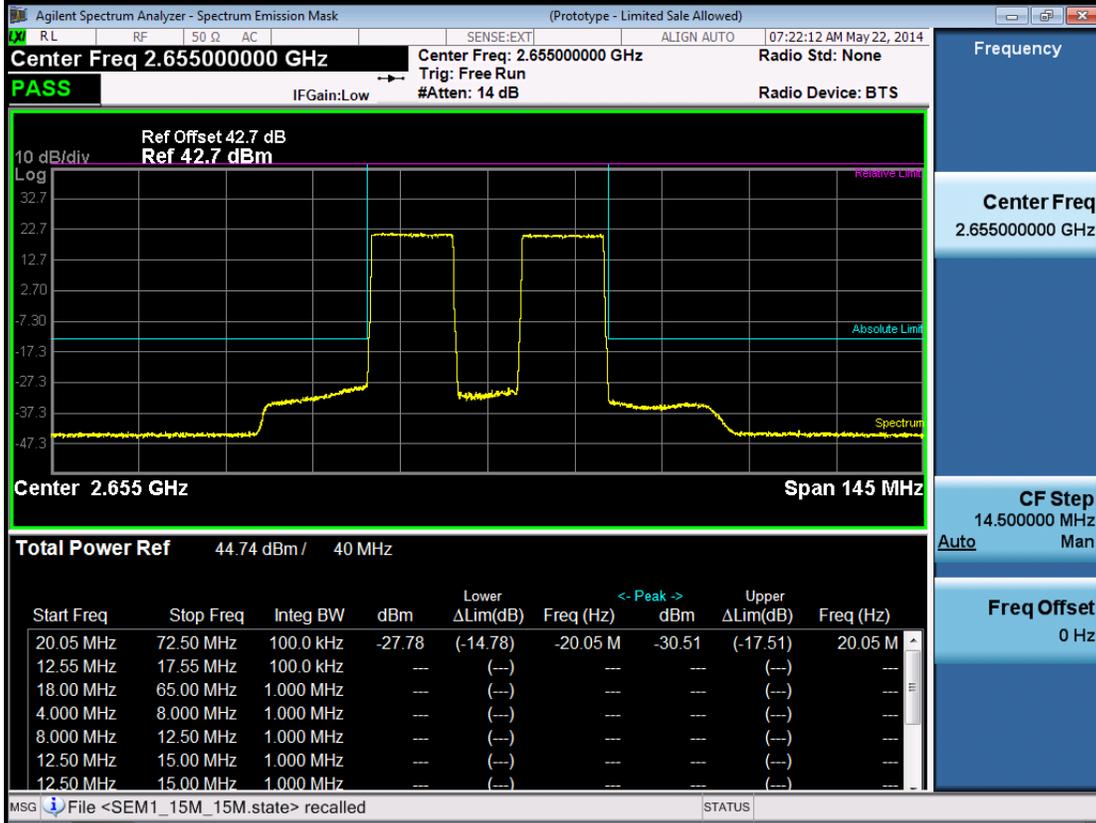


15M+15M -Port 2 -2670MHz

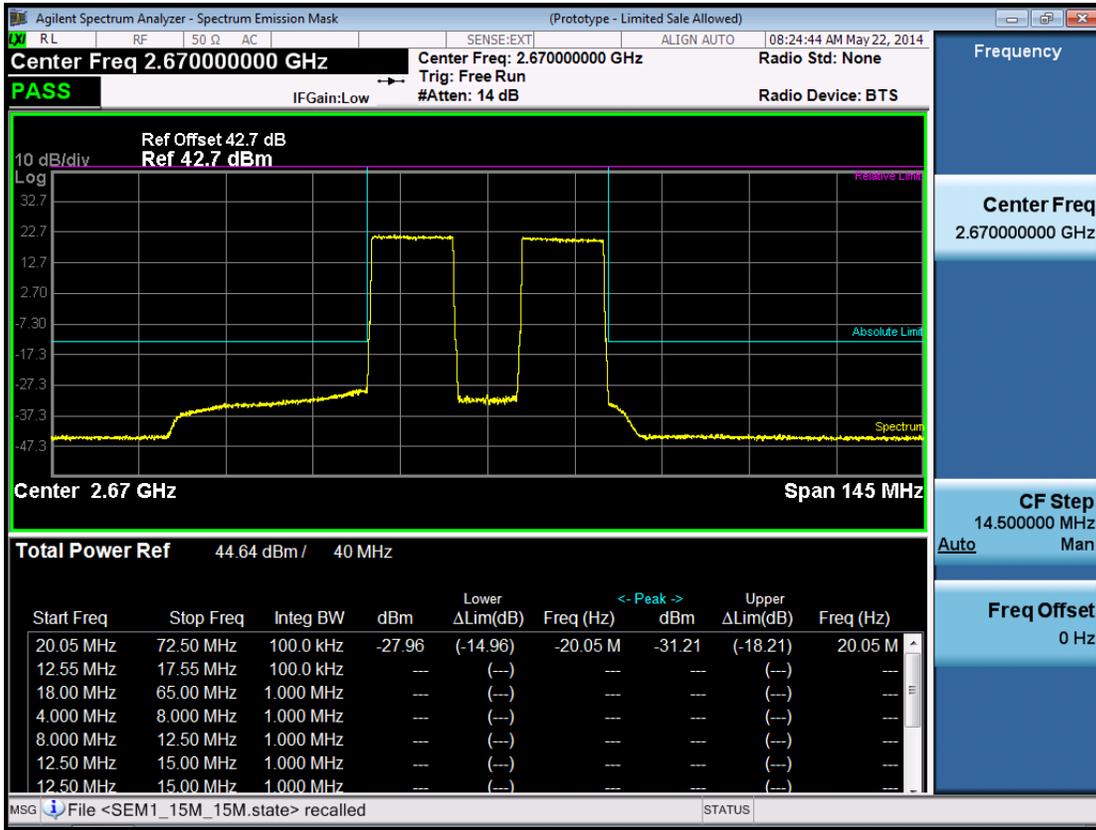


Channel Bandwidth :20M+20M

Port	RF Carrier Center Frequency. (MHz)	Max bandedge Emission (dBm)	Limit (dBm)
1	2640	-28.79	-13
	2655	-28.12	-13
	2670	-28.50	-13
2	2640	-29.64	-13
	2655	-28.60	-13
	2670	-28.61	-13


20M+20M -Port 1 -2640MHz

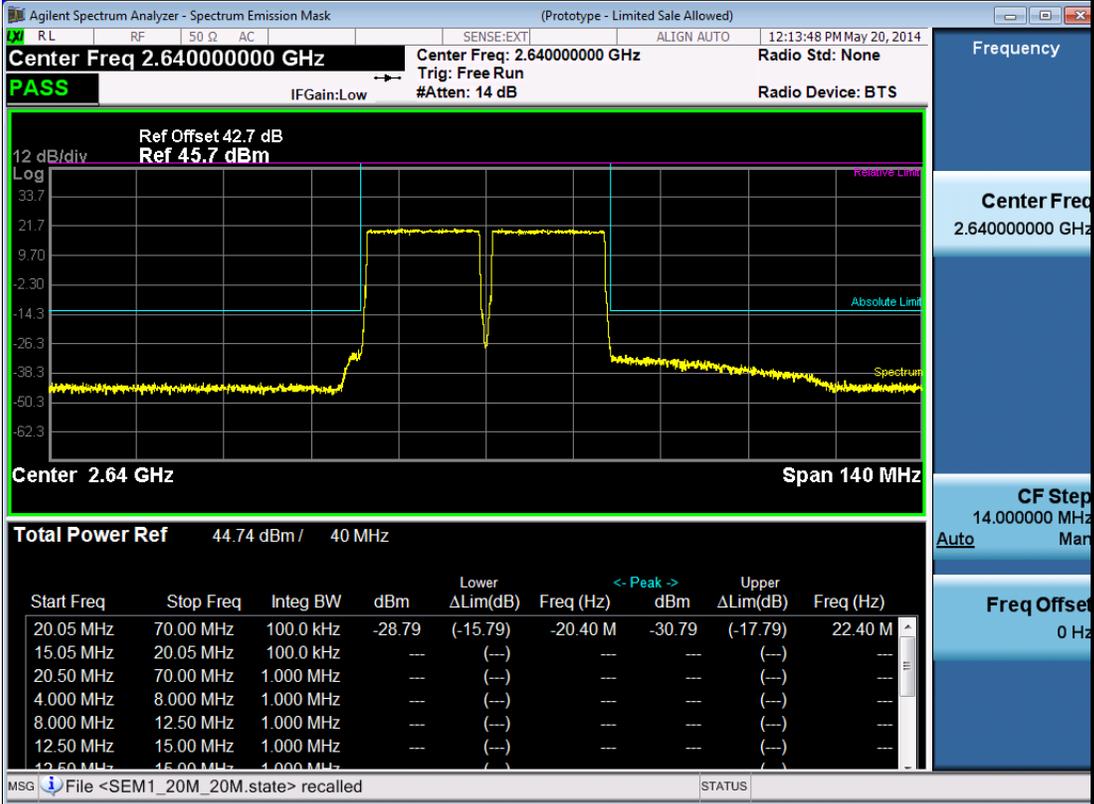


20M+20M -Port 1 -2655MHz

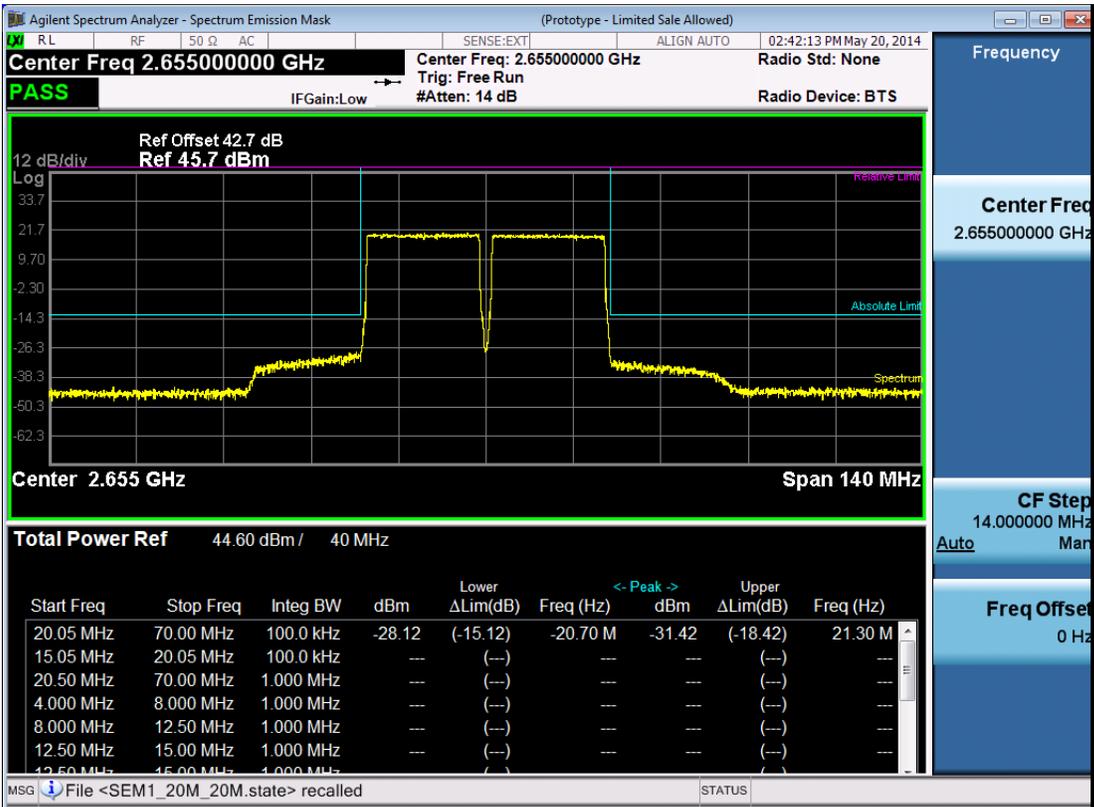


20M+20M -Port 1 -2670MHz

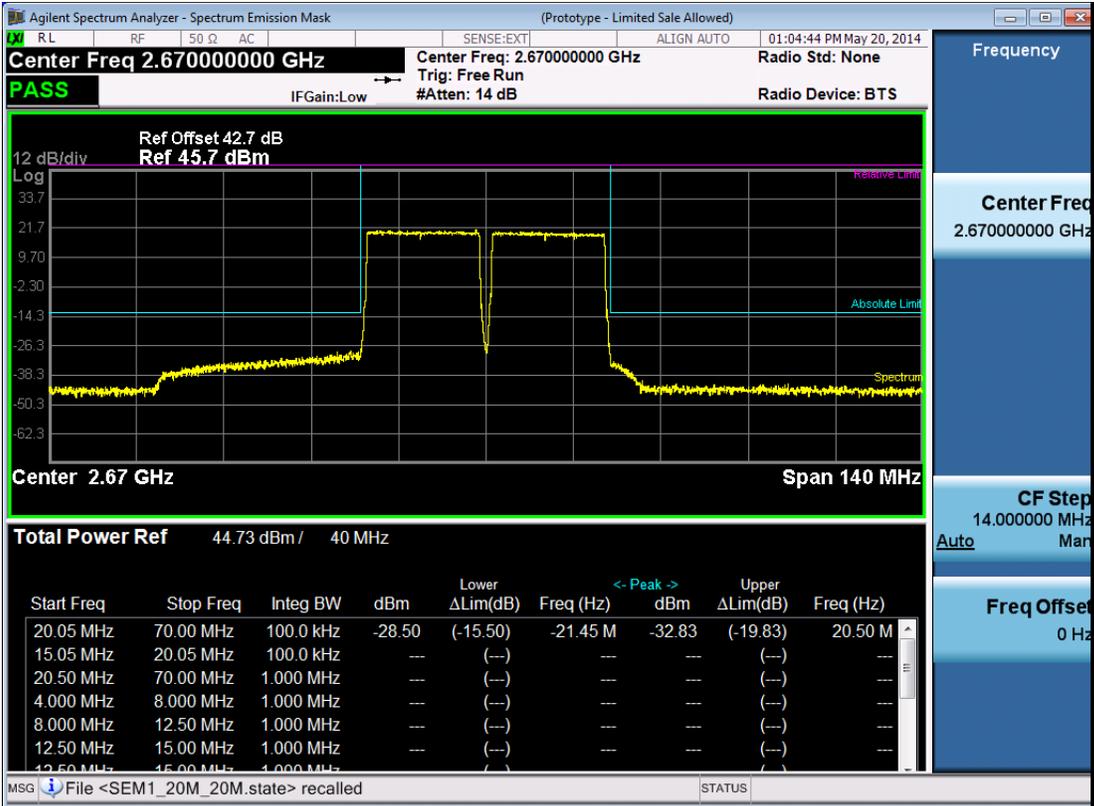


20M+20M -Port 2 -2640MHz

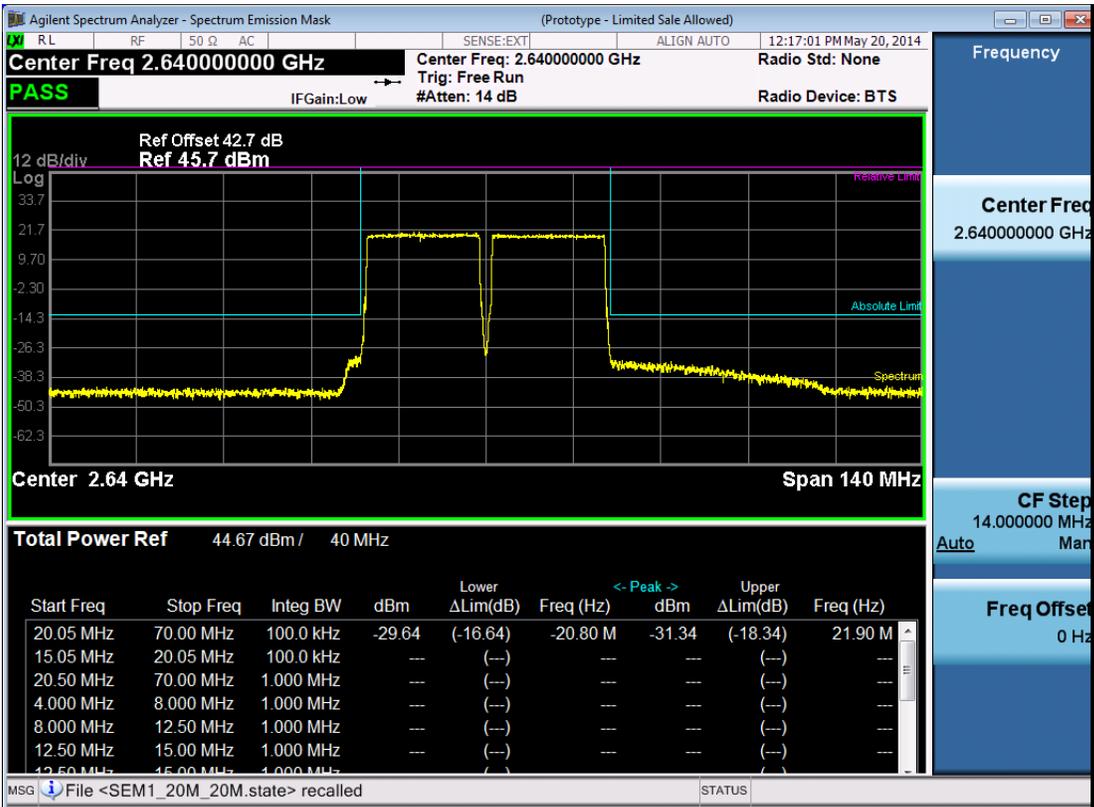

20M+20M -Port 2 -2655MHz

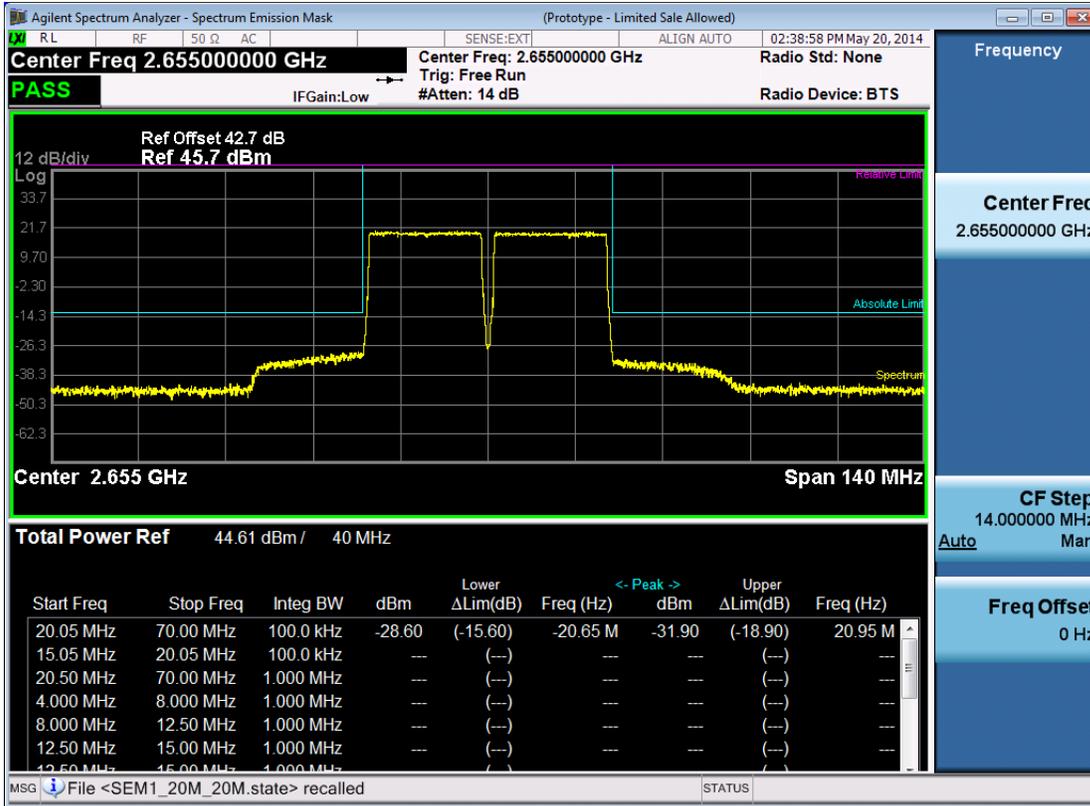

20M+20M -Port 2 -2670MHz

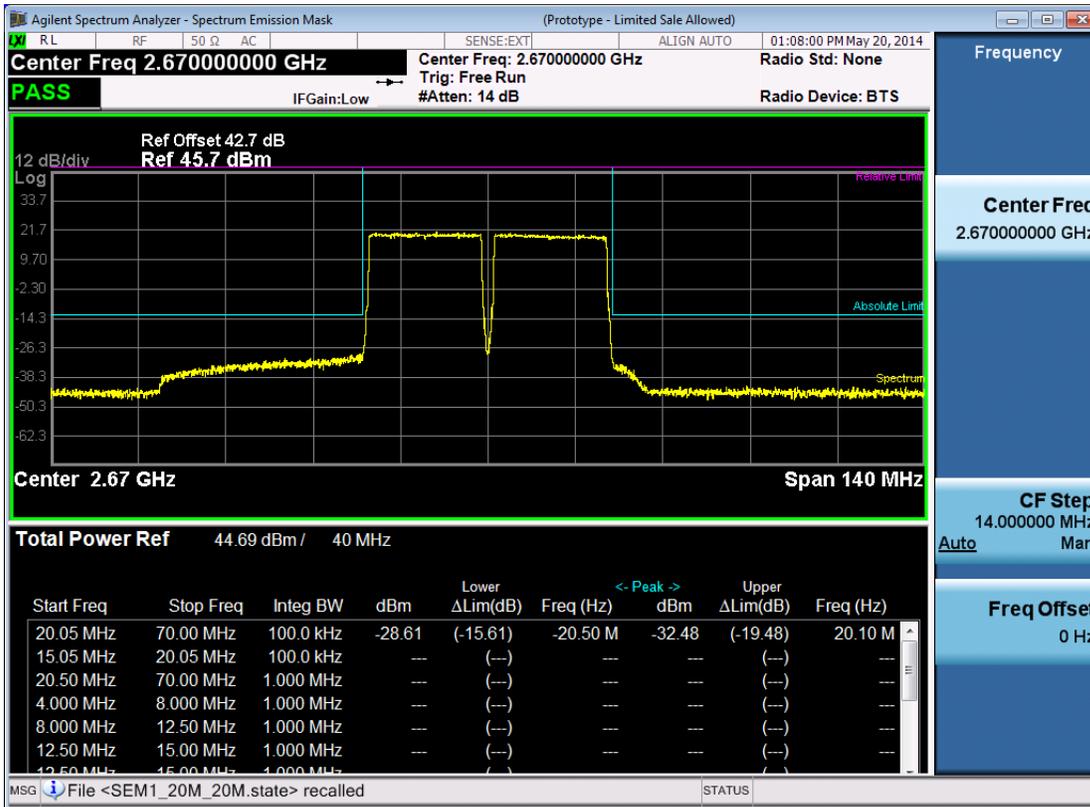

12 FREQUENCY STABILITY

Applicable Standard: FCC § 2.1055

Requirements: FCC § 2.1055 (a)(d), The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
GZ-ESPEC	Temperature Chamber	EW0470	06113028	2013.12.06	2014.12.06
Agilent	MXA Series Spectrum Analyzer	N9030A	MY49431143	2013.06.18	2014.06.18
DTS	DTS 40dB Attenuator	DTS100-40-3-1	09112005	2013.07.19	2014.07.19

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Spectrum Analyzer via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 150 minutes, the frequency output was recorded from the counter.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

Environmental Conditions

Normal condition:	25° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Test Result: Pass

Test Mode: Transmitting LTE

Test Data

Frequency Stability Versus Temperature

Frequency Stability vs Temperature (Channel Bandwidth:20M Frequency :2655MHz)							
Temperature (°C)	Power Supplied (V _{DC})	Port	Frequency Measure Error (Hz)	E-TM	Limit (ppm)	Limit (Hz)	Result
-40	-48	1	0.313	TM2.0	0.05	37.3	PASS
			0.292	TM3.1	0.05	37.3	PASS
			0.298	TM3.2	0.05	37.3	PASS
			0.221	TM3.3	0.05	37.3	PASS
		2	0.810	TM2.0	0.05	37.3	PASS
			0.123	TM3.1	0.05	37.3	PASS
			0.118	TM3.2	0.05	37.3	PASS
			1.530	TM3.3	0.05	37.3	PASS
-30	-48	1	1.021	TM2.0	0.05	37.3	PASS
			0.423	TM3.1	0.05	37.3	PASS
			0.325	TM3.2	0.05	37.3	PASS
			0.381	TM3.3	0.05	37.3	PASS
		2	0.152	TM2.0	0.05	37.3	PASS
			1.687	TM3.1	0.05	37.3	PASS
			0.264	TM3.2	0.05	37.3	PASS
			0.328	TM3.3	0.05	37.3	PASS
-20	-48	1	0.124	TM2.0	0.05	37.3	PASS
			0.510	TM3.1	0.05	37.3	PASS
			0.101	TM3.2	0.05	37.3	PASS
			0.493	TM3.3	0.05	37.3	PASS
		2	0.206	TM2.0	0.05	37.3	PASS

-10		0.114	TM3.1	0.05	37.3	PASS
		0.213	TM3.2	0.05	37.3	PASS
		0.323	TM3.3	0.05	37.3	PASS
	1	0.067	TM2.0	0.05	37.3	PASS
		0.057	TM3.1	0.05	37.3	PASS
		0.504	TM3.2	0.05	37.3	PASS
		0.156	TM3.3	0.05	37.3	PASS
	2	0.124	TM2.0	0.05	37.3	PASS
		0.156	TM3.1	0.05	37.3	PASS
		0.301	TM3.2	0.05	37.3	PASS
		0.156	TM3.3	0.05	37.3	PASS
	0	1	0.068	TM2.0	0.05	37.3
0.142			TM3.1	0.05	37.3	PASS
0.230			TM3.2	0.05	37.3	PASS
0.102			TM3.3	0.05	37.3	PASS
2		0.150	TM2.0	0.05	37.3	PASS
		0.162	TM3.1	0.05	37.3	PASS
		0.580	TM3.2	0.05	37.3	PASS
		0.219	TM3.3	0.05	37.3	PASS
10	1	0.090	TM2.0	0.05	37.3	PASS
		0.233	TM3.1	0.05	37.3	PASS
		0.162	TM3.2	0.05	37.3	PASS
		0.090	TM3.3	0.05	37.3	PASS
	2	0.090	TM2.0	0.05	37.3	PASS
		0.162	TM3.1	0.05	37.3	PASS
		0.110	TM3.2	0.05	37.3	PASS
		0.172	TM3.3	0.05	37.3	PASS
20	1	0.230	TM2.0	0.05	37.3	PASS
		0.430	TM3.1	0.05	37.3	PASS
		0.321	TM3.2	0.05	37.3	PASS
		0.112	TM3.3	0.05	37.3	PASS
	2	0.672	TM2.0	0.05	37.3	PASS
		0.166	TM3.1	0.05	37.3	PASS
		0.318	TM3.2	0.05	37.3	PASS
		0.172	TM3.3	0.05	37.3	PASS
30	1	0.268	TM2.0	0.05	37.3	PASS
		0.856	TM3.1	0.05	37.3	PASS
		0.121	TM3.2	0.05	37.3	PASS

40		2	0.107	TM3.3	0.05	37.3	PASS	
			1.140	TM2.0	0.05	37.3	PASS	
			1.103	TM3.1	0.05	37.3	PASS	
			0.756	TM3.2	0.05	37.3	PASS	
		1	0.259	TM3.3	0.05	37.3	PASS	
			0.121	TM2.0	0.05	37.3	PASS	
			0.323	TM3.1	0.05	37.3	PASS	
			0.234	TM3.2	0.05	37.3	PASS	
		2	0.235	TM3.3	0.05	37.3	PASS	
			0.785	TM2.0	0.05	37.3	PASS	
			0.563	TM3.1	0.05	37.3	PASS	
			0.233	TM3.2	0.05	37.3	PASS	
		50	1	0.125	TM3.3	0.05	37.3	PASS
				0.523	TM2.0	0.05	37.3	PASS
				0.962	TM3.1	0.05	37.3	PASS
				0.354	TM3.2	0.05	37.3	PASS
2	0.076		TM3.3	0.05	37.3	PASS		
	1.923		TM2.0	0.05	37.3	PASS		
	1.023		TM3.1	0.05	37.3	PASS		
	0.564		TM3.2	0.05	37.3	PASS		
55	1	0.823	TM3.3	0.05	37.3	PASS		
		0.612	TM2.0	0.05	37.3	PASS		
		1.031	TM3.1	0.05	37.3	PASS		
		0.345	TM3.2	0.05	37.3	PASS		
	2	0.625	TM3.3	0.05	37.3	PASS		
		1.239	TM2.0	0.05	37.3	PASS		
		1.023	TM3.1	0.05	37.3	PASS		
		0.420	TM3.2	0.05	37.3	PASS		
			0.843	TM3.3	0.05	37.3	PASS	

Frequency Stability vs Temperature (Channel Bandwidth:20M+20M RF Center Frequency :2655MHz)								
Temperature (°C)	Power Supplied (V _{DC})	Port	Carry1 Frequency Measure Error (Hz)	Carry2 Frequency Measure Error (Hz)	E-TM	Limit (ppm)	Limit (Hz)	Result
-40	-48	1	-1.039	-1.179	TM2.0	0.05	37.3	PASS
			-1.296	-1.135	TM3.1	0.05	37.3	PASS

			-1.166	-0.996	TM3.2	0.05	37.3	PASS	
			-0.783	-0.921	TM3.3	0.05	37.3	PASS	
		2	-1.209	-0.956	TM2.0	0.05	37.3	PASS	
			-1.132	-1.162	TM3.1	0.05	37.3	PASS	
			-1.117	-1.265	TM3.2	0.05	37.3	PASS	
		-30		-1.045	-1.315	TM3.3	0.05	37.3	PASS
			1	-1.015	-1.117	TM2.0	0.05	37.3	PASS
				-1.226	-1.1213	TM3.1	0.05	37.3	PASS
				-1.162	-1.0021	TM3.2	0.05	37.3	PASS
			2	-0.802	-0.8923	TM3.3	0.05	37.3	PASS
-1.149	-0.9612	TM2.0		0.05	37.3	PASS			
-1.095	-1.162	TM3.1		0.05	37.3	PASS			
		-20		-1.117	-1.185	TM3.2	0.05	37.3	PASS
			1	-1.001	-1.085	TM2.0	0.05	37.3	PASS
				-1.221	-1.095	TM3.1	0.05	37.3	PASS
				-1.159	-1.010	TM3.2	0.05	37.3	PASS
			2	-0.811	-0.882	TM3.3	0.05	37.3	PASS
-1.159	-0.971	TM2.0		0.05	37.3	PASS			
-1.056	-1.152	TM3.1		0.05	37.3	PASS			
		-10		-1.096	-1.125	TM3.2	0.05	37.3	PASS
			1	-1.011	-1.232	TM3.3	0.05	37.3	PASS
				-1.002	-1.085	TM2.0	0.05	37.3	PASS
				-1.211	-1.095	TM3.1	0.05	37.3	PASS
			2	-1.143	-1.010	TM3.2	0.05	37.3	PASS
-0.802	-0.862	TM3.3		0.05	37.3	PASS			
-1.142	-0.965	TM2.0		0.05	37.3	PASS			
		0		-1.032	-1.131	TM3.1	0.05	37.3	PASS
			1	-1.095	-1.130	TM3.2	0.05	37.3	PASS
				-1.144	-1.020	TM3.2	0.05	37.3	PASS
				-1.015	-1.212	TM3.3	0.05	37.3	PASS
			2	-0.986	-1.011	TM2.0	0.05	37.3	PASS
-1.101	-1.090	TM3.1		0.05	37.3	PASS			
-1.144	-1.020	TM3.2		0.05	37.3	PASS			
				-0.800	-0.842	TM3.3	0.05	37.3	PASS
			1	-1.092	-0.985	TM2.0	0.05	37.3	PASS
				-1.1012	-1.123	TM3.1	0.05	37.3	PASS
				-1.064	-1.130	TM3.2	0.05	37.3	PASS
			2	-1.014	-1.156	TM3.3	0.05	37.3	PASS

10	1	-0.986	-0.998	TM2.0	0.05	37.3	PASS
		-1.096	-1.066	TM3.1	0.05	37.3	PASS
		-1.102	-0.996	TM3.2	0.05	37.3	PASS
		-0.802	-0.856	TM3.3	0.05	37.3	PASS
	2	-1.122	-0.975	TM2.0	0.05	37.3	PASS
		-1.022	-1.121	TM3.1	0.05	37.3	PASS
		-1.065	-1.112	TM3.2	0.05	37.3	PASS
		-1.021	-1.122	TM3.3	0.05	37.3	PASS
20	1	-0.988	-0.981	TM2.0	0.05	37.3	PASS
		-1.106	-1.046	TM3.1	0.05	37.3	PASS
		-1.096	-0.985	TM3.2	0.05	37.3	PASS
		-0.796	-0.855	TM3.3	0.05	37.3	PASS
	2	-1.122	-0.985	TM2.0	0.05	37.3	PASS
		-1.015	-1.109	TM3.1	0.05	37.3	PASS
		-1.043	-1.106	TM3.2	0.05	37.3	PASS
		-1.005	-1.136	TM3.3	0.05	37.3	PASS
30	1	-0.978	-0.971	TM2.0	0.05	37.3	PASS
		-1.066	-1.016	TM3.1	0.05	37.3	PASS
		-1.086	-0.976	TM3.2	0.05	37.3	PASS
		-0.803	-0.865	TM3.3	0.05	37.3	PASS
	2	-1.134	-1.012	TM2.0	0.05	37.3	PASS
		-1.025	-1.115	TM3.1	0.05	37.3	PASS
		-1.123	-1.126	TM3.2	0.05	37.3	PASS
		-1.035	-1.135	TM3.3	0.05	37.3	PASS
40	1	-0.975	-0.986	TM2.0	0.05	37.3	PASS
		-1.052	-1.003	TM3.1	0.05	37.3	PASS
		-1.006	-0.968	TM3.2	0.05	37.3	PASS
		-0.801	-0.864	TM3.3	0.05	37.3	PASS
	2	-1.131	-1.011	TM2.0	0.05	37.3	PASS
		-1.015	-1.105	TM3.1	0.05	37.3	PASS
		-1.123	-1.131	TM3.2	0.05	37.3	PASS
		-1.023	-1.143	TM3.3	0.05	37.3	PASS
50	1	-0.989	-0.976	TM2.0	0.05	37.3	PASS
		-1.042	-0.996	TM3.1	0.05	37.3	PASS
		-1.010	-0.973	TM3.2	0.05	37.3	PASS
		-0.800	-0.863	TM3.3	0.05	37.3	PASS
	2	-1.110	-1.003	TM2.0	0.05	37.3	PASS
		-1.012	-1.098	TM3.1	0.05	37.3	PASS

55		1	-1.112	-1.132	TM3.2	0.05	37.3	PASS
			-1.023	-1.143	TM3.3	0.05	37.3	PASS
			-0.963	-0.943	TM2.0	0.05	37.3	PASS
			-1.032	-0.985	TM3.1	0.05	37.3	PASS
			-0.986	-0.976	TM3.2	0.05	37.3	PASS
			-0.765	-0.863	TM3.3	0.05	37.3	PASS
			-1.102	-1.032	TM2.0	0.05	37.3	PASS
			-1.010	-0.988	TM3.1	0.05	37.3	PASS
			-1.019	-1.096	TM3.2	0.05	37.3	PASS
			-1.021	-1.119	TM3.3	0.05	37.3	PASS

Frequency Stability Versus Voltage

Frequency Stability vs Voltage (Channel Bandwidth:20M Frequency :2655MHz)							
Power Supplied (V _{DC})	Temperature (°C)	Port	Frequency Measure Error (Hz)	E-TM	Limit (ppm)	Limit (Hz)	Result
-40	20	1	1.203	TM2.0	0.05	37.3	PASS
			0.321	TM3.1	0.05	37.3	PASS
			0.280	TM3.2	0.05	37.3	PASS
			0.127	TM3.3	0.05	37.3	PASS
		2	1.218	TM2.0	0.05	37.3	PASS
			1.317	TM3.1	0.05	37.3	PASS
			0.627	TM3.2	0.05	37.3	PASS
			0.127	TM3.3	0.05	37.3	PASS
-44	20	1	0.271	TM2.0	0.05	37.3	PASS
			0.754	TM3.1	0.05	37.3	PASS
			1.038	TM3.2	0.05	37.3	PASS
			2.531	TM3.3	0.05	37.3	PASS
		2	1.058	TM2.0	0.05	37.3	PASS
			0.323	TM3.1	0.05	37.3	PASS
			0.455	TM3.2	0.05	37.3	PASS
			0.567	TM3.3	0.05	37.3	PASS
-48	20	1	0.230	TM2.0	0.05	37.3	PASS
			0.430	TM3.1	0.05	37.3	PASS
			0.321	TM3.2	0.05	37.3	PASS
			0.112	TM3.3	0.05	37.3	PASS

-52	2	0.672	TM2.0	0.05	37.3	PASS
		0.166	TM3.1	0.05	37.3	PASS
		0.318	TM3.2	0.05	37.3	PASS
		0.172	TM3.3	0.05	37.3	PASS
	1	0.561	TM2.0	0.05	37.3	PASS
		0.785	TM3.1	0.05	37.3	PASS
		0.452	TM3.2	0.05	37.3	PASS
		1.9627	TM3.3	0.05	37.3	PASS
	2	0.560	TM2.0	0.05	37.3	PASS
		0.523	TM3.1	0.05	37.3	PASS
		0.442	TM3.2	0.05	37.3	PASS
		0.774	TM3.3	0.05	37.3	PASS
-60	1	0.573	TM2.0	0.05	37.3	PASS
		0.655	TM3.1	0.05	37.3	PASS
		0.235	TM3.2	0.05	37.3	PASS
		0.231	TM3.3	0.05	37.3	PASS
	2	0.413	TM2.0	0.05	37.3	PASS
		0.985	TM3.1	0.05	37.3	PASS
		0.654	TM3.2	0.05	37.3	PASS
		0.325	TM3.3	0.05	37.3	PASS

Frequency Stability vs Voltage (Channel Bandwidth:20M+20M RF Center Frequency :2655MHz)								
Power Supplied (V _{DC})	Temperature (°C)	Port	Carry1 Frequency Measure Error (Hz)	Carry2 Frequency Measure Error (Hz)	E-TM	Limit (ppm)	Limit (Hz)	Result
-40	20	1	-0.987	-0.979	TM2.0	0.05	37.3	PASS
			-1.098	-1.041	TM3.1	0.05	37.3	PASS
			-1.086	-0.975	TM3.2	0.05	37.3	PASS
			-0.776	-0.845	TM3.3	0.05	37.3	PASS
		2	-1.118	-0.982	TM2.0	0.05	37.3	PASS
			-1.008	-1.102	TM3.1	0.05	37.3	PASS
			-1.033	-1.104	TM3.2	0.05	37.3	PASS
			-1.002	-1.134	TM3.3	0.05	37.3	PASS
-44	1	-0.985	-0.981	TM2.0	0.05	37.3	PASS	
		-1.103	-1.042	TM3.1	0.05	37.3	PASS	
		-1.088	-0.992	TM3.2	0.05	37.3	PASS	

		-0.804	-0.862	TM3.3	0.05	37.3	PASS
	2	-1.111	-0.992	TM2.0	0.05	37.3	PASS
		-1.015	-1.065	TM3.1	0.05	37.3	PASS
		-1.032	-1.063	TM3.2	0.05	37.3	PASS
		-1.011	-1.121	TM3.3	0.05	37.3	PASS
-48	1	-0.988	-0.981	TM2.0	0.05	37.3	PASS
		-1.106	-1.046	TM3.1	0.05	37.3	PASS
		-1.096	-0.985	TM3.2	0.05	37.3	PASS
		-0.796	-0.855	TM3.3	0.05	37.3	PASS
	2	-1.122	-0.985	TM2.0	0.05	37.3	PASS
		-1.015	-1.109	TM3.1	0.05	37.3	PASS
		-1.043	-1.106	TM3.2	0.05	37.3	PASS
		-1.005	-1.136	TM3.3	0.05	37.3	PASS
-52	1	-0.992	-0.956	TM2.0	0.05	37.3	PASS
		-1.063	-1.032	TM3.1	0.05	37.3	PASS
		-1.086	-0.963	TM3.2	0.05	37.3	PASS
		-0.796	-0.823	TM3.3	0.05	37.3	PASS
	2	-1.163	-0.988	TM2.0	0.05	37.3	PASS
		-1.011	-1.111	TM3.1	0.05	37.3	PASS
		-1.023	-1.111	TM3.2	0.05	37.3	PASS
		-1.009	-1.112	TM3.3	0.05	37.3	PASS
-60	1	-0.977	-0.971	TM2.0	0.05	37.3	PASS
		-1.110	-1.036	TM3.1	0.05	37.3	PASS
		-1.066	-0.925	TM3.2	0.05	37.3	PASS
		-0.786	-0.835	TM3.3	0.05	37.3	PASS
	2	-1.092	-0.975	TM2.0	0.05	37.3	PASS
		-1.061	-1.123	TM3.1	0.05	37.3	PASS
		-1.053	-1.106	TM3.2	0.05	37.3	PASS
		-1.041	-1.111	TM3.3	0.05	37.3	PASS