

FCC MEASUREMENT AND TEST REPORT

For

ZTE Corporation

ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen,
Guangdong, China 518057

FCC ID: Q78- RSU82S8500

Nov 15, 2012

This Report Concerns: ☒ Original Report		Equipment Type: RSU Macro Radio Remote Unit
Test Engineer:	Bloom <i>Bloom</i>	
Report No.:	FCC-2011-085	
Test Date:	Sep 25 – Nov 10, 2012	
Reviewed By:	Xie Yuming <i>Xie Yuming</i>	
Prepared By:	ZTE Corporation.	
ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen, Guangdong, China 518057, P.R.China Tel: +86-755-26770000 Fax: +86-755-26771999		

Note: The test report is specially limited to the above company and this particular sample only. It may not be duplicated without prior written consent of ZTE Corporation. This report must not be used by the client to claim product certification ,approval ,or endorsement by any agency of the US Government.

TABLE OF CONTENTS

TABLE OF CONTENTS	2
1 GENERAL INFORMATION.....	7
Product Description for Equipment Under Test (EUT).....	7
Objective	8
Related Submittal(s)/Grant(s).....	8
Test Methodology	8
Test Facility.....	8
2 SYSTEM TEST CONFIGURATION.....	9
Description of Test Configuration	9
3 CDMA OF TEST RESULTS.....	10
3.1 TRANSMITTER OUTPUT POWER	11
Applicable Standard: FCC §2.1046 §22.913	11
Test Equipment List and Details.....	11
Test Procedure.....	11
Environmental Conditions	11
Test Result: Pass.....	12
Test Mode: Transmitting CDMA	12
Test Data:.....	12
3.2 RF EXPOSURE	20
Applicable standard: FCC §2.1091 §1.1037	20
Limit.....	20
Test Data.....	20
Test Result: pass.....	20
3.3 MODULATION CHARACTERISTIC.....	21
Applicable Standard: FCC §2.1047	21
Test Equipment List and Details.....	21
Test Procedure.....	21
Test Data Environmental Conditions	21
Test Result: Pass.....	21
Test Mode: Transmitting CDMA	21
Test Data:.....	22
3.4 SPURIOUS RADIATED EMISSIONS.....	24
Applicable Standard: FCC CFR 47, §2.1053	24
Test Equipment List and Details.....	24
Test Procedure.....	25
Test Results Summary: PASS	25
Environmental Conditions	25
Test data	26
3.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	27
Applicable Standard: FCC§2.1051, §22.917	27
Test Equipment List and Details.....	27
Test Procedure.....	27
Test Data Environmental Conditions	28
Test Result: Pass.....	28
Test Mode: Transmitting CDMA	28
Test Data:.....	28
3.6 OCCUPIED BANDWIDTH.....	41
Applicable Standard: FCC §2.1049 §22.917	41

Test Equipment List and Details:	41
Test Procedure	41
Environmental Conditions	41
Test Result: Pass	42
Test Mode: Transmitting CDMA	42
Test Data	42
3.7 BAND EDGES	50
Applicable Standard: FCC §2.1051	50
Test Equipment List and Details	50
Test Procedure	50
Test Data Environmental Conditions	50
Test Result: Pass	51
Test Mode: Transmitting CDMA	51
Test Data	51
3.8 FREQUENCY STABILITY	57
Applicable Standard: FCC § 2.1055, § 22.355	57
Test Equipment List and Details	57
Test Procedure	57
Environmental Conditions	57
Test Result: Pass	58
Test Mode: Transmitting CDMA	58
Test Data	58
Frequency Stability Versus Temperature	58
Frequency Stability Versus Voltage	59
4 UMTS OF TEST RESULTS	60
4.1 TRANSMITTER OUTPUT POWER	61
Applicable Standard: FCC §2.1046 §22.913	61
Test Equipment List and Details	61
Test Procedure	61
Environmental Conditions	61
Test Result: Pass	62
Test Mode: Transmitting UMTS	62
Test Data	62
4.2 RF EXPOSURE	70
Applicable standard: FCC §2.1091 §1.1037	70
Limit	70
Test Data	70
Test Result: pass	70
4.3 MODULATION CHARACTERISTIC	71
Applicable Standard: FCC §2.1047	71
Test Equipment List and Details	71
Test Procedure	71
Test Data Environmental Conditions	71
Test Result: Pass	71
Test Mode: Transmitting UMTS	71
Test Data	72
4.4 SPURIOUS RADIATED EMISSIONS	74
Applicable Standard: FCC CFR 47, §2.1053	74
Test Equipment List and Details	74
Test Procedure	75
Test Results Summary: PASS	75
Environmental Conditions	75
Test data	76

4.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	77
Applicable Standard: FCC§2.1051, §22.917	77
Test Equipment List and Details	77
Test Procedure.....	77
Test Data Environmental Conditions	78
Test Result: Pass.....	78
Test Mode: Transmitting UMTS.....	78
Test Data:.....	78
4.6 OCCUPIED BANDWIDTH.....	97
Applicable Standard: FCC §2.1049 §22.917	97
Test Equipment List and Details:.....	97
Test Procedure.....	97
Environmental Conditions	97
Test Result: Pass.....	98
Test Mode: Transmitting UMTS.....	98
Test Data.....	98
4.7 BAND EDGES.....	100
Applicable Standard: FCC §2.1051	100
Test Equipment List and Details.....	100
Test Procedure.....	100
Test Data Environmental Conditions	100
Test Result: Pass.....	101
Test Mode: Transmitting UMTS.....	101
Test Data.....	101
4.8 FREQUENCY STABILITY	107
Applicable Standard: FCC § 2.1055, § 22.355.....	107
Test Equipment List and Details.....	107
Test Procedure.....	107
Environmental Conditions	107
Test Result: Pass.....	108
Test Mode: Transmitting UMTS.....	108
Test Data.....	108
Frequency Stability Versus Temperature.....	108
Frequency Stability Versus Voltage.....	109
5 GSM OF TEST RESULTS	111
5.1 TRANSMITTER OUTPUT POWER	112
Applicable Standard: FCC §2.1046 §22.913	112
Test Equipment List and Details.....	112
Test Procedure.....	112
Environmental Conditions	112
Test Result: Pass.....	113
Test Mode: Transmitting GSM	113
Test Data:.....	113
5.2 RF EXPOSURE	137
Applicable standard: FCC §2.1091 §1.1037	137
Limit.....	137
Test Data.....	137
Test Result: pass.....	137
5.3 MODULATION CHARACTERISTIC.....	138
Applicable Standard: FCC §2.1047	138
Test Equipment List and Details.....	138
Test Procedure.....	138
Test Data Environmental Conditions	138

Test Result: Pass.....	138
Test Mode: Transmitting GSM	138
Test Data:.....	139
5.4 SPURIOUS RADIATED EMISSIONS.....	143
Applicable Standard: FCC CFR 47, §2.1053	143
Test Equipment List and Details.....	143
Test Procedure.....	144
Test Results Summary: PASS	144
Environmental Conditions	144
Test data	145
5.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	146
Applicable Standard: FCC§2.1051, §22.917	146
Test Equipment List and Details.....	146
Test Procedure.....	146
Test Data Environmental Conditions	147
Test Result: Pass.....	147
Test Mode: Transmitting GSM	147
Test Data:.....	147
5.6 OCCUPIED BANDWIDTH.....	157
Applicable Standard: FCC §2.1049 §22.917.....	157
Test Equipment List and Details:.....	157
Test Procedure.....	157
Environmental Conditions	157
Test Result: Pass.....	158
Test Mode: Transmitting GSM	158
Test Data.....	158
5.7 BAND EDGES.....	162
Applicable Standard: FCC §2.1051	162
Test Equipment List and Details.....	162
Test Procedure.....	162
Test Data Environmental Conditions	162
Test Result: Pass.....	163
Test Mode: Transmitting GSM	163
Test Data.....	163
5.8 FREQUENCY STABILITY	172
Applicable Standard: FCC § 2.1055, § 22.355.....	172
Test Equipment List and Details.....	172
Test Procedure.....	172
Environmental Conditions	172
Test Result: Pass.....	173
Test Mode: Transmitting GSM	173
Test Data.....	173
Frequency Stability Versus Temperature.....	173
Frequency Stability Versus Voltage.....	174
6 DUAL-MODE OF TEST RESULTS.....	176
6.1 TRANSMITTER OUTPUT POWER	177
Applicable Standard: FCC §2.1046 §22.913	177
Test Equipment List and Details.....	177
Test Procedure.....	177
Environmental Conditions	177
Test Result: Pass.....	178
Test Mode: Transmitting 2GSMTRX and 2UMTS carriers and 4GSMTRX and 1UMTS carriers	178
Test Data:.....	178

6.2 RF EXPOSURE	180
Applicable standard: FCC §2.1091 §1.1037	180
Limit.....	180
Test Data.....	180
Test Result: pass.....	180
6.3 SPURIOUS RADIATED EMISSIONS.....	181
Applicable Standard: FCC CFR 47, §2.1053	181
Test Equipment List and Details.....	181
Test Procedure.....	182
Test Results Summary: PASS	182
Environmental Conditions	182
Test data	183
6.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	184
Applicable Standard: FCC§2.1051, §22.917	184
Test Equipment List and Details.....	184
Test Procedure.....	184
Test Data Environmental Conditions	185
Test Result: Pass.....	185
Test Mode: Transmitting 2GSMTRX and 2UMTS carriers and 4GSMTRX and 1UMTS carriers	185
Test Data:.....	185
6.5 OCCUPIED BANDWIDTH.....	192
Applicable Standard: FCC §2.1049 §22.917	192
Test Equipment List and Details:.....	192
Test Procedure.....	192
Environmental Conditions	192
Test Result: Pass.....	193
Test Mode: Transmitting 2GSMTRX and 2UMTS carriers and 4GSMTRX and 1UMTS carriers	193
Test Data.....	193
6.6 BAND EDGES.....	195
Applicable Standard: FCC §2.1051	195
Test Equipment List and Details.....	195
Test Procedure.....	195
Test Data Environmental Conditions	195
Test Result: Pass.....	196
Test Mode: Transmitting 2GSMTRX and 2UMTS carriers and 4GSMTRX and 1UMTS carriers	196
Test Data.....	196

1 GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The ZXSDR RSU82 S8500 is a multi-mode remote RF unit that supports 2T4R FDD. It supports GSM, UMTS, and CDMA communications systems and features compact structure, large capacity, and easy installation.

Technical specification:

Size: 482 mm × 360 mm × 88 mm(H x W x D)

Input voltage: -48Vdc


Frequency range: 869MHz to 894MHz

Max RF output power: 49dBm

Gain of the antenna: 18dBi, except CDMA is 13dBi

Modulation type of emission: the modulation of CDMA is QPSK; UMTS 4 Carriers; GSM 6 TRX; 4 GSM TRX and 1 UMTS carriers or 2 GSM TRX and 2 UMTS carriers

Appearance of EUT:

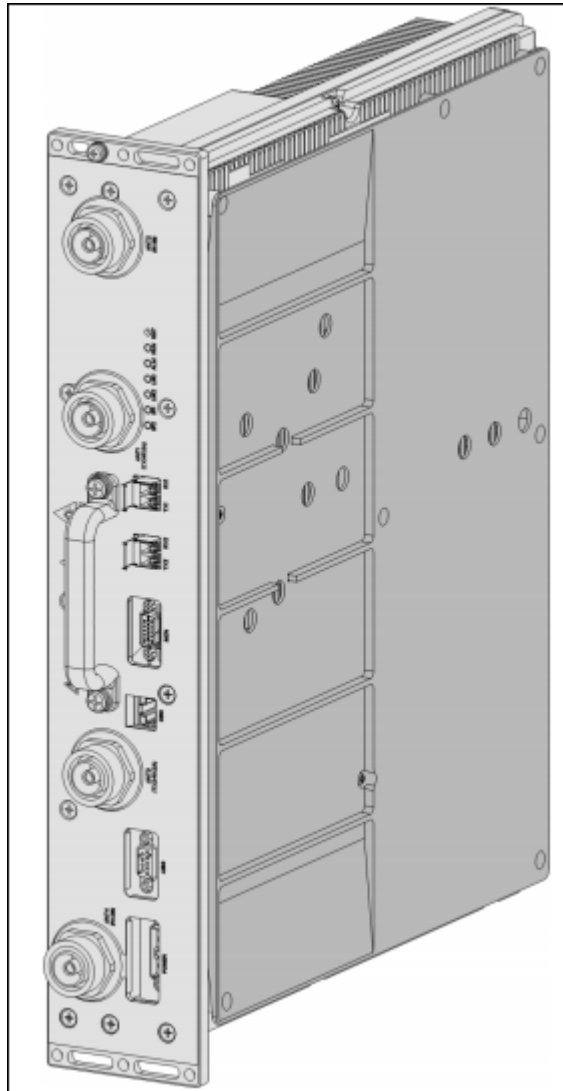

Objective

This Type approval report is prepared on behalf of ZTE Corporation in accordance with Part 2:2011, Part 15:2011, Part 22:2011 of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2. as well as the following parts:

Part 24 Wireless Communication Services

Applicable Standards: TIA EIA 137-A, TIA EIA 97-D, TIA/EIA 603-C, Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

All radiated and conducted measurement was performed at ZTE Corporation Reliability Testing Center. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by ZTE Corporation to collect test data is located in the 1/F,B2 Wing, ZTE Plaza, Keji Road South, Shenzhen, Guangdong, 518057, P.R.China, Tel: +86-755-26771609, Fax: +86-755-26770347. Test site at ZTE Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC). ZTE Corporation EMC Lab was certificated by CNAS and the registration number was L0611. The FCC registration number of ZTE corporation EMC lab is 373926. The IC registration number of ZTE corporation EMC lab is 5200A. The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 0009043175. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

2 SYSTEM TEST CONFIGURATION

Description of Test Configuration


Justification

The EUT was configured for testing according to TIA/EIA-603C.

The final qualification test was performed with EUT operating at normal mode.

Equipment Modifications

ZTE Corporation has not done any modification on the EUT.

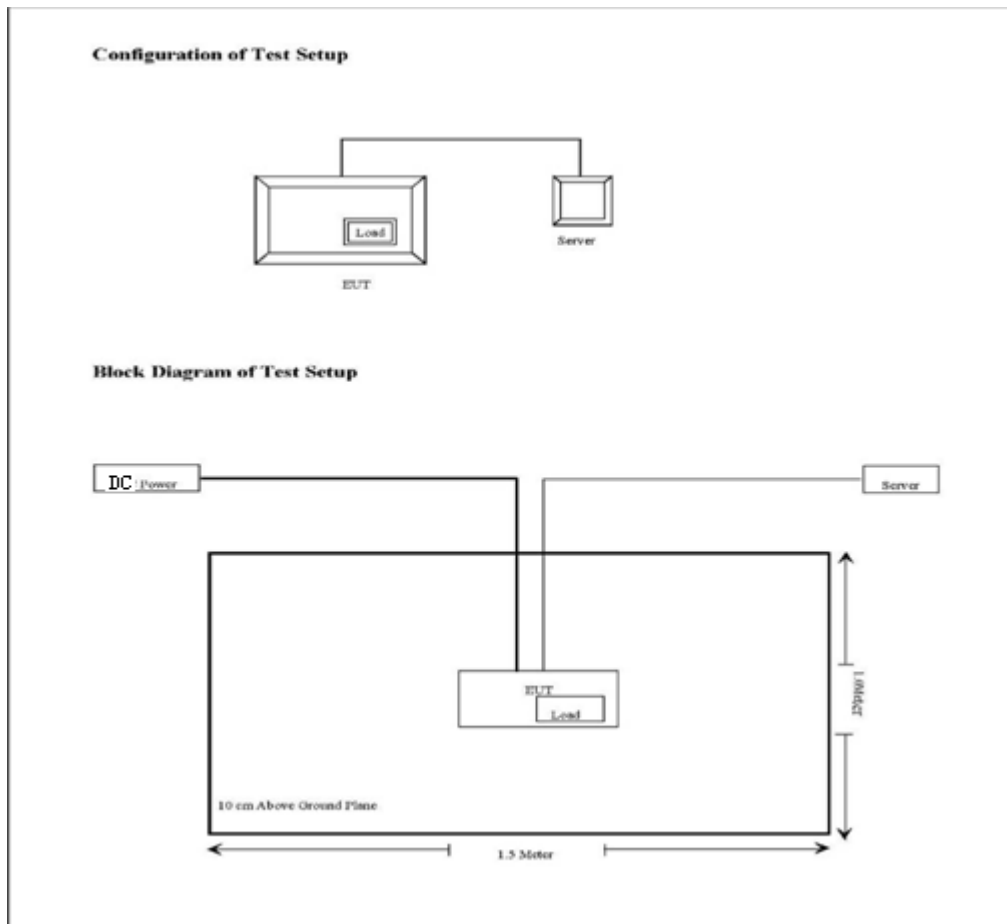

3 CDMA OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§2.1046 ,§22.913	Transmitter output Power	Compliant
§2.1091 ,§1.1037	RF Exposure	Compliant
§2.1047	Modulation Characteristic	Compliant
§2.1053, §22.917	Spurious Radiated Emissions	Compliant
§2.1051, §22.917	Spurious Emissions AT Antenna Terminals	Compliant
§2.1049 §22.917	Occupied Bandwidth	Compliant
§2.1051, §22.917	Band Edge	Compliant
§ 2.1055, §22.355	Frequency stability	Compliant

3.1 TRANSMITTER OUTPUT POWER

Applicable Standard: FCC §2.1046 §22.913


According to FCC §2.1046 & §22.913, the ERP (equivalent radiated power) must not exceed 500 Watts.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	002	1034	2011-4-8	2012-4-7

***statement of traceability:** ZTE Corporation Reliability Testing Center attests that all calibration has been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

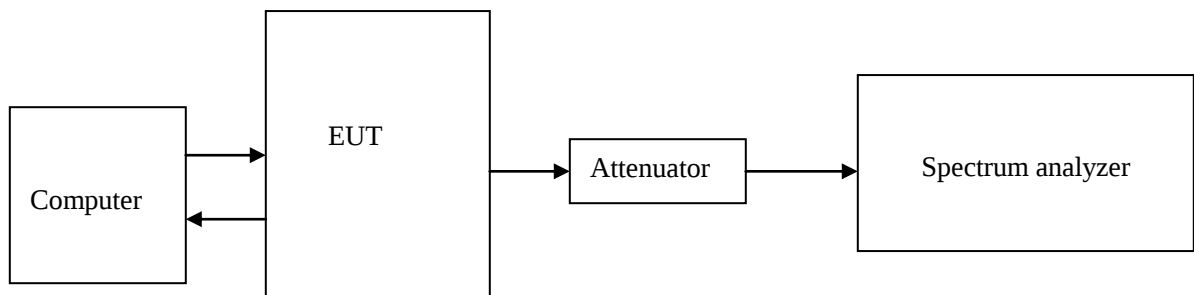


The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. External attenuation Loss is 40dB, Cable Loss is about 2dB



Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar

Test Result: Pass**Test Mode:** Transmitting CDMA**Test Data:****Four carriers**


Center Freq. (MHz)	Frequency (MHz)	Max output Power (dBm)
871.605	869.76/870.99/872.22/873.45	49.60
881.505	879.66/880.89/882.12/883.35	49.11
891.405	889.56/890.79/892.02/893.25	49.03


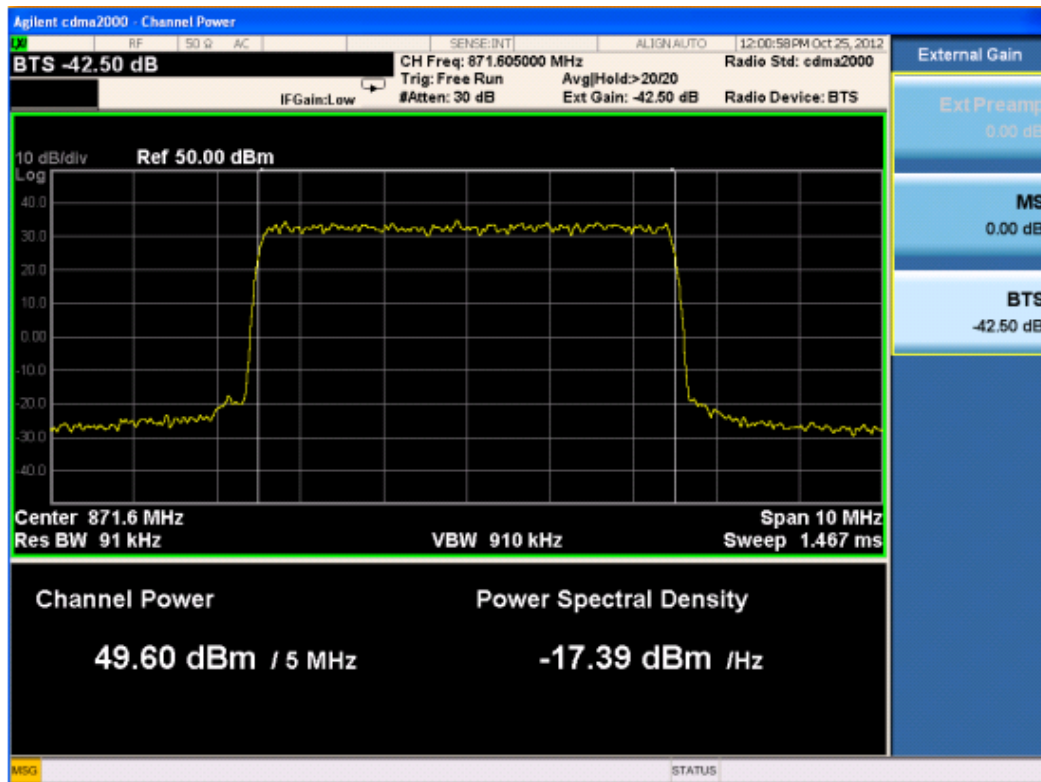


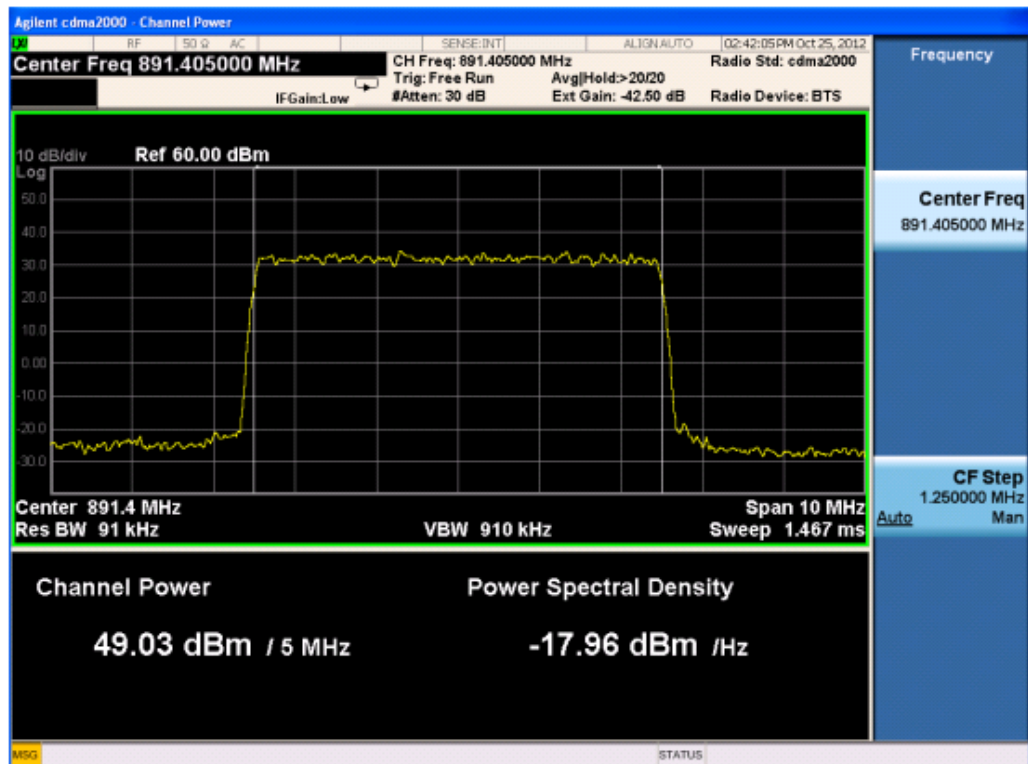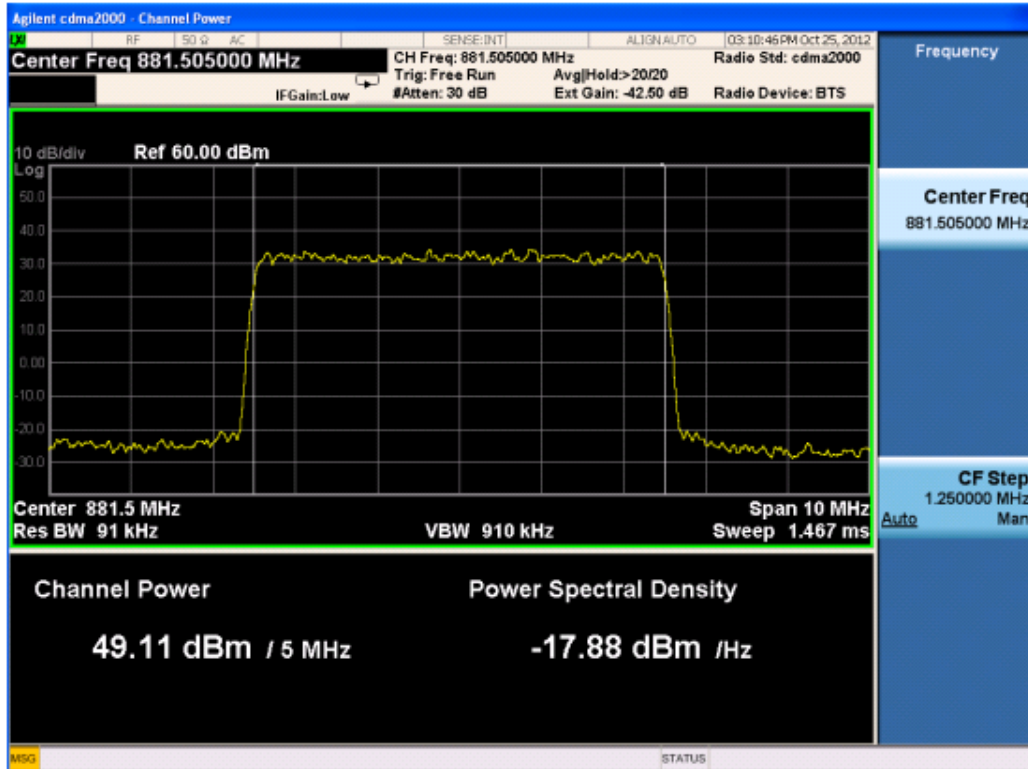

Three carriers


Center Freq. (MHz)	Frequency (MHz)	Max output Power (dBm)
870.99	869.76/870.99/872.22	49
881.49	880.26/881.49/882.72	49.21
892.02	890.79/892.02/893.25	49.07


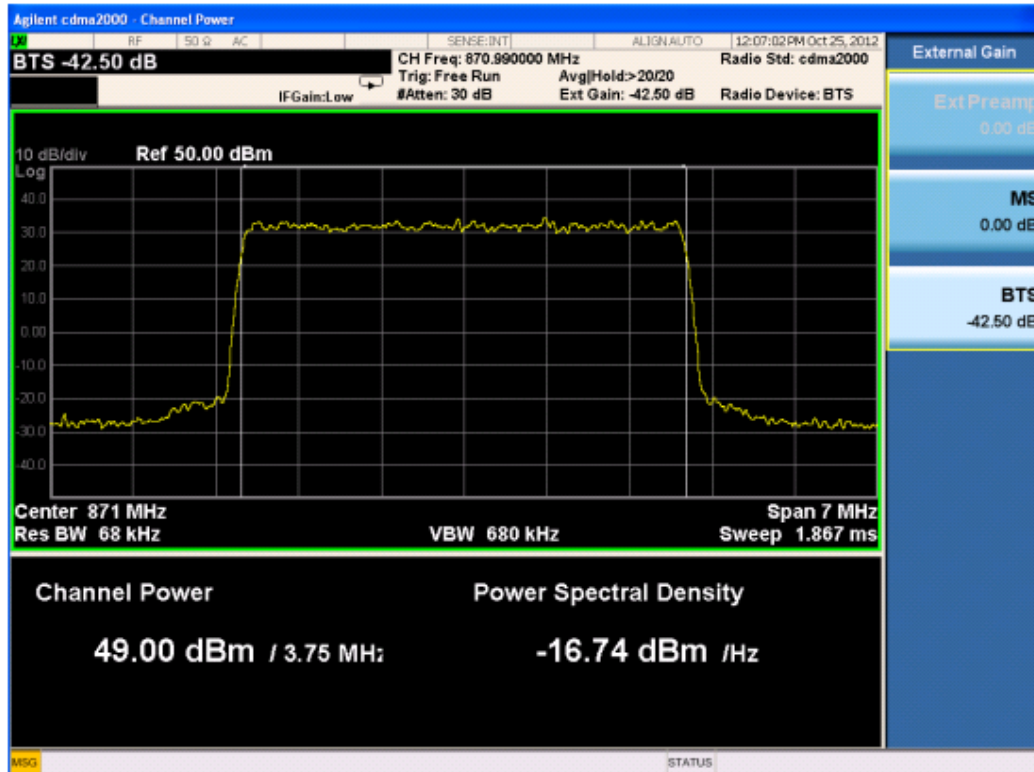


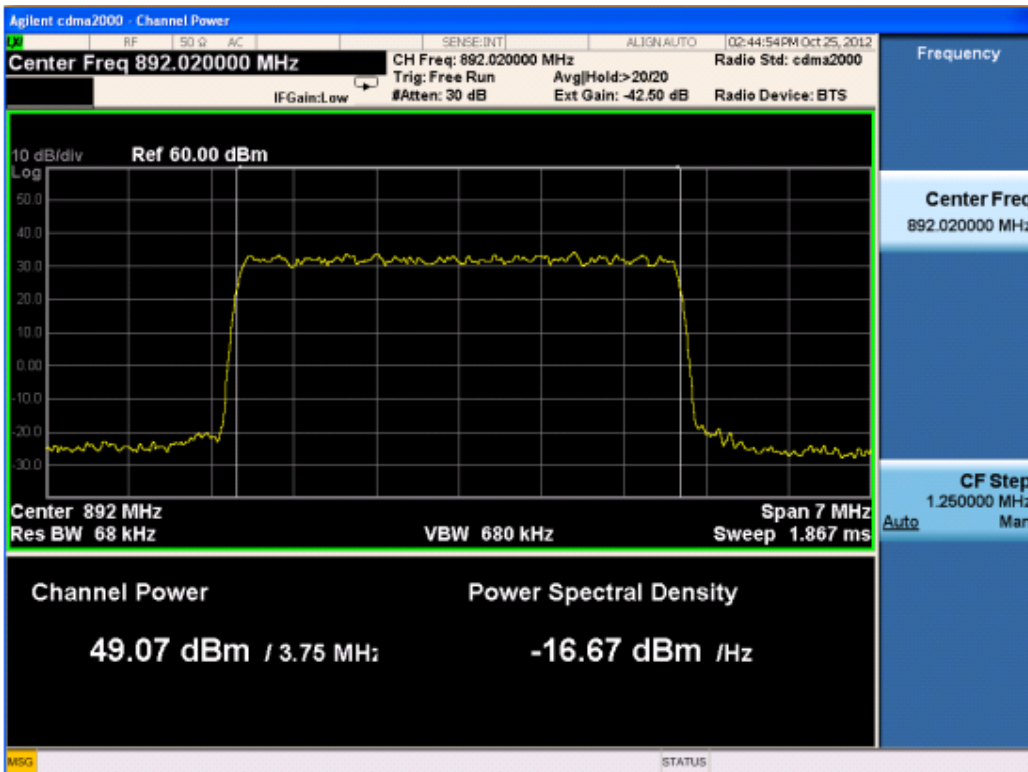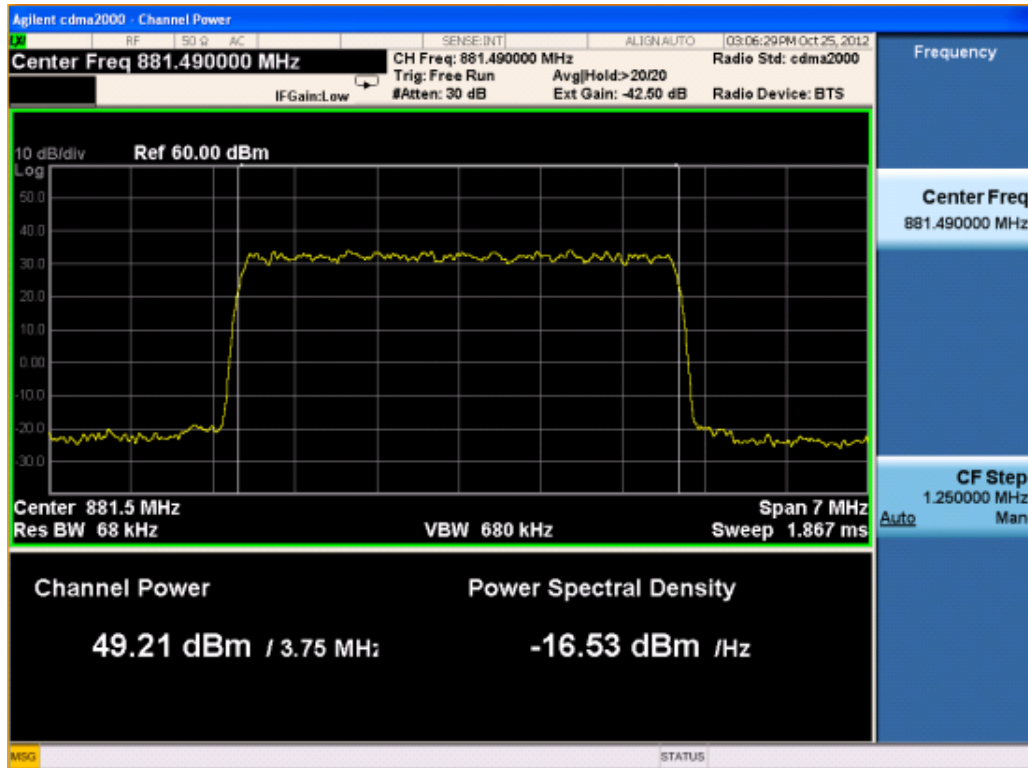

Two carriers


Center Freq. (MHz)	Frequency (MHz)	Max output Power (dBm)
870.375	869.76/870.99	49.3
881.505	880.89/882.12	49.2
892.635	892.02/893.25	49.09


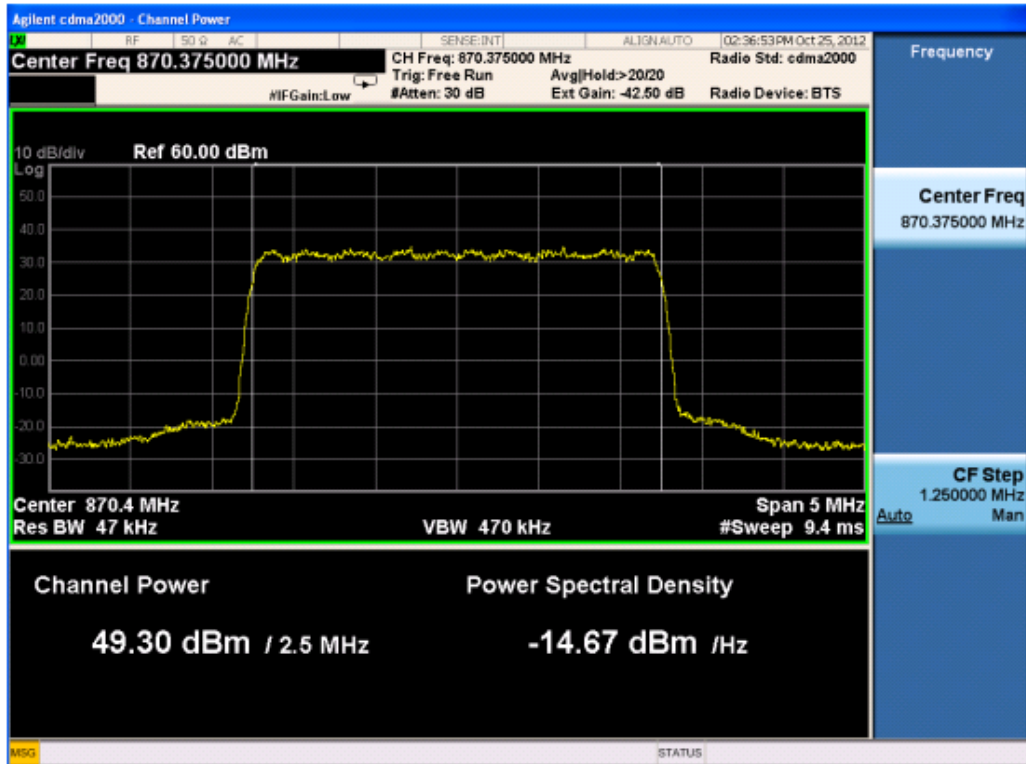


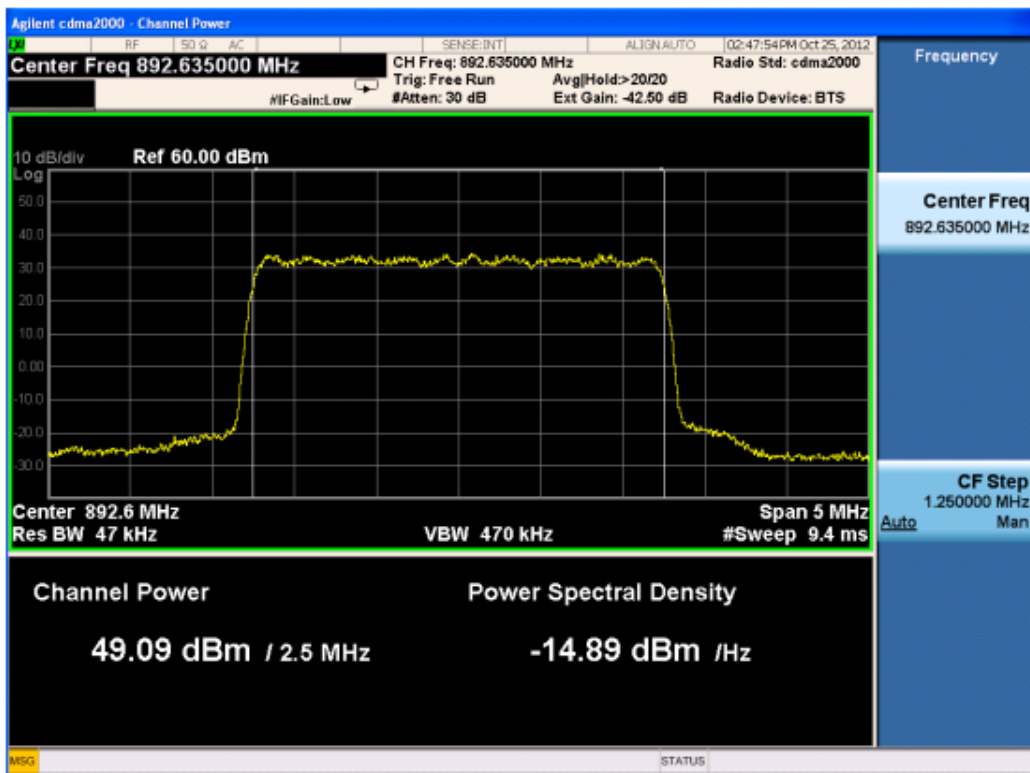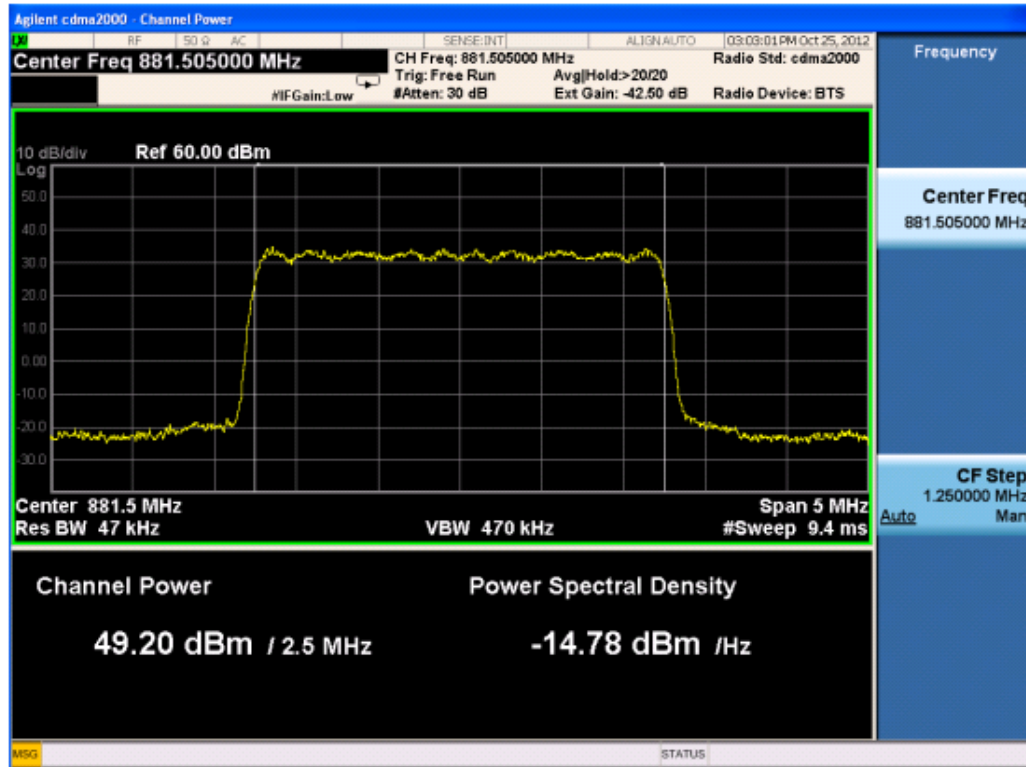

One carrier

Center Freq. (MHz)	Frequency (MHz)	Max output Power (dBm)
869.76	869.76	49.08
881.49	881.49	49.1
893.25	893.25	449.13

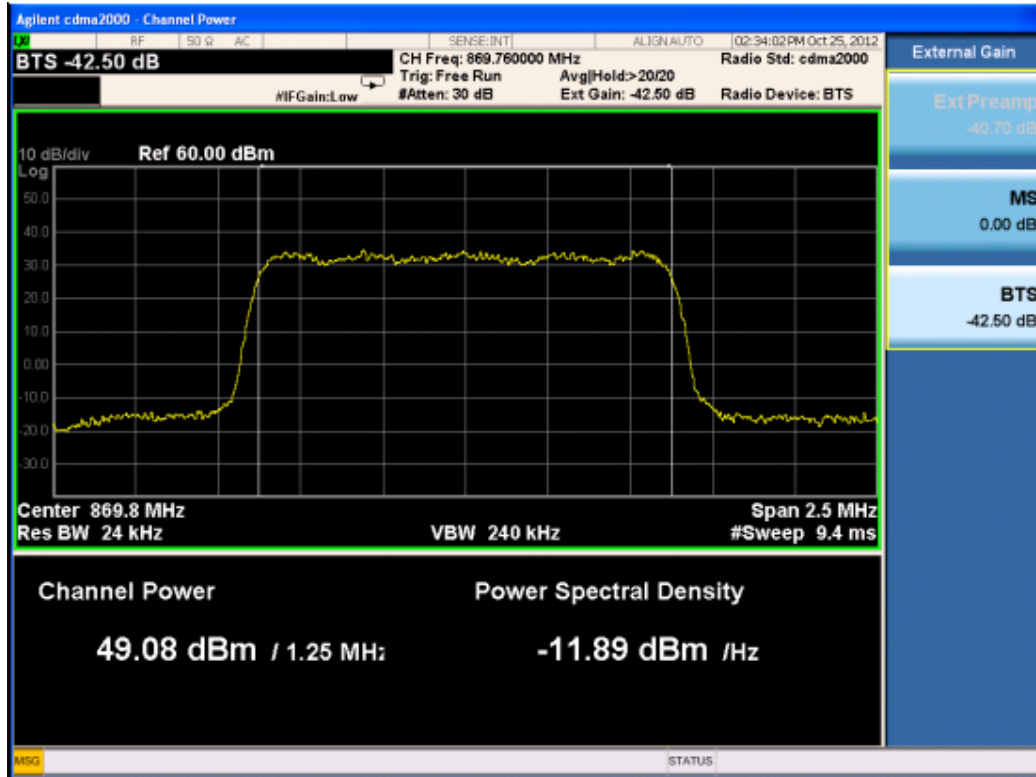

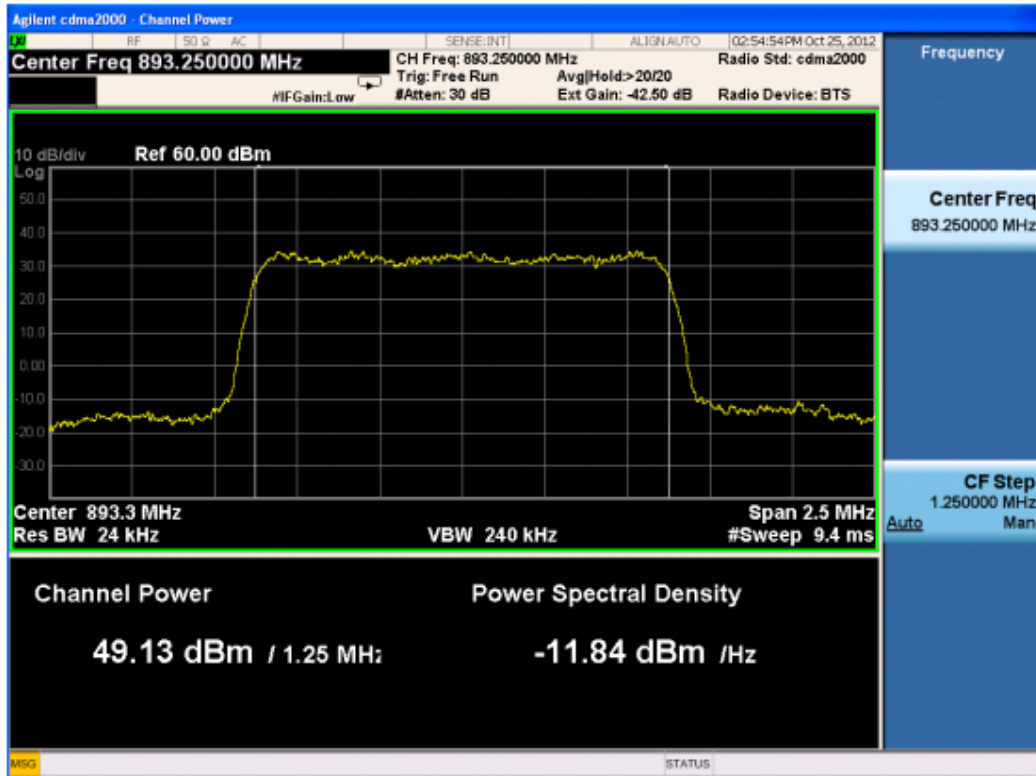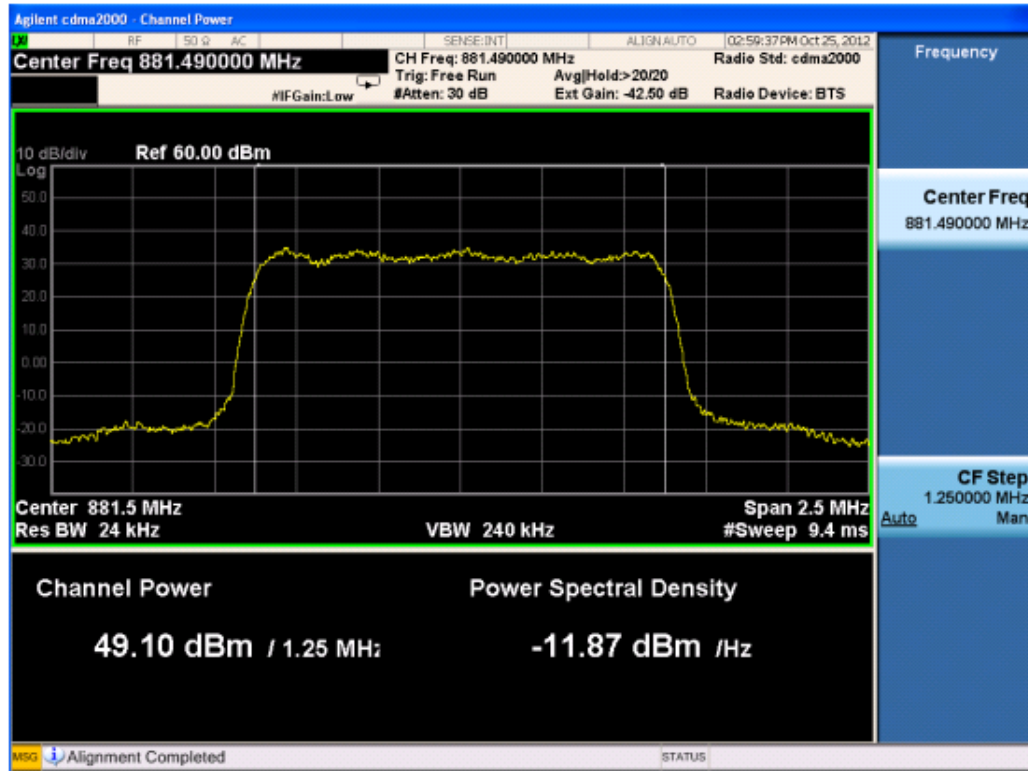

3.2 RF EXPOSURE

Applicable standard: FCC §2.1091 §1.1037

Limit

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated. Limits for Maximum Permissible Exposure (MPE)

(B) Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

Test Data

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = \text{EIRP} / 4\pi R^2$$

Where: S = power density

EIRP= equivalent isotropically radiated power=ERP+2.15dB

R = distance to the center of radiation of the antenna= $[(\text{ERP}+2.15\text{dB})/4\pi S]^{1/2}$

Maximum EIRP, In general, the equivalent isotropically radiated power (EIRP) of base transmitters and cellular repeaters must not exceed 500 Watts.

Frequency is between 300MHz and 1500MHz, and the Maximum,

$$S=894/1500=0.596\text{mW/cm}^2, R=3.31\text{m}.$$

This equipment should be installed and operated with minimum distance 3.31m between the radiator& your body.

Test Result: pass

3.3 MODULATION CHARACTERISTIC

Applicable Standard: FCC §2.1047

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	002	1034	2011-4-8	2012-4-7

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

CDMA digital mode is used by EUT.

Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar



Test Result: Pass

Test Mode: Transmitting CDMA

Test Data:

Frequency (MHz)	Rho
869.76	0.99689
881.49	0.99668
893.25	0.99680

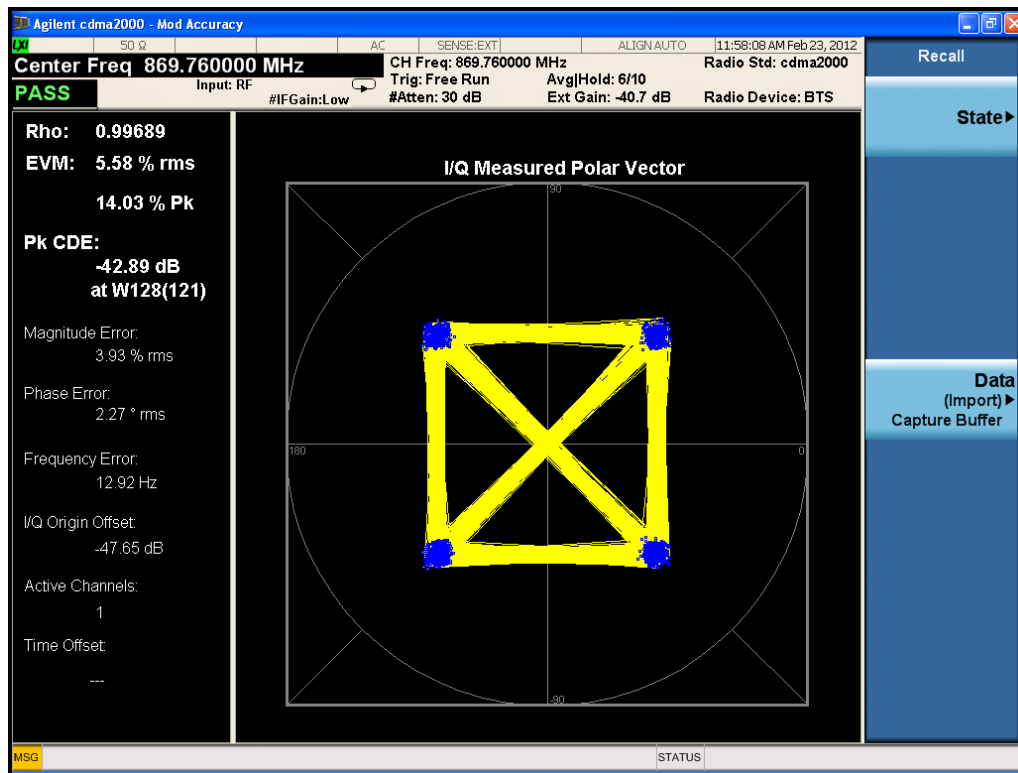

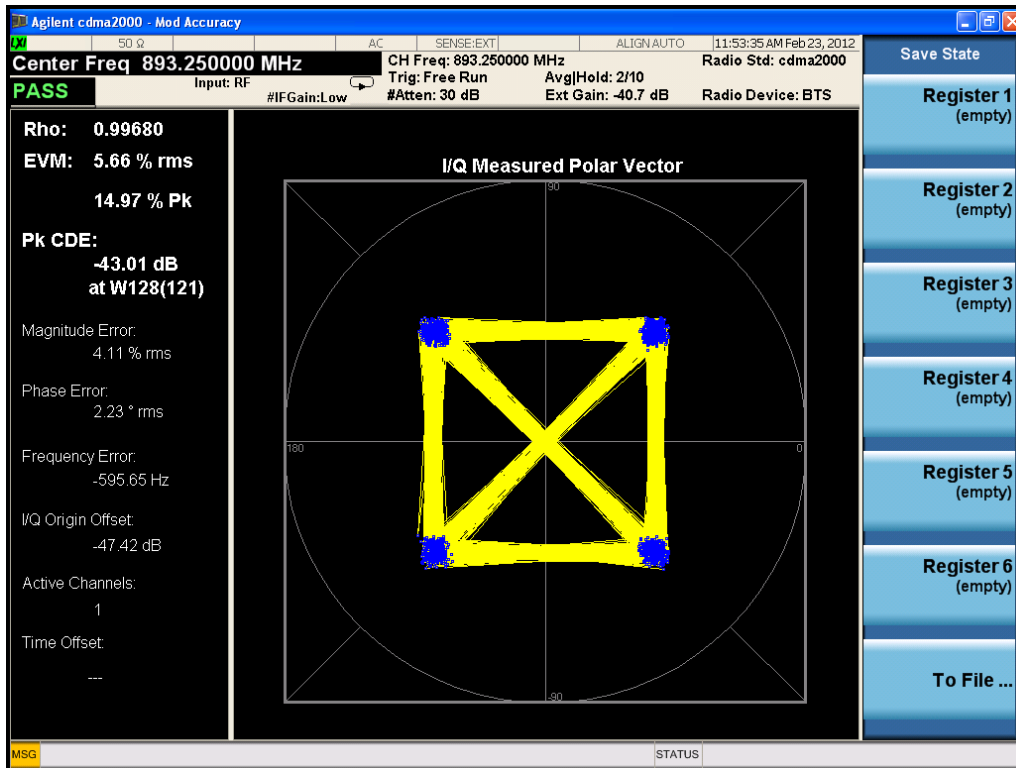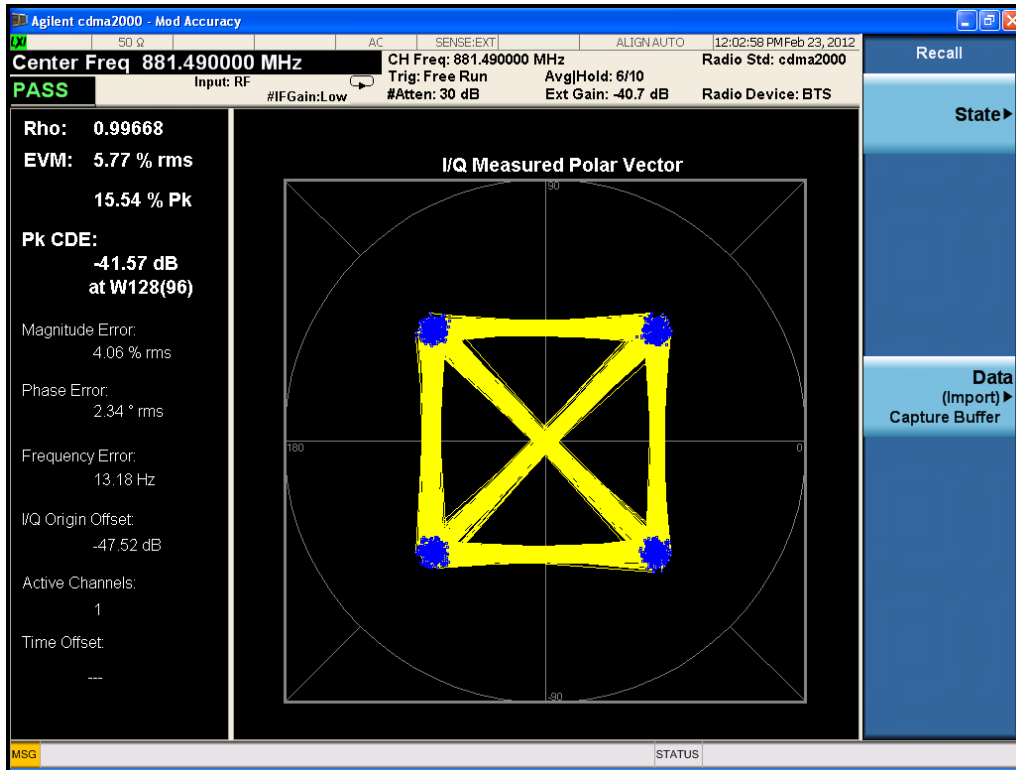

3.4 SPURIOUS RADIATED EMISSIONS

Applicable Standard: FCC CFR 47, §2.1053

Test Equipment List and Details


Manufacturer	Equipment	Model	Serial Number	Last Cal.	Cal. Interval
R&S	SIGNAL GENERATOR	SMR20	A00017351	2012-9-26	1 year
Albatross	Anechoic Chamber	3m Site	A00017354	2012-10-29	1 year
R&S	EMI Test Receiver	ESIB26	100058	2012-10-29	1 year
R&S	Ultra Breitband Antennas	HL562	100022	2012-7-29	1 year
R&S	Double-Ridged Waveguide Horn Antenna	HF906	100032	2012-7-29	1 year
R&S	Double-Ridged Waveguide Horn Antenna	HF906	100446	2012-7-29	1 year
SCHWARZ-BECK	Biconical Antenna	VUBA9117	9117-122	2012-7-29	1 year

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiated emissions measurement at the EMC lab. is 3.6dB.

EUT Setup

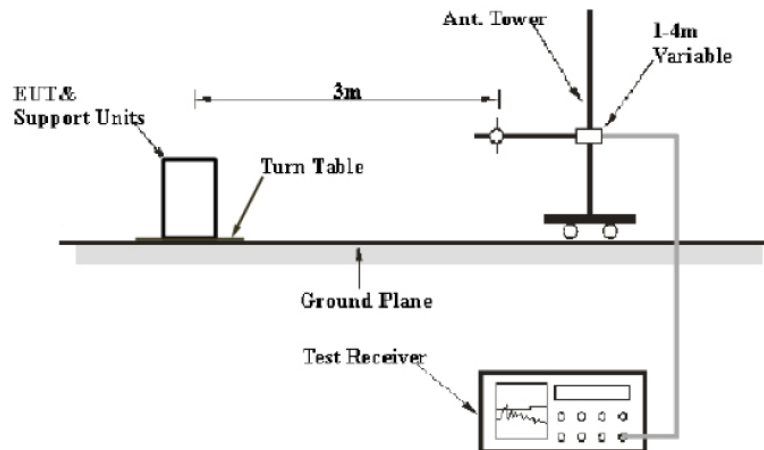

The radiated emission tests were performed in the 3-meter Chamber, using the setup accordance with the FCC part 2.1053. The specification used was the FCC 2.1053 limits.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg(\text{TX pwr in Watts}/0.001)$ - the absolute level

Spurious attenuation limit in dB = $43 + 10 \lg P$ (power out in Watts)

The resolution bandwidth of the spectrum analyzer was set at 1 percent as specified for 30MHz to 1GHz scanning, set at 1MHz for 1GHz to 20GHz scanning.

Test Results Summary: PASS

Environmental Conditions

Temperature:	26°C
Relative Humidity:	60 %
ATM Pressure:	1009 mbar

Test data

Indicated		Test Antenna	Substituted		Cable Loss(dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (GHz)	Amp. (dB μ V)	Polar H/V	Level (dBm)	Antenna Gain Correction						
33.887776	27.91	V	-64.32	-42.03	0.3	-106.65	2.15	-108.8	-13	95.8
134.96994	28.75	V	-68.83	-9.59	0.8	-79.22	2.15	-81.37	-13	68.37
173.847695	29.65	V	-67.04	-2.23	1.1	-70.37	2.15	-72.52	-13	59.52
618.997996	32.45	V	-63.65	-1.39	2.1	-67.14	2.15	-69.29	-13	56.29
871.703407	72.58	V	-36.25	-1.32	2.5	-40.07	2.15	-42.22	-13	29.22
3000	59.3	V	-50.78	7.75	4.6	-47.63	2.15	-49.78	-13	36.78
33.887776	28.82	H	-57.34	-42.03	0.3	-99.67	2.15	-101.82	-13	88.82
138.857715	27.81	H	-69.28	-8.42	1	-78.7	2.15	-80.85	-13	67.85
177.735471	29.92	H	-66.85	-1.65	1.1	-69.6	2.15	-71.75	-13	58.75
599.559118	33.34	H	-64.28	-1.21	2	-67.49	2.15	-69.64	-13	56.64
871.703407	69.93	H	-29.02	-1.32	2.5	-32.84	2.15	-34.99	-13	21.99
2839.67936	59.3	H	-47.3	7.95	4.5	-43.85	2.15	-46	-13	33

Radiation emission spurious below 3GHz

Indicated		Test Antenna	Substituted		Cable Loss(dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (GHz)	Amp. (dB μ V)	Polar H/V	Level (dBm)	Antenna Gain Correction						
4042.08417	41.2	V	-51.03	7.95	5.3	-48.38	2.15	-50.53	-13	37.53
5412.82565	45.07	V	-52.51	8.55	6.3	-50.26	2.15	-52.41	-13	39.41
6927.85571	49.58	V	-47.11	9.25	7.3	-45.16	2.15	-47.31	-13	34.31
9821.64329	54.34	V	-41.76	9.95	8.9	-40.71	2.15	-42.86	-13	29.86
10196.3928	59	V	-49.83	11.35	8.9	-47.38	2.15	-49.53	-13	36.53
17977.9559	71.86	V	-38.22	8.95	12.2	-41.47	2.15	-43.62	-13	30.62
3881.76353	42.38	H	-43.78	7.75	5.2	-41.23	2.15	-43.38	-13	30.38
5380.76152	44.67	H	-52.42	8.55	6.3	-50.17	2.15	-52.32	-13	39.32
6903.80762	50.01	H	-46.76	9.25	7.3	-44.81	2.15	-46.96	-13	33.96
9821.64329	53.54	H	-44.08	9.95	8.9	-43.03	2.15	-45.18	-13	32.18
13348.6974	58.45	H	-40.5	11.85	10.2	-38.85	2.15	-41	-13	28
17911.8236	71.57	H	-35.03	8.95	12.2	-38.28	2.15	-40.43	-13	27.43

Radiation emission spurious above 3GHz

3.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard: FCC§2.1051, §22.917

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	002	1034	2011-4-8	2012-4-7

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

EUT Setup:

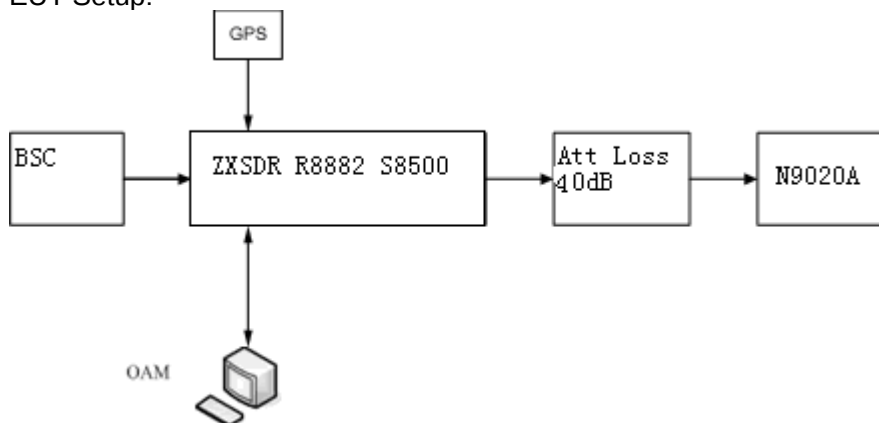

REMARKS: Attenuator loss (dB)=40dB, Cable Loss (dB)=2dB.

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100KHz for 30MHz to 1GHz band, set at 1MHz for 1GHz to 10GHz band. Sufficient scans were taken to

show any out of band emissions up to 10th harmonic.

Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar


Test Result: Pass


Test Mode: Transmitting CDMA

Test Data:

Four carriers (working in bottom frequency)

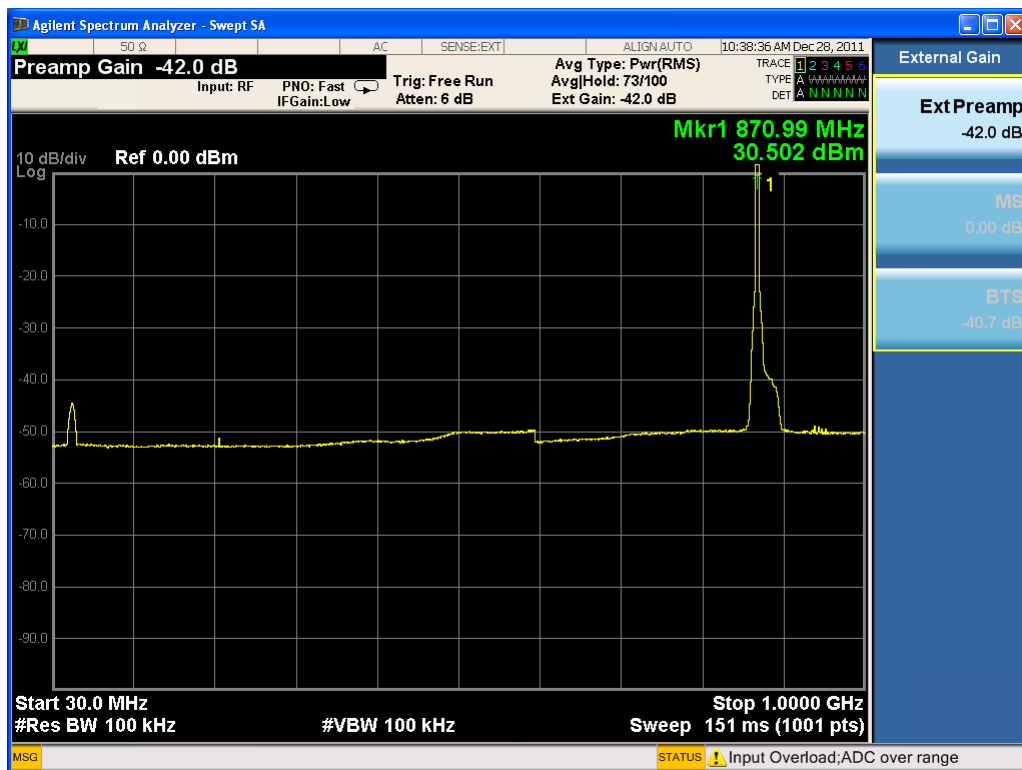









Three carriers (working in bottom frequency)

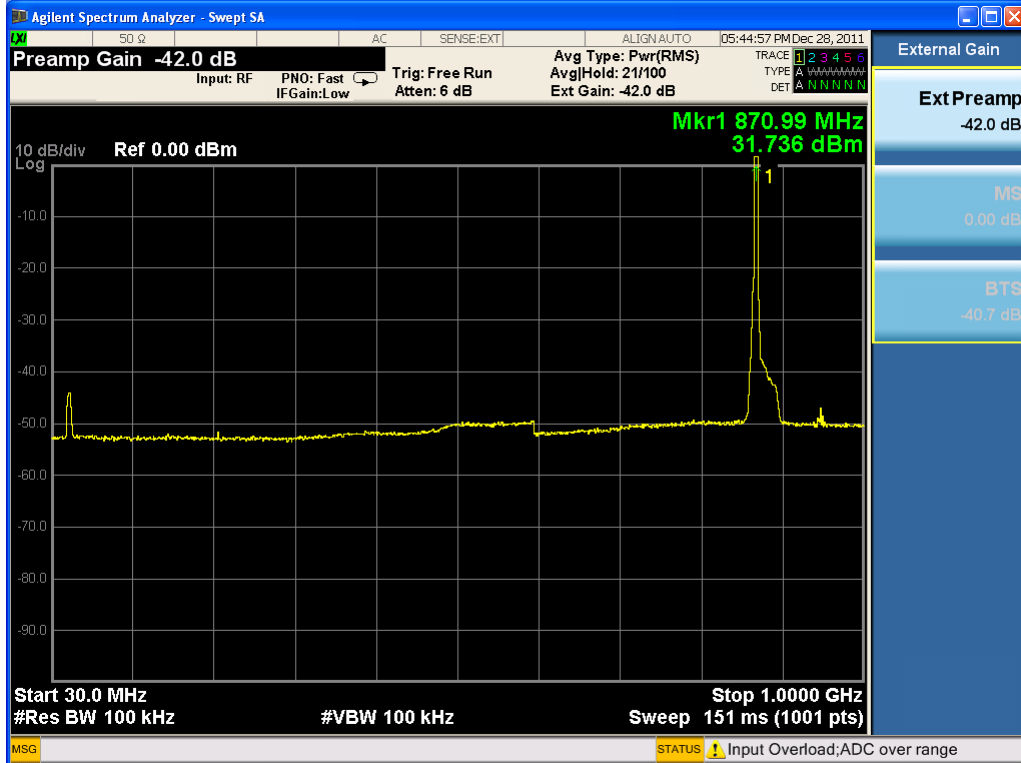





Three carriers (working in middle frequency)

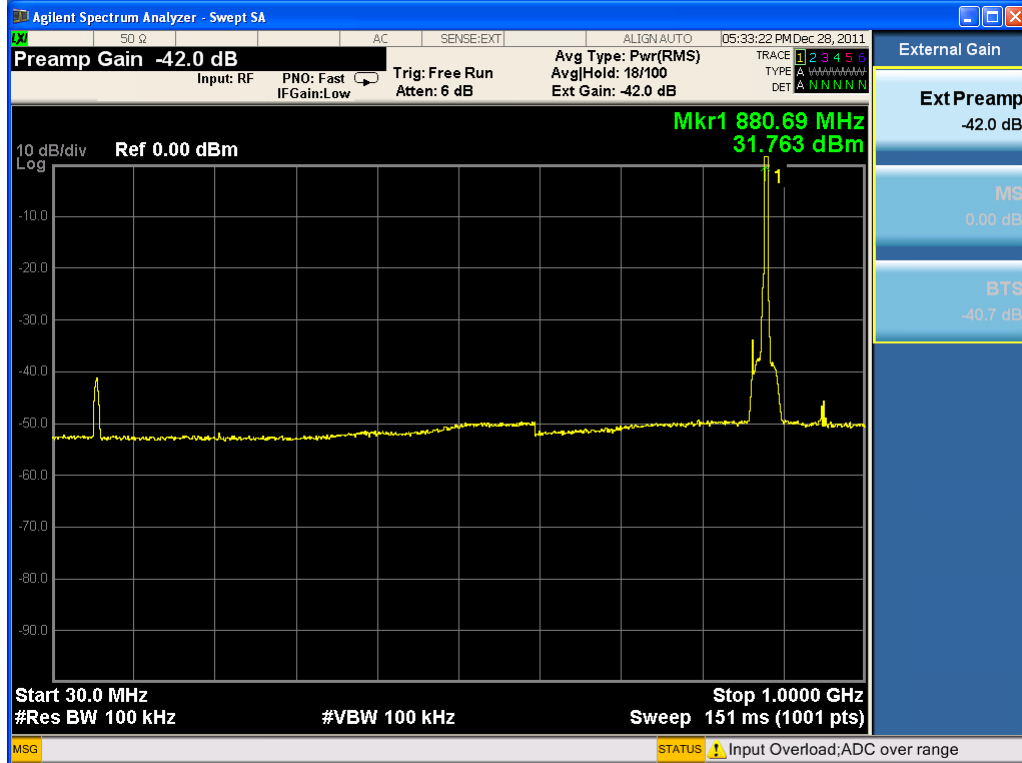




Three carriers (working in top frequency)

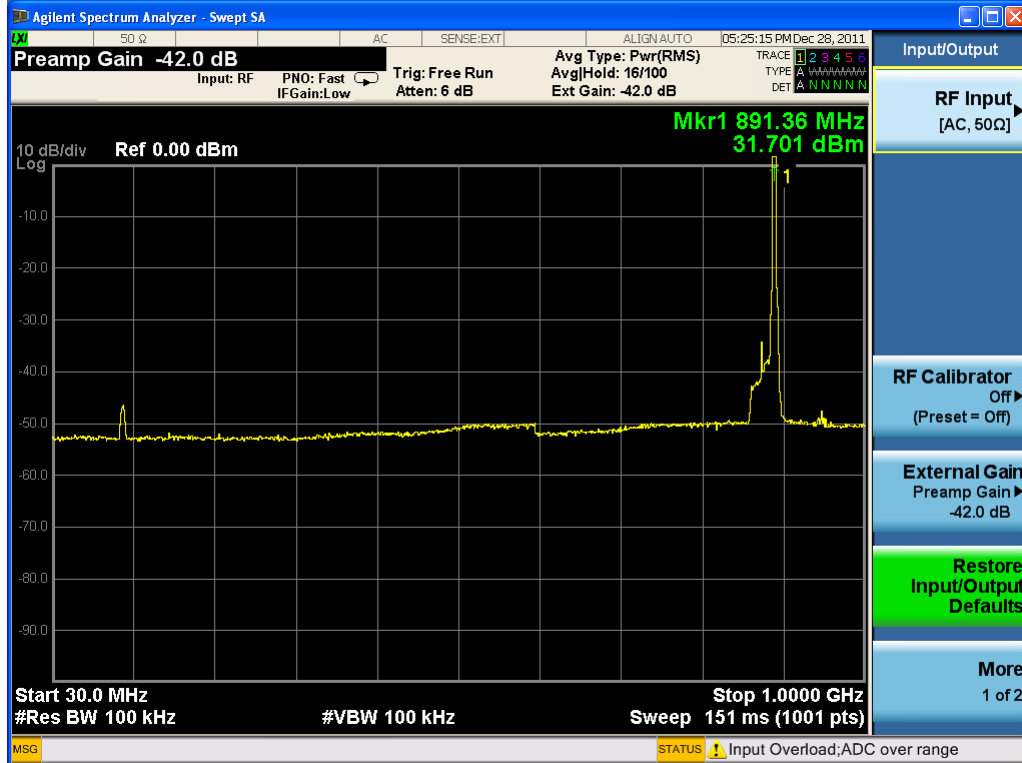







Two carriers (working in middle frequency)

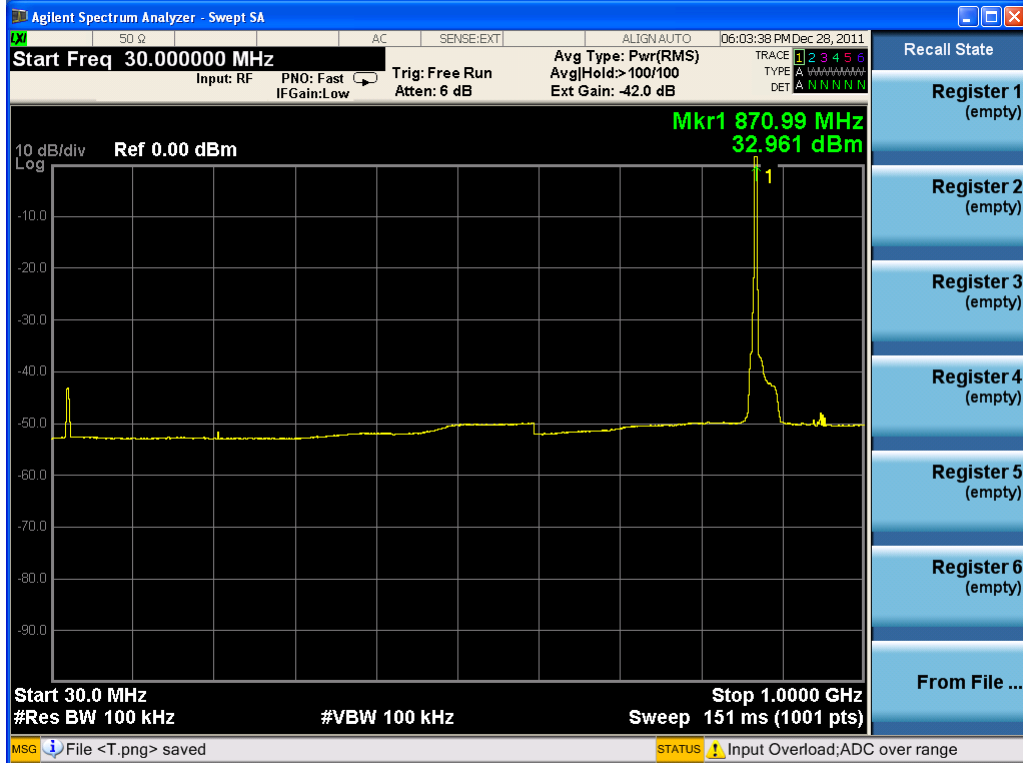










One carrier (working in middle frequency)

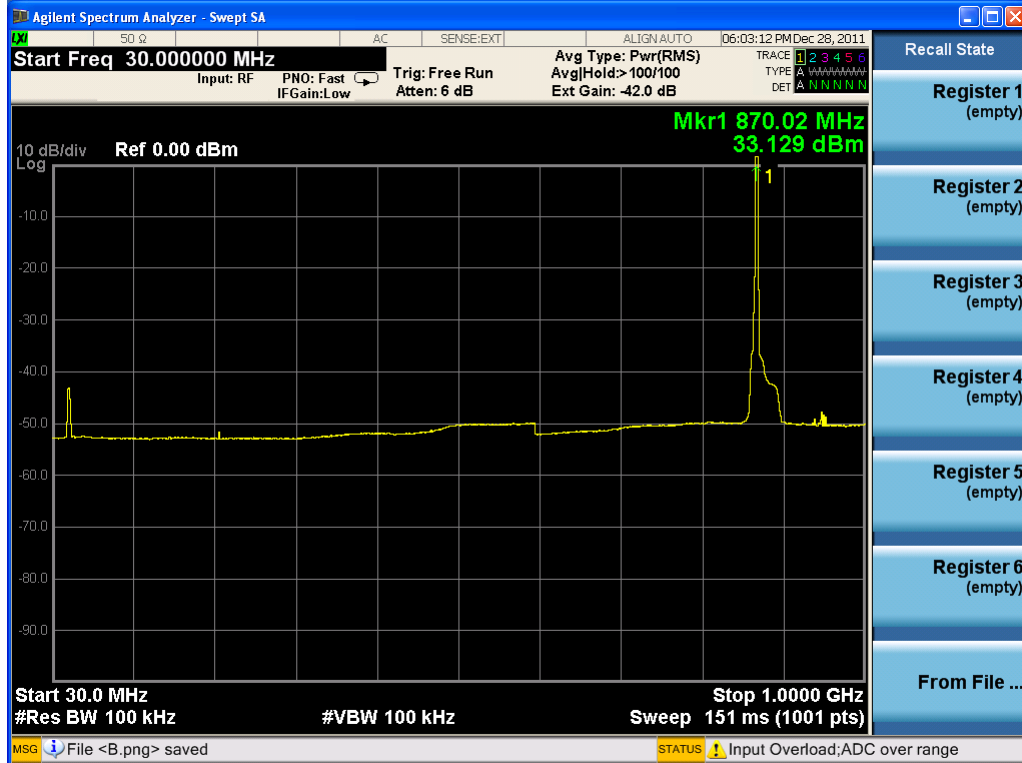



One carrier (working in top frequency)

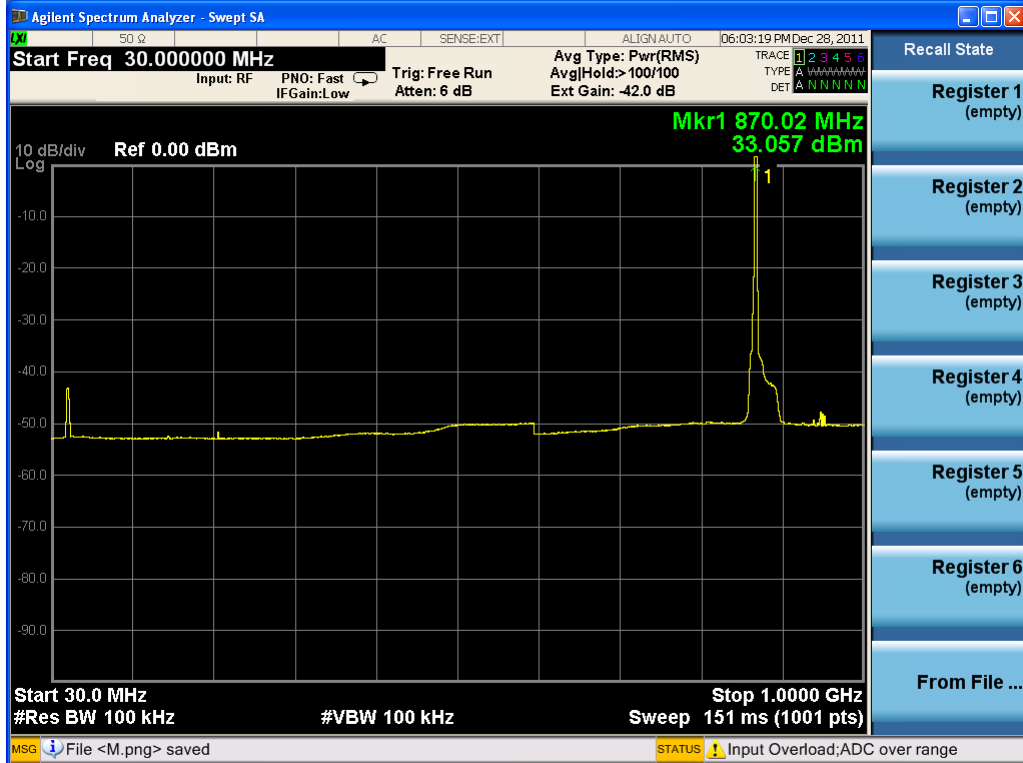

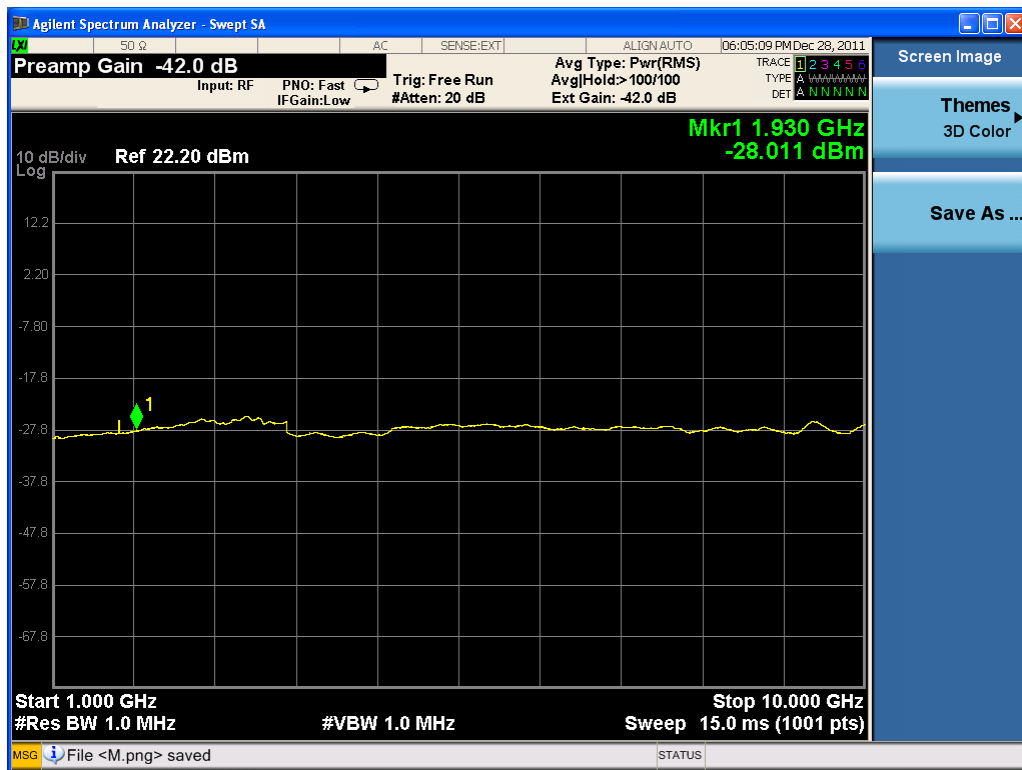

3.6 OCCUPIED BANDWIDTH

Applicable Standard: FCC §2.1049 §22.917

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	002	1034	2011-4-8	2012-4-7

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

The RF out of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. 99%Power bandwidth was recorded.


Environmental Conditions



Temperature:	20 ° C
Relative Humidity:	53%
ATM Pressure:	1009mbar

Test Result: Pass**Test Mode:** Transmitting CDMA**Test Data**

For four carries:


Frequency (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
869.76/870.99/872.22/873.45	4.8947	<5.00
879.66/880.89/882.12/883.35	4.8858	<5.00
889.56/890.79/892.02/893.25	4.8948	<5.00


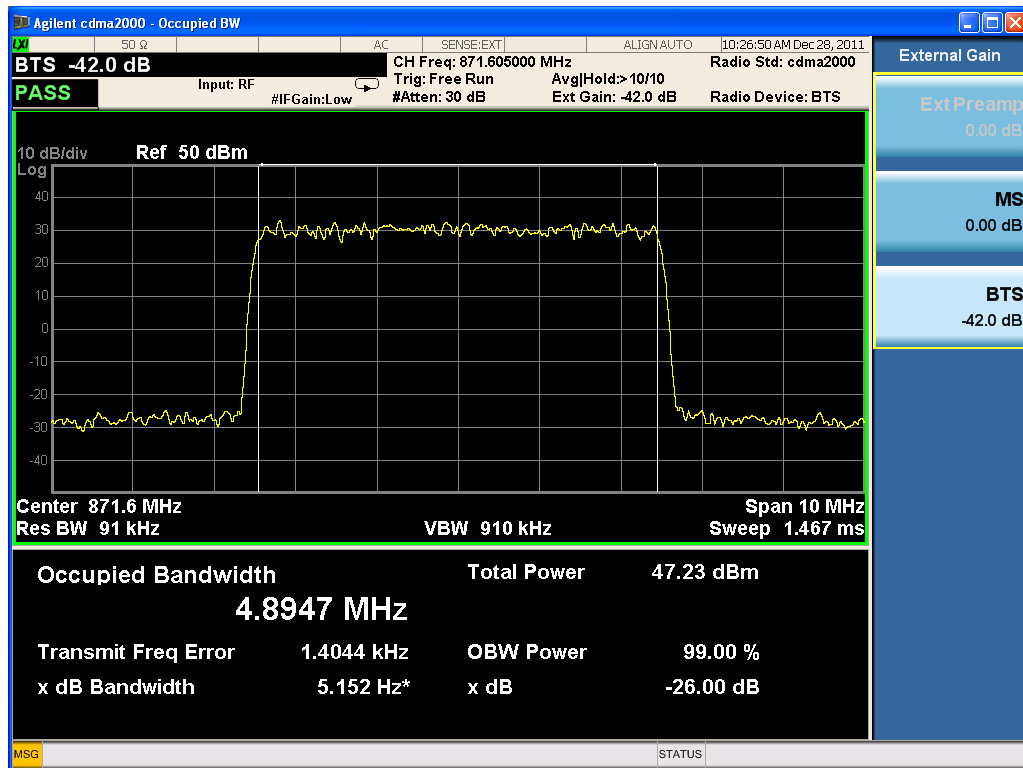


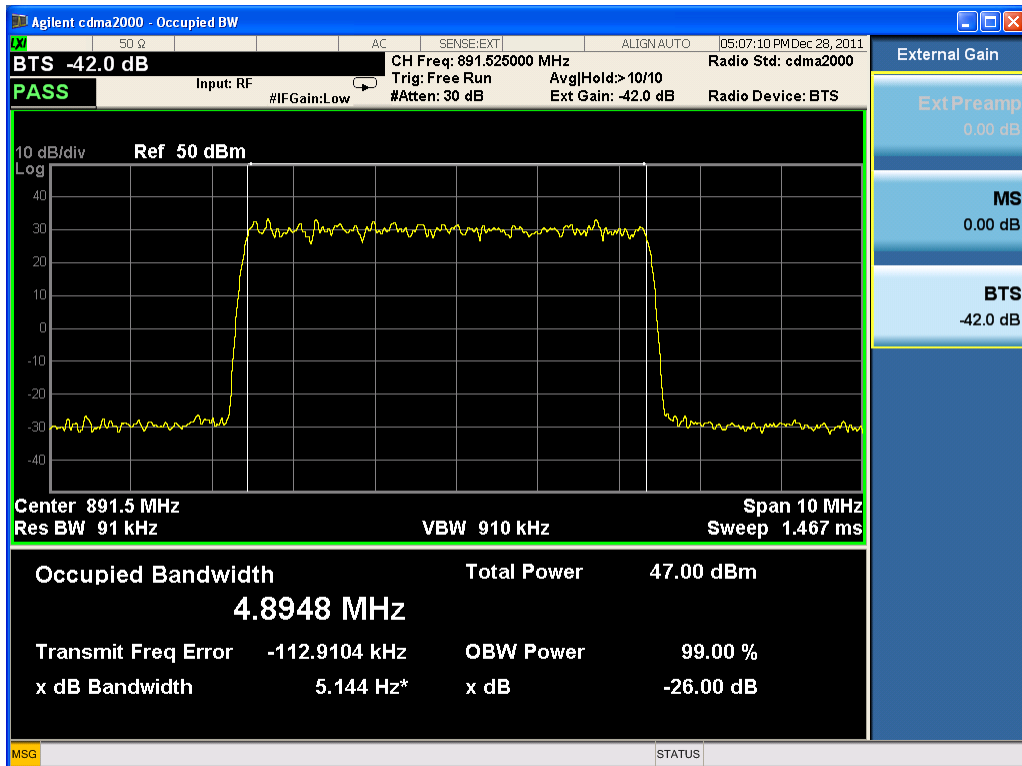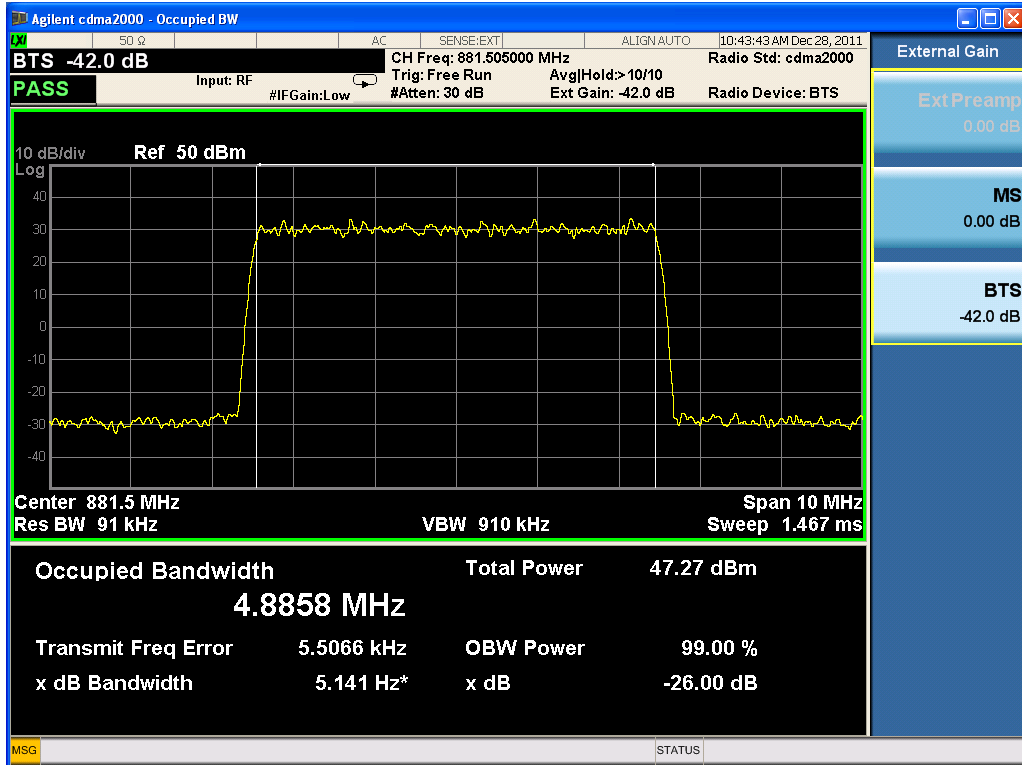

For three carries:


Frequency (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
869.76/870.99/872.22	3.6612	<3.75
880.26/881.49/882.72	3.6711	<3.75
890.79/892.02/893.25	3.6777	<3.75


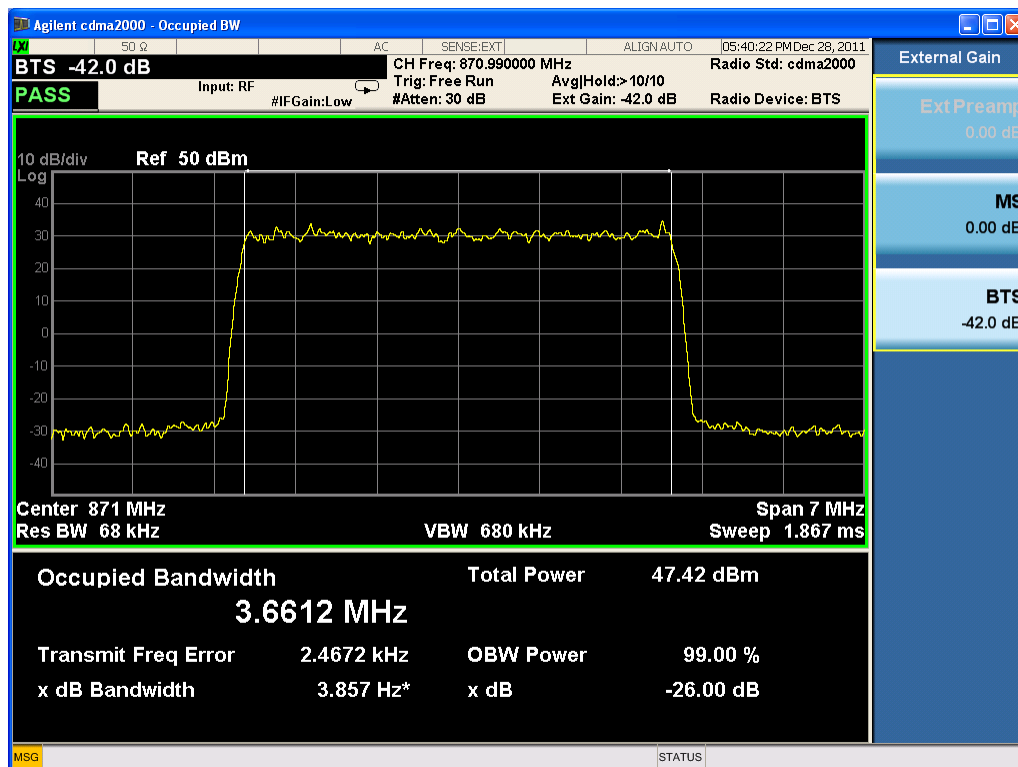


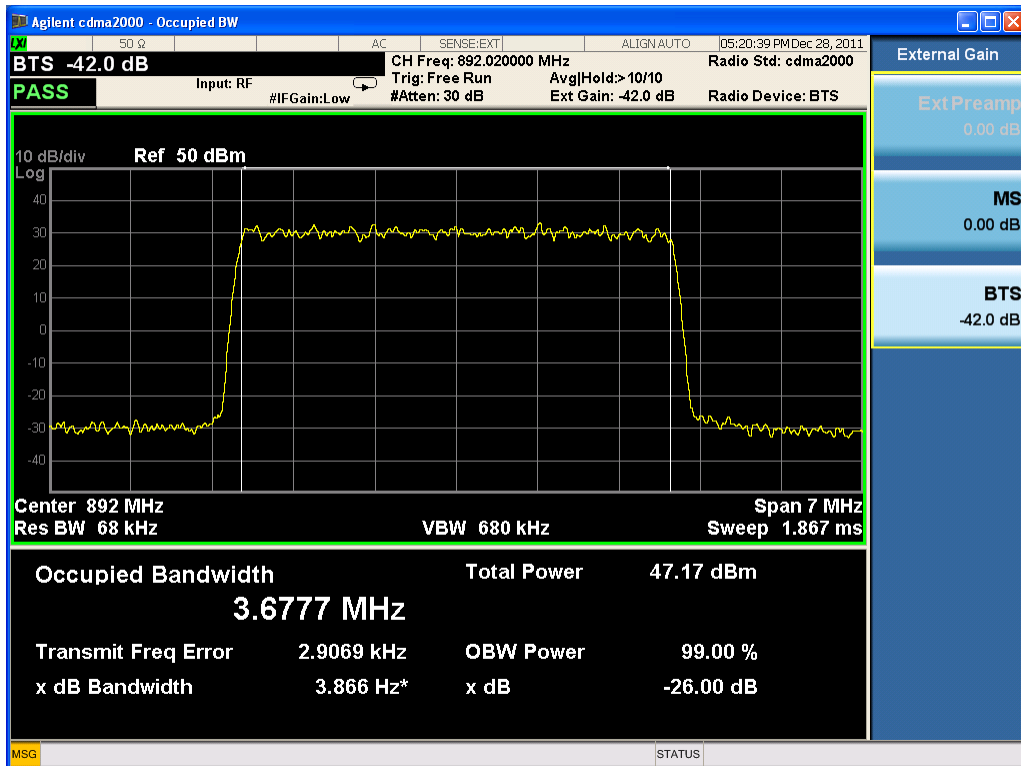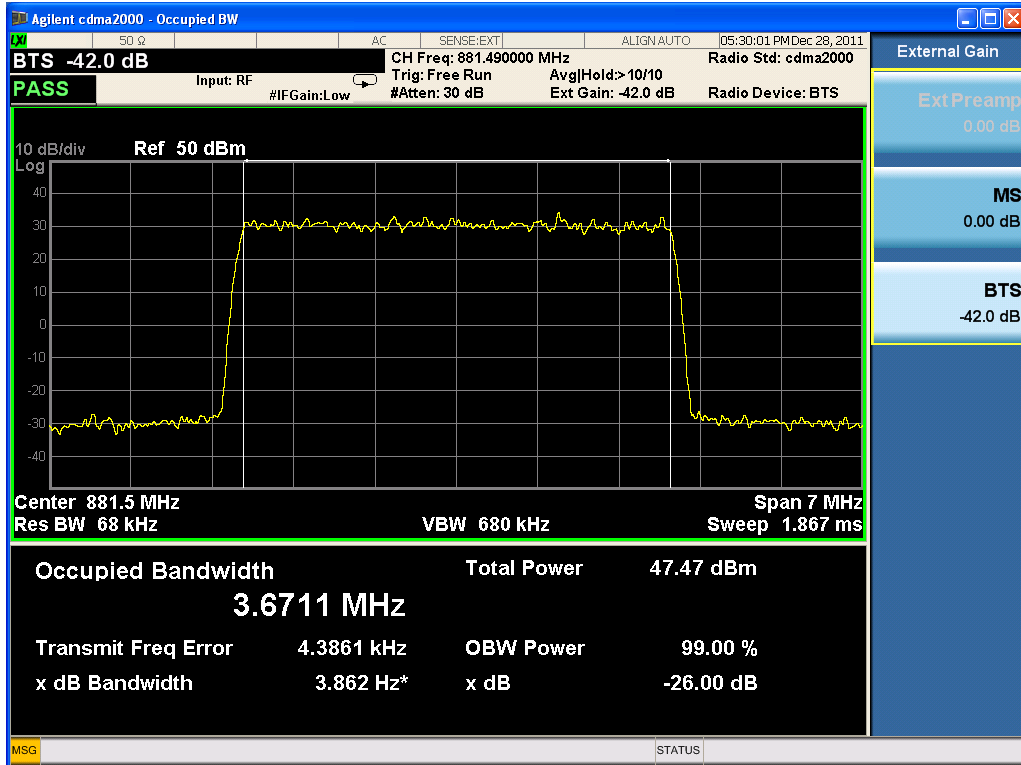

For two carries


Frequency (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
869.76/870.99	2.4423	<2.50
880.89/882.12	2.4463	<2.50
892.02/893.25	2.4482	<2.50


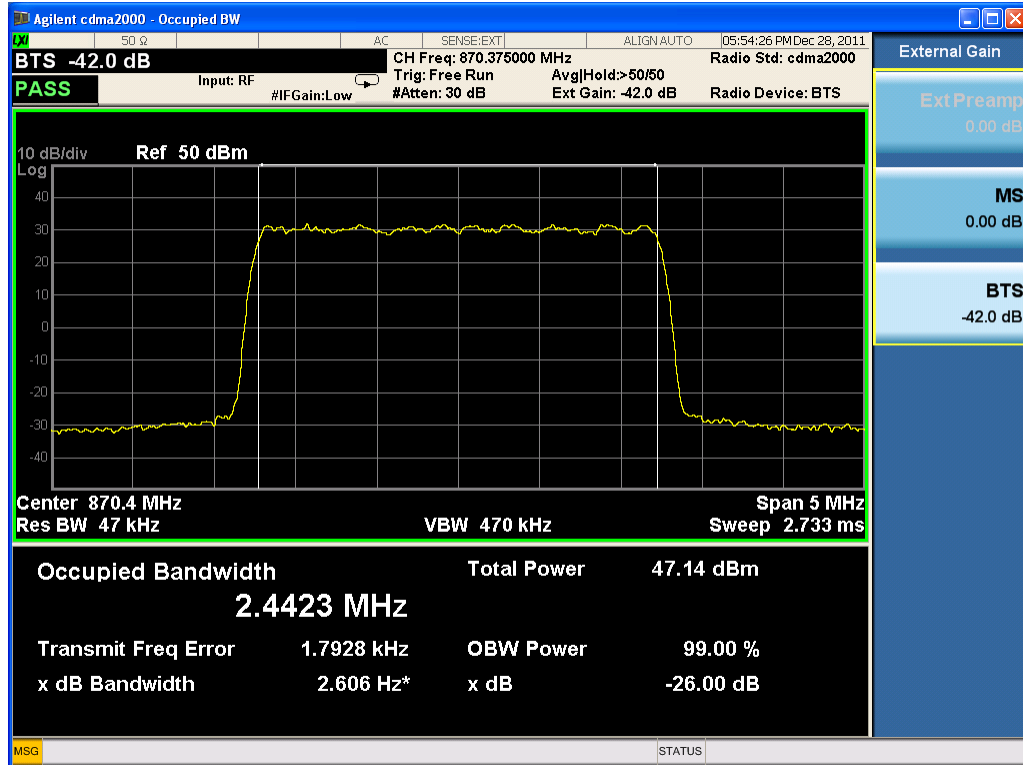


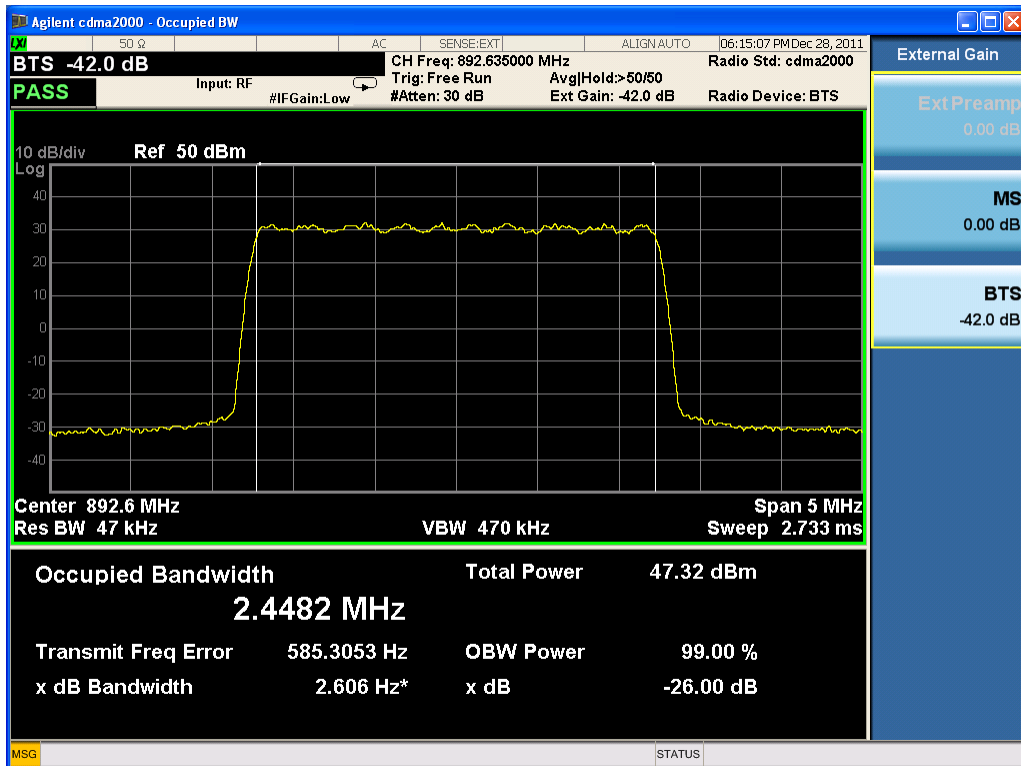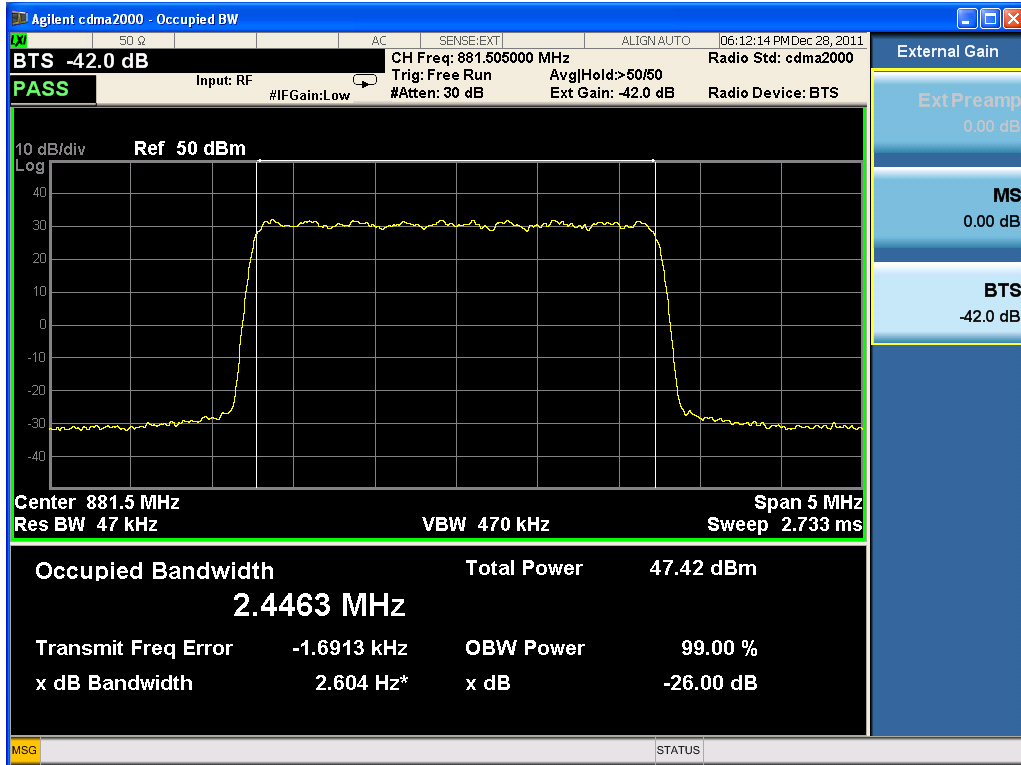

For one carrier

Frequency (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
869.76	1.2304	<1.25
881.49	1.2299	<1.25
893.25	1.2360	<1.25

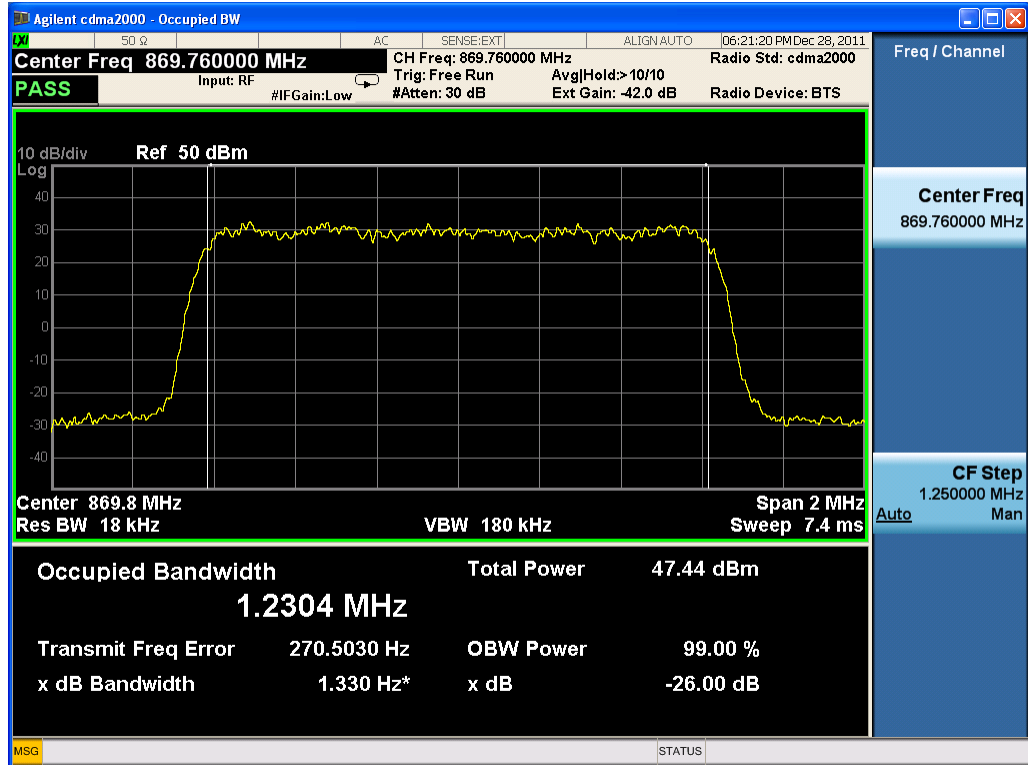

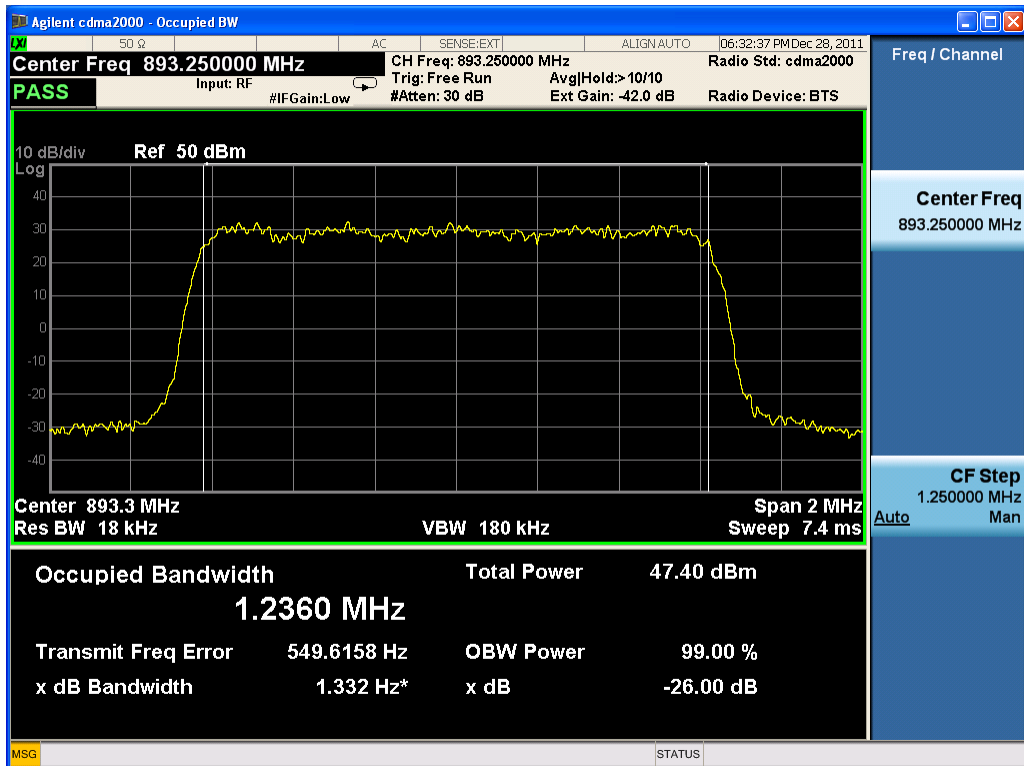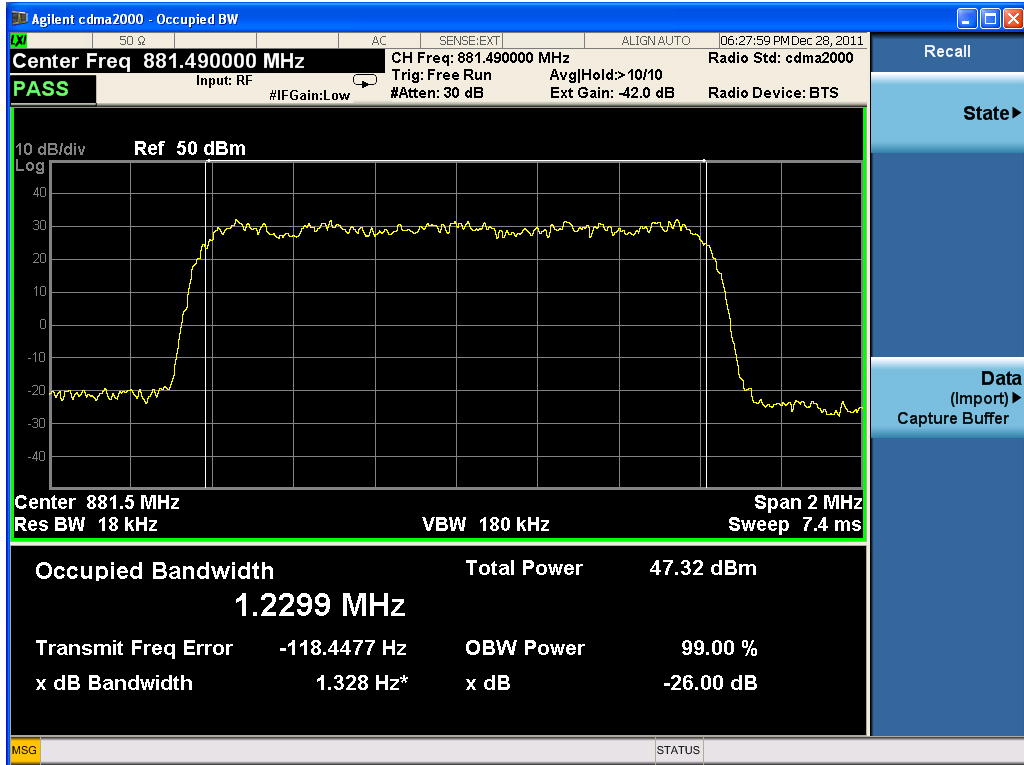

3.7 BAND EDGES

Applicable Standard: FCC §2.1051

According to §2.1051, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (p) by a factor of at least $43 + 10 \log(p)$ dB. The limit (dBm) should $< P - (43 + 10 \log(P)) = -13 \text{ dBm}$.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	002	1034	2011-4-8	2012-4-7

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.
The center of the spectrum analyzer was set to block edge frequency.


Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53%
ATM Pressure:	1009mbar

Test Result: Pass**Test Mode:** Transmitting CDMA**Test Data**

For four carriers



Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
869.76/870.99/872.22/873.45	-23.586	-13.00
889.56/890.79/892.02/893.25	-20.736	-13.00

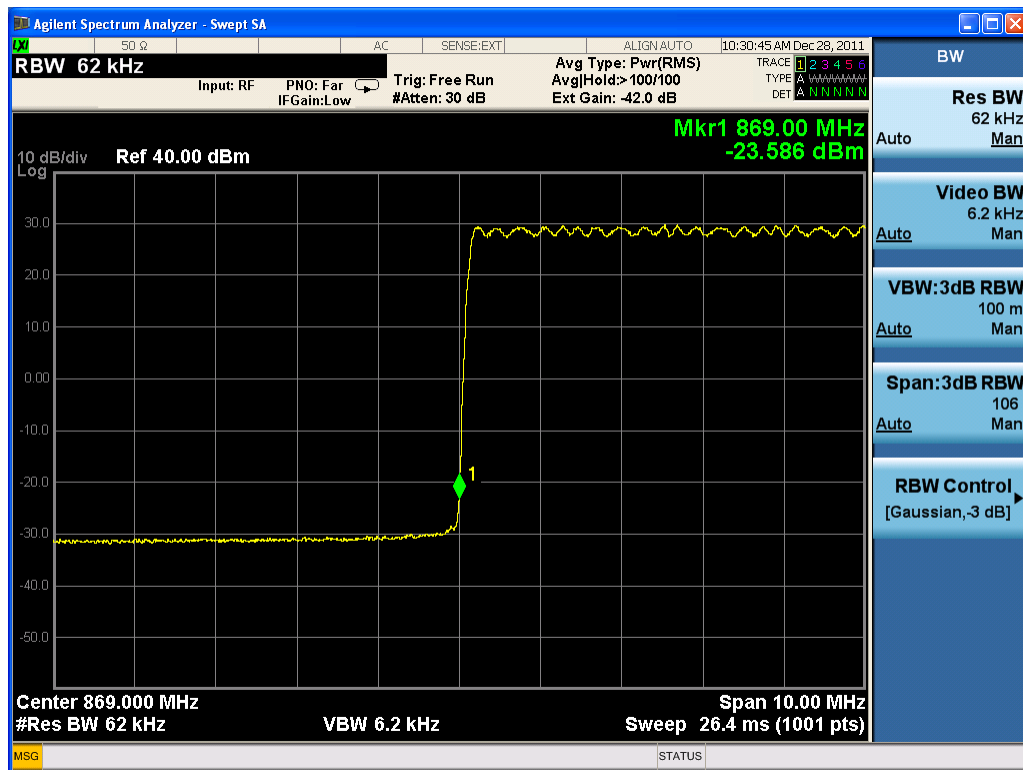

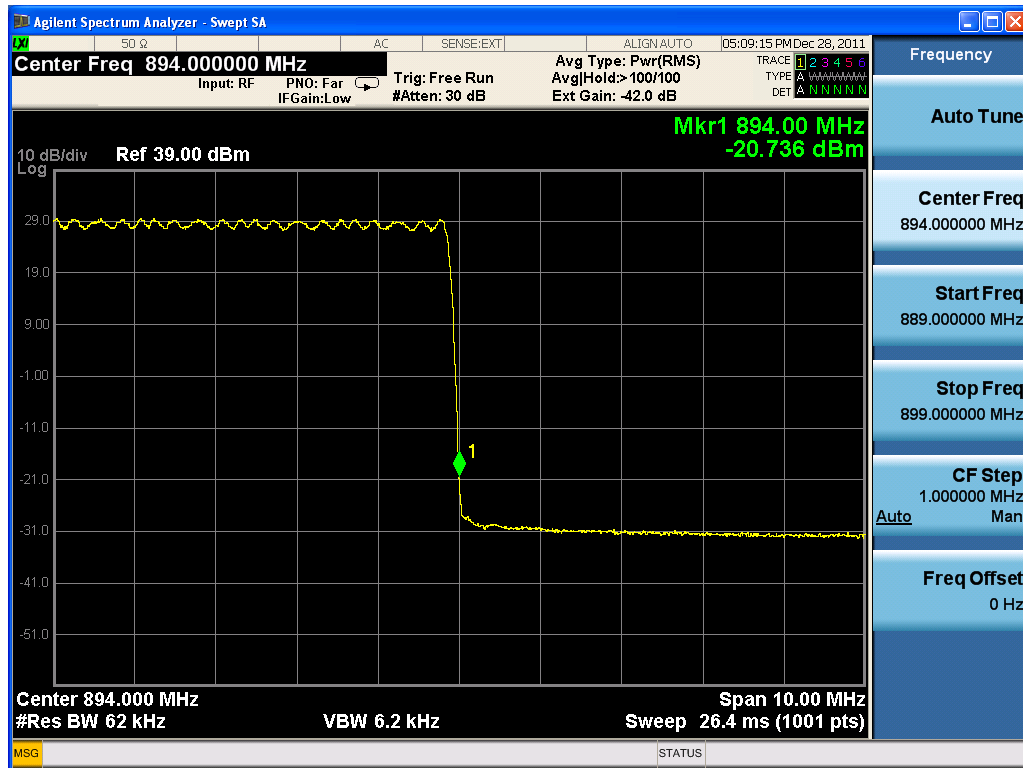


For three carriers


Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
869.76/870.99/872.22	-22.852	-13.00
890.79/892.02/893.25	-20.491	-13.00

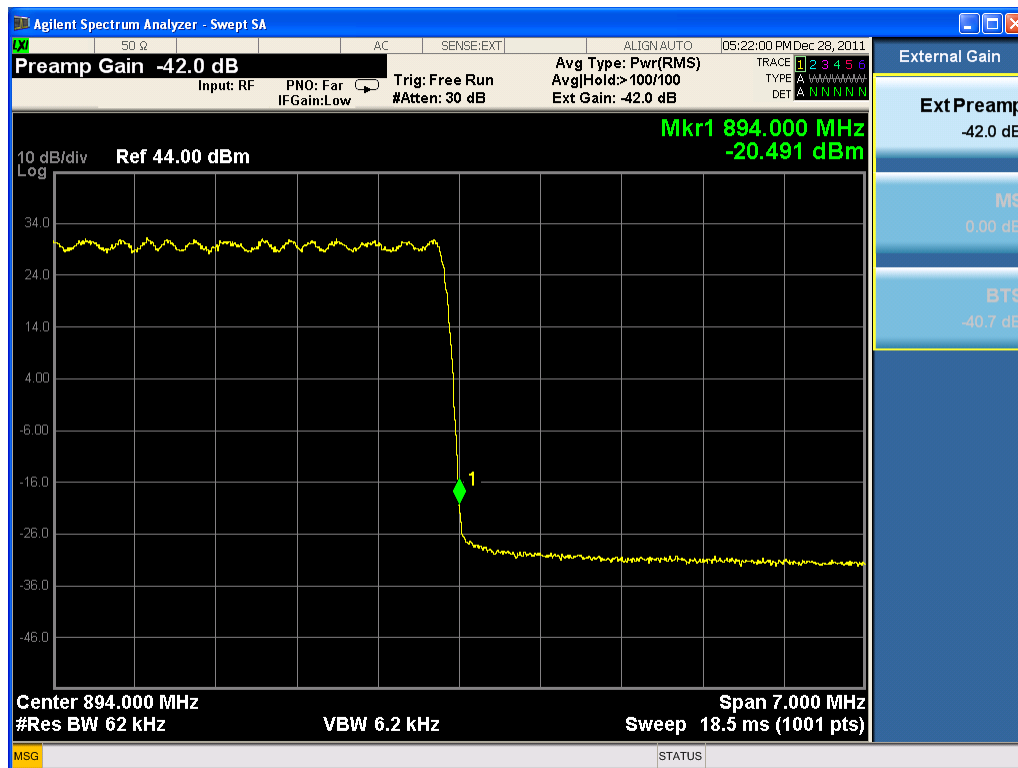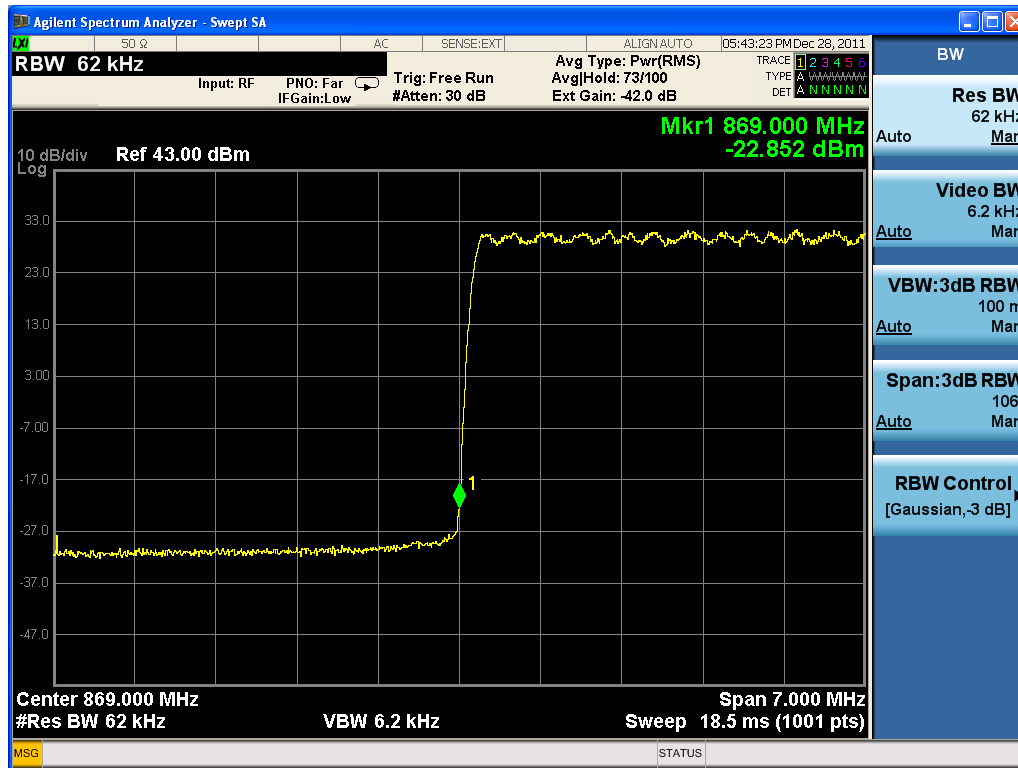

For two carriers



Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
869.76/870.99	-25.569	-13.00
892.02/893.25	-23.825	-13.00

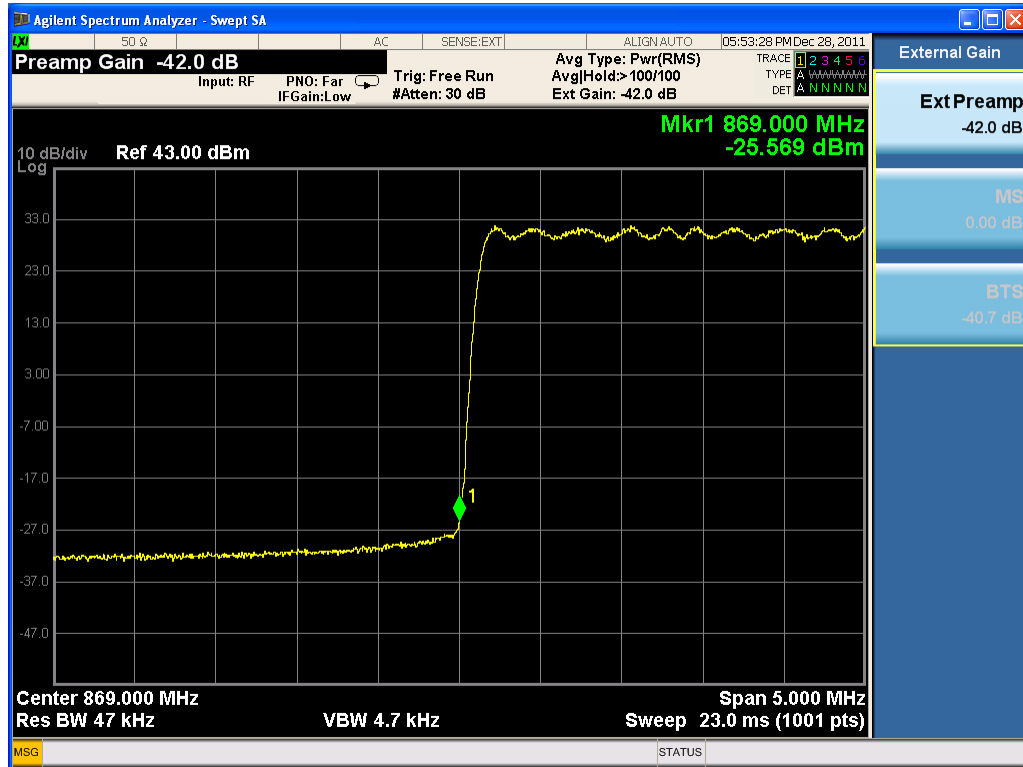

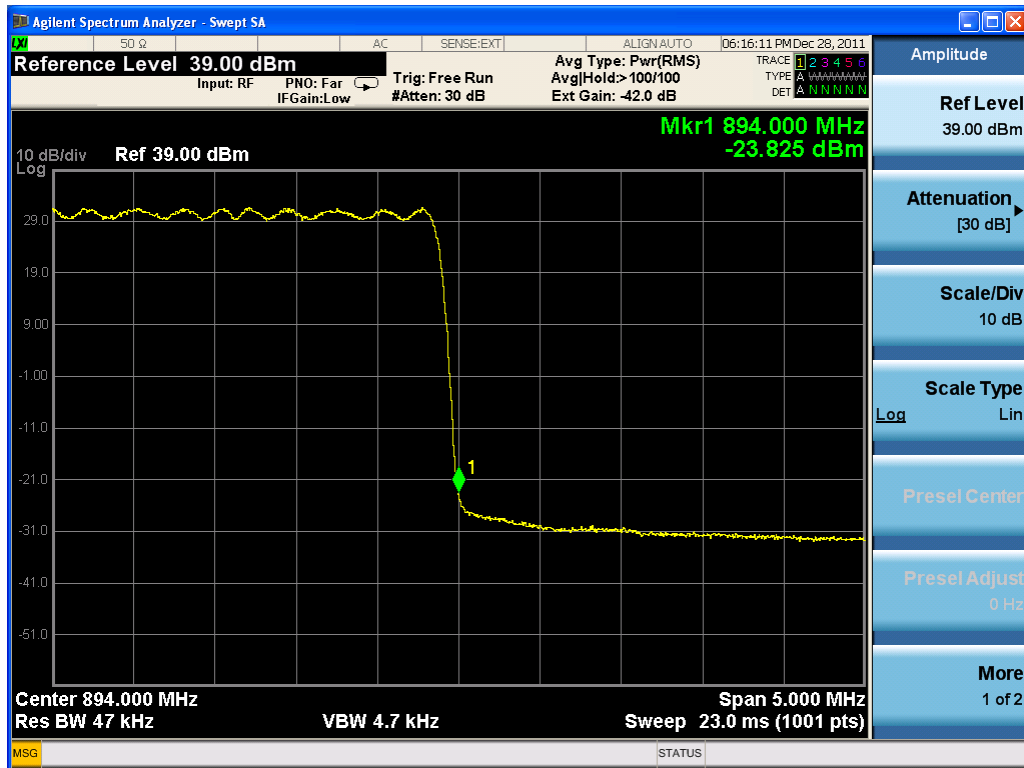

For One carrier

Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
869.76	-26.789	-13.00
893.25	-24.953	-13.00

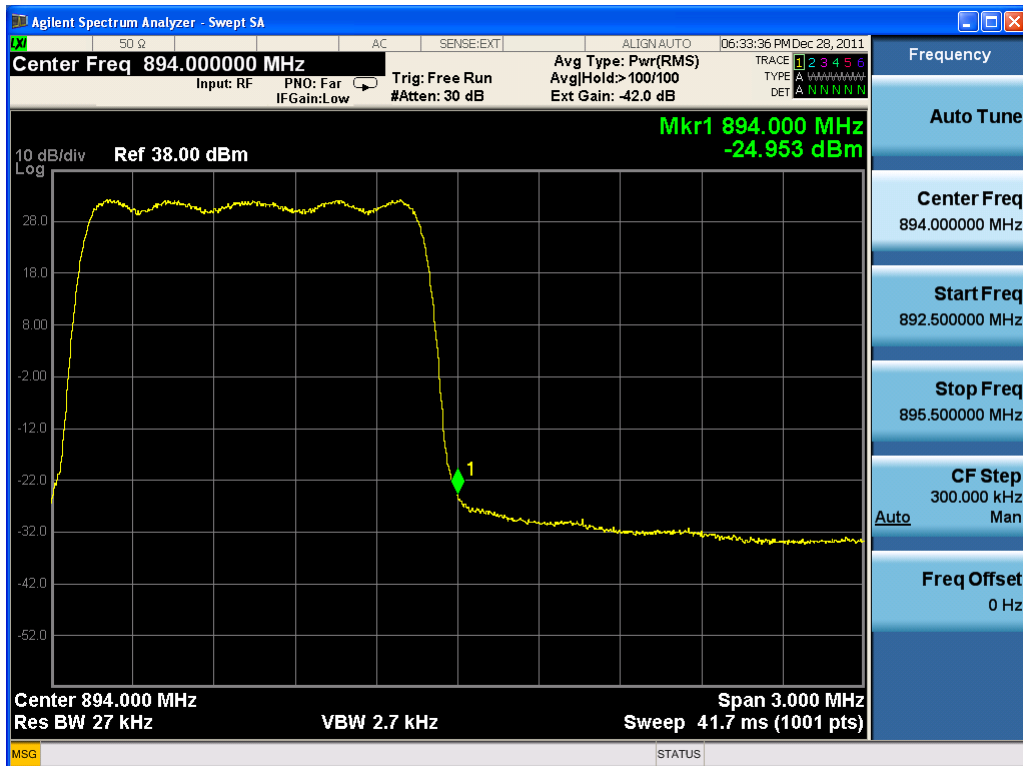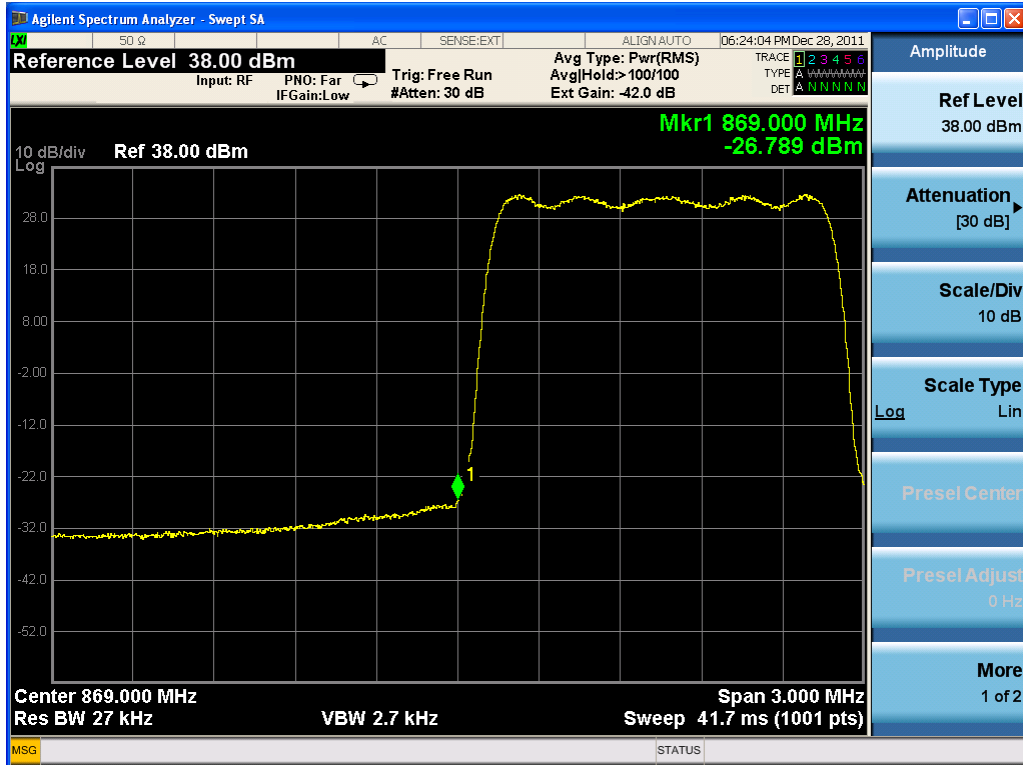

3.8 FREQUENCY STABILITY

Applicable Standard: FCC § 2.1055, § 22.355

Requirements: FCC § 2.1055 (a)(d), The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
GZ-ESPEC	Temperature Chamber	EW0470	06113028	2012-1-26	2013-1-26
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	002	1034	2011-4-8	2012-4-7

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Spectrum Analyzer via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 150 minutes, the frequency output was recorded from the counter.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

Environmental Conditions

Normal condition:	25° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Test Result: Pass

Test Mode: Transmitting CDMA

Test Data

Frequency Stability Versus Temperature

Frequency Stability vs Temperature					
Temperature (°C)	Power Supplied (V _{dc})	Frequency Measure Error (Hz)	Error (ppm)	Limit (ppm)	Result
f=881.5MHz					
-40	-48	-13.6	-0.015472127	0.02	PASS
-30	-48	-12.4	-0.01410694	0.02	PASS
-20	-48	-14.2	-0.016154721	0.02	PASS
-10	-48	-13.4	-0.015244596	0.02	PASS
0	-48	-12.5	-0.014220705	0.02	PASS
10	-48	-10.1	-0.01149033	0.02	PASS
20	-48	-16.7	-0.018998862	0.02	PASS
30	-48	-14.9	-0.016951081	0.02	PASS
40	-48	-13.2	-0.015017065	0.02	PASS
50	-48	-12.4	-0.01410694	0.02	PASS
55	-48	-14.2	-0.016154721	0.02	PASS

Frequency Stability Versus Voltage

Frequency Stability vs. Voltage					
Voltage V_{dc}	Temperature $^{\circ}C$	Frequency Measure Error Hz	Error ppm	Limit ppm	Result
f=881.5MHz					
40	20	-15.4	-0.017519909	0.02	PASS
44	20	-14.2	-0.016154721	0.02	PASS
47	20	-14.8	-0.016837315	0.02	PASS
50	20	-15.9	-0.018088737	0.02	PASS
53	20	-12.4	-0.01410694	0.02	PASS
56	20	-13.6	-0.015472127	0.02	PASS
57	20	-12.1	-0.013765643	0.02	PASS

4 UMTS OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§2.1046 ,§22.913	Transmitter output Power	Compliant
§2.1091 ,§1.1037	RF Exposure	Compliant
§2.1047	Modulation Characteristic	Compliant
§2.1053, §22.917	Spurious Radiated Emissions	Compliant
§2.1051, §22.917	Spurious Emissions AT Antenna Terminals	Compliant
§2.1049 §22.917	Occupied Bandwidth	Compliant
§2.1051, §22.917	Band Edge	Compliant
§ 2.1055, §22.355	Frequency stability	Compliant

4.1 TRANSMITTER OUTPUT POWER

Applicable Standard: FCC §2.1046 §22.913


According to FCC §2.1046 & §22.913, the ERP (equivalent radiated power) must not exceed 500 Watts.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	002	1034	2011-4-8	2012-4-7

***statement of traceability:** ZTE Corporation Reliability Testing Center attests that all calibration has been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

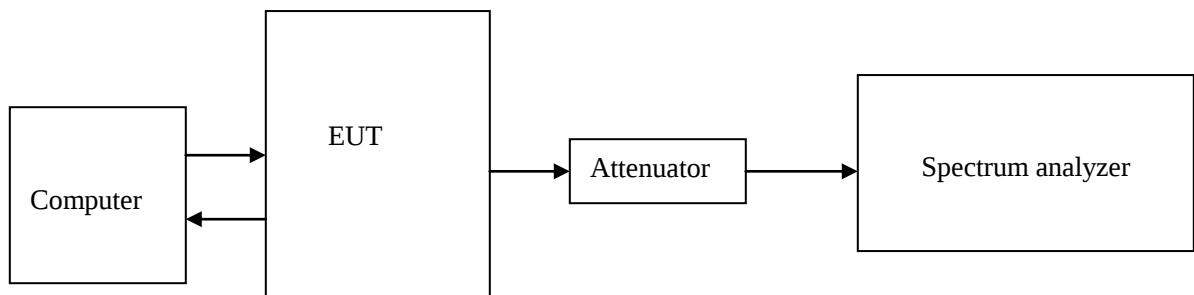

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. External attenuation Loss is 40dB, Cable Loss is about 2dB

Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar


Test Result: Pass



Test Mode: Transmitting UMTS

Test Data:

Four carriers


Center Freq. (MHz)	Frequency (MHz)	Max output Power (dBm)
871.9	871.6/ 876.6/ 881.6/ 886.6	49.01
881.5	874/879/884/889	48.94
883.9	876.4/881.4/886.4/891.4	48.99


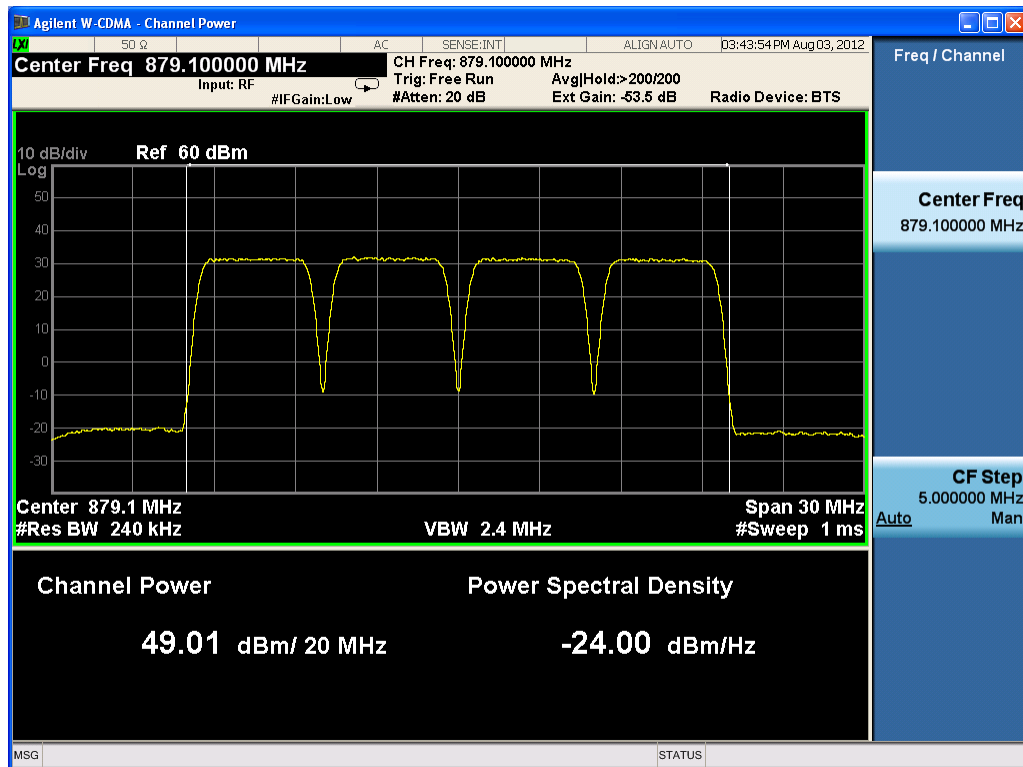


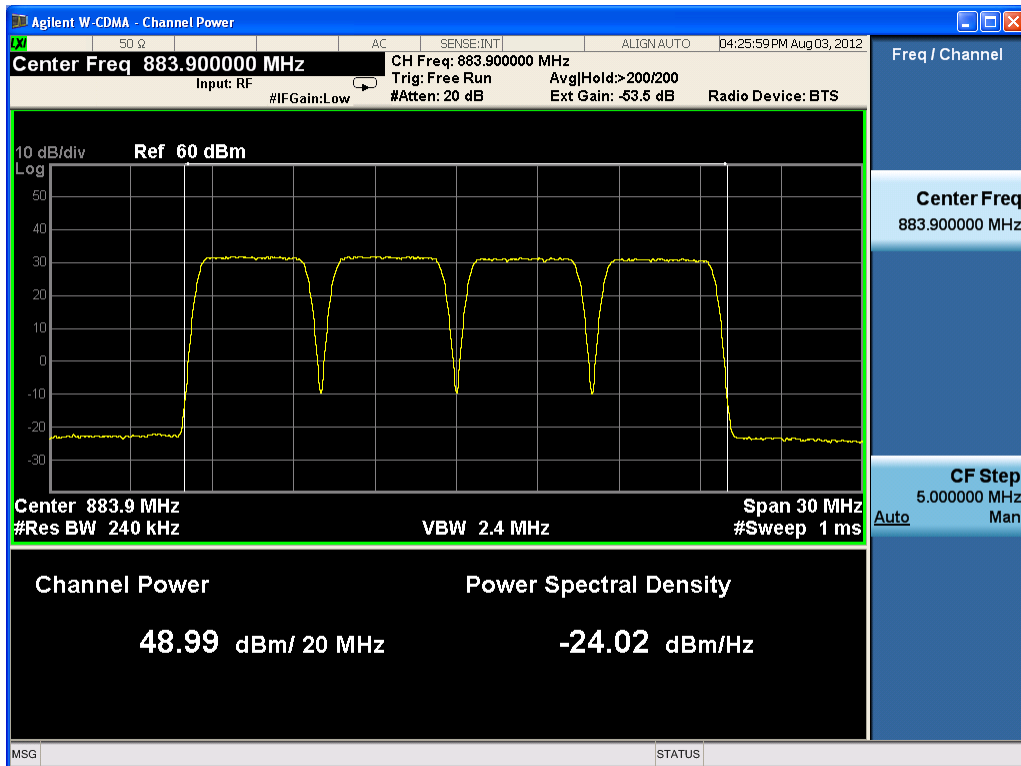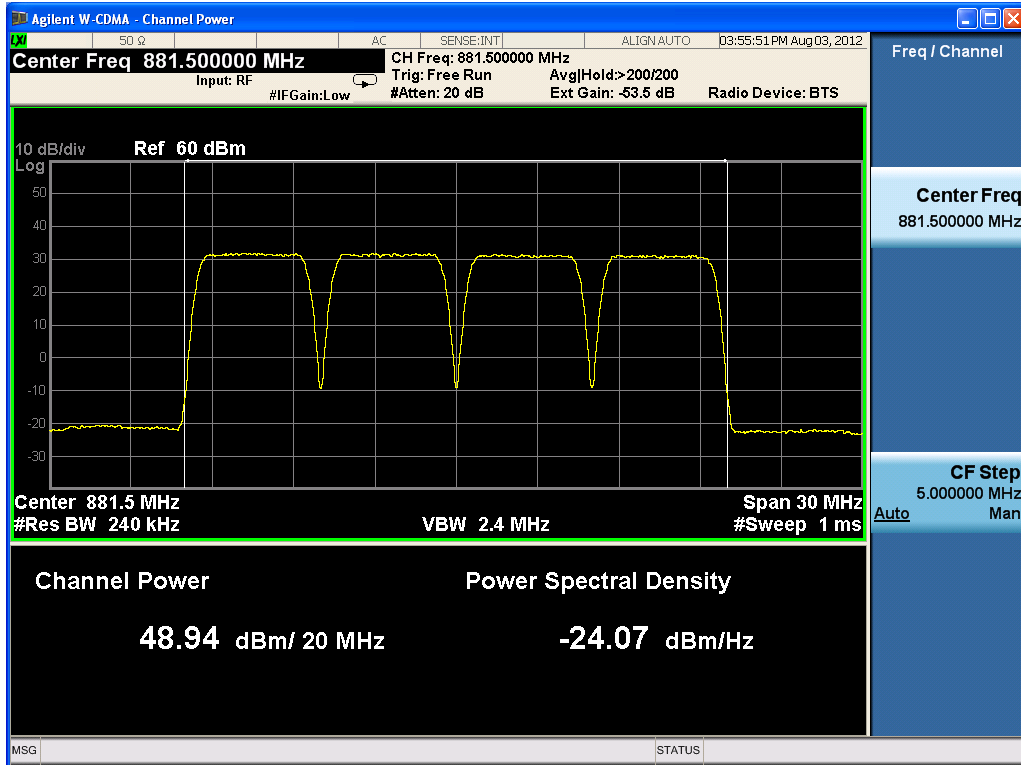

Three carriers


Center Freq. (MHz)	Frequency (MHz)	Max output Power (dBm)
876.6	871.6/876.6/881.6	49.08
881.6	876.6/881.6/886.6	48.95
886.4	881.4/886.4/891.4	49.02


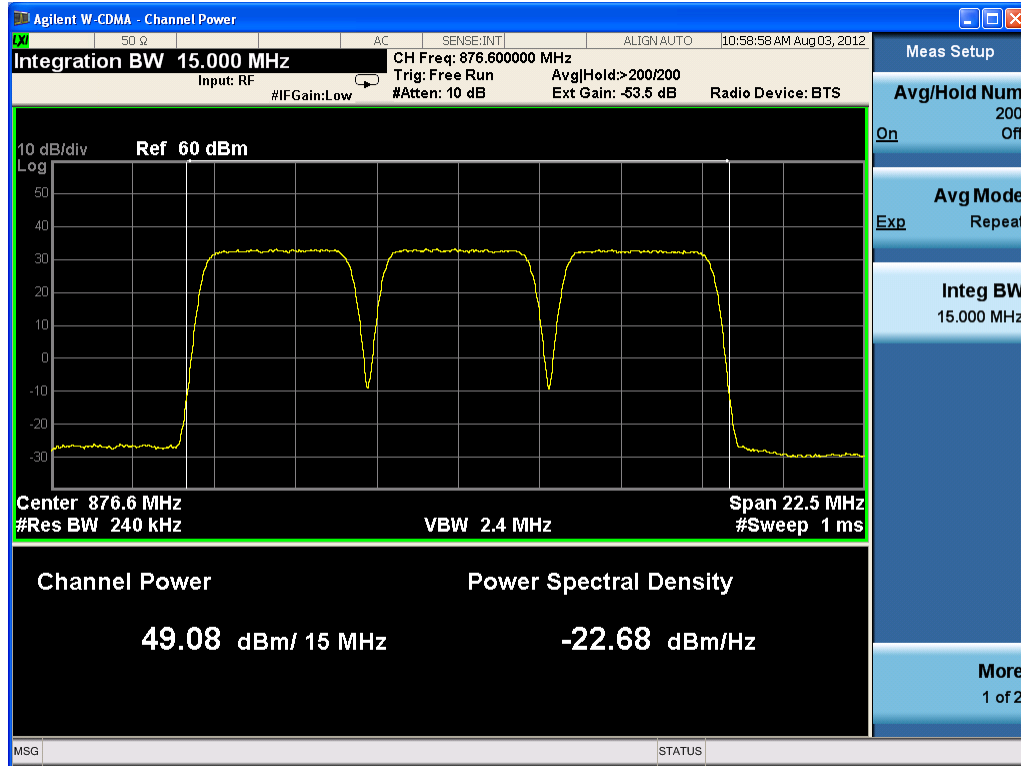


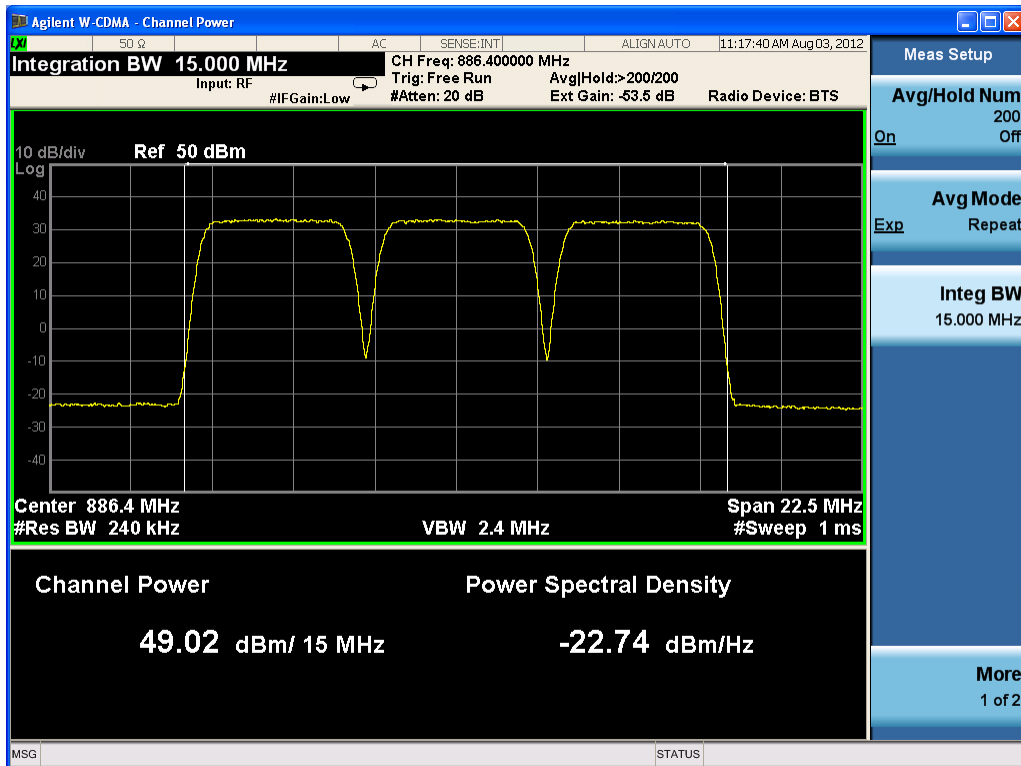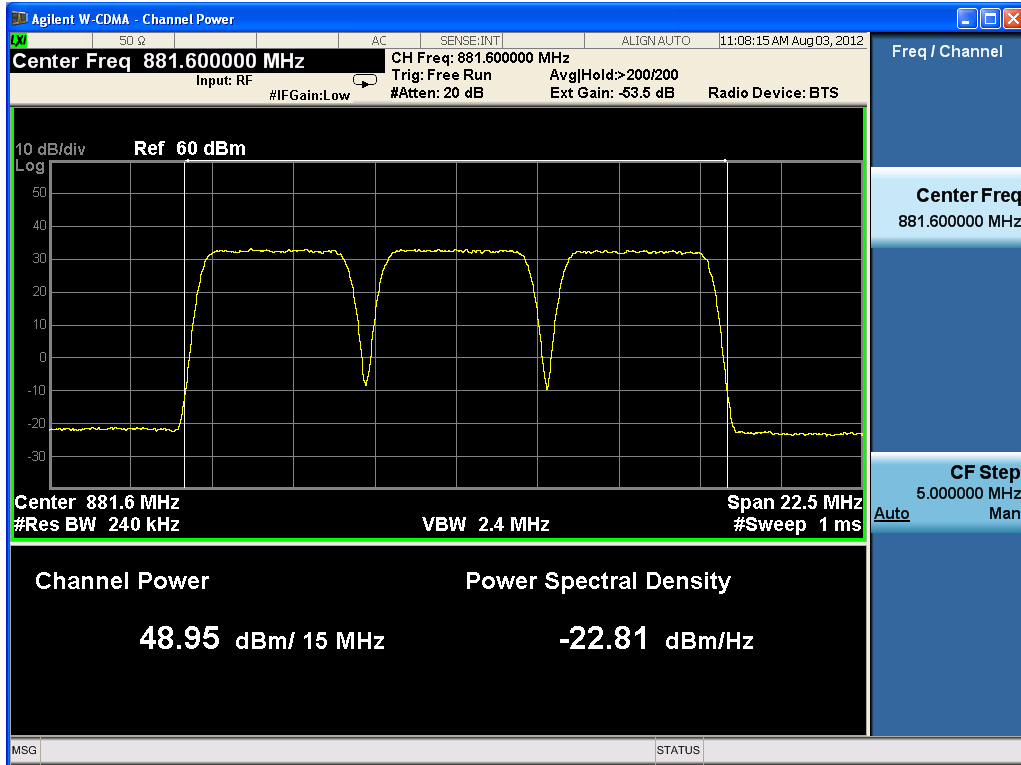

Two carriers


Center Freq. (MHz)	Frequency (MHz)	Max output Power (dBm)
874.1	871.6/876.6	49.08
881.5	879/884	48.81
888.9	886.4/891.4	48.97


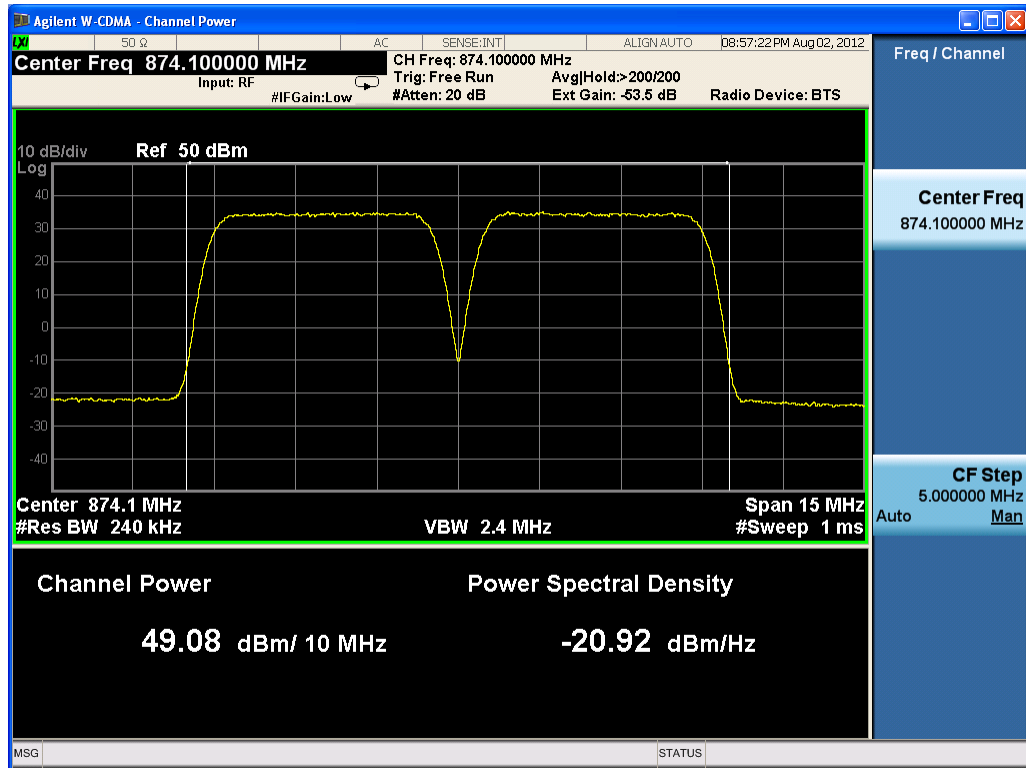


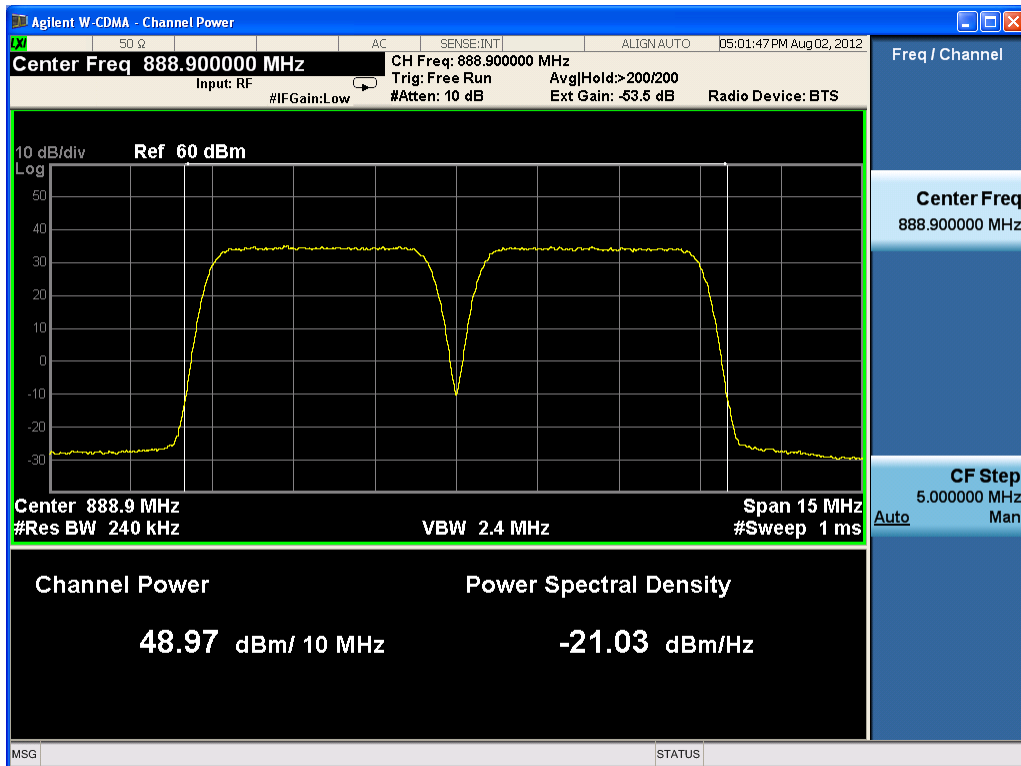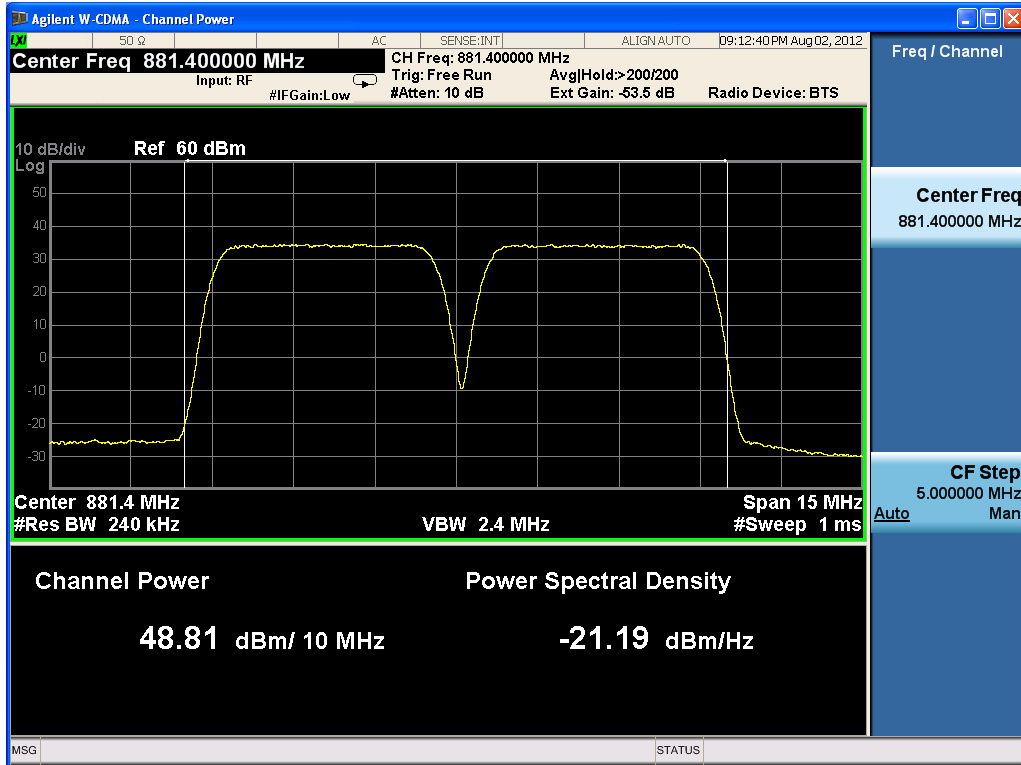

One carrier

Center Freq. (MHz)	Frequency (MHz)	Max output Power (dBm)
871.6	871.6	48.98
881.4	881.4	48.88
891.4	891.4	48.96

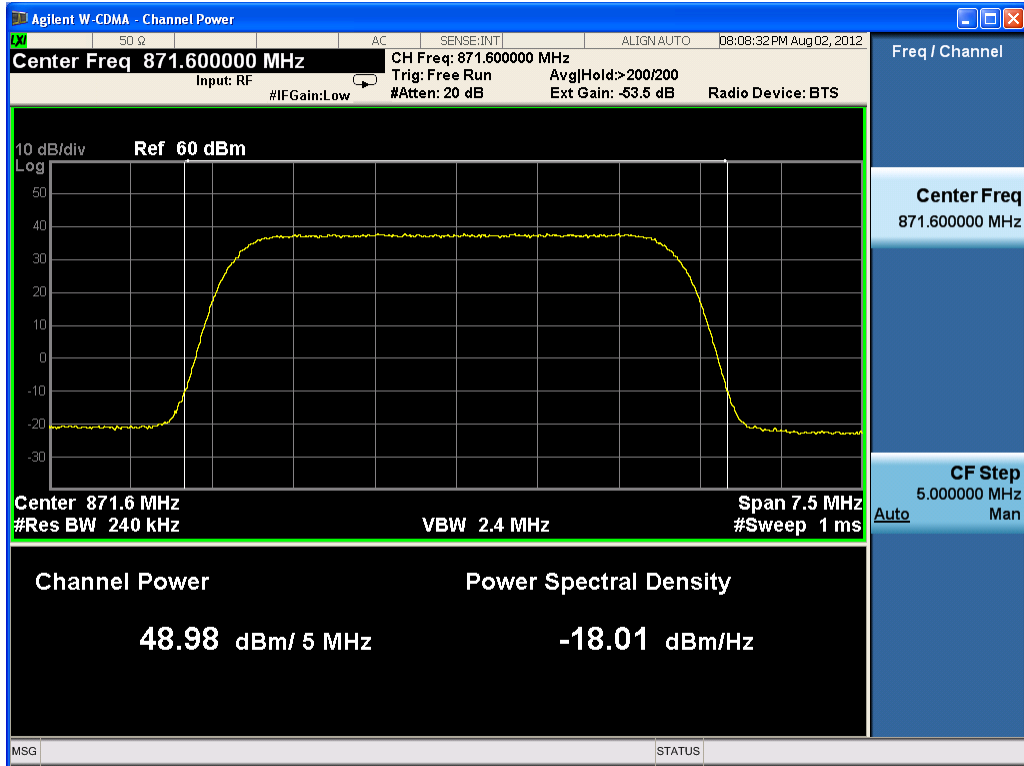

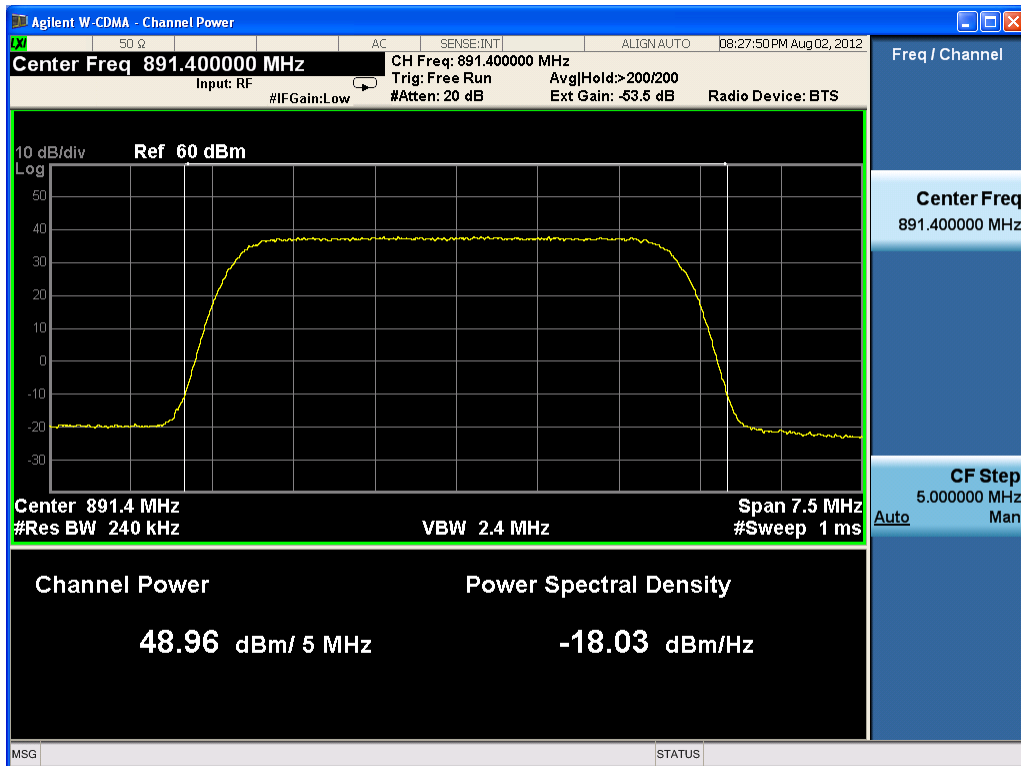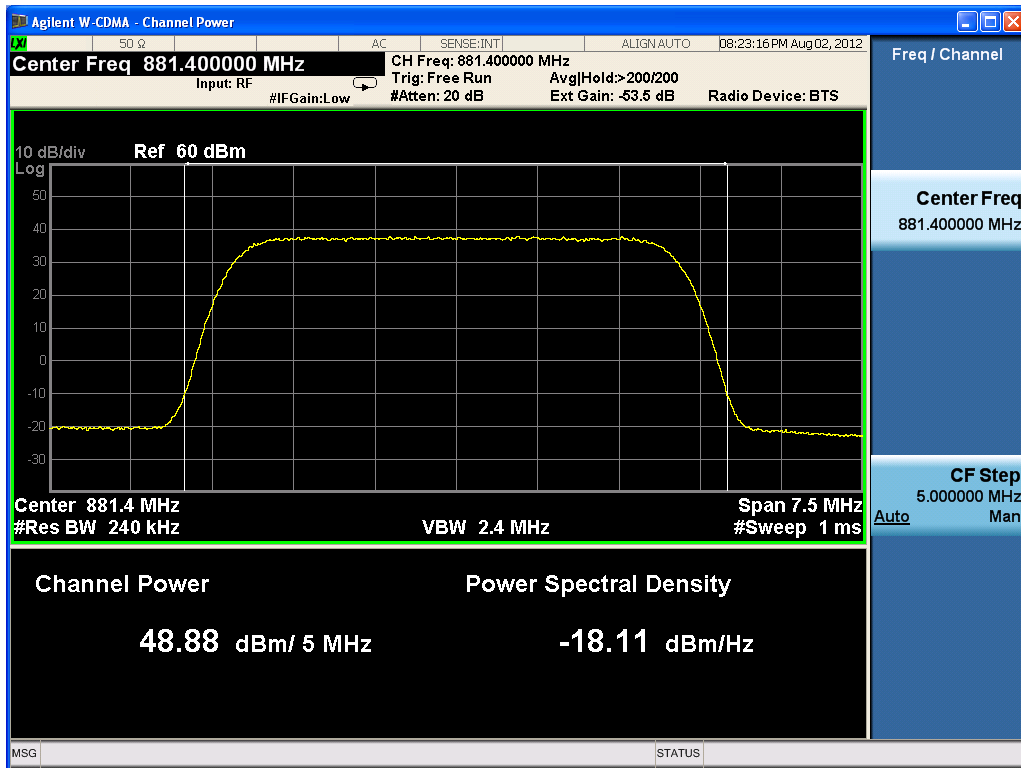

4.2 RF EXPOSURE

Applicable standard: FCC §2.1091 §1.1037

Limit

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated. Limits for Maximum Permissible Exposure (MPE)

(B) Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

Test Data

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = \text{EIRP} / 4\pi R^2$$

Where: S = power density

EIRP= equivalent isotropically radiated power=ERP+2.15dB

R = distance to the center of radiation of the antenna= $[(\text{ERP}+2.15\text{dB})/4\pi S]^{1/2}$

Maximum EIRP, In general, the equivalent isotropically radiated power (EIRP) of base transmitters and cellular repeaters must not exceed 500 Watts.

Frequency is between 300MHz and 1500MHz, and the Maximum,

$$S=894/1500=0.596\text{mW/cm}^2, R=3.31\text{m}.$$

This equipment should be installed and operated with minimum distance 3.31m between the radiator& your body.

Test Result: pass

4.3 MODULATION CHARACTERISTIC

Applicable Standard: FCC §2.1047

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	002	1034	2011-4-8	2012-4-7

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

CDMA digital mode is used by EUT.

Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar



Test Result: Pass

Test Mode: Transmitting UMTS

Test Data:

Frequency (MHz)	Rho
871.6	0.99408
881.4	0.99406
891.4	0.99442

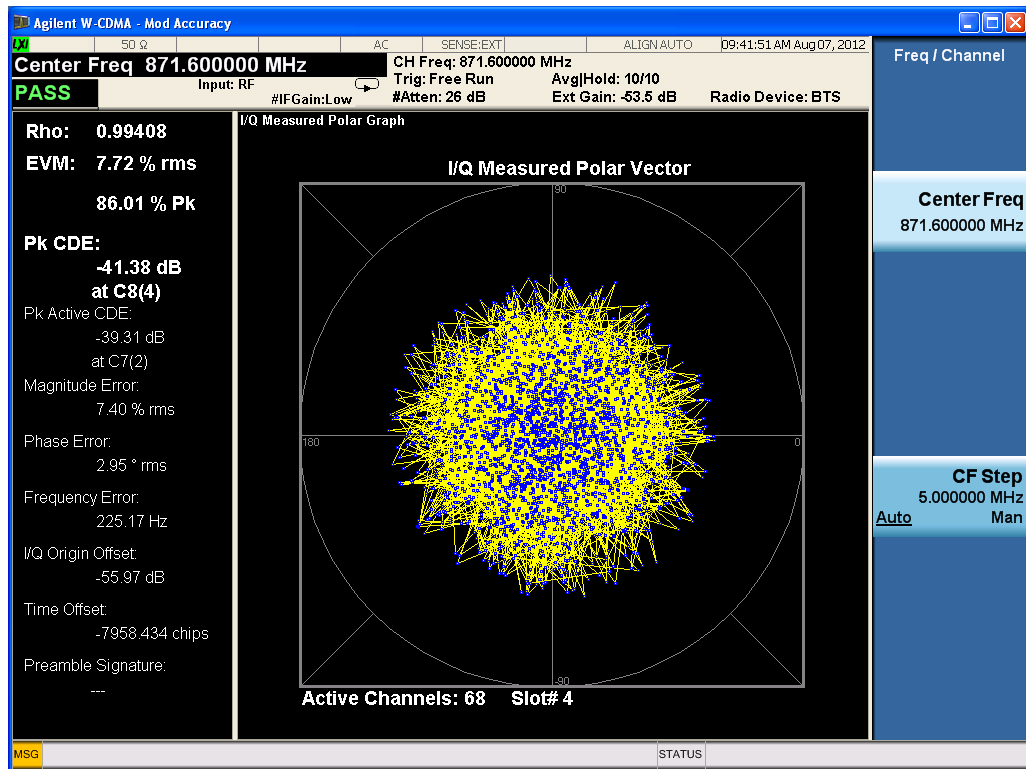

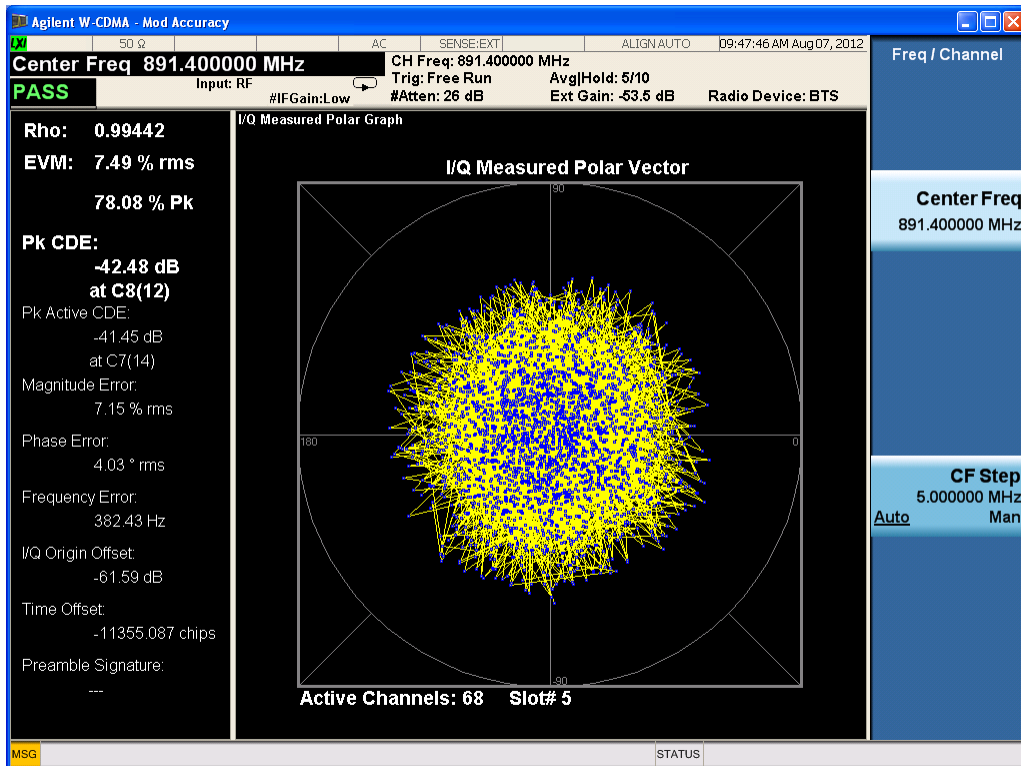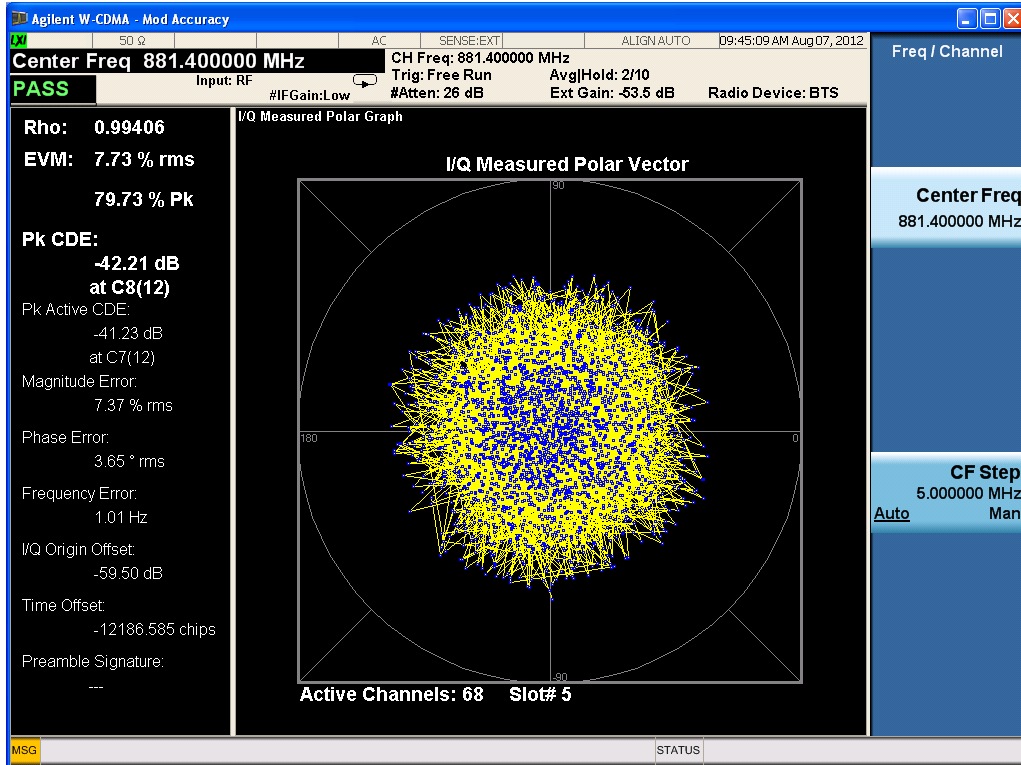

4.4 SPURIOUS RADIATED EMISSIONS

Applicable Standard: FCC CFR 47, §2.1053

Test Equipment List and Details


Manufacturer	Equipment	Model	Serial Number	Last Cal.	Cal. Interval
R&S	SIGNAL GENERATOR	SMR20	A00017351	2012-9-26	1 year
Albatross	Anechoic Chamber	3m Site	A00017354	2012-10-29	1 year
R&S	EMI Test Receiver	ESIB26	100058	2012-10-29	1 year
R&S	Ultra Breitband Antennas	HL562	100022	2012-7-29	1 year
R&S	Double-Ridged Waveguide Horn Antenna	HF906	100032	2012-7-29	1 year
R&S	Double-Ridged Waveguide Horn Antenna	HF906	100446	2012-7-29	1 year
SCHWARZ-BECK	Biconical Antenna	VUBA9117	9117-122	2012-7-29	1 year

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiated emissions measurement at the EMC lab. is 3.6dB.

EUT Setup

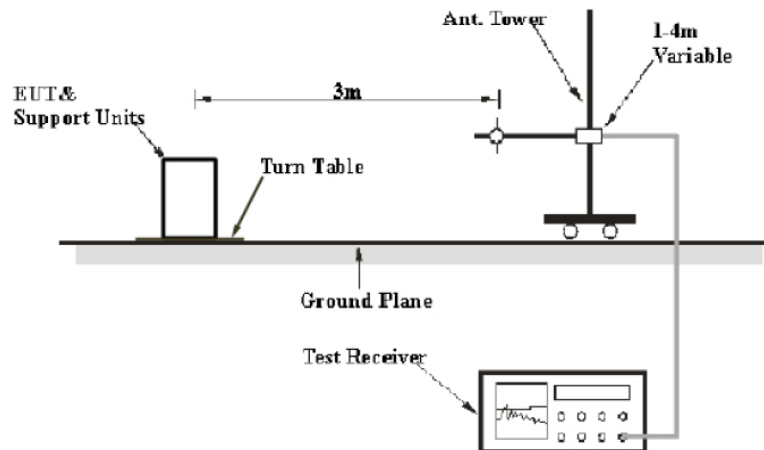

The radiated emission tests were performed in the 3-meter Chamber, using the setup accordance with the FCC part 2.1053. The specification used was the FCC 2.1053 limits.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg(\text{TX pwr in Watts}/0.001)$ - the absolute level

Spurious attenuation limit in dB = $43 + 10 \lg P$ (power out in Watts)

The resolution bandwidth of the spectrum analyzer was set at 1 percent as specified for 30MHz to 1GHz scanning, set at 1MHz for 1GHz to 20GHz scanning.

Test Results Summary: PASS

Environmental Conditions

Temperature:	26°C
Relative Humidity:	60 %
ATM Pressure:	1009 mbar

Test data

Indicated		Test Antenna	Substituted		Cable Loss(dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (GHz)	Amp. (dB μ V)	Polar H/V	Level (dBm)	Antenna Gain Correction						
33.887776	27.91	V	-64.44	-42.06	0.31	-106.81	2.15	-108.96	-13	95.96
134.96994	28.75	V	-68.96	-9.59	0.81	-79.36	2.15	-81.51	-13	68.51
173.8477	29.65	V	-67.16	-2.22	1.11	-70.49	2.15	-72.64	-13	59.64
618.998	32.45	V	-63.77	-1.38	2.11	-67.25	2.15	-69.40	-13	56.40
871.70341	72.58	V	-36.31	-1.31	2.51	-40.13	2.15	-42.28	-13	29.28
3000	59.3	V	-50.87	7.77	4.60	-47.70	2.15	-49.85	-13	36.85
33.887776	28.82	H	-57.44	-42.06	0.31	-99.82	2.15	-101.97	-13	88.97
138.85772	27.81	H	-69.41	-8.42	1.01	-78.83	2.15	-80.98	-13	67.98
177.73547	29.92	H	-66.97	-1.64	1.11	-69.72	2.15	-71.87	-13	58.87
599.55912	33.34	H	-64.40	-1.20	2.01	-67.61	2.15	-69.76	-13	56.76
871.70341	69.93	H	-29.07	-1.31	2.51	-32.88	2.15	-35.03	-13	22.03
2839.6794	59.3	H	-47.38	7.97	4.50	-43.92	2.15	-46.07	-13	33.07

Radiation emission spurious below 3GHz

Indicated		Test Antenna	Substituted		Cable Loss(dB)	Effective radiated power (dBm)	Dipole Antenna	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (GHz)	Amp. (dB μ V)	Polar H/V	Level (dBm)	Antenna Gain Correction						
4042.0842	41.2	V	-51.12	7.97	5.30	-48.45	2.15	-50.60	-13	37.60
5412.8257	45.07	V	-52.61	8.57	6.30	-50.33	2.15	-52.48	-13	39.48
6927.8557	49.58	V	-47.19	9.27	7.30	-45.22	2.15	-47.37	-13	34.37
9821.6433	54.34	V	-41.83	9.97	8.89	-40.76	2.15	-42.91	-13	29.91
10196.393	59	V	-49.92	11.37	8.89	-47.44	2.15	-49.59	-13	36.59
17977.956	71.86	V	-38.29	8.97	12.19	-41.50	2.15	-43.65	-13	30.65
3881.7635	42.38	H	-43.86	7.77	5.20	-41.29	2.15	-43.44	-13	30.44
5380.7615	44.67	H	-52.51	8.57	6.30	-50.24	2.15	-52.39	-13	39.39
6903.8076	50.01	H	-46.84	9.27	7.30	-44.87	2.15	-47.02	-13	34.02
9821.6433	53.54	H	-44.16	9.97	8.89	-43.08	2.15	-45.23	-13	32.23
13348.697	58.45	H	-40.57	11.87	10.19	-38.89	2.15	-41.04	-13	28.04
17911.824	71.57	H	-35.09	8.97	12.19	-38.31	2.15	-40.46	-13	27.46

Radiation emission spurious above 3GHz

4.5 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard: FCC§2.1051, §22.917

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	002	1034	2011-4-8	2012-4-7

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

EUT Setup:

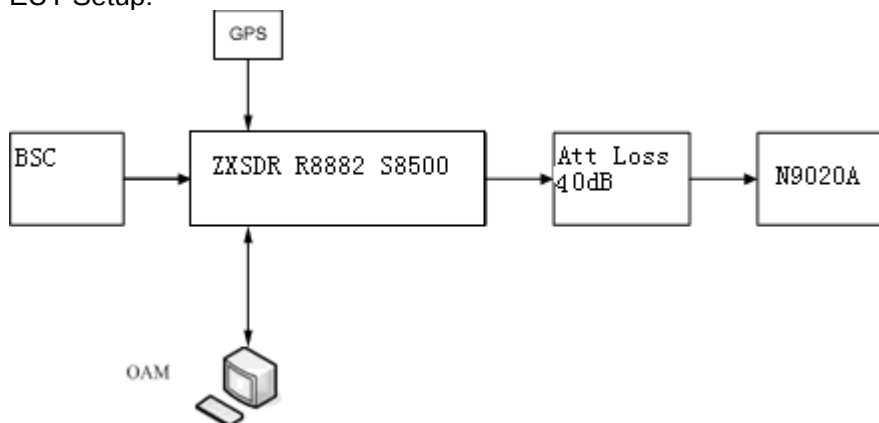

REMARKS: Attenuator loss (dB)=40dB, Cable Loss (dB)=2dB.

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100KHz for 30MHz to 1GHz band, set at 1MHz for 1GHz to 10GHz band. Sufficient scans were taken to

show any out of band emissions up to 10th harmonic.

Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar



Test Result: Pass

Test Mode: Transmitting UMTS



Test Data:


Four carriers (working in bottom frequency)

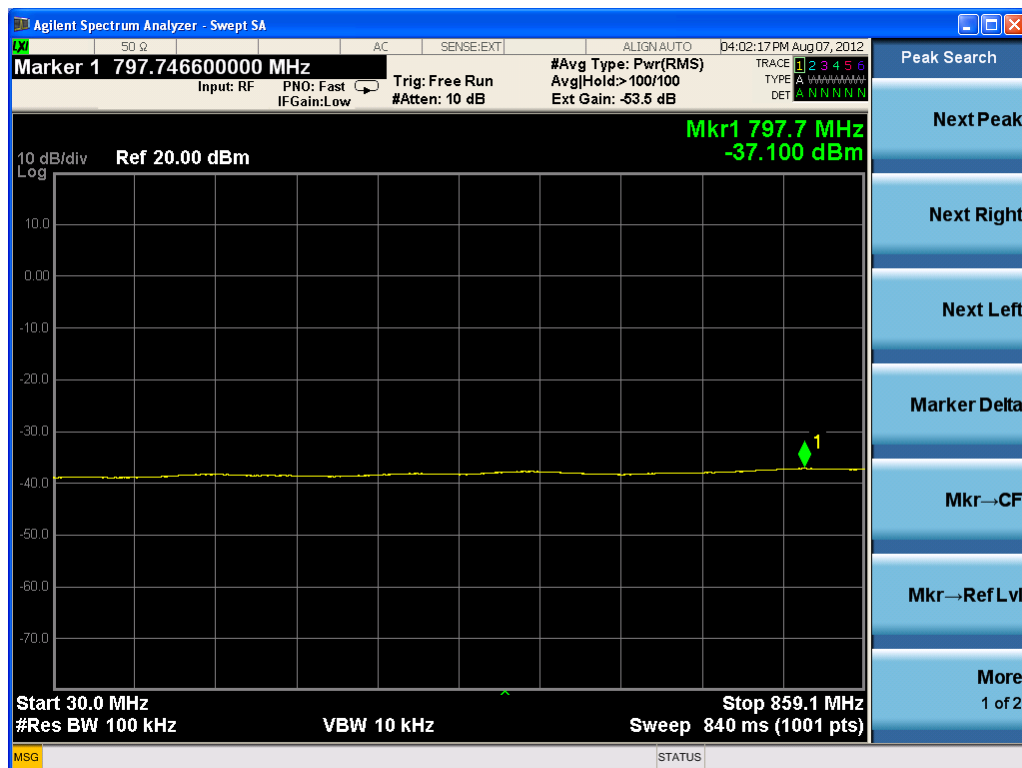

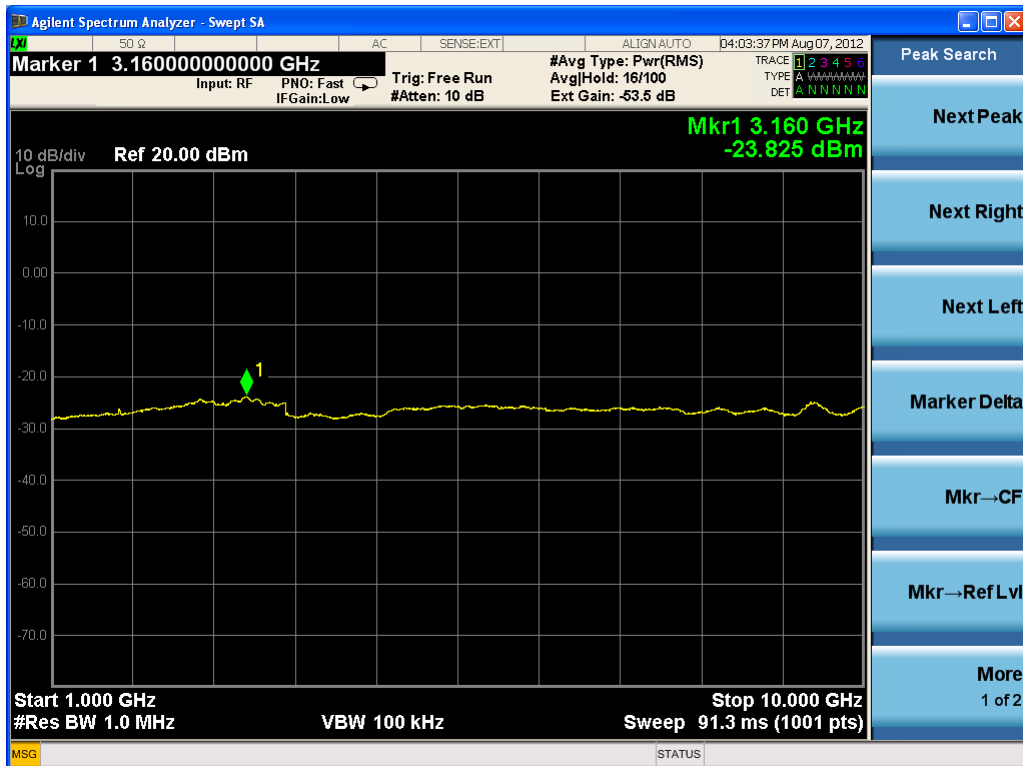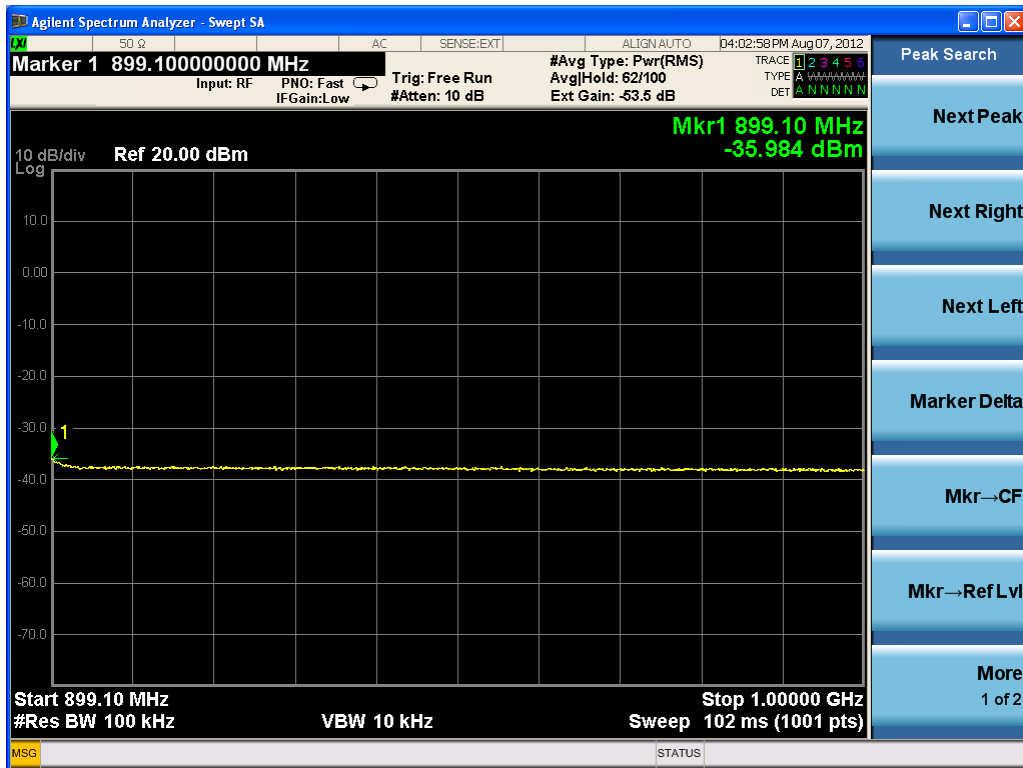




Four carriers (working in middle frequency)

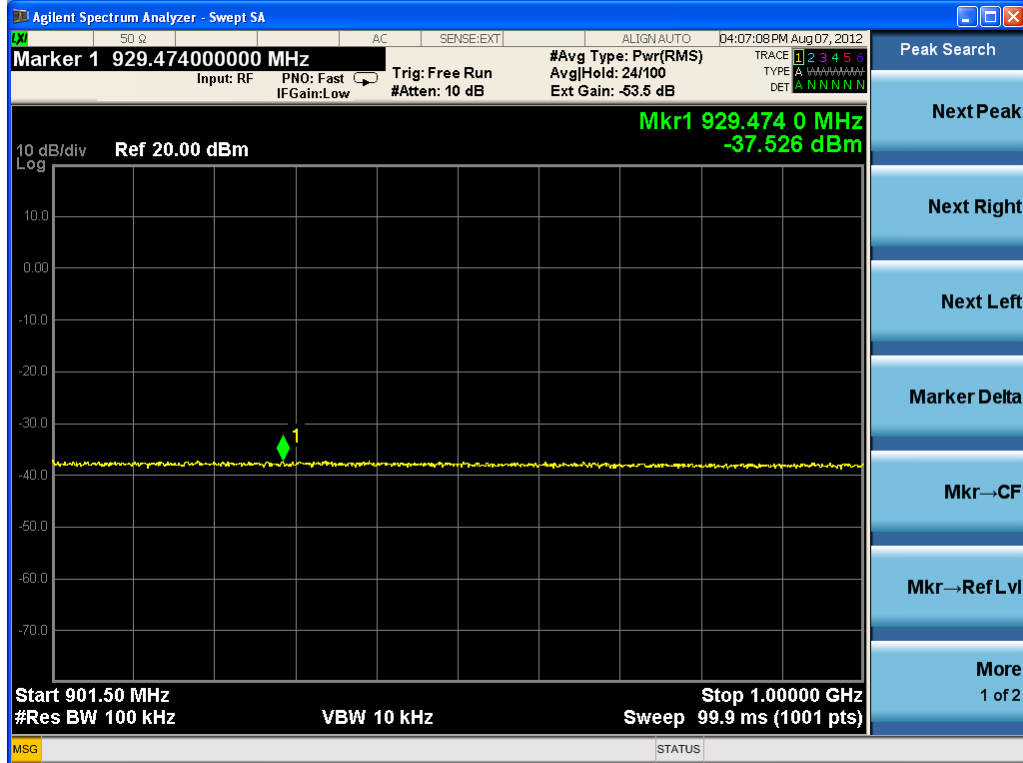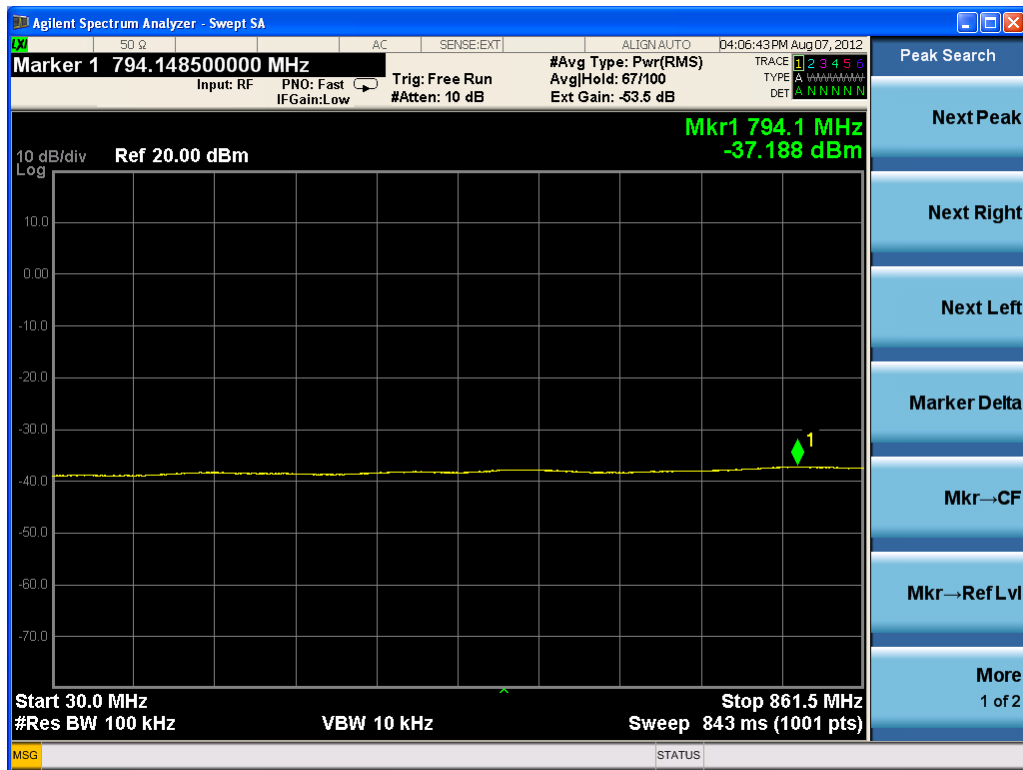


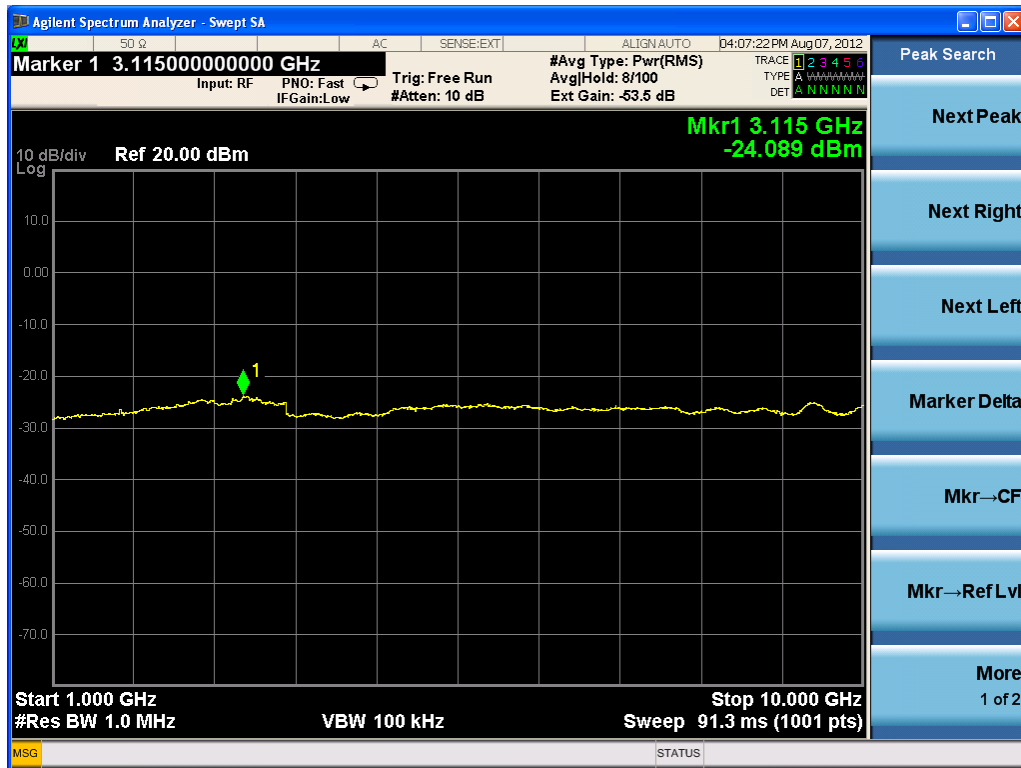



Four carriers (working in top frequency)

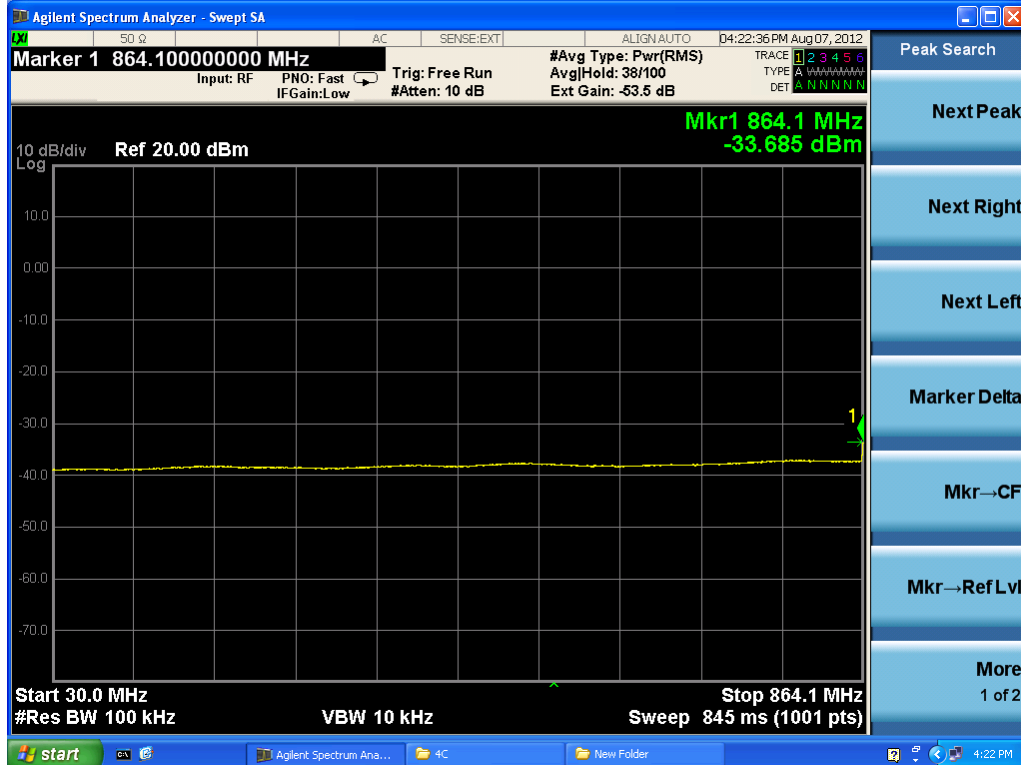

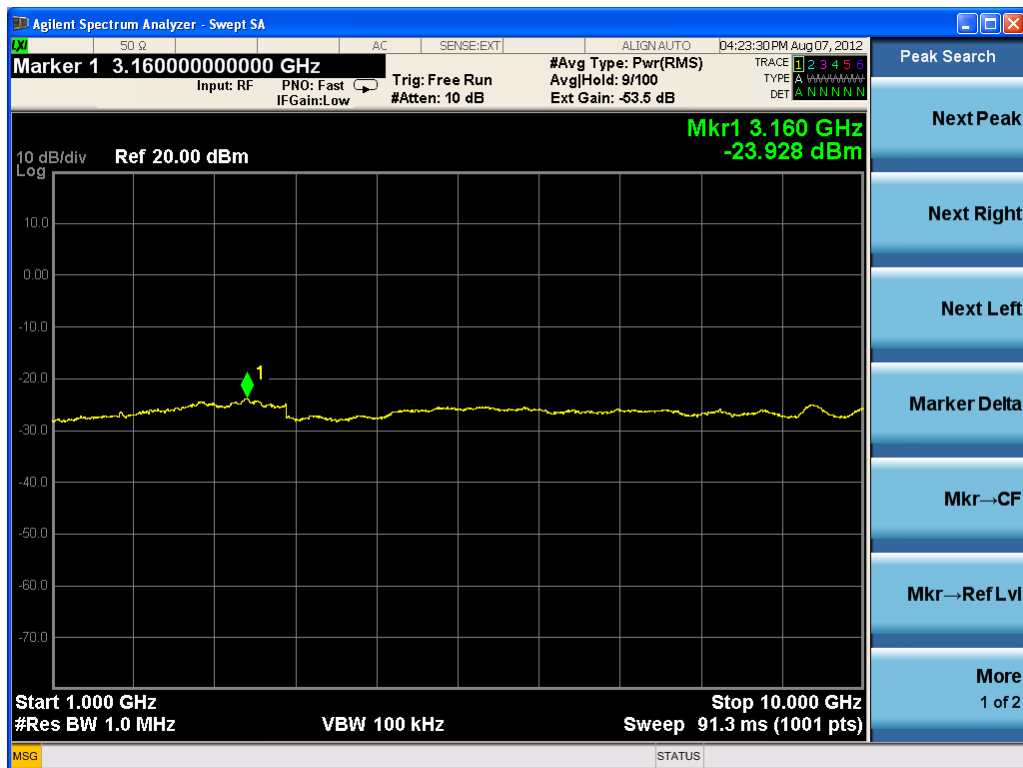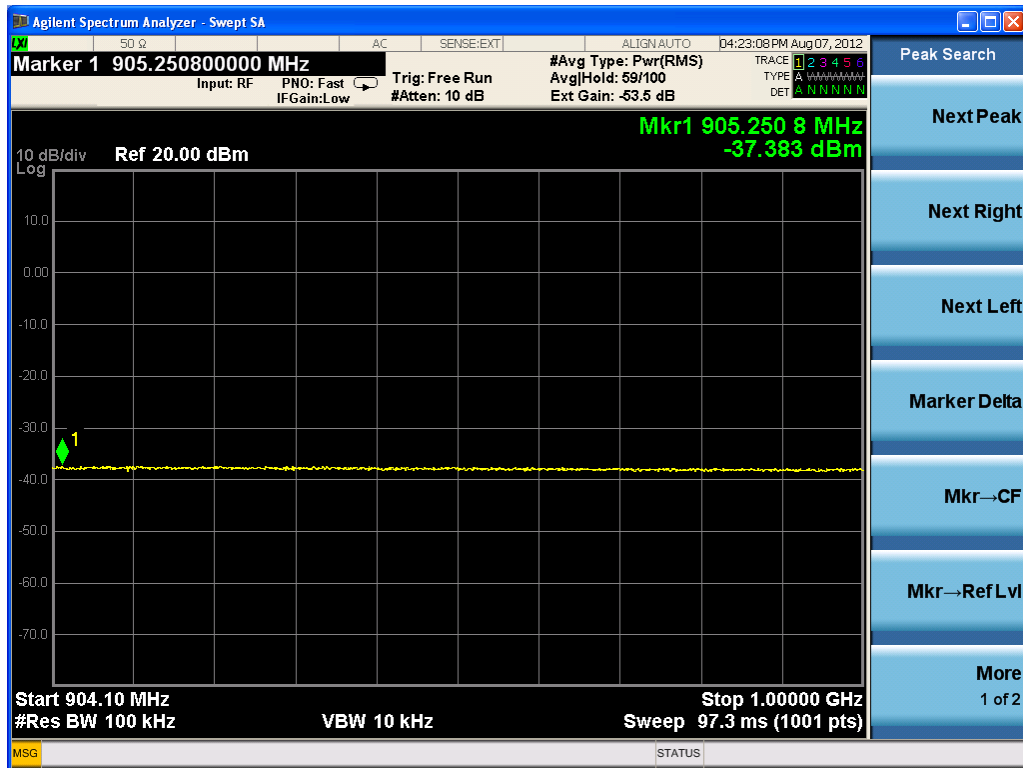




Three carriers (working in bottom frequency)

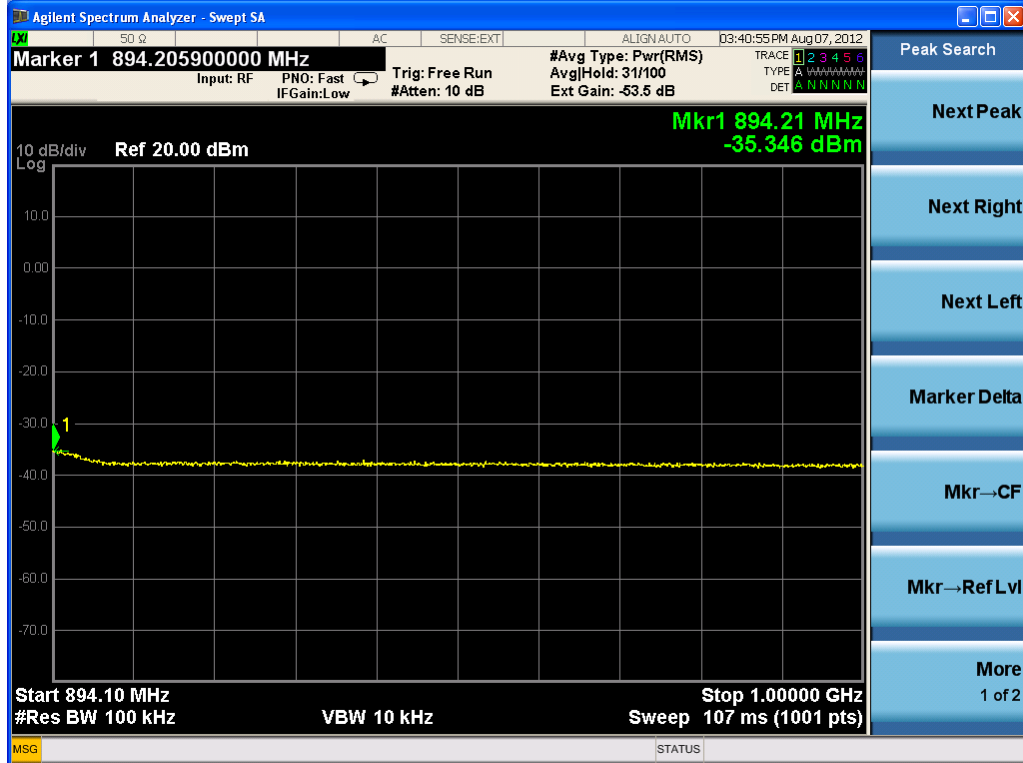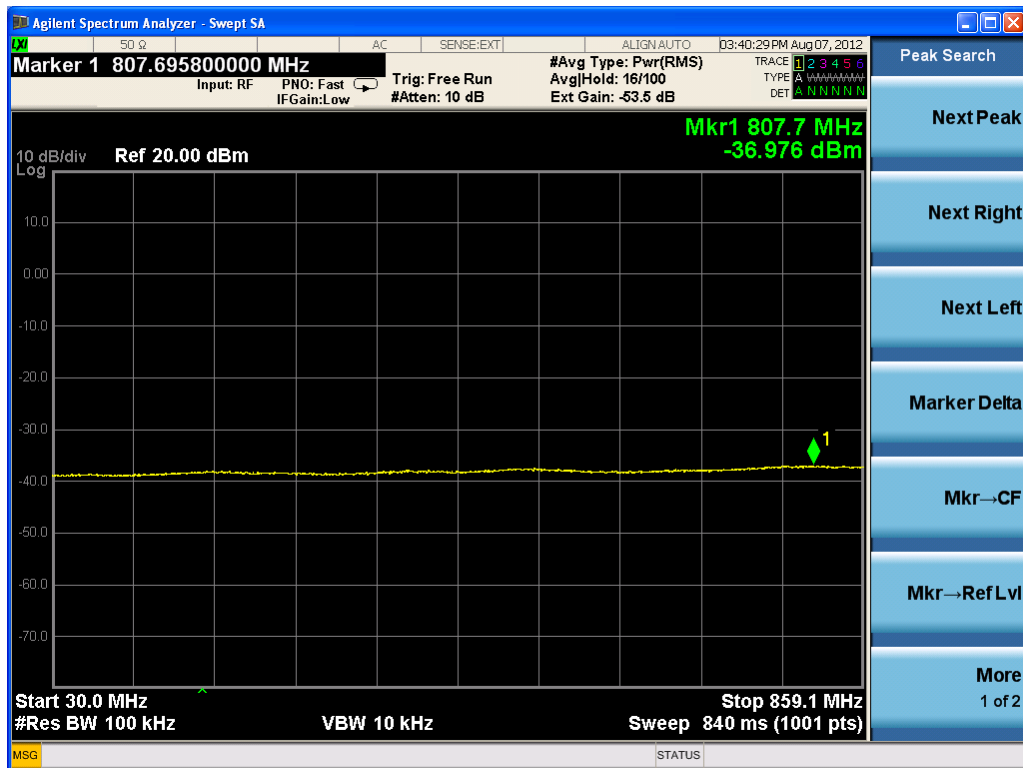


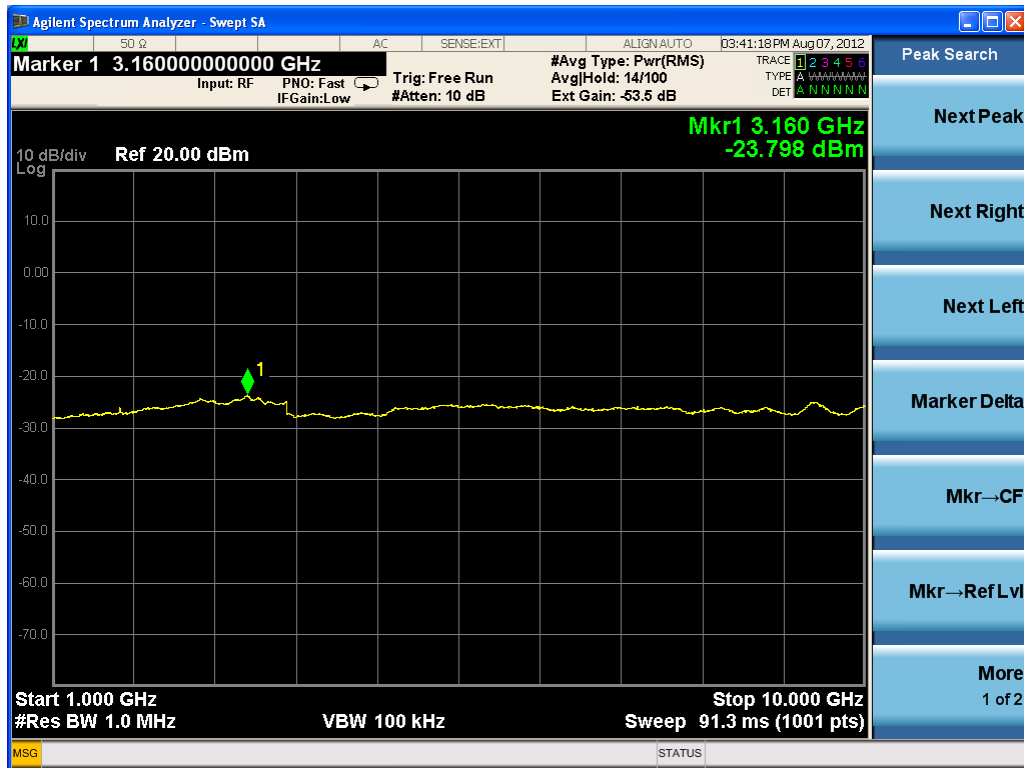



Three carriers (working in middle frequency)

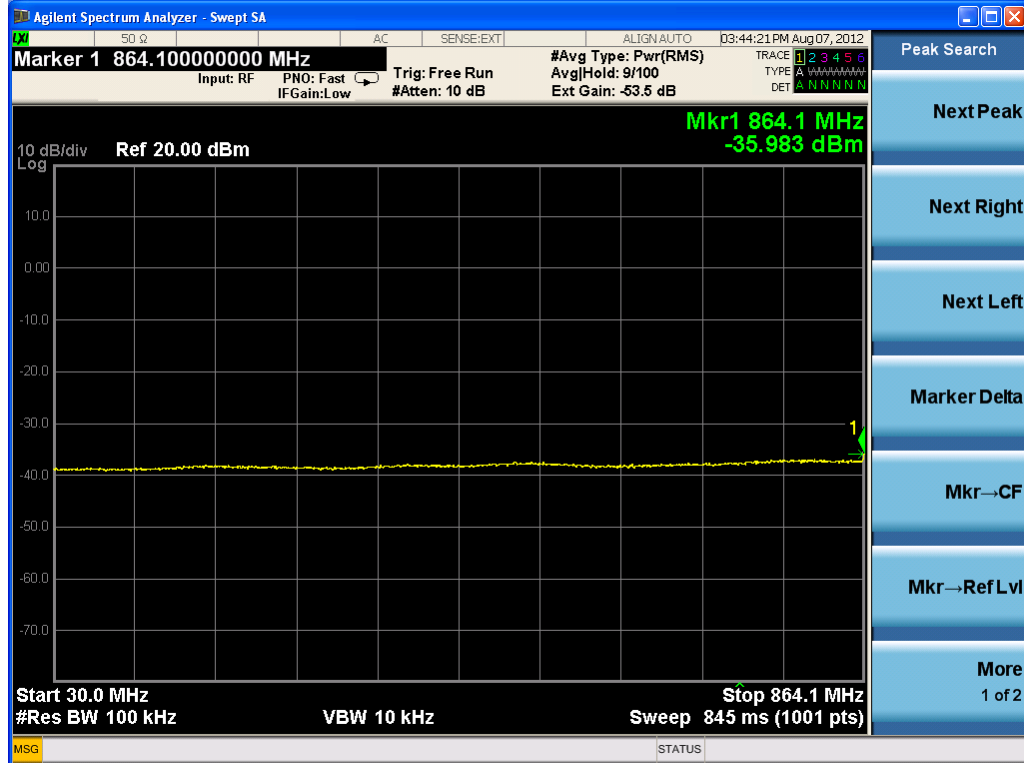

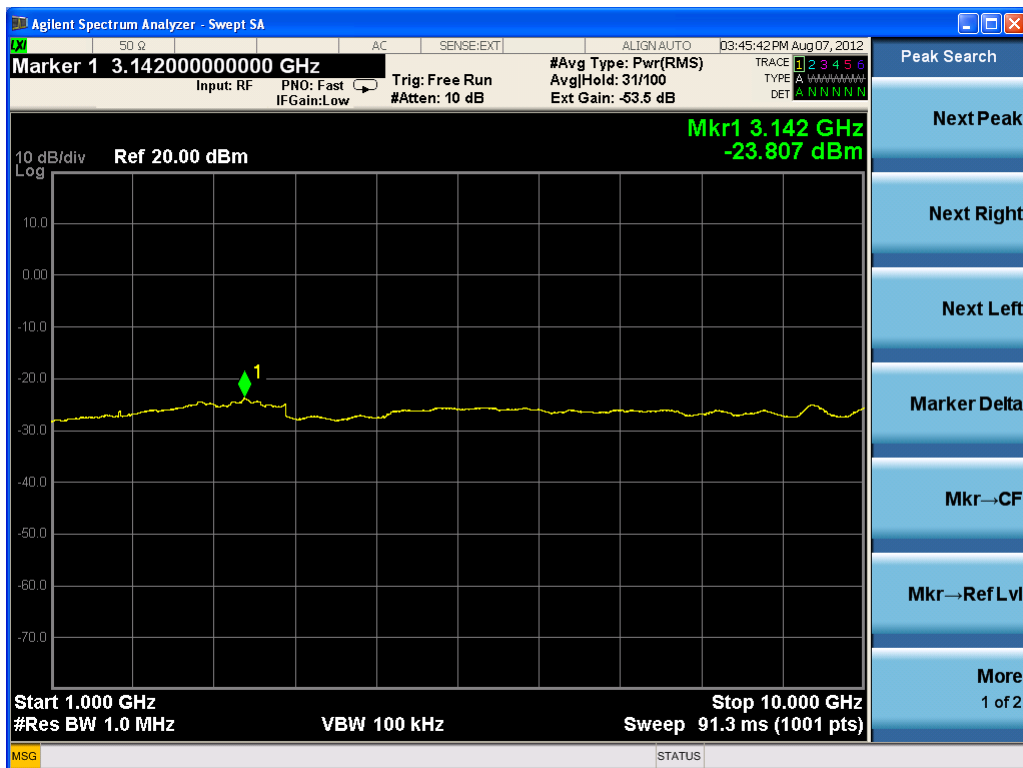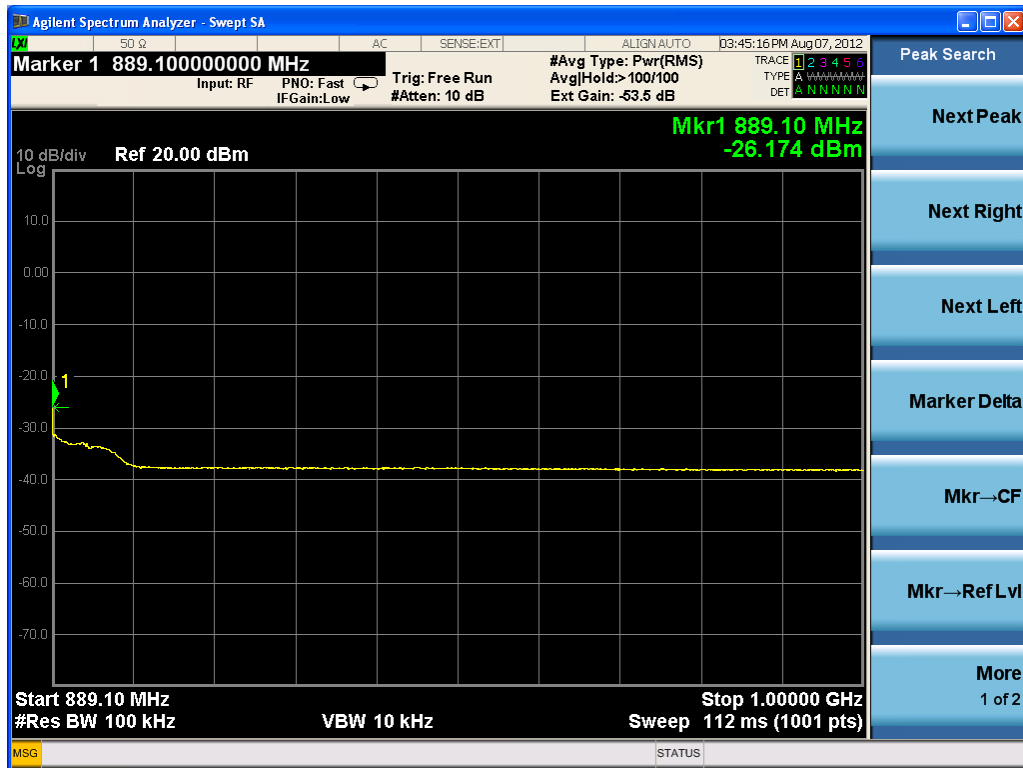




Three carriers (working in top frequency)

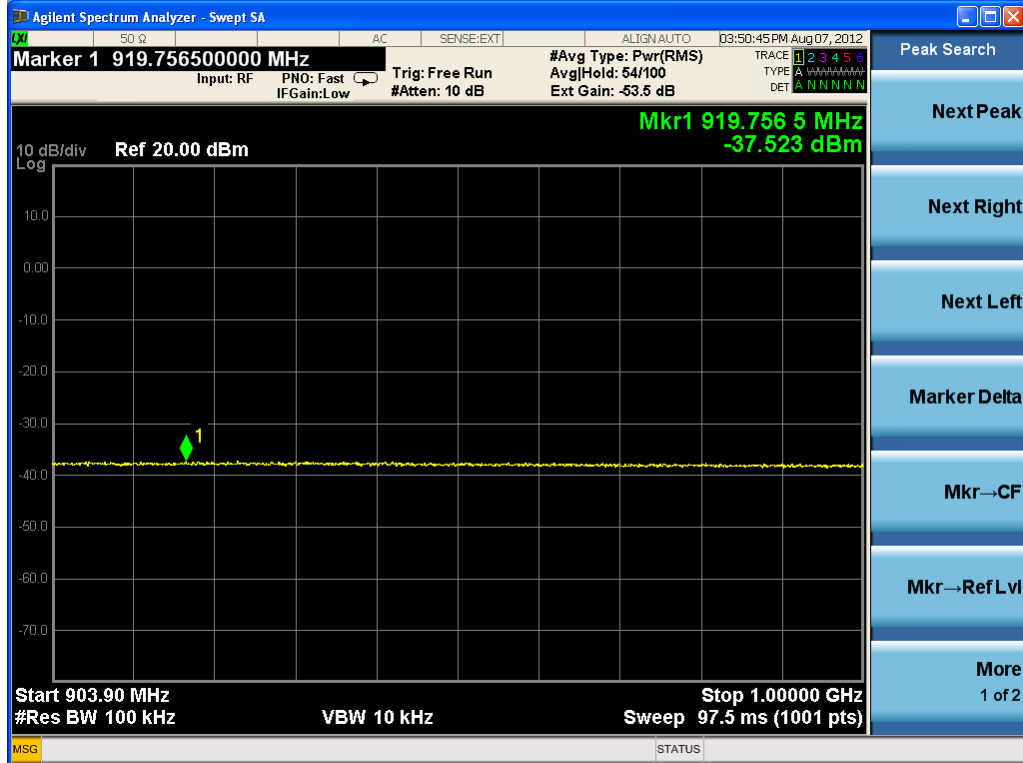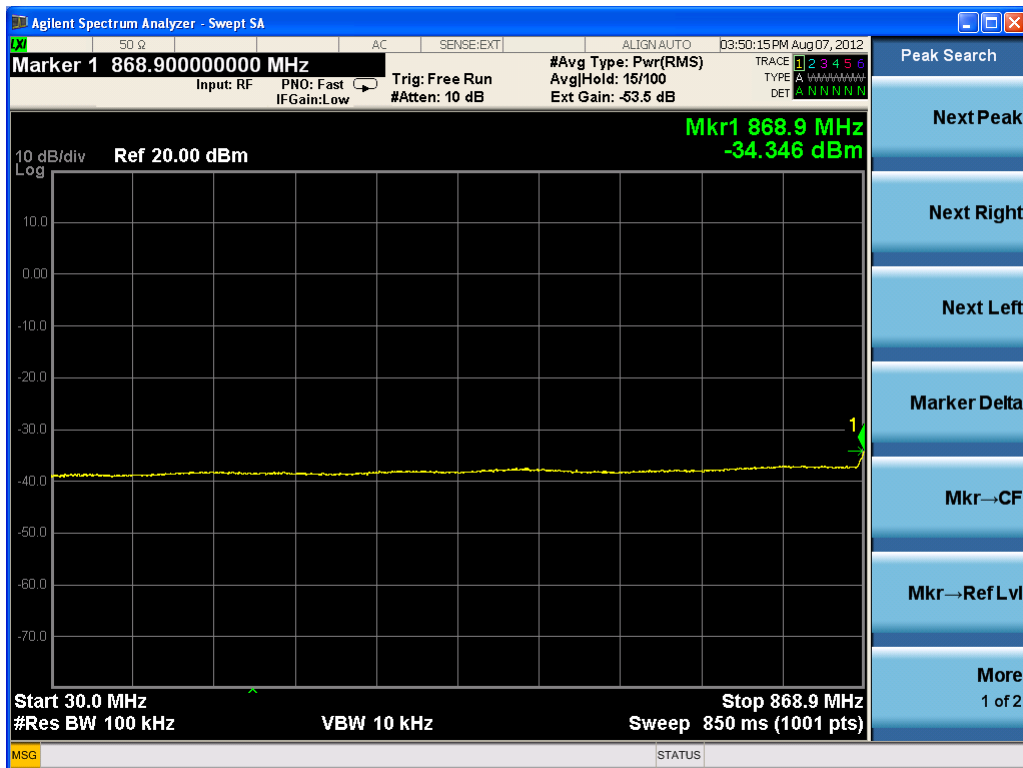


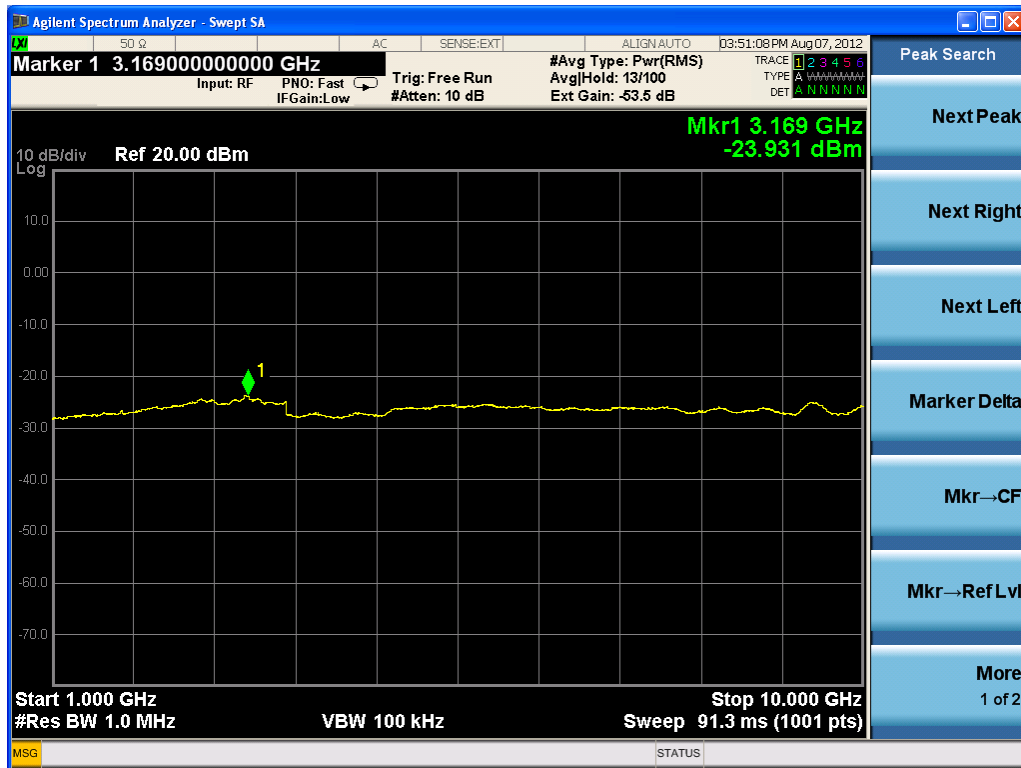



Two carriers (working in bottom frequency)

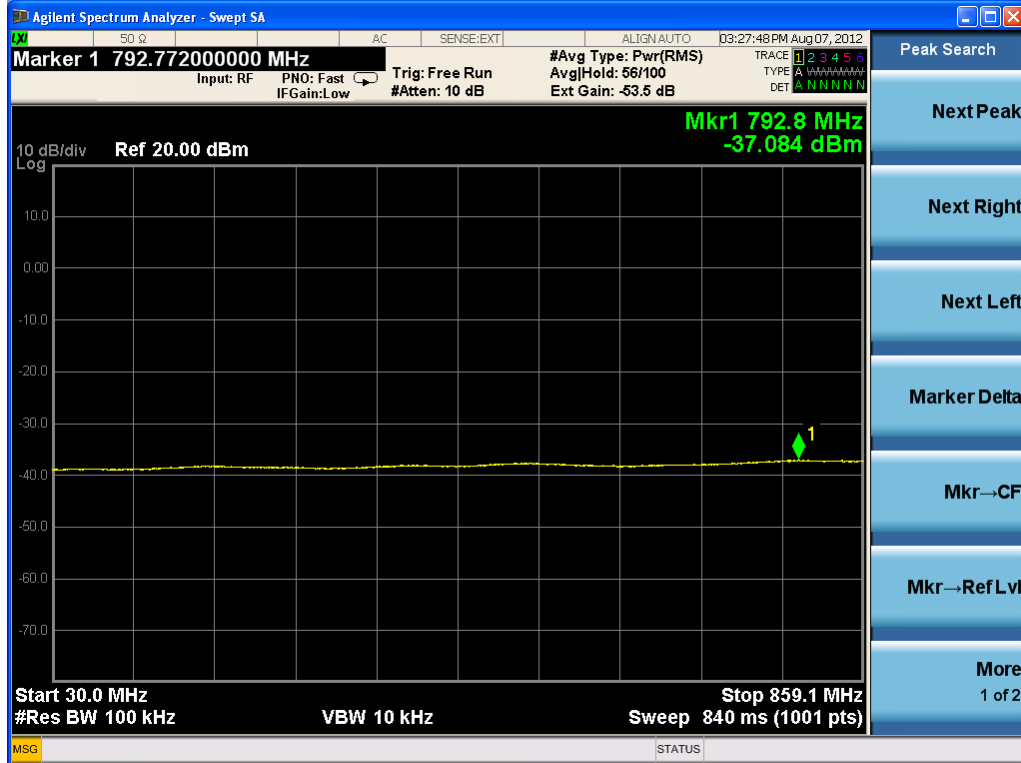

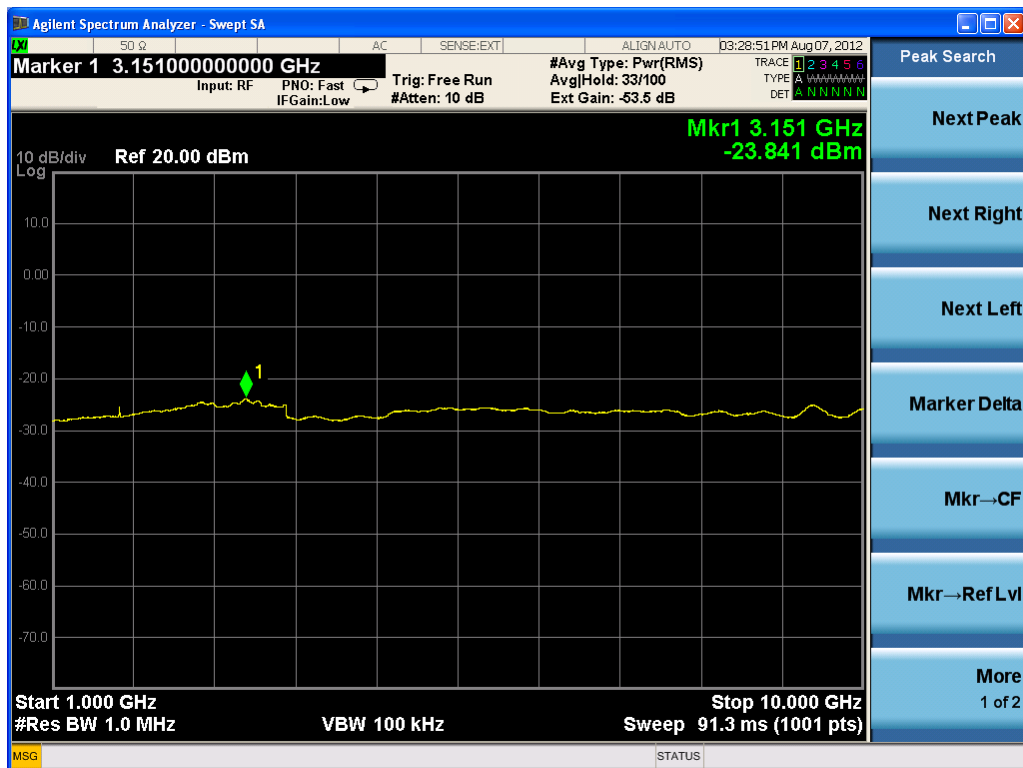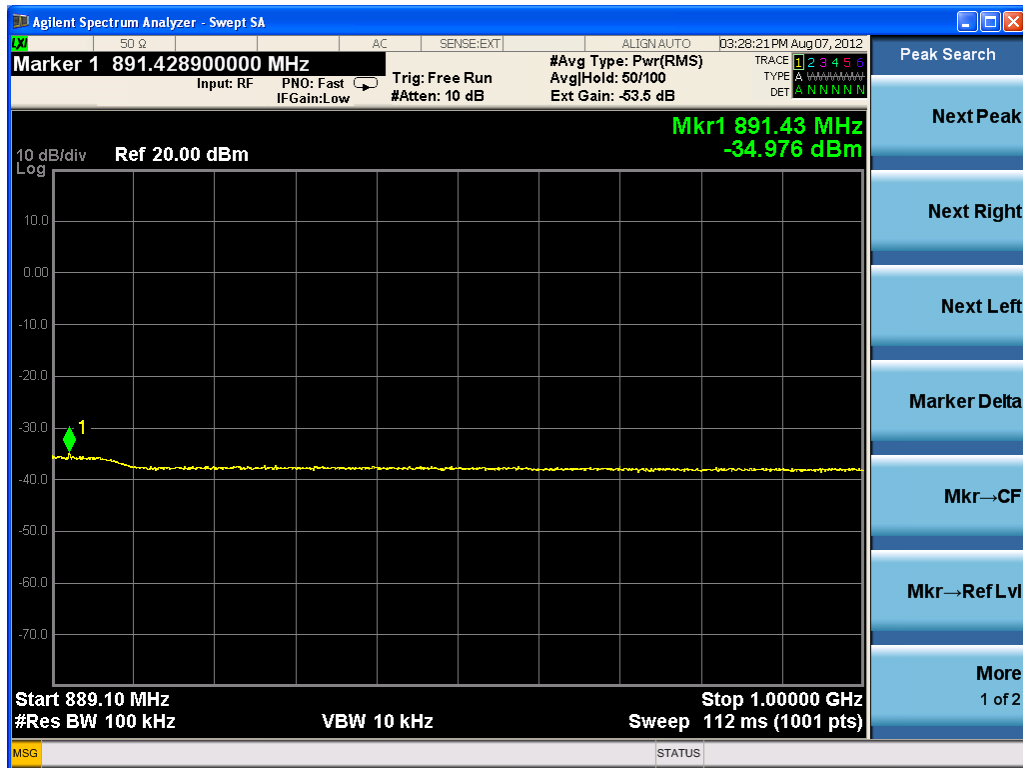




Two carriers (working in middle frequency)

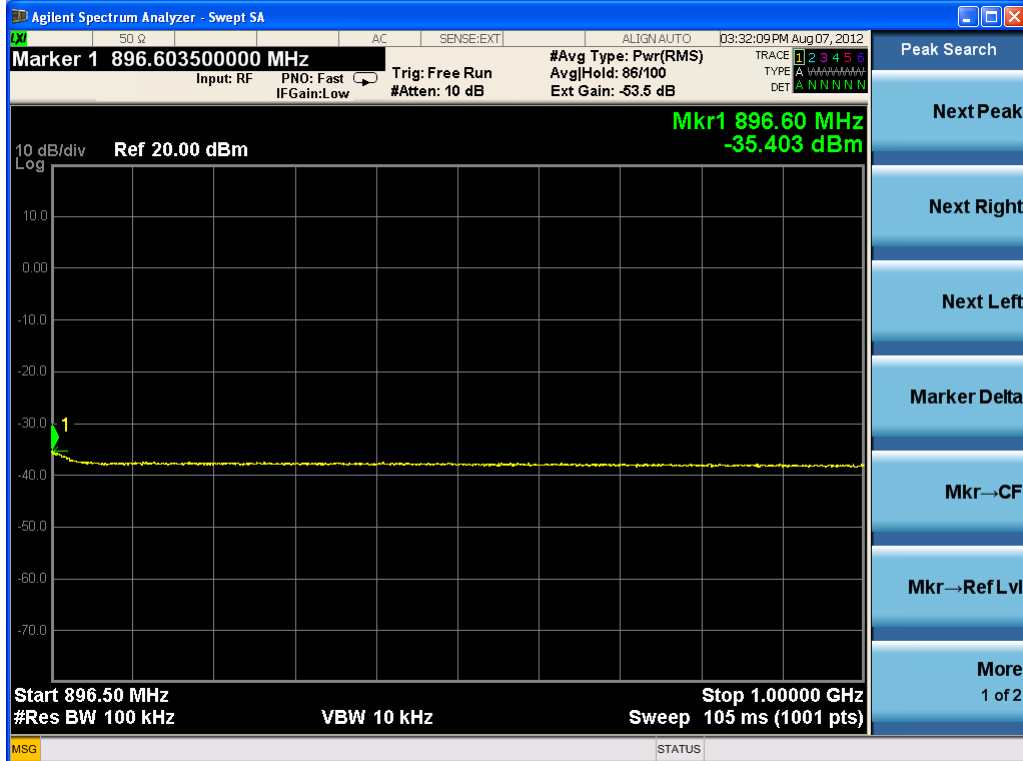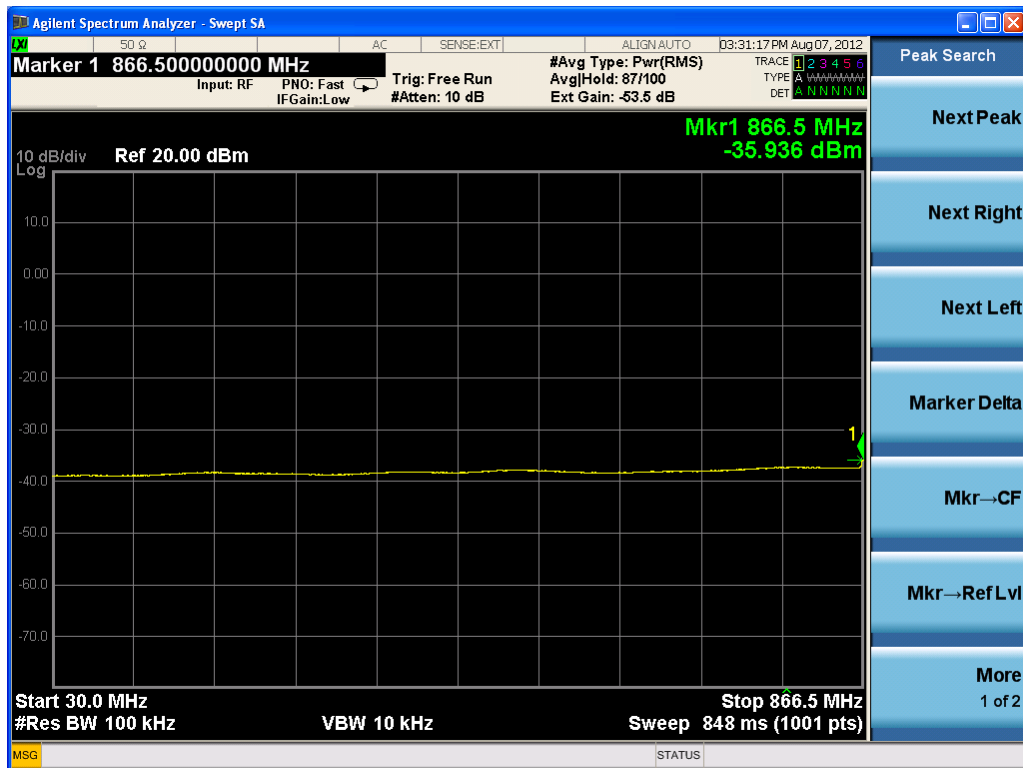


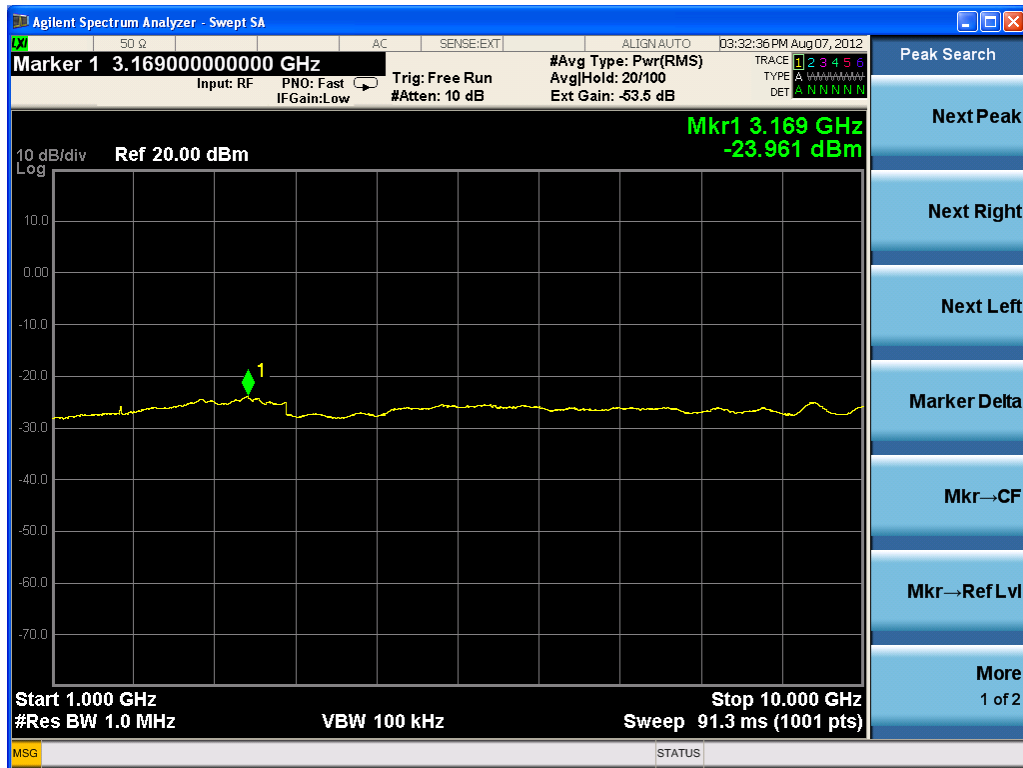



Two carriers (working in top frequency)

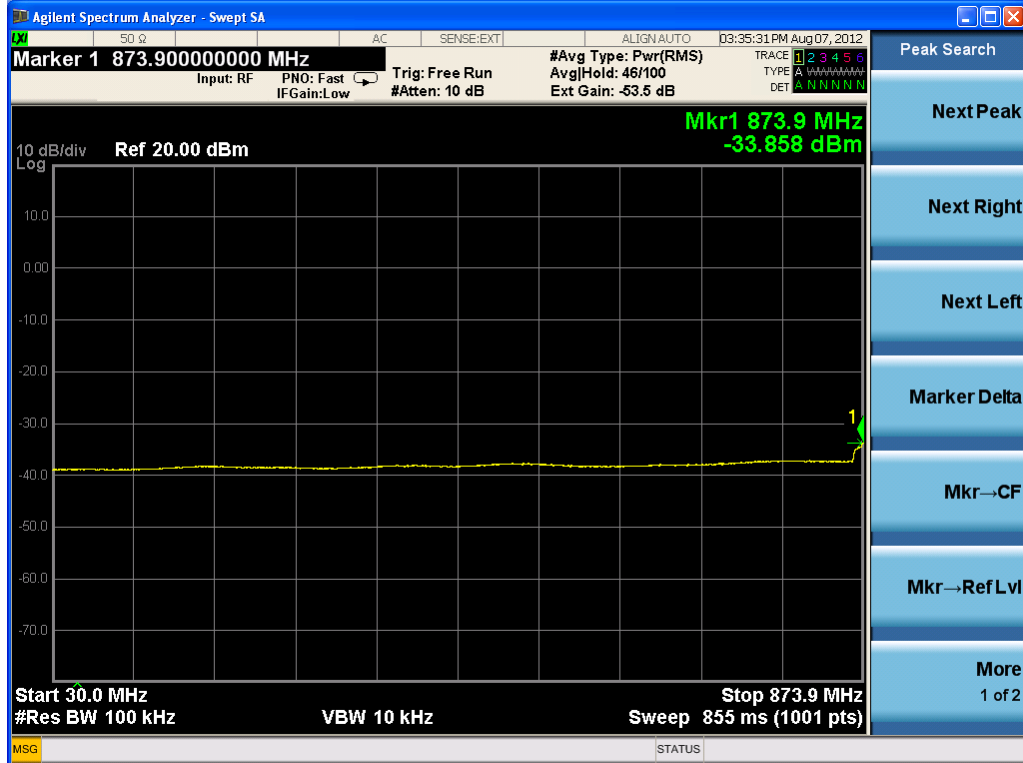

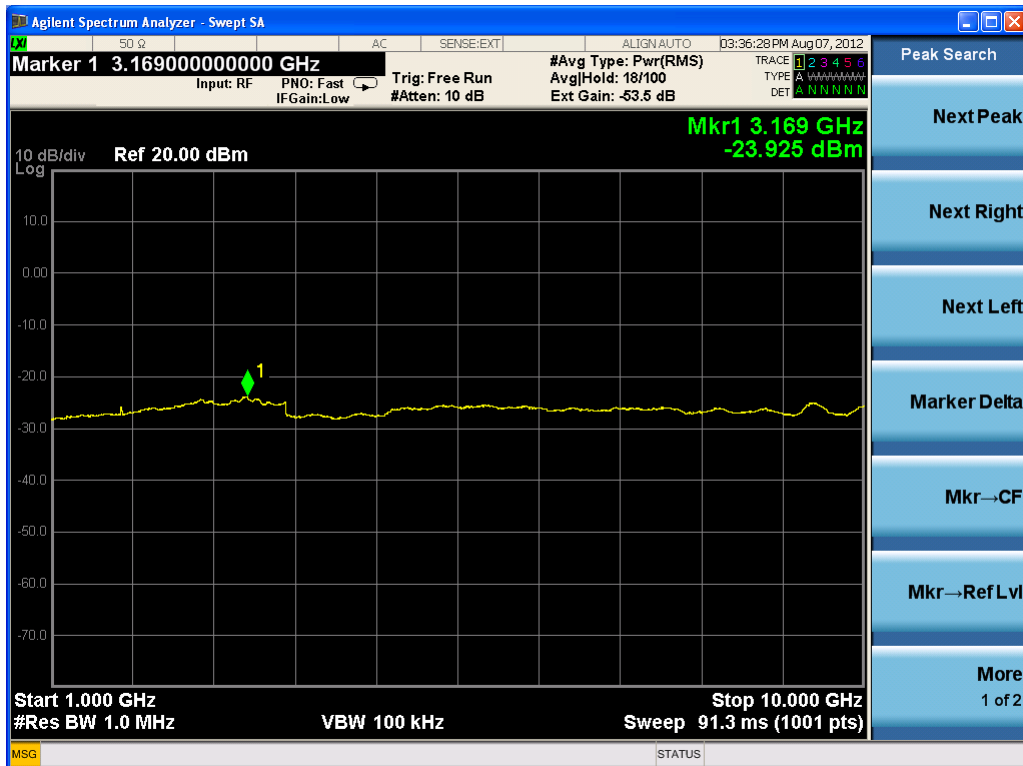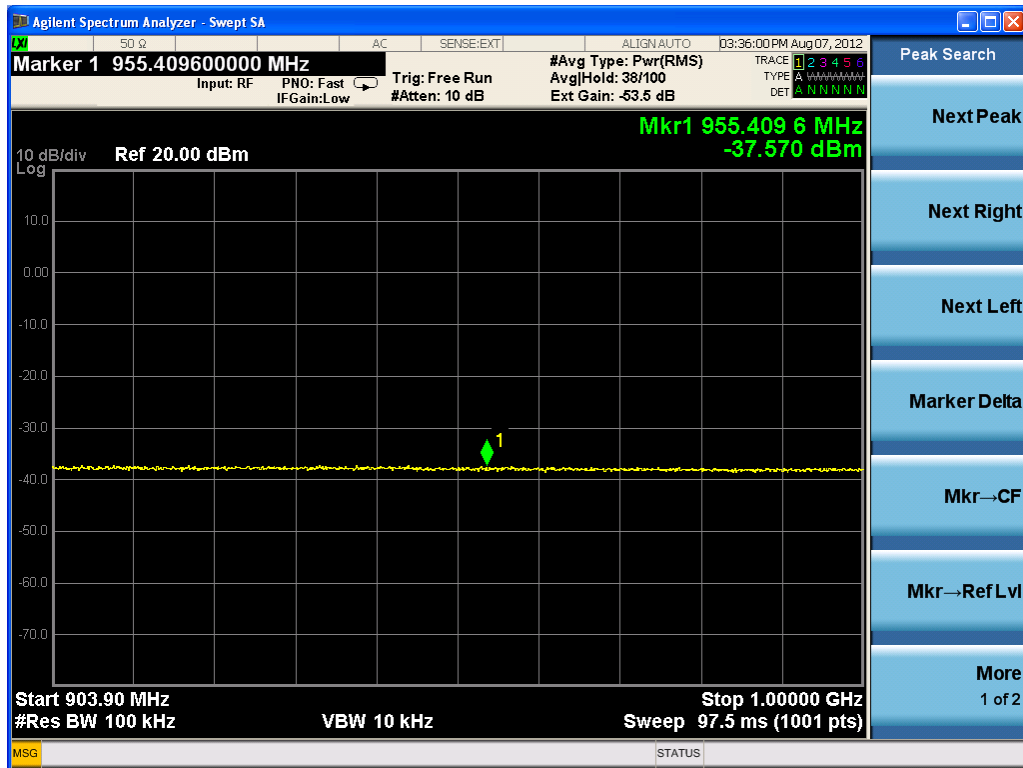




One carrier (working in bottom frequency)

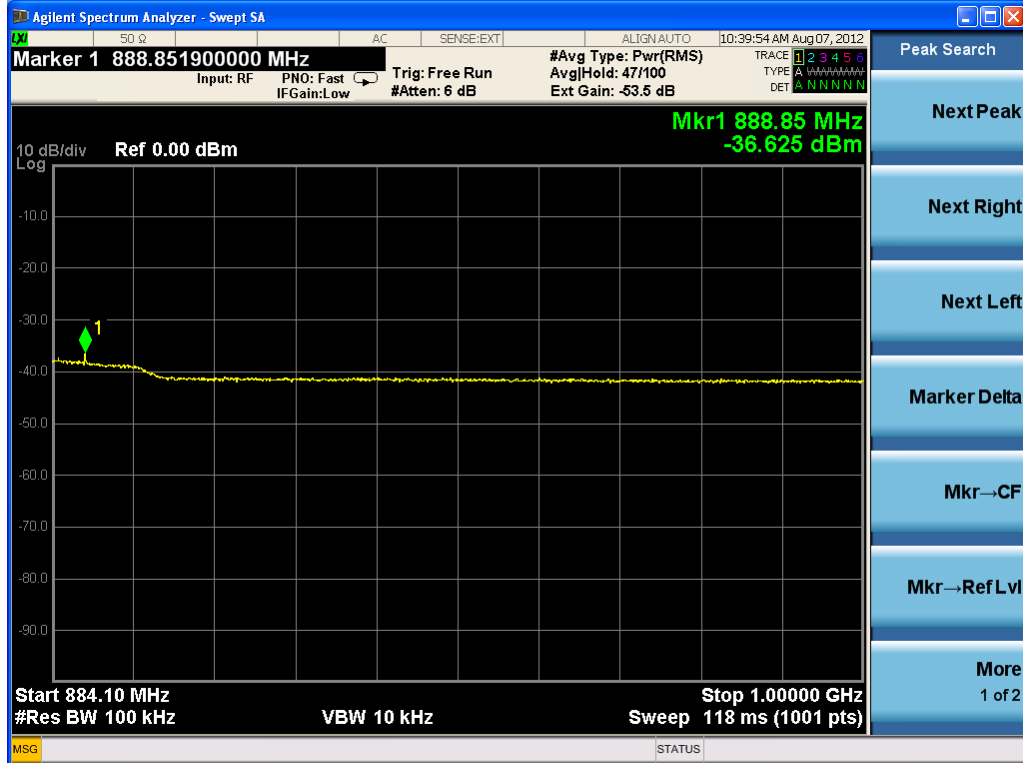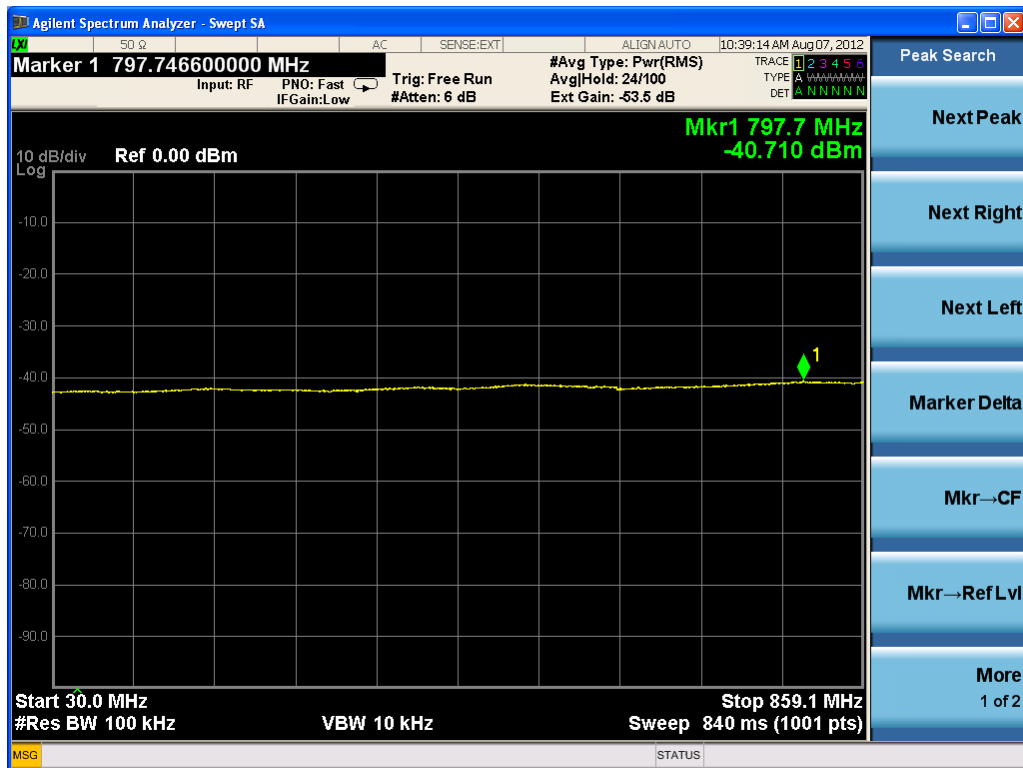


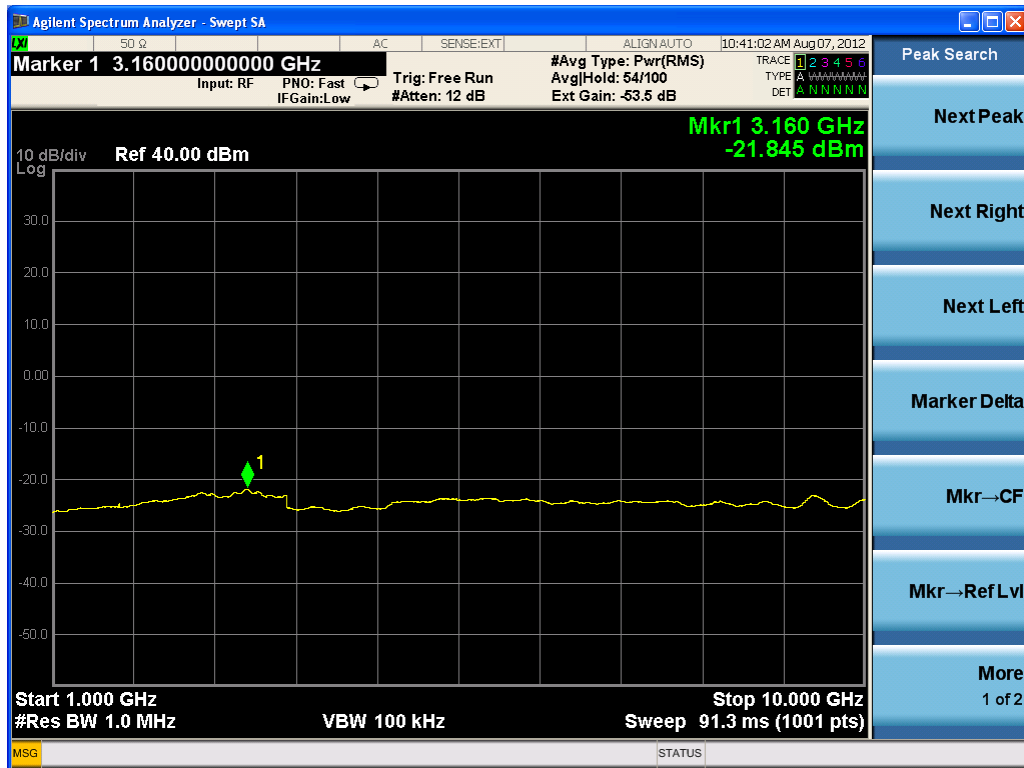



One carrier (working in middle frequency)

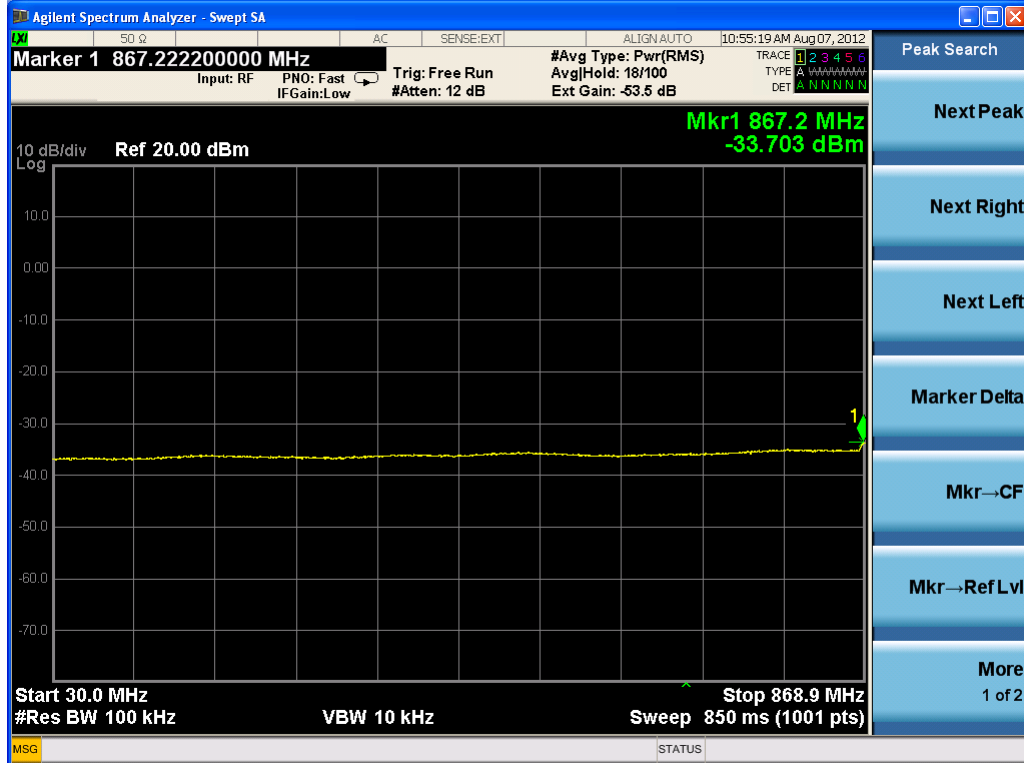

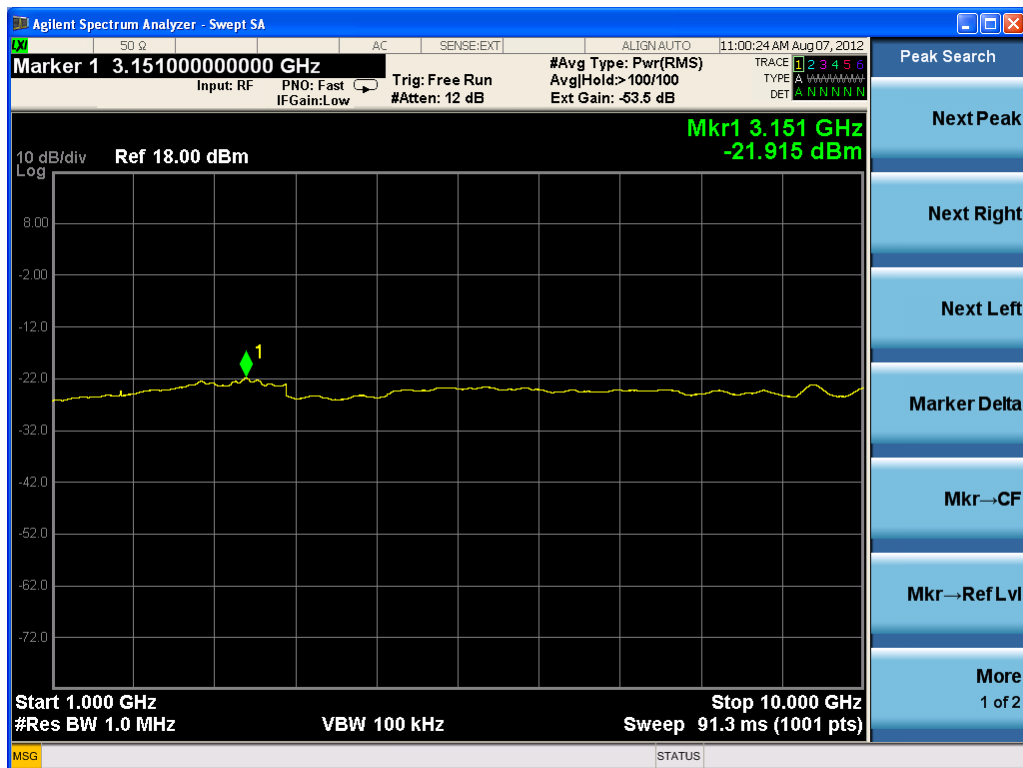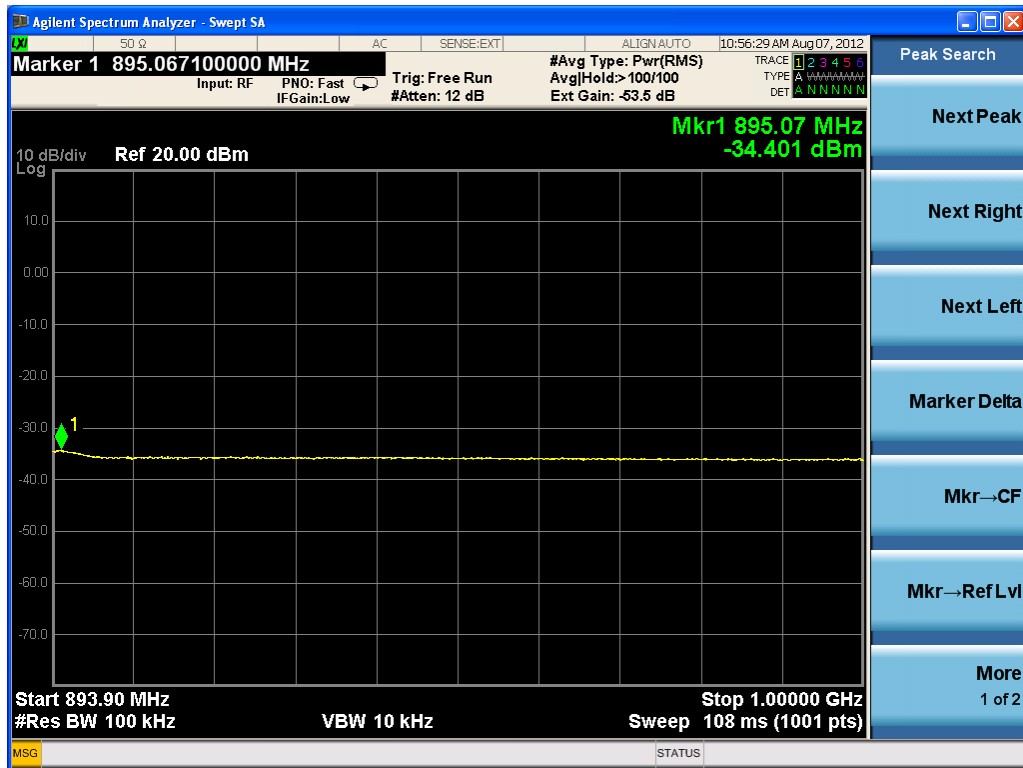

One carrier (working in top frequency)

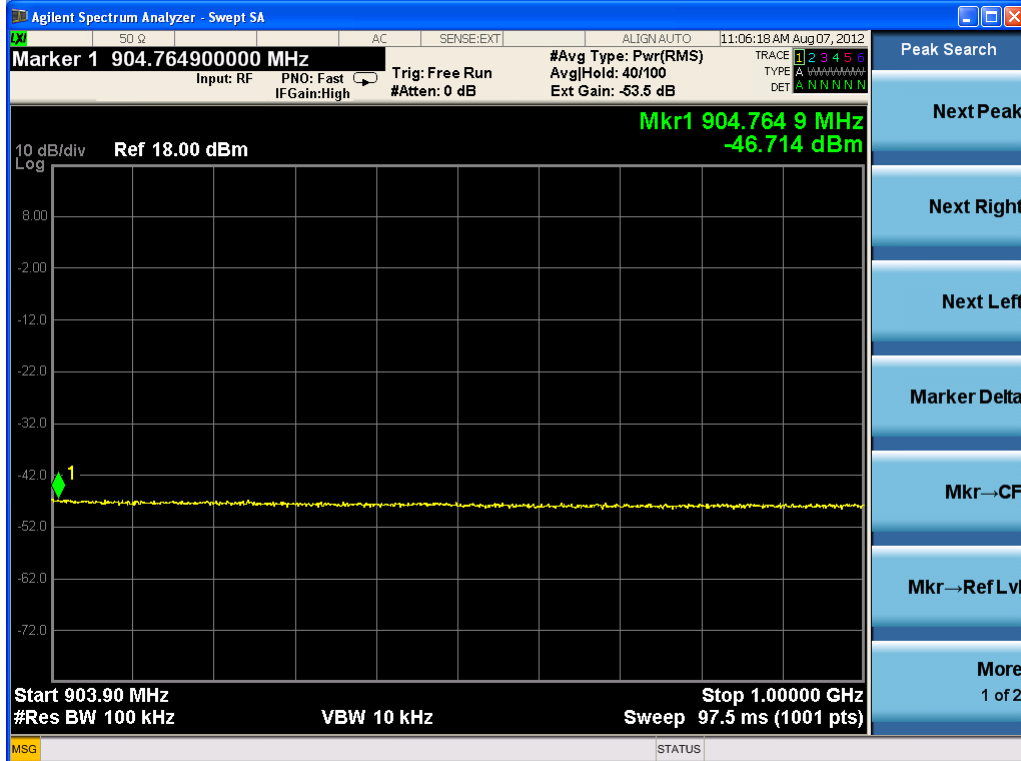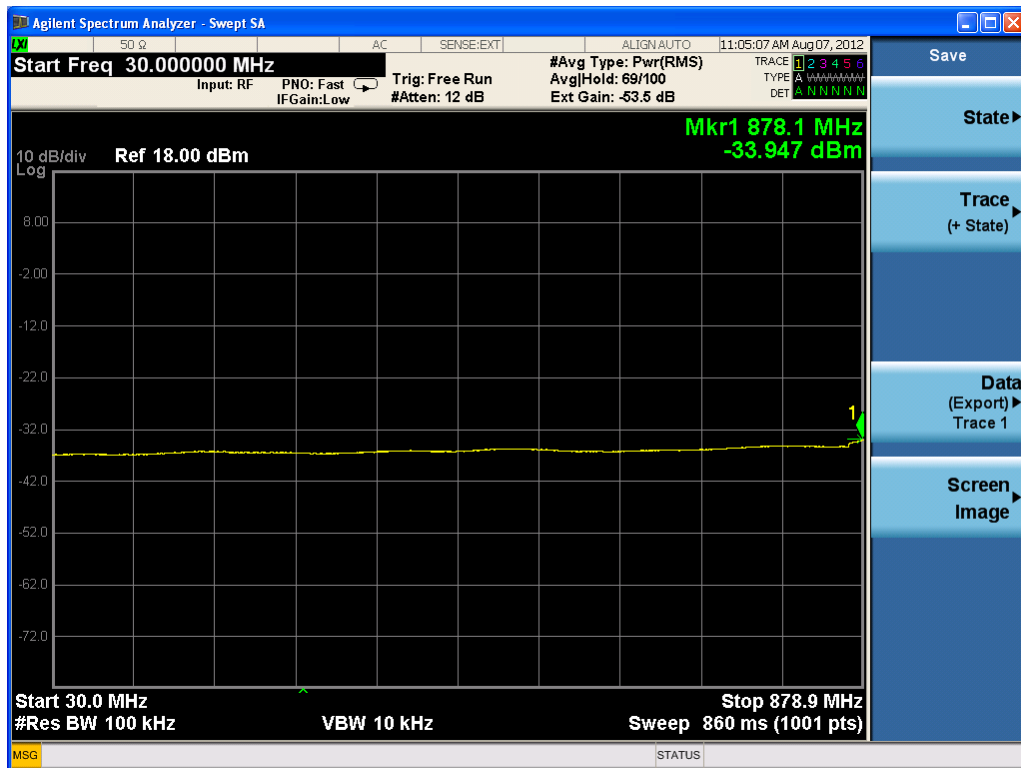

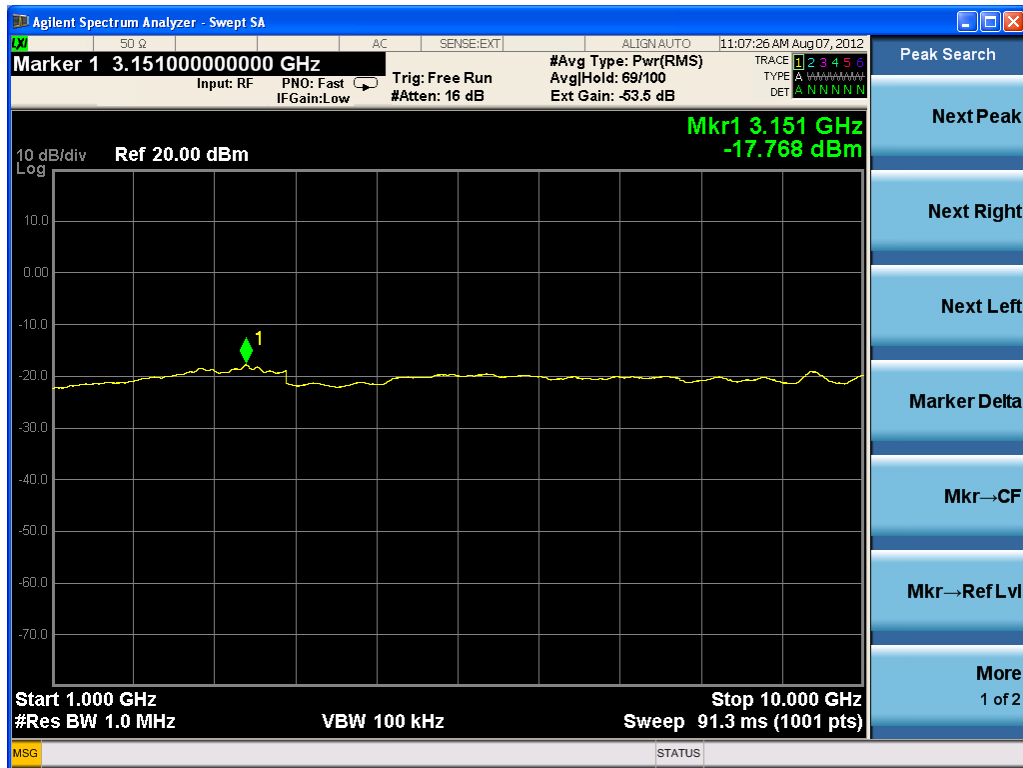

4.6 OCCUPIED BANDWIDTH

Applicable Standard: FCC §2.1049 §22.917

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2011-4-8	2012-4-7
Atten	40dB Attenuator	ATSI150-4-40	11300100204204	2011-7-11	2012-7-11
Forstar	Forstar RF Cable	002	1034	2011-4-8	2012-4-7

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

The RF out of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. 99%Power bandwidth was recorded.

Environmental Conditions

Temperature:	20 ° C
Relative Humidity:	53%
ATM Pressure:	1009mbar

Test Result: Pass

Test Mode: Transmitting UMTS

Test Data

Frequency (MHz)	99% Power Bandwidth (MHz)	Limit (MHz)
871.6/881.4/891.4	3.9512/3.9437/3.9651	<4.2

