


FCC/IC MEASUREMENT AND TEST REPORT

For

ZTE Corporation

ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen,
Guangdong, China 518057FCC ID: Q78-RSUC1930
IC : 5200A-RSUC1930

Sep 10, 2010

This Report Concerns: ☒ Original Report	Equipment Type: CDMA Remote Radio Unit
Test Engineer: 	
Report No.:	FCC-2010-035
Test Date:	Jun ,06 – Aug20, 2010
Reviewed By:	
Prepared By:	ZTE Corporation. ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen, Guangdong, China 518057, P.R.China Tel: +86-755-26770000 Fax: +86-755-26771999

Note: The test report is specially limited to the above company and this particular sample only. It may not be duplicated without prior written consent of ZTE Corporation. This report must not be used by the client to claim product certification 、 approval 、 or endorsement by any agency of the US Government.

1 TABLE OF CONTENTS

1	TABLE OF CONTENTS	2
2	GENERAL INFORMATION.....	4
	Product Description for Equipment Under Test (EUT).....	4
	Objective.....	5
	Related Submittal(s)/Grant(s).....	5
	Test Methodology	5
	Test Facility.....	5
3	SYSTEM TEST CONFIGURATION.....	6
	Description of Test Configuration	6
4	SUMMARY OF TEST RESULTS	7
5	TRANSMITTER OUTPUT POWER.....	8
	Applicable Standard: FCC §2.1046 §24.232 and IC RSS 133 § 6.4.....	8
	Test Equipment List and Details.....	8
	Test Procedure.....	8
	Environmental Conditions	9
	Test Result: Pass.....	9
	Test Mode: Transmitting CDMA	9
	Test Data:.....	9
6	RF EXPLOSURE	18
	Applicable standard: FCC §2.1091 §1.1037 and IC §RSS 102 2.5.2	18
	Limit.....	18
	Test Data.....	18
	Test Result: pass.....	18
7	MODULATION CHARACTERISTIC.....	19
	Applicable Standard: FCC §2.1047 and IC §RSS 133 6.2.....	19
	Test Equipment List and Details.....	19
	Test Procedure.....	19
	Test Data Environmental Conditions	19
	Test Result: Pass.....	19
	Test Mode: Transmitting CDMA	19
	Test Data:.....	20
8	SPURIOUS RADIATED EMISSIONS	22
	Applicable Standard: FCC CFR 47, §2.1053 and IC RSS133 §6.5,Rss Gen §4.9	22
	Test Equipment List and Details.....	22
	Test Procedure.....	23
	Test Results Summary: PASS	23
	Environmental Conditions	23
	Test data	24
9	SPURIOUS EMISSIONS AT ANTENNA TERMINALS	25
	Applicable Standard: FCC§2.1051, §24.238 IC §RSS 133 6.5.....	25
	Test Equipment List and Details.....	25
	Test Procedure.....	25
	Test Data Environmental Conditions	26
	Test Result: Pass.....	26
	Test Mode: Transmitting CDMA	26
	Test Data:.....	26
10	OCCUPIED BANDWIDTH.....	74
	Applicable Standard: FCC §2.1049 §24.229 §24.238 IC § RSS Gen 4.6.1	74

Test Equipment List and Details :	74
Test Procedure.....	74
Environmental Conditions	74
Test Result: Pass.....	75
Test Mode: Transmitting CDMA	75
Test Data.....	75
11 BAND EDGES	83
Applicable Standard: FCC §24.238 IC §RSS 133 6.5	83
Test Equipment List and Details.....	83
Test Procedure.....	83
Test Data Environmental Conditions	83
Test Result: Pass.....	84
Test Mode: Transmitting CDMA	84
Test Data.....	84
12 FREQUENCY STABILITY	90
Applicable Standard: FCC § 2.1055 § 24.235 IC §RSS 133 6.3 §RSS Gen 4.7	90
Test Equipment List and Details.....	90
Test Procedure.....	90
Environmental Conditions	91
Test Result: Pass.....	91
Test Mode: Transmitting CDMA	91
Test Data.....	91
Frequency Stability Versus Temperature.....	91
Frequency Stability Versus Voltage.....	92

2 GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The ZTE Corporation's product, model number: ZXSDR RSUC1930 or the "EUT" as referred to in this report is a CDMA Remote Radio Unit.

Technical specification:

Size: 400.5 mm × 72.7 mm × 455 mm(H x W x D)

Input voltage: -57 ~ -40Vdc

Frequency range: 1930MHz to1995MHz


(Bottom frequency is about 1930.65MHz, Middle frequency is about 1962.50MHz, Top frequency is about 1994.35MHz).

Max RF output power: 47.8dBm

Gain of the antenna: 13dBi

Modulation type of emission: CDMA

Appearance of EUT:

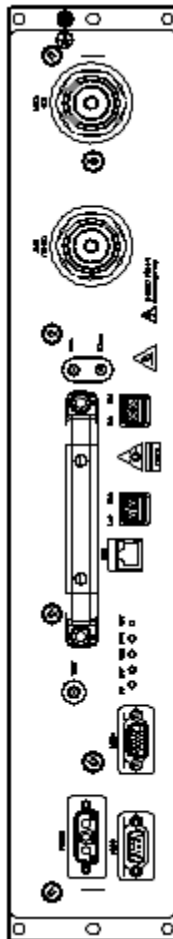

Objective

This Type approval report is prepared on behalf of ZTE Corporation in accordance with Part 2, Part 15, Part 24 of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, as well as the following parts:

Part 24 Wireless Communication Services

Applicable Standards: TIA EIA 137-A, TIA EIA 97-D, TIA/EIA 603-C, Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

All radiated and conducted measurement was performed at ZTE Corporation Reliability Testing Center. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by ZTE Corporation to collect test data is located in the ZTE Plaza, Hi-tech Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China, Tel: +86-755-26770000, Fax: +86-755-26771999. Test site at ZTE Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 0007895832. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

3 SYSTEM TEST CONFIGURATION

Description of Test Configuration


Justification

The EUT was configured for testing according to TIA/ELA-603C.

The final qualification test was performed with EUT operating at normal mode.

Equipment Modifications

ZTE Corporation has not done any modification on the EUT.

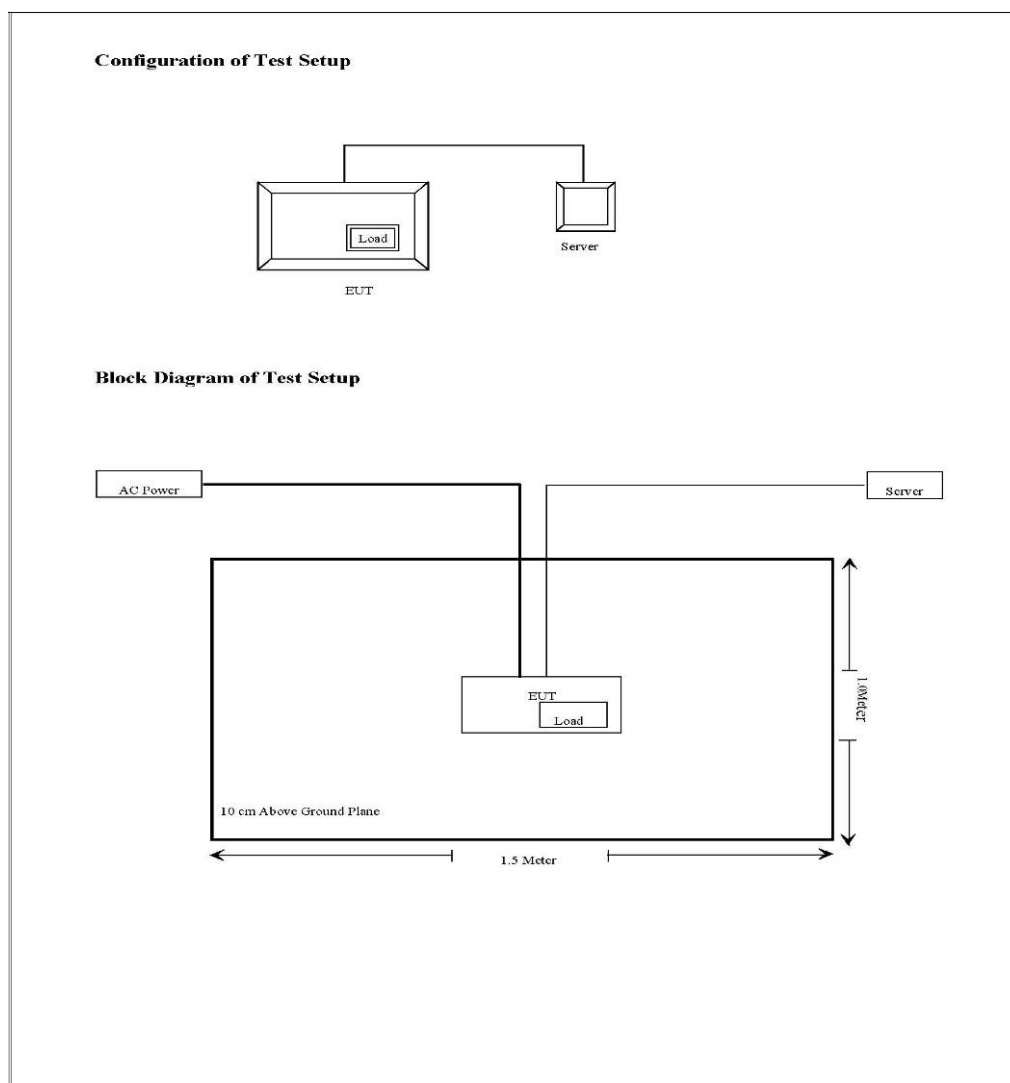

4 SUMMARY OF TEST RESULTS

FCC RULES	IC RULES	DESCRIPTION OF TEST	RESULT
§2.1046 §24.232	RSS 133 § 6.4	Transmitter output Power	Compliant
§2.1091 §1.1037	§RSS 102 2.5.2	RF Exposure	Compliant
§2.1047	§RSS 133 6.2	Modulation Characteristic	Compliant
§2.1053	RSS133 §6.5,Rss Gen §4.9	Spurious Radiated Emissions	Compliant
§2.1051, §24.238	§RSS 133 6.5	Spurious Emissions AT Antenna Terminals	Compliant
§2.1049 §24.229 §24.238	§RSS Gen 4.6.1	Occupied Bandwidth	Compliant
§24.238	§RSS 133 6.5	Band Edge	Compliant
§ 2.1055 § 24.235	§RSS 133 6.3 §RSS Gen 4.7	Frequency stability	Compliant

5 TRANSMITTER OUTPUT POWER

Applicable Standard: FCC §2.1046 §24.232

According to FCC §2.1046 & §24.232, the EIRP (equivalent isotropically radiated power) must not exceed 1640 Watts.


According to RSS-133, SRSP 510 5.1, the EIRP (equivalent isotropically radiated power) must not exceed 3280 Watts/MHz for base station transmitters operating in the band of 1930 MHz to 1995 MHz with the antenna height above average terrain up to 300 meters. If used in urban area, the limit should be 1640 Watts/MHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2010-4-9	2011-4-9
DTS	DTS100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

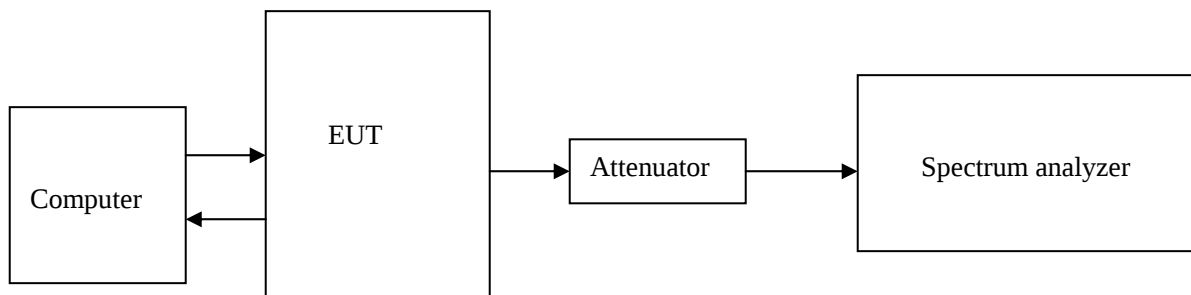

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. External attenuation Loss is 40dB, Cable Loss is about 3dB

Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar


Test Result: Pass


Test Mode: Transmitting CDMA

Test Data:

Four Carriers (near top frequency and bottom frequency)


Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm	Antenna gain dBi	Total Power in W
1932.525	1930.65/1931.90/1933.15/1934.4	47.61	13	1151
1962.5	1960.6/1961.85/1963.1/1964.35	47.49	13	1119
1992.475	1990.6/1991.85/1993.10/1994.35	47.04	13	1009

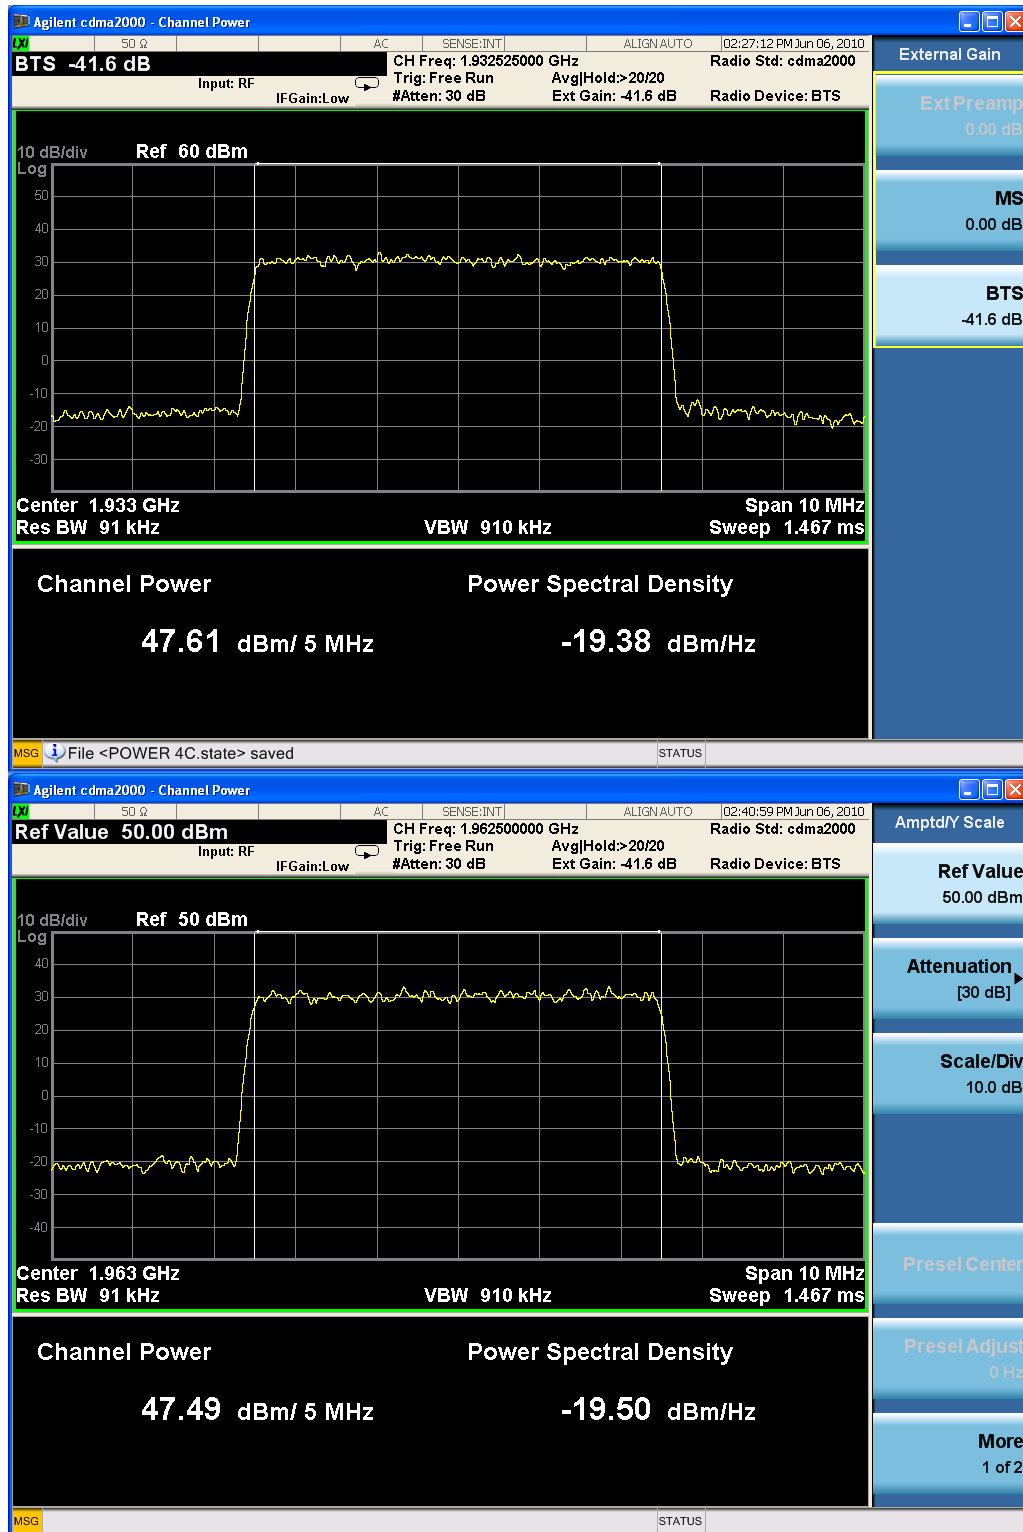


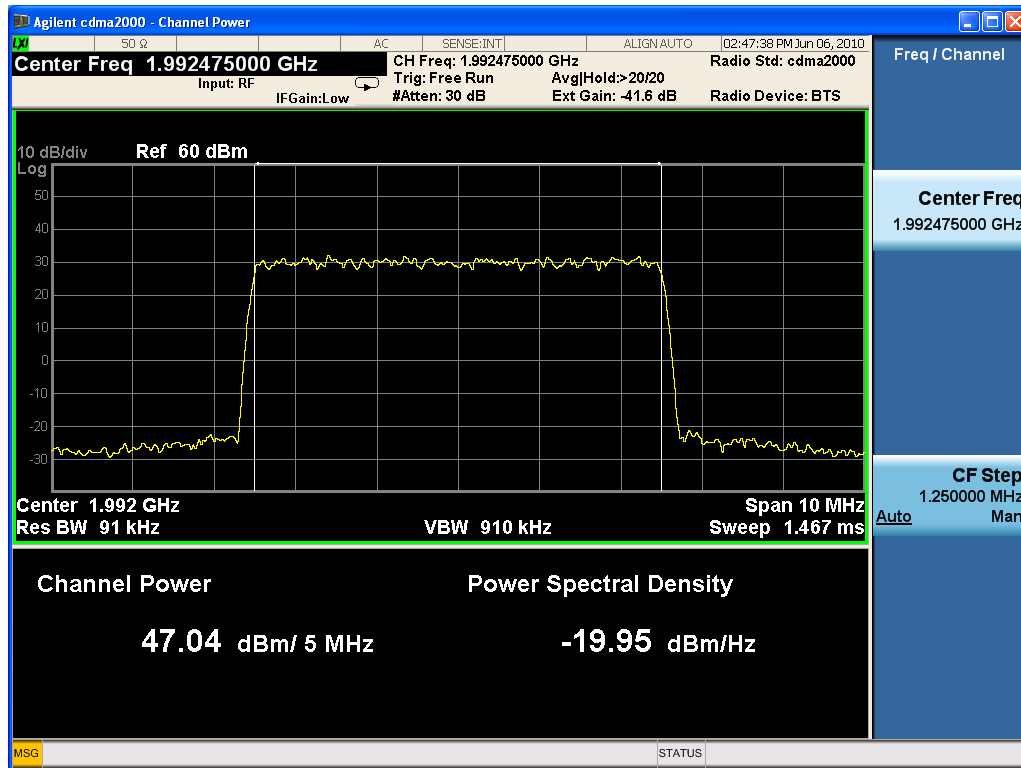

Three carriers


Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm	Antenna gain dBi	Total Power in W
1931.9	1930.65/1931.9/1933.15	47.42	13	1102
1962.5	1961.25/1962.5/1963.75	47.56	13	1137
1993.1	1991.85/1993.1/1994.35	47.61	13	1151

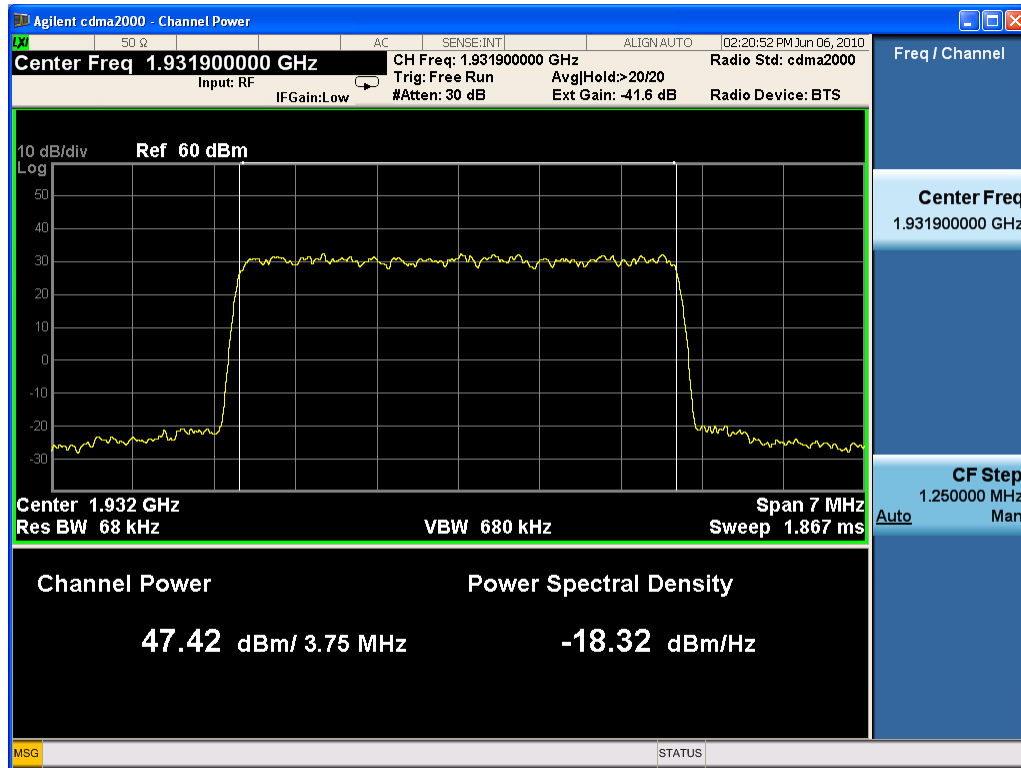


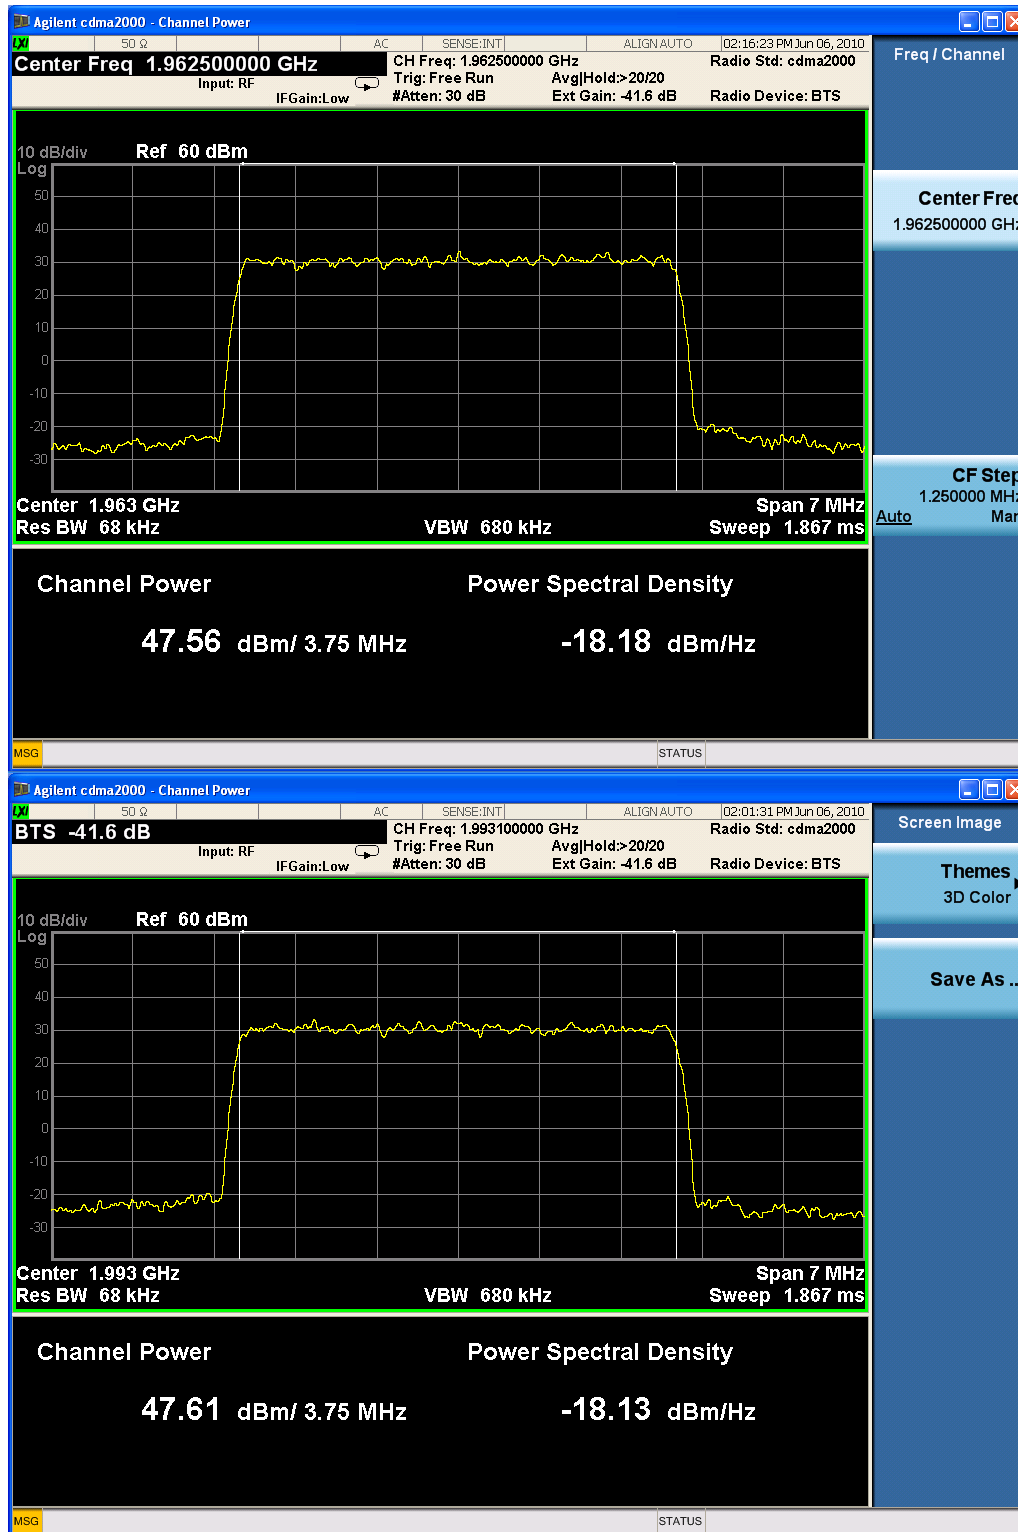

Two carriers


Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm	Antenna gain dBi	Total Power in W
1931.275	1930.65/1931.90	47.47	13	1114
1962.475	1961.85/1963.10	47.69	13	1172
1993.725	1993.10/1994.35	47.54	13	1132

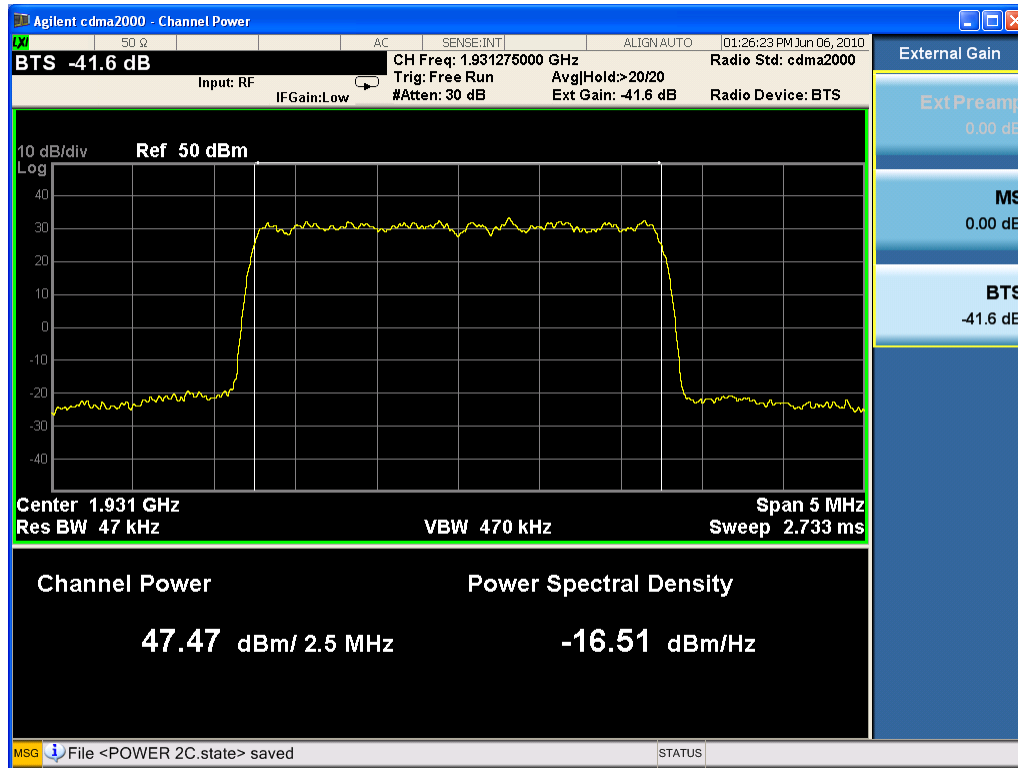


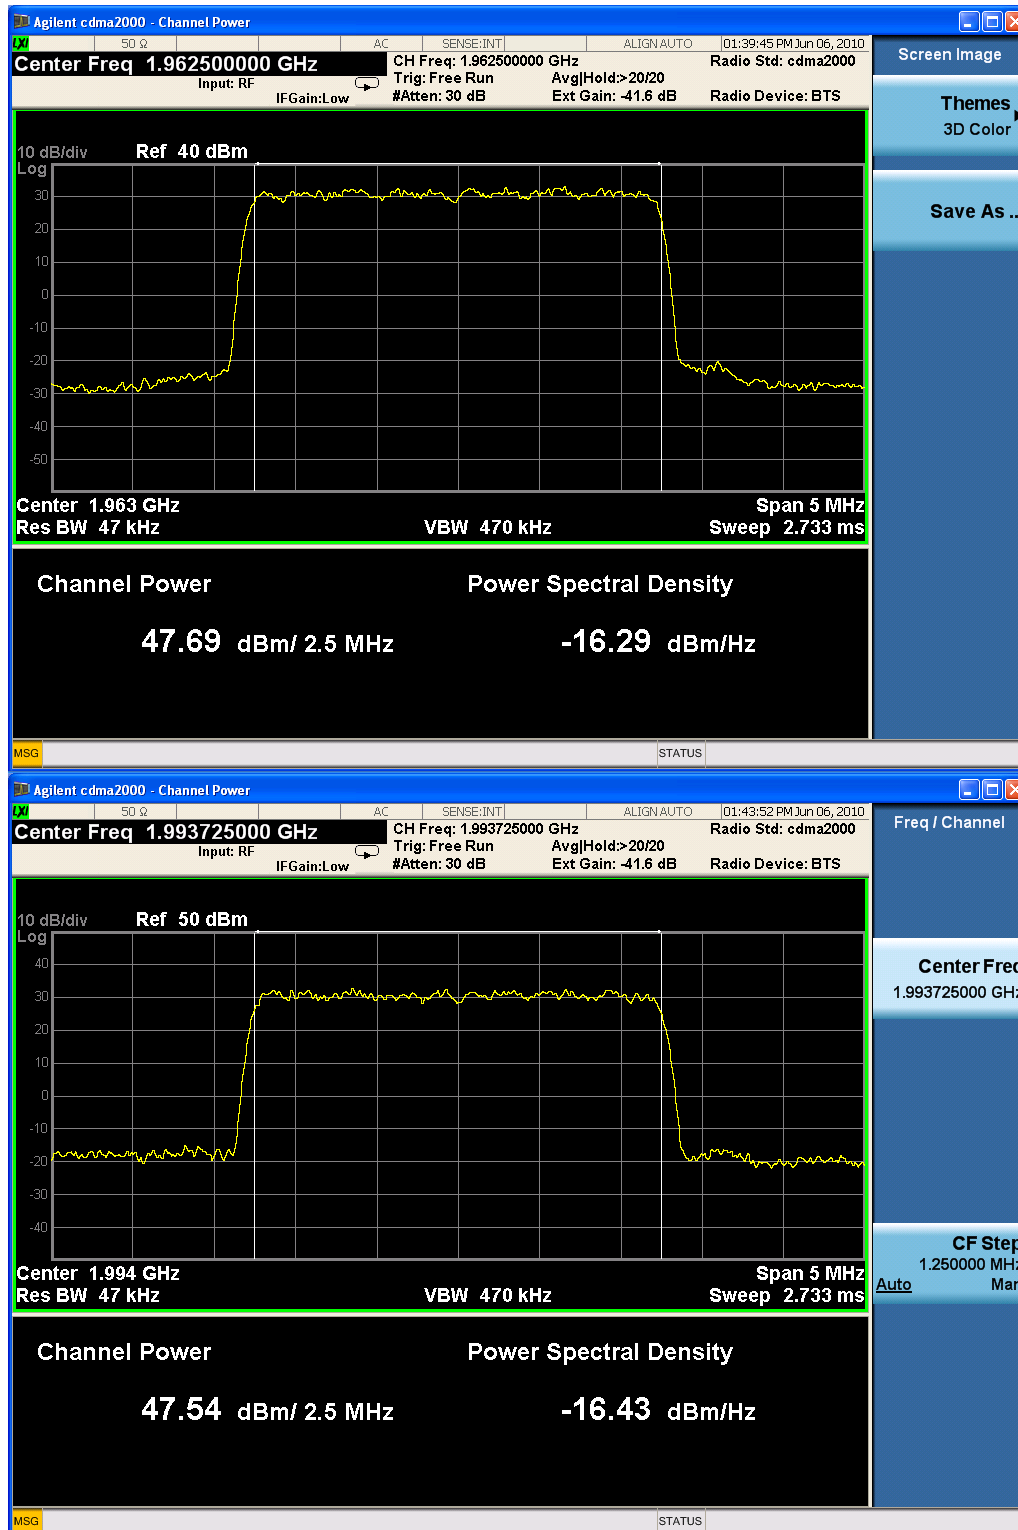

One carrier

Center Freq. (MHz)	Frequency (MHz)	Max output Power in dBm	Antenna gain dBi	Total Power in W
1930.65	1930.65	47.64	13	1159
1962.50	1962.50	47.54	13	1132
1994.35	1994.35	47.65	13	1161

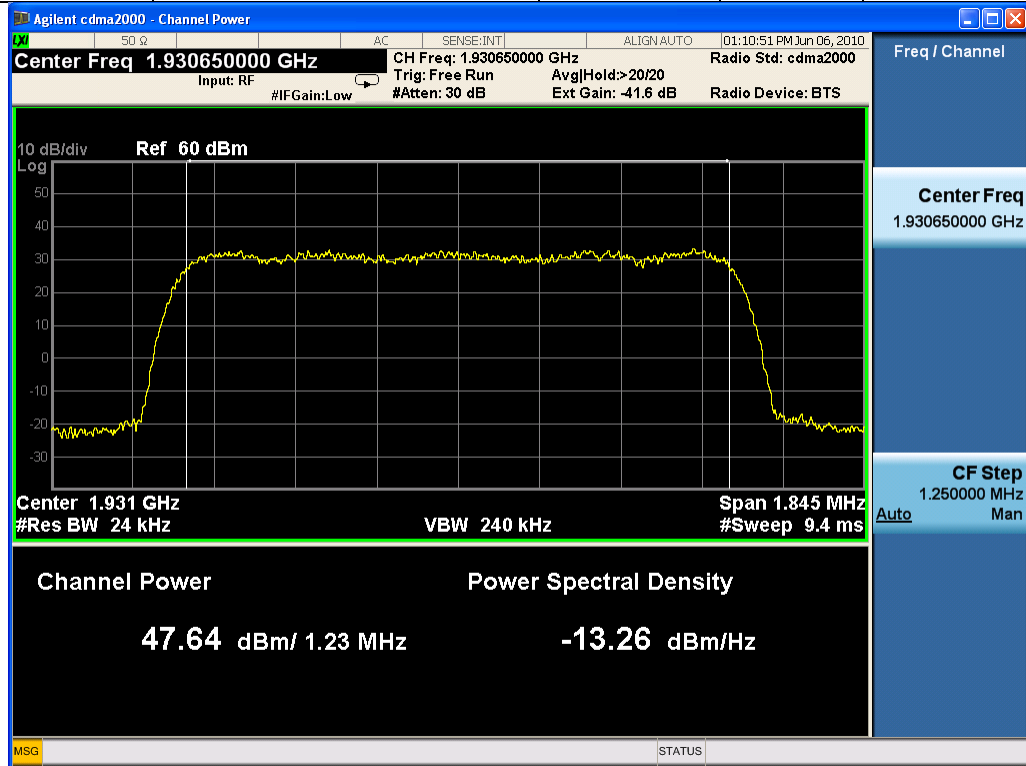

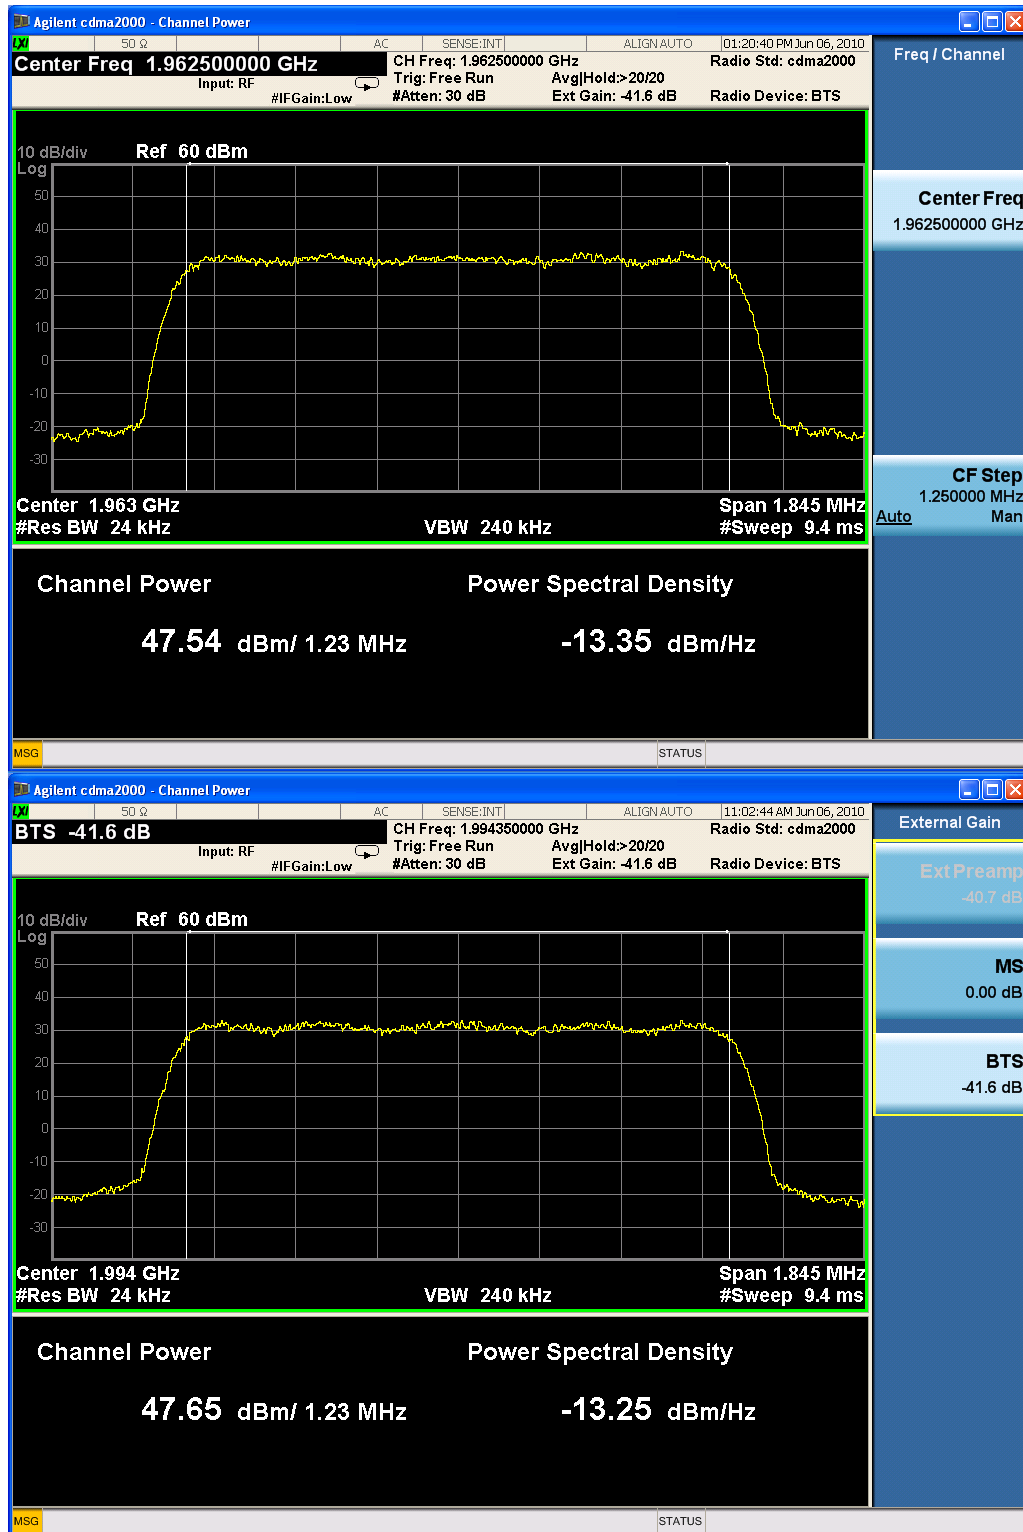

6 RF EXPLOSURE

Applicable standard: FCC §2.1091 §1.1037 and IC §RSS 102 2.5.2

Limit

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated. Limits for Maximum Permissible Exposure (MPE)

(B) Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

Test Data

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG / 4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal: 47.69(dBm) Maximum peak

output power at antenna input terminals: 58.7 (W)

Prediction distance: 400 (cm)

Predication frequency: 1962.475 (MHz)

Antenna Gain (typical): 13 (dBi)

Power density at predication frequency at 400 cm: 0.379 (mW/cm²)

MPE limit for uncontrolled exposure at prediction frequency: 1.0 (mW/cm²)

Test Result: pass

7 MODULATION CHARACTERISTIC

Applicable Standard: FCC §2.1047 and IC §RSS 133 6.2

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2010-4-9	2011-4-9
DTS	DTS100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

CDMA digital mode is used by EUT.

Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar



Test Result: Pass

Test Mode: Transmitting CDMA

Test Data:

Frequency (MHz)	Rho
1994.35	0.99666
1962.50	0.99672
1930.65	0.99665

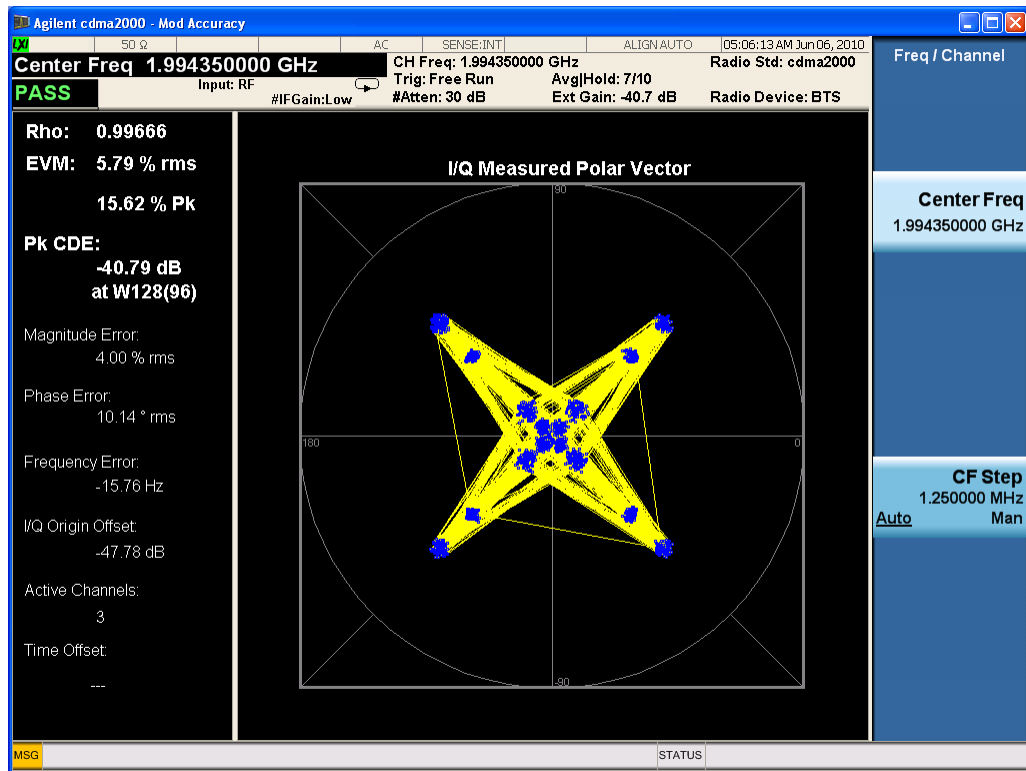

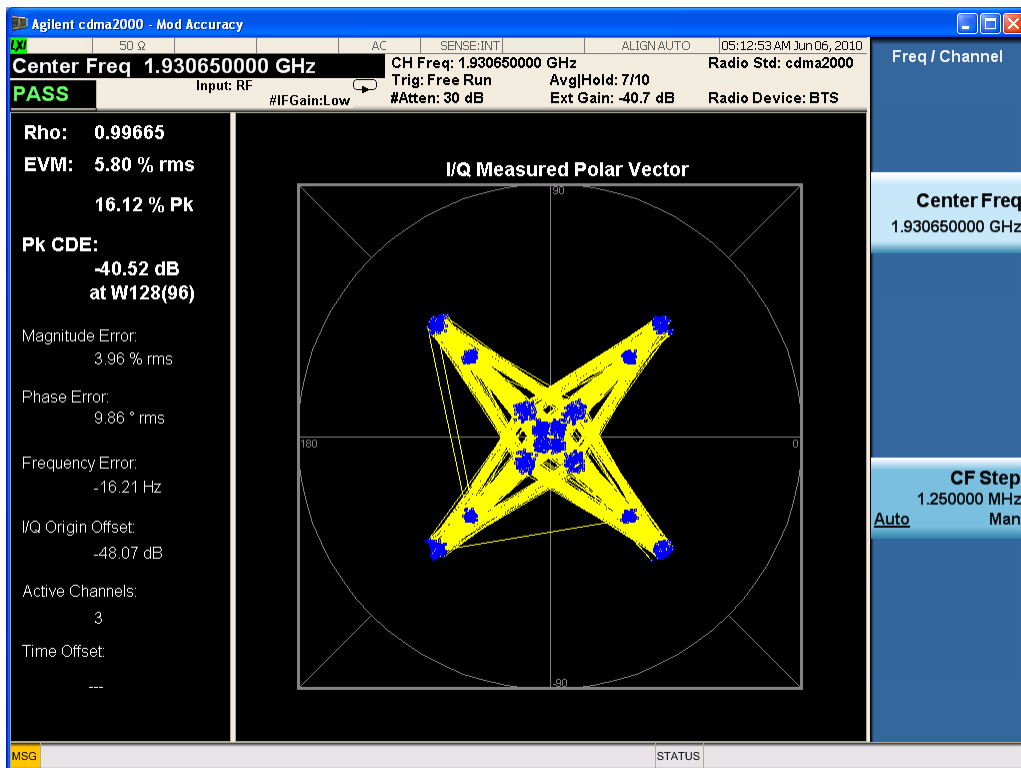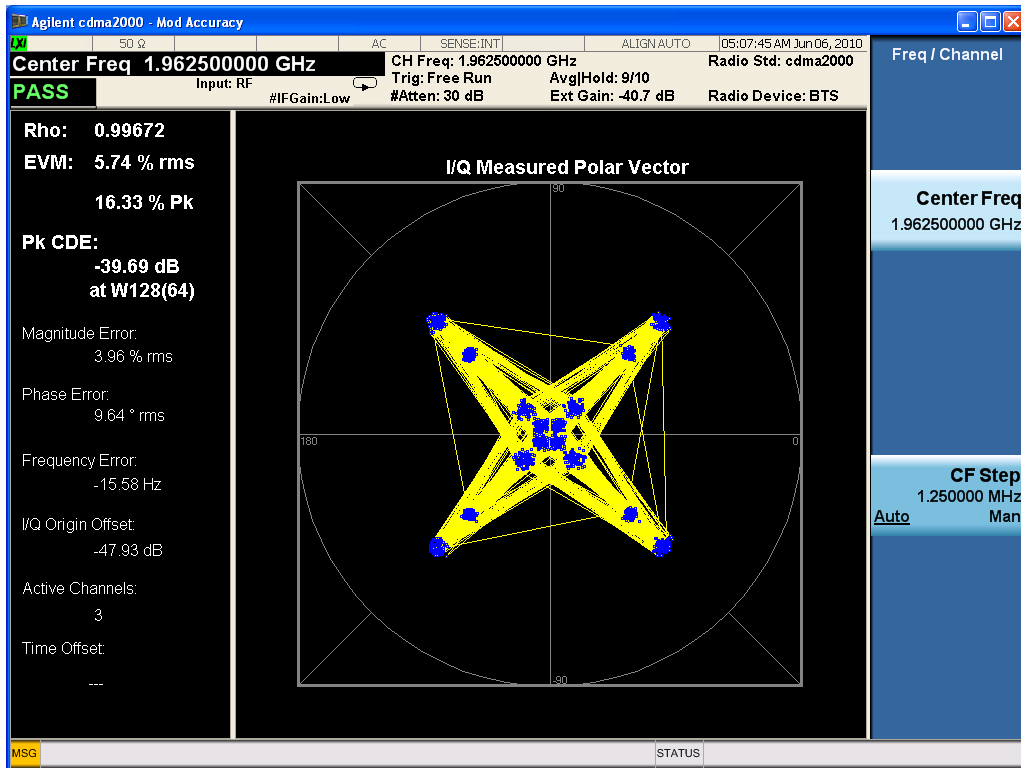

8 SPURIOUS RADIATED EMISSIONS

Applicable Standard: FCC CFR 47, §2.1053 and IC RSS133 §6.5, Rss Gen

§4.9

Test Equipment List and Details


Manufacturer	Equipment	Model	Serial Number	Last Cal.	Cal. Interval
Sunol Sciences	Horn Antenna	DRH-118	A052604	2010-09-03	1 Year
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2010-09-03	1 Year
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2010-09-03	1 Year
HP	Preamplifier	8449B	3008A00277	2010-09-07	1 Year
HP	Signal Generator	HP8657A	2849U00982	2010-09-07	1 Year
HP	Amplifier	HP8447D	2944A09795	2010-09-07	1 Year
HP	Synthesized Sweeper	8341B	2624A00116	2010-09-07	1 Year
COM POWER	Dipole Antenna	AD-100	041000	2010-09-07	1 Year
A.H. System	Horn Antenna	SAS-200/57 1	135	2010-09-07	1 Year
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	1100.0008.02	2010-09-07	1 Year

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiated emissions measurement at the EMC lab. is 3.6dB.

EUT Setup

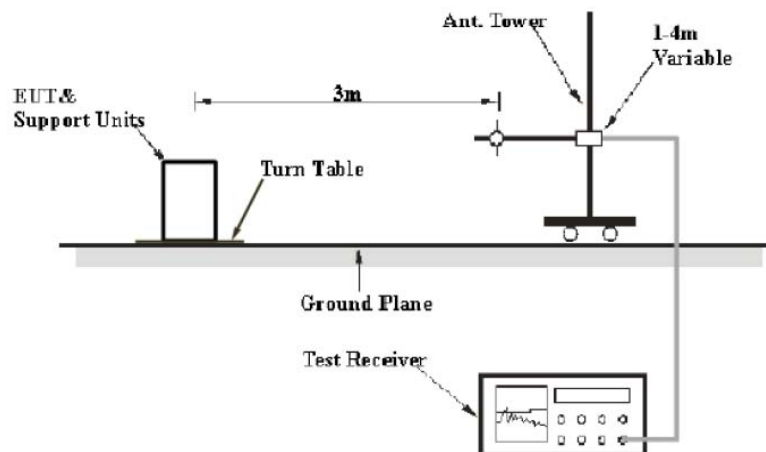

The radiated emission tests were performed in the 3-meter Chamber, using the setup accordance with the FCC part 15.109. The specification used were the FCC 15.109 limits and RSS 133 clause 6.5 limits.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TX pwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 43 + 10 Lg P (power out in Watts)

The resolution bandwidth of the spectrum analyzer was set at 100KHz for 30MHz to 1GHz scanning, set at 1MHz or 3MHz for 1GHz to 20GHz scanning.

Test Results Summary: PASS

Environmental Conditions

Temperature:	26°C
Relative Humidity:	60 %
ATM Pressure:	1009 mbar

Test data

Indicated		Table	Test Antenna		Substituted			Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (GHz)	Amp. (dBuV)	Angle Degree	Height (M)	Polar H/V	Frequency (GHz)	Level (dBm)	Antenna Gain Correction				
61.102204	30.13	360.00	1	V	61.102204	-37.07	-27.24	0.6	-67.06	-13	54.06
183.567134	39.78	150.30	1	V	183.567134	-54.26	-0.97	1.1	-58.48	-13	45.48
961.122244	34.09	85.40	1	V	961.122244	-62.02	-2.82	2.6	-69.59	-13	56.59
1356.71343	47.80	279.90	1	V	1356.71343	-55.99	4.25	3.1	-56.99	-13	43.99
1989.97996	91.08	20.40	1	V	1989.97996	-16.44	6.55	3.7	-15.74	-13	2.74
2995.99198	60.63	279.90	1	V	2995.99198	-41.11	7.95	4.6	-39.91	-13	26.91
195.230461	36. 81	114.30	1	H	195.230461	-62.58	0.35	1.1	-65.48	-13	52.48
239.93988	36	215.70	1	H	239.93988	-56.45	1.61	1.3	-58.29	-13	45.29
990.280561	33. 69	81.90	1	H	990.280561	-58.31	-2.59	2.7	-65.75	-13	52.75
1388.77756	47. 87	49.50	1	H	1388.77756	-58.23	4.25	3.1	-59.23	-13	46.23
1989.97996	91. 05	313.00	1	H	1989.97996	-15.55	6.55	3.7	-14.85	-13	1.85
2995.99198	60. 93	179.10	1	H	2995.99198	-43.18	7.95	4.6	-41.98	-13	28.98

Radiation emission spurious below 3GHz

Indicated		Table	Test Antenna		Substituted			Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	Amp. (dBuV)	Angle Degree	Height (M)	Polar H/V	Frequency (MHz)	Level (dBm)	Antenna Gain Correction				
3985.97194	46.89	328.40	2	V	3985.97194	-59.2	7.75	5.3	-58.9	-13	45.9
5597.19439	47.92	275.20	2	V	5597.19439	-58.71	9.05	6.4	-58.21	-13	45.21
5981.96393	66.77	0.10	2	V	5981.96393	-36.71	9.05	6.7	-36.51	-13	23.51
10204.4088	59.13	12.50	1	V	10204.4088	-49.69	11.35	8.9	-49.39	-13	36.39
14503.006	61.68	359.90	1	V	14503.006	-47.84	9.15	11	-51.84	-13	38.84
19973.9479	76.54	340.90		V	19973.9479	-25.2	6.45	12.2	-33.1	-13	20.1
3985.97194	50.71	25.50	1	H	3985.97194	-62.58	7.75	5.3	-55.08	-13	42.08
5637.27455	47.05	275.80	2	H	5637.27455	-56.45	9.05	6.5	-51.16	-13	38.16
5981.96393	68.41	340.10	1	H	5981.96393	-58.31	9.05	6.7	-30	-13	17
10204.4088	57.17	275.80	2	H	10204.4088	-58.23	11.35	8.9	-51.47	-13	38.47
14555.1102	61.97	275.80	2	H	14555.1102	-15.55	9.15	11	-50.38	-13	37.38
20000	76.72	287.60	1	H	20000	-43.18	6.45	12.2	-29.03	-13	16.03

Radiation emission spurious above 3GHz

9 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standard: FCC§2.1051, §24.238 IC §RSS 133 6.5

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified .


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2010-4-9	2011-4-9
DST	DST100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

EUT Setup:

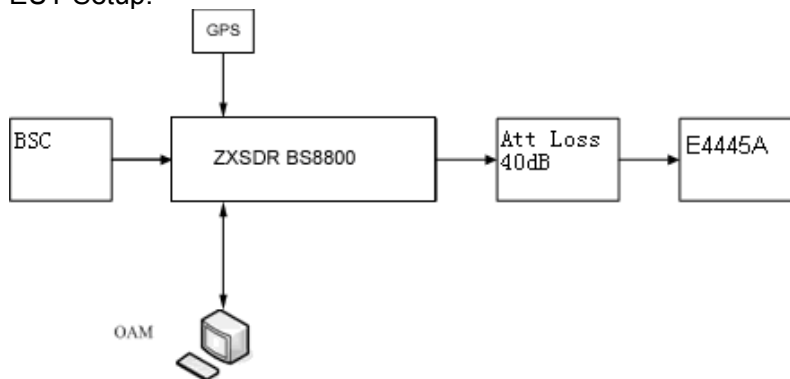

REMARKS: Attenuator loss (dB)=40dB, Cable Loss (dB)=3dB.

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1 kHz for 9KHz to 150KHz scanning, set at 10KHz for 150KHz to 30MHz scanning ,set at 100KHz for 30MHz to 1GHz scanning, set at 1MHz or 3MHz for 1GHz to 22GHz scanning. Sufficient scans were

taken to show any out of band emissions up to 10th harmonic.

Test Data Environmental Conditions


Temperature:	20 °C
Relative Humidity:	53 %
ATM Pressure:	1009 mbar


Test Result: Pass


Test Mode: Transmitting CDMA


Test Data:

Four Carriers (working in bottom frequency)

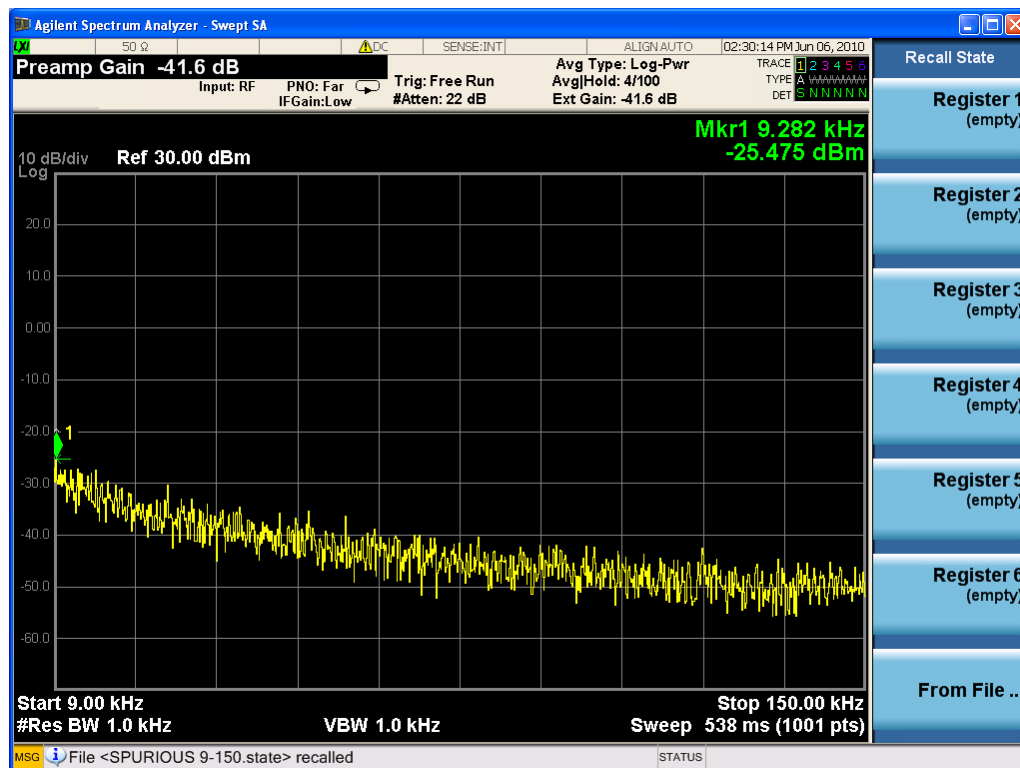


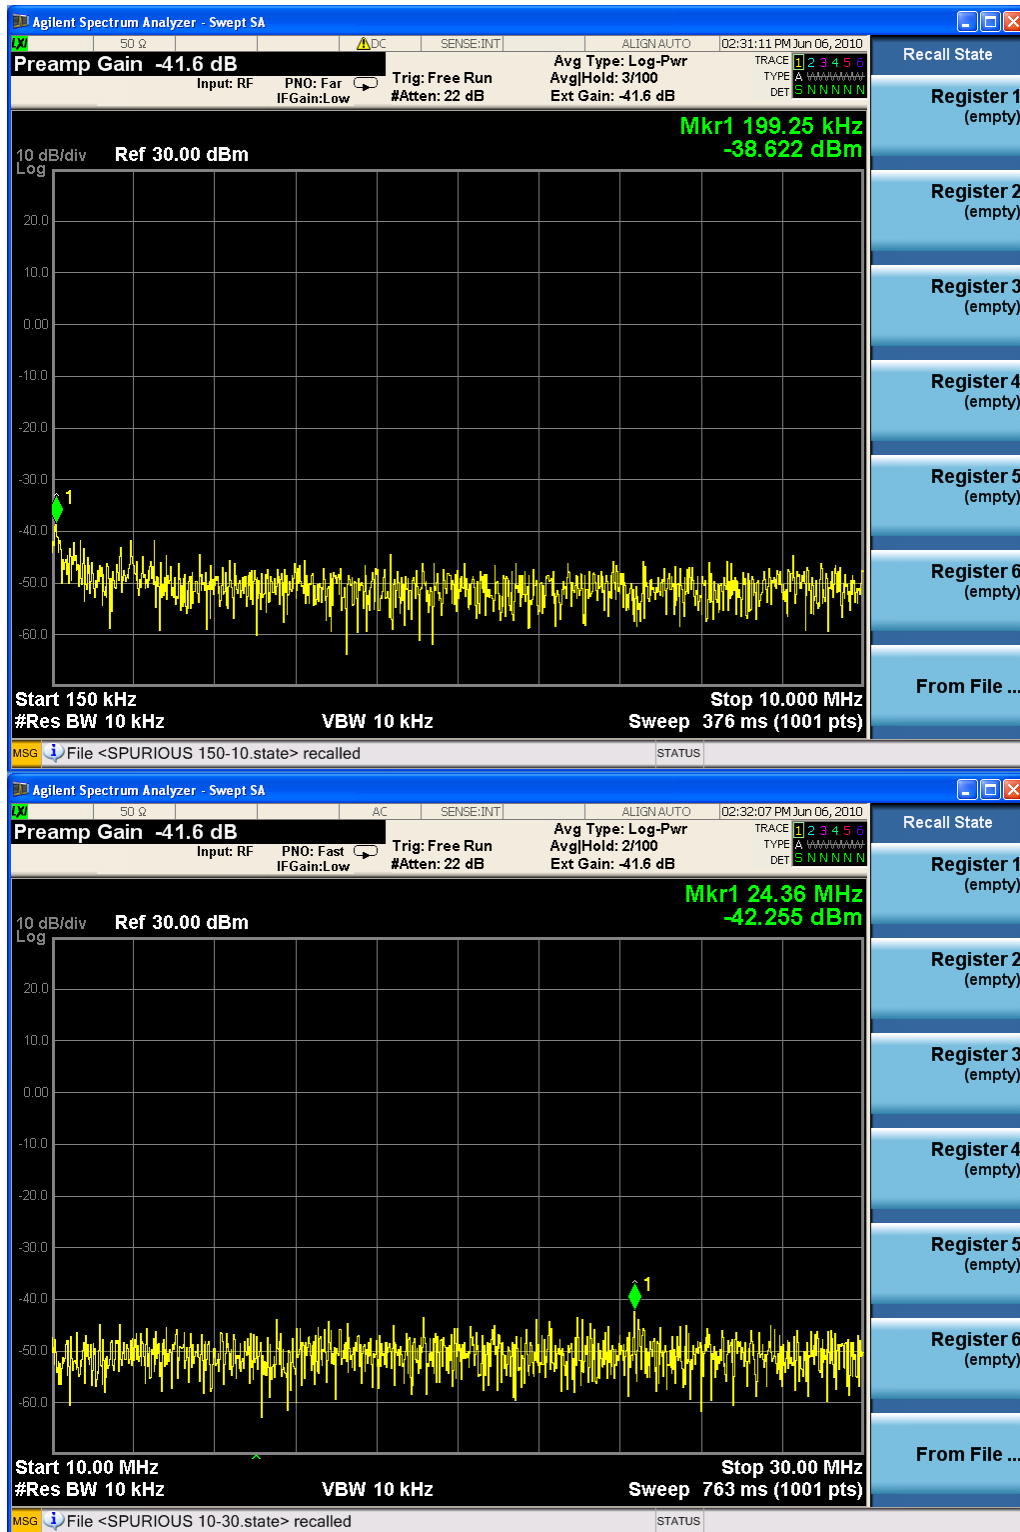

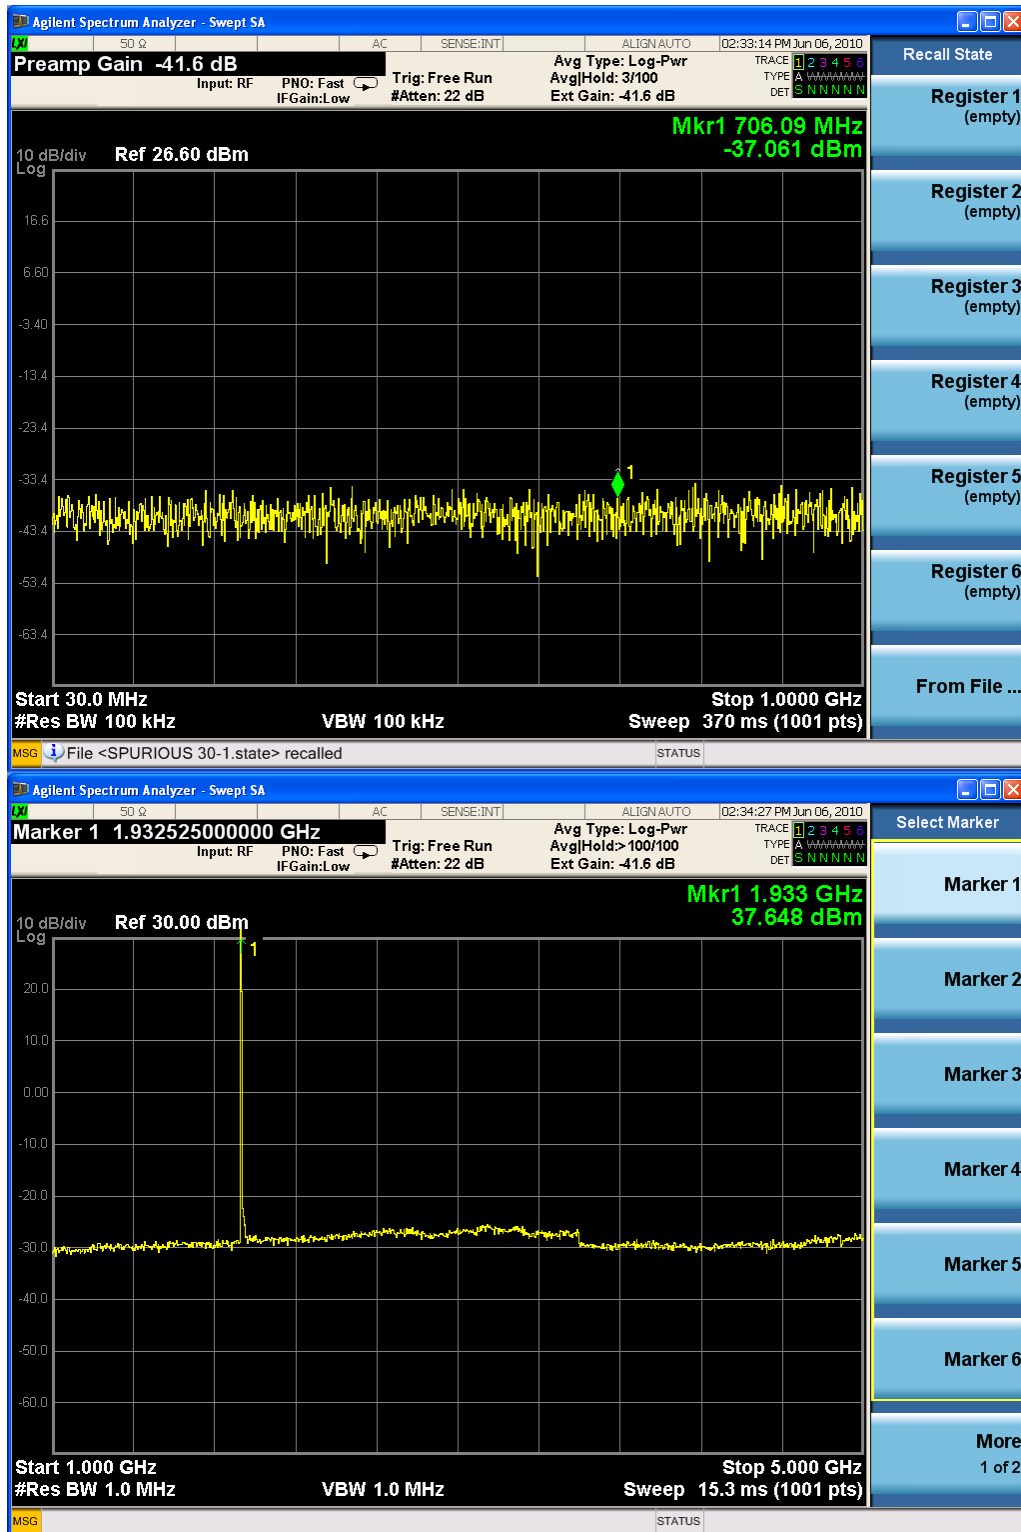


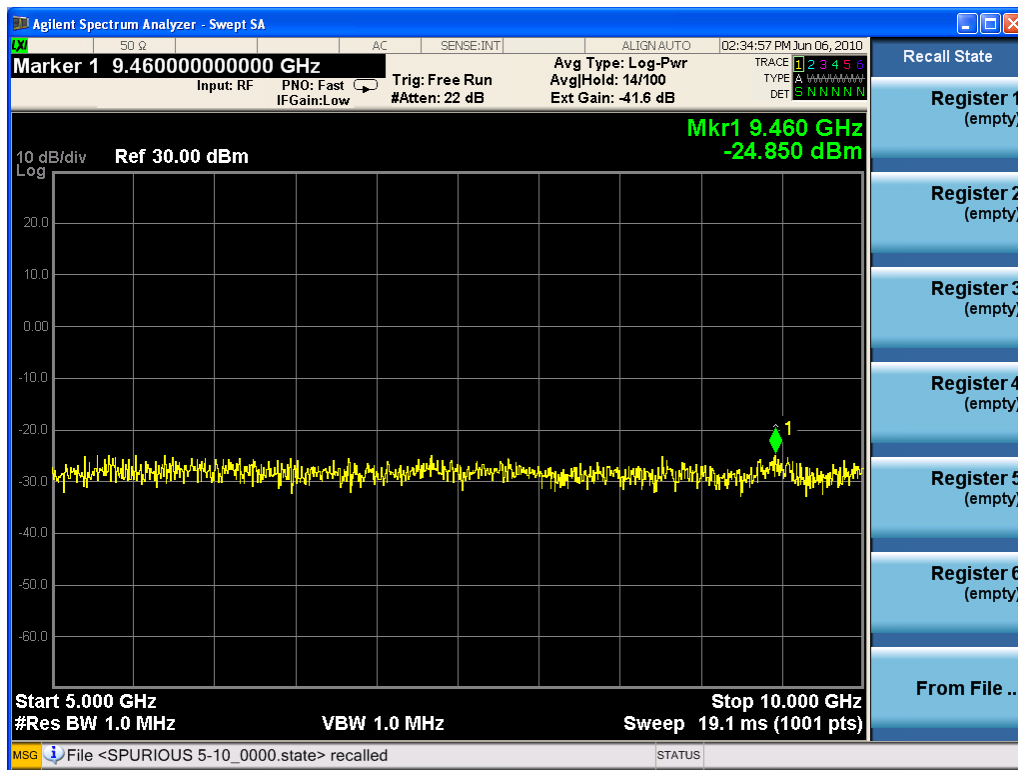



* The highest point is in working frequency block

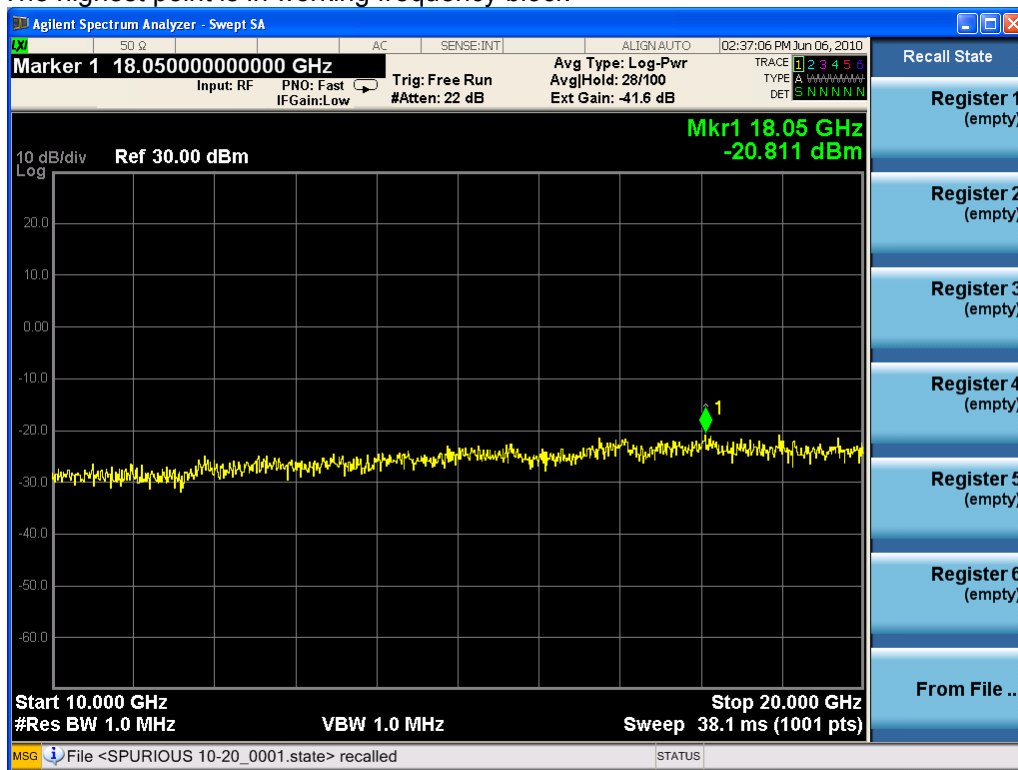


Four carriers (working in top frequency)

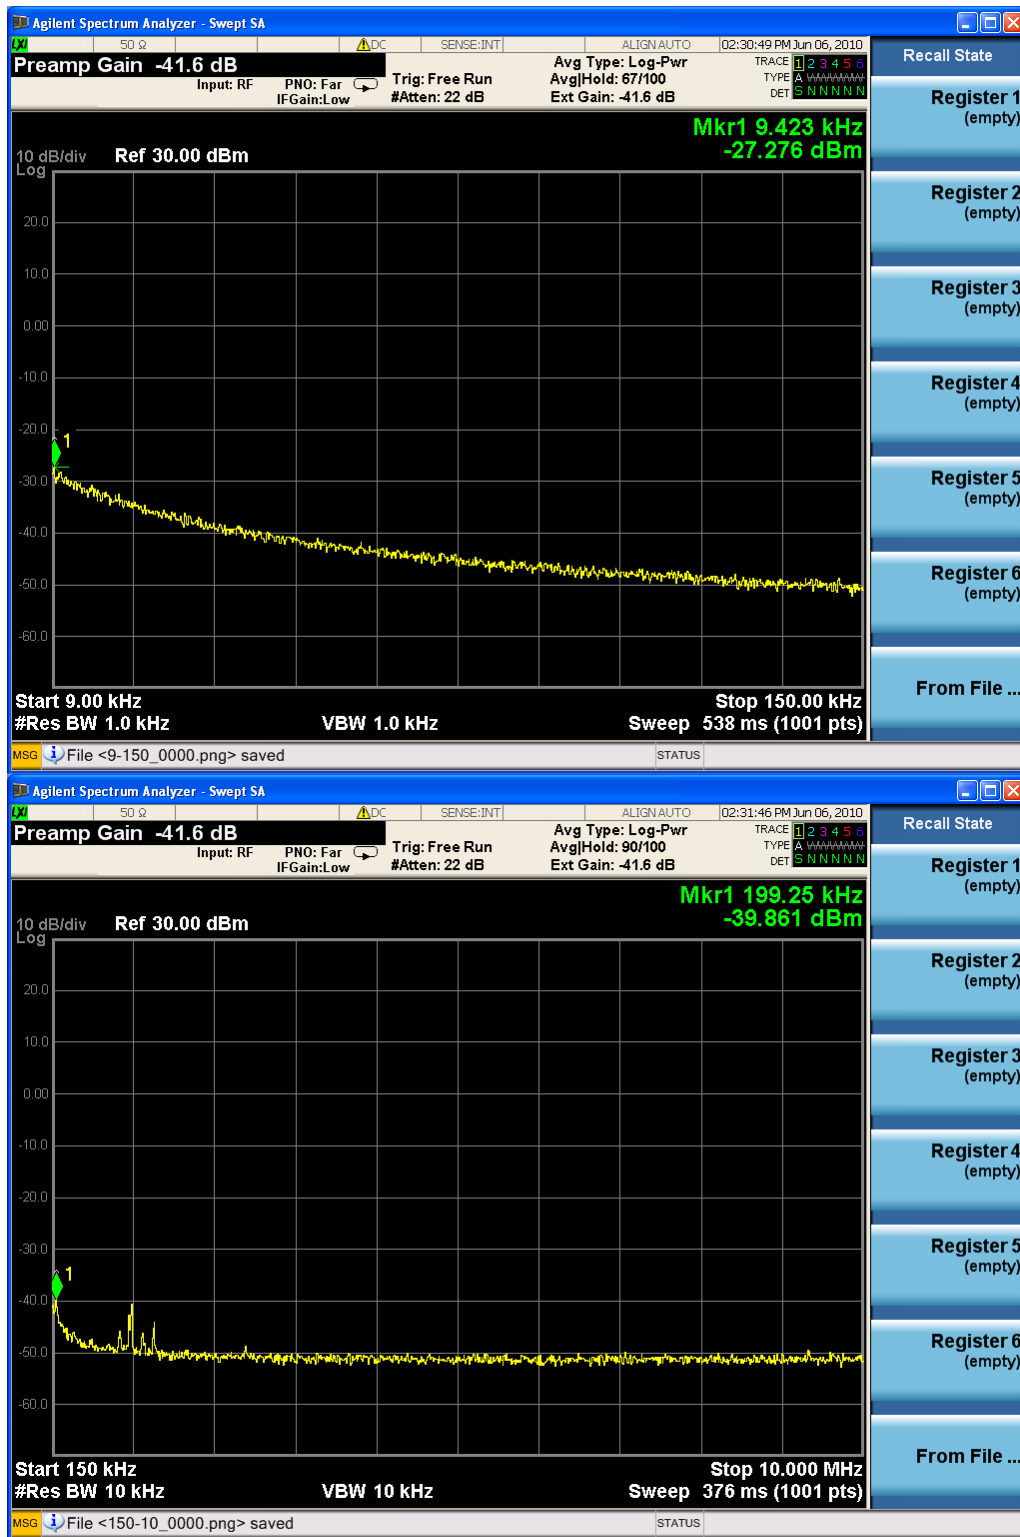

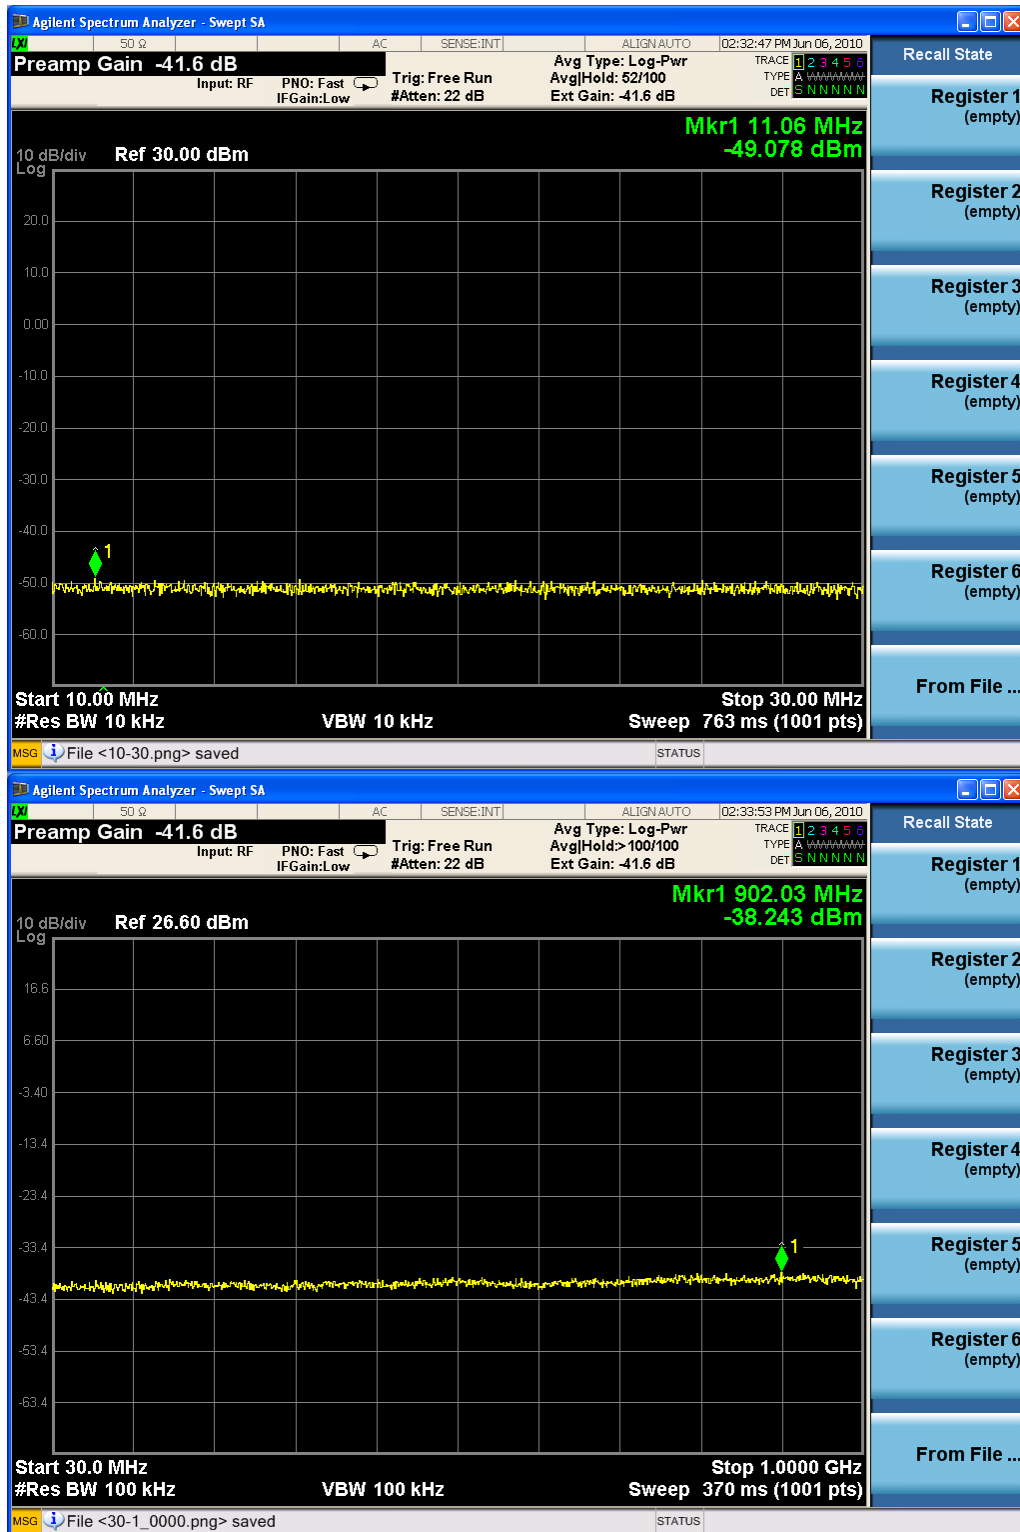


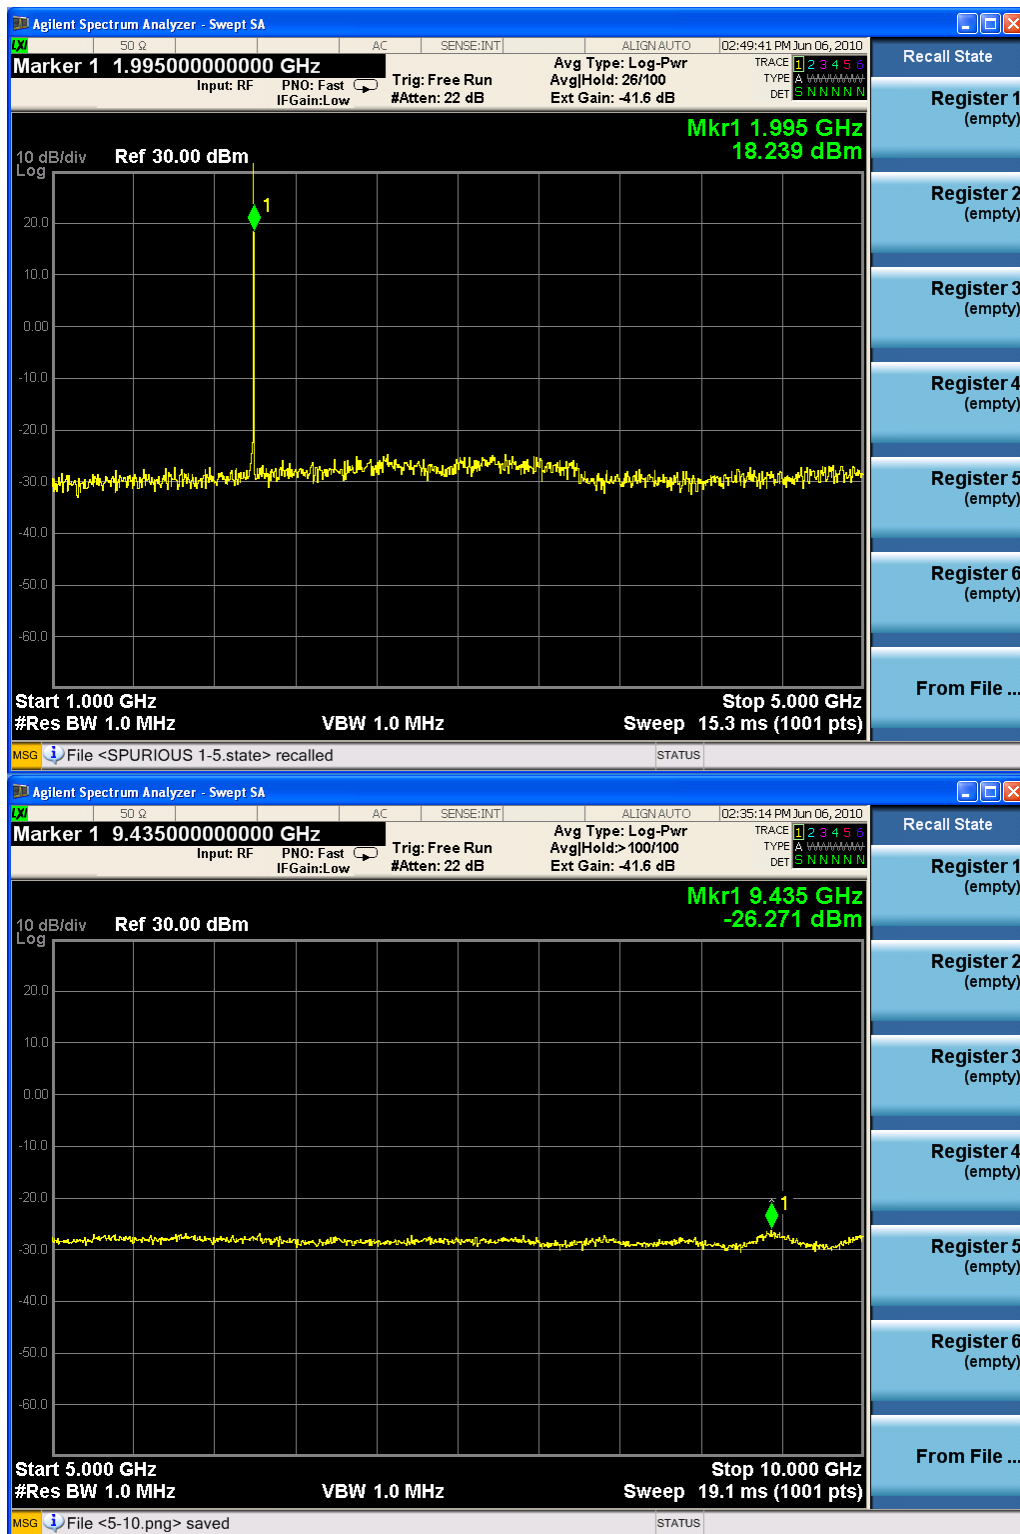



* The highest point is in working frequency block

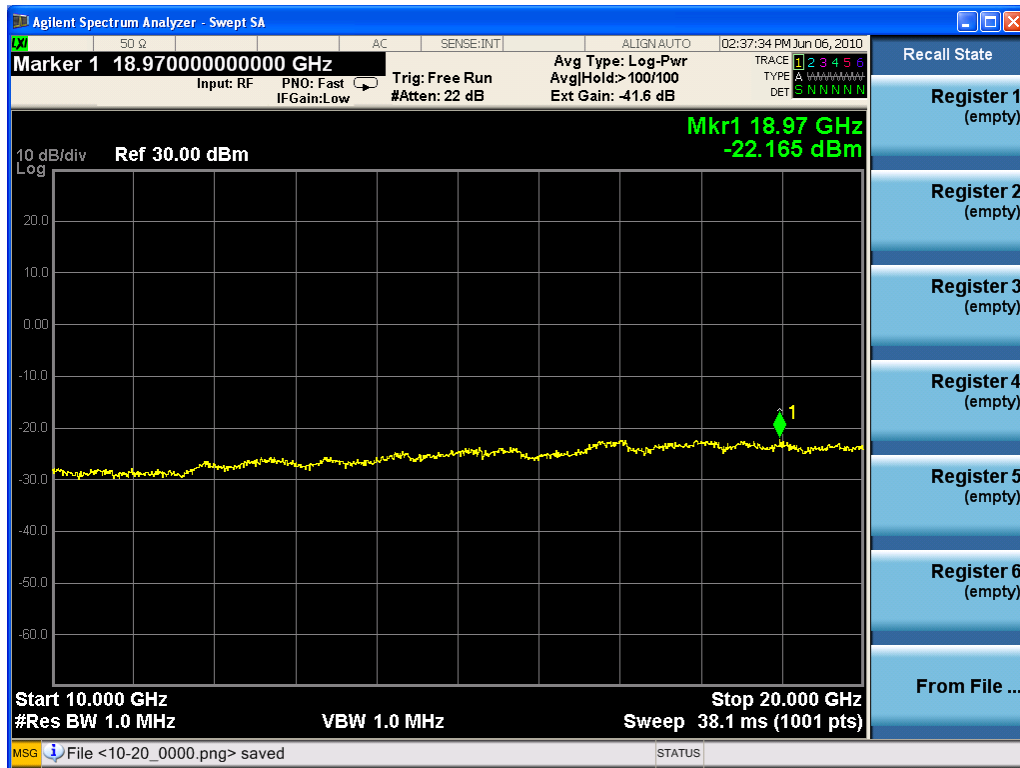

Four carriers (working in middle frequency)

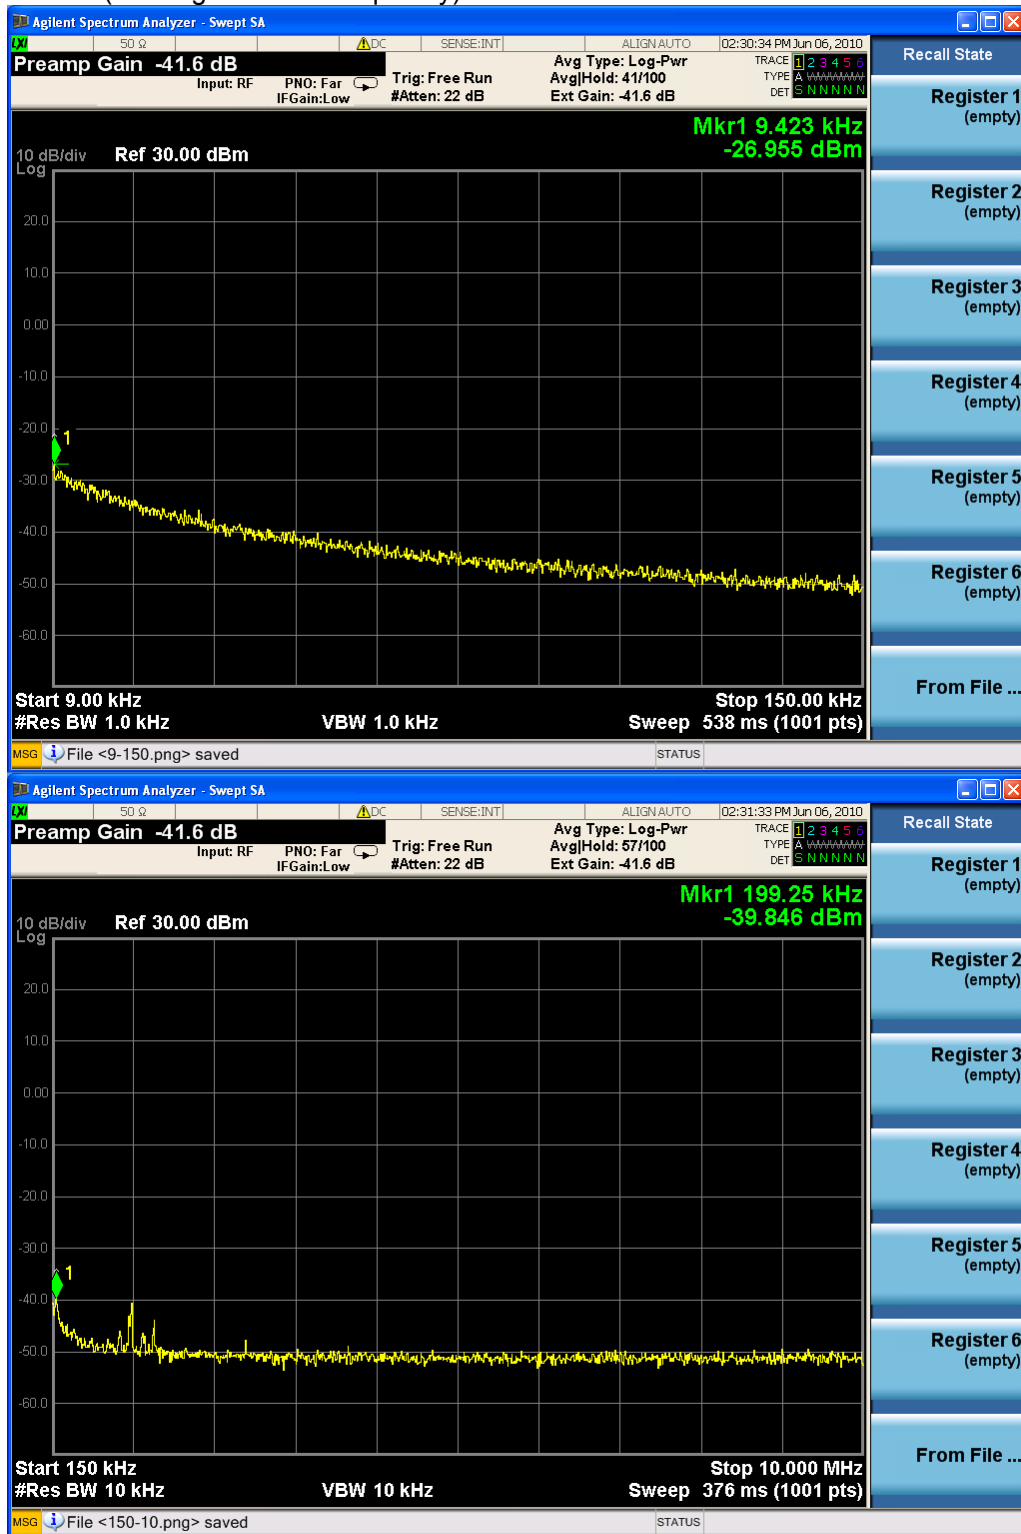

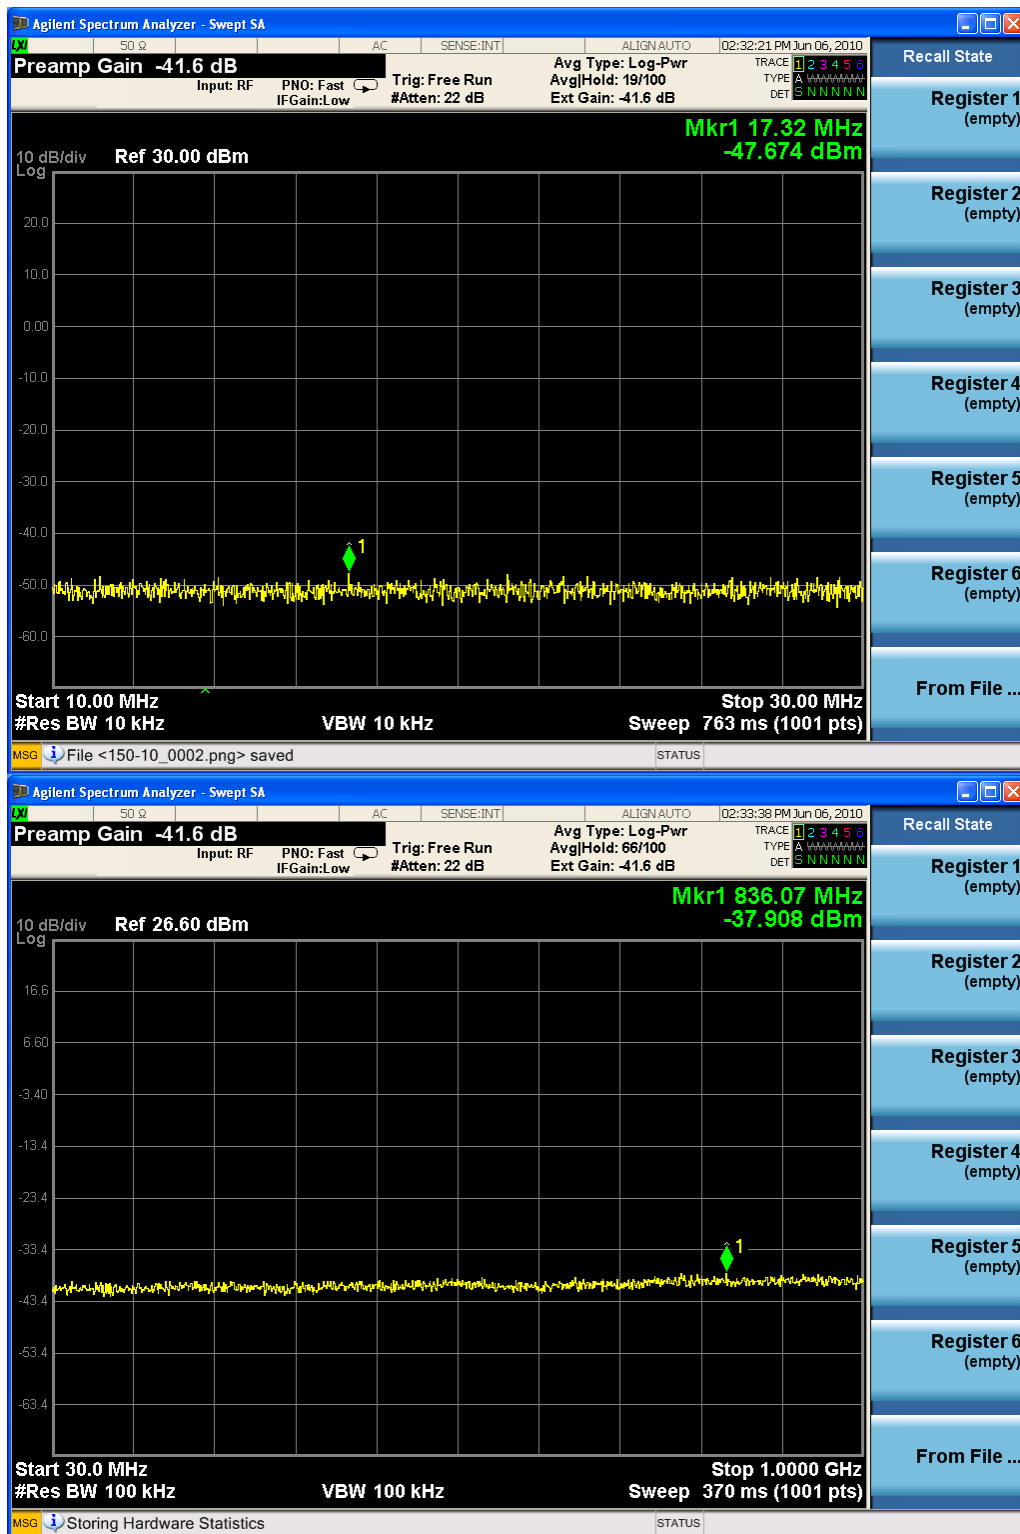


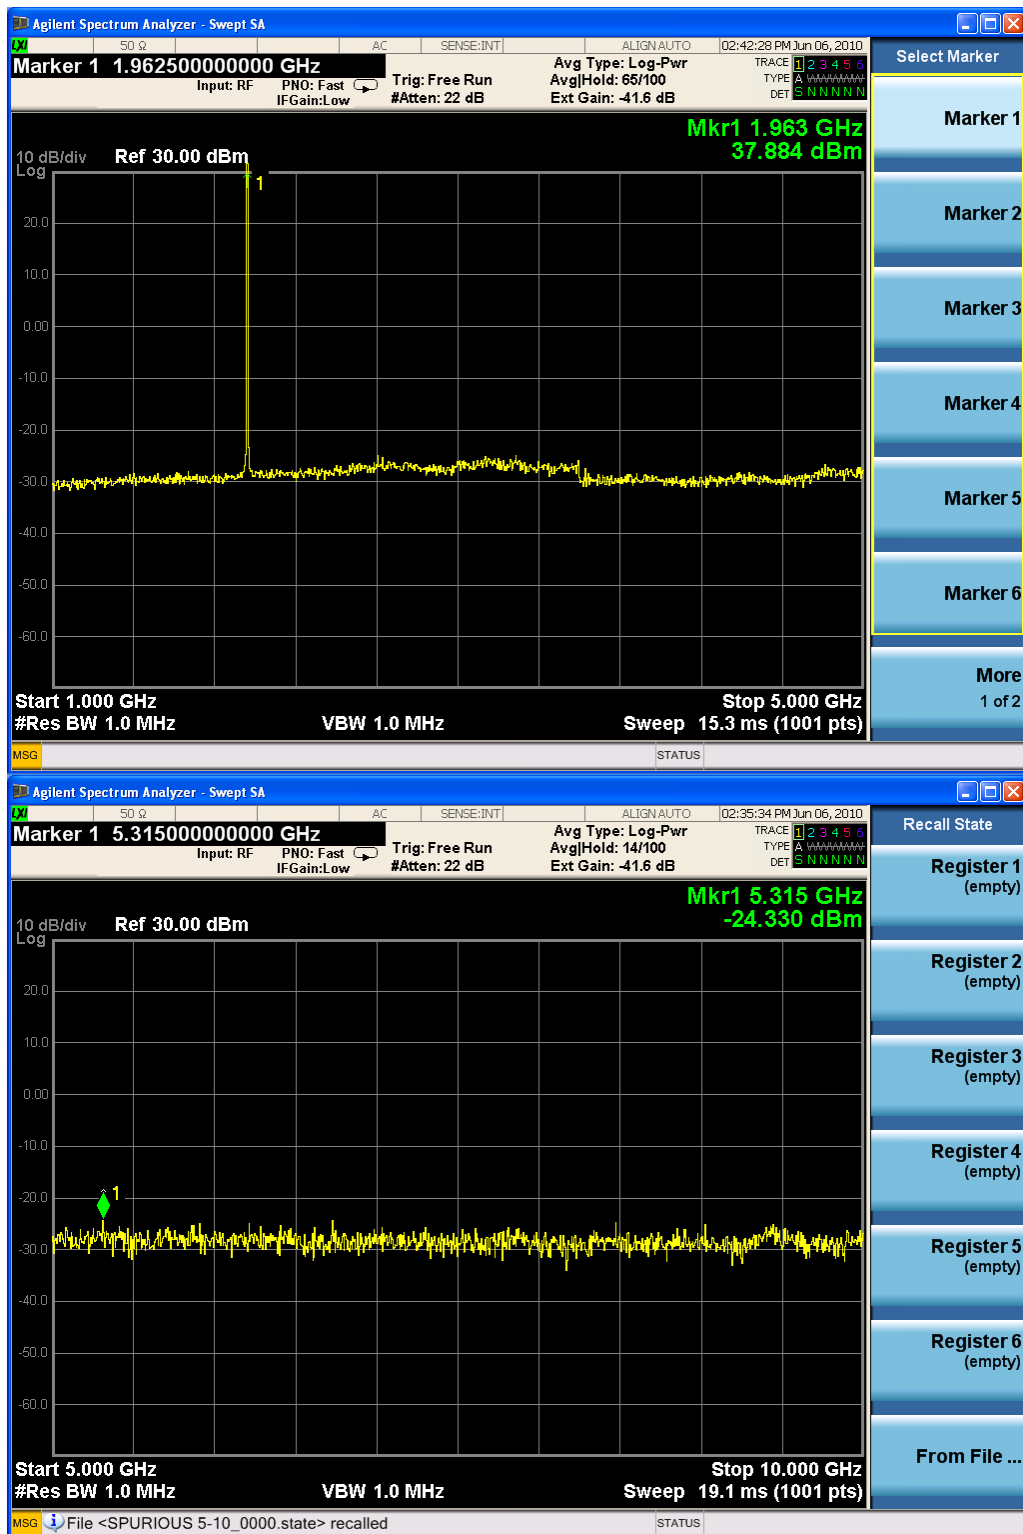



* The highest point is in working frequency block




Three carriers (working in bottom frequency)

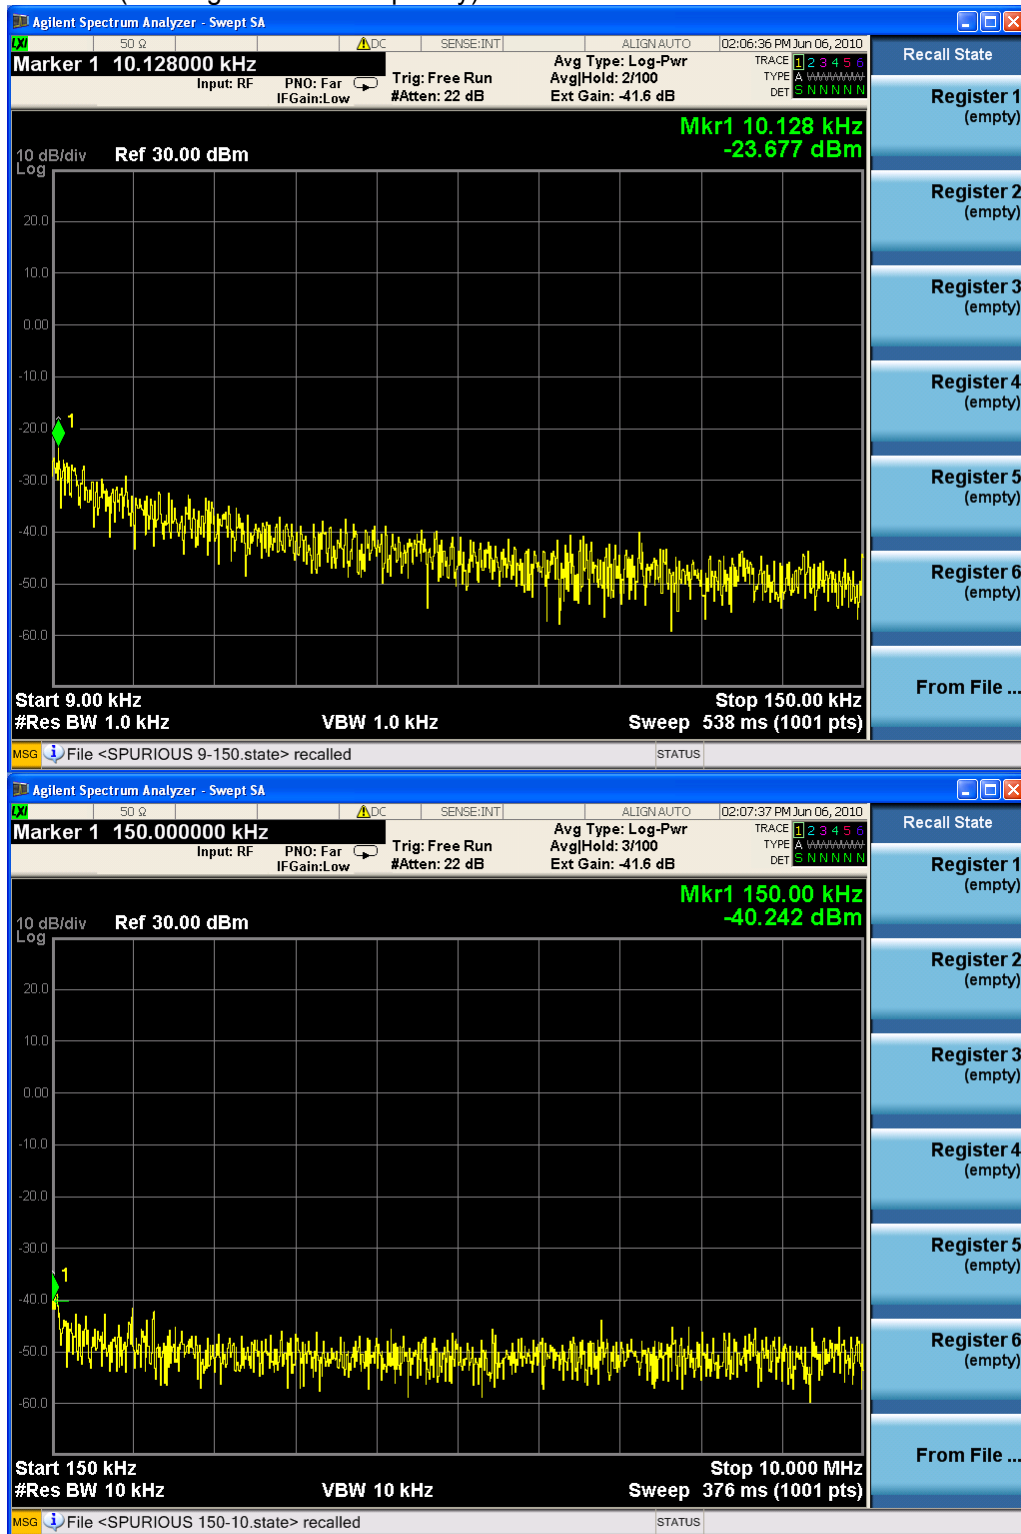

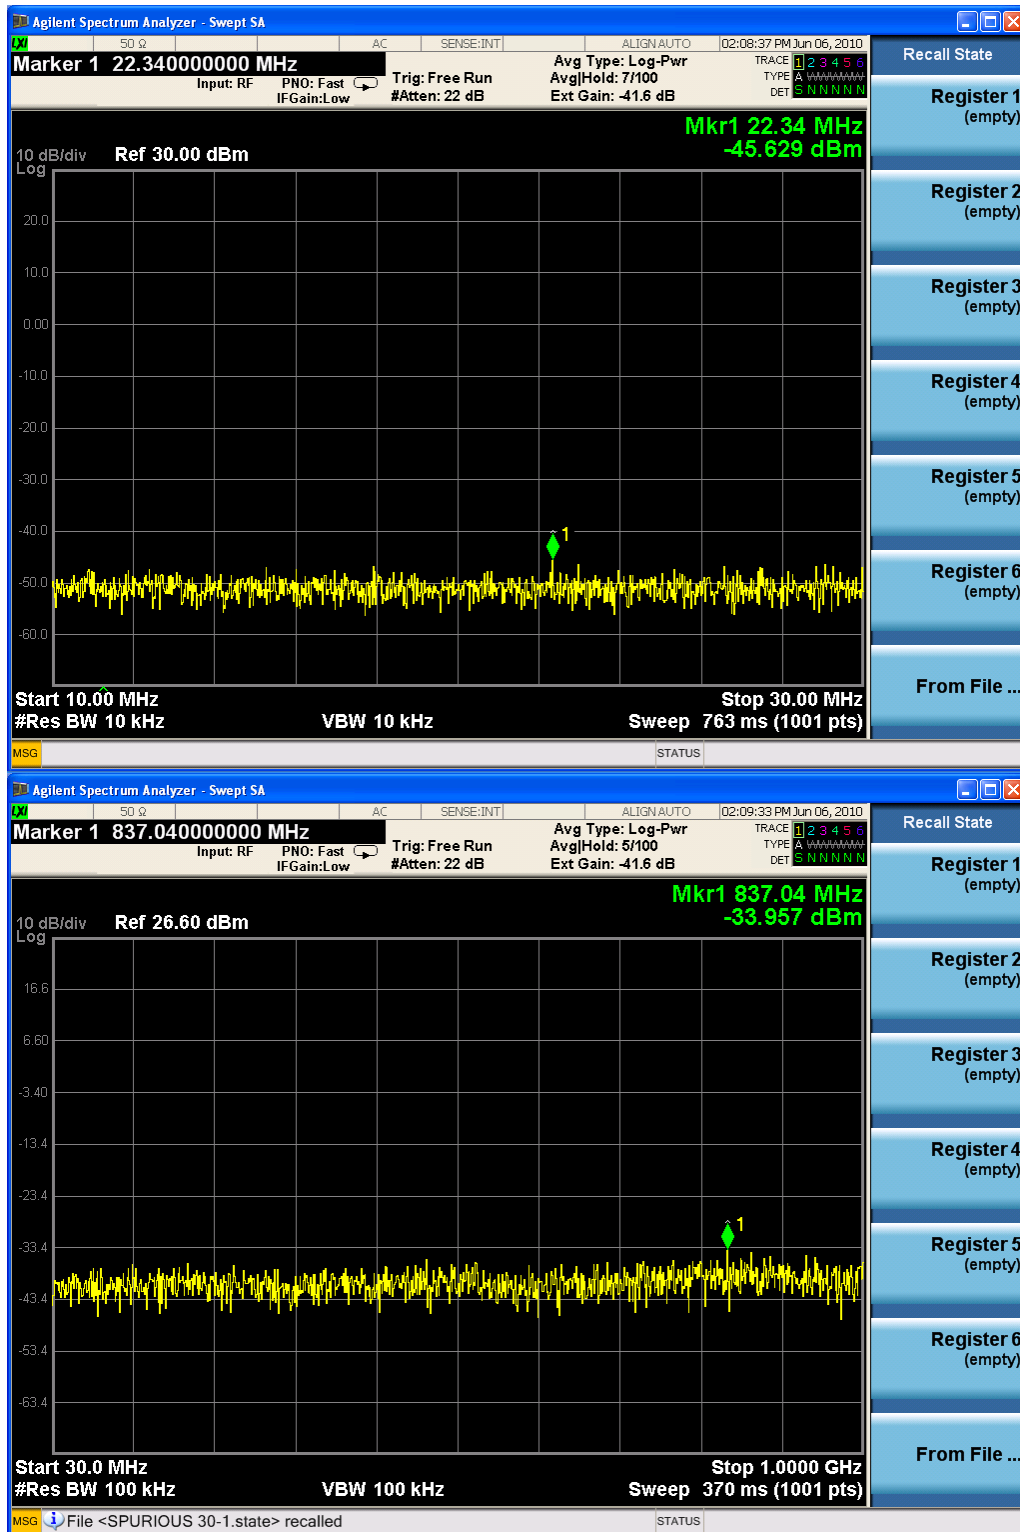


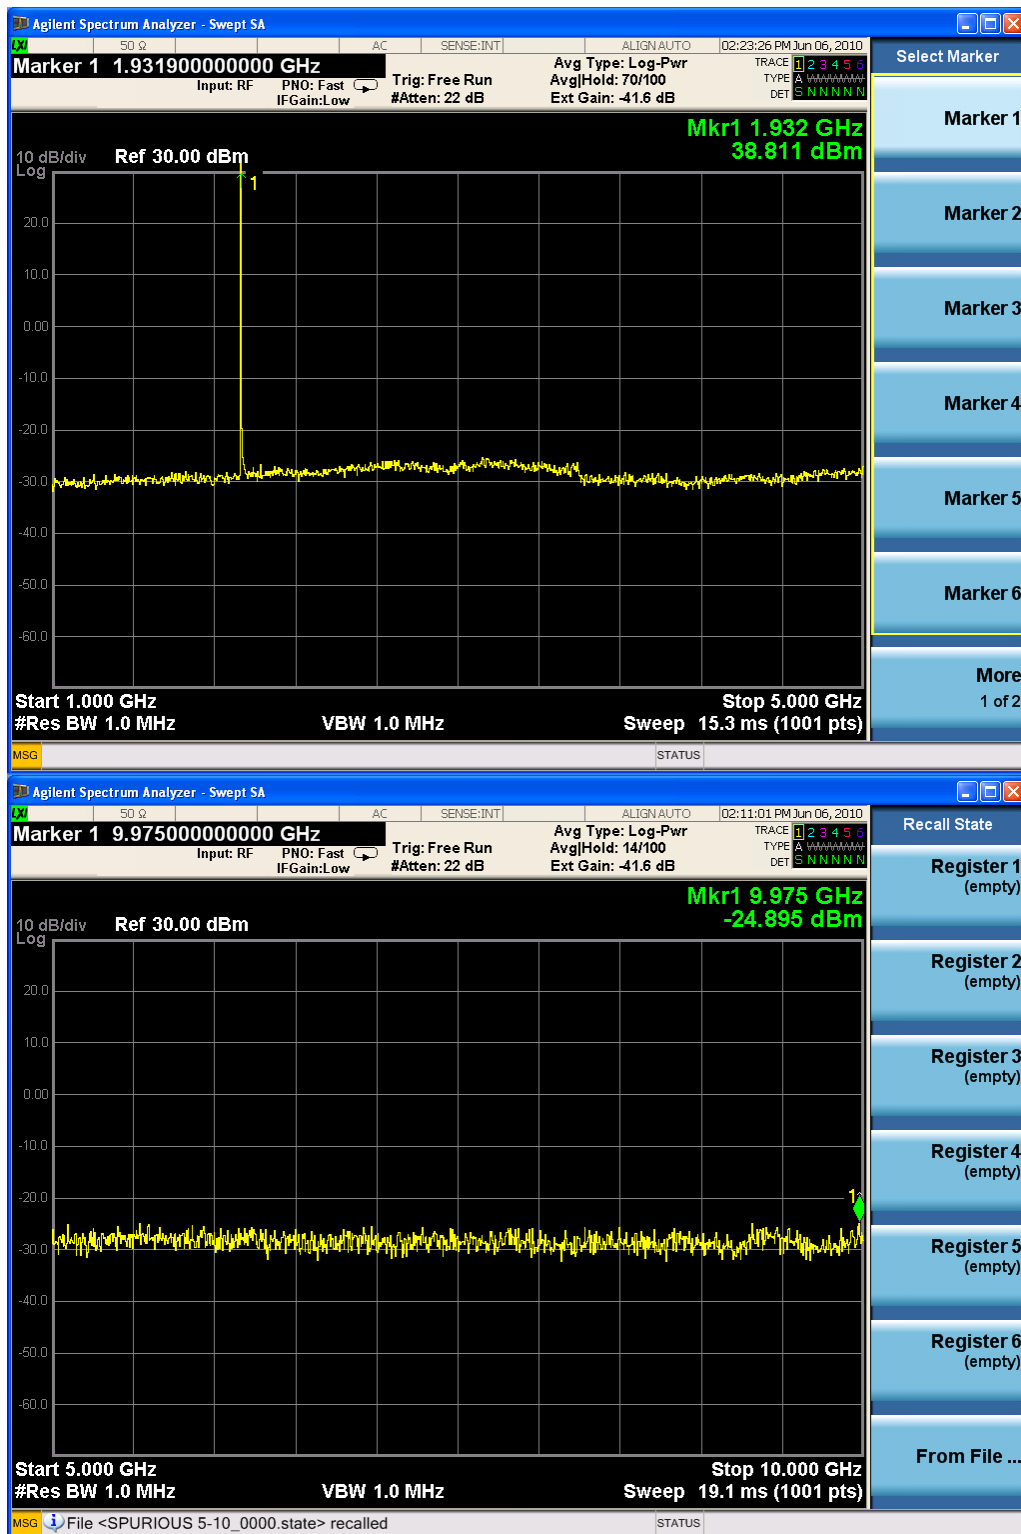



* The highest point is in working frequency block

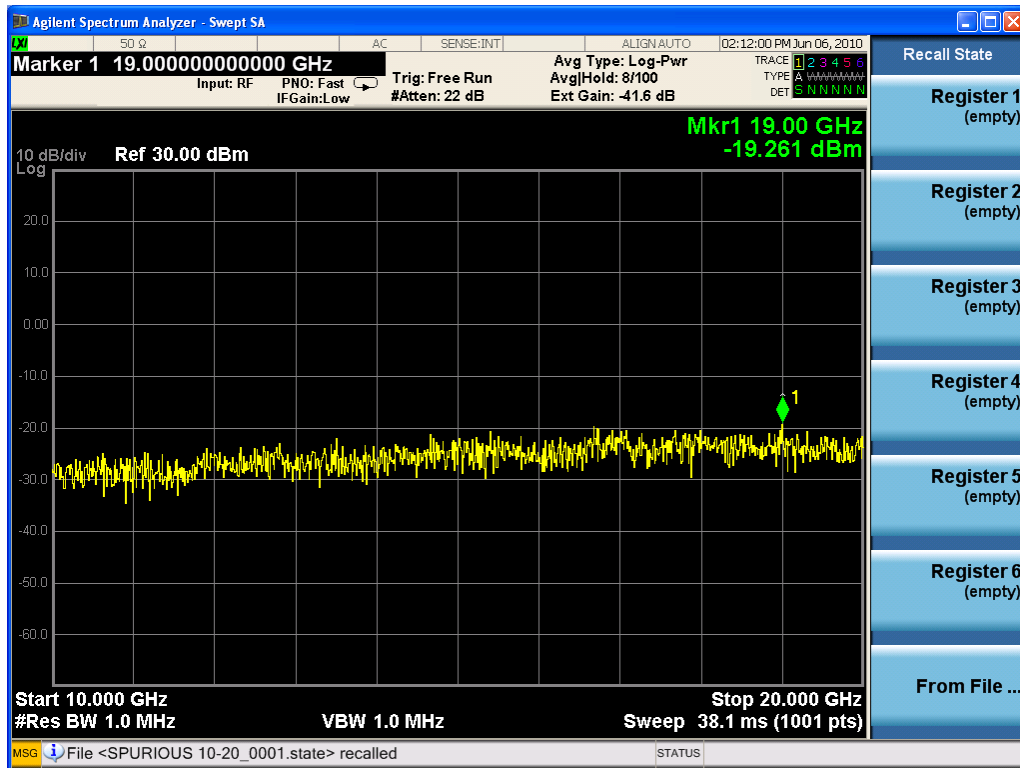

Three carriers (working in middle frequency)

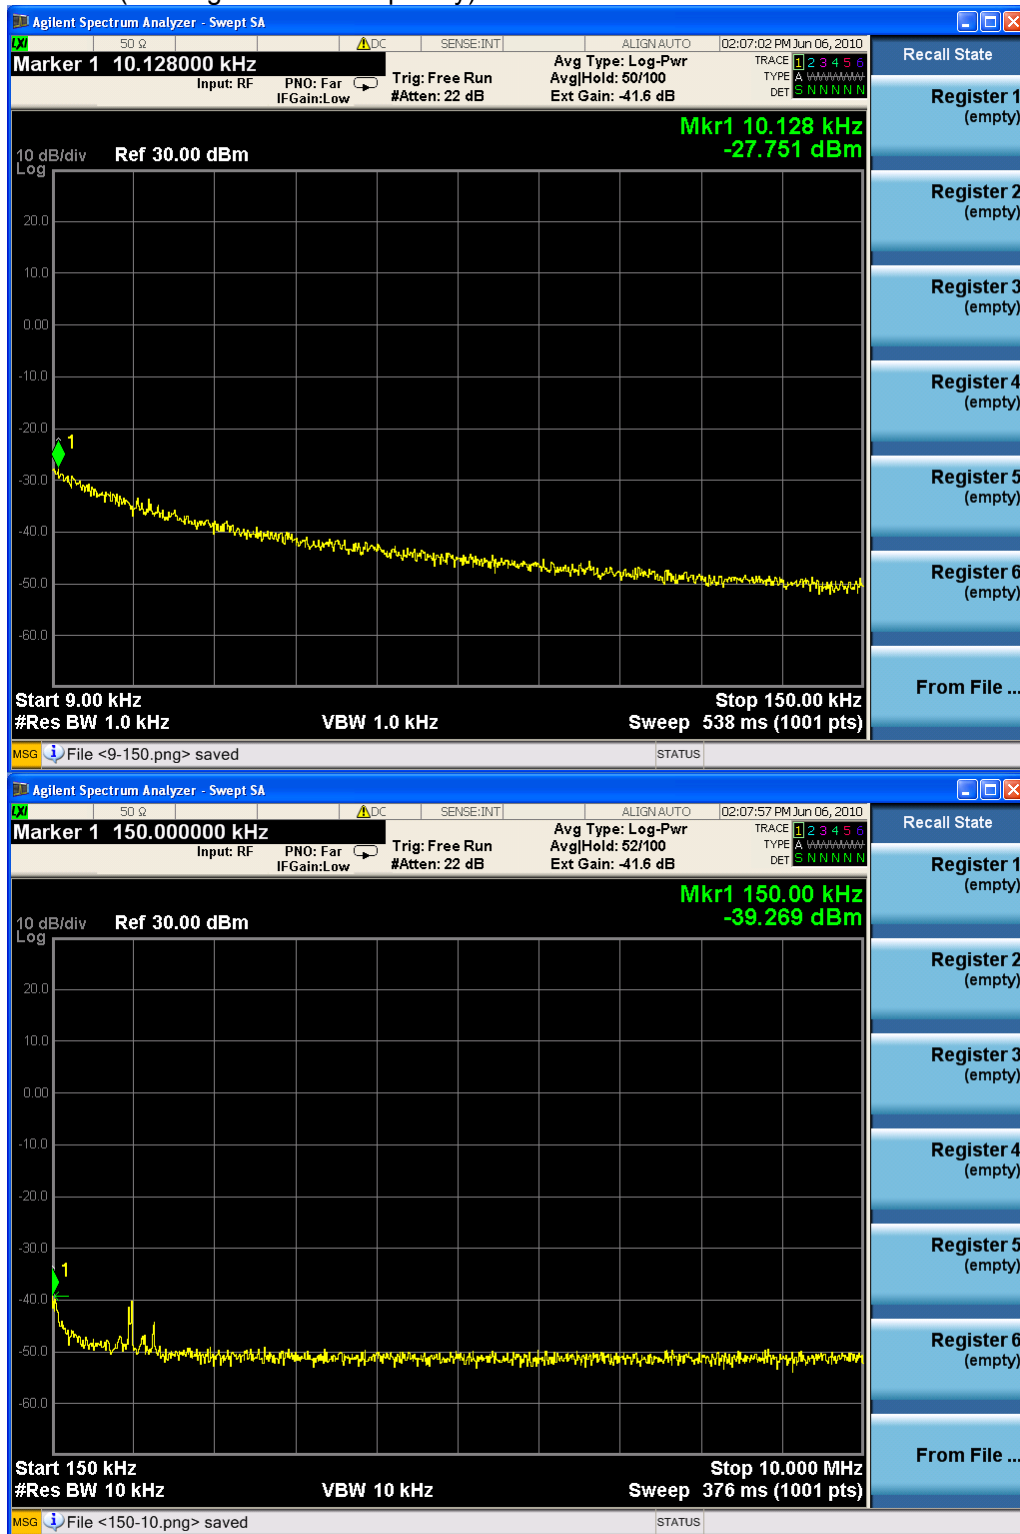

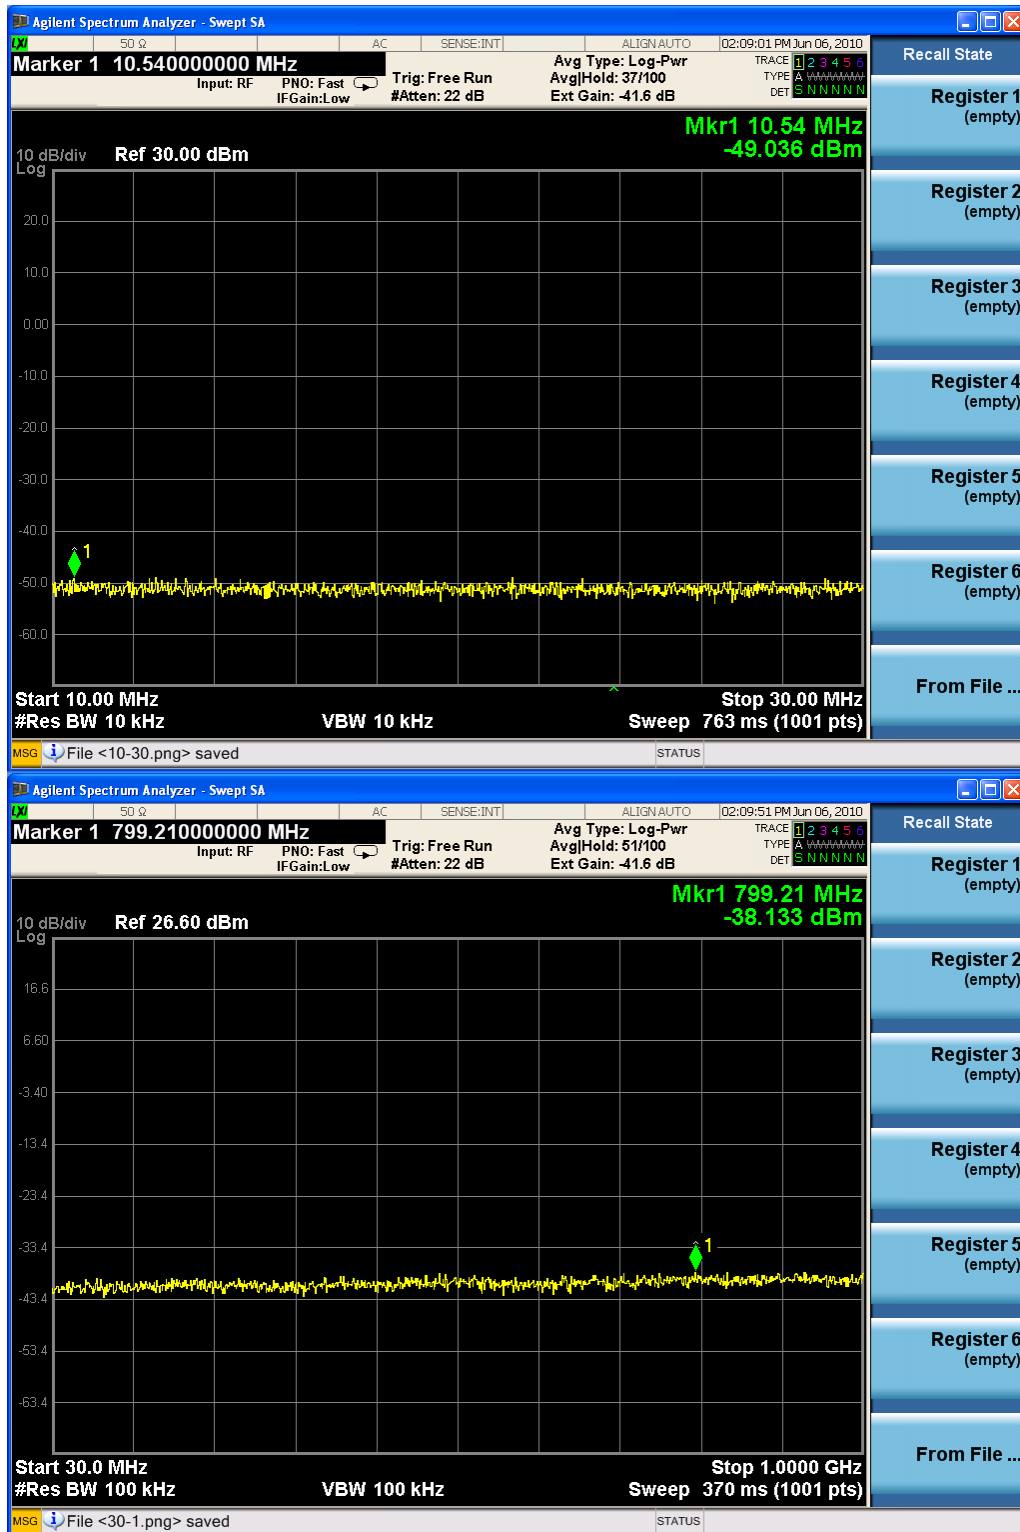

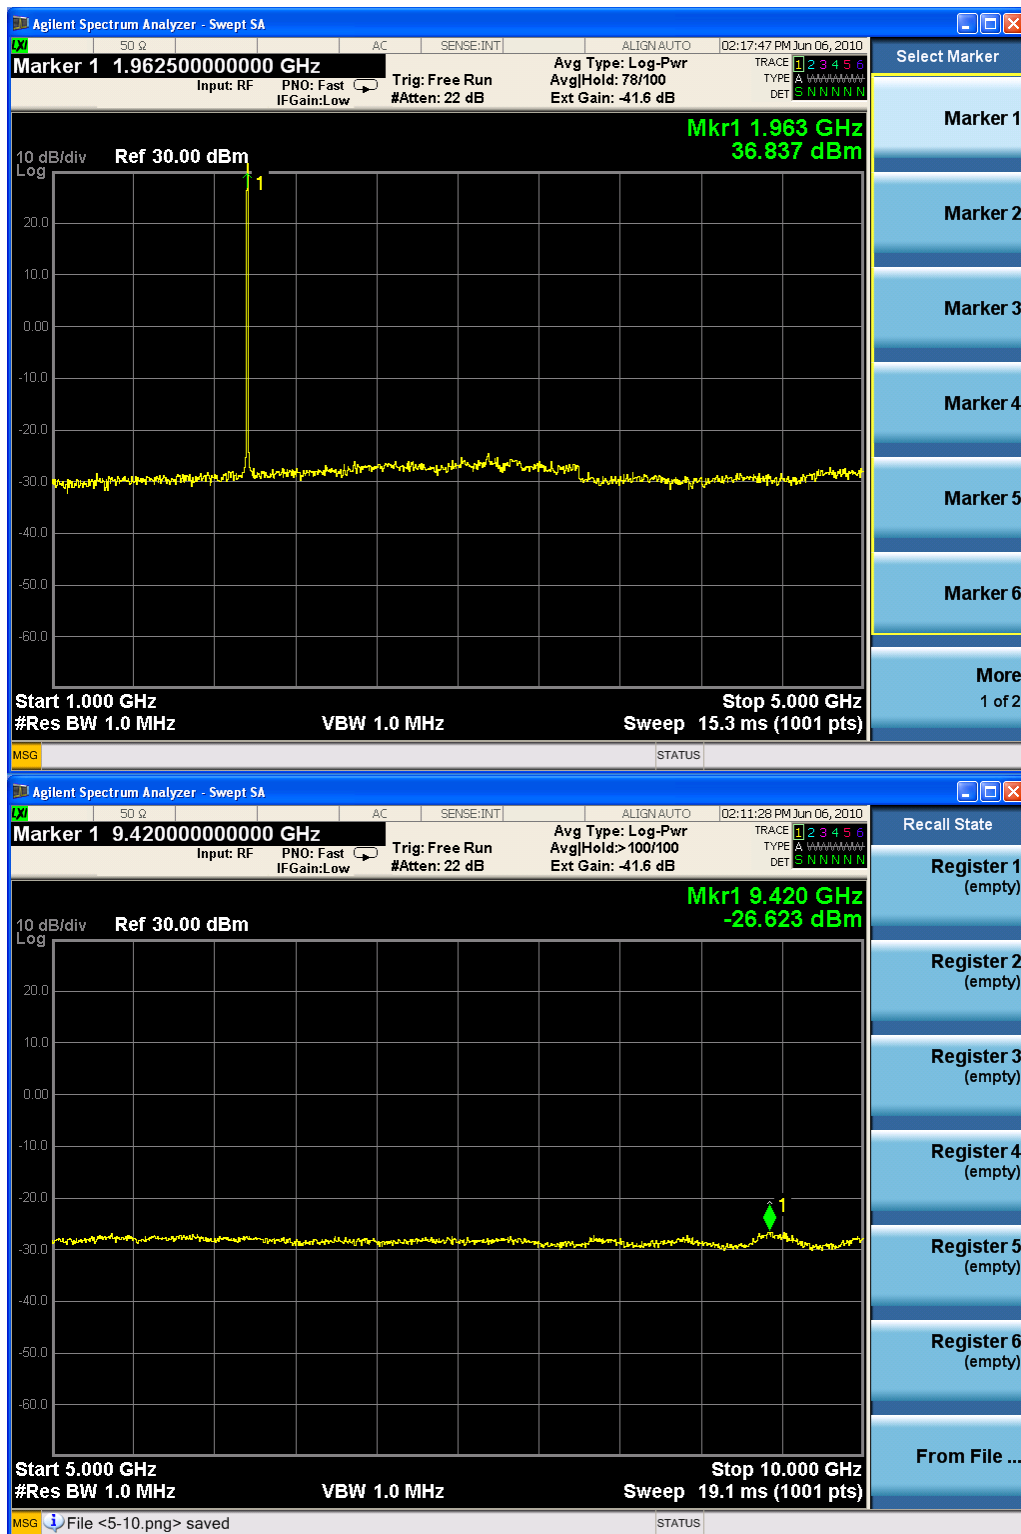



* The highest point is in working frequency block




Three carriers (working in top frequency)



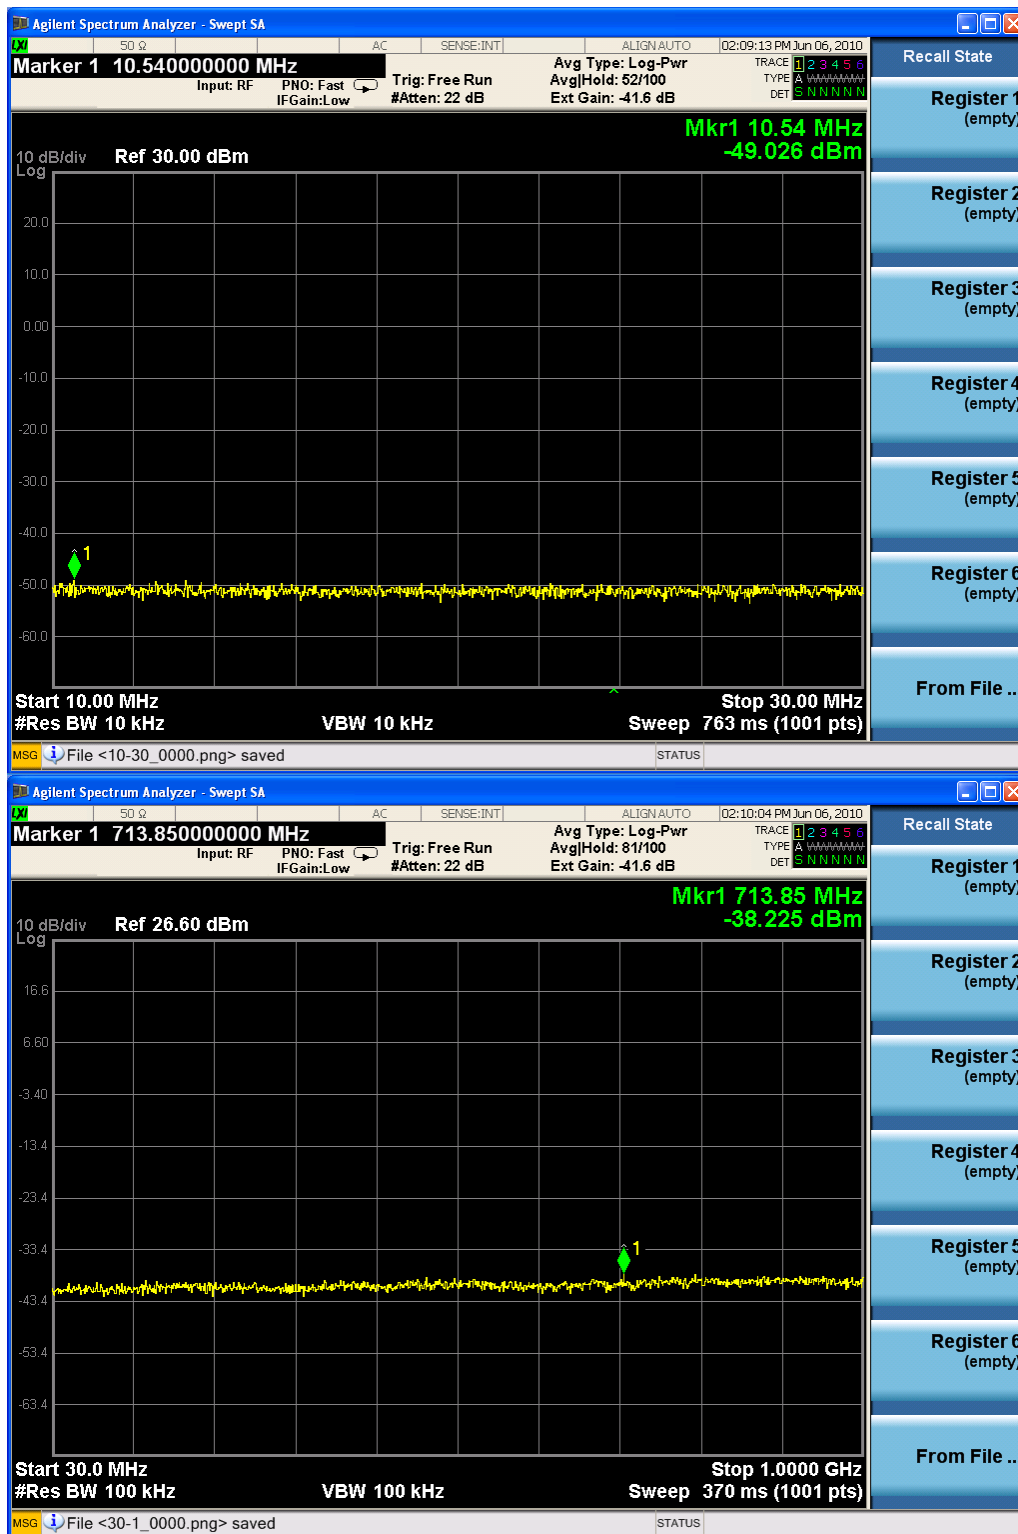


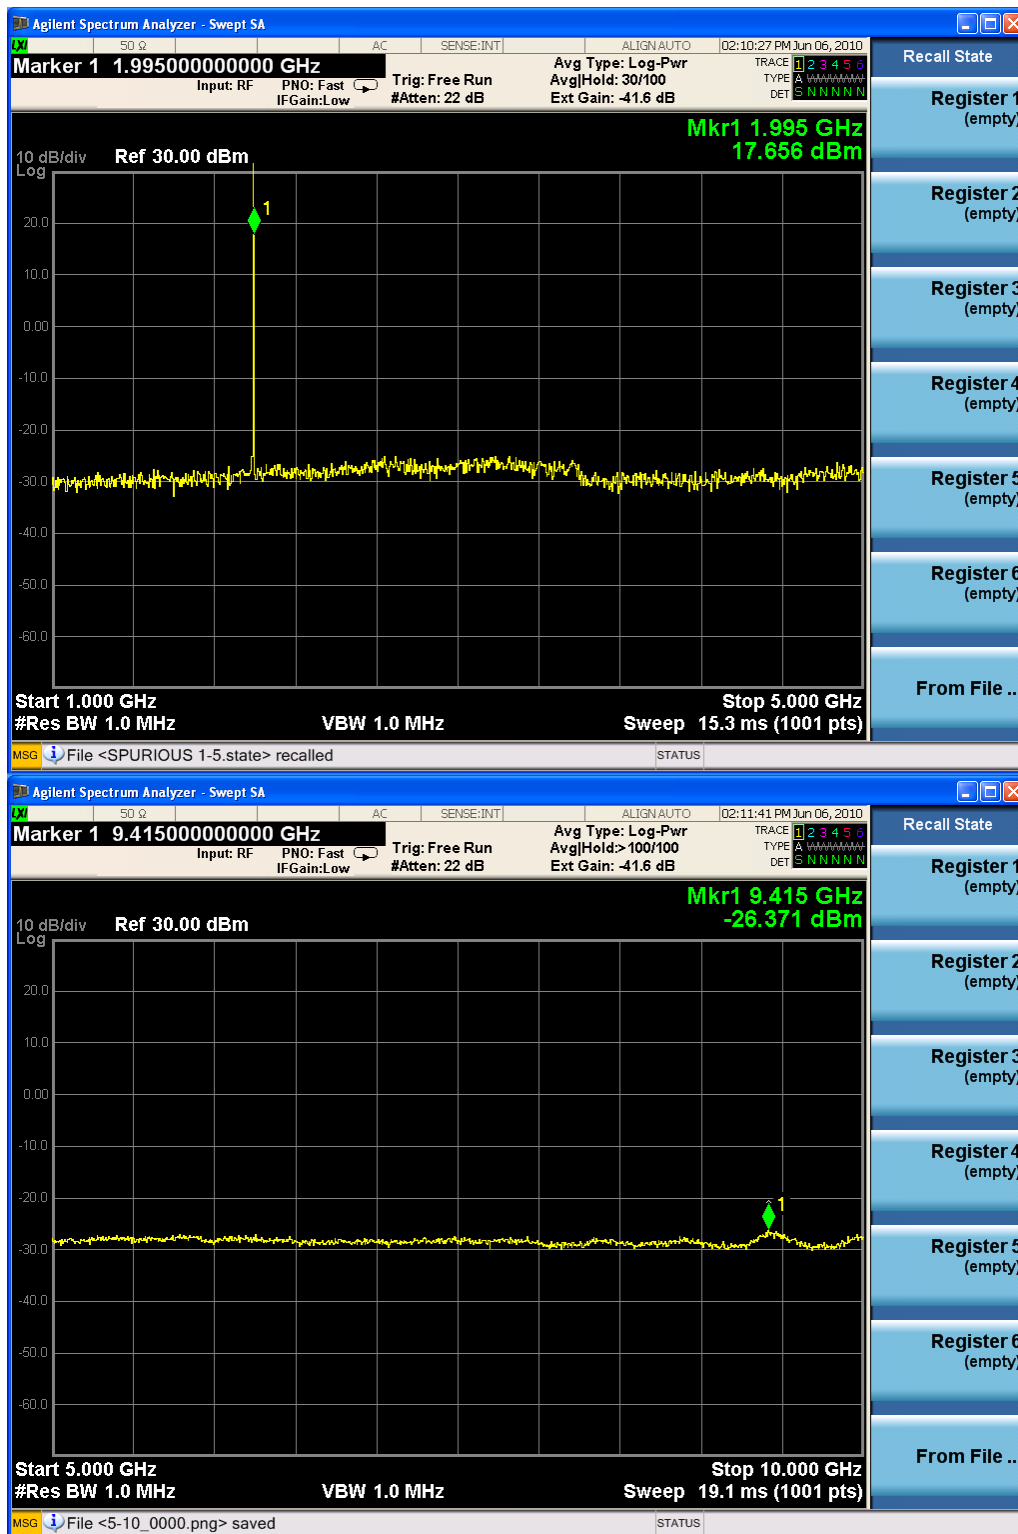



* The highest point is in working frequency block

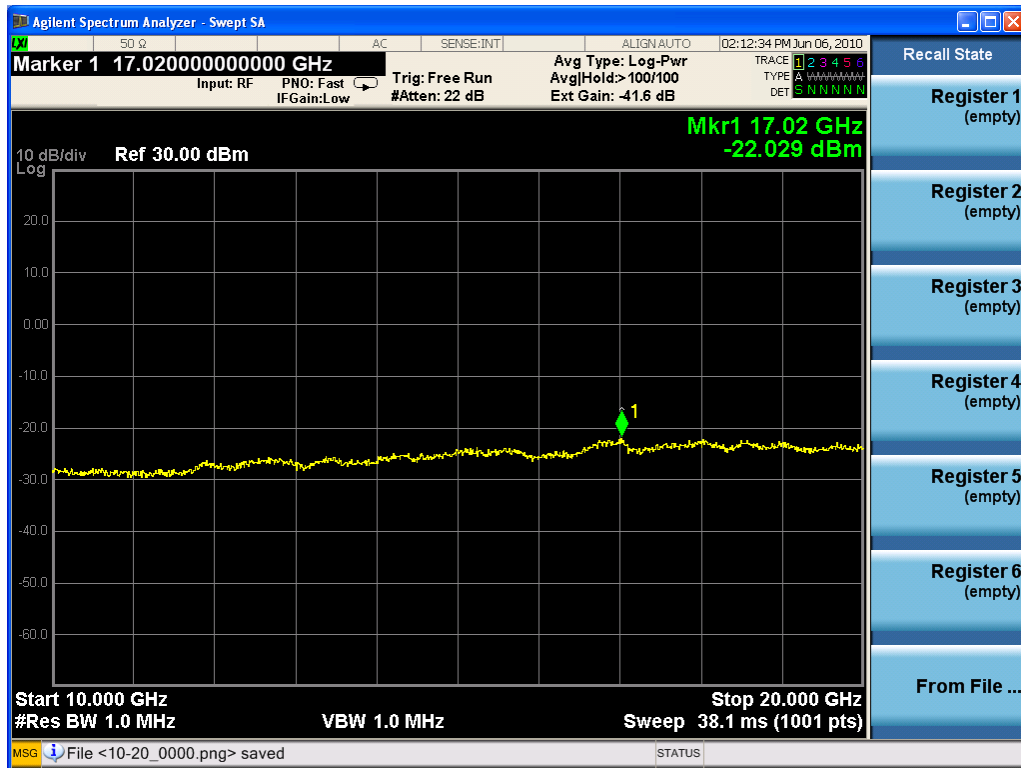

Two carriers (working in bottom frequency)

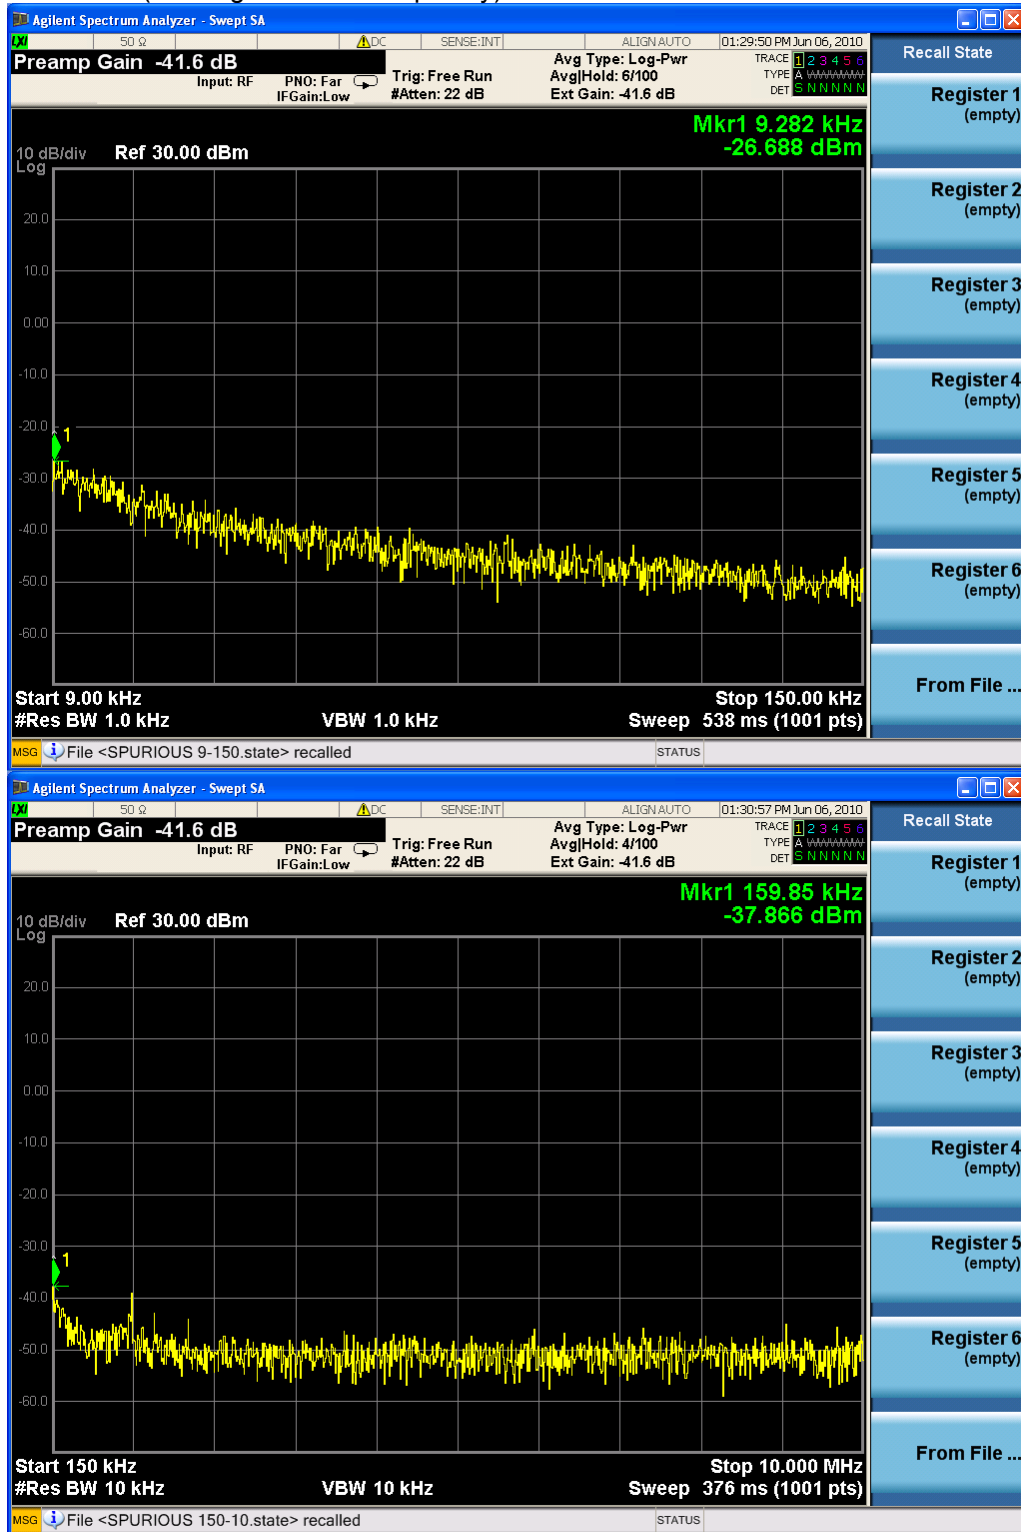

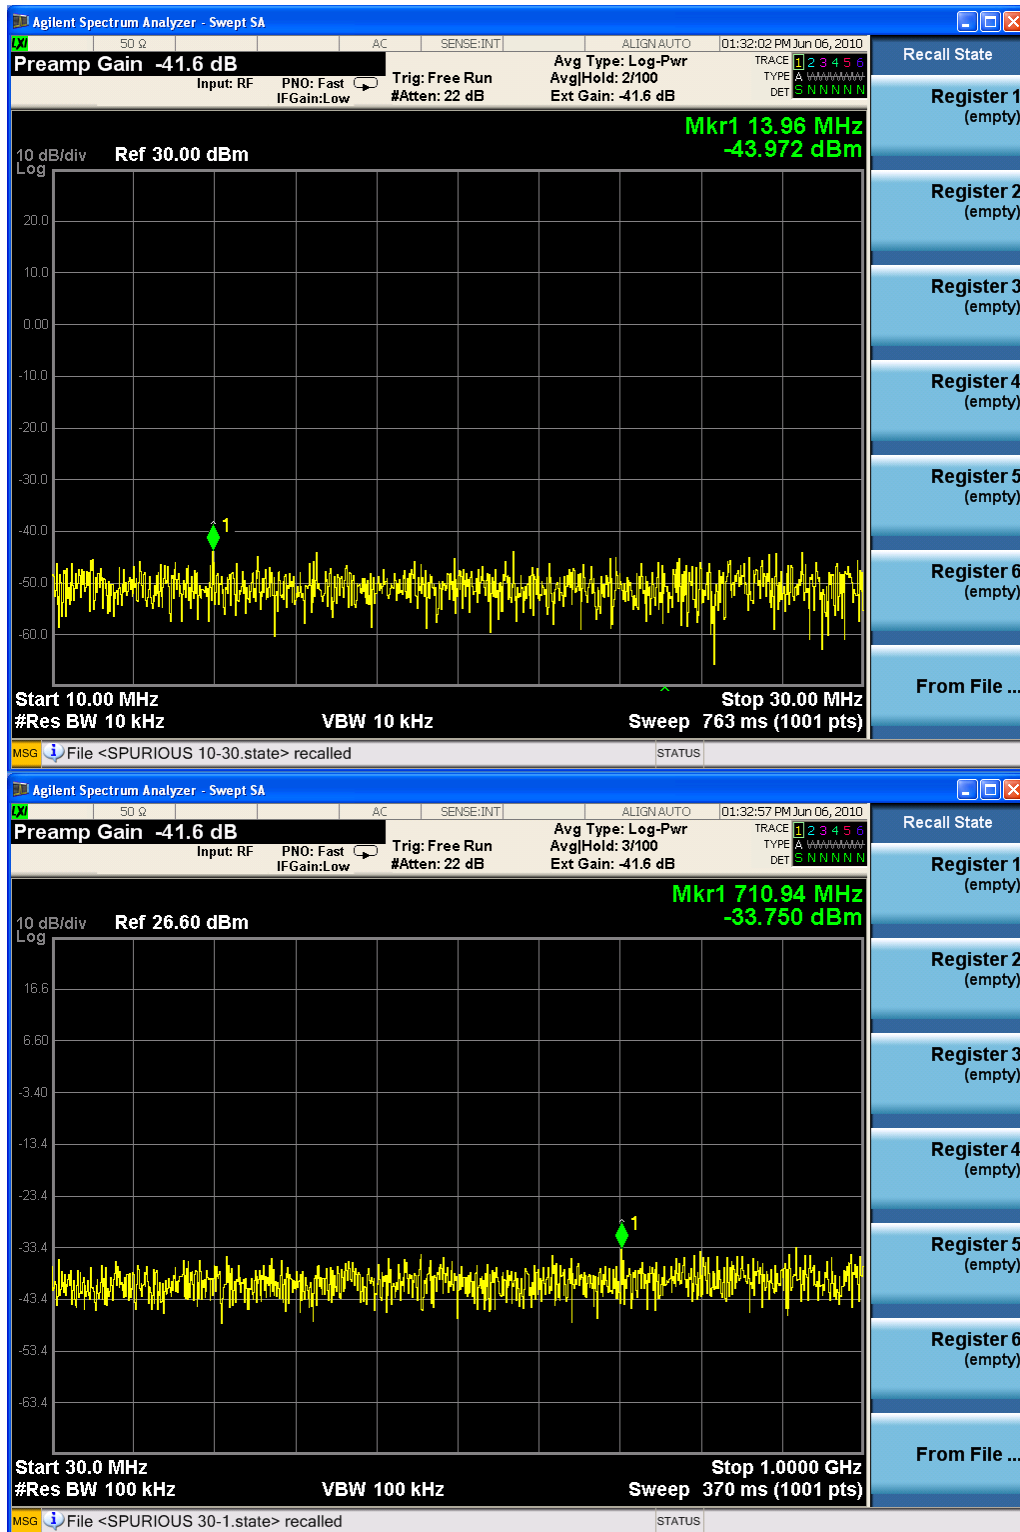


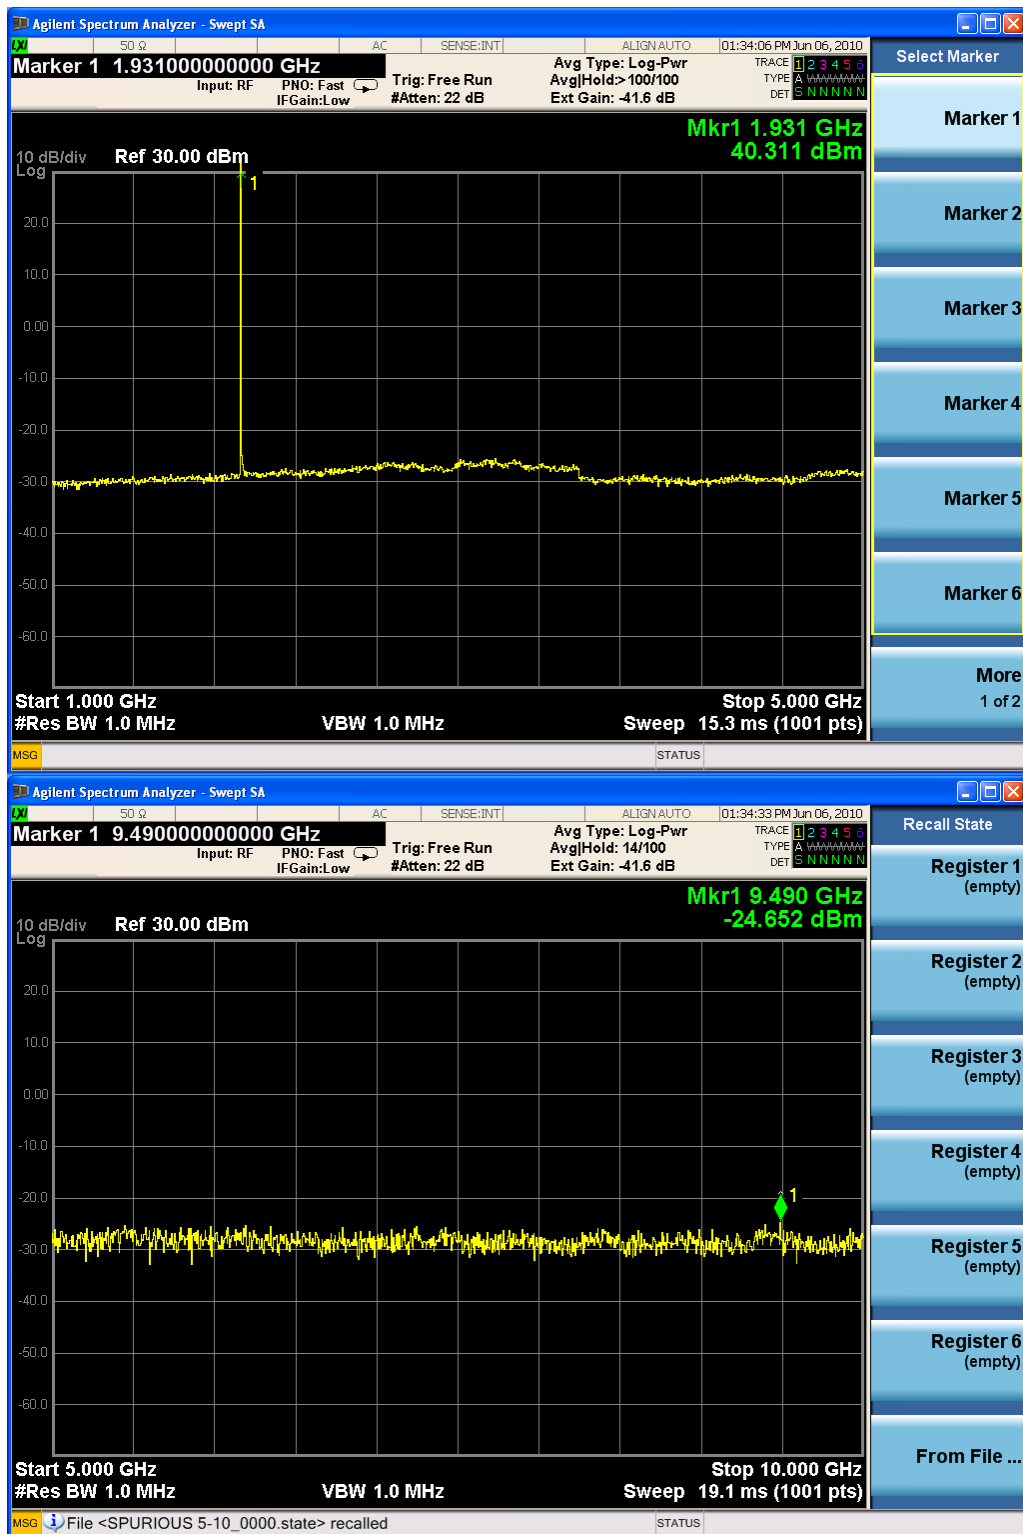



* The highest point is in working frequency block




Two carriers (working in middle frequency)

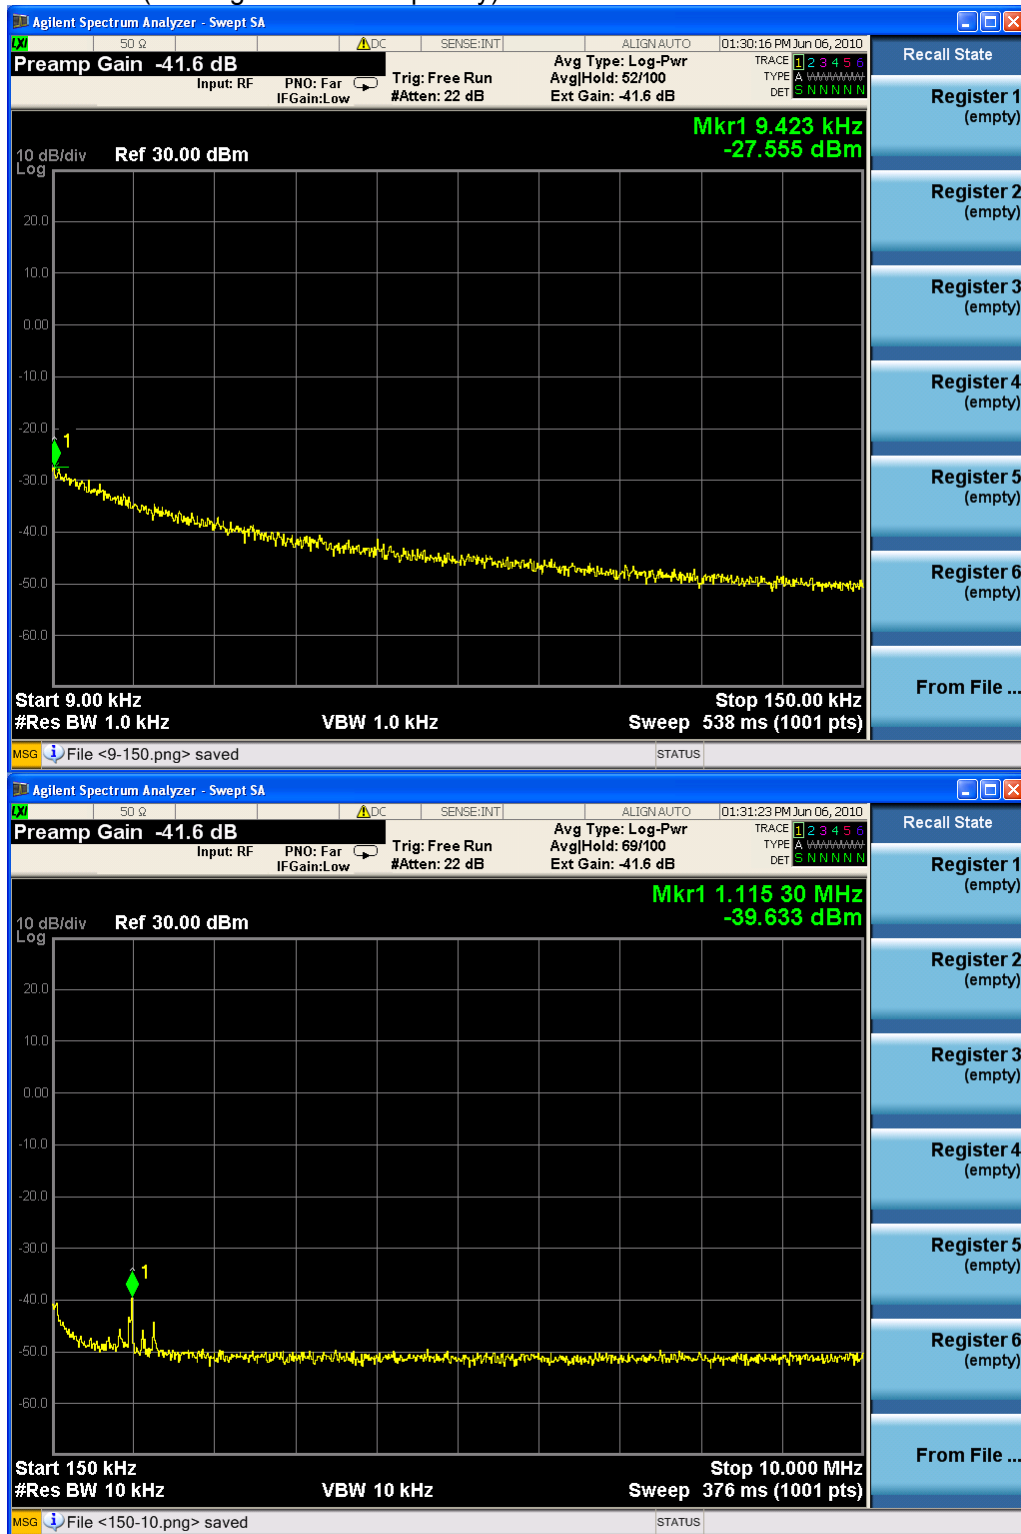

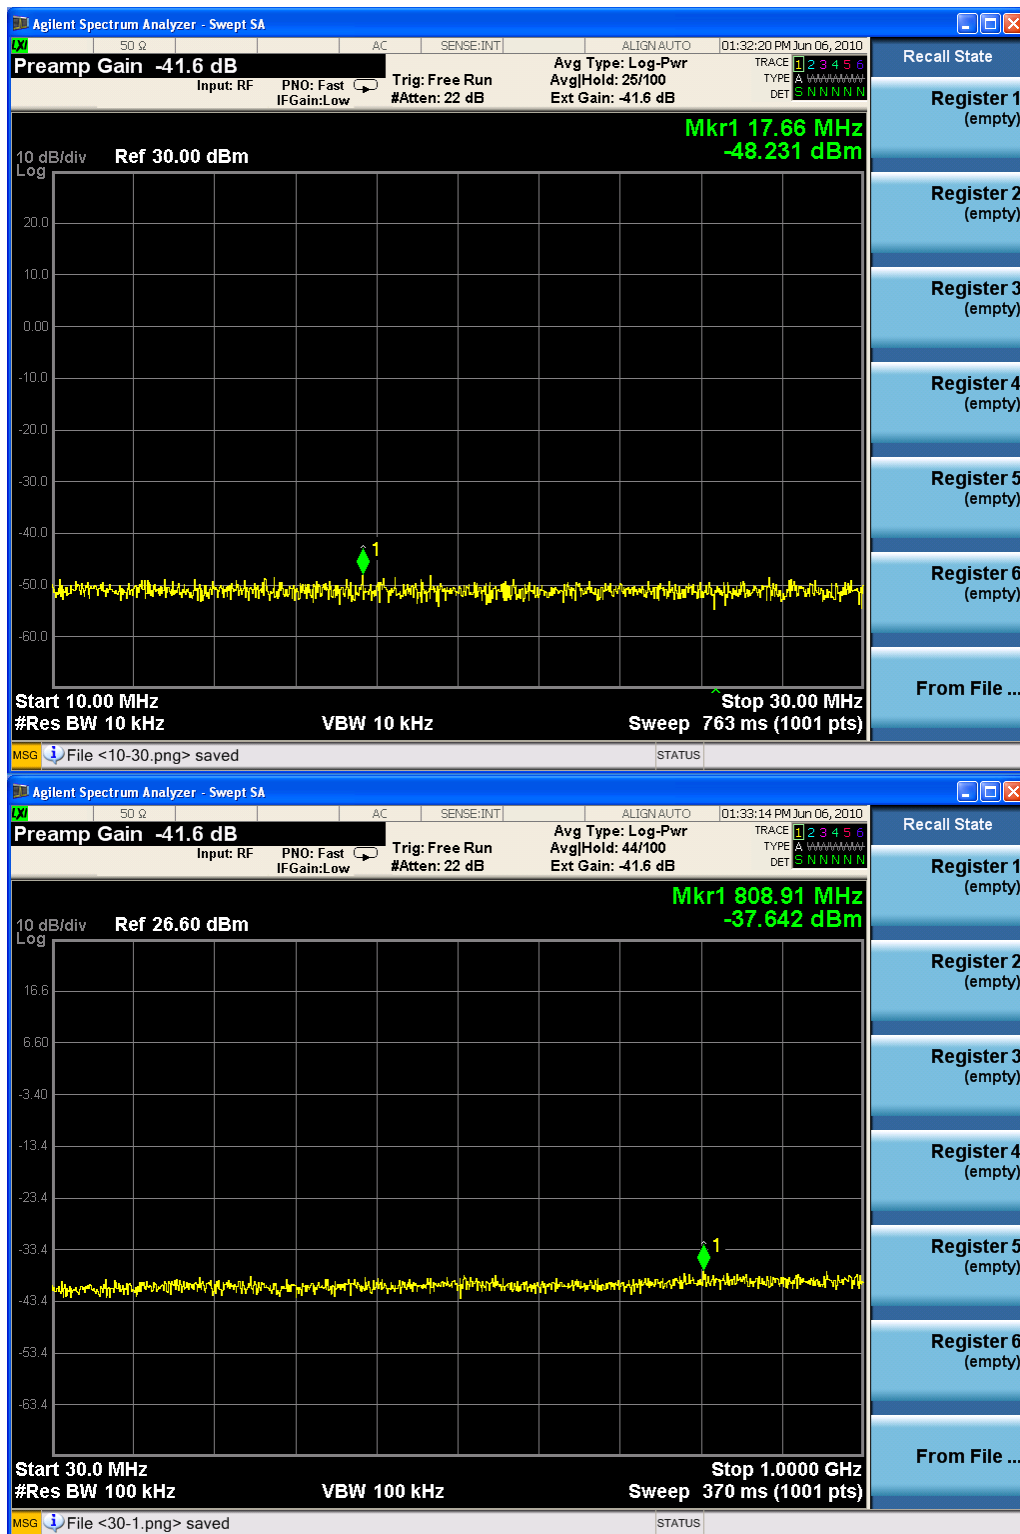


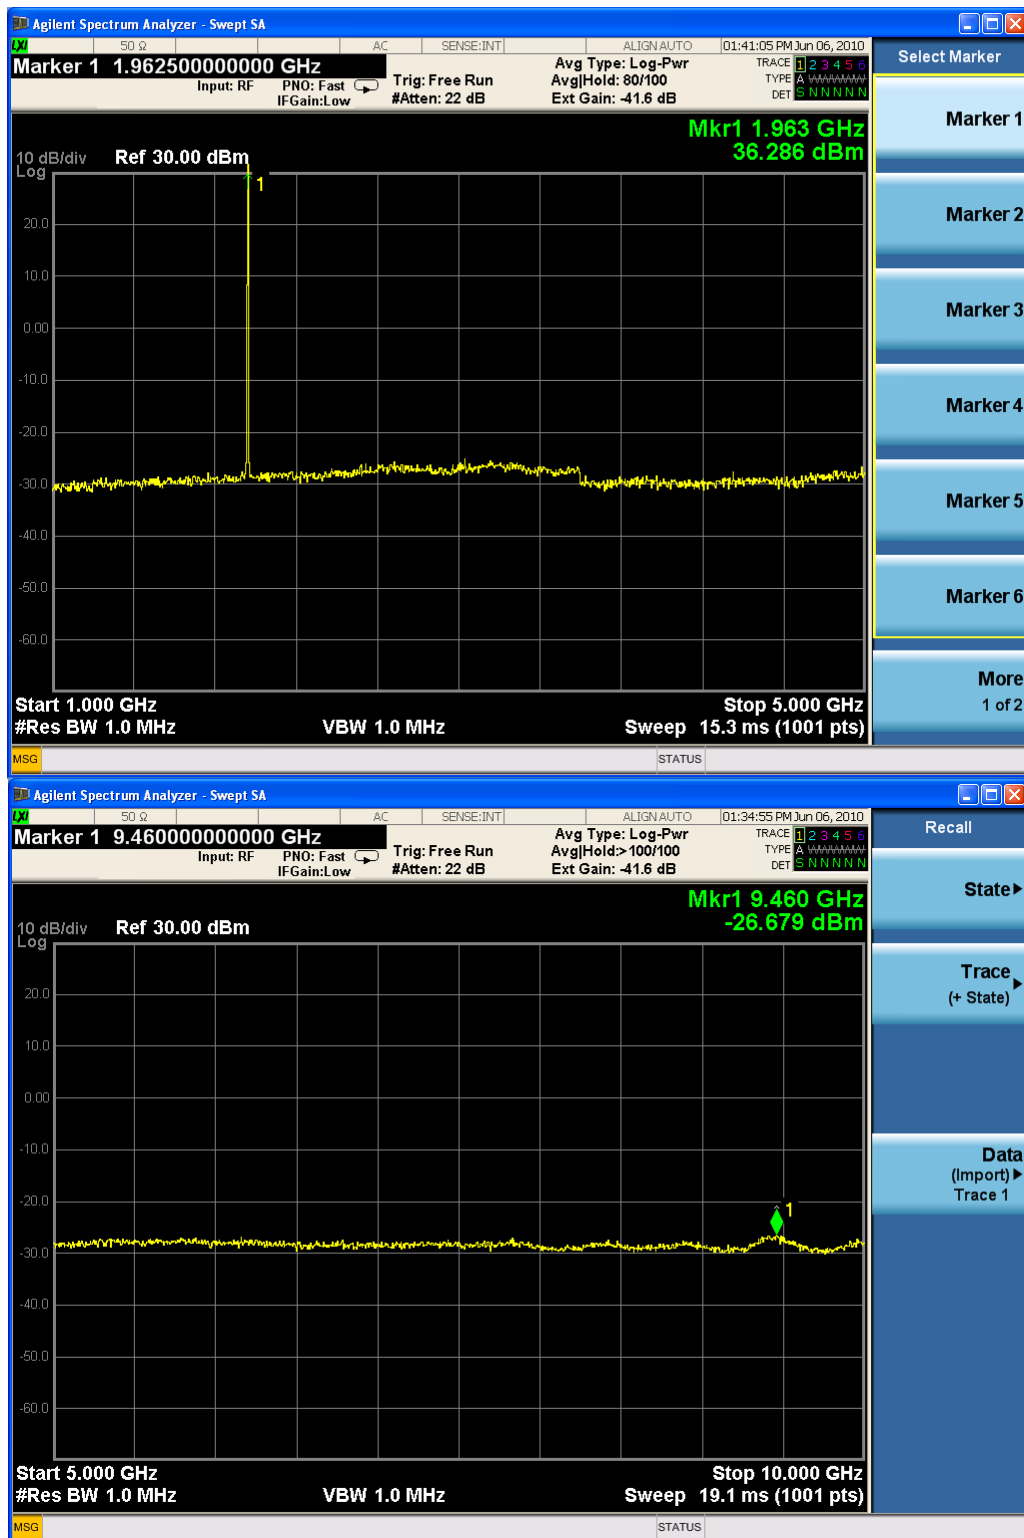



* The highest point is in working frequency block

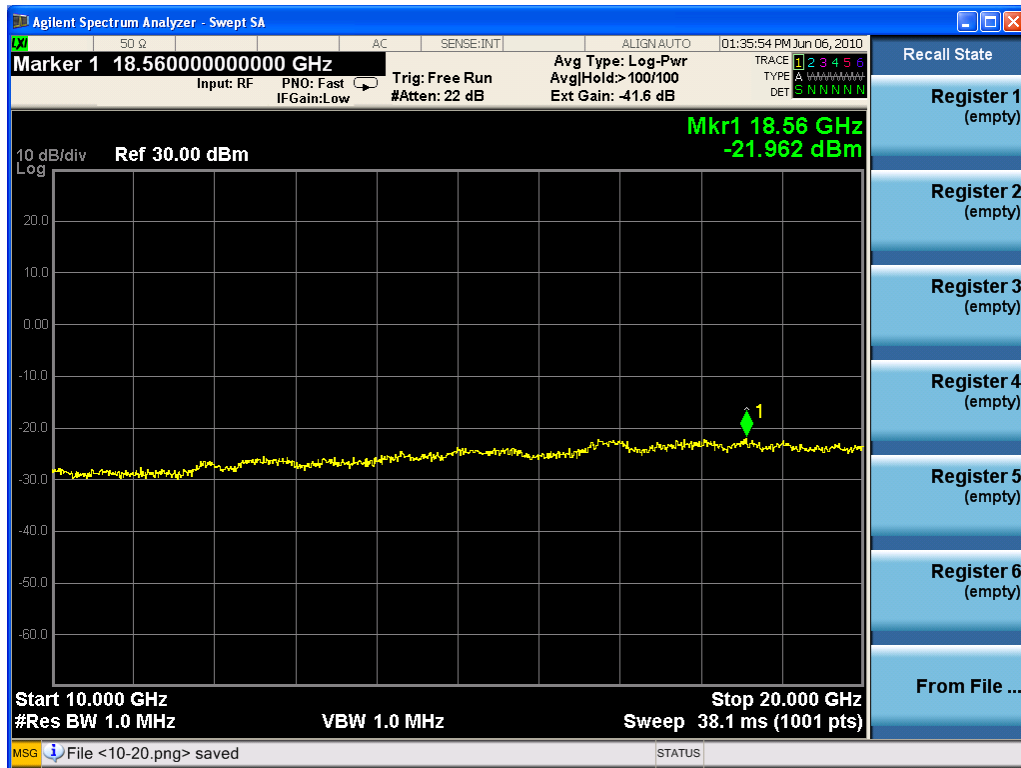


Two carriers (working in top frequency)

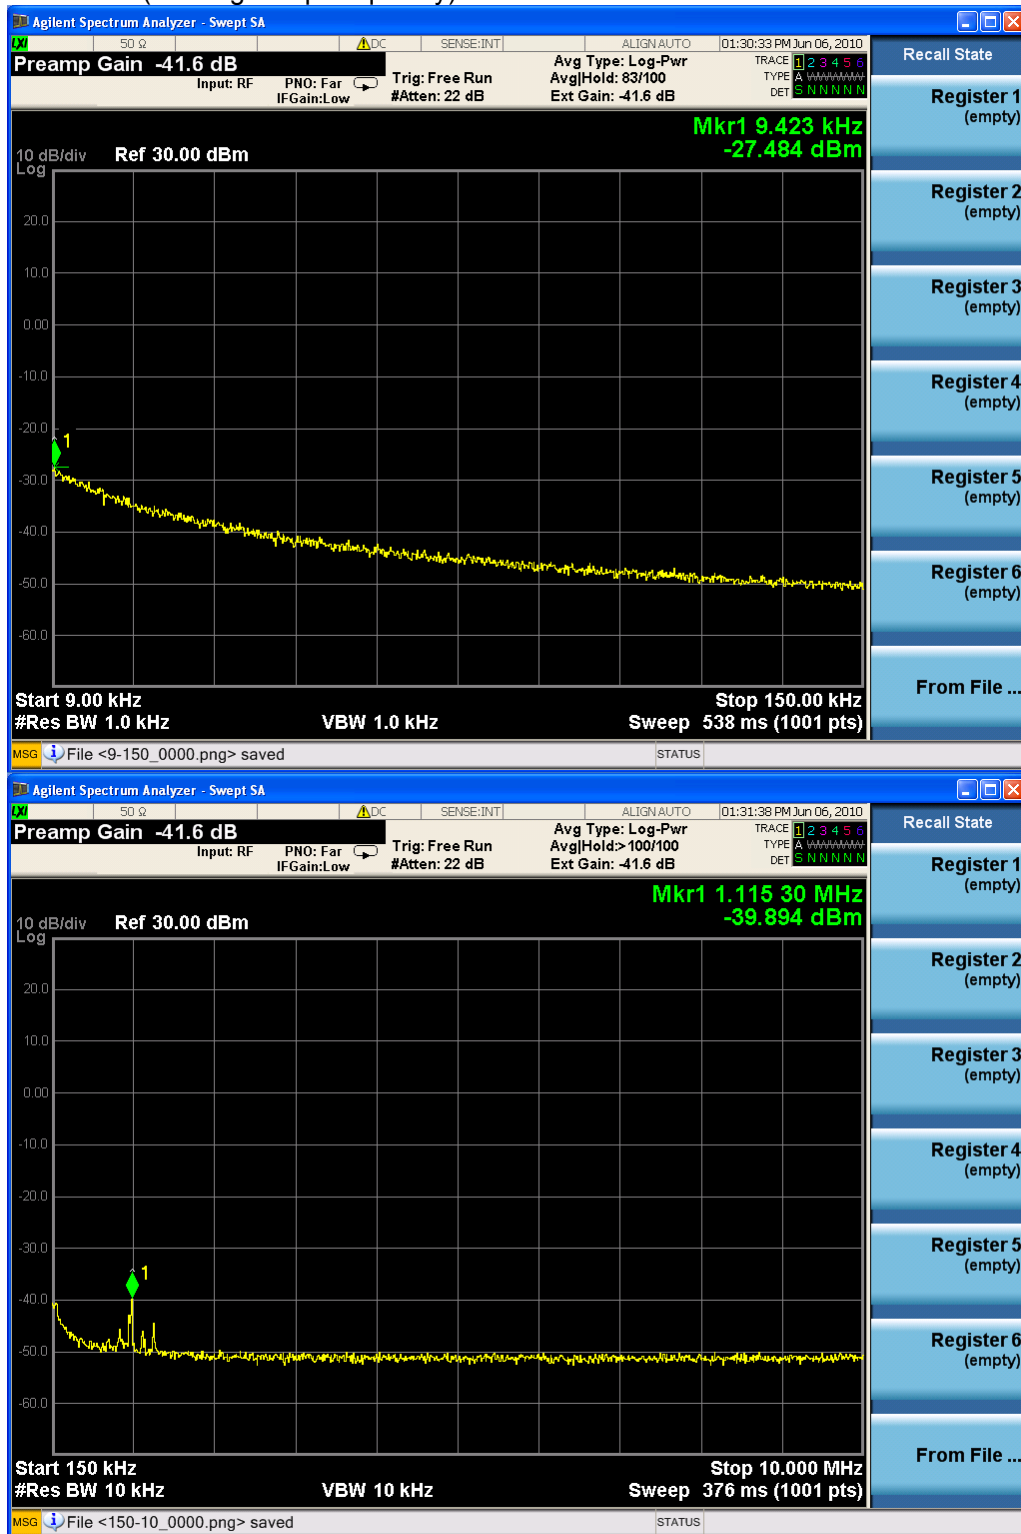

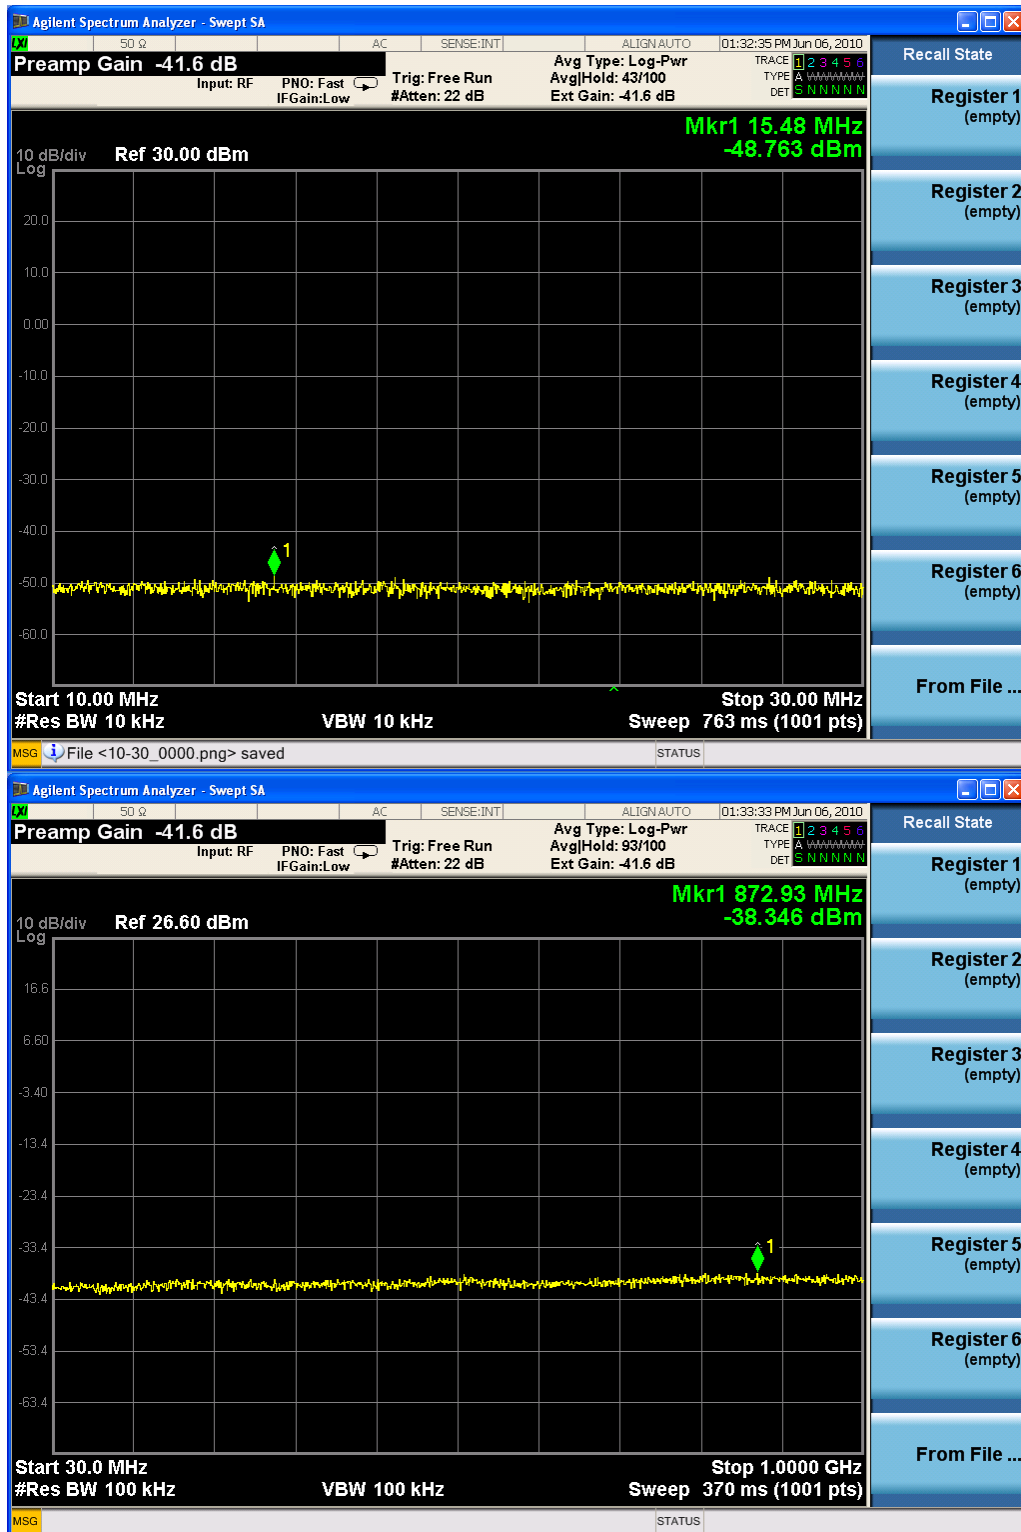


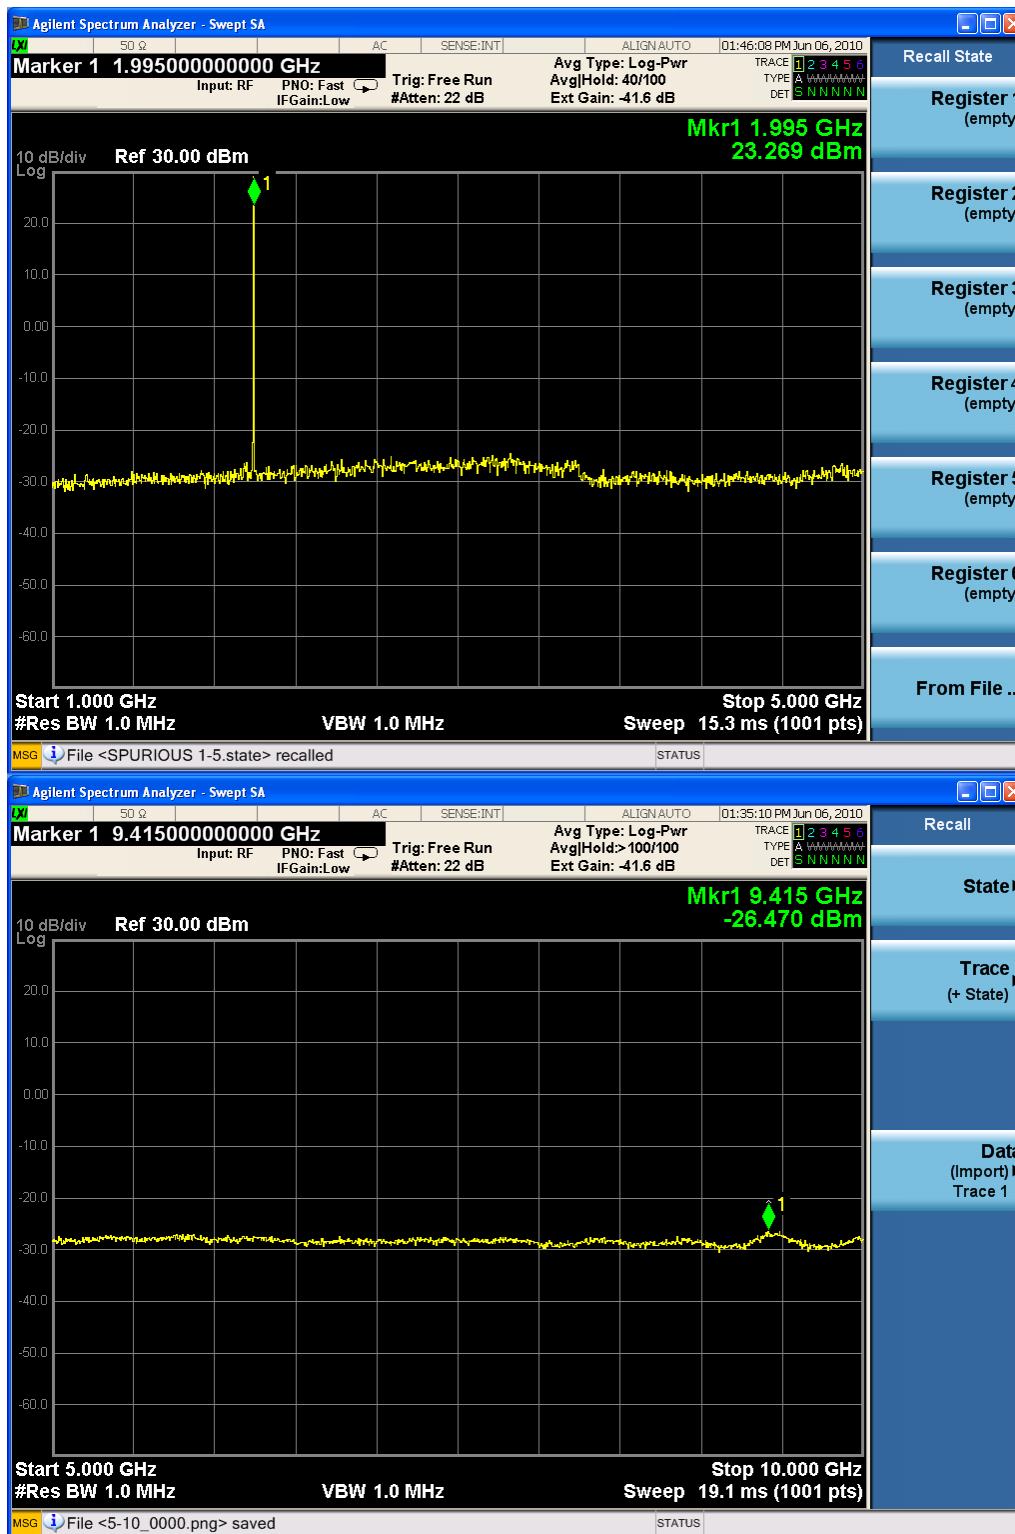



* The highest point is in working frequency block

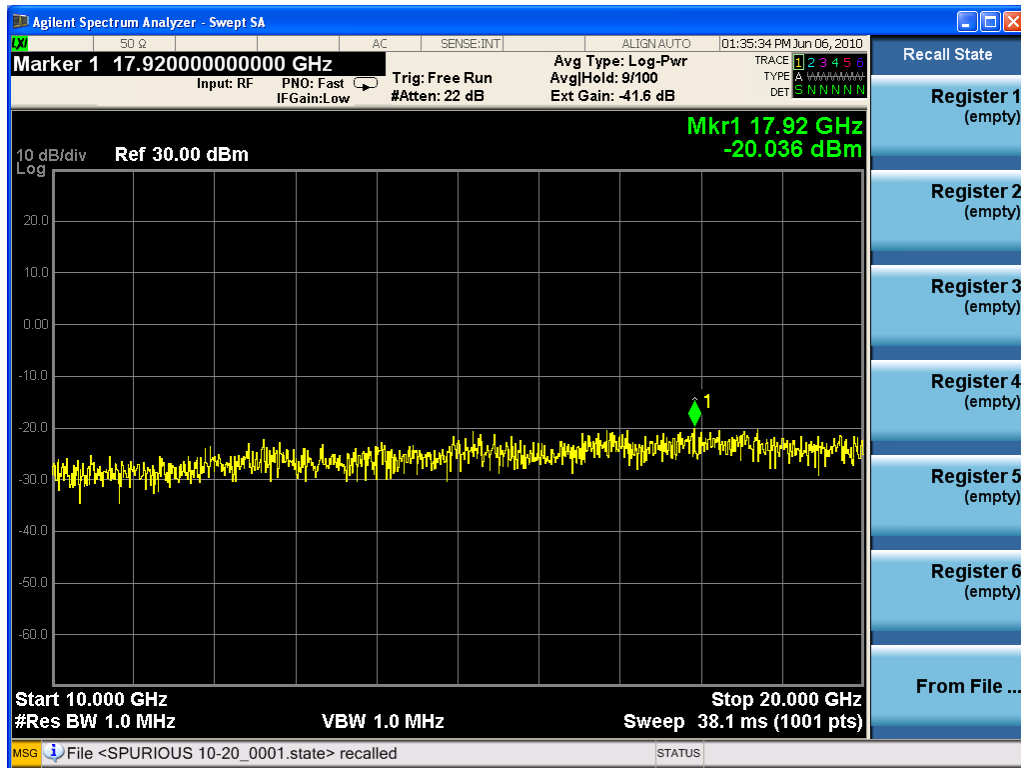

One carrier (working in bottom frequency)

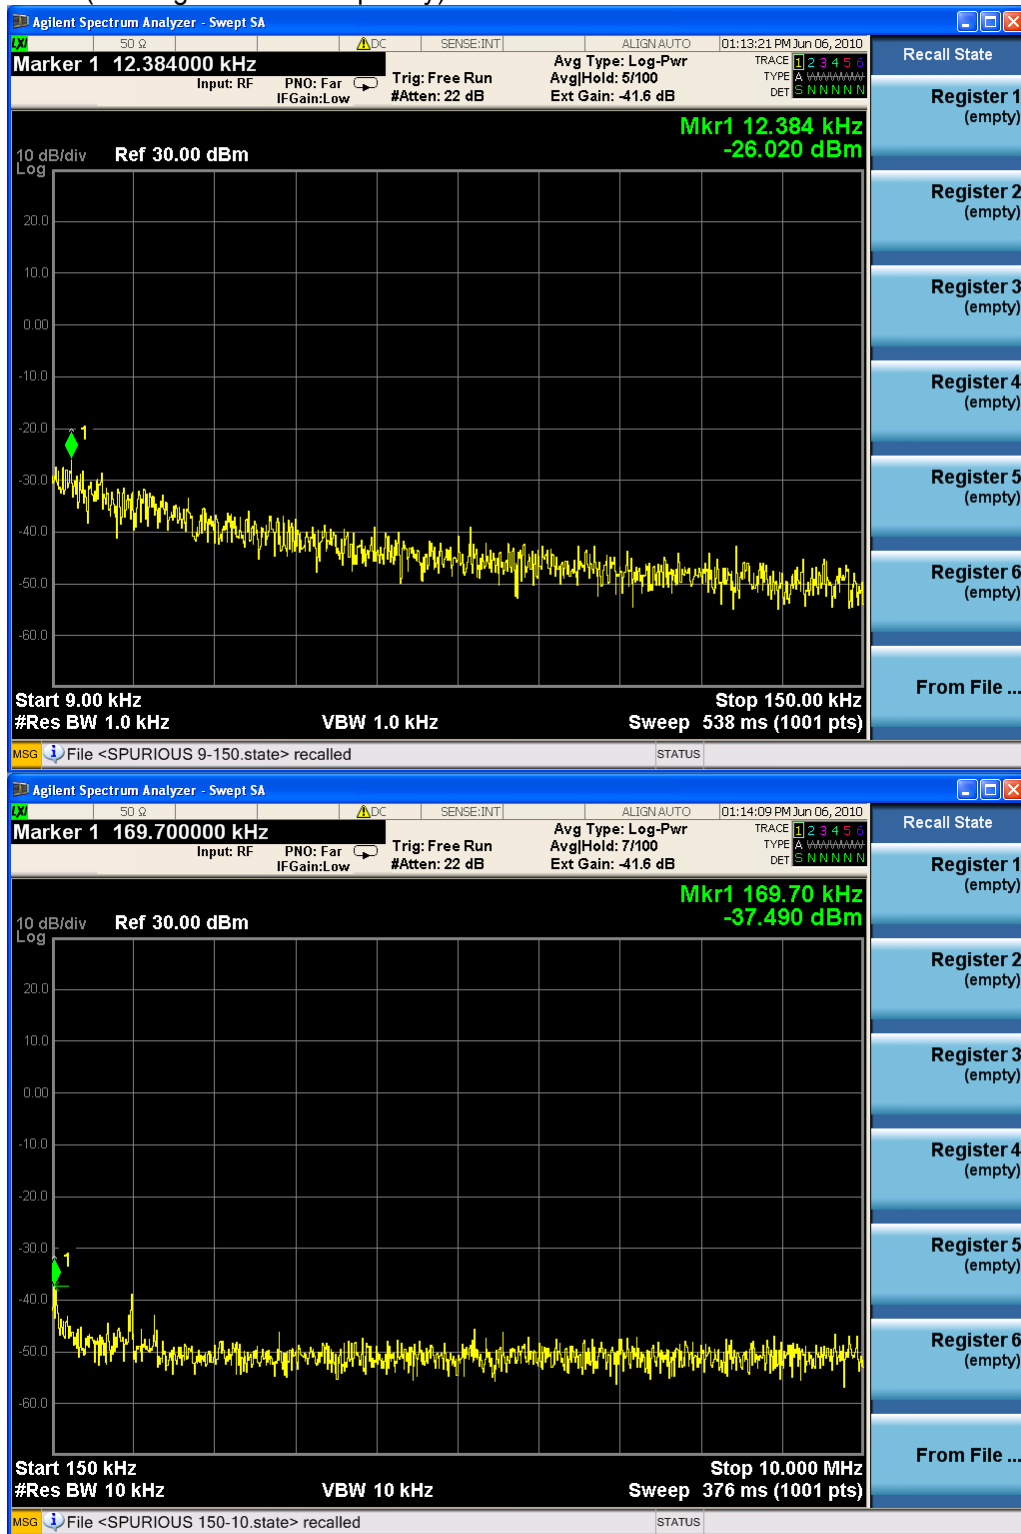

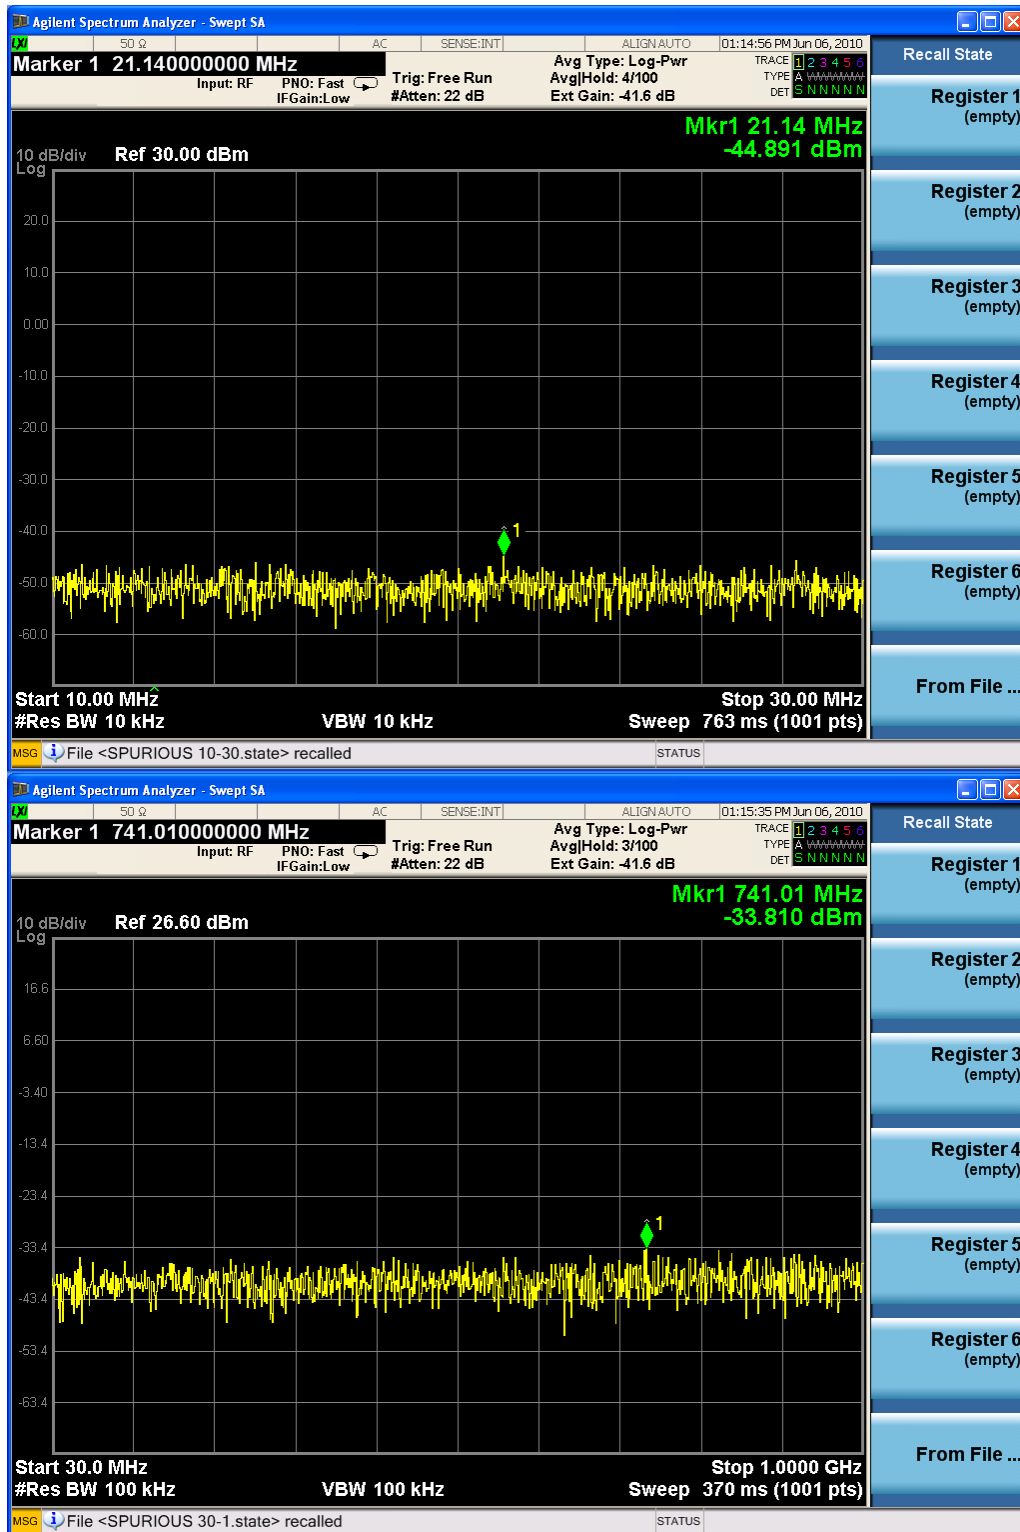


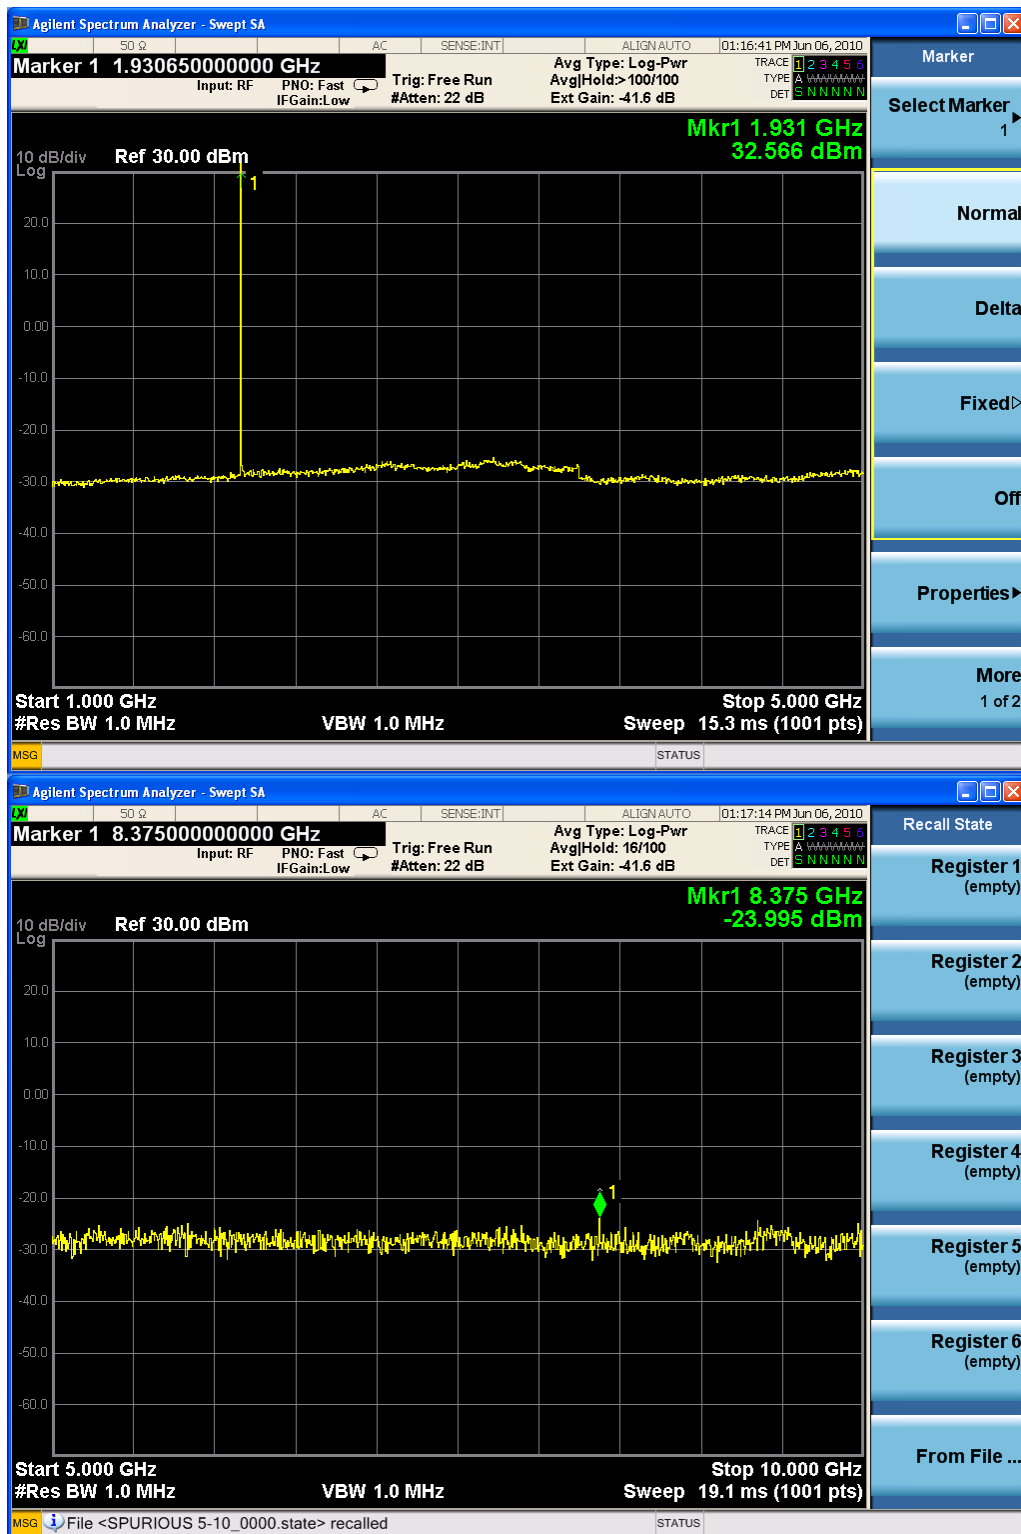



* The highest point is in working frequency block




One carrier (working in middle frequency)

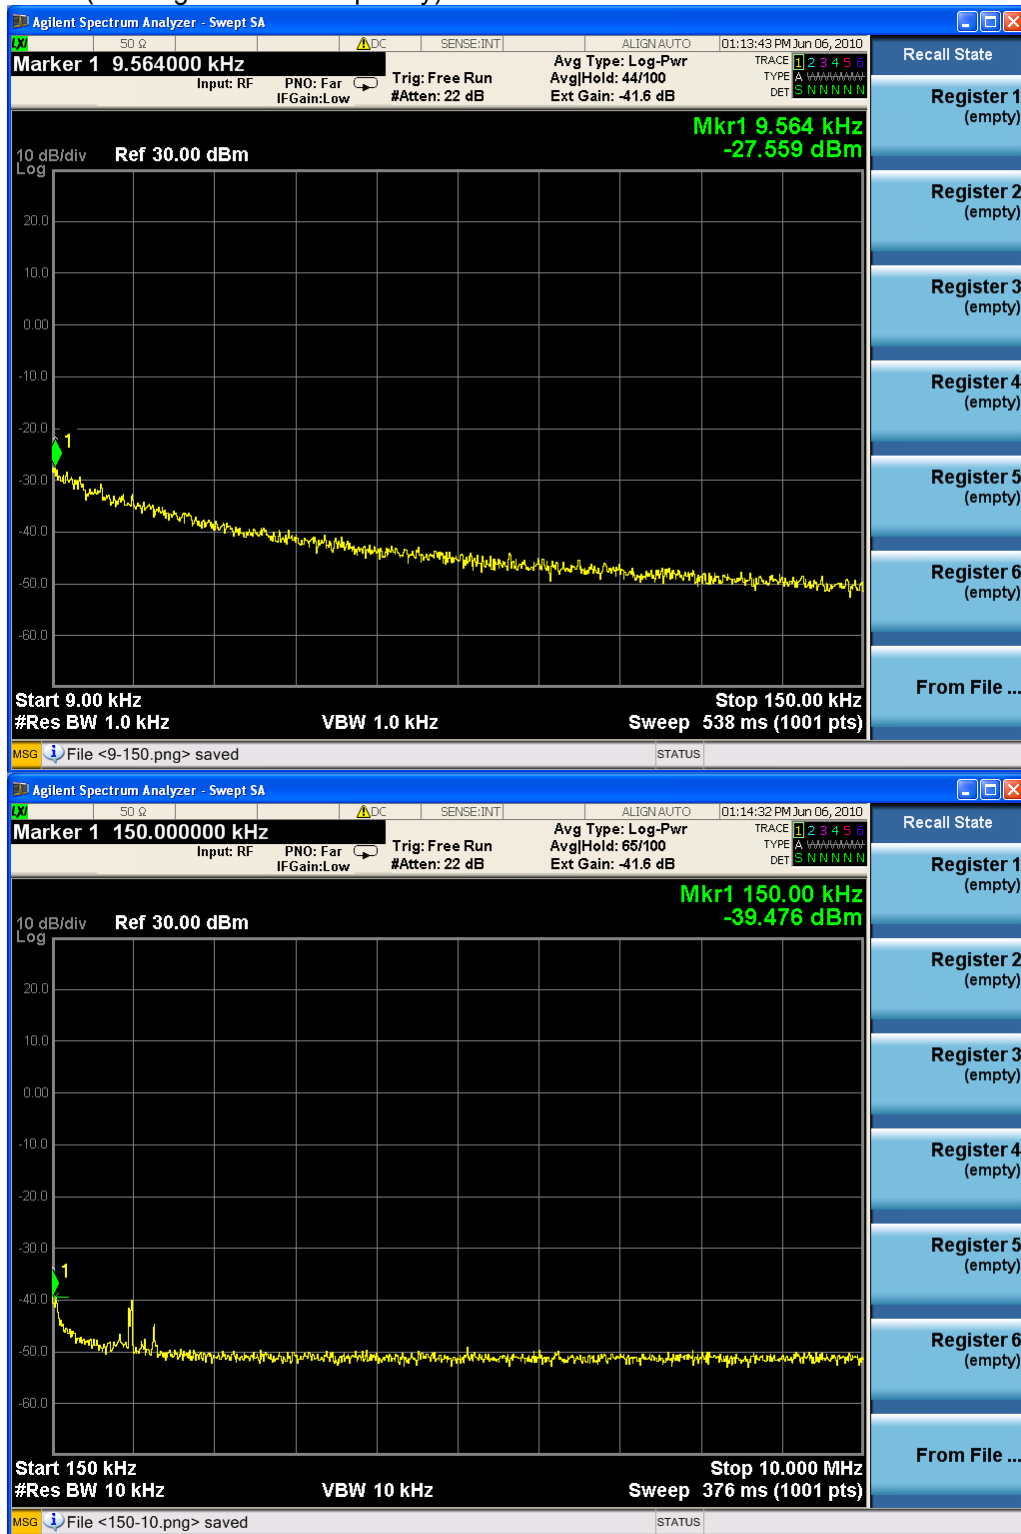

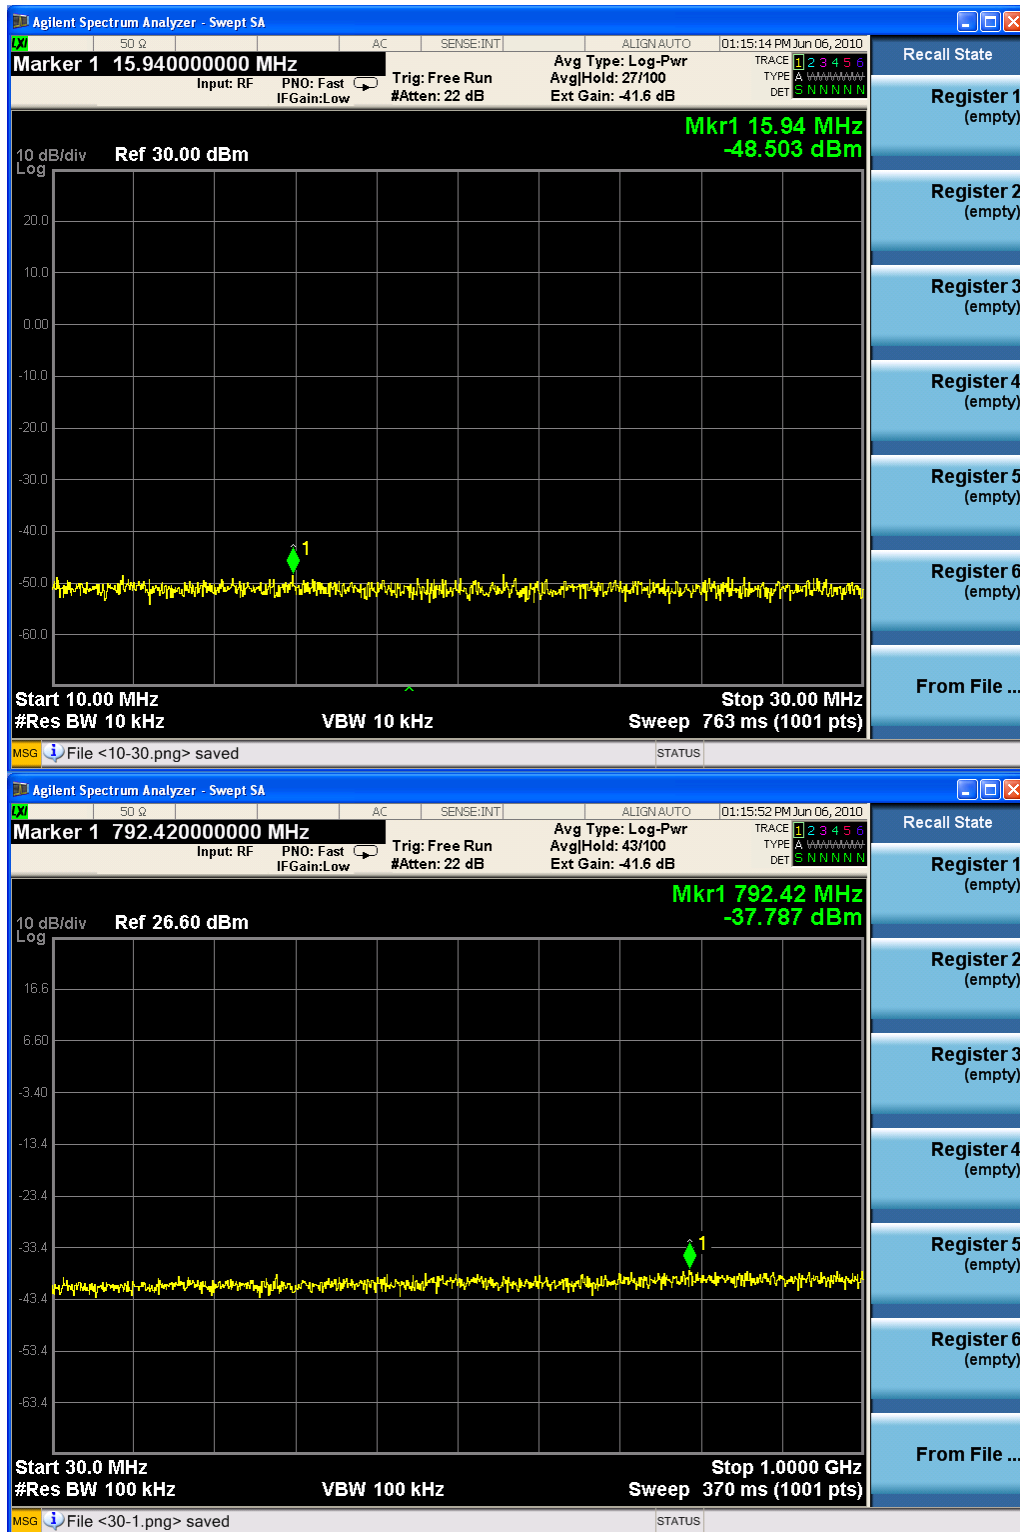


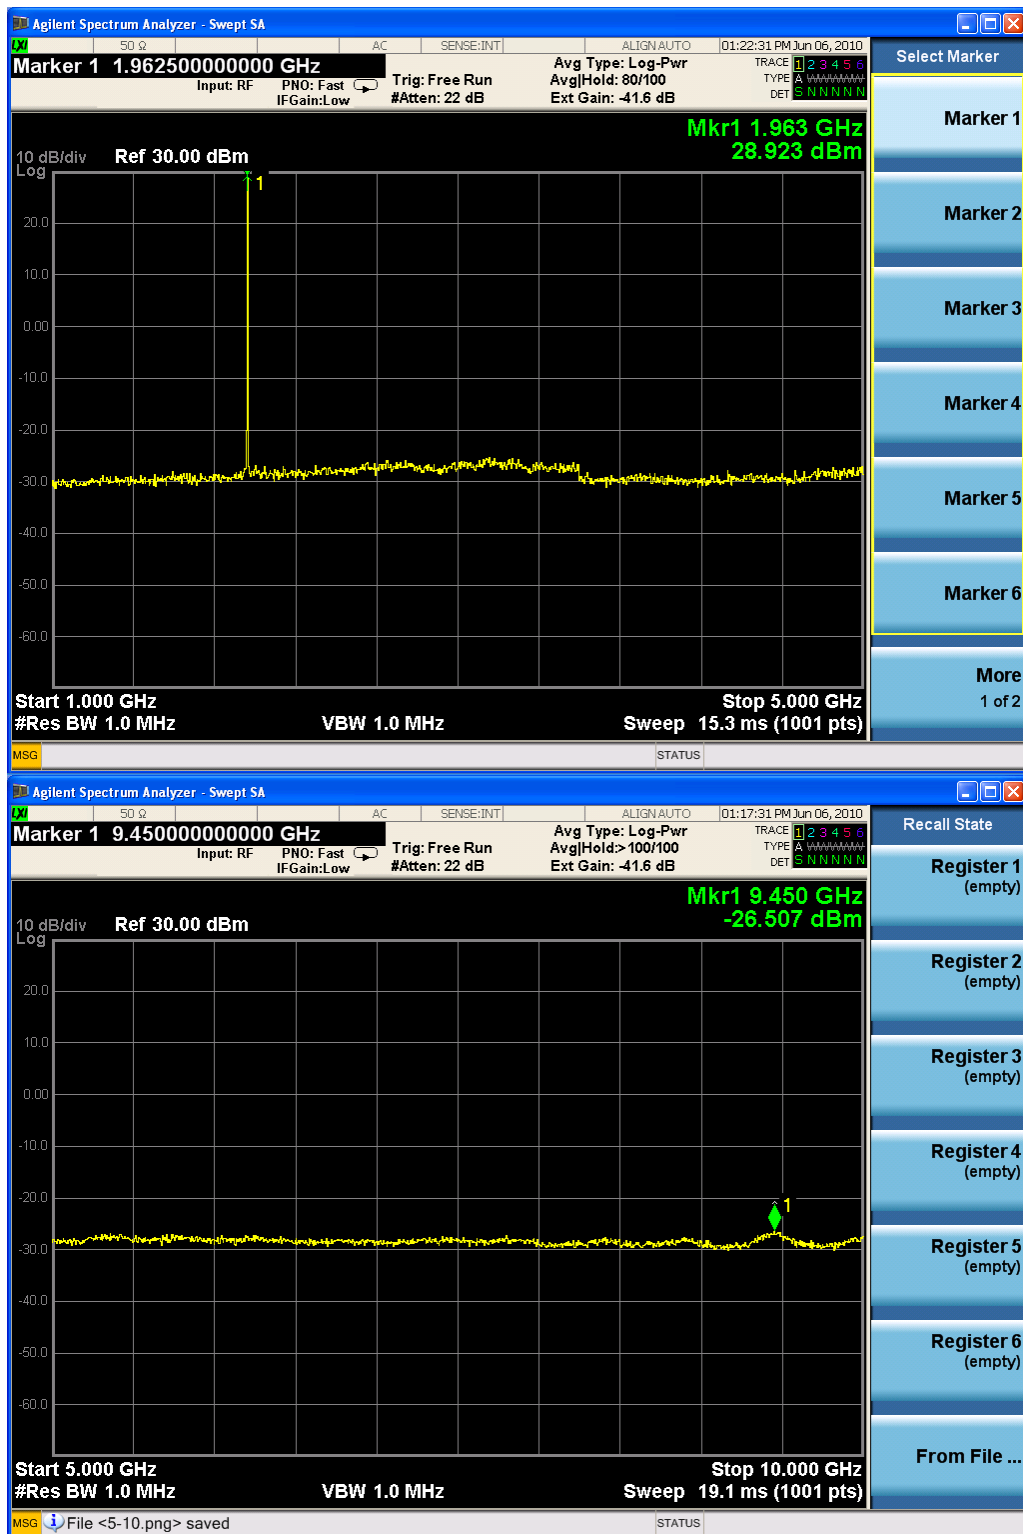



* The highest point is in working frequency block

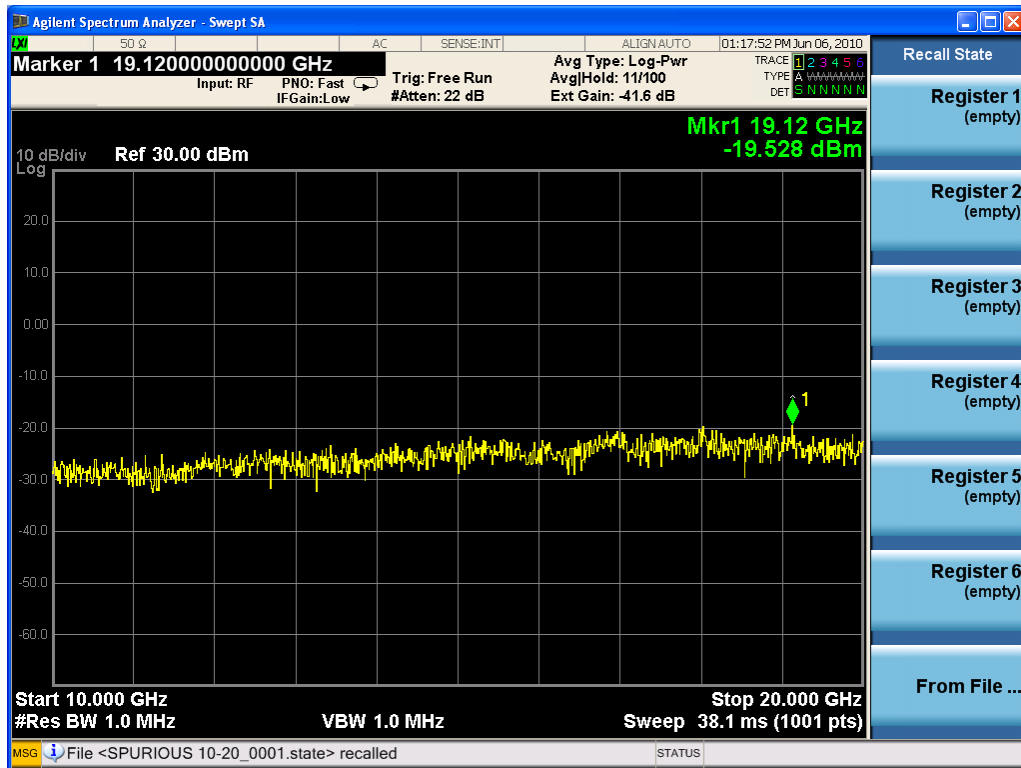


One carrier (working in top frequency)

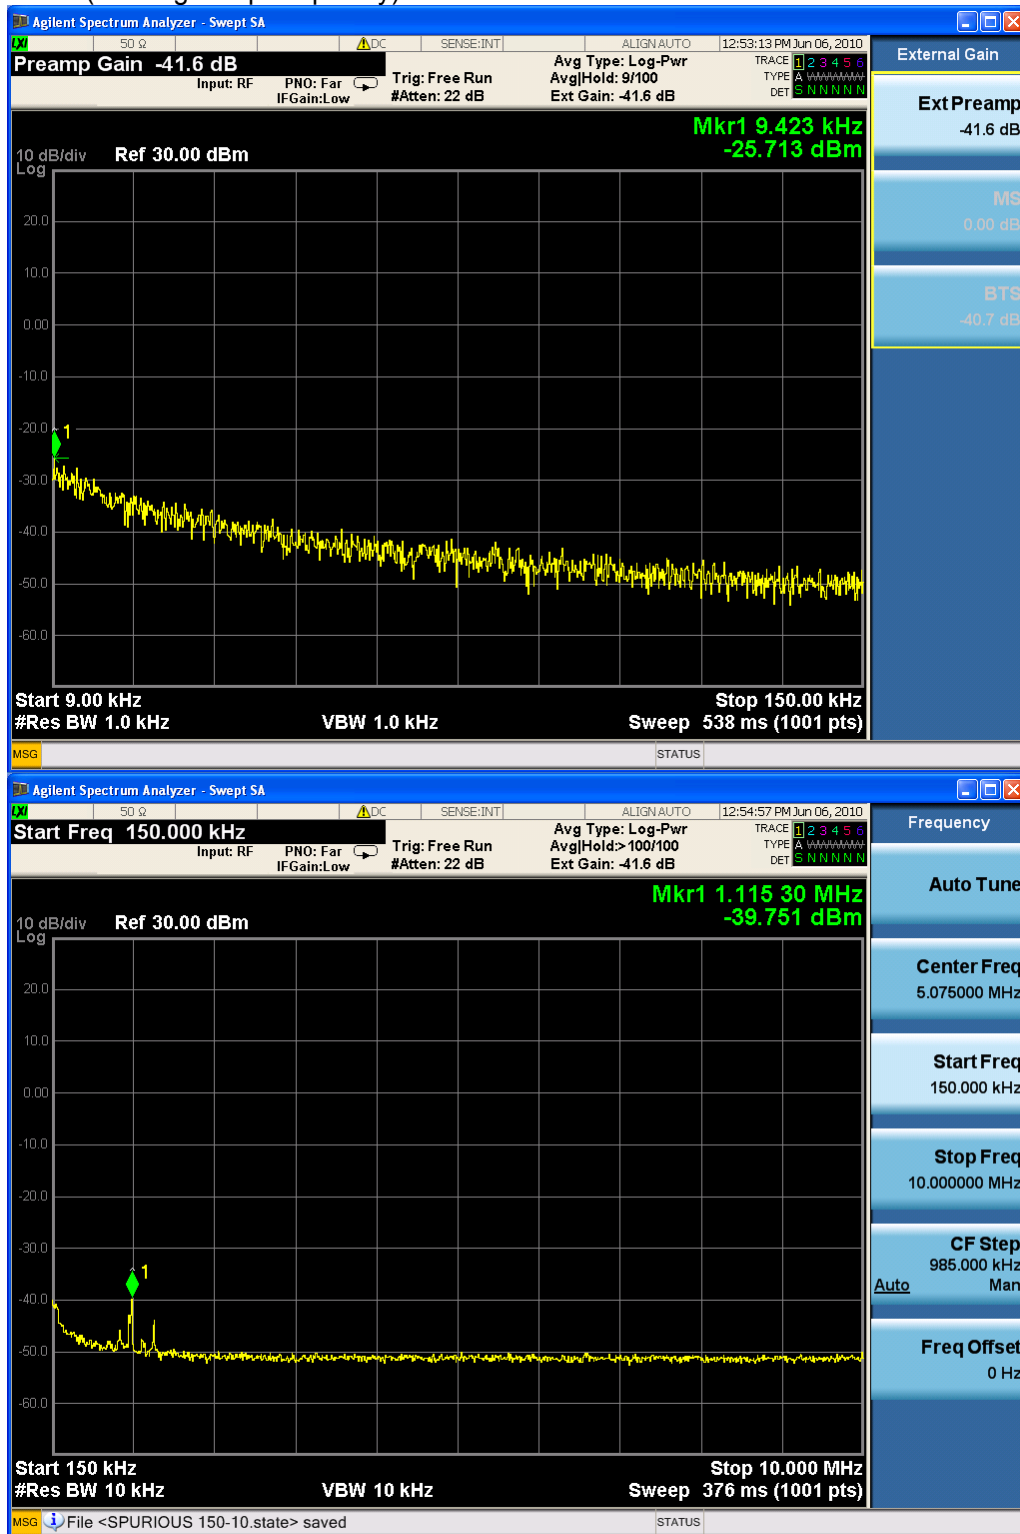

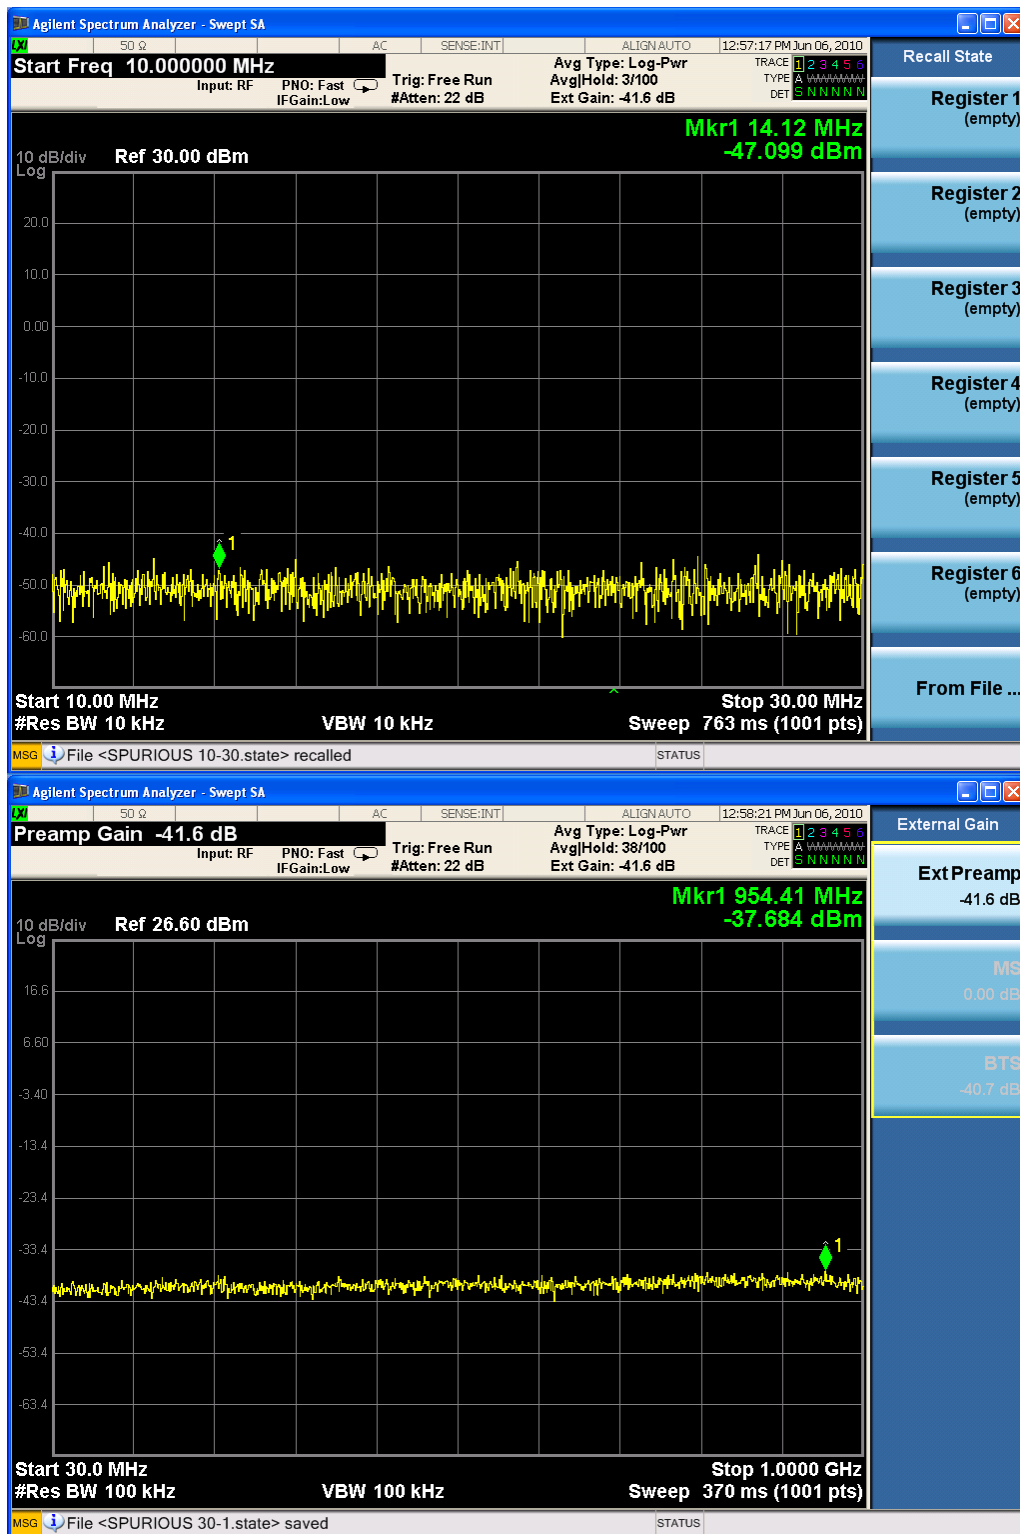

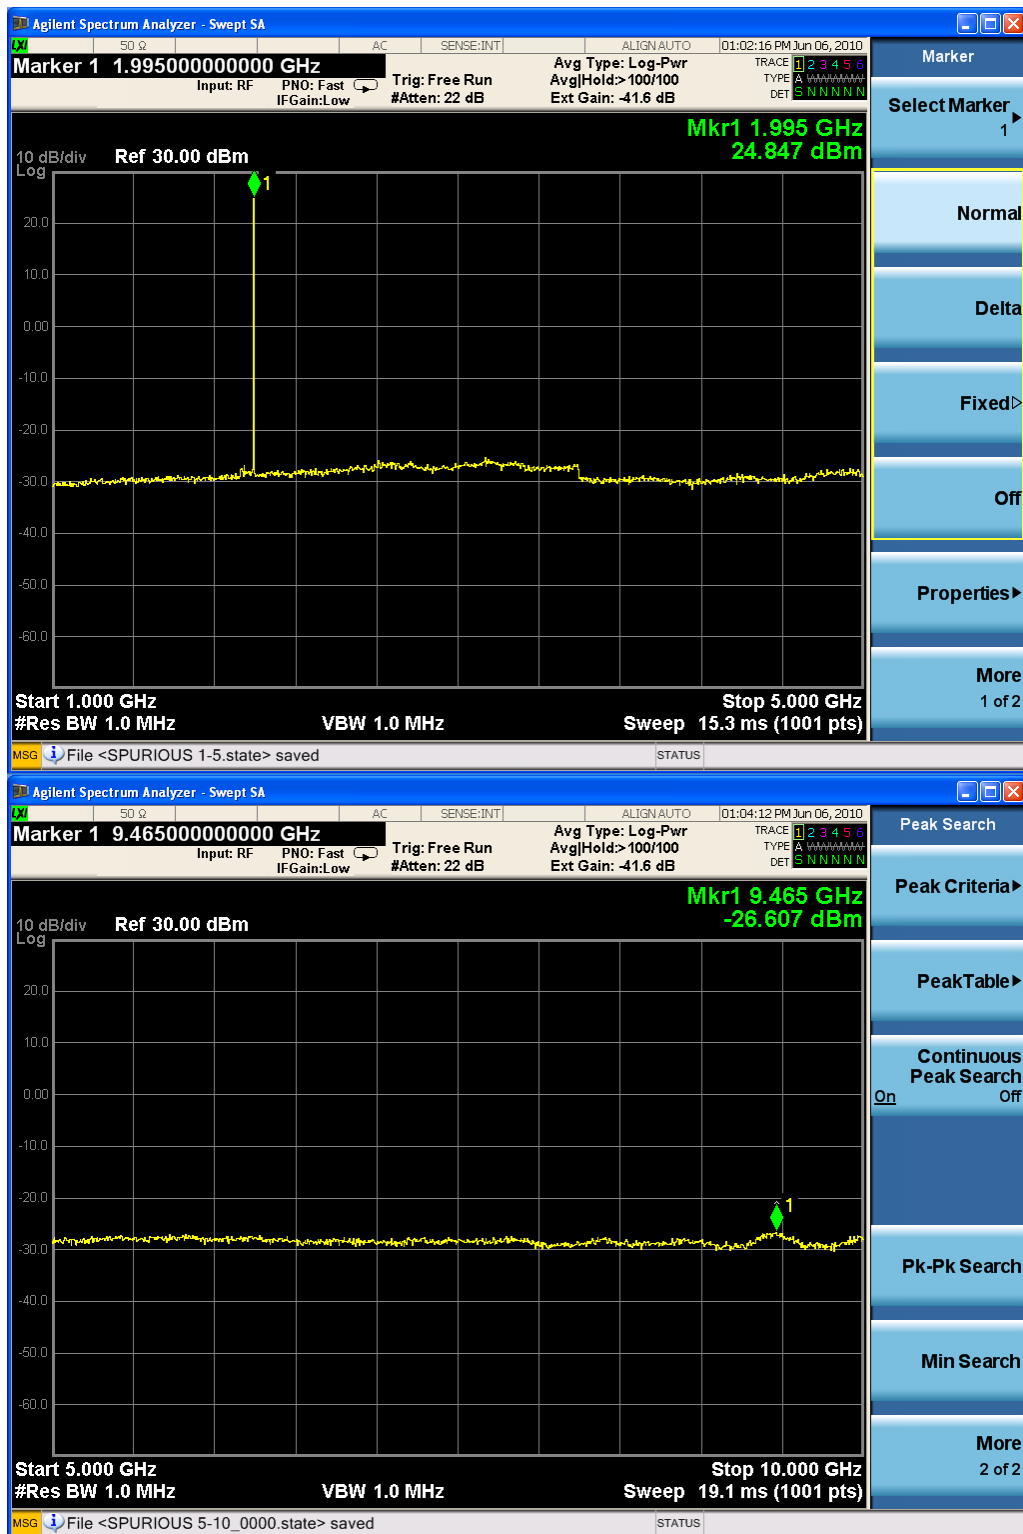

* The highest point is in working frequency block

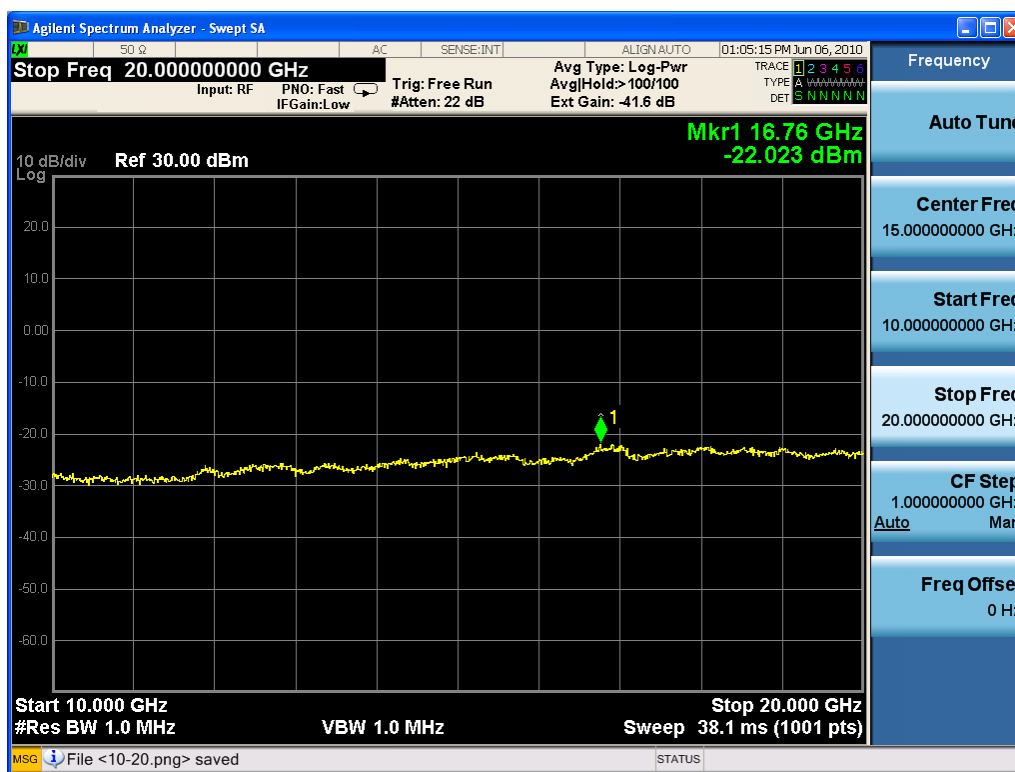

10 OCCUPIED BANDWIDTH

Applicable Standard: FCC §2.1049 §24.229 §24.238 IC § RSS Gen 4.6.1

Test Equipment List and Details :

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2010-4-9	2011-4-9
DST	DST100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure


The RF out of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation. The resolution bandwidth of the spectrum analyzer was set at 1% of the span or higher and 99%Power bandwidth was recorded.


Environmental Conditions

Temperature:	20 ° C
Relative Humidity:	53%
ATM Pressure:	1009mbar


Test Result: Pass**Test Mode:** Transmitting CDMA**Test Data**


Frequency (MHz)	Channel	99% Power Bandwidth (MHz)	Limit (MHz)
1932.525	13/38/63/88	4.9224	<5.00
1962.50	612/637/662/687	4.9260	<5.00
1992.475	1212/1237/1262/1287	4.9219	<5.00

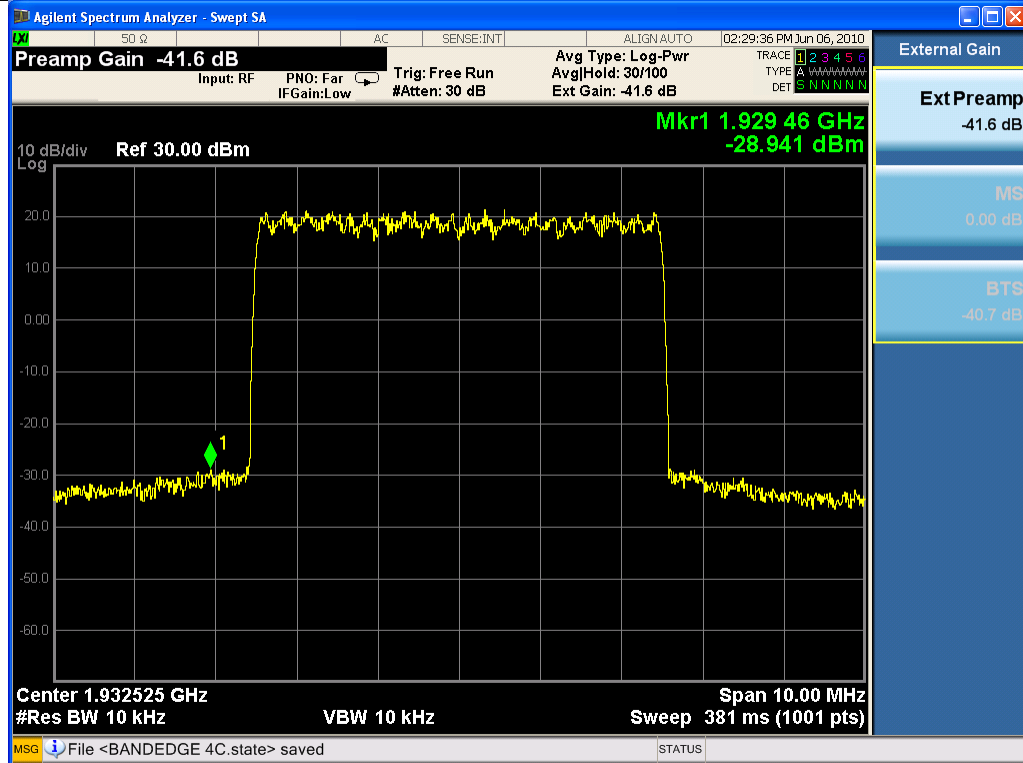

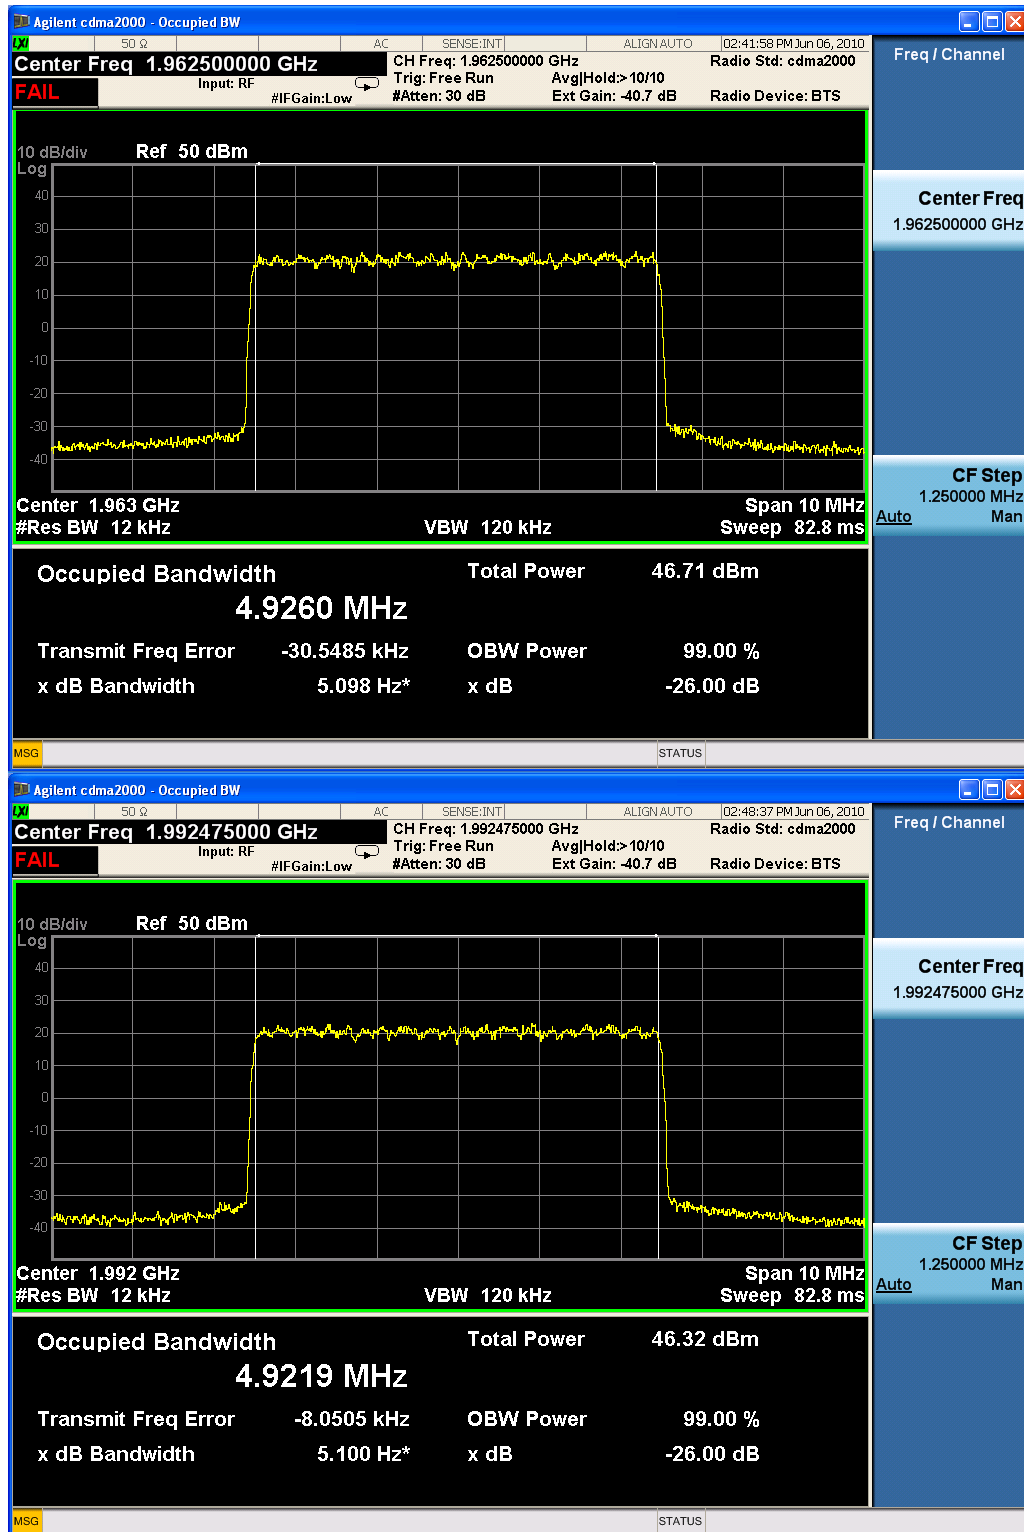



Frequency (MHz)	Channel	99% Power Bandwidth (MHz)	Limit (MHz)
1931.90	13/38/63	3.6864	<3.75
1962.50	625/650/675	3.6935	<3.75
1993.10	1237/1262/1287	3.6922	<3.75

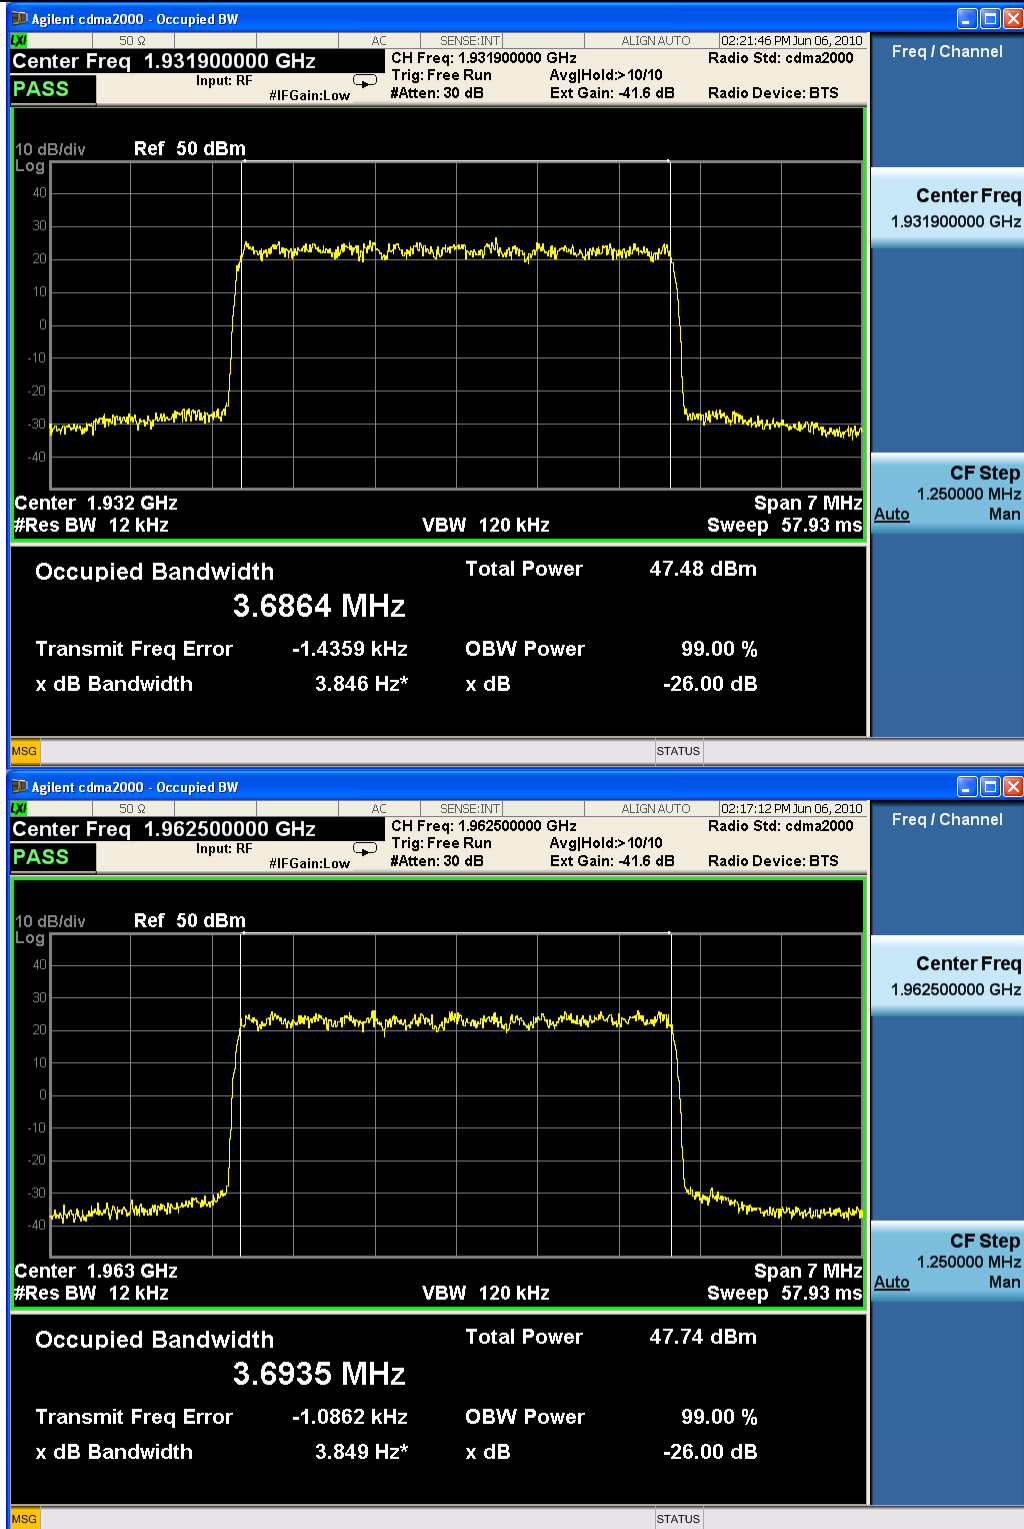

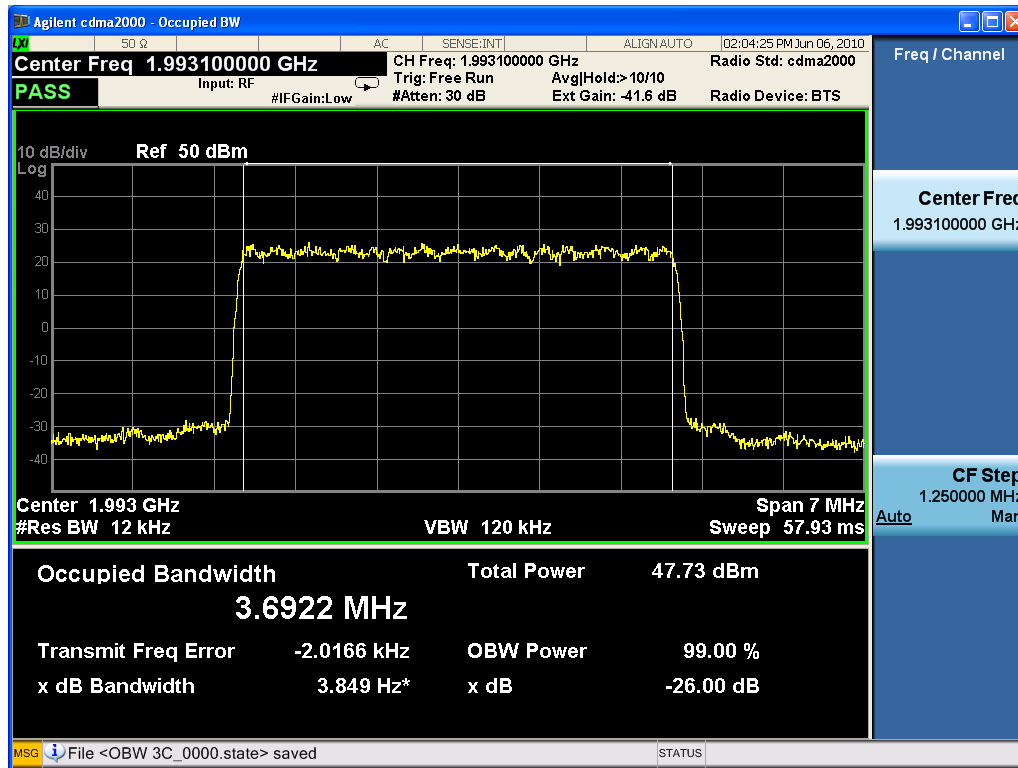


Frequency (MHz)	Channel	99% Power Bandwidth (MHz)	Limit (MHz)
1931.275	13/38	2.4651	<2.50
1962.475	637/662	2.4665	<2.50
1993.725	1262/1287	2.4636	<2.50

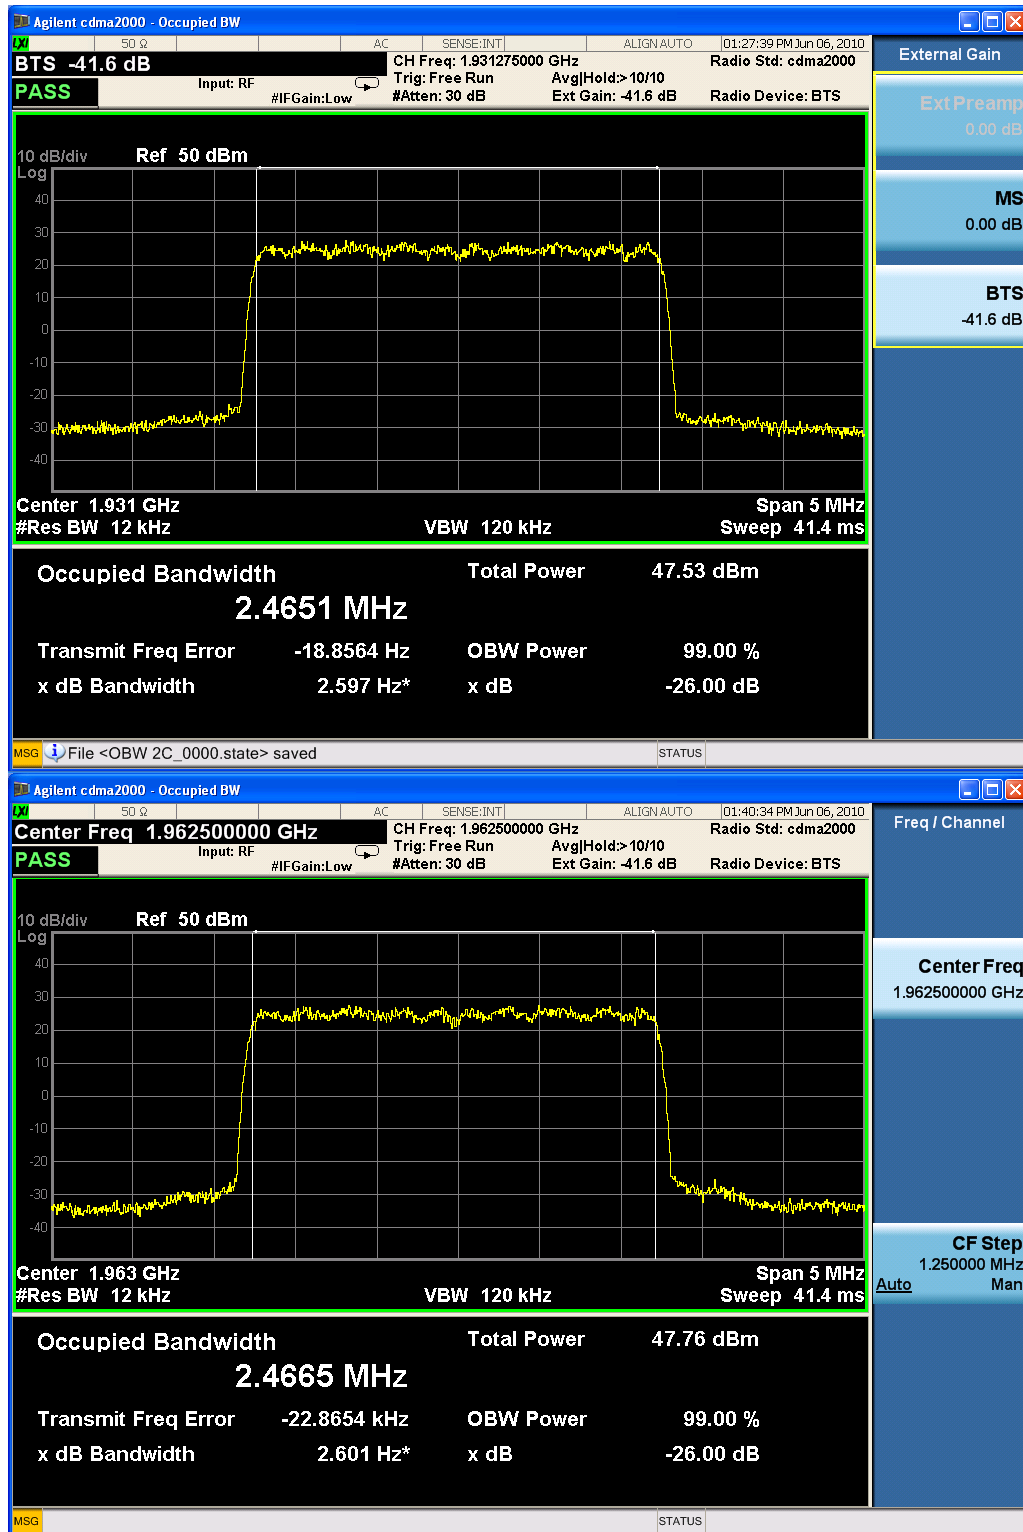

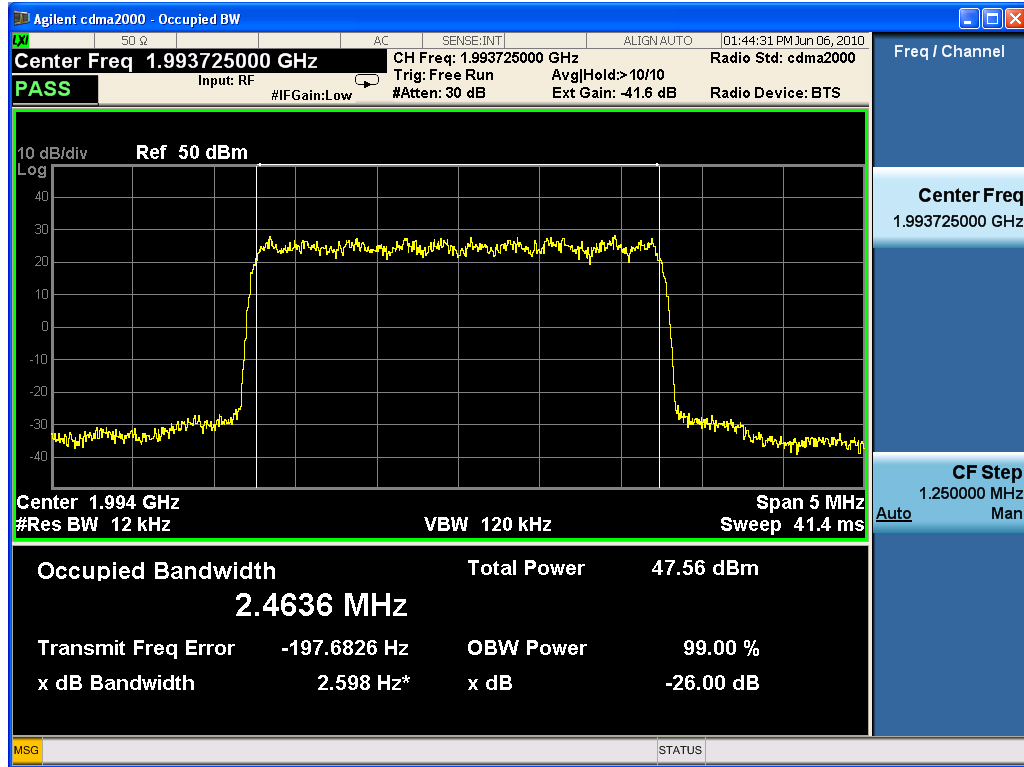

Frequency (MHz)	Channel	99% Power Bandwidth (MHz)	Limit (MHz)
1930.65/1962.50/1994.35	13/650/1287	1.2382/1.2395/1.2406	<1.25



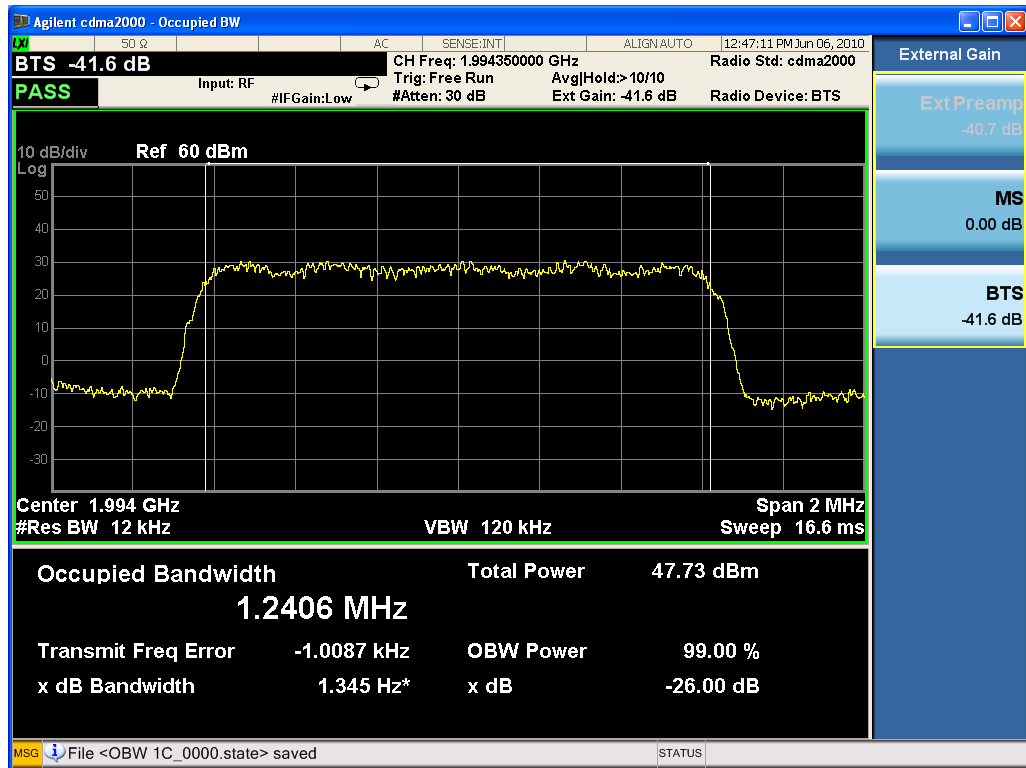

11 BAND EDGES

Applicable Standard: FCC §24.238 IC §RSS 133 6.5

According to §2.1051 and §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (p) by a factor of at least $43 + 10 \log(p)$ dB. The limit (dBm) should $< P - (43 + 10 \log(P)) = -13 \text{ dBm}$.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2010-4-9	2011-4-9
DST	DST100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.


Test Data Environmental Conditions

Temperature:	20 °C
Relative Humidity:	53%
ATM Pressure:	1009mbar

Test Result: Pass**Test Mode:** Transmitting CDMA**Test Data**


four carriers

Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1930.65/1931.90/1933.15/1934.4	-30.446	-13.00
1990.6/1991.85/1993.10/1994.35	-36.477	-13.00

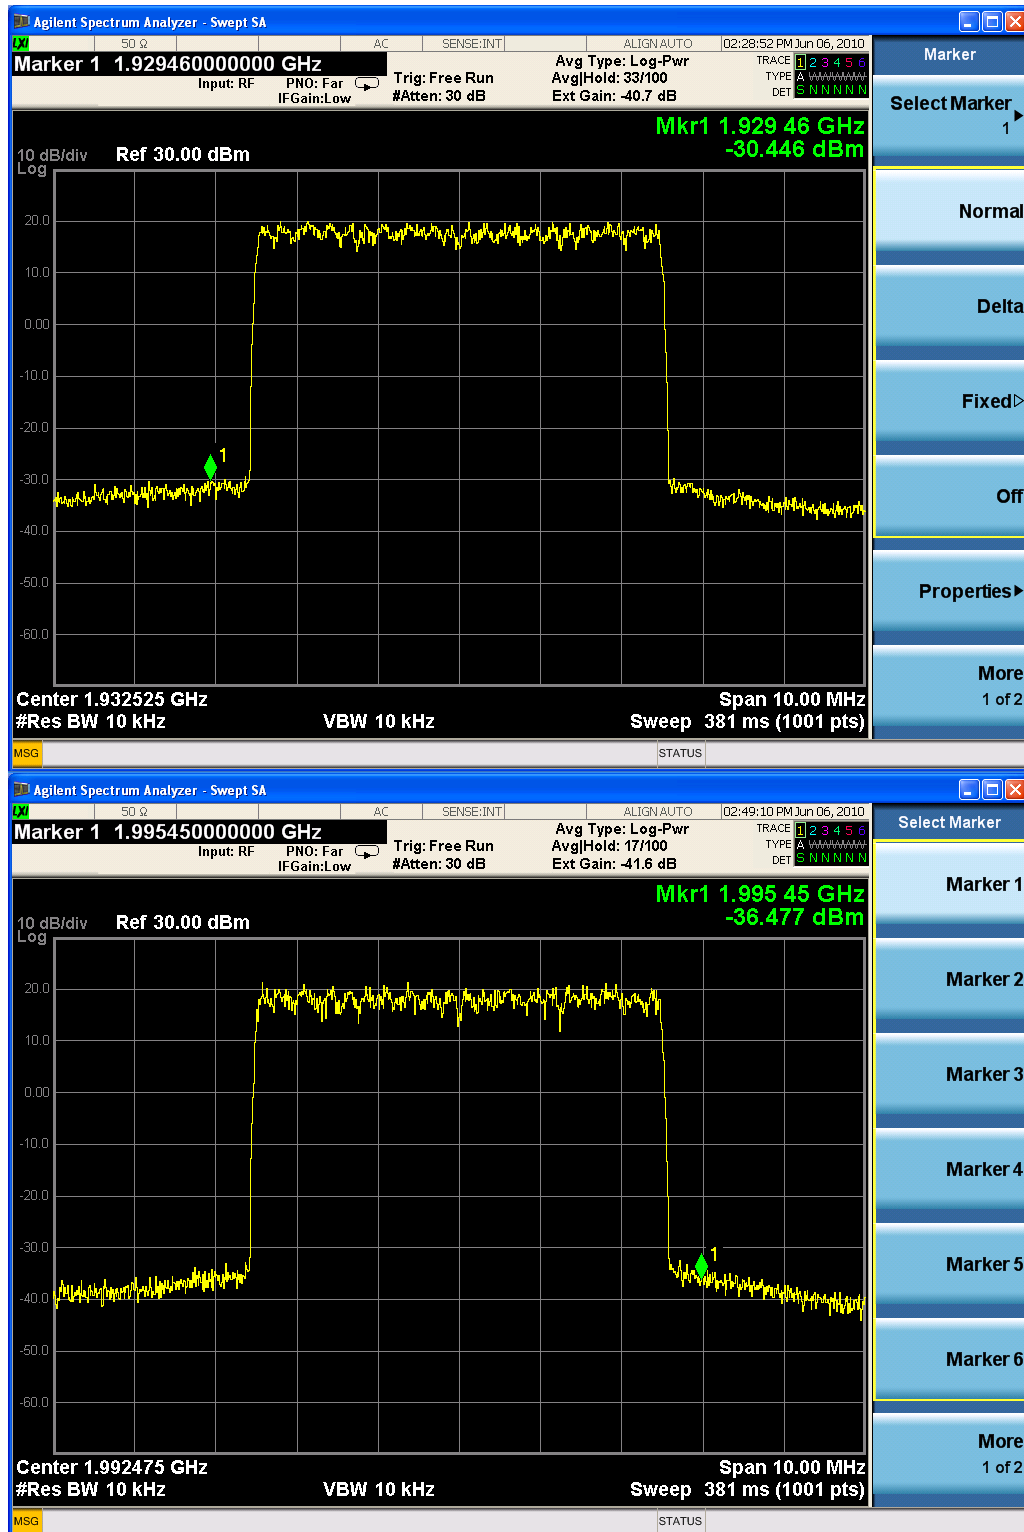


three carriers

Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1930.65/1931.9/1933.15	-30.468	-13.00
1991.85/1993.1/1994.35	-33.705	-13.00

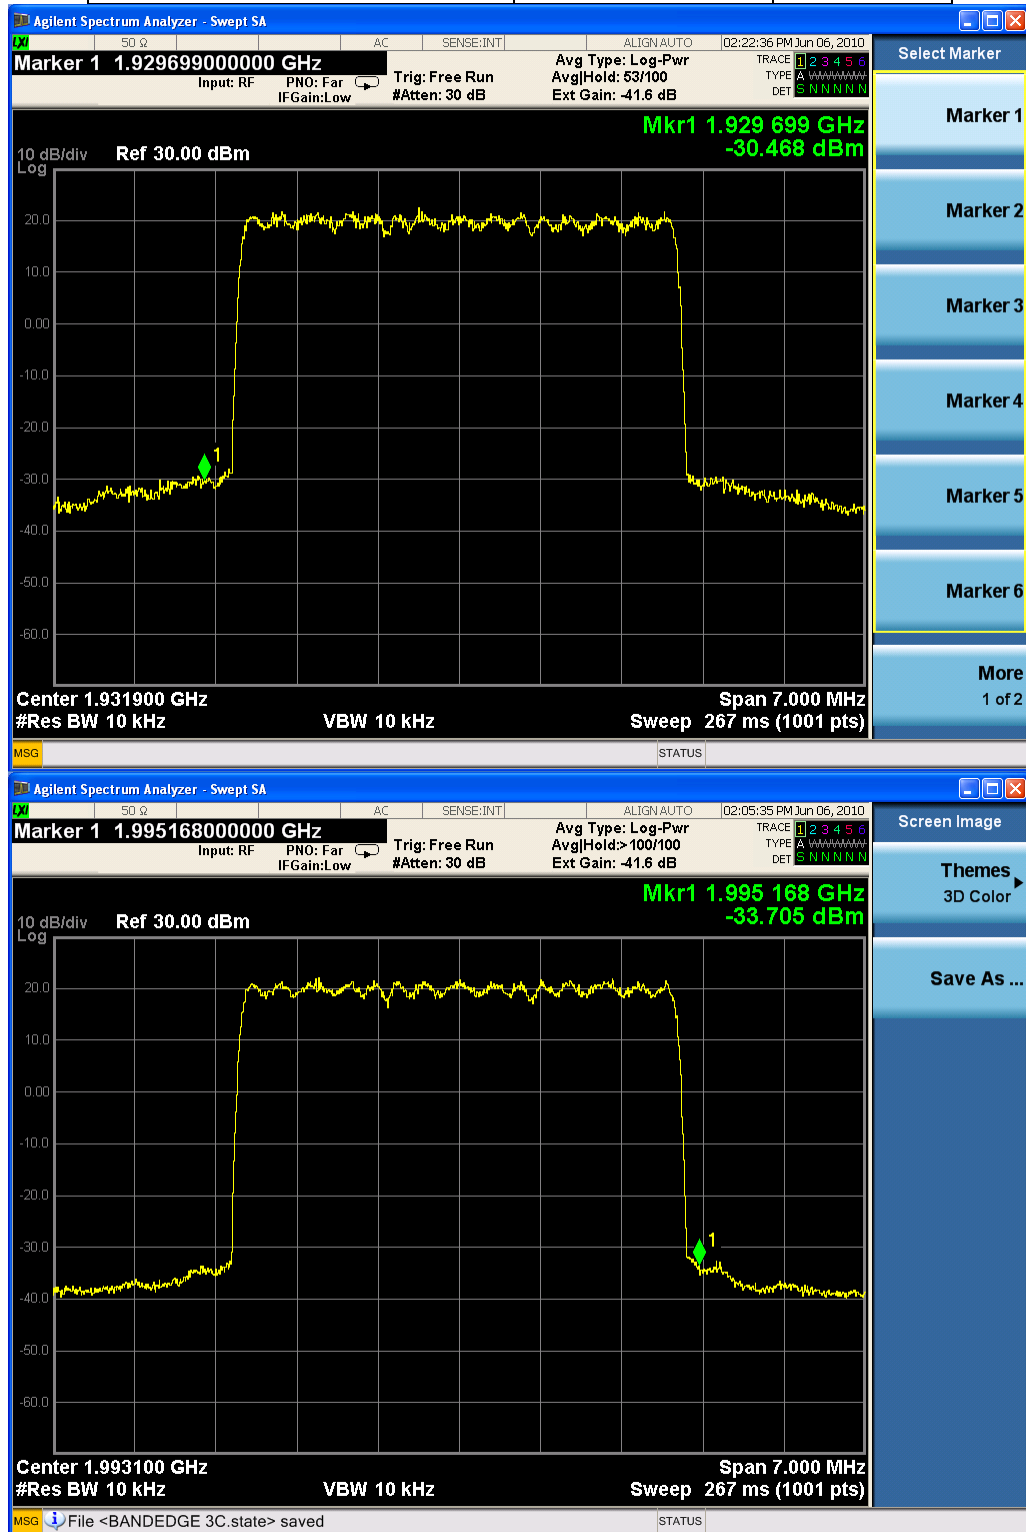


two carriers


Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1930.65/1931.90	-30.186	-13.00
1993.10/1994.35	-32.749	-13.00

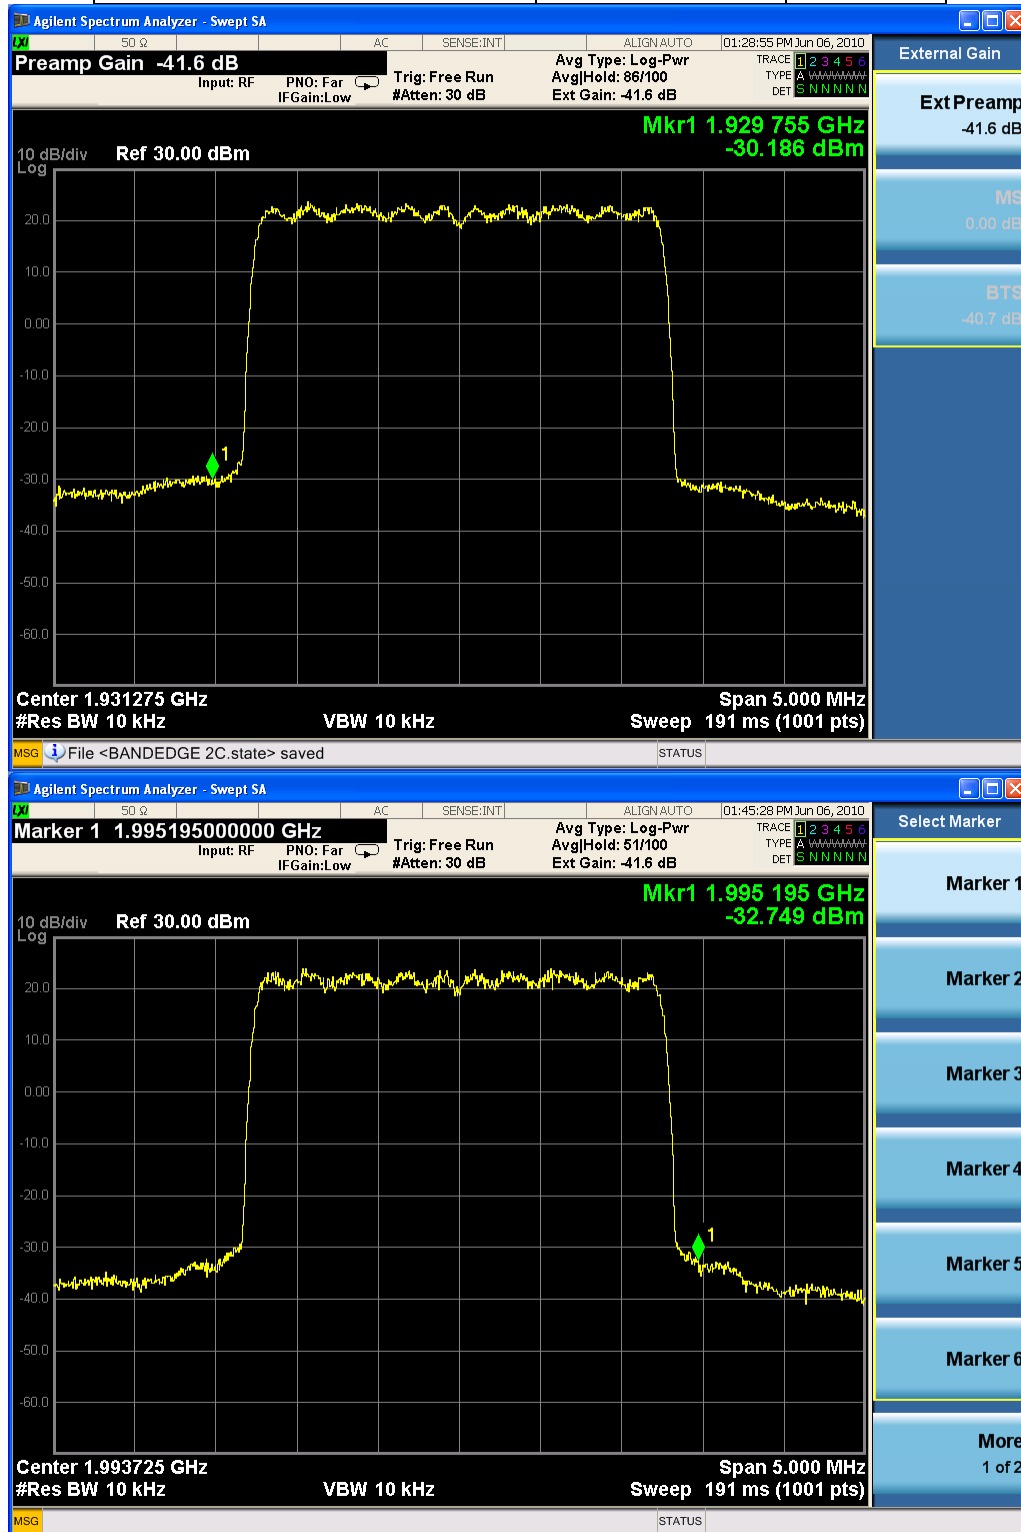

One carrier

Frequency channel	Max bandedge Emission (dBm)	Limit (dBm)
1930.65	-27.894	-13.00
1994.35	-30.340	-13.00

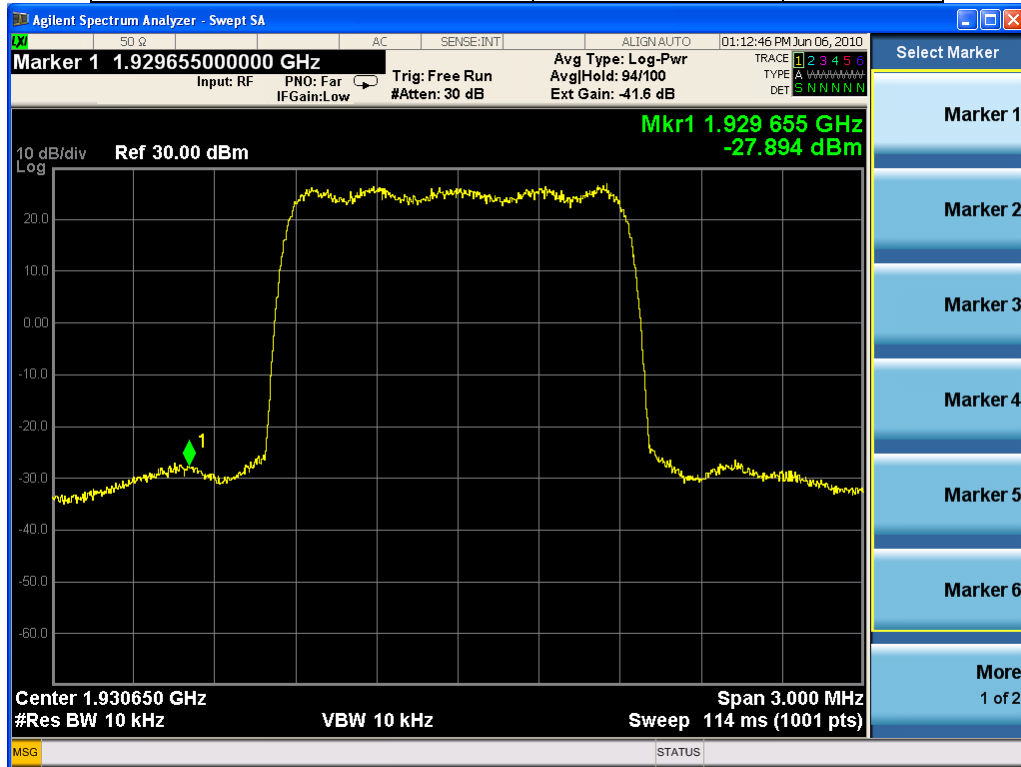

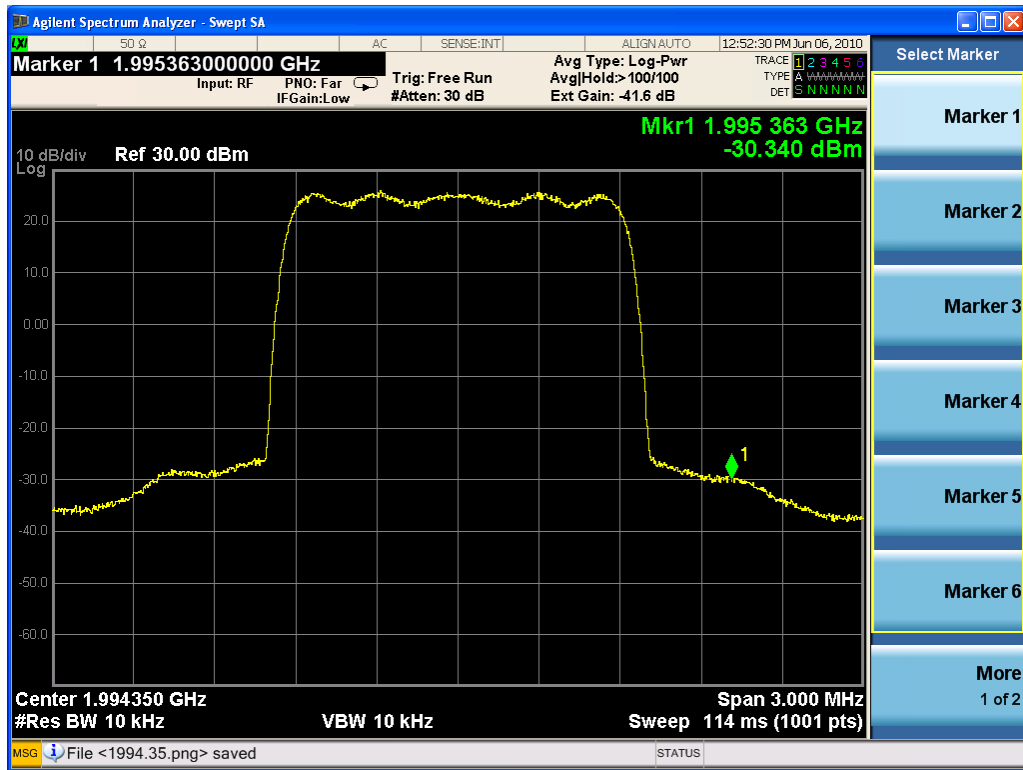

12 FREQUENCY STABILITY

Applicable Standard: FCC § 2.1055 § 24.235 IC §RSS 133 6.3 §RSS Gen 4.7

Requirements: FCC § 2.1055 (a)(d), Part24.235 and IC RSS 133 §6.3, RSS Gen §4.7
The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
GZ-ESPEC	Temperature Chamber	GRW-120	00020268	2010-1-22	2011-1-22
Agilent	MXA Series Spectrum Analyzer	N9020A	MY48011941	2010-4-9	2011-4-9
DST	DST100 40dB Attenuator	DTS100-40dB-N	N/A	N/A	N/A
Hewlett Packard	Hewlett Packard RF Cable	8120-6192	01428251	N/A	N/A

***statement of traceability:** ZTE Corporation Reliability Testing Center attest that all calibration have been performed per the NVLAP requirements , traceable to NIST.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Spectrum Analyzer via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 150 minutes, the frequency output was recorded from the counter.

Frequency Stability vs. Voltage: An external variable DC power supply Source. The voltage was set to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the end point. The output frequency was recorded for each voltage.

Environmental Conditions

Normal condition:	25° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Test Result: Pass**Test Mode:** Transmitting CDMA**Test Data****Frequency Stability Versus Temperature**

Frequency Stability vs. Temperature				
Temperature °C	Power Supplied Vdc	Frequency Measure Error Hz	Error ppm	Limit 0.02ppm
f=1930.65MHz				
-40	-48	-16.03	-0.008	PASS
-30	-48	-16.97	-0.009	PASS
-20	-48	-15.8	-0.008	PASS
-10	-48	-16.27	-0.008	PASS
0	-48	-15.79	-0.008	PASS
10	-48	-14.96	-0.008	PASS
20	-48	-16.3	-0.008	PASS
30	-48	-16.23	-0.008	PASS
40	-48	-14.12	-0.007	PASS
50	-48	-16.45	-0.009	PASS
55	-48	-14.51	-0.008	PASS
f=1962.5MHz				
-40	-48	-17.48	-0.009	PASS
-30	-48	-16.04	-0.008	PASS

-20	-48	-14.83	-0.008	PASS
-10	-48	-16.39	-0.008	PASS
0	-48	-15.05	-0.008	PASS
10	-48	-14.92	-0.008	PASS
20	-48	-14.92	-0.008	PASS
30	-48	-15.7	-0.008	PASS
40	-48	-17.74	-0.009	PASS
50	-48	-16.31	-0.008	PASS
55	-48	-16.04	-0.008	PASS
f=1994.35MHz				
-40	-48	-16.2	-0.008	PASS
-30	-48	-16.38	-0.008	PASS
-20	-48	-15.52	-0.008	PASS
-10	-48	-15.82	-0.008	PASS
0	-48	-15.93	-0.008	PASS
10	-48	-15.95	-0.008	PASS
20	-48	-17.01	-0.009	PASS
30	-48	-15.25	-0.008	PASS
40	-48	-15.09	-0.008	PASS
50	-48	-17.02	-0.009	PASS
55	-48	-17.09	-0.009	PASS

Frequency Stability Versus Voltage

Frequency Stability vs. Voltage				
Voltage Vac	Temperature °C	Frequency Measure Error Hz	Error ppm	Limit 0.02ppm
f=1930.65MHz				
40	20	-15.27	-0.008	PASS
44	20	-15.18	-0.008	PASS
47	20	-15.23	-0.008	PASS
50	20	-14.53	-0.008	PASS
53	20	-16.04	-0.008	PASS
56	20	-15.6	-0.008	PASS
57	20	-15.27	-0.008	PASS
f=1962.5MHz				
40	20	-16.11	-0.008	PASS

44	20	-14.93	-0.008	PASS
47	20	-15.05	-0.008	PASS
50	20	-16.95	-0.009	PASS
53	20	-16.49	-0.008	PASS
56	20	-15.08	-0.008	PASS
57	20	-16.11	-0.008	PASS
f=1994.35MHz				
40	20	-16.53	-0.008	PASS
44	20	-16.01	-0.008	PASS
47	20	-16.7	-0.008	PASS
50	20	-16.41	-0.008	PASS
53	20	-14.63	-0.007	PASS
56	20	-16.01	-0.008	PASS
57	20	-16.53	-0.008	PASS