



SAR TEST REPORT

Issued to

ZTE Corporation

For

Portable Tablet PC

Model Name : ZTE-T72
 Trade Name : ZTE 中兴
 Brand Name : ZTE 中兴
 FCC ID : Q78-T72
 Standard : FCC Oet65 Supplement C Jun.2001
 47CFR 2.1093
 ANSI C95.1-1999
 IEEE 1528-2003
 MAX SAR : Body: 1.171W/kg
 Test date : 2012-3-17
 Issue date : 2012-4-24

Shenzhen MORLAB Communication Technology Co., Ltd.



Tested by Zhu Zhan
 Zhu Zhan
 Date 2012.4.24

Approved by Wei Yaoli
 Wei Yaoli
 Date 2012.4.24

Review by Li Lei
 Li Lei
 Date 2012.4.24



The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his GPRSer, Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

DIRECTORY

TESTING LABORATORY	4
1.1. Identification of the Responsible Testing Laboratory	4
1.2. Identification of the Responsible Testing Location	4
1.3. Accreditation Certificate	4
1.4. List of Test Equipments	4
2. TECHNICAL INFORMATION	5
2.1. Identification of Applicant	5
2.2. Identification of Manufacturer	5
2.3. Equipment Under Test (EUT)	5
2.3.1. Photographs of the EUT	5
2.3.2. Identification of all used EUT	5
2.4. Applied Reference Documents	6
2.5. Device Category and SAR Limits	6
2.6. Test Environment/Conditions	7
3. SPECIFIC ABSORPTION RATE (SAR)	8
3.1. Introduction	8
3.2. SAR Definition	8
4. SAR MEASUREMENT SETUP	9
4.1. The Measurement System	9
4.2. Probe	9
4.3. Probe Calibration Process	11
4.3.1 Dosimetric Assessment Procedure	11
4.3.2 Free Space Assessment Procedure	11
4.3.2 Temperature Assessment Procedure	11
4.4. Phantom	12
4.5. Device Holder	12
5. TISSUE SIMULATING LIQUIDS	13
6. UNCERTAINTY ASSESSMENT	14
6.1. UNCERTAINTY EVALUATION FOR HANDSET SAR TEST	14
6.2. UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK	15
7. SAR MEASUREMENT EVALUATION	17

7.1. System Setup	17
7.2. Validation Results	18
8. OPERATIONAL CONDITIONS DURING TEST	19
8.1. Body-worn Configurations	19
8.2. Measurement procedure	19
8.3. Description of interpolation/extrapolation scheme	20
9. 3G MEASUREMENT PROCEDURES	21
9.1. Procedures Used To Establish Test Signal	21
9.2. Output Power Verification	21
9.3. SAR Measurements	21
9.4. Measurement Of Conducted Peak Output Power	23
10. WIRELESS HOT SPOT SAR EVALUATION PROCEDURES	26
11. TEST RESULTS LIST	27
12. MULTIPLE TRANSMITTERS EVALUATION	30
ANNEX A EUT SETUP PHOTOS	31
ANNEX B GRAPH TEST RESULTS	34

Change History		
Issue	Date	Reason for change
1.0	Mar. 27 ,2012	First edition
2.0	Apr. 11 ,2012	Revise some mistakes about numbers.
3.0	Apr. 18,2012	Add evaluation of HSDPA/HSUPA.

Testing Laboratory

1.1. Identification of the Responsible Testing Laboratory

Company Name: Shenzhen Morlab Communications Technology Co., Ltd.
 Department: Morlab Laboratory
 Address: 3/F, Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, 518055 P. R. China
 Responsible Test Lab Manager: Mr. Shu Luan
 Telephone: +86 755 86130268
 Facsimile: +86 755 86130218

1.2. Identification of the Responsible Testing Location

Name: Shenzhen Morlab Communications Technology Co., Ltd.
 Morlab Laboratory
 Address: 3/F, Electronic Testing Building, Shahe Road, Nanshan District, Shenzhen, 518055 P. R. China

1.3. Accreditation Certificate

Accredited Testing Laboratory: No. CNAS L3572

1.4. List of Test Equipments

No.	Instrument	Type	Cal. Date	Cal. Due
1	PC	Dell (Pentium IV 2.4GHz, SN:X10-23533)	(n.a)	(n.a)
2	Network Emulator	Rohde&Schwarz (CMU200, SN:105894)	2011-9-26	1year
3	Voltmeter	Keithley (2000, SN:1000572)	2011-9-24	1year
4	Synthetizer	Rohde&Schwarz (SML_03, SN:101868)	2011-9-24	1year
5	Amplifier	Nucl udes (ALB216, SN:10800)	2011-9-24	1year
6	Power Meter	Rohde&Schwarz (NRVD, SN:101066)	2011-9-24	1year
7	Probe	Satimo (SN:SN_3708_EP80)	2011-9-24	1year
8	Phantom	Satimo (SN:SN_36_08_SAM62)	2011-9-24	1year
9	Liquid	Satimo (Last Calibration: 2012-3-17)	N/A	N.A
10	Dipole 835MHz	Satimo (SN 36/08 DIPC 99)	2011-9-24	1year
11	Dipole 1900MHz	Satimo (SN 36/08 DIPF 102)	2011-9-24	1year
12	Dipole 2450MHz	Satimo (SN 36/08 DIPJ 103)	2011-9-24	1year

2. Technical Information

Note: the following data is based on the information by the applicant.

2.1. Identification of Applicant

Company Name: ZTE Corporation
Address: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R. China

2.2. Identification of Manufacturer

Company Name: ZTE Corporation
Address: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R. China

2.3. Equipment Under Test (EUT)

Model Name: ZTE-T72
Trade Name: ZTE 中兴
Brand Name: ZTE 中兴
Hardware Version: P1.1
Software Version: 2.6.35.3-01198-gd0e5eb9
Frequency Bands: GSM 850MHz / PCS 1900MHz; WCDMA 850MHz/1900MHz; WIFI802.11 B/G/N; Bluetooth
Modulation Mode: GPRS: GMSK; EDGE: 8PSK; WIFI802.11B: DSSS; WIFI802.11G: OFDM; WIFI802.11N: OFDM; WCDMA/HSDPA/HSUPA: QPSK
Multislot Class: GPRS: Multislot Class 12; EDGE: Multislot Class 12
Antenna type: Fixed Internal Antenna
Development Stage: Identical prototype
Battery Model: BST27210
Battery specification: 2200mAh 7.4V
3GPP Version: Release 6

2.3.1. Photographs of the EUT

Please see for photographs of the EUT.

2.3.2. Identification of all used EUT

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
1#	P1.1	2.6.35.3-01198-gd0e5eb9

2.4. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR§2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
2	FCC OET Bulletin 65 (Edition 97-01), Supplement C (Edition 01-01)	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields
3	ANSI C95.1-1999	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 GHz
4	IEEE 1528-2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.
5	KDB 616217 D03	SAR Evaluation Considerations for Laptop/Notebook/Netbook and Tablet Computers
6	KDB 447498 D01	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
7	KDB 941225 D6	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
8	KDB 2484227	SAR Measurement Procedures for 802.11 a/b/g Transmitters

2.5. Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

2.6. Test Environment/Conditions

Normal Temperature (NT):	20 ... 25 °C
Relative Humidity:	30 ... 75 %
Air Pressure:	980 ... 1020 hPa
Test frequency:	GSM 850MHz PCS 1900MHz WCDMA 850MHz WCDMA1900MHz WIFI 802.11B/G/N
Operation mode:	Call established/Data transmitting
Power Level:	GSM 850 MHz Maximum output power(level 5) PCS 1900 MHz Maximum output power(level 0) WCDMA Maximum output power(All up bits) WIFI Maximum output power

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 125, 190 and 251 respectively in the case of GSM 850 MHz, or to 512, 661 and 810 respectively in the case of PCS 1900 MHz ,or to 9262, 9400 and 9538 respectively in the case of WCDMA 19000, or to 4132, 4175 and 4233 respectively in the case of WCDMA 850. The EUT is commanded to operate at maximum transmitting power.

During WIFI SAR test, the EUT was located at channel 1, 6, 11. And EUT was commanded to operate at maximum transmitting power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

For SAR testing, EUT is in GPRS/EDGE or WCDMA link mode. In GPRS/EDGE link mode, its crest factor is 2, because EUT is set in GPRS/EDGE multi-slot class 12 with 4 uplink slots. In WCDMA and WIFI mode, its crest factor is 1.

3. Specific Absorption Rate (SAR)

3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \frac{\delta T}{\delta t}$$

, where C is the specific heat capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

, where σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4. SAR Measurement Setup

4.1. The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

4.2. Probe


For the measurements the Specific Dosimetric E-Field Probe SN 37/08 EP80 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 6.5 mm
- Distance between probe tip and sensor center: 2.5mm
- Distance between sensor center and the inner phantom surface: 4 mm
(repeatability better than +/- 1mm)

- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.25 dB
- Calibration range: 835 to 2500 MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with CENELEC EN 62209 and IEEE 1528 std, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 622091 annexe technique using reference guide at the five frequencies.

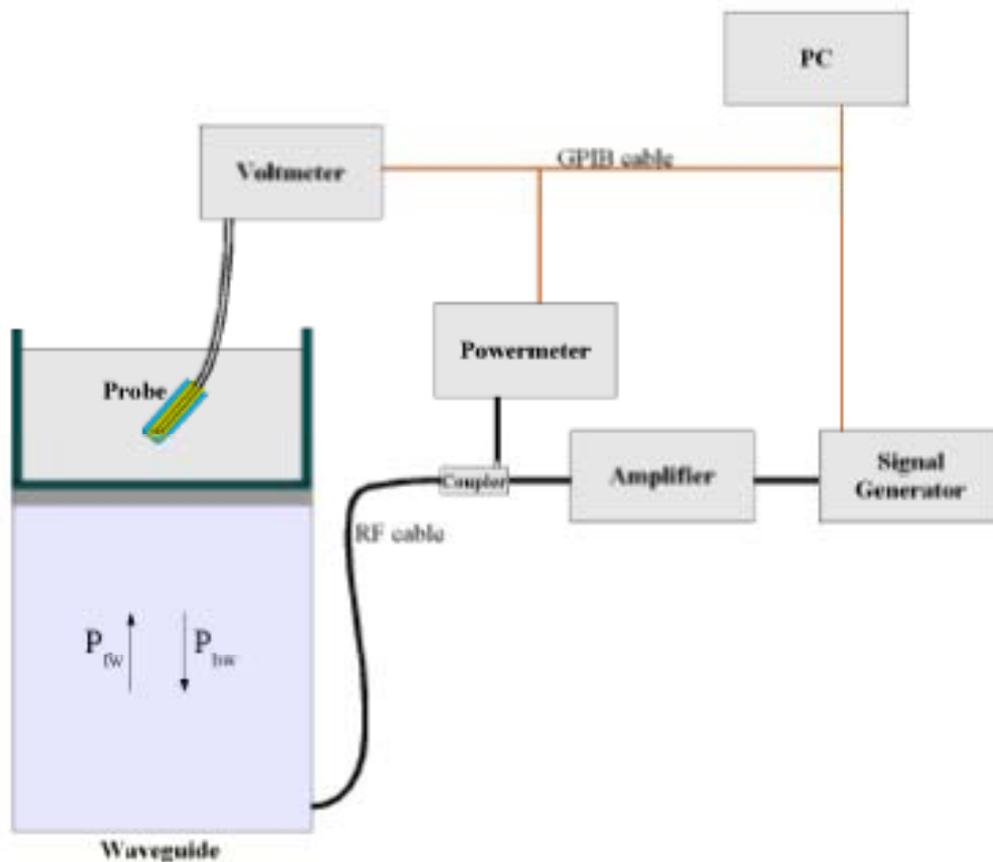

$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi \frac{y}{a}\right) e^{-2z/\delta}$$

Where :

P_{fw} = Forward Power

P_{bw} = Backward Power

a and b = Waveguide dimensions

δ = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS=10; FILTER TYPE = MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N) = SAR(N) / V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage $V_{lin}(N)$ is obtained from the displayed output voltage $V(N)$ using

$$V_{lin}(N) = V(N) * (1 + V(N) / DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

4.3. Probe Calibration Process

4.3.1 Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an with CALISAR, Antenna proprietary calibration system.

4.3.2 Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

4.3.2 Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = simulated tissue conductivity,


ρ = Tissue density (1.25 g/cm³ for brain tissue)

4.4. Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

4.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

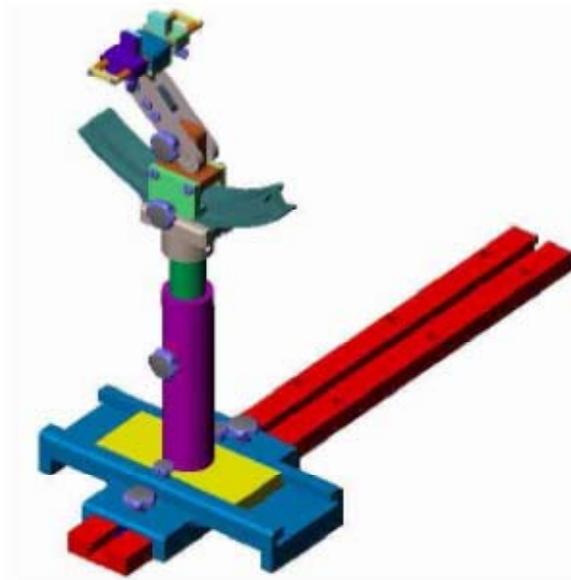

Device holder

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

5. Tissue Simulating Liquids

Simulant liquids that are used for testing at frequencies of 850, 1900MHz and 2450MHz. which are made mainly of sugar, salt and water solutions may be left in the phantoms. Approximately 20litres are needed for an upright head compared to about 25 litres for a horizontal bath phantom. The liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is (head SAR) or from the flat phantom to the liquid top surface (body SAR) is 15cm.

Following are the recipes for one liter of head and body tissue simulating liquid for frequency band 835 MHz, 1900 MHz and 2450 MHz.

Ingredients (% by weight)	Frequency Band	Frequency Band	Frequency Band
	835MHz	1900MHz	2450MHz
Tissue Type	Body	Body	Body
Water	52.4	40.4	73.2
Salt(NaCl)	1.4	0.5	0.04
Sugar	45.0	58.0	0.0
HEC	1.0	1.0	0.0
Bactericide	0.1	0.1	0.0
Triton	0.0	0.0	0.0
DGBE	0.0	0.0	0.0
Acticide SPX	0.0	0.0	26.7
Dielectric Constant	56.1	54.0	52.5
Conductivity (S/m)	0.95	1.45	1.78

Recipes for Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85033E Dielectric Probe Kit and an Agilent Network Analyzer.

For body-worn measurements, the device was tested against flat phantom representing the user body. Under measurement phone was put on in the phone holder.

Table 1: Dielectric Performance of Body Tissue Simulating Liquid

Temperature: 23.0~23.8°C, humidity: 54~60%.			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	835 MHz	55.2	0.97
Validation value (Mar. 17)	835 MHz	55.709999	0.980903
Target value	1900 MHz	53.3	1.52
Validation value (Mar. 17)	1900 MHz	53.261611	1.553978
Target value	2450 MHz	52.7	1.95
Validation value (Mar. 17)	2450 MHz	52.548876	1.974257

6. Uncertainty Assessment

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Antennessa.

6.1. UNCERTAINTY EVALUATION FOR HANDSET SAR TEST

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	lg Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.76	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.01	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.62	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Test sample Related									
Test sample positioning	E.4.2.1	0.03	N	1	1	1	0.03	0.03	N-1
Device Holder Uncertainty	E.4.1.1	5.00	N	1	1	1	5.00	5.00	N-1
Output power Power drift - SAR drift measurement	6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.33	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞

Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.13	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	1	0.64	0.43	3.20	2.15	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.04	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	1	0.6	0.49	6.00	4.90	M
Combined Standard Uncertainty			RSS				11.55	10.67	
Expanded Uncertainty (95% Confidence interval)			K=2				23.11	21.33	

6.2. UNCERTAINTY FOR SYSTEM PERFORMANCE CHECK

a	b	c	d	e= f(d,k)	f	g	h= c*f/e	i= c*g/e	k
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	Vi
Measurement System									
Probe calibration	E.2.1	4.76	N	1	1	1	4.76	4.76	∞
Axial Isotropy	E.2.2	2.5	R	$\sqrt{3}$	0.7	0.7	1.01	1.01	∞
Hemispherical Isotropy	E.2.2	4.0	R	$\sqrt{3}$	0.7	0.7	1.62	1.62	∞
Boundary effect	E.2.3	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	E.2.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
System detection limits	E.2.5	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	E.2.6	0.02	N	1	1	1	0.02	0.02	∞
Reponse Time	E.2.7	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Integration Time	E.2.8	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
RF ambient Conditions	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner Mechanical Tolerance	E.6.2	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Probe positioning with respect to Phantom Shell	E.6.3	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	E.5.2	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole									
Dipole axis to liquid Distance	8,E.4.2	1.00	N	$\sqrt{3}$	1	1	0.58	0.58	∞

Input power and SAR drift measurement	8,6.6.2	4.04	R	$\sqrt{3}$	1	1	2.33	2.33	∞
Phantom and Tissue Parameters									
Phantom Uncertainty (Shape and thickness tolerances)	E.3.1	0.05	R	$\sqrt{3}$	1	1	0.03	0.03	∞
Liquid conductivity - deviation from target value	E.3.2	4.57	R	$\sqrt{3}$	0.64	0.43	1.69	1.13	∞
Liquid conductivity - measurement uncertainty	E.3.3	5.00	N	$\sqrt{3}$	0.64	0.43	1.85	1.24	M
Liquid permittivity - deviation from target value	E.3.2	3.69	R	$\sqrt{3}$	0.6	0.49	1.28	1.04	∞
Liquid permittivity - measurement uncertainty	E.3.3	10.00	N	$\sqrt{3}$	0.6	0.49	3.46	2.83	M
Combined Standard Uncertainty			RSS				8.83	8.37	
Expanded Uncertainty (95% Confidence interval)			K=2				17.66	16.73	

7. SAR Measurement Evaluation


7.1. System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 835 MHz, 1900 MHz and 2450MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom.

Equipments:

name	Type and specification
Signal generator	E4433B
Directional coupler	450MHz-3GHz
Amplifier	3W 502(10-2500MHz)
Reference dipole	835MHz:SN 36/08 DIPC 99 1900MHz:SN 36/08 DIPF 102 2450MHz:SN 36/08 DIPJ 103

System Verification Setup Block Diagram

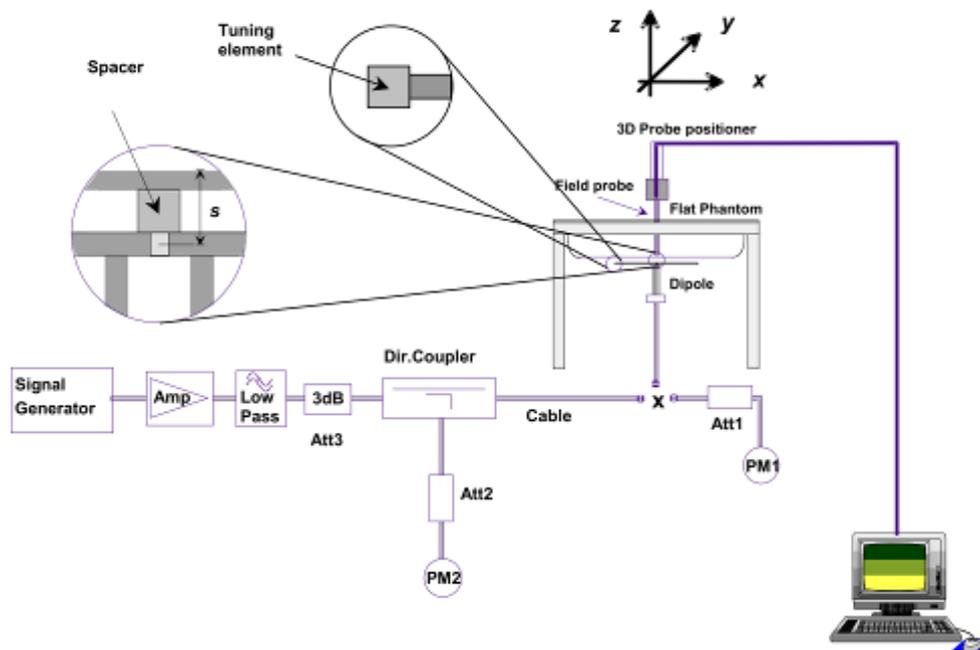

7.2. Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %.

Cal. On Mar.17, 2012

Frequency	835MHz(Body)	1900MHz(Body)	2450MHz(Body)
Target value (1g)	9.714 W/Kg	39.89 W/Kg	52.4 W/Kg
250 mW input power	2.386 W/Kg	9.740 W/Kg	12.789 W/Kg
Test value (1g)	9.544W/Kg	38.960 W/Kg	51.156 W/Kg

Note: System checks the specific test data please see page 95~100.

8. Operational Conditions During Test

The EUT antenna and battery are those specified by the manufacturer. The battery is fully charged before each measurement. The output power and frequency are controlled using a base station simulator. The EUT is set to transmit at its highest output peak power level.


Remark: Please refer to Appendix B for the test setup photos.

8.1. Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

The depth of the body tissue was 15.1cm. The distance between the back of the device and the bottom of the flat phantom is 1.5cm(taking into account of the IEEE 1528 and the place of the antenna)

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

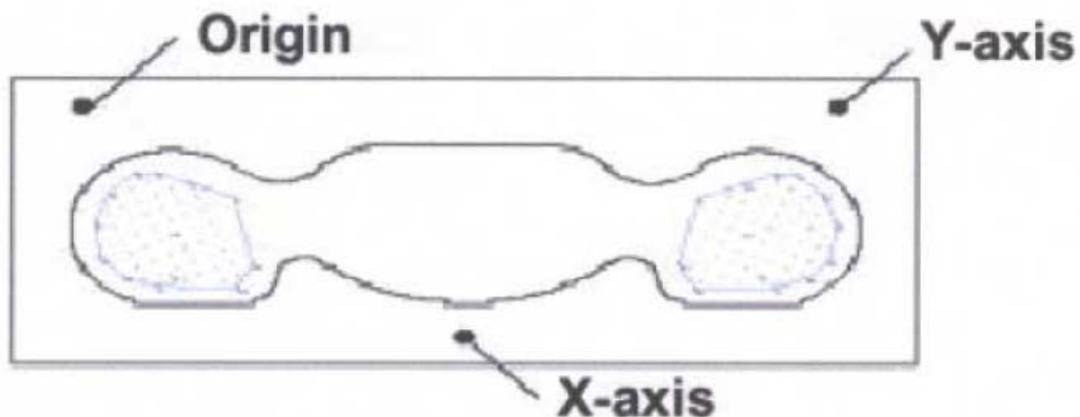

SAR Measurement Points in Area Scan

8.2. Measurement procedure

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.

- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

8.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

9. 3G MEASUREMENT PROCEDURES

9.1. Procedures Used To Establish Test Signal

The following procedures are applicable to HSPA (HSUPA/HSDPA) data devices operating under 3GPP Release 6. Body exposure conditions generally apply to these devices, including handset and data modems operating in various electronic devices. HSUPA operates in conjunction with WCDMA and HSDPA. SAR is initially measured in WCDMA test configurations without HSPA. The default test configuration is to establish a radio link between the DUT and a communication test set to configure a 12.2 kbps RMC (reference measurement channel) in Test Loop Mode 1. SAR for HSPA is selectively measured with HS-DPCCH, E-DPCCH and E-DPDCH, all enabled, along with a 12.2 kbps RMC using the highest SAR configuration in WCDMA with 12.2 kbps RMC only. An FRC is configured according to E-DCH Subtest 5 requirements. SAR for other HSPA sub-test configurations is also confirmed selectively according to output power is verified according to procedures in applicable version of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. The UE Categories for HS-DPCCH and HSPA should be clearly identified in the SAR report. The following procedures are applicable only if Max Power Reduction (MPR) is implemented according to Cubic Metric (CM) requirements.

9.2. Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC(transmit power control) set to all "1s". Results for all applicable physical channel configurations (DPCCH, DPDCH and spreading codes) should be tabulated in the test report. All configurations that are not supported by the EUT or cannot be measured due to technical or equipment limitations should be clearly identified.

9.3. SAR Measurements

When voice transmission and head exposure conditions are applicable to a WCDMA/HSPA data device, head exposure is measured according to the 'Head SAR Measurements' of the handset. SAR for body exposure configurations is measured according to the 'Body SAR Measurements' procedures of WCDMA handsets. In addition, body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least 1/4 dB Higher than that measured without HSPA using 12.2 kbps RMC or maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP is applicable for head exposure, SAR is not required when the maximum output of each RF channel with HSPA is less than 1/4 dB higher than that measured using 12.2 kbps RMC; otherwise, the same HSPA configuration used for body measurements should be used to test for head exposure.

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set and E-DCH configurations for HSPA

should be configured according to the β values indicated below.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF0) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Sub-test 5 Setup for Release 6 HSUPA

E-DCH category	Maximum number of E-DCH codes transmitted per transport block	Minimum spreading factor	Support for 10 and 2 ms TTI EDCH	Maximum number of bits of an E-DCH transport block transmitted within a 10 ms E-DCH TTI	Maximum number of bits of an E-DCH transport block transmitted within a 2 ms E-DCH TTI
Category 1	1	SF4	10 ms TTI only	7110	-
Category 2	2	SF4	10 ms and 2 ms TTI	14484	2798
Category 3	2	SF4	10 ms TTI only	14484	-
Category 4	2	SF2	10 ms and 2 ms TTI	20000	5772
Category 5	2	SF2	10 ms TTI only	20000	-
Category 6	4	SF2	10 ms and 2 ms TTI	20000	11484
Category 7	4	SF2	10ms and 2 ms TTI	20000	22996
Category 8	4	SF2	2 ms TTI	-	11484
Category 9	4	SF2	2 ms TTI	-	22996

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4

HSPA UE category

9.4. Measurement Of Conducted Peak Output Power.

1. WCDMA Conducted peak output power

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4175	4233	9262	9400	9538
	subtest	dBm			dBm		
5.2(WCDMA)	non	22.47	22.71	22.59	22.63	22.75	22.65
HSDPA	1	22.42	22.65	22.45	22.55	22.68	22.61
	2	22.43	22.67	22.44	22.53	22.66	22.59
	3	21.95	21.13	21.93	22.07	21.41	22.12
	4	21.93	21.16	21.92	22.05	21.85	21.11
HSUPA	1	22.18	22.37	22.35	21.62	21.23	21.19
	2	20.17	20.35	20.31	20.61	19.79	19.38
	3	21.25	21.33	21.33	21.52	20.21	20.27
	4	20.16	20.41	20.39	20.58	19.22	19.37
	5	22.16	22.32	22.33	22.63	21.19	21.17

Band	Channel	Power Drift (%)
WCDMA 850	4132	0.12
	4175	-0.32
	4233	0.67
WCDMA 1900	9262	-0.26
	9400	0.57
	9538	0.06

2. Wifi peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			Power Drift (%)
			802.11B (DSSS)	802.11G (OFDM)	802.11N (OFDM)	802.11B (DSSS)
WiFi	1	2412	14.12	12.73	12.51	-1.36
	6	2437	13.94	12.96	12.89	/
	11	2462	13.59	11.91	11.90	/

3. Bluetooth peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)		
			GFSK	$\Pi/4$ -DQPSK	8-DPSK
BT	0	2402	6.036	6.648	6.802
	38	2441	6.274	6.765	6.825
	79	2480	7.636	8.008	8.114

4. GPRS Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	30.99	30.97	31.00	30.92
	190	836.6	31.65	31.57	31.46	31.60
	251	848.8	31.62	31.66	31.65	31.73
PCS 1900	512	1850.2	28.58	28.62	28.56	28.52
	661	1880.0	28.62	28.73	28.63	28.70
	810	1909.8	28.27	28.20	28.23	28.32

GPRS Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)				Power Drift (%)
			Slot 1	Slot 2	Slot 3	Slot 4	Slot 4
GSM 850	128	824.2	21.99	24.95	26.74	27.91	-1.32
	190	836.6	22.65	25.55	27.20	28.59	1.29
	251	848.8	22.62	25.64	27.39	28.72	-0.72
PCS 1900	512	1850.2	19.58	22.60	24.30	25.51	
	661	1880.0	19.62	22.71	24.37	25.69	0.81
	810	1909.8	19.27	22.18	23.97	25.31	

Timeslot consignations:

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2Up2Down	3Up2Down	4Up1Down
Duty Cycle	1:8	1:4	1:2.67	1:2
Correct Factor	-9.00dB	-6.02dB	-4.26dB	-3.01dB

Note: 1. Correct Factor= $10 \cdot \log$ (Duty Cycle)

2. Average Power= Peak Power+ Correct Factor

5. EDGE Mode Conducted peak output power

Band	Channel	Frequency (MHz)	Output Power(dBm)			
			Slot 1	Slot 2	Slot 3	Slot 4
GSM 850	128	824.2	31.03	30.95	30.93	30.96
	190	836.6	31.55	31.65	31.56	31.69
	251	848.8	31.76	31.74	31.78	31.79
PCS 1900	512	1850.2	28.62	28.63	28.57	28.60
	661	1880.0	28.71	28.73	28.69	28.75
	810	1909.8	28.25	28.34	28.26	28.30

EDGE Time-based Average Power

Band	Channel	Frequency (MHz)	Output Power(dBm)				Power Drift (%)
			Slot 1	Slot 2	Slot 3	Slot 4	Slot 4
GSM 850	128	824.2	22.03	24.93	26.67	27.95	-1.20
	190	836.6	22.55	25.63	27.30	28.68	-0.12
	251	848.8	22.76	25.72	27.52	28.78	1.62
PCS 1900	512	1850.2	19.62	22.61	24.31	25.59	
	661	1880.0	19.71	22.71	24.43	25.74	0.67
	810	1909.8	19.25	22.32	24.00	25.29	

Timeslot consignations:

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2Up2Down	3Up2Down	4Up1Down
Duty Cycle	1:8	1:4	1:2.67	1:2
Correct Factor	-9.00dB	-6.02dB	-4.26dB	-3.01dB


Note: 1. Correct Factor= $10 \cdot \log$ (Duty Cycle)

2. Average Power= Peak Power+ Correct Factor

10. Wireless Hot Spot SAR Evaluation Procedures

This Portable Devices with Wireless Router function. And the SAR evaluation procedures accord with KDB 941225 D06 Hot Spot SAR v01.

1. SAR must be tested for all surfaces and edges (side) with a transmitting antenna with in 2.5 cm from that surface or edge, at a test separation distance of 5 mm, in the wireless modes that support wireless routing.
2. Edge configurations:

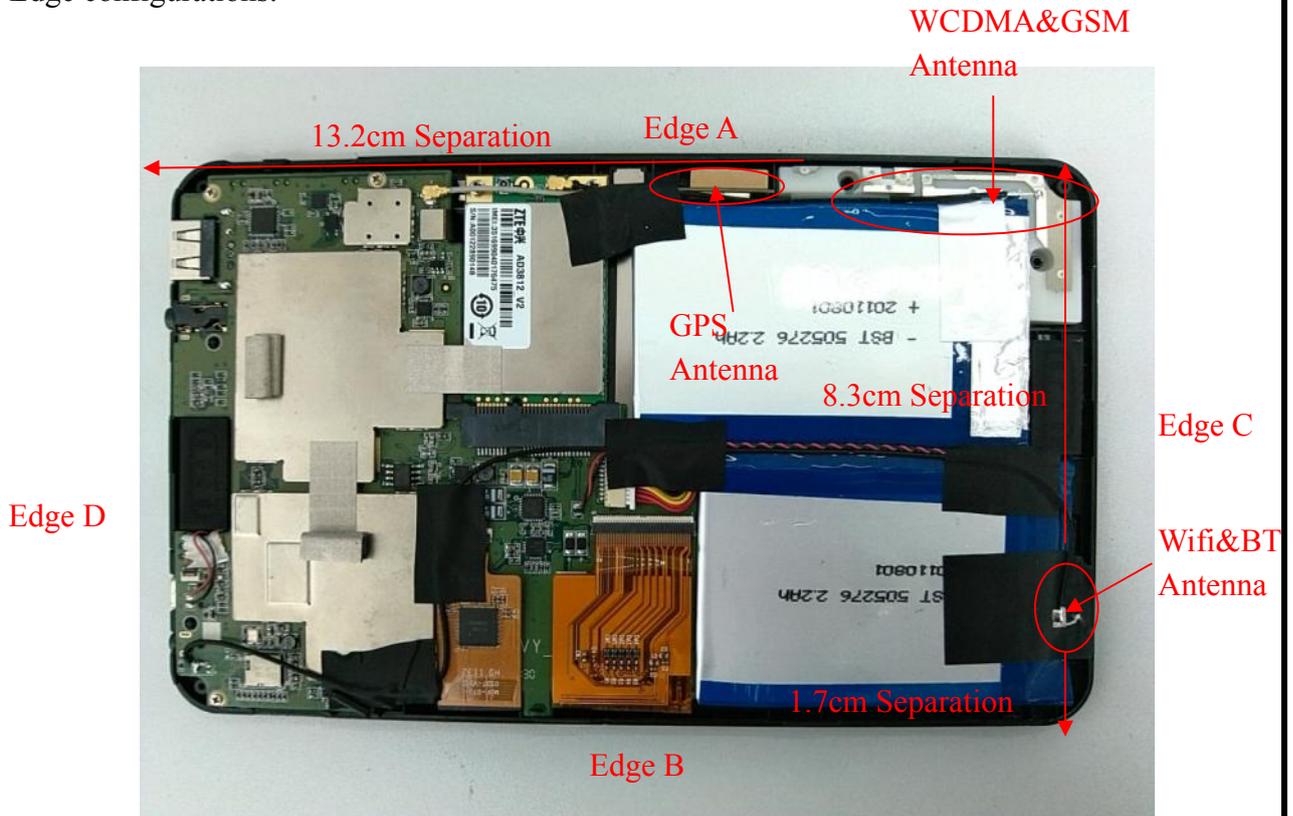

3. WCDMA&GSM antenna is located at edge C, the distance between WCDMA&GSM antenna and edge D is 13.2cm larger than 2.5cm, and the distance between WCDMA&GSM antenna and Edge B, is larger than 2.5cm, according to KDB941225 D06, the SAR measurement of edge B&D of WCDMA and GSM are not required.
4. Wifi antenna is located at Edge C, the distance between wifi&BT antenna and edge A is 8.3cm large than 2.5 cm, and the distance between wifi&BT antenna and Edge D, is larger than 2.5cm. according to KDB941225 D06, the SAR measurement of Edge A&D, are not required.

11. Test Results List

Summary of Measurement Results (GSM 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations		Device Test Positions	SAR(W/Kg), 1g Peak		
			Device Test channel,		
			Channel 128	Channel 190	Channel 251
Body (5mm Separation)	GPRS	Back upward	1.171	1.048	1.113
		Face Upward	/	/	0.742
		EDGE A	/	/	0.565
		EDGE C	/	/	0.341
	EDGE	Back upward	0.824	0.929	0.891

Note: The highest power channel is 251 for GPRS/EDGE mode, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 447498, testing for the other channels is not required.

Summary of Measurement Results (GSM 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.					
Phantom Configurations		Device Test Positions	SAR(W/Kg), 1g Peak		
			Device Test channel,		
			Channel 512	Channel 661	Channel 810
Body (5mm Separation)	GPRS	Back upward	/	0.729	/
		Face Upward	/	0.342	/
		EDGE A	/	0.455	/
		EDGE C	/	0.505	
	EDGE	Back upward	/	0.715	/

Note: The highest power channel is 661 for GPRS/EDGE mode, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 447498, testing for the other channels is not required.

Summary of Measurement Results (WCDMA 850MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.				
Phantom Configurations	Device Test Positions	SAR(W/Kg), 1g Peak		
		Device Test channel		
		Channel 4132	Channel 4175	Channel 4233
Body (5mm Separation)	Back upward	0.982	1.107	0.976
	Face Upward	/	0.497	/
	EDGE A	/	0.612	/
	EDGE C	/	0.652	/

- Note: 1. The highest power channel is 4175 for WCDMA 850MHz mode, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 447498, testing for the other channels is not required.
2. Maximum SAR for 12.2kbps RMC is 1.107 W/Kg \leq 75% of the SAR limit (i.e. 1.2W/Kg 1g) and maximum average output of each RF channel with HSUPA/HSDPA active is less than 1/4 dB higher than that measured without HSUPA/HSDPA using 12.2kbps RMC (refer to Page 22 of the report), according to KDB 941225D01v02, SAR is not required for this handset with HSPA capabilities.

Summary of Measurement Results (WCDMA 1900MHz Band)

Temperature: 21.0~23.8°C, humidity: 54~60%.				
Phantom Configurations	Device Test Positions	SAR(W/Kg), 1g Peak		
		Device Test channel		
		Channel 9262	Channel 9400	Channel 9538
Body (5mm Separation)	Back upward	0.862	0.803	0.819
	Face Upward	/	0.650	/
	EDGE A	/	0.676	/
	EDGE C		0.507	

- Note:1.The highest power channel is 9400 for WCDMA 1900MHz mode, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, refer to KDB 447498, testing for the other channels is not required.
2. Maximum SAR for 12.2kbps RMC is 0.862 W/Kg \leq 75% of the SAR limit (i.e. 1.2W/Kg 1g) and maximum average output of each RF channel with HSUPA/HSDPA active is less than 1/4 dB higher than that measured without HSUPA/HSDPA using 12.2kbps RMC (refer to Page 22 of the report), according to KDB 941225D01v02, SAR is not required for this handset with HSPA capabilities.

Summary of Measurement Results (WLAN 802.11B Band)


Temperature: 21.0~23.8°C, humidity: 54~60%.				
Phantom Configurations	Device Test Positions	SAR(W/Kg), 1g Peak		
		Device Test channel		
		Channel 1	Channel 6	Channel 11
Body (5mm Separation)	Back upward	0.106	/	/
	Face Upward	0.069	/	/
	EDGE B	0.064	/	/
	EDGE C	0.098	/	/

Note:

1. The highest power channel is 1 at 802.1B mode, refer to KDB 447498, when the SAR of highest power channel of each configurations is less than 0.8 W/kg, testing for the other channels is not required.
2. WCDMA&GSM antenna is located at edge C, the distance between WCDMA&GSM antenna and edge D is 13.2cm larger than 2.5cm, and the distance between WCDMA&GSM antenna and Edge B, is larger than 2.5cm, according to KDB941225 D06, the SAR measurement of edge B&D of WCDMA and GSM are not required.
3. Wifi antenna is located at Edge C, the distance between wifi&BT antenna and edge A is 8.3cm large than 2.5 cm, and the distance between wifi&BT antenna and Edge D, is larger than 2.5cm. according to KDB941225 D06, the SAR measurement of Edge A&D, are not required.

12. Multiple Transmitters Evaluation


The are three transmitters build in EUT, As following :

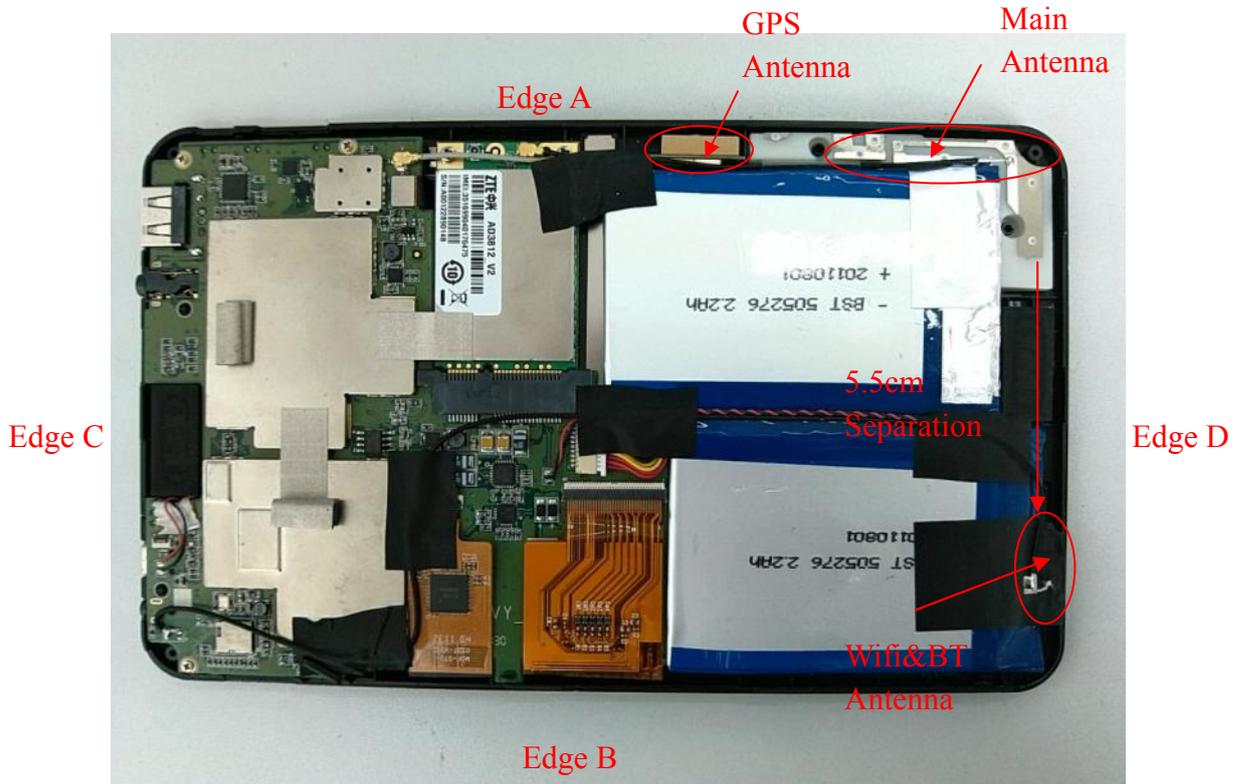

1. The EUT is a tablet, only has a touchscreen interface.
2. The BT Max. Peak output power is 8.11dBm (6.47mW) less than 25mW {60/f(GHz) , f(GHz)=2.4}, according to KDB 616217, Bluetooth Stand-alone SAR is not required.
3. The GPS antenna can't support transmitting.
4. The GSM and WCDMA can't simultaneous transmitting.
5. The BT and Wifi can't transmit simultaneously.
6. The Wifi mode Body Max. 1-g SAR vauel is **0.106W/Kg** (SAR₁), and the Main Antenna Body Max. 1-g SAR vauel is **1.171W/Kg**(SAR₂) , the separation distance between the antenna pair is 5.5cm greater than $5 \cdot [(SAR_1 + SAR_2) / 1.6]^{1.5} \text{ cm} \approx 4$, according to **KDB 616217 D03 4) b) i)** ,simultaneous transmission SAR evaluation is not required for Wifi Antenna and Main Antenna.
7. The BT mode Body Max. 1-g SAR vauel is **0W/Kg**(SAR₁), and and the Main Antenna Body Max. 1-g SAR vauel is **1.171W/Kg**(SAR₂) , the separation distance between the antenna pair is 5.5cm greater than $5 \cdot [(SAR_1 + SAR_2) / 1.6]^{1.5} \text{ cm} \approx 4$, according to **KDB 616217 D03 4) b) i)** ,simultaneous transmission SAR evaluation is not required for BT Antenna and Main Antenna.

Annex A EUT Setup Photos

1. Back upward

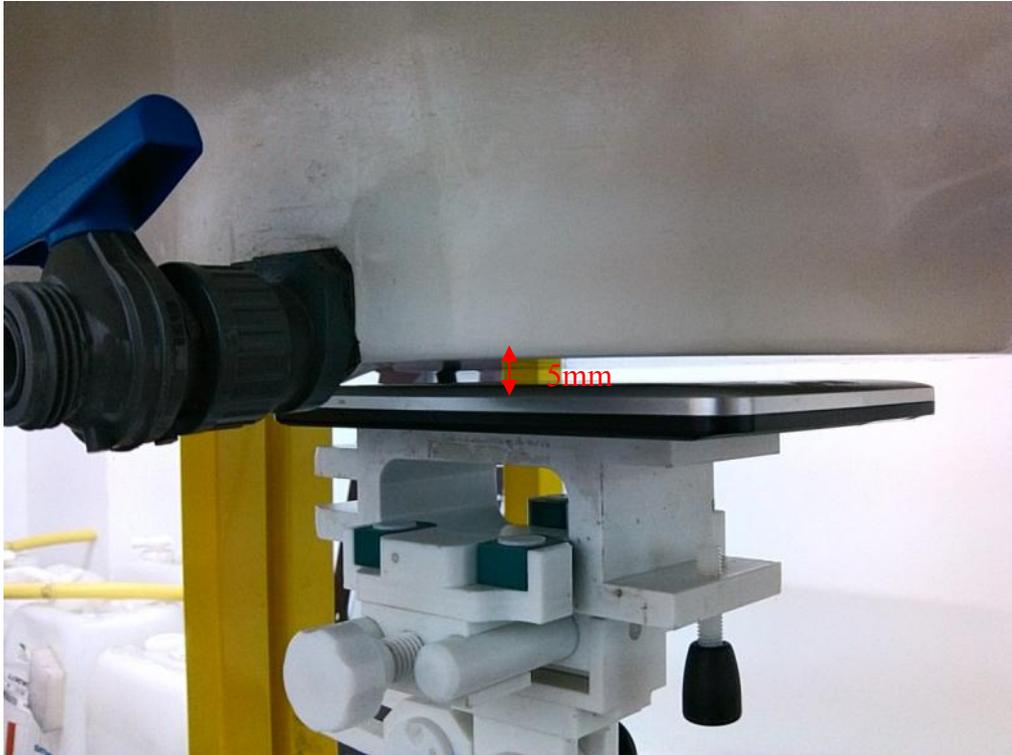

2. Back upward



3. Edge A



4. Edge B



5. Edge C



6. ELiquid Level Photo



Annex B Graph Test Results

BAND	<u>PARAMETERS</u>
<u>GSM850</u>	<p><u>Measurement 1:</u> Validation Plane with Body device position on Low Channel in GPRS mode</p> <p><u>Measurement 2:</u> Validation Plane with Body device position on Middle Channel in GPRS mode</p> <p><u>Measurement 3:</u> Validation Plane with Body device position on High Channel in GPRS mode</p> <p><u>Measurement 4:</u> Validation Plane with Body device position on High Channel in GPRS mode</p> <p><u>Measurement 5:</u> Validation Plane with Body device position on High Channel in GPRS mode</p> <p><u>Measurement 6:</u> Validation Plane with Body device position on High Channel in GPRS mode</p> <p><u>Measurement 7:</u> Validation Plane with Body device position on Low Channel in EDGE mode_</p> <p><u>Measurement 8:</u> Validation Plane with Body device position on Middle Channel in EDGE mode_</p> <p><u>Measurement 9:</u> Validation Plane with Body device position on High Channel in EDGE mode</p>
<u>GSM1900</u>	<p><u>Measurement 10:</u> Validation Plane with Body device position on Middle Channel in GPRS mode</p> <p><u>Measurement 11:</u> Validation Plane with Body device position on Middle Channel in GPRS mode</p> <p><u>Measurement 12:</u> Validation Plane with Body device position on Middle Channel in GPRS mode</p> <p><u>Measurement 13:</u> Validation Plane with Body device position on Middle Channel in GPRS mode</p> <p><u>Measurement 14:</u> Validation Plane with Body device position on Middle Channel in EDGE mode</p>
<u>WCDMA 850</u>	<p><u>Measurement 15:</u> Validation Plane with Body device position on Low Channel in CDMA mode</p> <p><u>Measurement 16:</u> Validation Plane with Body device position on Middle Channel in CDMA mode</p> <p><u>Measurement 17:</u> Validation Plane with Body device position on High Channel in CDMA mode</p> <p><u>Measurement 18:</u> Validation Plane with Body device position on Middle Channel in CDMA mode</p> <p><u>Measurement 19:</u> Validation Plane with Body device position on Middle Channel in CDMA mode</p> <p><u>Measurement 20:</u> Validation Plane with Body device position on Middle Channel in CDMA mode</p>

<p><u>WCDMA</u> <u>1900</u></p>	<p><u>Measurement 21:</u> Validation Plane with Body device position on Low Channel in CDMA mode</p> <p><u>Measurement 22:</u> Validation Plane with Body device position on Middle Channel in CDMA mode</p> <p><u>Measurement 23:</u> Validation Plane with Body device position on High Channel in CDMA mode</p> <p><u>Measurement 24:</u> Validation Plane with Body device position on Middle Channel in CDMA mode</p> <p><u>Measurement 25:</u> Validation Plane with Body device position on Middle Channel in CDMA mode</p> <p><u>Measurement 26:</u> Validation Plane with Body device position on Middle Channel in CDMA mode</p>
<p><u>802.11</u> <u>B Band</u></p>	<p><u>Measurement 27:</u> Validation Plane with Body device position on Low Channel in DSSS mode</p> <p><u>Measurement 28:</u> Validation Plane with Body device position on Low Channel in DSSS mode</p> <p><u>Measurement 29:</u> Validation Plane with Body device position on Low Channel in DSSS mode</p> <p><u>Measurement 30:</u> Validation Plane with Body device position on Low Channel in DSSS mode</p>

MEASUREMENT 1

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	GPRS

B. SAR Measurement Results


Lower Band SAR (Channel 128):

Frequency (MHz)	824.200000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-1.320000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:2

SURFACE SAR

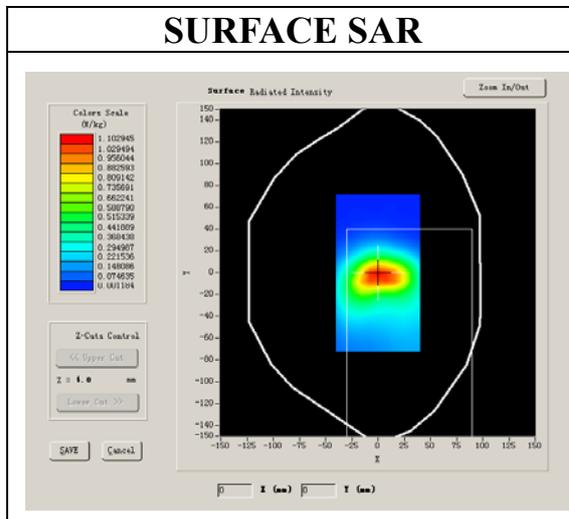

VOLUME SAR


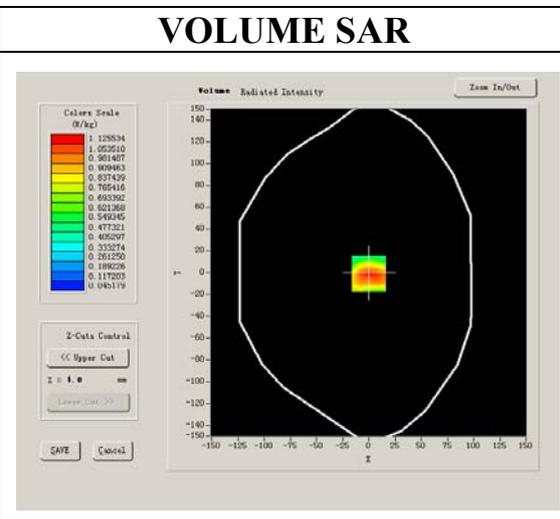


Maximum location: X=0.00, Y=-1.00

SAR 10g (W/Kg)	0.697964
SAR 1g (W/Kg)	1.171060

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.2356	0.7689	0.4817	0.2995	0.1968	0.1314

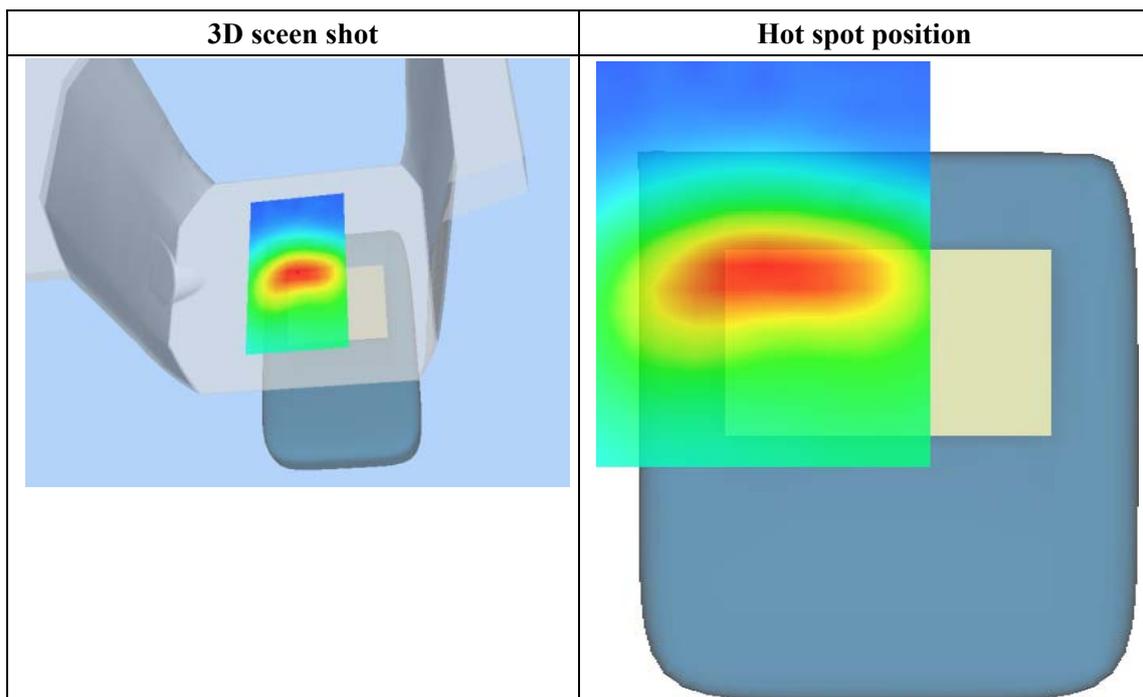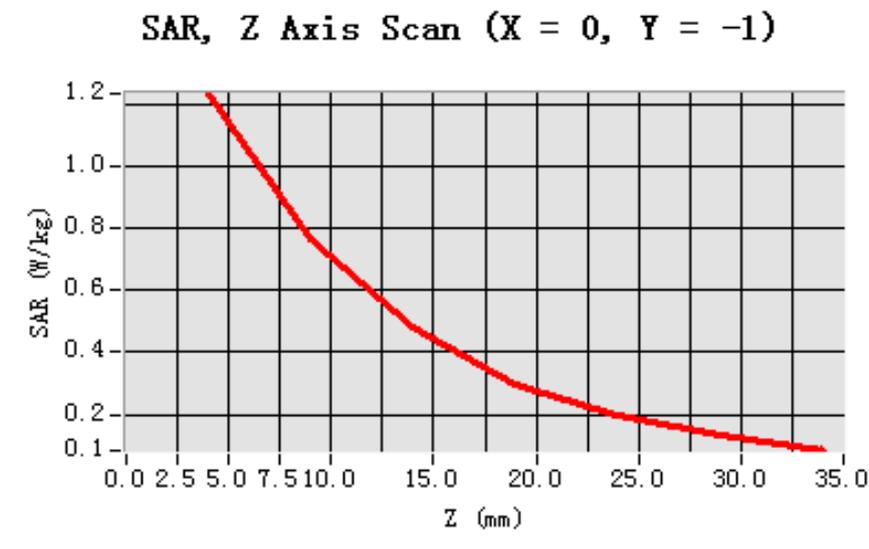

MEASUREMENT 2

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 8 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	GPRS

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.600000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	1.290000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:2


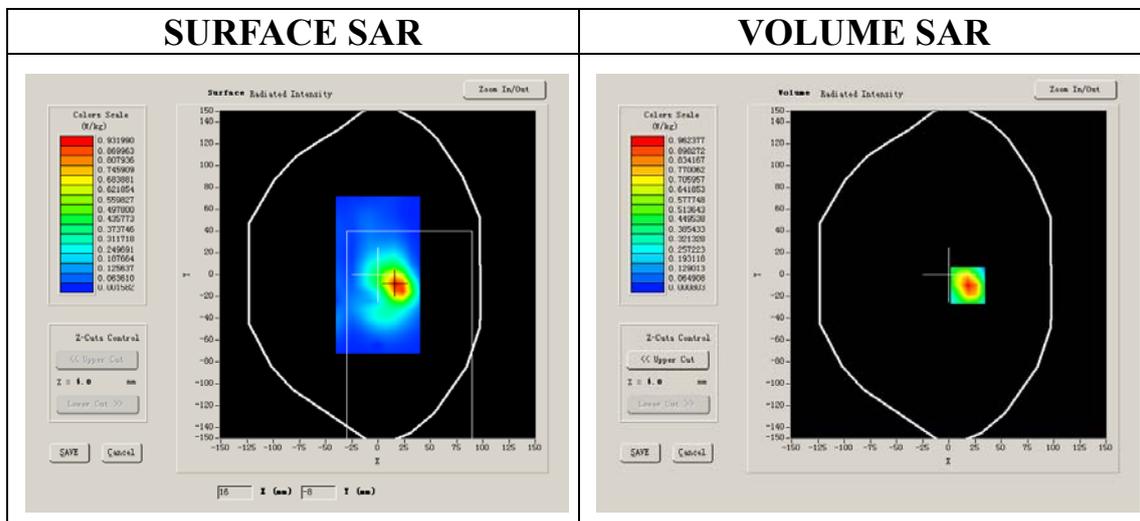


Maximum location: X=18.00, Y=-10.00

SAR 10g (W/Kg)	0.467141
SAR 1g (W/Kg)	1.048174

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.0927	0.4447	0.1788	0.0690	0.0300	0.0129

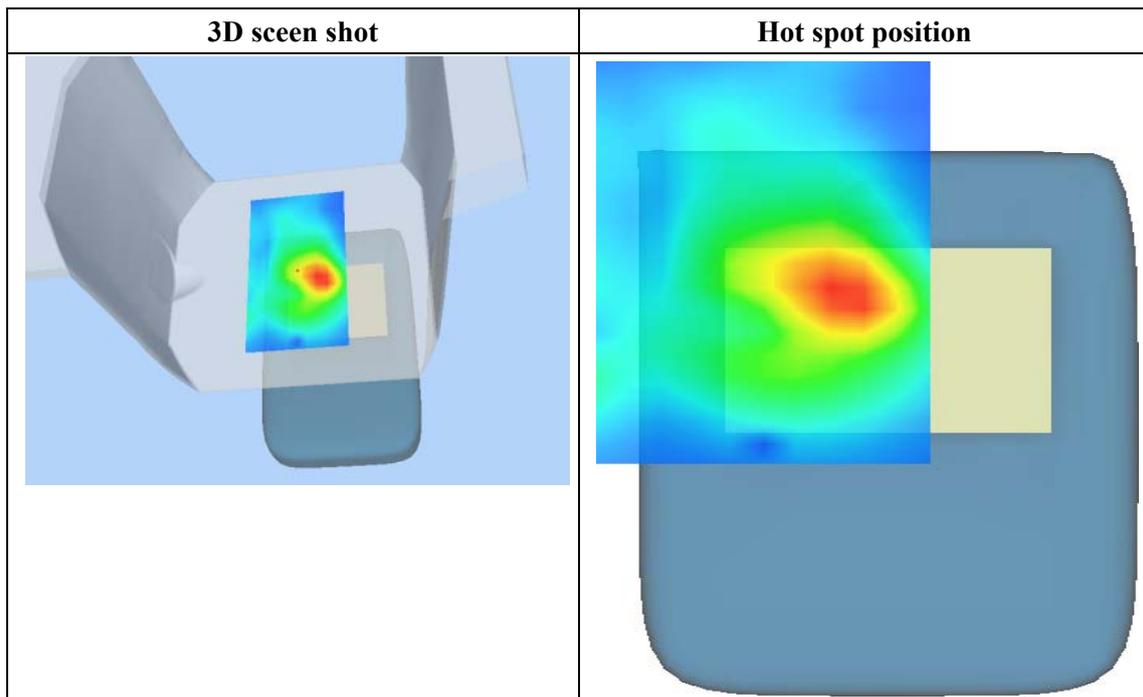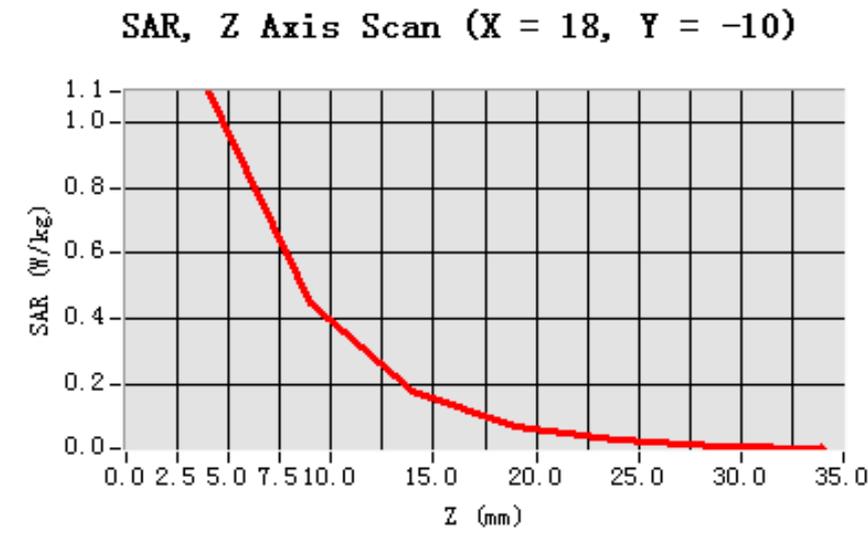

MEASUREMENT 3

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 8 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	High
Signal	GPRS

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-0.370000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:2


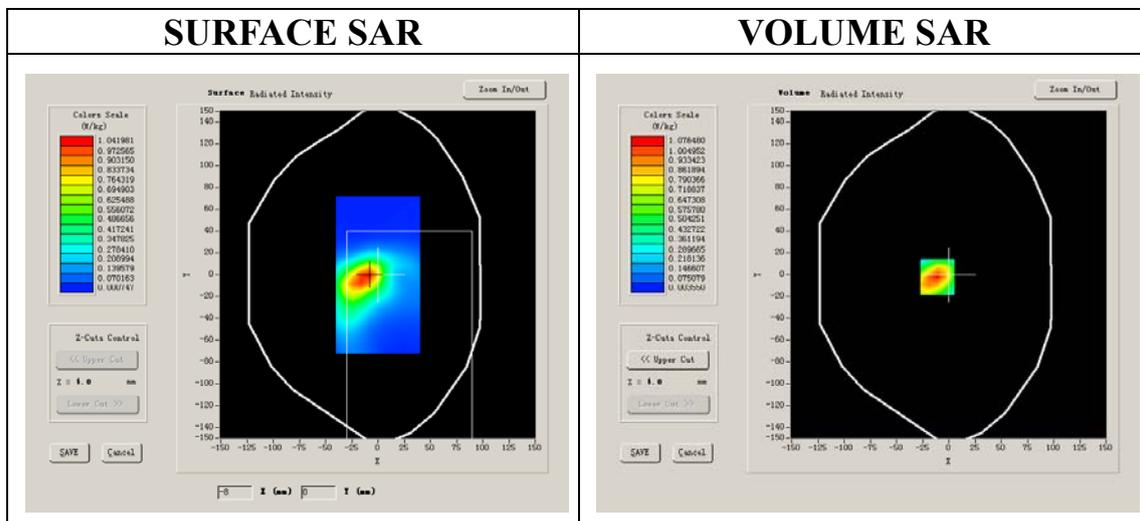


Maximum location: X=-11.00, Y=-2.00

SAR 10g (W/Kg)	0.538692
SAR 1g (W/Kg)	1.113106

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.1722	0.4962	0.2270	0.0995	0.0516	0.0238

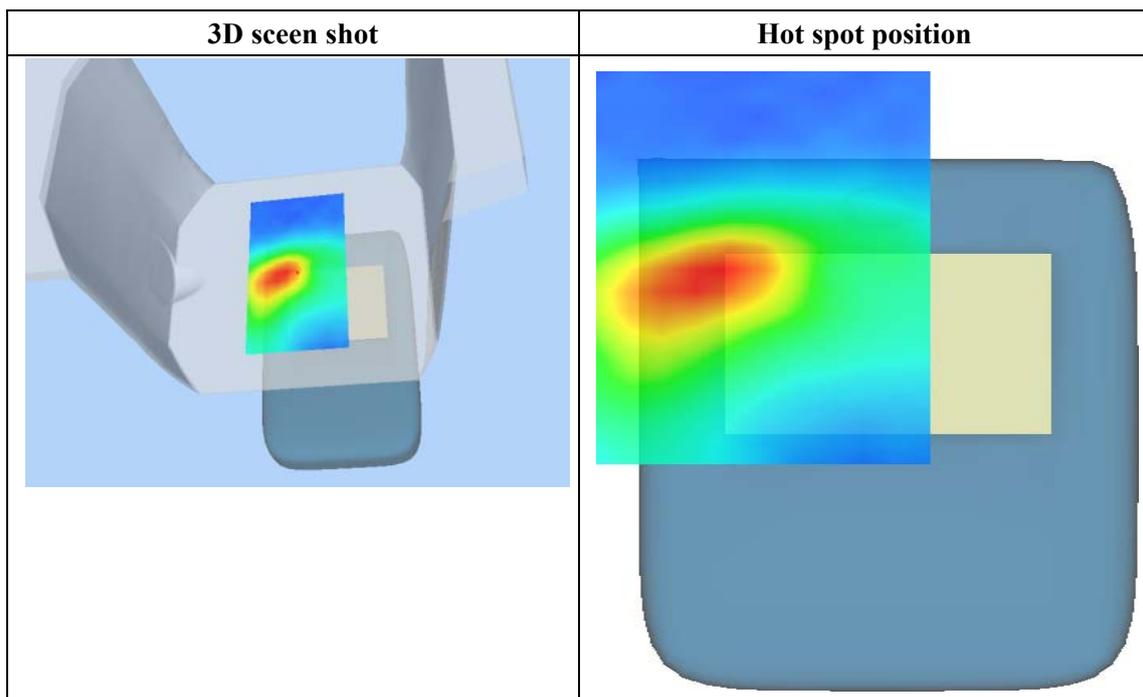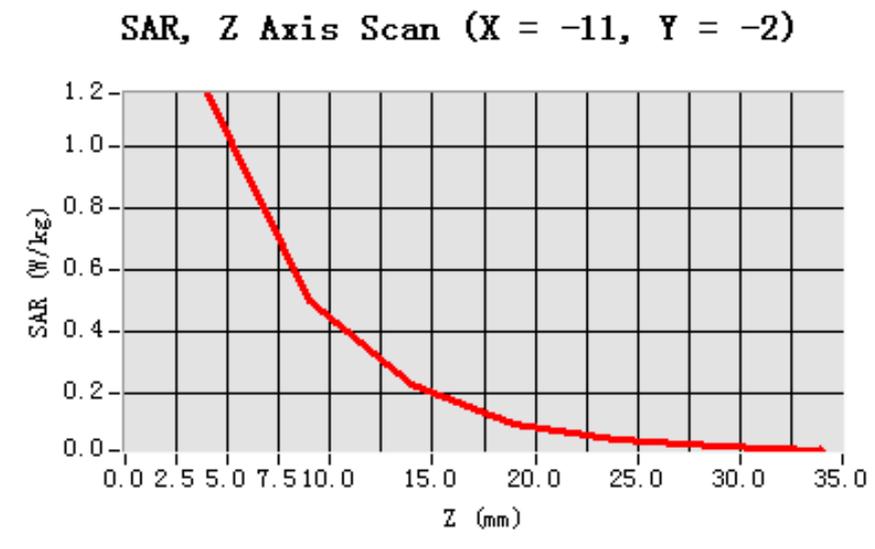

MEASUREMENT 4

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 4 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	High
Signal	GPRS

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-0.720000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:2


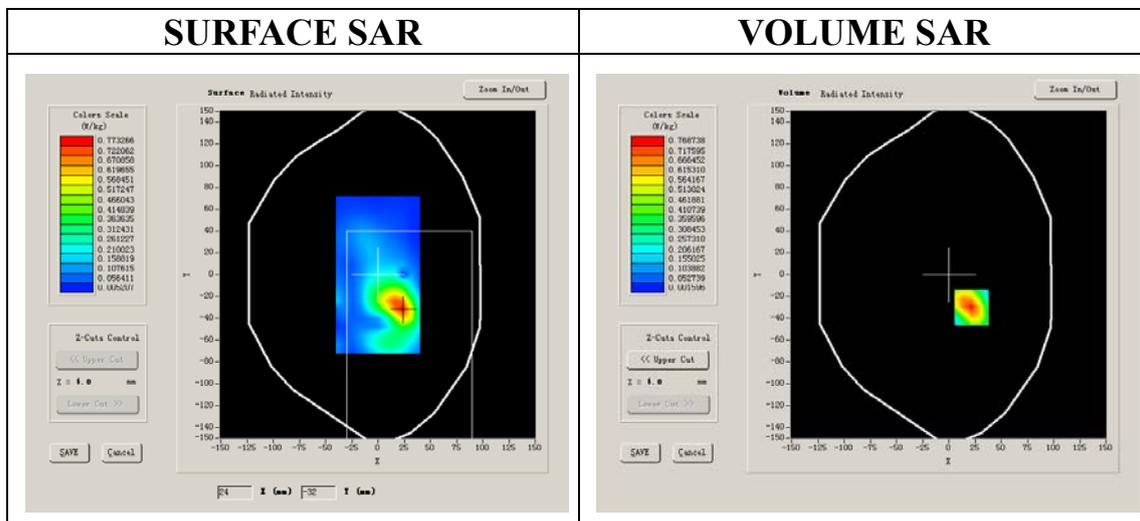


Maximum location: X=22.00, Y=-30.00

SAR 10g (W/Kg)	0.354665
SAR 1g (W/Kg)	0.742311

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.7866	0.3270	0.1394	0.0626	0.0288	0.0130

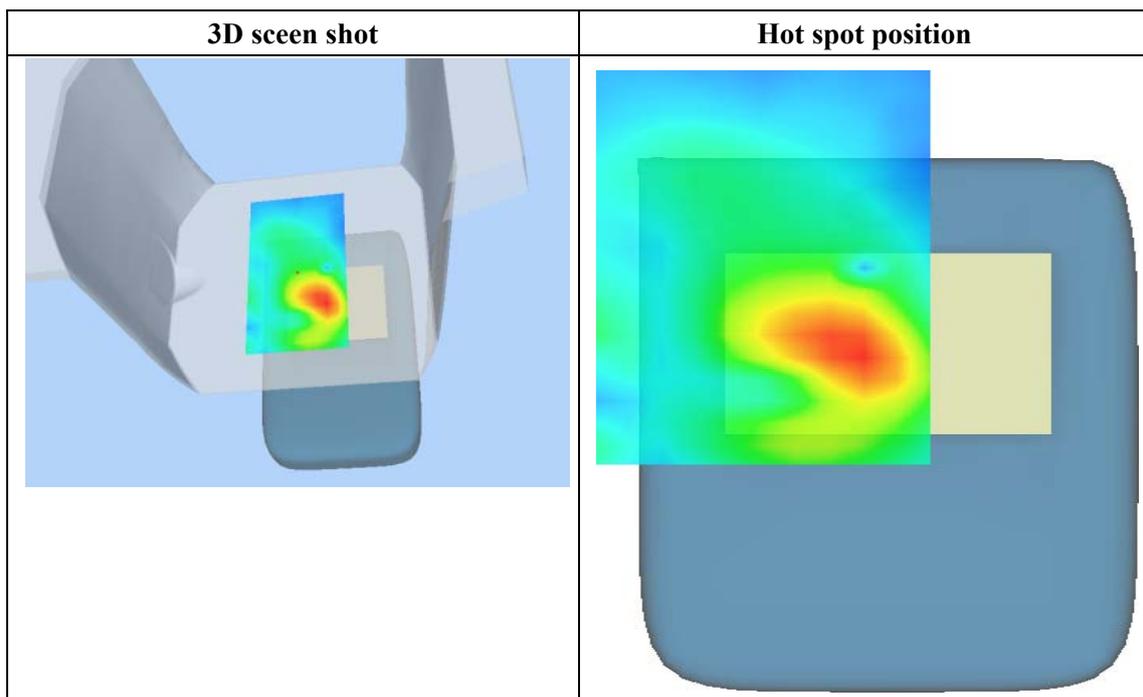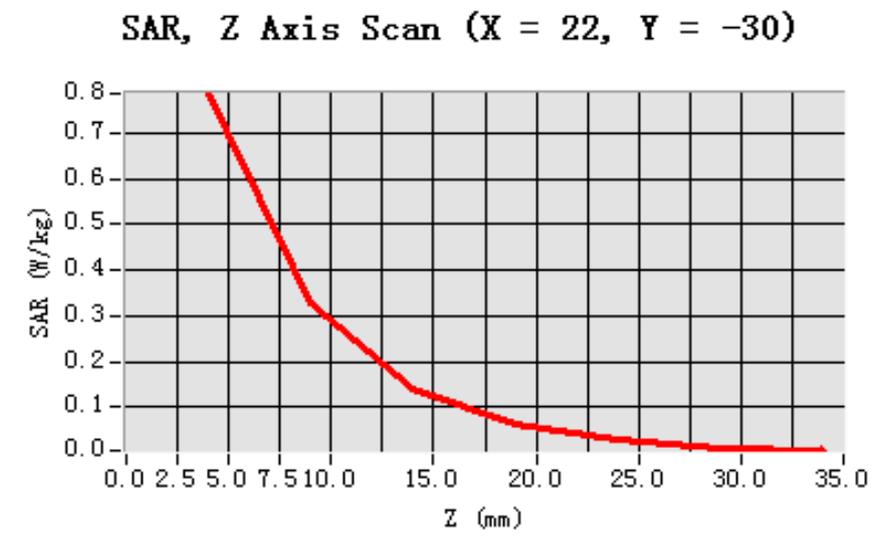

MEASUREMENT 5

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 11 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	High
Signal	GPRS

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-0.680000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:2

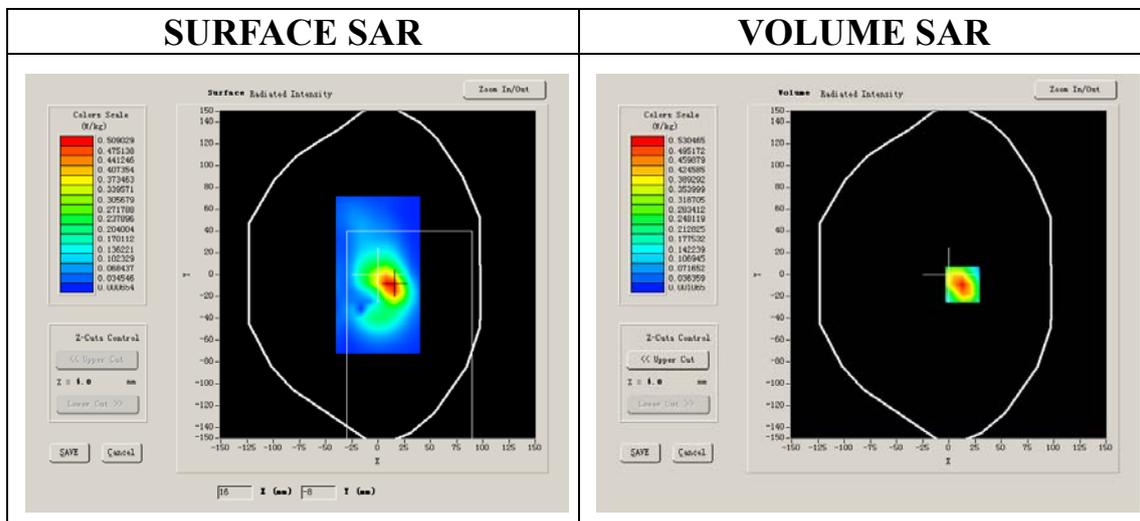


Maximum location: X=13.00, Y=-9.00

SAR 10g (W/Kg)	0.262627
SAR 1g (W/Kg)	0.564542


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6023	0.2531	0.1046	0.0428	0.0207	0.0095


SAR, Z Axis Scan (X = 13, Y = -9)

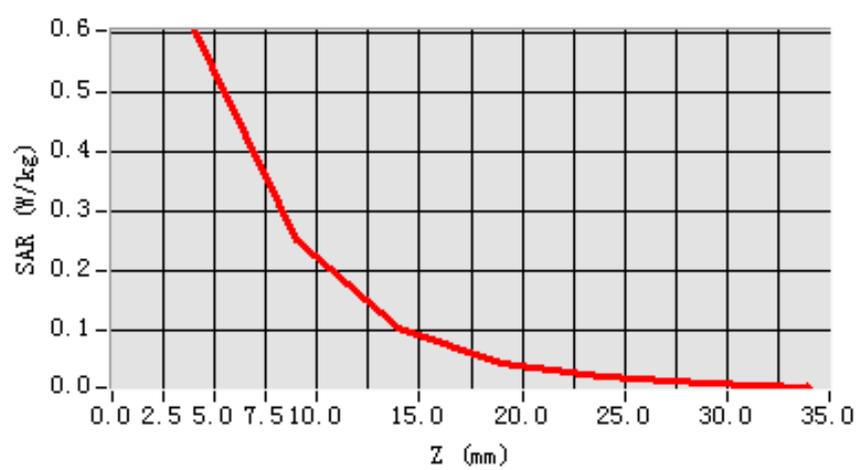

3D scene shot

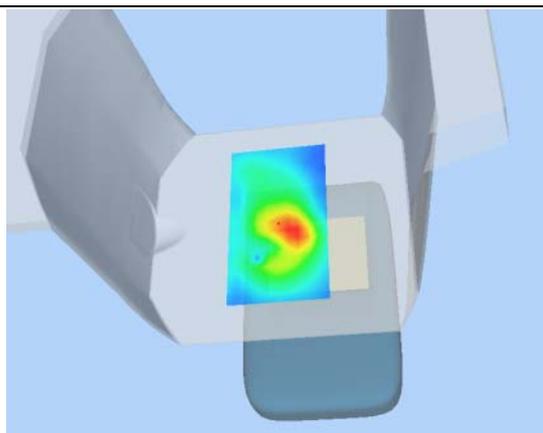

Hot spot position

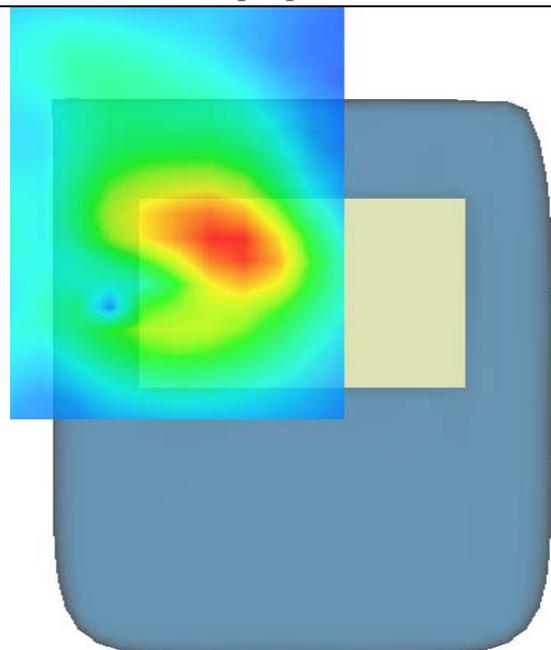

MEASUREMENT 6

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 7 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	High
Signal	GPRS

B. SAR Measurement Results

Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-0.720000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:2

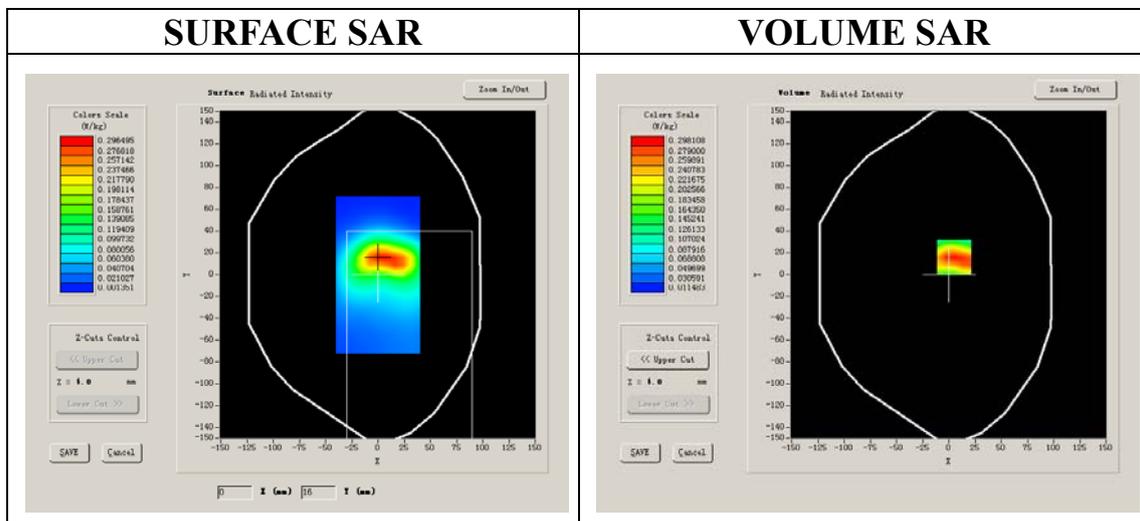


Maximum location: X=5.00, Y=16.00

SAR 10g (W/Kg)	0.198312
SAR 1g (W/Kg)	0.341643


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3578	0.2125	0.1326	0.0849	0.0541	0.0349


SAR, Z Axis Scan (X = 5, Y = 16)

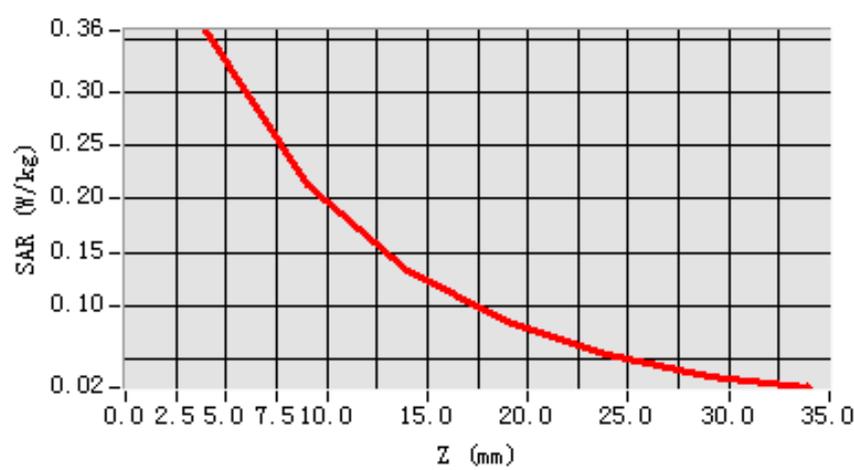

3D scen shot

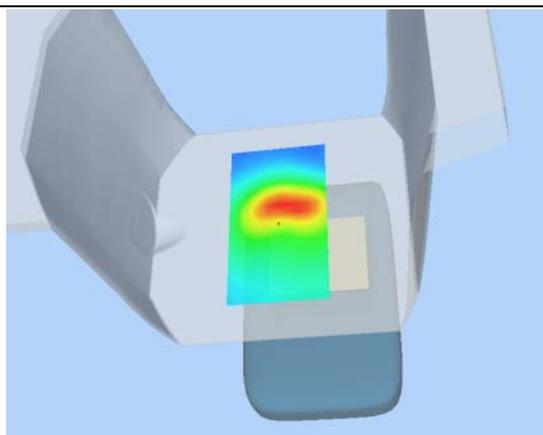

Hot spot position

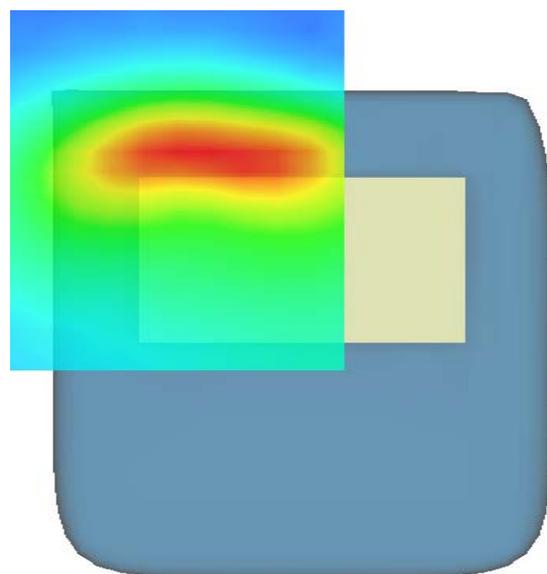

MEASUREMENT 7

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 5 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Low
Signal	EDGE

B. SAR Measurement Results

Lower Band SAR (Channel 128):

Frequency (MHz)	824.200000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-1.200000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:2

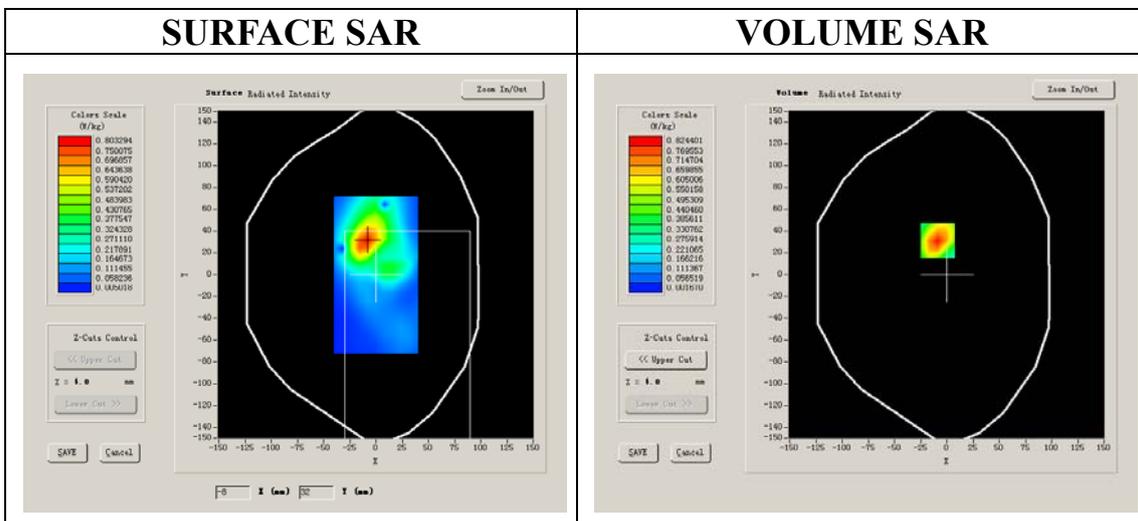


Maximum location: X=-9.00, Y=31.00

SAR 10g (W/Kg)	0.393607
SAR 1g (W/Kg)	0.823750


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.8436	0.3840	0.1749	0.0815	0.0380	0.0200


SAR, Z Axis Scan (X = -9, Y = 31)

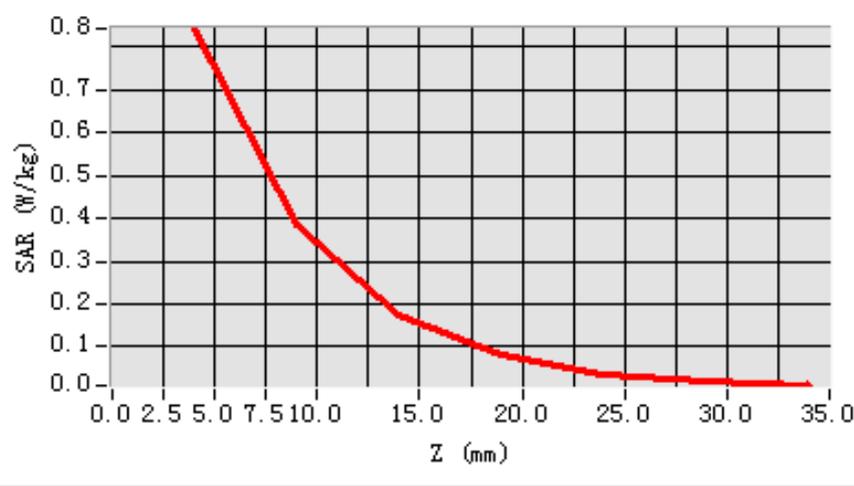

3D scen shot

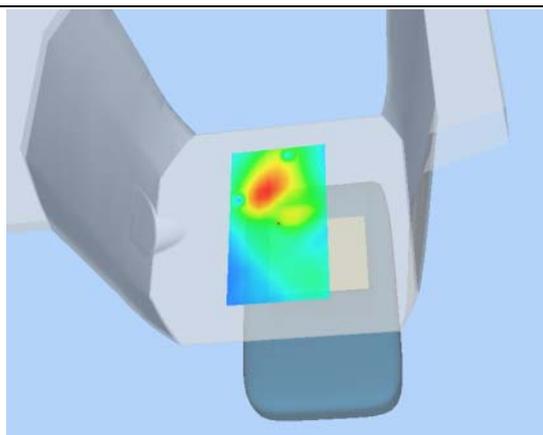

Hot spot position

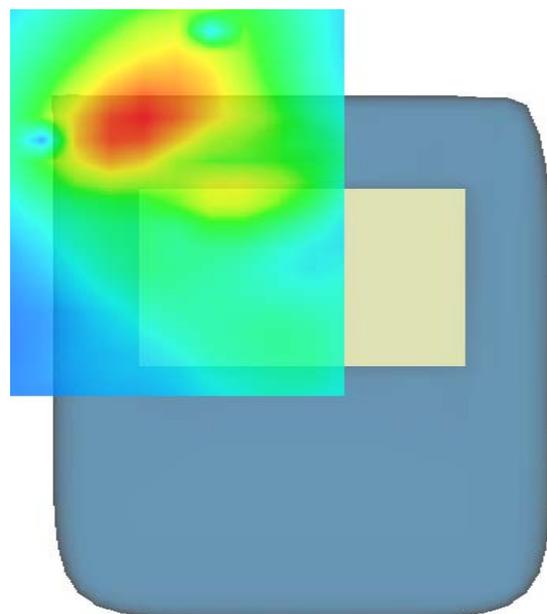

MEASUREMENT 8

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 5 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	Middle
Signal	EDGE

B. SAR Measurement Results

Middle Band SAR (Channel 190):

Frequency (MHz)	836.600000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	-0.120000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:2

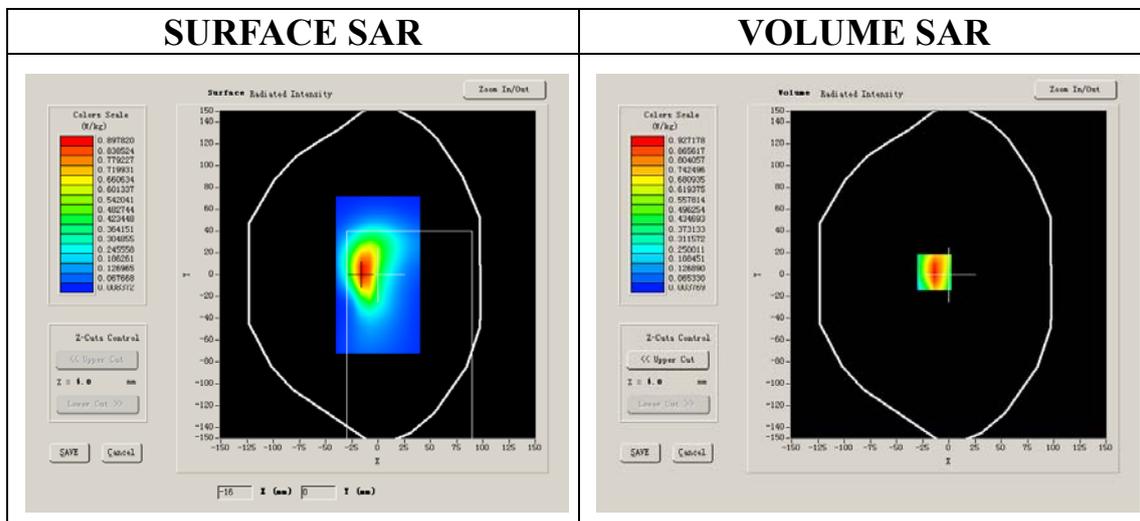


Maximum location: X=-14.00, Y=2.00

SAR 10g (W/Kg)	0.479828
SAR 1g (W/Kg)	0.929287


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.0179	0.4545	0.2132	0.1042	0.0469	0.0237


SAR, Z Axis Scan (X = -14, Y = 2)

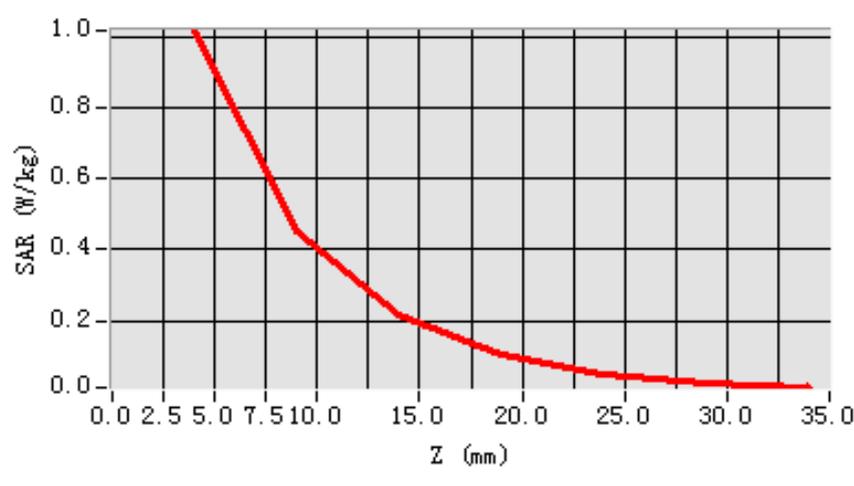

3D scen shot

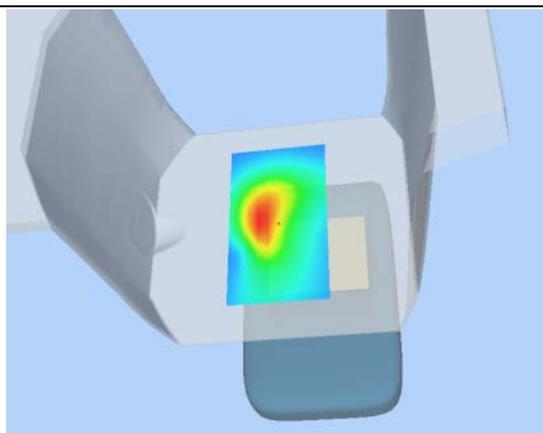

Hot spot position

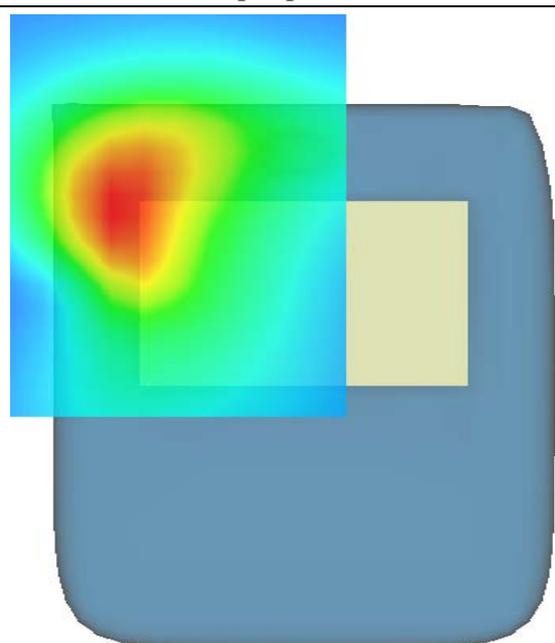

MEASUREMENT 9

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 5 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM850
Channels	High
Signal	EDGE

B. SAR Measurement Results


Higher Band SAR (Channel 251):

Frequency (MHz)	848.800000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	1.009033
Power drift (%)	1.620000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:2

SURFACE SAR

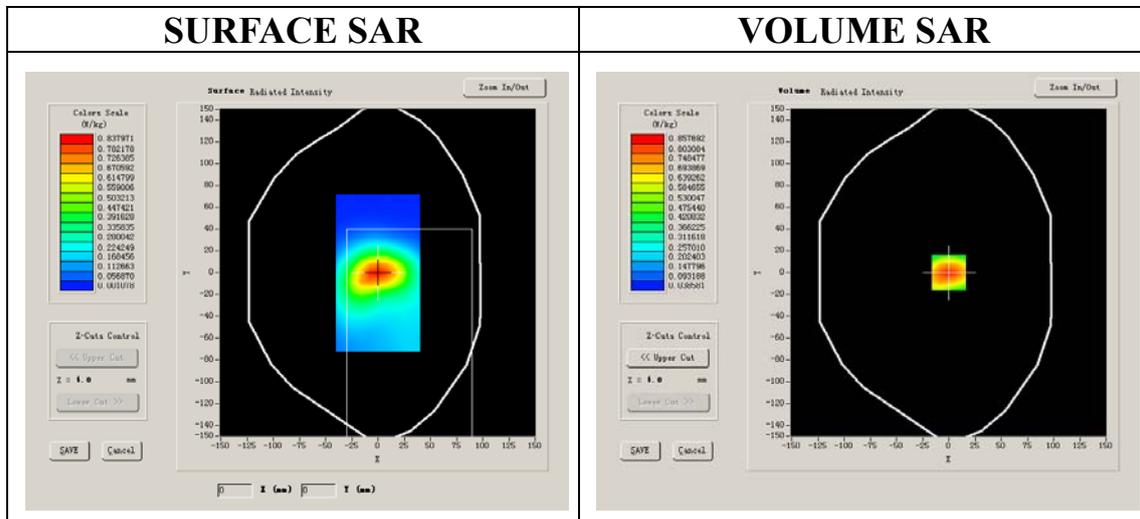

VOLUME SAR

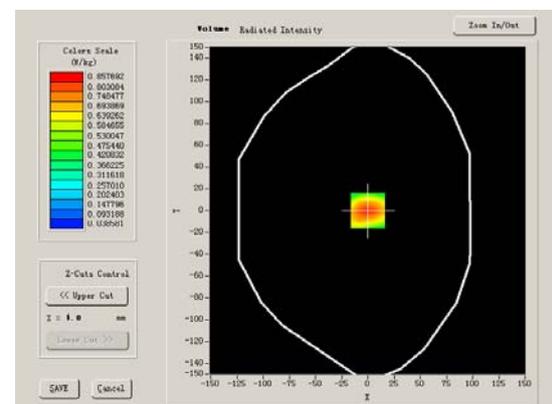


Maximum location: X=0.00, Y=0.00

SAR 10g (W/Kg)	0.541981
SAR 1g (W/Kg)	0.891054


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.9416	0.5819	0.3846	0.2476	0.1704	0.1080


SAR, Z Axis Scan (X = 0, Y = 0)

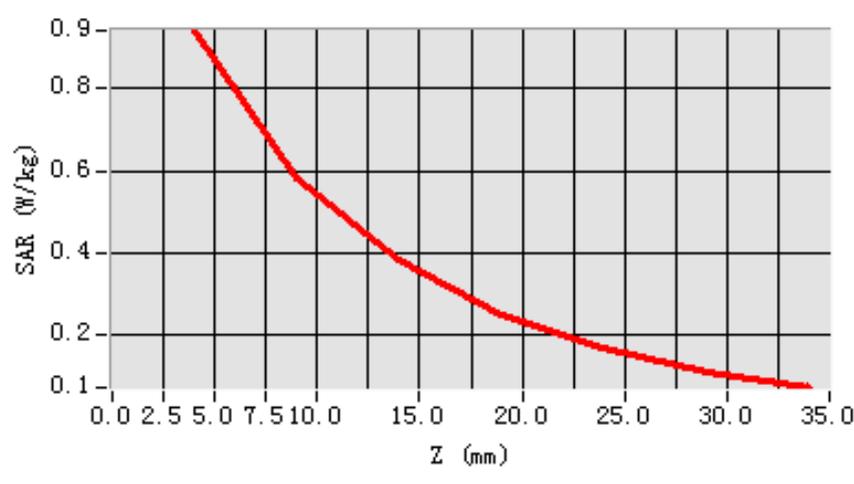

3D scen shot

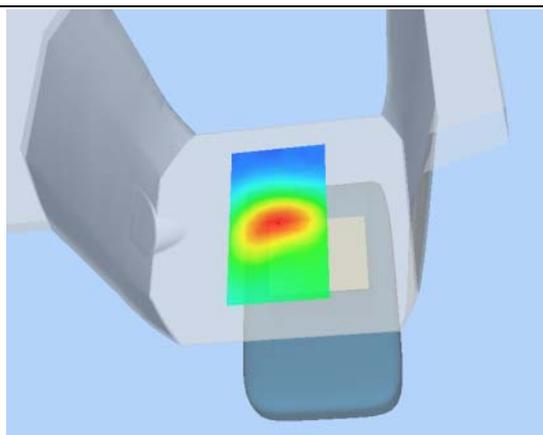

Hot spot position

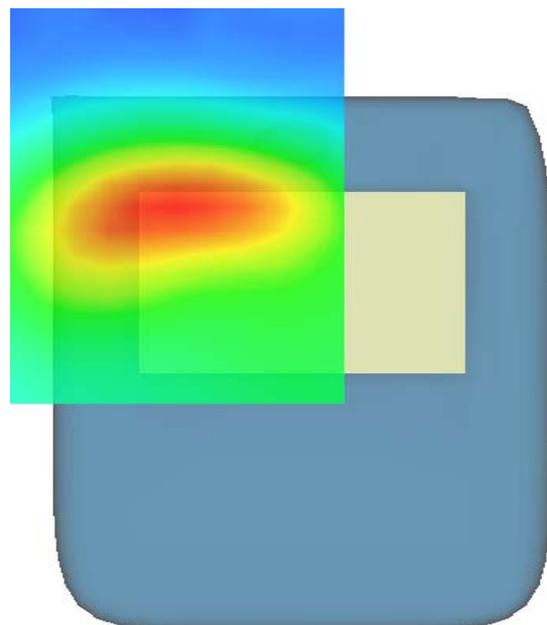

MEASUREMENT 10

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 8 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GPRS

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	0.170000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2


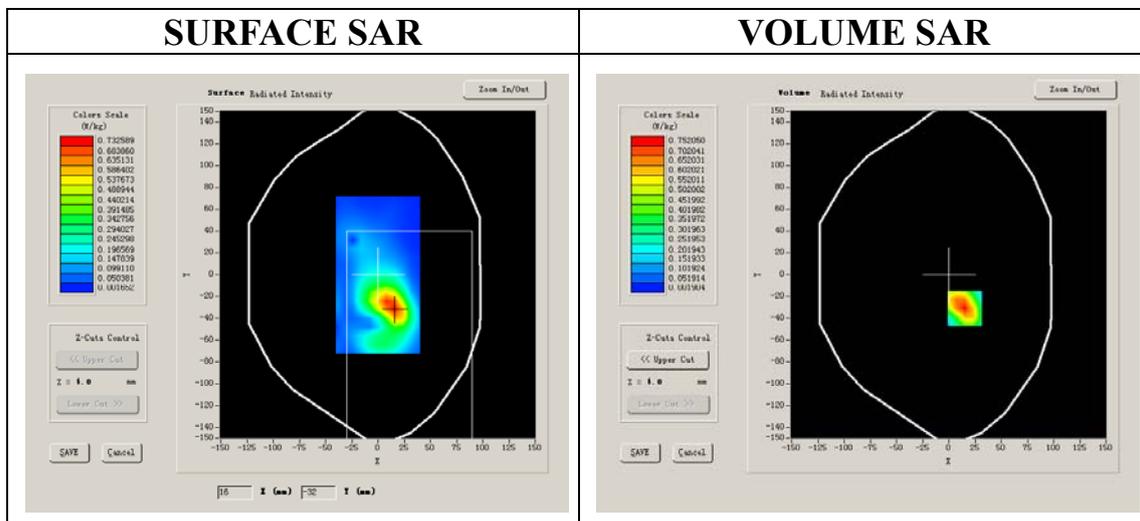


Maximum location: X=15.00, Y=-31.00

SAR 10g (W/Kg)	0.350326
SAR 1g (W/Kg)	0.728918

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.7696	0.3369	0.1436	0.0617	0.0300	0.0106

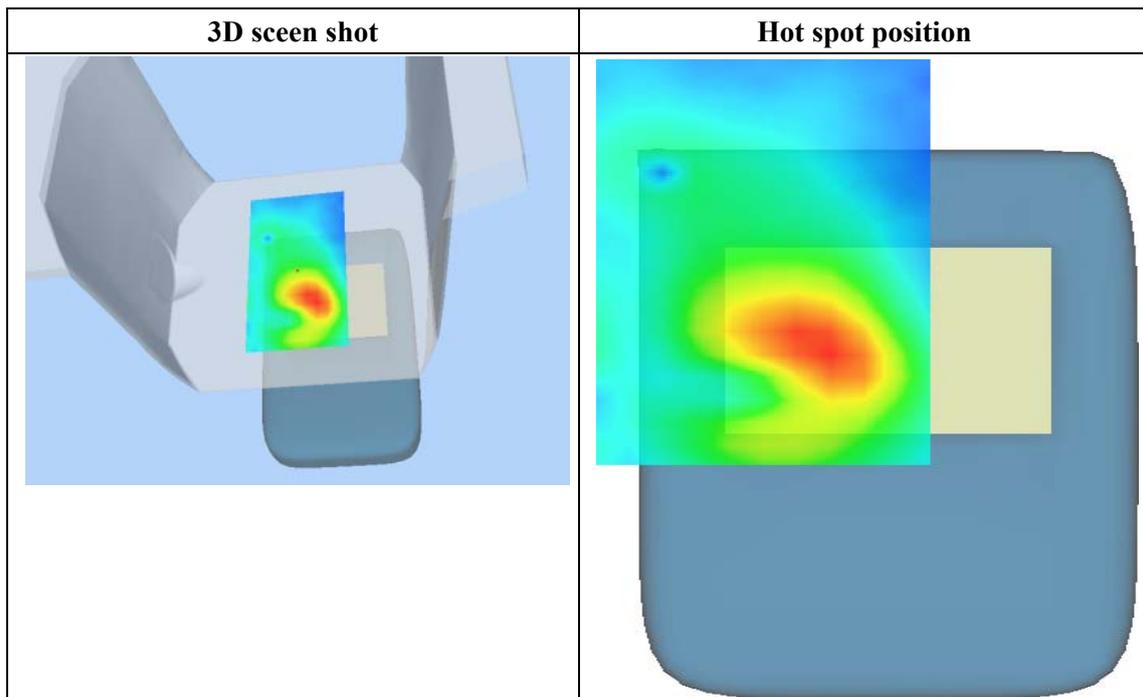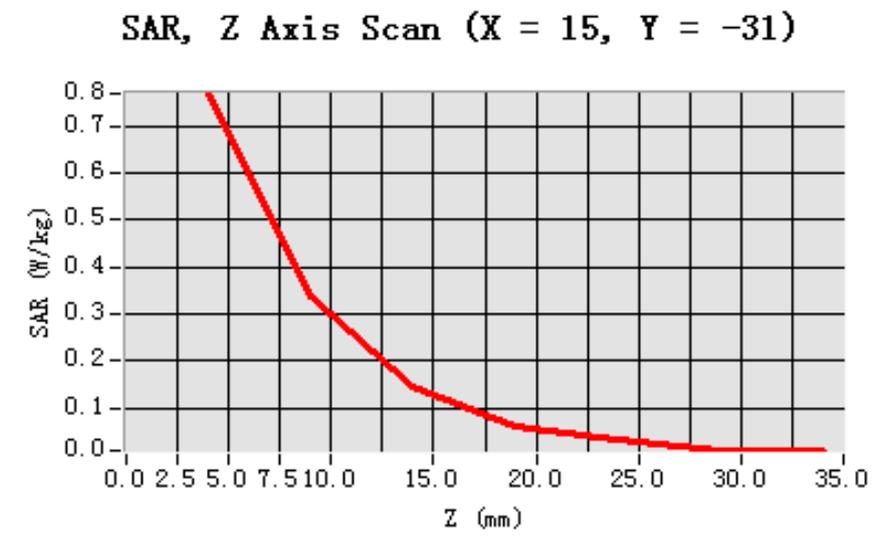

MEASUREMENT 11

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 8 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GPRS

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	0.390000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

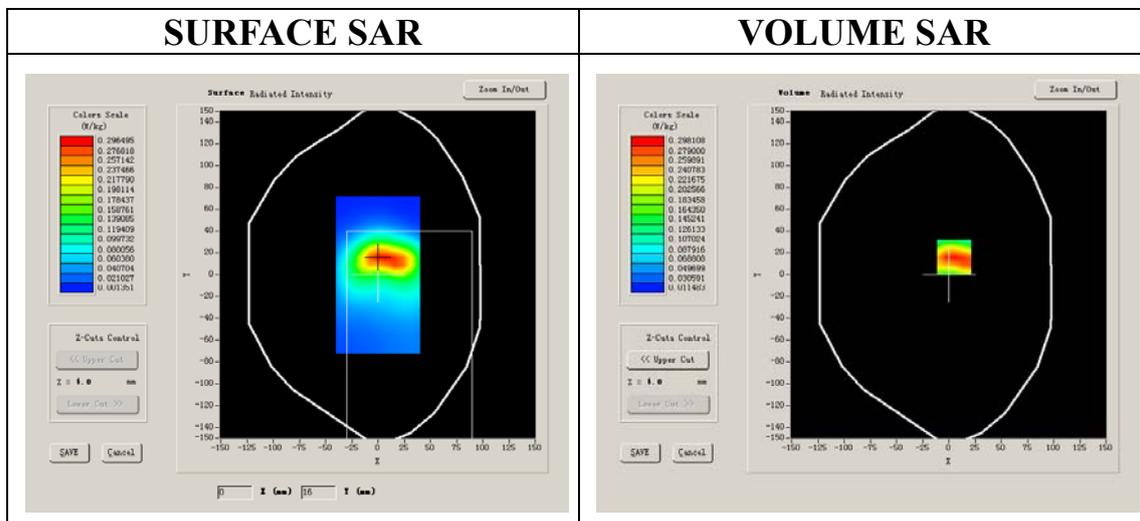


Maximum location: X=5.00, Y=16.00

SAR 10g (W/Kg)	0.198312
SAR 1g (W/Kg)	0.341643


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.3578	0.2125	0.1326	0.0849	0.0541	0.0349


SAR, Z Axis Scan (X = 5, Y = 16)

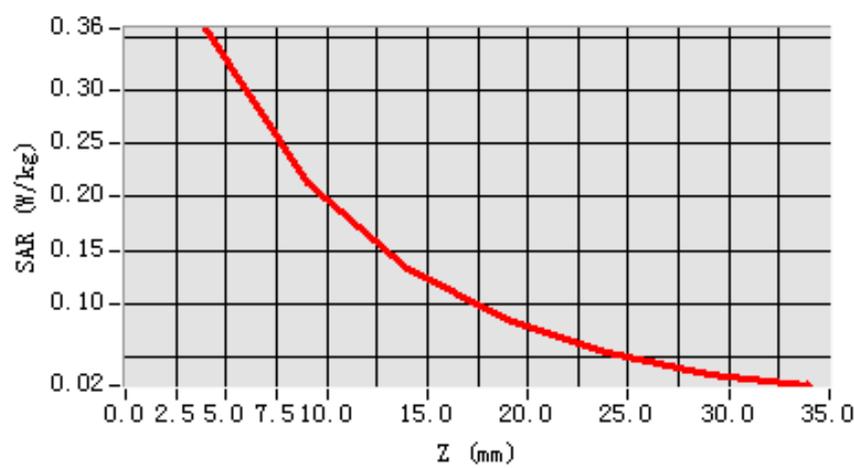

3D scen shot

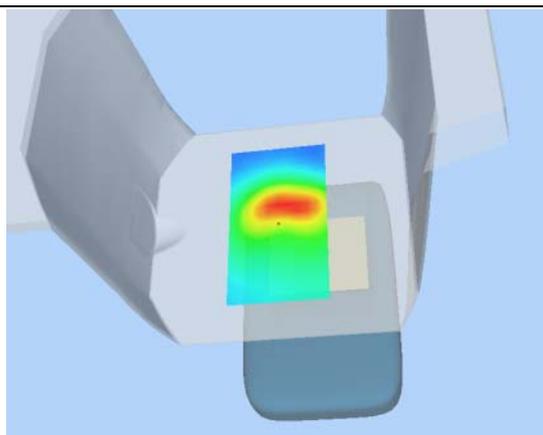

Hot spot position

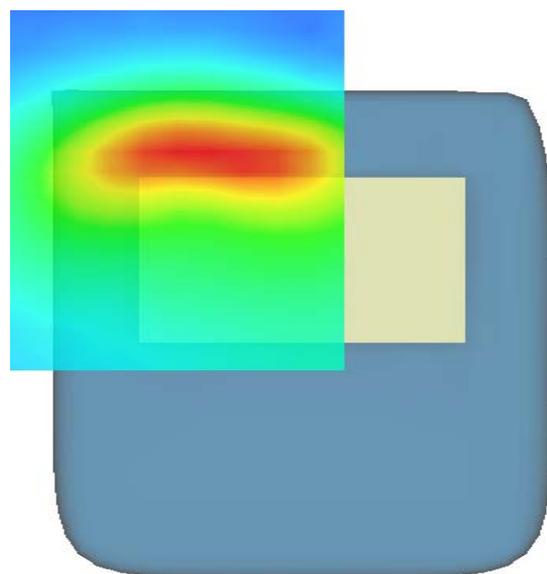

MEASUREMENT 12

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 8 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GPRS

B. SAR Measurement Results


Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	0.810000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

SURFACE SAR

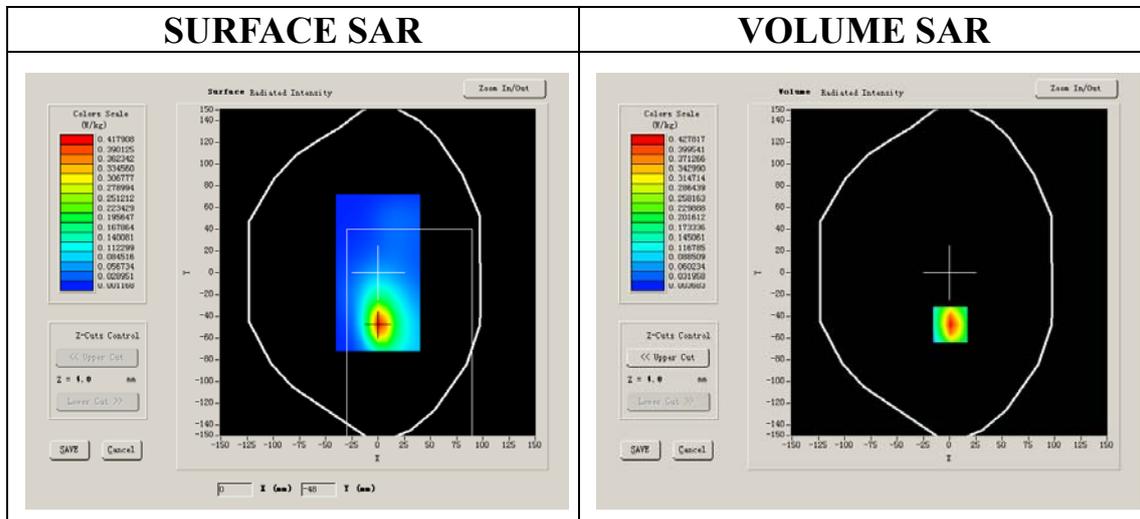

VOLUME SAR

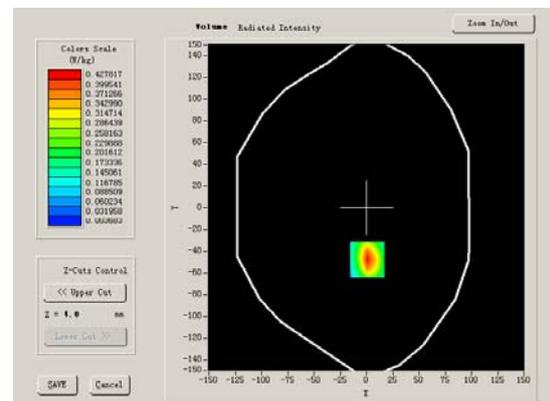


Maximum location: X=1.00, Y=-48.00

SAR 10g (W/Kg)	0.224727
SAR 1g (W/Kg)	0.455410


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.4858	0.2158	0.1071	0.0588	0.0330	0.0197


SAR, Z Axis Scan (X = 1, Y = -48)

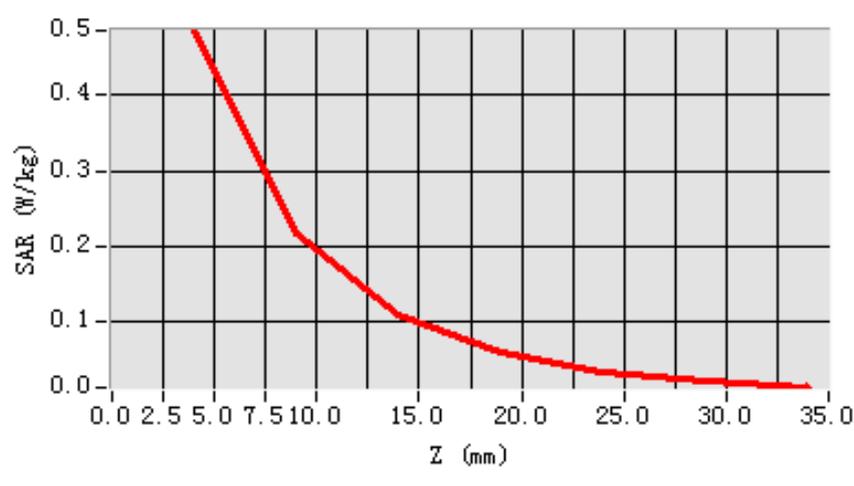

3D scen shot

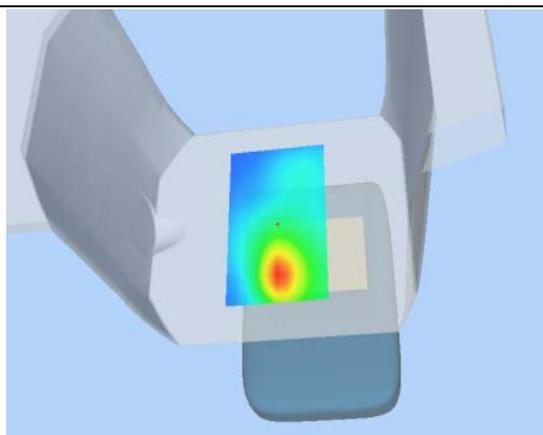

Hot spot position

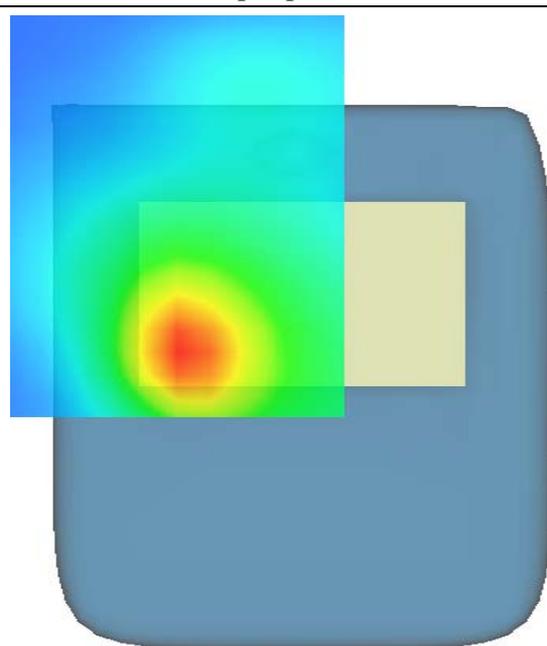

MEASUREMENT 13

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 8 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	GPRS

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	-0.070000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

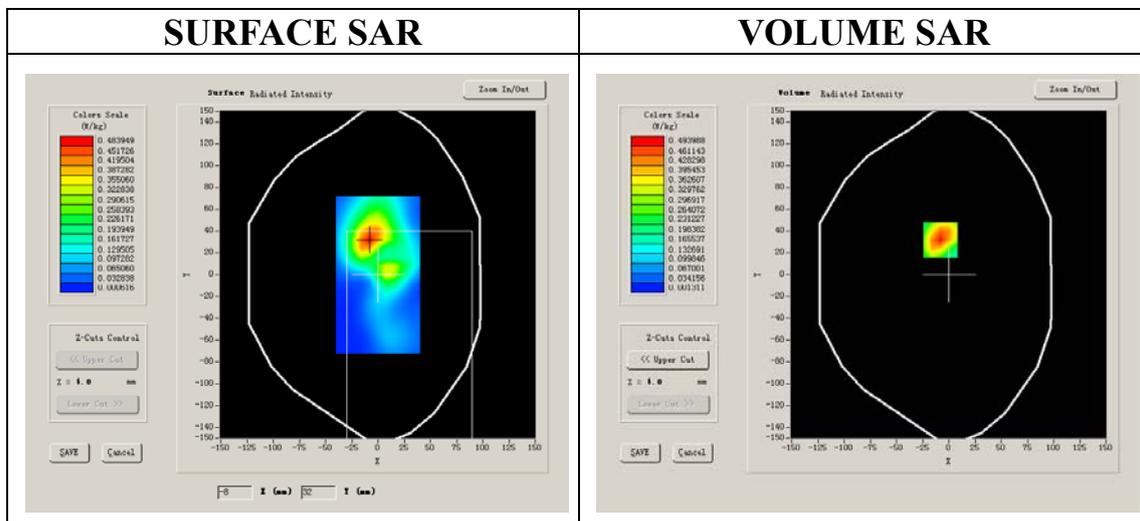


Maximum location: X=-8.00, Y=32.00

SAR 10g (W/Kg)	0.254920
SAR 1g (W/Kg)	0.505148


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5350	0.2452	0.1114	0.0533	0.0249	0.0118


SAR, Z Axis Scan (X = -8, Y = 32)

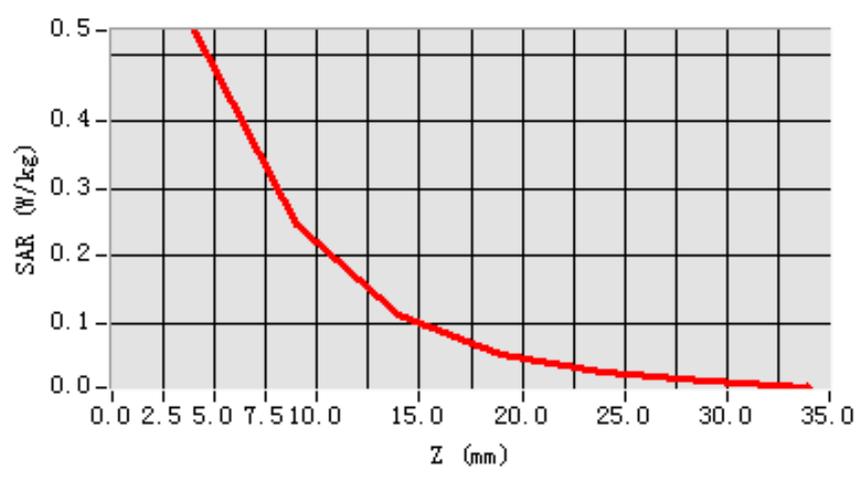

3D scen shot

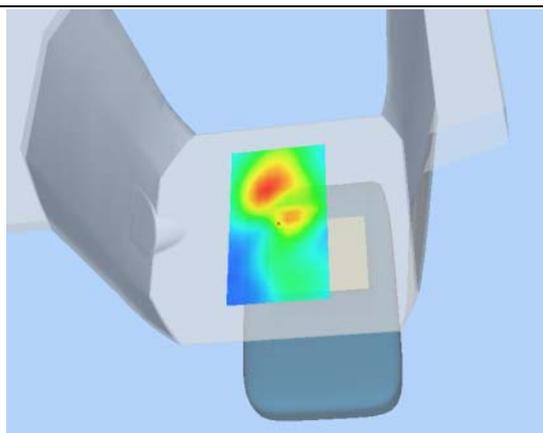

Hot spot position

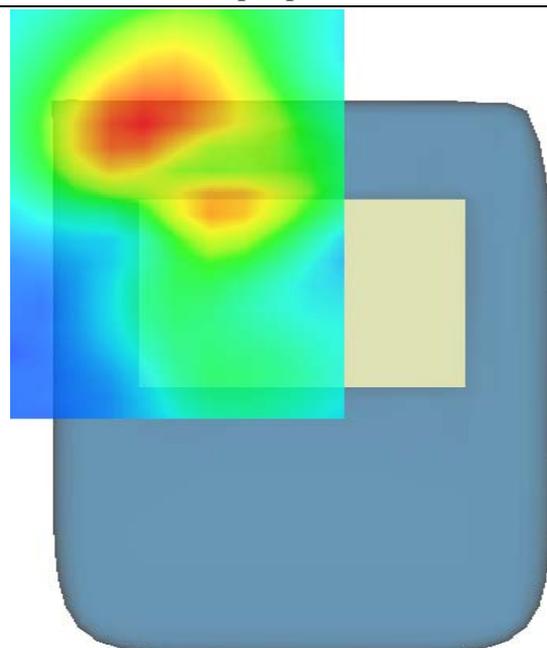

MEASUREMENT 14

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 8 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	GSM1900
Channels	Middle
Signal	EDGE

B. SAR Measurement Results

Middle Band SAR (Channel 661):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.540001
Relative permittivity	14.070000
Conductivity (S/m)	1.469533
Power drift (%)	-0.380000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:2

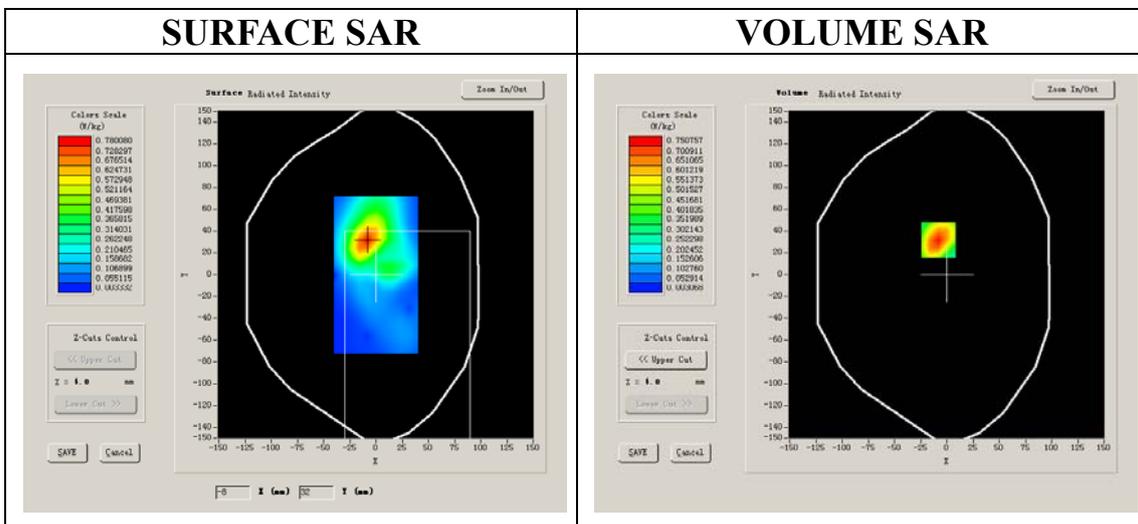


Maximum location: X=-8.00, Y=32.00

SAR 10g (W/Kg)	0.366908
SAR 1g (W/Kg)	0.715592


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.7682	0.3764	0.1777	0.0831	0.0402	0.0200


SAR, Z Axis Scan (X = -8, Y = 32)

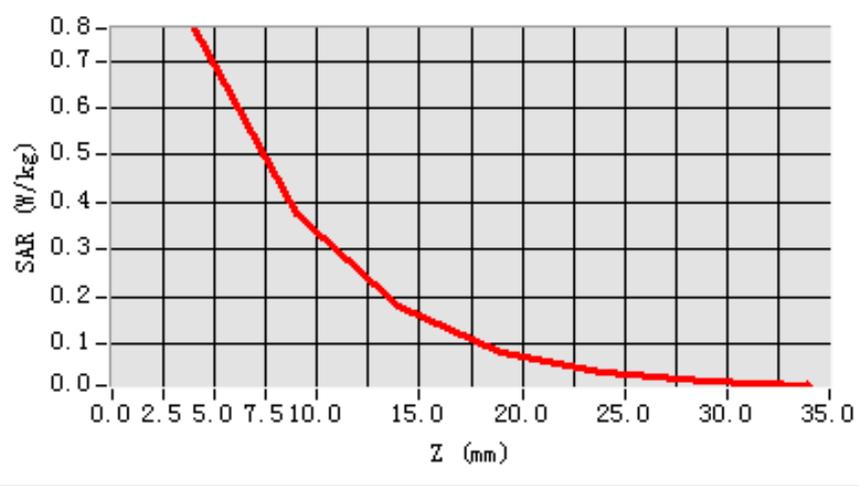

3D scen shot

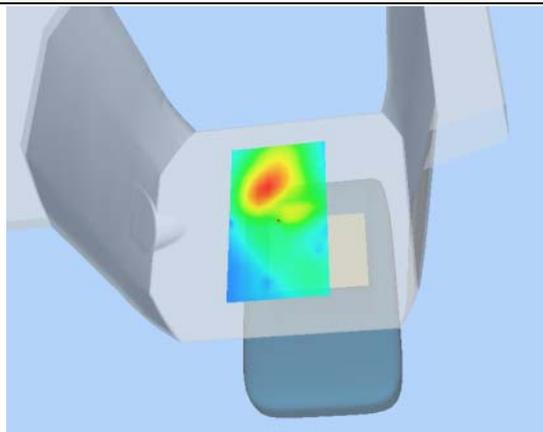

Hot spot position

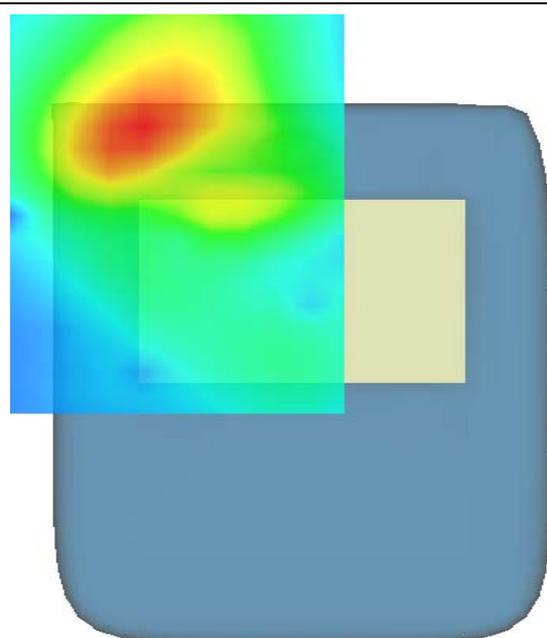

MEASUREMENT 15

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 7 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Low
Signal	CDMA

B. SAR Measurement Results

Lower Band SAR (Channel 4132):

Frequency (MHz)	826.400000
Relative permittivity (real part)	55.709999
Relative permittivity	15.877050
Conductivity (S/m)	0.980903
Power drift (%)	0.120000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

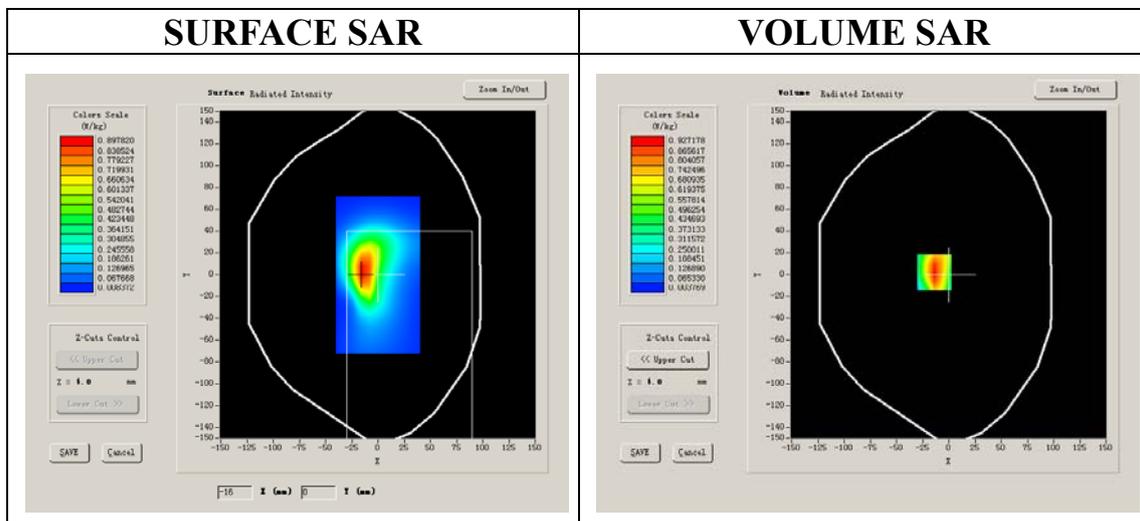


Maximum location: X=-14.00, Y=2.00

SAR 10g (W/Kg)	0.479828
SAR 1g (W/Kg)	0.982287


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.1279	0.4545	0.2132	0.1042	0.0469	0.0237


SAR, Z Axis Scan (X = -14, Y = 2)

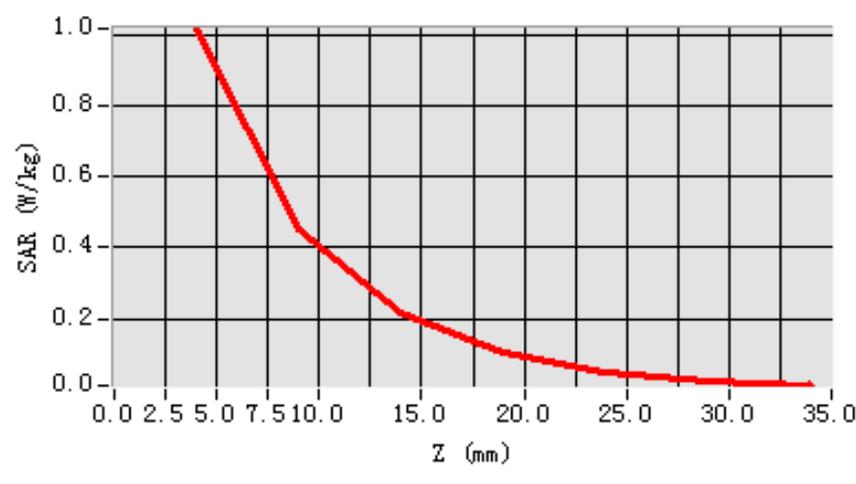

3D scen shot

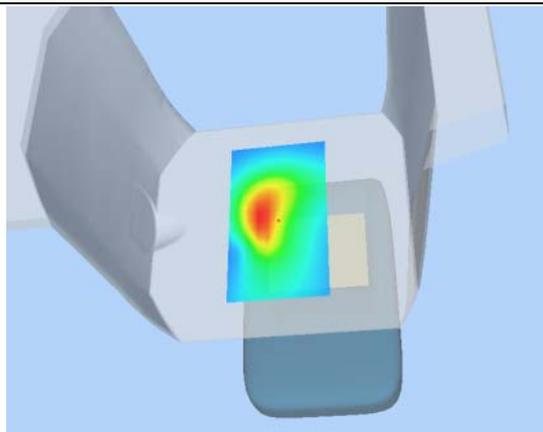

Hot spot position

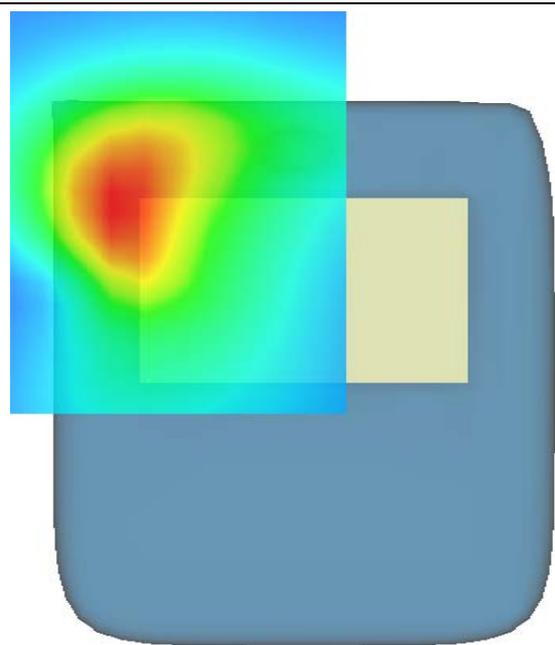

MEASUREMENT 16

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 5 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 4175):

Frequency (MHz)	835.000000
Relative permittivity (real part)	55.709999
Relative permittivity	15.877050
Conductivity (S/m)	0.980903
Power drift (%)	-0.320000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

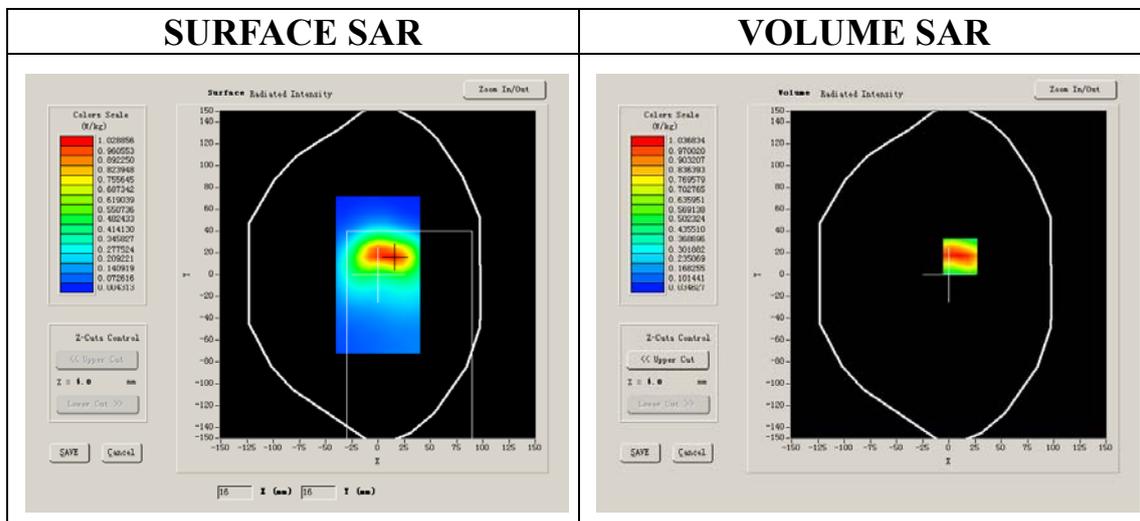


Maximum location: X=11.00, Y=17.00

SAR 10g (W/Kg)	0.694999
SAR 1g (W/Kg)	1.107184


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.2043	0.7471	0.4681	0.2939	0.1859	0.1238


SAR, Z Axis Scan (X = 11, Y = 17)

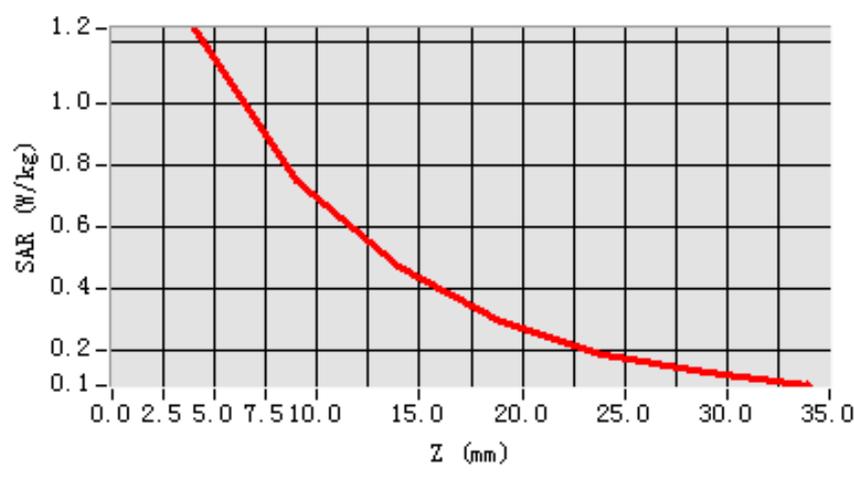

3D scen shot

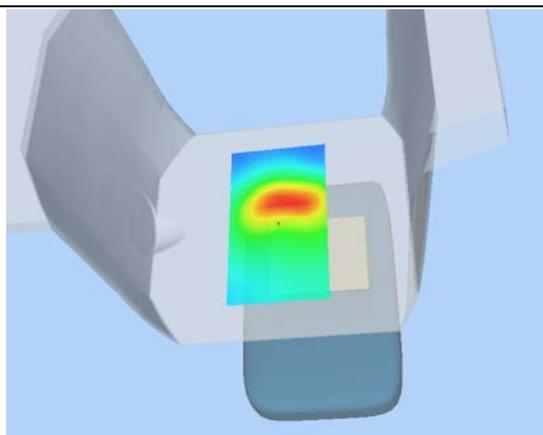

Hot spot position

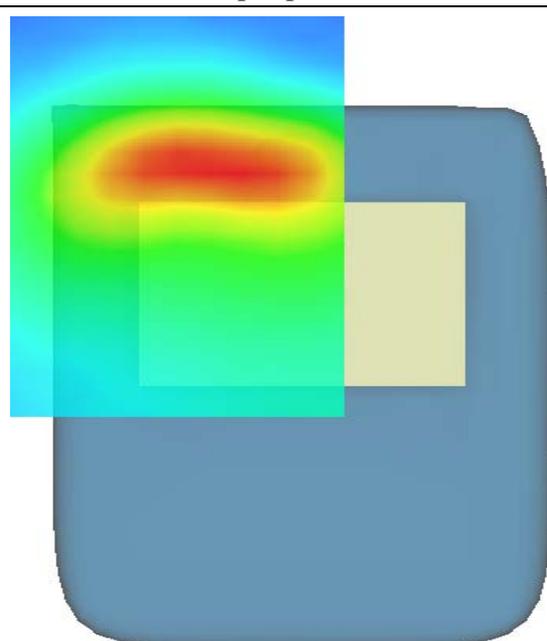

MEASUREMENT 17

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 5 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	High
Signal	CDMA

B. SAR Measurement Results

Higher Band SAR (Channel 4233):

Frequency (MHz)	846.600000
Relative permittivity (real part)	55.709999
Relative permittivity	15.877050
Conductivity (S/m)	0.980903
Power drift (%)	0.670000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.8°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

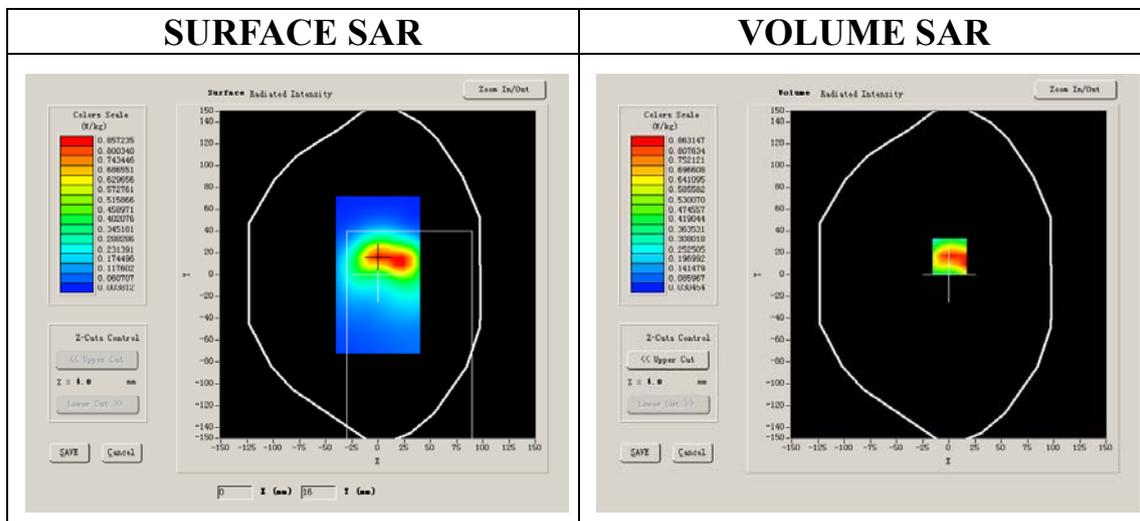


Maximum location: X=1.00, Y=17.00

SAR 10g (W/Kg)	0.558379
SAR 1g (W/Kg)	0.975524


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	1.0824	0.5849	0.3634	0.2250	0.1480	0.0893


SAR, Z Axis Scan (X = 1, Y = 17)

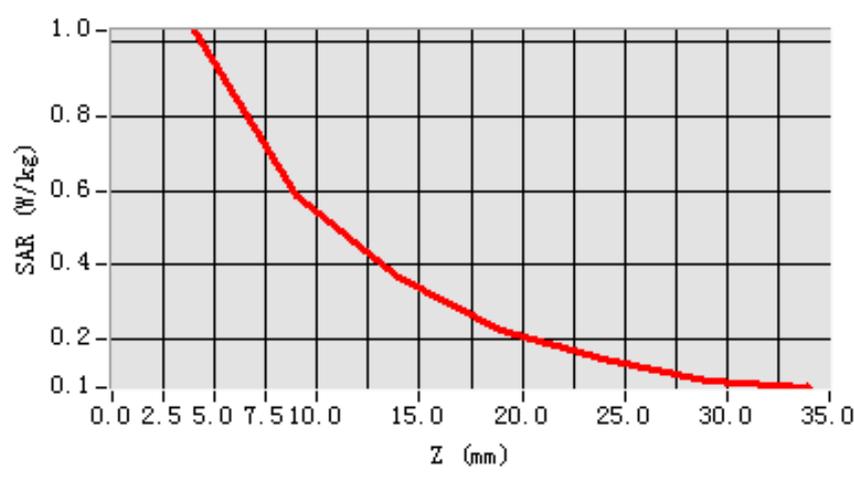

3D scen shot

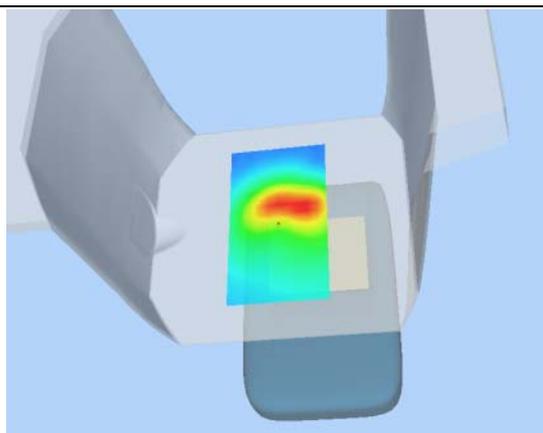

Hot spot position

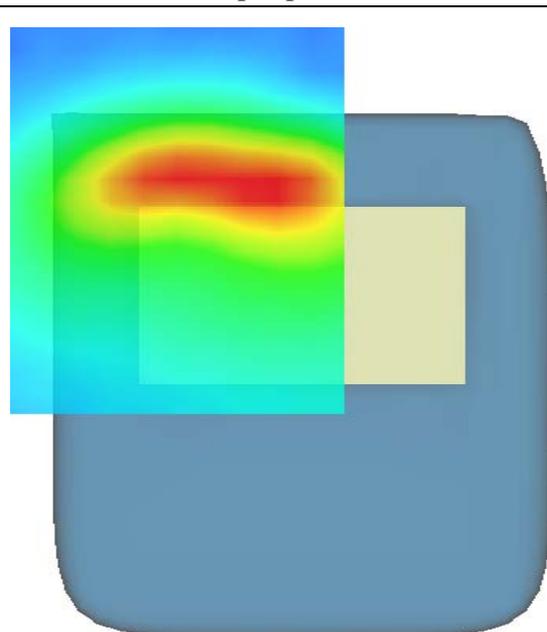

MEASUREMENT 18

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 6 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results


Middle Band SAR (Channel 4175):

Frequency (MHz)	835.000000
Relative permittivity (real part)	55.709999
Relative permittivity	15.877050
Conductivity (S/m)	0.980903
Power drift (%)	-0.020000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

SURFACE SAR

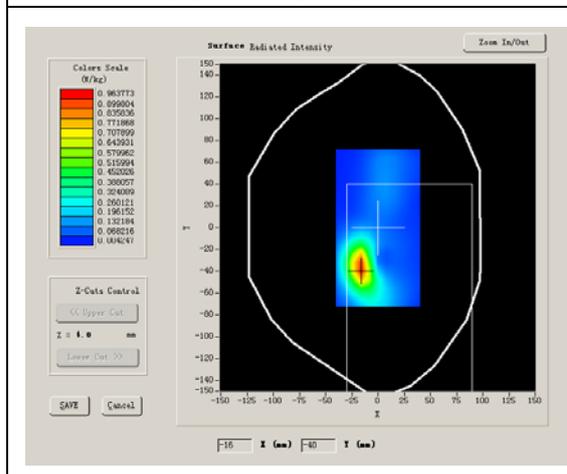

VOLUME SAR


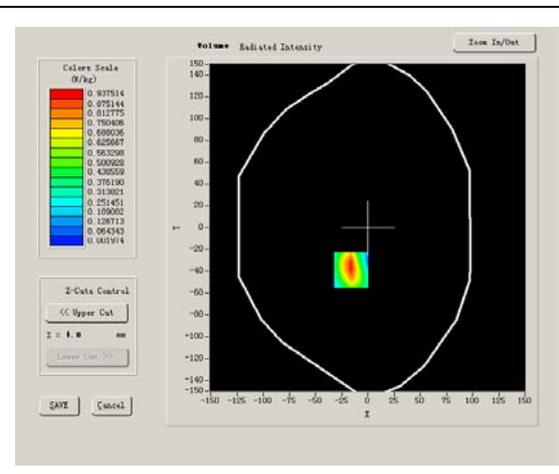


Maximum location: X=0.00, Y=25.00

SAR 10g (W/Kg)	0.277392
SAR 1g (W/Kg)	0.497288

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5046	0.2561	0.1325	0.0697	0.0372	0.0228

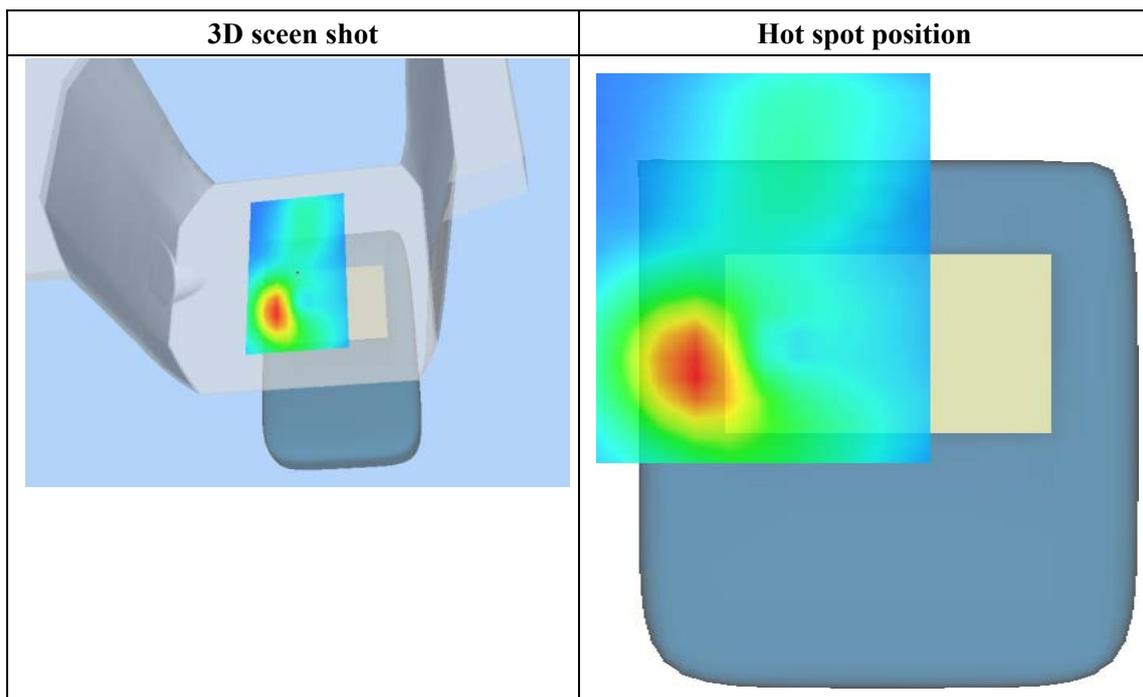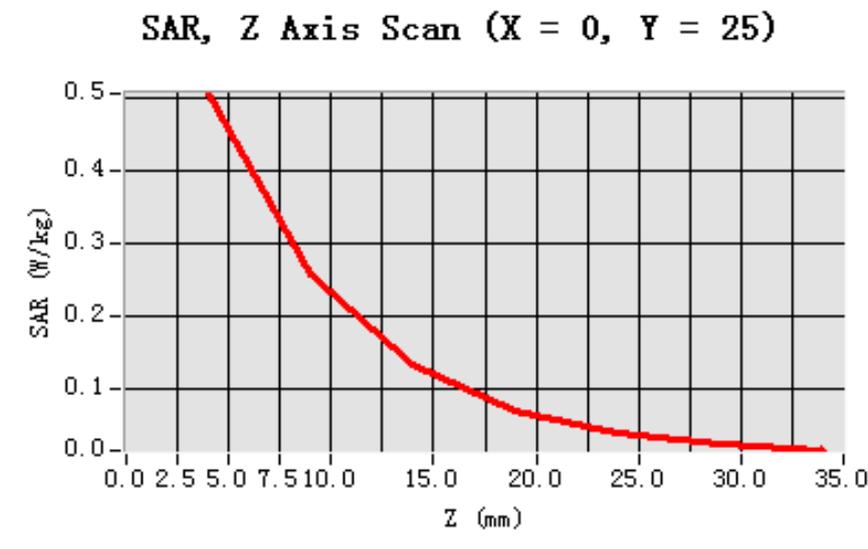


Maximum location: X=-10.00, Y=-25.00

SAR 10g (W/Kg)	0.278259
SAR 1g (W/Kg)	0.611991


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6658	0.2838	0.1188	0.0506	0.0241	0.0108


SAR, Z Axis Scan (X = -10, Y = -25)

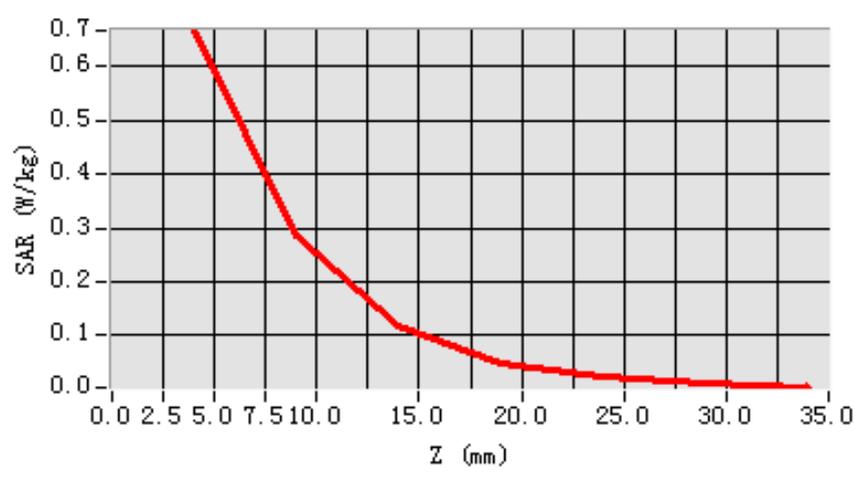

3D scen shot

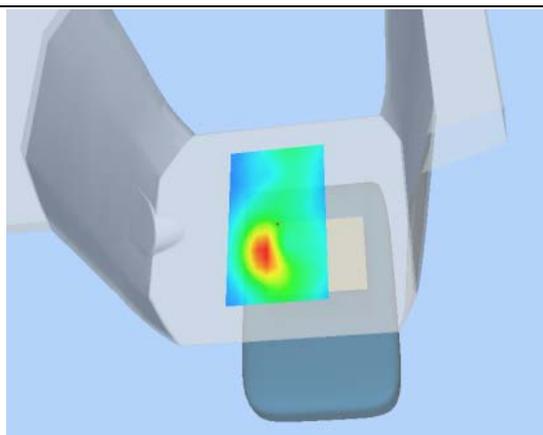

Hot spot position

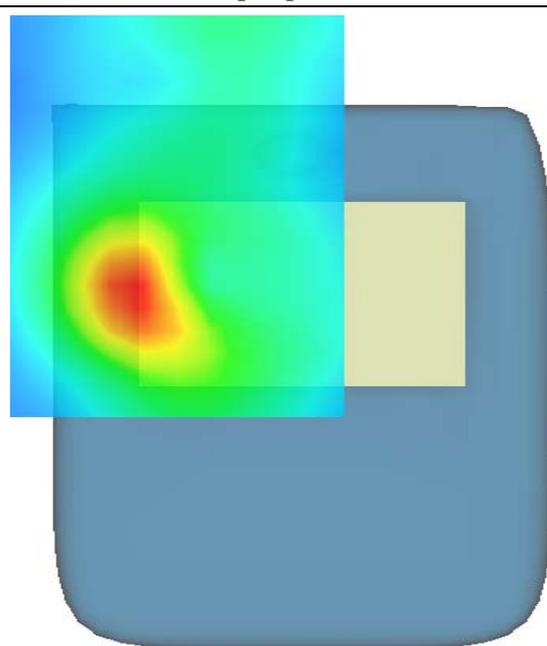

MEASUREMENT 20

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 4 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA850
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 4175):

Frequency (MHz)	835.000000
Relative permittivity (real part)	55.709999
Relative permittivity	15.877050
Conductivity (S/m)	0.980903
Power drift (%)	-0.320000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	28.559, 25.681, 27.588
Crest factor:	1:1

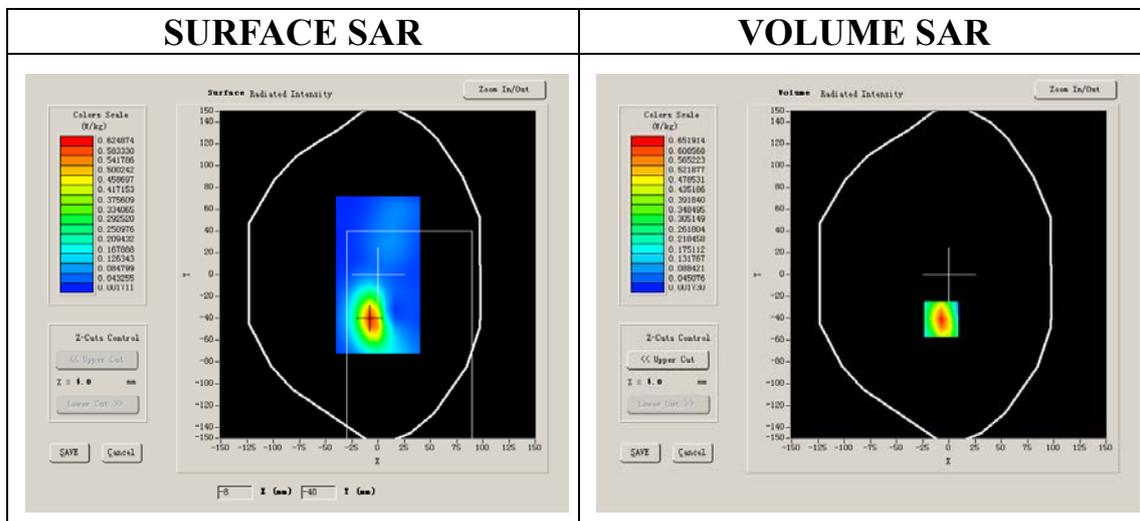


Maximum location: X=-7.00, Y=-41.00

SAR 10g (W/Kg)	0.309769
SAR 1g (W/Kg)	0.652077


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.7160	0.3415	0.1570	0.0741	0.0332	0.0171


SAR, Z Axis Scan (X = 5, Y = 7)

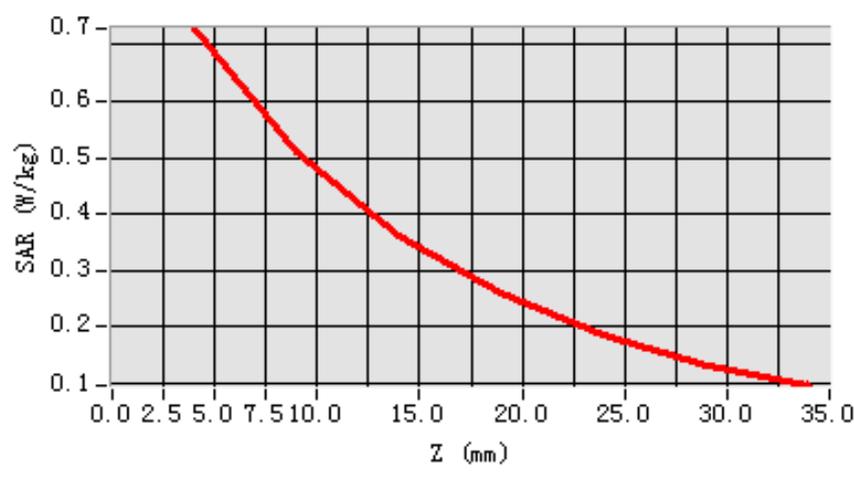

3D scen shot

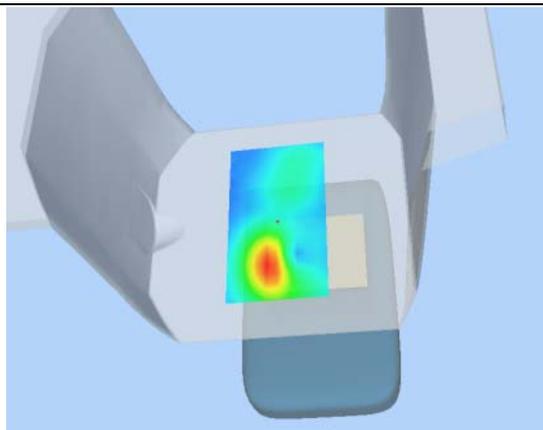

Hot spot position

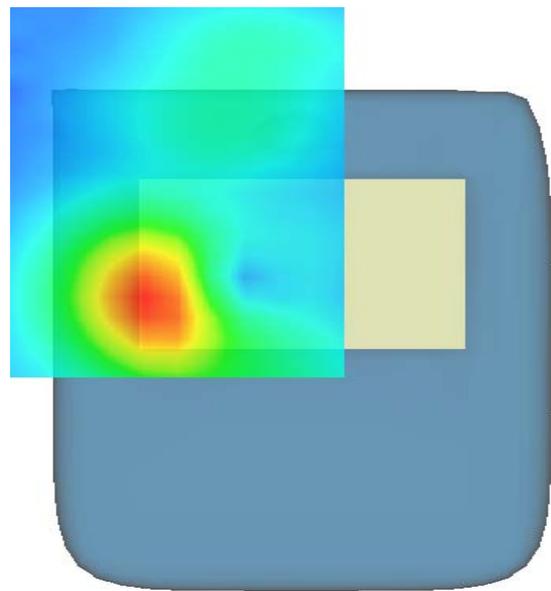

MEASUREMENT 21

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 7 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	Low
Signal	CDMA

B. SAR Measurement Results


Lower Band SAR (Channel 9262):

Frequency (MHz)	1852.400000
Relative permittivity (real part)	55.709999
Relative permittivity	15.877050
Conductivity (S/m)	1.553978
Power drift (%)	-0.260000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR

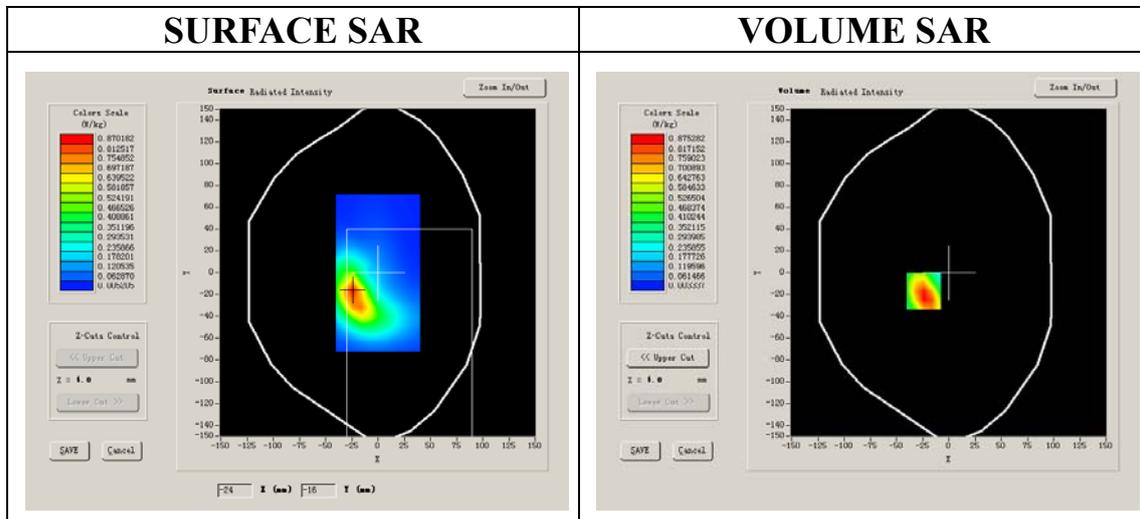

VOLUME SAR

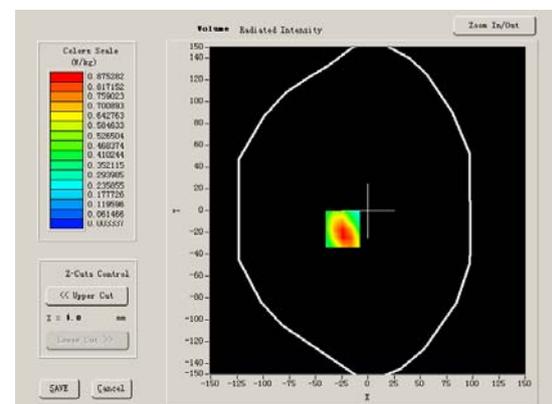


Maximum location: X=-24.00, Y=-17.00

SAR 10g (W/Kg)	0.434574
SAR 1g (W/Kg)	0.862607


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.8917	0.3982	0.1818	0.0843	0.0408	0.0182


SAR, Z Axis Scan (X = -24, Y = -17)

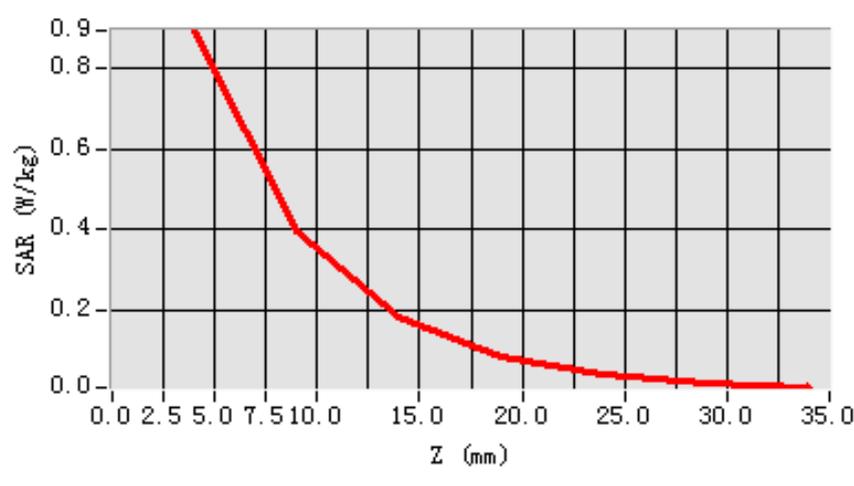

3D scen shot

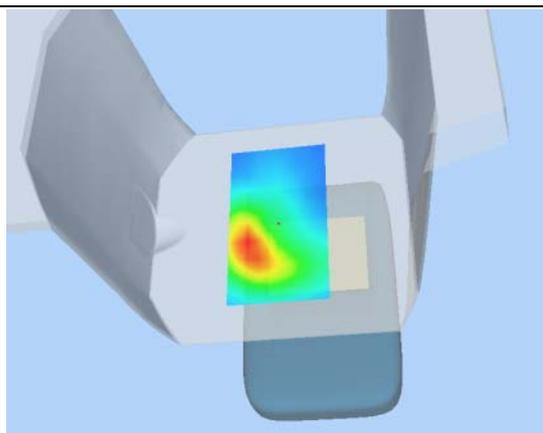

Hot spot position

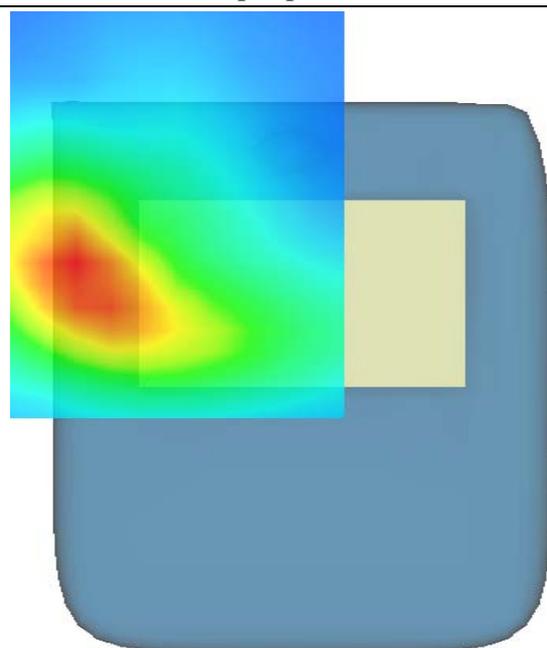

MEASUREMENT 22

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 7 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	Middle
Signal	CDMA

B. SAR Measurement Results


Middle Band SAR (Channel 9400):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	55.709999
Relative permittivity	15.877050
Conductivity (S/m)	1.553978
Power drift (%)	0.570000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR

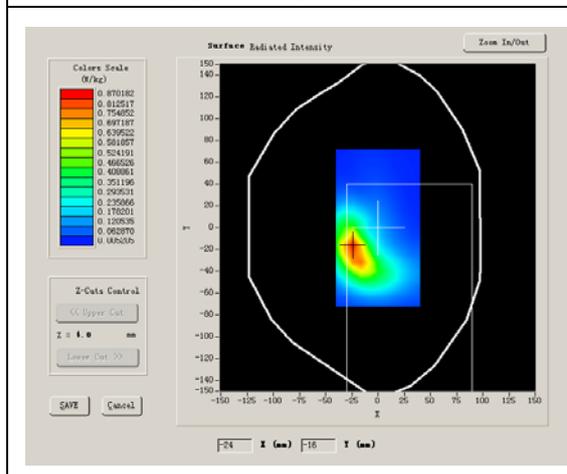

VOLUME SAR

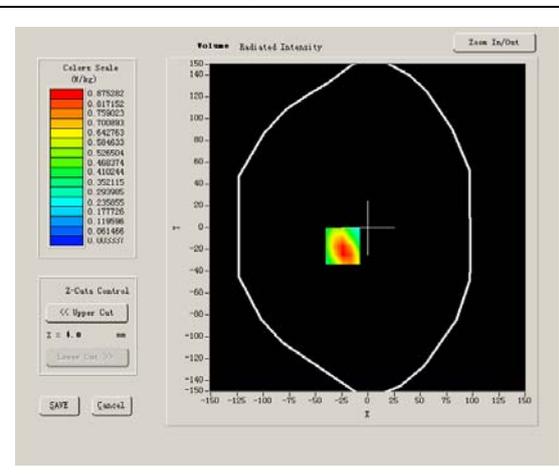



Maximum location: X=3.00, Y=-15.00

SAR 10g (W/Kg)	0.440969
SAR 1g (W/Kg)	0.802569

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.8089	0.4714	0.2696	0.1586	0.0927	0.0539

SAR, Z Axis Scan (X = 3, Y = -15)

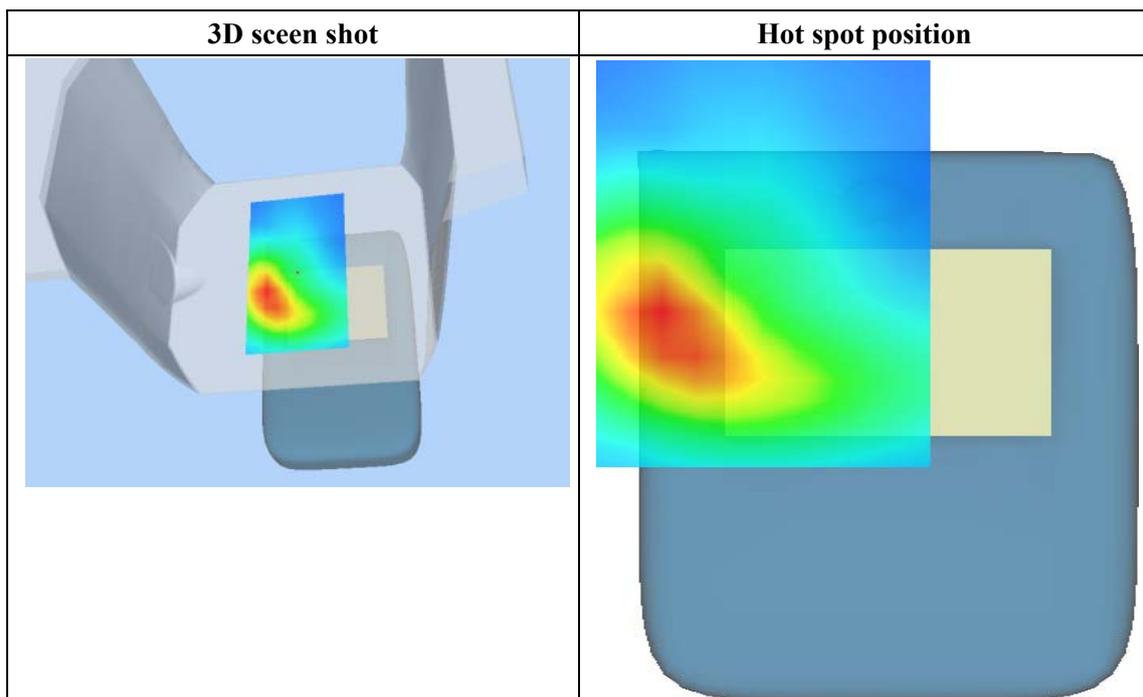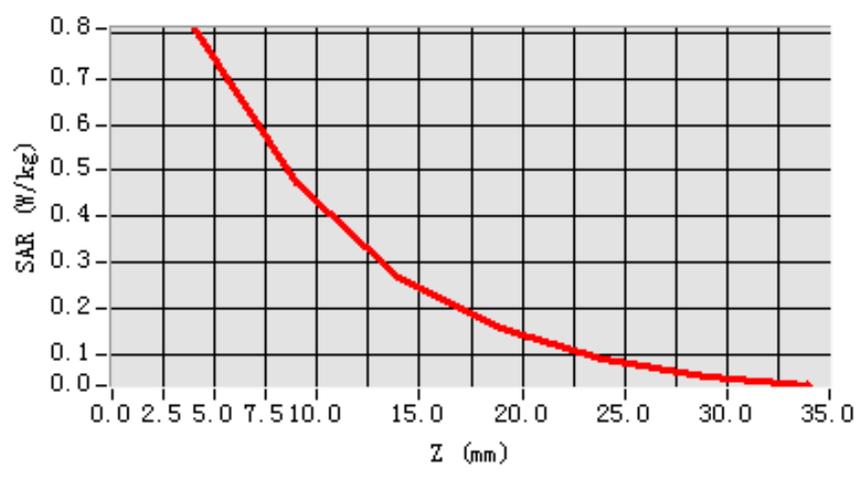

MEASUREMENT 23

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 7 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	High
Signal	CDMA

B. SAR Measurement Results


Higher Band SAR (Channel 9538):

Frequency (MHz)	1907.600000
Relative permittivity (real part)	55.709999
Relative permittivity	15.877050
Conductivity (S/m)	1.553978
Power drift (%)	0.060000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR

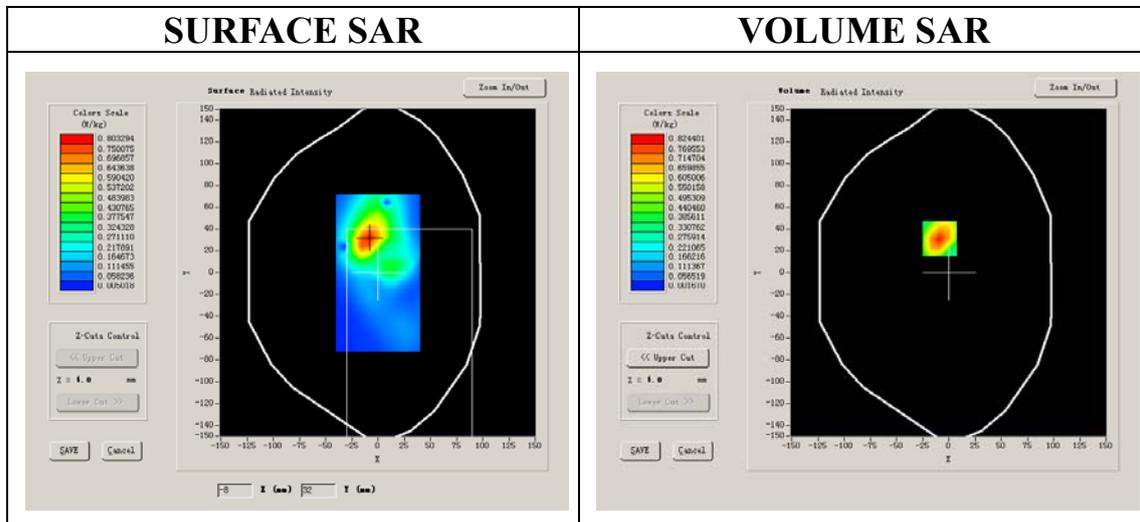

VOLUME SAR

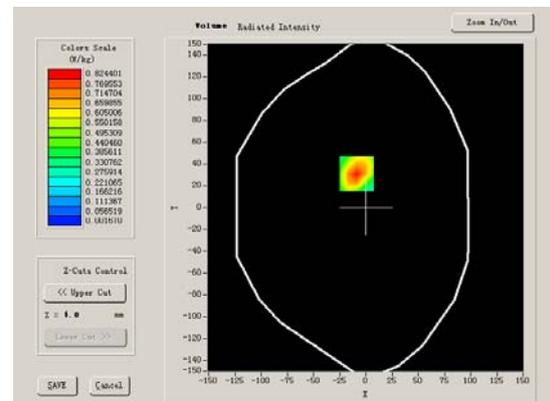


Maximum location: X=-9.00, Y=31.00

SAR 10g (W/Kg)	0.393607
SAR 1g (W/Kg)	0.818750


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.8436	0.3840	0.1749	0.0815	0.0380	0.0200


SAR, Z Axis Scan (X = -9, Y = 31)

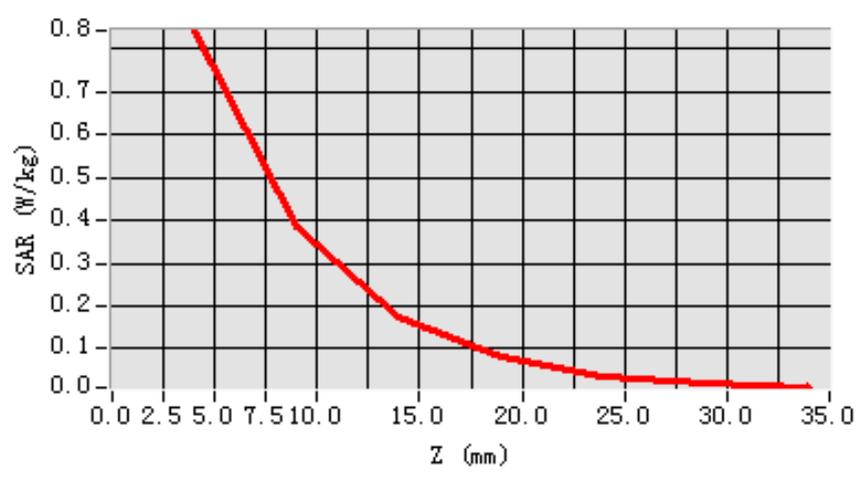

3D scen shot

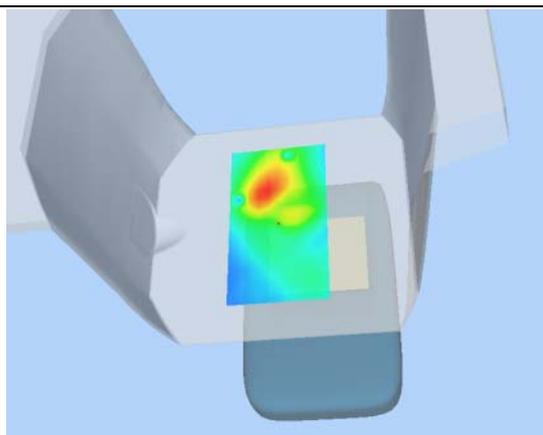

Hot spot position

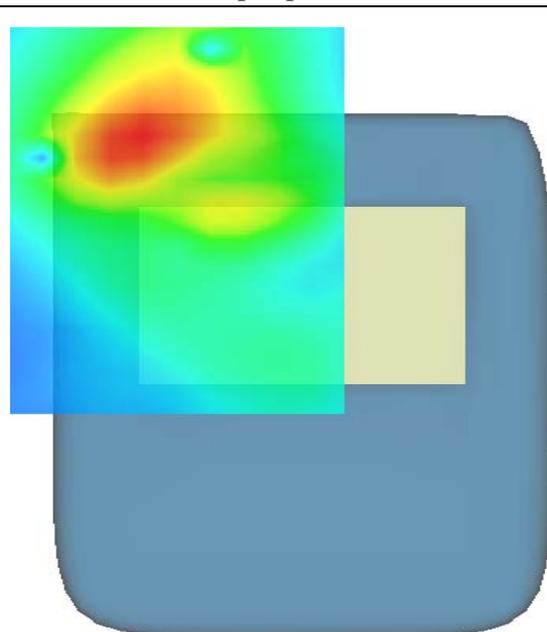

MEASUREMENT 24

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 5 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 9400):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	55.709999
Relative permittivity	15.877050
Conductivity (S/m)	1.553978
Power drift (%)	-0.930000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

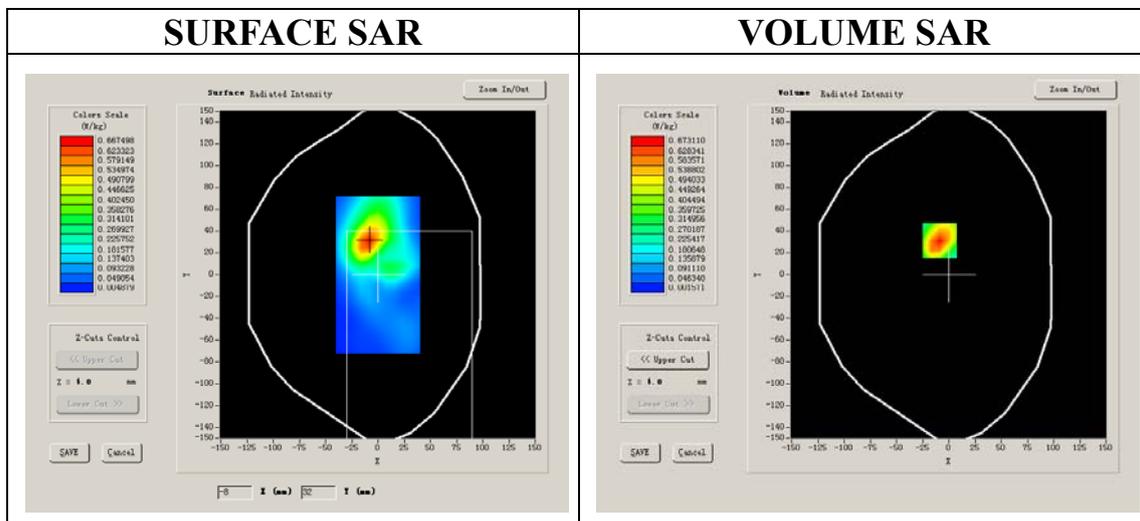


Maximum location: X=-9.00, Y=31.00

SAR 10g (W/Kg)	0.323987
SAR 1g (W/Kg)	0.650014


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.6888	0.3159	0.1468	0.0705	0.0323	0.0168


SAR, Z Axis Scan (X = -9, Y = 31)

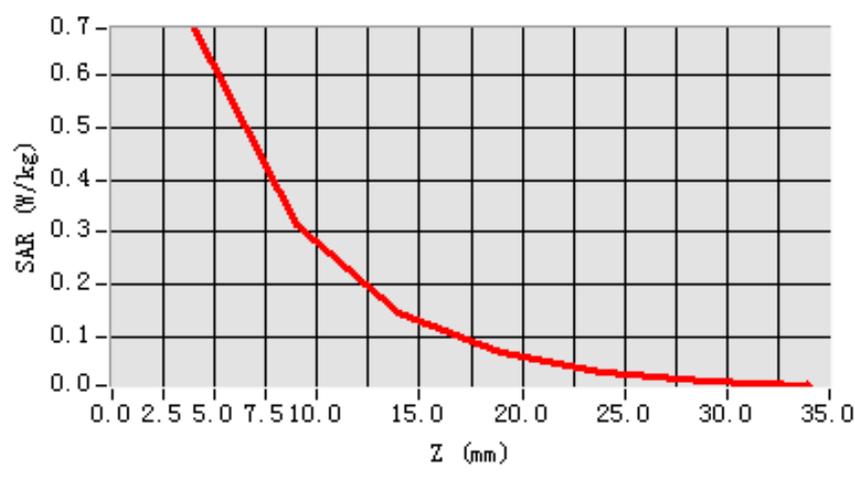

3D scen shot

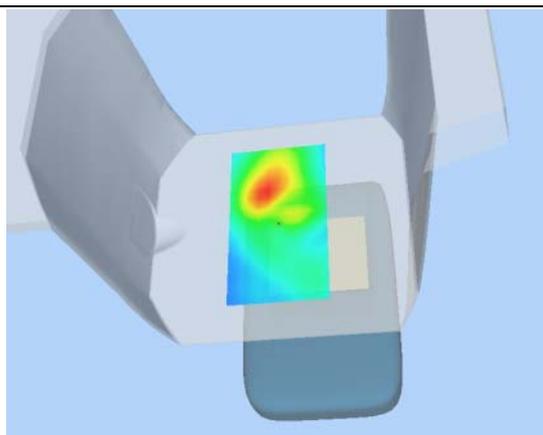

Hot spot position

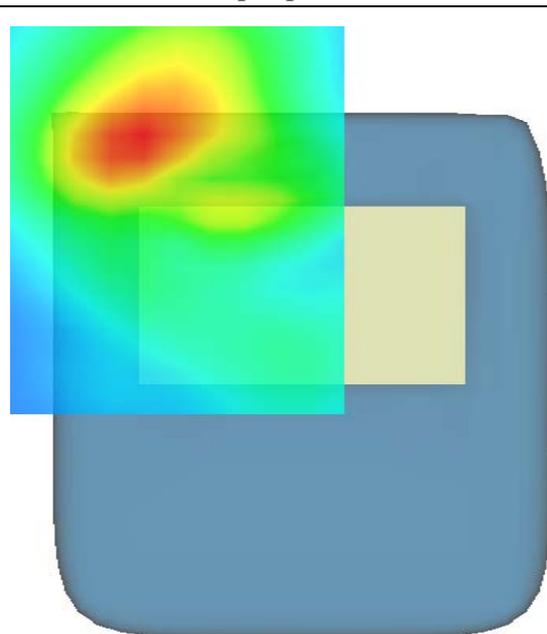

MEASUREMENT 25

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 5 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 9400):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	55.709999
Relative permittivity	15.877050
Conductivity (S/m)	1.553978
Power drift (%)	-0.370000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1


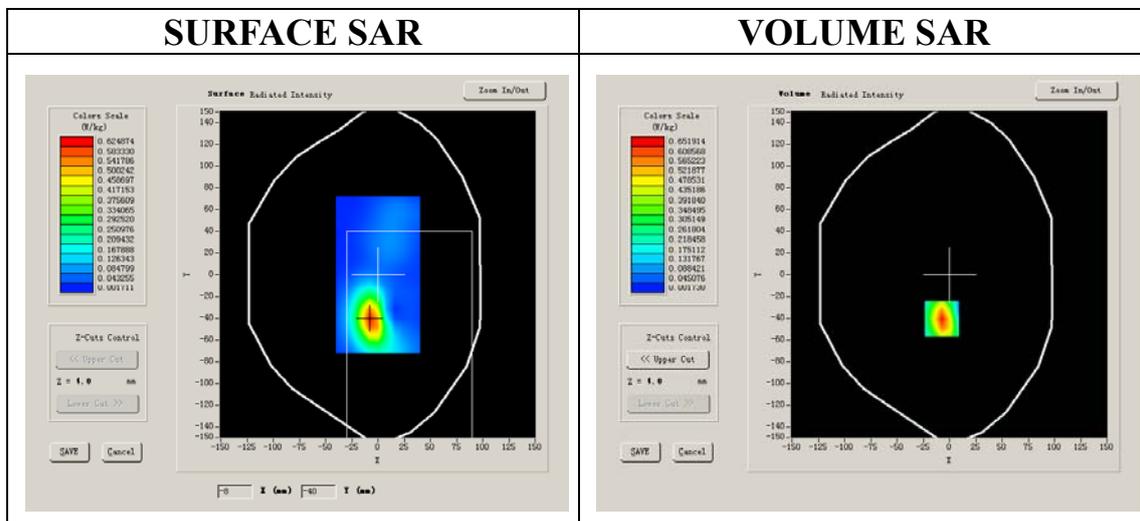


Maximum location: X=-7.00, Y=-41.00

SAR 10g (W/Kg)	0.309769
SAR 1g (W/Kg)	0.676077

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.7060	0.3415	0.1570	0.0741	0.0332	0.0171

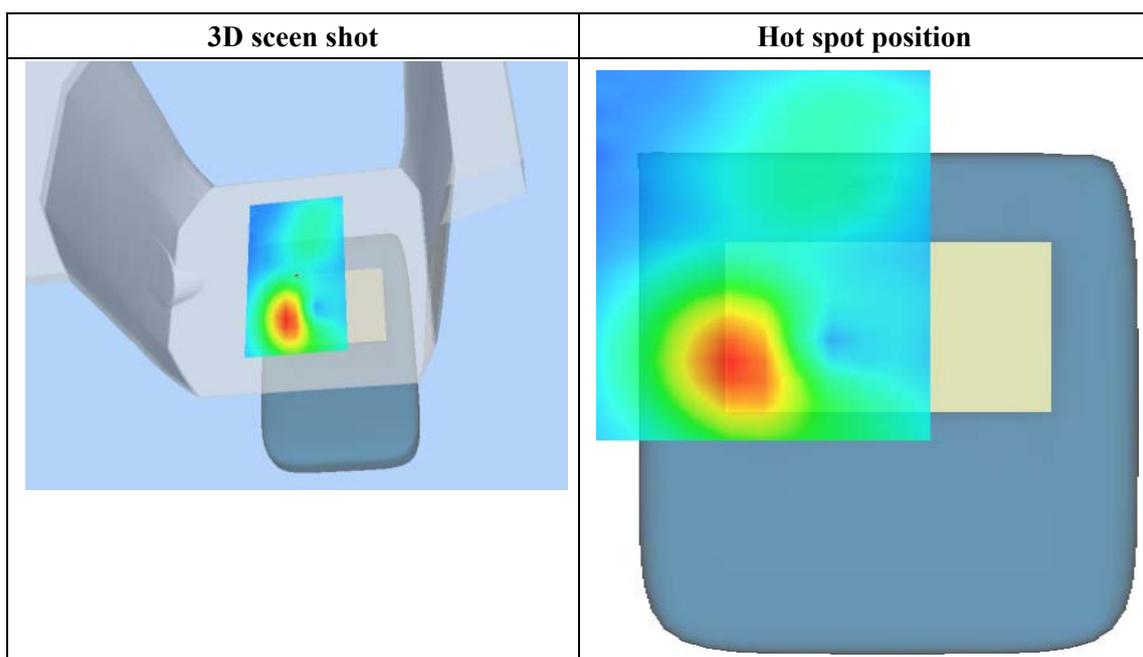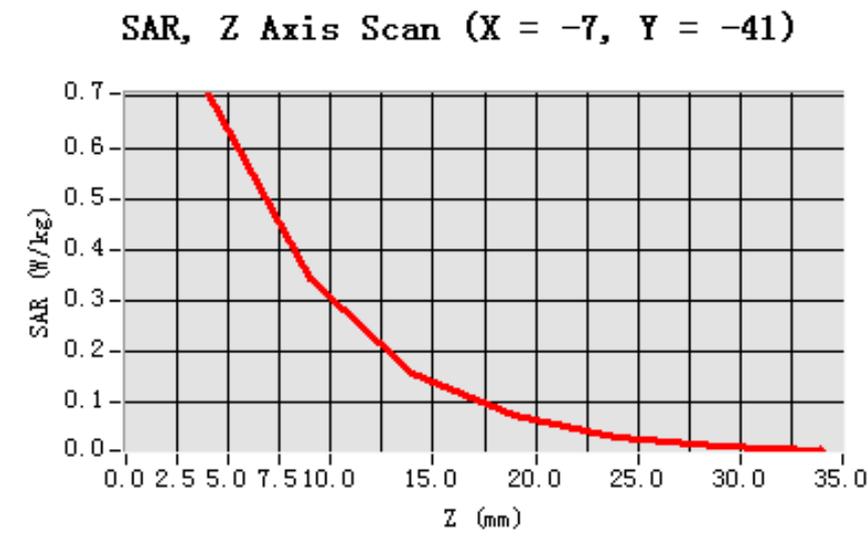

MEASUREMENT 26

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 12 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	WCDMA1900
Channels	Middle
Signal	CDMA

B. SAR Measurement Results

Middle Band SAR (Channel 9400):

Frequency (MHz)	1880.000000
Relative permittivity (real part)	55.709999
Relative permittivity	15.877050
Conductivity (S/m)	1.553978
Power drift (%)	1.030000
Ambient Temperature:	22.6°C
Liquid Temperature:	22.7°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

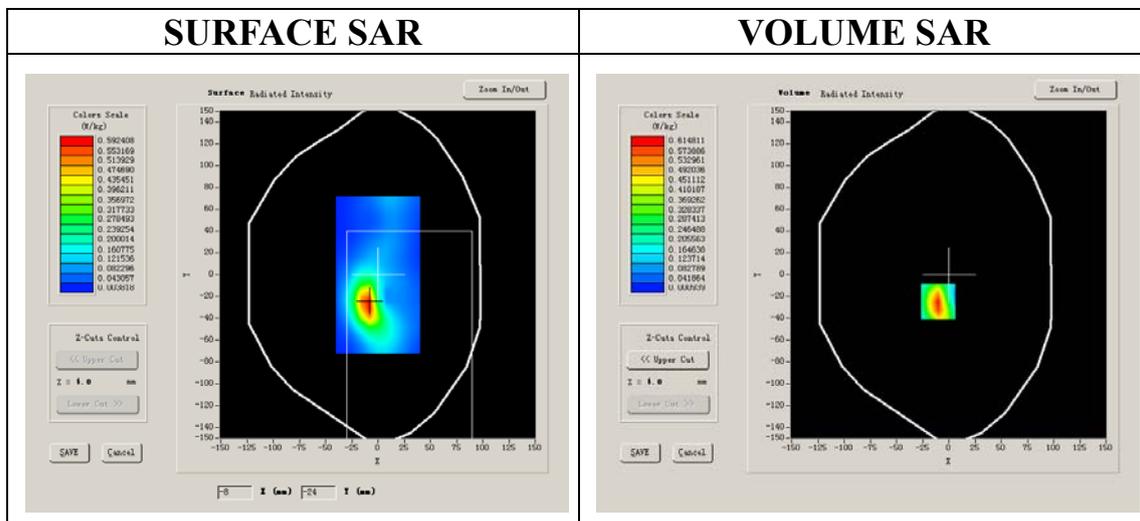


Maximum location: X=0.00, Y=-26.00

SAR 10g (W/Kg)	0.336763
SAR 1g (W/Kg)	0.507310


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.5176	0.3617	0.2425	0.1690	0.1222	0.0870


SAR, Z Axis Scan (X = 0, Y = -26)

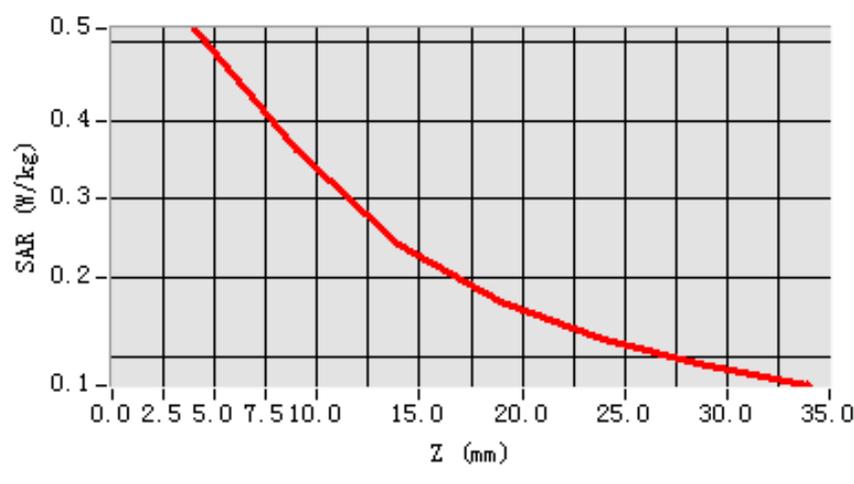

3D scen shot

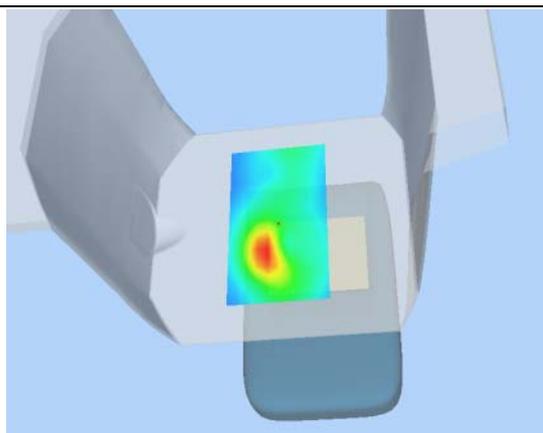

Hot spot position

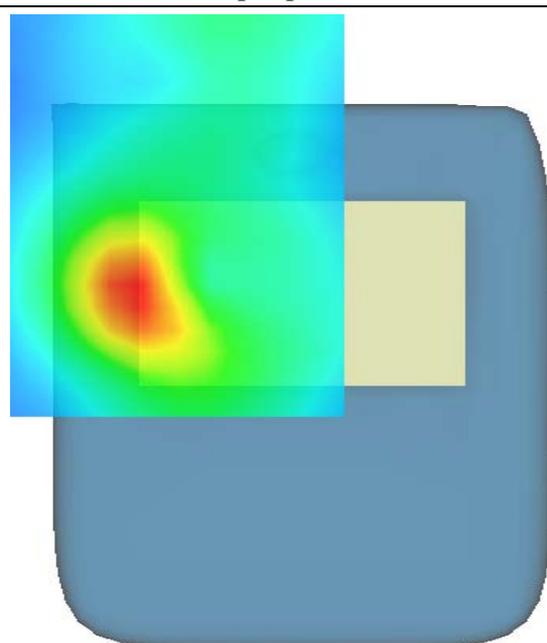

MEASUREMENT 27

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 10 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	Low
Signal	DSSS

B. SAR Measurement Results


Lower Band SAR (Channel 1)

Frequency (MHz)	2412.000000
Relative permittivity (real part)	52.548876
Relative permittivity	15.500000
Conductivity (S/m)	1.974257
Power drift (%)	-0.290000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR

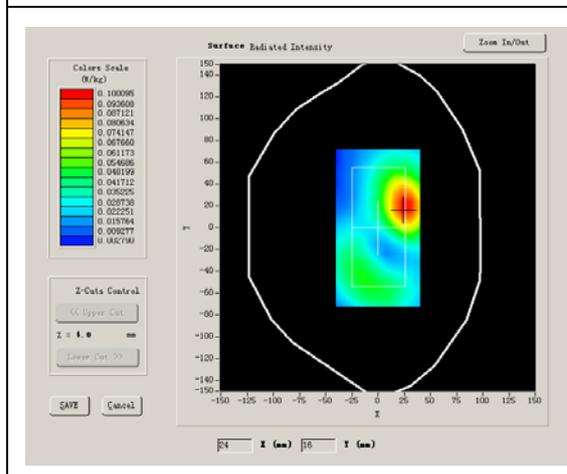

VOLUME SAR

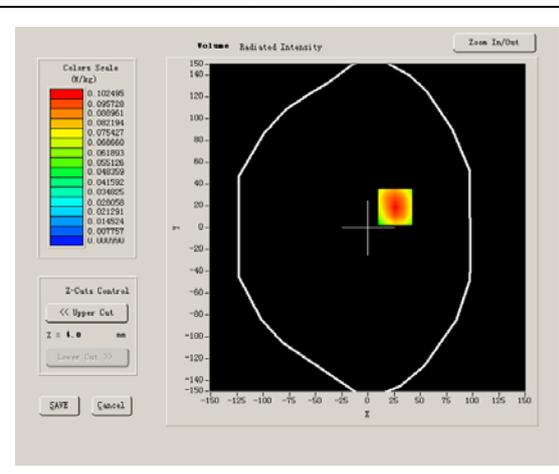


Maximum location: X=26.00, Y=19.00

SAR 10g (W/Kg)	0.058550
SAR 1g (W/Kg)	0.106429


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1116	0.0560	0.0306	0.0160	0.0087	0.0048


SAR, Z Axis Scan (X = 26, Y = 19)

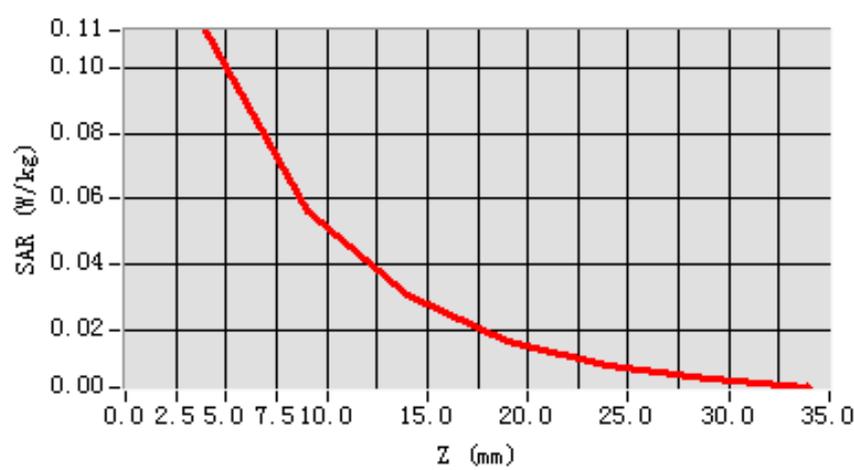

3D scen shot

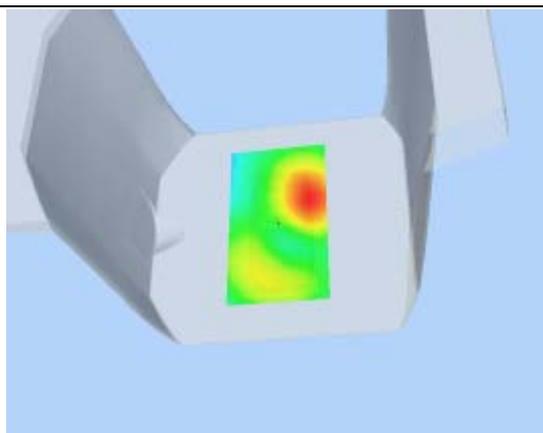

Hot spot position

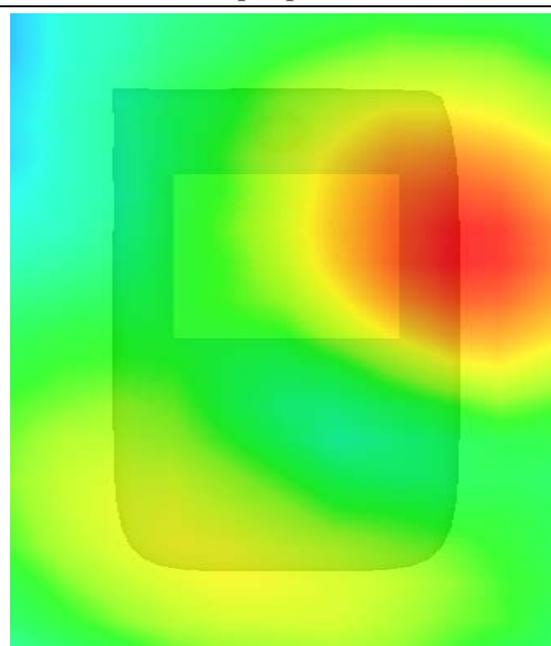

MEASUREMENT 28

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 10 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	Low
Signal	DSSS

B. SAR Measurement Results

Lower Band SAR (Channel 1)

Frequency (MHz)	2412.000000
Relative permittivity (real part)	52.548876
Relative permittivity	15.500000
Conductivity (S/m)	1.974257
Power drift (%)	-1.360000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1


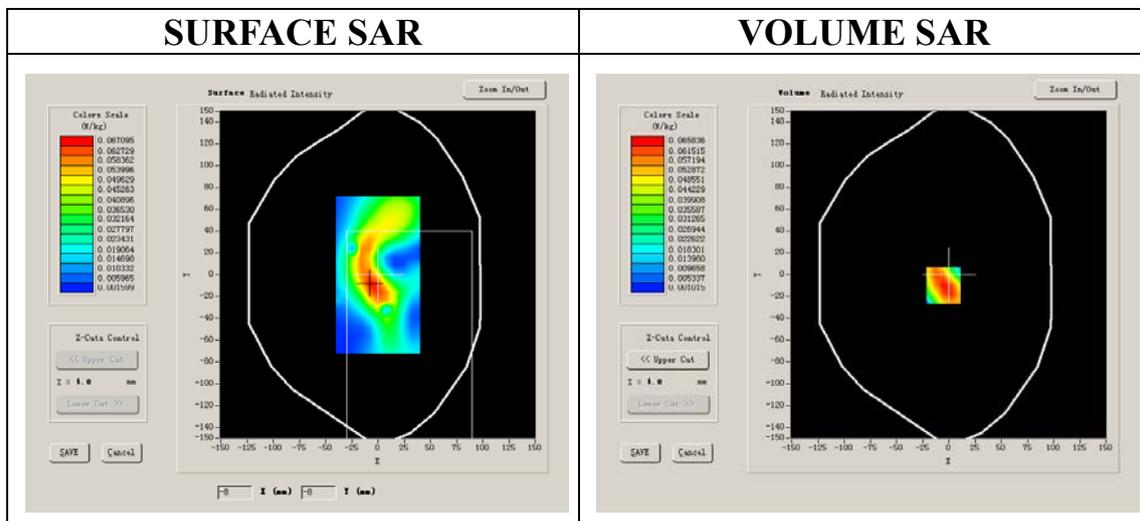


Maximum location: X=-5.00, Y=-10.00

SAR 10g (W/Kg)	0.042770
SAR 1g (W/Kg)	0.069223

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0740	0.0472	0.0300	0.0197	0.0122	0.0086

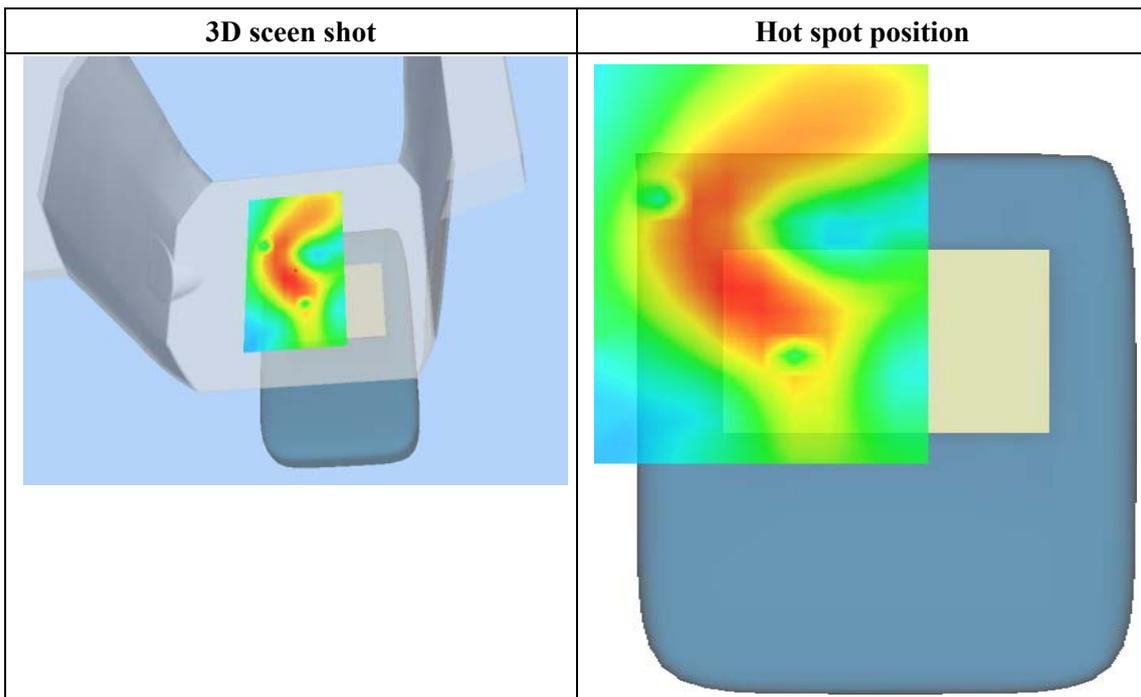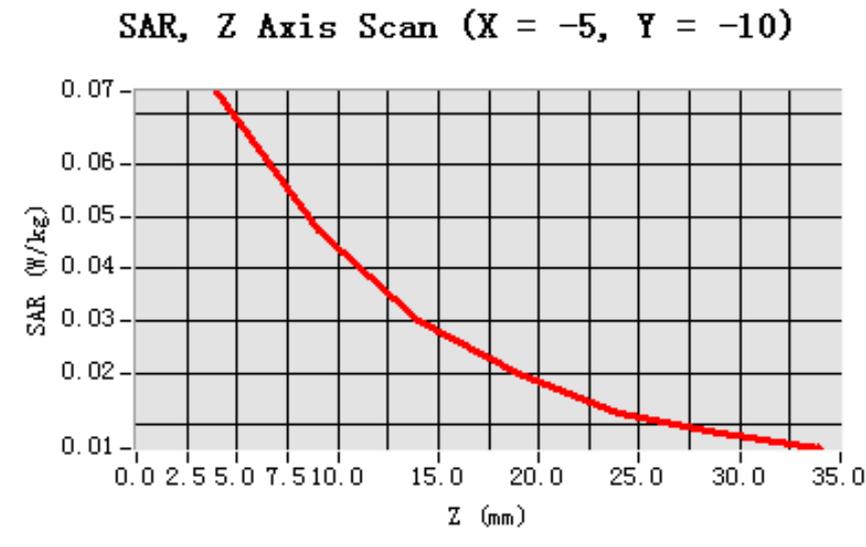

MEASUREMENT 29

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 10 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	Low
Signal	DSSS

B. SAR Measurement Results

Lower Band SAR (Channel 1)

Frequency (MHz)	2412.000000
Relative permittivity (real part)	52.548876
Relative permittivity	15.500000
Conductivity (S/m)	1.974257
Power drift (%)	-1.090000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

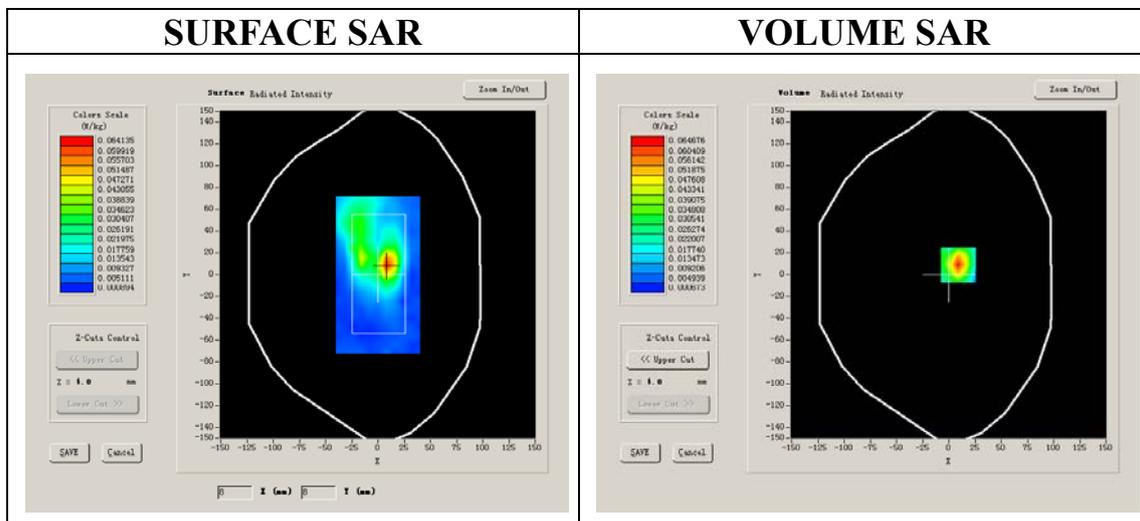


Maximum location: X=9.00, Y=9.00

SAR 10g (W/Kg)	0.031755
SAR 1g (W/Kg)	0.063988


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.0700	0.0388	0.0219	0.0129	0.0085	0.0032


SAR, Z Axis Scan (X = 9, Y = 9)

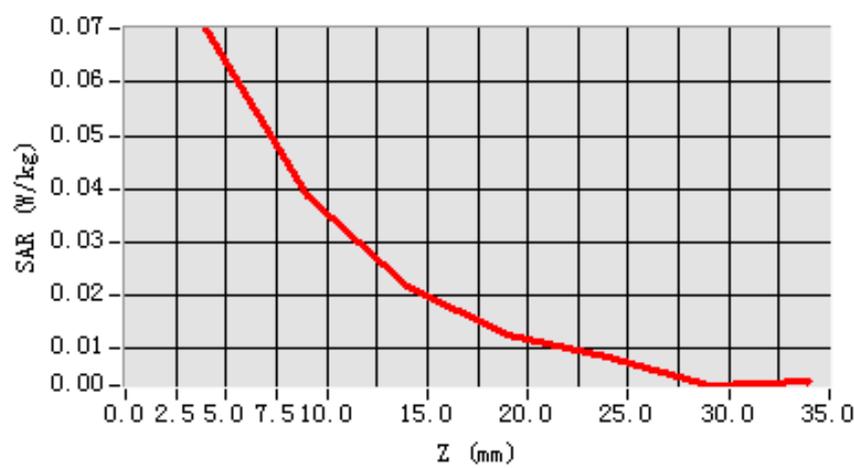

3D scen shot

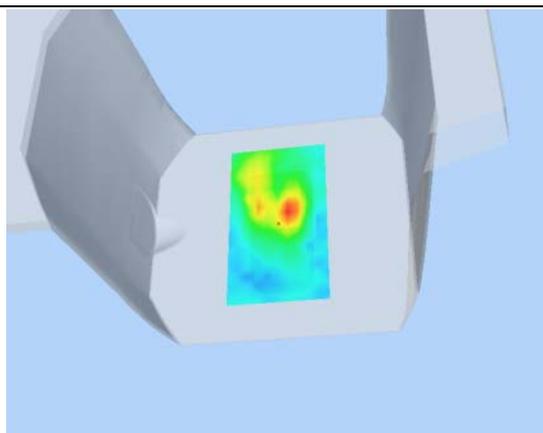

Hot spot position

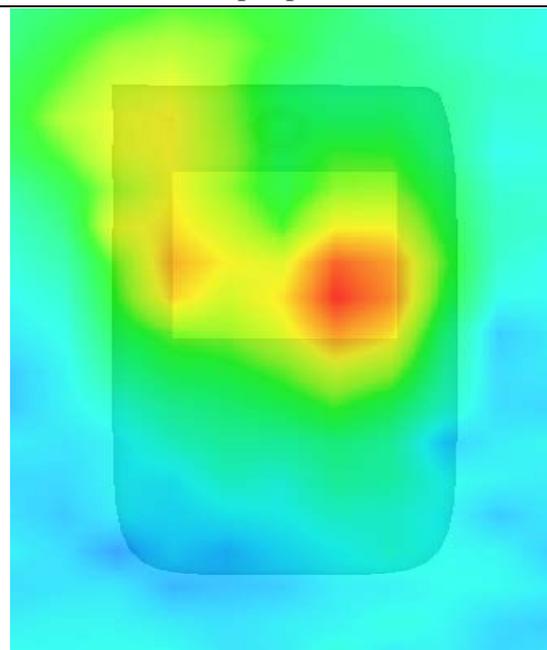

MEASUREMENT 30

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 9 minutes 10 seconds


A. Experimental conditions.

Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	Body
Band	802.11B
Channels	Low
Signal	DSSS

B. SAR Measurement Results

Lower Band SAR (Channel 1)

Frequency (MHz)	2412.000000
Relative permittivity (real part)	52.548876
Relative permittivity	15.500000
Conductivity (S/m)	1.974257
Power drift (%)	-0.950000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1


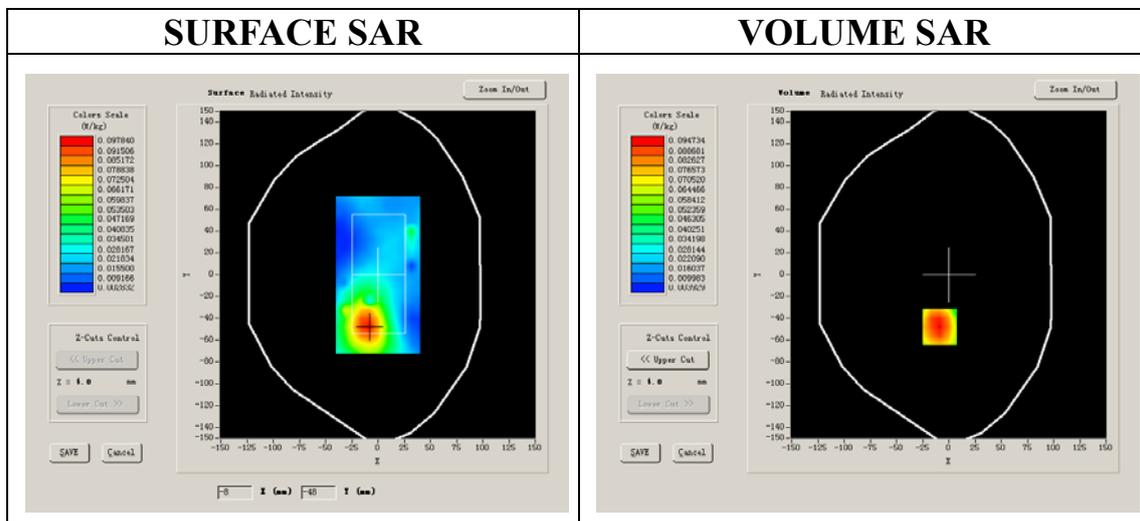


Maximum location: X=-9.00, Y=-48.00

SAR 10g (W/Kg)	0.068440
SAR 1g (W/Kg)	0.098294

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	0.1032	0.0773	0.0568	0.0424	0.0337	0.0260

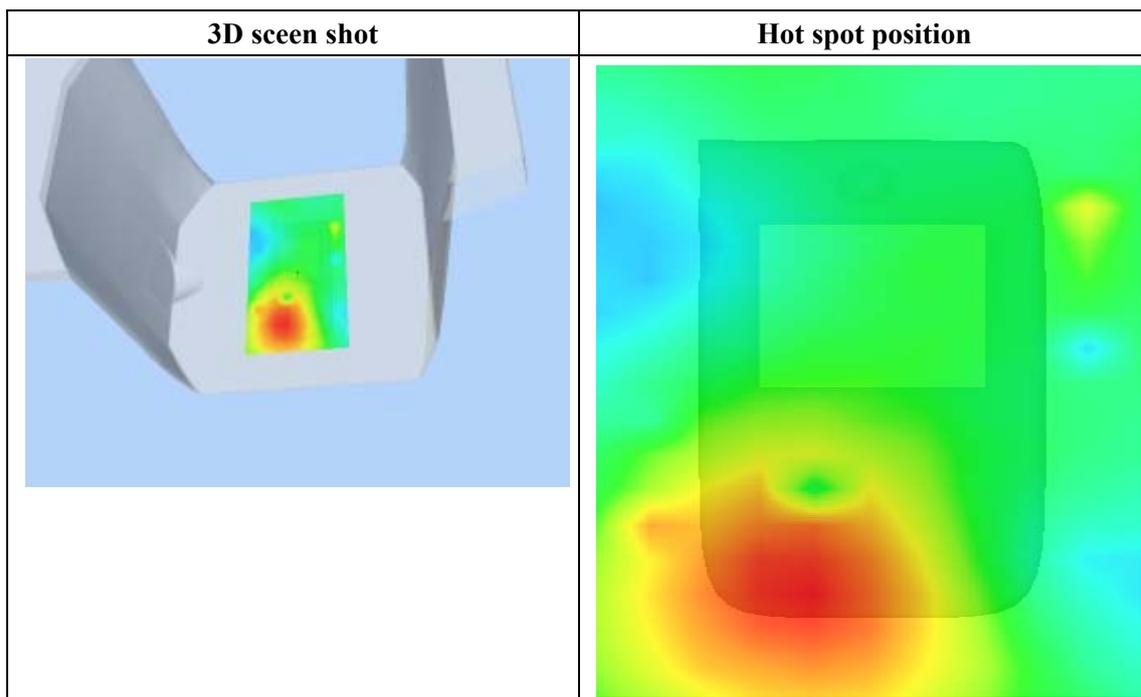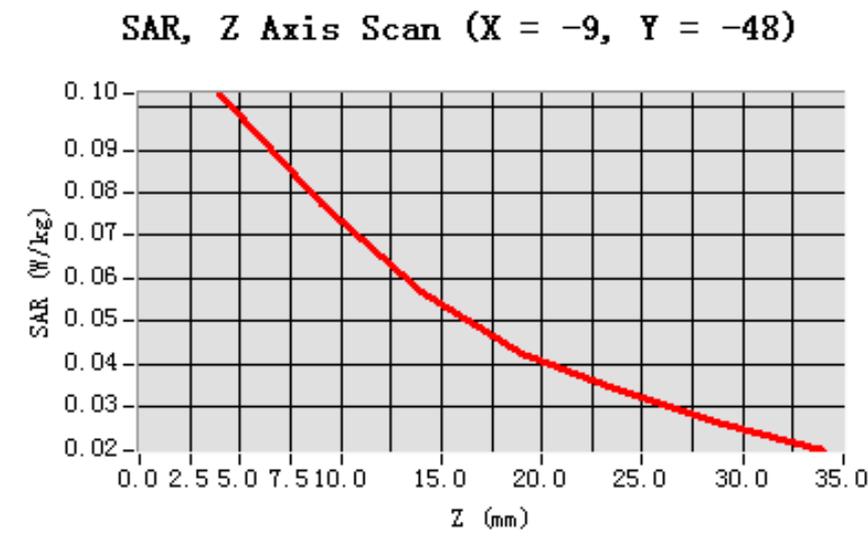

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	835MHz
Channels	
Signal	CW

B. SAR Measurement Results


Band SAR

Frequency (MHz)	835.000000
Relative permittivity (real part)	55.709999
Relative permittivity	21.709999
Conductivity (S/m)	0.980903
Power drift (%)	-0.170000
Ambient Temperature:	22.4°C
Liquid Temperature:	21.5°C
ConvF:	28.559,25.681,27.588
Crest factor:	1:1

SURFACE SAR

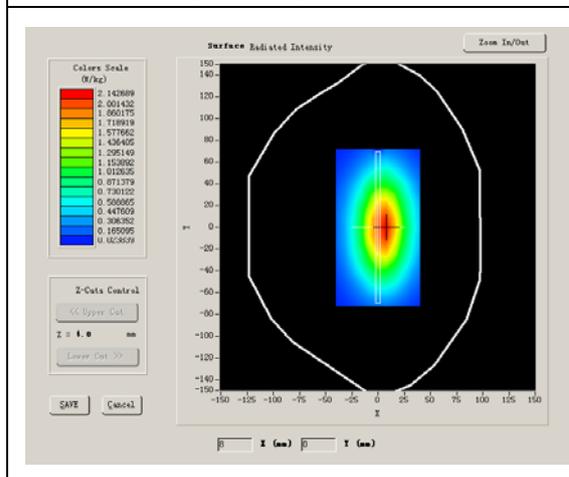

VOLUME SAR

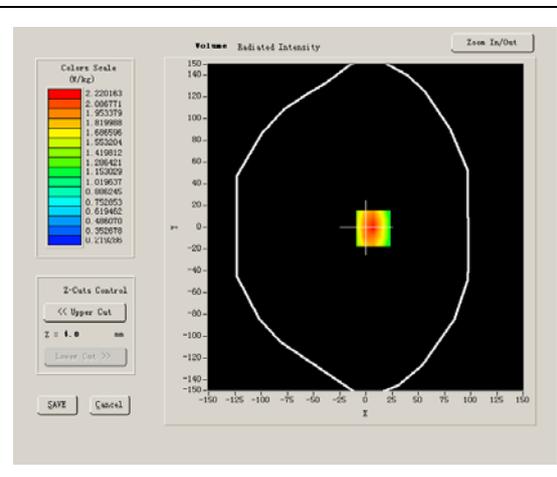


Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.539476
SAR 1g (W/Kg)	2.385979


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	2.5209	1.6629	1.1437	0.8075	0.5889	0.4143


SAR, Z Axis Scan (X = 7, Y = -1)

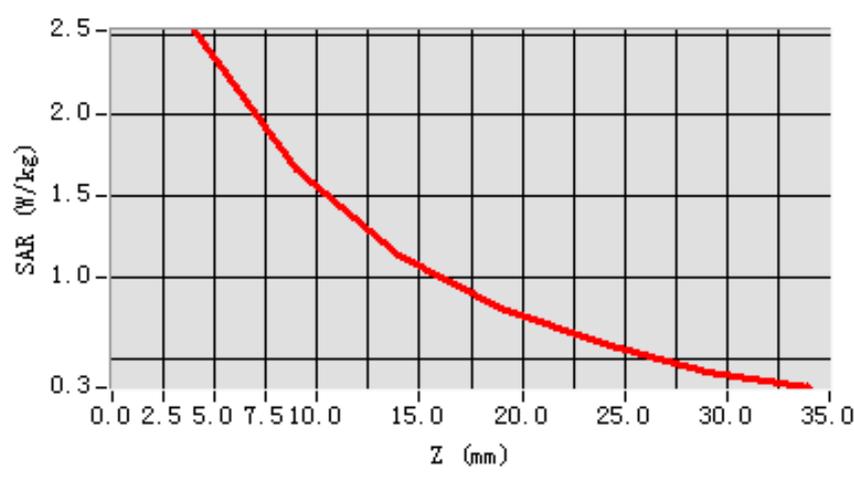

3D scen shot

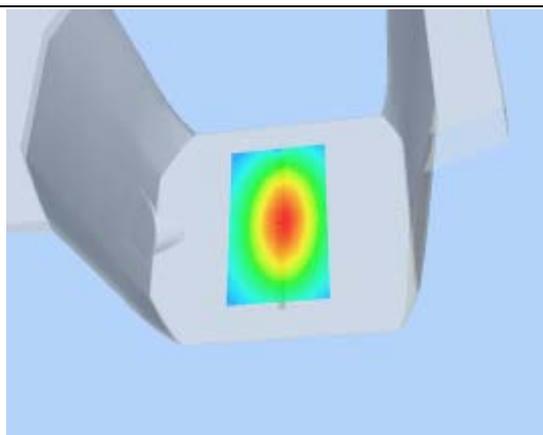

Hot spot position

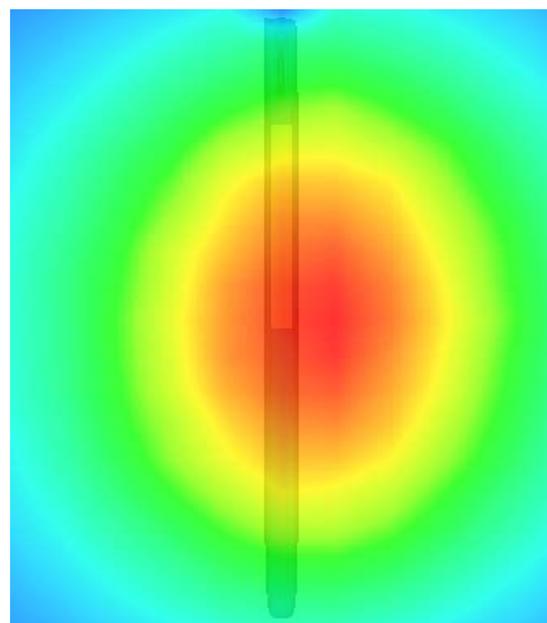

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 13 minutes 26 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	1900MHz
Channels	
Signal	CW

B. SAR Measurement Results


Band SAR

Frequency (MHz)	1900.000000
Relative permittivity (real part)	53.261611
Relative permittivity	14.070000
Conductivity (S/m)	1.553978
Power drift (%)	-0.030000
Ambient Temperature:	22.3°C
Liquid Temperature:	22.6°C
ConvF:	40.625,34.773,38.535
Crest factor:	1:1

SURFACE SAR

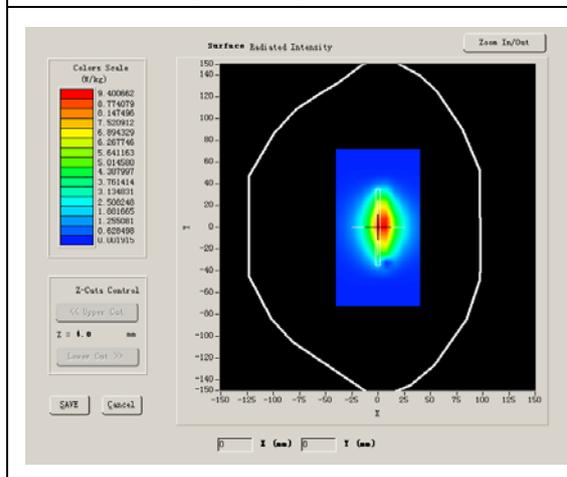

VOLUME SAR

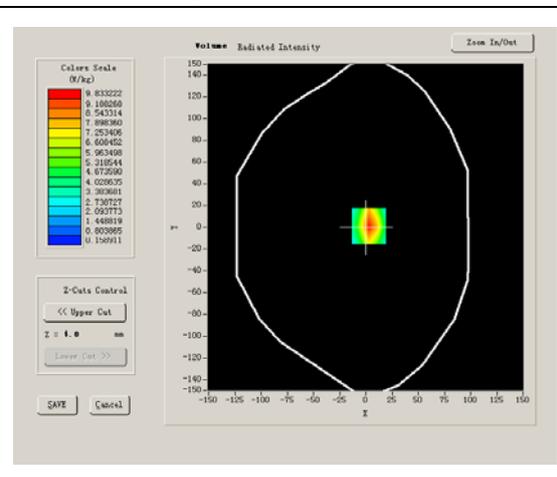


Maximum location: X=3.00, Y=1.00

SAR 10g (W/Kg)	4.981611
SAR 1g (W/Kg)	9.740177


Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.0000	10.0621	5.6445	3.6226	2.1642	1.4521	0.9078


SAR, Z Axis Scan (X = 3, Y = 1)

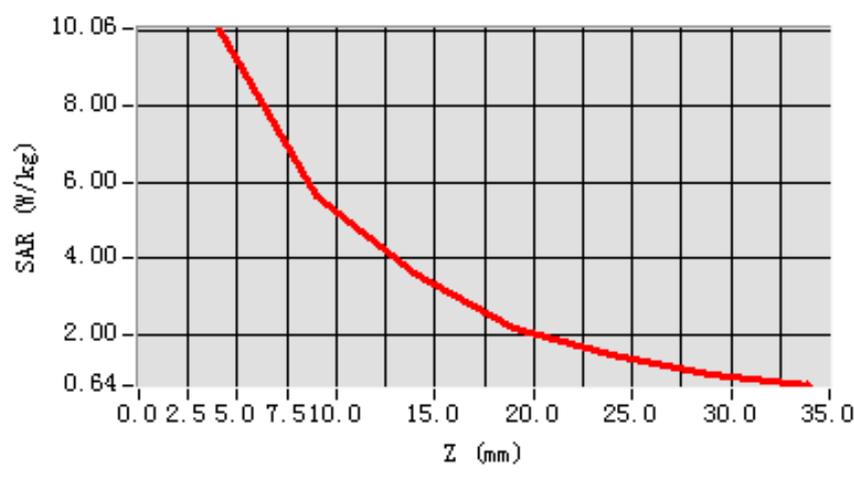

3D scen shot

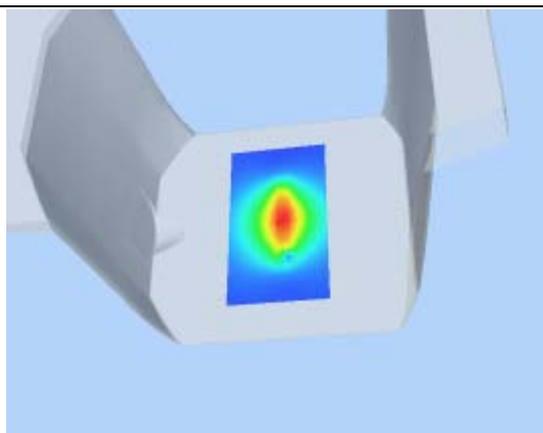

Hot spot position

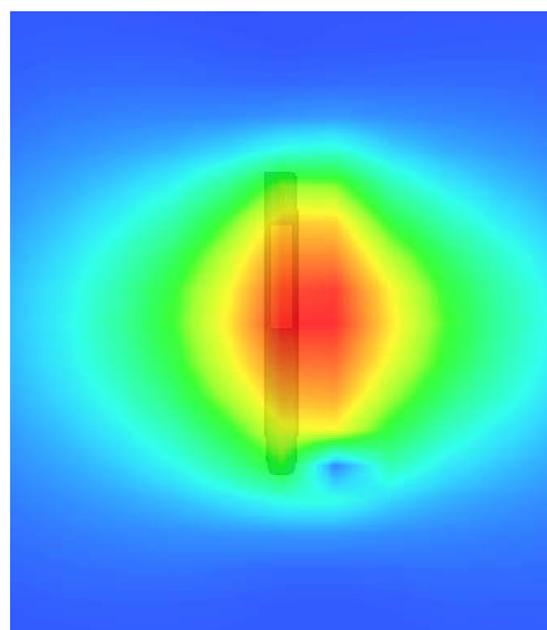

System Performance Check Data(Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 17/3/2012

Measurement duration: 13 minutes 27 seconds

A. Experimental conditions.


Phantom File	surf_sam_plan.txt
Phantom	Validation plane
Device Position	
Band	2450MHz
Channels	
Signal	CW

B. SAR Measurement Results


Band SAR

Frequency (MHz)	2450.000000
Relative permittivity (real part)	52.548876
Relative permittivity	12.991650
Conductivity (S/m)	1.974257
Power Drift (%)	1.080000
Ambient Temperature:	22.0°C
Liquid Temperature:	21.8°C
ConvF:	39.772,33.946,37.835
Crest factor:	1:1

SURFACE SAR

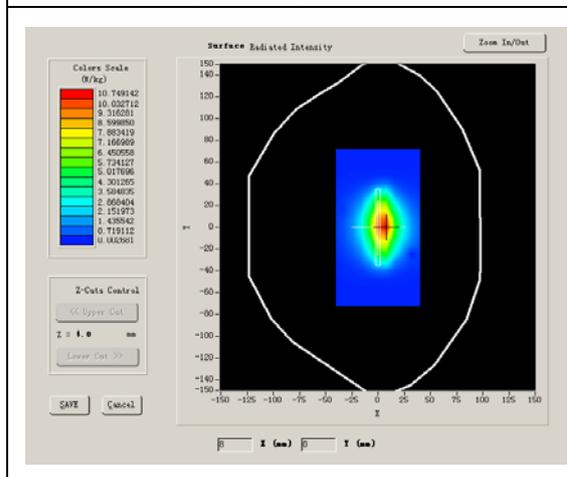

VOLUME SAR

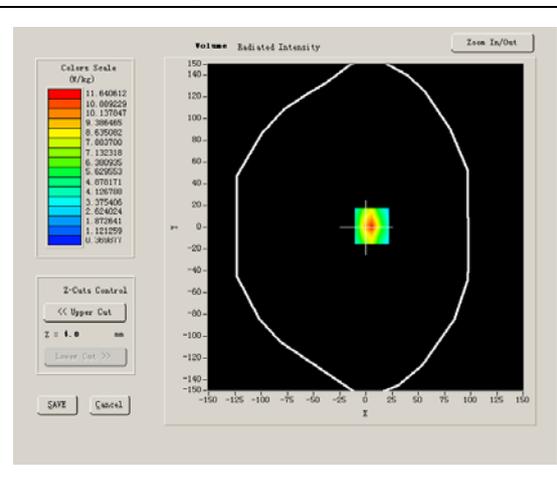

Maximum location: X=-1.00, Y=-50.00

SAR 10g (W/Kg)	6.256773
SAR 1g (W/Kg)	12.789110

Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	13.1279	6.8312	3.5991	1.3473

