



**FCC PART 15C
TEST REPORT
No.2012WLN0310**

for

ZTE CORPORATION

WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone

Model: ZTE T760

With

FCC ID: Q78-T760

Hardware Version: GMAI

Software Version: W850-W2100-P173A30V1.0.1

Issued Date: 2012-03-05



Deutscher
Akkreditierungs
Rat

DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02

FCC 2.948 Listed: No.733176

No. DGA-PL-114/01-02

IC O.A.T.S listed: No.6629A-1

Note:The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China, 100191

Tel:+86(0)10-62304633, Fax:+86(0)10-62304793 Email:welcome@emcite.com. www.emcite.com

CONTENTS

CONTENTS	2
1. TEST LABORATORY	6
1.1. TESTING LOCATION	6
1.2. TESTING ENVIRONMENT	6
1.3. PROJECT DATA	6
1.4. SIGNATURE	6
2. CLIENT INFORMATION	7
2.1. APPLICANT INFORMATION	7
2.2. MANUFACTURER INFORMATION.....	7
3. EQUIPMENT UNDER TEST(EUT) AND ANCILLARY EQUIPMENT(AE)	8
3.1. ABOUT EUT.....	8
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	8
3.4. GENERAL DESCRIPTION	8
4. REFERENCE DOCUMENTS	9
4.1. DOCUMENTS SUPPLIED BY APPLICANT.....	9
4.2. REFERENCE DOCUMENTS FOR TESTING.....	9
5. LABORATORY ENVIRONMENT	10
6. SUMMARY OF TEST RESULTS	11
6.1. SUMMARY OF TEST RESULTS.....	11
6.2. STATEMENTS.....	11
7. TEST EQUIPMENTS UTILIZED	12
ANNEX A: MEASUREMENT RESULTS	13
A.1. MEASUREMENT METHOD	13
A.2. MAXIMUM OUTPUT POWER	14
A.2.1. MAXIMUM PEAK OUTPUT POWER-CONDUCTED	14
A.2.2. MAXIMUM AVERAGE OUTPUT POWER-CONDUCTED	16
A.3. PEAK POWER SPECTRAL DENSITY	17
FIG. 1 POWER SPECTRAL DENSITY (802.11B, CH 1)	18
FIG. 2 POWER SPECTRAL DENSITY (802.11B, CH 6)	18
FIG. 3 POWER SPECTRAL DENSITY (802.11B, CH 11)	19
FIG. 4 POWER SPECTRAL DENSITY (802.11G, CH 1).....	19
FIG. 5 POWER SPECTRAL DENSITY (802.11G, CH 6).....	20
FIG. 6 POWER SPECTRAL DENSITY (802.11G, CH 11).....	20
FIG. 7 POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 1)	21
FIG. 8 POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 6)	21
FIG. 9 POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 11)	22

FIG. 10	POWER SPECTRAL DENSITY (802.11N-40MHZ, CH 3)	错误! 未定义书签。
FIG. 11	POWER SPECTRAL DENSITY (802.11N-40MHZ, CH 6)	错误! 未定义书签。
FIG. 12	POWER SPECTRAL DENSITY (802.11N-40MHZ, CH 9)	错误! 未定义书签。
A.4.	OCCUPIED 6DB BANDWIDTH	24
FIG. 13	OCCUPIED 6DB BANDWIDTH (802.11B, CH 1)	25
FIG. 14	OCCUPIED 6DB BANDWIDTH (802.11B, CH 6)	25
FIG. 15	OCCUPIED 6DB BANDWIDTH (802.11B, CH 11)	26
FIG. 16	OCCUPIED 6DB BANDWIDTH (802.11G, CH 1)	26
FIG. 17	OCCUPIED 6DB BANDWIDTH (802.11G, CH 6)	27
FIG. 18	OCCUPIED 6DB BANDWIDTH (802.11G, CH 11)	27
FIG. 19	OCCUPIED 6DB BANDWIDTH (802.11N-20MHZ, CH 1)	28
FIG. 20	OCCUPIED 6DB BANDWIDTH (802.11N-20MHZ, CH 6)	28
FIG. 21	OCCUPIED 6DB BANDWIDTH (802.11N-20MHZ, CH 11)	29
FIG. 22	OCCUPIED 6DB BANDWIDTH (802.11N-40MHZ, CH 3)	错误! 未定义书签。
FIG. 23	OCCUPIED 6DB BANDWIDTH (802.11N-40MHZ, CH 6)	错误! 未定义书签。
FIG. 24	OCCUPIED 6DB BANDWIDTH (802.11N-40MHZ, CH 9)	错误! 未定义书签。
A.5.	BAND EDGES COMPLIANCE	31
FIG. 25	BAND EDGES (802.11B, CH 1)	32
FIG. 26	BAND EDGES (802.11B, CH 11)	32
FIG. 27	BAND EDGES (802.11G, CH 1)	33
FIG. 28	BAND EDGES (802.11G, CH 11)	33
FIG. 29	BAND EDGES (802.11N-20MHZ, CH 1)	34
FIG. 30	BAND EDGES (802.11N-20MHZ, CH 11)	34
FIG. 31	BAND EDGES (802.11N-40MHZ, CH 3)	错误! 未定义书签。
FIG. 32	BAND EDGES (802.11N-40MHZ, CH 9)	错误! 未定义书签。
A.6.	TRANSMITTER SPURIOUS EMISSION	36
A.6.1	TRANSMITTER SPURIOUS EMISSION - CONDUCTED	36
FIG. 33	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, CENTER FREQUENCY)	37
FIG. 34	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 30 MHZ-26 GHZ)	38
FIG. 35	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, CENTER FREQUENCY)	38
FIG. 36	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 30 MHZ-26 GHZ)	39
FIG. 37	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, CENTER FREQUENCY)	39
FIG. 38	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 30 MHZ-26 GHZ)	40
FIG. 39	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, CENTER FREQUENCY)	40
FIG. 40	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 30 MHZ-26 GHZ)	41
FIG. 41	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, CENTER FREQUENCY)	41
FIG. 42	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 30 MHZ-26 GHZ)	42
FIG. 43	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, CENTER FREQUENCY)	42
FIG. 44	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 30 MHZ-26 GHZ)	43
FIG. 45	CONDUCTED SPURIOUS EMISSION (802.11N-20MHZ, CH1, CENTER FREQUENCY)	43
FIG. 46	CONDUCTED SPURIOUS EMISSION (802.11N-20MHZ, CH1, 30 MHZ-26 GHZ)	44
FIG. 47	CONDUCTED SPURIOUS EMISSION (802.11N-20MHZ, CH6, CENTER FREQUENCY)	44
FIG. 48	CONDUCTED SPURIOUS EMISSION (802.11N-20MHZ, CH6, 30 MHZ-26 GHZ)	45
FIG. 49	CONDUCTED SPURIOUS EMISSION (802.11N-20MHZ, CH11, CENTER FREQUENCY)	45

FIG. 50	CONDUCTED SPURIOUS EMISSION (802.11N-20MHZ, CH11, 30 MHZ-26 GHZ)	46
FIG. 51	CONDUCTED SPURIOUS EMISSION (802.11N-40MHZ, CH3, CENTER FREQUENCY) 错误! 未定义书签。	
FIG. 52	CONDUCTED SPURIOUS EMISSION (802.11N-40MHZ, CH3, 30 MHZ-26 GHZ)错误! 未定义书签。	
FIG. 53	CONDUCTED SPURIOUS EMISSION (802.11N-40MHZ, CH6, CENTER FREQUENCY) 错误! 未定义书签。	
FIG. 54	CONDUCTED SPURIOUS EMISSION (802.11N-40MHZ, CH6, 30 MHZ-26 GHZ)错误! 未定义书签。	
FIG. 55	CONDUCTED SPURIOUS EMISSION (802.11N-40MHZ, CH9, CENTER FREQUENCY) 错误! 未定义书签。	
FIG. 56	CONDUCTED SPURIOUS EMISSION (802.11N-40MHZ, CH9, 30 MHZ-26 GHZ)错误! 未定义书签。	
A.6.2	TRANSMITTER SPURIOUS EMISSION - RADIATED	50
FIG. 57	RADIATED SPURIOUS EMISSION (POWER): 802.11B, CH1, 2.38 GHZ - 245GHZ	57
FIG. 58	RADIATED SPURIOUS EMISSION (802.11B, CH1, 30 MHZ-1 GHZ)	57
FIG. 59	RADIATED SPURIOUS EMISSION (802.11B, CH1, 1 GHZ-4 GHZ)	58
FIG. 60	RADIATED SPURIOUS EMISSION (802.11B, CH1, 4 GHZ-18 GHZ)	58
FIG. 61	RADIATED SPURIOUS EMISSION (802.11B, CH6, 30 MHZ-1 GHZ)	59
FIG. 62	RADIATED SPURIOUS EMISSION (802.11B, CH6, 1 GHZ-4 GHZ)	59
FIG. 63	RADIATED SPURIOUS EMISSION (802.11B, CH6, 4 GHZ-18 GHZ)	60
FIG. 64	RADIATED SPURIOUS EMISSION (POWER): 802.11B, CH11, 2.45 GHZ - 2.50GHZ	60
FIG. 65	RADIATED SPURIOUS EMISSION (802.11B, CH11, 30 MHZ-1 GHZ)	61
FIG. 66	RADIATED SPURIOUS EMISSION (802.11B, CH11, 1 GHZ-4 GHZ)	61
FIG. 67	RADIATED SPURIOUS EMISSION (802.11B, CH11, 4 GHZ-18 GHZ)	62
FIG. 68	RADIATED SPURIOUS EMISSION (POWER): 802.11G, CH1, 2.38 GHZ - 2.45GHZ	62
FIG. 69	RADIATED SPURIOUS EMISSION (802.11G, CH1, 30 MHZ-1 GHZ)	63
FIG. 70	RADIATED SPURIOUS EMISSION (802.11G, CH1, 1 GHZ-4 GHZ)	63
FIG. 71	RADIATED SPURIOUS EMISSION (802.11G, CH1, 4 GHZ-18 GHZ)	64
FIG. 72	RADIATED SPURIOUS EMISSION (802.11G, CH6, 30 MHZ-1 GHZ)	64
FIG. 73	RADIATED SPURIOUS EMISSION (802.11G, CH6, 1 GHZ-4 GHZ)	65
FIG. 74	RADIATED SPURIOUS EMISSION (802.11G, CH6, 4 GHZ-18 GHZ)	65
FIG. 75	RADIATED SPURIOUS EMISSION (POWER): 802.11G, CH11, 2.45 GHZ - 2.50GHZ	66
FIG. 76	RADIATED SPURIOUS EMISSION (802.11G, CH11, 30 MHZ-1 GHZ)	66
FIG. 77	RADIATED SPURIOUS EMISSION (802.11G, CH11, 1 GHZ-4 GHZ)	67
FIG. 78	RADIATED SPURIOUS EMISSION (802.11G, CH11, 4 GHZ-18 GHZ)	67
FIG. 79	RADIATED SPURIOUS EMISSION (POWER): 802.11N-20MHZ, CH1, 2.38 GHZ - 2.45GHZ .	68
FIG. 80	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH1, 30 MHZ-1 GHZ)	68
FIG. 81	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH1, 1 GHZ-4 GHZ)	69
FIG. 82	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH1, 4 GHZ-18 GHZ)	69
FIG. 83	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH6, 30 MHZ-1 GHZ)	70
FIG. 84	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH6, 1 GHZ-4 GHZ)	70
FIG. 85	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH6, 4 GHZ-18 GHZ)	71
FIG. 86	RADIATED SPURIOUS EMISSION (POWER): 802.11N-20MHZ, CH11, 2.45 GHZ - 2.50GHZ	71

FIG. 87	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH11, 30 MHZ-1 GHZ)	72
FIG. 88	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH11, 1 GHZ-4 GHZ)	72
FIG. 89	RADIATED SPURIOUS EMISSION (802.11N-20MHZ, CH11, 4 GHZ-18 GHZ)	73
FIG. 90	RADIATED SPURIOUS EMISSION (POWER): 802.11N-40MHZ, CH3, 2.38 GHZ - 2.45GHZ ..	错误! 未定义书签。
FIG. 91	RADIATED SPURIOUS EMISSION (802.11N-40MHZ, CH3, 30 MHZ-1 GHZ) ..	错误! 未定义书签。
FIG. 92	RADIATED SPURIOUS EMISSION (802.11N-40MHZ, CH3, 1 GHZ-4 GHZ) ..	错误! 未定义书签。
FIG. 93	RADIATED SPURIOUS EMISSION (802.11N-40MHZ, CH3, 4 GHZ-18 GHZ) ..	错误! 未定义书签。
FIG. 94	RADIATED SPURIOUS EMISSION (802.11N-40MHZ, CH6, 30 MHZ-1 GHZ) ..	错误! 未定义书签。
FIG. 95	RADIATED SPURIOUS EMISSION (802.11N-40MHZ, CH6, 1 GHZ-4 GHZ) ..	错误! 未定义书签。
FIG. 96	RADIATED SPURIOUS EMISSION (802.11N-40MHZ, CH6, 4 GHZ-18 GHZ) ..	错误! 未定义书签。
FIG. 97	RADIATED SPURIOUS EMISSION (POWER): 802.11N-40MHZ, CH9, 2.45 GHZ - 2.50GHZ ..	错误! 未定义书签。
FIG. 98	RADIATED SPURIOUS EMISSION (802.11N-40MHZ, CH9, 30 MHZ-1 GHZ) ..	错误! 未定义书签。
FIG. 99	RADIATED SPURIOUS EMISSION (802.11N-40MHZ, CH9, 1 GHZ-4 GHZ) ..	错误! 未定义书签。
FIG. 100	RADIATED SPURIOUS EMISSION (802.11N-40MHZ, CH9, 4 GHZ-18 GHZ) ..	错误! 未定义书签。
FIG. 101	RADIATED EMISSION: 18 GHZ - 26.5 GHZ	79
A.7.	AC POWERLINE CONDUCTED EMISSION	80
FIG. 102	AC POWERLINE CONDUCTED EMISSION-802.11N	81
FIG. 103	AC POWERLINE CONDUCTED EMISSION-IDLE	82

1. TEST LABORATORY

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304793

1.2. Testing Environment

Normal Temperature: 15-30°C
Extreme Temperature: -20/+55°C
Relative Humidity: 30-60%
Air Pressure 990hPa-1040hPa

Note: The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.

1.3. Project data

Testing Start Date: 2012-01-15
Testing End Date: 2012-03-05


1.4. Signature



Sun Zhenyu
(Prepared this test report)



Gao Hong
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. CLIENT INFORMATION

2.1. Applicant Information

Company Name: ZTE CORPORATION
Address /Post: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China
City: Shenzhen
Postal Code: 518057
Country: China
Contact /
Email /
Telephone: +86-21-68897541
Fax: +86-21-50801070

2.2. Manufacturer Information

Company Name: ZTE CORPORATION
Address /Post: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R. China
City: Shenzhen
Postal Code: 518057
Country: China
Contact /
Email /
Telephone: +86-21-68897541
Fax: +86-21-50801070

3. EQUIPMENT UNDER TEST(EUT) AND ANCILLARY EQUIPMENT(AE)

3.1. About EUT

Description	WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone
Model	ZTE T760
FCC ID	Q78-T760
IC ID	/
With WLAN Function	Yes
Frequency Range	ISM 2400MHz~2483.5MHz
Type of Modulation	DSSS/CCK/OFDM
Number of Channels	11
Antenna	Integral Antenna
MAX Conducted Power	21.03dBm(OFDM)
Power Supply	3.7V DC by Battery

Note: Photographs of EUT are shown in ANNEX C of this test report.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	/	GMAI	W850-W2100-P173A30V1.0.1
EUT2	/	GMAI	W850-W2100-P173A30V1.0.1

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Type	SN
AE1	Battery	Li3713T42P3h415266-H	/
AE2	Battery	Li3713T42P3h415266	/
AE3	Charger	STC-A22O501700M5-C	/

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

Equipment Under Test (EUT) is a model of WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone with integrated antenna. It consists of normal options: Battery and Charger.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. REFERENCE DOCUMENTS FOR TESTING

The following documents listed in this section are referred for testing.

FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	Oct, 2009 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009
KDB558074	Measurement of Digital Transmission Systems Operating under Section 15.247	March 23, 2005

5. LABORATORY ENVIRONMENT

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing::

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Shielding Room2 (7.30 meters×4.00 meters×3.80 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

6. SUMMARY OF TEST RESULTS

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (a)	/	P
Peak Power Spectral Density	15.247 (d)	/	P
Occupied 6dB Bandwidth	15.247 (d)	/	P
Band Edges Compliance	15.247 (b)	/	P
Transmitter Spurious Emission - Conducted	15.247	/	P
Transmitter Spurious Emission - Radiated	15.247, 15.209, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

The measurement is made according to Public notice KDB558074 and ANSI C63.4.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by TMC
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

TMC has evaluated the test cases requested by the client/manufacturer as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.1.

This report only deals with the WLAN function among the features described in section 3.

Test Conditions

T nom	Normal Temperature
T min	Low Temperature
T max	High Temperature
V nom	Normal Voltage
V min	Low Voltage
V max	High Voltage
H nom	Norm Humidity
A nom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	T nom	26°C
Voltage	V nom	3.6V(By battery)
Humidity	H nom	44%
Air Pressure	A nom	1010hPa

7. TEST EQUIPMENTS UTILIZED

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	2012-07-19
2	Spectrum Analyzer	MS2687B	6200819812	Anritsu	2012-09-22
3	Test Receiver	ESS	847151/015	Rohde & Schwarz	2012-10-30
4	LISN	ESH2-Z5	829991/012	Rohde & Schwarz	2012-08-12

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Test Receiver	ESI40	831564/002	Rohde & Schwarz	2012-08-11
2	BiLog Antenna	3142B	9908-1403	EMCO	2012-03-15
3	Dual-Ridge Waveguide Horn Antenna	3115	9906-5827	EMCO	2012-12-25

Anechoic chamber


Anechoic chamber by Frankonia German.

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

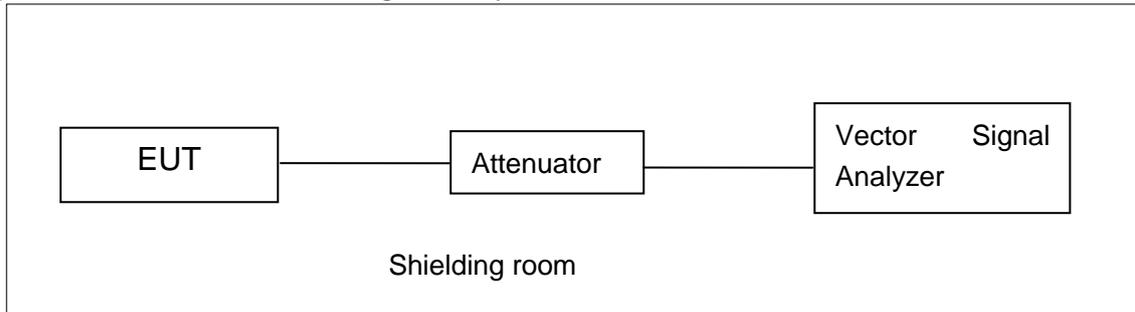


A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

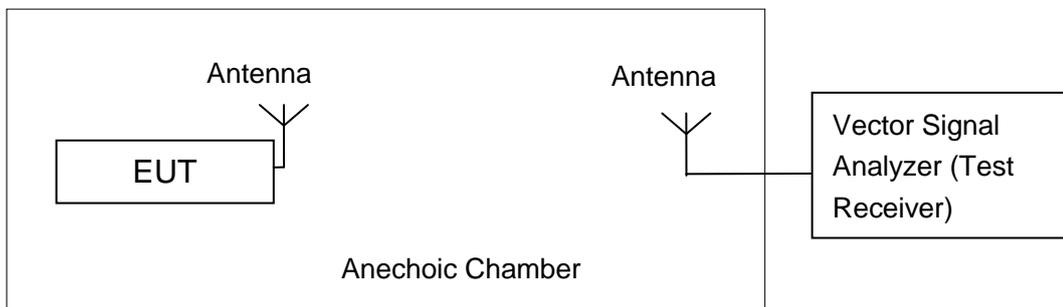

The measurement is made according to ANSI C63.4 and KDB558074

A.2. Maximum Output Power

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

The measurement is made according to ANSI C63.4 and KDB558074, and power output option 1 (RBW=20MHz) in KDB558074 is used for the test. EUT is operating in continuous transmitting mode

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

A.2.1. Maximum Peak Output Power-conducted

Measurement Results:

802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	17.41	/	/
	2	17.65	/	/
	5.5	18.11	/	/
	11	19.66	19.59	20.24
802.11g	6	20.12	/	/
	9	20.54	/	/
	12	20.20	/	/
	18	20.31	/	/
	24	20.81	20.46	20.80
	36	20.44	/	/
	48	20.60	/	/
	54	20.67	/	/

The data rate 11Mbps and 24Mbps are selected as worse condition, and the following cases are performed with this condition.

802.11n-HT20MHz mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n (20MHz)	MCS0	20.05	/	/
	MCS1	19.73	/	/
	MCS2	20.22		
	MCS3	20.80	/	/
	MCS4	20.87	/	/
	MCS5	21.03	20.62	20.97

	MCS6	20.57	/	/
	MCS7	20.62	/	/

The data rate MCS5 is selected as worse condition, and the following cases are performed with this condition.

802.11n-HT40MHz mode

Mode	Data Rate (Index)	Test Result (dBm)		
		2422MHz (Ch3)	2437MHz (Ch6)	2452 MHz (Ch9)
802.11n (40MHz)	MCS0	17.73	/	/
	MCS1	17.99	/	/
	MCS2	18.07	/	/
	MCS3	18.55	/	/
	MCS4	18.63	/	/
	MCS5	18.73	/	/
	MCS6	18.74	/	/
	MCS7	18.75	18.59	19.11

The data rate MCS7 is selected as worse condition, and the following cases are performed with this condition.

A.2.2. Maximum Average Output Power-conducted

802.11b/g mode

Mode	Test Result (dBm)		
	2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	13.35	14.05	14.57
802.11g	11.63	12.11	12.51

802.11n-HT20MHz mode

Mode	Test Result (dBm)		
	2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n (20MHz)	11.83	11.82	12.16

802.11n-HT40MHz mode

Mode	Test Result (dBm)		
	2422MHz (Ch3)	2437MHz (Ch6)	2452 MHz (Ch9)
802.11n (40MHz)	9.30	9.41	9.57

Conclusion: PASS

A.3. Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC CRF Part 15.247(d)	< 8 dBm/3 kHz

The measurement is made according to ANSI C63.4 and KDB558074

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Results:

802.11b/g mode

Mode	Channel	Power Spectral Density (dBm/3 kHz)		Conclusion
802.11b	1	Fig.1	-7.63	P
	6	Fig.2	-6.79	P
	11	Fig.3	-3.32	P
802.11g	1	Fig.4	-11.90	P
	6	Fig.5	-12.01	P
	11	Fig.6	-11.38	P

802.11n-HT20MHz mode

Mode	Channel	Power Spectral Density (dBm/3 kHz)		Conclusion
802.11n (20MHz)	1	Fig.7	-10.47	P
	6	Fig.8	-12.76	P
	11	Fig.9	-11.32	P
802.11n (40MHz)	3	Fig.10	-21.11	P
	6	Fig.11	-19.80	P
	9	Fig.12	-19.93	P

Conclusion: PASS

Test graphs as below:

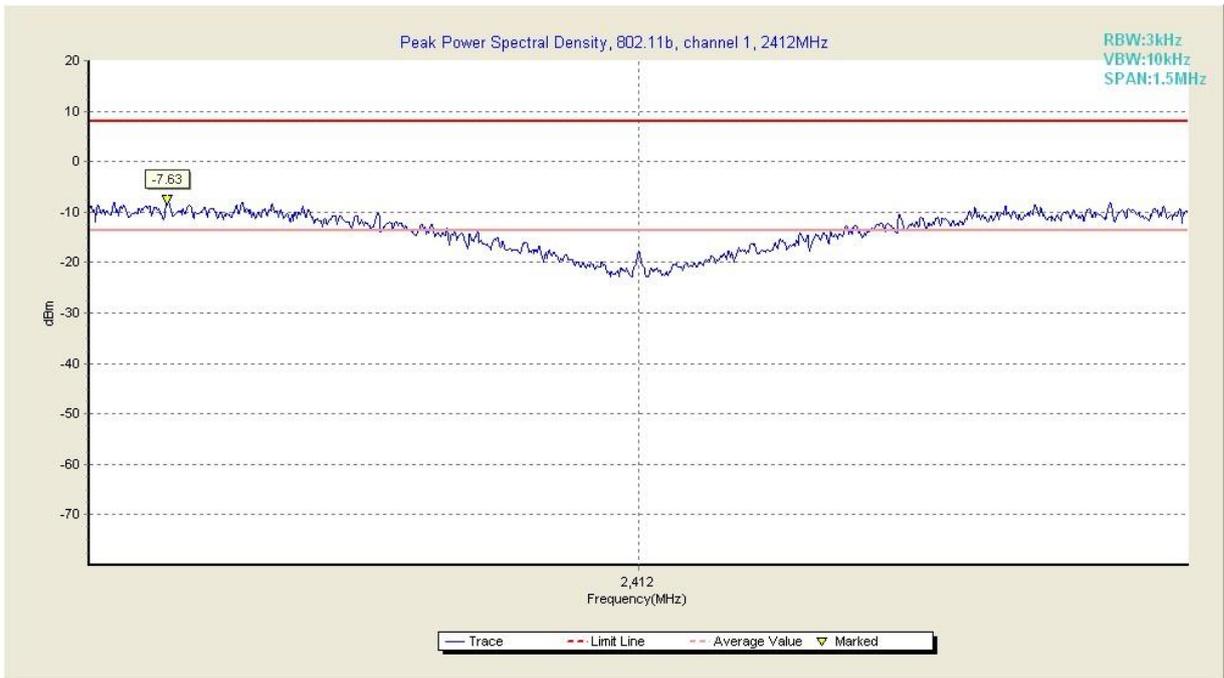


Fig. 1 Power Spectral Density (802.11b, Ch 1)

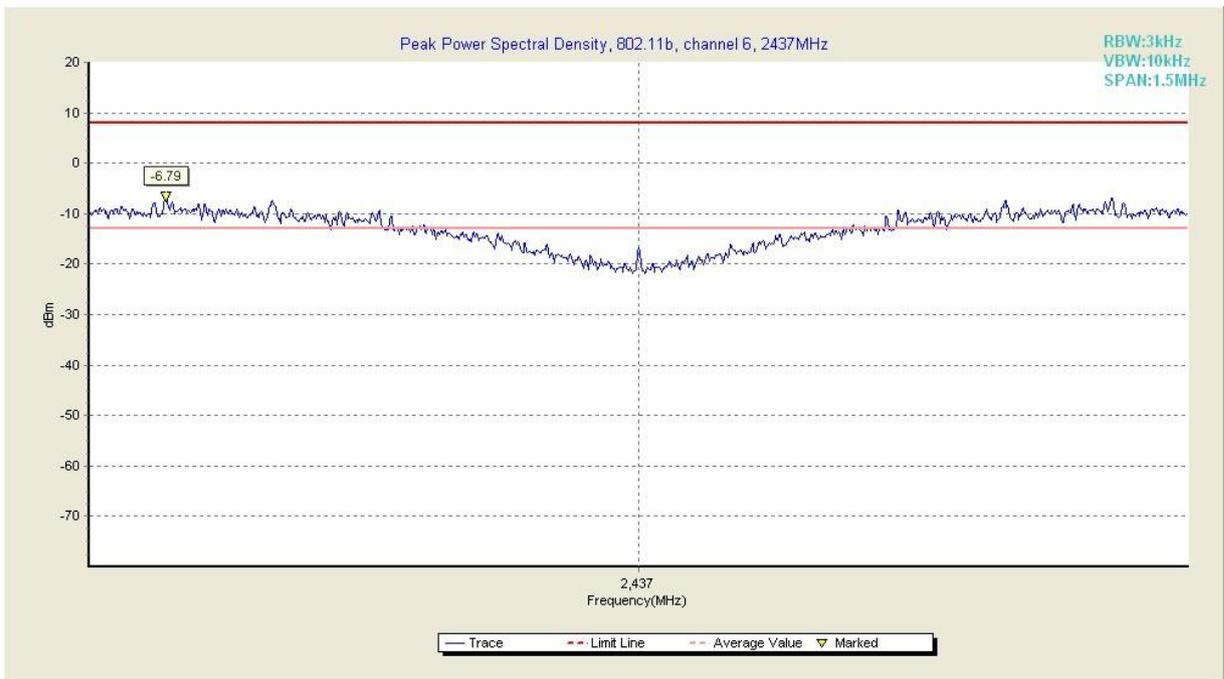


Fig. 2 Power Spectral Density (802.11b, Ch 6)

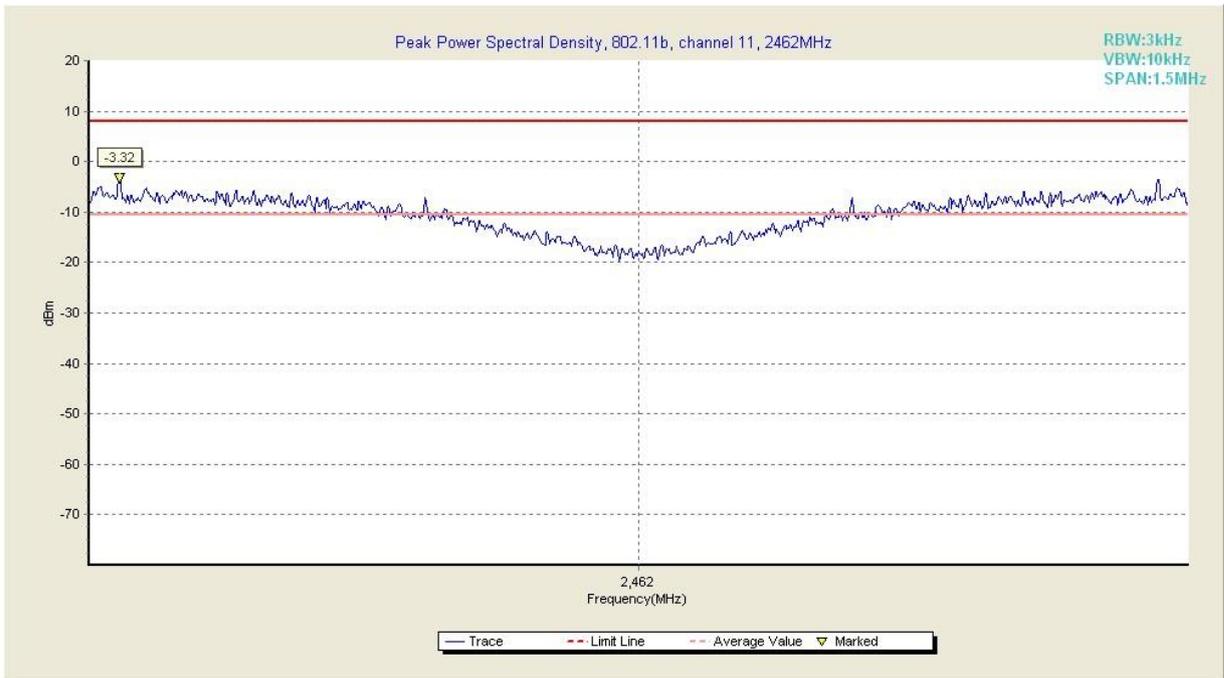


Fig. 3 Power Spectral Density (802.11b, Ch 11)

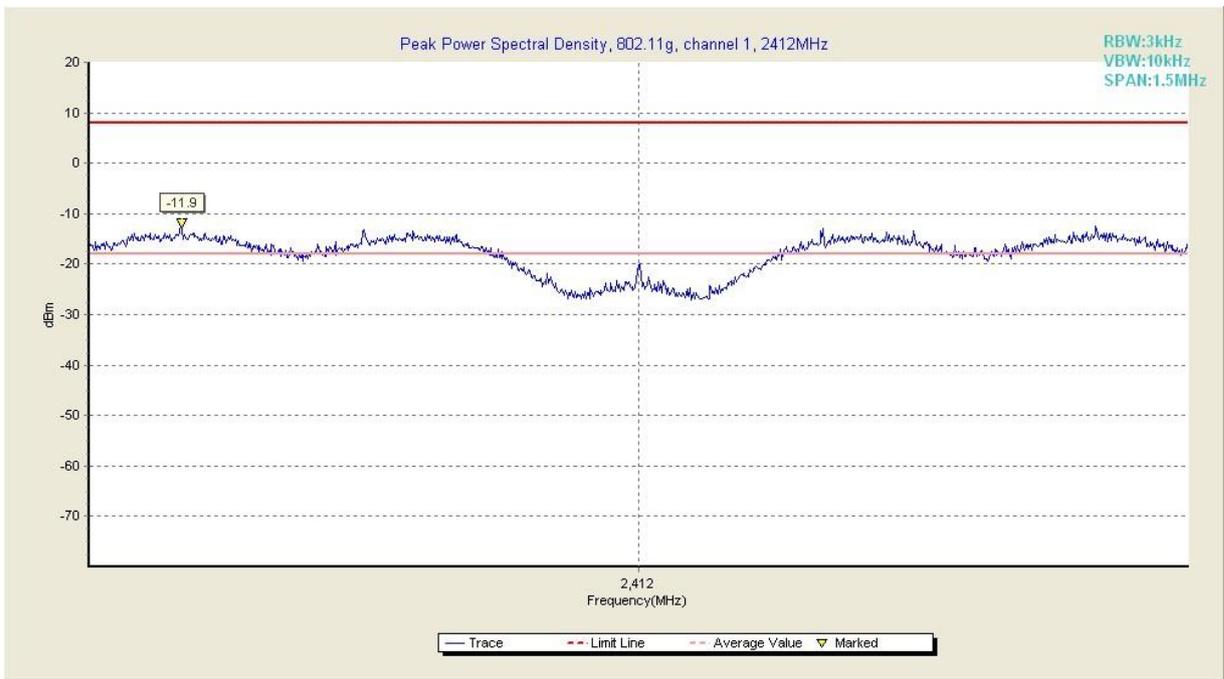


Fig. 4 Power Spectral Density (802.11g, Ch 1)

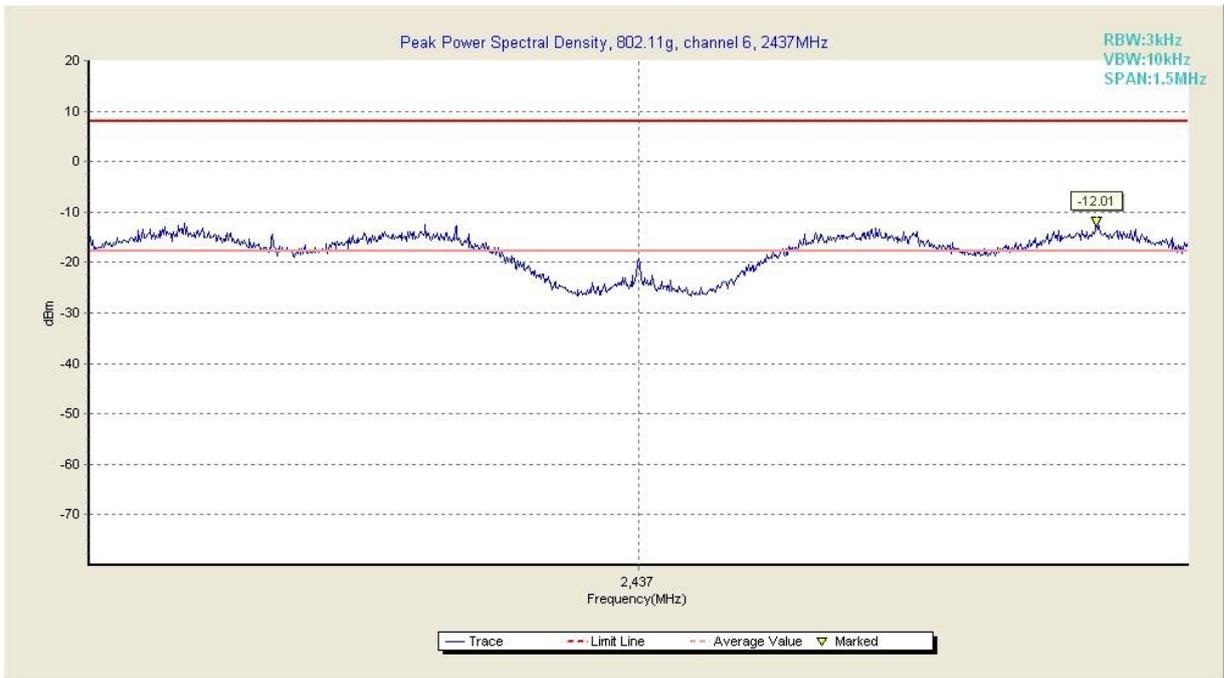


Fig. 5 Power Spectral Density (802.11g, Ch 6)

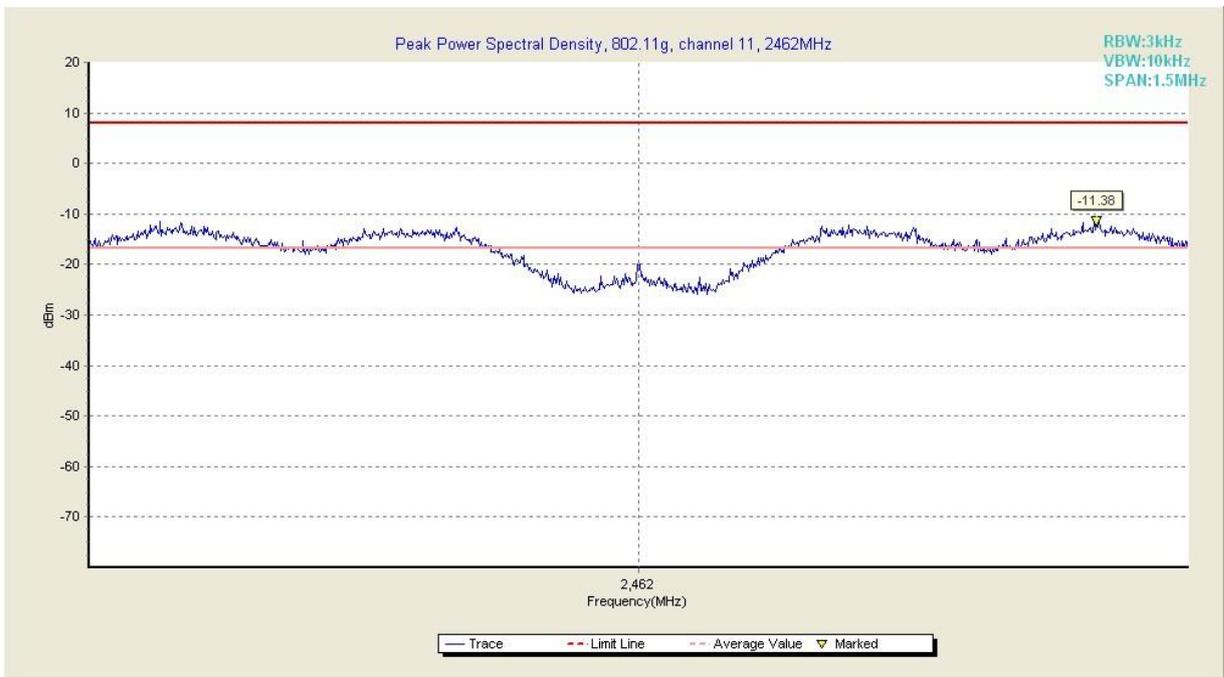


Fig. 6 Power Spectral Density (802.11g, Ch 11)

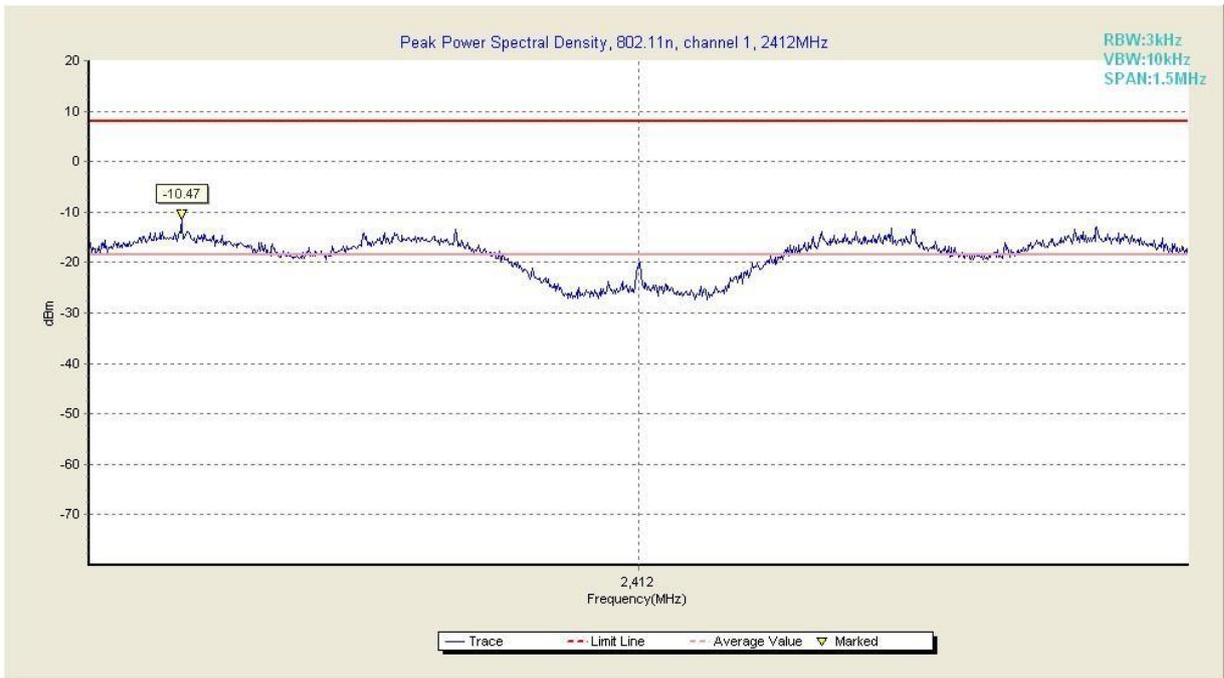


Fig. 7 Power Spectral Density (802.11n-20MHz, Ch 1)

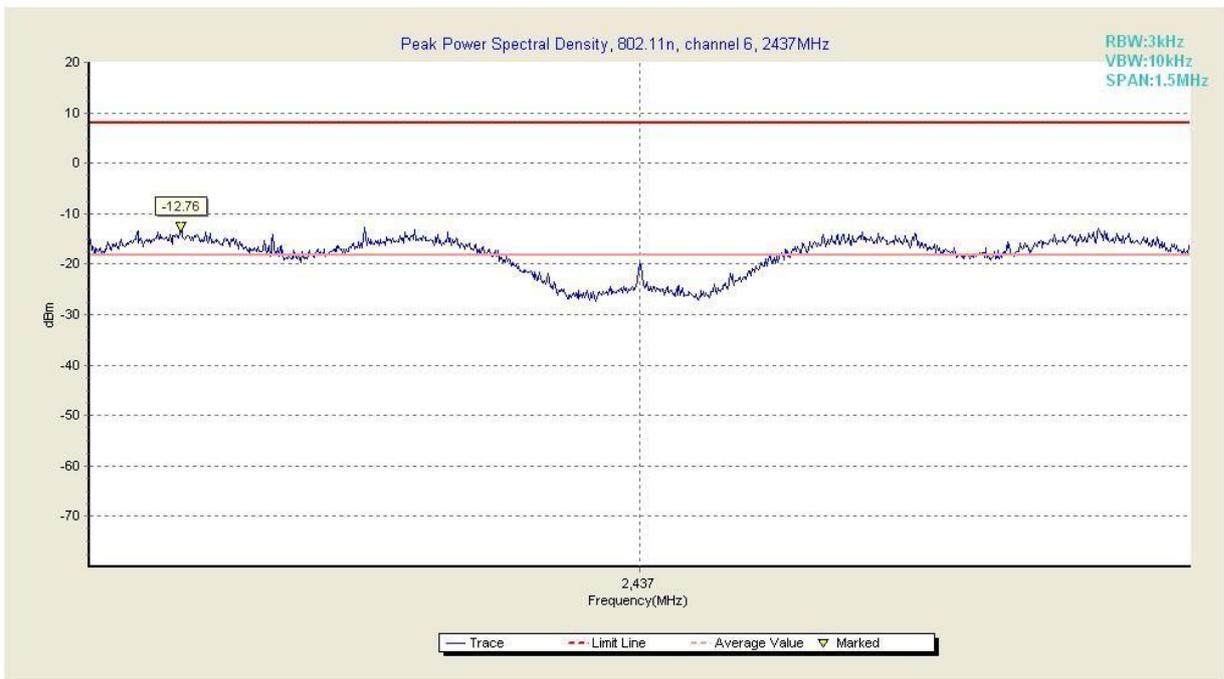


Fig. 8 Power Spectral Density (802.11n-20MHz, Ch 6)

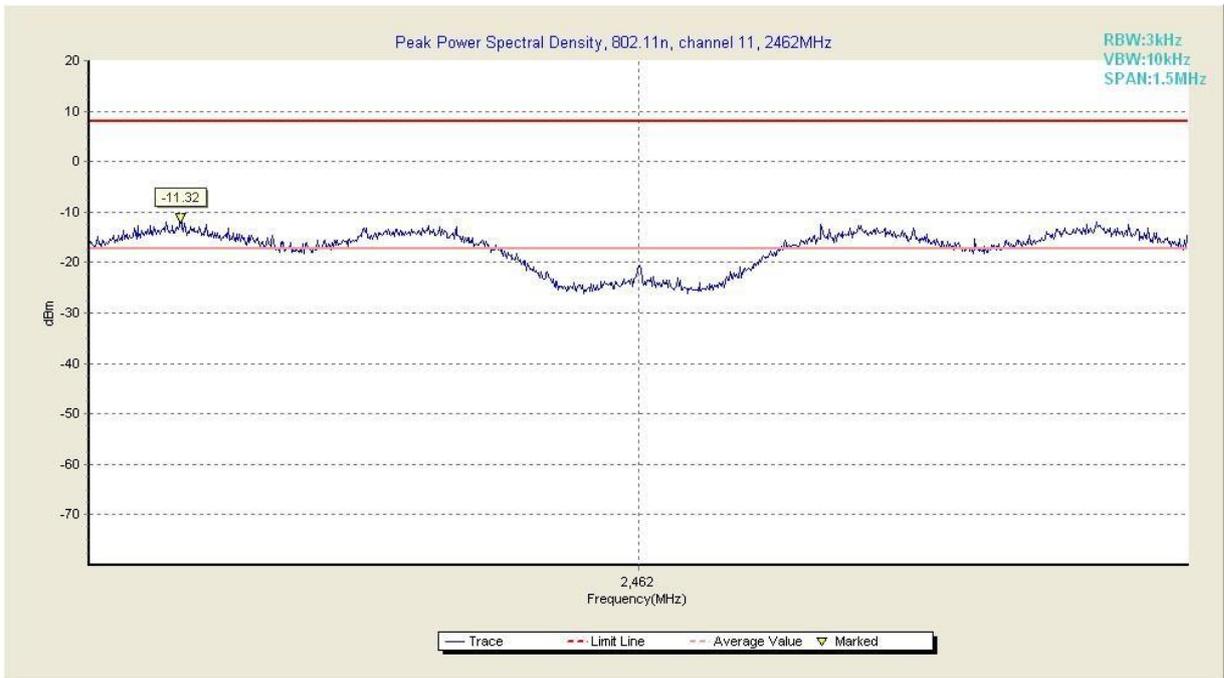


Fig. 9 Power Spectral Density (802.11n-20MHz, Ch 11)

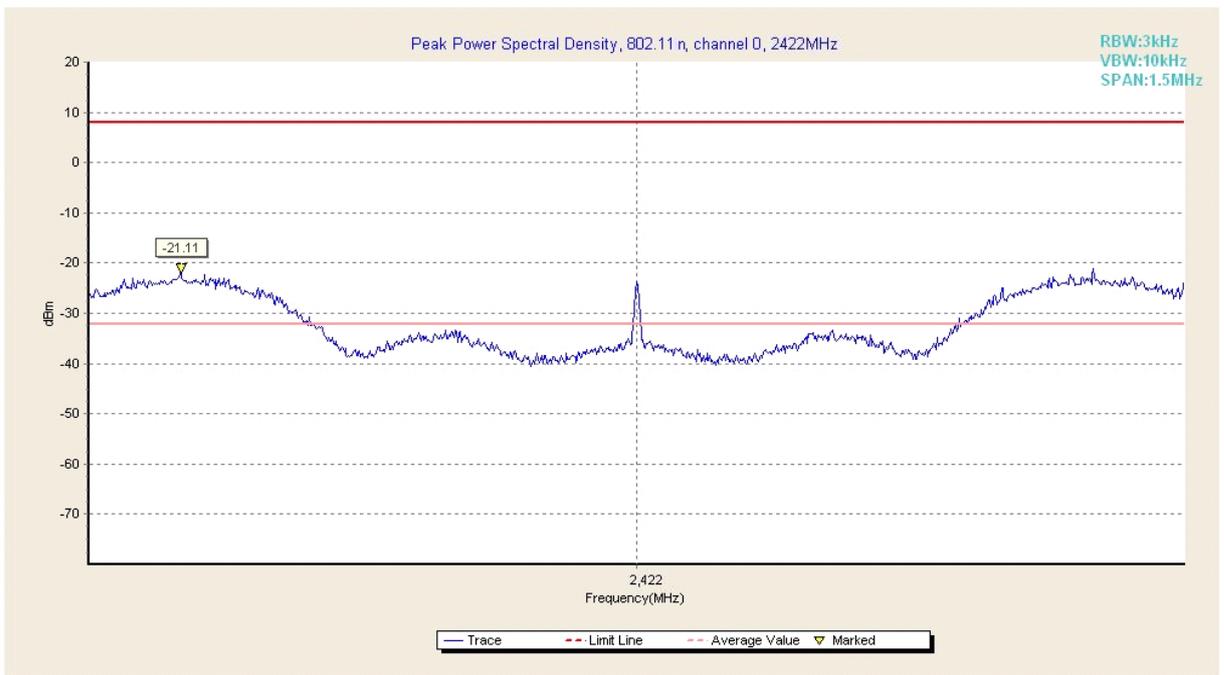


Fig. 10 Power Spectral Density (802.11n-40MHz, Ch 3)

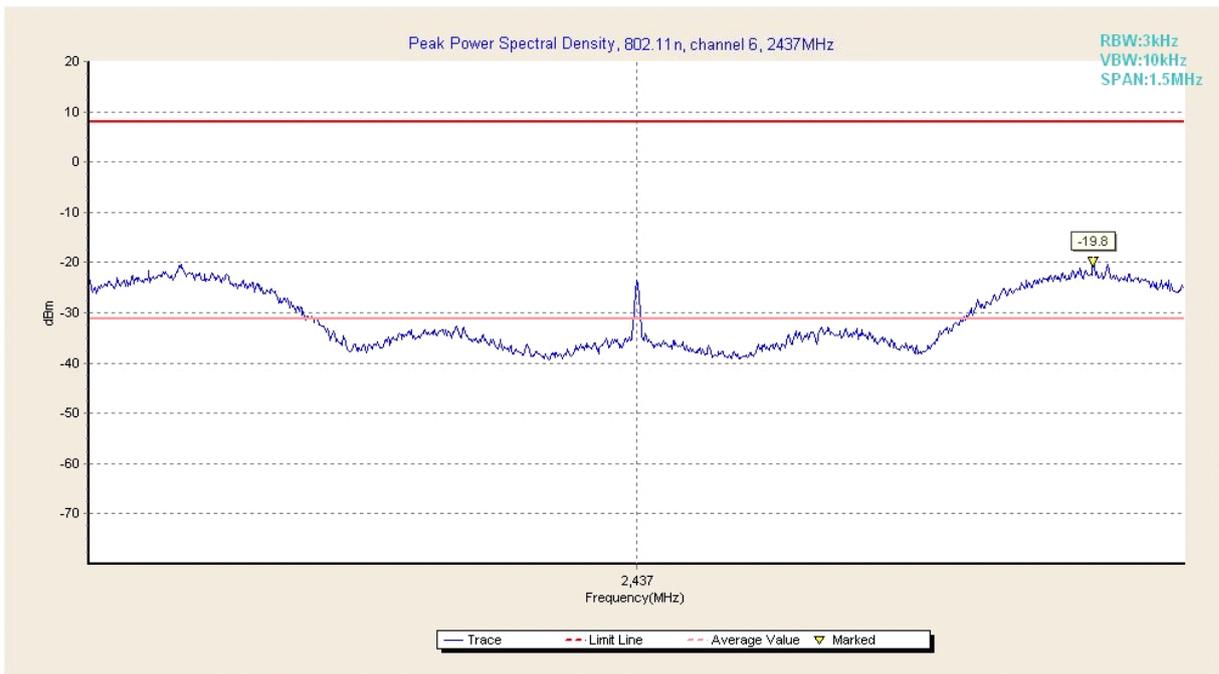


Fig. 11 Power Spectral Density (802.11n-40MHz, Ch 6)

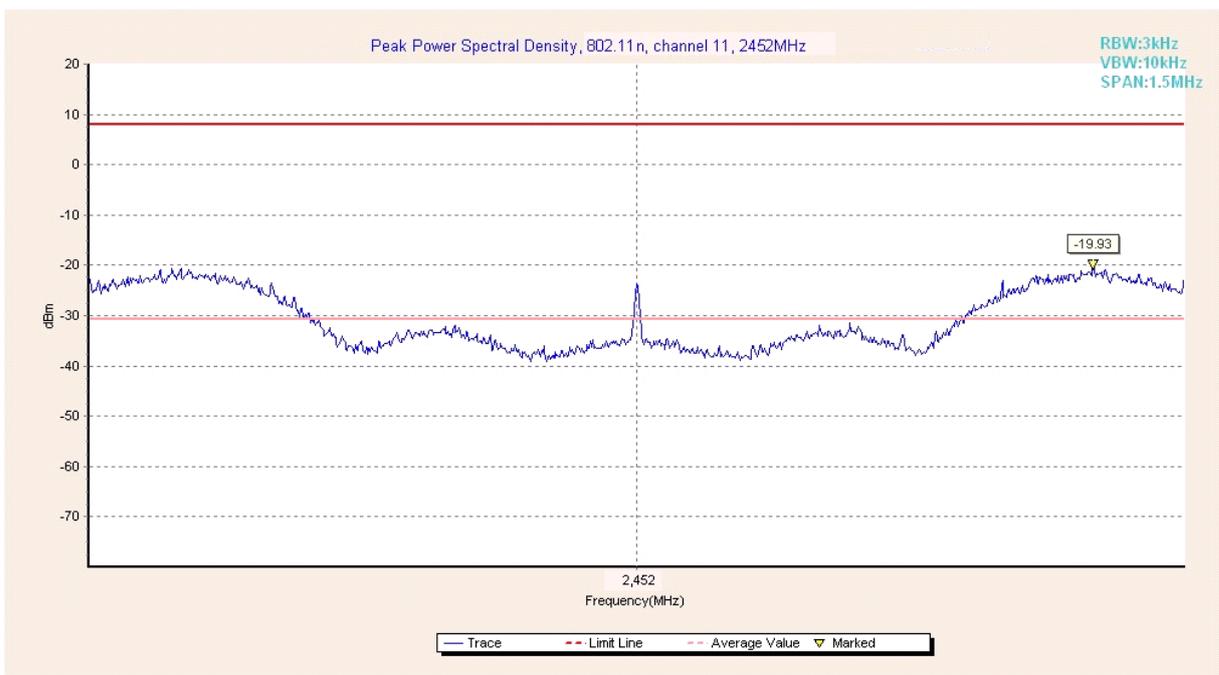


Fig. 12 Power Spectral Density (802.11n-40MHz, Ch 9)

A.4. Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

The measurement is made according to ANSI C63.4 and KDB558074

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

802.11b/g mode

Mode	Channel	Occupied 6dB Bandwidth (kHz)		conclusion
802.11b	1	Fig.13	9100	P
	6	Fig.14	9100	P
	11	Fig.15	9150	P
802.11g	1	Fig.16	16500	P
	6	Fig.17	16450	P
	11	Fig.18	16450	P

802.11n mode

Mode	Channel	Occupied 6dB Bandwidth (kHz)		conclusion
802.11n (20MHz)	1	Fig.19	17700	P
	6	Fig.20	17750	P
	11	Fig.21	17750	P
802.11n (40MHz)	3	Fig.22	36550	P
	6	Fig.23	36450	P
	9	Fig.24	36200	P

Conclusion: PASS

Test graphs as below:

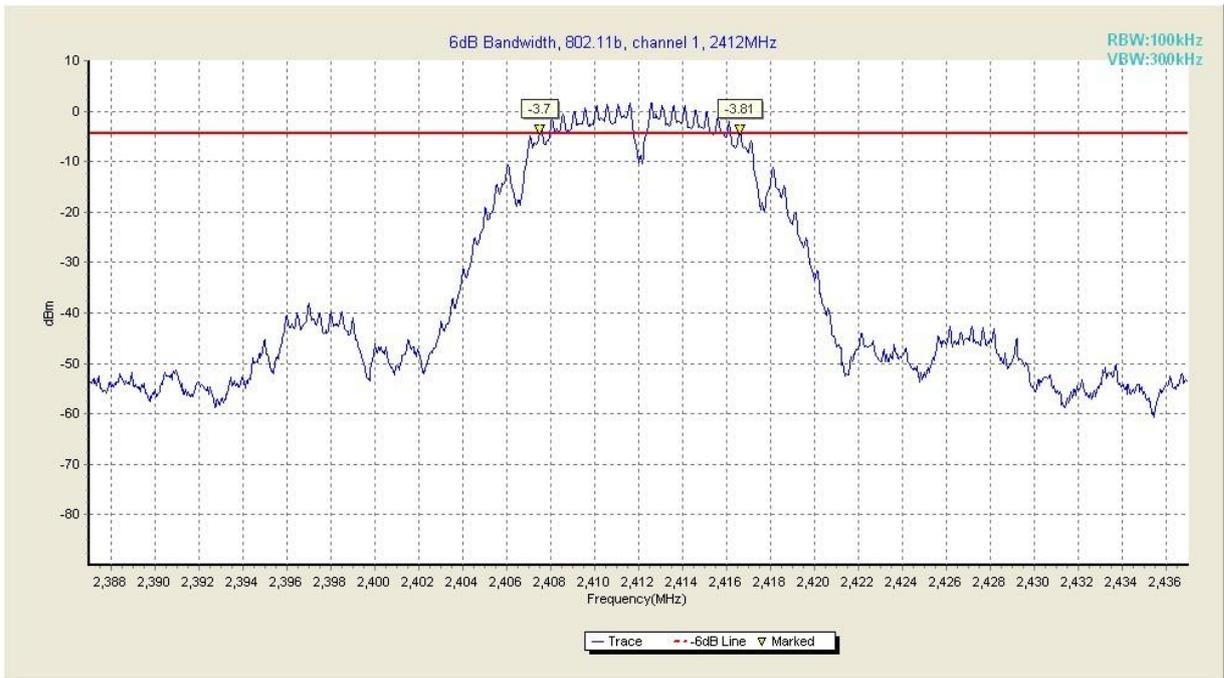


Fig. 13 Occupied 6dB Bandwidth (802.11b, Ch 1)

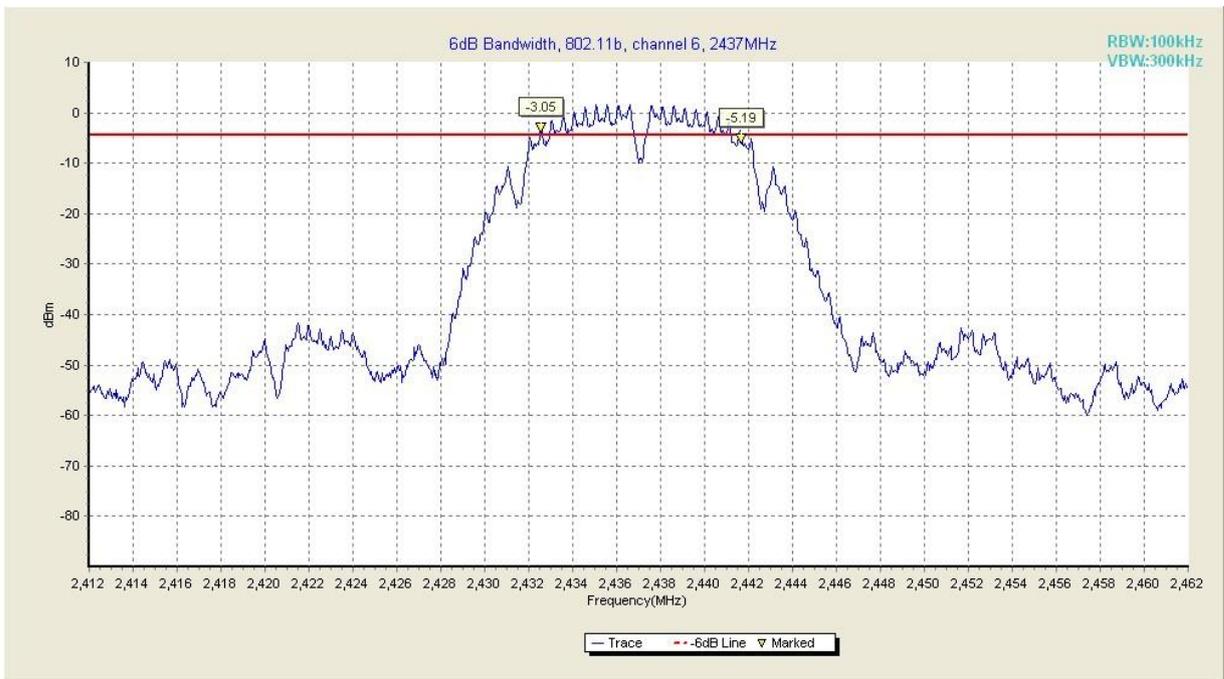


Fig. 14 Occupied 6dB Bandwidth (802.11b, Ch 6)

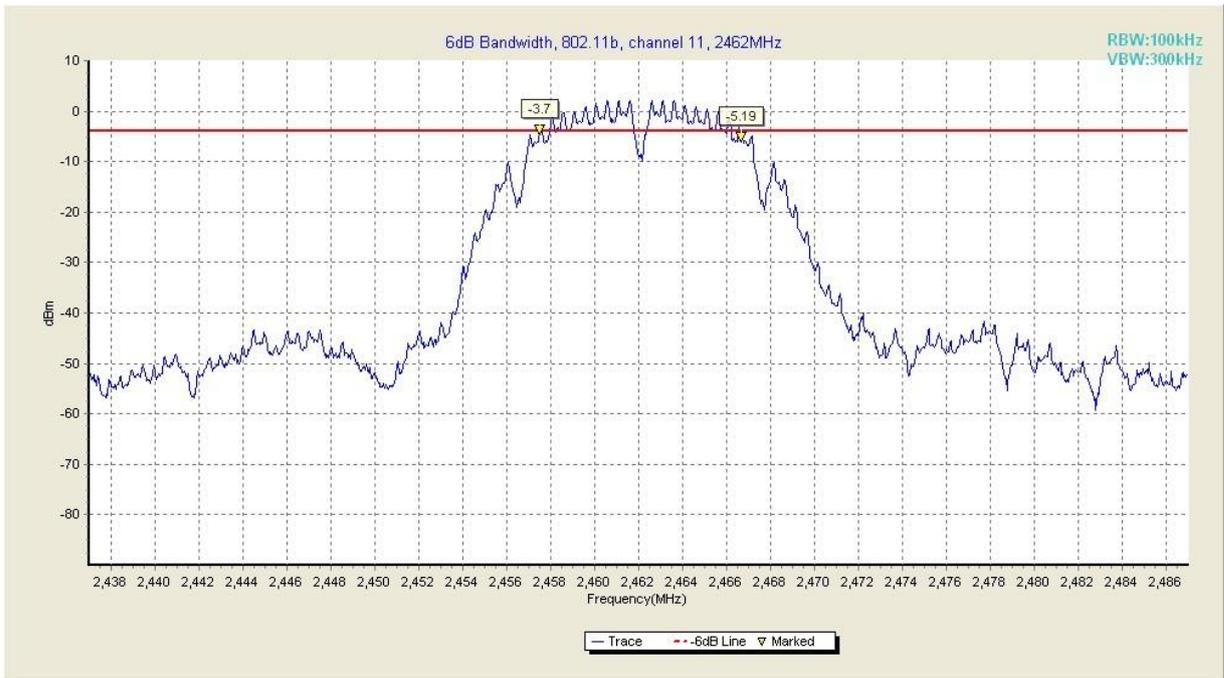


Fig. 15 Occupied 6dB Bandwidth (802.11b, Ch 11)

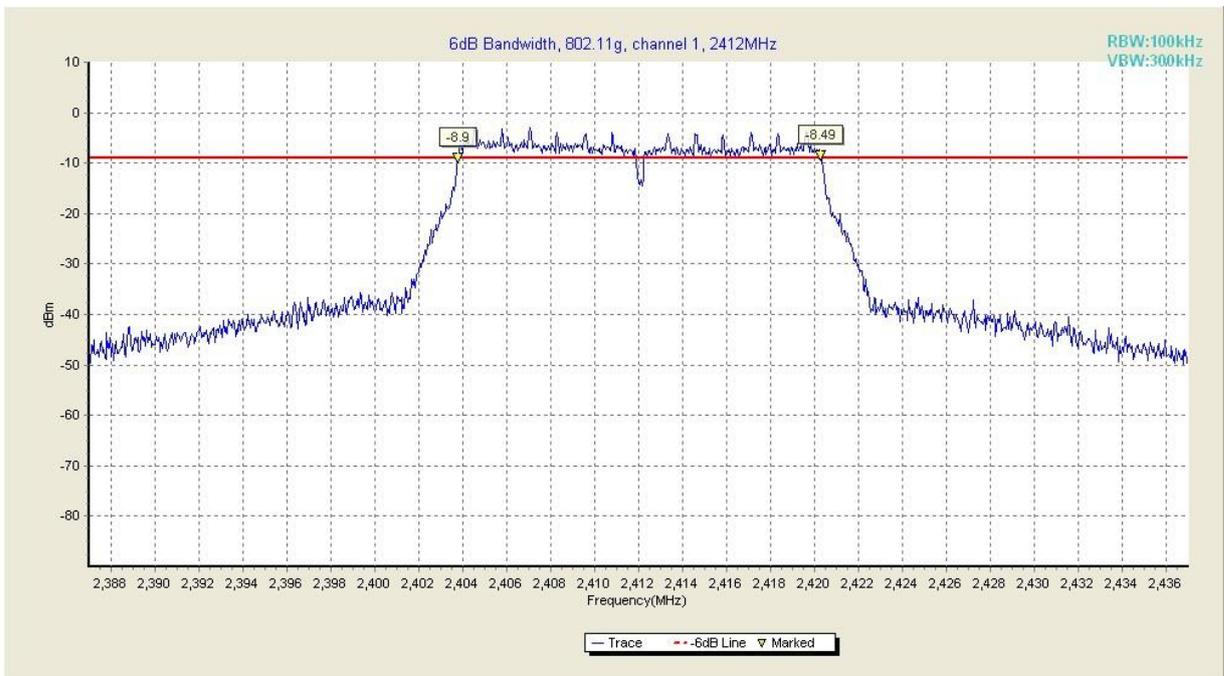


Fig. 16 Occupied 6dB Bandwidth (802.11g, Ch 1)

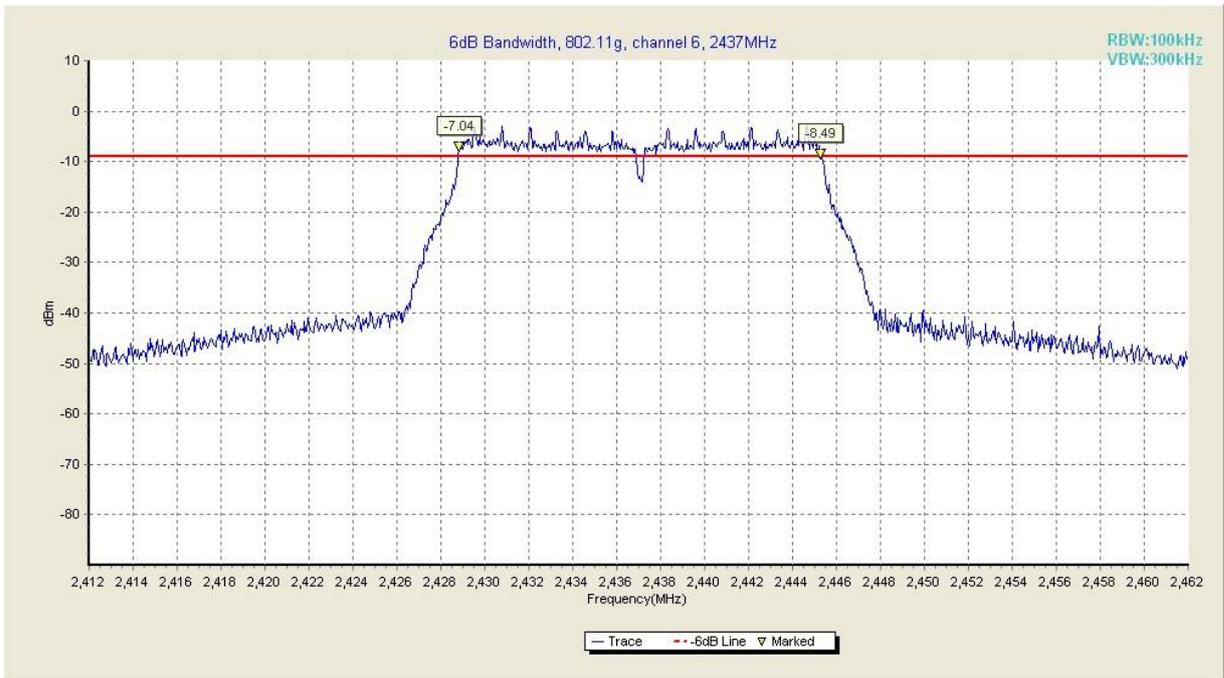


Fig. 17 Occupied 6dB Bandwidth (802.11g, Ch 6)

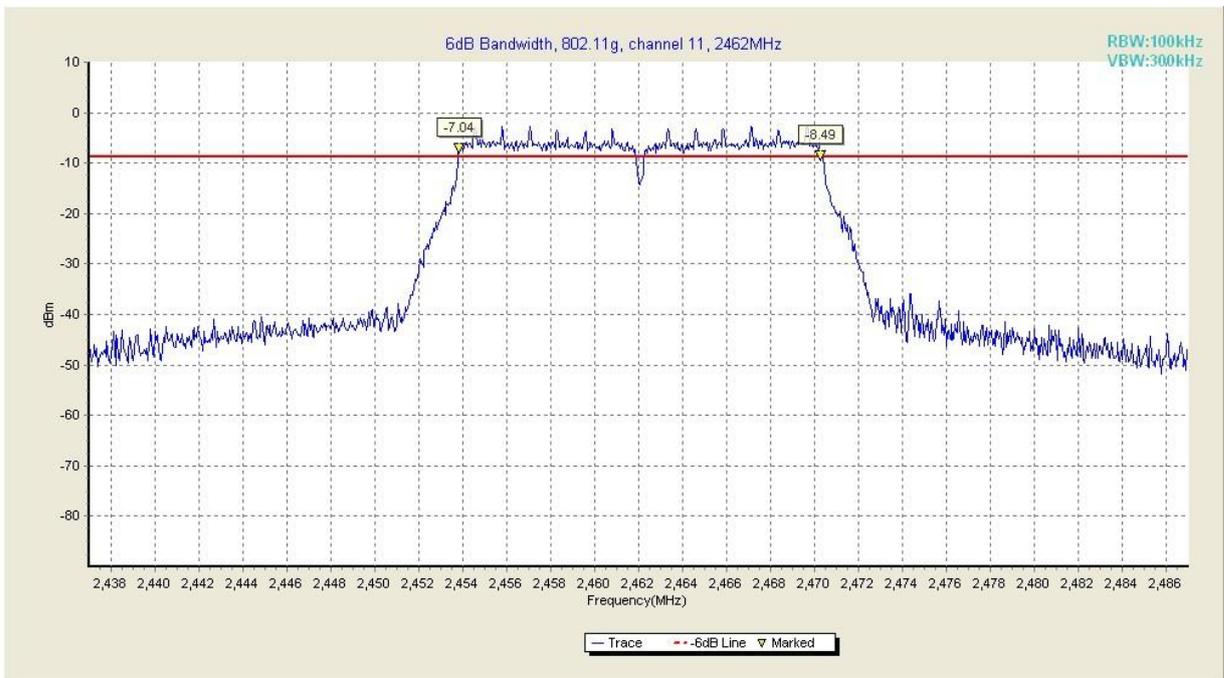


Fig. 18 Occupied 6dB Bandwidth (802.11g, Ch 11)

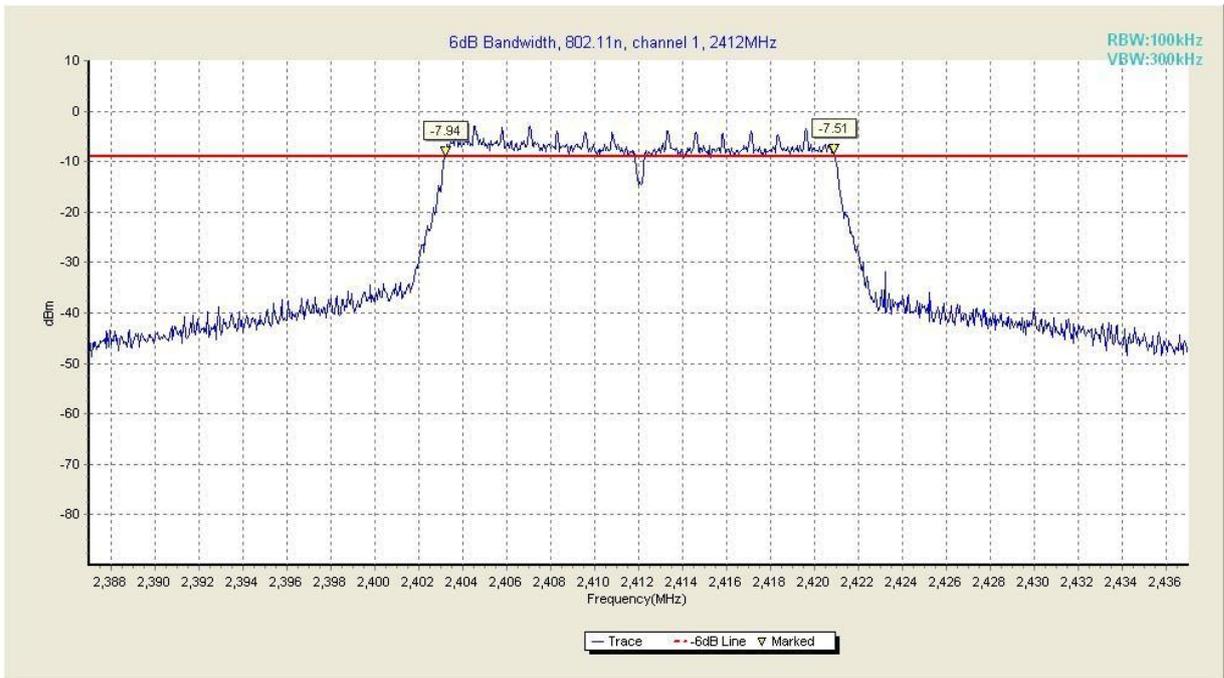


Fig. 19 Occupied 6dB Bandwidth (802.11n-20MHz, Ch 1)

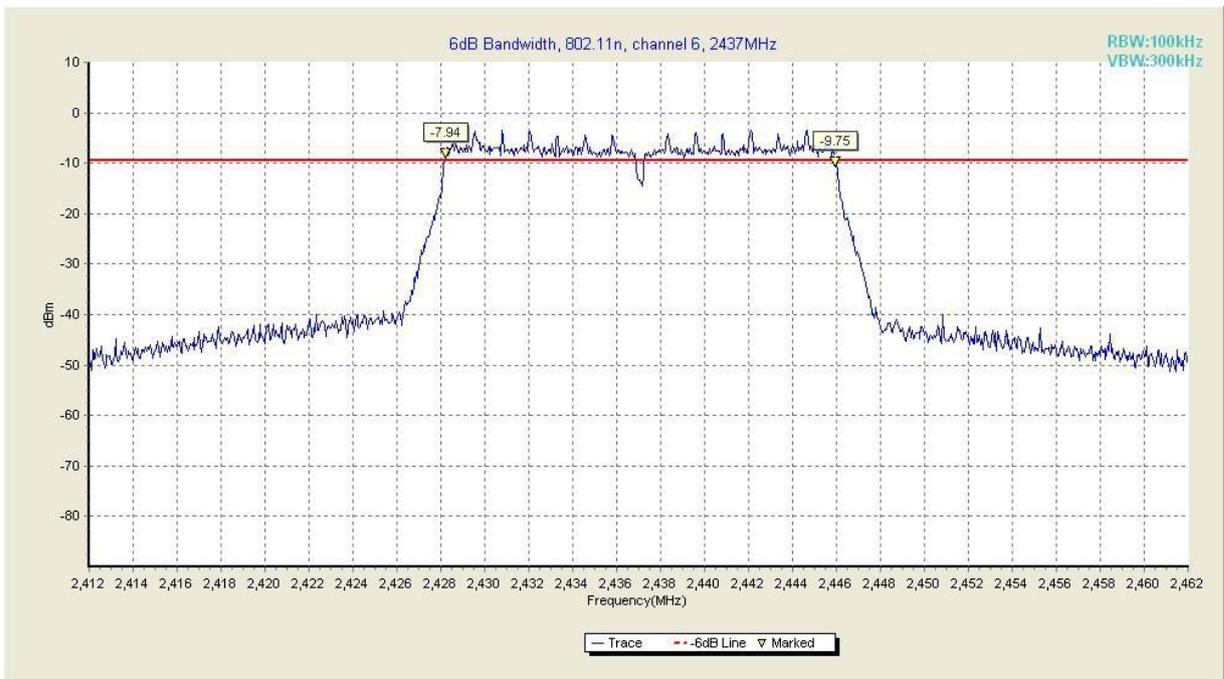


Fig. 20 Occupied 6dB Bandwidth (802.11n-20MHz, Ch 6)

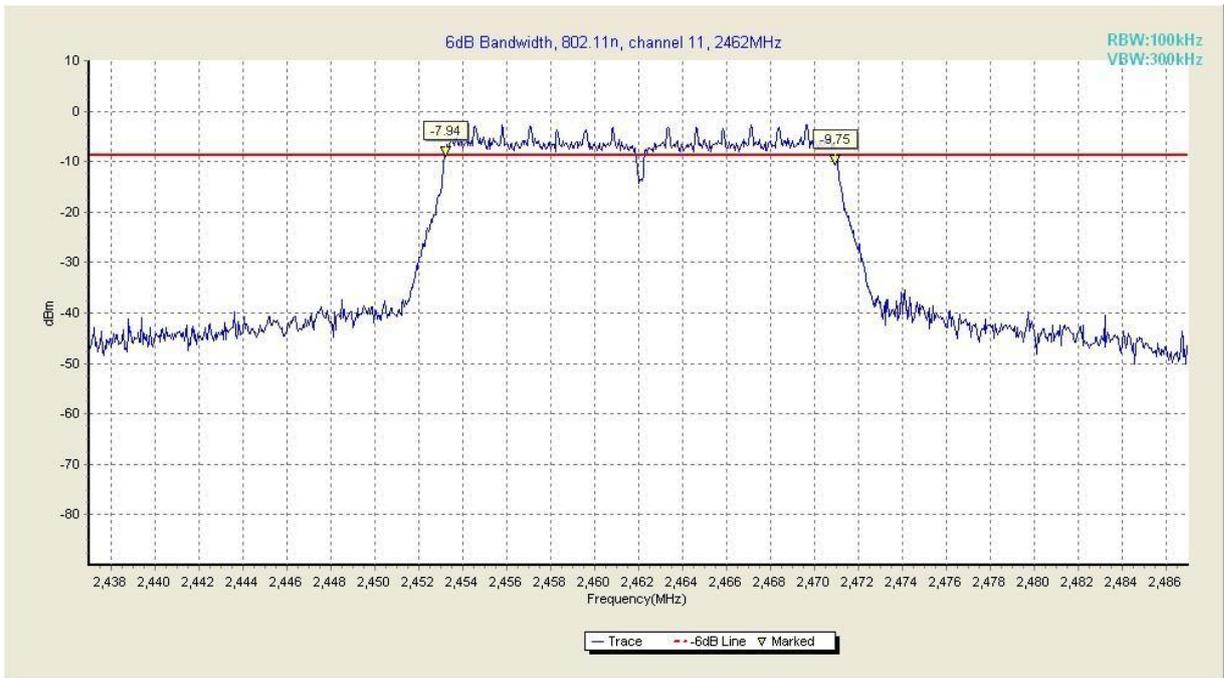


Fig. 21 Occupied 6dB Bandwidth (802.11n-20MHz, Ch 11)

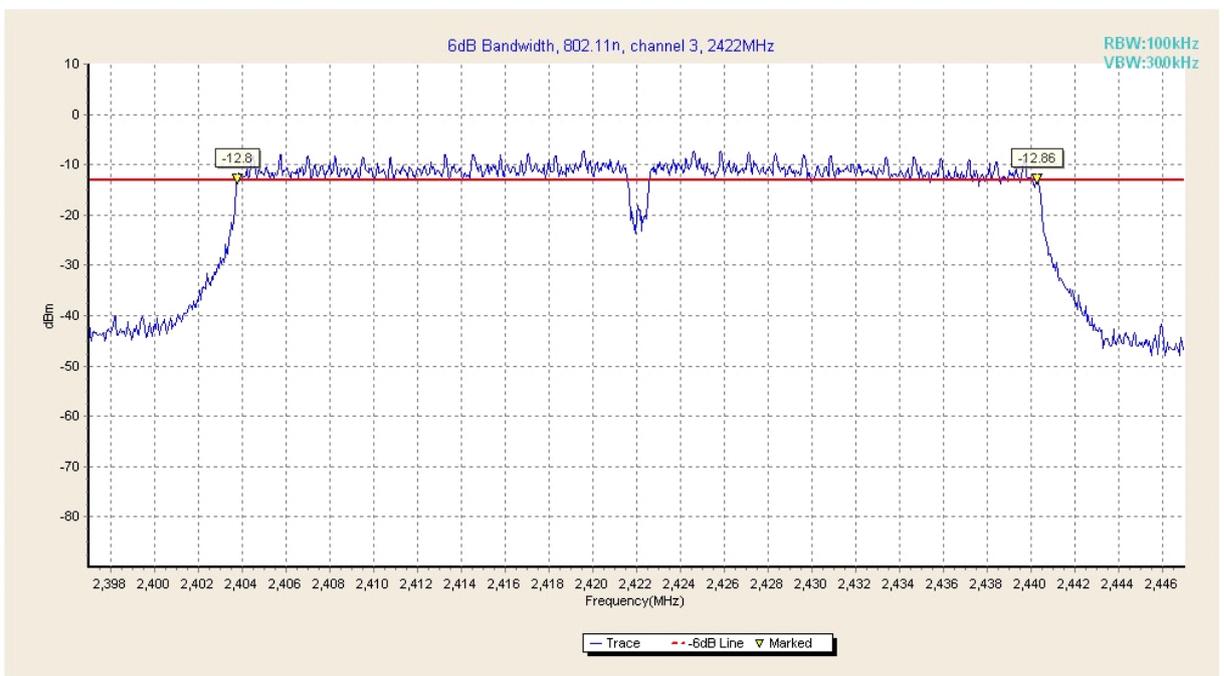


Fig. 22 Occupied 6dB Bandwidth (802.11n-40MHz, Ch 3)

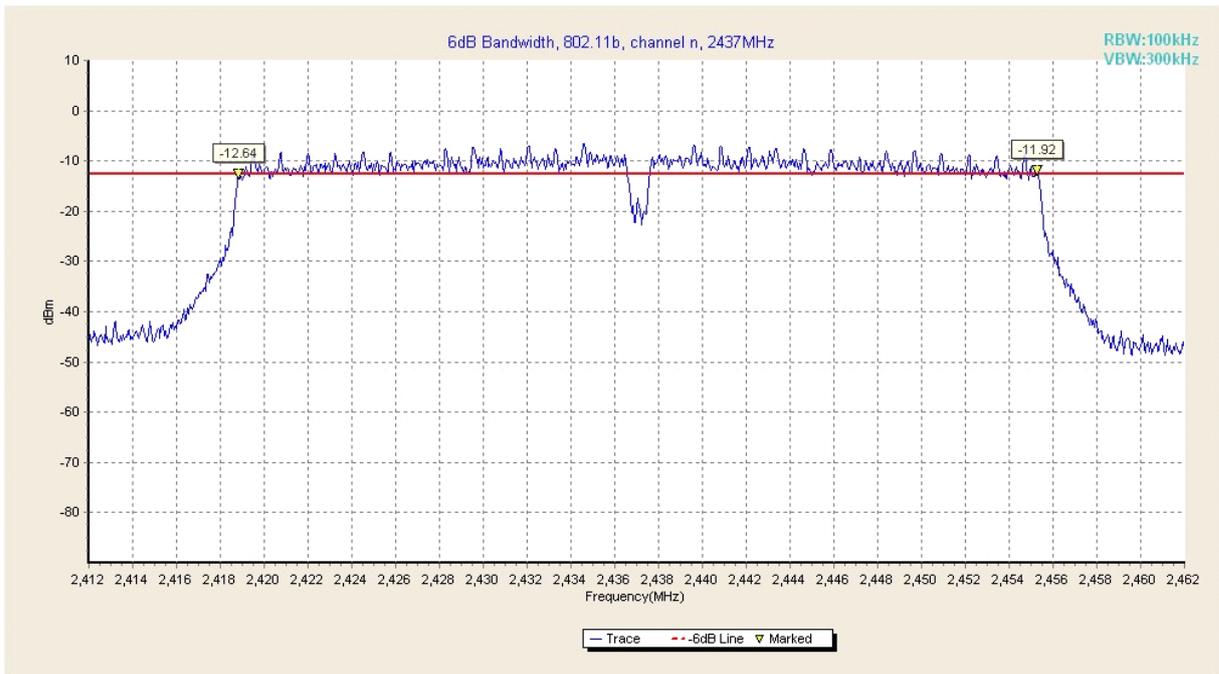


Fig. 23 Occupied 6dB Bandwidth (802.11n-40MHz, Ch 6)

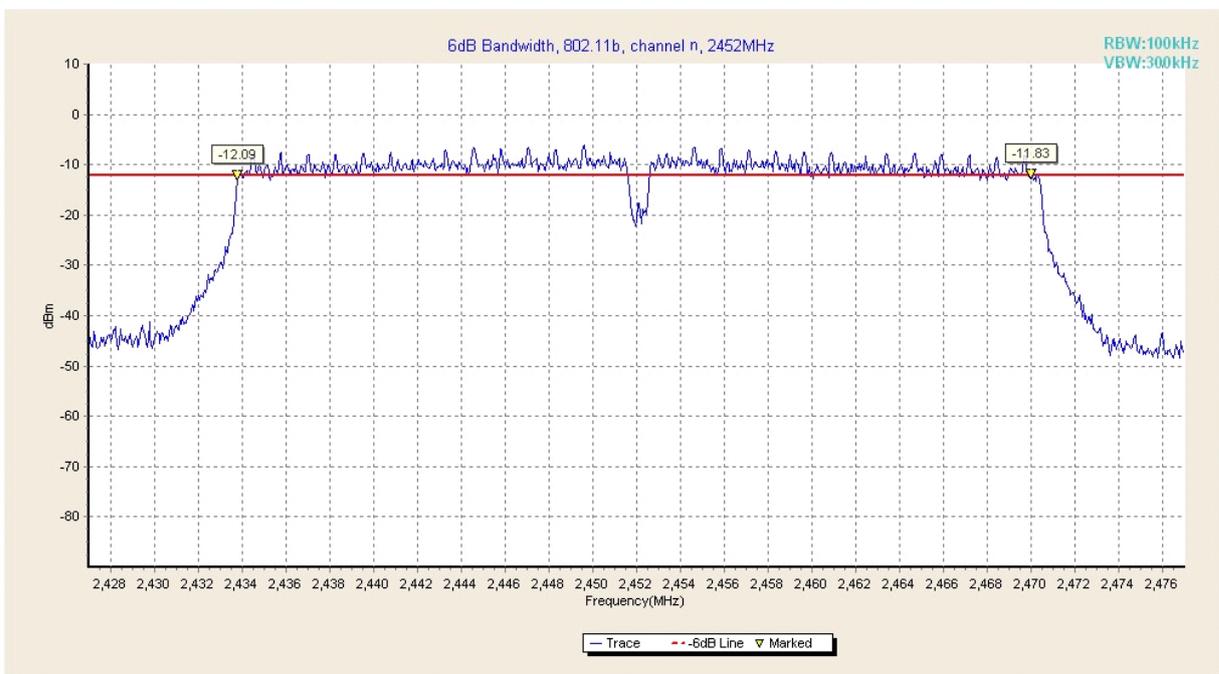


Fig. 24 Occupied 6dB Bandwidth (802.11n-40MHz, Ch 9)

A.5. Band Edges Compliance

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

The measurement is made according to ANSI C63.4 and KDB558074

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Result:

802.11b/g mode

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.25	P
	11	Fig.26	P
802.11g	1	Fig.27	P
	11	Fig.28	P

802.11n mode

Mode	Channel	Test Results	Conclusion
802.11n (20MHz)	1	Fig.29	P
	11	Fig.30	P
802.11n (40MHz)	3	Fig.31	P
	9	Fig.32	P

Conclusion: PASS

Test graphs as below:

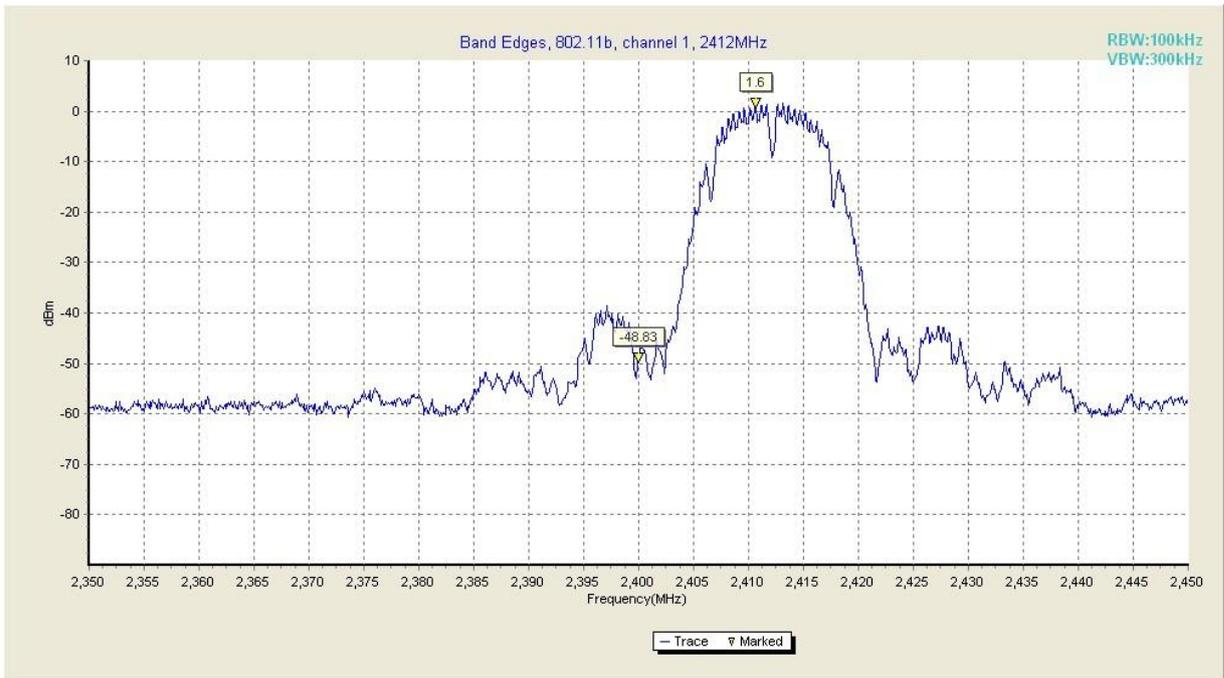


Fig. 25 Band Edges (802.11b, Ch 1)

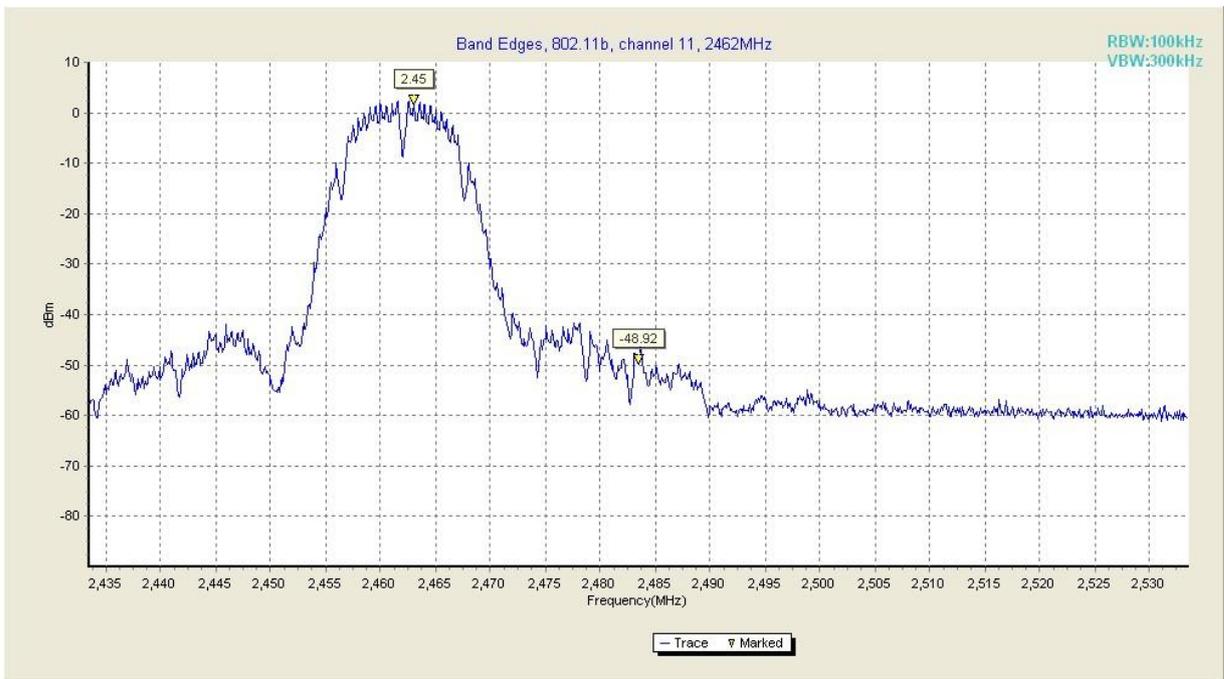


Fig. 26 Band Edges (802.11b, Ch 11)

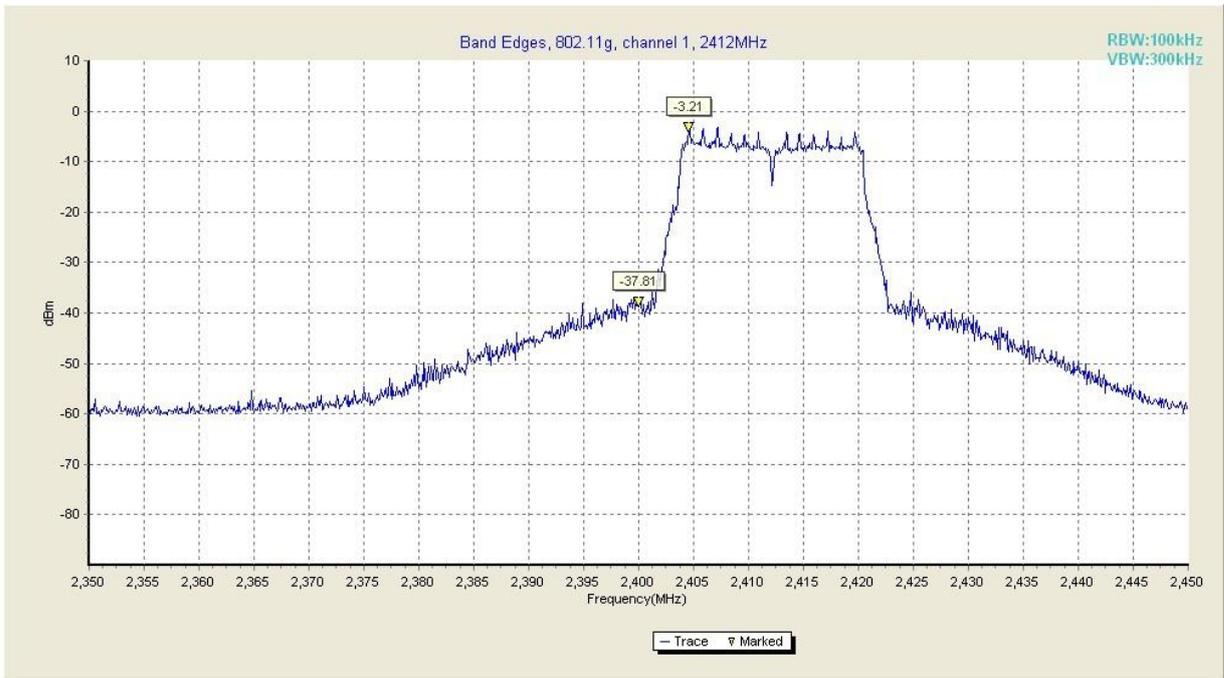


Fig. 27 Band Edges (802.11g, Ch 1)

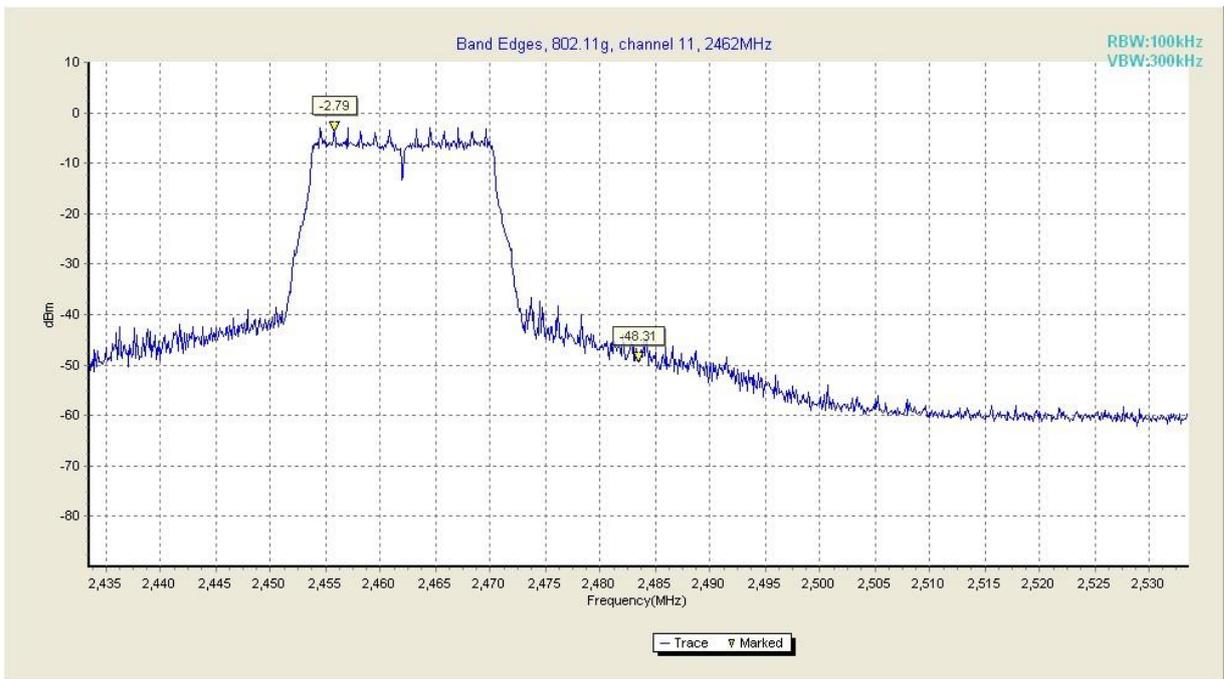


Fig. 28 Band Edges (802.11g, Ch 11)

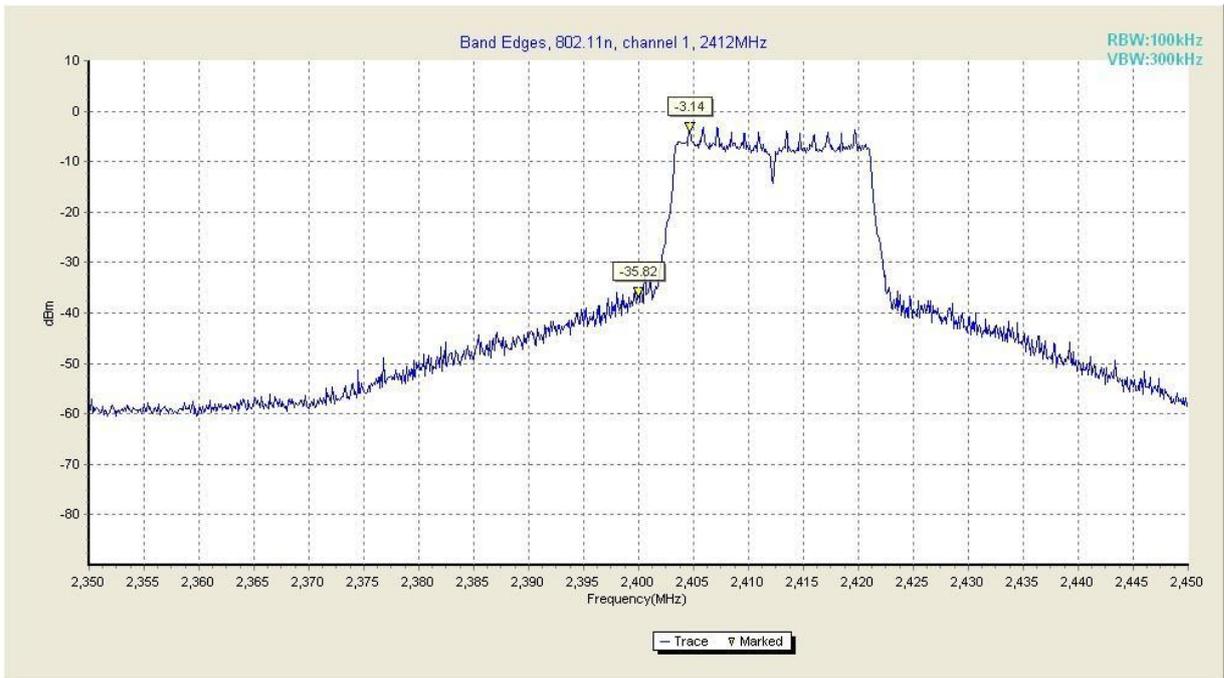


Fig. 29 Band Edges (802.11n-20MHz, Ch 1)

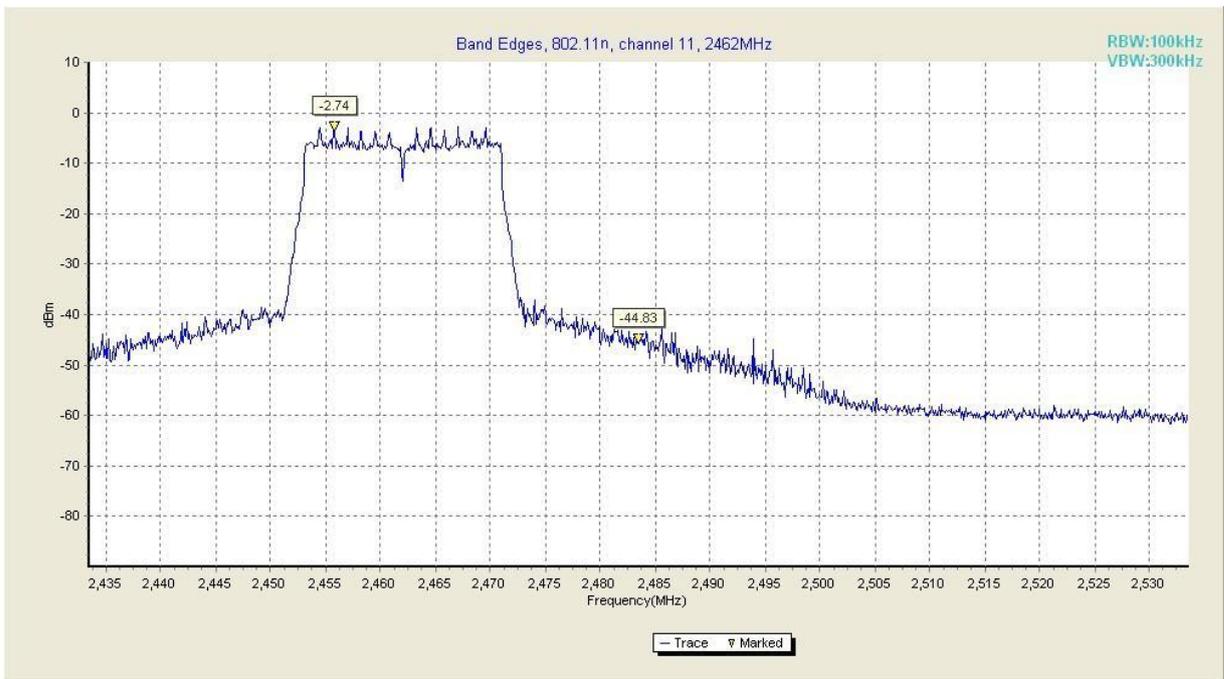


Fig. 30 Band Edges (802.11n-20MHz, Ch 11)

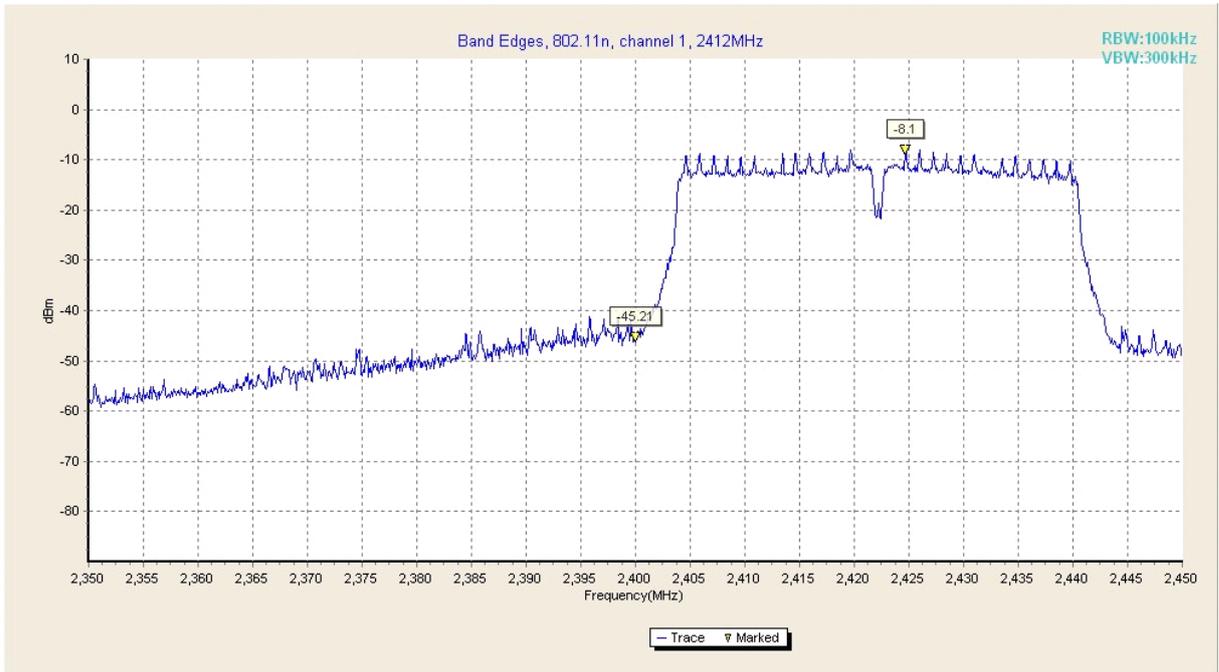


Fig. 31 Band Edges (802.11n-40MHz, Ch 3)

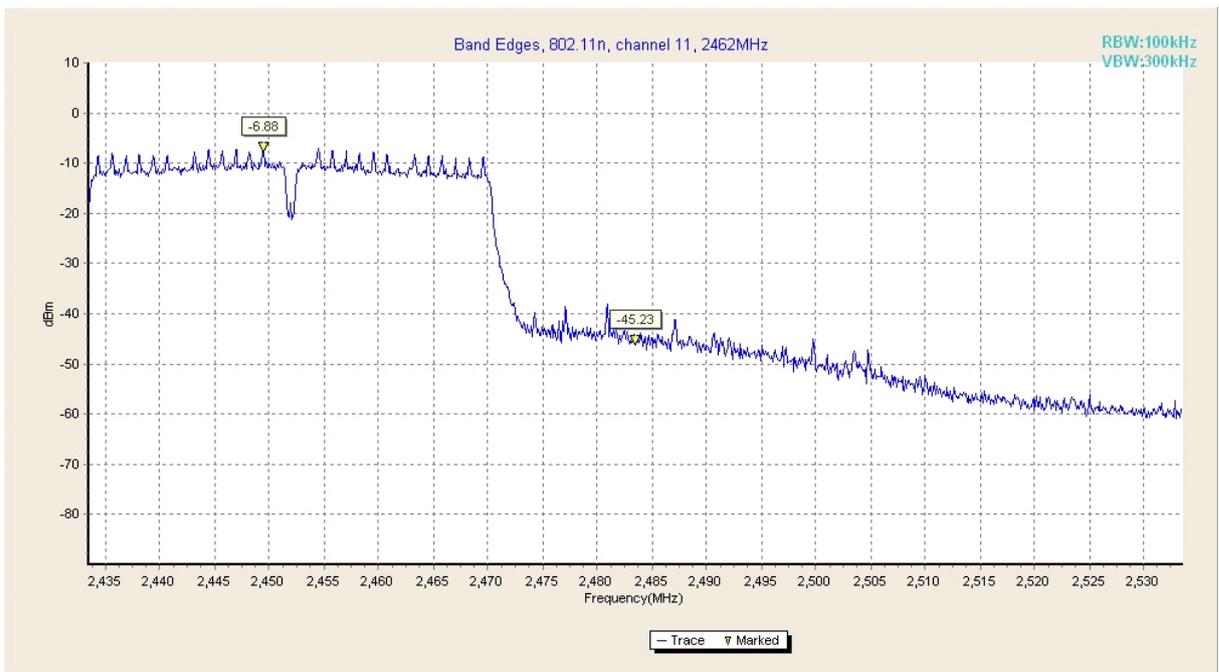


Fig. 32 Band Edges (802.11n-40MHz, Ch 9)

A.6. Transmitter Spurious Emission

A.6.1 Transmitter Spurious Emission - Conducted

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

The measurement is made according to ANSI C63.4 and KDB558074

Measurement Uncertainty:

Frequency Range	Uncertainty
$30\text{MHz} \leq f \leq 2\text{GHz}$	0.63
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	0.82
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.55
$8\text{GHz} \leq f \leq 20\text{GHz}$	1.86
$20\text{GHz} \leq f \leq 22\text{GHz}$	1.90
$22\text{GHz} \leq f \leq 26\text{GHz}$	2.20

Measurement Results:

802.11b/g mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412 GHz	Fig.33	P
		30 MHz ~ 26 GHz	Fig.34	P
	6	2.437 GHz	Fig.35	P
		30 MHz ~ 26 GHz	Fig.36	P
	11	2.462 GHz	Fig.37	P
		30 MHz ~ 26 GHz	Fig.38	P
802.11g	1	2.412 GHz	Fig.39	P
		30 MHz ~ 26 GHz	Fig.40	P
	6	2.437 GHz	Fig.41	P
		30 MHz ~ 26 GHz	Fig.42	P
	11	2.462 GHz	Fig.43	P
		30 MHz ~ 26 GHz	Fig.44	P

802.11n mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n (20MHz)	1	2.412 GHz	Fig.45	P
		30 MHz ~ 26 GHz	Fig.46	P
	6	2.437 GHz	Fig.47	P
		30 MHz ~ 26 GHz	Fig.48	P
	11	2.462 GHz	Fig.49	P

		30 MHz ~ 26 GHz	Fig.50	P
802.11n (40MHz)	3	2.422 GHz	Fig.51	P
		30 MHz ~ 26 GHz	Fig.52	P
	6	2.437 GHz	Fig.53	P
		30 MHz ~ 26 GHz	Fig.54	P
	9	2.452 GHz	Fig.55	P
		30 MHz ~ 26 GHz	Fig.56	P

Conclusion: PASS

Test graphs as below:

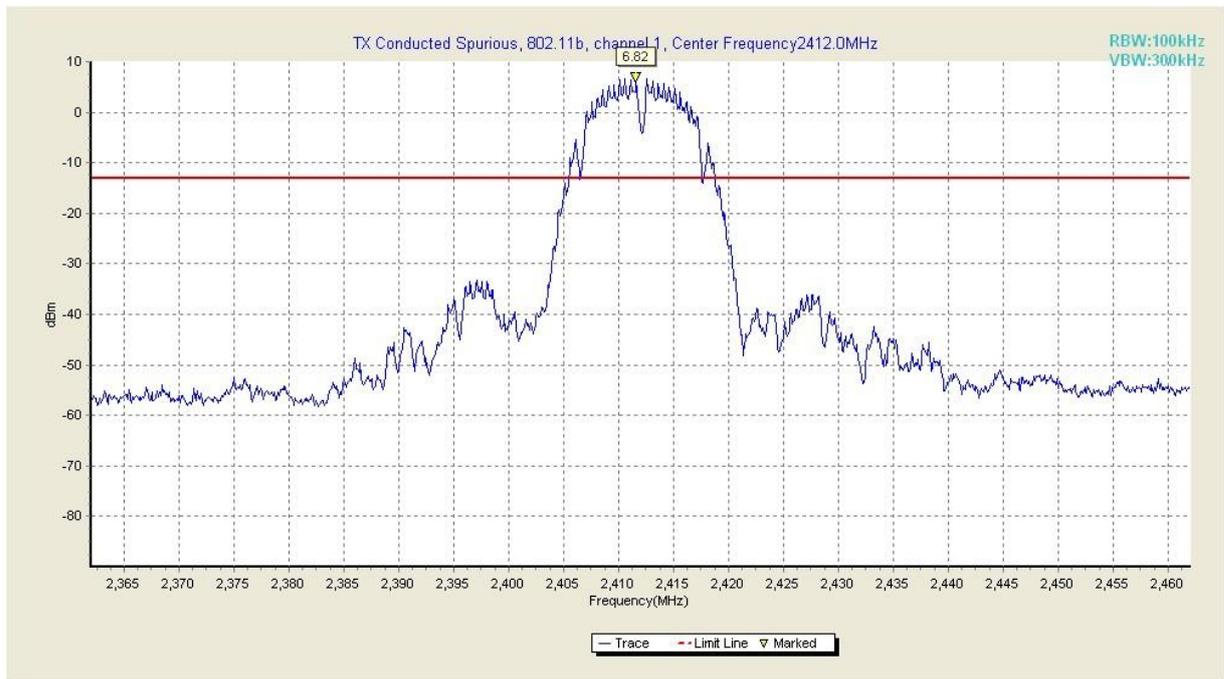


Fig. 33 Conducted Spurious Emission (802.11b, Ch1, Center Frequency)

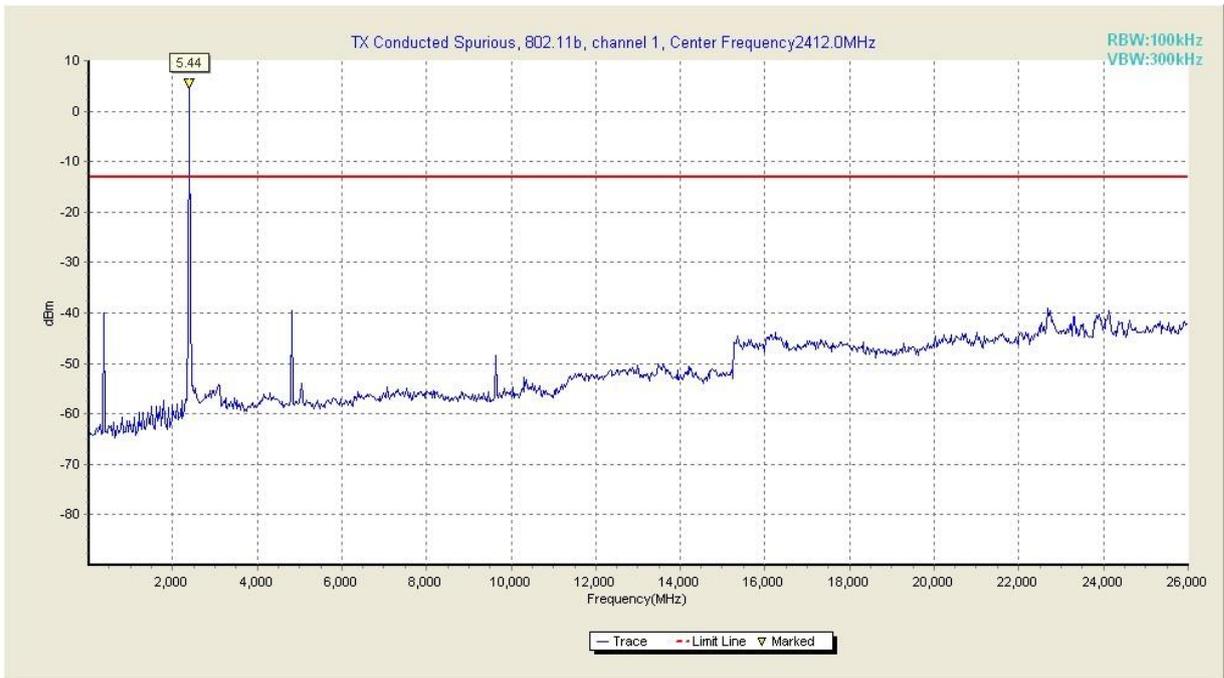


Fig. 34 Conducted Spurious Emission (802.11b, Ch1, 30 MHz-26 GHz)

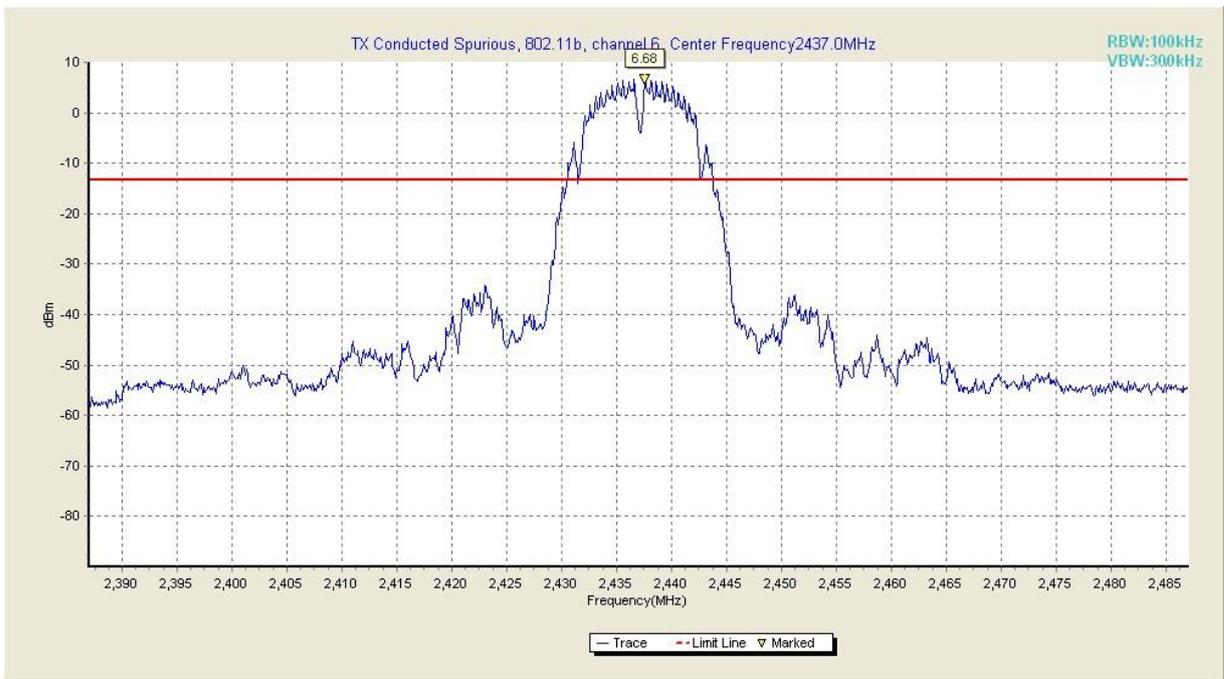


Fig. 35 Conducted Spurious Emission (802.11b, Ch6, Center Frequency)

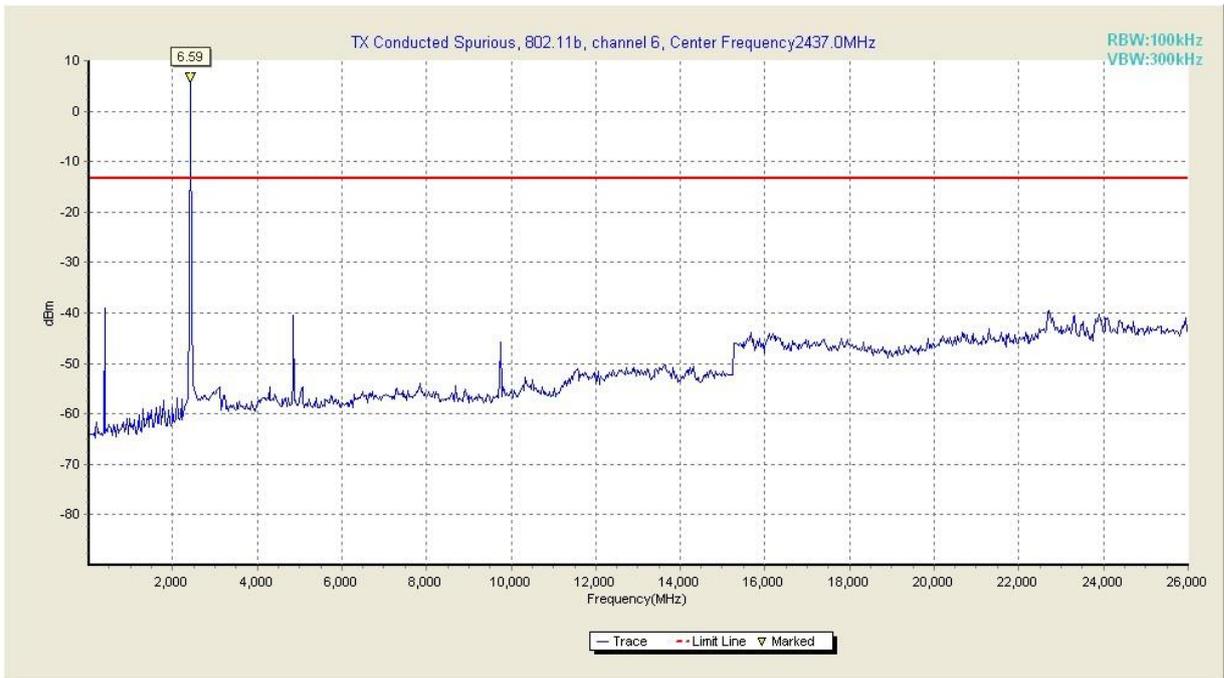


Fig. 36 Conducted Spurious Emission (802.11b, Ch6, 30 MHz-26 GHz)

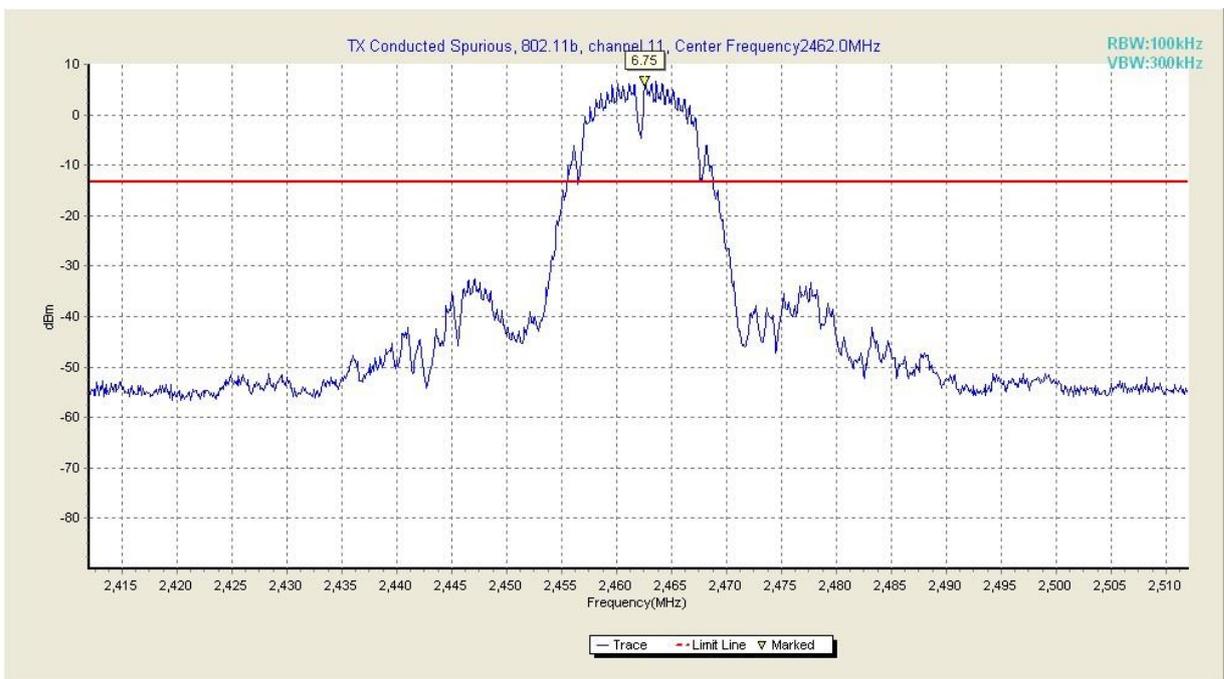


Fig. 37 Conducted Spurious Emission (802.11b, Ch11, Center Frequency)

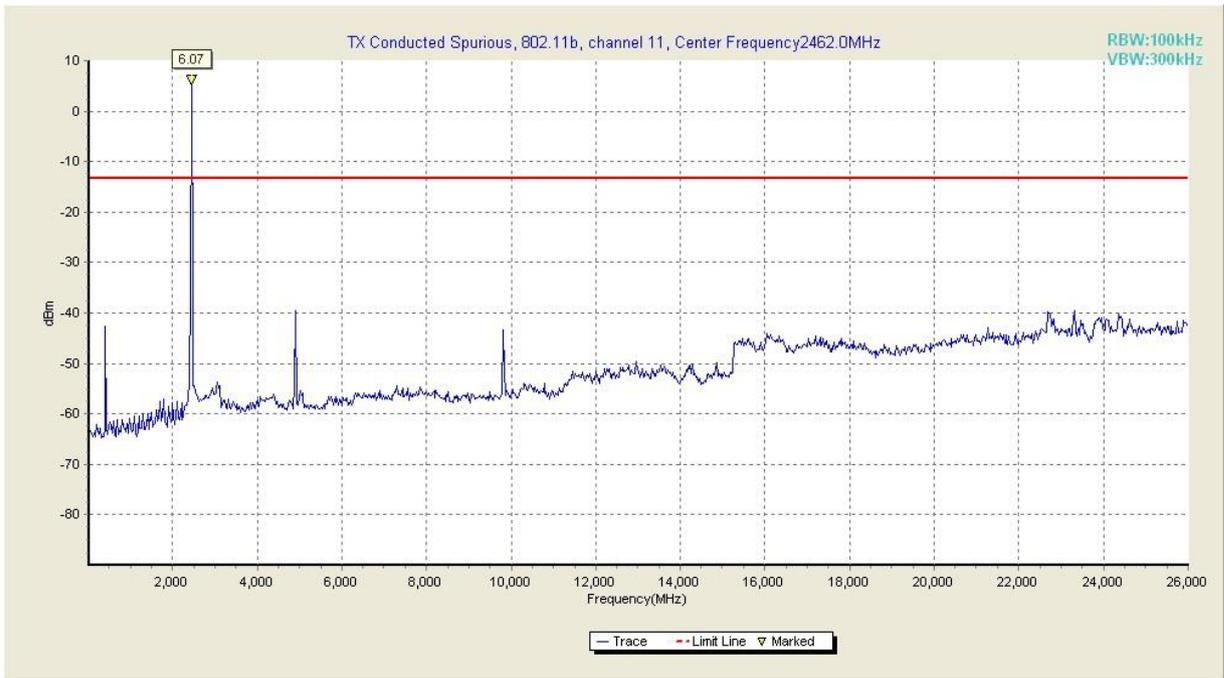


Fig. 38 Conducted Spurious Emission (802.11b, Ch11, 30 MHz-26 GHz)

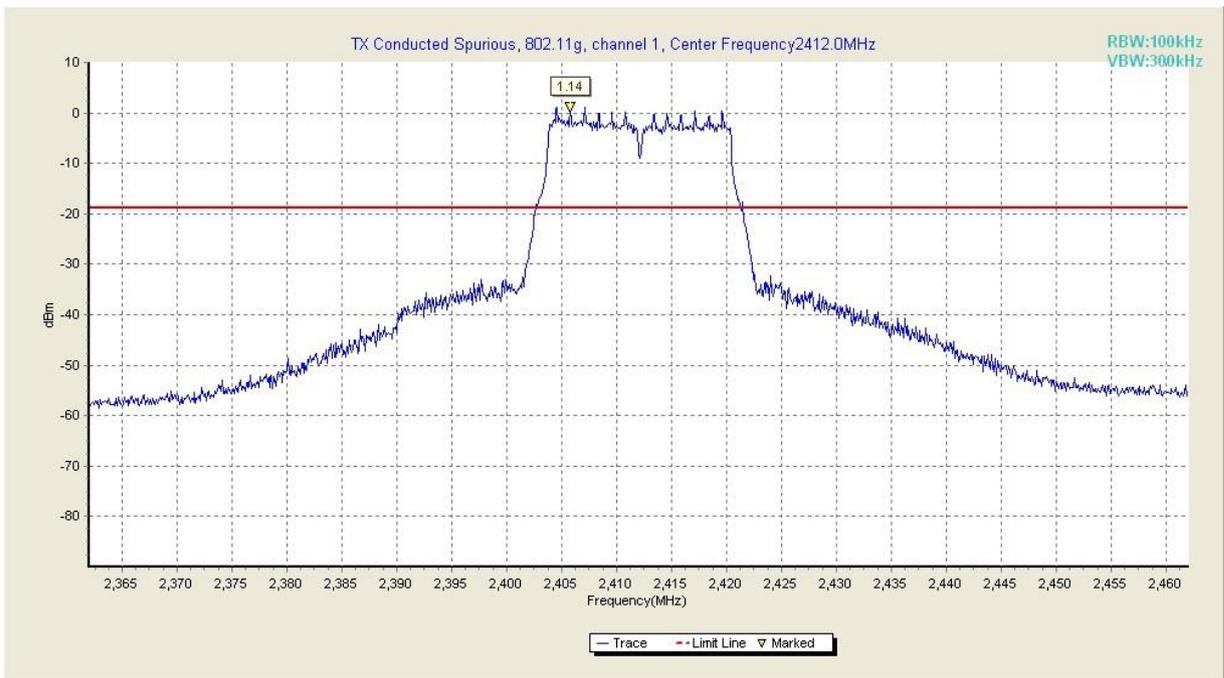


Fig. 39 Conducted Spurious Emission (802.11g, Ch1, Center Frequency)

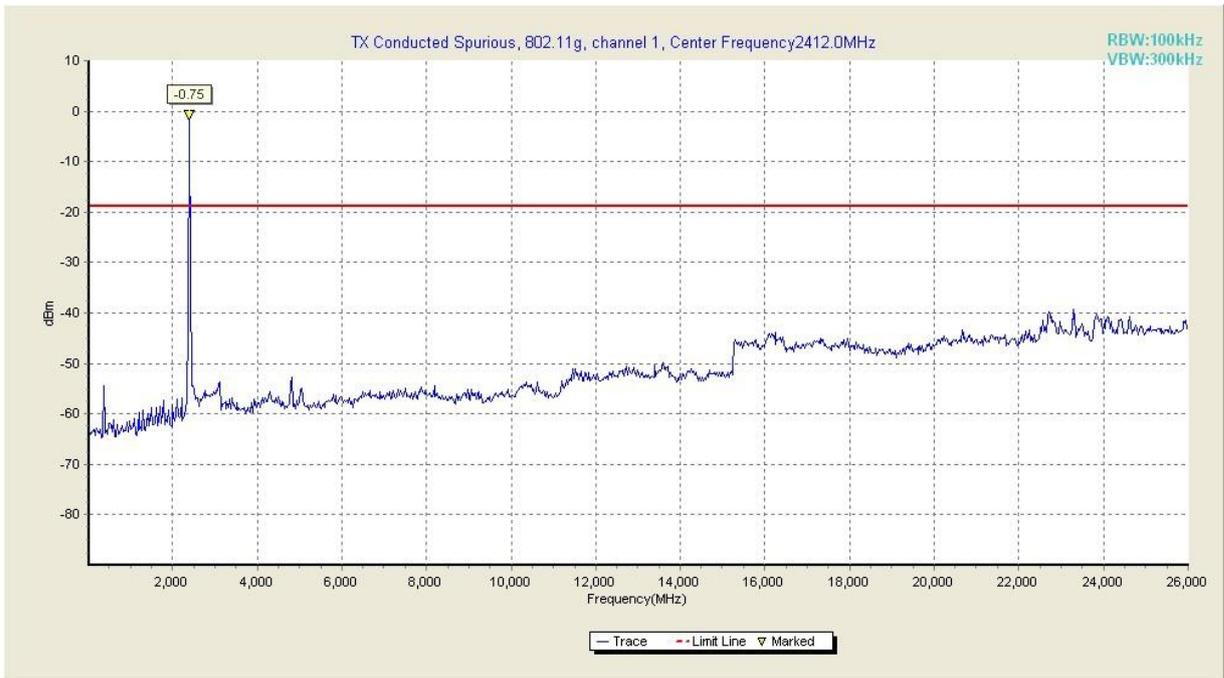


Fig. 40 Conducted Spurious Emission (802.11g, Ch1, 30 MHz-26 GHz)

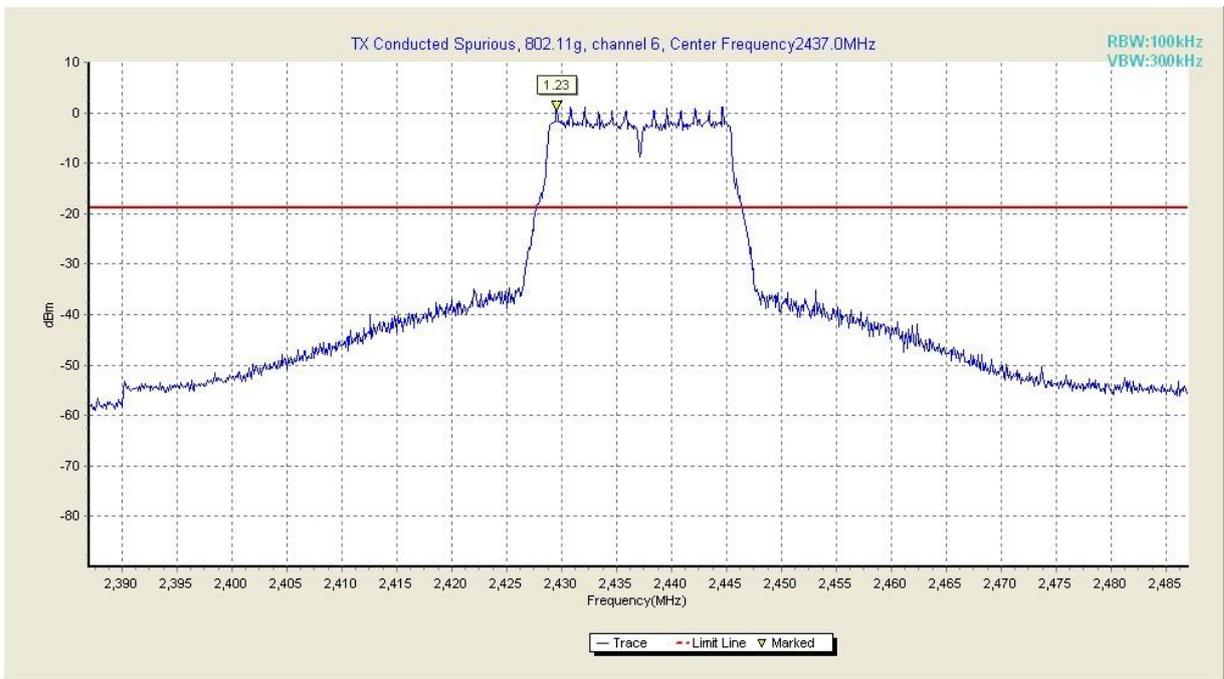


Fig. 41 Conducted Spurious Emission (802.11g, Ch6, Center Frequency)

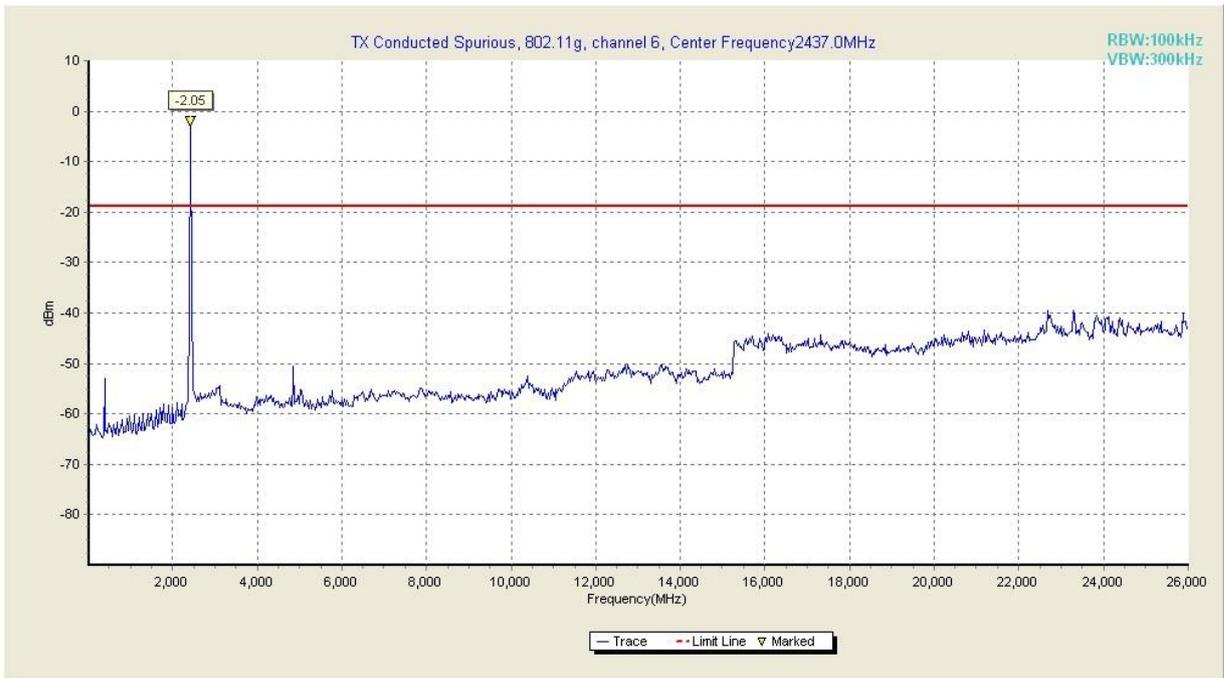


Fig. 42 Conducted Spurious Emission (802.11g, Ch6, 30 MHz-26 GHz)

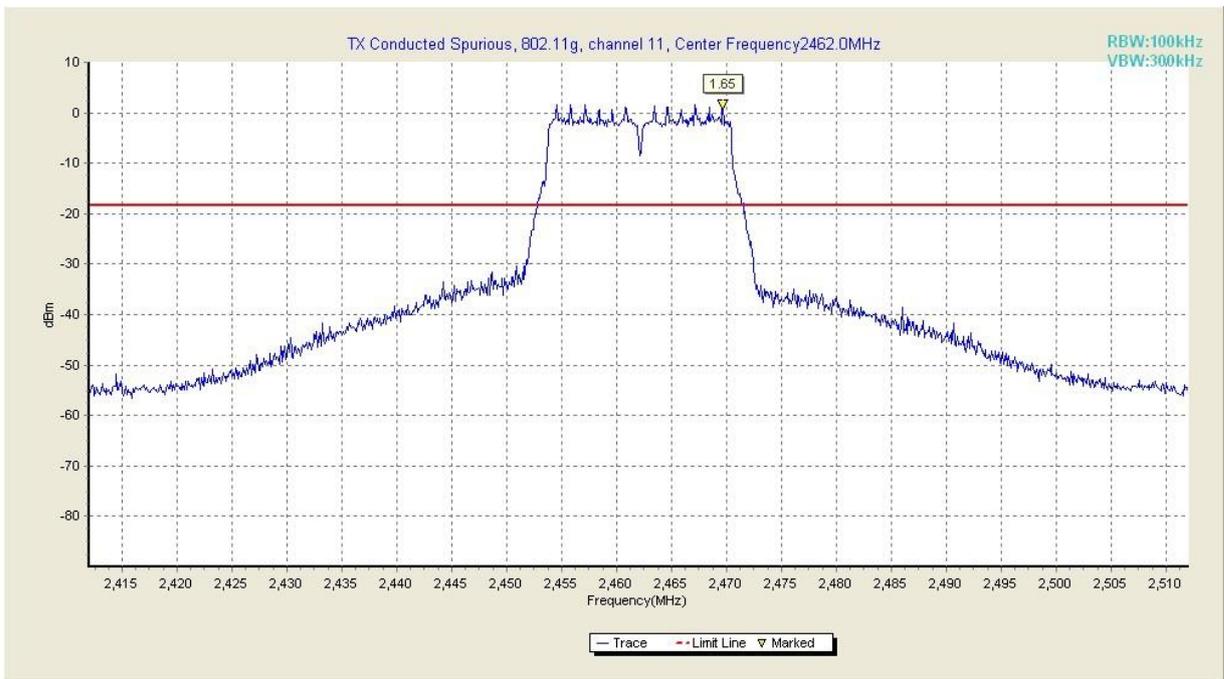


Fig. 43 Conducted Spurious Emission (802.11g, Ch11, Center Frequency)

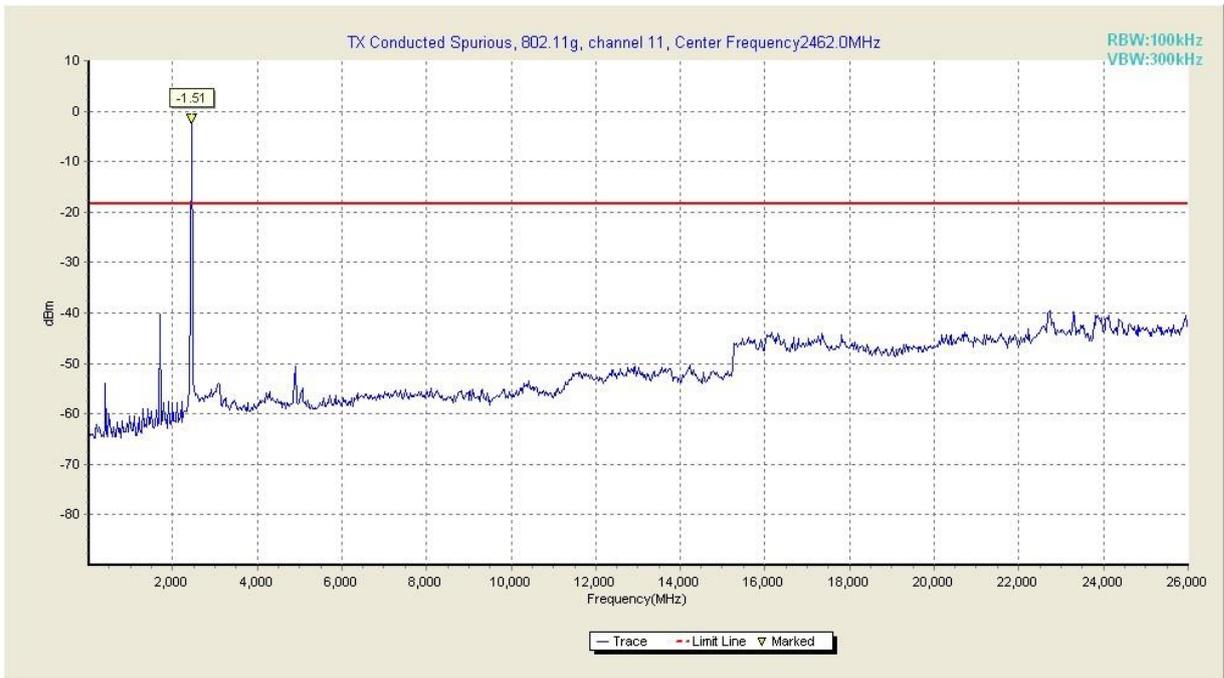


Fig. 44 Conducted Spurious Emission (802.11g, Ch11, 30 MHz-26 GHz)

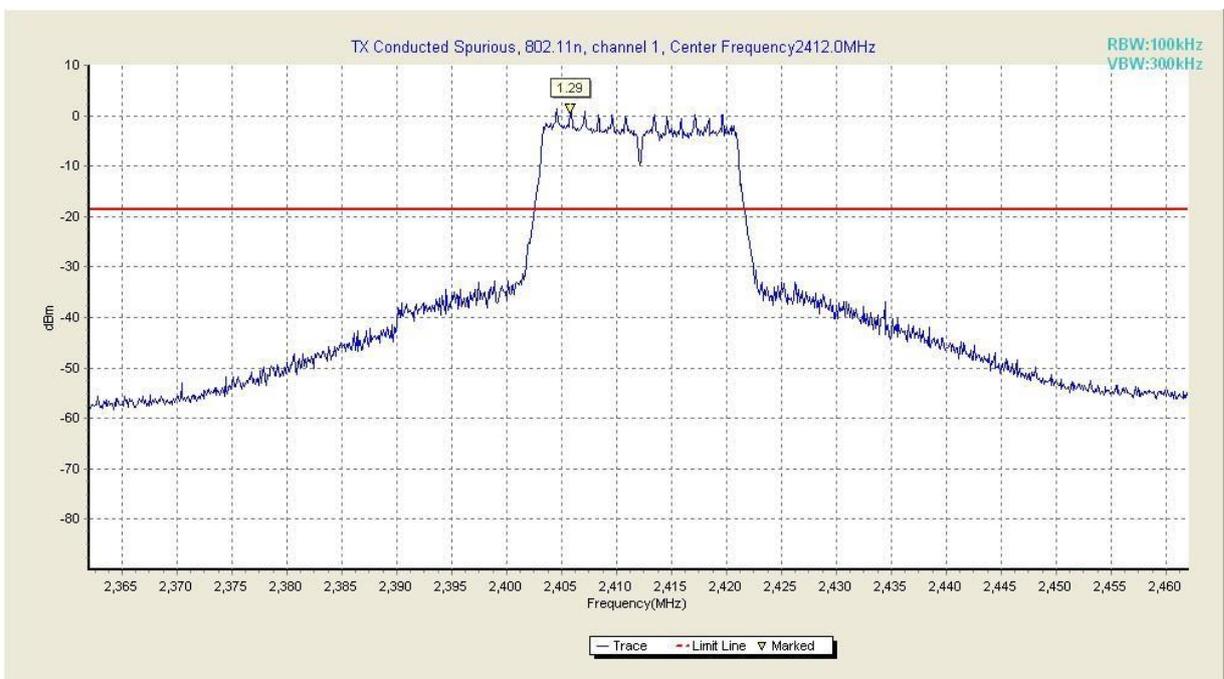


Fig. 45 Conducted Spurious Emission (802.11n-20MHz, Ch1, Center Frequency)

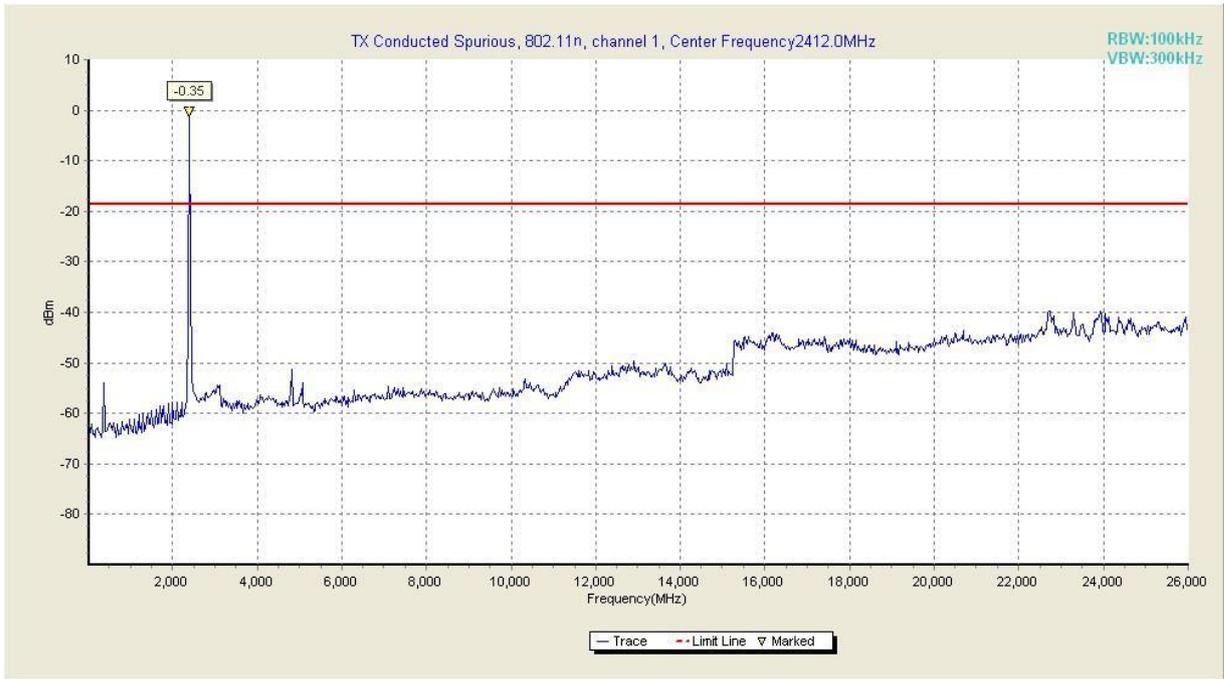


Fig. 46 Conducted Spurious Emission (802.11n-20MHz, Ch1, 30 MHz-26 GHz)

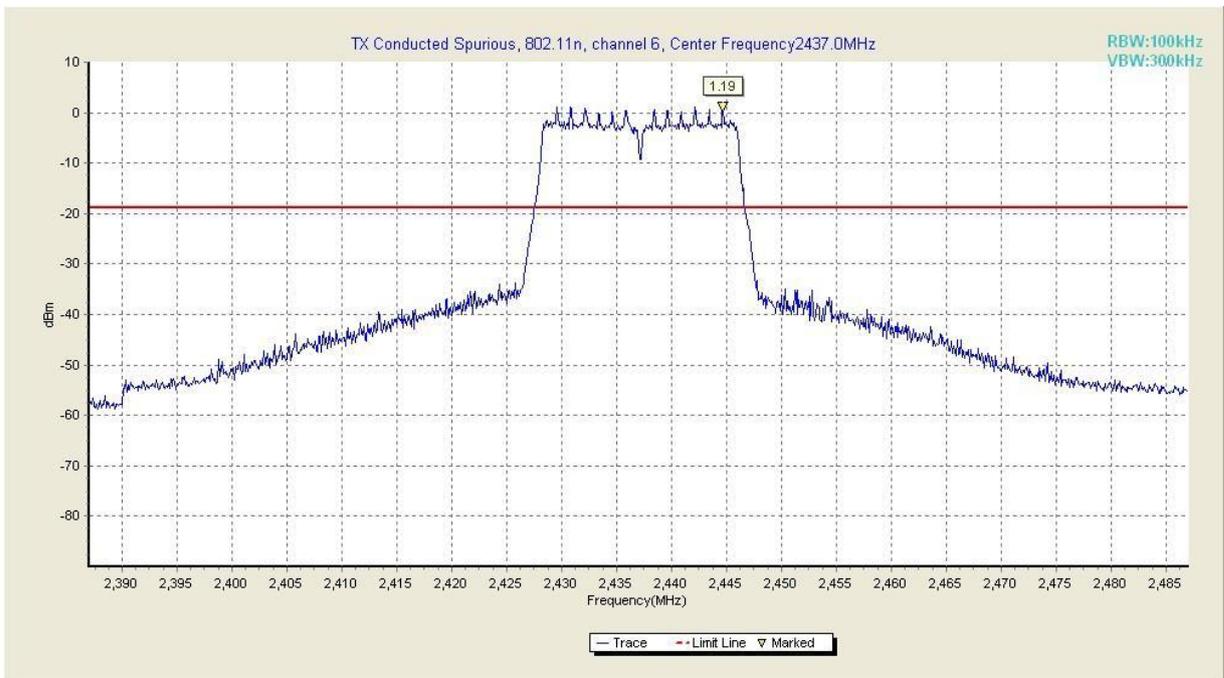


Fig. 47 Conducted Spurious Emission (802.11n-20MHz, Ch6, Center Frequency)

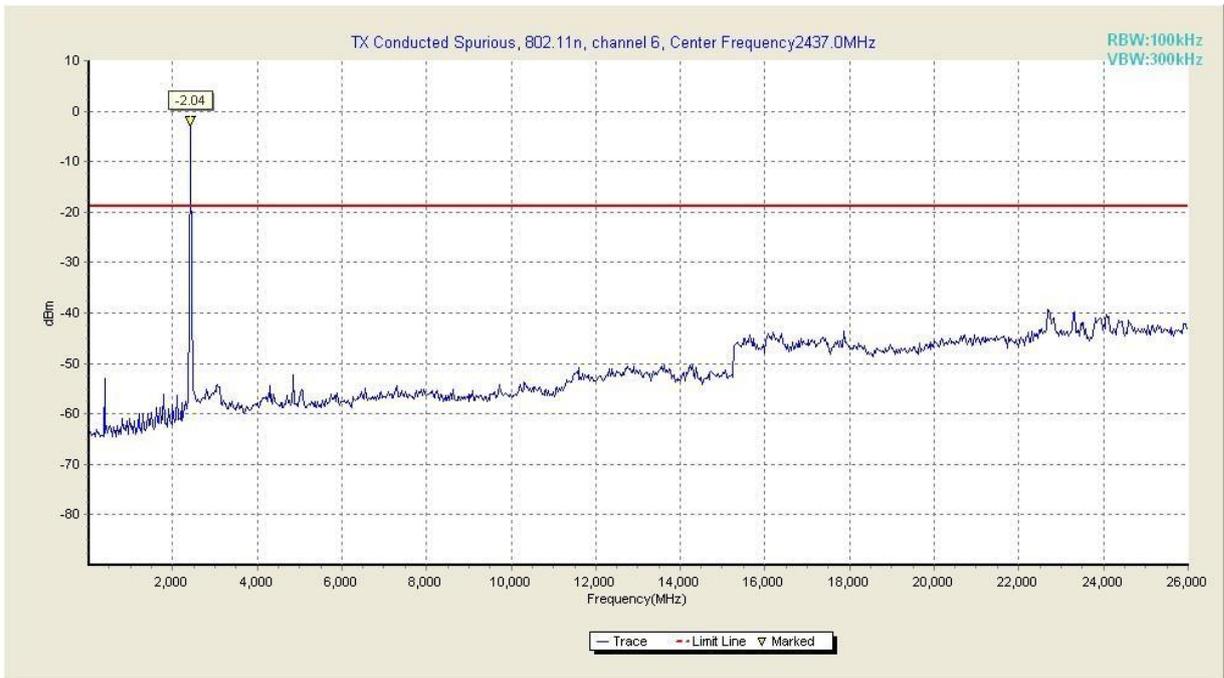


Fig. 48 Conducted Spurious Emission (802.11n-20MHz, Ch6, 30 MHz-26 GHz)

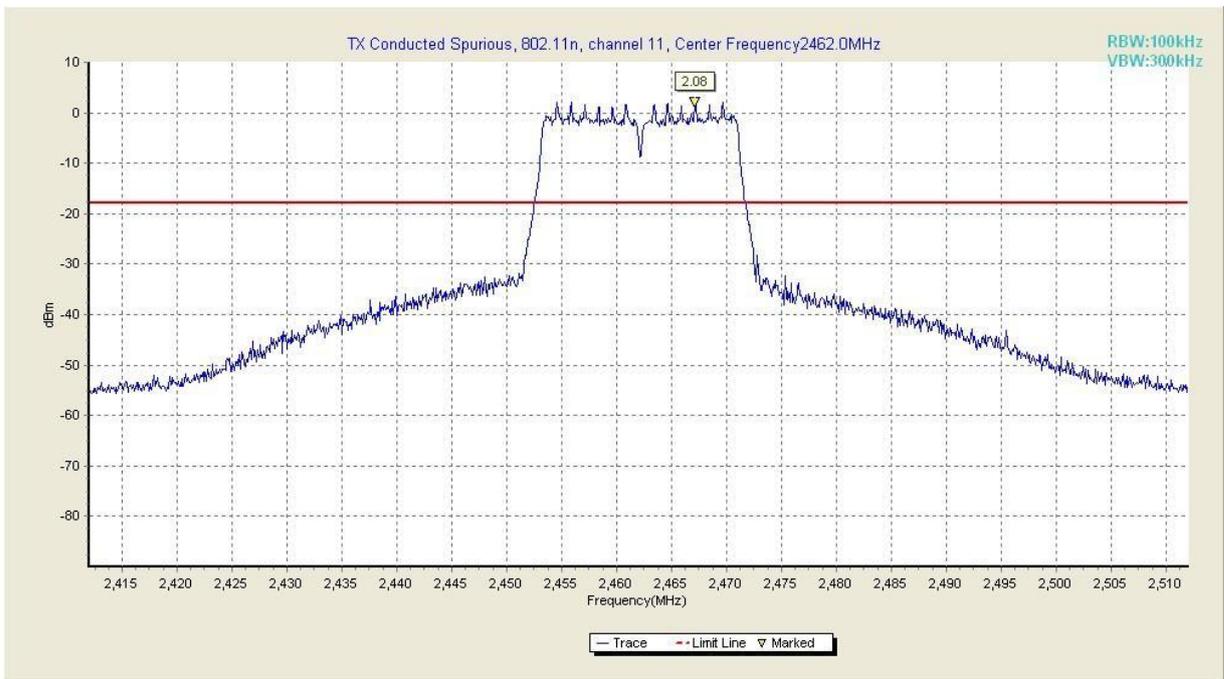


Fig. 49 Conducted Spurious Emission (802.11n-20MHz, Ch11, Center Frequency)

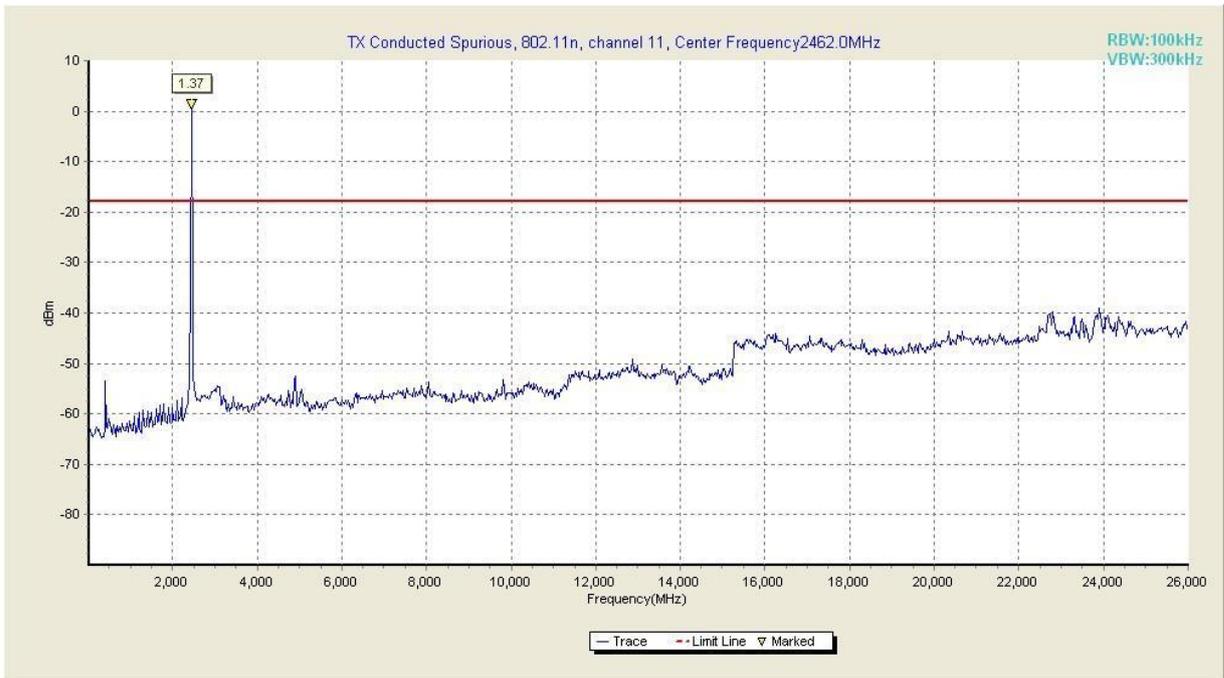


Fig. 50 Conducted Spurious Emission (802.11n-20MHz, Ch11, 30 MHz-26 GHz)

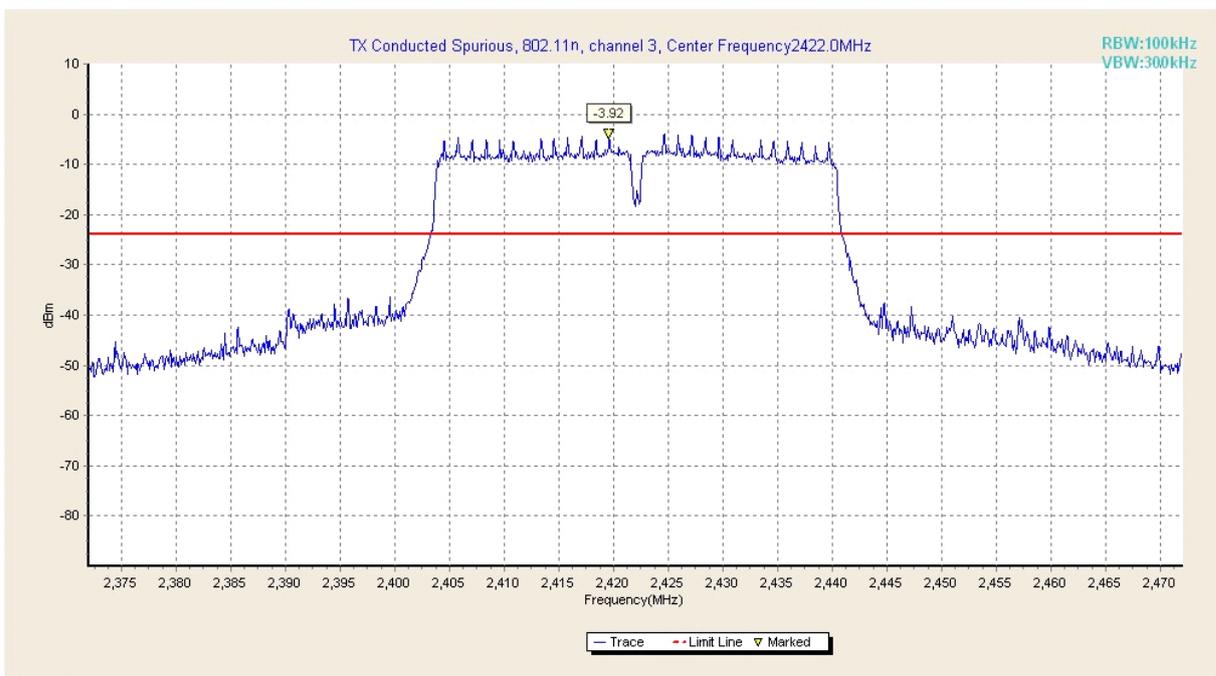


Fig. 51 Conducted Spurious Emission (802.11n-40MHz, Ch3, Center Frequency)

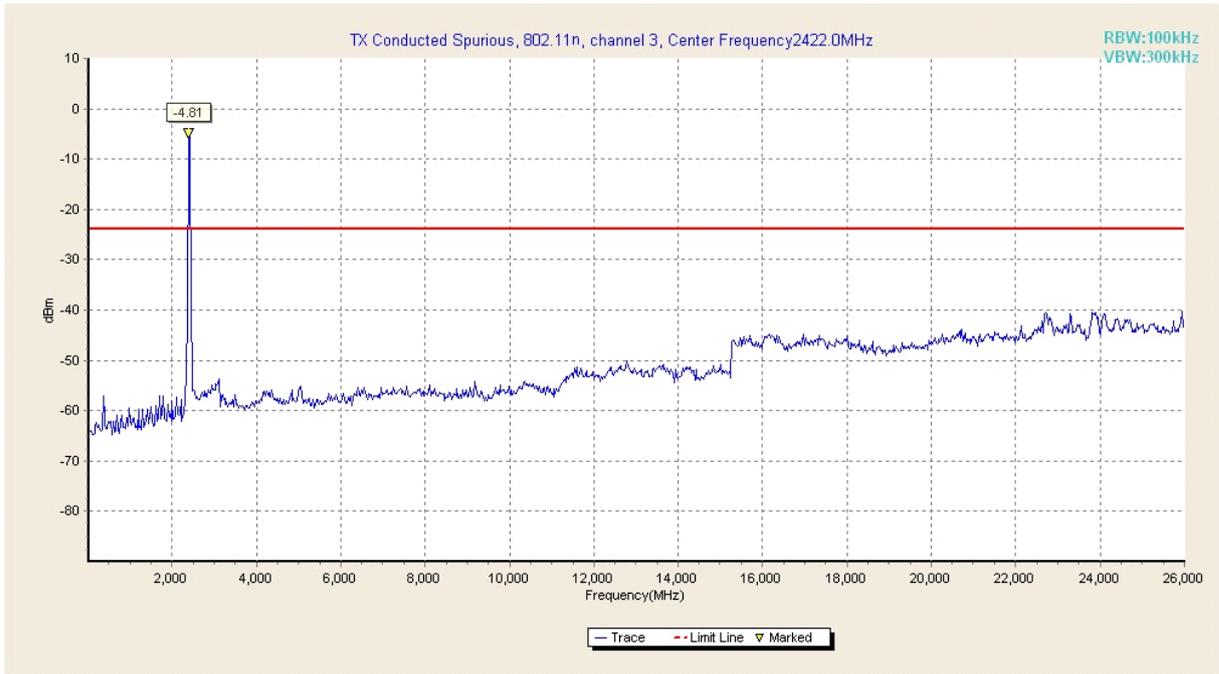


Fig. 52 Conducted Spurious Emission (802.11n-40MHz, Ch3, 30 MHz-26 GHz)

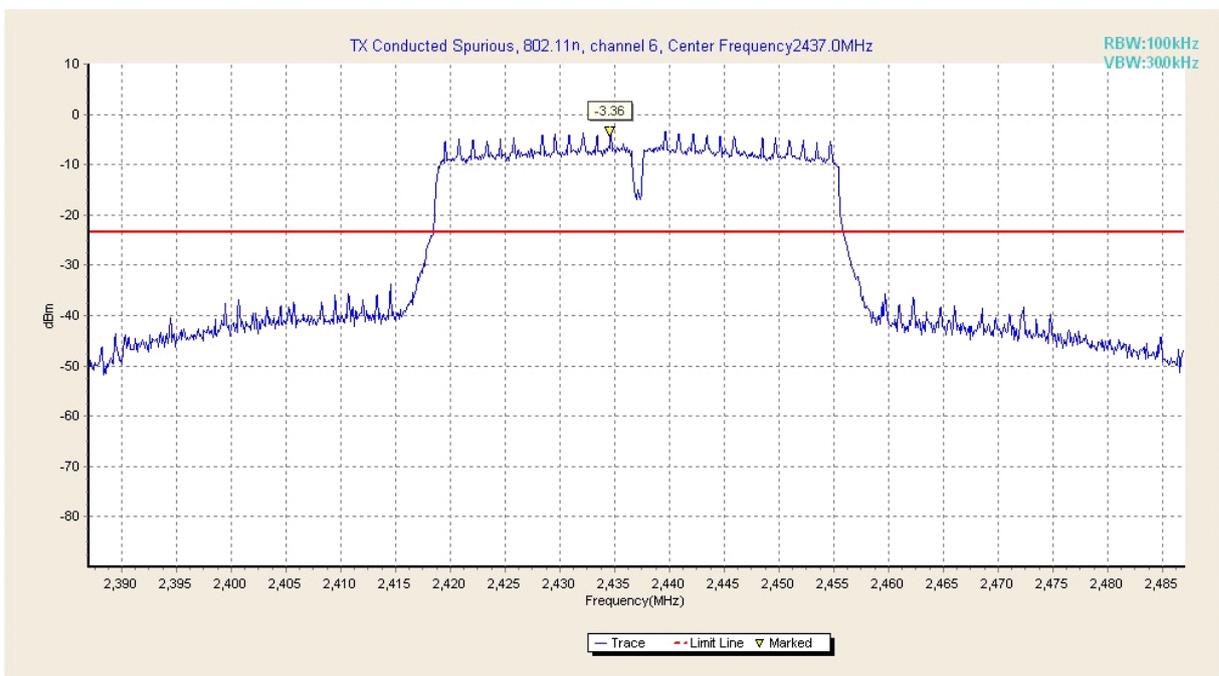


Fig. 53 Conducted Spurious Emission (802.11n-40MHz, Ch6, Center Frequency)

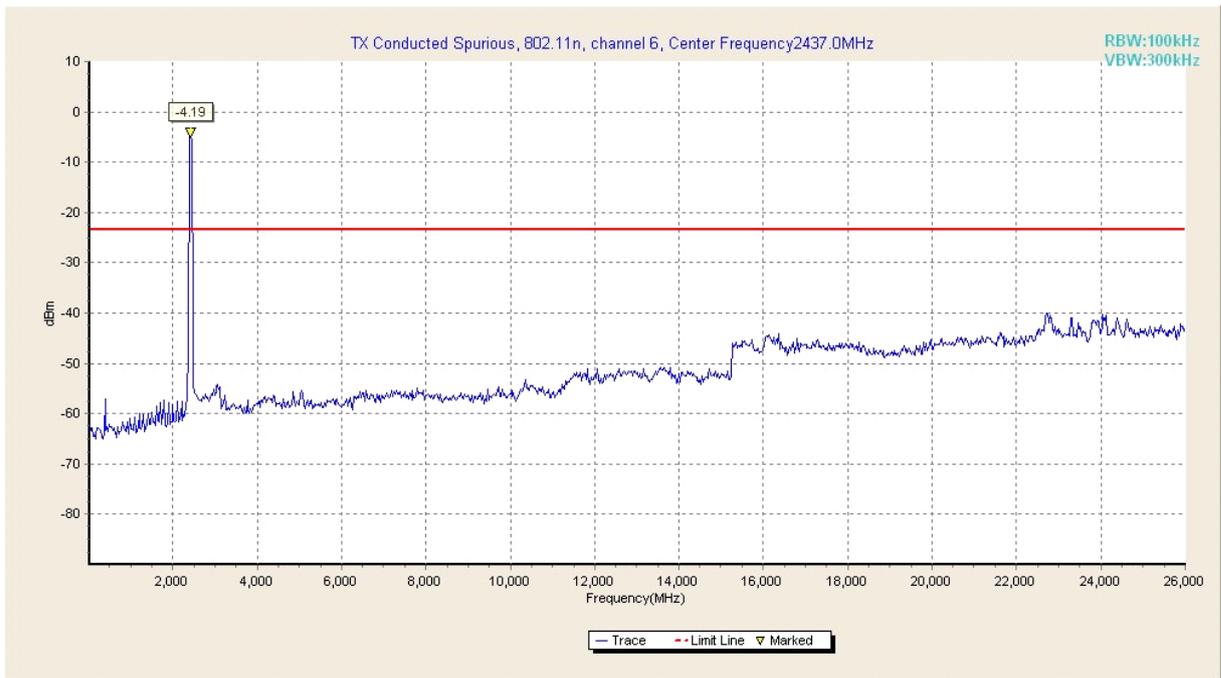


Fig. 54 Conducted Spurious Emission (802.11n-40MHz, Ch6, 30 MHz-26 GHz)

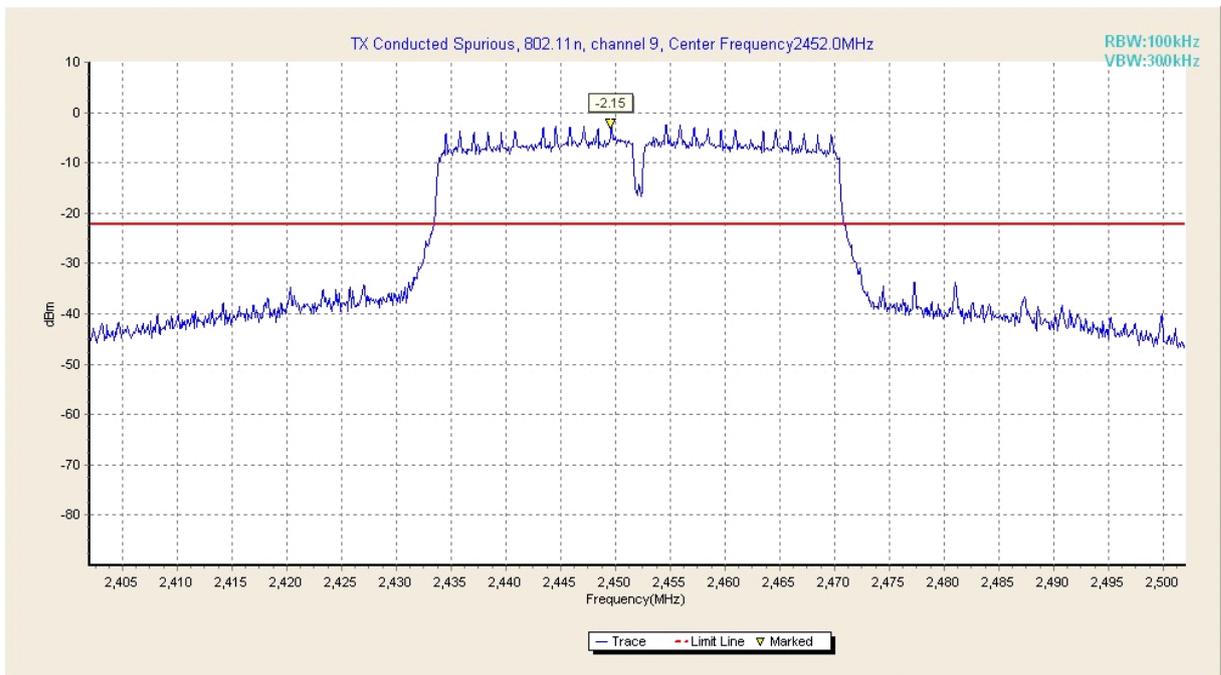


Fig. 55 Conducted Spurious Emission (802.11n-40MHz, Ch9, Center Frequency)

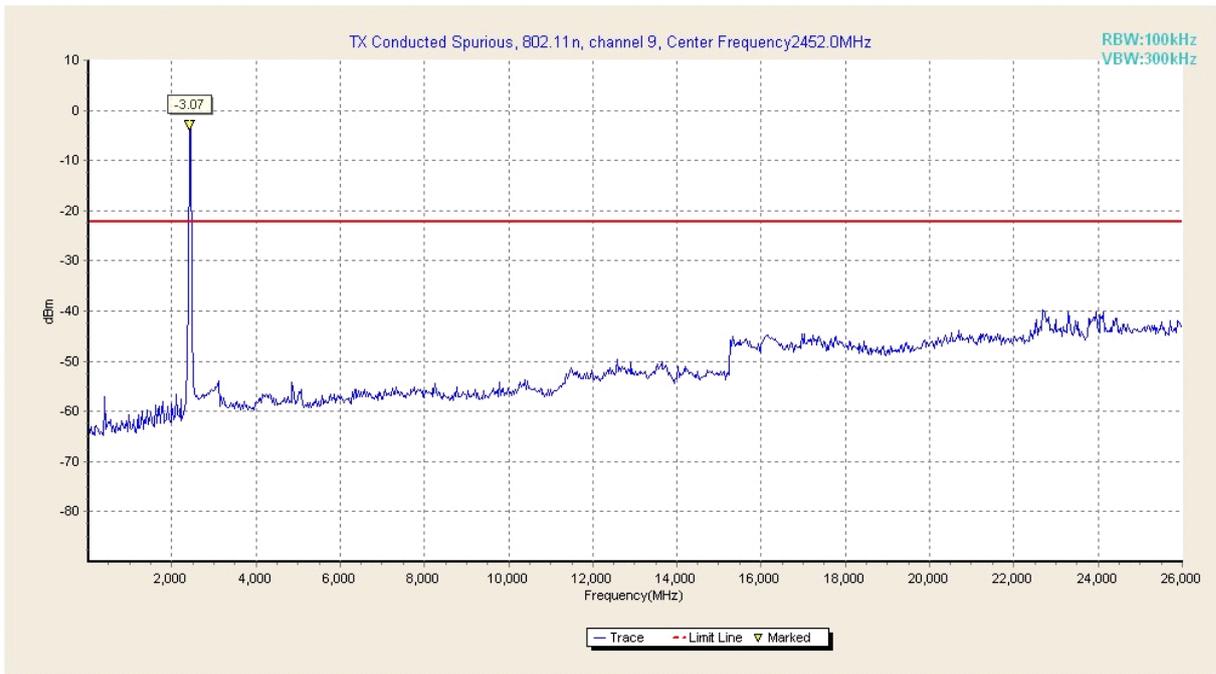


Fig. 56 Conducted Spurious Emission (802.11n-40MHz, Ch9, 30 MHz-26 GHz)

A.6.2 Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

The measurement is made according to ANSI C63.4 and KDB558074.

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

Measurement Results:

802.11b/g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power	2.38GHz ~2.45GHz	Fig.57	P
	1	30 MHz ~1 GHz	Fig.58	P
		1 GHz ~ 4 GHz	Fig.59	P
		4 GHz ~ 18 GHz	Fig.60	P
	6	30 MHz ~1 GHz	Fig.61	P
		1 GHz ~ 4 GHz	Fig.62	P
		4 GHz ~ 18 GHz	Fig.63	P
	Power	2.45GHz ~2.5GHz	Fig.64	P
	11	30 MHz ~1 GHz	Fig.65	P
		1 GHz ~ 4 GHz	Fig.66	P
		4 GHz ~ 18 GHz	Fig.67	P
	802.11g	Power	2.38GHz ~2.43GHz	Fig.68
1		30 MHz ~1 GHz	Fig.69	P
		1 GHz ~ 4 GHz	Fig.70	P
		4 GHz ~ 18 GHz	Fig.71	P
6		30 MHz ~1 GHz	Fig.72	P
		1 GHz ~ 4 GHz	Fig.73	P
		4 GHz ~ 18 GHz	Fig.74	P
Power		2.45GHz ~2.5GHz	Fig.75	P
11		30 MHz ~1 GHz	Fig.76	P
		1 GHz ~ 4 GHz	Fig.77	P
		4 GHz ~ 18 GHz	Fig.78	P

802.11n mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (20MHz)	Power	2.38GHz ~2.45GHz	Fig.79	P
	1	30 MHz ~1 GHz	Fig.80	P
		1 GHz ~ 4 GHz	Fig.81	P
		4 GHz ~ 18 GHz	Fig.82	P
	6	30 MHz ~1 GHz	Fig.83	P
		1 GHz ~ 4 GHz	Fig.84	P
		4 GHz ~ 18 GHz	Fig.85	P
	Power	2.45GHz ~2.5GHz	Fig.86	P
	11	30 MHz ~1 GHz	Fig.87	P
		1 GHz ~ 4 GHz	Fig.88	P
		4 GHz ~ 18 GHz	Fig.89	P
	802.11n (40MHz)	Power	2.38GHz ~2.45GHz	Fig.90
3		30 MHz ~1 GHz	Fig.91	P
		1 GHz ~ 4 GHz	Fig.92	P

		4 GHz ~ 18 GHz	Fig.93	P
	6	30 MHz ~1 GHz	Fig.94	P
		1 GHz ~ 4 GHz	Fig.95	P
		4 GHz ~ 18 GHz	Fig.96	P
	Power	2.45GHz ~2.5GHz	Fig.97	P
	9	30 MHz ~1 GHz	Fig.98	P
		1 GHz ~ 4 GHz	Fig.99	P
		4 GHz ~ 18 GHz	Fig.100	P
/	All channels	18 GHz~ 26.5 GHz	Fig.101	P

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

802.11b

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2410.822	75.22	-18.7	27.5	66.42	HORIZONTAL
2414.83	75.2	-18.7	27.5	66.4	HORIZONTAL
2406.814	67.3	-18.7	27.5	58.5	HORIZONTAL
2418.838	62.91	-18.7	27.5	54.11	HORIZONTAL
2402.806	41.17	-18.7	27.5	32.37	HORIZONTAL
3699.399	38.92	-19.2	33.4	24.72	VERTICAL

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2438.878	73.5	-18.9	27.5	64.9	HORIZONTAL
2434.87	73.33	-18.9	27.5	64.73	HORIZONTAL
2442.886	66.1	-18.9	27.5	57.5	HORIZONTAL
2430.862	60.25	-18.9	27.5	51.65	HORIZONTAL
2446.894	39.89	-18.9	27.5	31.29	HORIZONTAL
3699.399	38.89	-19.2	33.4	24.69	VERTICAL

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2462.826	73.81	-18.6	27.5	64.91	VERTICAL
2463.226	73.64	-18.6	27.5	64.74	VERTICAL
2463.727	73.48	-18.6	27.5	64.58	HORIZONTAL
2462.926	73.14	-18.6	27.5	64.24	VERTICAL
2466.934	70.35	-18.6	27.5	61.45	VERTICAL
2458.918	69.27	-18.7	27.5	60.47	VERTICAL

802.11g

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2414.83	65.61	-18.7	27.5	56.81	HORIZONTAL
2418.838	65.51	-18.7	27.5	56.71	HORIZONTAL
2406.814	64.83	-18.7	27.5	56.03	HORIZONTAL
2410.822	64.31	-18.7	27.5	55.51	HORIZONTAL
2402.806	55.47	-18.7	27.5	46.67	HORIZONTAL
2422.846	47.19	-18.8	27.5	38.49	HORIZONTAL

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2442.886	68.18	-18.9	27.5	59.58	HORIZONTAL
2434.87	67.3	-18.9	27.5	58.7	HORIZONTAL
2438.878	67.23	-18.9	27.5	58.63	HORIZONTAL
2430.862	66.8	-18.9	27.5	58.2	HORIZONTAL
2446.894	59.05	-18.9	27.5	50.45	HORIZONTAL
2426.854	48.87	-18.8	27.5	40.17	HORIZONTAL

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2458.918	67.66	-18.7	27.5	58.86	HORIZONTAL
2466.934	67.45	-18.6	27.5	58.55	HORIZONTAL
2462.926	67.19	-18.6	27.5	58.29	HORIZONTAL
2454.91	65.54	-18.7	27.5	56.74	HORIZONTAL
2470.942	62.83	-18.4	27.5	53.73	HORIZONTAL
2450.902	40.89	-18.7	27.5	32.09	HORIZONTAL

802.11n-20MHz

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2418.838	71	-18.7	27.5	62.2	HORIZONTAL
2414.83	70.82	-18.7	27.5	62.02	HORIZONTAL
2406.814	69.97	-18.7	27.5	61.17	HORIZONTAL
2410.822	69.53	-18.7	27.5	60.73	HORIZONTAL
2402.806	63.91	-18.7	27.5	55.11	HORIZONTAL
2422.846	57.77	-18.8	27.5	49.07	HORIZONTAL

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2438.878	71.05	-18.9	27.5	62.45	HORIZONTAL
2434.87	70.49	-18.9	27.5	61.89	HORIZONTAL
2442.886	64.86	-18.9	27.5	56.26	HORIZONTAL
2430.862	60.06	-18.9	27.5	51.46	HORIZONTAL
2446.894	41.68	-18.9	27.5	33.08	HORIZONTAL
3699.399	38.92	-19.2	33.4	24.72	VERTICAL

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2458.918	72.76	-18.7	27.5	63.96	HORIZONTAL
2466.934	72.72	-18.6	27.5	63.82	HORIZONTAL
2454.91	72.42	-18.7	27.5	63.62	HORIZONTAL
2462.926	71.99	-18.6	27.5	63.09	HORIZONTAL
2470.942	70.54	-18.4	27.5	61.44	HORIZONTAL
2450.902	48.31	-18.7	27.5	39.51	HORIZONTAL

802.11n-40MHz

Ch3

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2418.838	66.62	-18.7	27.5	57.82	HORIZONTAL
2426.854	66.58	-18.8	27.5	57.88	HORIZONTAL
2434.87	66.4	-18.9	27.5	57.8	HORIZONTAL
2430.862	66.3	-18.9	27.5	57.7	HORIZONTAL
2414.83	66.21	-18.7	27.5	57.41	HORIZONTAL
2438.878	65.76	-18.9	27.5	57.16	HORIZONTAL

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2442.886	68.77	-18.9	27.5	60.17	HORIZONTAL
2434.87	68.39	-18.9	27.5	59.79	HORIZONTAL
2446.894	67.98	-18.9	27.5	59.38	HORIZONTAL
2438.878	67.88	-18.9	27.5	59.28	HORIZONTAL
2430.862	67.58	-18.9	27.5	58.98	HORIZONTAL
2426.854	67.07	-18.8	27.5	58.37	HORIZONTAL

Ch9

Frequency(MHz)	Result (dBuV/m)	Cable Loss	Antenna Factor	P _{Mea} (dBuV/m)	Polarization
2446.894	68.56	-18.9	27.5	59.96	HORIZONTAL
2458.918	68.46	-18.7	27.5	59.66	HORIZONTAL
2454.91	68.34	-18.7	27.5	59.54	HORIZONTAL
2442.886	68.21	-18.9	27.5	59.61	HORIZONTAL
2462.926	68.15	-18.6	27.5	59.25	HORIZONTAL
2466.934	67.64	-18.6	27.5	58.74	HORIZONTAL

Test graphs as below:

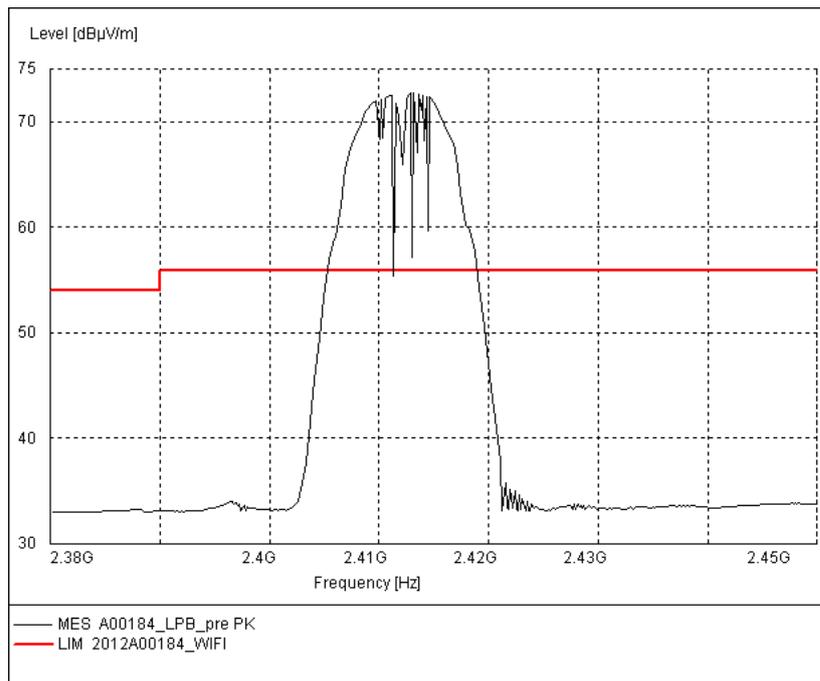


Fig. 57 Radiated Spurious Emission (Power): 802.11b, ch1, 2.38 GHz - 245GHz

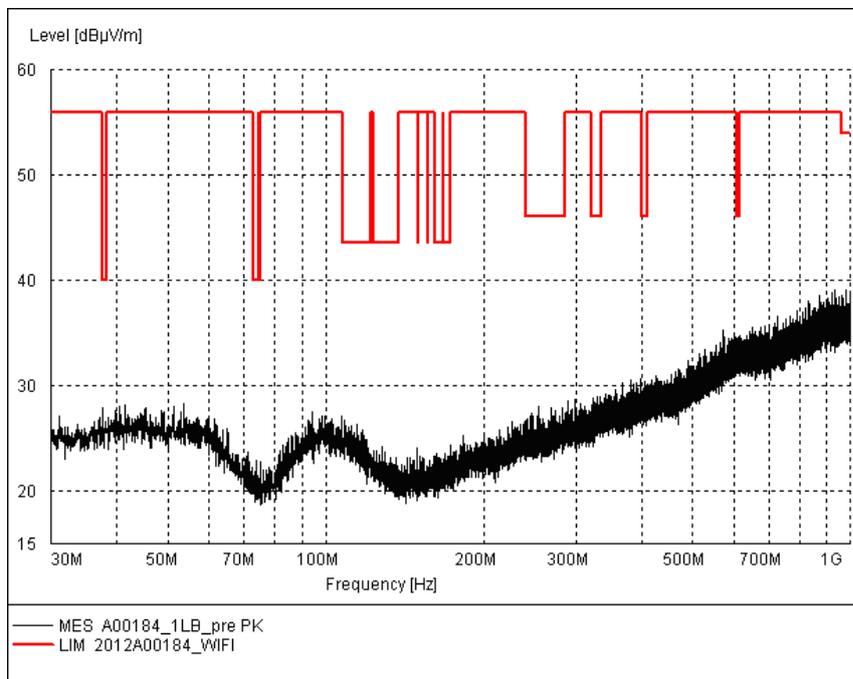


Fig. 58 Radiated Spurious Emission (802.11b, Ch1, 30 MHz-1 GHz)

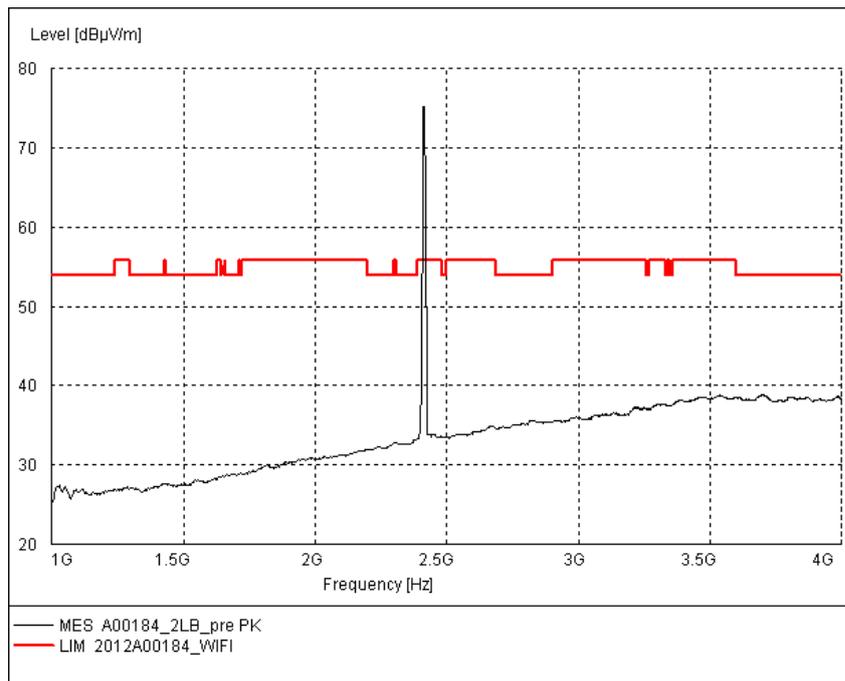


Fig. 59 Radiated Spurious Emission (802.11b, Ch1, 1 GHz-4 GHz)

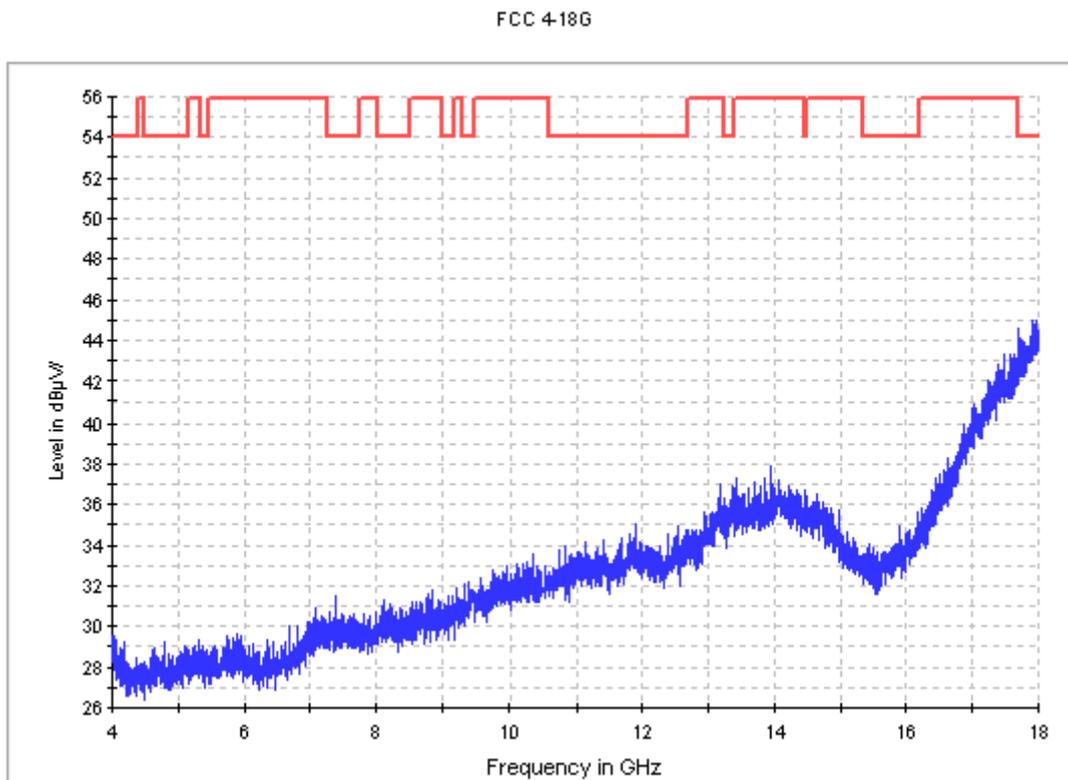


Fig. 60 Radiated Spurious Emission (802.11b, Ch1, 4 GHz-18 GHz)

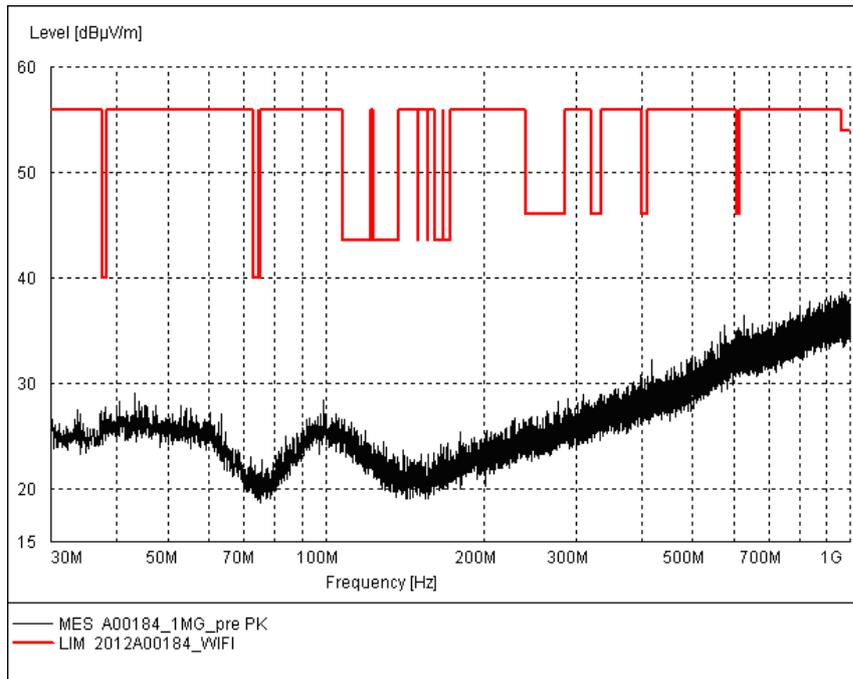


Fig. 61 Radiated Spurious Emission (802.11b, Ch6, 30 MHz-1 GHz)

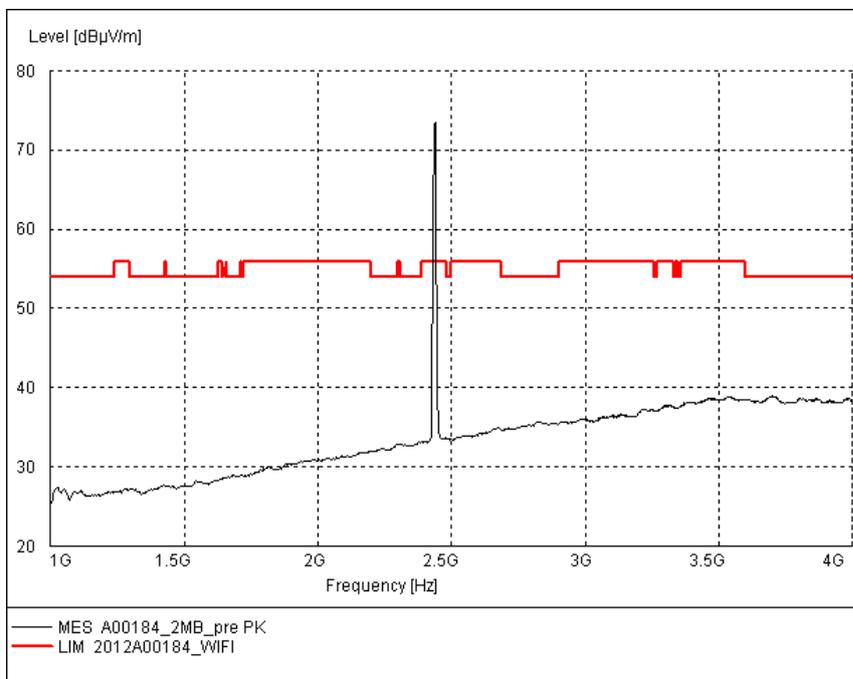


Fig. 62 Radiated Spurious Emission (802.11b, Ch6, 1 GHz-4 GHz)

FCC 4-18G

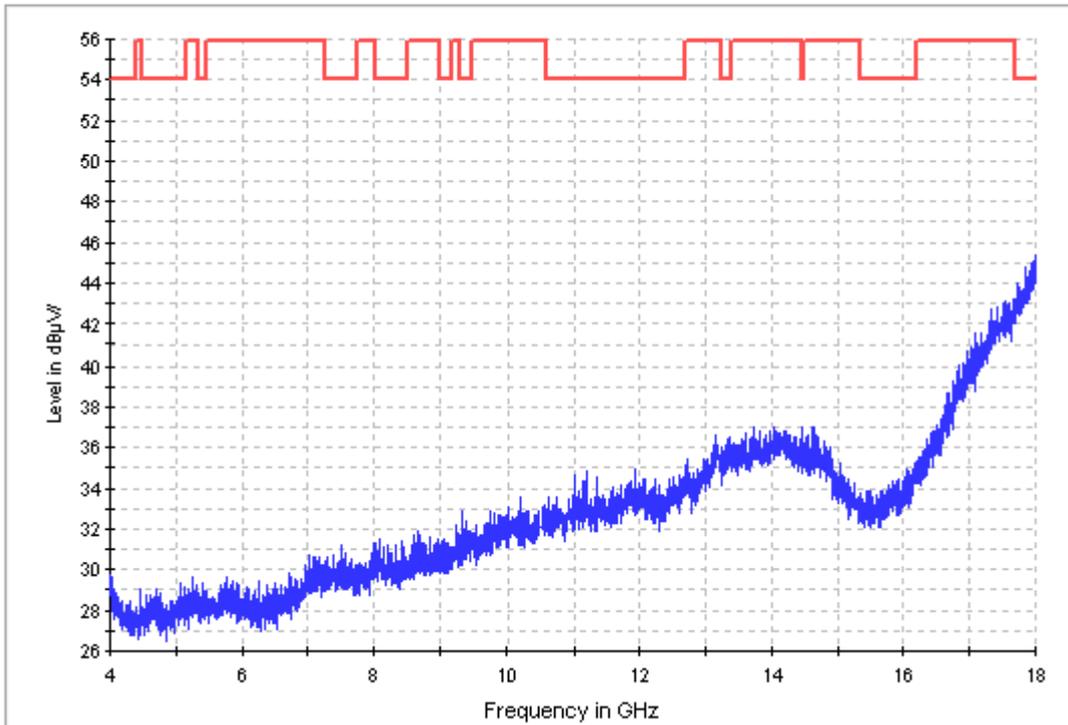


Fig. 63 Radiated Spurious Emission (802.11b, Ch6, 4 GHz-18 GHz)

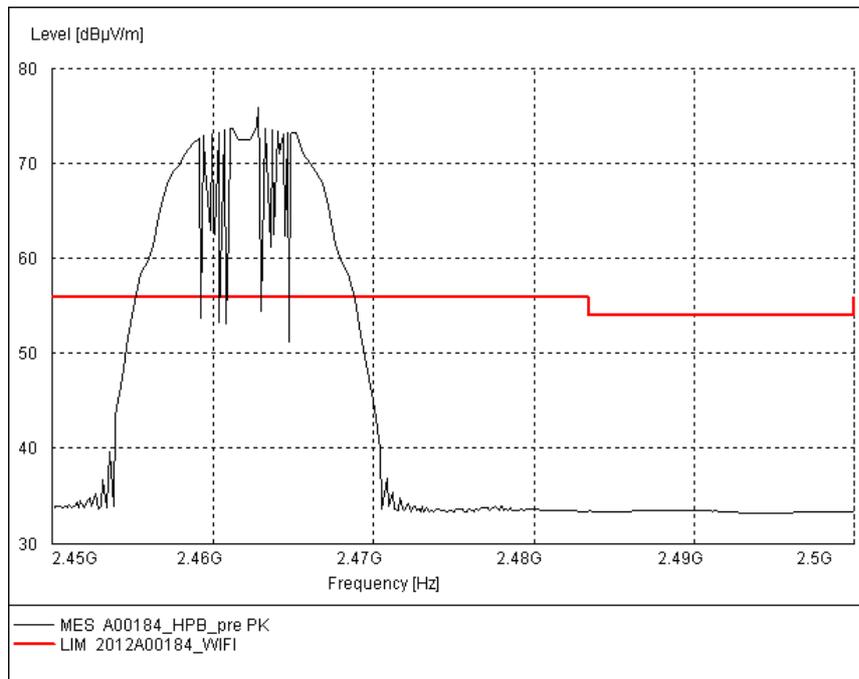


Fig. 64 Radiated Spurious Emission (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz

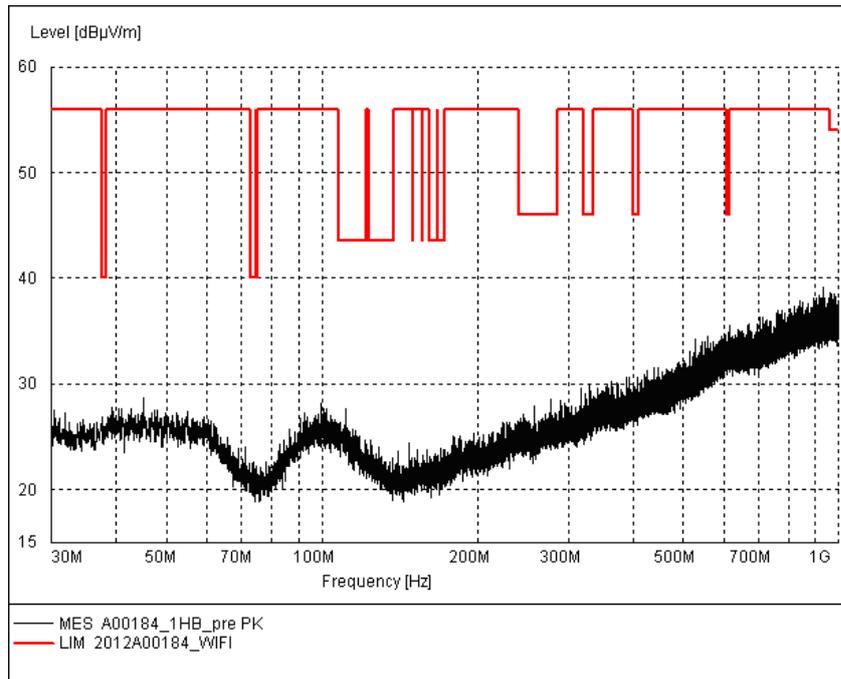


Fig. 65 Radiated Spurious Emission (802.11b, Ch11, 30 MHz-1 GHz)

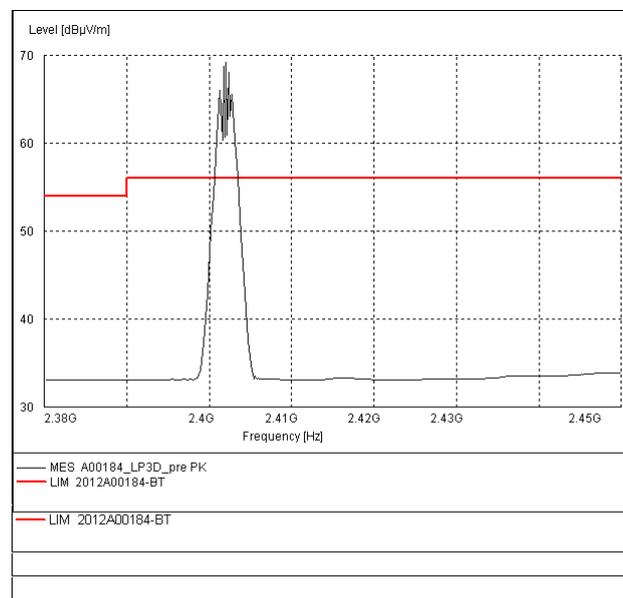


Fig. 66 Radiated Spurious Emission (802.11b, Ch11, 1 GHz-4 GHz)

FCC 4-18G

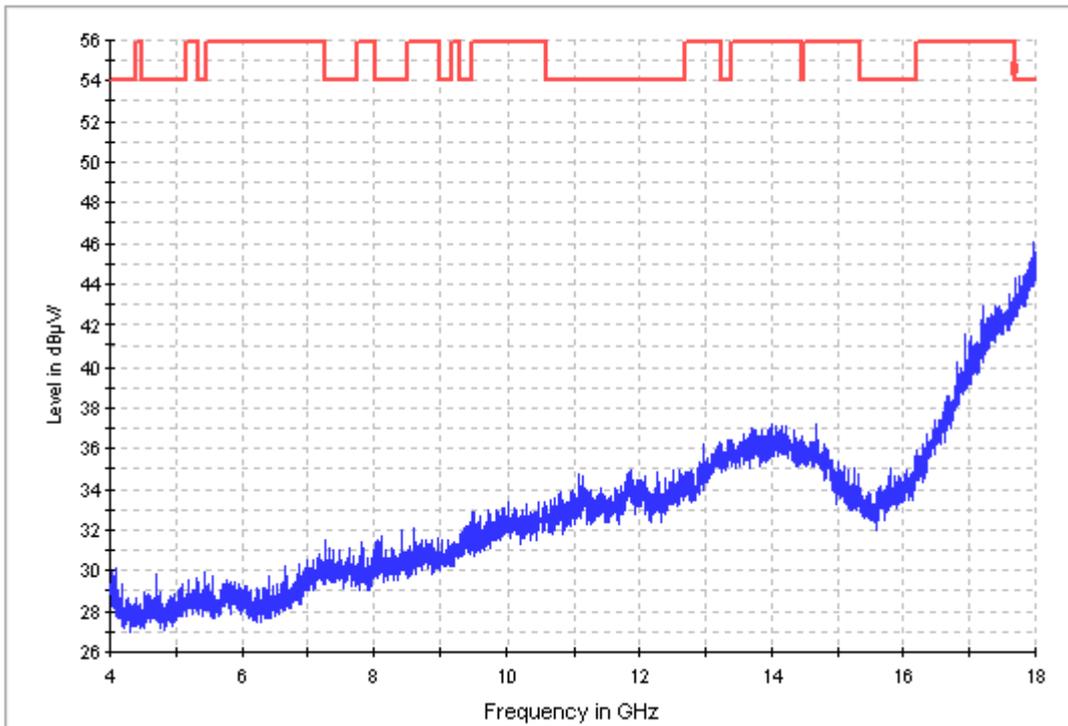


Fig. 67 Radiated Spurious Emission (802.11b, Ch11, 4 GHz-18 GHz)

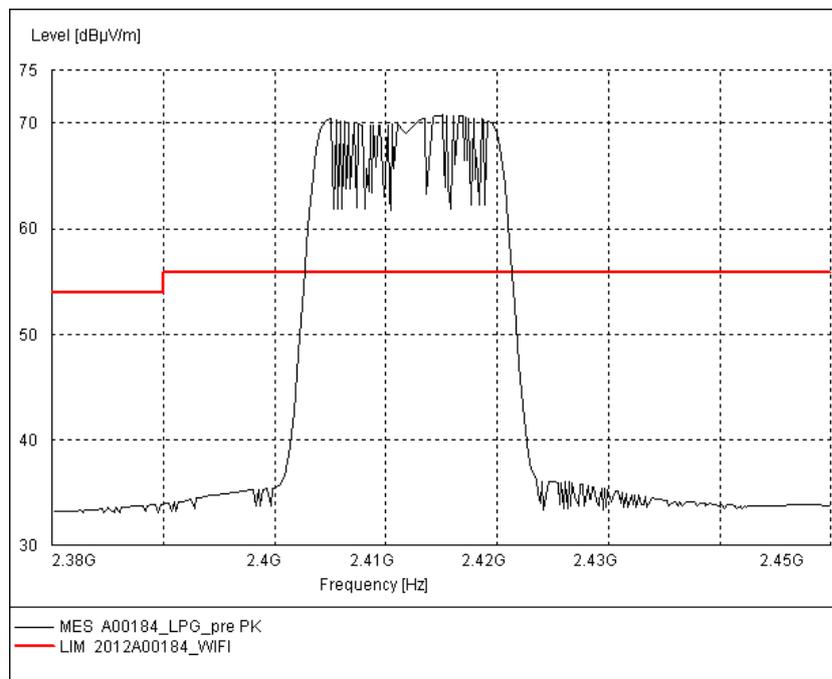


Fig. 68 Radiated Spurious Emission (Power): 802.11g, ch1, 2.38 GHz - 2.45GHz

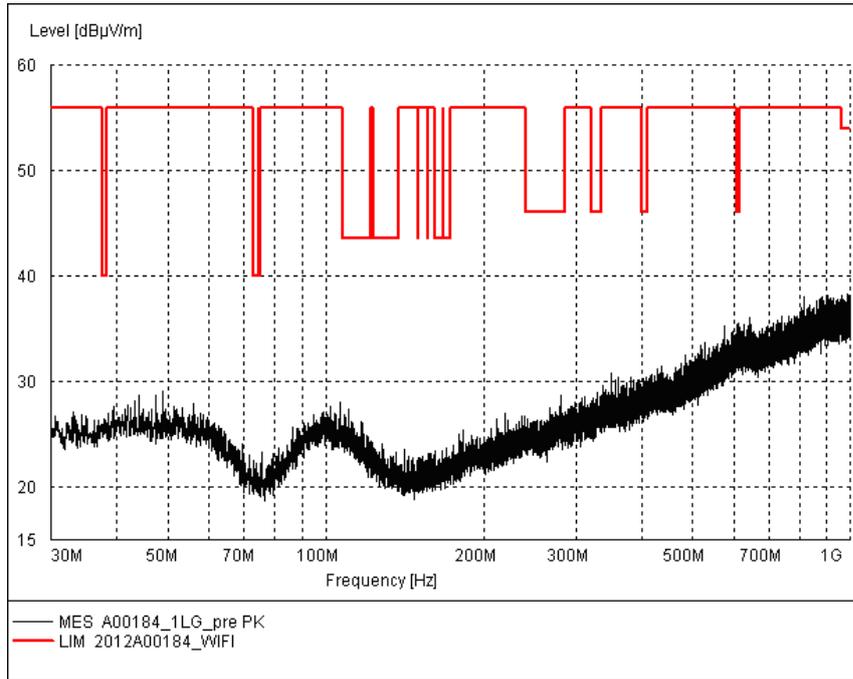


Fig. 69 Radiated Spurious Emission (802.11g, Ch1, 30 MHz-1 GHz)

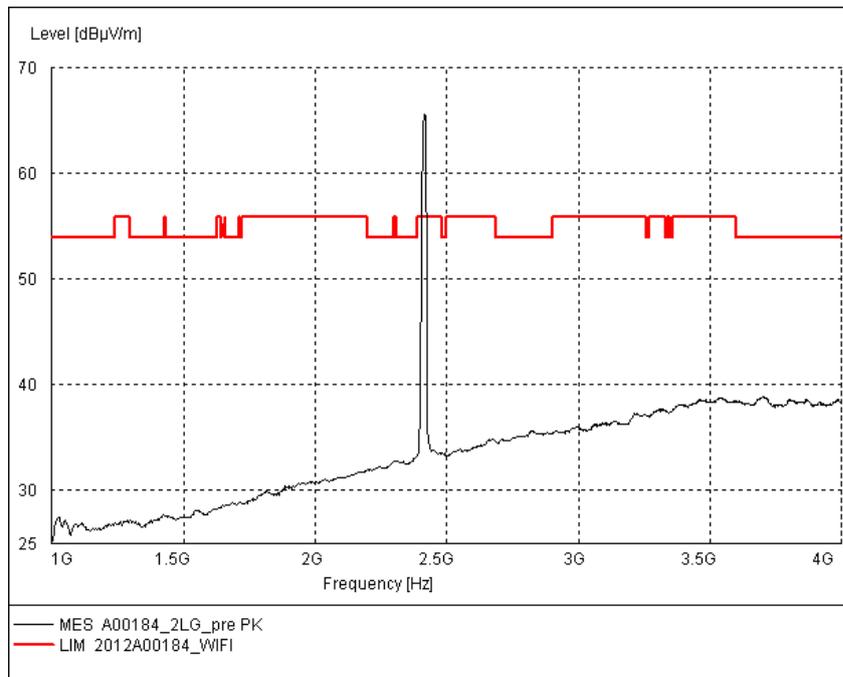


Fig. 70 Radiated Spurious Emission (802.11g, Ch1, 1 GHz-4 GHz)

FCC 4-18G

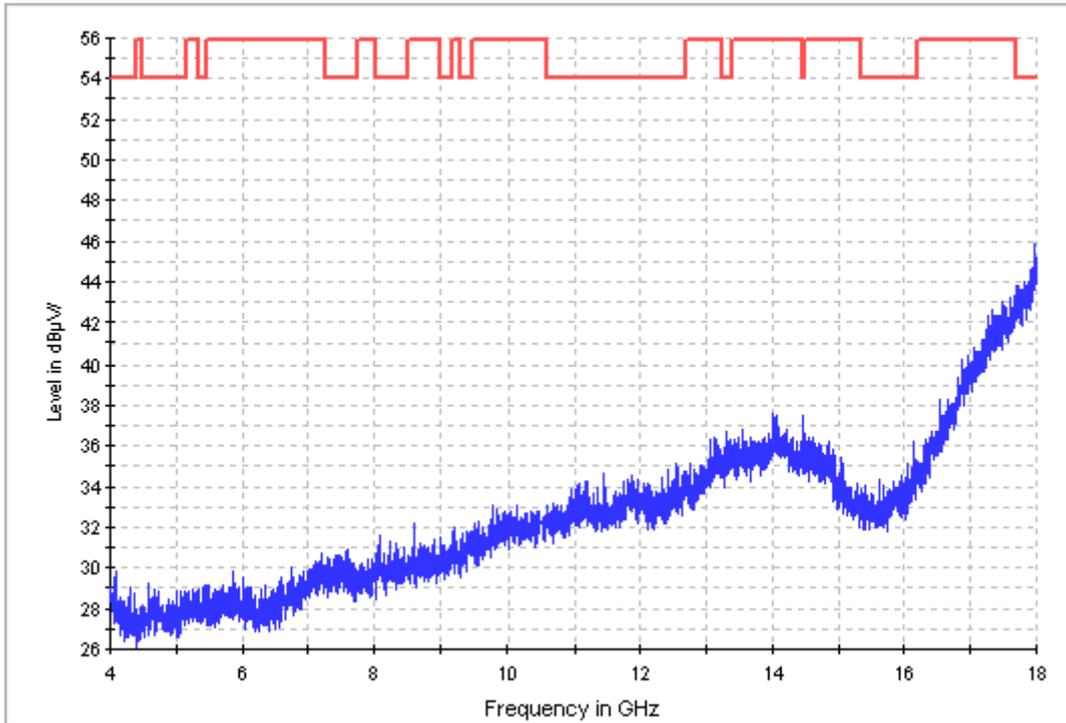


Fig. 71 Radiated Spurious Emission (802.11g, Ch1, 4 GHz-18 GHz)

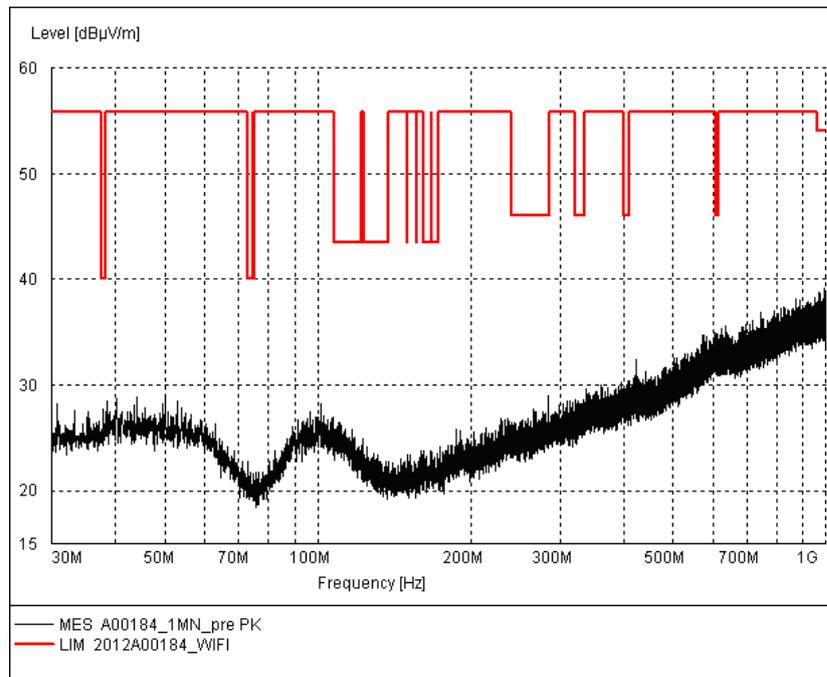


Fig. 72 Radiated Spurious Emission (802.11g, Ch6, 30 MHz-1 GHz)

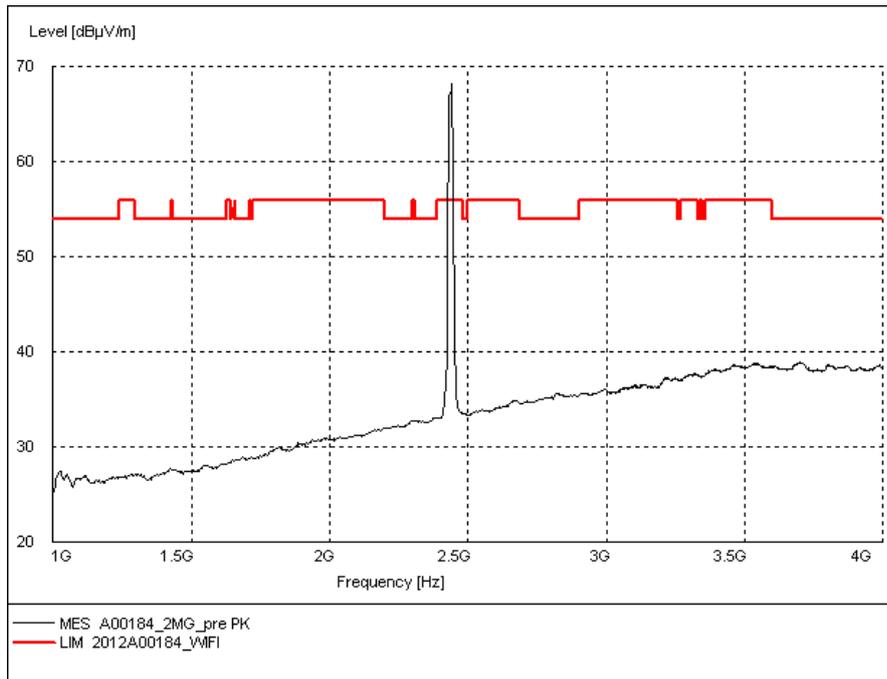


Fig. 73 Radiated Spurious Emission (802.11g, Ch6, 1 GHz-4 GHz)

FCC 4-18G

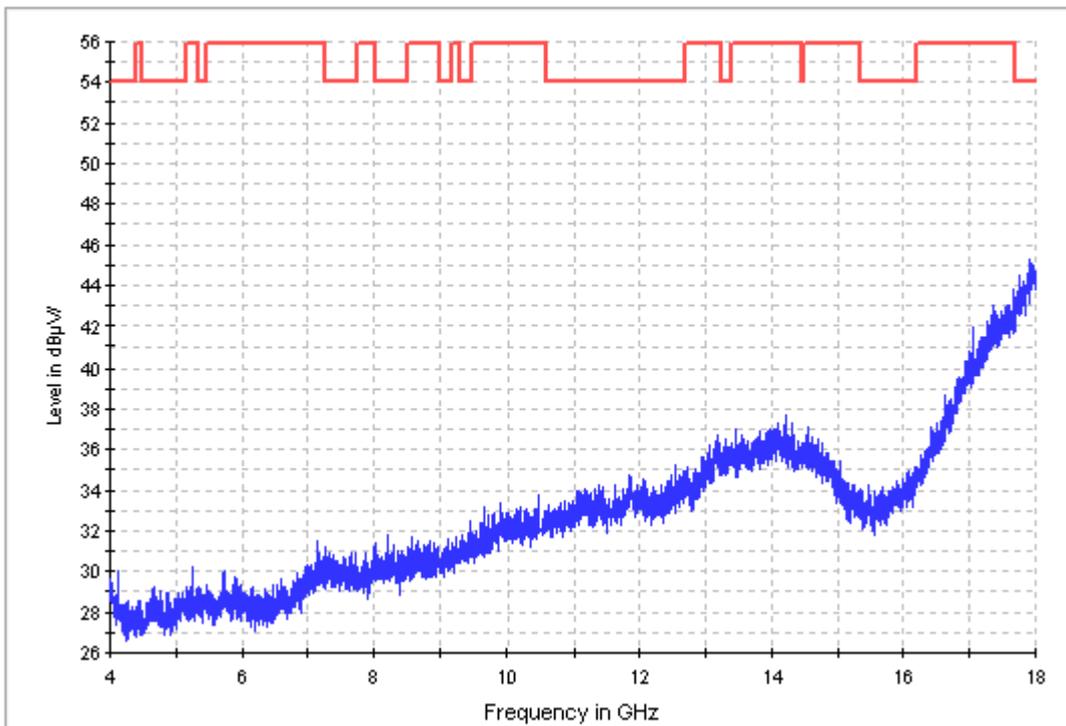


Fig. 74 Radiated Spurious Emission (802.11g, Ch6, 4 GHz-18 GHz)

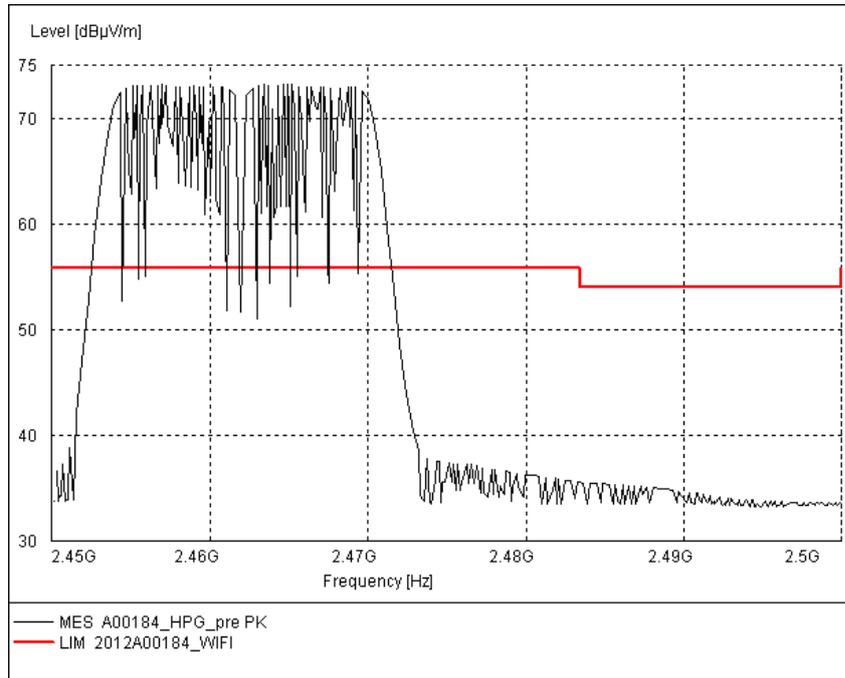


Fig. 75 Radiated Spurious Emission (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz

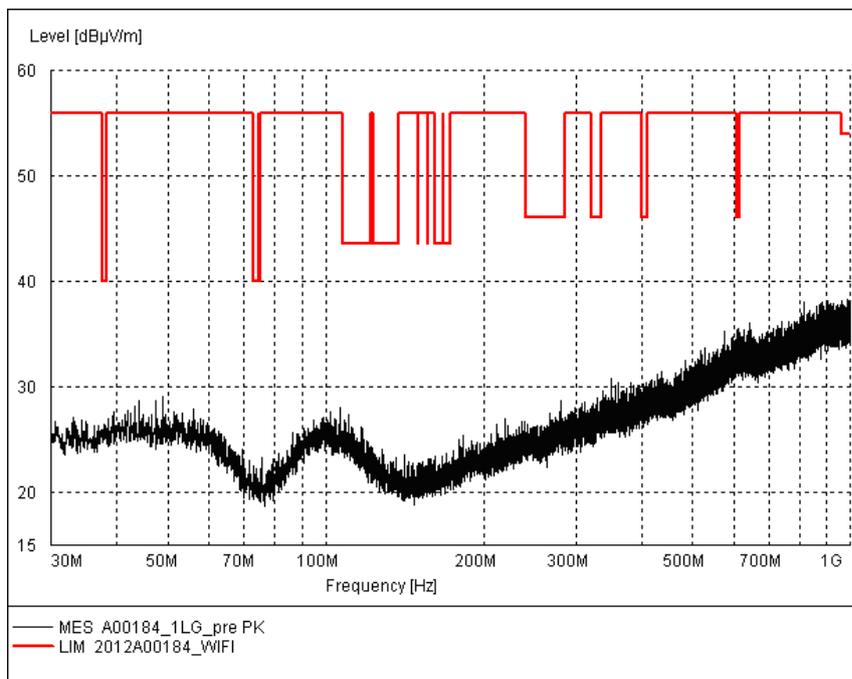


Fig. 76 Radiated Spurious Emission (802.11g, Ch11, 30 MHz-1 GHz)

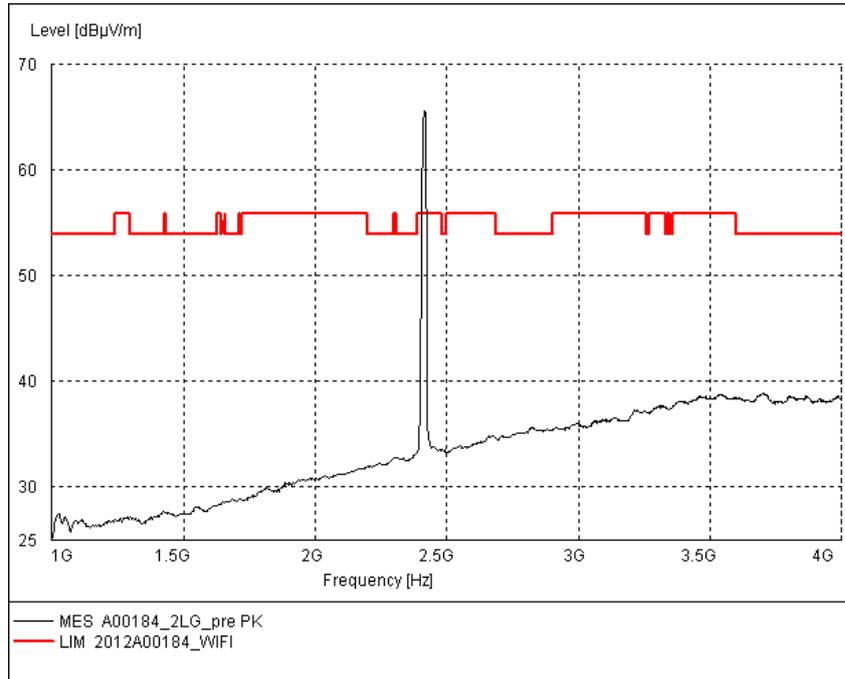


Fig. 77 Radiated Spurious Emission (802.11g, Ch11, 1 GHz-4 GHz)

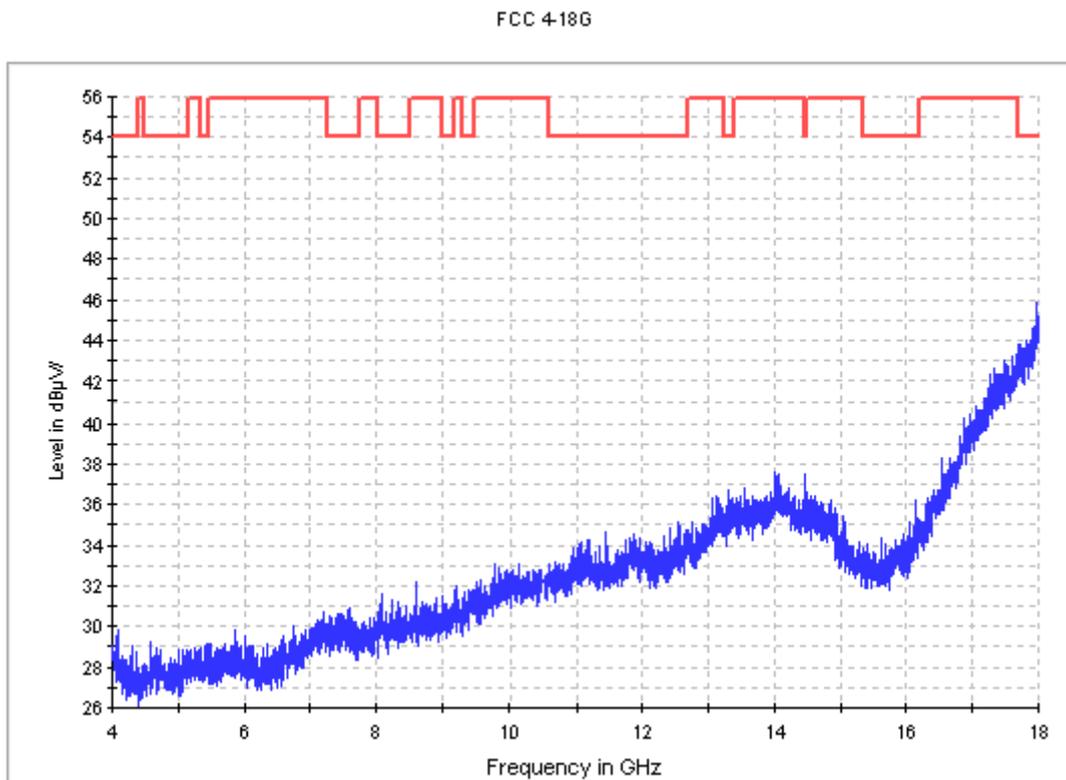


Fig. 78 Radiated Spurious Emission (802.11g, Ch11, 4 GHz-18 GHz)

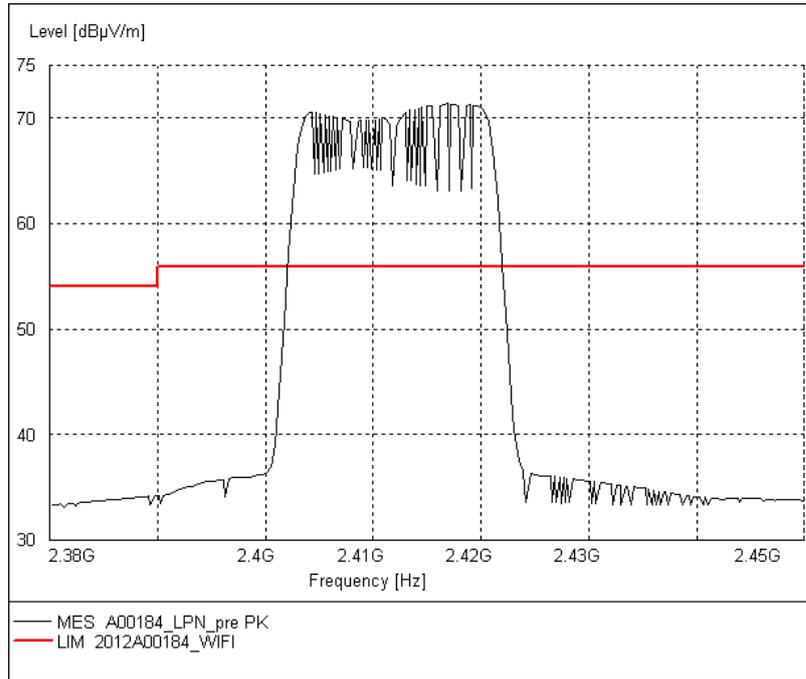


Fig. 79 Radiated Spurious Emission (Power): 802.11n-20MHz, ch1, 2.38 GHz - 2.45GHz

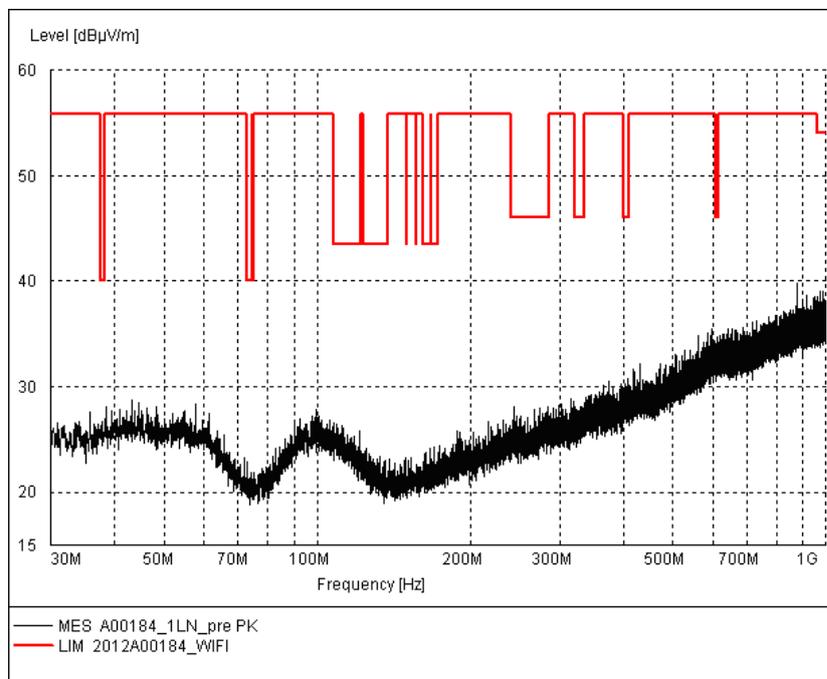


Fig. 80 Radiated Spurious Emission (802.11n-20MHz, Ch1, 30 MHz-1 GHz)

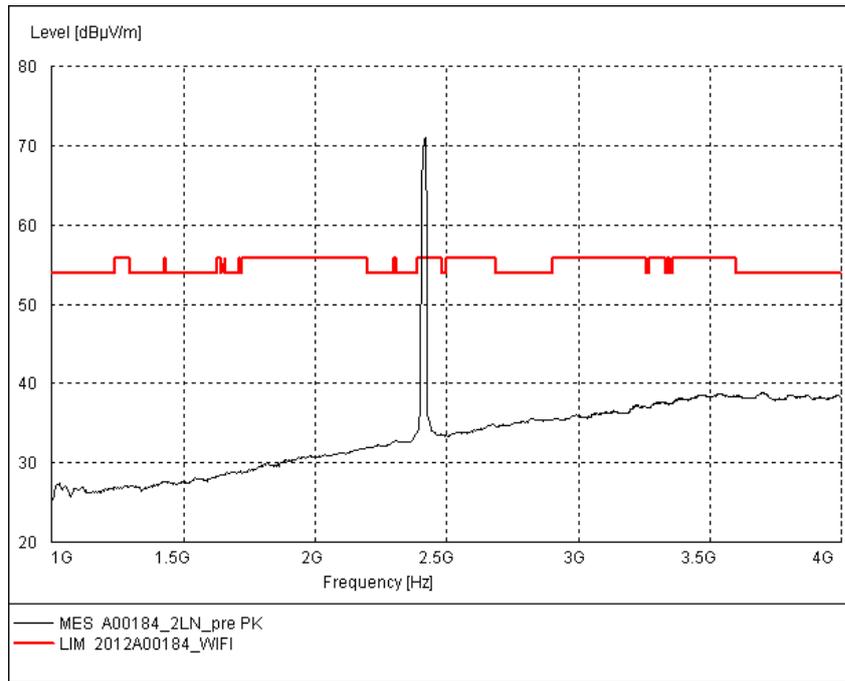


Fig. 81 Radiated Spurious Emission (802.11n-20MHz, Ch1, 1 GHz-4 GHz)

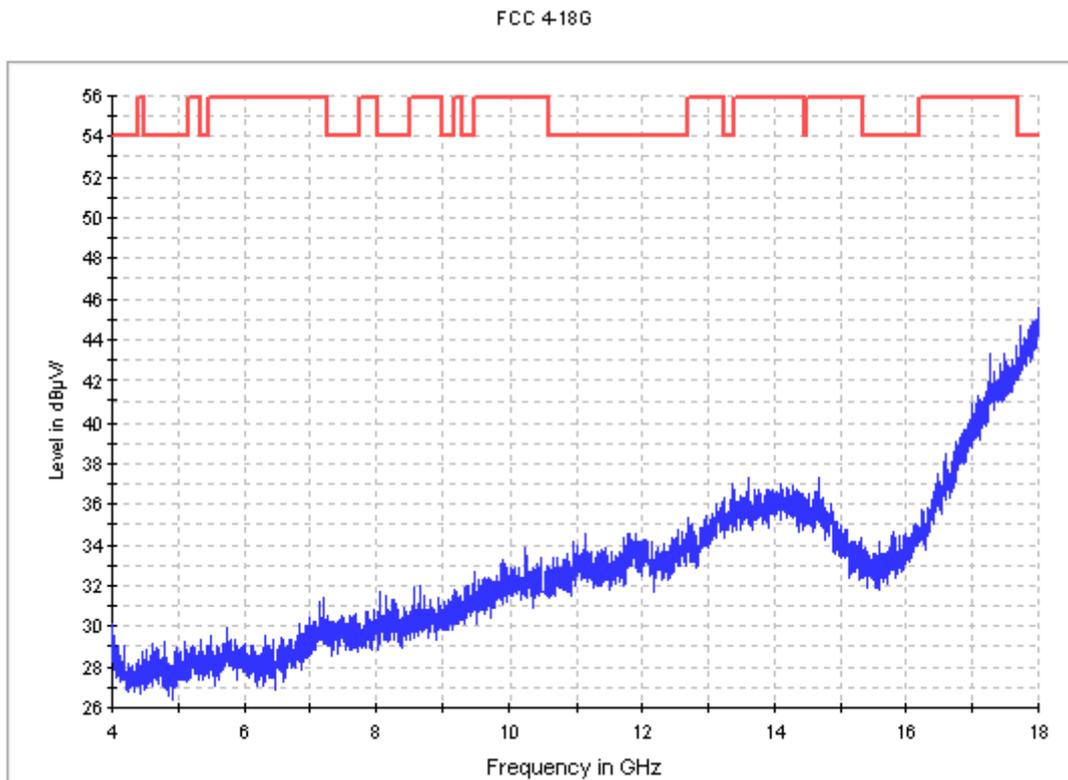


Fig. 82 Radiated Spurious Emission (802.11n-20MHz, Ch1, 4 GHz-18 GHz)

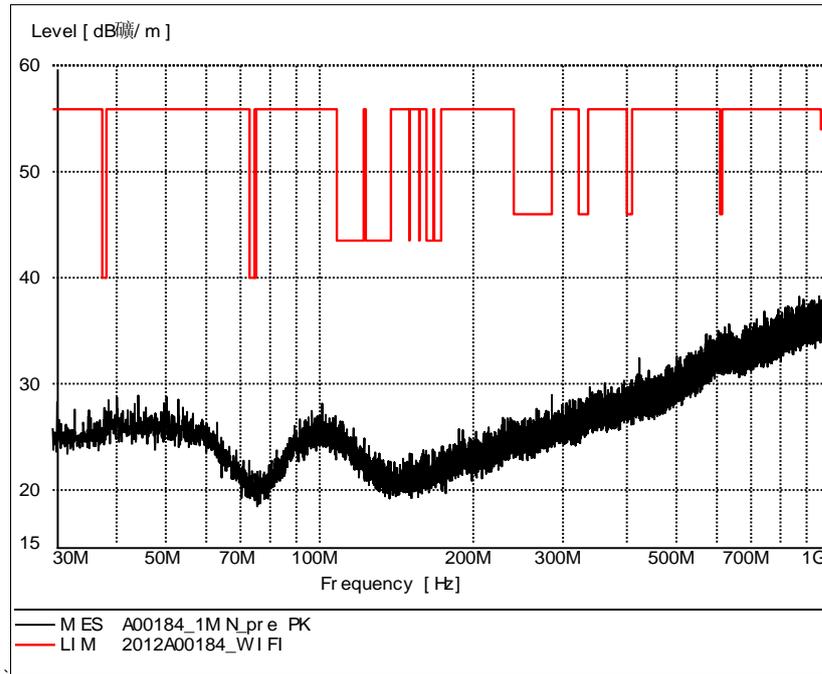


Fig. 83 Radiated Spurious Emission (802.11n-20MHz, Ch6, 30 MHz-1 GHz)

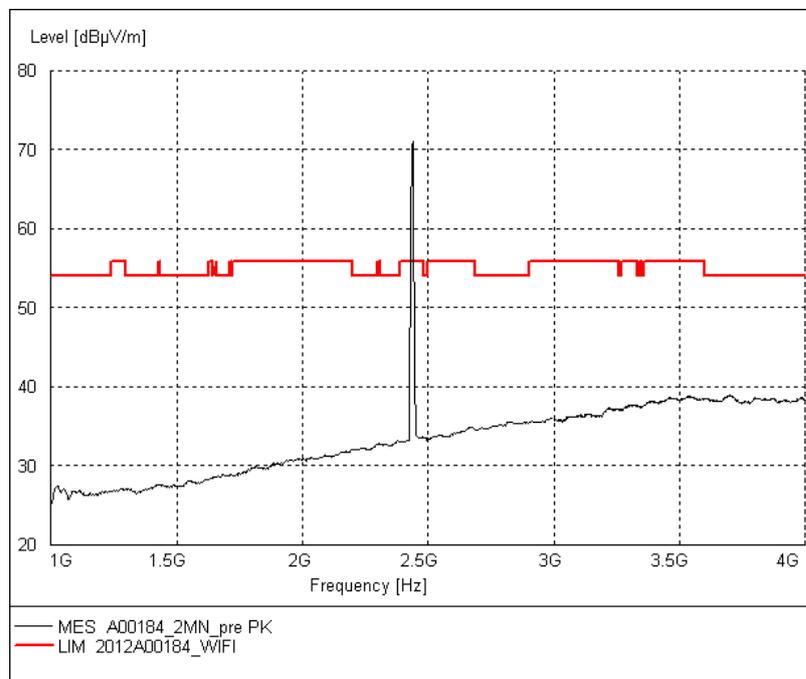


Fig. 84 Radiated Spurious Emission (802.11n-20MHz, Ch6, 1 GHz-4 GHz)

FCC 4-18G

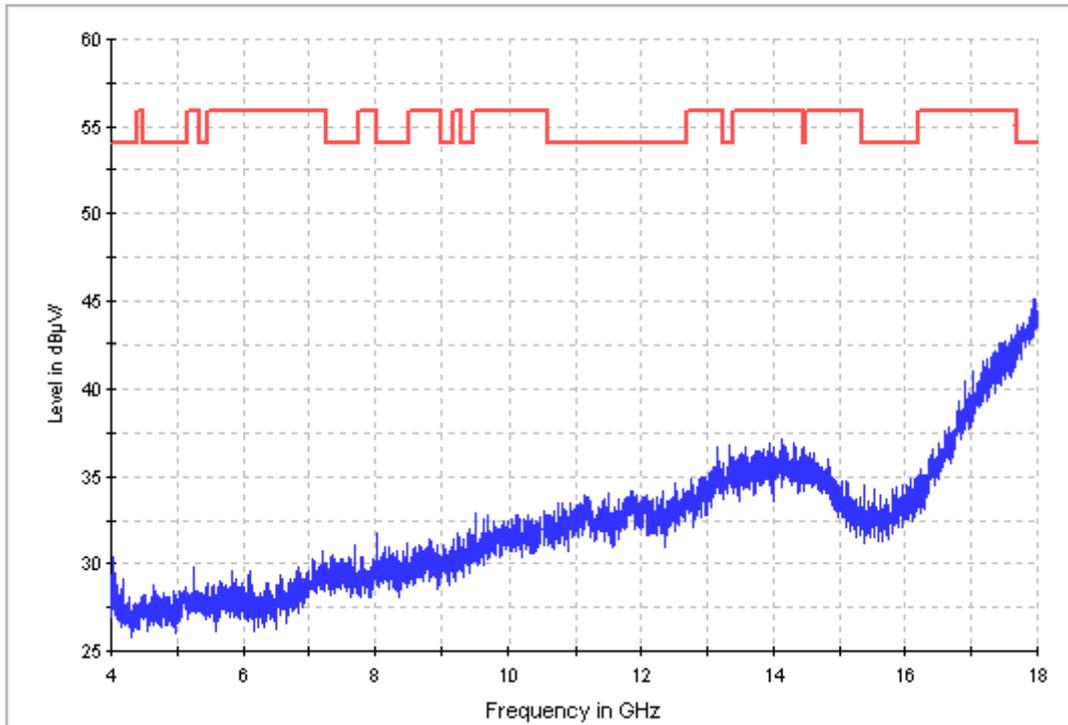


Fig. 85 Radiated Spurious Emission (802.11n-20MHz, Ch6, 4 GHz-18 GHz)

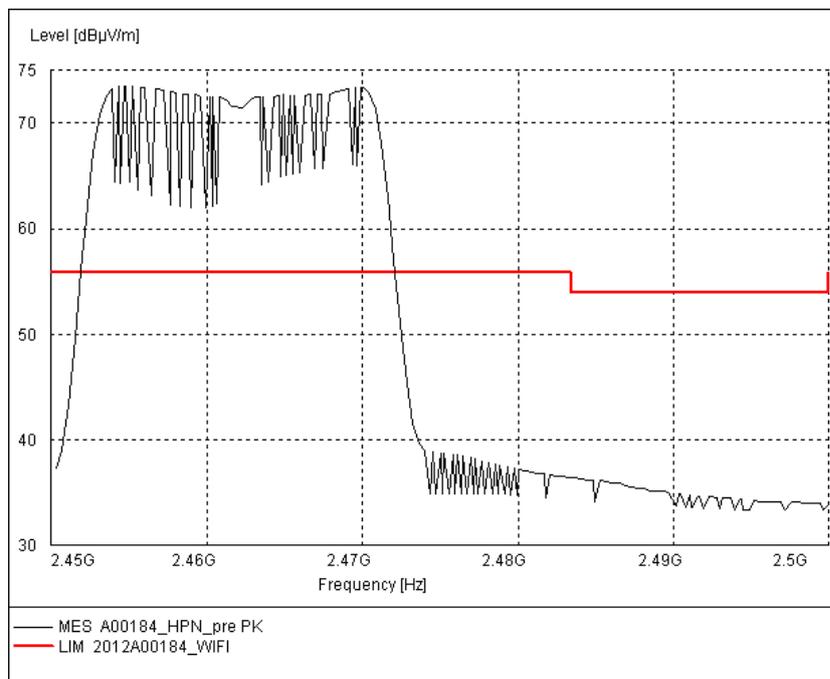


Fig. 86 Radiated Spurious Emission (Power): 802.11n-20MHz, ch11, 2.45 GHz - 2.50GHz

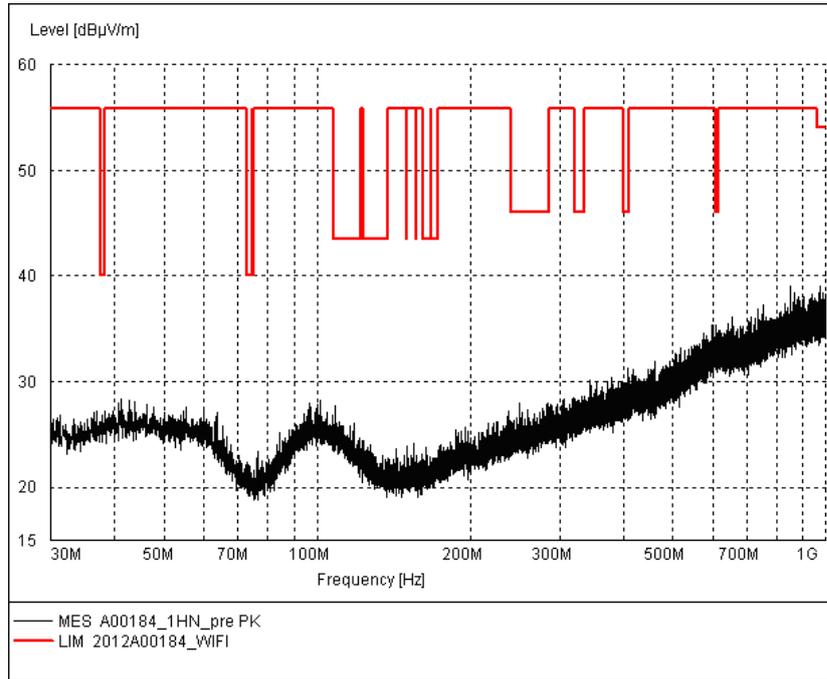


Fig. 87 Radiated Spurious Emission (802.11n-20MHz, Ch11, 30 MHz-1 GHz)

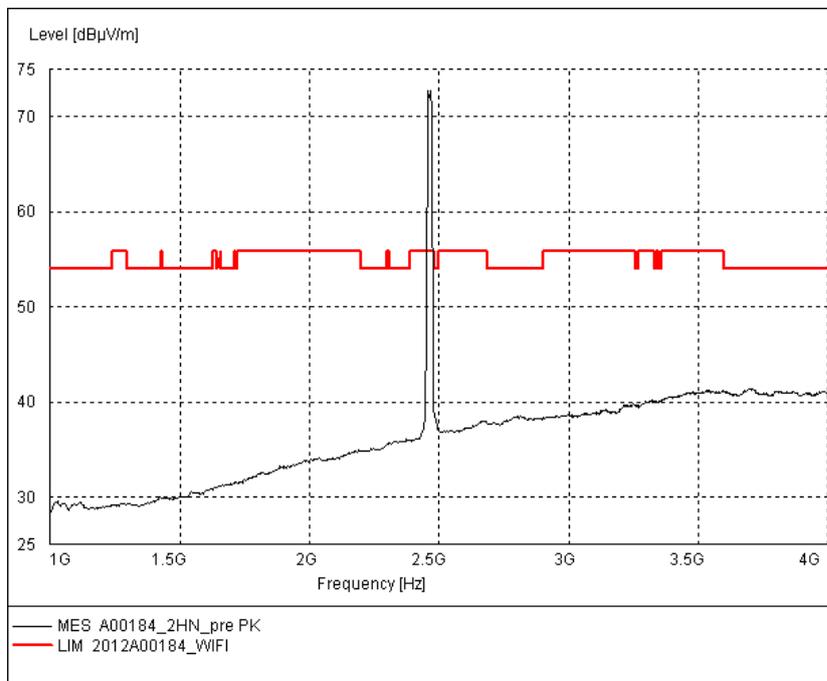


Fig. 88 Radiated Spurious Emission (802.11n-20MHz, Ch11, 1 GHz-4 GHz)

FCC 4-18G

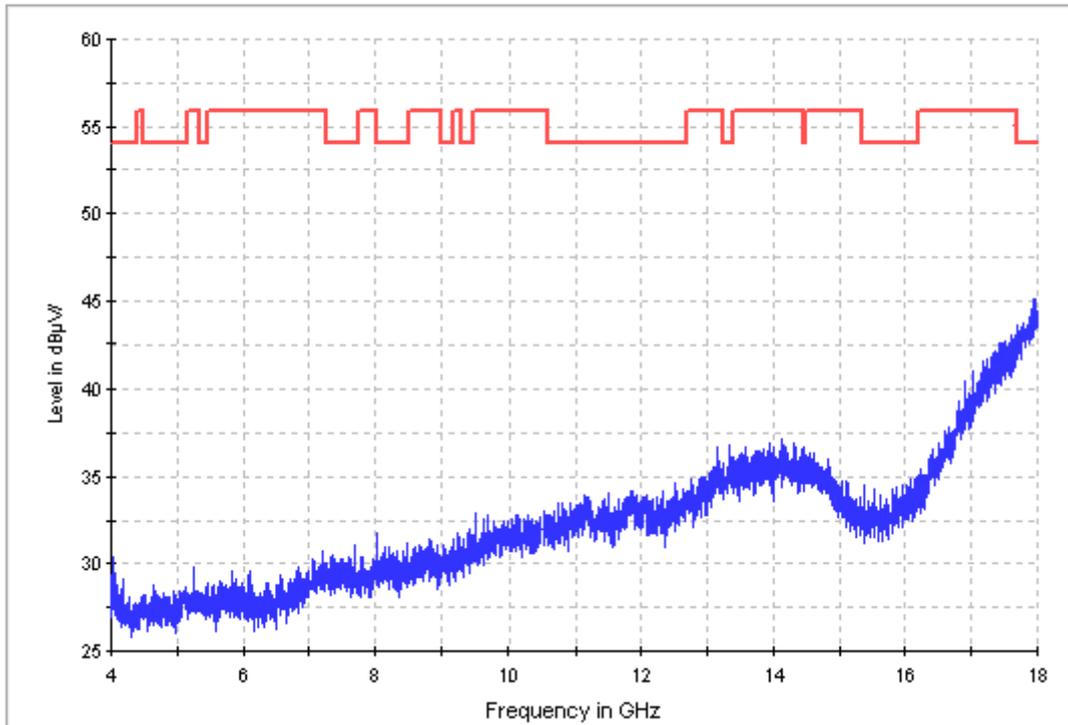


Fig. 89 Radiated Spurious Emission (802.11n-20MHz, Ch11, 4 GHz-18 GHz)

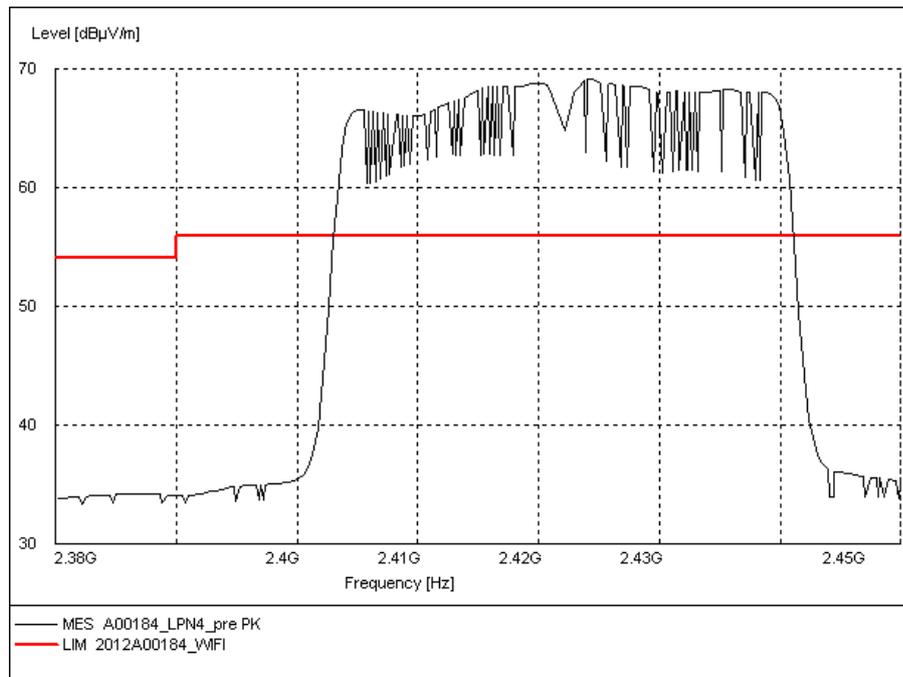


Fig. 90 Radiated Spurious Emission (Power): 802.11n-40MHz, ch3, 2.38 GHz - 2.45GHz

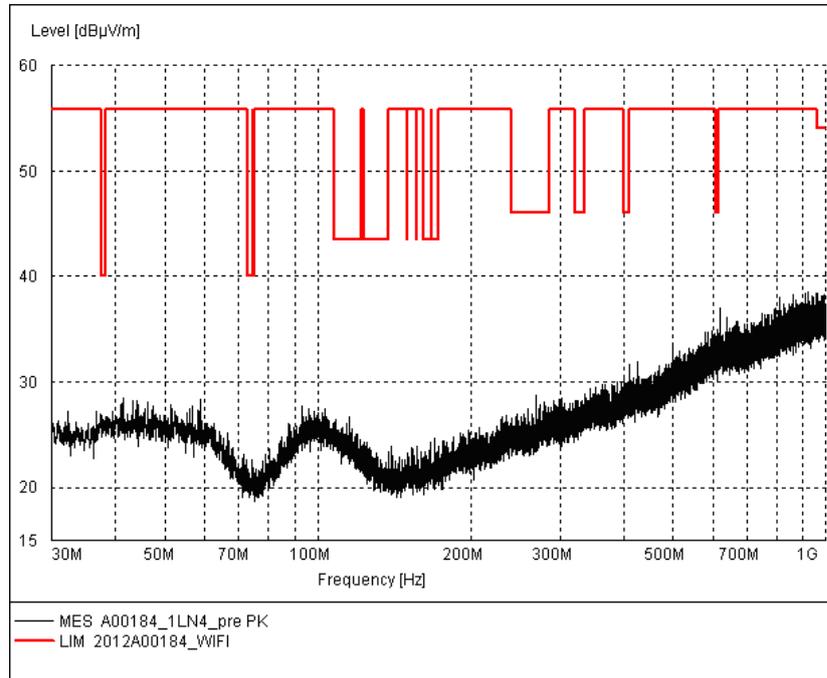


Fig. 91 Radiated Spurious Emission (802.11n-40MHz, Ch3, 30 MHz-1 GHz)

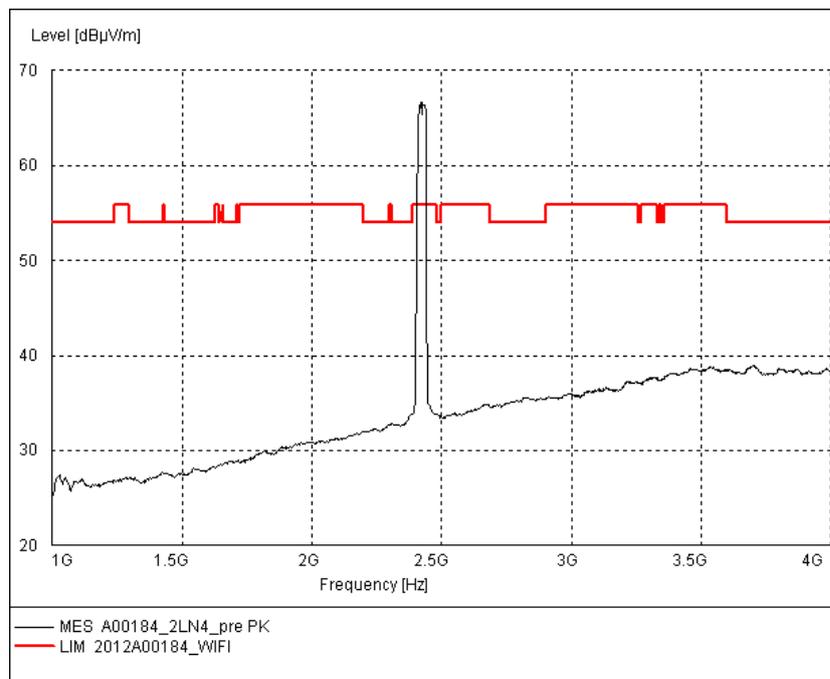


Fig. 92 Radiated Spurious Emission (802.11n-40MHz, Ch3, 1 GHz-4 GHz)

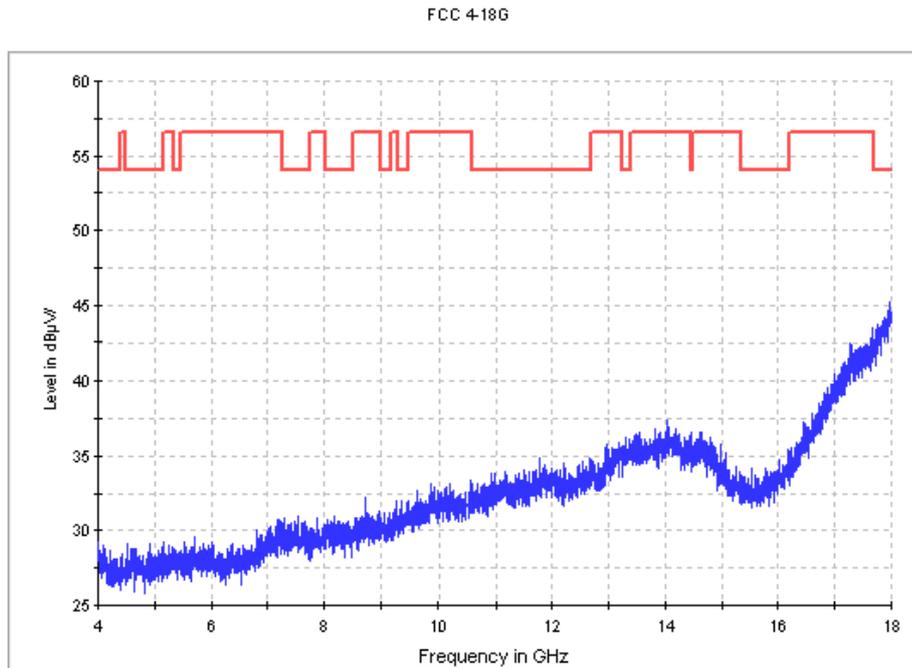


Fig. 93 Radiated Spurious Emission (802.11n-40MHz, Ch3, 4 GHz-18 GHz)

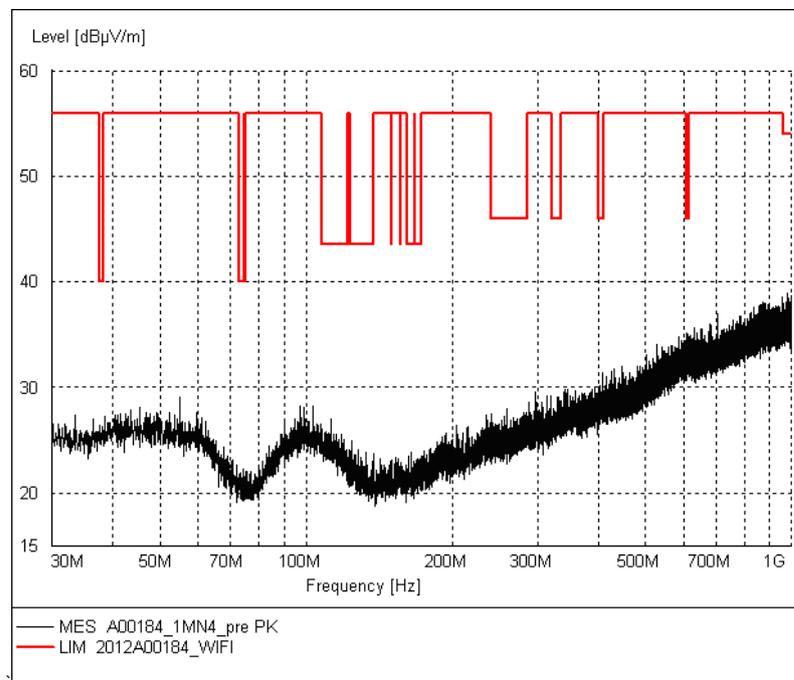


Fig. 94 Radiated Spurious Emission (802.11n-40MHz, Ch6, 30 MHz-1 GHz)

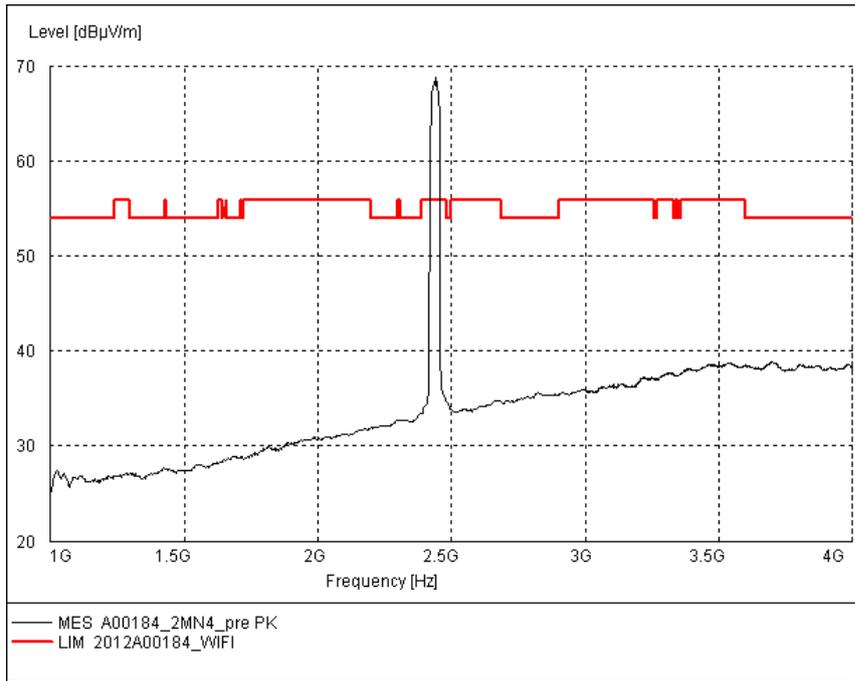


Fig. 95 Radiated Spurious Emission (802.11n-40MHz, Ch6, 1 GHz-4 GHz)

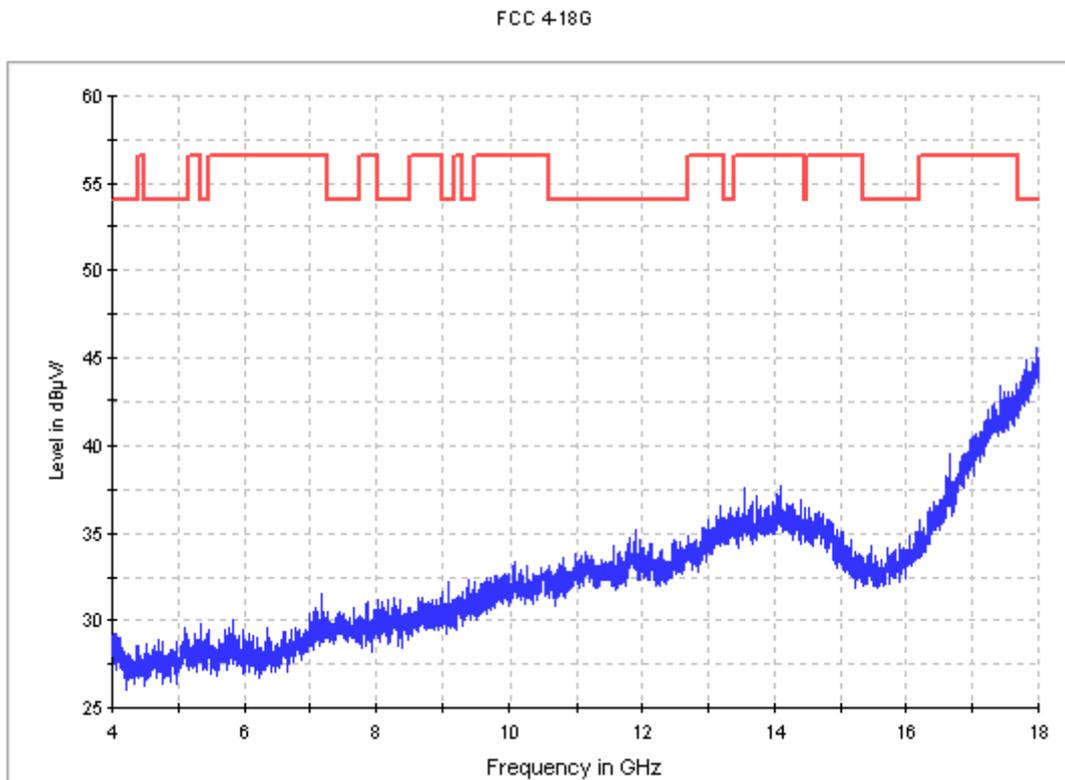


Fig. 96 Radiated Spurious Emission (802.11n-40MHz, Ch6, 4 GHz-18 GHz)

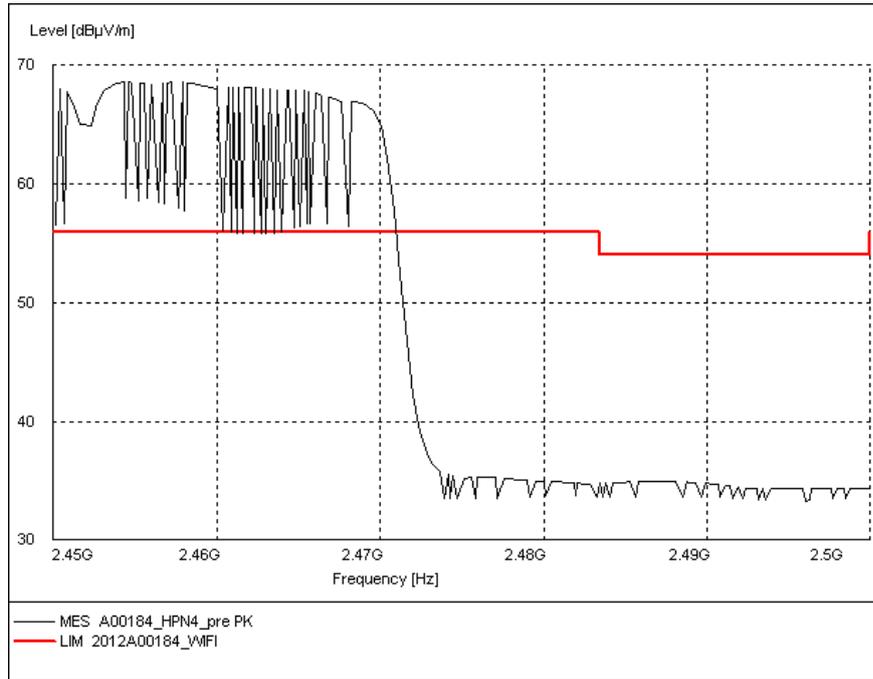


Fig. 97 Radiated Spurious Emission (Power): 802.11n-40MHz, ch9, 2.45 GHz - 2.50GHz

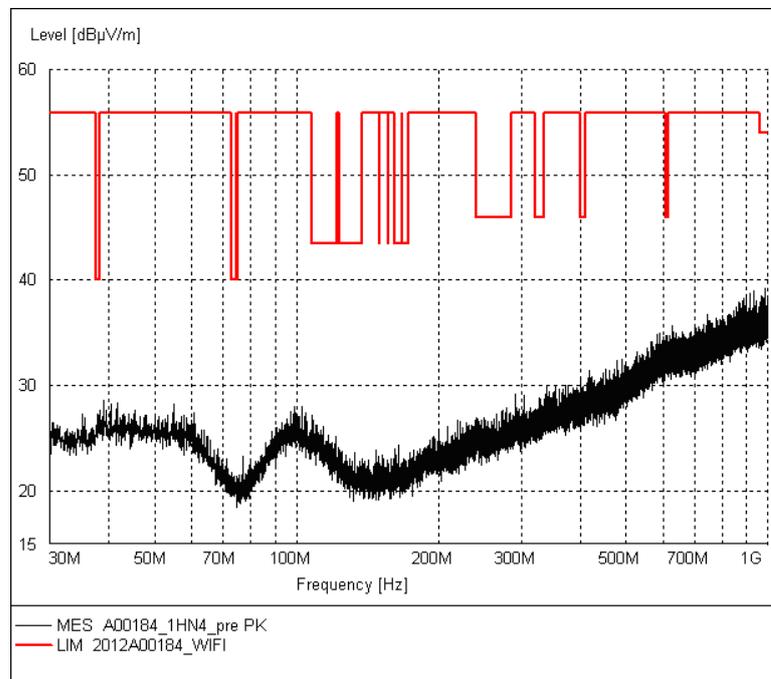


Fig. 98 Radiated Spurious Emission (802.11n-40MHz, Ch9, 30 MHz-1 GHz)

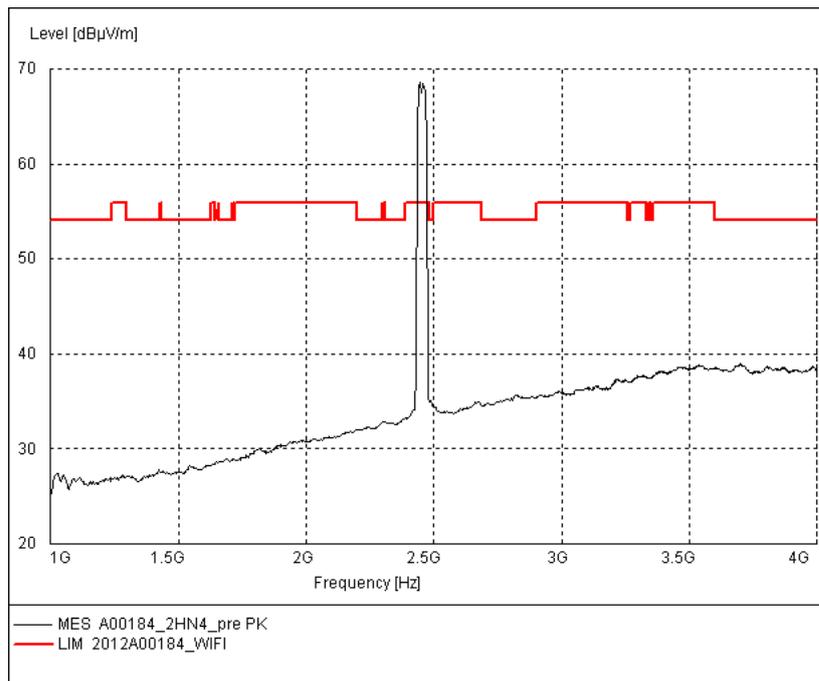


Fig. 99 Radiated Spurious Emission (802.11n-40MHz, Ch9, 1 GHz-4 GHz)

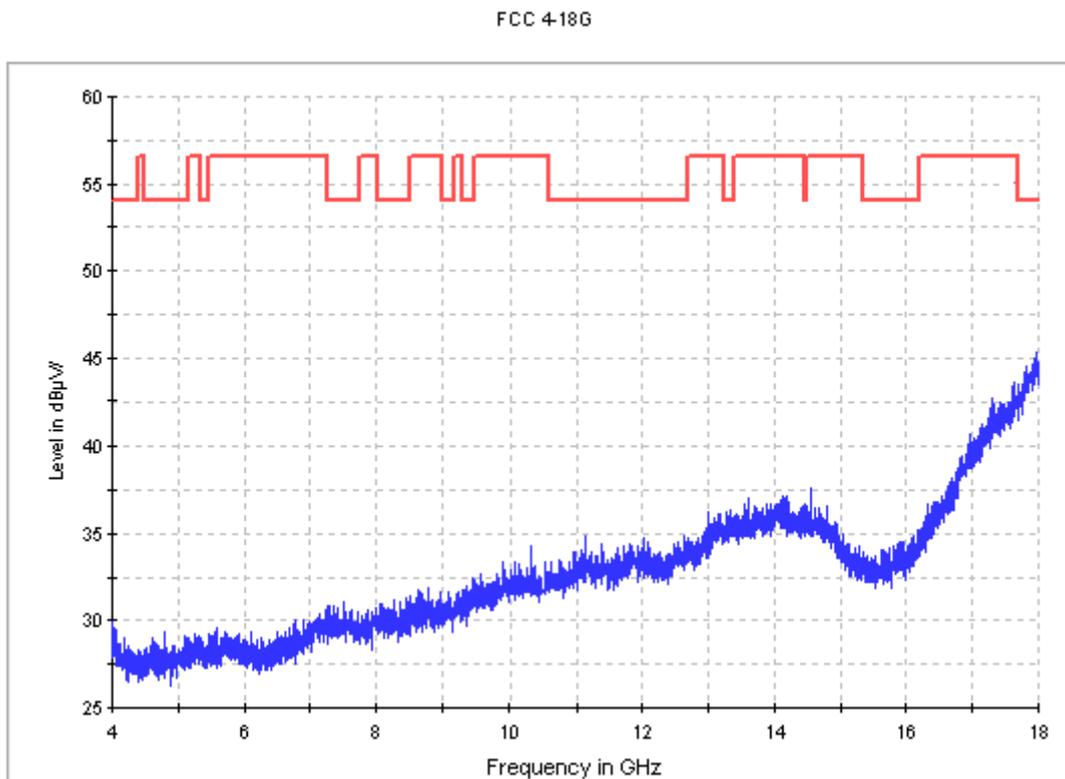


Fig. 100 Radiated Spurious Emission (802.11n-40MHz, Ch9, 4 GHz-18 GHz)

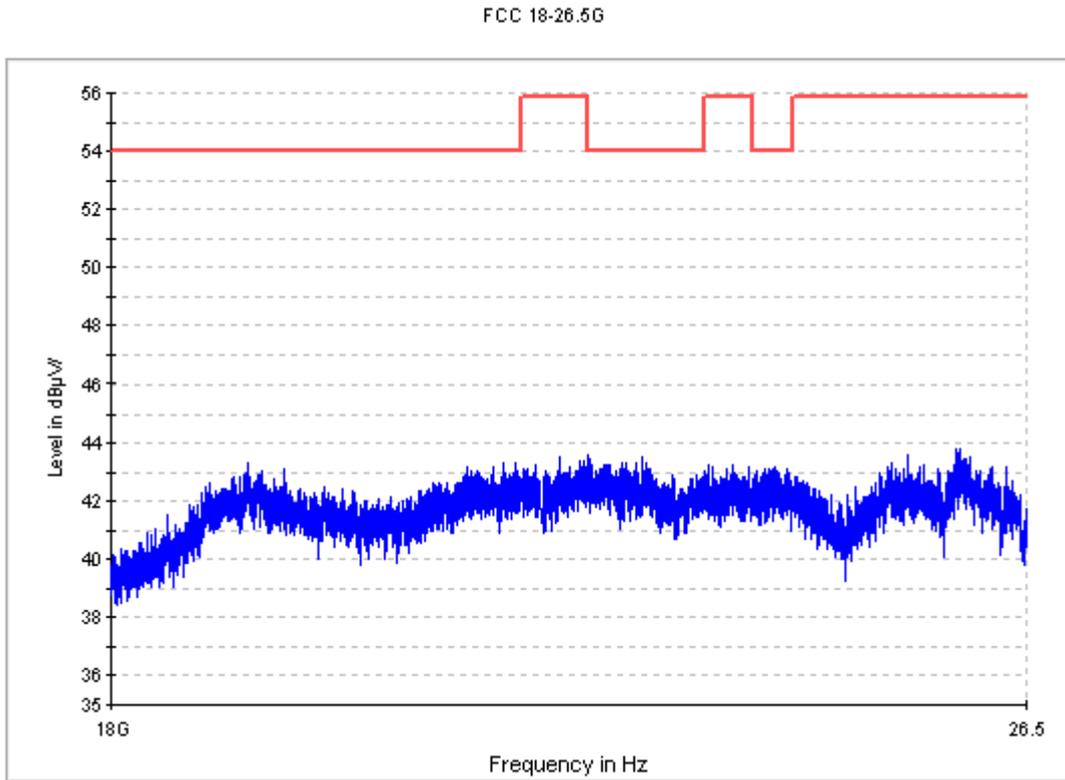


Fig. 101 Radiated emission: 18 GHz - 26.5 GHz

A.7. AC Powerline Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)			Conclusion
		With charger			
		802.11b	802.11g	802.11n	
0.15 to 0.5	66 to 56	Fig. 102	Fig.103	Fig.104	P
0.5 to 5	56				
5 to 30	60				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)			Conclusion
		With charger			
		802.11n	Idle		
0.15 to 0.5	56 to 46	Fig.102	Fig.103	Fig.104	P
0.5 to 5	46				
5 to 30	50				

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.4 and KDB558074

Conclusion: PASS

Test graphs as below:

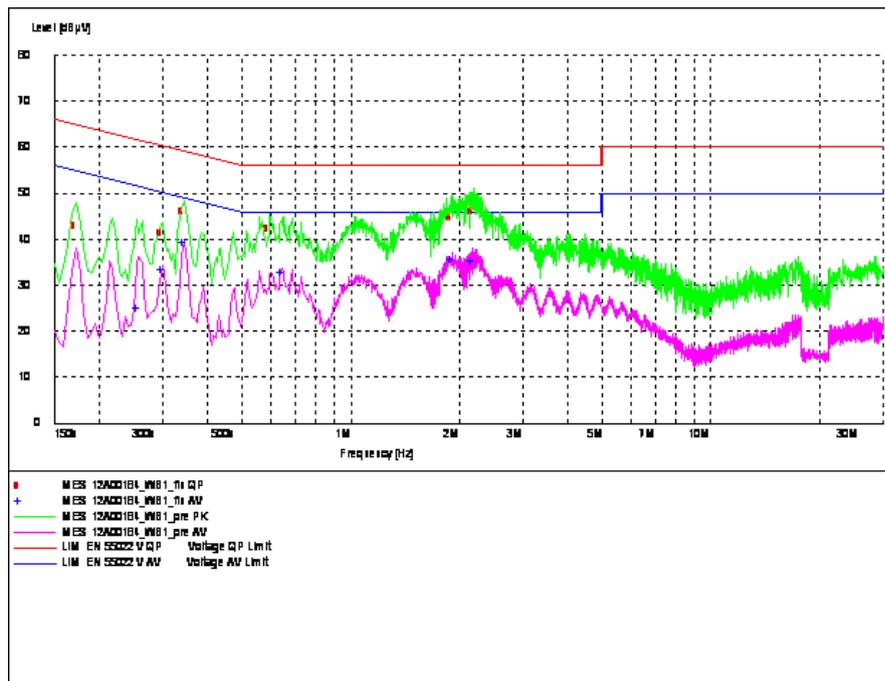


Fig. 102 AC Powerline Conducted Emission-802.11b

MEASUREMENT RESULT: "12A00184_WB1_fin QP"

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
0.1725	43	10.1	65	21.9	L1	GND
0.2985	41.3	10.1	60	19	L1	GND
0.3435	46.1	10.1	59	13	L1	GND
0.5955	42.3	10.1	56	13.7	L1	GND
1.905	44.7	10.1	56	11.3	L1	GND
2.201307	46	10.1	56	10	L1	GND

MEASUREMENT RESULT: "12A00184_WB1_fin AV"

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
0.258	25	10.1	52	26.5	N	GND
0.2985	33.4	10.1	50	16.9	N	GND
0.3435	39.1	10.1	49	10	N	GND
0.645	32.7	10.1	46	13.3	N	GND
1.905	35.6	10.1	46	10.4	L1	GND
2.170734	35.3	10.1	46	10.7	L1	GND

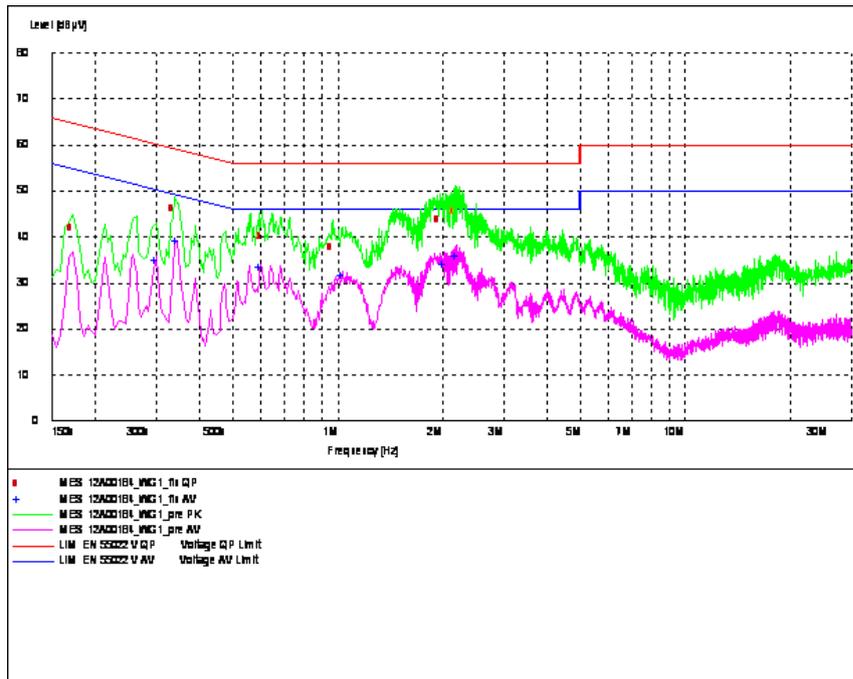


Fig. 103 AC Powerline Conducted Emission-802.11g

MEASUREMENT RESULT: "12A00184_WG1_fin QP"

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
0.1725	42.1	10.1	65	22.8	L1	GND
0.339	46.2	10.1	59	13	L1	GND
0.6045	40.3	10.1	56	15.7	L1	GND
0.969	37.8	10.1	56	18.2	L1	GND
1.9725	43.9	10.1	56	12.1	L1	GND
2.179425	45.7	10.1	56	10.3	L1	GND

MEASUREMENT RESULT: "12A00184_WG1_fin AV"

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
0.2985	34.7	10.1	50	15.6	N	GND
0.3435	39.1	10.1	49	10	N	GND
0.6	33.3	10.1	46	12.7	N	GND
1.0275	31.5	10.1	46	14.5	N	GND
2.028169	34	10.1	46	12	L1	GND
2.201307	35.8	10.1	46	10.2	L1	GND

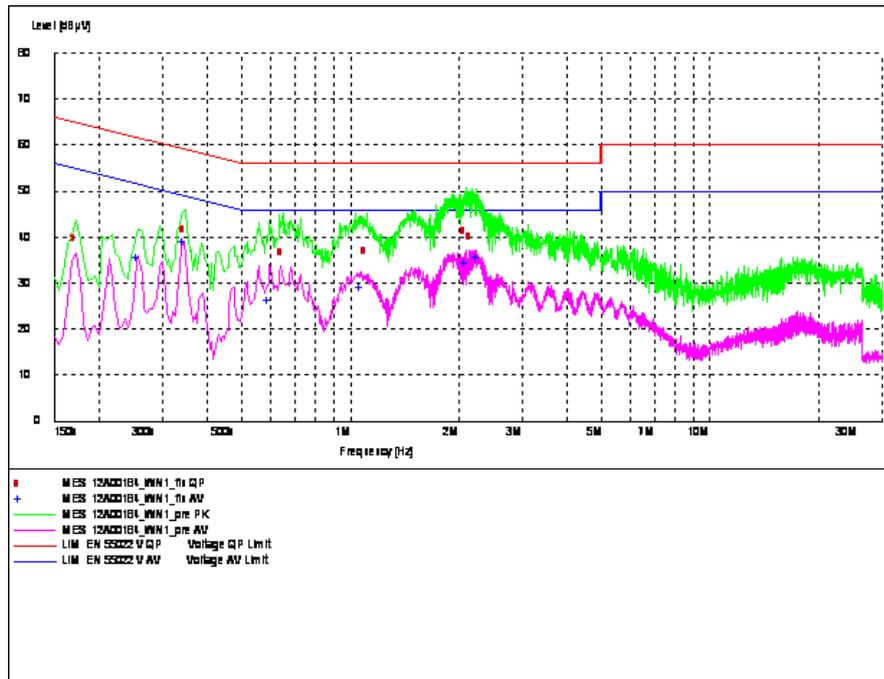


Fig. 104 AC Powerline Conducted Emission-802.11n

MEASUREMENT RESULT: "12A00184_WN1_fin QP"

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
0.1725	39.8	10.1	65	25.1	N	GND
0.348	41.6	10.1	59	17.4	N	GND
0.654	36.8	10.1	56	19.2	N	GND
1.1085	37.1	10.1	56	18.9	N	GND
2.106642	41.3	10.1	56	14.7	N	GND
2.175075	40.1	10.1	56	15.9	N	GND

MEASUREMENT RESULT: "12A00184_WN1_fin AV"

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
0.258	35.6	10.1	52	15.8	N	GND
0.3435	38.8	10.1	49	10.3	N	GND
0.5955	26	10.1	46	20	N	GND
1.0725	28.9	10.1	46	17.1	N	GND
2.106642	34.1	10.1	46	11.9	L1	GND
2.245732	35.5	10.1	46	10.5	L1	GND

*** END OF REPORT BODY ***