



TEST REPORT

No. 2012TAR022

for

ZTE Corporation

WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone

Model Name: ZTE T760

FCC ID : Q78-T760

with

Hardware Version: GMAI

Software Version: W850-W2100-P173A30V1.0.1

Issued Date: 2012-02-20

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633 , Fax:+86(0)10-62304633 Email:welcome@emcite.com. www.emcite.com

CONTENTS

1. TEST LABORATORY	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA	3
1.4. SIGNATURE.....	3
2. CLIENT INFORMATION	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT.....	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
4. REFERENCE DOCUMENTS.....	6
4.1. REFERENCE DOCUMENTS FOR TESTING.....	6
5. LABORATORY ENVIRONMENT.....	7
6. SUMMARY OF TEST RESULTS.....	8
7. TEST EQUIPMENTS UTILIZED.....	9
ANNEX A: MEASUREMENT RESULTS	10

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan beilu, Haidian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304633


1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.3. Project data


Testing Start Date: Jan 12, 2011
Testing End Date: Jan 30, 2011

1.4. Signature




Liu Baodian

(Prepared this test report)



Sun Xiangqian

(Reviewed this test report)



Lu Bingsong

Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: ZTE Corporation
Address /Post: #68 Zijin Hua Road, Nanjing, Jiangsu Province, P. R. China
City: Nan Jing
Postal Code: 210012
Country: China
Telephone: +86-25-52878232
Fax: +86-25-68897541

2.2. Manufacturer Information

Company Name: ZTE Corporation
Address /Post: #68 Zijin Hua Road, Nanjing, Jiangsu Province, P. R. China
City: Nan Jing
Postal Code: 210012
Country: China
Telephone: +86-25-52878232
Fax: +86-25-68897541

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone
Model Name	ZTE T760
FCC ID	Q78-T760
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.7VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MII of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	862033010010418	GMAI	W850-W2100-P173A30V1.0.1

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	/
AE2	Travel Adapter	/
AE3	Travel Adapter	/
AE4	USB Cable	/
AE5	Battery	/

AE1

Model	Li3713T42P3h415266-H
Manufacturer	ZTE
Capacitance	1350mAh
Nominal Voltage	3.7V

AE2

Model	STC-A22O50I700USBA-I
Manufacturer	RUIDE
Length of DC line	9cm with USB connector

AE3

Model	STC-A22O50I700USBA-Z
Manufacturer	RUIDE
Length of headset line	/

AE4

Model	/
Manufacturer	ZTE
Length of headset line	120cm

AE5

Model	Li3715T42P3h415266
Manufacturer	ZTE
Capacitance	1500mAh

Nominal Voltage 3.7V

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

Equipment Under Test (EUT) is a model of WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone with integrated antenna. It supports GSM 900/1800/850/1900 bands and WCDMA Band I/IV.

It has MP3, Camera, FM radio, USB memory, Bluetooth, Wi-Fi (802.11b/g/n) and GPS functions. It also supports GPRS function with multi-slots class 12 and EDGE class 12.

It consists of normal options: Lithium Battery, Charger and Headset. Since subscribers often use MS during charging, EUT is to be tested in accordance with "Base Station and ancillary equipment for fixed use" besides in accordance with "Portable and ancillary equipment for portable use".

Manual and specifications of the EUT were provided to fulfill the test.

Samples undergoing test were selected by the Client.

3.5. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+ AE1+AE2+AE4	Charging
Set.2	EUT1+ AE1+AE3+AE4	Charging
Set.3	EUT1+ AE1+AE4	USB

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	July 10, 2008 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

Conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1(6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Fully-anechoic chamber2(8.6 meters×6.1 meters×3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 1Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Clause	List	Clause in FCC rules	Verdict
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESCI	100344	R&S	2012-03-12
2	Test Receiver	ESCI	100766	R&S	2012-12-06
3	Test Receiver	ESI40	831564/002	R&S	2012-02-12
4	BiLog Antenna	VUL9163	9163-302	Schwarzbeck	2012-02-10
5	Signal Generator	SMB100A	102063	R&S	2012-03-05
6	LISN	ESH2-Z5	829991/012	R&S	2012-04-20
7	Universal Radio Communication Tester	CMU200	100680	R&S	2012-09-05
8	Dual-Ridge Waveguide Horn Antenna	3115	6914	EMCO	2013-01-18
9	PC	OPTIPLEX 755	3908243625	DELL	N/A
10	Monitor	E178FPc	CN-OWR979-64 180-7AJ-D2MS	DELL	N/A
11	Printer	DeskJet D2368	TH72E12G7Q	HP	N/A
12	Keyboard	L100	CN0RH6596589 07ATOI40	DELL	N/A
13	Mouse	VR-301	6927225500198	XINGYU	N/A

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

A.1.2 EUT Operating Mode:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.1.3 Measurement Limit

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

A.1.4 Test Condition

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + F_A + G_{\text{PL}}$$

Where

F_A : Receive Antenna Factor

G_{PL} : Cable Loss

P_{Mea} : The measurement result on receiver.

Charging Mode(Set.1)

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	F_A (dB/m)	P_{Mea} (dBuV)	Polarity
3699.399	38.99	-19.5	33.4	25.09	VERTICAL
3697.395	38.94	-19.5	33.4	25.04	HORIZONTAL
3701.403	38.91	-19.4	33.4	24.91	VERTICAL
3695.391	38.89	-19.5	33.4	24.99	HORIZONTAL
3703.407	38.86	-19.4	33.4	24.86	VERTICAL
3533.066	38.85	-19.4	33.4	24.85	VERTICAL

Charging Mode(Set.2)

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	F_A (dB/m)	P_{Mea} (dBuV)	Polarity
3699.399	39.02	-19.5	33.4	25.12	HORIZONTAL
3697.395	38.91	-19.5	33.4	25.01	VERTICAL
3701.403	38.91	-19.4	33.4	24.91	VERTICAL
3703.407	38.89	-19.4	33.4	24.89	VERTICAL
3691.383	38.86	-19.5	33.4	24.96	VERTICAL
3695.391	38.86	-19.5	33.4	24.96	VERTICAL

USB Mode(Set.3)

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	F_A (dB/m)	P_{mea} (dBuV)	Polarity
3699.399	39.53	-19.5	33.4	25.63	VERTICAL
3697.395	39.49	-19.5	33.4	25.59	VERTICAL
3701.403	39.49	-19.4	33.4	25.49	VERTICAL
3695.391	39.47	-19.5	33.4	25.57	VERTICAL
3703.407	39.47	-19.4	33.4	25.47	VERTICAL
3535.07	39.46	-19.4	33.4	25.46	VERTICAL

Charging Mode(Set.1)

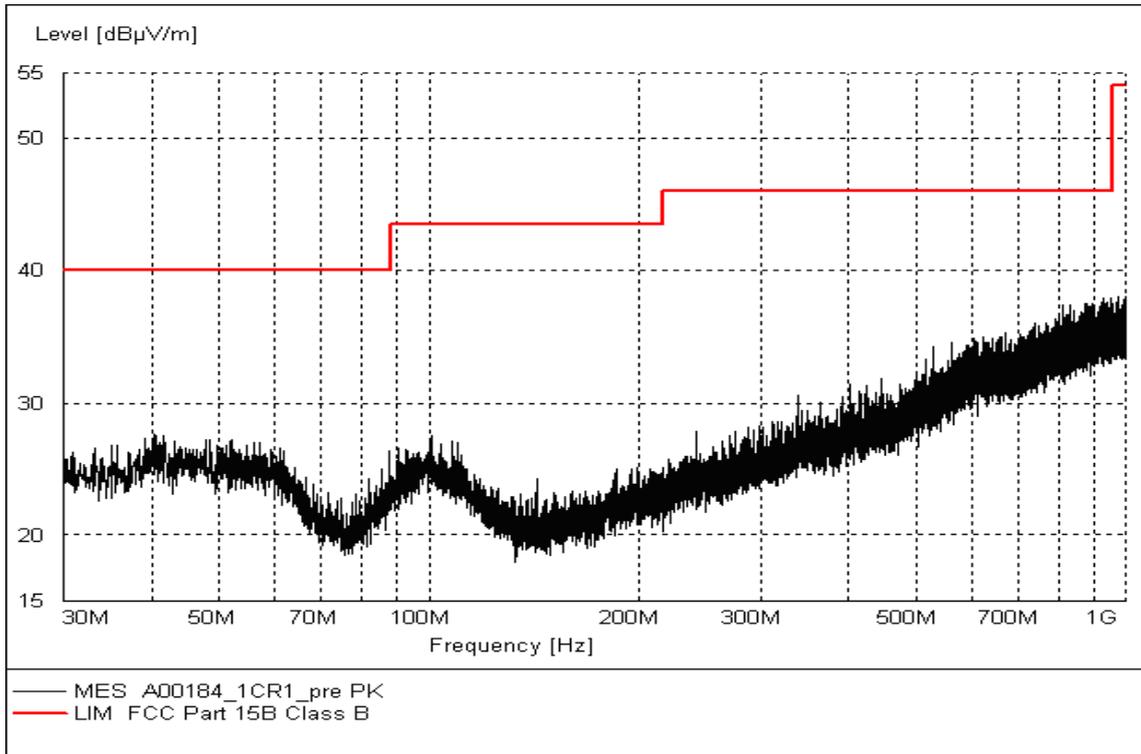


Figure A.1 Radiated Emission from 30MHz to 1GHz

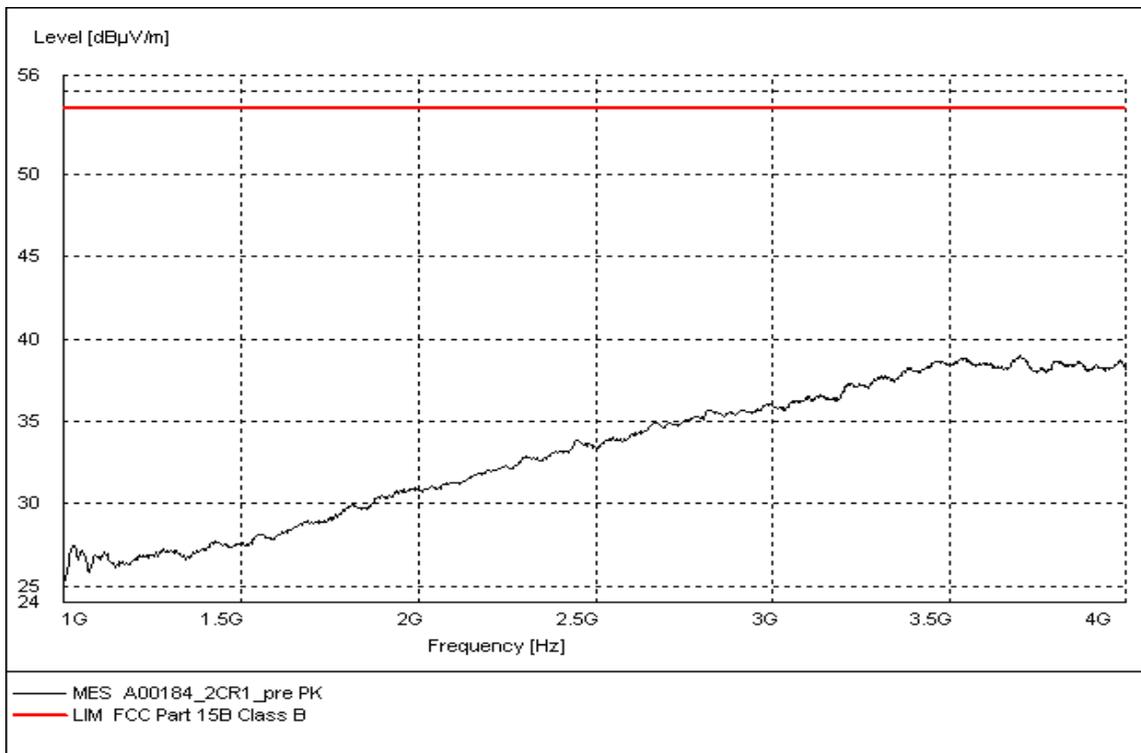


Figure A.2 Radiated Emission from 1GHz to 4GHz

Charging Mode(Set.2)

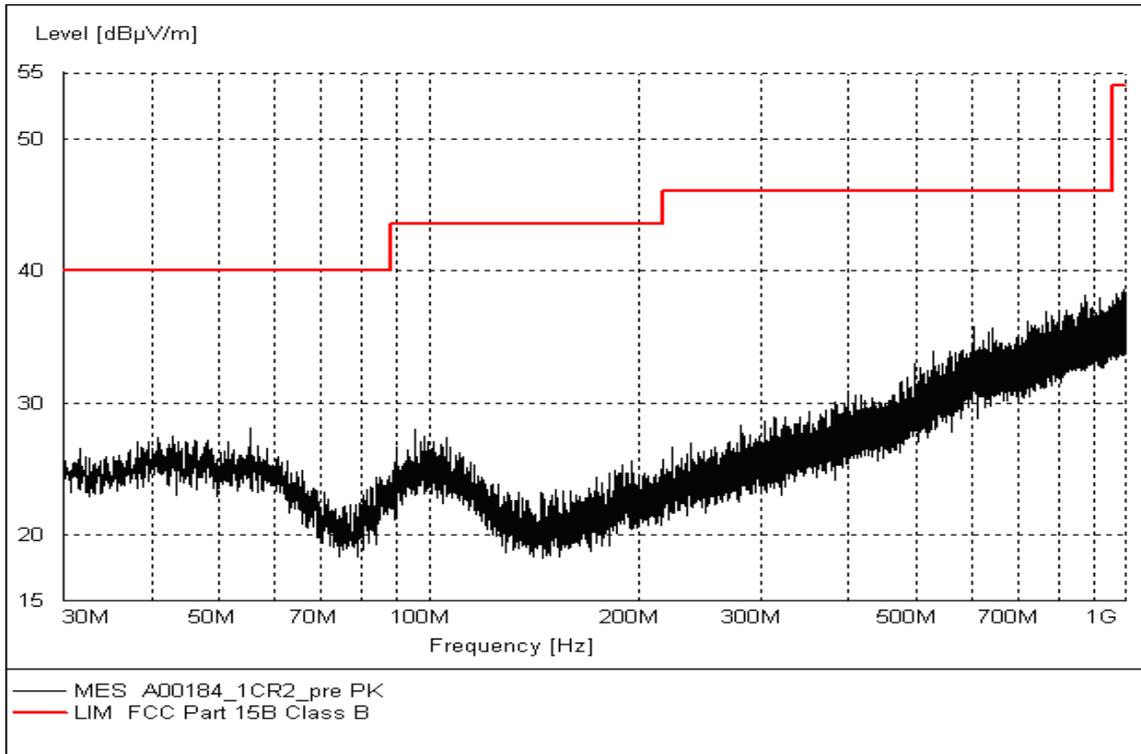


Figure A.3 Radiated Emission from 30MHz to 1GHz

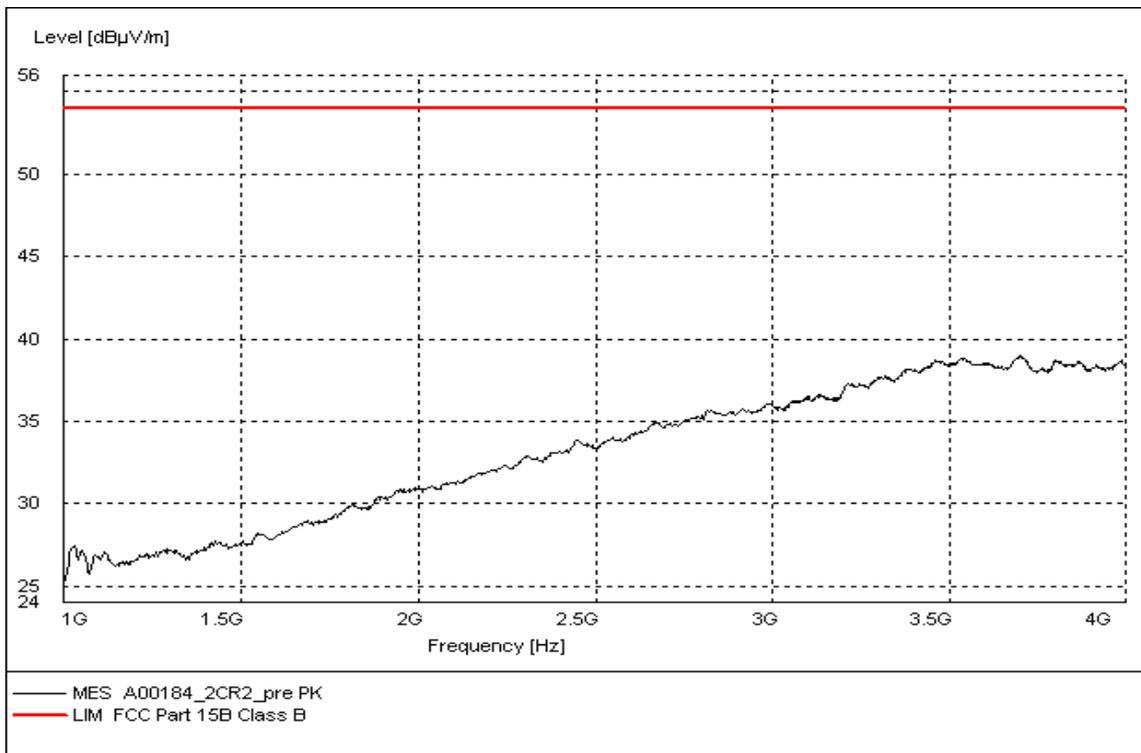


Figure A.4 Radiated Emission from 1GHz to 4GHz

USB Mode(Set.3)

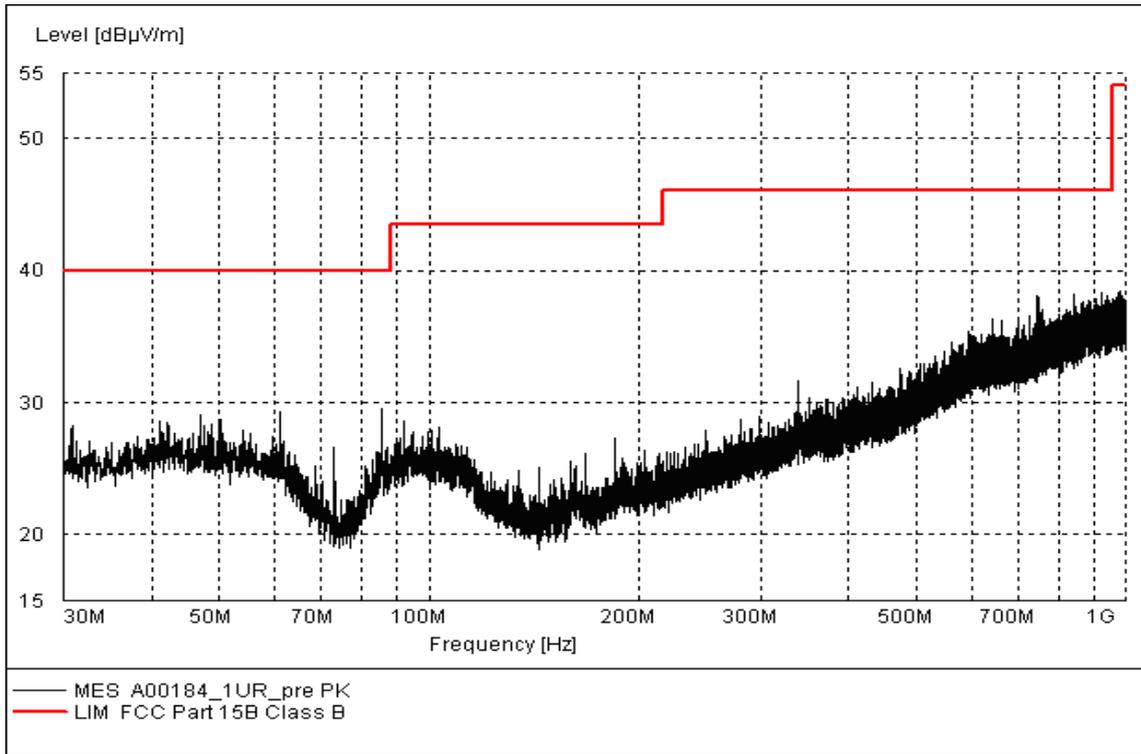


Figure A.5 Radiated Emission from 30MHz to 1GHz

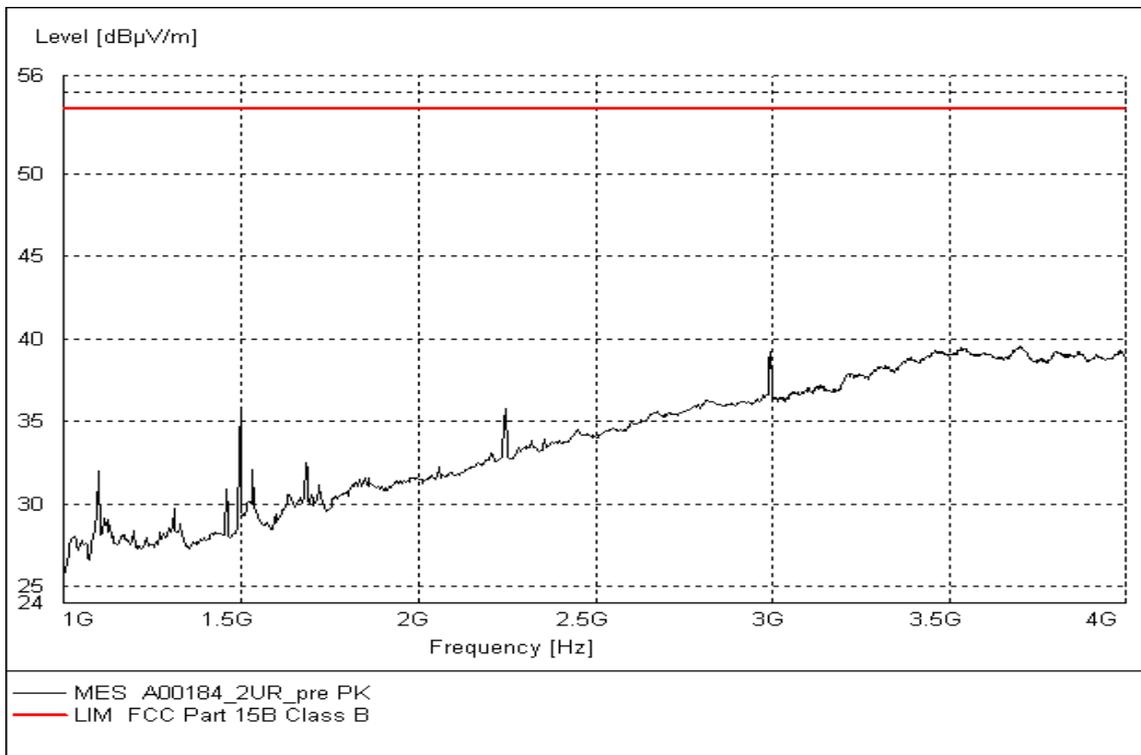


Figure A.6 Radiated Emission from 1GHz to 4GHz

A.2 Conducted Emission (§15.107(a))

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 7.2.

A.2.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW	Sweep Time(s)
9kHz	1

A.2.4 Measurement Results
Charging Mode(Set.1)

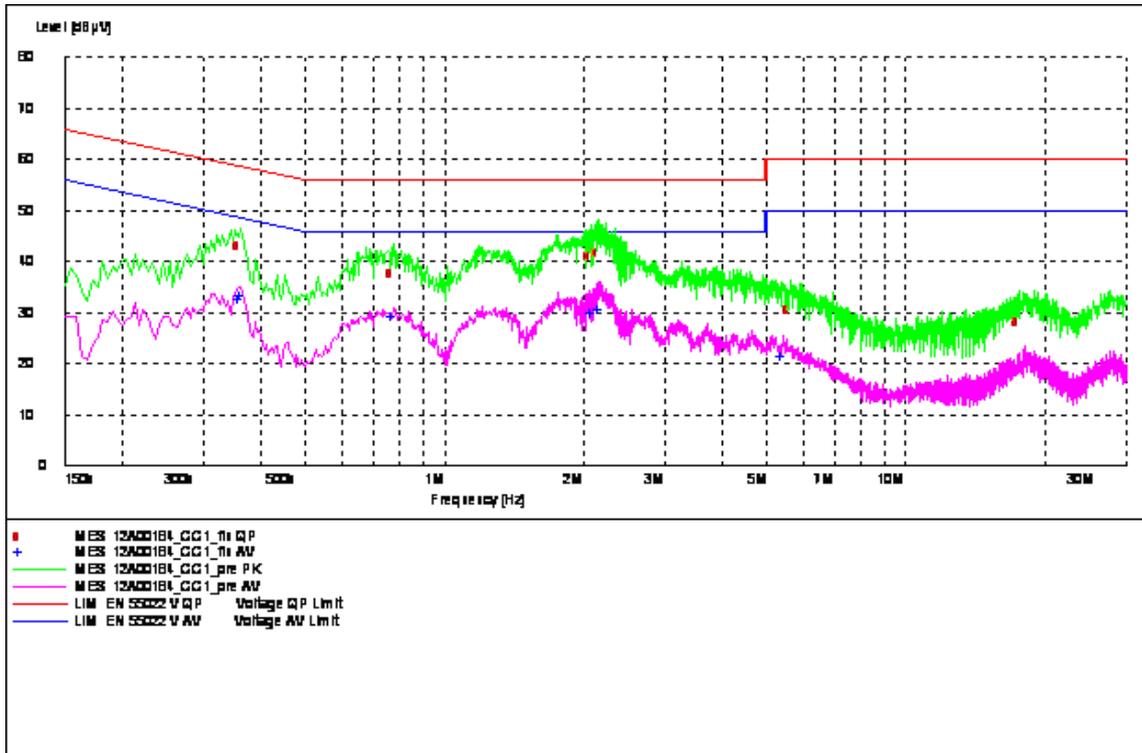


Figure A.7 Conducted Emission

MEASUREMENT RESULT: "12A00184_CC1_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.361500	43.00	10.1	59	15.7	L1	GND
0.775500	37.80	10.1	56	18.2	L1	GND
2.085701	41.00	10.1	56	15.0	L1	GND
2.153454	41.90	10.1	56	14.1	L1	GND
5.607565	30.60	10.2	60	29.4	L1	GND
17.654136	28.10	10.3	60	31.9	L1	GND

MEASUREMENT RESULT: "12A00184_CC1_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.361500	32.70	10.1	49	16.0	N	GND
0.366000	33.40	10.1	49	15.2	N	GND
0.775500	29.40	10.1	46	16.6	N	GND
2.102437	30.00	10.1	46	16.0	L1	GND
2.170734	30.70	10.1	46	15.3	L1	GND
5.420296	21.50	10.2	50	28.5	N	GND

Charging Mode(Set.2)

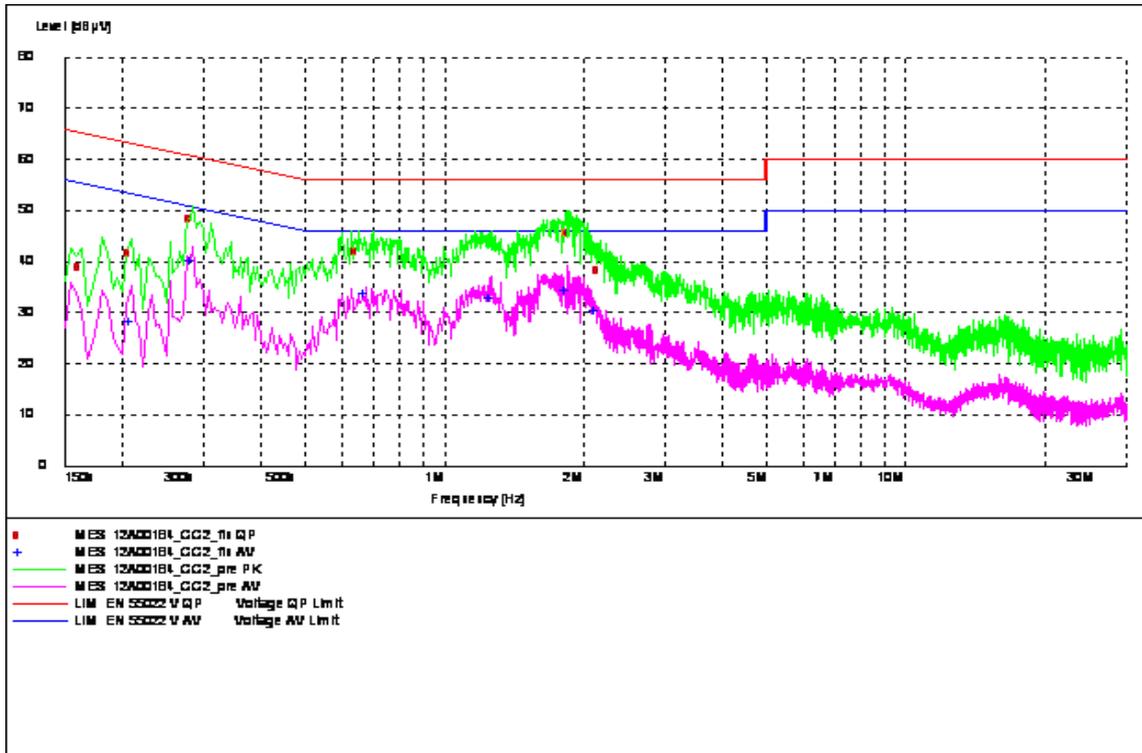


Figure A.8 Conducted Emission

MEASUREMENT RESULT: "12A00184_CC2_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.163500	38.90	10.1	65	26.4	L1	GND
0.208500	41.50	10.1	63	21.8	L1	GND
0.285000	48.40	10.1	61	12.2	L1	GND
0.649500	41.80	10.1	56	14.2	L1	GND
1.855500	45.60	10.1	56	10.4	L1	GND
2.188152	38.30	10.1	56	17.7	L1	GND

MEASUREMENT RESULT: "12A00184_CC2_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.208500	28.10	10.1	53	25.2	N	GND
0.285000	39.90	10.1	51	10.7	L1	GND
0.676500	33.60	10.1	46	12.4	L1	GND
1.270500	32.80	10.1	46	13.2	L1	GND
1.846500	34.30	10.1	46	11.7	L1	GND
2.140585	30.10	10.1	46	15.9	L1	GND

USB Mode(Set.3)

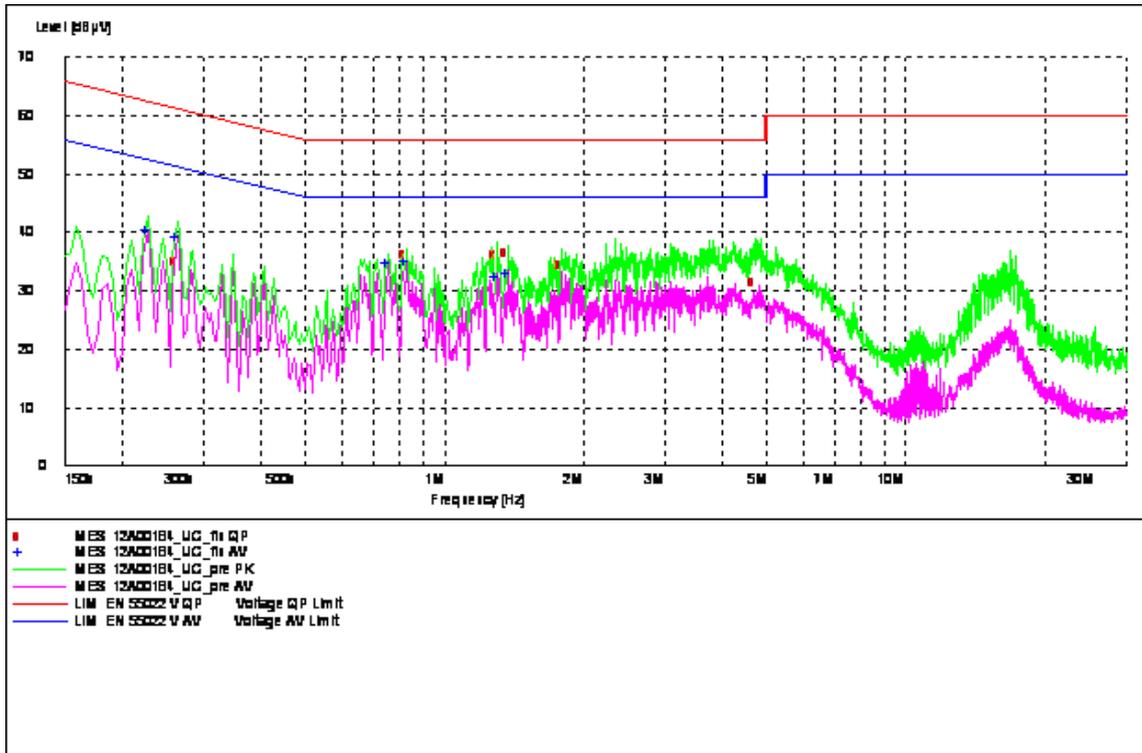


Figure A.9 Conducted Emission

MEASUREMENT RESULT: "12A00184_UC_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.262500	35.20	10.1	61	26.2	L1	GND
0.829500	36.40	10.1	56	19.6	N	GND
1.297500	36.20	10.1	56	19.8	N	GND
1.374000	36.60	10.1	56	19.4	N	GND
1.797000	34.50	10.1	56	21.5	N	GND
4.712838	31.60	10.2	56	24.4	N	GND

MEASUREMENT RESULT: "12A00184_UC_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB	/	/
0.226500	40.40	10.1	53	12.2	N	GND
0.262500	39.40	10.1	51	12.0	N	GND
0.753000	34.90	10.1	46	11.1	N	GND
0.829500	35.00	10.1	46	11.0	N	GND
1.297500	32.40	10.1	46	13.6	N	GND
1.374000	32.90	10.1	46	13.1	N	GND

END OF REPORT