



Report No.: SZ12060127W01



FCC TEST REPORT

Issued to

ZTE Corporation

For

cdma2000 Digital Mobile Phone

Model Name: ZTE V6700
 Brand Name: ZTE 中兴
 Trade Name: ZTE 中兴
 FCC ID: Q78-V6700
 Standard: 47 CFR Part 2
 47 CFR Part 22 Subpart H
 Test date: 2012-6-27 to 2012-7-17
 Issue date: 2012-7-20

Shenzhen Morlab Communications Technology Co., Ltd.



Tested by Zhang Yan
Zhang Yan

Date 2012.7.20

Approved by Wu Xuebin
Wu Xuebin

Date 2012.7.20

Review by Peng Huarui
Peng Huarui

Date 2012.7.20



The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



TABLE OF CONTENTS

- 1. GENERAL INFORMATION3**
- 1.1 EUT Description3**
- 1.2 Test Standards and Results4**
- 1.3 Facilities and Accreditations5**
- 2. 47 CFR PART 2, PART 22H REQUIREMENTS6**
- 2.1 Conducted RF Output Power6**
- 2.2 99% Occupied Bandwidth 11**
- 2.3 Frequency Stability15**
- 2.4 Conducted Out of Band Emissions17**
- 2.5 Band Edge20**
- 2.6 Transmitter Radiated Power (EIRP/ERP)23**
- 2.7 Radiated Out of Band Emissions27**

Change History		
Issue	Date	Reason for change
1.0	Jul 20, 2012	First edition

1. GENERAL INFORMATION

1.1 EUT Description

EUT Type: cdma2000 Digital Mobile Phone
Model Name: ZTE V6700
Serial No.....: (n.a, marked #1 by test site)
Hardware Version: QB7625_02A_V1AMB_B
Software Version: V6700_Z46_EN_PS3CF143
Applicant: ZTE Corporatio
ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan
District, Shenzhen, Guangdong, P.R.China
Manufacturer: ZTE Corporation
ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan
District, Shenzhen, Guangdong, P.R.China
Frequency Range: CDMA 800MHz:
Tx: 824.7-848.31 MHz;
Rx: 869.7-893.31MHz
Modulation Type.....: CDMA 1X
Emission Designators: 1M28F9W
Modulation Type.....: PIFA Antenna

Note 1: The EUT is a cdma2000 Digital Mobile Phone operating in Cellular.

Note 2: The normal configuration for the EUT is the Mobile Phone (MS) associated with ancillary equipments e.g. the Battery and/or the AC Adapter (Charger).

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2 Test Standards and Results

The objective of the report is to perform testing according to:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-09 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-09 Edition)	Public Mobile Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR	Description	Test Band	Result
1	2.1046	Conducted RF Output Power	CDMA 800MHz	PASS
2	2.1049	Occupied Bandwidth	CDMA 800MHz	PASS
3	2.1055 22.355	Frequency Stability	CDMA 800MHz	PASS
4	2.1051 2.1057 22.917	Conducted Out of Band Emissions	CDMA 800MHz	PASS
5	2.1051 2.1057 22.917	Band Edge	CDMA 800MHz	PASS
6	22.913	Transmitter Radiated Power (EIPR/ERP)	CDMA 800MHz	PASS
7	2.1053 2.1057 22.917	Radiated Out of Band Emissions	CDMA 800MHz	PASS

NOTE: Measurement method according to ANSI/TIA-603-D 2010.



1.3 Facilities and Accreditations

1.3.1 Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at 3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 2, PART 22H REQUIREMENTS


2.1 Conducted RF Output Power

2.1.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified

2.1.2 Test Description

1. Test Setup:

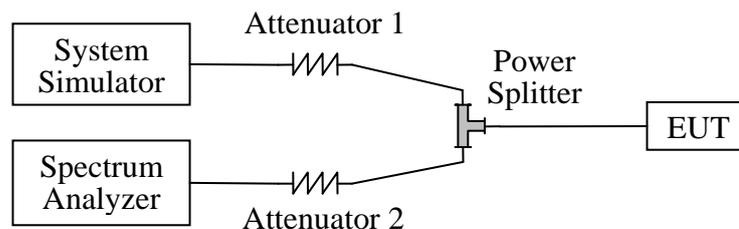

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. A call is established between the EUT and the SS.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	Agilent	E5515C	GB43130131	2012.05
Spectrum Analyzer	Agilent	E7405A	US44210471	2012.05
Power Splitter	Weinschel	1506A	NW521	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)

2.1.3 Test Result


Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT. For the CDMA 800MHz operates at maximum output Power, the rated

conducted RF output power is 38.5dBm.


1. Test Verdict:

No.	Channel Number	Frequency (MHz)	Measured Power		Rated Power	
			dBm	W	dBm	W
CDMA 800MHz	1013	824.7	26.02	0.39994	38.5	7
	384	836.52	24.85	0.30549		
	777	848.31	25.06	0.32062		
EVDO 800MHz	1013	824.7	25.82	0.38194	38.5	7
	384	836.52	24.45	0.27861		
	777	848.31	24.72	0.29648		


2. Test Plots:

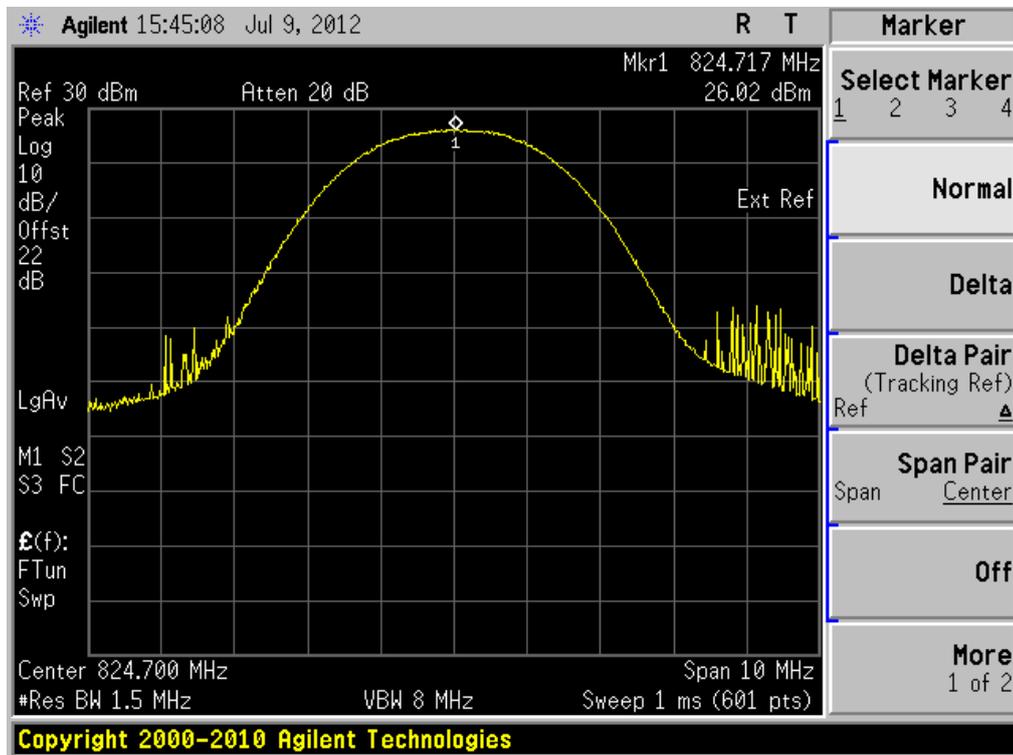


(Plot A: CDMA 800MHz Channel = 1013)

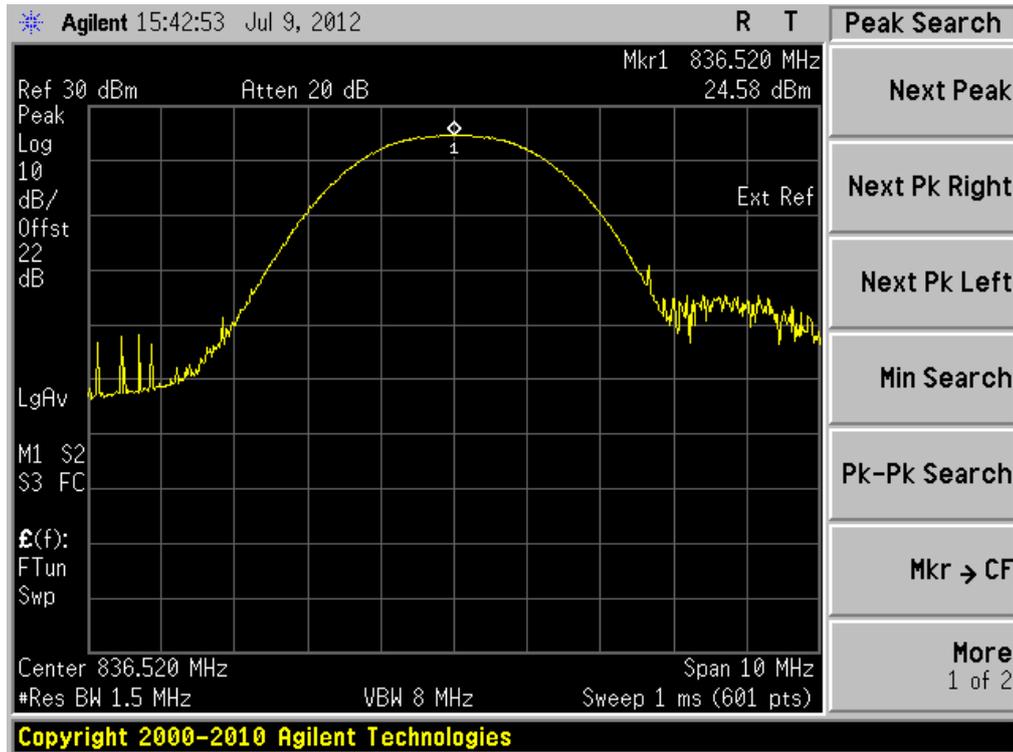


(Plot B: CDMA 800MHz Channel = 384)

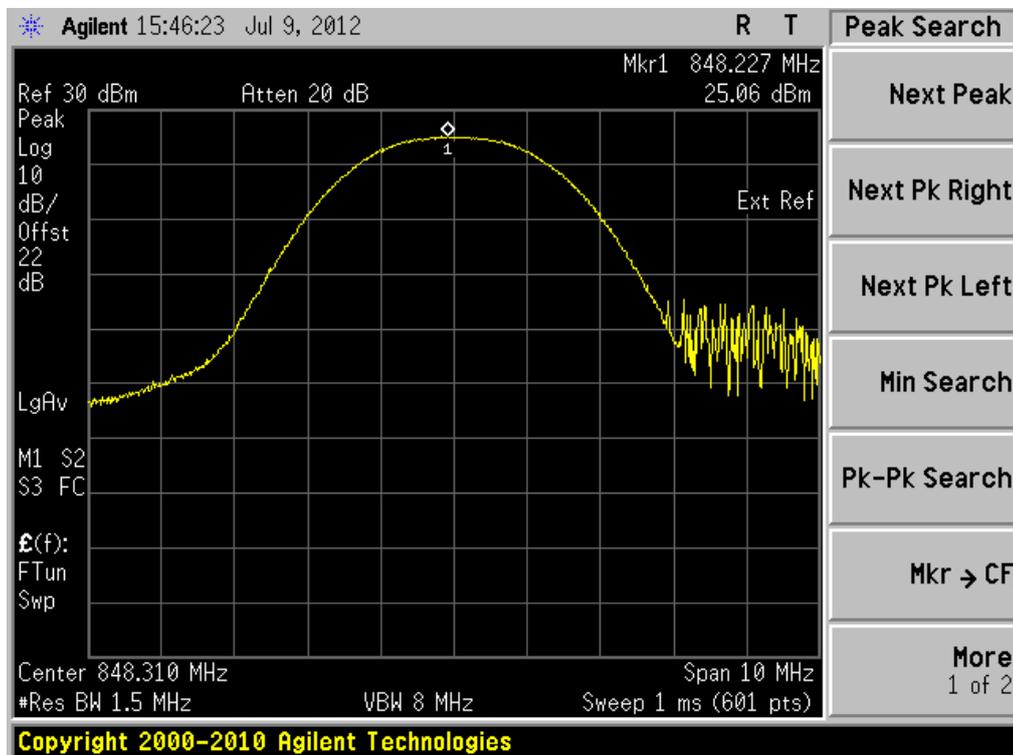


(Plot C: CDMA 800MHz Channel = 777)

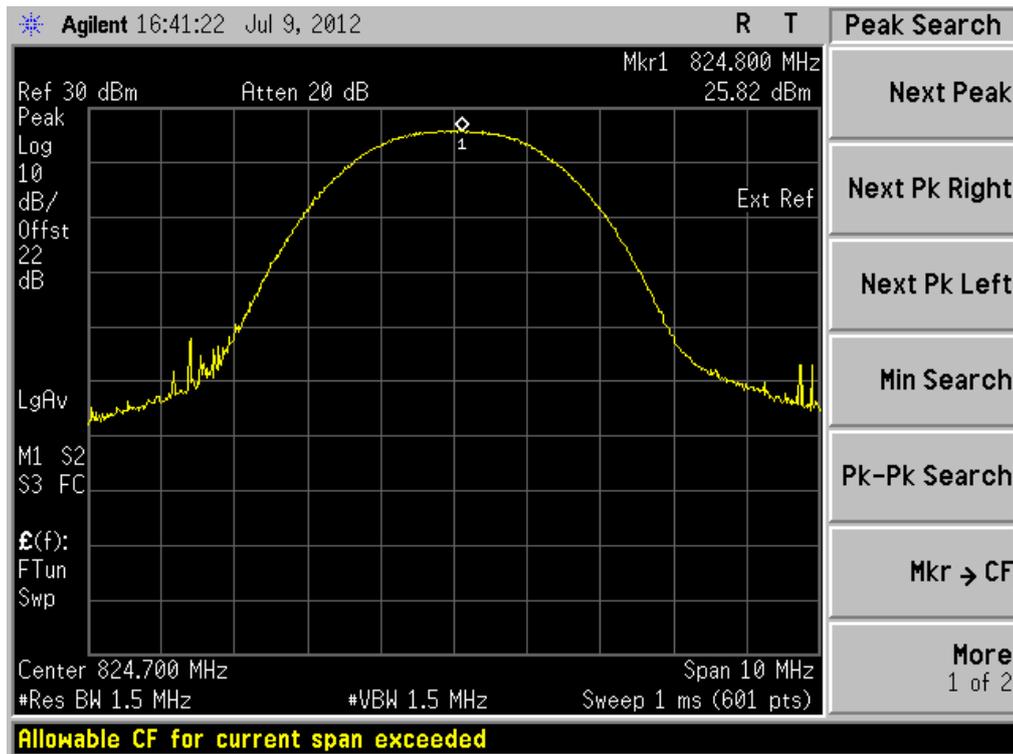

(Plot D: EVDO 800MHz Channel =1013)

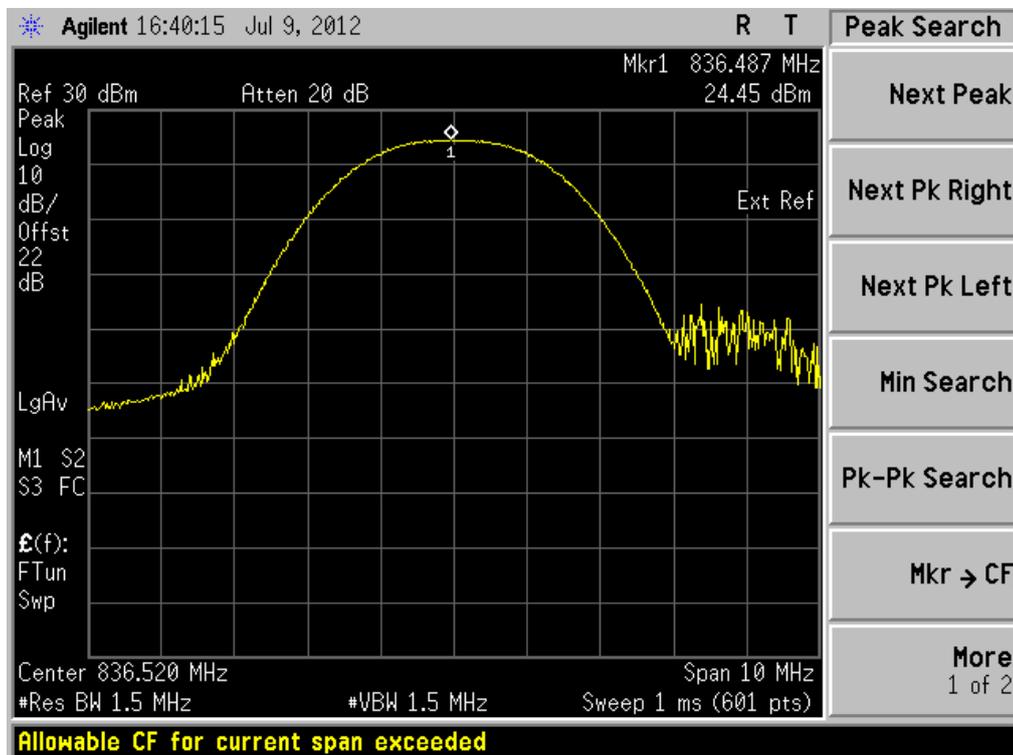

(Plot E: EVDO 800MHz Channel = 384)

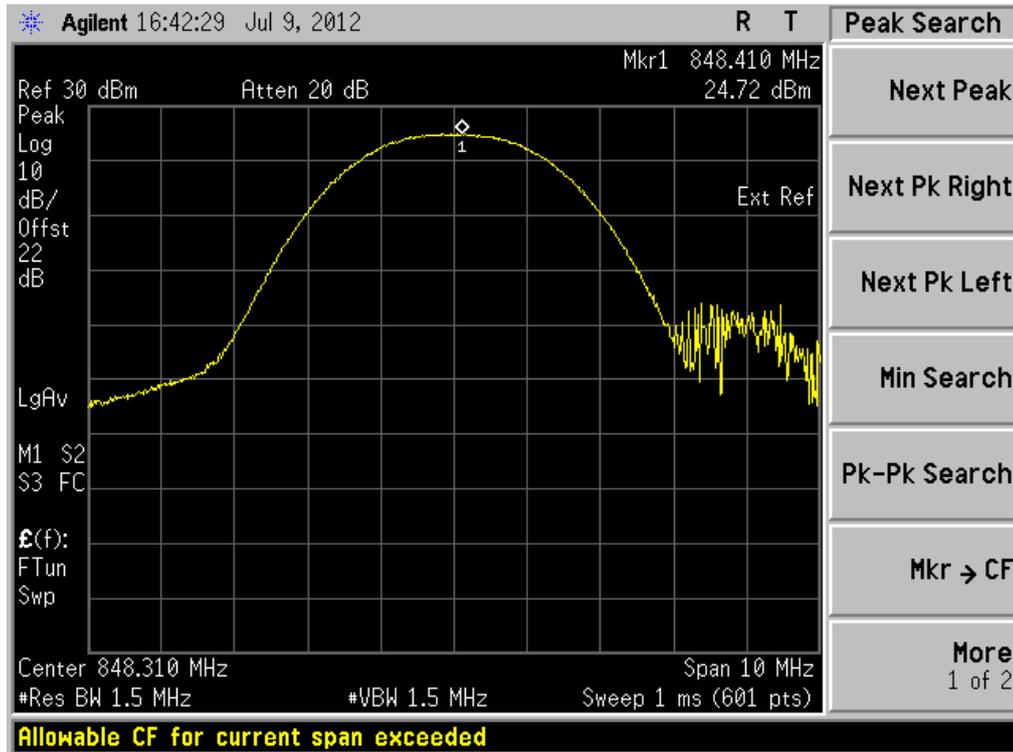

(Plot F: EVDO 800MHz Channel = 777)

2.2 99% Occupied Bandwidth

2.2.1 Definition

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth.

2.2.2 Test Description

See section 2.1.2 of this report.


2.2.3 Test Verdict

Here the lowest, middle and highest channels are tested to record the 99% occupied bandwidth.


1. Test Verdict:

Band	Channel	Frequency (MHz)	Measured 99% Occupied Bandwidth (MHz)	Refer to Plot
CDMA 800MHz	1013	824.7	1.2829 MHz	Plot A
	384	836.52	1.2845 MHz	Plot B
	777	848.31	1.2814 MHz	Plot C
EVDO 800MHz	1013	824.7	1.2757 MHz	Plot D
	384	836.52	1.2844 MHz	Plot E
	777	848.31	1.2816MHz	Plot F


2. Test Plots:

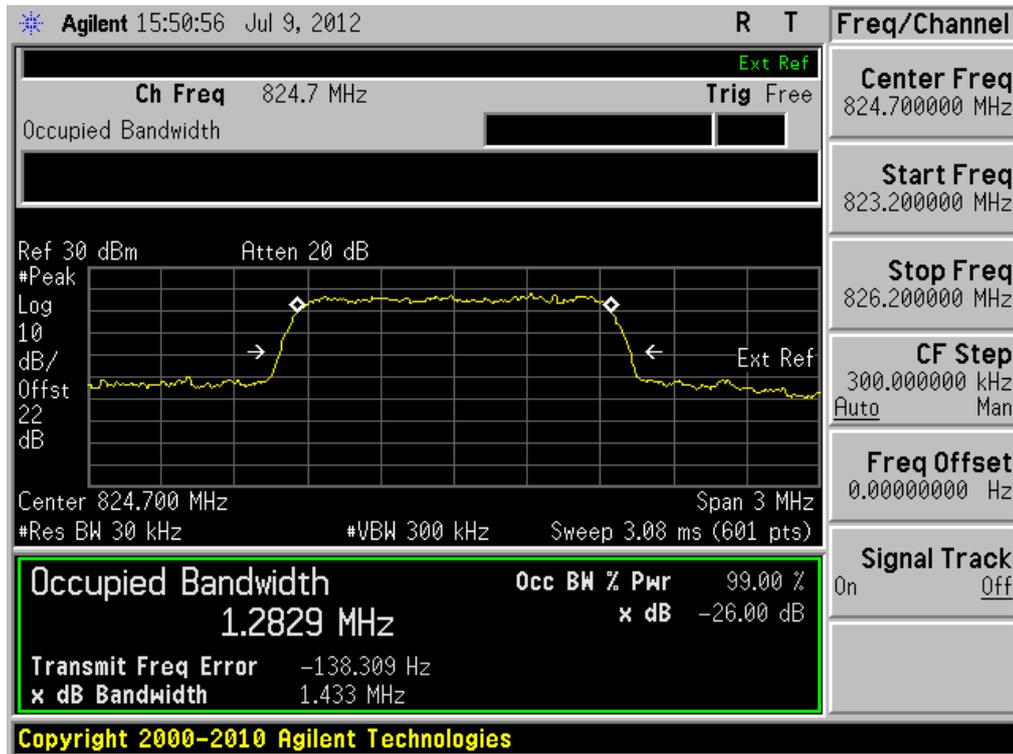


(Plot A: CDMA 800MHz Channel = 1013)

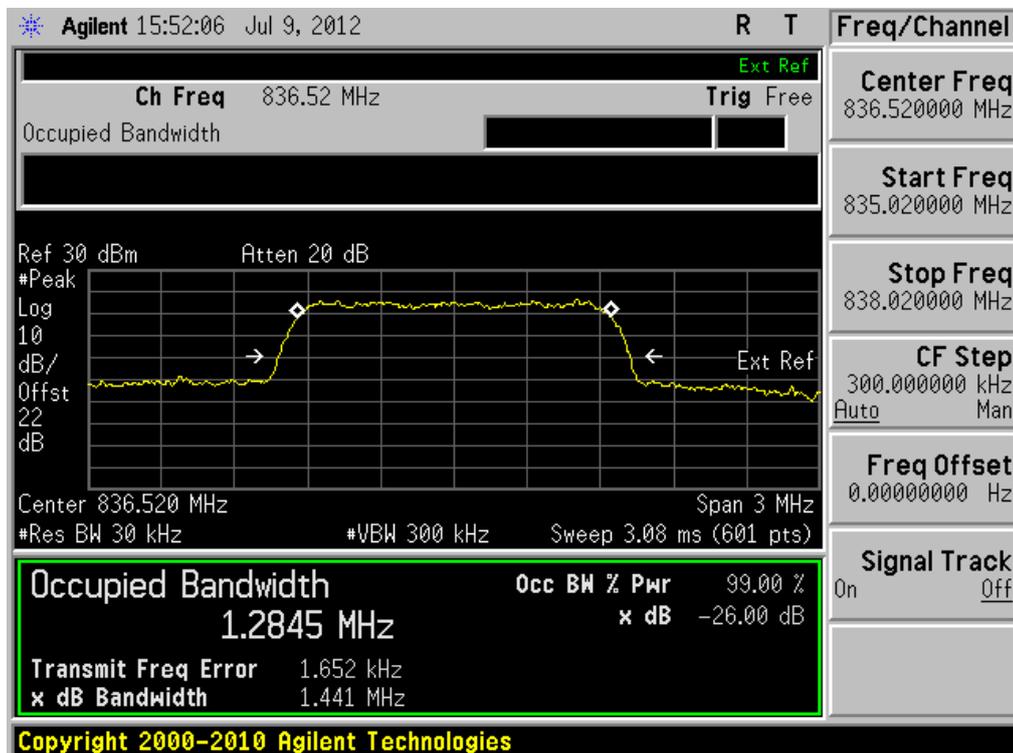


(Plot B: CDMA 800MHz Channel = 384)

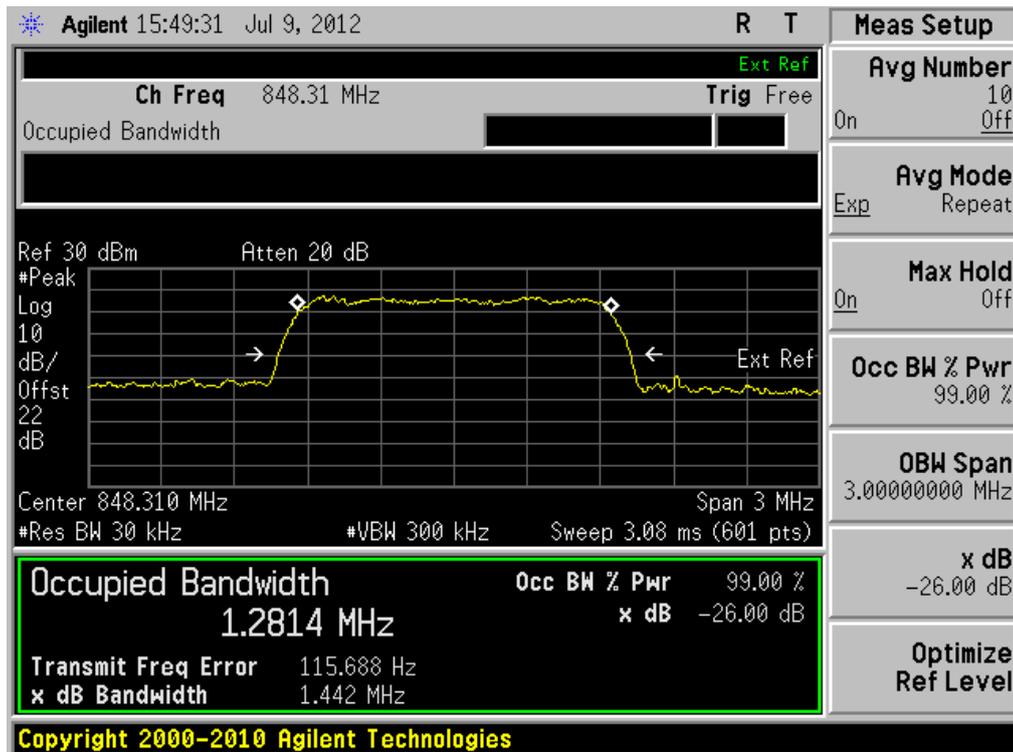


(Plot C: CDMA 800MHz Channel = 777)

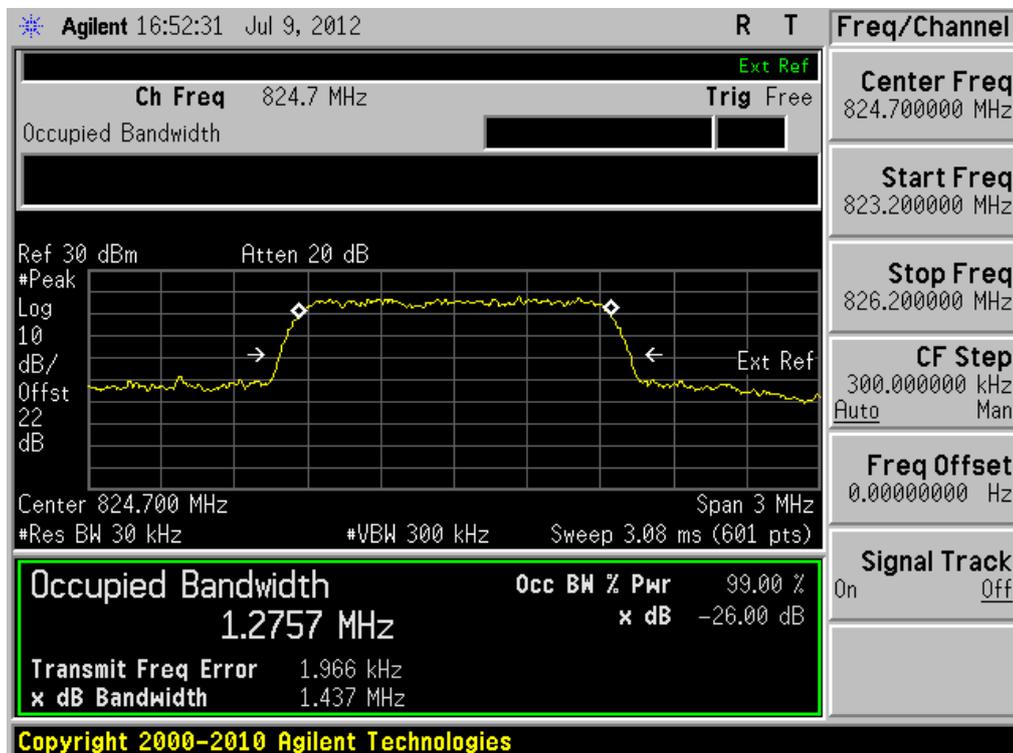

(Plot D: EVDO 800MHz Channel = 1013)

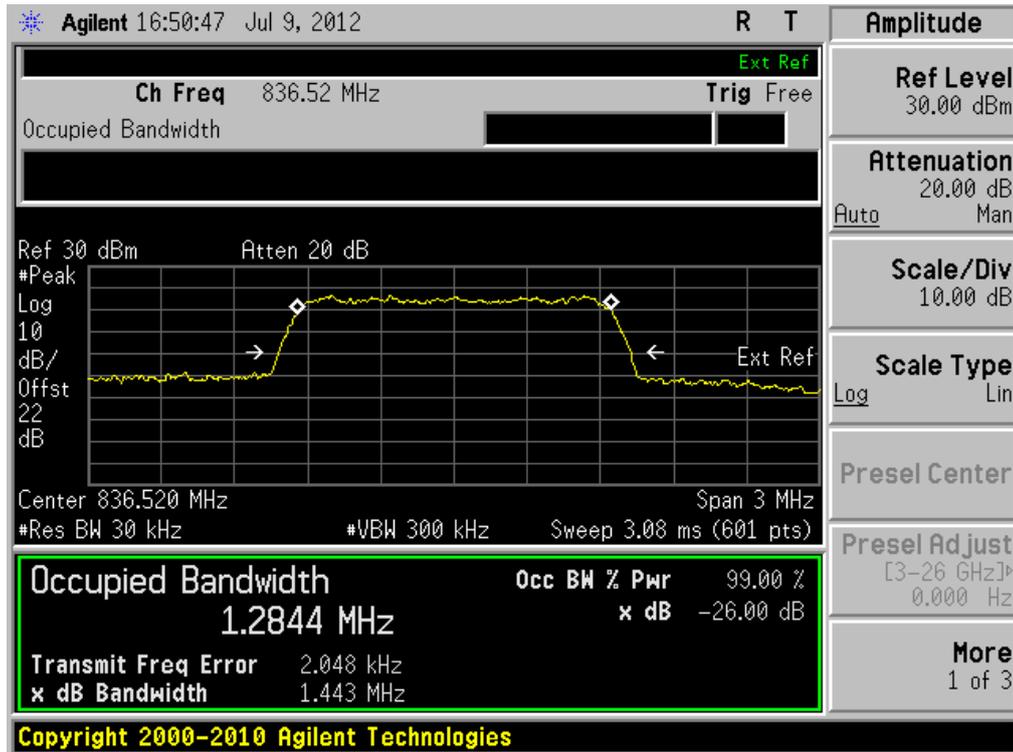

(Plot E: EVDO 800MHz Channel = 384)

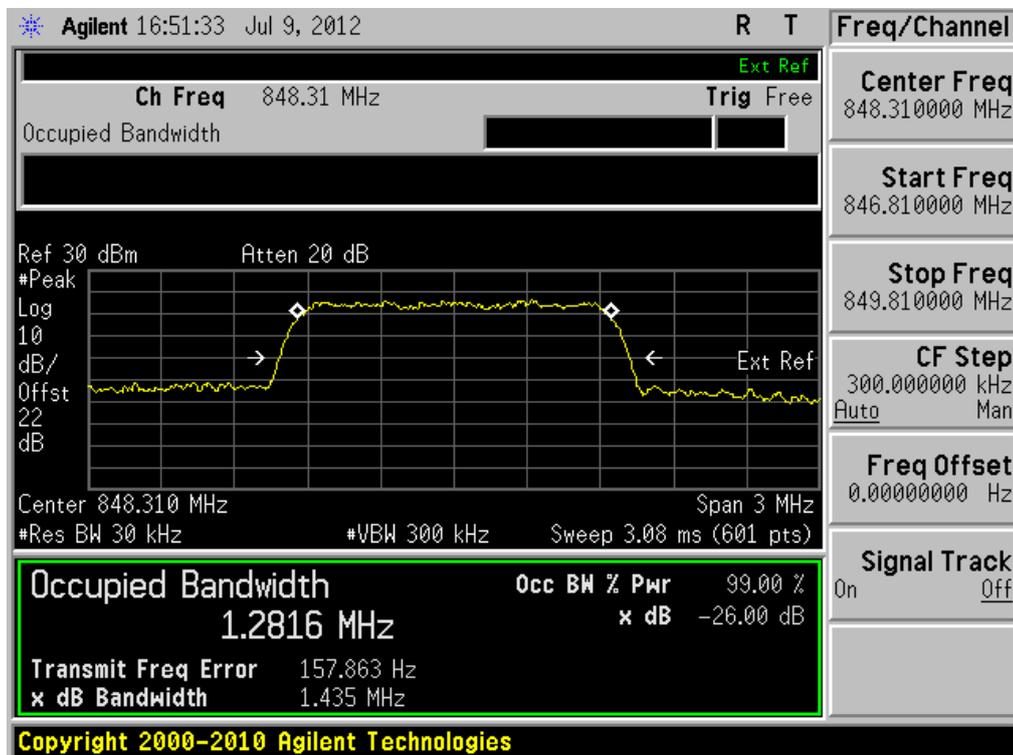

(Plot F: EVDO 800MHz Channel = 777)

2.3 Frequency Stability


2.3.1 Requirement

According to FCC section 22.355, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

2.3.2 Test Description

1. Test Setup:

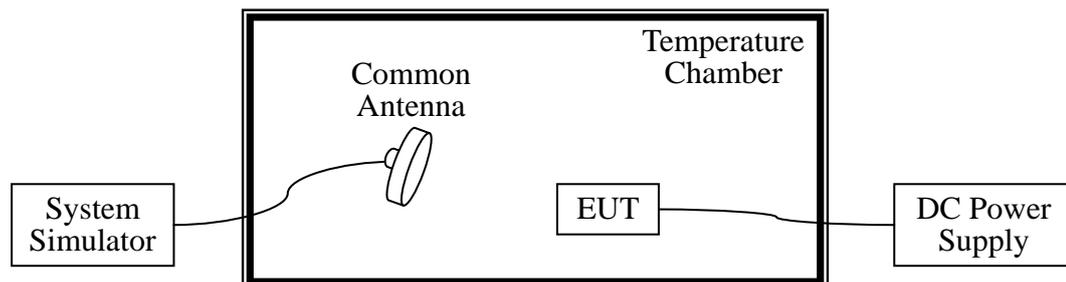

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power. A call is established between the EUT and the SS via a Common Antenna.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	Agilent	E5515C	GB43130131	2012.05
DC Power Supply	Good Will	GPS-3030DD	EF920938	2012.05
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2012.05

2.3.3 Test Verdict

The nominal, highest and lowest extreme voltages are separately 3.7VDC, 4.2VDC and 3.6VDC, which are specified by the applicant; the normal temperature here used is 25°C . The frequency deviation limit of CDMA 800MHz band is $\pm 2.5\text{ppm}$, CDMA 1900MHz is $\pm 1\text{ppm}$.



Band	Test Conditions		Frequency Deviation						Verdict
	Power (VDC)	Temperature (°C)	Channel = 1013 (824.7MHz)		Channel = 384 (836.52MHz)		Channel = 777 (848.31MHz)		
			Hz	Limits	Hz	Limits	Hz	Limits	
CDMA 800MHz	3.7	-30	7.06	±2061.7 5	26.75	±2091. 30	-16.29	±2120.7 75	PASS
		-20	-21.13		-11.01		29.37		
		-10	17.01		11.54		-11.06		
		0	3.20		-4.85		35.04		
		+10	-5.17		13.32		-22.26		
		+20	14.51		5.09		35.09		
		+30	20.79		23.04		26.75		
		+40	-18.75		-10.26		-11.08		
		+50	17.43		21.09		21.44		
	4.2	+25	13.27	-17.85	-7.85				
	3.6	+25	14.34	15.32	25.32				

Band	Test Conditions		Frequency Deviation						Verdict
	Power (VDC)	Temperature (°C)	Channel = 1013 (824.7MHz)		Channel = 384 (836.52MHz)		Channel = 777 (848.31MHz)		
			Hz	Limits	Hz	Limits	Hz	Limits	
EVDO 800MHz	3.7	-30	17.21	±2061.7 5	21.11	±2091. 30	-15.31	±2120.7 75	PASS
		-20	3.20		-18.73		21.33		
		-10	-5.17		17.51		-15.12		
		0	14.51		-18.75		35.04		
		+10	20.79		17.43		-21.11		
		+20	-18.75		20.79		-22.26		
		+30	17.01		-18.75		37.09		
		+40	-18.75		-10.26		26.75		
		+50	17.43		21.09		-19.08		
	4.2	+25	13.27	-17.85	-22.26				
	3.6	+25	14.34	15.32	35.09				

2.4 Conducted Out of Band Emissions

2.4.1 Requirement

According to FCC section 21051, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

2.4.2 Test Description

See section 2.1.2 of this report.

2.4.3 Test Result



The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.

1. Test Verdict:



No.	Channel	Frequency(MHz)	Measured Max Spurious Emission(dBm)	Limit(dBm)
CDMA 800MHz	1013	824.7	< -25	-13
	384	836.52	< -25	-13
	777	848.31	< -25	-13
EVDO 800MHz	1013	824.7	< -25	-13
	384	836.52	< -25	-13
	777	848.31	< -25	-13

2. Test Plots for the Whole Measurement Frequency Range:



Note: the power of the EUT transmitting frequency should be ignored.

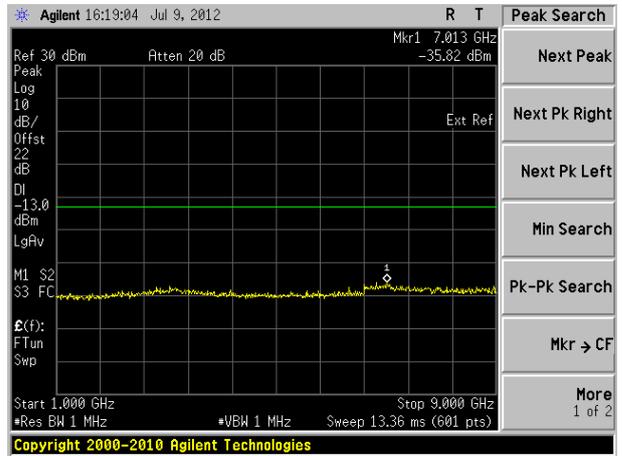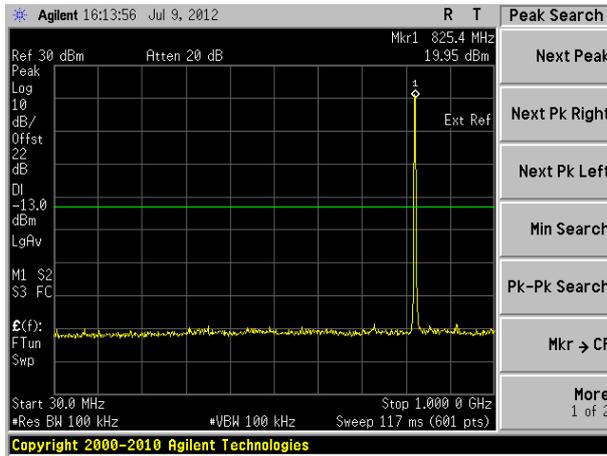



(Plot A: CDMA 800MHz Channel = 1013, 30MHz to 9GHz)

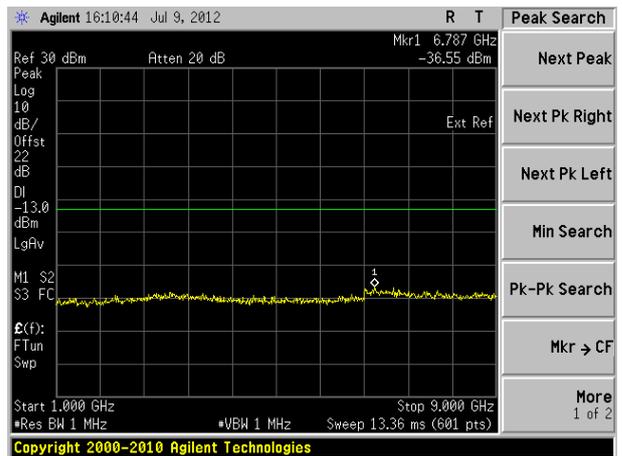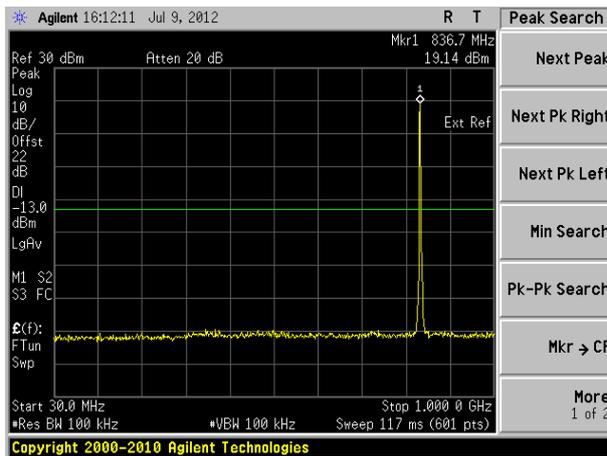



(Plot B: CDMA 800MHz Channel = 384, 30MHz to 9GHz)

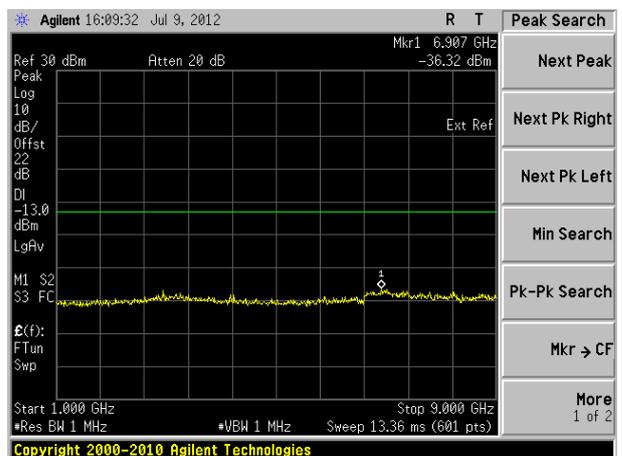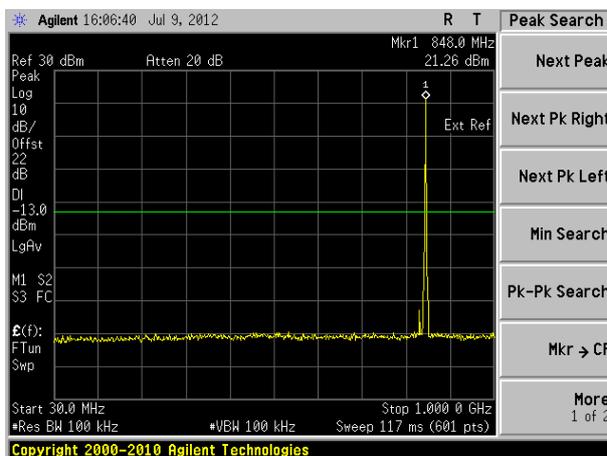



(Plot C: CDMA 800MHz Channel = 777, 30MHz to 9GHz)

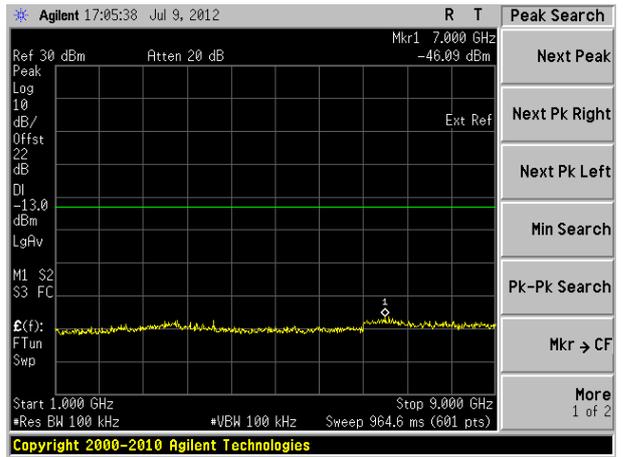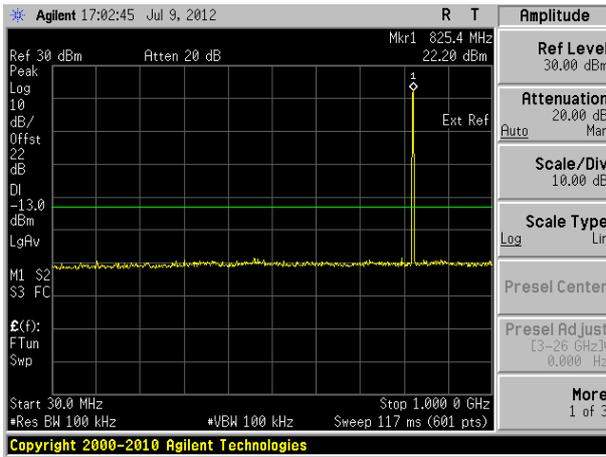

(Plot D: EVDO 800MHz Channel = 1013, 30MHz to 9GHz)

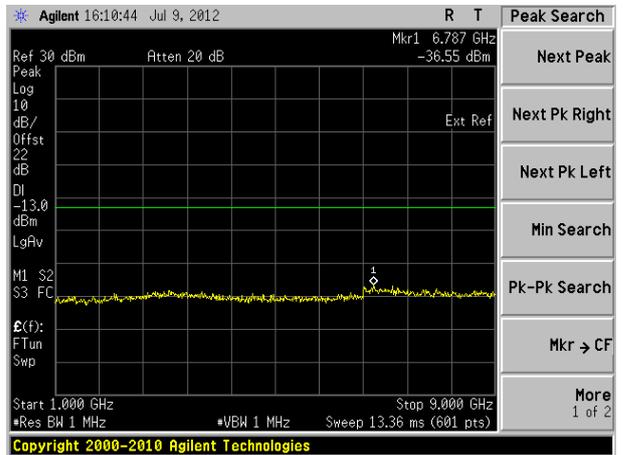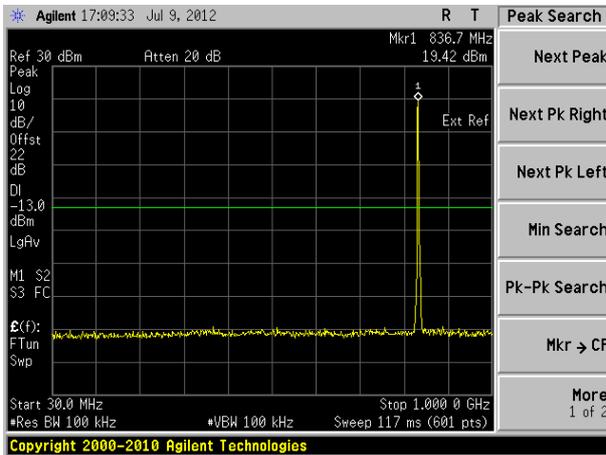

(Plot E: CDMA 800MHz Channel = 384, 30MHz to 9GHz)

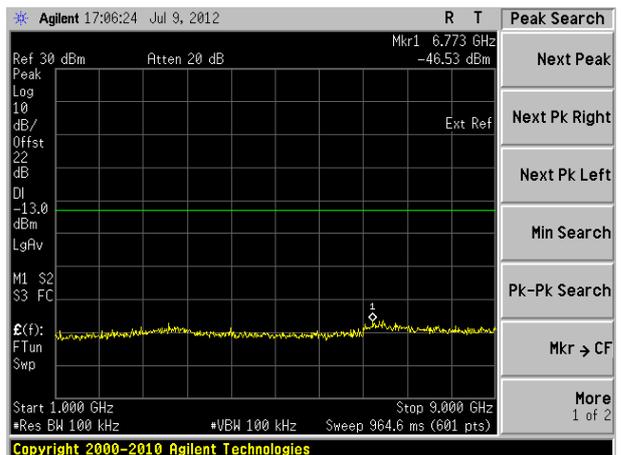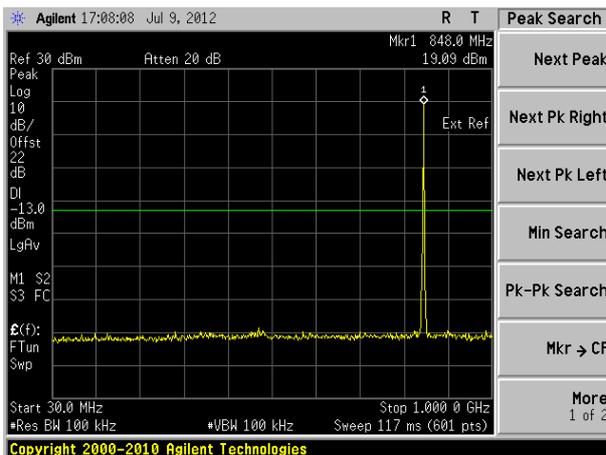

(Plot F: EVDO 800MHz Channel = 777, 30MHz to 9GHz)

2.5 Band Edge

2.5.1 Requirement

According to FCC section 2.1051, in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

2.5.2 Test Description

See section 2.1.2 of this report.


2.5.3 Test Result

The lowest and highest channels are tested to verify the band edge emissions.


1. Test Verdict:

Band	Channel	Frequency (MHz)	Measured Max. Band Edge Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
CDMA 800MHz	1013	824.7	-13.38	Plat A	-13	PASS
	777	848.31	-15.28	Plot B		PASS
EVDO 800MHz	1013	824.7	-17.07	Plat C	-13	PASS
	777	848.31	-18.73	Plot D		PASS


2. Test Plots:

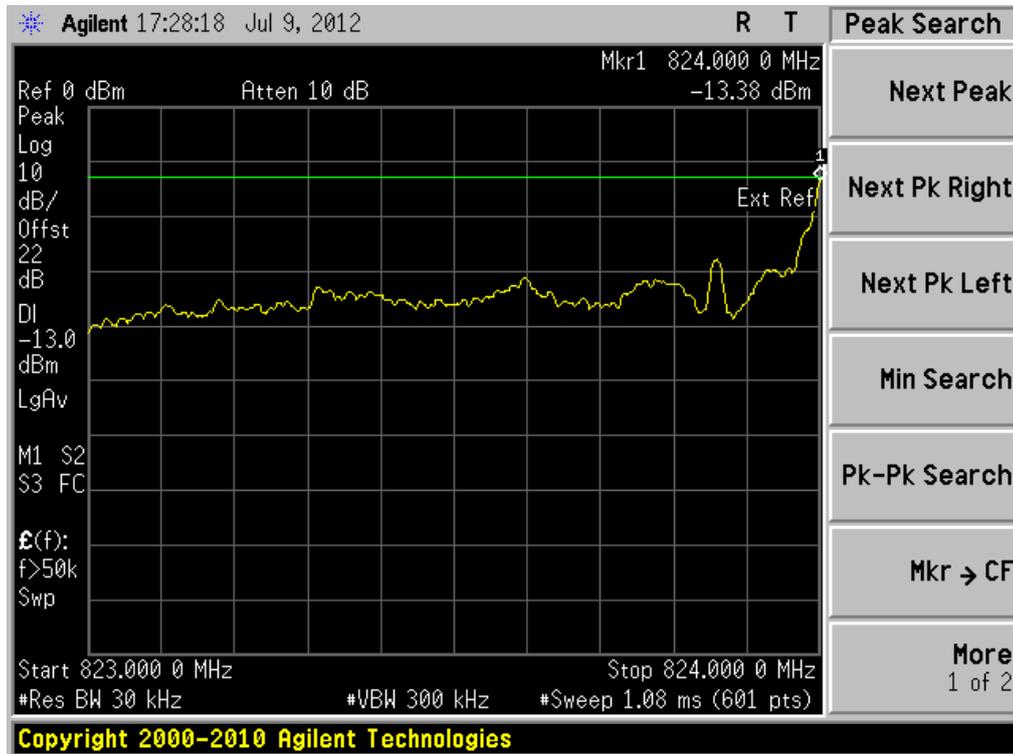


(Plot A: CDMA 800MHz Channel = 1013)

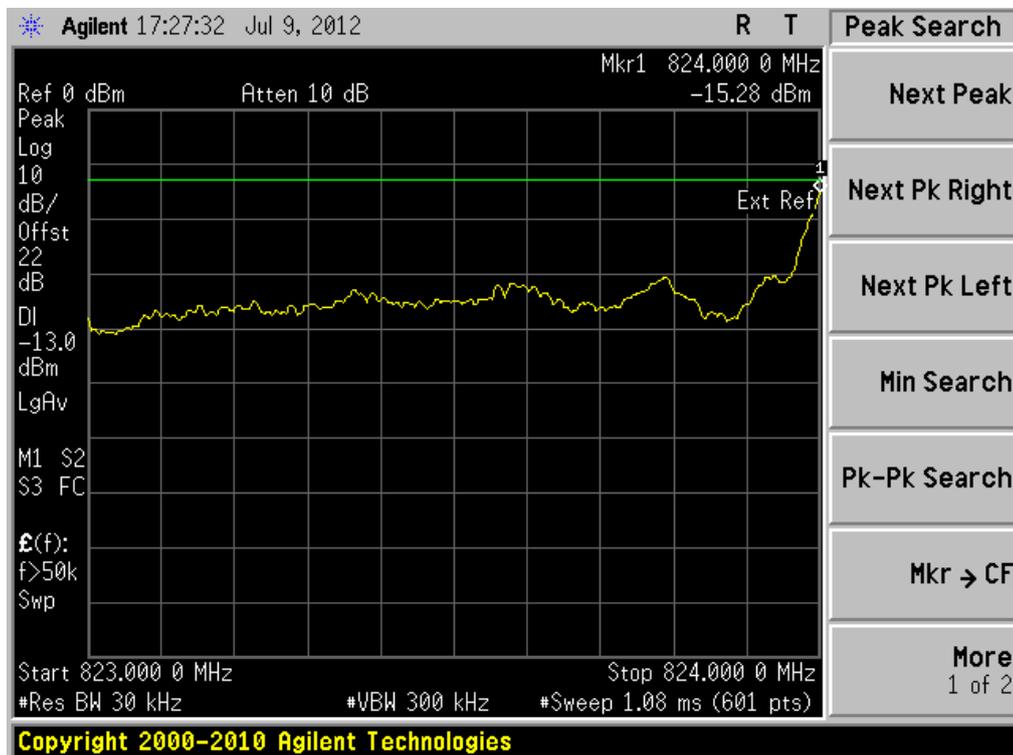

(Plot B: CDMA 800MHz Channel = 777)

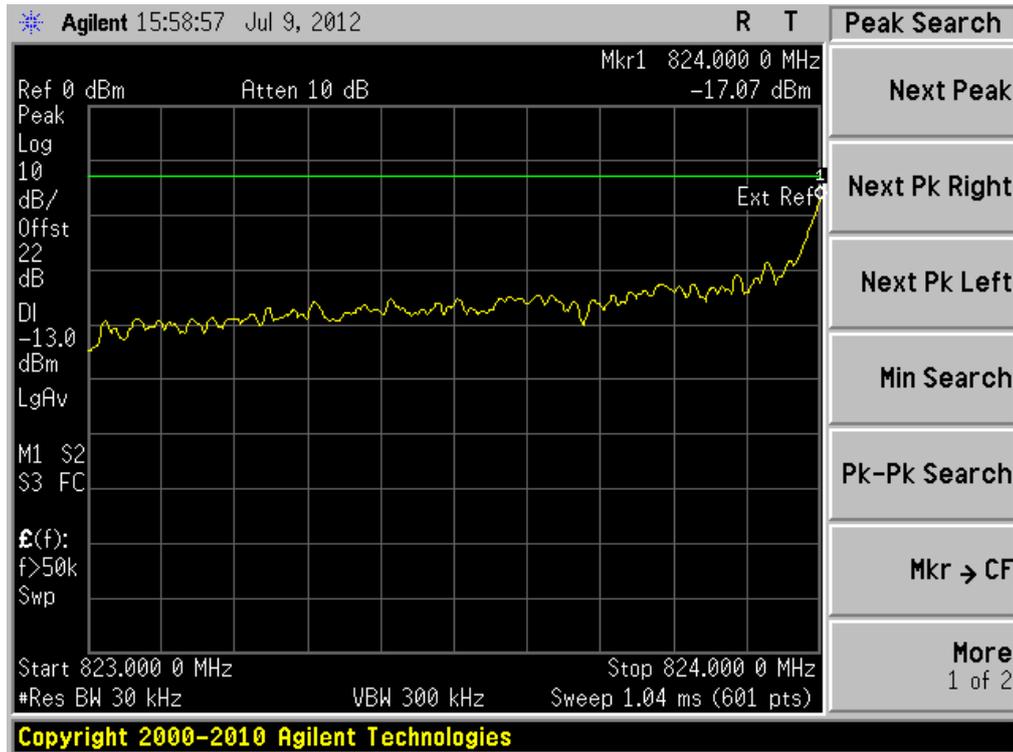

(Plot C: EVDO 800MHz Channel = 1013)

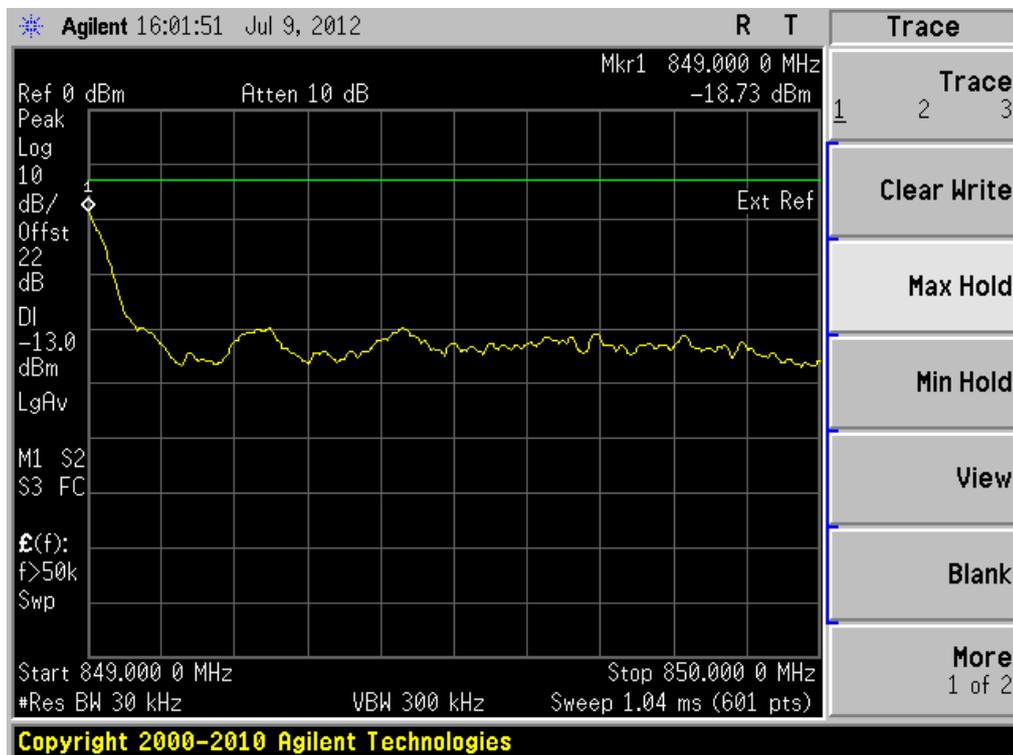

(Plot D: EVDO 800MHz Channel = 777)


2.6 Transmitter Radiated Power (EIRP/ERP)

2.6.1 Requirement

According to FCC section 22.913, the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7Watts e.i.r.p. peak power.

2.6.2 Test Description

1. Test Setup:

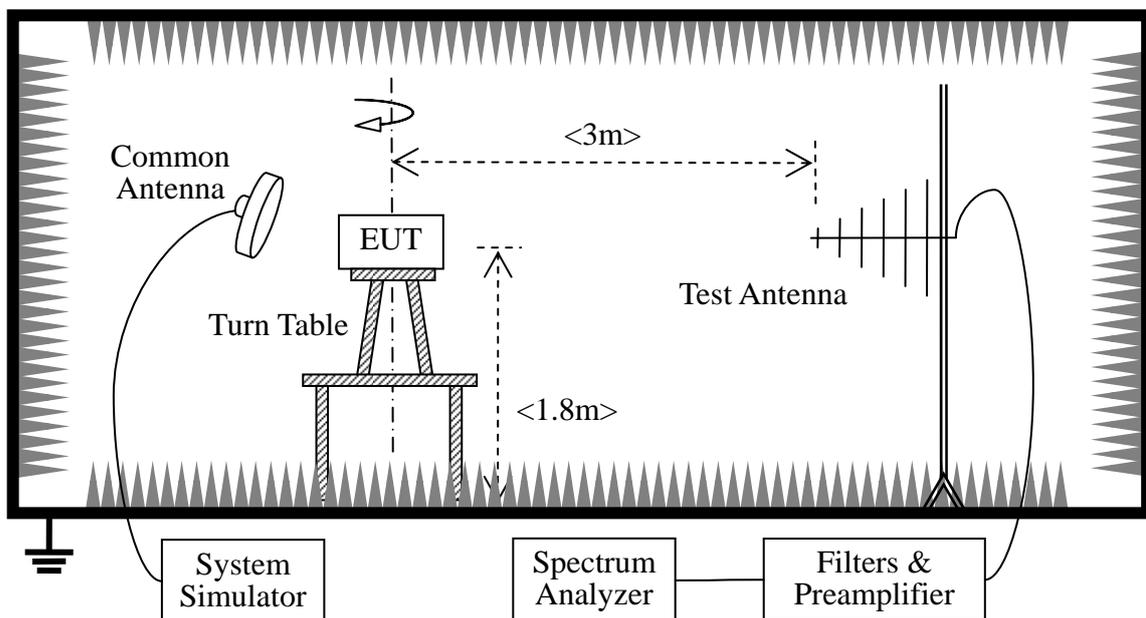

1. The resolution bandwidth of the Spectrum Analyzer is set to be comparable to the emission bandwidth of the transmitter, e.g. for GSM modulated signal (here used): $RBW=VBW=1MHz$, for CDMA modulated signal: $RBW=VBW=3MHz$.
2. The low, middle and the high channels are selected to perform tests respectively.
3. Employ the bi-log Test Antenna as the test system receiving antenna; set the polarization of the Test Antenna to be the same as that of the EUT transmitting antenna.

Set the frequency range of the Spectrum Analyzer suitably to capture the waveform; actuate the Turn Table to turn from 0 degrees to 360 degrees to find the maximum reading via the Spectrum Analyzer, mark the peak; finally record the peak and the plot.

-Maximum RF output power: CDMA800 26.02dBm, EVDO 800 25.82dBm

- Step size (dB): 3dB

- Minimum RF power: CDMA800 0.2dBm, EVDO 800 0.2dBm

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	Agilent	E5515C	GB43130131	2012.05
Spectrum Analyzer	Agilent	E7405A	US44210471	2012.05
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2012.05
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2012.05
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2012.05

2.6.3 Test Result

The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested.

The substitution corrections are obtained as described below:

$$A_{\text{SUBST}} = P_{\text{SUBST_TX}} - P_{\text{SUBST_RX}} - L_{\text{SUBST_CABLES}} + G_{\text{SUBST_TX_ANT}}$$

$$A_{\text{TOT}} = L_{\text{CABLES}} + A_{\text{SUBST}}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain.

$P_{\text{SUBST_TX}}$ is signal generator level,

$P_{\text{SUBST_RX}}$ is receiver level,

$L_{\text{SUBST_CABLES}}$ is cable losses including TX cable,

$G_{\text{SUBST_TX_ANT}}$ is substitution antenna gain.

A_{TOT} is total correction factor including cable loss and substitution correction


During the test, the data of A_{TOT} was added in the Test Spectrum Analyze, so Spectrum Analyze reading is the final values which contain the data of A_{TOT} .

1. Test Verdict:


No.	Channel	Frequency (MHz)	Measured ERP		Limit	
			dBm	W	dBm	W
CDMA 800MHz	1013	824.7	27.55	0.56885	38.5	7
	384	836.52	27.59	0.57412		
	777	848.31	27.61	0.57677		

No.	Channel	Frequency (MHz)	Measured EIRP		Limit	
			dBm	W	dBm	W
EVDO 800MHz	1013	824.7	26.96	0.49659	38.5	7
	384	836.52	26.71	0.46881		
	777	848.31	27.07	0.50933		

2. Test Plots:

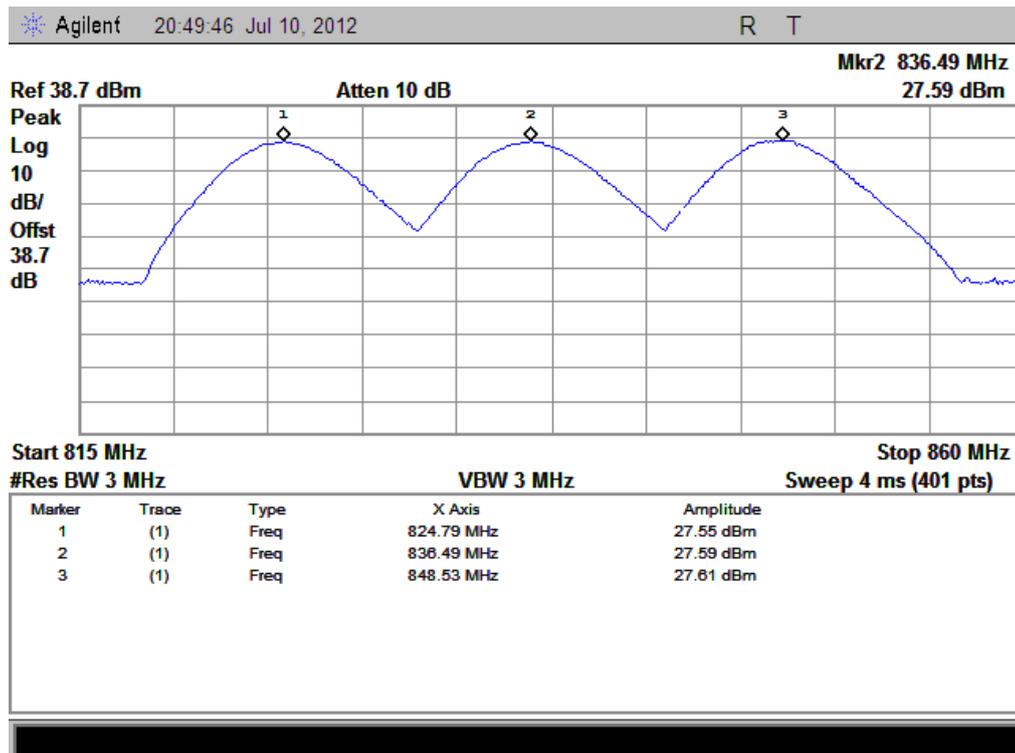

(Plot A: CDMA 800MHz Channel = 1013,384, 777)

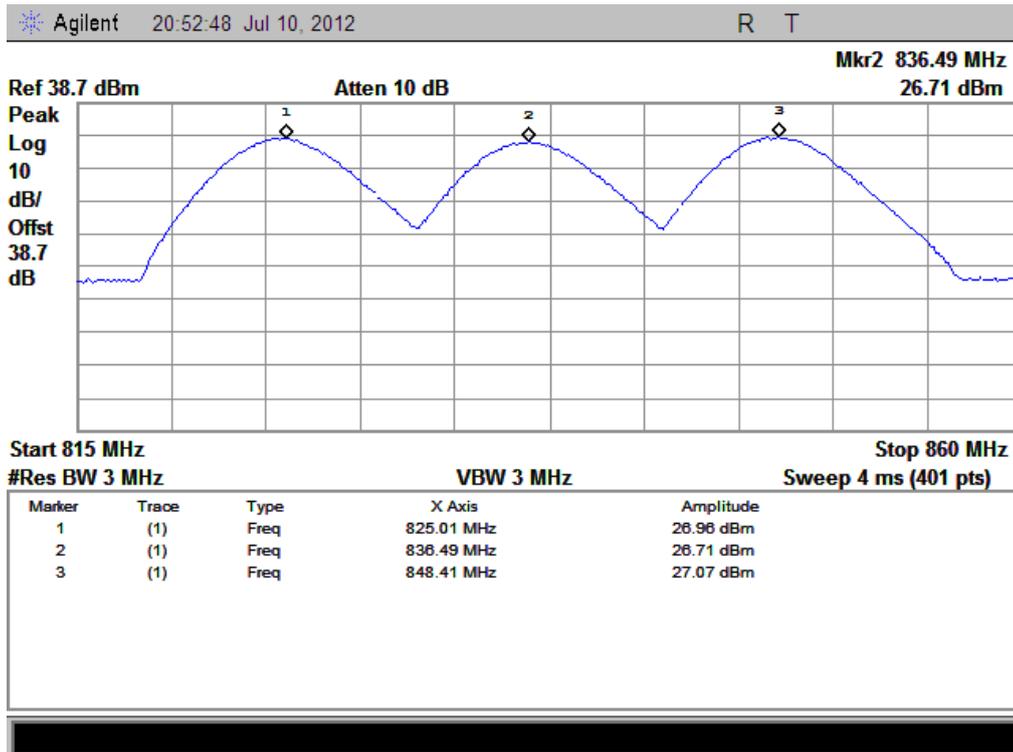

(Plot B: EVDO 800MHz Channel = 1013,384, 777)

2.7 Radiated Out of Band Emissions

2.7.1 Requirement

According to FCC section 2.1053, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

2.7.2 Test Description

See section 2.6.2 of this report.

Note: when doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

2.7.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.

1. Test Verdict:


Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)		Refer to Plot	Limit (dBm)	Verdict
			Test Antenna Horizontal	Test Antenna Vertical			
CDMA 800MHz	1013	1649	< -25	< -25	Plot A.1/A.2	-13	PASS
	384	1673	< -25	< -25	Plot B.1/B.2		PASS
	777	1696	< -25	< -25	Plot C.1/C.2		PASS
EVDO 800MHz	1013	1649	< -25	< -25	Plot D.1/D.2	-13	PASS
	384	1673	< -25	< -25	Plot E.1/E.2		PASS
	777	1696	< -25	< -25	Plot F.1/F.2		PASS

2. Test Plots for the Whole Measurement Frequency Range:

Note: the power of the EUT transmitting frequency should be ignored.




(Plot A.1: CDMA 800MHz Channel = 1013, Test Antenna Horizontal)

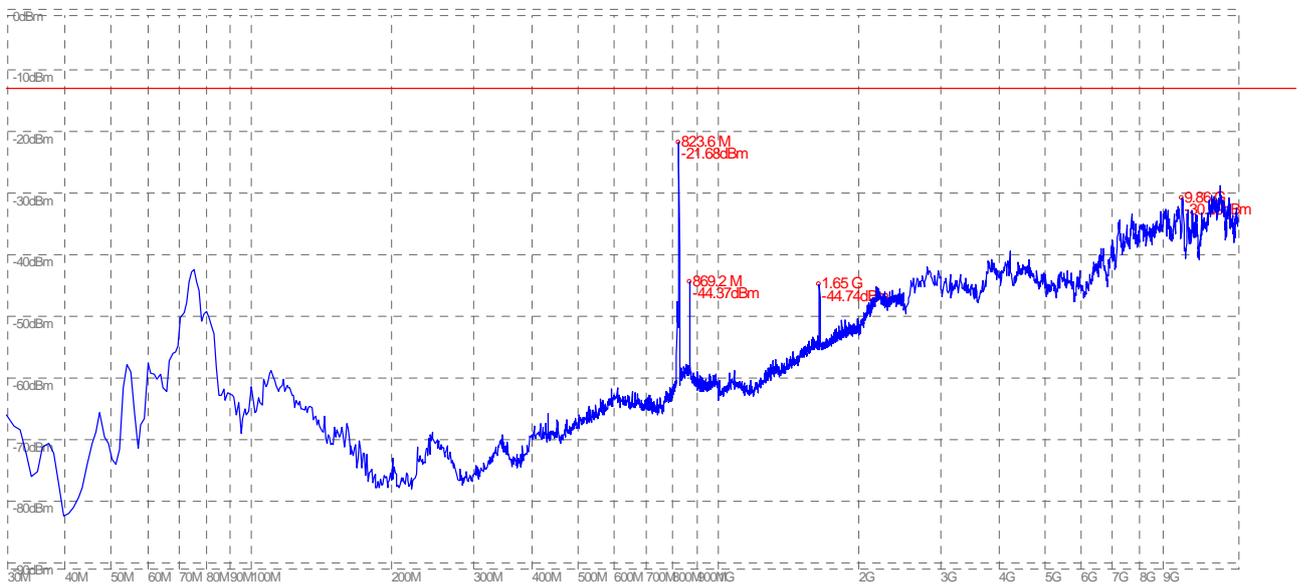


(Plot A.2: CDMA 800MHz Channel = 1013, Test Antenna Vertical)



(Plot B.1: CDMA 800MHz Channel = 384, Test Antenna Horizontal)

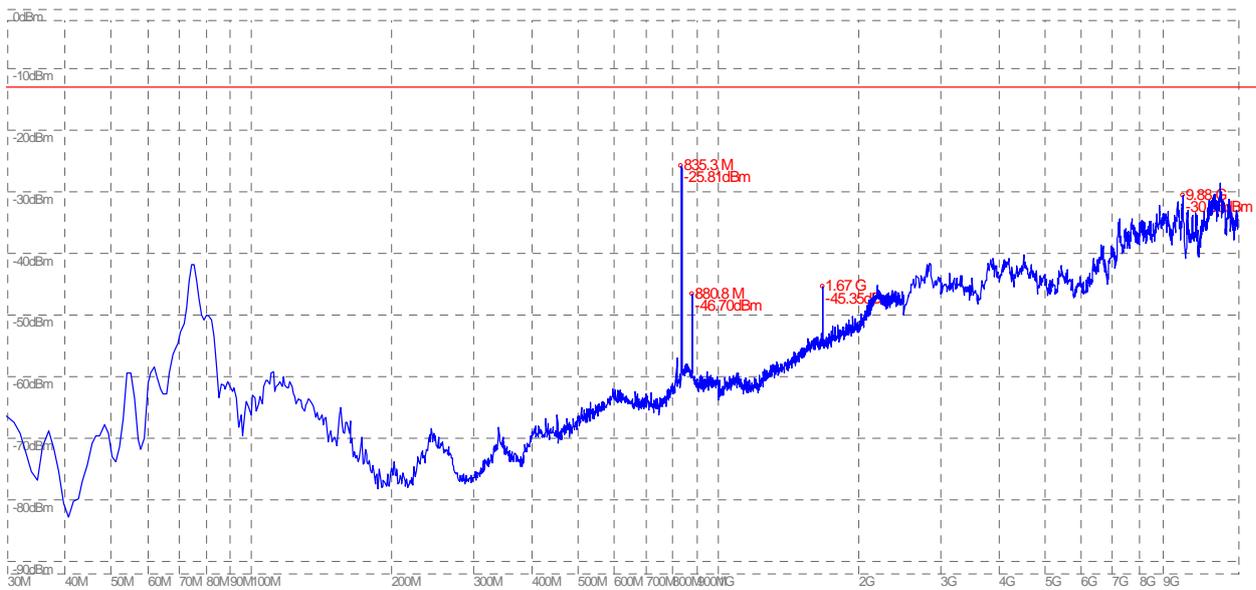

(Plot B.2: CDMA 800MHz Channel = 384, Test Antenna Vertical)

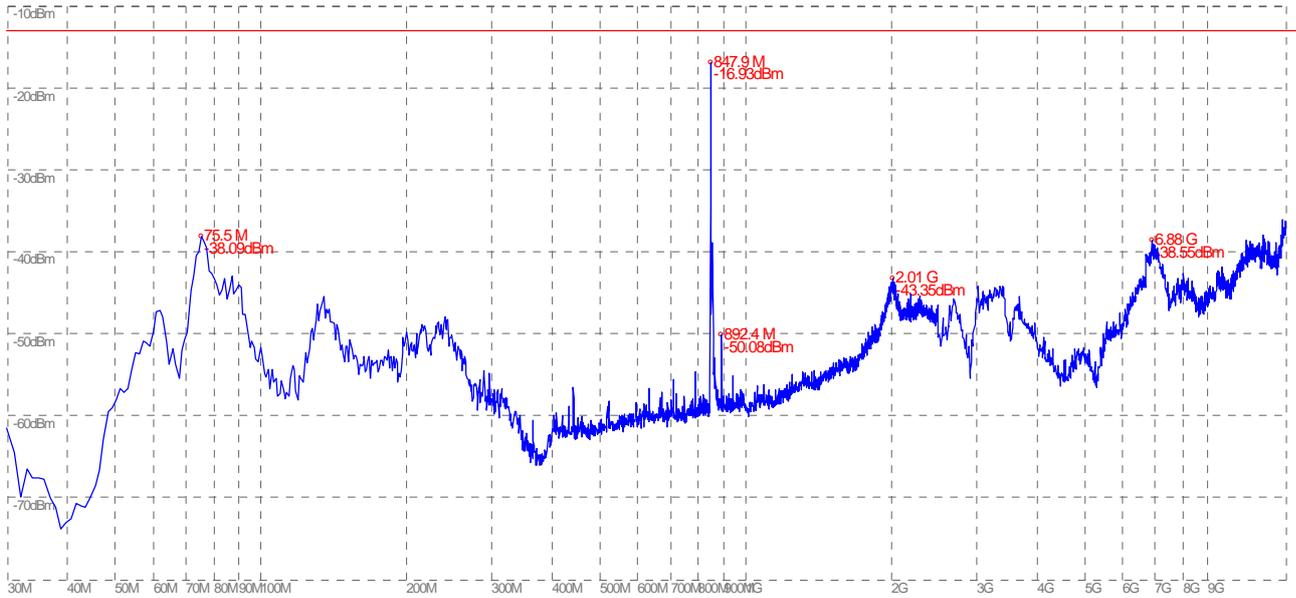

(Plot C.1: CDMA 800MHz Channel = 777, Test Antenna Horizontal)



(Plot C.2: CDMA 800MHz Channel = 777, Test Antenna Vertical)



(Plot D.1: EVDO 800MHz Channel = 1013, Test Antenna Horizontal)



(Plot D.2: EVDO 800MHz Channel = 1013, Test Antenna Vertical)




(Plot E.1: EVDO 800MHz Channel = 384, Test Antenna Horizontal)



(Plot E.2: EVDO 800MHz Channel = 384, Test Antenna Vertical)



(Plot F.1: EVDO 800MHz Channel = 777, Test Antenna Horizontal)

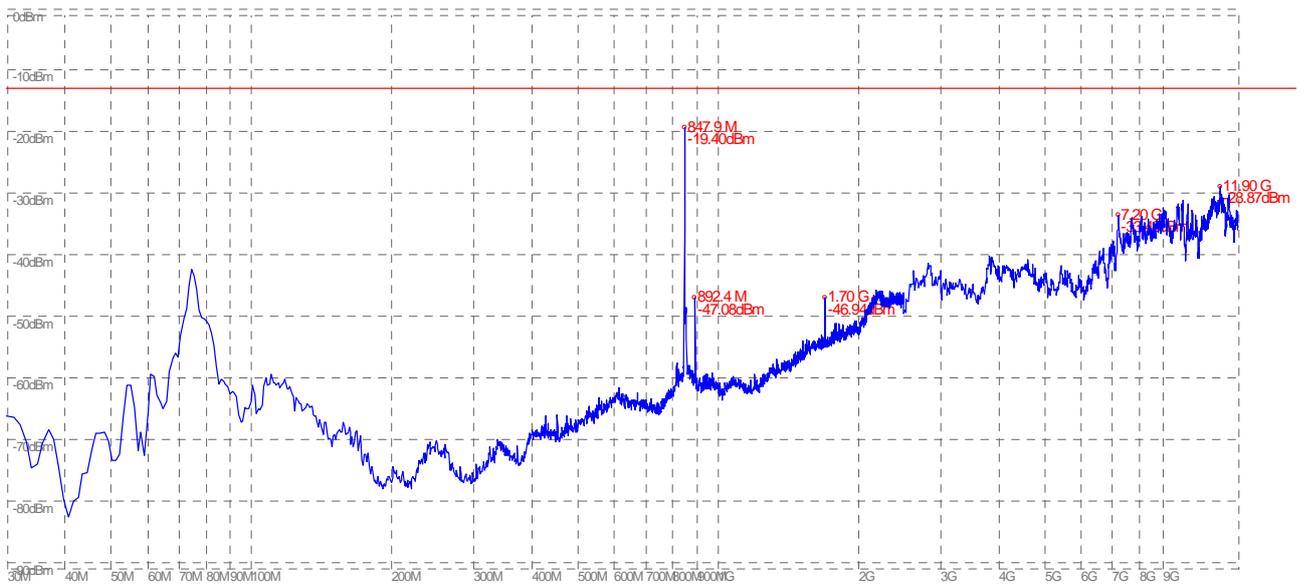

(Plot F.2: EVDO 800MHz Channel = 777, Test Antenna Vertical)

** END OF REPORT **