

FCC SAR Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : Tablet
BRAND NAME : ZTE
MODEL NAME : Smart Tab 7
FCC ID : Q78-V71A
STANDARD : FCC 47 CFR Part 2 (2.1093)
IEEE C95.1-1991
IEEE 1528-2003
FCC OET Bulletin 65 Supplement C (Edition 01-01)

The product was received on Aug. 18, 2011 and completely tested on Sep. 02, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



Table of Contents

Revision History.....	3
1. Statement of Compliance	4
2 Administration Data.....	5
2.1 Testing Laboratory	5
2.2 Applicant.....	5
2.3 Manufacturer	5
2.4 Application Details	5
3 General Information.....	6
3.1 Description of Device Under Test (DUT)	6
3.2 Product Photos	7
3.3 Applied Standards	7
3.4 Device Category and SAR Limits	7
3.5 Test Conditions	7
3.5.1 Ambient Condition	7
3.5.2 Test Configuration	7
4 Specific Absorption Rate (SAR).....	10
4.1 Introduction.....	10
4.2 SAR Definition	10
5 SAR Measurement System.....	11
5.1 E-Field Probe.....	12
5.1.1 E-Field Probe Specification	12
5.1.2 E-Field Probe Calibration.....	13
5.2 Data Acquisition Electronics (DAE).....	13
5.3 Robot.....	13
5.4 Measurement Server	14
5.5 Phantom	15
5.6 Device Holder	16
5.7 Data Storage and Evaluation.....	18
5.7.1 Data Storage	18
5.7.2 Data Evaluation	18
5.8 Test Equipment List	20
6 Tissue Simulating Liquids.....	21
7 Uncertainty Assessment	24
8 SAR Measurement Evaluation	27
8.1 Purpose of System Performance check	27
8.2 System Setup	27
8.3 Validation Results	28
9 DUT Testing Position.....	29
10 Measurement Procedures	30
10.1 Spatial Peak SAR Evaluation	30
10.2 Area & Zoom Scan Procedures	31
10.3 Volume Scan Procedures	31
10.4 SAR Averaged Methods	31
10.5 Power Drift Monitoring	31
11 SAR Test Configuration.....	32
11.1 Exposure Position Consideration.....	32
11.2 Simultaneous Transmission Consideration.....	33
12 SAR Test Results	34
12.1 Conducted Power (Unit: dBm).....	34
12.2 Test Records for Body SAR Test	39
12.3 Simultaneous Transmission Analysis	41
13 References.....	42

Appendix A. Plots of System Performance Check

Appendix B. Plots of SAR Measurement

Appendix C. DASY Calibration Certificate

Appendix D. Product Photos

Appendix E. Test Setup Photos

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA181807	Rev. 01	Initial issue of report	Sep. 04, 2011
FA181807	Rev. 02	1. Add notes for edge/surface test requirement per KDB 447498, at page 32. 2. Insert power reduction level column at page 35. 3. Insert power drift column at page 39,40	Sep. 15, 2011

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **ZTE CORPORATION Tablet, ZTE Smart Tab 7**, are as follows (with expanded uncertainty 21.4 % for 300 MHz to 3 GHz, and 25.2% for 3 GHz to 6 GHz).

< Test distance 0 cm to the phantom >

Band	Position	SAR _{1g} (W/kg)
GSM850	Body(0cm Gap)	0.918
GSM1900	Body(0cm Gap)	1.02
802.11 b/g/n, 2.4GHz	Body(0cm Gap)	0.755
802.11 a/n, 5GHz	Body(0cm Gap)	1.15
Bluetooth	Body(0cm Gap)	N/A

Note: BT SAR not tested due to that average power is below the FCC procedure thresholds, per KDB 447498.

<Test distance 0.4 cm to the phantom>

Band	Position	SAR _{1g} (W/kg)
GSM850	Body(0.4cm Gap)	0.754
GSM1900	Body(0.4cm Gap)	1.05

Note: The test records with distance 0.4 cm to the phantom are provided for verifying the SAR compliance when user is away from DUT and proximity sensor deactivated. 0.4 cm test results are for confirming operation of the power reduction scheme, and are not applicable for compliance demonstration for the FCC tablet PC SAR test procedures

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1991, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC OET Bulletin 65 Supplement C (Edition 01-01).

2 Administration Data

2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958

2.2 Applicant

Company Name	ZTE CORPORATION
Address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

2.3 Manufacturer

Company Name	ZTE CORPORATION
Address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

2.4 Application Details

Date of Receipt of Application	Aug. 18, 2011
Date of Start during the Test	Aug. 30, 2011
Date of End during the Test	Sep. 02, 2011

3 General Information

3.1 Description of Device Under Test (DUT)

Product Feature & Specification	
DUT Type	Tablet
Brand Name	ZTE
Model Name	Smart Tab 7
FCC ID	Q78-V71A
Tx Frequency	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~ 1910 MHz 802.11b/g/n : 2400 MHz ~ 2483.5 MHz 802.11a/n : 5150 MHz ~ 5250 MHz; 5725 MHz ~ 5825 MHz Bluetooth : 2400 MHz ~ 2483.5 MHz
Rx Frequency	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz 802.11b/g/n : 2400 MHz ~ 2483.5 MHz 802.11a/n : 5150 MHz ~ 5250 MHz; 5725 MHz ~ 5825 MHz Bluetooth : 2400 MHz ~ 2483.5 MHz
Maximum Output Power to Antenna	GSM850 : 32.98 dBm GSM1900 : 28.75 dBm 802.11b : 13.71 dBm 802.11g : 13.78 dBm 802.11n (BW 20MHz) (2.4GHz) : 14.87 dBm 802.11a : 11.75 dBm 802.11n (BW 20MHz) (5GHz) : 11.63 dBm Bluetooth: 2.64 dBm
Antenna Type	WWAN : Fixed Internal Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna
HW Version	110602
SW Version	SmartTab7-MSM8260-V02a-Aug212011-Vodafone-DE
Type of Modulation	GPRS : GMSK EDGE: GMSK/8PSK 802.11b : DSSS (BPSK / QPSK / CCK) 802.11a/g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
DUT Stage	Identical Prototype

Remark:

1. GSM Voice call not supported. DTM not supported.
2. The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

3.2 Product Photos

Please refer to Appendix D

3.3 Applied Standards

The Specific Absorption Rate (SAR) testing specification, method and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- IEEE C95.1-1991
- IEEE 1528-2003
- FCC OET Bulletin 65 Supplement C (Edition 01-01)
- FCC KDB 616217 D03 v01
- FCC KDB 941225 D03 v01
- FCC KDB 447498 D01 v04
- FCC KDB 248227 D01 v01r02

3.4 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3.5 Test Conditions

3.5.1 Ambient Condition

Ambient Temperature	20 to 24 °C
Humidity	< 60 %

3.5.2 Test Configuration

The device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the DUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of DUT. The DUT was set from the emulator to radiate maximum output power during all tests.

For WWAN SAR testing, the DUT is in GSM or GPRS or EDGE link mode.

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal. This RF signal utilized in SAR measurement has almost 100% duty cycle and its crest factor is 1.

In general, the crest factor is 8.3 for GSM and GPRS/EDGE multi-slot class 8, 4 for GPRS/EDGE multi-slot class 10, 2 for GPRS/EDGE multi-slot class 12, and 1 for HSDPA/HSUPA.

The DUT implements power reduction scheme for SAR compliance, for specific device configuration and orientations, as described below. The complete description of the implementation and functionality is provided in the “Technical Description” exhibit.

Power reduction applied for each wireless mode and orientation


Display Orientation / Wireless Mode	GPRS/EDGE (GMSK) 850	GPRS/EDGE (GMSK) 1900	EDGE (8PSK) 1900	802.11 a/n 5GHz
Secondary Landscape	#	#	#	
Primary Landscape	#	#	#	##
Secondary Portrait	##	##	##	
Primary Portrait	#	#	#	
# Reduced maximum limit applied only by activation of proximity sensor. ## Reduced maximum limit applied by default.				

Remark:

- EDGE 850 (8PSK) output power is not reduced for SAR compliance.
- WLAN 2.4GHz, BT output power is not reduced for SAR compliance

Power reduction target specifications:

Mode(s) of Operation	GPRS/EDGE (GMSK) 850	GPRS/EDGE (GMSK) 1900	EDGE (8PSK) 1900	802.11 a/n 5GHz
Target Reduction Level	5 dB	5 dB	2 dB	3 dB
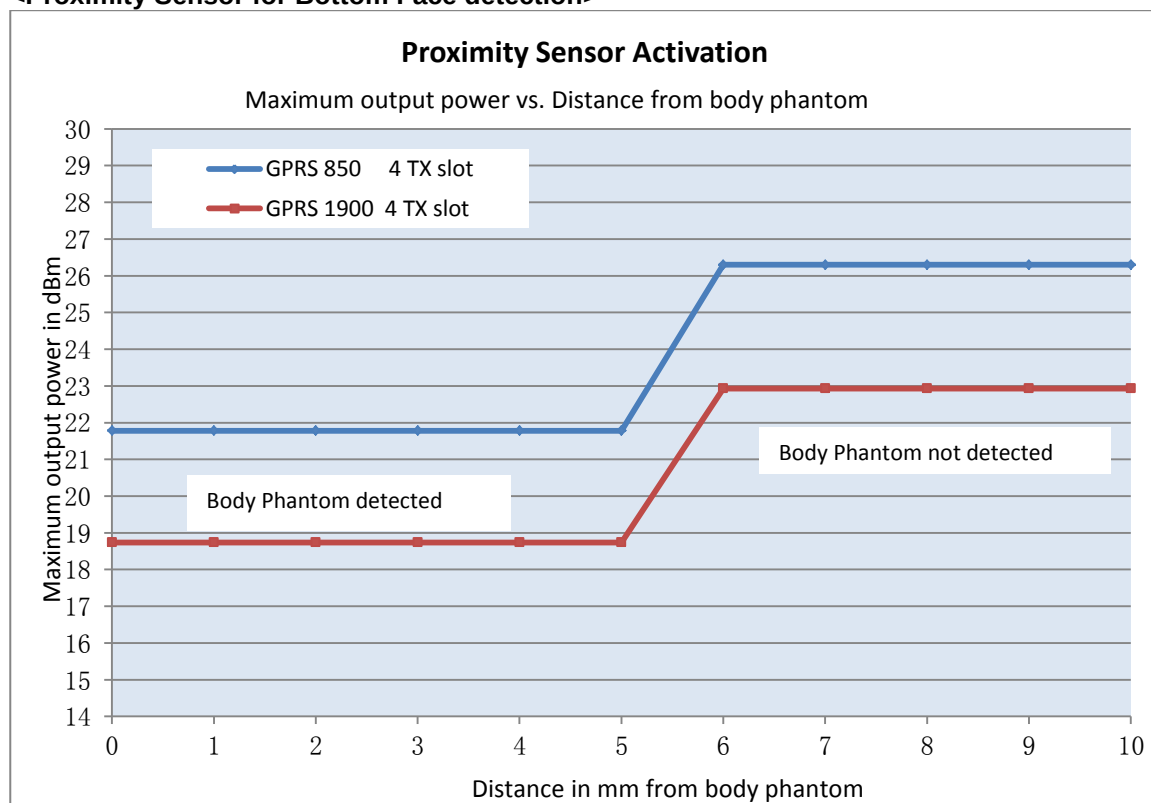
<Proximity Sensor for Bottom Face detection>

Remark:

1. GPRS 850 class 12, CH189. Full power: 26.3dBm, Reduced power: 21.78dBm. The power reduction level is 4.52dB.
2. GPRS 1900 class 12, CH 661. Full power: 22.93dBm, Reduced power: 18.74dBm. The power reduction level is 4.19dB.

4 Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5 SAR Measurement System

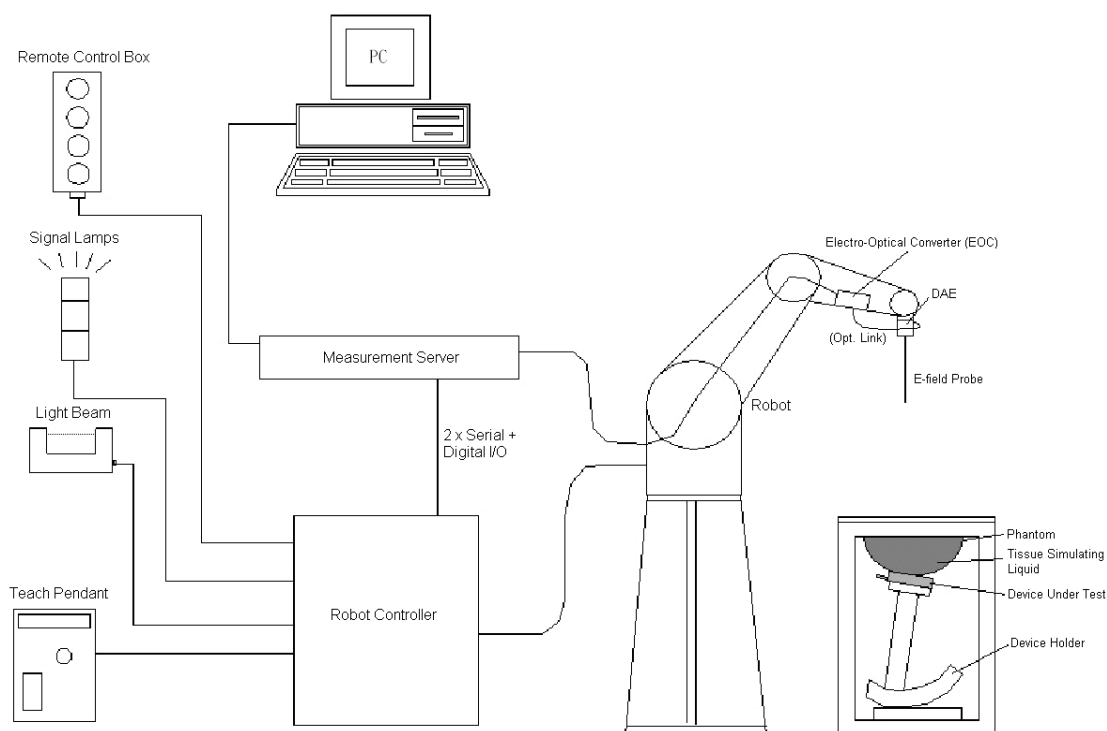


Fig 5.1 SPEAG DASY4 or DASY5 System Configurations

The DASY4 or DASY5 system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY4 or DASY5 software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Some of the components are described in details in the following sub-sections.

5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

5.1.1 E-Field Probe Specification

<ET3DV6 Probe >

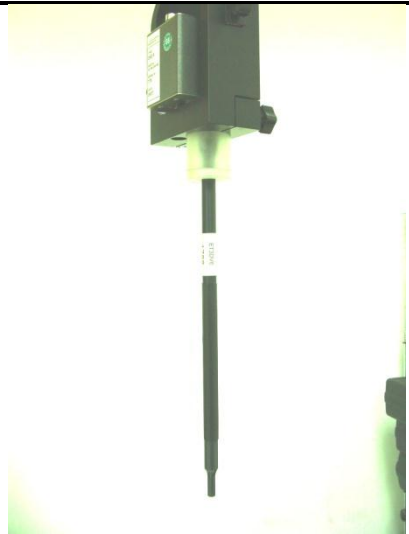
Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 3 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm	

Fig 5.2 Photo of ET3DV6

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

Fig 5.3 Photo of EX3DV4

5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.4 Photo of DAE

5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.5 Photo of DASY5

5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.1 Photo of Server for DASY5

5.5 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom



Fig 5.2 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)
Filling Volume	Approx. 30 liters
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm

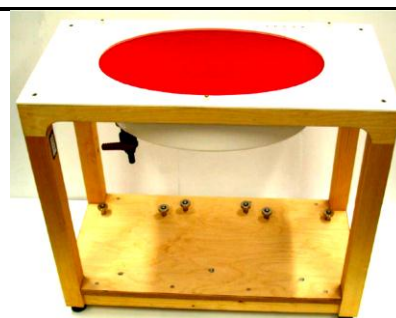


Fig 5.3 Photo of ELI4 Phantom

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

5.6 Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.4 Device Holder

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

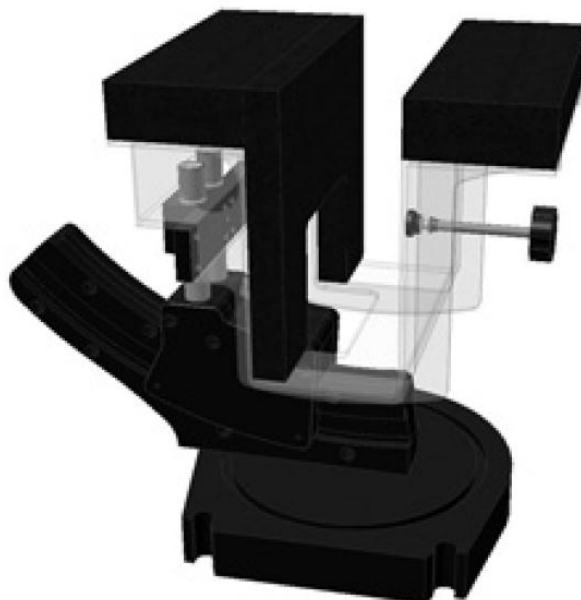


Fig 5.5 Laptop Extension Kit

5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lossy media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	$\text{Norm}_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	ConvF_i
	- Diode compression point	dcp_i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 U_i = input signal of channel i, (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

5.8 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Data Acquisition Electronics	DAE4	1210	Nov. 18, 2010	Nov. 17, 2011
SPEAG	Data Acquisition Electronics	DAE3	577	Jun. 20, 2011	Jun. 19, 2012
SPEAG	835MHz System Validation Kit	D835V2	4d091	Nov. 23, 2009	Nov. 21, 2011
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	Nov. 24, 2009	Nov. 22, 2011
SPEAG	2450MHz System Validation Kit	D2450V2	840	Mar. 18, 2010	Mar. 17, 2012
SPEAG	5GHz System Validation Kit	D5GHzV2	1040	Jun. 21, 2011	Jun. 20, 2013
SPEAG	Dosimetric E-Field Probe	ET3DV6	1788	Sep. 21, 2010	Sep. 20, 2011
SPEAG	Dosimetric E-Field Probe	EX3DV4	3578	Jun. 21, 2011	Jun. 20, 2012
SPEAG	ELI4 Phantom	QD OVA 001 BB	1079	NCR	NCR
Agilent	ENA Series Network Analyzer	E5071C	MY46106933	Jul. 06, 2010	Jul. 05, 2011
Agilent	Wireless Communication Test Set	E5515C	MY48367160	Feb. 16, 2010	Feb. 15, 2012
Agilent	Dielectric Probe Kit	85070E	MY44300475	NCR	NCR
R&S	Spectrum Analyzer	FSP30	101400	Jun. 02, 2011	Jun. 01, 2012
Agilent	Base Station	E5515C	GB47050646	Sep. 03, 2010	Sep. 02, 2011
AR	Amplifier	551G4	333096	NCR	NCR
R&S	Signal Generator	SMR40	100455	Jan. 06, 2011	Jan. 05, 2012

Table 5.1 Test Equipment List

Note: The calibration certificate of DASY can be referred to appendix C of this report. Referring to KDB 450824, the justification of dipole extended calibration is needed beyond 1 year. The justification data of dipole D835V2, SN: 4d091, D1900V2, SN: 5d118, D2450V2, SN: 840, can be found in appendix C.

6 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.

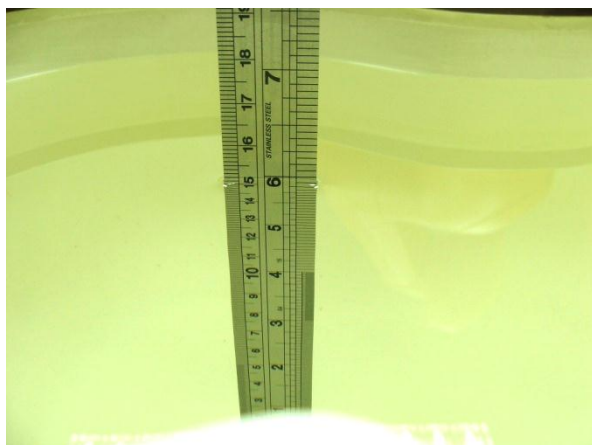


Fig 6.1 Photo of Liquid Height for Head SAR



Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

Table 6.1 Recipes of Tissue Simulating Liquid

The following table gives the targets for tissue simulating liquid.

Frequency (MHz)	Liquid Type	Conductivity (σ)	$\pm 5\%$ Range	Permittivity (ϵ_r)	$\pm 5\%$ Range
835	Head	0.90	0.86 ~ 0.95	41.5	39.4 ~ 43.6
900	Head	0.97	0.92 ~ 1.02	41.5	39.4 ~ 43.6
1800, 1900, 2000	Head	1.40	1.33 ~ 1.47	40.0	38.0 ~ 42.0
2450	Head	1.80	1.71 ~ 1.89	39.2	37.2 ~ 41.2
835	Body	0.97	0.92 ~ 1.02	55.2	52.4 ~ 58.0
900	Body	1.05	1.00 ~ 1.10	55.0	52.3 ~ 57.8
1800, 1900, 2000	Body	1.52	1.44 ~ 1.60	53.3	50.6 ~ 56.0
2450	Body	1.95	1.85 ~ 2.05	52.7	50.1 ~ 55.3
5200	Body	5.30	5.04 ~ 5.57	49.0	46.6 ~ 51.5
5500	Body	5.65	5.37 ~ 5.93	48.6	46.2 ~ 51.0
5800	Body	6.00	5.70 ~ 6.30	48.2	45.8 ~ 50.6

Table 6.2 Targets of Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Type	Temperature ($^{\circ}\text{C}$)	Conductivity (σ)	Permittivity (ϵ_r)	Measurement Date
835	Body	21.3	0.976	54.4	Aug. 30, 2011
1900	Body	21.3	1.51	53.9	Aug. 30, 2011
2450	Body	21.5	1.99	54.3	Aug. 31, 2011
5200	Body	21.6	5.297	49.185	Sep. 02, 2011
5800	Body	21.6	6.127	47.784	Sep. 02, 2011

Table 6.3 Measuring Results for Simulating Liquid

Frequency (MHz)	Liquid Type	Conductivity (σ)	Permittivity (ϵ_r)	Measurement Date
824.2	Body	0.966	54.5	Aug. 30, 2011
836.4	Body	0.978	54.4	Aug. 30, 2011
848.8	Body	0.989	54.3	Aug. 30, 2011
1850.2	Body	1.46	54.03	Aug. 30, 2011
1880	Body	1.49	54.00	Aug. 30, 2011
1909.8	Body	1.52	53.9	Aug. 30, 2011
2412	Body	1.92	54.4	Aug. 31, 2011
5180	Body	5.268	49.23	Sep. 02, 2011
5200	Body	5.297	49.185	Sep. 02, 2011
5220	Body	5.33	49.157	Sep. 02, 2011
5240	Body	5.363	49.129	Sep. 02, 2011
5745	Body	6.065	47.996	Sep. 02, 2011
5765	Body	6.087	47.925	Sep. 02, 2011
5785	Body	6.11	47.844	Sep. 02, 2011
5805	Body	6.134	47.763	Sep. 02, 2011
5825	Body	6.166	47.679	Sep. 02, 2011

Table 6.4 Low/mid/High channel for liquid validation

7 Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 7.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Table 7.1 Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is showed in Table 7.2.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty (1g)
Measurement System					
Probe Calibration	5.5	Normal	1	1	± 5.5 %
Axial Isotropy	4.7	Rectangular	√3	0.7	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	± 0.6 %
Linearity	4.7	Rectangular	√3	1	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	± 0.6 %
Readout Electronics	0.3	Normal	1	1	± 0.3 %
Response Time	0.8	Rectangular	√3	1	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	± 0.6 %
Test Sample Related					
Device Positioning	2.9	Normal	1	1	± 2.9 %
Device Holder	3.6	Normal	1	1	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	± 2.9 %
Phantom and Setup					
Phantom Uncertainty	4.0	Rectangular	√3	1	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	± 1.8 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	± 1.6 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	± 1.7 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	± 1.5 %
Combined Standard Uncertainty					± 10.7 %
Coverage Factor for 95 %					K = 2
Expanded Uncertainty					± 21.4 %

Table 7.2 Uncertainty Budget of DASY for frequency range 300 MHz to 3 GHz

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty (1g)
Measurement System					
Probe Calibration	6.55	Normal	1	1	± 6.55 %
Axial Isotropy	4.7	Rectangular	$\sqrt{3}$	0.7	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	$\sqrt{3}$	0.7	± 3.9 %
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %
Linearity	4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %
System Detection Limits	1.0	Rectangular	$\sqrt{3}$	1	± 0.6 %
Readout Electronics	0.3	Normal	1	1	± 0.3 %
Response Time	0.8	Rectangular	$\sqrt{3}$	1	± 0.5 %
Integration Time	2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %
RF Ambient Noise	3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	± 0.5 %
Probe Positioning	9.9	Rectangular	$\sqrt{3}$	1	± 5.7 %
Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %
Test Sample Related					
Device Positioning	2.9	Normal	1	1	± 2.9 %
Device Holder	3.6	Normal	1	1	± 3.6 %
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %
Phantom and Setup					
Phantom Uncertainty	4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.43	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.43	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.49	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.49	± 1.2 %
Combined Standard Uncertainty					± 12.6 %
Coverage Factor for 95 %					K = 2
Expanded Uncertainty					± 25.2 %

Table 7.3 Uncertainty Budget of DASY for frequency range 3 GHz to 6 GHz

8 SAR Measurement Evaluation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

8.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

8.2 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

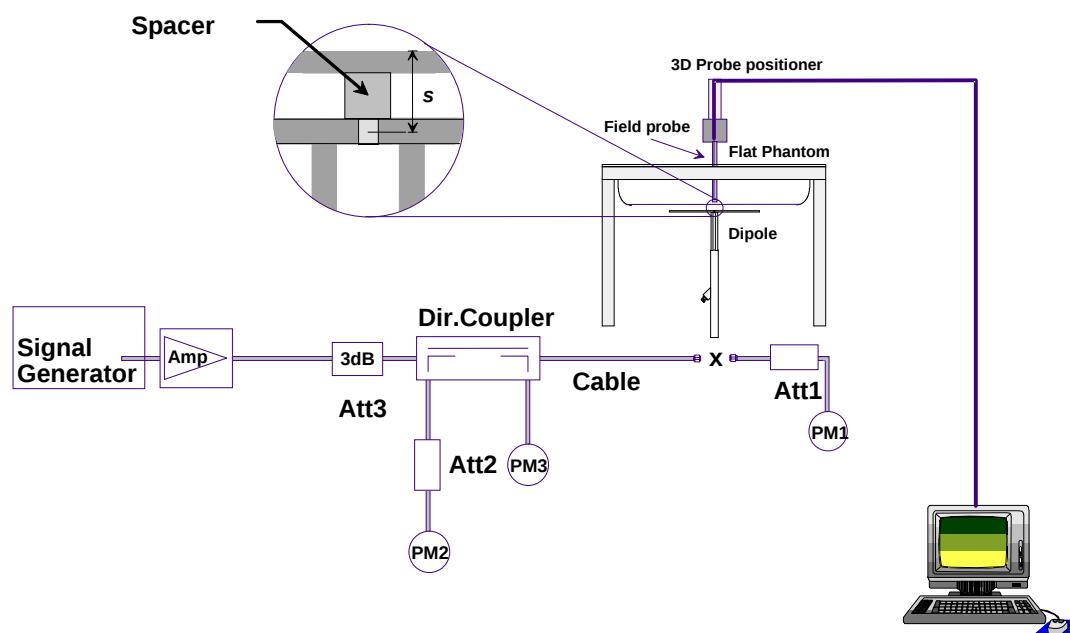


Fig 8.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected.



Fig 8.2 Photo of Dipole Setup

8.3 Validation Results

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %. Table 8.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Measurement Date	Frequency (MHz)	Targeted SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	Normalized SAR _{1g} (W/kg)	Deviation (%)
Aug. 30, 2011	835	9.800	2.490	9.96	1.63
Aug. 30, 2011	1900	39.600	9.770	39.08	-1.31
Aug. 31, 2011	2450	52.100	12.800	51.20	-1.73
Sep. 02, 2011	5200	76.000	20.300	81.20	6.84
Sep. 02, 2011	5800	75.400	20.000	80.00	6.10

Table 8.1 Target and Measurement SAR after Normalized

9 DUT Testing Position

This DUT was tested in four different positions. They are bottom face of tablet PC, Primary Landscape, Secondary Landscape, and Secondary Portrait. In these positions, the surface of DUT is touching with phantom 0 or 0.4 cm gap. Please refer to Appendix E for the test setup photos.

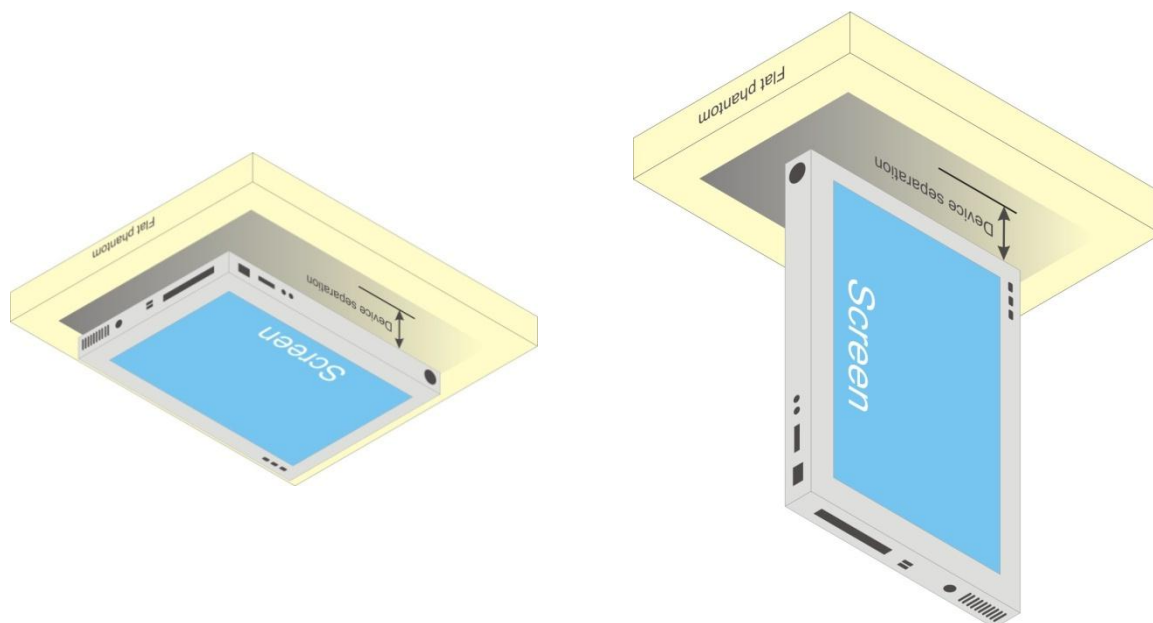


Fig 9.1 Illustration for Lap-touching Position

10 Measurement Procedures

The measurement procedures are as follows:

- (a) For WWAN function, link DUT with base station emulator in highest power channel
- (b) Set base station emulator to allow DUT to radiate maximum output power
- (c) For WLAN function, using engineering software to transmit RF power continuously (continuous Tx) in the middle channel
- (d) Measure output power through RF cable and power meter
- (e) Place the DUT in the positions described in the last section
- (f) Set scan area, grid size and other setting on the DASY software
- (g) Taking data for the middle channel on each testing position
- (h) Find out the largest SAR result on these testing positions of each band
- (i) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

10.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface

- (f) Calculation of the averaged SAR within masses of 1g and 10g

10.2 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

10.3 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the DUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

10.4 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.


Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

10.5 Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

11 SAR Test Configuration

11.1 Exposure Position Consideration

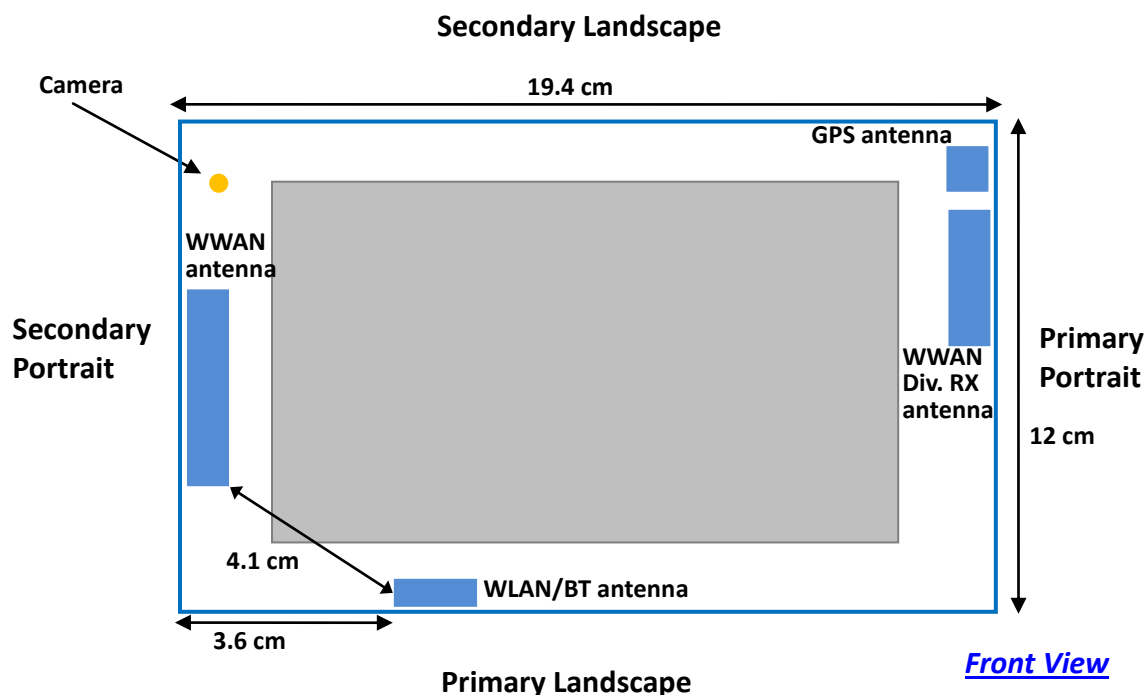

Sides for SAR tests; Tablet (> 20cm diagonal)						
Exposure Position	Bottom Face	Front Face	Secondary Landscape	Primary Landscape	Primary Portrait	Secondary Portrait
GPRS/EDGE	0mm, 4mm	x	0mm	0mm	x	0mm
WLAN 11 b/g/n	0mm	x	x	0mm	x	0mm
WLAN 11a/n	0mm	x	x	0mm	x	0mm

Note:

1. Per KDB 447498, WWAN SAR should be evaluated at Bottom Face. WWAN SAR should also be evaluated at Secondary-Landscape/Primary-Landscape/Secondary-Portrait positions due to the WWAN antenna to the user at those exposure positions is < 5cm. Per KDB 447498, Front Face and Primary-Portrait (antenna to the user >5cm) positions SAR is excluded.
2. Per KDB 447498, WLAN SAR should be evaluated at Bottom Face. WLAN SAR should also be evaluated at Primary-Landscape/Secondary-Portrait positions due to the WLAN antenna to the user at those exposure positions is < 5cm. Per KDB 447498, Front Face and Primary-Portrait/Secondary-Landscape (antenna to the user >5cm) positions SAR is excluded.
3. WWAN antenna to both Landscape position distance is < 5cm, thus SAR is evaluated.
4. Per KDB 447498, since Bluetooth average power is less than 60/f (13.8dBm), standalone SAR is excluded.

5. Per KDB 648474, since Bluetooth to WWAN antenna distance is > 2.5cm, and Bluetooth power is less than Pref (10.8dBm), therefore simultaneous SAR evaluation is excluded.
6. WLAN and Bluetooth share the same antenna and cannot transmit simultaneously; therefore simultaneous SAR evaluation is excluded.

11.2 Simultaneous Transmission Consideration

Simultaneous Transmission						
Exposure Position	Bottom Face	Front Face	Secondary Landscape	Primary Landscape	Primary Portrait	Secondary Portrait
GPRS/EDGE - With power reduction at Bottom Face position	0mm	x	x	0mm	x	x
WLAN 11 a/b/g/n	0mm	x	x	0mm	x	x
GPRS/EDGE Full Power	4mm	x	x	x	x	x
WLAN 11 a/b/g/n	0mm	x	x	x	x	x

Note:

For simultaneous SAR evaluation at Bottom Face, 4mm distance, since WLAN SAR value 0mm will be worse than 4mm data; therefore 0mm WLAN SAR data is used here.

12 SAR Test Results

12.1 Conducted Power (Unit: dBm)

< GPRS/EDGE – Full power >

GSM/GPRS/EDGE Burst Average Power						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS 8 (1 Uplink) CS1	32.88	32.95	32.98	28.65	28.75	28.60
GPRS 10 (2 Uplink) CS1	29.96	29.97	29.96	25.40	25.51	25.35
GPRS 11 (3 Uplink) CS1	28.20	28.18	28.23	24.75	24.83	24.53
GPRS 12 (4 Uplink) CS1	26.72	26.30	26.44	22.83	22.93	23.10
EDGE 8 (GMSK, 1 Uplink) MCS1	32.89	32.94	32.96	28.64	28.74	28.59
EDGE 10 (GMSK, 2 Uplink) MCS1	29.95	29.97	29.90	25.43	25.55	25.38
EDGE 11 (GMSK, 3 Uplink) MCS1	27.73	28.04	28.08	24.61	24.73	24.47
EDGE 12 (GMSK, 4 Uplink) MCS1	26.80	26.86	26.85	22.86	22.95	23.10
EDGE 8 (8PSK, 1 Uplink) MCS9	26.40	26.43	26.52	24.71	24.79	24.84
EDGE 10 (8PSK, 2 Uplink) MCS9	24.23	24.25	24.34	23.56	23.64	23.68
EDGE 11 (8PSK, 3 Uplink) MCS9	22.09	22.10	22.15	21.50	21.56	21.56
EDGE 12 (8PSK, 4 Uplink) MCS9	21.48	21.47	21.50	20.85	20.74	20.68

Source-Based Time-Averaged Power						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS 8 (1 Uplink) CS1	23.88	23.95	23.98	19.65	19.75	19.60
GPRS 10 (2 Uplink) CS1	23.96	23.97	23.96	19.40	19.51	19.35
GPRS 11 (3 Uplink) CS1	23.94	23.92	23.97	20.49	20.57	20.27
GPRS 12 (4 Uplink) CS1	23.72	23.30	23.44	19.83	19.93	20.10
EDGE 8 (GMSK, 1 Uplink) MCS1	23.89	23.94	23.96	19.64	19.74	19.59
EDGE 10 (GMSK, 2 Uplink) MCS1	23.95	23.97	23.90	19.43	19.55	19.38
EDGE 11 (GMSK, 3 Uplink) MCS1	23.47	23.78	23.82	20.35	20.47	20.21
EDGE 12 (GMSK, 4 Uplink) MCS1	23.80	23.86	23.85	19.86	19.95	20.10
EDGE 8 (8PSK, 1 Uplink) MCS9	17.40	17.43	17.52	15.71	15.79	15.84
EDGE 10 (8PSK, 2 Uplink) MCS9	18.23	18.25	18.34	17.56	17.64	17.68
EDGE 11 (8PSK, 3 Uplink) MCS9	17.83	17.84	17.89	17.24	17.30	17.30
EDGE 12 (8PSK, 4 Uplink) MCS9	18.48	18.47	18.50	17.85	17.74	17.68

Remark:

The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time averaged power = Maximum burst averaged power (1 Uplink) - 9 dB

Source based time averaged power = Maximum burst averaged power (2 Uplink) - 6 dB

Source based time averaged power = Maximum burst averaged power (3 Uplink) - 4.26 dB

Source based time averaged power = Maximum burst averaged power (4 Uplink) - 3 dB

Note:

1. According to highest source-based time-average power, GPRS 850 class 8 and GPRS 1900 class 11 is used for SAR evaluation.
2. Per 2010/10 workshop, the maximum output power channel is used for SAR testing and for further SAR test reduction.
3. As in (2), Band-850 CH251 and Band-1900 CH661 are chosen.

<With Power Reduction: GPRS/EDGE 850, 1900>

GSM/GPRS/EDGE Burst Average Power												
Band	GSM850						GSM1900					
Channel	128		189		251		512		661		810	
Frequency (MHz)	824.2		836.4		848.8		1850.2		1880.0		1909.8	
	Output Power (dBm)	Reduction (dB)	Output Power (dBm)	Reduction (dB)	Output Power (dBm)	Reduction (dB)	Output Power (dBm)	Reduction (dB)	Output Power (dBm)	Reduction (dB)	Output Power (dBm)	Reduction (dB)
GPRS 8 (1 Uplink) CS1	28.59	4.29	28.72	4.23	28.75	4.23	25.58	3.07	25.73	3.02	25.31	3.29
GPRS 10 (2 Uplink) CS1	25.24	4.72	25.21	4.76	25.48	4.48	22.11	3.29	22.12	3.39	22.30	3.05
GPRS 11 (3 Uplink) CS1	23.23	4.97	23.40	4.78	23.41	4.82	19.70	5.05	19.74	5.09	19.79	4.74
GPRS 12 (4 Uplink) CS1	21.97	4.75	21.78	4.52	22.00	4.44	18.73	4.10	18.74	4.19	18.69	4.41
EDGE 8 (GMSK, 1 Uplink) MCS1	28.61	4.28	28.63	4.31	28.70	4.26	25.67	2.97	25.72	3.02	25.36	3.23
EDGE 10 (GMSK, 2 Uplink) MCS1	25.32	4.63	25.28	4.69	25.55	4.35	22.26	3.17	22.20	3.35	22.26	3.12
EDGE 11 (GMSK, 3 Uplink) MCS1	23.21	4.52	23.39	4.65	23.41	4.67	19.74	4.87	19.72	5.01	19.74	4.73
EDGE 12 (GMSK, 4 Uplink) MCS1	21.93	4.87	21.67	5.19	22.00	4.85	18.69	4.17	18.73	4.22	18.67	4.43
EDGE 8 (8PSK, 1 Uplink) MCS9	26.40	0.00	26.43	0.00	26.52	0.00	22.95	1.76	23.00	1.79	22.98	1.86
EDGE 10 (8PSK, 2 Uplink) MCS9	24.23	0.00	24.25	0.00	24.34	0.00	21.35	2.21	21.41	2.23	21.40	2.28
EDGE 11 (8PSK, 3 Uplink) MCS9	22.09	0.00	22.10	0.00	22.15	0.00	19.38	2.12	19.42	2.14	19.27	2.29
EDGE 12 (8PSK, 4 Uplink) MCS9	21.48	0.00	21.47	0.00	21.50	0.00	18.53	2.32	18.48	2.26	18.47	2.21

Source-Based Time-Averaged Power						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS 8 (1 Uplink) CS1	19.59	19.72	19.75	16.58	16.73	16.31
GPRS 10 (2 Uplink) CS1	19.24	19.21	19.48	16.11	16.12	16.30
GPRS 11 (3 Uplink) CS1	18.97	19.14	19.15	15.44	15.48	15.53
GPRS 12 (4 Uplink) CS1	18.97	18.78	19.00	15.73	15.74	15.69
EDGE 8 (GMSK, 1 Uplink) MCS1	19.61	19.63	19.70	16.67	16.72	16.36
EDGE 10 (GMSK, 2 Uplink) MCS1	19.32	19.28	19.55	16.26	16.20	16.26
EDGE 11 (GMSK, 3 Uplink) MCS1	18.95	19.13	19.15	15.48	15.46	15.48
EDGE 12 (GMSK, 4 Uplink) MCS1	18.93	18.67	19.00	15.69	15.73	15.67
EDGE 8 (8PSK, 1 Uplink) MCS9	17.40	17.43	17.52	13.95	14.00	13.98
EDGE 10 (8PSK, 2 Uplink) MCS9	18.23	18.25	18.34	15.35	15.41	15.40
EDGE 11 (8PSK, 3 Uplink) MCS9	17.83	17.84	17.89	15.12	15.16	15.01
EDGE 12 (8PSK, 4 Uplink) MCS9	18.48	18.47	18.50	15.53	15.48	15.47

Remark:

The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time averaged power = Maximum burst averaged power (1 Uplink) - 9 dB

Source based time averaged power = Maximum burst averaged power (2 Uplink) - 6 dB

Source based time averaged power = Maximum burst averaged power (3 Uplink) - 4.26 dB

Source based time averaged power = Maximum burst averaged power (4 Uplink) - 3 dB

Note:

1. According to source-based time-average power, GPRS class 8 is used for SAR evaluation.
2. Per 2010/10 TCB workshop, choose the highest output power channel to test SAR and determine further SAR exclusion

<Reduction Level>

Band	GSM850				GSM1900			
Channel	128	189	251	Target Reduction (dB)	512	661	810	Target Reduction (dB)
Frequency (MHz)	824.2	836.4	848.8		1850.2	1880	1909.8	
GPRS 8 (1 Uplink) CS1	4.29	4.23	4.23	5.00	3.07	3.02	3.29	5.00
GPRS 10 (2 Uplink) CS1	4.72	4.76	4.48	5.00	3.29	3.39	3.05	5.00
GPRS 11 (3 Uplink) CS1	4.97	4.78	4.82	5.00	5.05	5.09	4.74	5.00
GPRS 12 (4 Uplink) CS1	4.75	4.52	4.44	5.00	4.10	4.19	4.41	5.00
EDGE 8 (GMSK, 1 Uplink) MCS1	4.28	4.31	4.26	5.00	2.97	3.02	3.23	5.00
EDGE 10 (GMSK, 2 Uplink) MCS1	4.63	4.69	4.35	5.00	3.17	3.35	3.12	5.00
EDGE 11 (GMSK, 3 Uplink) MCS1	4.52	4.65	4.67	5.00	4.87	5.01	4.73	5.00
EDGE 12 (GMSK, 4 Uplink) MCS1	4.87	5.19	4.85	5.00	4.17	4.22	4.43	5.00
EDGE 8 (8PSK, 1 Uplink) MCS9	0.00	0.00	0.00	0.00	1.76	1.79	1.86	2.00
EDGE 10 (8PSK, 2 Uplink) MCS9	0.00	0.00	0.00	0.00	2.21	2.23	2.28	2.00
EDGE 11 (8PSK, 3 Uplink) MCS9	0.00	0.00	0.00	0.00	2.12	2.14	2.29	2.00
EDGE 12 (8PSK, 4 Uplink) MCS9	0.00	0.00	0.00	0.00	2.32	2.26	2.21	2.00

<WLAN 2.4G>

Band	802.11b			802.11g		
Channel	1	6	11	1	6	11
Frequency (MHz)	2412	2437	2462	2412	2437	2462
Average Power	13.71	13.69	13.11	13.78	13.53	13.33

Band	802.11n (BW 20MHz)		
Channel	1	6	11
Frequency (MHz)	2412	2437	2462
Average Power	14.87	14.50	14.31

Note:

1. Per 2010/10 TCB workshop and KDB 248227, choose the highest output power channel to test SAR and determine further SAR exclusion
2. Since 11n power is 1/4dB higher than 11b, 11n SAR will be verified.

<WLAN 5GHz – Full Power>

Band	802.11a						
Channel	36	40	44	149	153	157	161
Frequency (MHz)	5180	5200	5220	5745	5765	5785	5805
Average Power	11.52	11.44	11.50	11.75	11.57	11.50	11.73

Band	802.11n						
Channel	36	40	44	149	153	157	161
Frequency (MHz)	5180	5200	5220	5745	5765	5785	5805
Average Power	11.48	11.42	11.47	11.39	11.41	11.45	11.63

<WLAN 5GHz – Reduction Power>

Band	802.11a						
Channel	36	40	44	149	153	157	161
Frequency (MHz)	5180	5200	5220	5745	5765	5785	5805
Average Power	8.47	8.40	8.43	9.65	8.95	9.28	9.33

Band	802.11n						
Channel	36	40	44	149	153	157	161
Frequency (MHz)	5180	5200	5220	5745	5765	5785	5805
Average Power	8.37	8.3	8.33	8.87	8.97	9.02	9.13

Note:

1. Per 2010/10 TCB workshop and KDB 248227, choose the highest output power channel to test SAR and determine further SAR exclusion. Therefore CH36 and CH149 are chosen first for SAR testing.
2. Since 5GHz 11n power is less than 1/4dB higher than 11a, 11n SAR will be excluded.

<WLAN 5GHz – Reduction Level>

Band	802.11a						
Channel	36	40	44	149	153	157	161
Frequency (MHz)	5180	5200	5220	5745	5765	5785	5805
Reduction Level (dB)	3.05	3.04	3.07	3.1	2.62	2.22	2.4
Target Reduction Level (dB)	3	3	3	3	3	3	3

Band	802.11n						
Channel	36	40	44	149	153	157	161
Frequency (MHz)	5180	5200	5220	5745	5765	5785	5805
Reduction Level (dB)	3.11	3.12	3.14	2.52	2.44	2.43	2.5
Target Reduction Level (dB)	3	3	3	3	3	3	3

< Bluetooth >

Band	Bluetooth		
Channel	0	39	78
Frequency (MHz)	2402	2441	2480
Avg. Power	2.55	2.57	2.64

Note:

Per KDB 447498, since Bluetooth average power is less than 60/f (13.8dBm), SAR is excluded.

12.2 Test Records for Body SAR Test

<GSM>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Output Power (dBm)	Power Drift (dB)	SAR _{1g} (W/kg)
12	GSM850	GPRS multi-slot class 8	Bottom Face	0	251	28.75	0.013	0.489
13	GSM850	GPRS multi-slot class 8	Secondary Portrait	0	251	28.75	-0.016	0.918
14	GSM850	GPRS multi-slot class 8	Secondary Landscape	0	251	32.98	0.04	0.025
15	GSM850	GPRS multi-slot class 8	Primary Landscape	0	251	32.98	0.03	0.12
17	GSM850	GPRS multi-slot class 8	Secondary Portrait	0	128	28.59	-0.08	0.804
18	GSM850	GPRS multi-slot class 8	Secondary Portrait	0	189	28.72	0.07	0.902
16	GSM850	GPRS multi-slot class 8	Bottom Face	0.4	251	32.98	0.02	0.754
1	GSM1900	GPRS multi-slot class 8	Bottom Face	0	661	25.73	0.044	0.985
2	GSM1900	GPRS multi-slot class 8	Secondary Portrait	0	661	25.73	0.1	0.566
3	GSM1900	GPRS multi-slot class 8	Secondary Landscape	0	661	28.75	0.016	0.125
4	GSM1900	GPRS multi-slot class 8	Primary Landscape	0	661	28.75	-0.11	0.037
6	GSM1900	GPRS multi-slot class 8	Bottom Face	0	512	25.58	0.036	0.76
7	GSM1900	GPRS multi-slot class 8	Bottom Face	0	810	25.31	-0.085	1.02
8	GSM1900	GPRS multi-slot class 11	Bottom Face	0.4	512	24.75	0.06	0.875
9	GSM1900	GPRS multi-slot class 11	Bottom Face	0.4	810	24.53	0.03	1.05
5	GSM1900	GPRS multi-slot class 11	Bottom Face	0.4	661	24.83	0.05	1.02

Note:

- 0.4 cm test results are for confirming operation of the power reduction scheme, and are not applicable for compliance demonstration for the FCC tablet PC SAR test procedures. The specific SW utility is used to disable the proximity sensor for 0.4cm SAR testing. The SW is not available for end users.
- During SAR testing for positions other than Bottom Face, proximity sensor power reduction is disabled to avoid any unexpected trigger. The specific SW utility is used to disable the proximity sensor for 0.4cm SAR testing. The SW is not available for end users.
- Per KDB 447498, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

<WLAN>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Output Power (dBm)	Power Drift (dB)	SAR _{1g} (W/kg)
21	802.11b	-	Bottom Face	0	1	13.71	0.02	0.284
22	802.11b	-	Primary Landscape	0	1	13.71	0.04	0.574
23	802.11b	-	Secondary Portrait	0	1	13.71	-0.04	0.021
24	802.11n	-	Primary Landscape	0	1	14.87	0.021	0.755
25	802.11a	-	Bottom Face	0	36	11.52	0.143	0.355
26	802.11a	-	Primary Landscape	0	36	8.47	0.113	1.02
27	802.11a	-	Primary Landscape	0	44	8.43	0.14	1.15
28	802.11a	-	Secondary Portrait	0	36	11.52	-0.121	0.087
29	802.11a	-	Bottom Face	0	149	11.75	0.156	0.238
30	802.11a	-	Secondary Portrait	0	149	11.75	-0.14	0.129
31	802.11a		Primary Landscape	0	149	9.65	0.12	0.61

Note:

1. Per KDB 447498, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

12.3 Simultaneous Transmission Analysis

< Test distance 0 mm to the phantom >

Position	GSM 850	GSM 1900	802.11b/g/n	802.11a/n	Max. SAR Summation	Volume Scan
Bottom Face	0.489	1.02	0.284	0.355	1.38	No
Secondary Landscape	0.025	0.125	0	0	0.125	No
Secondary Portrait	0.918	0.566	0.021	0.129	1.04	No
Primary Landscape	0.12	0.037	0.755	1.15	1.19	No
Primary Portrait	0	0	0	0	0	No

Note:

1. If 1g-SAR scalar summation < 1.6W/kg, simultaneous SAR measurement is not necessary.

<Test distance 4 mm to the phantom; DUT with GPRS/EDGE Full Power >

Position	GSM 850	GSM 1900	802.11b/g/n	802.11a/n	Max. SAR Summation	Volume Scan
Bottom Face	0.754	1.05	0.284	0.355	1.41	No

Note:

1. 0.4 cm test results are for confirming operation of the power reduction scheme, and are not applicable for compliance demonstration for the FCC tablet PC SAR test procedures
2. WLAN SAR data at 0mm is applied here, and it will represent more conservative situation than WLAN SAR data at 0.4cm.

Test Engineer : Suhe Yin

13 References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] IEEE Std. C95.1-1991, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", 1991
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", June 2001
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [7] FCC KDB 447498 D01 v04, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", November 2009
- [8] FCC KDB 447498 D02 v02, "SAR Measurement Procedures for USB Dongle Transmitters", November 2009
- [9] FCC KDB 616217 D01 v01r01, "SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens", November 2009
- [10] FCC KDB 616217 D03 v01, "SAR Evaluation Considerations for Laptop/Notebook/Netbook and Tablet Computers", November 2009
- [11] FCC KDB 648474 D01 v01r05, "SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas", September 2008
- [12] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [13] FCC KDB 941225 D02 v02 "3GPP R6 HSPA and R7 HSPA+ SAR Guidance", December 2009.
- [14] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [15] FCC KDB 941225 D04 v01, "Evaluating SAR for GSM/(E)GPRS Dual Transfer Mode", January 27 2010



Appendix A. Plots of System Performance Check

The plots are shown as follows.



Appendix B. Plots of SAR Measurement

The plots are shown as follows.



Appendix C. DASY Calibration Certificate

The DASY calibration certificates are shown as follows.

System Check_Body_835MHz_110830

DUT: Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_835_110830 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.976 \text{ mho/m}$; $\epsilon_r = 54.394$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $21.3 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.99, 5.99, 5.99); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.714 mW/g


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.845 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.552 W/kg

SAR(1 g) = 2.49 mW/g ; SAR(10 g) = 1.65 mW/g

Maximum value of SAR (measured) = 2.699 mW/g

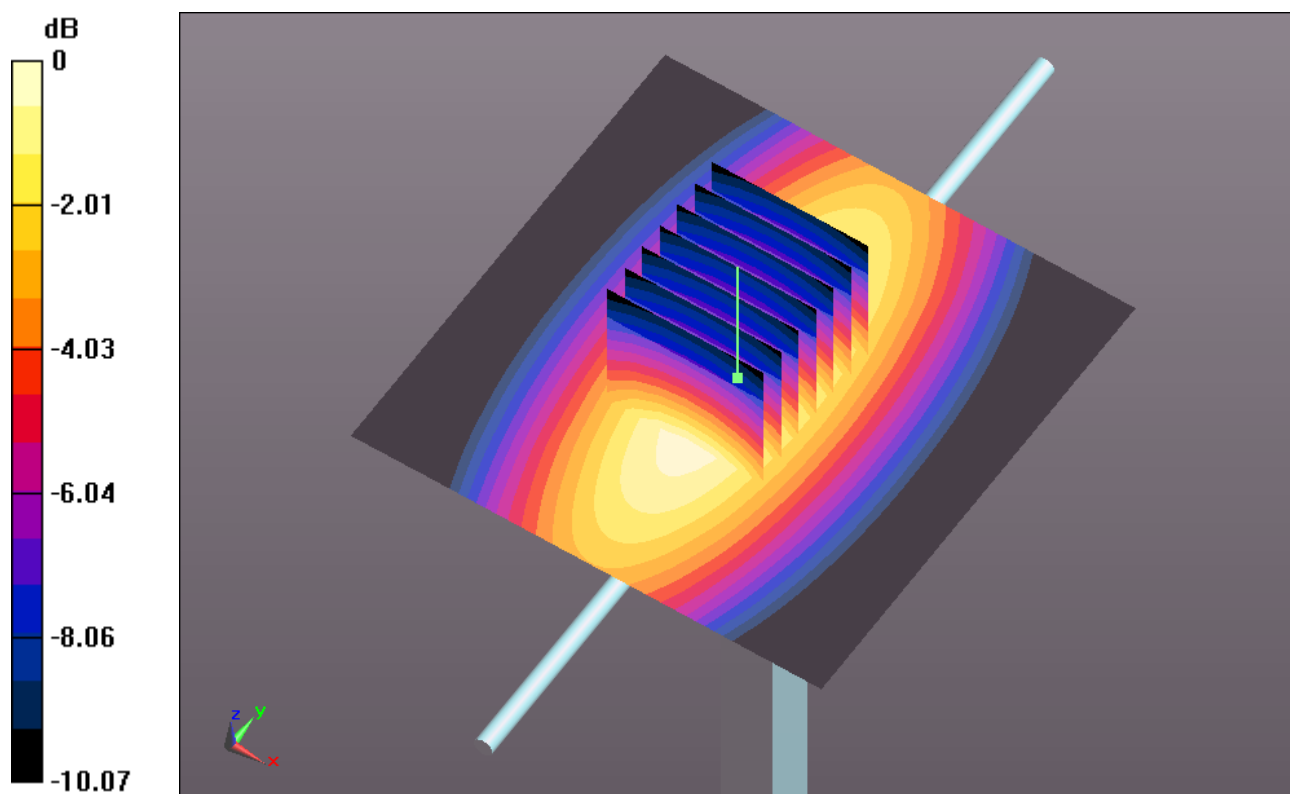

0 dB = 2.700mW/g

System Check_Body_1900MHz_110830

DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_110830 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.512$ mho/m; $\epsilon_r =$

53.903 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.39, 4.39, 4.39); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (61x61x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 11.637 mW/g


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 93.720 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 14.689 W/kg

SAR(1 g) = 9.77 mW/g; SAR(10 g) = 5.36 mW/g

Maximum value of SAR (measured) = 11.072 mW/g

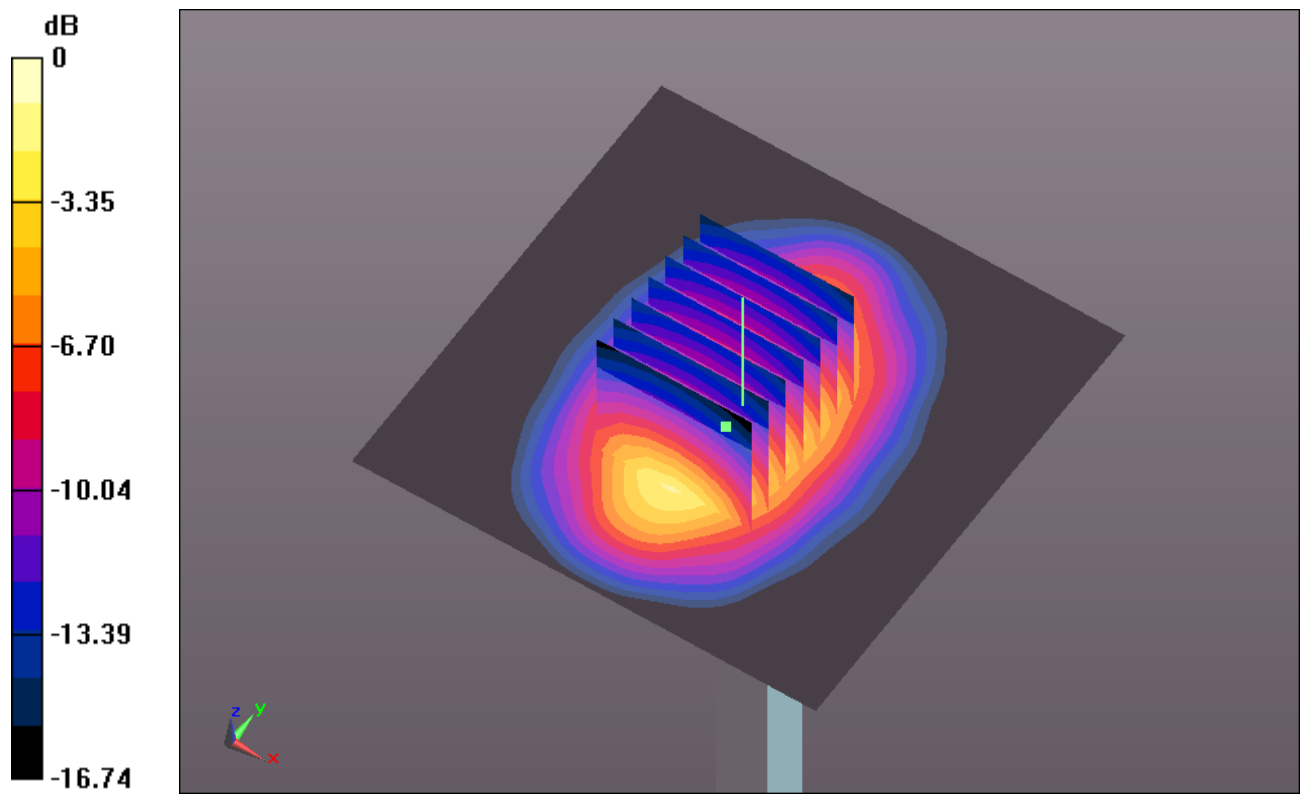

0 dB = 11.070mW/g

System Check_Body_2450MHz_110831

DUT: Dipole 2450 MHz

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_110831 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.992$ mho/m; $\epsilon_r = 54.311$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.04, 4.04, 4.04); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 14.861 mW/g


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.841 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 30.573 W/kg

SAR(1 g) = 12.8 mW/g; SAR(10 g) = 5.86 mW/g

Maximum value of SAR (measured) = 14.215 mW/g

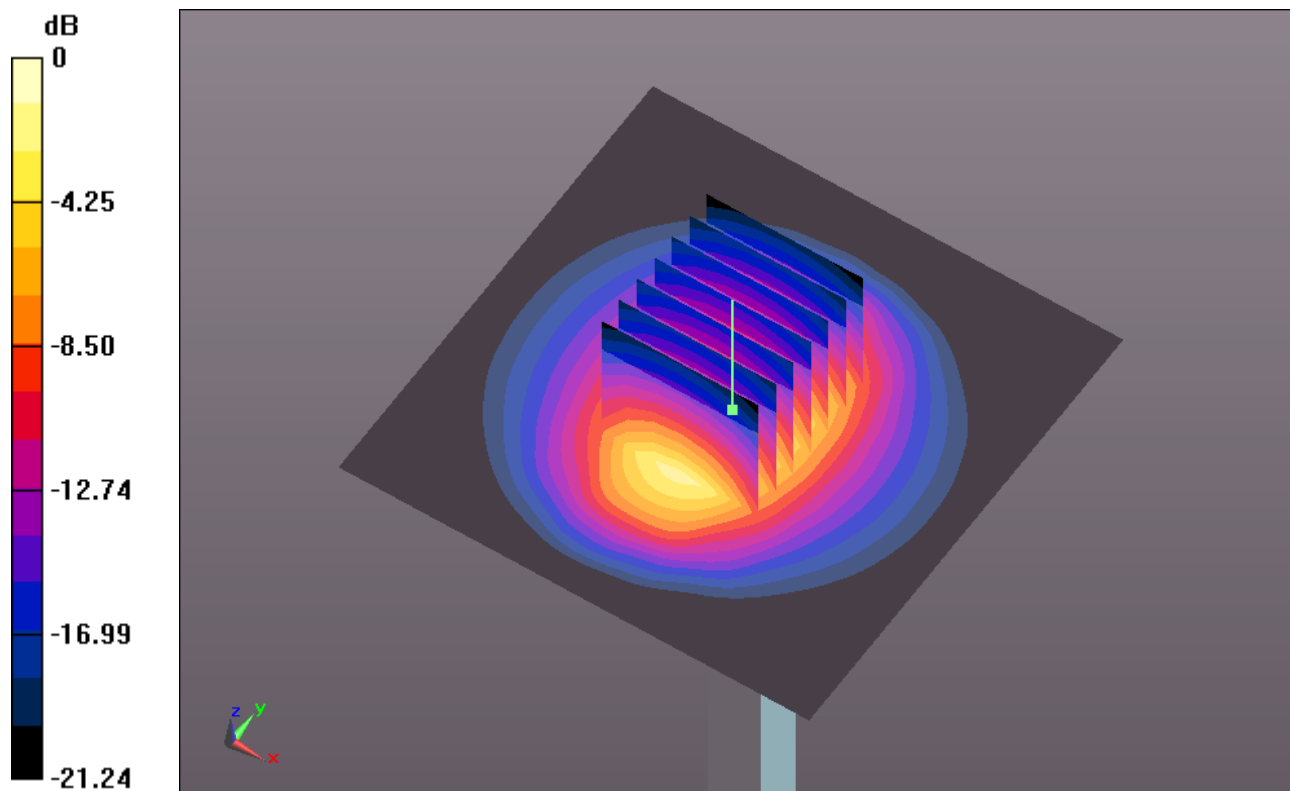

0 dB = 14.220mW/g

System Check_Body_5200MHz_110902**DUT: Dipole 5GHz**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110902 Medium parameters used: $f = 5200$ MHz; $\sigma = 5.297$ mho/m; $\epsilon_r = 49.185$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.74, 3.74, 3.74); Calibrated: 2011/6/21
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/1/13
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP1127
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 33.622 mW/g


Pin=250mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 86.670 V/m; Power Drift = 0.139 dB

Peak SAR (extrapolated) = 57.212 W/kg

SAR(1 g) = 20.3 mW/g; SAR(10 g) = 6.02 mW/g

Maximum value of SAR (measured) = 34.073 mW/g

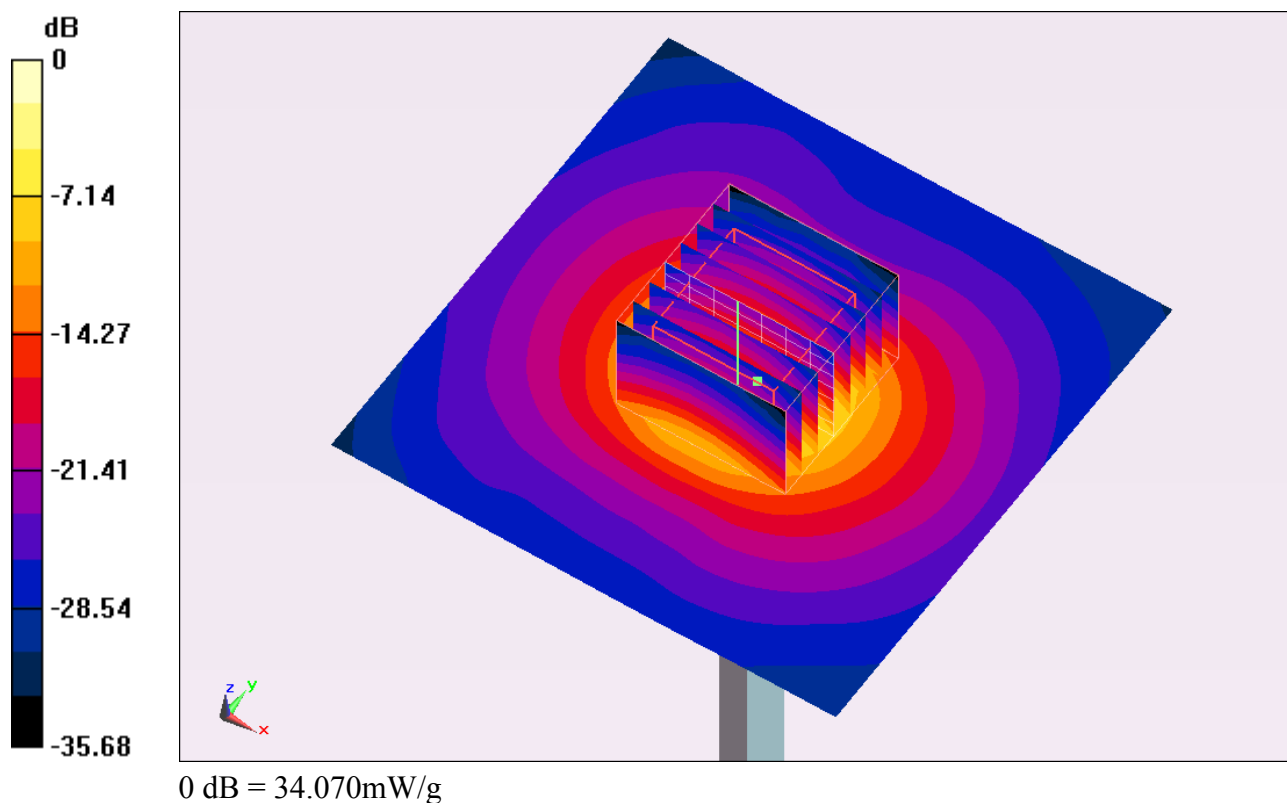

System Check_Body_5800MHz_110902**DUT: Dipole 5GHz**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110902 Medium parameters used: $f = 5800$ MHz; $\sigma = 6.127$ mho/m; $\epsilon_r = 47.784$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.23, 3.23, 3.23); Calibrated: 2011/6/21
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/1/13
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP1127
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 36.183 mW/g


Pin=250mW/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 83.278 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 59.408 W/kg

SAR(1 g) = 20 mW/g; SAR(10 g) = 5.77 mW/g

Maximum value of SAR (measured) = 33.047 mW/g

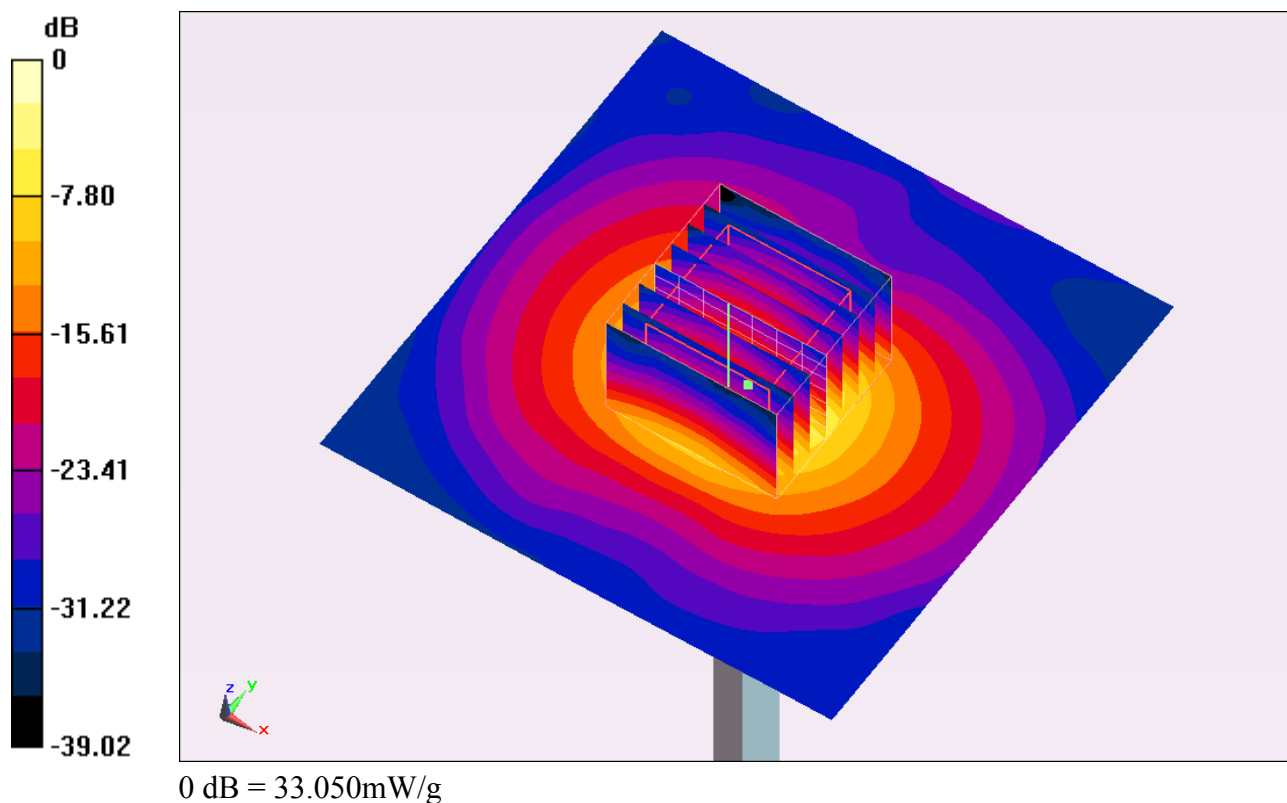

#12 GSM850_GPRS8_Bottom Face_0cm_Ch251

DUT: 181807

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_110830 Medium parameters used: $f = 849$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.273$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.99, 5.99, 5.99); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch251/Area Scan (101x151x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.527 mW/g



Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.232 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 1.121 W/kg

SAR(1 g) = 0.489 mW/g; SAR(10 g) = 0.282 mW/g

Maximum value of SAR (measured) = 0.547 mW/g

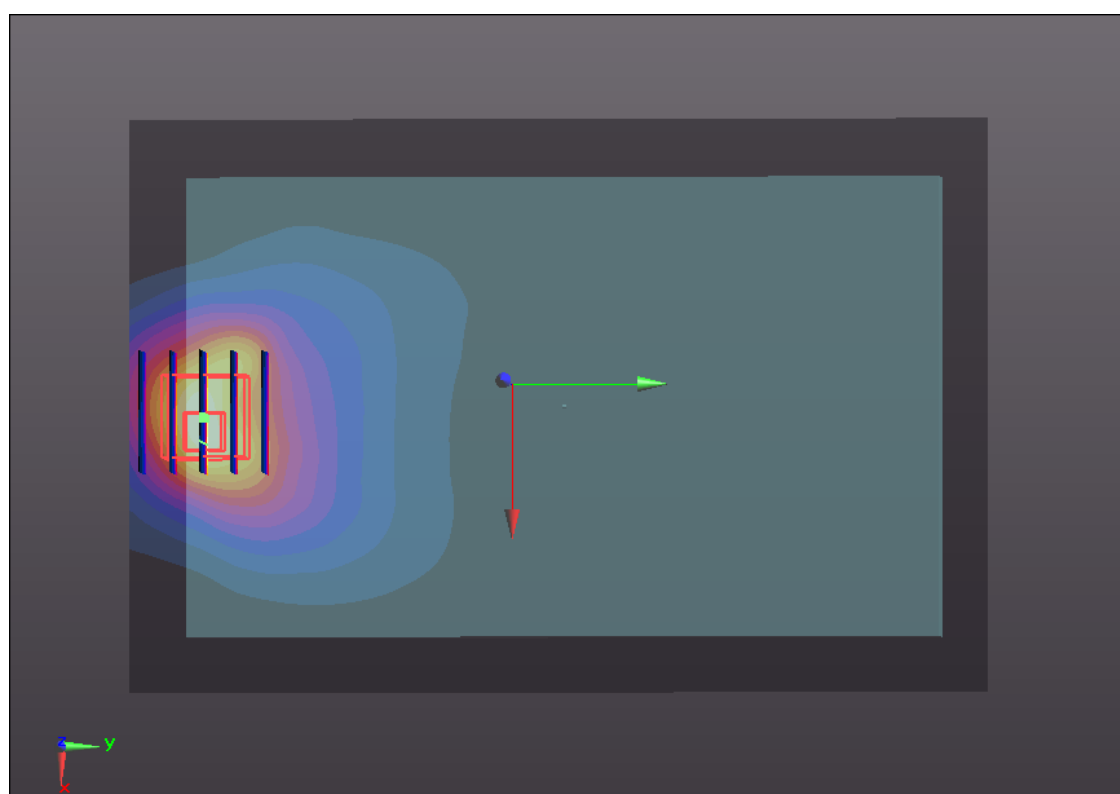

#13 GSM850_GPRS8_Secondary Portrait_0cm_Ch251

DUT: 181807

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_110830 Medium parameters used: $f = 849$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.273$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.99, 5.99, 5.99); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch251/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.103 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.673 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 1.634 W/kg

SAR(1 g) = 0.918 mW/g; SAR(10 g) = 0.503 mW/g

Maximum value of SAR (measured) = 1.051 mW/g

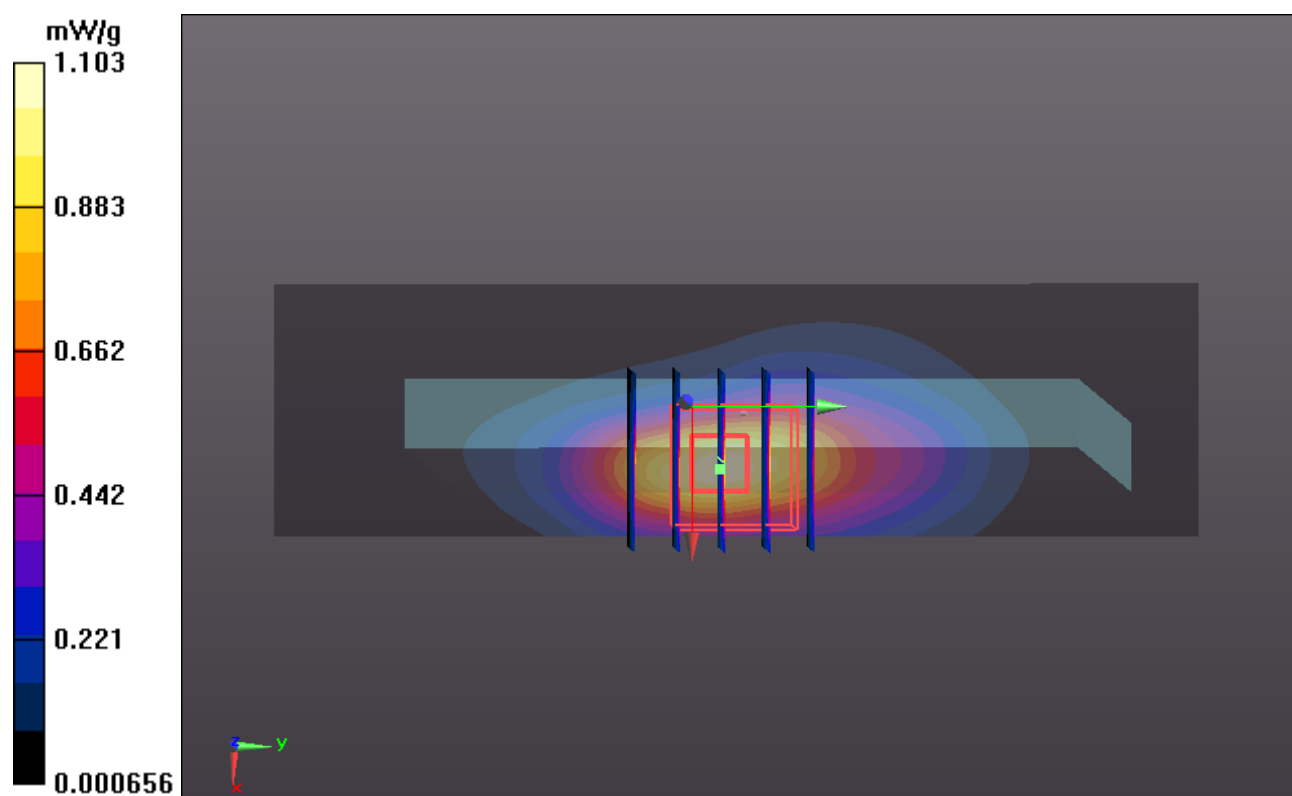

#13 GSM850_GPRS8_Secondary Portrait_0cm_Ch251_2D

DUT: 181807

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_110830 Medium parameters used: $f = 849$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.273$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.99, 5.99, 5.99); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch251/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.103 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.673 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 1.634 W/kg

SAR(1 g) = 0.918 mW/g; SAR(10 g) = 0.503 mW/g

Maximum value of SAR (measured) = 1.051 mW/g

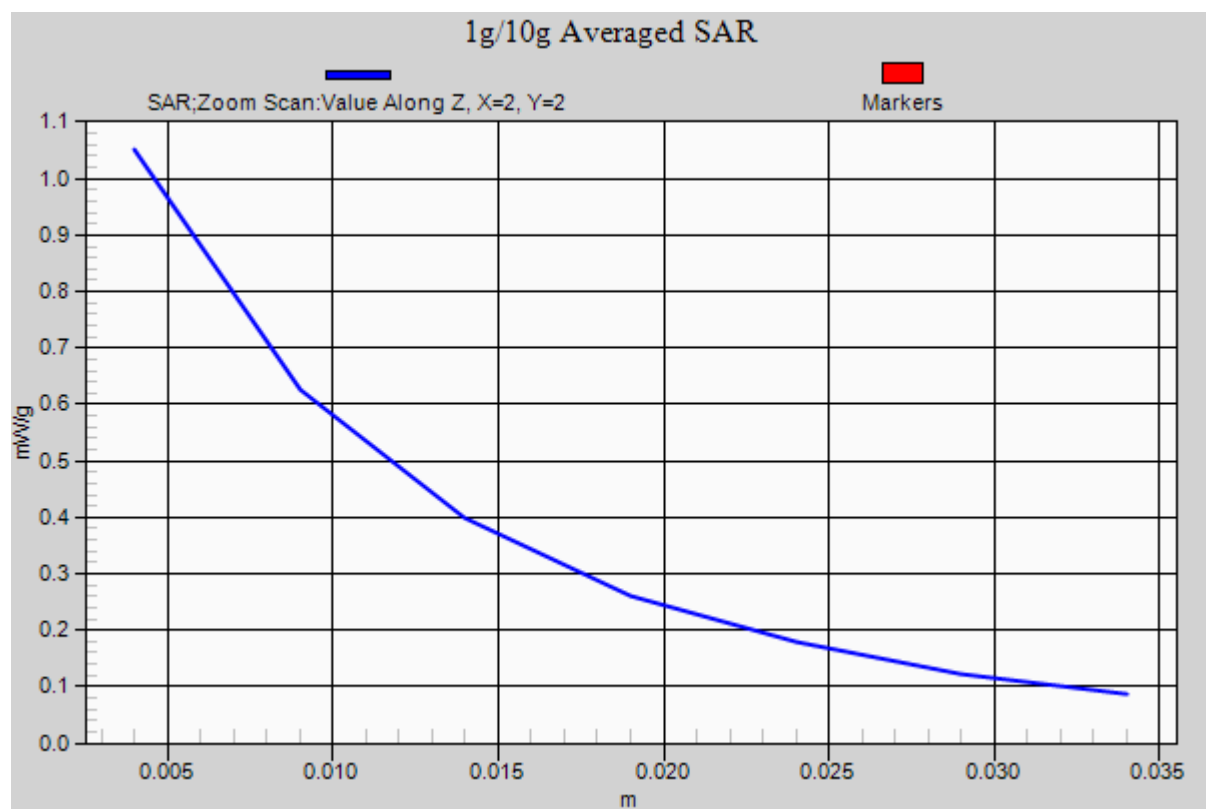

#14 GSM850_GPRS8_Secondary Landscape_0cm_Ch251

DUT: 181807

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_110830 Medium parameters used: $f = 849$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.273$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.99, 5.99, 5.99); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch251/Area Scan (31x151x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.025 mW/g

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.871 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.043 W/kg

SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.027 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.871 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.025 W/kg

SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.018 mW/g

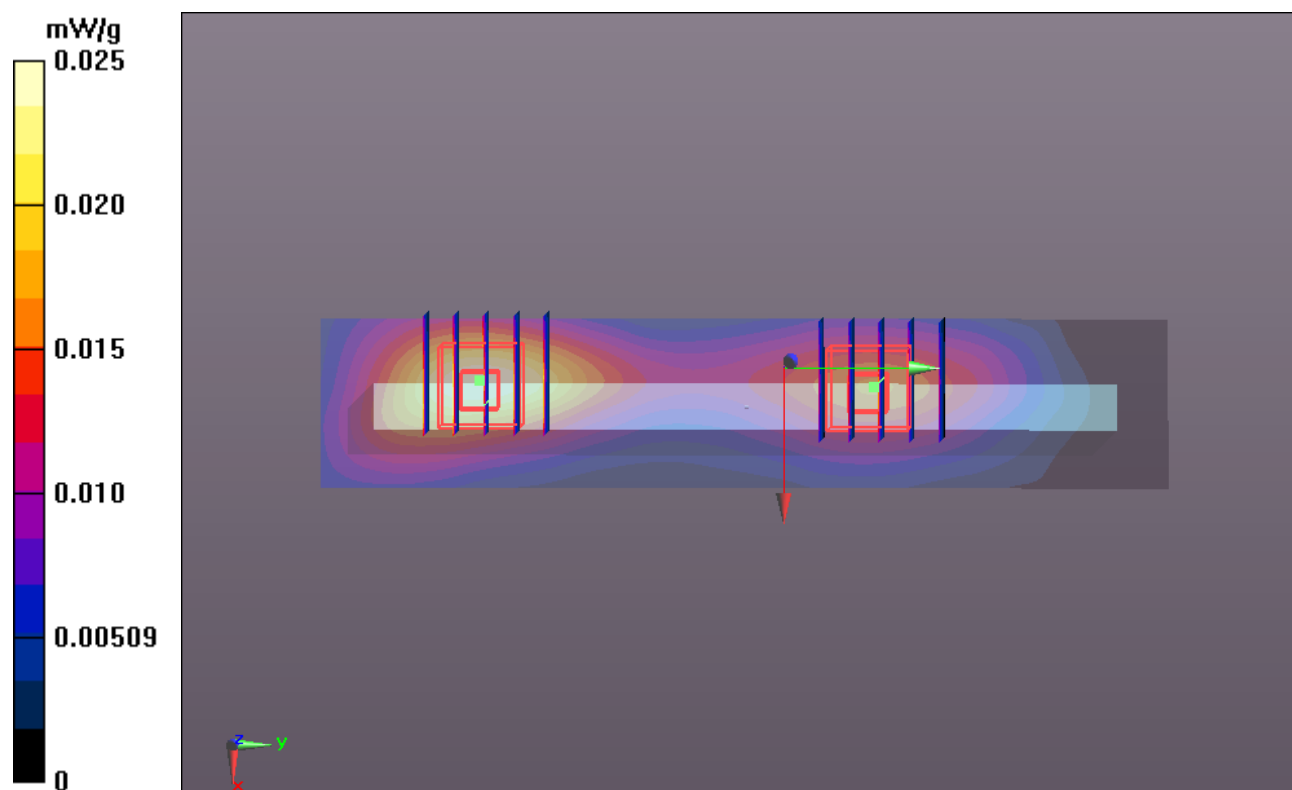

#15 GSM850_GPRS8_Primary Landscape_0cm_Ch251

DUT: 181807

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_110830 Medium parameters used: $f = 849$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.273$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.99, 5.99, 5.99); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch251/Area Scan (31x151x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.107 mW/g

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.963 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.389 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.051 mW/g

Maximum value of SAR (measured) = 0.155 mW/g


Ch251/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.963 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.085 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.096 mW/g

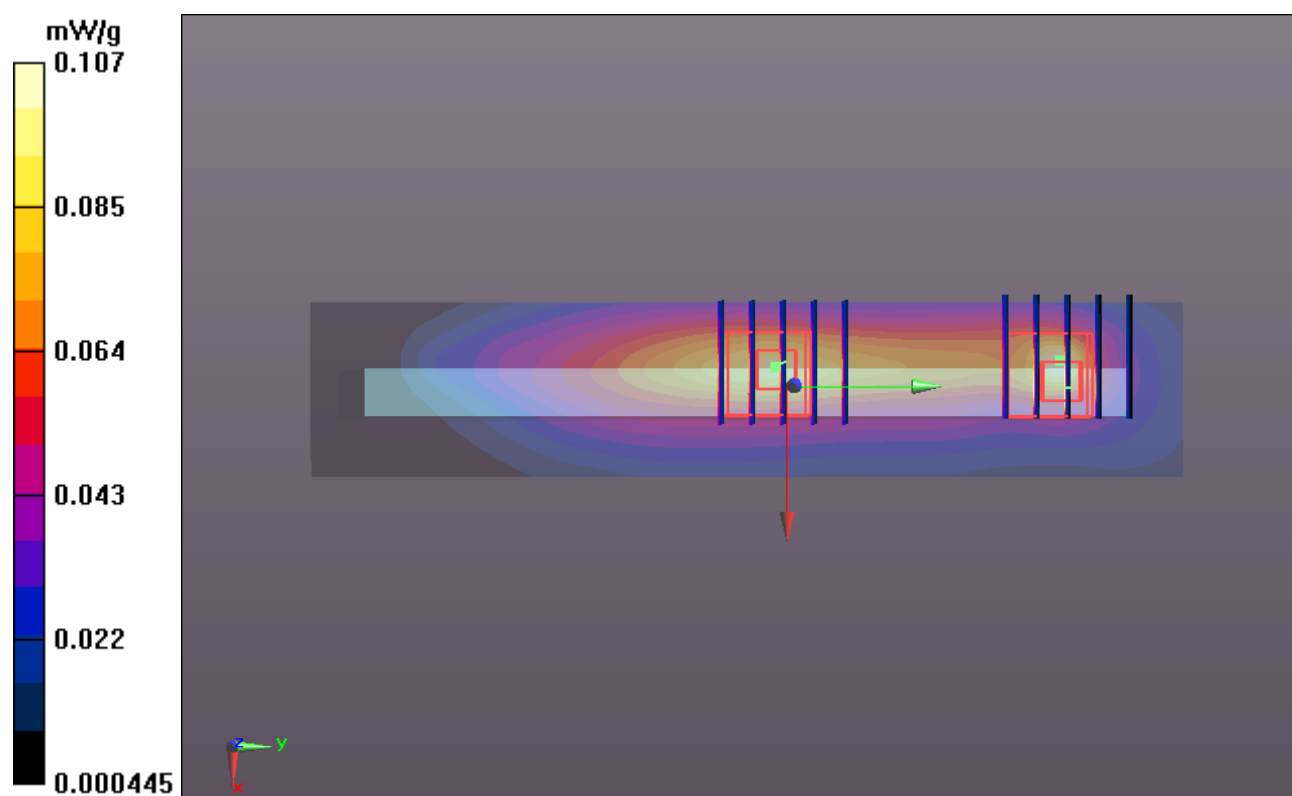

#17 GSM850_GPRS8_Secondary Portrait_0cm_Ch128

DUT: 181807

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_110830 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.966$ mho/m; $\epsilon_r =$

54.469; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.99, 5.99, 5.99); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.958 mW/g


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.010 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.461 W/kg

SAR(1 g) = 0.804 mW/g; SAR(10 g) = 0.438 mW/g

Maximum value of SAR (measured) = 0.922 mW/g

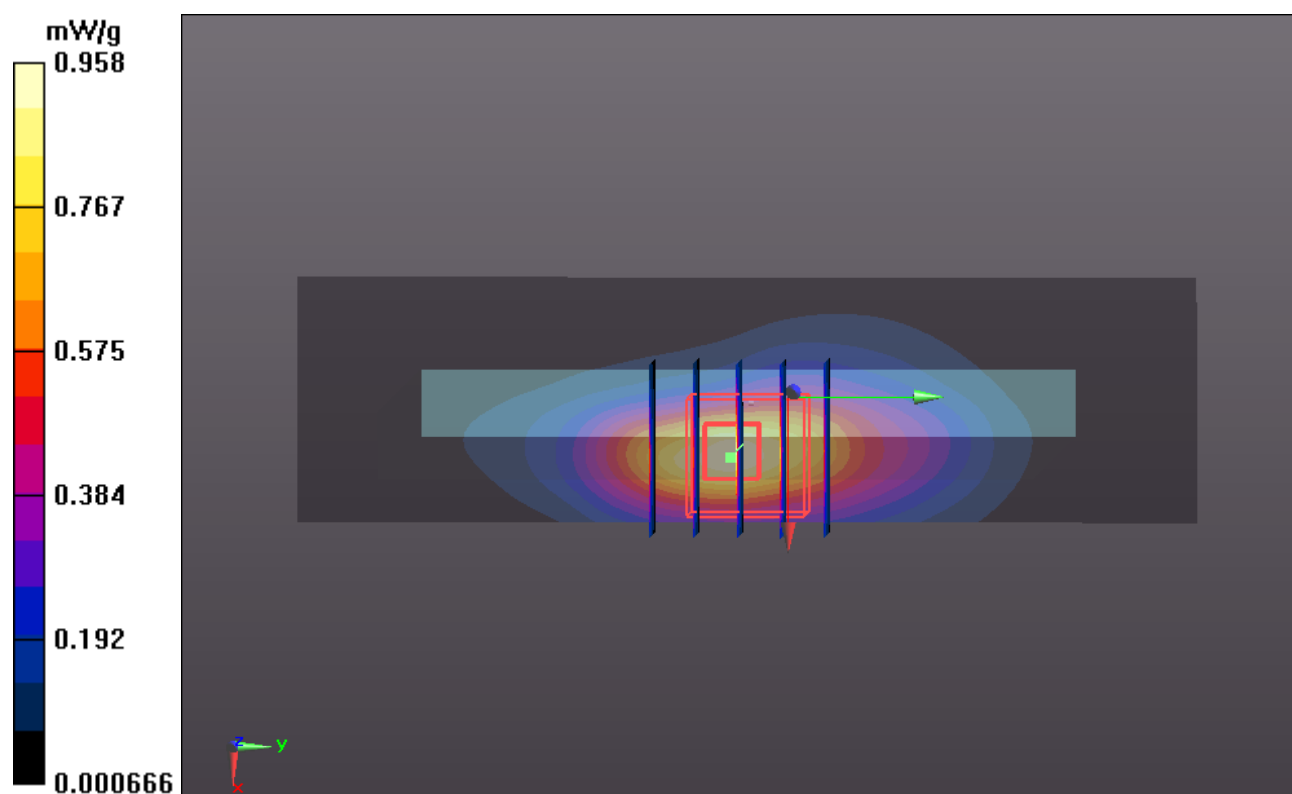

#18 GSM850_GPRS8_Secondary Portrait_0cm_Ch189

DUT: 181807

Communication System: Generic GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_110830 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r =$

54.38; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.99, 5.99, 5.99); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch189/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.042 mW/g


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.980 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.616 W/kg

SAR(1 g) = 0.902 mW/g; SAR(10 g) = 0.494 mW/g

Maximum value of SAR (measured) = 1.027 mW/g

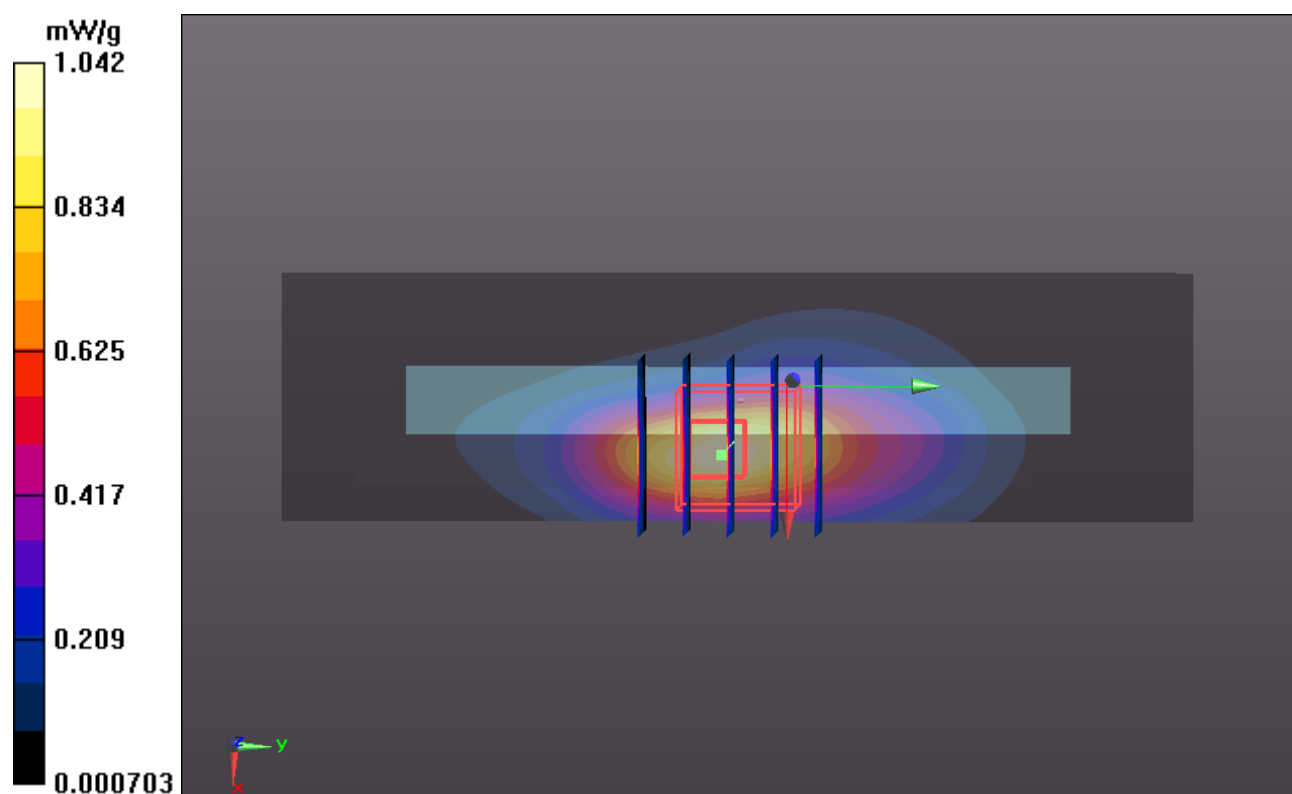

#16 GSM850_GPRS8_Bottom Face_0.4cm_Ch251

DUT: 181807

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_110830 Medium parameters used: $f = 849$ MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.273$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(5.99, 5.99, 5.99); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch251/Area Scan (101x151x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.775 mW/g



Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.744 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.374 W/kg

SAR(1 g) = 0.754 mW/g; SAR(10 g) = 0.431 mW/g

Maximum value of SAR (measured) = 0.823 mW/g

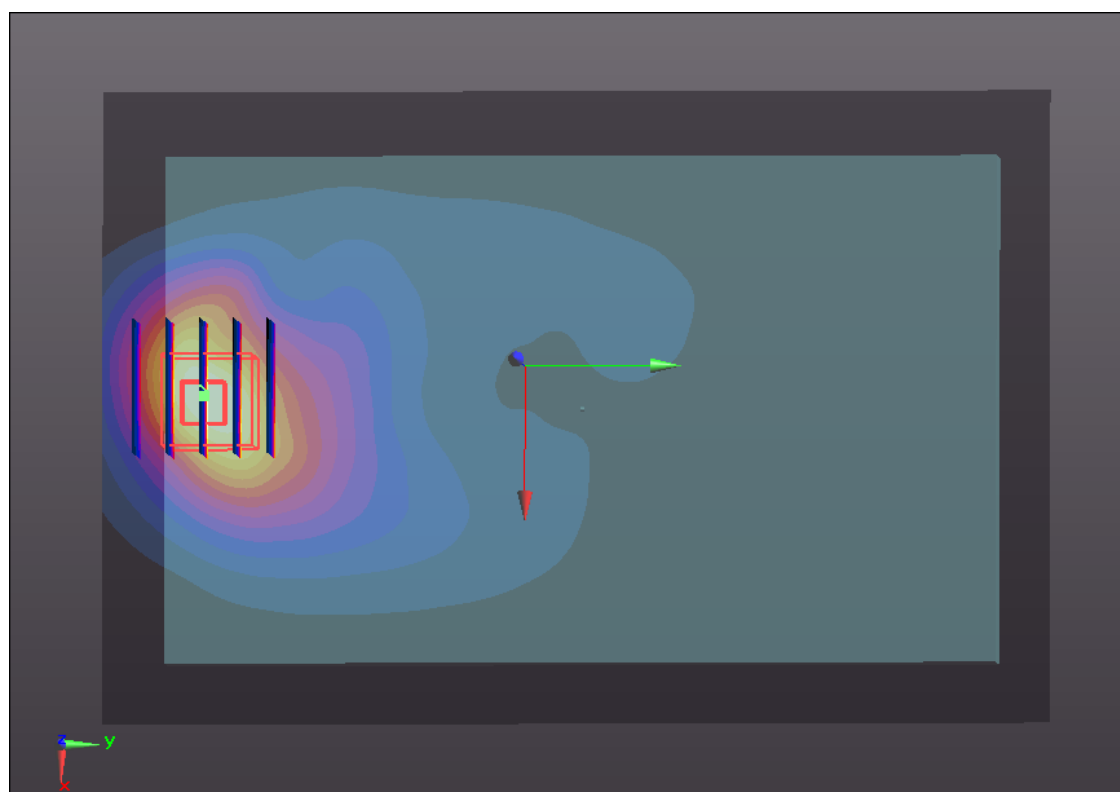

#01 GSM1900_GPRS8_Bottom Face_0cm_Ch661

DUT: 181807

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_110830 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r =$

53.955; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.39, 4.39, 4.39); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (101x151x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.177 mW/g



Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.766 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 1.807 W/kg

SAR(1 g) = 0.985 mW/g; SAR(10 g) = 0.419 mW/g

Maximum value of SAR (measured) = 1.153 mW/g

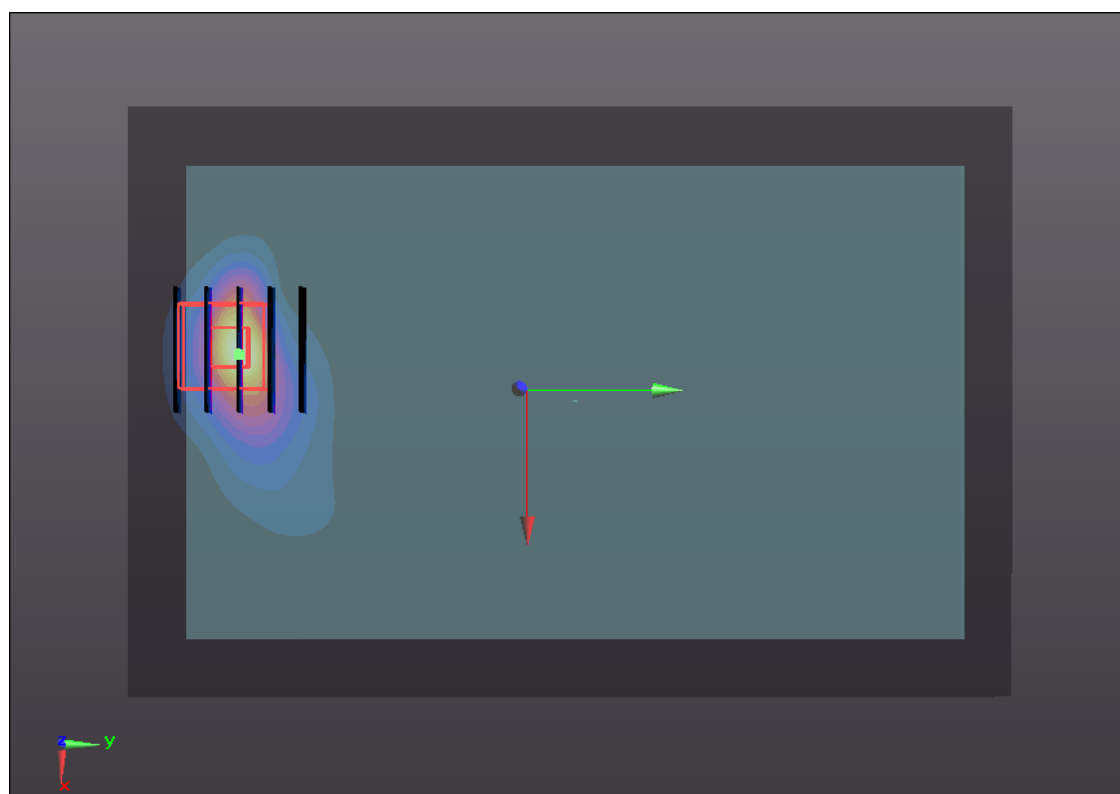

#02 GSM1900_GPRS8_Secondary Portrait_0cm_Ch661

DUT: 181807

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_110830 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r =$

53.955; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.39, 4.39, 4.39); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.585 mW/g

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.018 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.985 W/kg

SAR(1 g) = 0.566 mW/g; SAR(10 g) = 0.278 mW/g

Maximum value of SAR (measured) = 0.675 mW/g


Ch661/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.018 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.823 W/kg

SAR(1 g) = 0.486 mW/g; SAR(10 g) = 0.265 mW/g

Maximum value of SAR (measured) = 0.562 mW/g

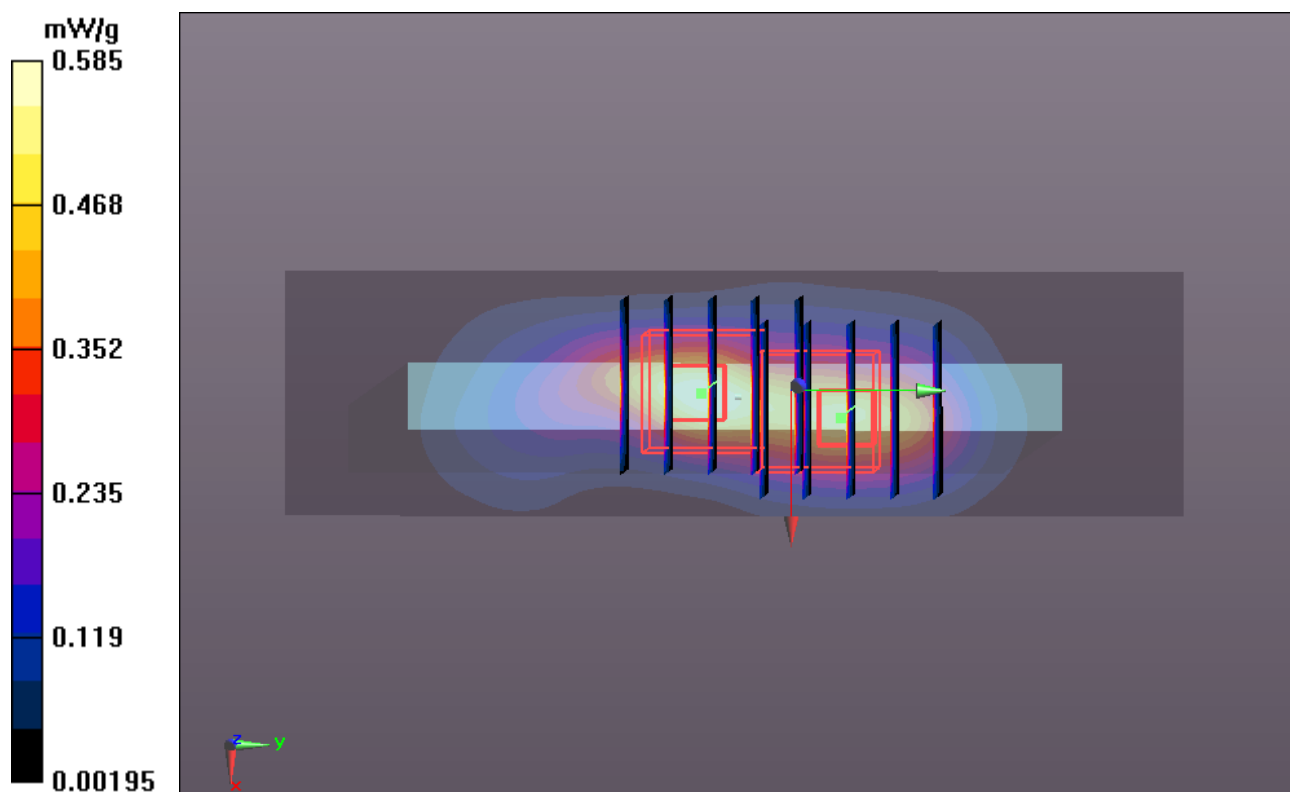

#03 GSM1900_GPRS8_Secondary Landscape_0cm_Ch661

DUT: 181807

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_110830 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r =$

53.955; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.39, 4.39, 4.39); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (41x151x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.146 mW/g



Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.520 V/m; Power Drift = 0.016 dB

Peak SAR (extrapolated) = 0.201 W/kg

SAR(1 g) = 0.125 mW/g; SAR(10 g) = 0.069 mW/g

Maximum value of SAR (measured) = 0.138 mW/g

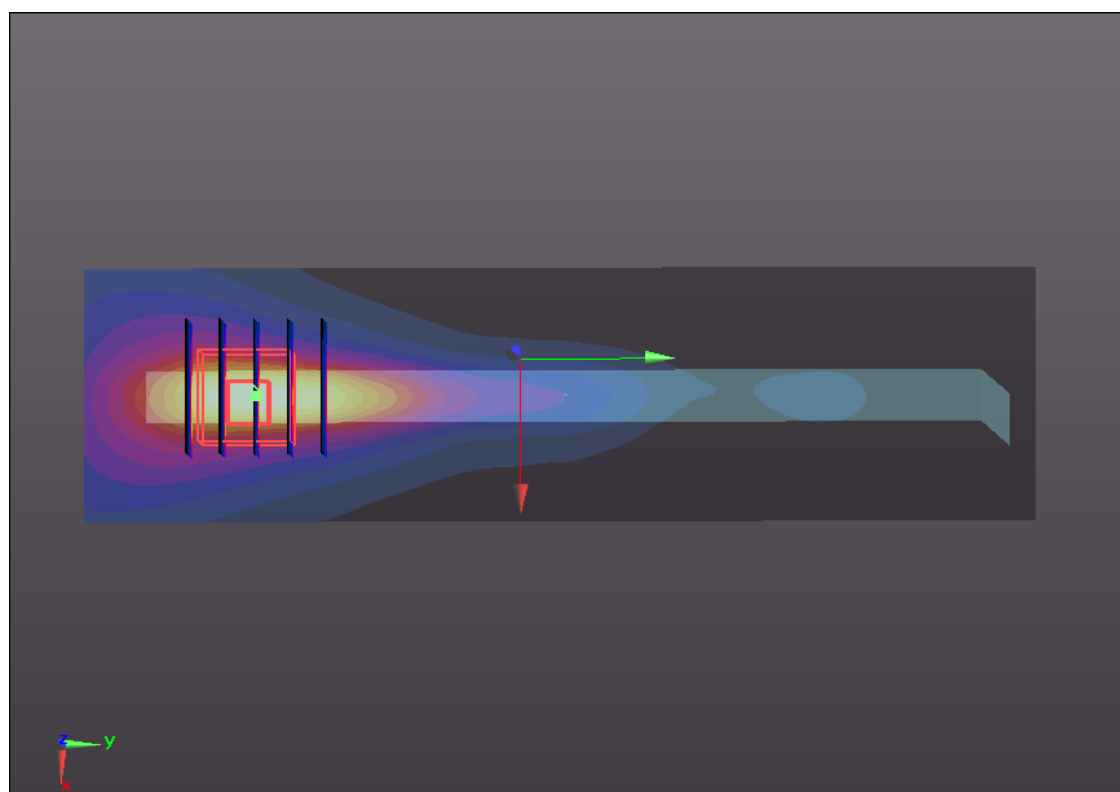

#04 GSM1900_GPRS8_Primary Landscape_0cm_Ch661

DUT: 181807

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_110830 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r =$

53.955; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.39, 4.39, 4.39); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (41x151x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.032 mW/g


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.646 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.105 W/kg

SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.043 mW/g

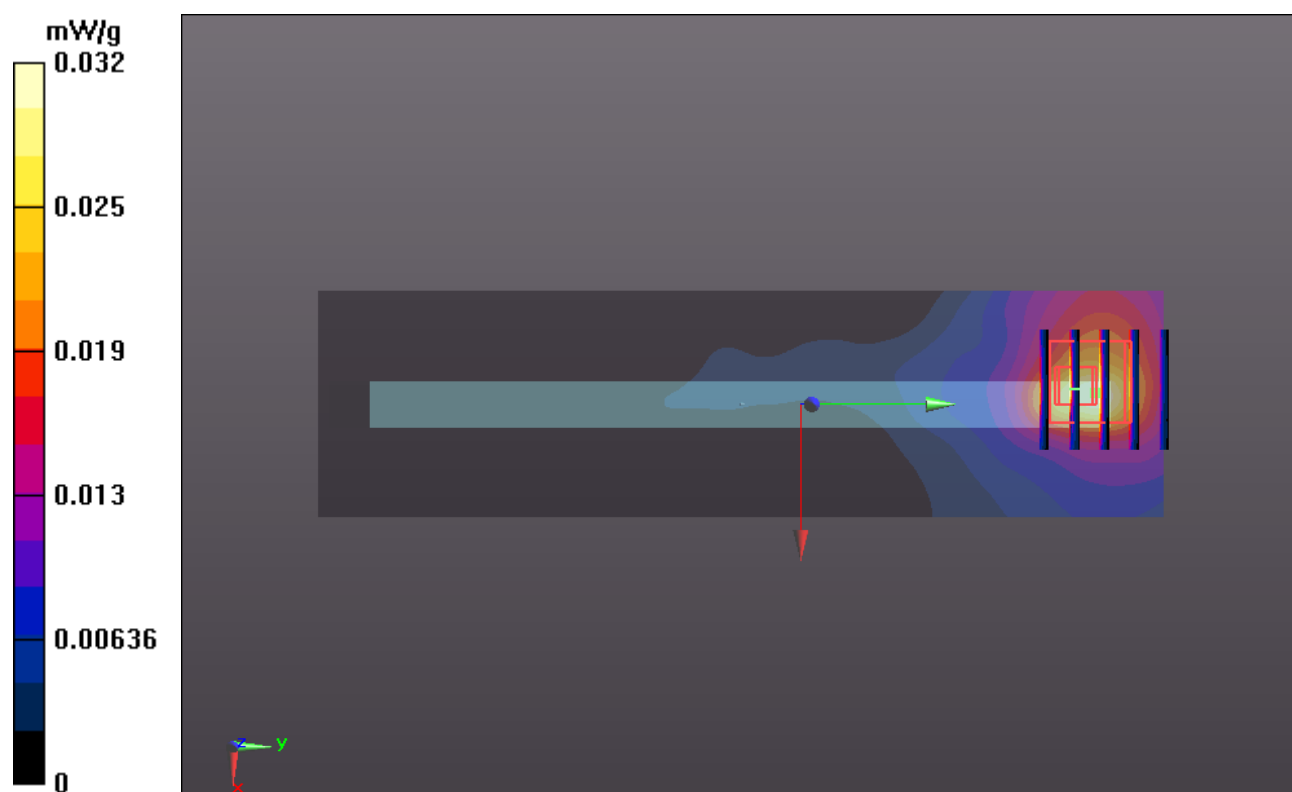

#06 GSM1900_GPRS8_Bottom Face_0cm_Ch512

DUT: 181807

Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_110830 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.455$ mho/m; $\epsilon_r =$

54.031; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.39, 4.39, 4.39); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch512/Area Scan (101x151x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.989 mW/g



Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.680 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 1.358 W/kg

SAR(1 g) = 0.760 mW/g; SAR(10 g) = 0.328 mW/g

Maximum value of SAR (measured) = 0.950 mW/g

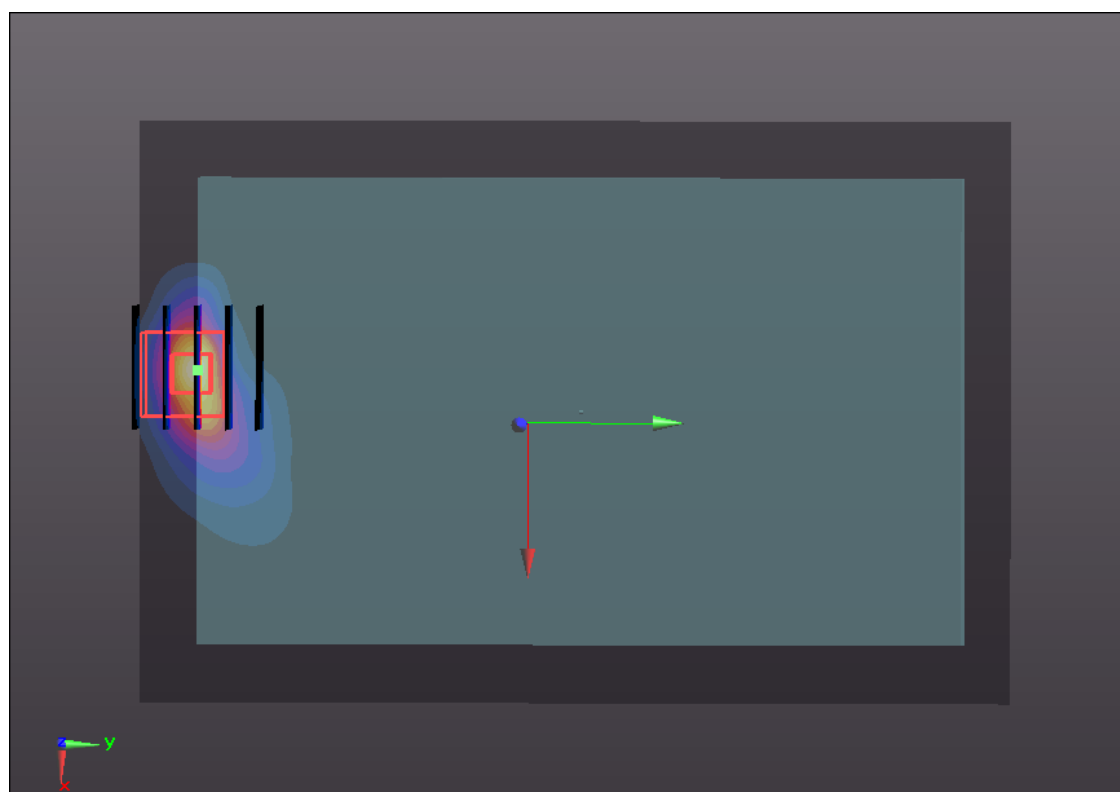

#07 GSM1900_GPRS8_Bottom Face_0cm_Ch810

DUT: 181807

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_110830 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.524$ mho/m; $\epsilon_r =$

53.873; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.39, 4.39, 4.39); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch810/Area Scan (101x151x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.011 mW/g



Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.924 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 1.867 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.448 mW/g

Maximum value of SAR (measured) = 1.282 mW/g

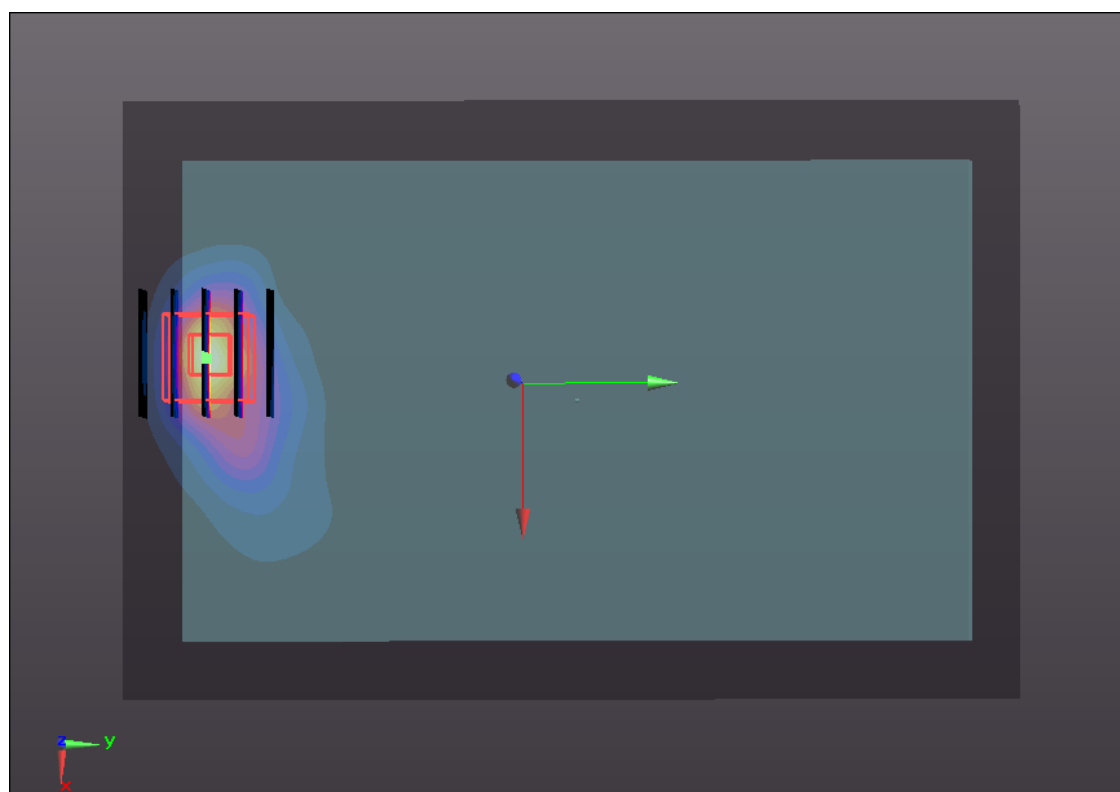

#08 GSM1900_GPRS11_Bottom Face_0.4cm_Ch512

DUT: 181807

Communication System: GPRS/EDGE 11; Frequency: 1850.2 MHz; Duty Cycle: 1:2.7

Medium: MSL_1900_110830 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.455$ mho/m; $\epsilon_r =$

54.031 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.39, 4.39, 4.39); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch512/Area Scan (101x151x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.023 mW/g



Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.450 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.503 W/kg

SAR(1 g) = 0.875 mW/g; SAR(10 g) = 0.427 mW/g

Maximum value of SAR (measured) = 1.016 mW/g

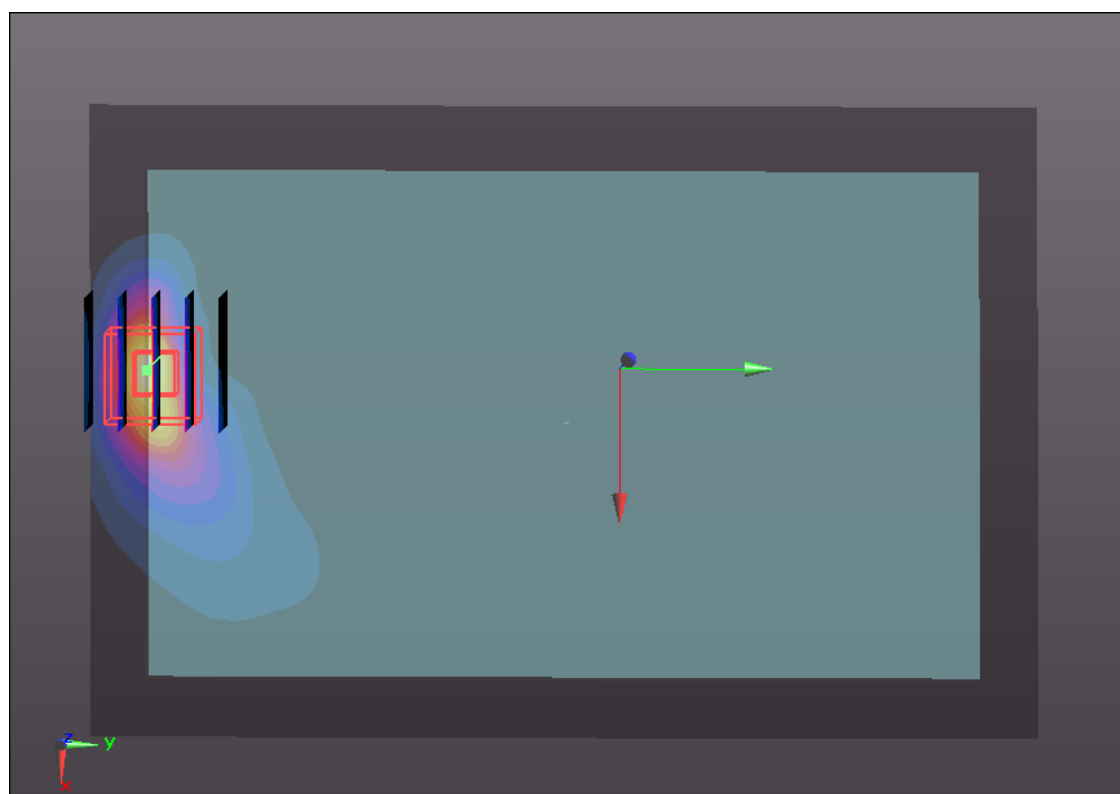

#09 GSM1900_GPRS11_Bottom Face_0.4cm_Ch810

DUT: 181807

Communication System: GPRS/EDGE 11; Frequency: 1909.8 MHz; Duty Cycle: 1:2.7

Medium: MSL_1900_110830 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.524$ mho/m; $\epsilon_r =$

53.873 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.39, 4.39, 4.39); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch810/Area Scan (101x151x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.411 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.740 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.819 W/kg

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.511 mW/g

Maximum value of SAR (measured) = 1.267 mW/g

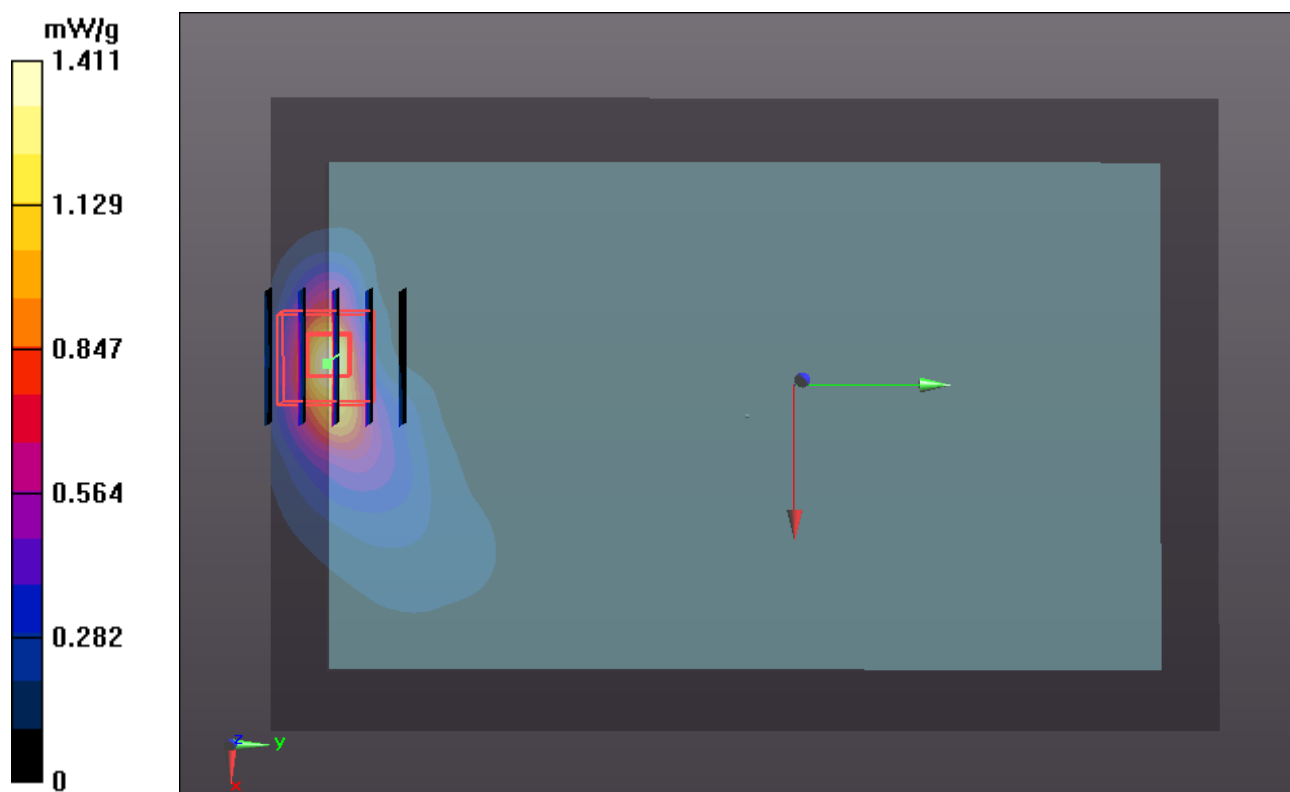

#09 GSM1900_GPRS11_Bottom Face_0.4cm_Ch810_2D

DUT: 181807

Communication System: GPRS/EDGE 11; Frequency: 1909.8 MHz; Duty Cycle: 1:2.7

Medium: MSL_1900_110830 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.524$ mho/m; $\epsilon_r =$

53.873 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.39, 4.39, 4.39); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch810/Area Scan (101x151x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.411 mW/g


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.740 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.819 W/kg

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.511 mW/g

Maximum value of SAR (measured) = 1.267 mW/g

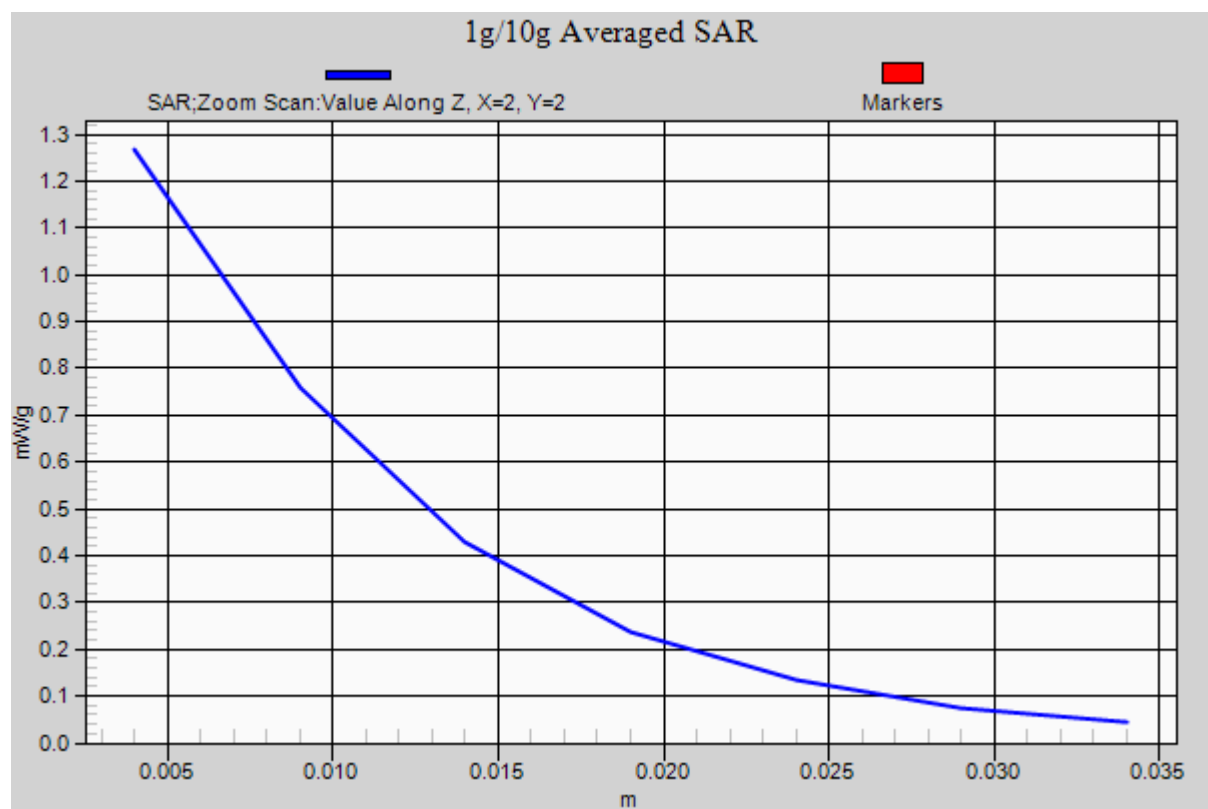

#05 GSM1900_GPRS11_Bottom Face_0.4cm_Ch661

DUT: 181807

Communication System: GPRS/EDGE 11; Frequency: 1880 MHz; Duty Cycle: 1:2.7

Medium: MSL_1900_110830 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r =$

53.955; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.39, 4.39, 4.39); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (101x151x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.388 mW/g



Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.591 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.717 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.494 mW/g

Maximum value of SAR (measured) = 1.193 mW/g

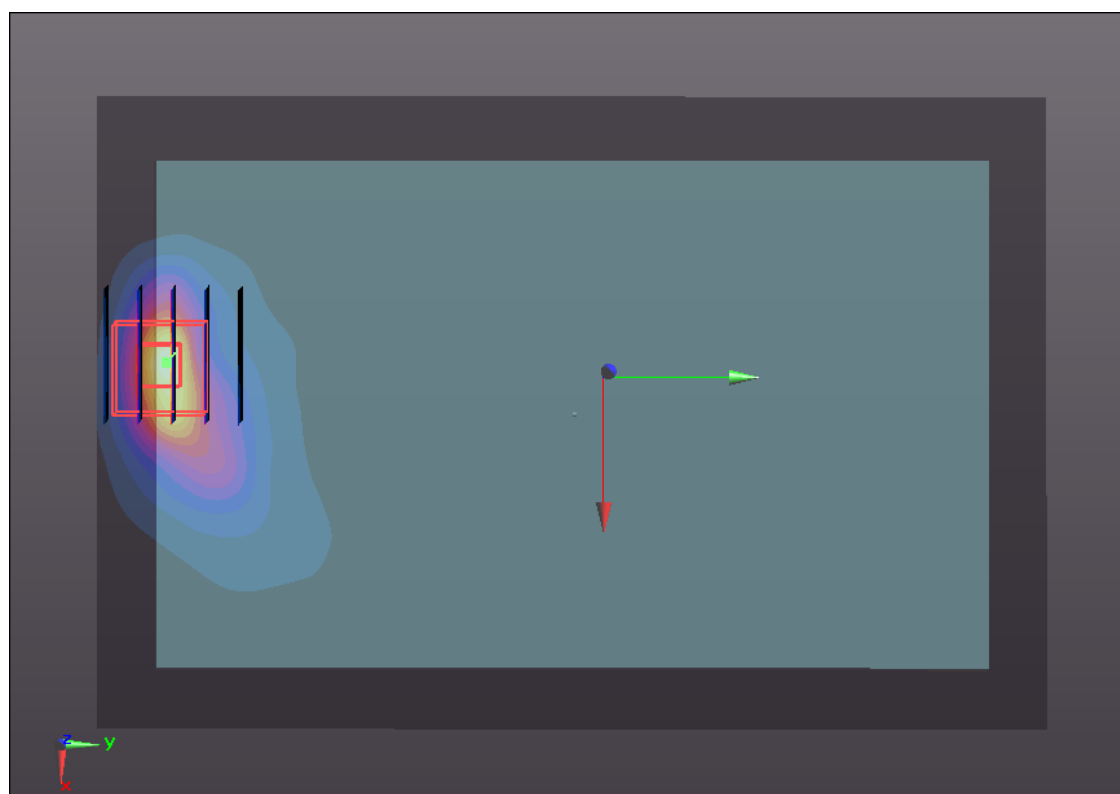

#21 802.11b_Bottom Face_0cm_Ch1

DUT: 181807

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_110831 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.922$ mho/m; $\epsilon_r = 54.35$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.04, 4.04, 4.04); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch1/Area Scan (101x151x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.326 mW/g



Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.911 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.763 W/kg

SAR(1 g) = 0.284 mW/g; SAR(10 g) = 0.125 mW/g

Maximum value of SAR (measured) = 0.324 mW/g

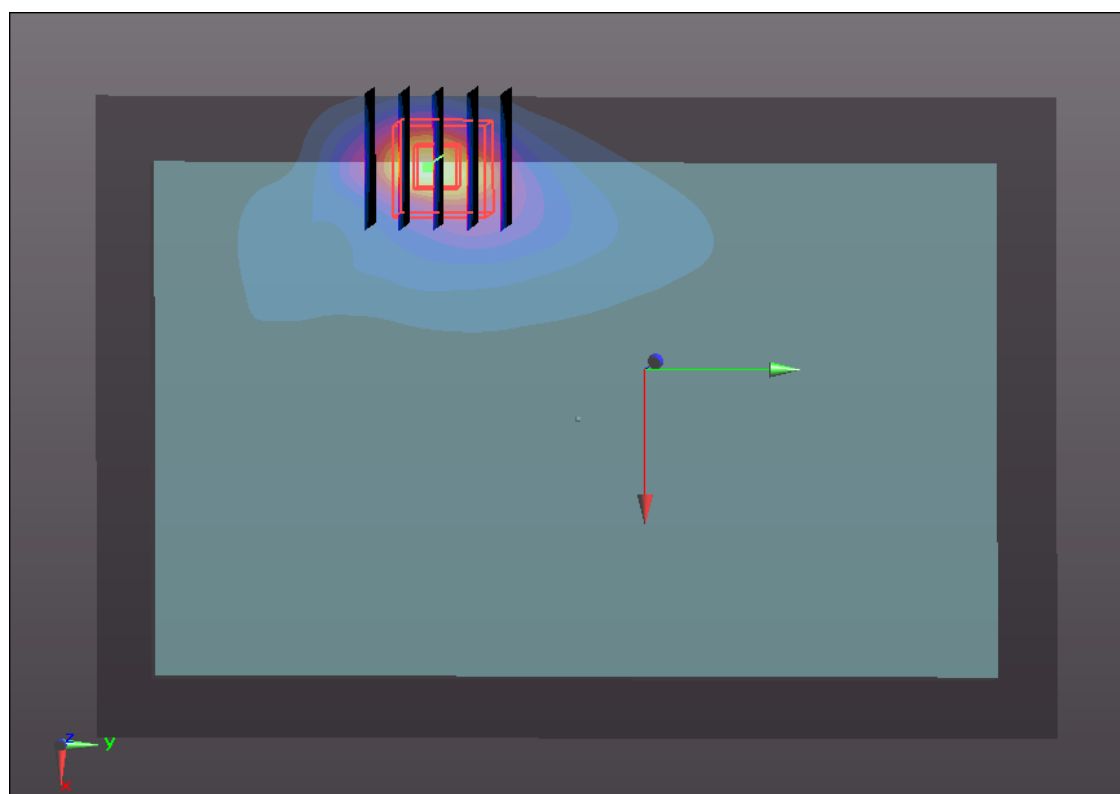

#22 802.11b_Primary Landscape_0cm_Ch1

DUT: 181807

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_110831 Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.922 \text{ mho/m}$; $\epsilon_r = 54.35$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.04, 4.04, 4.04); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch1/Area Scan (31x141x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.484 mW/g



Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.393 V/m ; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.666 W/kg

SAR(1 g) = 0.574 mW/g ; SAR(10 g) = 0.213 mW/g

Maximum value of SAR (measured) = 0.712 mW/g

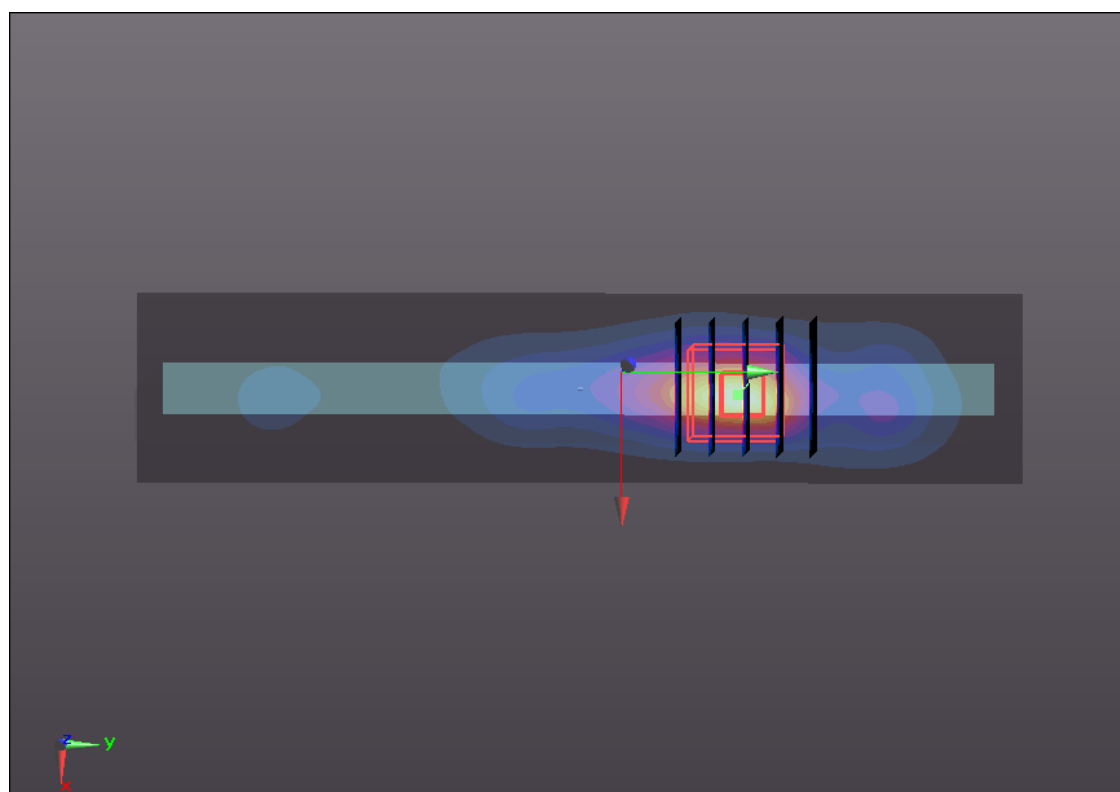

#23 802.11b_Secondary Portrait_0cm_Ch1

DUT: 181807

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_110831 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.922$ mho/m; $\epsilon_r = 54.35$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.04, 4.04, 4.04); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch1/Area Scan (41x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.022 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.994 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.040 W/kg

SAR(1 g) = 0.021 mW/g; SAR(10 g) = 0.011 mW/g

Maximum value of SAR (measured) = 0.025 mW/g

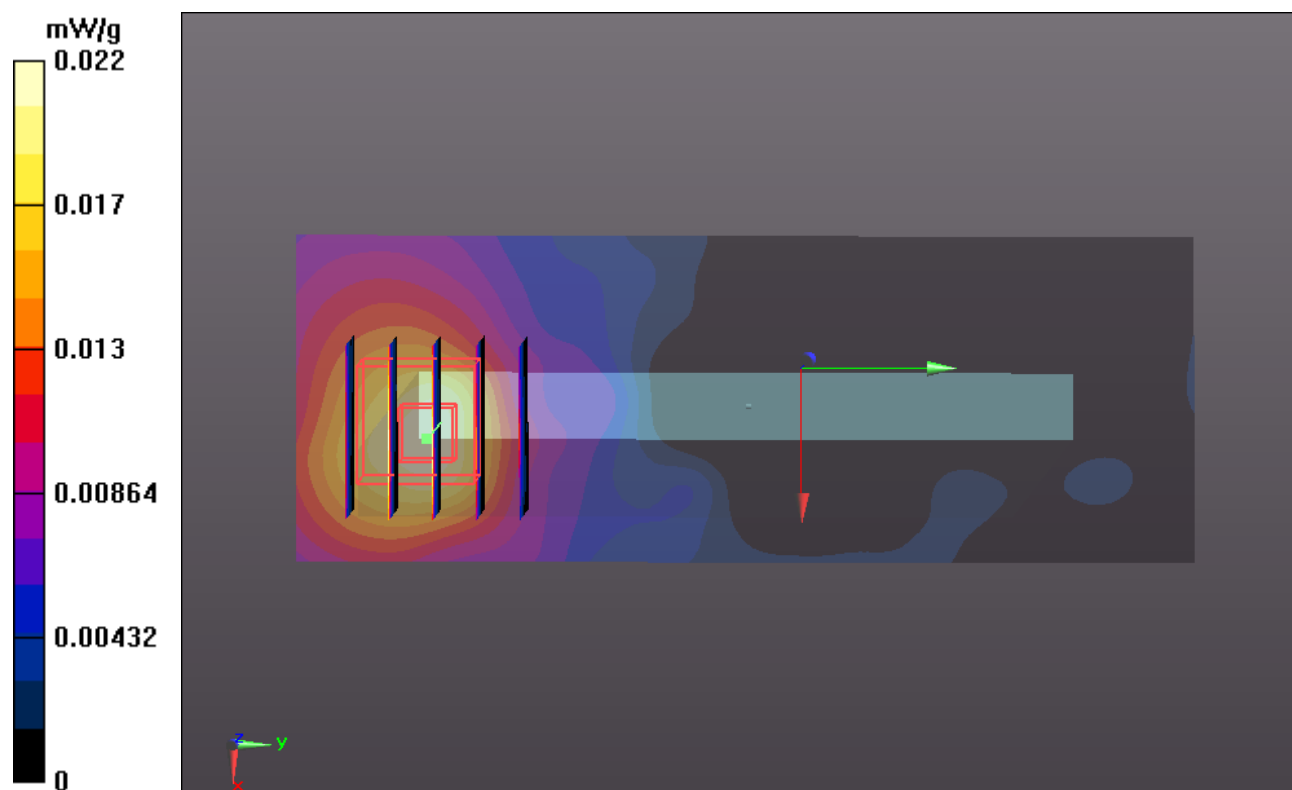

#24 802.11n_Primary Landscape_0cm_Ch1

DUT: 181807

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_110831 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.922$ mho/m; $\epsilon_r = 54.35$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.04, 4.04, 4.04); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch1/Area Scan (31x141x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.615 mW/g



Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.483 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 2.328 W/kg

SAR(1 g) = 0.755 mW/g; SAR(10 g) = 0.275 mW/g

Maximum value of SAR (measured) = 0.876 mW/g

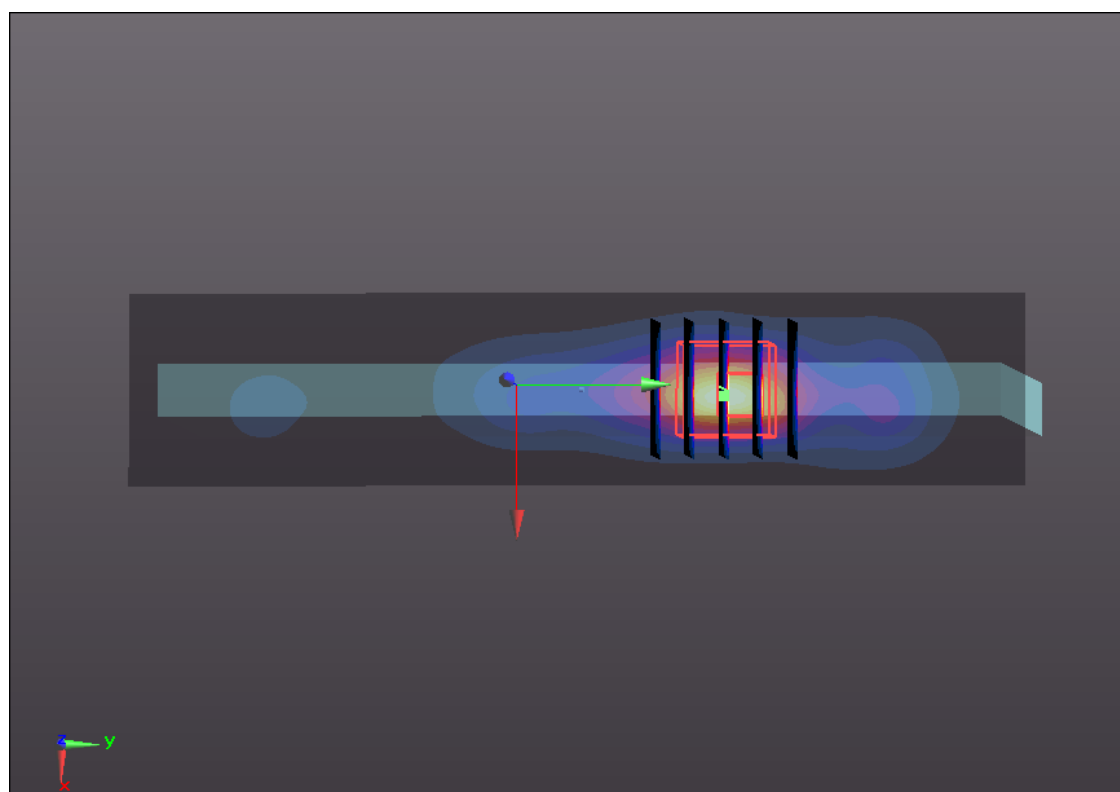

#24 802.11n_Primary Landscape_0cm_Ch1_2D

DUT: 181807

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_110831 Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.922 \text{ mho/m}$; $\epsilon_r = 54.35$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(4.04, 4.04, 4.04); Calibrated: 2010-9-21
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2010-11-18
- Phantom: SAM3; Type: SAM; Serial: TP-1079
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch1/Area Scan (31x141x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.615 mW/g


Ch1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.483 V/m ; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 2.328 W/kg

SAR(1 g) = 0.755 mW/g ; SAR(10 g) = 0.275 mW/g

Maximum value of SAR (measured) = 0.876 mW/g

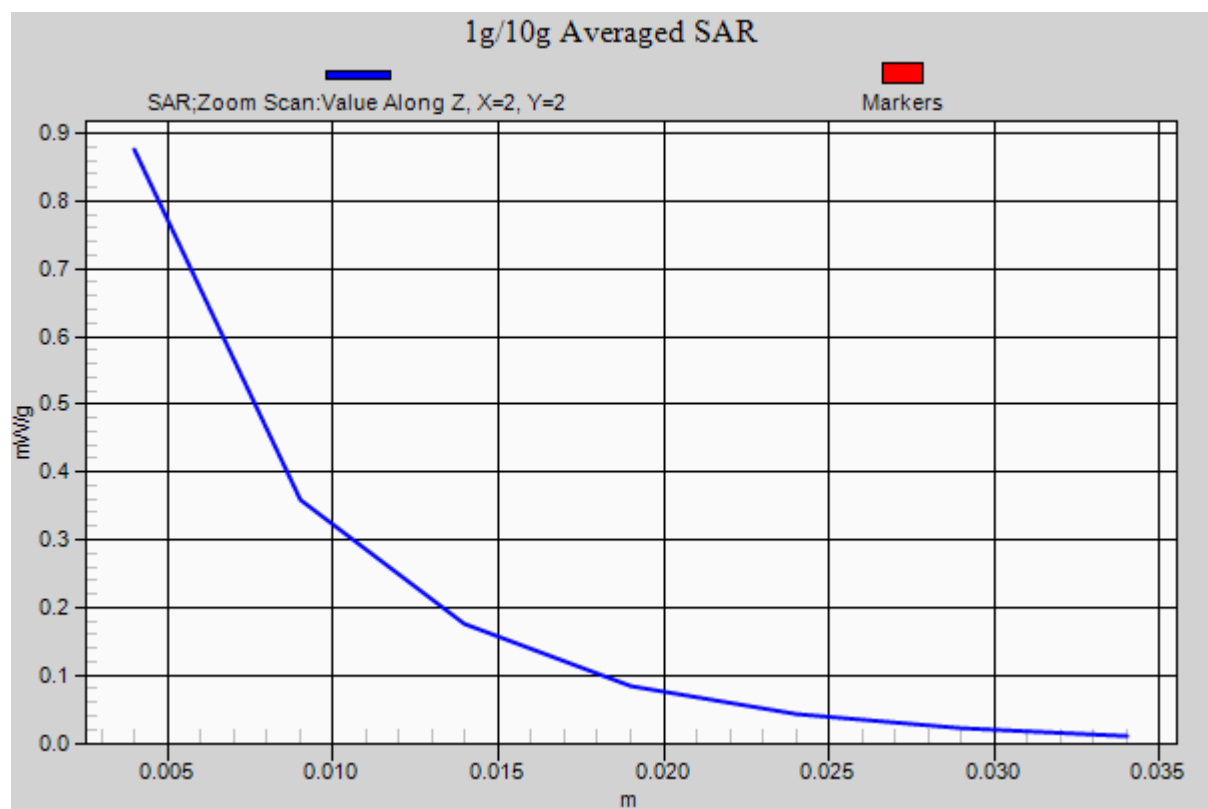

#25 802.11a Bottom Face_0cm_Ch36**DUT: 181807**

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110902 Medium parameters used : $f = 5180$ MHz; $\sigma = 5.268$ mho/m; $\epsilon_r = 49.23$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.74, 3.74, 3.74); Calibrated: 2011/6/21
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/1/13
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP1127
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch36/Area Scan (161x221x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.317 mW/g


Ch36/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.333 V/m; Power Drift = 0.143 dB

Peak SAR (extrapolated) = 1.311 W/kg

SAR(1 g) = 0.355 mW/g; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 0.707 mW/g

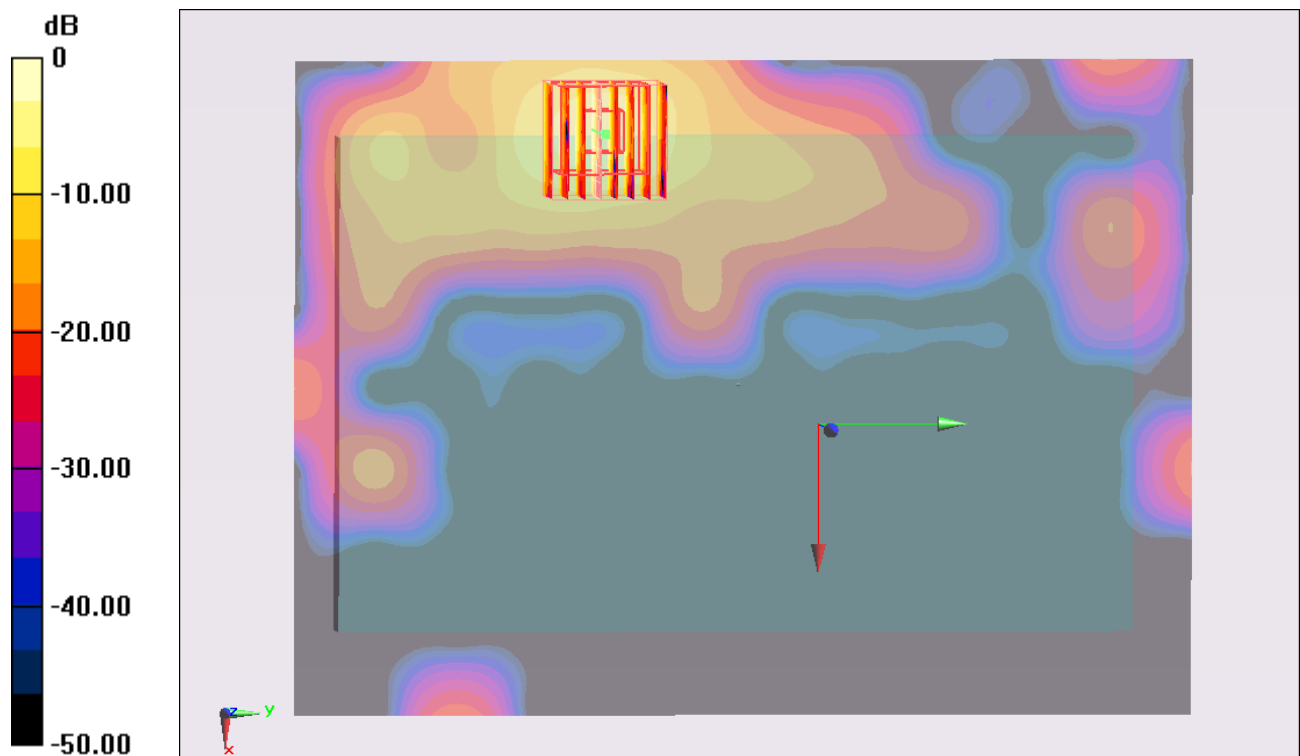

0 dB = 0.710mW/g

#26 802.11a Primary LandScape_0cm_Ch36**DUT: 181807**

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110902 Medium parameters used : $f = 5180$ MHz; $\sigma = 5.268$ mho/m; $\epsilon_r = 49.23$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.74, 3.74, 3.74); Calibrated: 2011/6/21
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/1/13
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP1127
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch36/Area Scan (61x221x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.109 mW/g


Ch36/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.485 V/m; Power Drift = 0.113 dB

Peak SAR (extrapolated) = 4.455 W/kg

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.225 mW/g

Maximum value of SAR (measured) = 2.337 mW/g

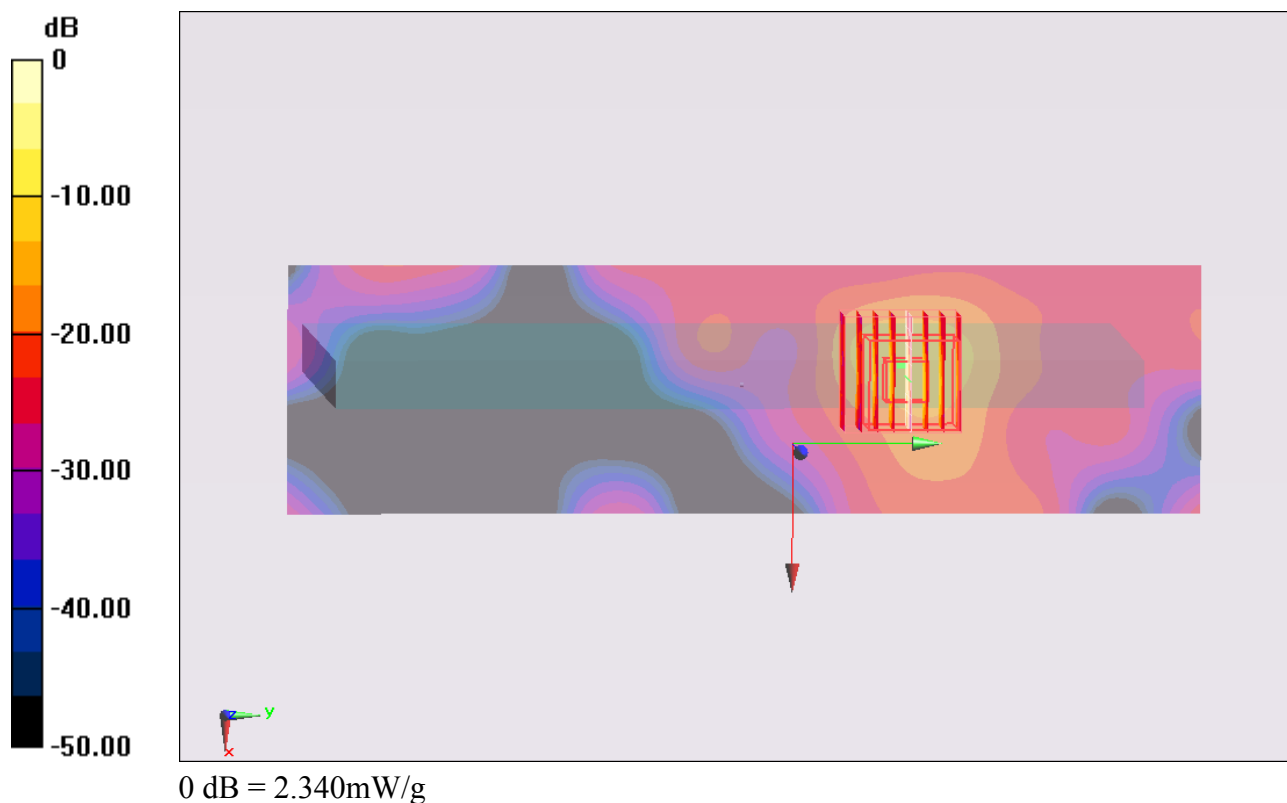

#27 802.11a Primary LandScape_0cm_Ch44**DUT: 181807**

Communication System: 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110902 Medium parameters used : $f = 5220$ MHz; $\sigma = 5.33$ mho/m; $\epsilon_r = 49.157$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.74, 3.74, 3.74); Calibrated: 2011/6/21
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/1/13
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP1127
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch44/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.133 mW/g


Ch44/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.875 V/m; Power Drift = 0.140 dB

Peak SAR (extrapolated) = 5.135 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.249 mW/g

Maximum value of SAR (measured) = 2.414 mW/g

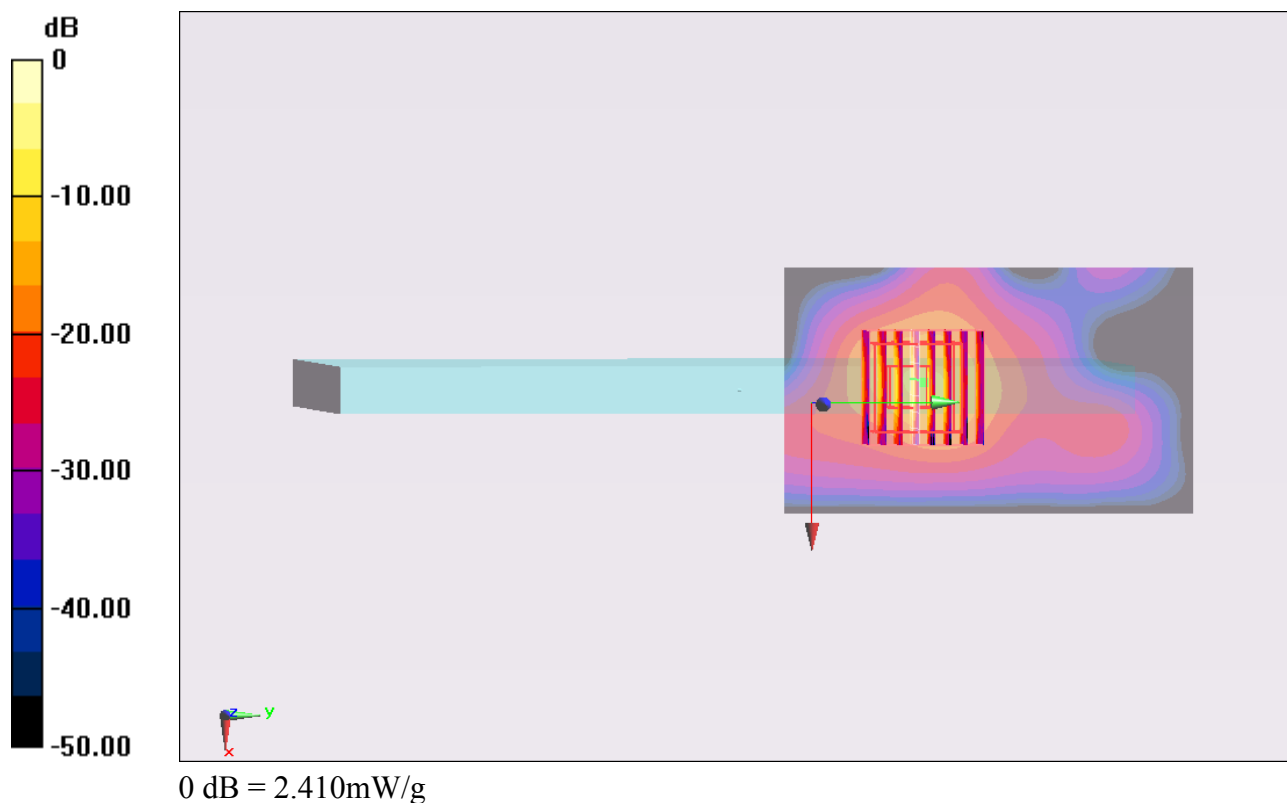

#27 802.11a Primary LandScape_0cm_Ch44_2D**DUT: 181807**

Communication System: 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110902 Medium parameters used : $f = 5220$ MHz; $\sigma = 5.33$ mho/m; $\epsilon_r = 49.157$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.74, 3.74, 3.74); Calibrated: 2011/6/21
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/1/13
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP1127
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch44/Area Scan (61x101x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.133 mW/g


Ch44/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.875 V/m; Power Drift = 0.140 dB

Peak SAR (extrapolated) = 5.135 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.249 mW/g

Maximum value of SAR (measured) = 2.414 mW/g

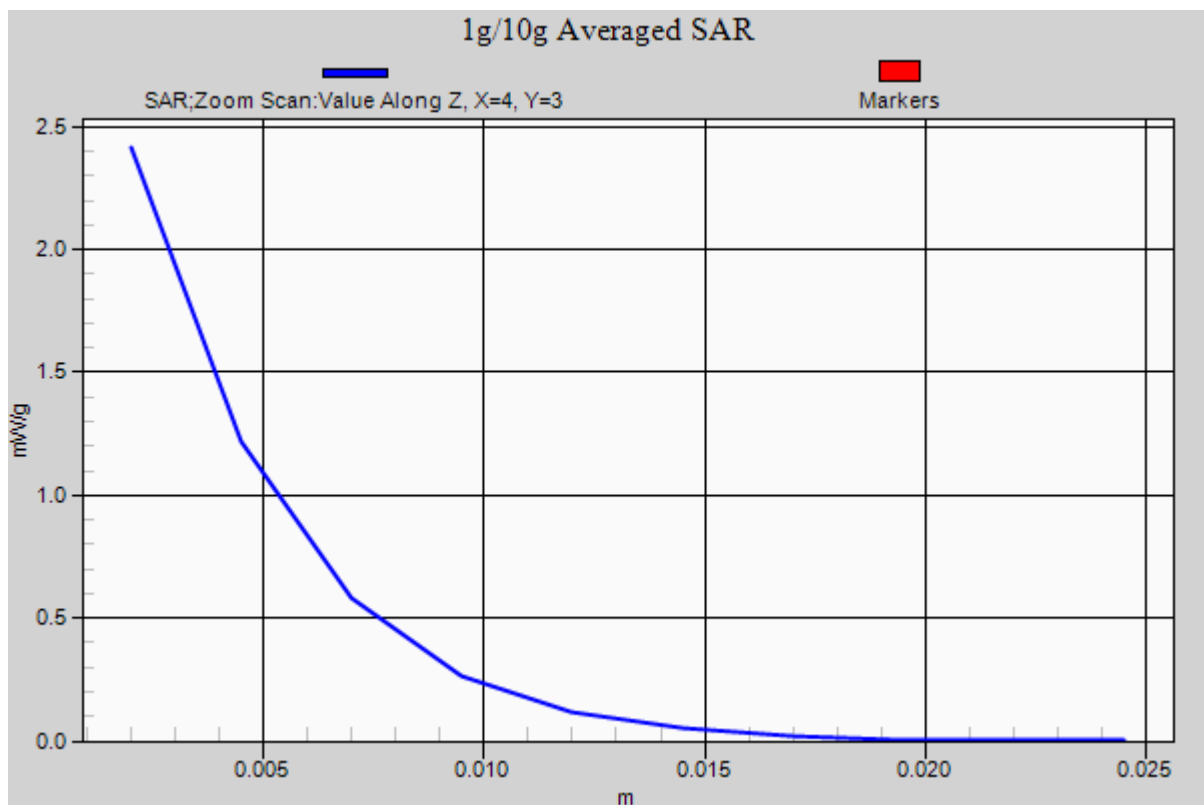

#28 802.11a Secondary Portrait_0cm_Ch36

DUT: 181807

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110902 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.268$ mho/m; $\epsilon_r = 49.23$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.74, 3.74, 3.74); Calibrated: 2011/6/21
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/1/13
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP1127
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch36/Area Scan (61x181x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.077 mW/g

Ch36/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.969 V/m; Power Drift = -0.121 dB

Peak SAR (extrapolated) = 0.307 W/kg

SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.045 mW/g

Maximum value of SAR (measured) = 0.157 mW/g


Ch36/Zoom Scan (8x8x10)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.969 V/m; Power Drift = -0.121 dB

Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.036 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.055 mW/g

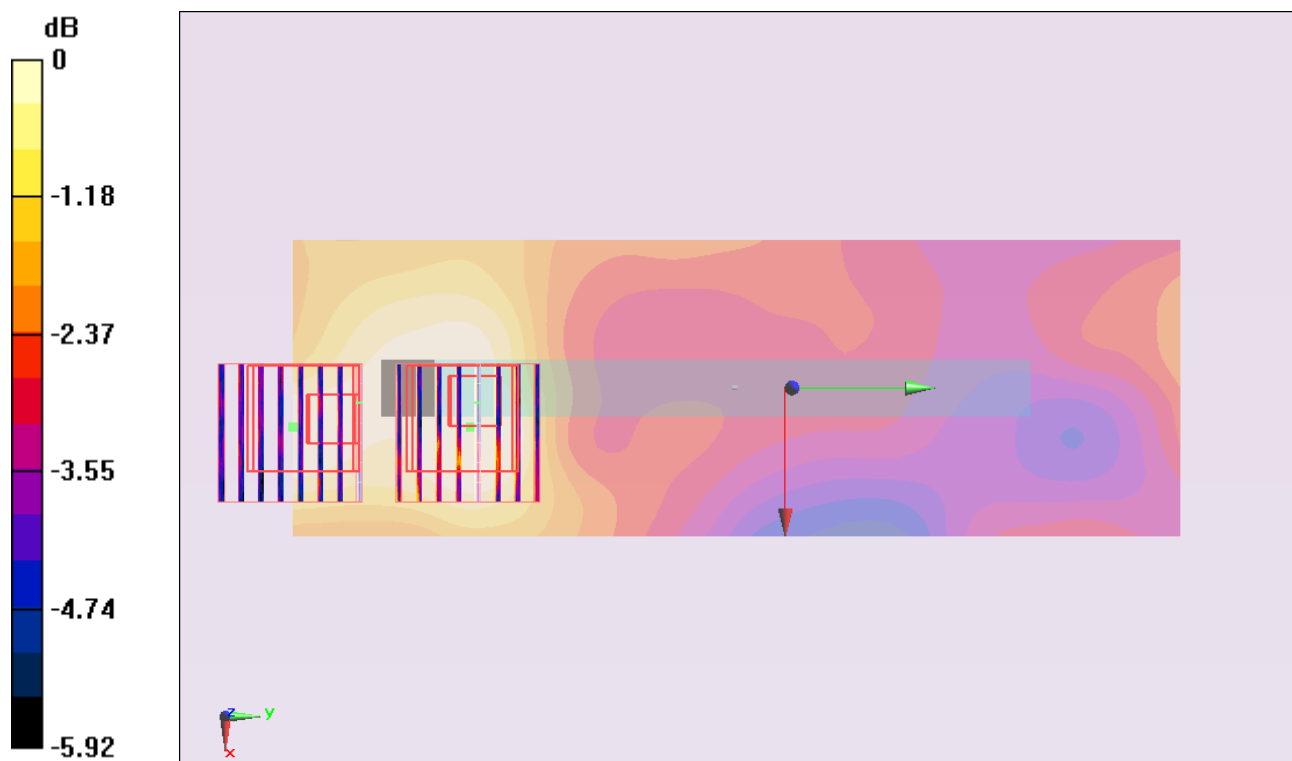

#29 802.11a Bottom Face_0cm_Ch149**DUT: 181807**

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110902 Medium parameters used : $f = 5745$ MHz; $\sigma = 6.065$ mho/m; $\epsilon_r = 47.996$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.23, 3.23, 3.23); Calibrated: 2011/6/21
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/1/13
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP1127
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch149/Area Scan (161x221x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.223 mW/g


Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.196 V/m; Power Drift = 0.156 dB

Peak SAR (extrapolated) = 0.946 W/kg

SAR(1 g) = 0.238 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.504 mW/g

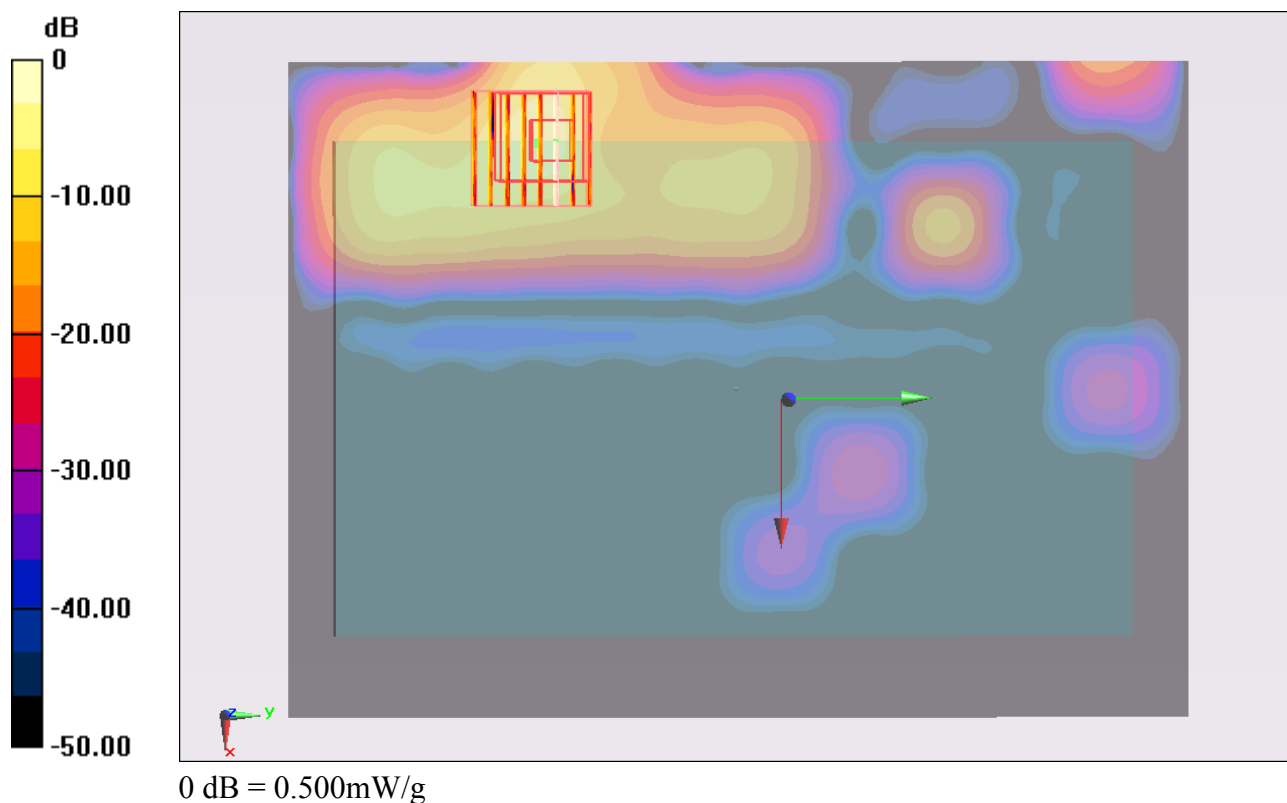

#30 802.11a Secondary Portrait_0cm_Ch149**DUT: 183132**

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110902 Medium parameters used : $f = 5745$ MHz; $\sigma = 6.065$ mho/m; $\epsilon_r = 47.996$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.23, 3.23, 3.23); Calibrated: 2011/6/21
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/1/13
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP1127
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch149/Area Scan (61x181x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.095 mW/g


Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.724 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.220 mW/g

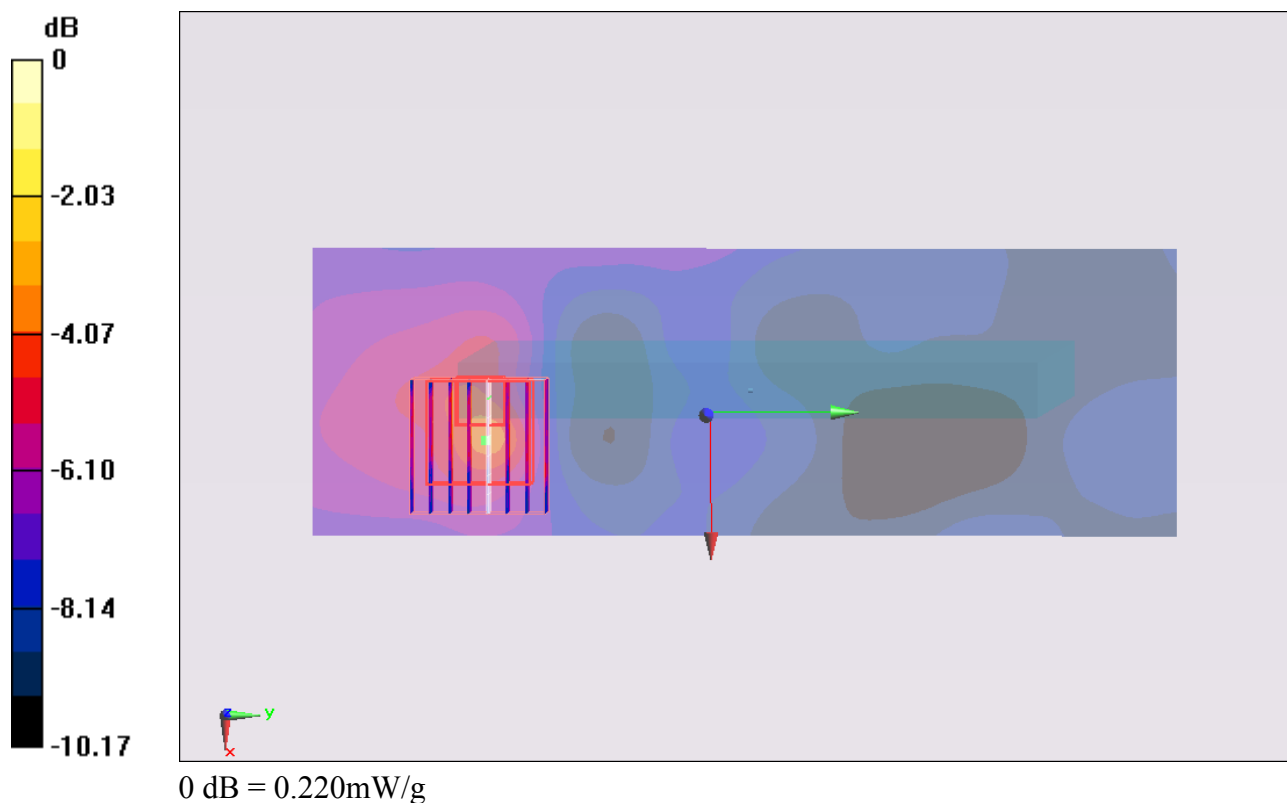

#31 802.11a Primary LandScape_0cm_Ch149**DUT: 181807**

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110902 Medium parameters used : $f = 5745$ MHz; $\sigma = 6.065$ mho/m; $\epsilon_r = 47.996$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.23, 3.23, 3.23); Calibrated: 2011/6/21
- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2011/1/13
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP1127
- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch149/Area Scan (61x221x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.807 mW/g


Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.464 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 3.063 W/kg

SAR(1 g) = 0.610 mW/g; SAR(10 g) = 0.124 mW/g

Maximum value of SAR (measured) = 1.579 mW/g

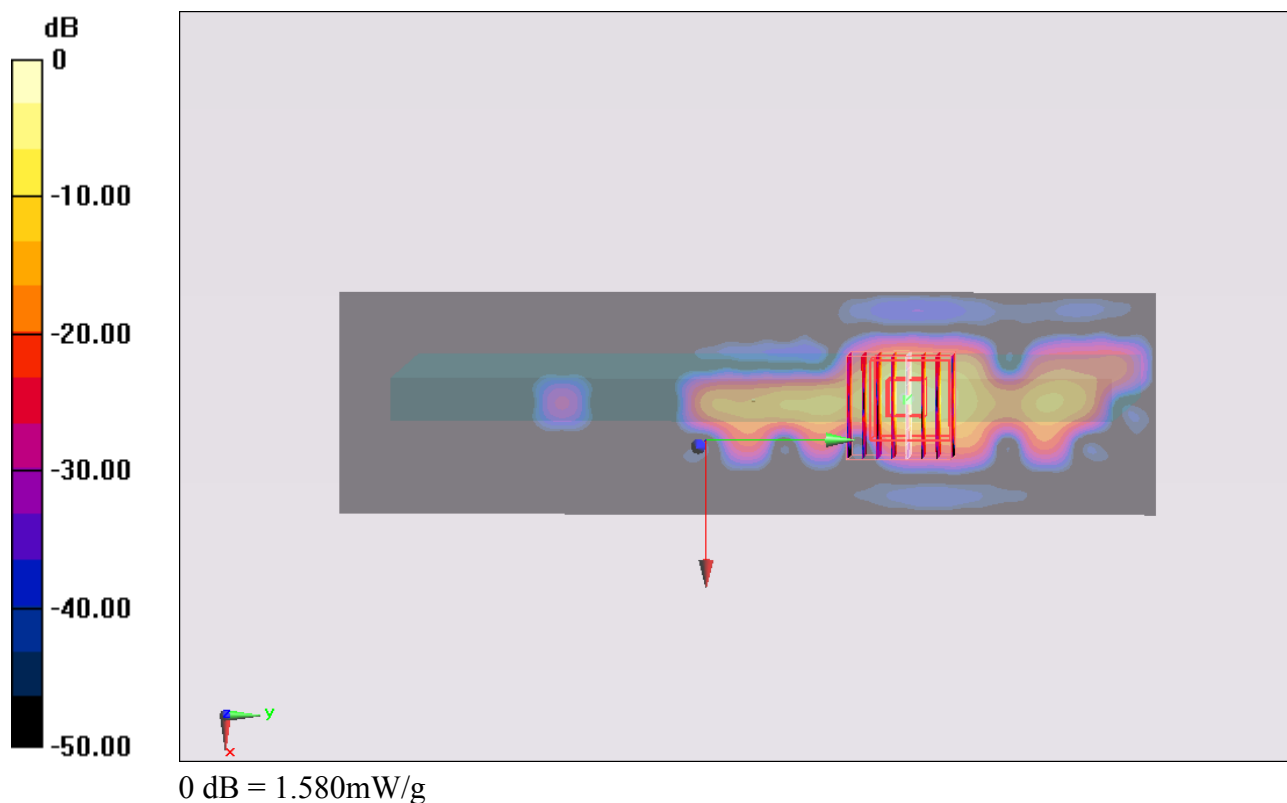

#31 802.11a Primary LandScape_0cm_Ch149_2D**DUT: 181807**

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110902 Medium parameters used : $f = 5745$ MHz; $\sigma = 6.065$ mho/m; $\epsilon_r =$ 47.996; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3578; ConvF(3.23, 3.23, 3.23); Calibrated: 2011/6/21

- Sensor-Surface: 4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn577; Calibrated: 2011/1/13

- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP1127

- Measurement SW: DASY52, Version 52.6 (2); SEMCAD X Version 14.4.5 (3634)

Ch149/Area Scan (61x221x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.807 mW/g

Ch149/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=2.5mm

Reference Value = 2.464 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 3.063 W/kg

SAR(1 g) = 0.610 mW/g; SAR(10 g) = 0.124 mW/g

Maximum value of SAR (measured) = 1.579 mW/g

