



TEST REPORT

No. 2012TAR540

for

ZTE Corporation

WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone

Model Name: ZTE V791

FCC ID: Q78-V791

with

Hardware Version: WMAK

Software Version: CLA-UNI-QB25S-P175A40V1.0.0

Issued Date: Nov. 12th, 2012

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629B-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633-2561 , Fax:+86(0)10-62304633-2504 Email:welcome@emcite.com. www.emcite.com

CONTENTS

1. TEST LABORATORY.....	3
1.1. TESTING LOCATION.....	3
1.2. TESTING ENVIRONMENT.....	3
1.3. PROJECT DATA.....	3
1.4. SIGNATURE.....	3
2. CLIENT INFORMATION.....	4
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE).....	5
3.1. ABOUT EUT.....	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
4. REFERENCE DOCUMENTS.....	6
4.1. REFERENCE DOCUMENTS FOR TESTING.....	6
5. LABORATORY ENVIRONMENT.....	7
6. SUMMARY OF TEST RESULTS.....	8
7. TEST EQUIPMENTS UTILIZED.....	9
ANNEX A: MEASUREMENT RESULTS.....	10

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 0086-10-62304633-2561
Fax: 0086-10-62304633-2504

1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: Nov. 1st, 2012
Testing End Date: Nov. 1st, 2012


1.4. Signature



Qu Pengfei
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: ZTE Corporation
Address /Post: #68 Zijin Hua Road, Nanjing, Jiangsu Province, P. R. China
City: Nan Jing
Postal Code: 210012
Country: China
Telephone: +86-25-52878232
Fax: +86-25-68897541

2.2. Manufacturer Information

Company Name: ZTE Corporation
Address /Post: #68 Zijin Hua Road, Nanjing, Jiangsu Province, P. R. China
City: Nan Jing
Postal Code: 210012
Country: China
Telephone: +86-25-52878232
Fax: +86-25-68897541

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone
Model Name	ZTE V791
FCC ID	Q78-V791
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.7VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	867525010007837	WMAK	CLA-UNI-QB25S-P175A40V1.0.0

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	10091207290058082
AE2	Battery	10091207290051197
AE3	Travel charger	/
AE5	USB cable	/

AE1, AE2

Model	Li3712T42P3h654246h
Manufacturer	ZTE
Capacitance	1200 mAh
Nominal voltage	3.7 V

AE3

Model	STC-A22O50I700USBA-Z
Manufacturer	RUIDE
Length of cable	71.5 cm (length of USB cable)

,AE5

Model	11.5001030046
Manufacturer	ZTE
Length of cable	71.5 cm

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	10-1-10 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

5. LABORATORY ENVIRONMENT

Control room/ conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber FAC-3 (8.6 meters X 6.1 meters X 3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Semi-anechoic chamber SAC-2 (10 meters X 6.7 meters X 6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Clause	List	Clause in FCC rules	Verdict
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESU26	100376	R&S	2013-11-07
2	EMI Antenna	VULB 9163	9163-514	Schwarzbeck	2014-11-10
3	EMI Antenna	3117	00139065	ETS-Lindgren	2014-07-31
4	LISN	ESH2-Z5	829991/012	R&S	2013-04-16
5	Test Receiver	ESCI	100344	R&S	2013-03-28
6	Universal Radio Communication Tester	CMU200	102228	R&S	2013-07-07
7	Universal Radio Communication Tester	CMU200	100680	R&S	2013-09-05
8	PC	OPTIPLEX 755	3908243625	DELL	N/A
9	Monitor	E178FPc	CN-OWR979-6 4180-7AJ-D2M S	DELL	N/A
10	Printer	LaserJet 1160	CNM2D33740	HP	N/A
11	Keyboard	L100	CN0RH659658 907ATOI40	DELL	N/A
12	Mouse	M-UAE119	LZ935220ZRC	Lenovo	N/A

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.1.3 Measurement Limit

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
Above 960	500

A.1.4 Test Condition

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz (IF Bandwidth)	5
1000-4000	1MHz/1MHz	15

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Charging Mode

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	G_A (dB/m)	P_{Mea} (dBuV)	Polarity
2791.600	43.9	-26.3	33.3	36.938	HORIZONTAL
2780.000	43.8	-26.3	33.3	36.838	HORIZONTAL
2759.000	43.8	-27.1	33.3	37.585	VERTICAL
2803.400	43.8	-27.6	33.8	37.641	VERTICAL
2792.000	43.8	-26.3	33.3	36.838	HORIZONTAL
2758.400	43.8	-27.1	33.3	37.585	VERTICAL

USB Mode

Frequency(MHz)	Result(dBuV/m)	G_{PL} (dB)	G_A (dB/m)	P_{mea} (dBuV)	Polarity
3000.000	46.2	-28.4	34.1	40.472	VERTICAL
2999.800	44.3	-29.0	33.8	39.479	VERTICAL
2776.400	44.0	-26.3	33.3	37.038	VERTICAL
2804.400	44.0	-27.6	33.8	37.841	VERTICAL
2793.600	44.0	-26.3	33.3	37.038	VERTICAL
2793.000	44.0	-26.3	33.3	37.038	HORIZONTAL

Charging Mode

15B RE 30MHz-1GHz

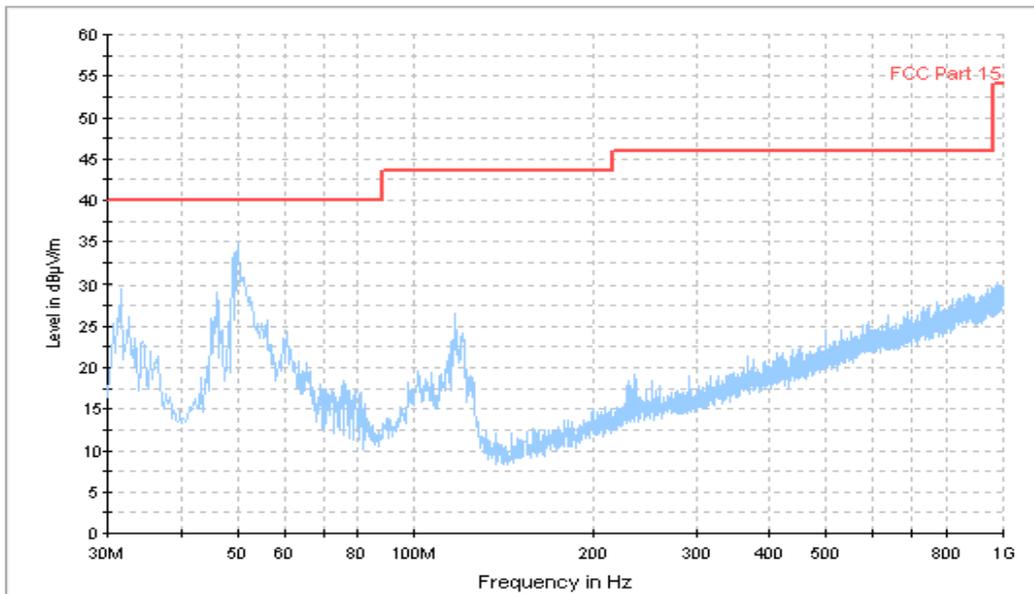


Figure A.1 Radiated Emission from 30MHz to 1GHz

15B RE - 1GHz-3GHz

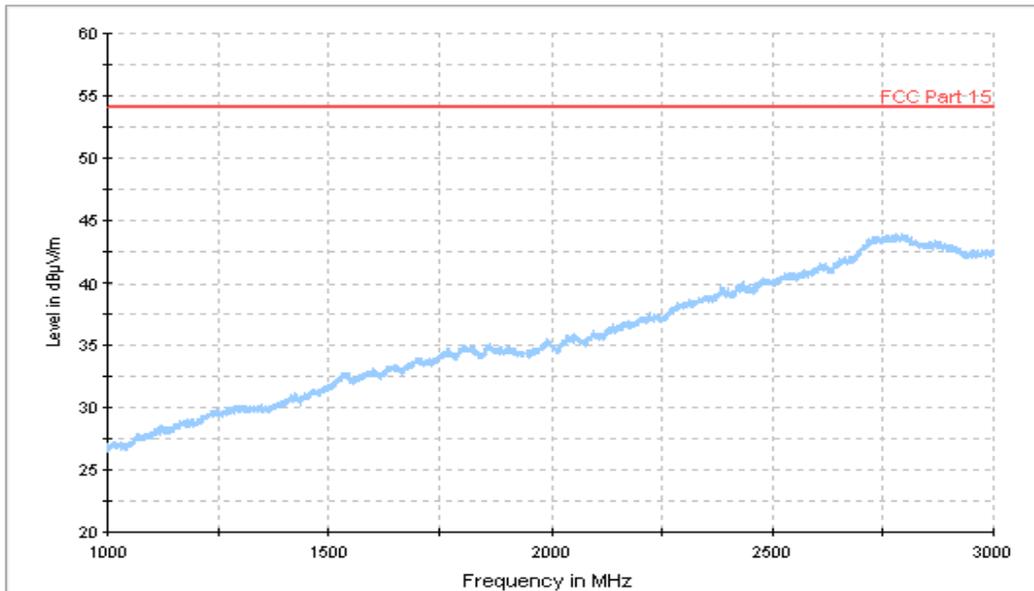


Figure A.2 Radiated Emission from 1GHz to 3GHz

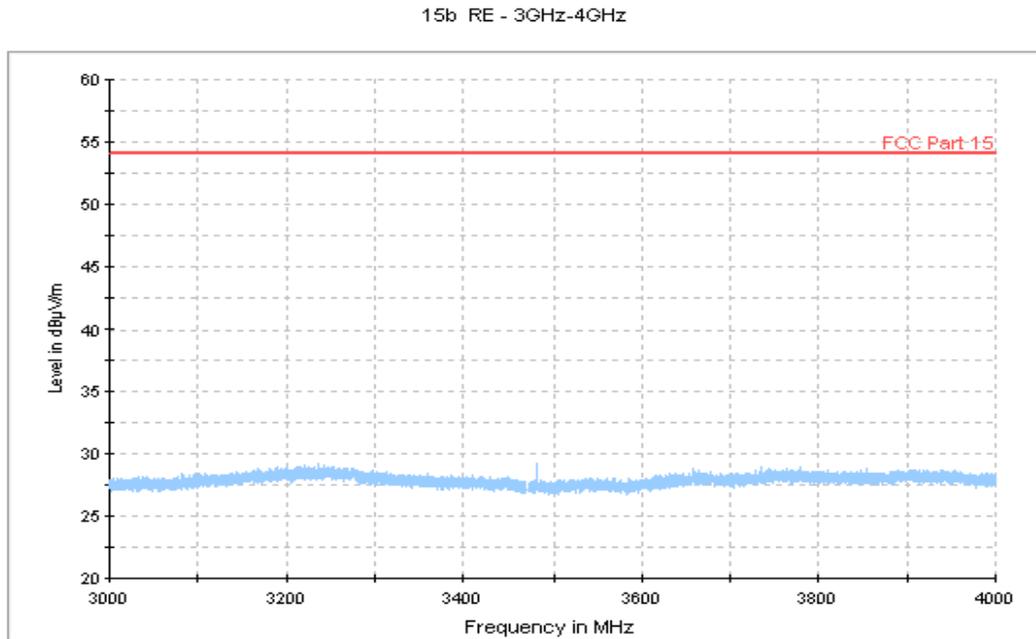


Figure A.3 Radiated Emission from 3GHz to 4GHz

USB Mode

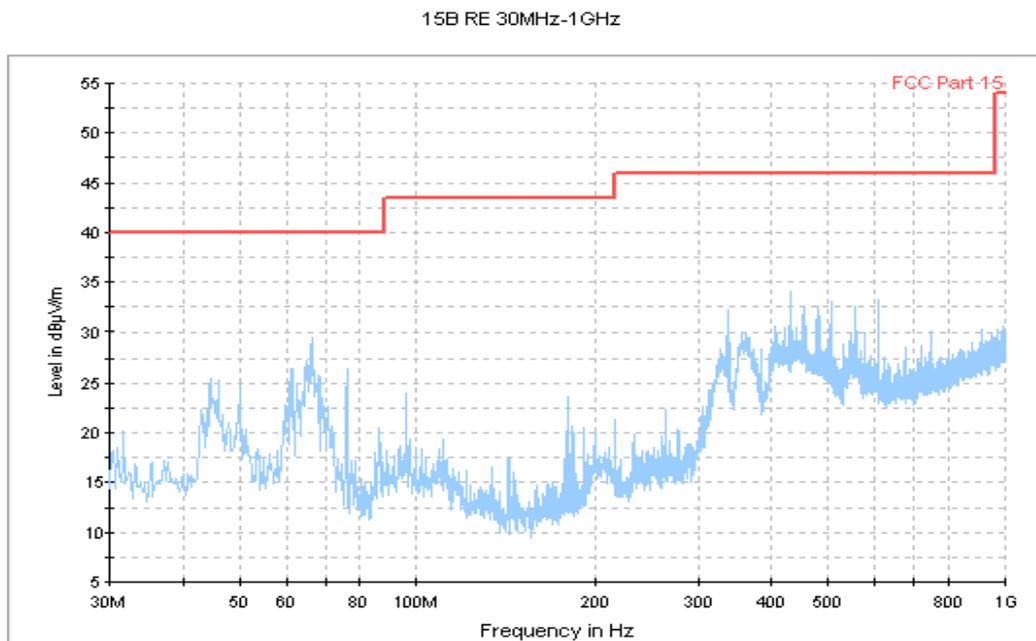


Figure A.4 Radiated Emission from 30MHz to 1GHz

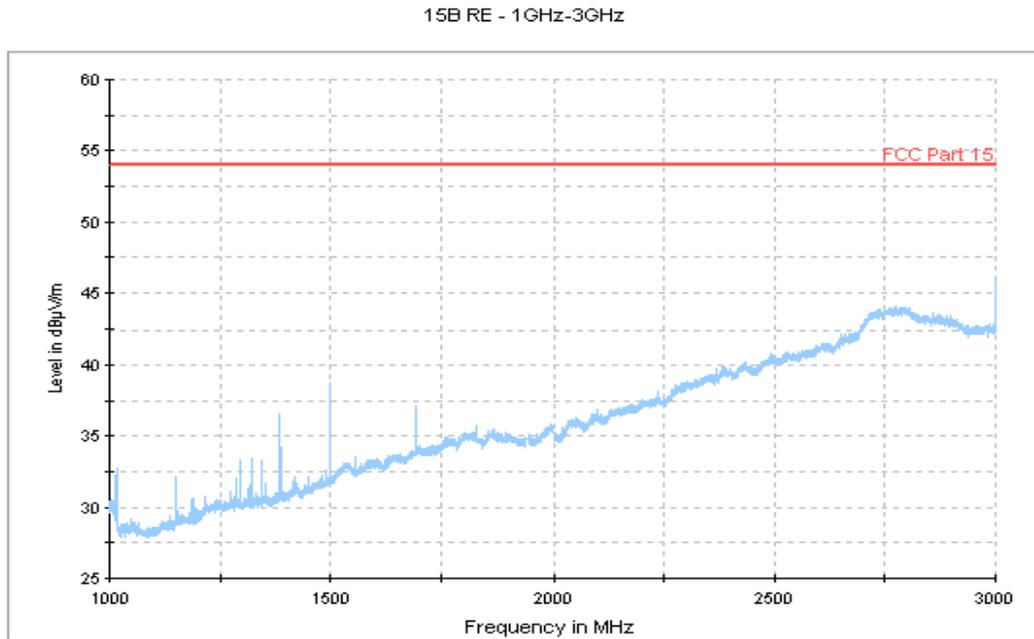


Figure A.5 Radiated Emission from 1GHz to 3GHz

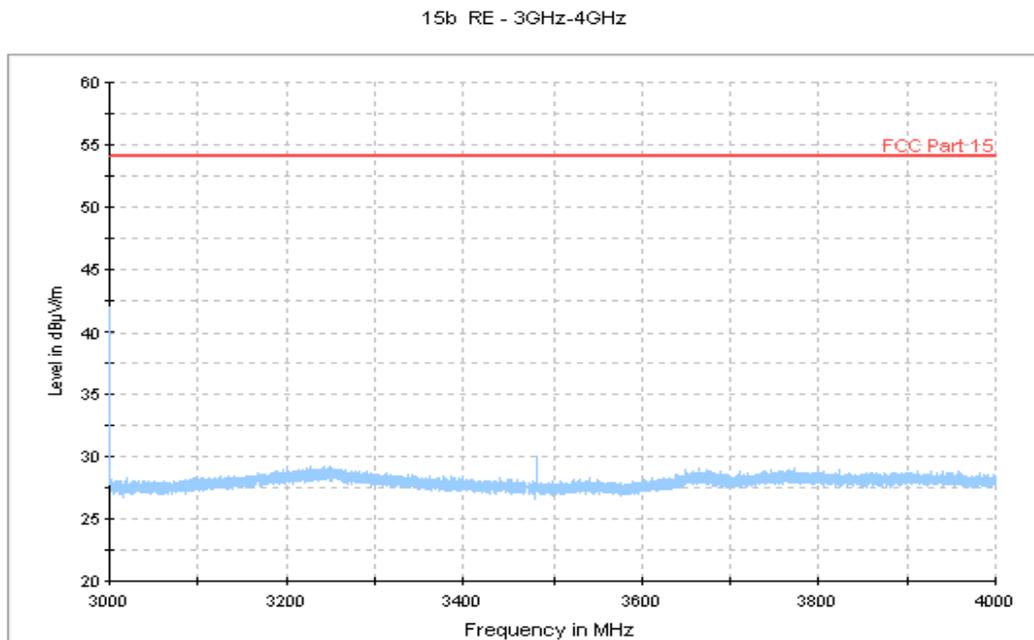


Figure A.6 Radiated Emission from 3GHz to 4GHz

A.2 Conducted Emission (§15.107(a))

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 7.2.

A.2.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results Charging Mode

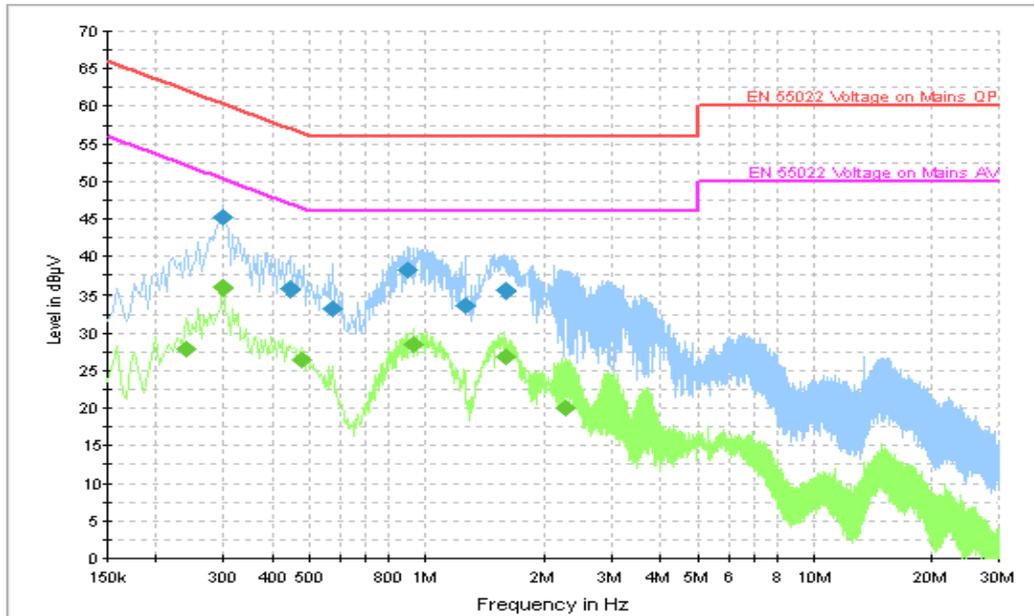


Figure A.7 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.298500	45.3	GND	L1	10.0	15.0	60.3
0.447000	35.7	GND	L1	10.0	21.2	56.9
0.573000	33.3	GND	L1	10.0	22.7	56.0
0.897000	38.3	GND	L1	10.0	17.7	56.0
1.266000	33.6	GND	L1	10.0	22.4	56.0
1.599000	35.5	GND	L1	10.0	20.5	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.240000	27.9	GND	L1	10.0	24.2	52.1
0.298500	35.9	GND	L1	10.0	14.4	50.3
0.478500	26.4	GND	N	10.0	19.9	46.4
0.928500	28.5	GND	L1	10.0	17.5	46.0
1.599000	26.9	GND	L1	10.0	19.1	46.0
2.283000	20.0	GND	L1	10.0	26.0	46.0

USB Mode

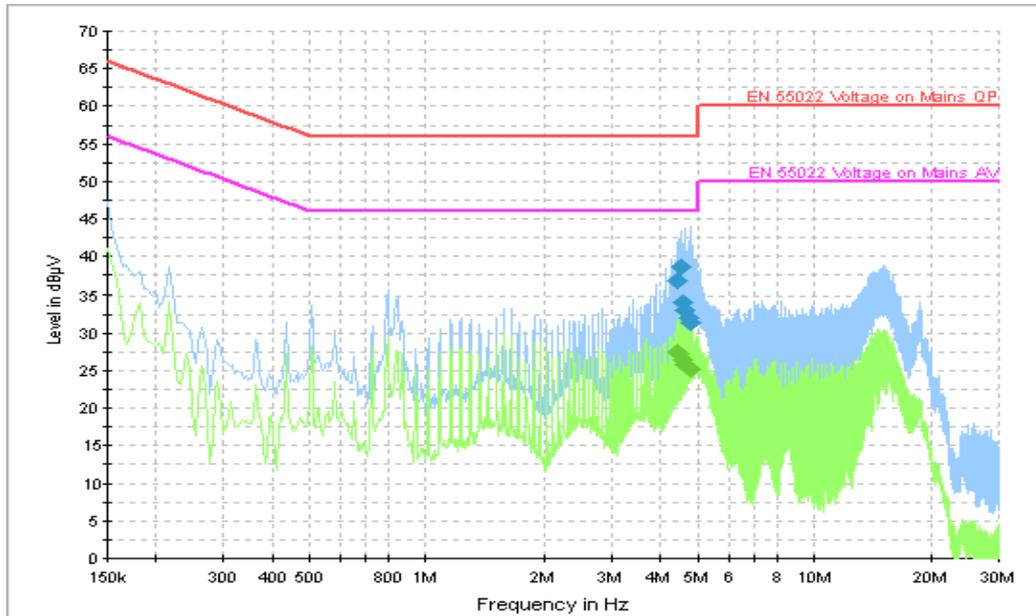


Figure A.8 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
4.425000	36.8	GND	N	10.0	19.2	56.0
4.497000	38.6	GND	N	10.0	17.4	56.0
4.564500	34.0	GND	N	10.0	22.0	56.0
4.636500	33.0	GND	N	10.0	23.0	56.0
4.708500	32.0	GND	N	10.0	24.0	56.0
4.780500	31.4	GND	N	10.0	24.6	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
4.420500	27.4	GND	N	10.0	18.6	46.0
4.492500	27.2	GND	N	10.0	18.8	46.0
4.564500	26.5	GND	N	10.0	19.5	46.0
4.636500	25.9	GND	N	10.0	20.1	46.0
4.708500	25.4	GND	N	10.0	20.6	46.0
4.780500	25.2	GND	N	10.0	20.8	46.0

END OF REPORT