


# FCC RF Test Report

**APPLICANT** : ZTE CORPORATION  
**EQUIPMENT** : WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone  
**BRAND NAME** : ZTE  
**MODEL NAME** : ZTE V887  
**FCC ID** : Q78-V887  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The product was received on Sep. 26, 2012 and completely tested on Oct. 12, 2012. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer..... 5

    1.3 Feature of Equipment Under Test ..... 5

    1.4 Testing Site ..... 6

    1.5 Applied Standards ..... 6

    1.6 Ancillary Equipment List ..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7**

    2.1 RF Output Power ..... 7

    2.2 Test Mode..... 8

    2.3 Connection Diagram of Test System..... 9

    2.4 RF Utility ..... 9

**3 TEST RESULT ..... 10**

    3.1 6dB Bandwidth Measurement ..... 10

    3.2 Peak Output Power Measurement ..... 13

    3.3 Power Spectral Density Measurement ..... 16

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 22

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 27

    3.6 AC Conducted Emission Measurement..... 40

    3.7 Antenna Requirements..... 44

**4 LIST OF MEASURING EQUIPMENT..... 45**

**5 UNCERTAINTY OF EVALUATION..... 46**

**APPENDIX A. PHOTOGRAPHS OF EUT**

**APPENDIX B. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)(1)	A8.1(b)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.5	15.247(e)	A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}$	Pass	-
3.4	15.247(d)	A8.5	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	A8.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under Limit 3.7 dB at 2483.500 MHz
3.6	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 10.02 dB at 1.660 MHz
3.7	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.2 Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.3 Feature of Equipment Under Test

Product Feature	
Equipment	WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	ZTE V887
FCC ID	Q78-V887
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA/WLAN 11bgn / Bluetooth 2.1 EDR / Bluetooth 3.0 EDR / Bluetooth 4.0 – LE
HW Version	WMAO
SW Version	ZTE-CN-QB125D-P177A10V1.0.0
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth 4.0 - LE : 1.47 dBm (0.0014 W)
Antenna Type	Monopole Antenna with gain -3.00 dBi
Type of Modulation	Bluetooth 4.0 - LE : GFSK

## 1.4 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.			
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC/IC Registration No.</b>
	TH01-KS	CO01-KS	03CH01-KS	149928/4086E-1

## 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
4.	Notebook	DELL	P08S	QDS-BRCM1030	N/A	AC I/P: Unshielded, 0.9 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-106	QTLBH-106	N/A	N/A



## 2 Test Configuration of Equipment Under Test

### 2.1 RF Output Power

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.0 – LE RF Output Power	
		Data Rate / Modulation	
		GFSK	
		1Mbps	
Ch00	2402MHz	0.08 dBm	
Ch19	2440MHz	0.17 dBm	
Ch39	2480MHz	<b>1.47 dBm</b>	

## 2.2 Test Mode

The EUT has been associated with peripherals pursuant to FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02

ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations.


The following tables are showing the test modes as the worst cases (Z plane) and recorded in this report.

The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.0 – LE / GFSK
<b>Conducted TCs</b>	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
<b>Radiated TCs</b>	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
<b>AC Conducted Emission</b>	Mode 1 :GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone

## 2.3 Connection Diagram of Test System

### <Bluetooth 4.0 – LE Tx Mode>

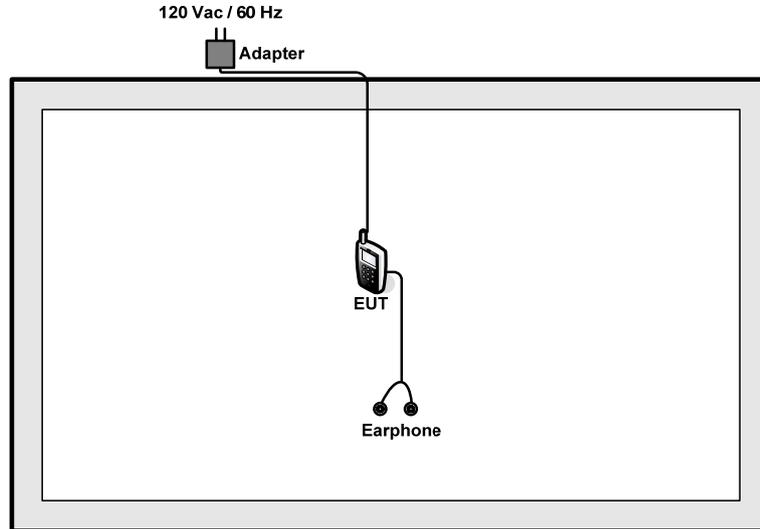

### <AC Conducted Emission Mode>

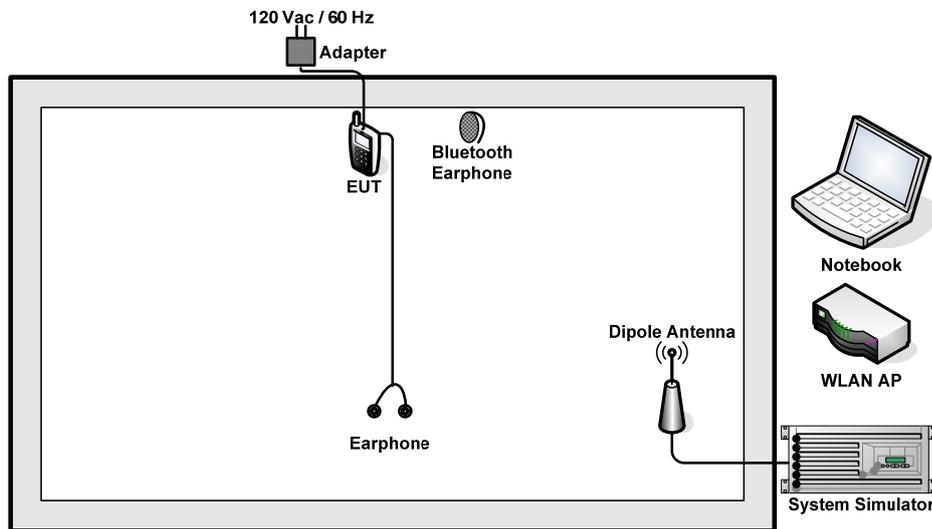

## 2.4 RF Utility

For Bluetooth function, key in “\* # \* # 3646633 # \* # \*” on the EUT directly. Then, the EUT will get into the engineering modes to continuous transmitting and receiving signals.

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 KHz.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.


##### 3.1.4 Test Setup

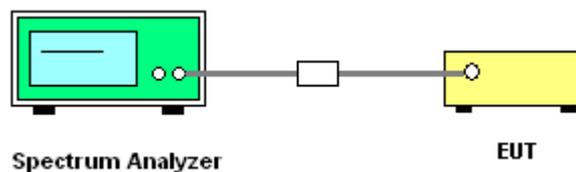






### 6 dB Bandwidth Plot on Channel 19

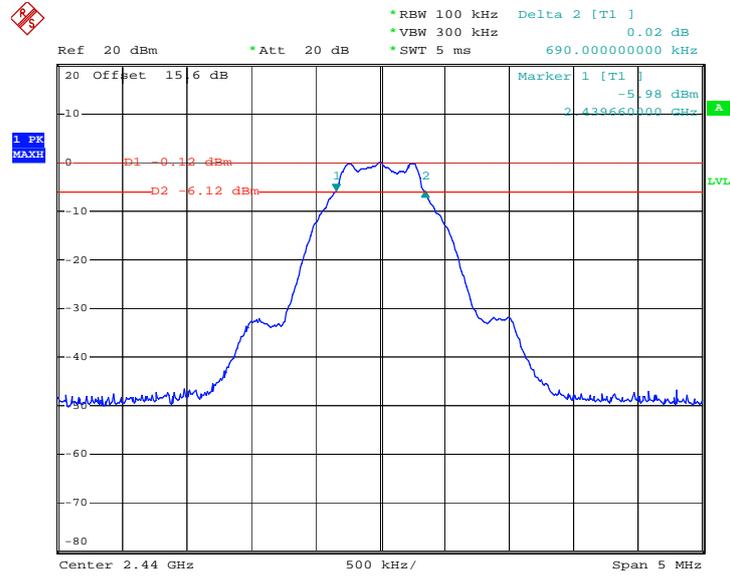

Date: 11.OCT.2012 21:49:48

### 6 dB Bandwidth Plot on Channel 39

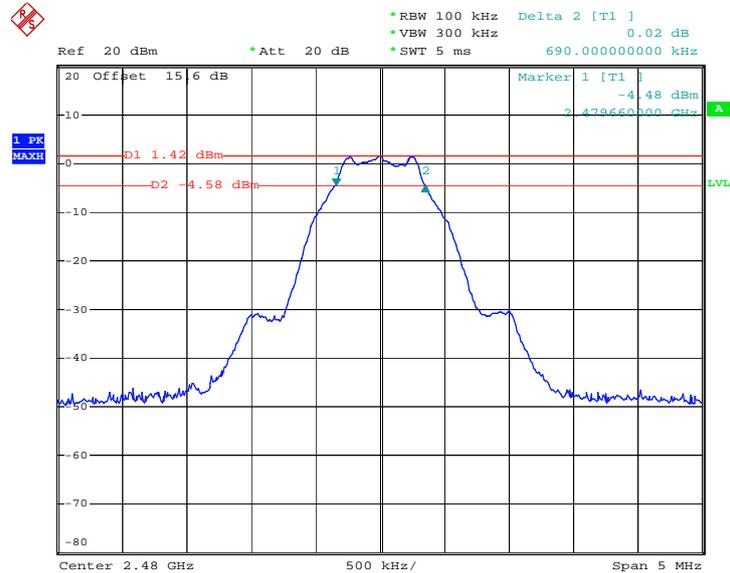

Date: 11.OCT.2012 21:51:03

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v02.
2. The RF output of EUT was connected to the power meter by a low loss cable
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

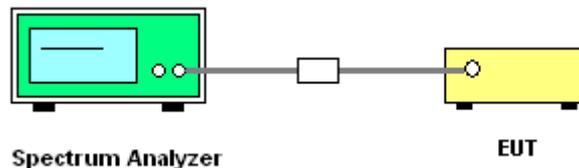




3.2.5 Test Result of Peak Output Power

Test Mode :	Bluetooth 4.0 - LE	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	0.08	30.00	Pass
19	2440	0.17	30.00	Pass
39	2480	1.47	30.00	Pass


Peak Output Power Plot on Channel 00

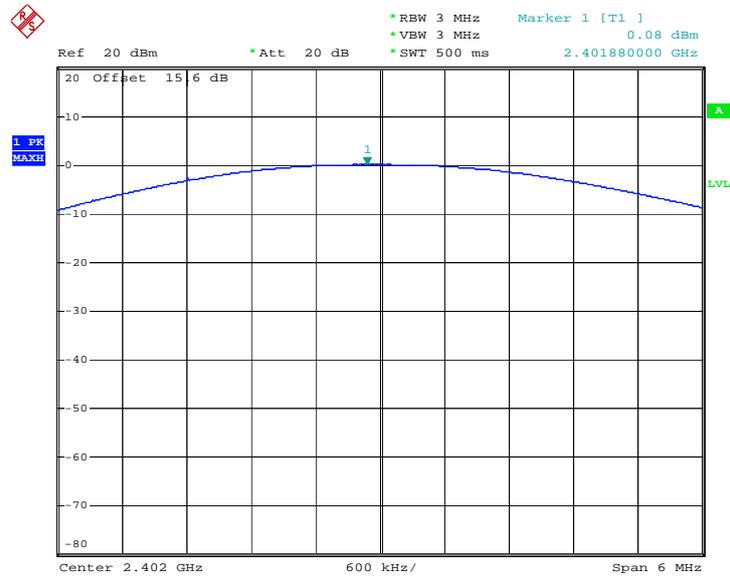

Date: 8.OCT.2012 18:59:28




Peak Output Power Plot on Channel 19

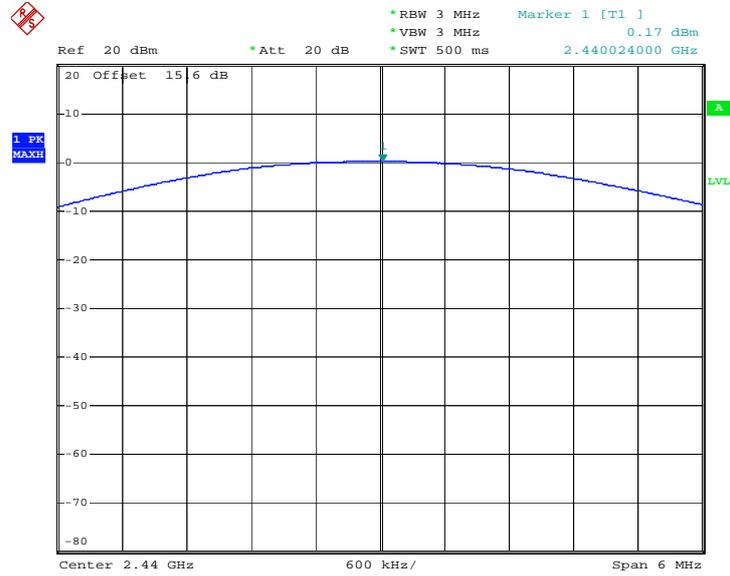

Date: 8.OCT.2012 19:00:45

Peak Output Power Plot on Channel 39

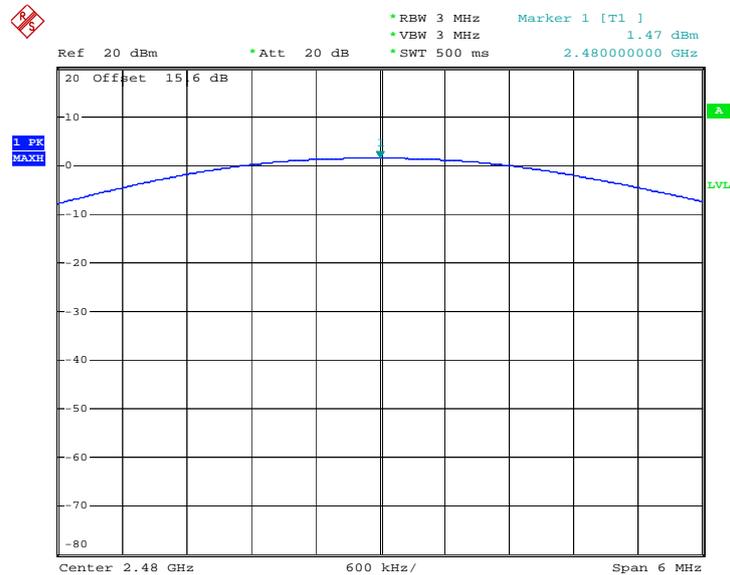

Date: 8.OCT.2012 19:01:21

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3KHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 9.1 Option 1 of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Record the measurement data derived from spectrum analyzer.

#### 3.3.4 Test Setup

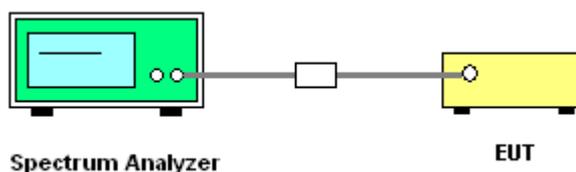



3.3.5 Test Result of Power Spectral Density

Test Mode :	Bluetooth 4.0 - LE	Temperature :	21~22°C
Test Engineer :	Cloud Peng	Relative Humidity :	41~42%

Channel	Frequency (MHz)	802.11b Power Density		Max. Limits (dBm)	Pass/Fail
		PSD/100KHz (dBm)	PSD/3KHz (dBm)		
01	2412	-0.96	-14.75	8	Pass
06	2437	-1.01	-14.82	8	Pass
11	2462	0.84	-13.24	8	Pass


Note:

1. Measured power density (dBm) has offset with cable loss.
2. Measured power density (dBm)/ 100KHz is for 20dBc reference only.




### 3.3.6 Test Result of Power Spectral Density Plots (100KHz)

PSD 100KHz Plot on Channel 00

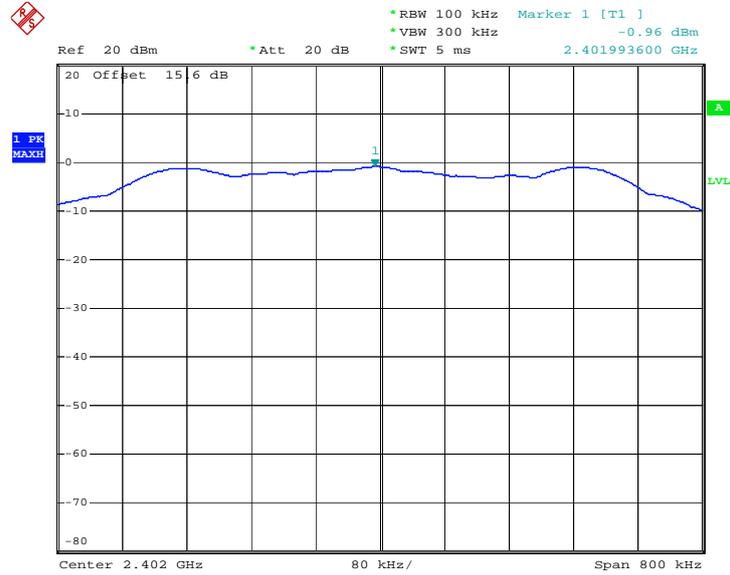

Date: 8.OCT.2012 19:13:51


PSD 100KHz Plot on Channel 19

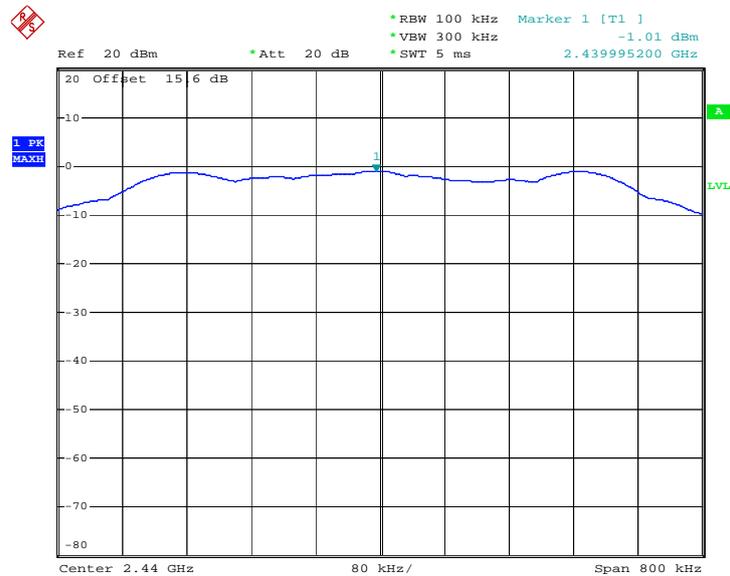

Date: 8.OCT.2012 19:14:40



PSD 100KHz Plot on Channel 39

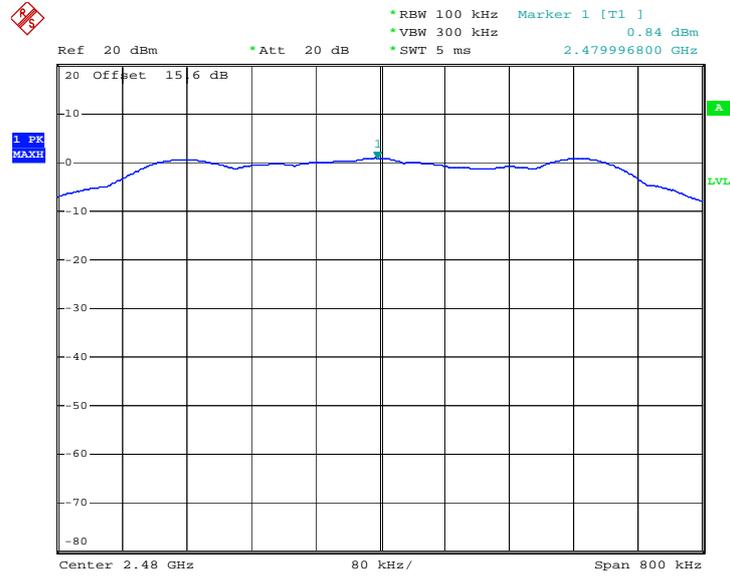


Date: 8.OCT.2012 19:15:18




### 3.3.7 Test Result of Power Spectral Density Plots (3KHz)

PSD 3KHz Plot on Channel 00

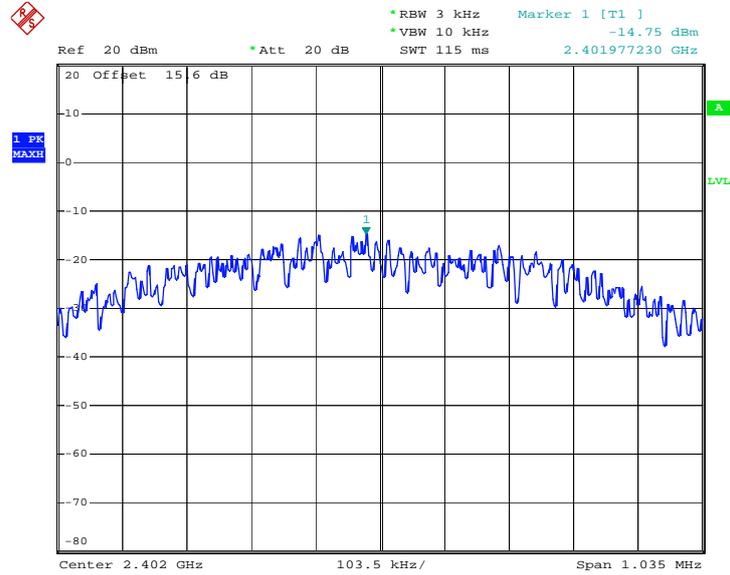

Date: 11.OCT.2012 21:57:46


PSD 3KHz Plot on Channel 19

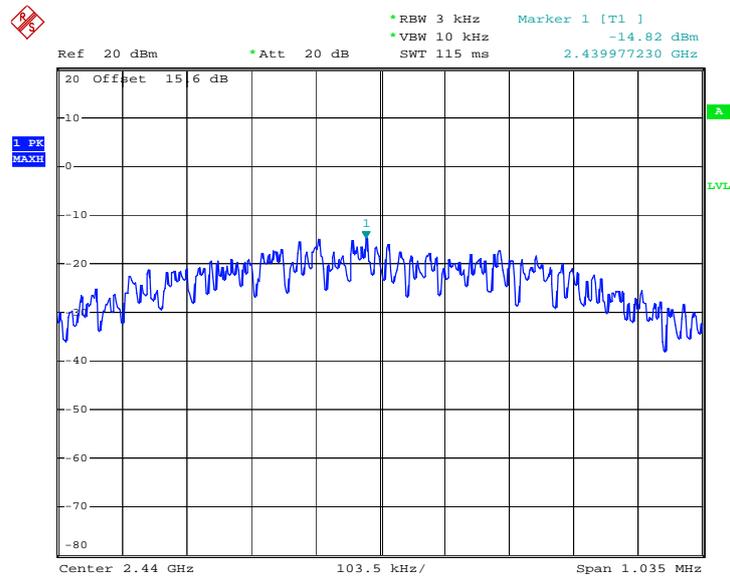

Date: 11.OCT.2012 21:58:45



PSD 3KHz Plot on Channel 39

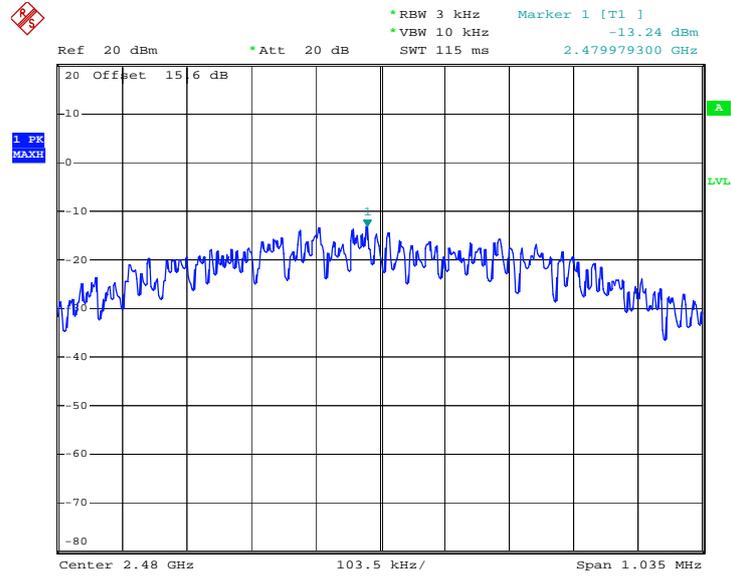

Date: 11.OCT.2012 21:59:42

### 3.4 Conducted Band Edges and Spurious Emission Measurement

#### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedure

1. The testing follows the guidelines in FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
2. ANSI C63.4-2003 and the Measurement Procedure of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02.
3. The transmitter output was connected to the spectrum analyzer via a low lose cable.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Set RBW = 100 KHz, Video bandwidth (VBW)  $\geq$  RBW. Out of the authorized frequency band emissions must be at least 20 dB lower than the highest emission level within the authorized band as measured with a 100 KHz RBW. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).

#### 3.4.4 Test Setup

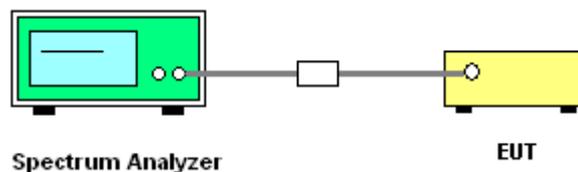




### 3.4.6 Test Result of Conducted Spurious Emission


Test Mode :	Bluetooth 4.0 - LE	Temperature :	21~22°C
Test Channel :	00	Relative Humidity :	41~42%
		Test Engineer :	Cloud Peng

Conducted Spurious Emission Plot on Bluetooth 4.0 - LE 1Mbps  
GFSK Channel 00

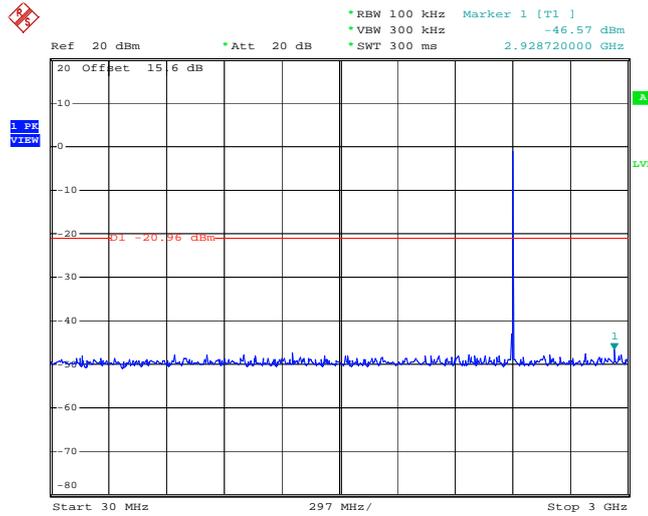

Date: 8.OCT.2012 19:51:37

Conducted Spurious Emission Plot on Bluetooth 4.0 - LE 1Mbps  
GFSK Channel 00

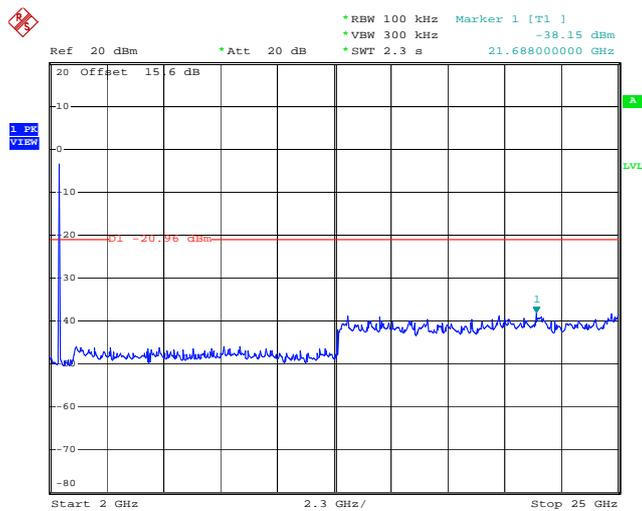


Date: 8.OCT.2012 19:52:08




Test Mode :	Bluetooth 4.0 - LE	Temperature :	21~22°C
Test Channel :	19	Relative Humidity :	41~42%
		Test Engineer :	Cloud Peng

Conducted Spurious Emission Plot on Bluetooth 4.0 - LE 1Mbps  
GFSK Channel 19

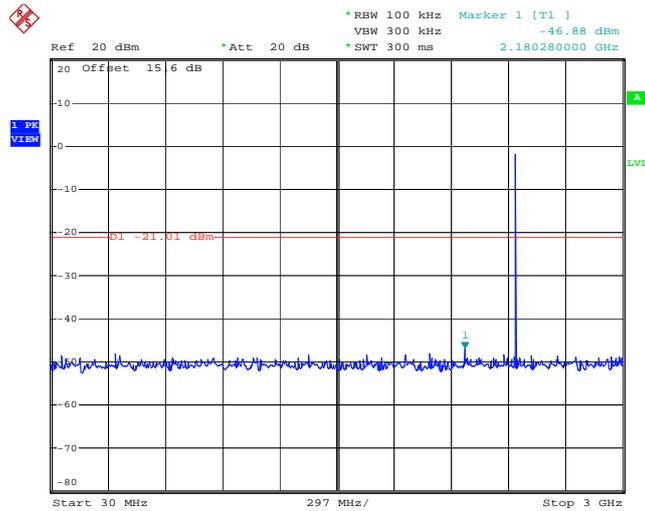

Date: 8.OCT.2012 19:45:12

Conducted Spurious Emission Plot on Bluetooth 4.0 - LE 1Mbps  
GFSK Channel 19

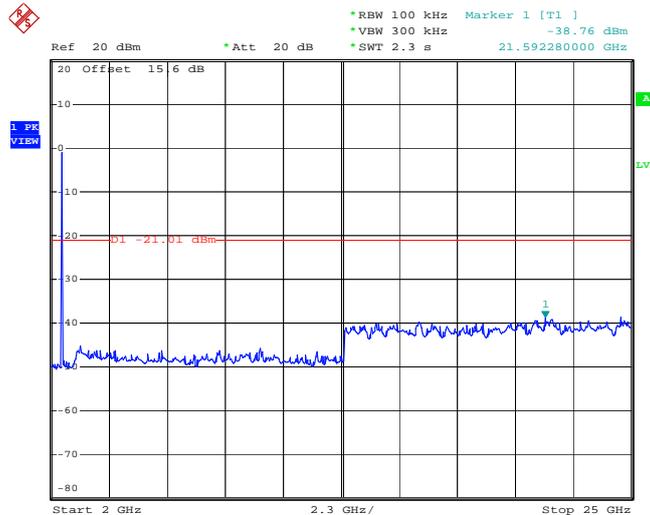


Date: 8.OCT.2012 19:46:05




Test Mode :	Bluetooth 4.0 - LE	Temperature :	21~22°C
Test Channel :	39	Relative Humidity :	41~42%
		Test Engineer :	Cloud Peng

Conducted Spurious Emission Plot on Bluetooth 4.0 - LE 1Mbps  
GFSK Channel 39

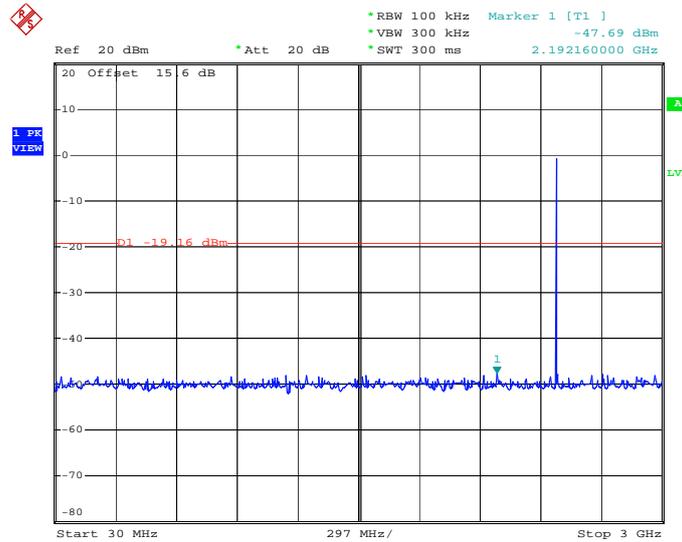

Date: 8.OCT.2012 19:49:47

Conducted Spurious Emission Plot on Bluetooth 4.0 - LE 1Mbps  
GFSK Channel 39

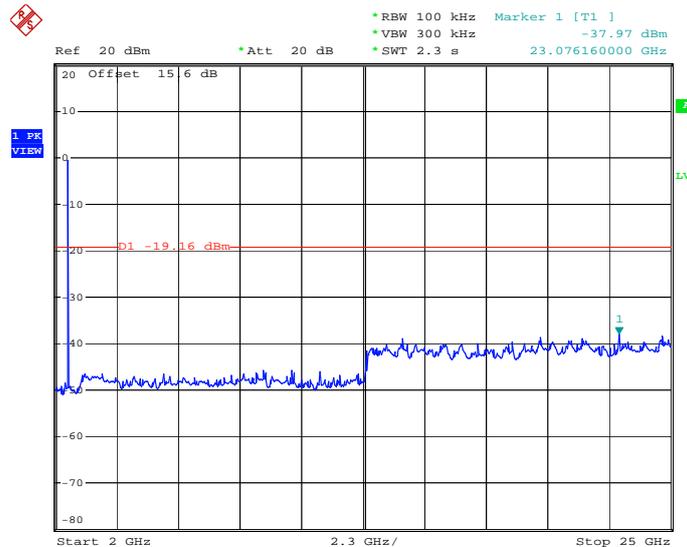

Date: 8.OCT.2012 19:50:23

### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Test Procedures

1. . The testing follows the guidelines in ANSI C63. 10-2009
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;

(2) Set RBW=100 KHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak;  
Trace = max hold;

(3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:

- $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(ms)	1/T(KHz)	VBW Setting
Bluetooth 4.0 - LE	60.13	0.380	2.63	3KHz

**Note:** For average measurement with duty cycle < 98%, use reduced VBW measurement method 4.2.3.2.3 in ANSI C63.10.

**Marker-Delta method :**

(1) Set RBW = 1 MHz, VBW = 3 MHz, peak detector.

Repeat the measurement with an average detector, use RBW = 1MHz

$VBW = 10$  Hz, when duty cycle is no less than 98 percent.

$VBW \geq 1/T$ , when duty cycle is less than 98 percent


(2) Set span = 10MHz, that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set RBW = 100KHz, 1% of the total span. Set VBW = 100KHz  $\geq$  RBW.

(3) Subtract the delta measured in step (2) from the field strengths measured in step (1).


The resultant field strengths (peak/average) are then used to determine band-edge compliance as required by Section 15.205.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

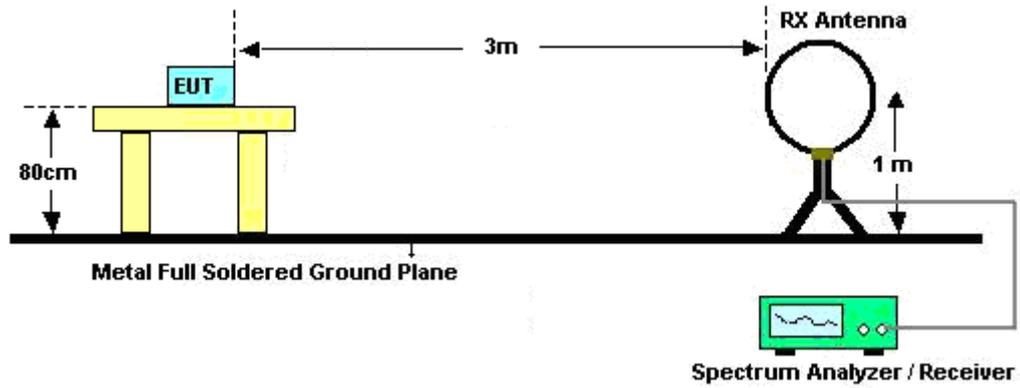

For radiated emissions from 30MHz to 1GHz

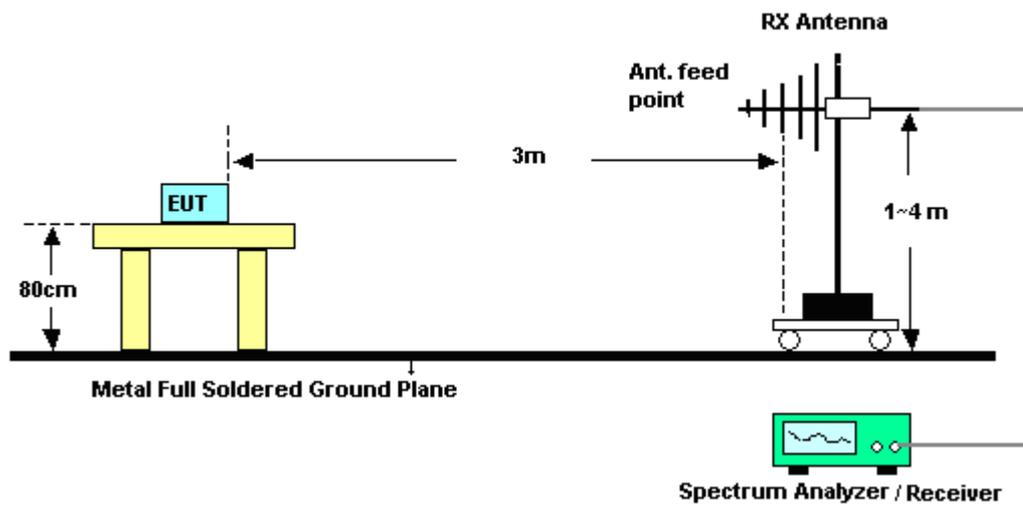

For radiated emissions above 1GHz

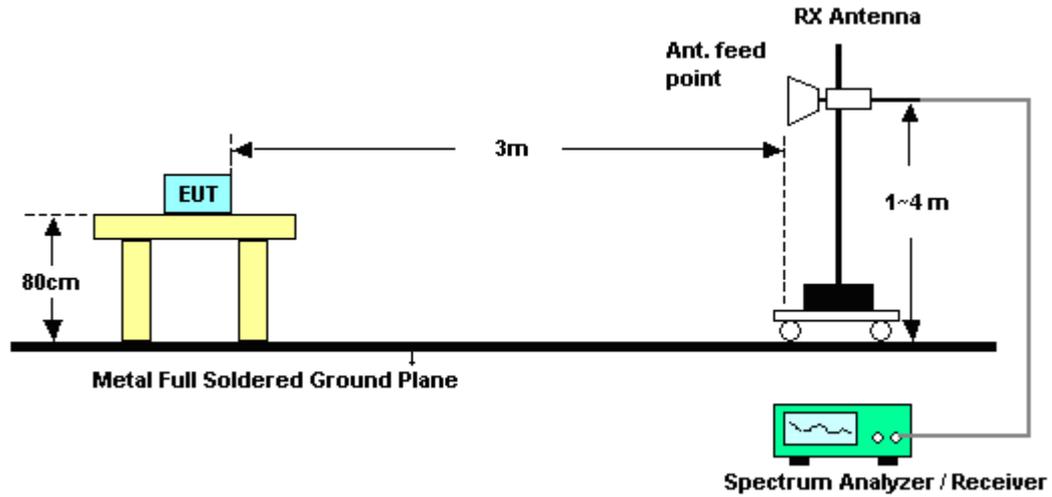

### 3.5.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.5.6 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	21~22°C
Test Channel :	00	Relative Humidity :	45~46%
		Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2388.93	53.15	-20.85	74	45.14	32.86	4.23	29.08	100	162	Peak
2385.96	42.19	-11.81	54	34.19	32.86	4.22	29.08	100	121	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2375.16	52.77	-21.23	74	44.82	32.83	4.22	29.1	100	85	Peak
2385.87	40.19	-13.81	54	32.19	32.86	4.22	29.08	100	82	Average



Test Mode :	Mode 3	Temperature :	21~22°C
Test Channel :	39	Relative Humidity :	45~46%
		Test Engineer :	Chenmy Cheng

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	65.83	-8.17	74	57.53	33.01	4.29	29	114	122	Peak
2483.5	62.29	8.29	54	53.99	33.01	4.29	29	114	123	Average
2483.5	51.2	-22.8	74	-	-	-	-	-	-	Peak
2483.5	50.3	-3.7	54	-	-	-	-	-	-	Average

Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBμV/m)	Delta Result (dB)	Measurement Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
Peak	104.74	53.54	51.2	74	-22.8	Pass
Average	103.84	53.54	50.3	54	-3.7	Pass

Note : Measurement result = Maximum field strength – Delta result

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.5	59.38	-14.62	74	51.08	33.01	4.29	29	100	115	Peak
2483.5	55.12	1.12	54	46.82	33.01	4.29	29	100	117	Average
2483.5	47.62	-26.38	74	-	-	-	-	-	-	Peak
2483.5	45.80	-8.20	54	-	-	-	-	-	-	Average


Summary results of marker-delta method:

Test mode	Maximum field strength of the fundamental emission (dBμV/m)	Delta Result (dB)	Measurement Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
Peak	98.2	50.58	47.62	74	-26.38	Pass
Average	96.38	50.58	45.80	54	-8.20	Pass

Note : Measurement result = Maximum field strength – Delta result



Test Mode :	Mode 3	Temperature :	21~22°C
Test Channel :	39	Relative Humidity :	45~46%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal

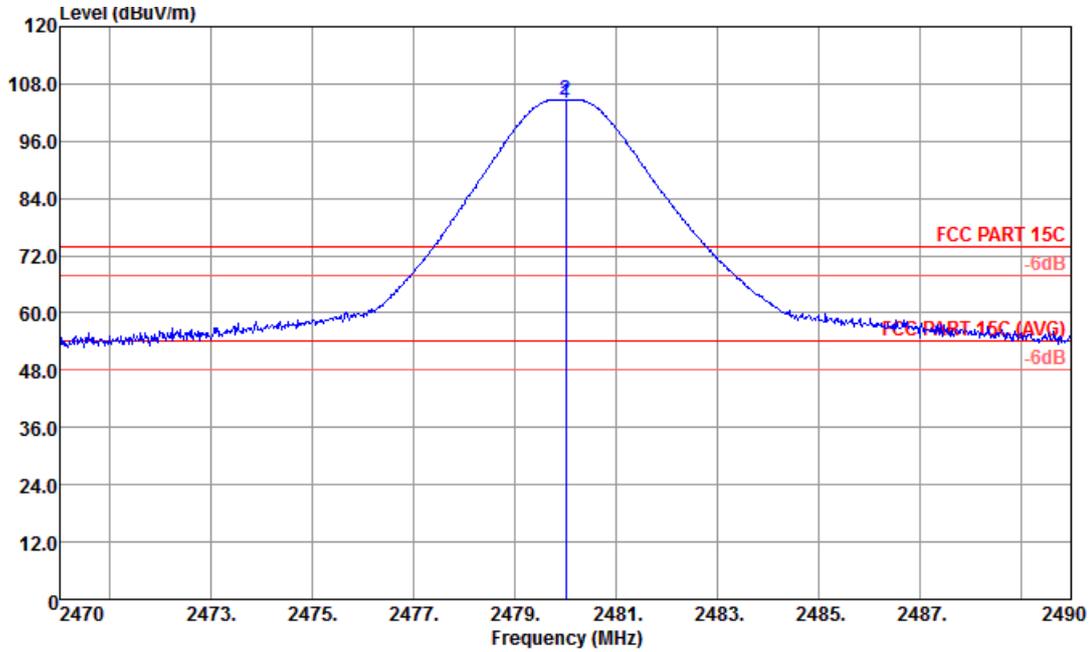


Site : 03CH01-KS  
 Condition : FCC PART 15C 3m HF ANT-100803 HORIZONTAL  
 : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	I/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2480.00	103.84	49.84	54.00	95.54	33.01	4.29	29.00	114	123	Average
2 *	2480.00	104.74	30.74	74.00	96.44	33.01	4.29	29.00	114	123	Peak

\* Maximum field strength of the fundamental emission



Test Mode :	Mode 3	Temperature :	21~22°C
Test Channel :	39	Relative Humidity :	45~46%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal

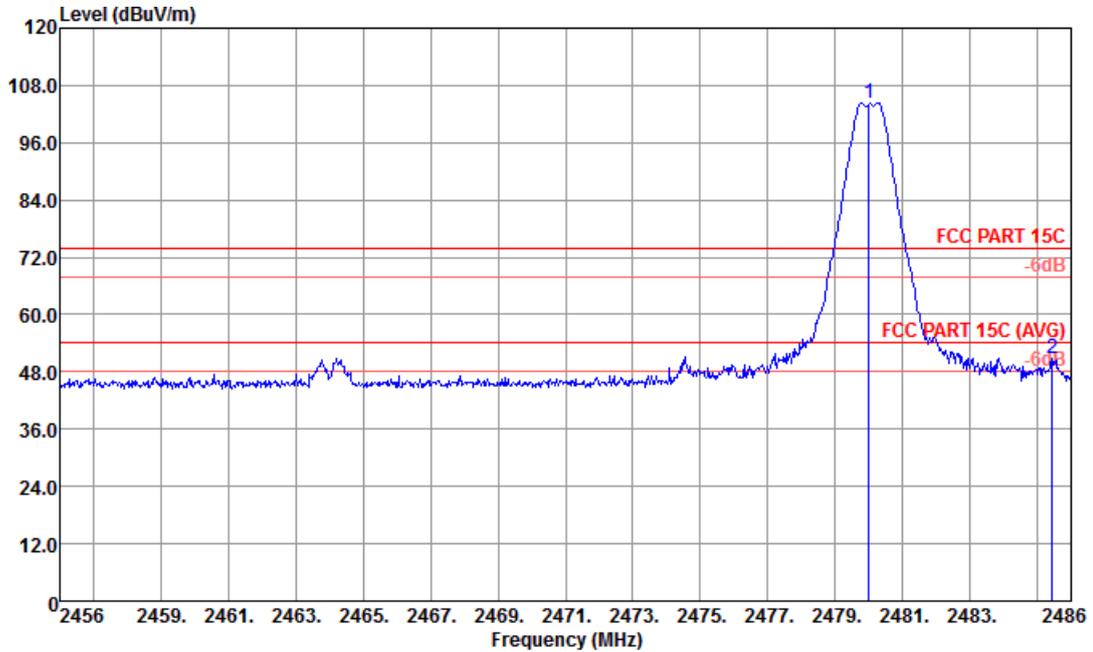


Site : 03CH01-KS  
 Condition : FCC PART 15C 3m HF ANT-100803 HORIZONTAL  
 : RBW:300.000KHz VBW:300.000KHz SWT:Auto

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	I/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2480.00	104.44	30.44	74.00	96.14	33.01	4.29	29.00	113	122	Peak
2	2485.43	50.90	-23.10	74.00	42.60	33.01	4.29	29.00	111	120	Peak

\* Marker-Delta Method (RBW/VBW=100KHz): 53.54 dB , single carrier Mode



Test Mode :	Mode 3	Temperature :	21~22°C
Test Channel :	39	Relative Humidity :	45~46%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical

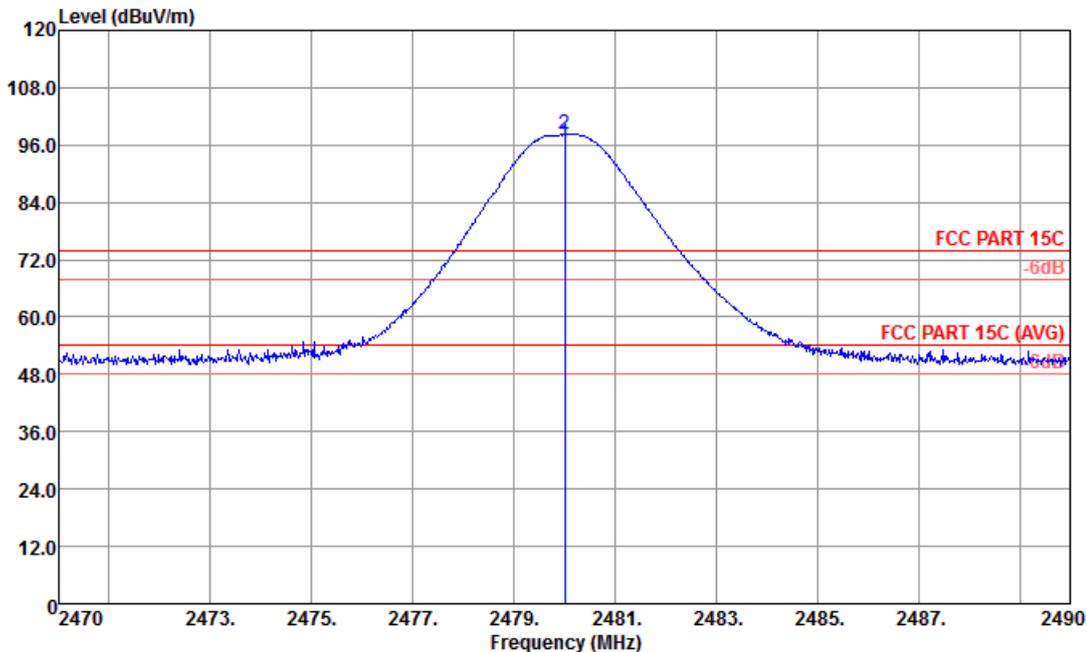


Site : 03CH01-KS  
 Condition : FCC PART 15C 3m HF ANT-100803 VERTICAL  
 : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2480.00	96.38	42.38	54.00	88.08	33.01	4.29	29.00	100	115	Average
2 *	2480.00	98.20	24.20	74.00	89.90	33.01	4.29	29.00	100	115	Peak

\* Maximum field strength of the fundamental emission



Test Mode :	Mode 3	Temperature :	21~22°C
Test Channel :	39	Relative Humidity :	45~46%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical

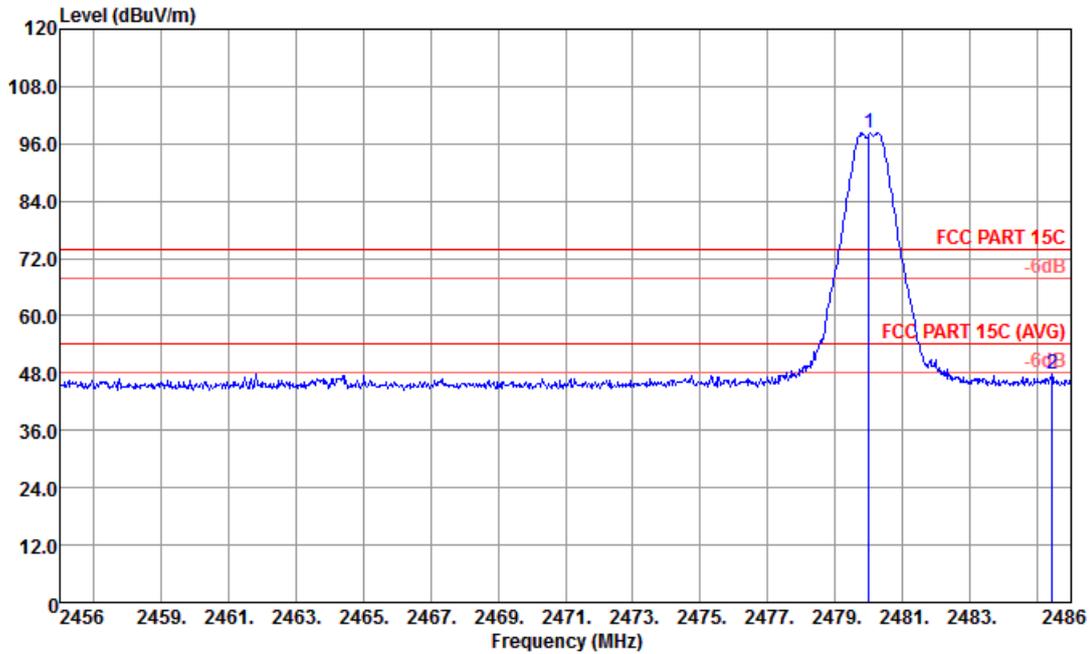

Site : 03CH01-KS  
 Condition : FCC PART 15C 3m HF ANT-100803 VERTICAL  
 : RBW:300.000KHz VBW:300.000KHz SWT:Auto

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2480.00	98.43	24.43	74.00	90.13	33.01	4.29	29.00	101	114	Peak
2	2485.43	47.85	-26.15	74.00	39.55	33.01	4.29	29.00	180	35	Peak

\* Marker-Delta Method (RBW/VBW=100KHz): 50.58 dB , single carrier Mode



3.5.7 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)

Test Mode :	Mode 1	Temperature :	21~22°C
Test Channel :	00	Relative Humidity :	45~46%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2402 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
59.441	19.63	-20.37	40	44.02	5.44	0.31	30.14	-	-	Peak
111.738	23.06	-20.44	43.5	40.8	11.8	0.43	29.97	-	-	Peak
191.745	22.04	-21.46	43.5	42.83	8.59	0.58	29.96	-	-	Peak
385.281	21.32	-24.68	46	34.73	15.62	0.83	29.86	-	-	Peak
480.528	23.5	-22.5	46	35.44	16.87	0.94	29.75	-	-	Peak
952.094	31.23	-14.77	46	38.7	20.74	1.33	29.54	100	116	Peak
2402	101.08	-	-	93.05	32.86	4.23	29.06	148	118	Average
2402	102.07	-	-	94.04	32.86	4.23	29.06	148	118	Peak

Test Mode :	Mode 1	Temperature :	21~22°C
Test Channel :	00	Relative Humidity :	45~46%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2402 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
31.955	25.34	-14.66	40	38.64	16.55	0.24	30.09	100	21	Peak
40.559	25.25	-14.75	40	43.41	11.64	0.25	30.05	-	-	Peak
45.217	24.39	-15.61	40	45	9.25	0.27	30.13	-	-	Peak
52.025	21.09	-18.91	40	43.92	7.01	0.29	30.13	-	-	Peak
102.36	23.45	-20.05	43.5	42.12	10.87	0.42	29.96	-	-	Peak
952.094	30.69	-15.31	46	38.16	20.74	1.33	29.54	-	-	Peak
2402	94.37	-	-	86.34	32.86	4.23	29.06	100	86	Average
2402	95.64	-	-	87.61	32.86	4.23	29.06	100	86	Peak



Test Mode :	Mode 2	Temperature :	21~22°C
Test Channel :	19	Relative Humidity :	45~46%
Test Engineer :	Chenmy Cheng	Polarization :	Horizontal
Remark :	2440 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.853	21.57	-18.43	40	34.11	17.29	0.25	30.08	-	-	Peak
113.714	23.58	-19.92	43.5	41.31	11.8	0.44	29.97	-	-	Peak
191.745	21.05	-22.45	43.5	41.84	8.59	0.58	29.96	-	-	Peak
377.259	21.37	-24.63	46	35.08	15.34	0.83	29.88	-	-	Peak
480.528	23.79	-22.21	46	35.73	16.87	0.94	29.75	-	-	Peak
952.094	31.93	-14.07	46	39.4	20.74	1.33	29.54	100	281	Peak
2440	101.24	-	-	93.07	32.95	4.25	29.03	100	21	Average
2440	102.15	-	-	93.98	32.95	4.25	29.03	100	21	Peak

Test Mode :	Mode 2	Temperature :	21~22°C
Test Channel :	19	Relative Humidity :	45~46%
Test Engineer :	Chenmy Cheng	Polarization :	Vertical
Remark :	2440 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
33.328	29.17	-10.83	40	42.98	16.04	0.24	30.09	100	192	Peak
40.988	24.84	-15.16	40	43	11.64	0.25	30.05	-	-	Peak
51.843	27.16	-12.84	40	49.99	7.01	0.29	30.13	-	-	Peak
100.934	24.26	-19.24	43.5	43.19	10.62	0.41	29.96	-	-	Peak
110.957	22.65	-20.85	43.5	40.39	11.8	0.43	29.97	-	-	Peak
948.761	31.91	-14.09	46	39.39	20.73	1.33	29.54	-	-	Peak
2440	95.01	-	-	86.84	32.95	4.25	29.03	100	161	Average
2440	96.15	-	-	87.98	32.95	4.25	29.03	100	161	Peak



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	Chenmy Cheng	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2480 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30	21.27	-18.73	40	33.09	18	0.26	30.08	-	-	Peak
59.859	19.83	-20.17	40	44.36	5.3	0.31	30.14	-	-	Peak
115.321	22.85	-20.65	43.5	40.58	11.8	0.44	29.97	-	-	Peak
480.528	23.47	-22.53	46	35.41	16.87	0.94	29.75	-	-	Peak
875.247	24.78	-21.22	46	32.58	20.48	1.29	29.57	-	-	Peak
952.094	32.38	-13.62	46	39.85	20.74	1.33	29.54	155	247	Peak
2480	103.67	-	-	95.37	33.01	4.29	29	113	122	Average
2480	104.64	-	-	96.34	33.01	4.29	29	113	122	Peak

<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	21~22°C
<b>Test Channel :</b>	39	<b>Relative Humidity :</b>	45~46%
<b>Test Engineer :</b>	Chenmy Cheng	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2480 MHz is fundamental signal which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
32.979	29.02	-10.98	40	42.83	16.04	0.24	30.09	200	0	Peak
52.208	28.84	-11.16	40	51.67	7.01	0.29	30.13	-	-	Peak
102.36	25.07	-18.43	43.5	43.74	10.87	0.42	29.96	-	-	Peak
480.528	22.15	-23.85	46	34.09	16.87	0.94	29.75	-	-	Peak
842.13	23.69	-22.31	46	31.63	20.43	1.28	29.65	-	-	Peak
948.761	32.59	-13.41	46	40.07	20.73	1.33	29.54	-	-	Peak
2480	96.41	-	-	88.11	33.01	4.29	29	100	116	Average
2480	97.28	-	-	88.98	33.01	4.29	29	100	116	Peak

### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.6.3 Test Procedures


- ♦ Please follow the guidelines in FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v02
  1. ANSI C63.4-2003.
  2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
  3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
  4. All the support units are connecting to the other LISN.
  5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
  6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
  7. Both sides of AC line were checked for maximum conducted interference.
  8. The frequency range from 150 kHz to 30 MHz was searched.
  9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.6.4 Test Setup

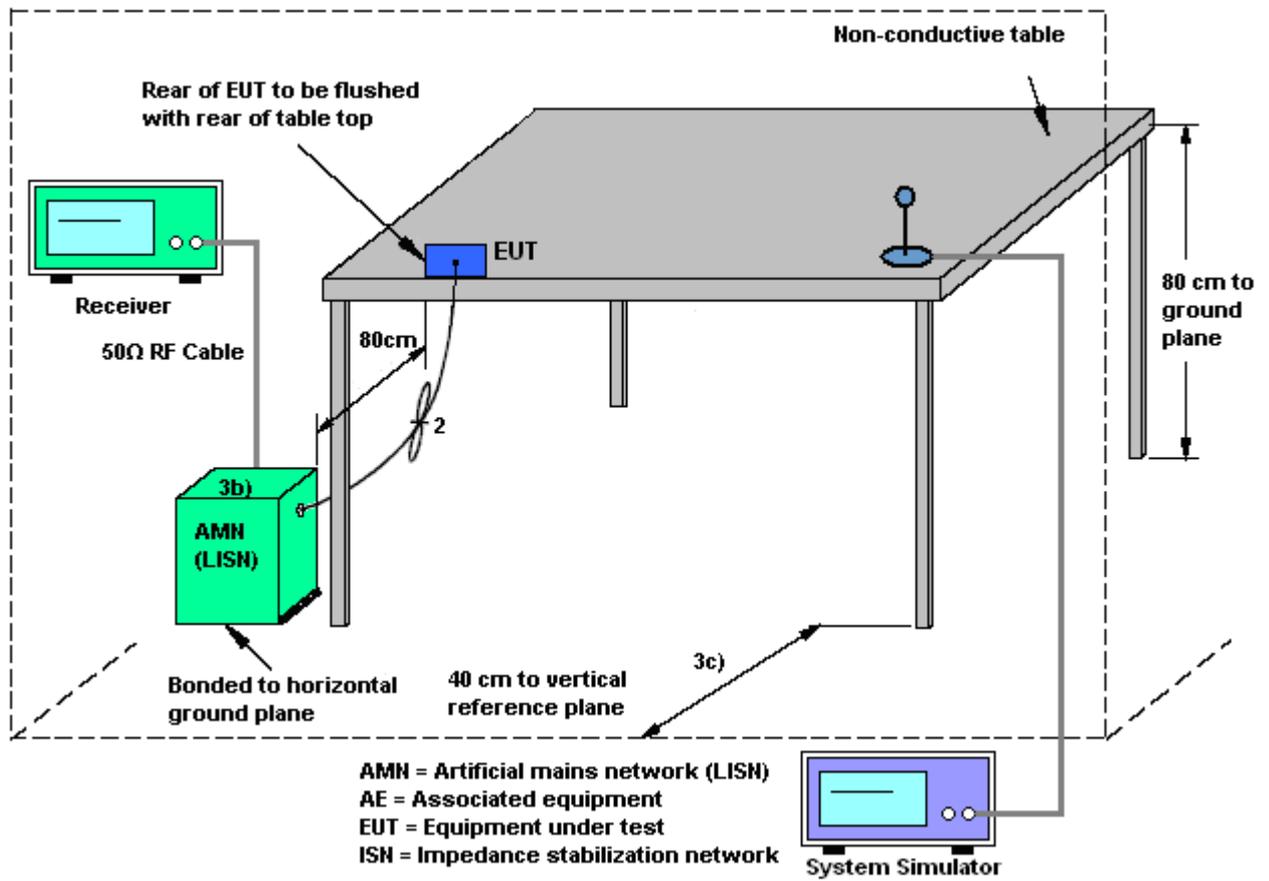

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

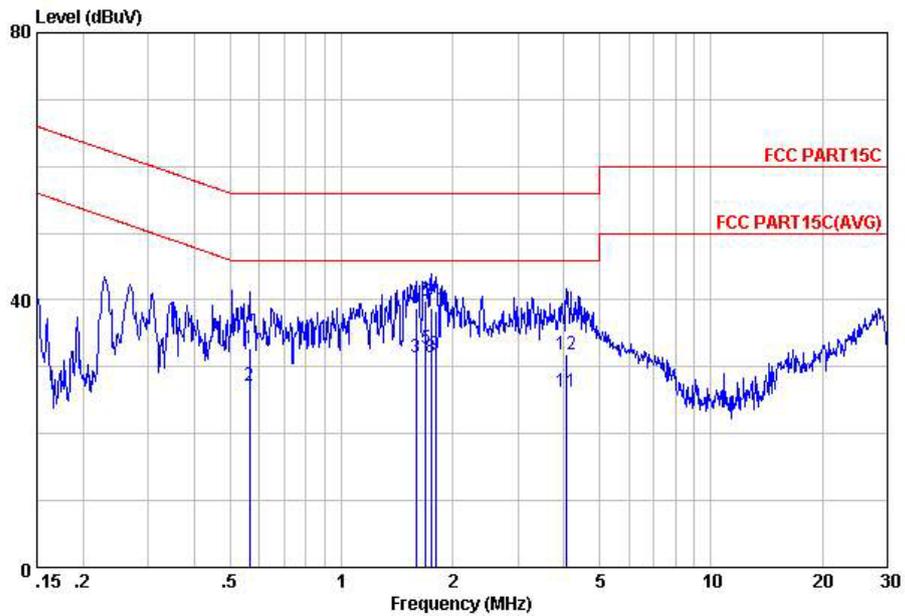


Site : C001-KS  
 Condition: FCC PART15C LISN-111230 LINE

mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.56	32.75	-23.25	56.00	22.20	-0.08	10.63	QP
2	0.56	27.25	-18.75	46.00	16.70	-0.08	10.63	Average
3	1.59	31.48	-14.52	46.00	20.90	-0.11	10.69	Average
4	1.59	38.68	-17.32	56.00	28.10	-0.11	10.69	QP
5	1.69	32.78	-13.22	46.00	22.20	-0.11	10.69	Average
6	1.69	39.98	-16.02	56.00	29.40	-0.11	10.69	QP
7	1.74	38.69	-17.31	56.00	28.11	-0.11	10.69	QP
8	1.74	31.39	-14.61	46.00	20.81	-0.11	10.69	Average
9	1.80	31.89	-14.11	46.00	21.30	-0.11	10.70	Average
10	1.80	38.39	-17.61	56.00	27.80	-0.11	10.70	QP
11	4.07	26.30	-19.70	46.00	15.60	-0.13	10.83	Average
12	4.07	31.90	-24.10	56.00	21.20	-0.13	10.83	QP



Test Mode :	Mode 1	Temperature :	19~20°C
Test Engineer :	Tom Wang	Relative Humidity :	39~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter) + Earphone		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

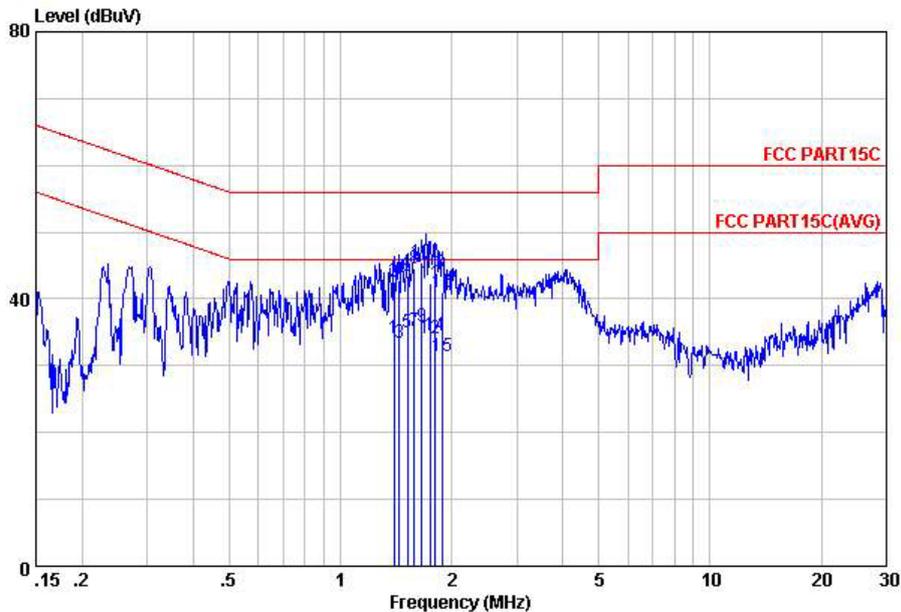

Site : C001-KS  
 Condition: FCC PART15C LISN-111230 NEUTRAL

mode : Mode 1

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	1.40	34.17	-11.83	46.00	23.60	-0.10	10.67	Average
2	1.40	42.47	-13.53	56.00	31.90	-0.10	10.67	QP
3	1.44	33.48	-12.52	46.00	22.90	-0.10	10.68	Average
4	1.44	42.78	-13.22	56.00	32.20	-0.10	10.68	QP
5	1.52	35.08	-10.92	46.00	24.50	-0.10	10.68	Average
6	1.52	43.38	-12.62	56.00	32.80	-0.10	10.68	QP
7	1.59	35.28	-10.72	46.00	24.69	-0.10	10.69	Average
8	1.59	44.58	-11.42	56.00	33.99	-0.10	10.69	QP
9	1.66	35.98	-10.02	46.00	25.40	-0.11	10.69	Average
10	1.66	45.38	-10.62	56.00	34.80	-0.11	10.69	QP
11	1.75	42.39	-13.61	56.00	31.81	-0.11	10.69	QP
12	1.75	34.09	-11.91	46.00	23.51	-0.11	10.69	Average
13	1.81	43.89	-12.11	56.00	33.30	-0.11	10.70	QP
14	1.81	34.59	-11.41	46.00	24.00	-0.11	10.70	Average
15	1.89	31.49	-14.51	46.00	20.90	-0.11	10.70	Average
16	1.89	41.09	-14.91	56.00	30.50	-0.11	10.70	QP



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Connected Construction**

Non-standard connector used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Oct. 08, 2012~ Oct. 12, 2012	Dec. 29, 2012	Conducted (TH01-KS)
Power Meter	Agilent	E4416A	MY45101555	N/A	Aug. 22, 2012	Oct. 08, 2012~ Oct. 12, 2012	Aug. 21, 2013	Conducted (TH01-KS)
Power Sensor	Agilent	E9327A	MY44421198	N/A	Aug. 22, 2012	Oct. 08, 2012~ Oct. 12, 2012	Aug. 21, 2013	Conducted (TH01-KS)
DC Power Supply	GWINSTEK	GPS-3030D	E1884515	N/A	Aug. 22, 2012	Oct. 08, 2012~ Oct. 12, 2012	Aug. 21, 2013	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 09, 2011	Oct. 11, 2012	Nov. 08, 2012	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Oct. 11, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 08, 2011	Oct. 11, 2012	Dec. 07, 2012	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/ 001	9 kHz~30 MHz	Jul. 03, 2012	Oct. 11, 2012	Jul. 02, 2013	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Jan. 06, 2012	Oct. 11, 2012	Jan. 05, 2013	Radiation (03CH01-KS)
Amplifier	Wireless	FPA-6592G	060004	30MHz~2GHz	Dec. 30, 2011	Oct. 11, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 30, 2011	Oct. 11, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Active Horn Antenna	com-power	AHA-118	701023	1GHz~18GHz	Nov. 07, 2011	Oct. 11, 2012	Nov. 06, 2012	Radiation (03CH01-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Oct. 13, 2011	Oct. 11, 2012	Oct.12, 2012	Radiation (03CH01-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Jun. 01, 2012	Oct. 09, 2012	May 31, 2013	Conduction (CO01-KS)
LISN	MessTec	AN3016	60103	9kHz~30MHz	Dec. 30, 2011	Oct. 09, 2012	Dec. 29, 2012	Conduction (CO01-KS)
LISN	MessTec	AN3016	60105	9kHz~30MHz	Dec. 30, 2011	Oct. 09, 2012	Dec. 29, 2012	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	N/A	Nov. 16, 2011	Oct. 09, 2012	Nov. 15, 2012	Conduction (CO01-KS)
System Simulator	R&S	CMU200	837587/066	2G Full-Band	Dec. 30, 2011	Oct. 09, 2012	Dec. 29, 2012	Conduction (CO01-KS)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.26
---	------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.54
---	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.72
---	------



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP292601 as below.