

# Variant FCC SAR Test Report

**APPLICANT** : ZTE CORPORATION  
**EQUIPMENT** : WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone  
**BRAND NAME** : ZTE  
**MODEL NAME** : ZTE V887  
**FCC ID** : Q78-V887  
**STANDARD** : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2003  
FCC OET Bulletin 65 Supplement C (Edition 01-01)

This is a variant report which is only valid together with the original test report. The product was completely tested on Nov. 21, 2012. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:



---

Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**

## Table of Contents

|                                                         |           |
|---------------------------------------------------------|-----------|
| <b>1. Statement of Compliance .....</b>                 | <b>4</b>  |
| <b>2. Administration Data .....</b>                     | <b>5</b>  |
| 2.1 Testing Laboratory.....                             | 5         |
| 2.2 Applicant .....                                     | 5         |
| 2.3 Manufacturer.....                                   | 5         |
| 2.4 Application Details.....                            | 5         |
| <b>3. General Information .....</b>                     | <b>6</b>  |
| 3.1 Description of Equipment Under Test (EUT) .....     | 6         |
| 3.2 Product Photos .....                                | 6         |
| 3.3 Applied Standard.....                               | 7         |
| 3.4 Device Category and SAR Limits .....                | 7         |
| 3.5 Test Conditions.....                                | 7         |
| <b>4. Specific Absorption Rate (SAR).....</b>           | <b>8</b>  |
| 4.1 Introduction .....                                  | 8         |
| 4.2 SAR Definition.....                                 | 8         |
| <b>5. SAR Measurement System.....</b>                   | <b>9</b>  |
| 5.1 E-Field Probe .....                                 | 10        |
| 5.2 Data Acquisition Electronics (DAE) .....            | 11        |
| 5.3 Robot .....                                         | 11        |
| 5.4 Measurement Server.....                             | 11        |
| 5.5 Phantom.....                                        | 12        |
| 5.6 Device Holder .....                                 | 12        |
| 5.7 Data Storage and Evaluation .....                   | 13        |
| 5.8 Test Equipment List.....                            | 15        |
| <b>6. Tissue Simulating Liquids.....</b>                | <b>16</b> |
| <b>7. SAR Measurement Evaluation .....</b>              | <b>17</b> |
| 7.1 Purpose of System Performance check.....            | 17        |
| 7.2 System Setup.....                                   | 17        |
| 7.3 Validation Results.....                             | 18        |
| <b>8. EUT Testing Position .....</b>                    | <b>19</b> |
| 8.1 Define two imaginary lines on the handset.....      | 19        |
| 8.2 Cheek Position .....                                | 20        |
| 8.3 Tilted Position.....                                | 20        |
| 8.4 Body Worn Position.....                             | 21        |
| <b>9. Measurement Procedures .....</b>                  | <b>22</b> |
| 9.1 Spatial Peak SAR Evaluation.....                    | 22        |
| 9.2 Area & Zoom Scan Procedures.....                    | 22        |
| 9.3 Volume Scan Procedures.....                         | 23        |
| 9.4 SAR Averaged Methods .....                          | 23        |
| 9.5 Power Drift Monitoring.....                         | 23        |
| <b>10. SAR Test Configurations.....</b>                 | <b>24</b> |
| 10.1 Conducted RF Output Power (Unit: dBm).....         | 24        |
| <b>11. SAR Test Results .....</b>                       | <b>27</b> |
| 11.1 Test Records for Head SAR Test.....                | 27        |
| 11.2 Test Records for Hotspot SAR Test .....            | 28        |
| 11.3 Simultaneous Multi-band Transmission Analysis..... | 29        |
| <b>12. Uncertainty Assessment .....</b>                 | <b>30</b> |
| <b>13. References .....</b>                             | <b>32</b> |
| <b>Appendix A. Plots of System Performance Check</b>    |           |
| <b>Appendix B. Plots of SAR Measurement</b>             |           |
| <b>Appendix C. DASY Calibration Certificate</b>         |           |
| <b>Appendix D. Product Photos</b>                       |           |
| <b>Appendix E. Test Setup Photos</b>                    |           |
| <b>Appendix F. Product Equality Declaration</b>         |           |

## Revision History

| REPORT NO.         | VERSION | DESCRIPTION                                                                                                                                                                                                                                                                                                                                    | ISSUED DATE   |
|--------------------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| <b>FA292601-01</b> | Rev. 01 | This is a variant report for ZTE V887. The product equality declaration could be referred to Appendix F. All the test cases were performed on original report which can be referred to Sporton Report Number FA292601. Based on the original test report, only the WWAN Conducted Power and the worst cases were verified for the differences. | Nov. 30, 2012 |
|                    |         |                                                                                                                                                                                                                                                                                                                                                |               |
|                    |         |                                                                                                                                                                                                                                                                                                                                                |               |
|                    |         |                                                                                                                                                                                                                                                                                                                                                |               |
|                    |         |                                                                                                                                                                                                                                                                                                                                                |               |
|                    |         |                                                                                                                                                                                                                                                                                                                                                |               |
|                    |         |                                                                                                                                                                                                                                                                                                                                                |               |
|                    |         |                                                                                                                                                                                                                                                                                                                                                |               |
|                    |         |                                                                                                                                                                                                                                                                                                                                                |               |
|                    |         |                                                                                                                                                                                                                                                                                                                                                |               |
|                    |         |                                                                                                                                                                                                                                                                                                                                                |               |
|                    |         |                                                                                                                                                                                                                                                                                                                                                |               |
|                    |         |                                                                                                                                                                                                                                                                                                                                                |               |
|                    |         |                                                                                                                                                                                                                                                                                                                                                |               |
|                    |         |                                                                                                                                                                                                                                                                                                                                                |               |

## **1. Statement of Compliance**

The maximum results of Specific Absorption Rate (SAR) found during testing for **ZTE CORPORATION**  
**DUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone; Brand Name: ZTE; Model Name: ZTE**  
**V887** are as follows.

### **<Standalone SAR>**

| <b>Band</b>          | <b>Position</b>           | <b>SAR<sub>1g</sub><br/>(W/kg)</b> | <b>Scaled<br/>SAR<sub>1q</sub><br/>(W/kg)</b> |
|----------------------|---------------------------|------------------------------------|-----------------------------------------------|
| <b>GSM850</b>        | <b>Head</b>               | <b>0.250</b>                       | <b>0.264</b>                                  |
| <b>GSM1900</b>       | <b>Head</b>               | <b>0.109</b>                       | <b>0.118</b>                                  |
| <b>WCDMA Band V</b>  | <b>Head</b>               | <b>0.192</b>                       | <b>0.212</b>                                  |
| <b>WCDMA Band II</b> | <b>Head</b>               | <b>0.190</b>                       | <b>0.235</b>                                  |
| <b>WLAN 2.4G</b>     | <b>Head</b>               | <b>0.419</b>                       | <b>0.476</b>                                  |
| <b>GSM850</b>        | <b>Hotspot (1 cm Gap)</b> | <b>0.820</b>                       | <b>1.064</b>                                  |
| <b>GSM1900</b>       | <b>Hotspot (1 cm Gap)</b> | <b>0.457</b>                       | <b>0.544</b>                                  |
| <b>WCDMA Band V</b>  | <b>Hotspot (1 cm Gap)</b> | <b>0.481</b>                       | <b>0.531</b>                                  |
| <b>WCDMA Band II</b> | <b>Hotspot (1 cm Gap)</b> | <b>0.472</b>                       | <b>0.583</b>                                  |
| <b>WLAN 2.4G</b>     | <b>Hotspot (1 cm Gap)</b> | <b>0.133</b>                       | <b>0.151</b>                                  |

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC OET Bulletin 65 Supplement C (Edition 01-01).

## **2. Administration Data**

### **2.1 Testing Laboratory**

|                    |                                                                                                                  |
|--------------------|------------------------------------------------------------------------------------------------------------------|
| Test Site          | SPORTON INTERNATIONAL (KUNSHAN) INC.                                                                             |
| Test Site Location | No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.<br>TEL: +86-0512-5790-0158<br>FAX: +86-0512-5790-0958 |

### **2.2 Applicant**

|              |                                                                                                                   |
|--------------|-------------------------------------------------------------------------------------------------------------------|
| Company Name | ZTE CORPORATION                                                                                                   |
| Address      | ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,<br>Nanshan District, Shenzhen, Guangdong, 518057, P.R.China |

### **2.3 Manufacturer**

|              |                                                                                                                   |
|--------------|-------------------------------------------------------------------------------------------------------------------|
| Company Name | ZTE CORPORATION                                                                                                   |
| Address      | ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,<br>Nanshan District, Shenzhen, Guangdong, 518057, P.R.China |

### **2.4 Application Details**

|                               |               |
|-------------------------------|---------------|
| Date of Start during the Test | Nov. 19, 2012 |
| Date of End during the Test   | Nov. 21, 2012 |

### 3. General Information

#### 3.1 Description of Equipment Under Test (EUT)

| Product Feature & Specification                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>EUT</b>                                                                                                                                                  | WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone                                                                                                                                                                                                                                                                                                                      |
| <b>Brand Name</b>                                                                                                                                           | ZTE                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Model Name</b>                                                                                                                                           | ZTE V887                                                                                                                                                                                                                                                                                                                                                             |
| <b>FCC ID</b>                                                                                                                                               | Q78-V887                                                                                                                                                                                                                                                                                                                                                             |
| <b>IMEI Code</b>                                                                                                                                            | 866970010003892                                                                                                                                                                                                                                                                                                                                                      |
| <b>Tx Frequency</b>                                                                                                                                         | GSM850: 824.2 MHz ~ 848.8 MHz<br>GSM1900: 1850.2 MHz ~ 1909.8 MHz<br>WCDMA Band V: 826.4 MHz ~ 846.6 MHz<br>WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz<br>WLAN2.4G: 2412 MHz ~ 2462 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz                                                                                                                                                |
| <b>Rx Frequency</b>                                                                                                                                         | GSM850: 869.2 MHz ~ 893.8 MHz<br>GSM1900: 1930.2 MHz ~ 1989.8 MHz<br>WCDMA Band V: 871.4 MHz ~ 891.6 MHz<br>WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz<br>WLAN2.4G: 2412 MHz ~ 2462 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz                                                                                                                                                |
| <b>Maximum Average Output Power to Antenna</b>                                                                                                              | GSM850: 32.26 dBm<br>GSM1900: 29.15 dBm<br>WCDMA Band V: 22.57 dBm<br>WCDMA Band II: 22.08 dBm                                                                                                                                                                                                                                                                       |
| <b>Antenna Type</b>                                                                                                                                         | WWAN: Monopole Antenna<br>WLAN: Monopole Antenna<br>Bluetooth: Monopole Antenna                                                                                                                                                                                                                                                                                      |
| <b>HW Version</b>                                                                                                                                           | WMAO                                                                                                                                                                                                                                                                                                                                                                 |
| <b>SW Version</b>                                                                                                                                           | ZTE-CN-QB125S-P177A10V1.0.0                                                                                                                                                                                                                                                                                                                                          |
| <b>Type of Modulation</b>                                                                                                                                   | GSM: GMSK<br>GPRS: GMSK<br>EDGE: GMSK / 8PSK<br>WCDMA: QPSK (Uplink)<br>HSDPA: QPSK (Uplink)<br>HSUPA: QPSK (Uplink)<br>802.11b: DSSS (BPSK / QPSK / CCK)<br>802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)<br>Bluetooth V2.1 : GFSK<br>Bluetooth V2.1 EDR : $\pi/4$ -DQPSK, 8-DPSK<br>Bluetooth 3.0 EDR : GFSK / $\pi/4$ -DQPSK / 8-DPSK<br>Bluetooth V4.0 LE : GFSK |
| <b>Dual Transfer Mode (DTM) Category</b>                                                                                                                    | Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.                                                                                                                                                                                                   |
| <b>EUT Stage</b>                                                                                                                                            | Identical Prototype                                                                                                                                                                                                                                                                                                                                                  |
| <b>Remark:</b> The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description. |                                                                                                                                                                                                                                                                                                                                                                      |

#### 3.2 Product Photos

Please refer to Appendix D.

### 3.3 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC OET Bulletin 65 Supplement C (Edition 01-01)
- FCC KDB 447498 D01 v04
- FCC KDB 648474 D01 v01r05
- FCC KDB 941225 D01 v02
- FCC KDB 941225 D03 v01
- FCC KDB 941225 D06 v01
- FCC KDB 248227 D01 v01r02

### 3.4 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

### 3.5 Test Conditions

#### 3.5.1 Ambient Condition

|                     |             |
|---------------------|-------------|
| Ambient Temperature | 20 to 24 °C |
| Humidity            | < 60 %      |

#### 3.5.2 Test Configuration

The device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during all tests.

For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

The maximum rated power of WWAN and WLAN is listed in "Tune-Up Procedure" exhibit; The scaling factor is calculated according to the difference between measured output power and maximum tolerance power on this device.

## **4. Specific Absorption Rate (SAR)**

### **4.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **4.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left( \frac{\delta T}{\delta t} \right)$$


Where: C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 5. SAR Measurement System

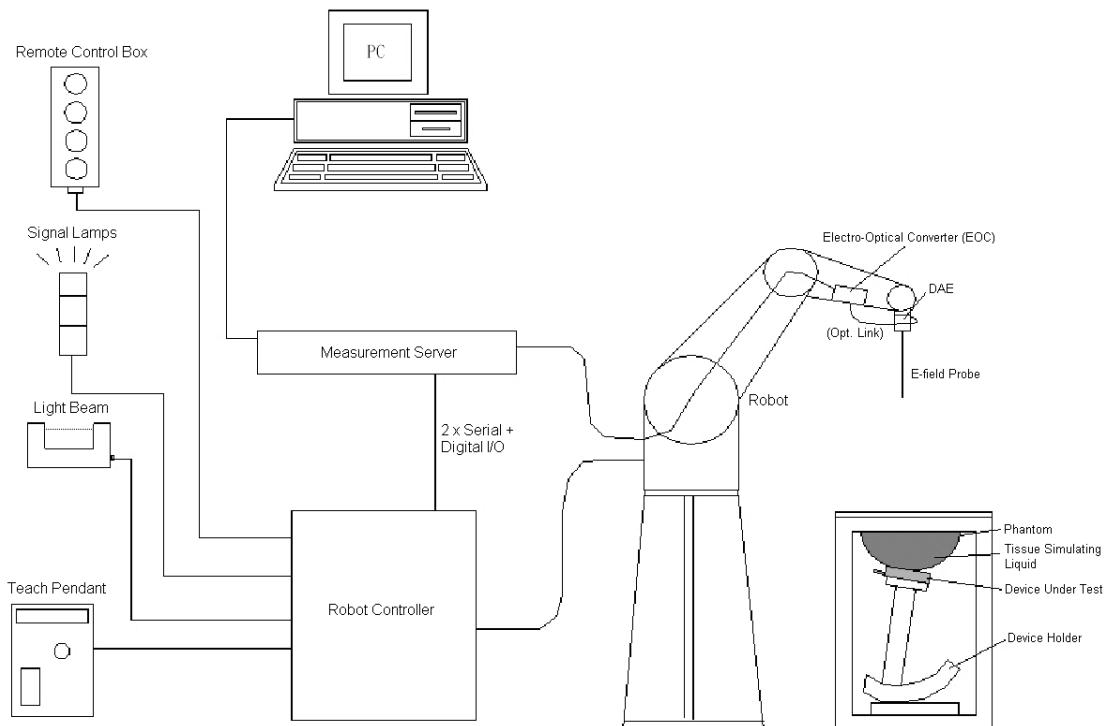

**Fig 5.1 SPEAG DASY System Configurations**

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in in the following sub-sections.

## 5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

### 5.1.1 E-Field Probe Specification

#### <EX3DV4 Probe>

|                      |                                                                                                                                                             |                                                                                     |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |  |
| <b>Frequency</b>     | 10 MHz to 6 GHz; Linearity: $\pm 0.2$ dB                                                                                                                    |                                                                                     |
| <b>Directivity</b>   | $\pm 0.3$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)                                         |                                                                                     |
| <b>Dynamic Range</b> | 10 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB<br>(noise: typically $< 1$ $\mu$ W/g)                                                                     |                                                                                     |
| <b>Dimensions</b>    | Overall length: 330 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                        |                                                                                     |

**Fig 5.2 Photo of EX3DV4**

### 5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy shall be evaluated and within  $\pm 0.25$  dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

## **5.2 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.3 Photo of DAE**

## **5.3 Robot**

The SPEAG DASY system uses the high precision robots (DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



**Fig 5.4 Photo of DASY5**

## **5.4 Measurement Server**

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



**Fig 5.5 Photo of Server for DASY5**

## 5.5 Phantom

### <SAM Twin Phantom>

|                          |                                                            |
|--------------------------|------------------------------------------------------------|
| <b>Shell Thickness</b>   | 2 ± 0.2 mm;<br>Center ear point: 6 ± 0.2 mm                |
| <b>Filling Volume</b>    | Approx. 25 liters                                          |
| <b>Dimensions</b>        | Length: 1000 mm; Width: 500 mm;<br>Height: adjustable feet |
| <b>Measurement Areas</b> | Left Hand, Right Hand, Flat Phantom                        |



**Fig 5.6 Photo of SAM Phantom**

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

## 5.6 Device Holder

### <Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



**Fig 5.7 Device Holder**

## 5.7 Data Storage and Evaluation

### 5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lossy media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

|                            |                           |                                                                         |
|----------------------------|---------------------------|-------------------------------------------------------------------------|
| <b>Probe parameters :</b>  | - Sensitivity             | Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub> |
|                            | - Conversion factor       | ConvF <sub>i</sub>                                                      |
|                            | - Diode compression point | dcp <sub>i</sub>                                                        |
| <b>Device parameters :</b> | - Frequency               | f                                                                       |
|                            | - Crest factor            | cf                                                                      |
| <b>Media parameters :</b>  | - Conductivity            | σ                                                                       |
|                            | - Density                 | ρ                                                                       |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 $U_i$  = input signal of channel i, (i = x, y, z)  
 $cf$  = crest factor of exciting field (DASY parameter)  
 $dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with  $V_i$  = compensated signal of channel i, (i = x, y, z)  
 $\text{Norm}_i$  = sensor sensitivity of channel i, (i = x, y, z),  $\mu\text{V}/(\text{V/m})^2$  for E-field Probes  
 $\text{ConvF}$  = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g  
 $E_{\text{tot}}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in  $\text{g/cm}^3$

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

### 5.8 Test Equipment List

| Manufacturer | Name of Equipment                    | Type/Model    | Serial Number | Calibration   |               |
|--------------|--------------------------------------|---------------|---------------|---------------|---------------|
|              |                                      |               |               | Last Cal.     | Due Date      |
| SPEAG        | 835MHz System Validation Kit         | D835V2        | 4d091         | Nov. 18, 2011 | Nov. 16, 2013 |
| SPEAG        | 1900MHz System Validation Kit        | D1900V2       | 5d118         | Nov. 21, 2011 | Nov. 16, 2013 |
| SPEAG        | 2450MHz System Validation Kit        | D2450V2       | 736           | Jul. 25, 2011 | Jul. 24, 2013 |
| SPEAG        | Data Acquisition Electronics         | DAE4          | 914           | Dec. 08, 2011 | Dec. 07, 2012 |
| SPEAG        | Dosimetric E-Field Probe             | EX3DV4        | 3857          | Jun. 20, 2012 | Jun. 19, 2013 |
| SPEAG        | SAM Twin Phantom                     | QD 000 P40 CB | TP-1477       | NCR           | NCR           |
| SPEAG        | SAM Twin Phantom                     | QD 000 P40 CB | TP-1479       | NCR           | NCR           |
| SPEAG        | Phone Positioner                     | N/A           | N/A           | NCR           | NCR           |
| Anritsu      | Radio communication analyzer         | MT8820C       | 6201074235    | Nov. 30, 2011 | Nov. 29, 2012 |
| Agilent      | Wireless Communication Test Set      | E5515C        | MY48367160    | Oct. 25, 2012 | Oct. 24, 2013 |
| R&S          | Universal Radio Communication Tester | CMU200        | 116456        | Sep. 19, 2012 | Sep. 18, 2013 |
| Agilent      | ENA Series Network Analyzer          | E5071C        | MY46111157    | Apr. 13, 2012 | Apr. 12, 2013 |
| R&S          | Signal Generator                     | SMR40         | 100455        | Dec. 30, 2011 | Dec. 29, 2012 |
| Agilent      | Power Meter                          | E4416A        | MY45101555    | Aug. 22, 2012 | Aug. 21, 2013 |
| Agilent      | Power Sensor                         | E9327A        | MY44421198    | Aug. 22, 2012 | Aug. 21, 2013 |
| R&S          | Spectrum Analyzer                    | FSP30         | 101399        | Jun. 01, 2012 | May 31, 2013  |

**Table 5.1 Test Equipment List**

**Note:**

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. Referring to KDB 450824 D02, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D835V2, SN: 4d091, D1900V2, SN: 5d118 and D2450V2, SN: 736 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

## 6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.



**Fig 6.1 Photo of Liquid Height for Head SAR**



**Fig 6.2 Photo of Liquid Height for Body SAR**

The following table gives the recipes for tissue simulating liquid.

| Frequency (MHz)  | Water (%) | Sugar (%) | Cellulose (%) | Salt (%) | Preventol (%) | DGBE (%) | Conductivity ( $\sigma$ ) | Permittivity ( $\epsilon_r$ ) |
|------------------|-----------|-----------|---------------|----------|---------------|----------|---------------------------|-------------------------------|
| <b>For Head</b>  |           |           |               |          |               |          |                           |                               |
| 835              | 40.3      | 57.9      | 0.2           | 1.4      | 0.2           | 0        | 0.90                      | 41.5                          |
| 1800, 1900, 2000 | 55.2      | 0         | 0             | 0.3      | 0             | 44.5     | 1.40                      | 40.0                          |
| 2450             | 55.0      | 0         | 0             | 0        | 0             | 45.0     | 1.80                      | 39.2                          |
| <b>For Body</b>  |           |           |               |          |               |          |                           |                               |
| 835              | 50.8      | 48.2      | 0             | 0.9      | 0.1           | 0        | 0.97                      | 55.2                          |
| 1800, 1900, 2000 | 70.2      | 0         | 0             | 0.4      | 0             | 29.4     | 1.52                      | 53.3                          |
| 2450             | 68.6      | 0         | 0             | 0        | 0             | 31.4     | 1.95                      | 52.7                          |

**Table 6.1 Recipes of Tissue Simulating Liquid**

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

| Freq. (MHz) | Liquid Type | Temp. (°C) | Conductivity ( $\sigma$ ) | Permittivity ( $\epsilon_r$ ) | Conductivity Target ( $\sigma$ ) | Permittivity Target ( $\epsilon_r$ ) | Delta ( $\sigma$ ) (%) | Delta ( $\epsilon_r$ ) (%) | Limit (%) | Date          |
|-------------|-------------|------------|---------------------------|-------------------------------|----------------------------------|--------------------------------------|------------------------|----------------------------|-----------|---------------|
| 835         | Head        | 21.1       | 0.88                      | 40.851                        | 0.90                             | 41.5                                 | -2.22                  | -1.56                      | ±5        | Nov. 19, 2012 |
| 1900        | Head        | 21.2       | 1.419                     | 40.609                        | 1.40                             | 40.0                                 | 1.36                   | 1.52                       | ±5        | Nov. 19, 2012 |
| 2450        | Head        | 21.4       | 1.856                     | 37.685                        | 1.80                             | 39.2                                 | 3.11                   | -3.86                      | ±5        | Nov. 21, 2012 |
| 835         | Body        | 21.5       | 0.983                     | 54.858                        | 0.97                             | 55.2                                 | 1.34                   | -0.62                      | ±5        | Nov. 19, 2012 |
| 1900        | Body        | 21.2       | 1.501                     | 53.849                        | 1.52                             | 53.3                                 | -1.25                  | 1.03                       | ±5        | Nov. 20, 2012 |
| 2450        | Body        | 21.3       | 2.002                     | 53.464                        | 1.95                             | 52.7                                 | 2.67                   | 1.45                       | ±5        | Nov. 21, 2012 |

**Table 6.2 Measuring Results for Simulating Liquid**

## 7. SAR Measurement Evaluation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

### 7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

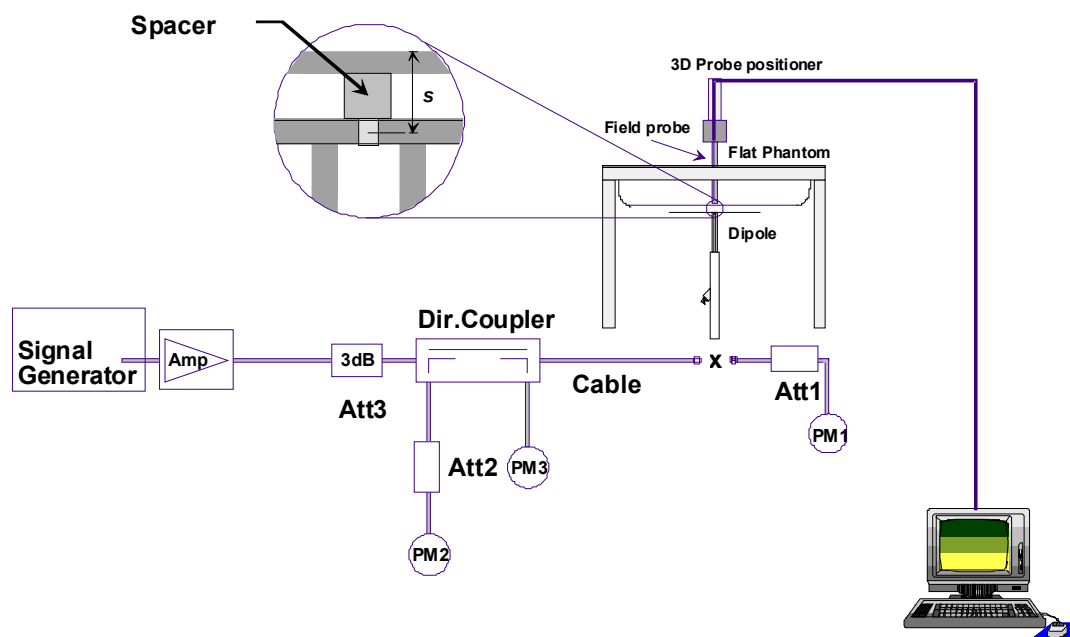


Fig 7.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected.



**Fig 7.2 Photo of Dipole Setup**

### **7.3 Validation Results**

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

| Measurement Date | Frequency (MHz) | Liquid Type | Targeted SAR <sub>1g</sub> (W/kg) | Measured SAR <sub>1g</sub> (W/kg) | Normalized SAR <sub>1g</sub> (W/kg) | Deviation (%) |
|------------------|-----------------|-------------|-----------------------------------|-----------------------------------|-------------------------------------|---------------|
| Nov. 19, 2012    | 835             | Head        | 9.40                              | 2.27                              | 9.08                                | -3.40         |
| Nov. 19, 2012    | 1900            | Head        | 40.3                              | 9.96                              | 39.84                               | -1.14         |
| Nov. 21, 2012    | 2450            | Head        | 54.8                              | 13.6                              | 54.40                               | -0.73         |
| Nov. 19, 2012    | 835             | Body        | 9.42                              | 2.25                              | 9.00                                | -4.46         |
| Nov. 20, 2012    | 1900            | Body        | 41.8                              | 9.9                               | 39.60                               | -5.26         |
| Nov. 21, 2012    | 2450            | Body        | 52.3                              | 13.5                              | 54.00                               | 3.25          |


**Table 7.1 Target and Measurement SAR after Normalized**

## 8. EUT Testing Position

This EUT was tested in six different positions. They are right cheek, right tilted, and left cheek, left tilted, Back of the EUT with phantom 1 cm gap and Bottom Side of the EUT with phantom 1 cm gap, as illustrated below:

### 8.1 Define two imaginary lines on the handset


- The vertical centerline passes through two points on the front side of the handset - the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

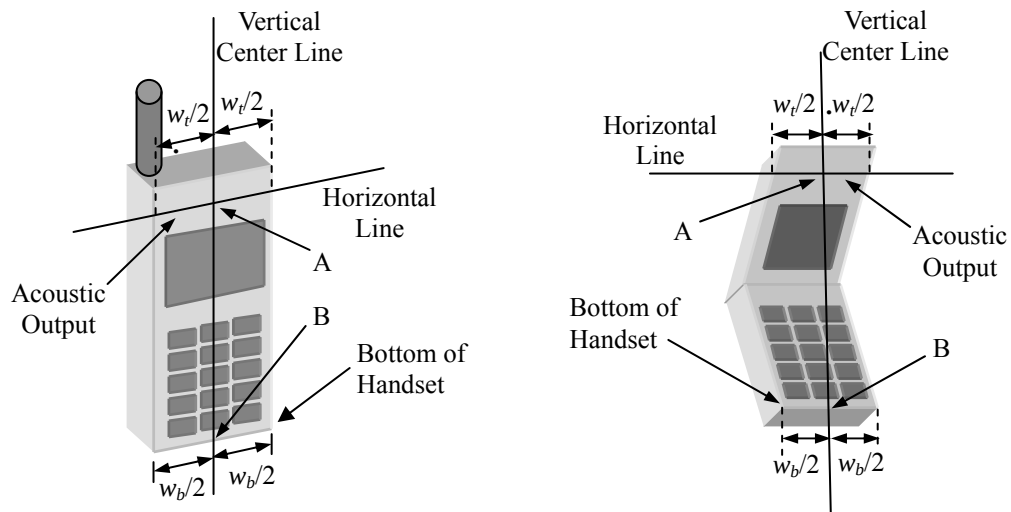

**Fig 9.1 Illustration for Handset Vertical and Horizontal Reference Lines**

## 8.2 Cheek Position


- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 9.2).

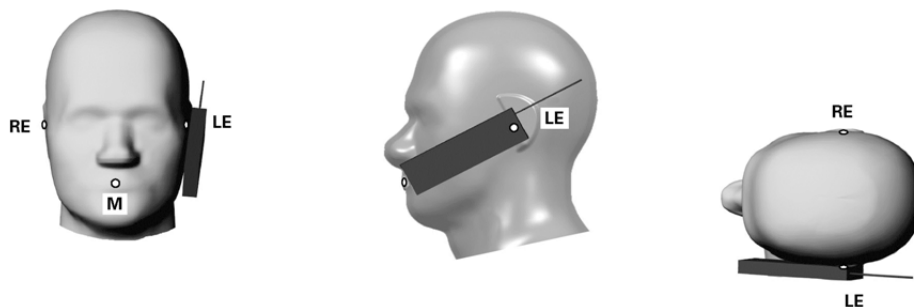

**Fig 9.2 Illustration for Cheek Position**

## 8.3 Tilted Position


- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 9.3).

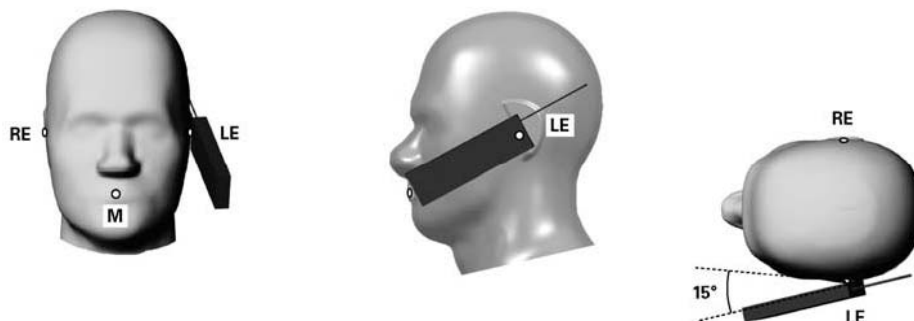

**Fig 9.3 Illustration for Tilted Position**

#### 8.4 Body Worn Position

- (a) To position the device edge parallel to the phantom surface.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1 cm.

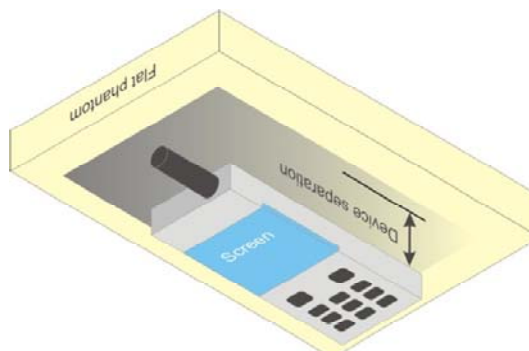

**Fig 9.4 Illustration for Body Worn Position**

#### <EUT Setup Photos>

Please refer to Appendix E for the test setup photos.

## **9. Measurement Procedures**

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% EUTy factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Appendix E demonstrates.
- (e) Set scan area, grid size and other setting on the DASY software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **9.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

### **9.2 Area & Zoom Scan Procedures**

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

### **9.3 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### **9.4 SAR Averaged Methods**

In DASy, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

### **9.5 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

## 10. SAR Test Configurations

### 10.1 Conducted RF Output Power (Unit: dBm)

<GSM/GPRS/EDGE>

| Burst Average Power            |        |       |       |         |        |        |
|--------------------------------|--------|-------|-------|---------|--------|--------|
| Band                           | GSM850 |       |       | GSM1900 |        |        |
| Channel                        | 128    | 189   | 251   | 512     | 661    | 810    |
| Frequency (MHz)                | 824.2  | 836.4 | 848.8 | 1850.2  | 1880.0 | 1909.8 |
| GSM (GMSK, 1 Tx slot)          | 32.19  | 32.14 | 32.26 | 28.98   | 28.93  | 29.15  |
| GPRS (GMSK, 1 Tx slot) – CS1   | 32.18  | 32.15 | 32.24 | 28.98   | 28.90  | 29.13  |
| GPRS (GMSK, 2 Tx slots) – CS1  | 31.30  | 31.27 | 31.23 | 28.21   | 28.05  | 28.09  |
| GPRS (GMSK, 3 Tx slots) – CS1  | 29.43  | 29.38 | 29.33 | 26.50   | 26.33  | 26.53  |
| GPRS (GMSK, 4 Tx slots) – CS1  | 28.42  | 28.37 | 28.50 | 25.66   | 25.51  | 25.74  |
| EDGE (GMSK, 1 Tx slot) – MCS1  | 32.17  | 32.14 | 32.20 | 29.03   | 28.94  | 29.14  |
| EDGE (GMSK, 2 Tx slots) – MCS1 | 31.29  | 31.25 | 31.21 | 28.26   | 28.10  | 28.29  |
| EDGE (GMSK, 3 Tx slots) – MCS1 | 29.42  | 29.37 | 29.33 | 26.48   | 26.31  | 26.54  |
| EDGE (GMSK, 4 Tx slots) – MCS1 | 28.42  | 28.39 | 28.47 | 25.68   | 25.51  | 25.73  |
| EDGE (8PSK, 1 Tx slot) – MCS9  | 26.37  | 26.10 | 25.97 | 25.60   | 25.48  | 25.50  |
| EDGE (8PSK, 2 Tx slots) – MCS9 | 25.30  | 25.13 | 25.04 | 24.63   | 24.61  | 24.57  |
| EDGE (8PSK, 3 Tx slots) – MCS9 | 23.04  | 23.01 | 22.83 | 22.62   | 22.63  | 22.58  |
| EDGE (8PSK, 4 Tx slots) – MCS9 | 21.88  | 21.71 | 21.75 | 21.43   | 21.44  | 21.38  |

| Source-Based Time-Averaged Power |        |       |       |         |        |        |
|----------------------------------|--------|-------|-------|---------|--------|--------|
| Band                             | GSM850 |       |       | GSM1900 |        |        |
| Channel                          | 128    | 189   | 251   | 512     | 661    | 810    |
| Frequency (MHz)                  | 824.2  | 836.4 | 848.8 | 1850.2  | 1880.0 | 1909.8 |
| GSM (GMSK, 1 Tx slot)            | 23.19  | 23.14 | 23.26 | 19.98   | 19.93  | 20.15  |
| GPRS (GMSK, 1 Tx slot) – CS1     | 23.18  | 23.15 | 23.24 | 19.98   | 19.90  | 20.13  |
| GPRS (GMSK, 2 Tx slots) – CS1    | 25.30  | 25.27 | 25.23 | 22.21   | 22.05  | 22.09  |
| GPRS (GMSK, 3 Tx slots) – CS1    | 25.17  | 25.12 | 25.07 | 22.24   | 22.07  | 22.27  |
| GPRS (GMSK, 4 Tx slots) – CS1    | 25.42  | 25.37 | 25.50 | 22.66   | 22.51  | 22.74  |
| EDGE (GMSK, 1 Tx slot) – MCS1    | 23.17  | 23.14 | 23.20 | 20.03   | 19.94  | 20.14  |
| EDGE (GMSK, 2 Tx slots) – MCS1   | 25.29  | 25.25 | 25.21 | 22.26   | 22.10  | 22.29  |
| EDGE (GMSK, 3 Tx slots) – MCS1   | 25.16  | 25.11 | 25.07 | 22.22   | 22.05  | 22.28  |
| EDGE (GMSK, 4 Tx slots) – MCS1   | 25.42  | 25.39 | 25.47 | 22.68   | 22.51  | 22.73  |
| EDGE (8PSK, 1 Tx slot) – MCS9    | 17.37  | 17.10 | 16.97 | 16.60   | 16.48  | 16.50  |
| EDGE (8PSK, 2 Tx slots) – MCS9   | 19.30  | 19.13 | 19.04 | 18.63   | 18.61  | 18.57  |
| EDGE (8PSK, 3 Tx slots) – MCS9   | 18.78  | 18.75 | 18.57 | 18.36   | 18.37  | 18.32  |
| EDGE (8PSK, 4 Tx slots) – MCS9   | 18.88  | 18.71 | 18.75 | 18.43   | 18.44  | 18.38  |

**Remark:** The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:  
Source based time averaged power = Maximum burst averaged power (1 Tx slot) - 9 dB  
Source based time averaged power = Maximum burst averaged power (2 Tx slots) - 6 dB  
Source based time averaged power = Maximum burst averaged power (3 Tx slots) - 4.26 dB  
Source based time averaged power = Maximum burst averaged power (4 Tx slots) - 3 dB

**Note:**

1. For Head SAR testing, GSM should be evaluated, therefore the EUT was set in GSM for GSM850 and set in GSM for GSM1900 due to its highest source-based time-average power.
2. For Body SAR testing, GPRS and EDGE should be evaluated, therefore the EUT was set in GPRS (4 Tx slots) for GSM850 and GSM1900 due to its highest source-based time-average power.
3. Per KDB 447498, the maximum output power channel is used for SAR testing and for further SAR test reduction.
4. The EUT do not support DTM function.

**<WCDMA>**

| Band            | WCDMA Band V |       |       | WCDMA Band II |        |        |
|-----------------|--------------|-------|-------|---------------|--------|--------|
| Channel         | 4132         | 4182  | 4233  | 9262          | 9400   | 9538   |
| Frequency (MHz) | 826.4        | 836.4 | 846.6 | 1852.4        | 1880.0 | 1907.6 |
| AMR             | 22.51        | 22.56 | 22.45 | 22.06         | 22.02  | 22.00  |
| RMC 12.2K       | 22.53        | 22.57 | 22.46 | 22.08         | 22.03  | 22.01  |
| HSDPA Subtest-1 | 22.56        | 22.56 | 22.49 | 22.01         | 22.00  | 22.02  |
| HSDPA Subtest-2 | 21.50        | 21.55 | 21.53 | 21.23         | 21.24  | 21.28  |
| HSDPA Subtest-3 | 21.04        | 21.06 | 21.01 | 20.74         | 20.77  | 20.79  |
| HSDPA Subtest-4 | 20.99        | 21.03 | 20.95 | 20.71         | 20.73  | 20.77  |
| HSUPA Subtest-1 | 20.21        | 20.00 | 20.01 | 20.13         | 20.10  | 20.13  |
| HSUPA Subtest-2 | 19.17        | 19.12 | 19.09 | 19.12         | 19.14  | 19.09  |
| HSUPA Subtest-3 | 19.71        | 19.51 | 19.48 | 19.62         | 19.57  | 19.63  |
| HSUPA Subtest-4 | 20.21        | 20.21 | 20.11 | 20.13         | 20.14  | 20.19  |
| HSUPA Subtest-5 | 21.98        | 22.16 | 22.07 | 21.70         | 21.74  | 21.77  |

| MPR (dB) |                 |              |      |      |               |      |      |
|----------|-----------------|--------------|------|------|---------------|------|------|
| 3GPP MPR | Subtest         | WCDMA Band V |      |      | WCDMA Band II |      |      |
| 0        | HSDPA Subtest-1 | 0.00         | 0.00 | 0.00 | 0.00          | 0.00 | 0.00 |
| 0        | HSDPA Subtest-2 | 1.06         | 1.01 | 0.96 | 0.78          | 0.76 | 0.74 |
| ≤ 0.5    | HSDPA Subtest-3 | 1.52         | 1.50 | 1.48 | 1.27          | 1.23 | 1.23 |
| ≤ 0.5    | HSDPA Subtest-4 | 1.57         | 1.53 | 1.54 | 1.30          | 1.27 | 1.25 |
| 0        | HSUPA Subtest-1 | 1.77         | 2.16 | 2.06 | 1.57          | 1.64 | 1.64 |
| ≤ 2      | HSUPA Subtest-2 | 2.81         | 3.04 | 2.98 | 2.58          | 2.60 | 2.68 |
| ≤ 1      | HSUPA Subtest-3 | 2.27         | 2.65 | 2.59 | 2.08          | 2.17 | 2.14 |
| ≤ 2      | HSUPA Subtest-4 | 1.77         | 1.95 | 1.96 | 1.57          | 1.60 | 1.58 |
| 0        | HSUPA Subtest-5 | 0.00         | 0.00 | 0.00 | 0.00          | 0.00 | 0.00 |

**Note:**

- For Head SAR, per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 1/4 dB higher than RMC, SAR tests with AMR 12.2kbps can be excluded.
- For Body SAR, per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA subset-1 and HSUPA subset-5 output power is < 1/4 dB higher than RMC, and SAR with RMC 12.2kbps setting is  $\leq 1.2\text{W/kg}$ , HSDPA and HSUPA SAR evaluation can be excluded.
- EUT is designed to follow the MPR of 3GPP Table 5.2B.1 specification. In production units, MPR result deviation from 3GPP is expected; the implementation and expected deviation is detailed in tune-up procedure exhibit.

## 11. SAR Test Results

### 11.1 Test Records for Head SAR Test

#### <GSM>

| Plot No. | Band    | Mode | Test Position | Ch. | Output Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | SAR <sub>1g</sub> (W/kg) | Scaled SAR <sub>1g</sub> (W/kg) | Power Drift (dB) |
|----------|---------|------|---------------|-----|--------------------|---------------------|----------------|--------------------------|---------------------------------|------------------|
| 1        | GSM850  | GSM  | Right Cheek   | 251 | 32.26              | 32.5                | 1.057          | 0.250                    | 0.264                           | -0.095           |
| 2        | GSM850  | GSM  | Right Tilted  | 251 | 32.26              | 32.5                | 1.057          | 0.132                    | 0.139                           | -0.02            |
| 3        | GSM850  | GSM  | Left Cheek    | 251 | 32.26              | 32.5                | 1.057          | 0.226                    | 0.239                           | -0.07            |
| 4        | GSM850  | GSM  | Left Tilted   | 251 | 32.26              | 32.5                | 1.057          | 0.131                    | 0.138                           | -0.03            |
| 5        | GSM1900 | GSM  | Right Cheek   | 810 | 29.15              | 29.5                | 1.084          | 0.063                    | 0.068                           | 0.05             |
| 6        | GSM1900 | GSM  | Right Tilted  | 810 | 29.15              | 29.5                | 1.084          | 0.038                    | 0.041                           | 0.10             |
| 7        | GSM1900 | GSM  | Left Cheek    | 810 | 29.15              | 29.5                | 1.084          | 0.109                    | 0.118                           | -0.08            |
| 8        | GSM1900 | GSM  | Left Tilted   | 810 | 29.15              | 29.5                | 1.084          | 0.047                    | 0.051                           | 0.02             |

**Note:** Per KDB 447498, if the highest output channel scaled SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.

#### <WCDMA>

| Plot No. | Band          | Mode     | Test Position | Ch.  | Output Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | SAR <sub>1g</sub> (W/kg) | Scaled SAR <sub>1g</sub> (W/kg) | Power Drift (dB) |
|----------|---------------|----------|---------------|------|--------------------|---------------------|----------------|--------------------------|---------------------------------|------------------|
| 9        | WCDMA Band V  | RMC12.2K | Right Cheek   | 4182 | 22.57              | 23                  | 1.104          | 0.192                    | 0.212                           | -0.03            |
| 10       | WCDMA Band II | RMC12.2K | Left Cheek    | 9262 | 22.08              | 23                  | 1.236          | 0.190                    | 0.235                           | 0.09             |

**Note:** Per KDB 447498, if the highest output channel scaled SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.

#### <WLAN 2.4GHz>

| Plot No. | Band      | Mode    | Test Position | Ch. | Output Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | SAR <sub>1g</sub> (W/kg) | Scaled SAR <sub>1g</sub> (W/kg) | Power Drift (dB) |
|----------|-----------|---------|---------------|-----|--------------------|---------------------|----------------|--------------------------|---------------------------------|------------------|
| 11       | WLAN 2.4G | 802.11b | Left Cheek    | 11  | 14.95              | 15.5                | 1.135          | 0.419                    | 0.476                           | 0.10             |

**Note:** Per KDB 248227, if the highest output channel scaled SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.

## 11.2 Test Records for Hotspot SAR Test

### <GSM>

| Plot No. | Band    | Mode              | Test Position | Gap (cm) | Ch. | Output Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | SAR <sub>1g</sub> (W/kg) | Scaled SAR <sub>1g</sub> (W/kg) | Power Drift (dB) |
|----------|---------|-------------------|---------------|----------|-----|--------------------|---------------------|----------------|--------------------------|---------------------------------|------------------|
| 12       | GSM850  | GPRS (4 Tx slots) | Back          | 1        | 128 | 28.42              | 29.5                | 1.282          | 0.769                    | 0.986                           | 0.01             |
| 13       | GSM850  | GPRS (4 Tx slots) | Back          | 1        | 189 | 28.37              | 29.5                | 1.297          | 0.820                    | 1.064                           | 0.01             |
| 14       | GSM850  | GPRS (4 Tx slots) | Back          | 1        | 251 | 28.5               | 29.5                | 1.259          | 0.801                    | 1.008                           | 0.081            |
| 15       | GSM1900 | GPRS (4 Tx slots) | Bottom Side   | 1        | 810 | 25.74              | 26.5                | 1.191          | 0.457                    | 0.544                           | 0.13             |

**Note:** Per KDB 447498 if the highest output channel scaled SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.

### <WCDMA>

| Plot No. | Band          | Mode     | Test Position | Gap (cm) | Ch.  | Output Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | SAR <sub>1g</sub> (W/kg) | Scaled SAR <sub>1g</sub> (W/kg) | Power Drift (dB) |
|----------|---------------|----------|---------------|----------|------|--------------------|---------------------|----------------|--------------------------|---------------------------------|------------------|
| 16       | WCDMA Band V  | RMC12.2K | Back          | 1        | 4182 | 22.57              | 23                  | 1.104          | 0.481                    | 0.531                           | 0.044            |
| 17       | WCDMA Band II | RMC12.2K | Bottom Side   | 1        | 9262 | 22.08              | 23                  | 1.236          | 0.472                    | 0.583                           | 0.08             |

**Note:** Per KDB 447498, if the highest output channel scaled SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.

### <WLAN 2.4GHz>

| Plot No. | Band      | Mode    | Test Position | Gap (cm) | Ch. | Output Power (dBm) | Tune-Up Limit (dBm) | Scaling Factor | SAR <sub>1g</sub> (W/kg) | Scaled SAR <sub>1g</sub> (W/kg) | Power Drift (dB) |
|----------|-----------|---------|---------------|----------|-----|--------------------|---------------------|----------------|--------------------------|---------------------------------|------------------|
| 18       | WLAN 2.4G | 802.11b | Back          | 1        | 11  | 14.95              | 15.5                | 1.135          | 0.133                    | 0.151                           | 0.01             |

**Note:** Per KDB 248227, if the highest output channel scaled SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.

### 11.3 Simultaneous Multi-band Transmission Analysis

#### <Head SAR>

| Position   | WWAN          |         |                      | WLAN    |                      | Max. SAR Sum | WWAN    |                             | WLAN    |                             | Scaled WWAN + Scaled WLAN |
|------------|---------------|---------|----------------------|---------|----------------------|--------------|---------|-----------------------------|---------|-----------------------------|---------------------------|
|            | WWAN Band     | Plot No | Max. WWAN SAR (W/kg) | Plot No | Max. WLAN SAR (W/kg) |              | Plot No | Max. Scaled WWAN SAR (W/kg) | Plot No | Max. Scaled WLAN SAR (W/kg) |                           |
| Left Cheek | GSM850        | #03     | 0.226                | #11     | 0.419                | 0.65         | #03     | 0.239                       | #11     | 0.476                       | 0.72                      |
|            | GSM1900       | #07     | 0.109                | #11     | 0.419                | 0.53         | #07     | 0.118                       | #11     | 0.476                       | 0.59                      |
|            | WCDMA Band II | #10     | 0.19                 | #11     | 0.419                | 0.61         | #10     | 0.235                       | #11     | 0.476                       | 0.71                      |

#### <Hotspot SAR>

| Position | WWAN         |         |                      | WLAN    |                      | Max. SAR Sum | WWAN    |                             | WLAN    |                             | Scaled WWAN + Scaled WLAN |
|----------|--------------|---------|----------------------|---------|----------------------|--------------|---------|-----------------------------|---------|-----------------------------|---------------------------|
|          | WWAN Band    | Plot No | Max. WWAN SAR (W/kg) | Plot No | Max. WLAN SAR (W/kg) |              | Plot No | Max. Scaled WWAN SAR (W/kg) | Plot No | Max. Scaled WLAN SAR (W/kg) |                           |
| Back     | GSM850       | #13     | 0.820                | #18     | 0.133                | 0.95         | #13     | 1.064                       | #18     | 0.151                       | 1.22                      |
|          | WCDMA Band V | #16     | 0.481                | #18     | 0.133                | 0.61         | #16     | 0.531                       | #18     | 0.151                       | 0.68                      |

#### Note:

1. The maximum SAR summation is calculated based on the same configuration and test position.
2. When stand-alone 1-g SAR is not required for a transmitter or antenna, its SAR is considered zero in the 1-g SAR summing process to determine simultaneous transmission SAR evaluation requirements
3. If 1g-SAR scalar summation < 1.6W/kg, simultaneous SAR measurement is not necessary.
4. If 1g-SAR scalar summation > 1.6W/kg, SPLSR calculation is necessary.
5. Per KDB 648474 D01, the simultaneous transmission SAR for WWAN and WLAN was not required, because the SAR scalar summation (Head: 0.72 W/kg; Body: 1.22 W/kg) is less than 1.6 W/kg.

**Test Engineer :** Fulu Hu and Jimmy Cheng

## **12. Uncertainty Assessment**

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 12.1

| <b>Uncertainty Distributions</b>   | <b>Normal</b> | <b>Rectangular</b> | <b>Triangular</b> | <b>U-Shape</b> |
|------------------------------------|---------------|--------------------|-------------------|----------------|
| Multi-plying Factor <sup>(a)</sup> | $1/k^{(b)}$   | $1/\sqrt{3}$       | $1/\sqrt{6}$      | $1/\sqrt{2}$   |

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b)  $k$  is the coverage factor

**Table 12.1 Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

| Error Description             | Uncertainty   | Probability  | Divisor | Ci   | Ci    | Standard            | Standard             |
|-------------------------------|---------------|--------------|---------|------|-------|---------------------|----------------------|
|                               | Value<br>(±%) | Distribution |         | (1g) | (10g) | Uncertainty<br>(1g) | Uncertainty<br>(10g) |
| Measurement System            |               |              |         |      |       |                     |                      |
| Probe Calibration             | 6.0           | Normal       | 1       | 1    | 1     | ± 6.0 %             | ± 6.0 %              |
| Axial Isotropy                | 4.7           | Rectangular  | √3      | 0.7  | 0.7   | ± 1.9 %             | ± 1.9 %              |
| Hemispherical Isotropy        | 9.6           | Rectangular  | √3      | 0.7  | 0.7   | ± 3.9 %             | ± 3.9 %              |
| Boundary Effects              | 1.0           | Rectangular  | √3      | 1    | 1     | ± 0.6 %             | ± 0.6 %              |
| Linearity                     | 4.7           | Rectangular  | √3      | 1    | 1     | ± 2.7 %             | ± 2.7 %              |
| System Detection Limits       | 1.0           | Rectangular  | √3      | 1    | 1     | ± 0.6 %             | ± 0.6 %              |
| Readout Electronics           | 0.3           | Normal       | 1       | 1    | 1     | ± 0.3 %             | ± 0.3 %              |
| Response Time                 | 0.8           | Rectangular  | √3      | 1    | 1     | ± 0.5 %             | ± 0.5 %              |
| Integration Time              | 2.6           | Rectangular  | √3      | 1    | 1     | ± 1.5 %             | ± 1.5 %              |
| RF Ambient Noise              | 3.0           | Rectangular  | √3      | 1    | 1     | ± 1.7 %             | ± 1.7 %              |
| RF Ambient Reflections        | 3.0           | Rectangular  | √3      | 1    | 1     | ± 1.7 %             | ± 1.7 %              |
| Probe Positioner              | 0.4           | Rectangular  | √3      | 1    | 1     | ± 0.2 %             | ± 0.2 %              |
| Probe Positioning             | 2.9           | Rectangular  | √3      | 1    | 1     | ± 1.7 %             | ± 1.7 %              |
| Max. SAR Eval.                | 1.0           | Rectangular  | √3      | 1    | 1     | ± 0.6 %             | ± 0.6 %              |
| Test Sample Related           |               |              |         |      |       |                     |                      |
| Device Positioning            | 2.9           | Normal       | 1       | 1    | 1     | ± 2.9 %             | ± 2.9 %              |
| Device Holder                 | 3.6           | Normal       | 1       | 1    | 1     | ± 3.6 %             | ± 3.6 %              |
| Power Drift                   | 5.0           | Rectangular  | √3      | 1    | 1     | ± 2.9 %             | ± 2.9 %              |
| Phantom and Setup             |               |              |         |      |       |                     |                      |
| Phantom Uncertainty           | 4.0           | Rectangular  | √3      | 1    | 1     | ± 2.3 %             | ± 2.3 %              |
| Liquid Conductivity (Target)  | 5.0           | Rectangular  | √3      | 0.64 | 0.43  | ± 1.8 %             | ± 1.2 %              |
| Liquid Conductivity (Meas.)   | 2.5           | Normal       | 1       | 0.64 | 0.43  | ± 1.6 %             | ± 1.1 %              |
| Liquid Permittivity (Target)  | 5.0           | Rectangular  | √3      | 0.6  | 0.49  | ± 1.7 %             | ± 1.4 %              |
| Liquid Permittivity (Meas.)   | 2.5           | Normal       | 1       | 0.6  | 0.49  | ± 1.5 %             | ± 1.2 %              |
| Combined Standard Uncertainty |               |              |         |      |       | ± 11.0 %            | ± 10.8 %             |
| Coverage Factor for 95 %      |               |              |         |      |       | K=2                 |                      |
| Expanded Uncertainty          |               |              |         |      |       | ± 22.0 %            | ± 21.5 %             |

**Table 12.2 Uncertainty Budget of DASY for frequency range 300 MHz to 3 GHz**

### **13. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", June 2001
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [7] FCC KDB 447498 D01 v04, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", November 2009
- [8] FCC KDB 648474 D01 v01r05, "SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas", September 2008
- [9] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [10] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [11] FCC KDB 941225 D06 v01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", April 2011



## ***Appendix A. Plots of System Performance Check***

The plots are shown as follows.

## **System Check\_Head\_835MHz\_121119**

### **DUT: D835V2 - SN:4d091**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL\_835\_121119 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.88 \text{ mho/m}$ ;  $\epsilon_r = 40.851$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $21.1 \text{ }^\circ\text{C}$

#### **DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (61x61x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $2.455 \text{ mW/g}$


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $53.361 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$

Peak SAR (extrapolated) =  $3.295 \text{ W/kg}$

**SAR(1 g) =  $2.27 \text{ mW/g}$ ; SAR(10 g) =  $1.5 \text{ mW/g}$**

Maximum value of SAR (measured) =  $2.458 \text{ mW/g}$

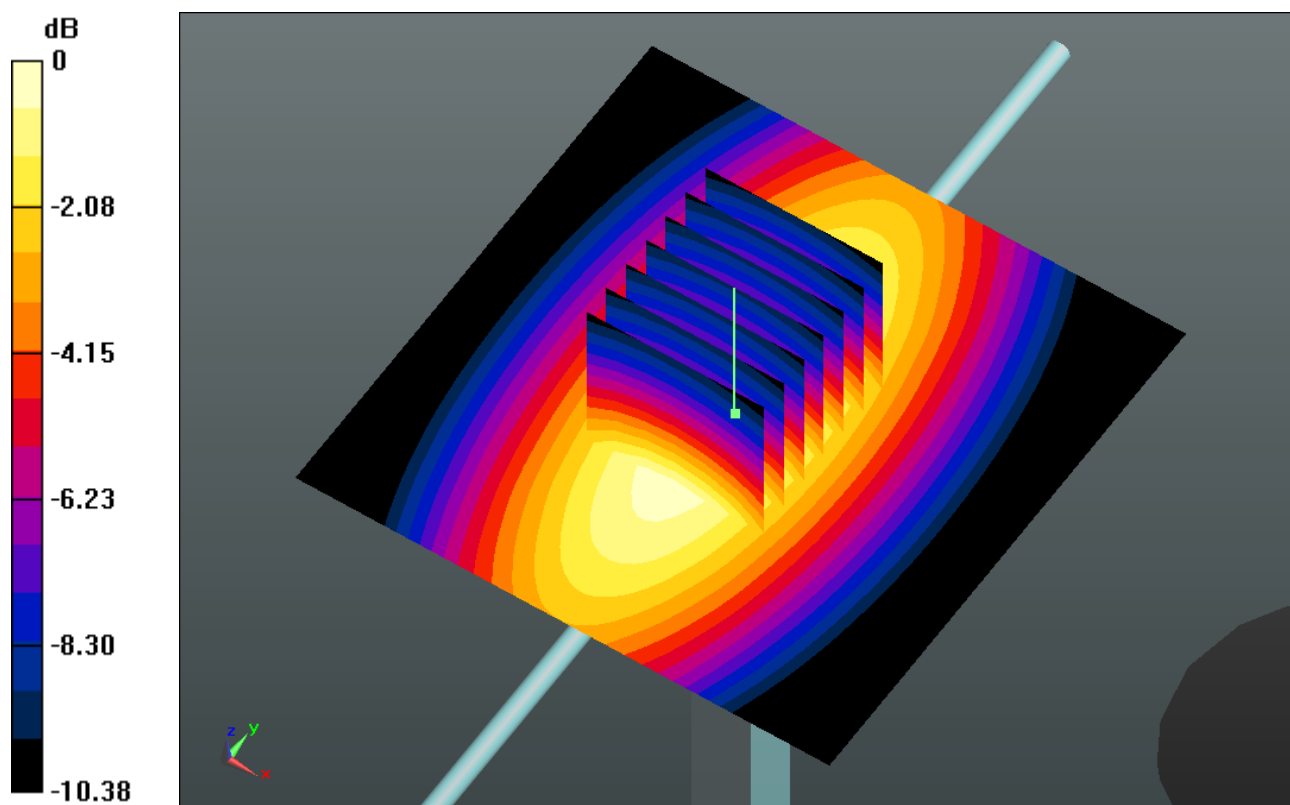

0 dB = 2.460mW/g

## **System Check\_Head\_1900MHz\_121119**

### **DUT: D1900V2 - SN:5d118**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_121119 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.419$  mho/m;  $\epsilon_r =$

40.609;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.2 °C

#### **DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.343 mW/g


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.620 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 18.883 W/kg

**SAR(1 g) = 9.96 mW/g; SAR(10 g) = 5.12 mW/g**

Maximum value of SAR (measured) = 11.237 mW/g

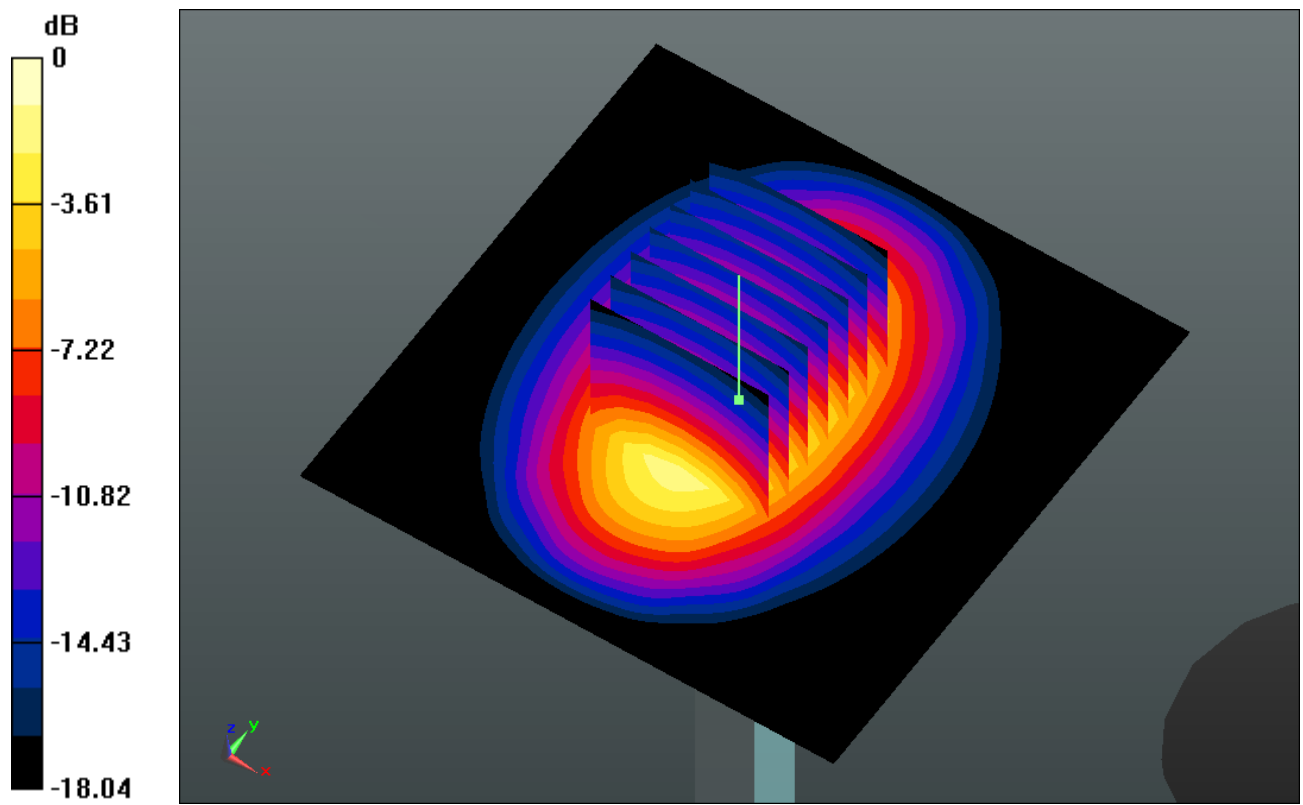

0 dB = 11.240mW/g

## **System Check\_Head\_2450MHz\_121121**

### **DUT: D2450V2 - SN:736**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_121121 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.856$  mho/m;  $\epsilon_r =$

37.685;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.4 °C

#### **DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(6.87, 6.87, 6.87); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (71x71x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 21.840 mW/g


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.968 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 28.962 W/kg

**SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.15 mW/g**

Maximum value of SAR (measured) = 21.208 mW/g

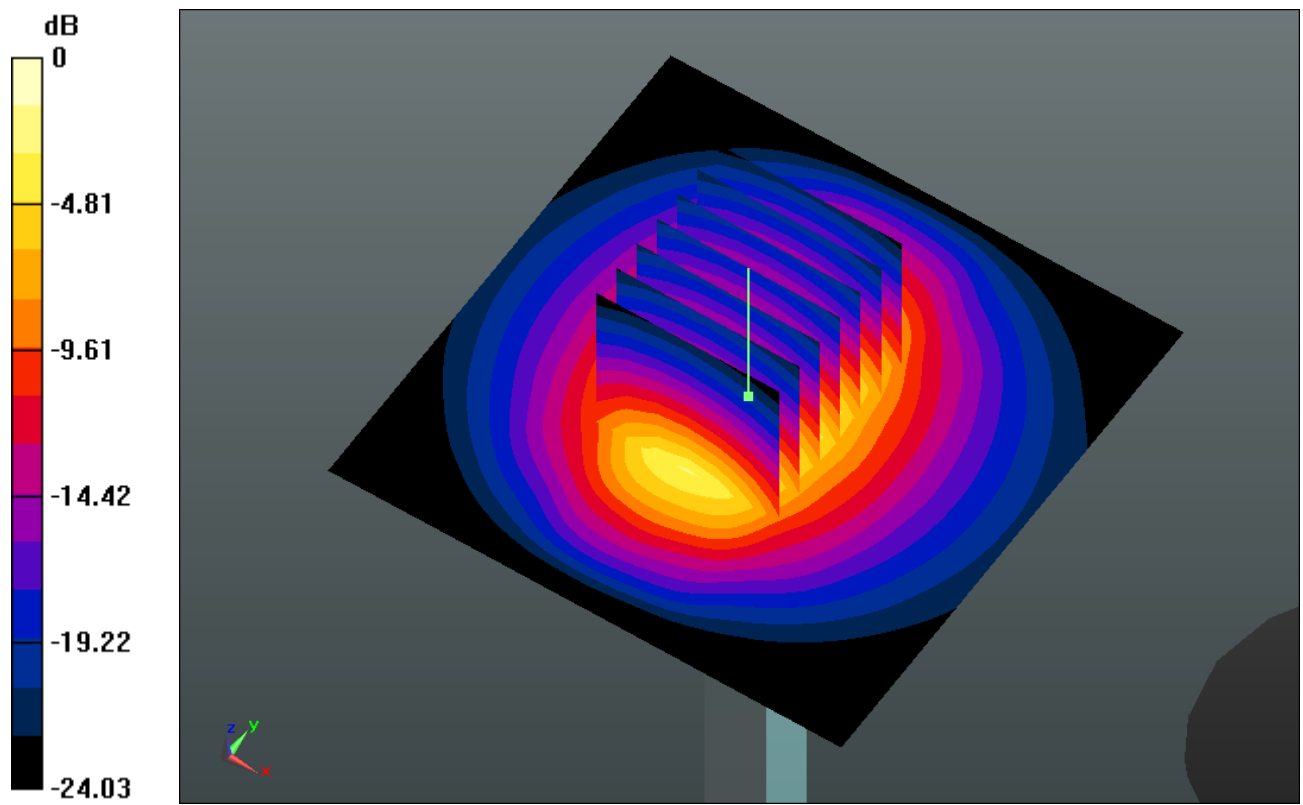

0 dB = 21.210mW/g

## **System Check\_Body\_835MHz\_121119**

### **DUT: D835V2 - SN:4d091**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_121119 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.983 \text{ mho/m}$ ;  $\epsilon_r = 54.858$ ;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.3 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $21.5 \text{ }^\circ\text{C}$

#### **DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (61x61x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $2.431 \text{ mW/g}$


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $50.130 \text{ V/m}$ ; Power Drift =  $0.0051 \text{ dB}$

Peak SAR (extrapolated) =  $3.250 \text{ W/kg}$

**SAR(1 g) =  $2.25 \text{ mW/g}$ ; SAR(10 g) =  $1.49 \text{ mW/g}$**

Maximum value of SAR (measured) =  $2.434 \text{ mW/g}$

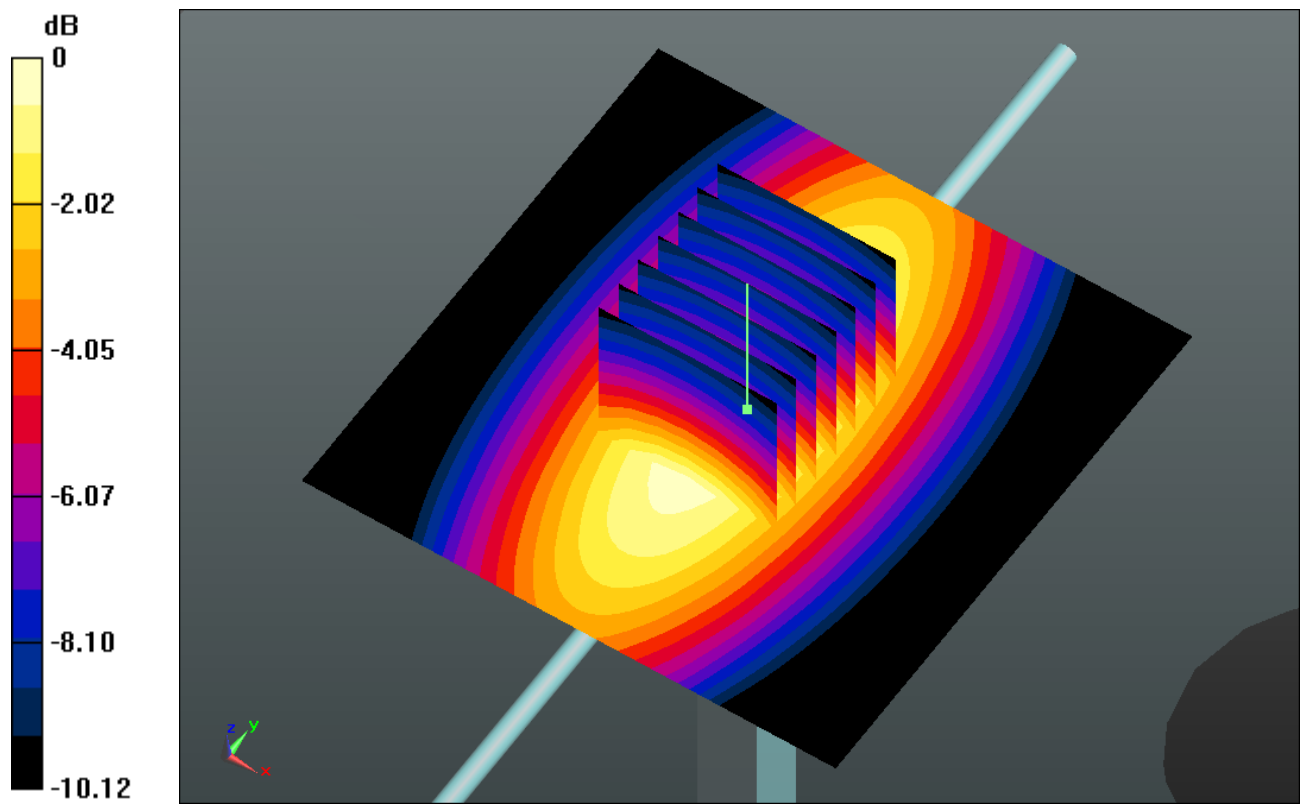

0 dB = 2.430mW/g

## **System Check\_Body\_1900MHz\_121120**

### **DUT: D1900V2 - SN:5d118**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_121120 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.501$  mho/m;  $\epsilon_r =$

53.849;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.2 °C

#### **DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.250 mW/g


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.953 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 18.170 W/kg

**SAR(1 g) = 9.9 mW/g; SAR(10 g) = 5.08 mW/g**

Maximum value of SAR (measured) = 11.140 mW/g

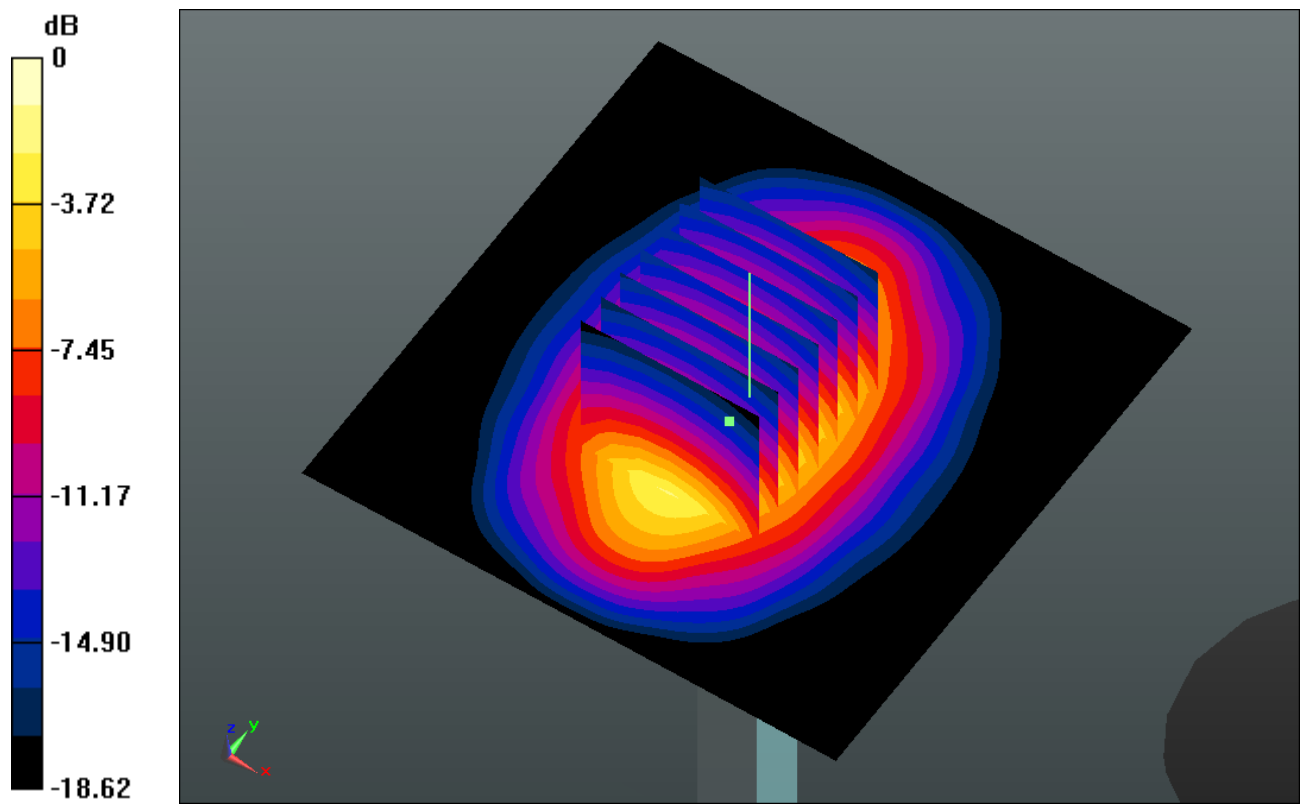

0 dB = 11.140mW/g

**System Check\_Body\_2450MHz\_121121**

**DUT: D2450V2 - SN:736**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_121121 Medium parameters used:  $f = 2450 \text{ MHz}$ ;  $\sigma = 2.002 \text{ mho/m}$ ;  $\epsilon_r =$

$53.464$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $21.3 \text{ }^\circ\text{C}$

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Pin=250mW/Area Scan (71x71x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (interpolated) =  $21.315 \text{ mW/g}$


**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $87.320 \text{ V/m}$ ; Power Drift =  $0.095 \text{ dB}$

Peak SAR (extrapolated) =  $28.982 \text{ W/kg}$

**SAR(1 g) =  $13.5 \text{ mW/g}$ ; SAR(10 g) =  $6.08 \text{ mW/g}$**

Maximum value of SAR (measured) =  $20.832 \text{ mW/g}$

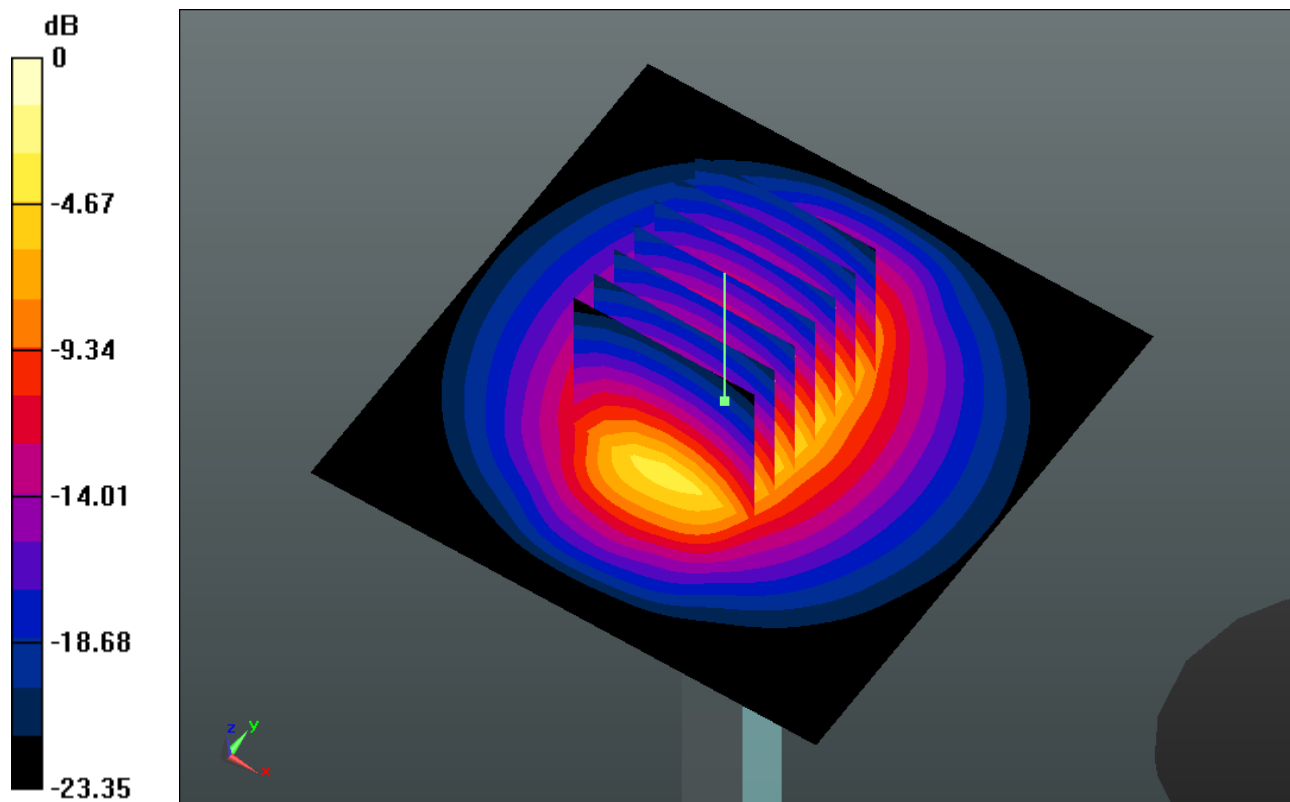

0 dB = 20.830mW/g



## ***Appendix B. Plots of SAR Measurement***

The plots are shown as follows.

**#01 GSM850\_GSM\_Right Cheek\_Ch251**

**DUT: 292601-01**

Communication System: General GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL\_835\_121119 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.892$  mho/m;  $\epsilon_r = 40.663$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch251/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.280 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.447 V/m; Power Drift = -0.095 dB

Peak SAR (extrapolated) = 0.299 W/kg

**SAR(1 g) = 0.250 mW/g; SAR(10 g) = 0.192 mW/g**

Maximum value of SAR (measured) = 0.278 mW/g

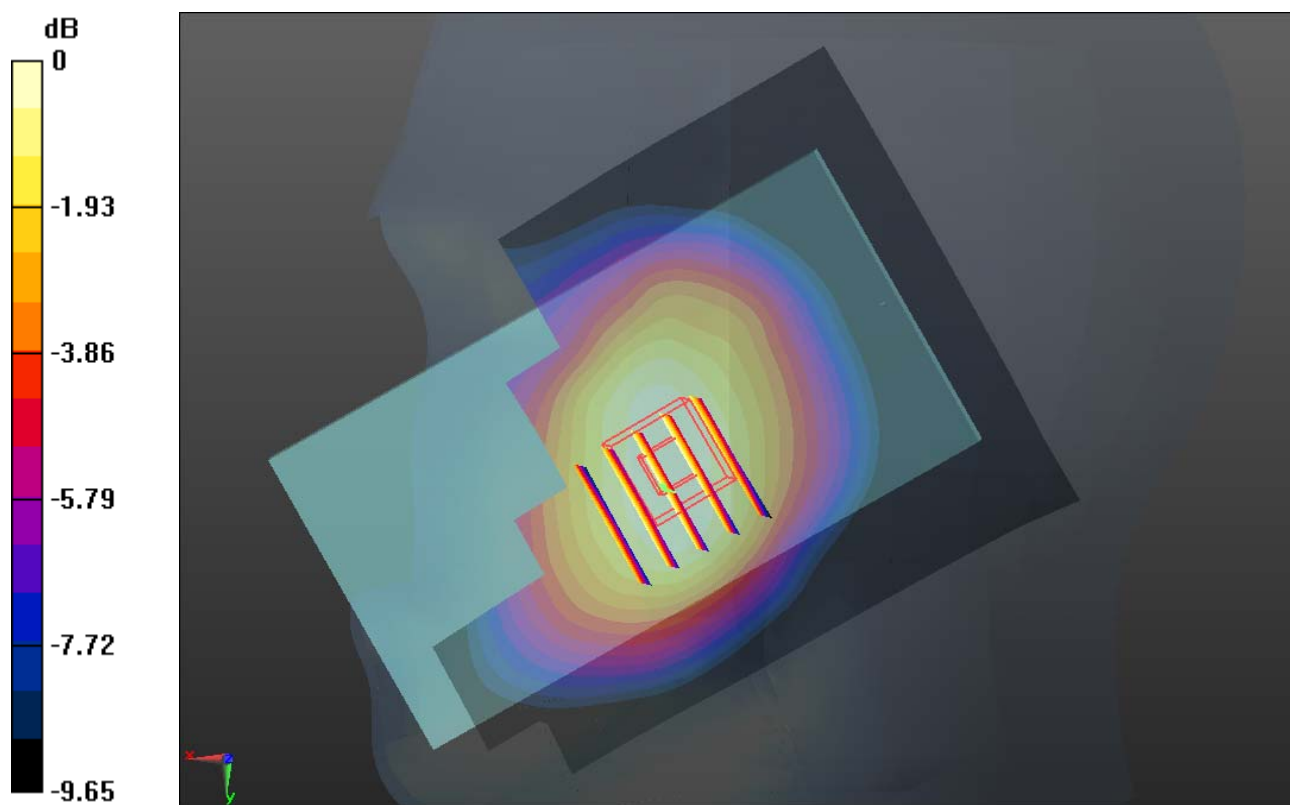

0 dB = 0.280mW/g

**#01 GSM850\_GSM\_Right Cheek\_Ch251\_2D**

**DUT: 292601-01**

Communication System: General GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL\_835\_121119 Medium parameters used:  $f = 849 \text{ MHz}$ ;  $\sigma = 0.892 \text{ mho/m}$ ;  $\epsilon_r = 40.663$ ;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $21.1 \text{ }^\circ\text{C}$

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch251/Area Scan (81x121x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $0.280 \text{ mW/g}$


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $4.447 \text{ V/m}$ ; Power Drift =  $-0.095 \text{ dB}$

Peak SAR (extrapolated) =  $0.299 \text{ W/kg}$

**SAR(1 g) =  $0.250 \text{ mW/g}$ ; SAR(10 g) =  $0.192 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.278 \text{ mW/g}$

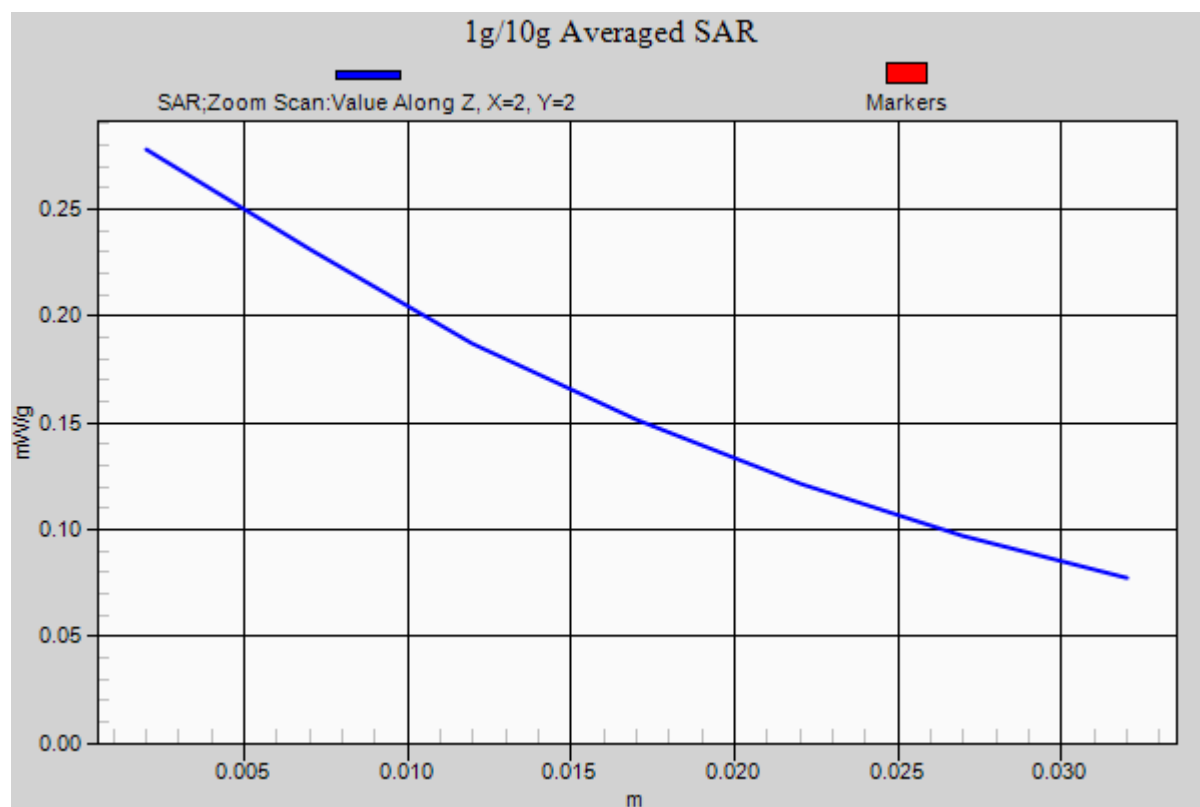

## **#02 GSM850\_GSM\_Right Tilted\_Ch251**

### **DUT: 292601-01**

Communication System: General GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL\_835\_121119 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.892$  mho/m;  $\epsilon_r = 40.663$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.1 °C

#### **DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch251/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.148 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.965 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.159 W/kg

**SAR(1 g) = 0.132 mW/g; SAR(10 g) = 0.104 mW/g**

Maximum value of SAR (measured) = 0.146 mW/g

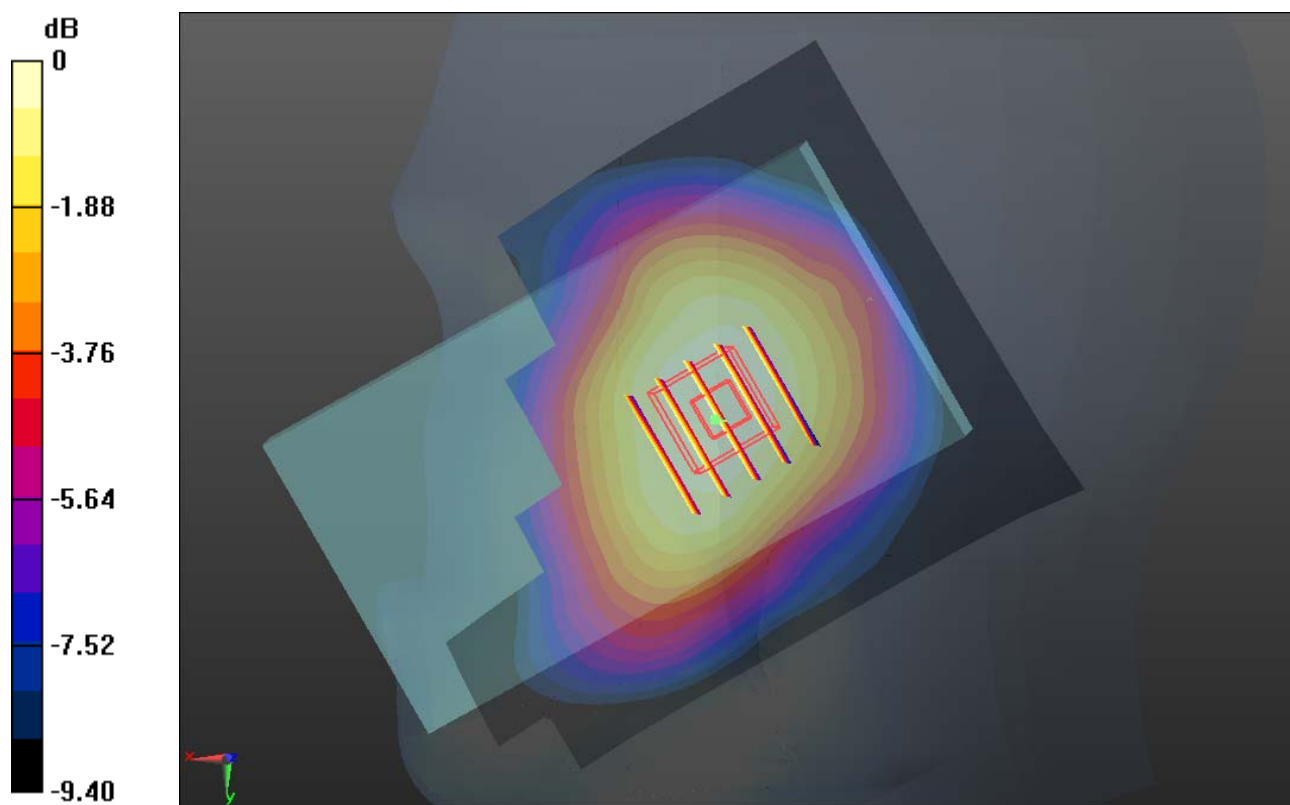

0 dB = 0.150mW/g

### #03 GSM850\_GSM\_Left Cheek\_Ch251

#### DUT: 292601-01

Communication System: General GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL\_835\_121119 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.892$  mho/m;  $\epsilon_r = 40.663$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.1 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch251/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.257 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.345 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.275 W/kg

**SAR(1 g) = 0.226 mW/g; SAR(10 g) = 0.174 mW/g**

Maximum value of SAR (measured) = 0.256 mW/g

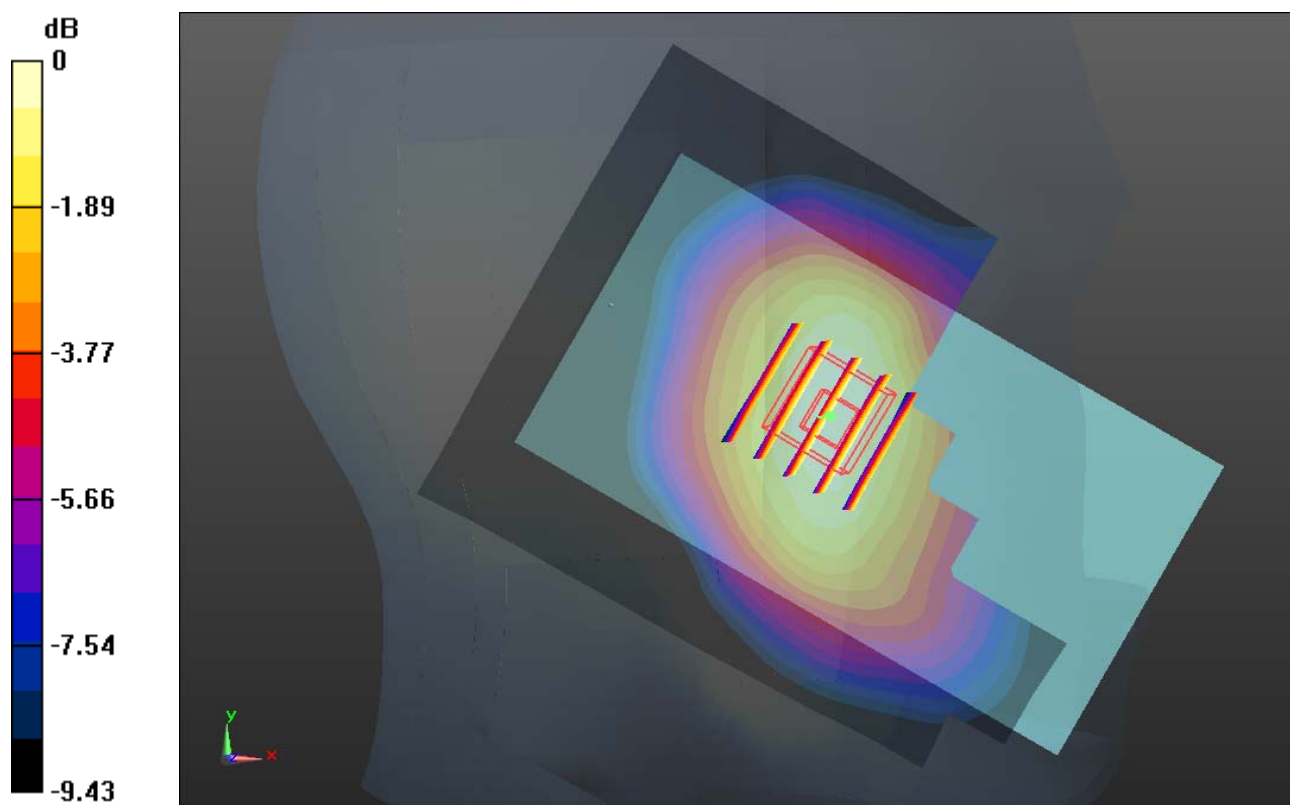

0 dB = 0.260mW/g

## **#04 GSM850\_GSM\_Left Tilted\_Ch251**

### **DUT: 292601-01**

Communication System: General GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL\_835\_121119 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.892$  mho/m;  $\epsilon_r = 40.663$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.1 °C

#### **DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch251/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.146 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.722 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.156 W/kg

**SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.103 mW/g**

Maximum value of SAR (measured) = 0.145 mW/g

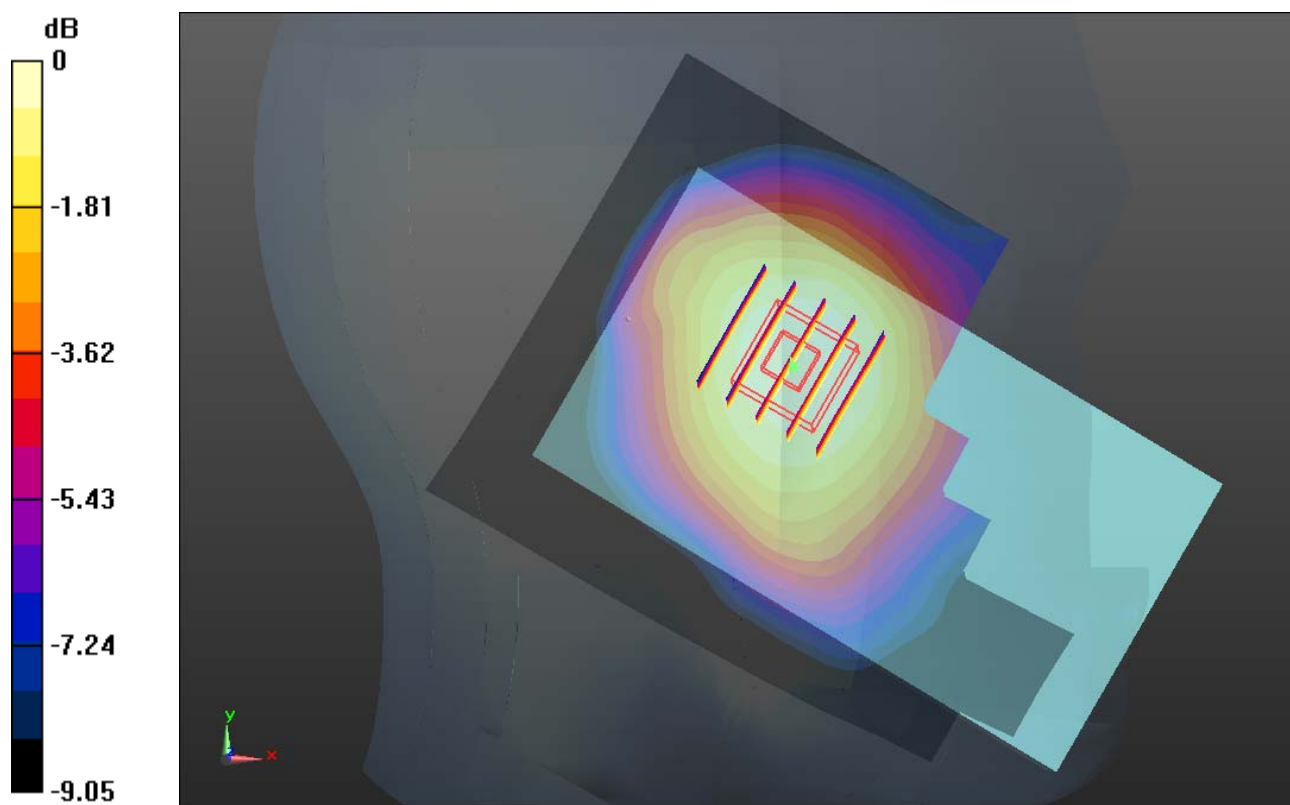

## **#05 GSM1900\_GSM\_Right Cheek\_Ch810**

### **DUT: 292601-01**

Communication System: General GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL\_1900\_121119 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40.64$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.2 °C

#### **DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.085 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.574 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.101 W/kg

**SAR(1 g) = 0.063 mW/g; SAR(10 g) = 0.037 mW/g**

Maximum value of SAR (measured) = 0.080 mW/g

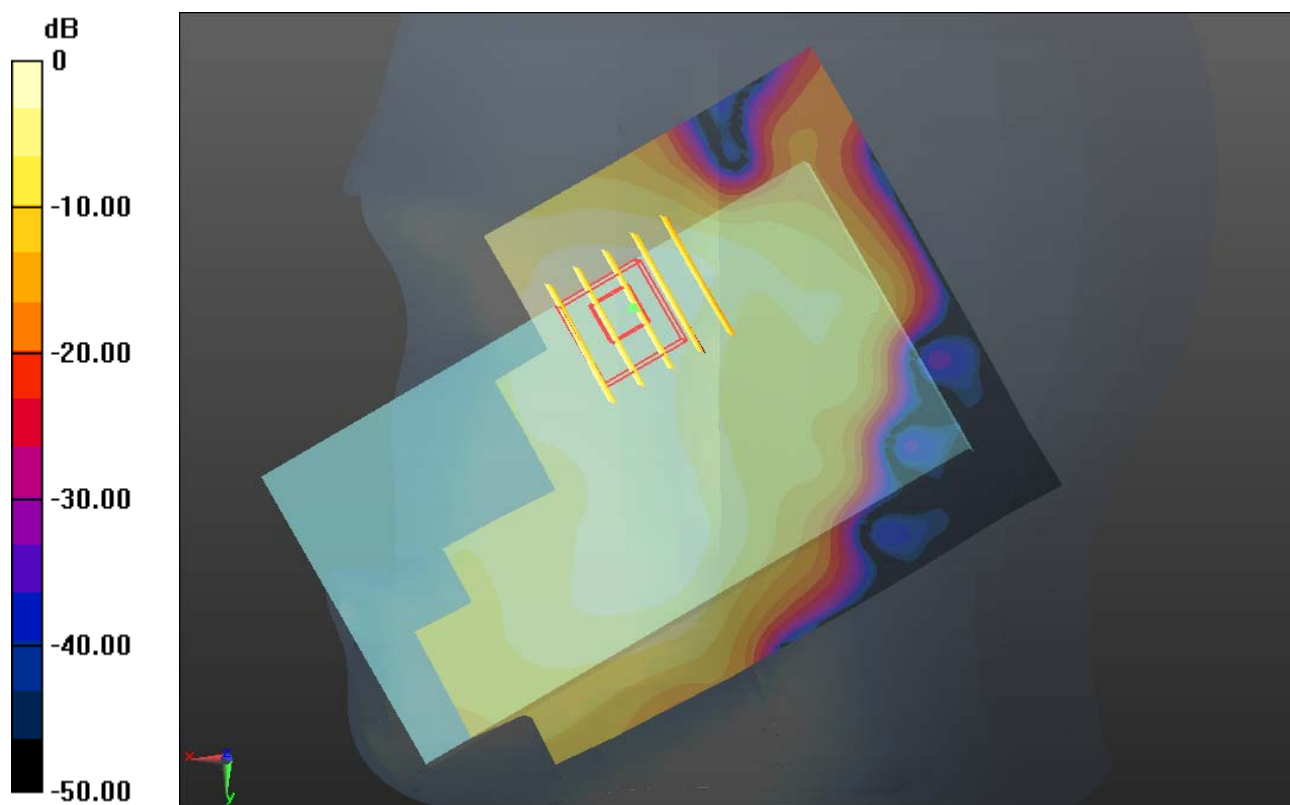

0 dB = 0.080mW/g

## **#06 GSM1900\_GSM\_Right Tilted\_Ch810**

### **DUT: 292601-01**

Communication System: General GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL\_1900\_121119 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40.64$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.2 °C

#### **DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.054 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.097 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.061 W/kg

**SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.022 mW/g**

Maximum value of SAR (measured) = 0.049 mW/g

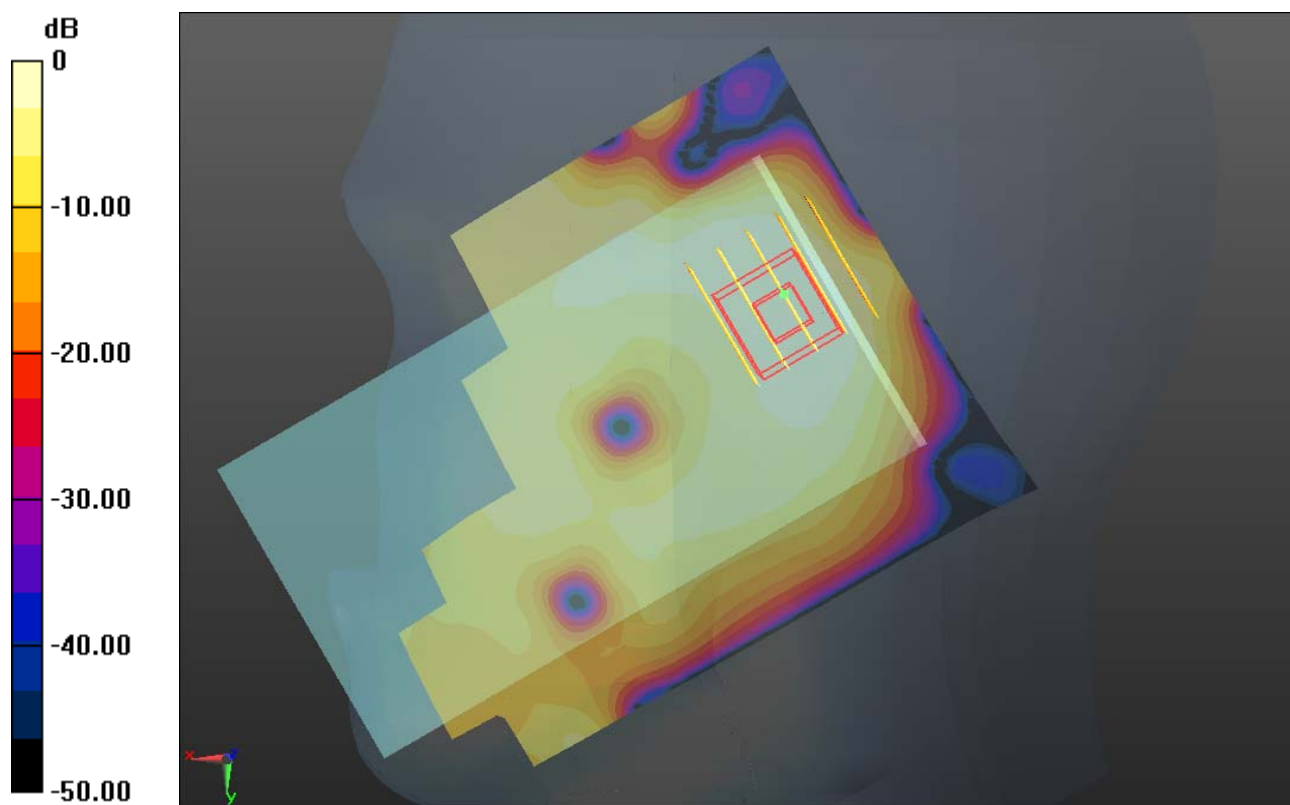

0 dB = 0.050mW/g

**#07 GSM1900\_GSM\_Left Cheek\_Ch810**

**DUT: 292601-01**

Communication System: General GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL\_1900\_121119 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40.64$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.2 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.166 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.227 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.176 W/kg

**SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.066 mW/g**

Maximum value of SAR (measured) = 0.139 mW/g

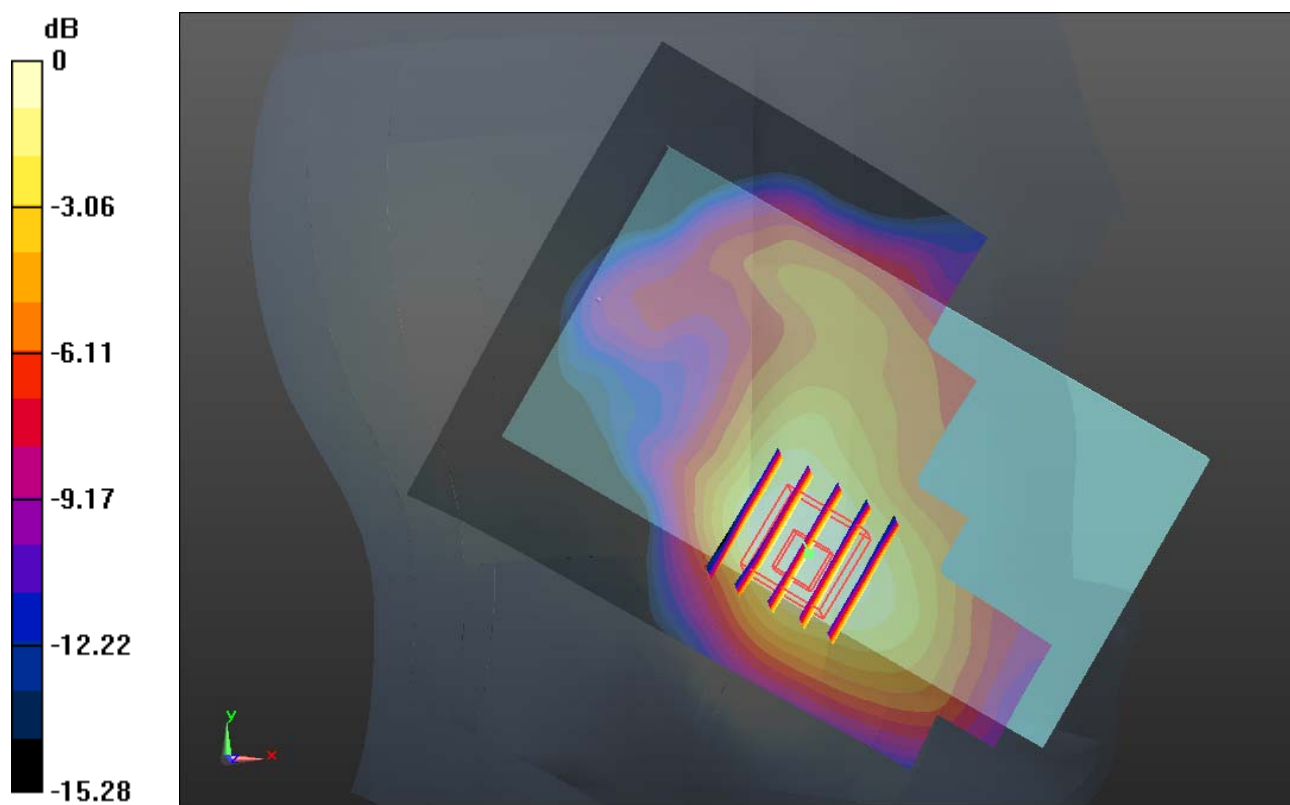

0 dB = 0.140mW/g

**#07 GSM1900\_GSM\_Left Cheek\_Ch810\_2D**

**DUT: 292601-01**

Communication System: General GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL\_1900\_121119 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40.64$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.2 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.166 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.227 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.176 W/kg

**SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.066 mW/g**

Maximum value of SAR (measured) = 0.139 mW/g

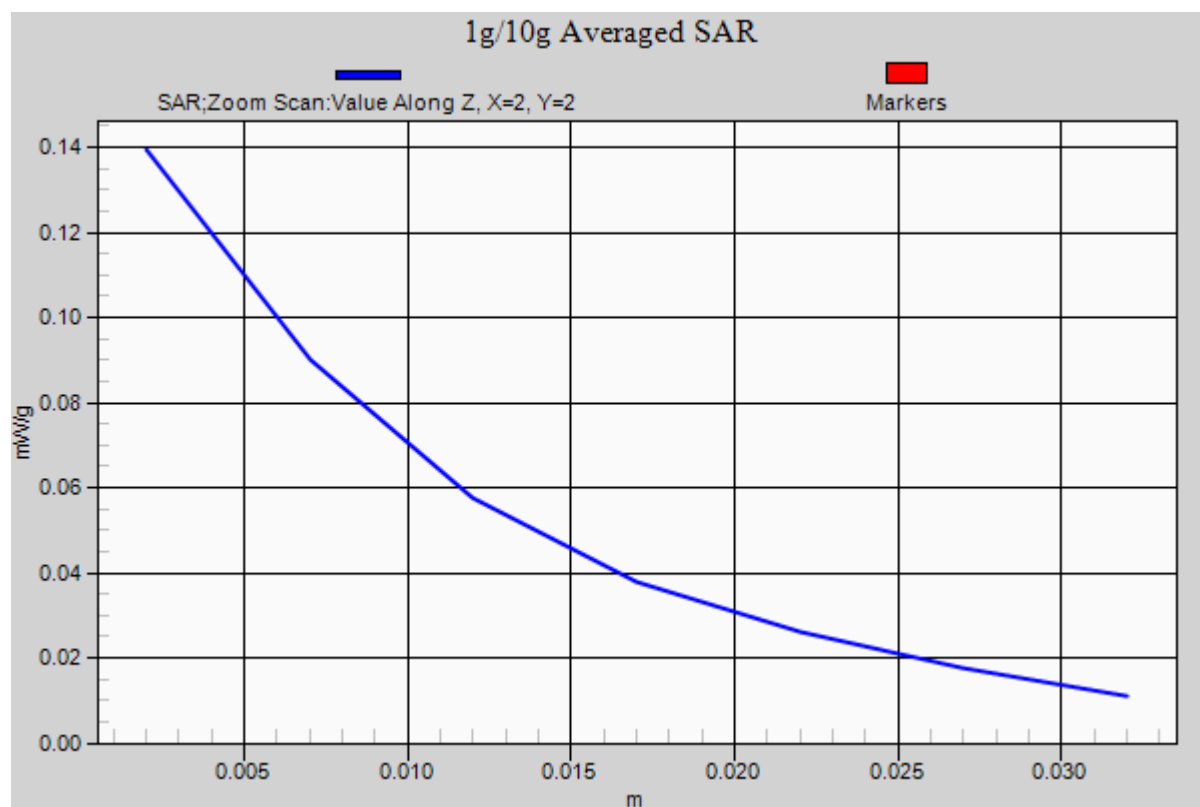

## **#08 GSM1900\_GSM\_Left Tilted\_Ch810**

### **DUT: 292601-01**

Communication System: General GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL\_1900\_121119 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.43$  mho/m;  $\epsilon_r = 40.64$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.2 °C

#### **DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.063 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.699 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.075 W/kg

**SAR(1 g) = 0.047 mW/g; SAR(10 g) = 0.027 mW/g**

Maximum value of SAR (measured) = 0.063 mW/g

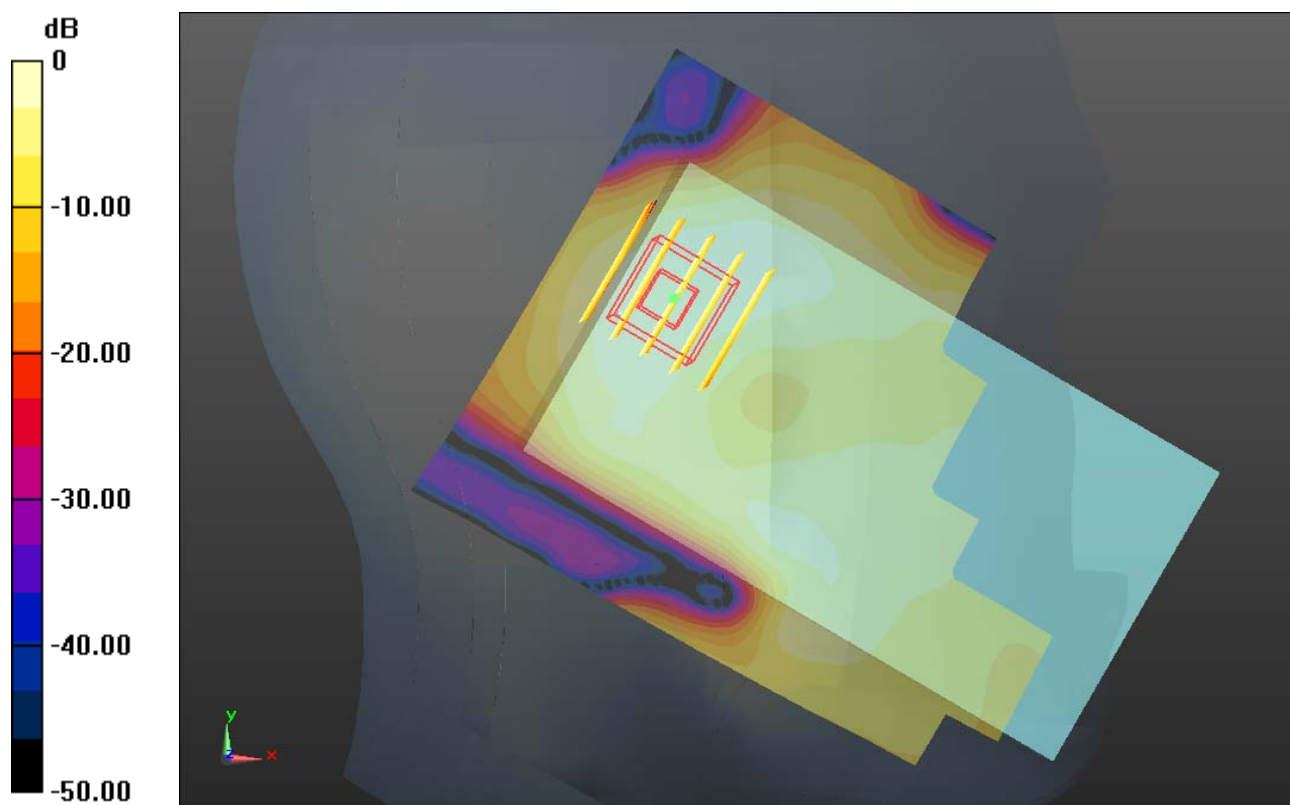

0 dB = 0.060mW/g

**#09 WCDMA Band V\_RMC12.2K\_Right Cheek\_Ch4182**

**DUT: 292601-01**

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL\_835\_121119 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.881$  mho/m;  $\epsilon_r =$

$40.833$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature :  $23.2$  °C; Liquid Temperature :  $21.1$  °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4182/Area Scan (81x121x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (interpolated) =  $0.213$  mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value =  $4.039$  V/m; Power Drift =  $-0.03$  dB

Peak SAR (extrapolated) =  $0.231$  W/kg

**SAR(1 g) =  $0.192$  mW/g; SAR(10 g) =  $0.148$  mW/g**

Maximum value of SAR (measured) =  $0.216$  mW/g

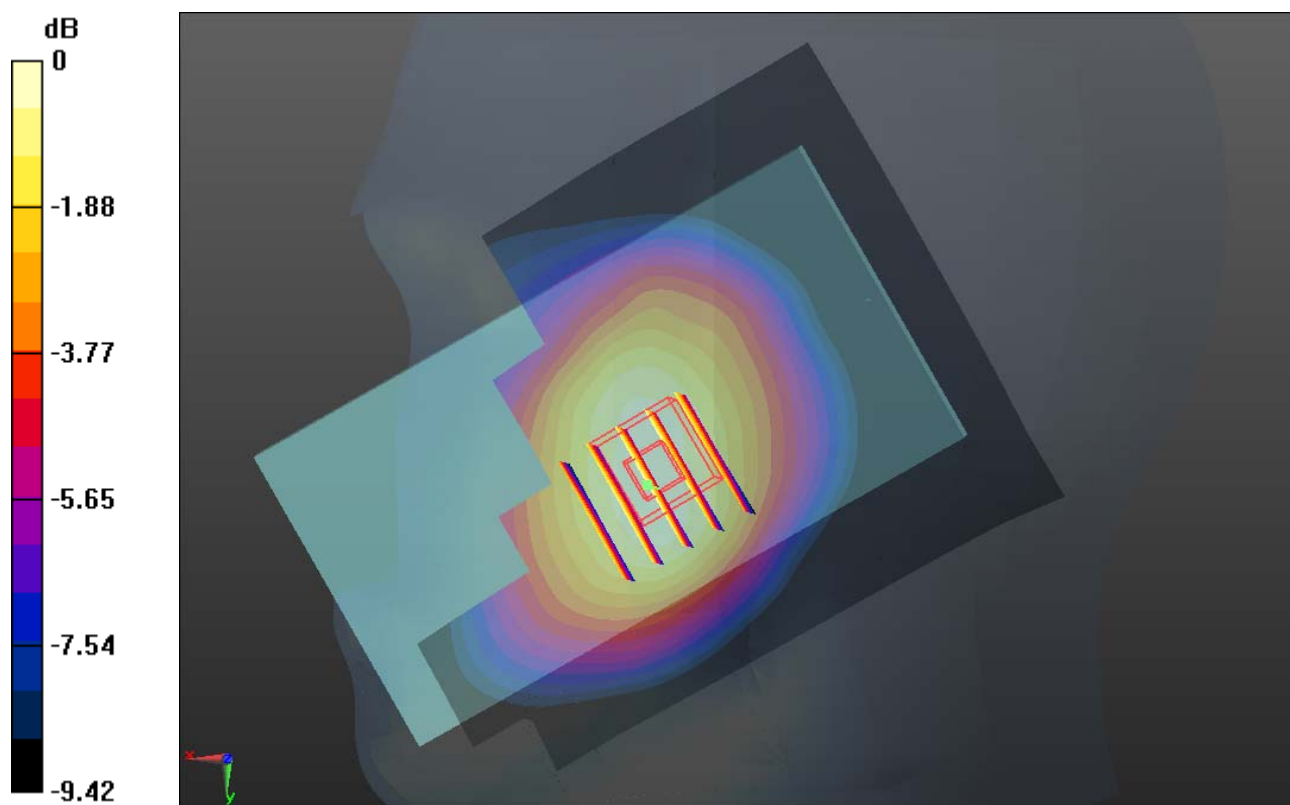

0 dB = 0.220mW/g

**#09 WCDMA Band V\_RMC12.2K\_Right Cheek\_Ch4182\_2D**

**DUT: 292601-01**

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL\_835\_121119 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.881$  mho/m;  $\epsilon_r =$

40.833;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4182/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.213 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.039 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.231 W/kg

**SAR(1 g) = 0.192 mW/g; SAR(10 g) = 0.148 mW/g**

Maximum value of SAR (measured) = 0.216 mW/g

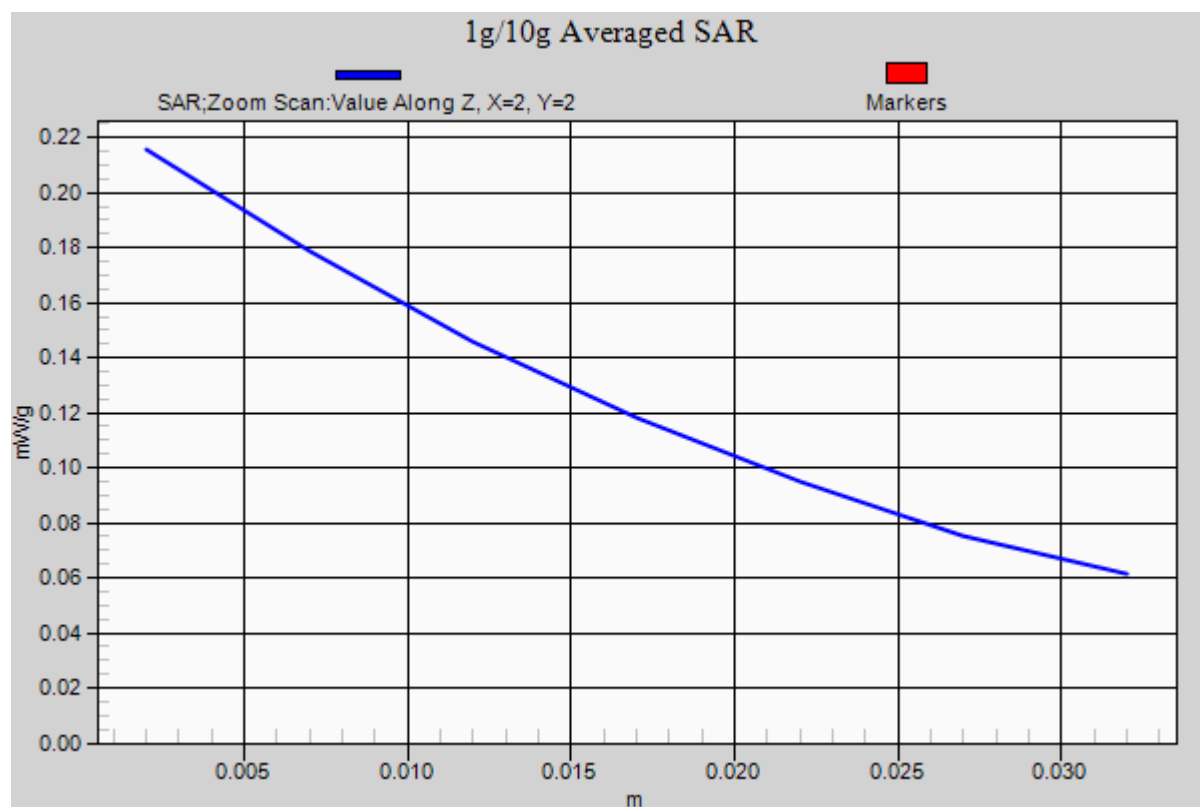

**#10 WCDMA Band II\_RMC12.2K\_Left Cheek\_Ch9262**

**DUT: 292601-01**

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_121119 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.364$  mho/m;  $\epsilon_r =$

40.803;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.2 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9262/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.260 mW/g


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.919 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.299 W/kg

**SAR(1 g) = 0.190 mW/g; SAR(10 g) = 0.119 mW/g**

Maximum value of SAR (measured) = 0.238 mW/g

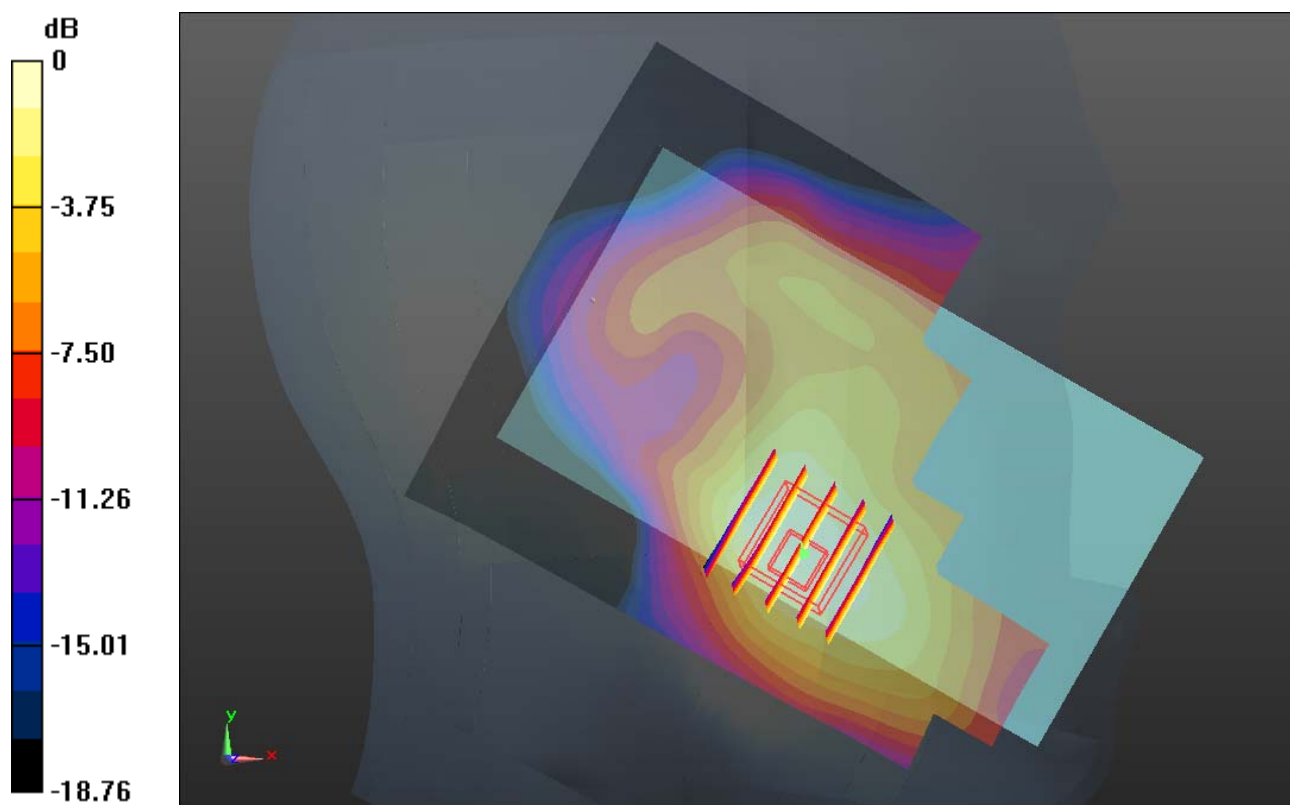

0 dB = 0.240mW/g

**#10 WCDMA Band II\_RMC12.2K\_Left Cheek\_Ch9262\_2D**

**DUT: 292601-01**

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_121119 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.364$  mho/m;  $\epsilon_r =$

40.803;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.2 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9262/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.260 mW/g


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.919 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.299 W/kg

**SAR(1 g) = 0.190 mW/g; SAR(10 g) = 0.119 mW/g**

Maximum value of SAR (measured) = 0.238 mW/g

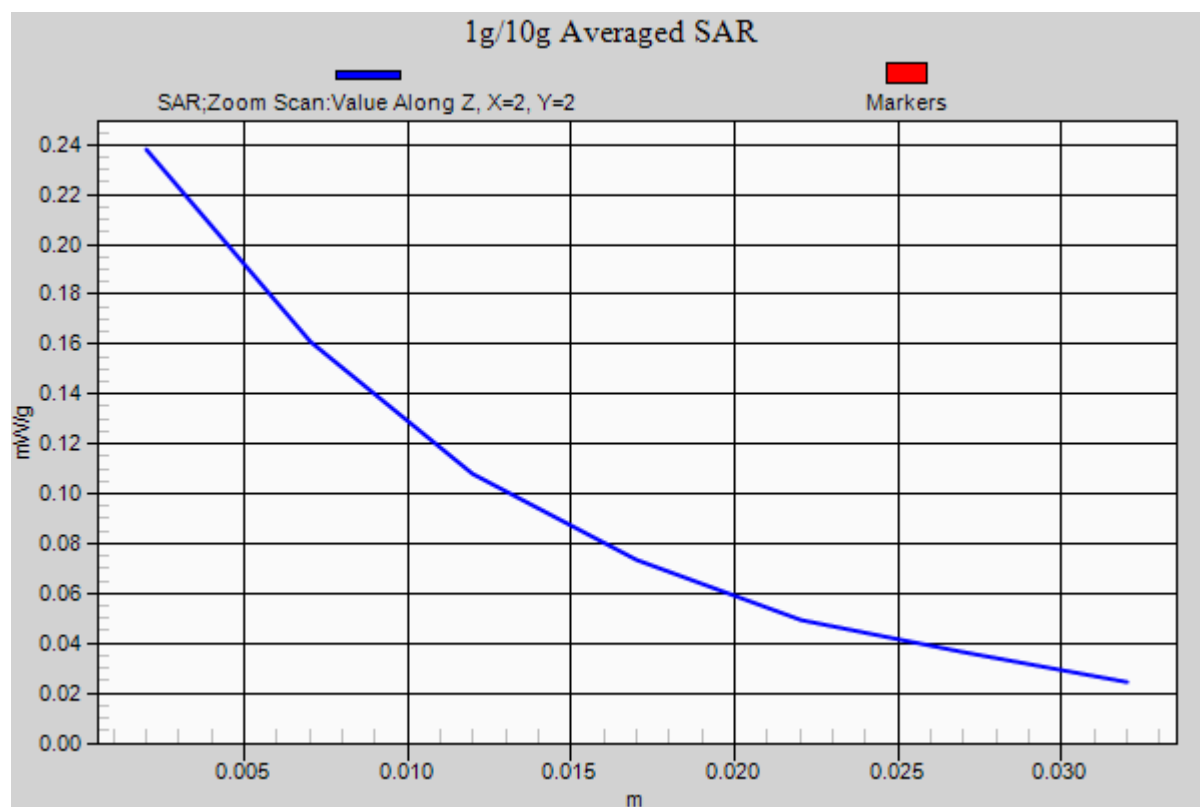

**#11 802.11b\_Left Cheek\_1M\_Ch11**

**DUT: 292601-01**

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_121121 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.87$  mho/m;  $\epsilon_r =$

37.641;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(6.87, 6.87, 6.87); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch11/Area Scan (91x151x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.603 mW/g


**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.072 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.810 W/kg

**SAR(1 g) = 0.419 mW/g; SAR(10 g) = 0.209 mW/g**

Maximum value of SAR (measured) = 0.597 mW/g

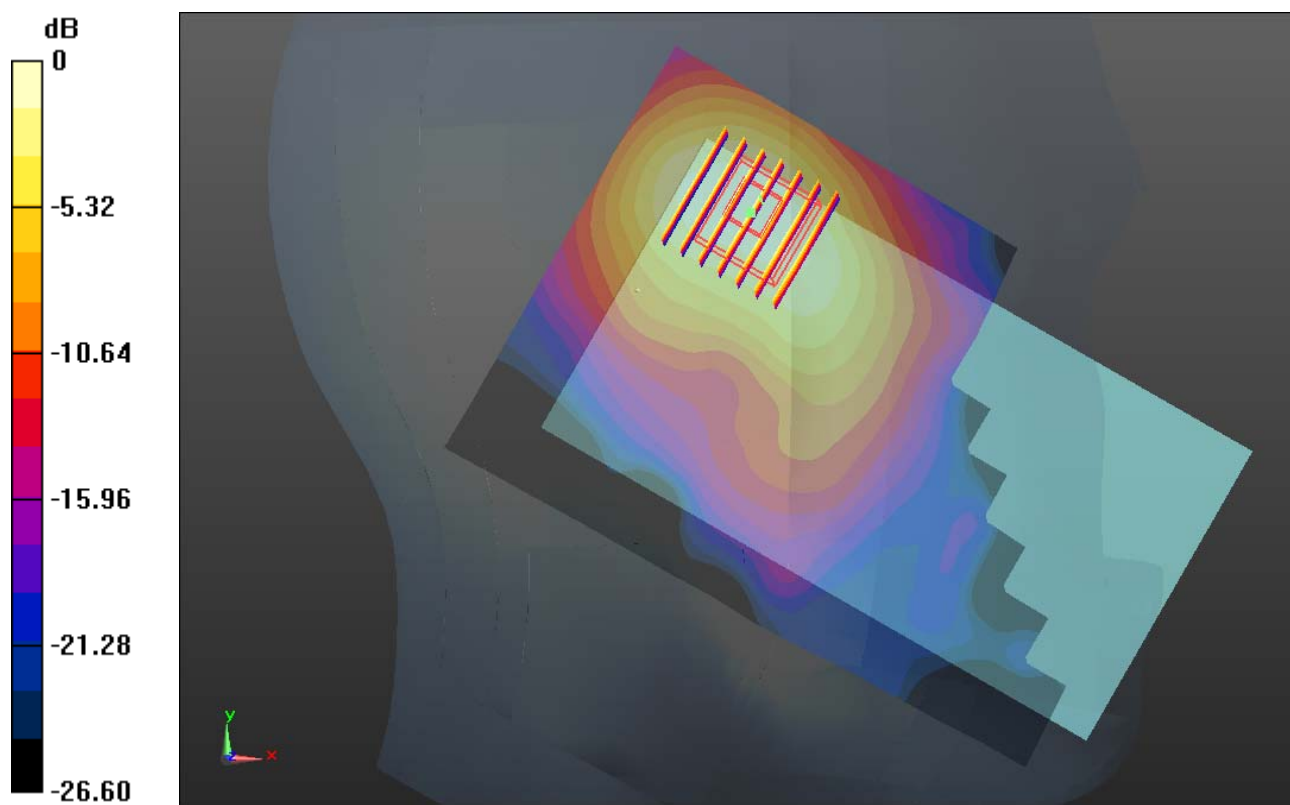

0 dB = 0.600mW/g

**#11 802.11b\_Left Cheek\_1M\_Ch11\_2D**

**DUT: 292601-01**

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_121121 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.87$  mho/m;  $\epsilon_r =$

37.641;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(6.87, 6.87, 6.87); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch11/Area Scan (91x151x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.603 mW/g


**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.072 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.810 W/kg

**SAR(1 g) = 0.419 mW/g; SAR(10 g) = 0.209 mW/g**

Maximum value of SAR (measured) = 0.597 mW/g

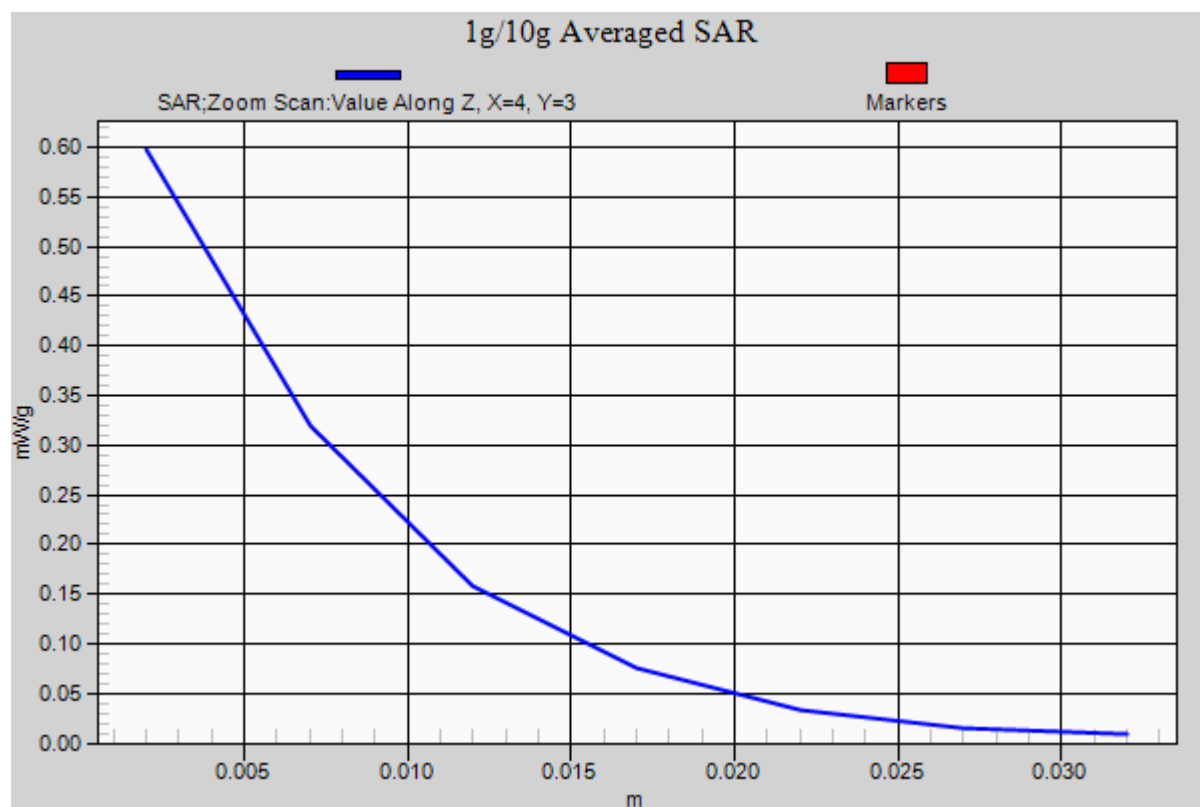

## **#12 GSM850\_GPRS (4 Tx slots)\_Back 1cm\_Ch128**

### **DUT: 292601-01**

Communication System: GPRS/EDGE (4 Tx slots); Frequency: 824.2 MHz; Duty Cycle: 1:2  
Medium: MSL\_835\_121119 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.972$  mho/m;  $\epsilon_r = 54.958$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 21.5 °C


#### **DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch128/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.896 mW/g

**Ch128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 28.785 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.953 W/kg  
**SAR(1 g) = 0.769 mW/g; SAR(10 g) = 0.598 mW/g**  
Maximum value of SAR (measured) = 0.871 mW/g

**Ch128/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 28.785 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.674 W/kg  
**SAR(1 g) = 0.457 mW/g; SAR(10 g) = 0.295 mW/g**  
Maximum value of SAR (measured) = 0.609 mW/g

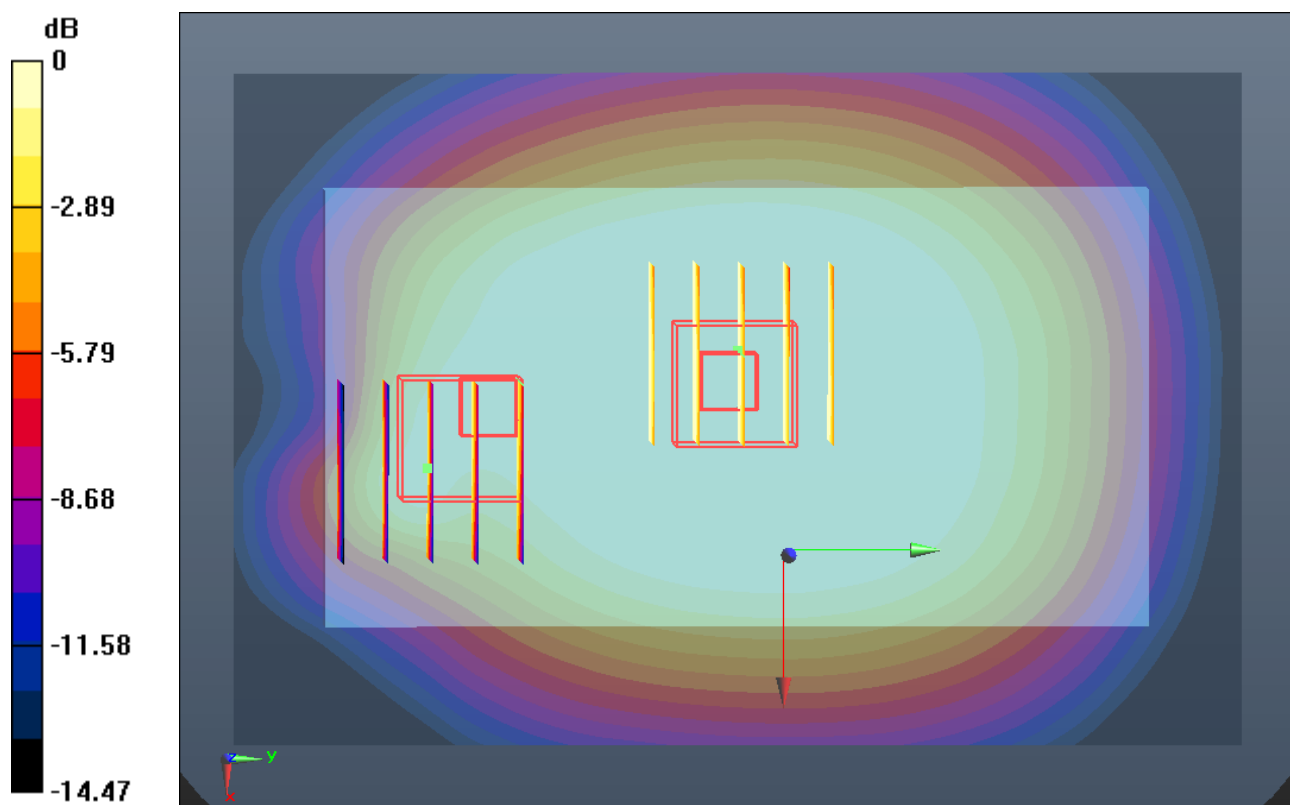

0 dB = 0.610mW/g

### #13 GSM850\_GPRS (4 Tx slots)\_Back 1cm\_Ch189

#### DUT: 292601-01

Communication System: GPRS/EDGE (4 Tx slots); Frequency: 836.4 MHz; Duty Cycle: 1:2  
Medium: MSL\_835\_121119 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.984$  mho/m;  $\epsilon_r = 54.842$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 21.5 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

#### Ch189/Area Scan (81x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.939 mW/g

#### Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.398 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.017 W/kg

**SAR(1 g) = 0.820 mW/g; SAR(10 g) = 0.636 mW/g**

Maximum value of SAR (measured) = 0.932 mW/g


#### Ch189/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.398 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.705 W/kg

**SAR(1 g) = 0.476 mW/g; SAR(10 g) = 0.309 mW/g**

Maximum value of SAR (measured) = 0.639 mW/g

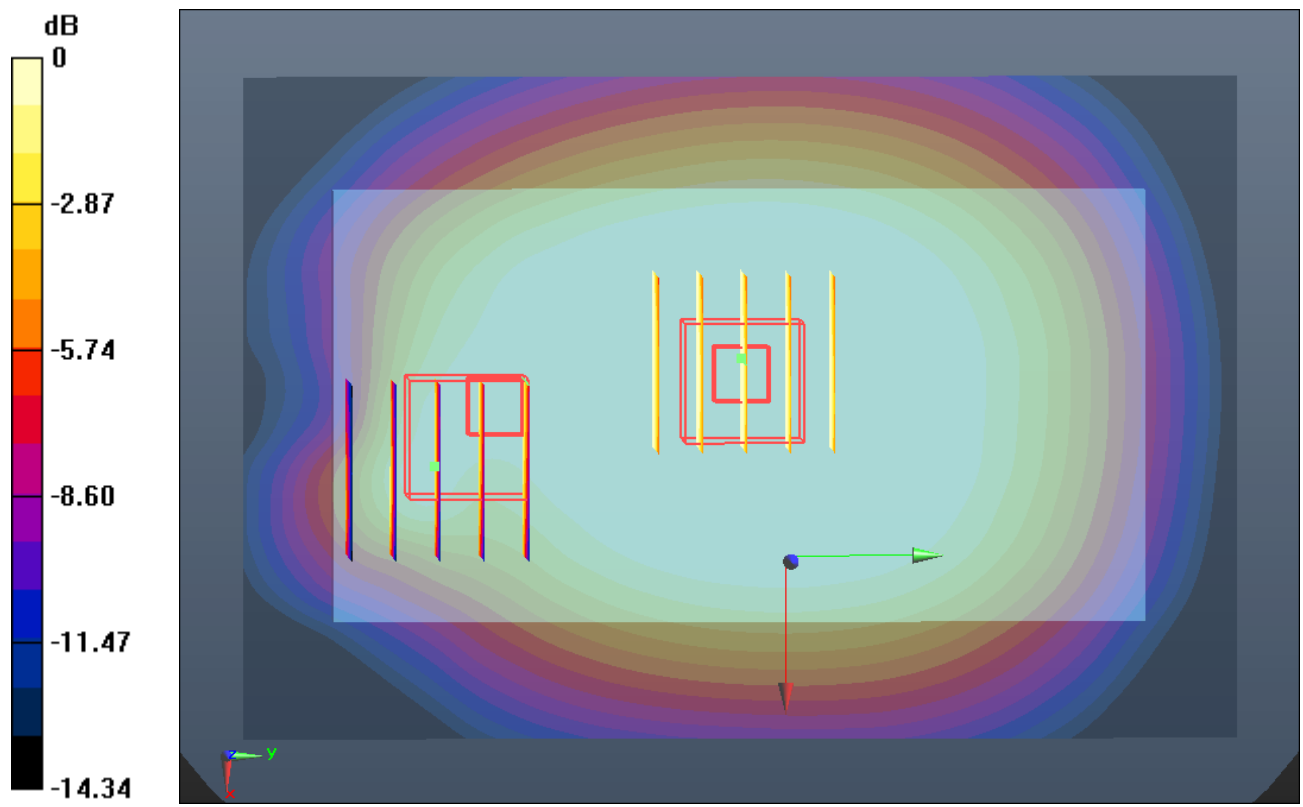

0 dB = 0.640mW/g

### #13 GSM850\_GPRS (4 Tx slots)\_Back 1cm\_Ch189\_2D

#### DUT: 292601-01

Communication System: GPRS/EDGE (4 Tx slots); Frequency: 836.4 MHz; Duty Cycle: 1:2  
Medium: MSL\_835\_121119 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.984$  mho/m;  $\epsilon_r = 54.842$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 21.5 °C


#### DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch189/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.939 mW/g

**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 29.398 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 1.017 W/kg  
**SAR(1 g) = 0.820 mW/g; SAR(10 g) = 0.636 mW/g**  
Maximum value of SAR (measured) = 0.932 mW/g

**Ch189/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 29.398 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.705 W/kg  
**SAR(1 g) = 0.476 mW/g; SAR(10 g) = 0.309 mW/g**  
Maximum value of SAR (measured) = 0.639 mW/g

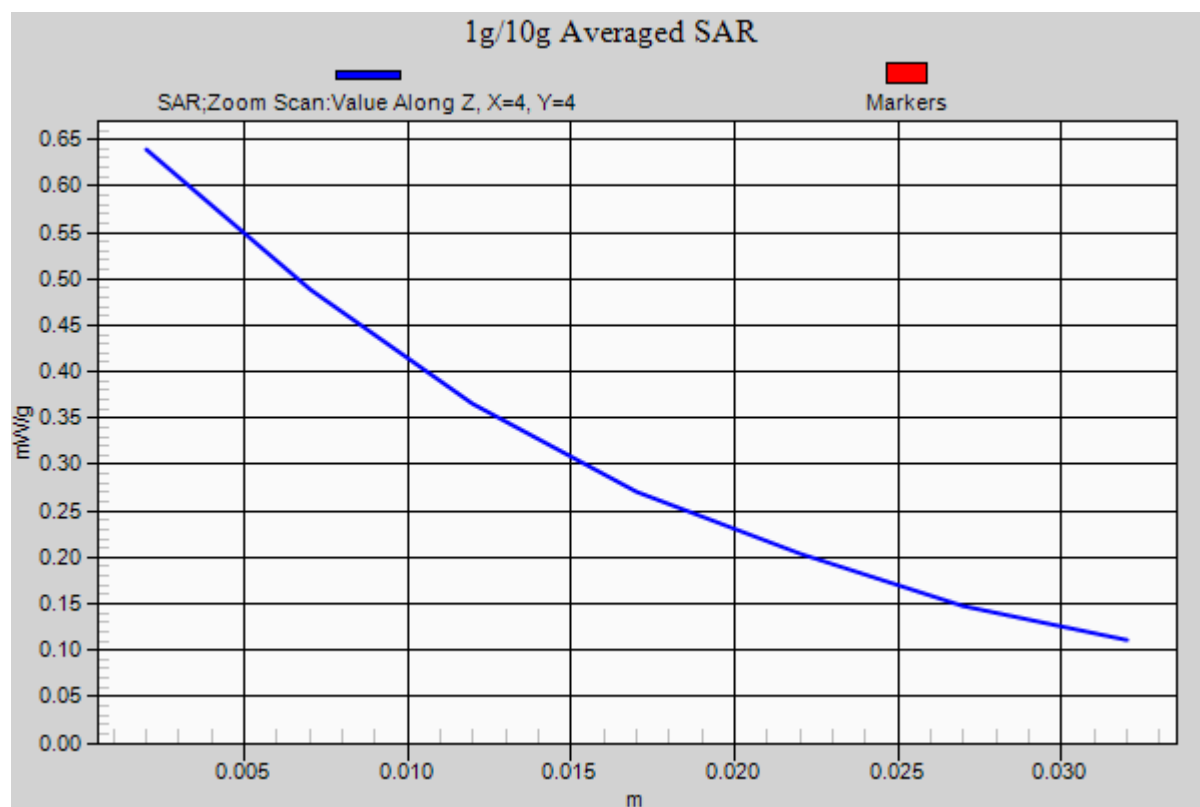

## **#14 GSM850\_GPRS (4 Tx slots)\_Back 1cm\_Ch251**

### **DUT: 292601-01**

Communication System: GPRS/EDGE (4 Tx slots); Frequency: 848.8 MHz; Duty Cycle: 1:2

Medium: MSL\_835\_121119 Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.997$  mho/m;  $\epsilon_r = 54.706$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.5 °C

#### **DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch251/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.916 mW/g

**Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.863 V/m; Power Drift = 0.081 dB

Peak SAR (extrapolated) = 1.001 W/kg

**SAR(1 g) = 0.801 mW/g; SAR(10 g) = 0.619 mW/g**

Maximum value of SAR (measured) = 0.916 mW/g


**Ch251/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.863 V/m; Power Drift = 0.081 dB

Peak SAR (extrapolated) = 0.708 W/kg

**SAR(1 g) = 0.441 mW/g; SAR(10 g) = 0.290 mW/g**

Maximum value of SAR (measured) = 0.591 mW/g

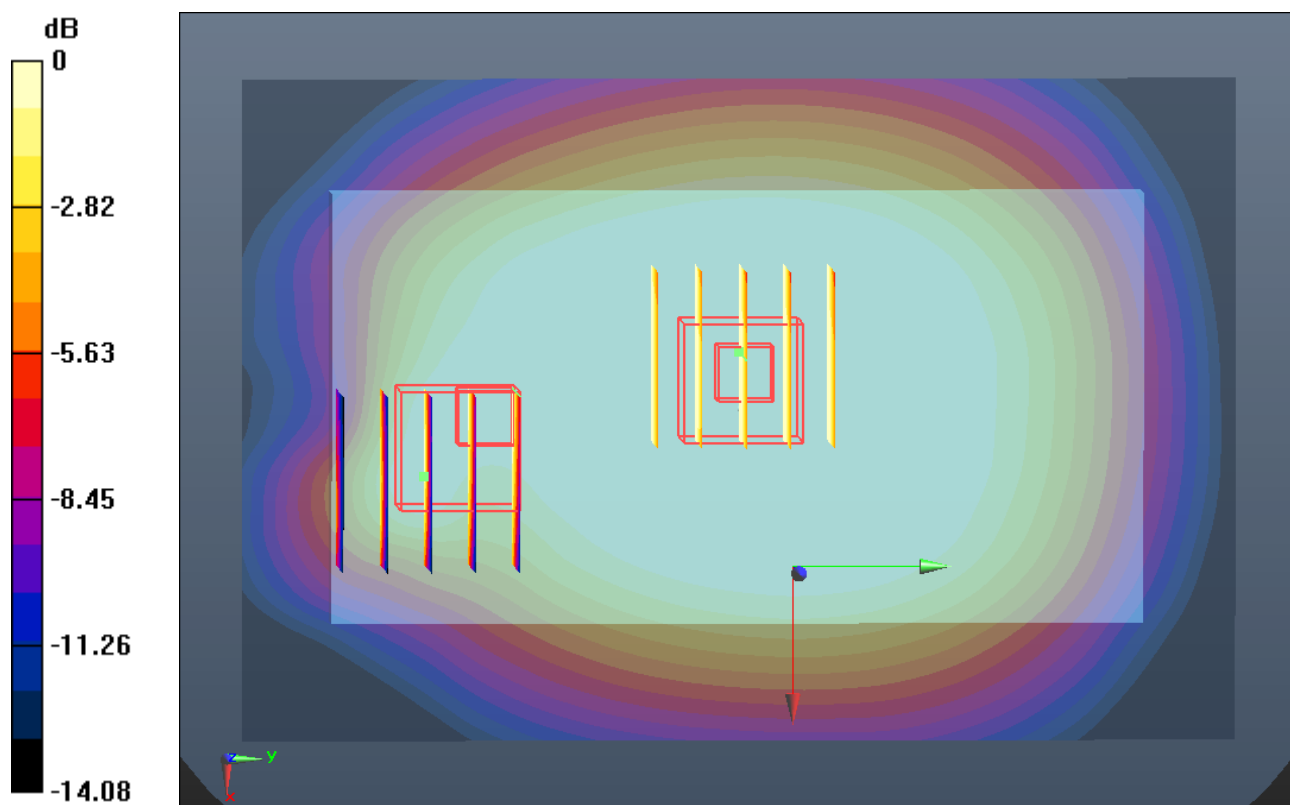

**#15 GSM1900\_GPRS (4 Tx slots)\_Bottom Side 1cm\_Ch810**

**DUT: 292601-01**

Communication System: GPRS/EDGE (4 Tx slots); Frequency: 1909.8 MHz; Duty Cycle: 1:2  
Medium: MSL\_1900\_121120 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.511$  mho/m;  $\epsilon_r = 53.819$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 21.2 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (31x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.639 mW/g


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.712 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.764 W/kg

**SAR(1 g) = 0.457 mW/g; SAR(10 g) = 0.251 mW/g**

Maximum value of SAR (measured) = 0.626 mW/g

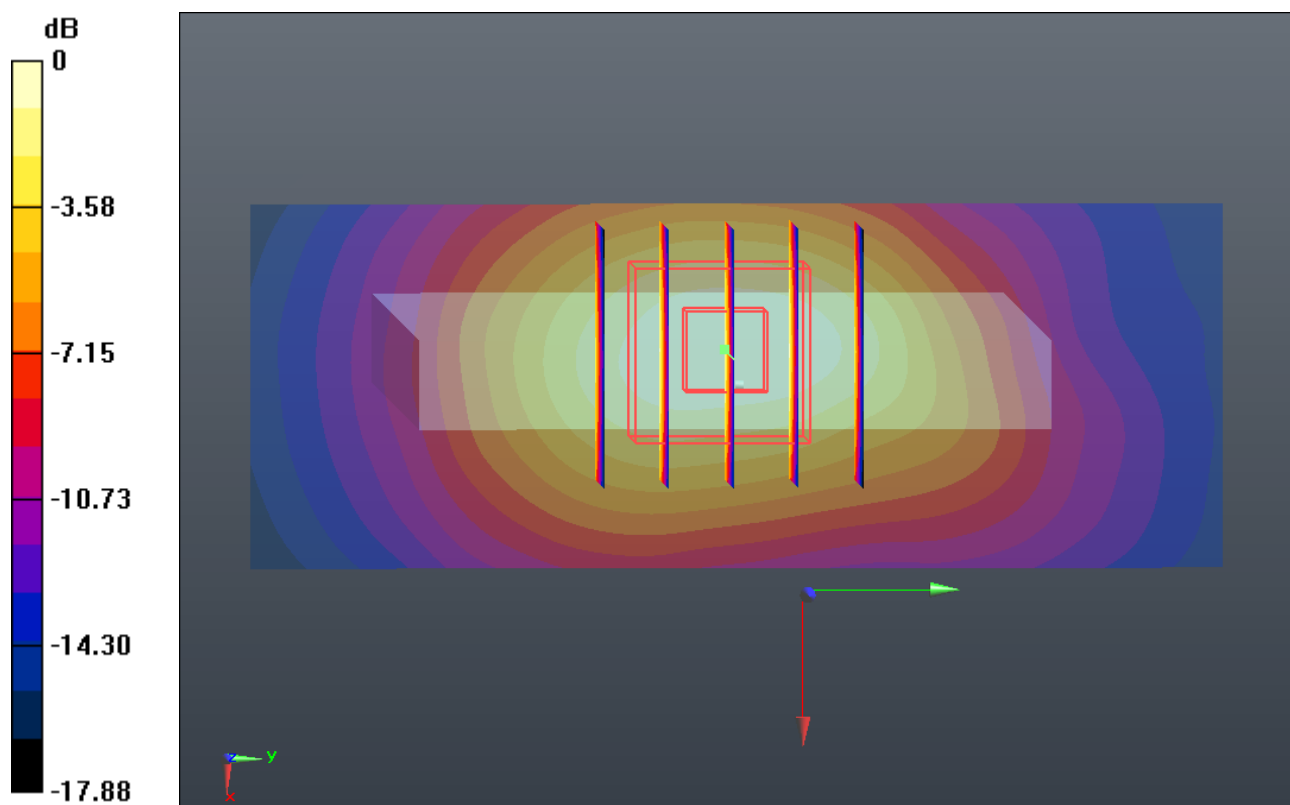

0 dB = 0.630mW/g

**#15 GSM1900\_GPRS (4 Tx slots)\_Bottom Side 1cm\_Ch810\_2D**

**DUT: 292601-01**


Communication System: GPRS/EDGE (4 Tx slots); Frequency: 1909.8 MHz; Duty Cycle: 1:2  
Medium: MSL\_1900\_121120 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.511$  mho/m;  $\epsilon_r = 53.819$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch810/Area Scan (31x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.639 mW/g

**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 17.712 V/m; Power Drift = 0.13 dB  
Peak SAR (extrapolated) = 0.764 W/kg  
**SAR(1 g) = 0.457 mW/g; SAR(10 g) = 0.251 mW/g**  
Maximum value of SAR (measured) = 0.626 mW/g

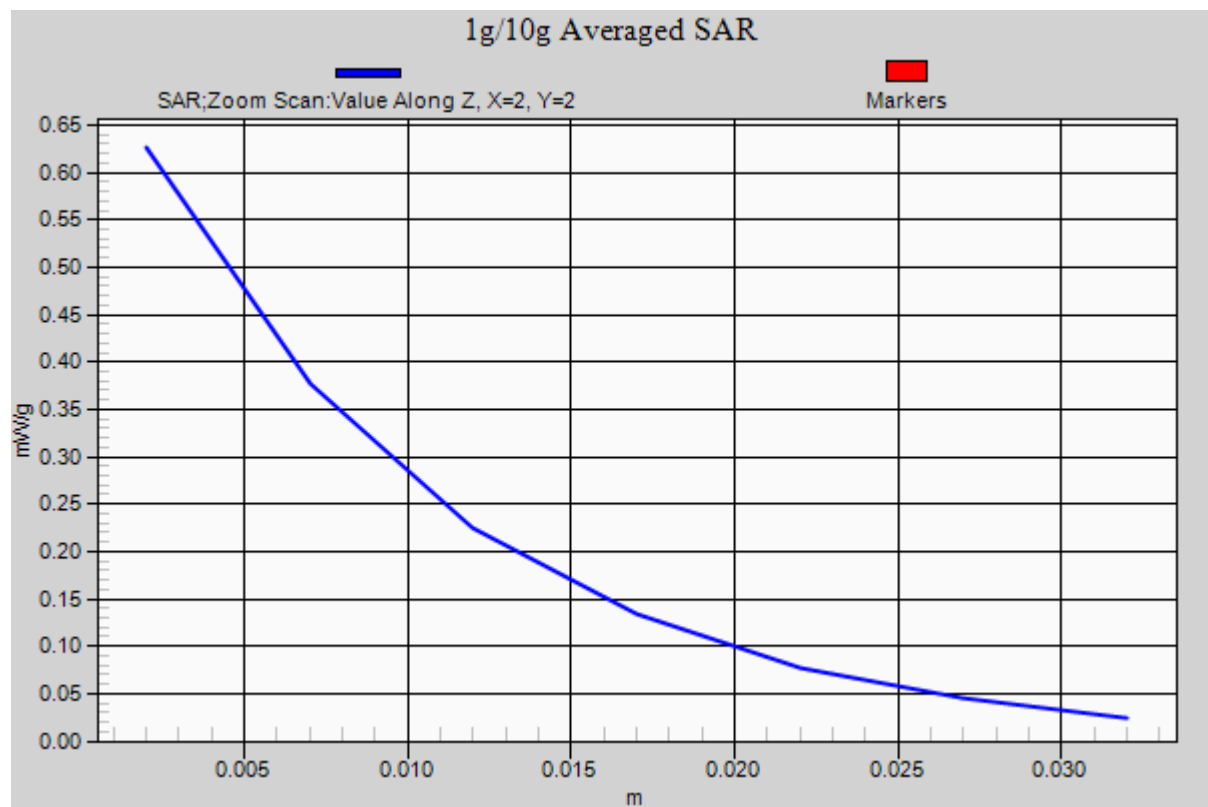

**#16 WCDMA Band V\_RMC12.2K\_Back 1cm\_Ch4182**

**DUT: 292601-01**

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_121119 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.984$  mho/m;  $\epsilon_r =$

54.842;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4182/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.550 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.574 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.596 W/kg

**SAR(1 g) = 0.481 mW/g; SAR(10 g) = 0.373 mW/g**

Maximum value of SAR (measured) = 0.547 mW/g

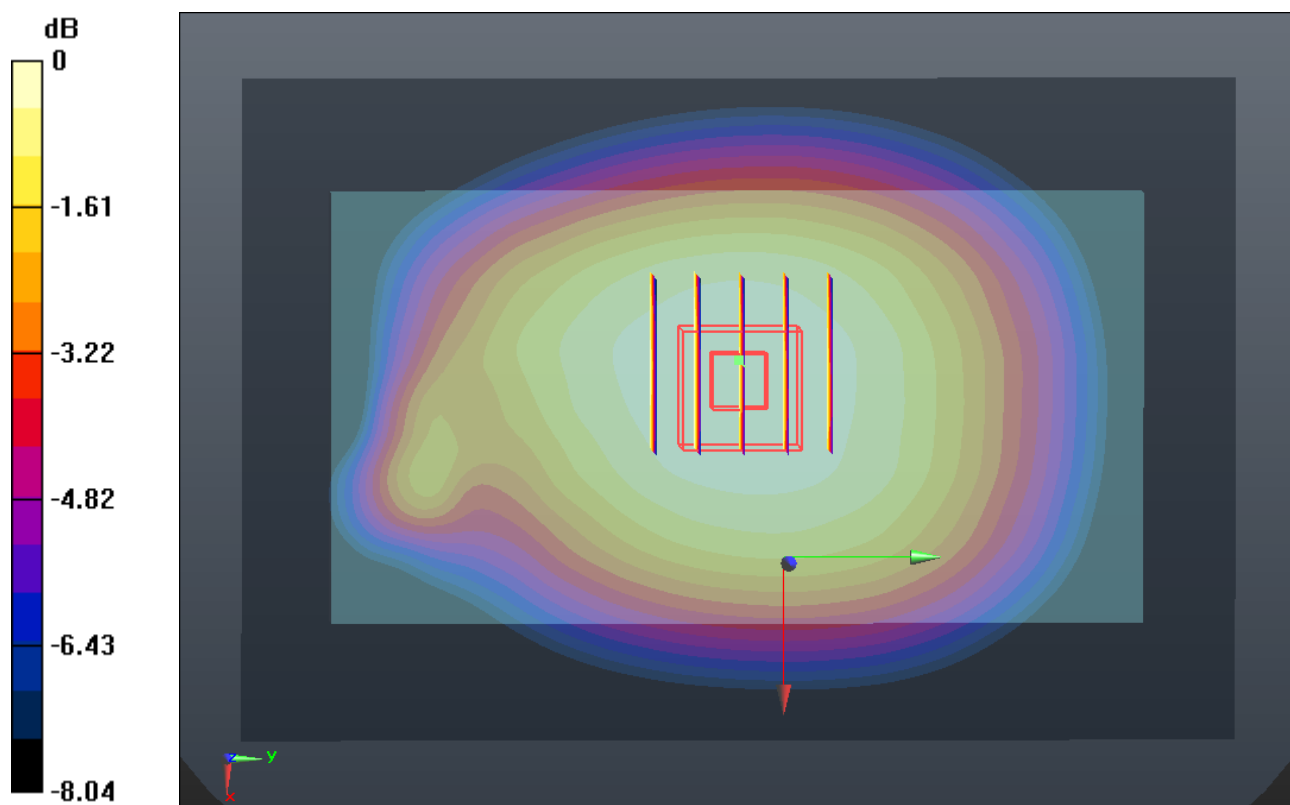

0 dB = 0.550mW/g

**#16 WCDMA Band V\_RMC12.2K\_Back 1cm\_Ch4182\_2D**

**DUT: 292601-01**

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_121119 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.984$  mho/m;  $\epsilon_r =$

54.842;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch4182/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.550 mW/g


**Ch4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.574 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.596 W/kg

**SAR(1 g) = 0.481 mW/g; SAR(10 g) = 0.373 mW/g**

Maximum value of SAR (measured) = 0.547 mW/g

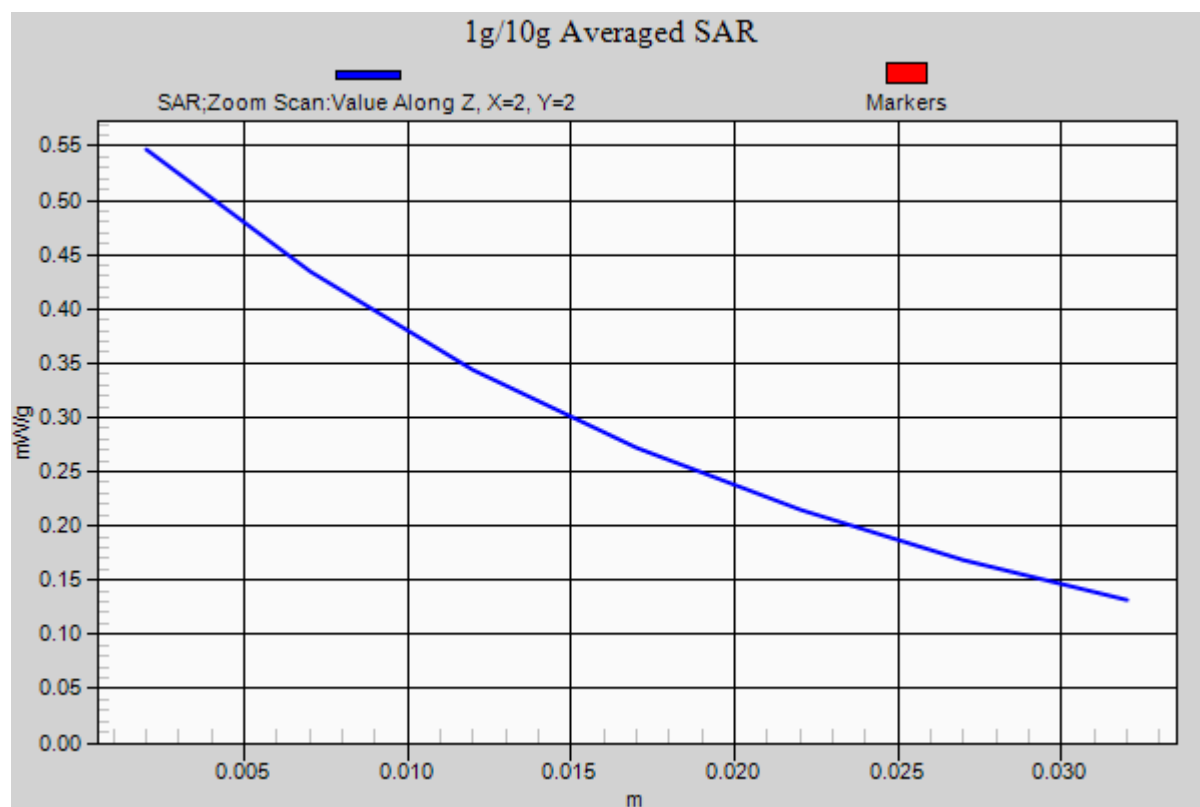

**#17 WCDMA Band II\_RMC12.2K\_Bottom Side 1cm\_Ch9262**

**DUT: 292601-01**

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_121120 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.444$  mho/m;  $\epsilon_r =$

53.844;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 21.2 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9262/Area Scan (31x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.649 mW/g


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.517 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.781 W/kg

**SAR(1 g) = 0.472 mW/g; SAR(10 g) = 0.262 mW/g**

Maximum value of SAR (measured) = 0.643 mW/g

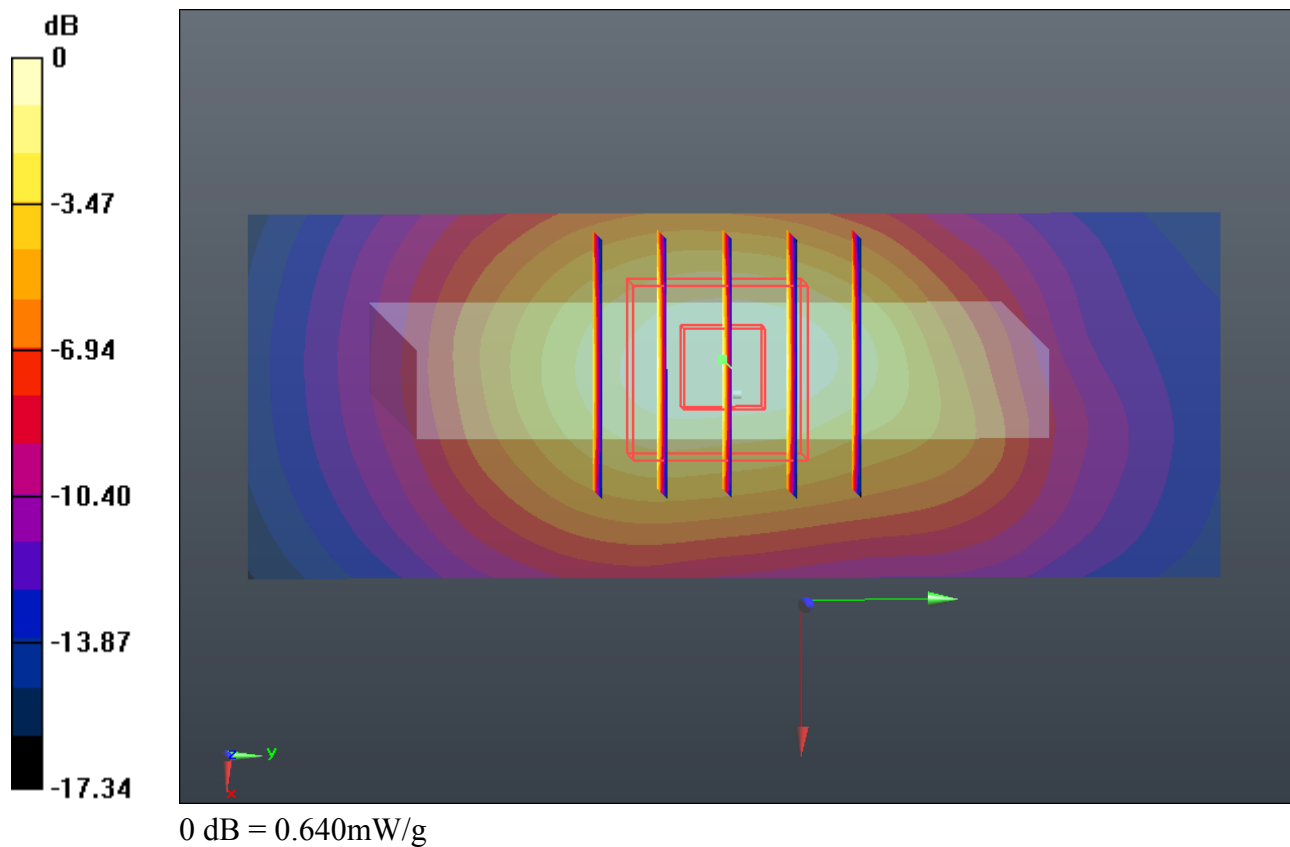

**#17 WCDMA Band II\_RMC12.2K\_Bottom Side 1cm\_Ch9262\_2D**

**DUT: 292601-01**

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_121120 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.444$  mho/m;  $\epsilon_r =$

53.844;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 21.2 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch9262/Area Scan (31x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.649 mW/g


**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.517 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.781 W/kg

**SAR(1 g) = 0.472 mW/g; SAR(10 g) = 0.262 mW/g**

Maximum value of SAR (measured) = 0.643 mW/g

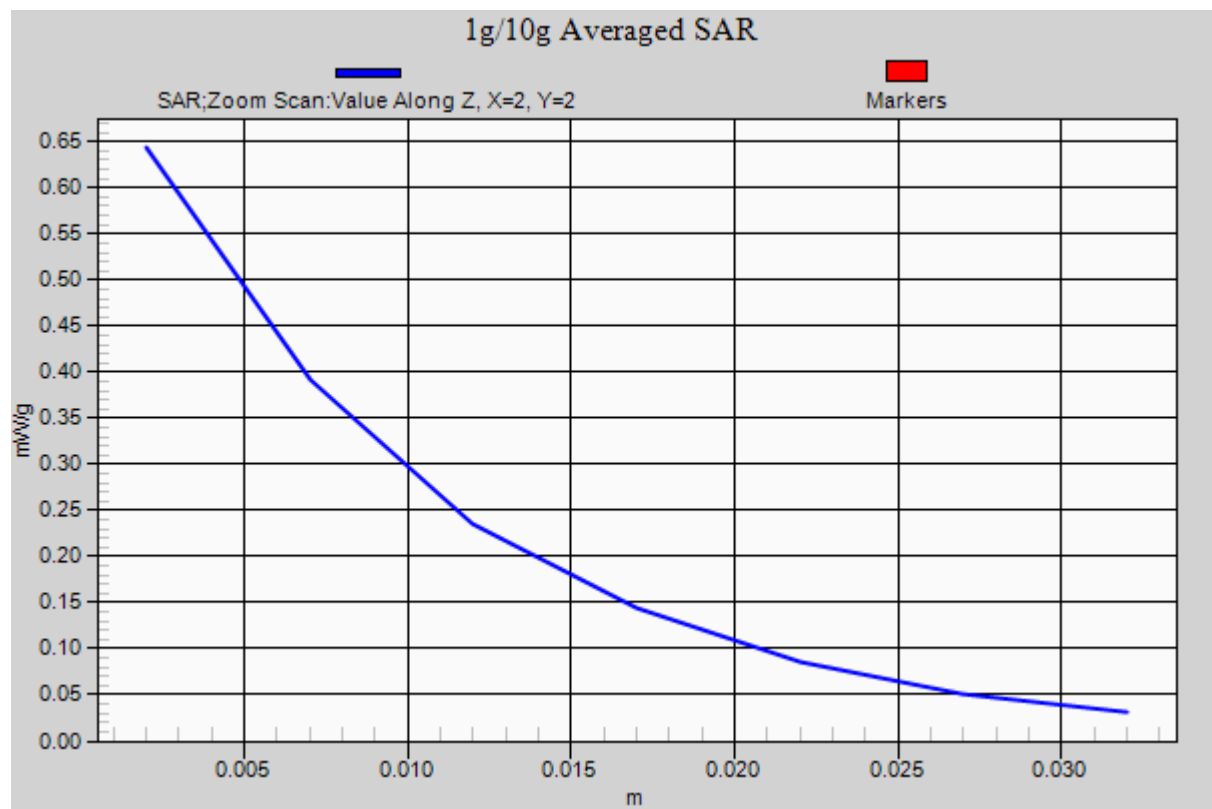

**#18 802.11b\_Back 1cm\_1M\_Ch11**

**DUT: 292601-01**

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_121121 Medium parameters used:  $f = 2462 \text{ MHz}$ ;  $\sigma = 2.027 \text{ mho/m}$ ;  $\epsilon_r =$

$53.408$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5^\circ\text{C}$ ; Liquid Temperature :  $21.3^\circ\text{C}$

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch11/Area Scan (91x151x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (interpolated) =  $0.211 \text{ mW/g}$


**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $3.511 \text{ V/m}$ ; Power Drift =  $0.01 \text{ dB}$

Peak SAR (extrapolated) =  $0.282 \text{ W/kg}$

**SAR(1 g) =  $0.133 \text{ mW/g}$ ; SAR(10 g) =  $0.069 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.200 \text{ mW/g}$

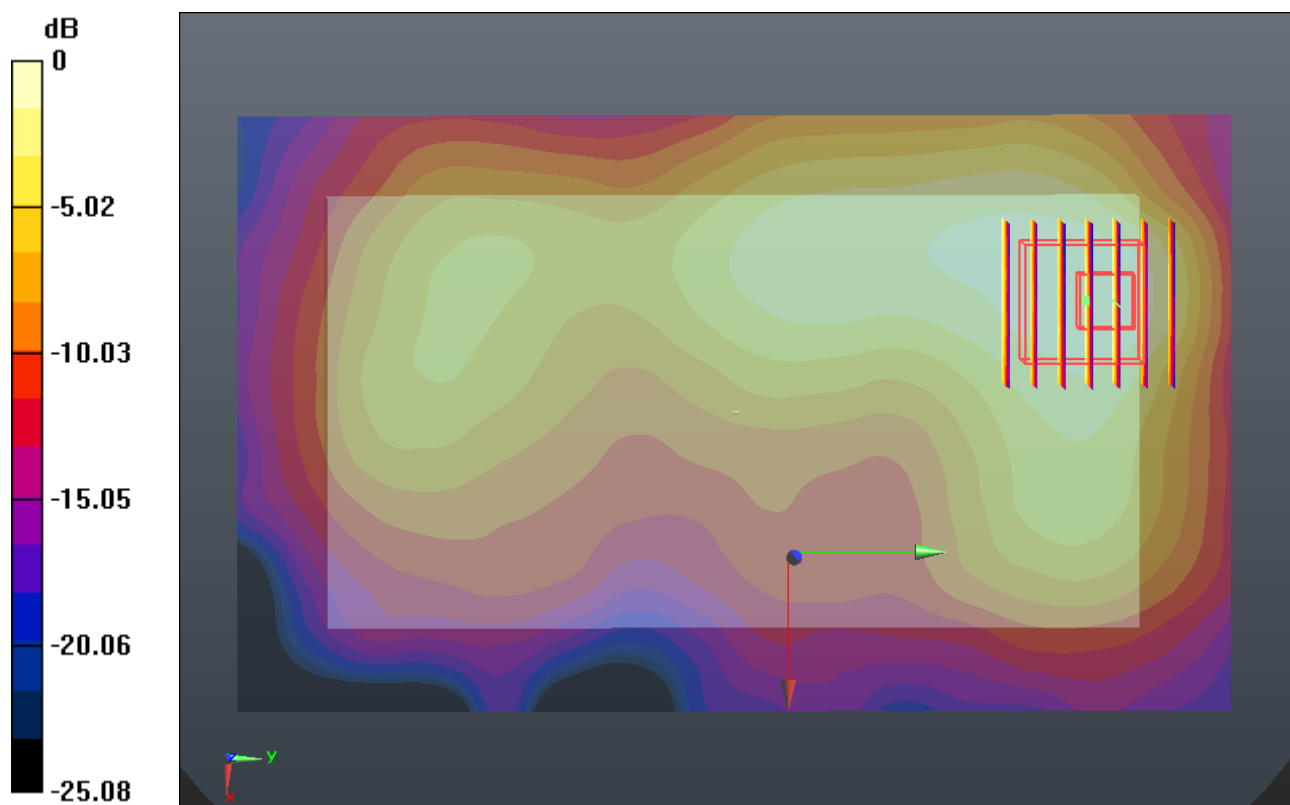

0 dB = 0.200mW/g

**#18 802.11b\_Back 1cm\_1M\_Ch11\_2D**

**DUT: 292601-01**

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_121121 Medium parameters used:  $f = 2462 \text{ MHz}$ ;  $\sigma = 2.027 \text{ mho/m}$ ;  $\epsilon_r =$

$53.408$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.5^\circ\text{C}$ ; Liquid Temperature :  $21.3^\circ\text{C}$

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn914; Calibrated: 2011-12-8
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

**Ch11/Area Scan (91x151x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (interpolated) =  $0.211 \text{ mW/g}$


**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $3.511 \text{ V/m}$ ; Power Drift =  $0.01 \text{ dB}$

Peak SAR (extrapolated) =  $0.282 \text{ W/kg}$

**SAR(1 g) =  $0.133 \text{ mW/g}$ ; SAR(10 g) =  $0.069 \text{ mW/g}$**

Maximum value of SAR (measured) =  $0.200 \text{ mW/g}$

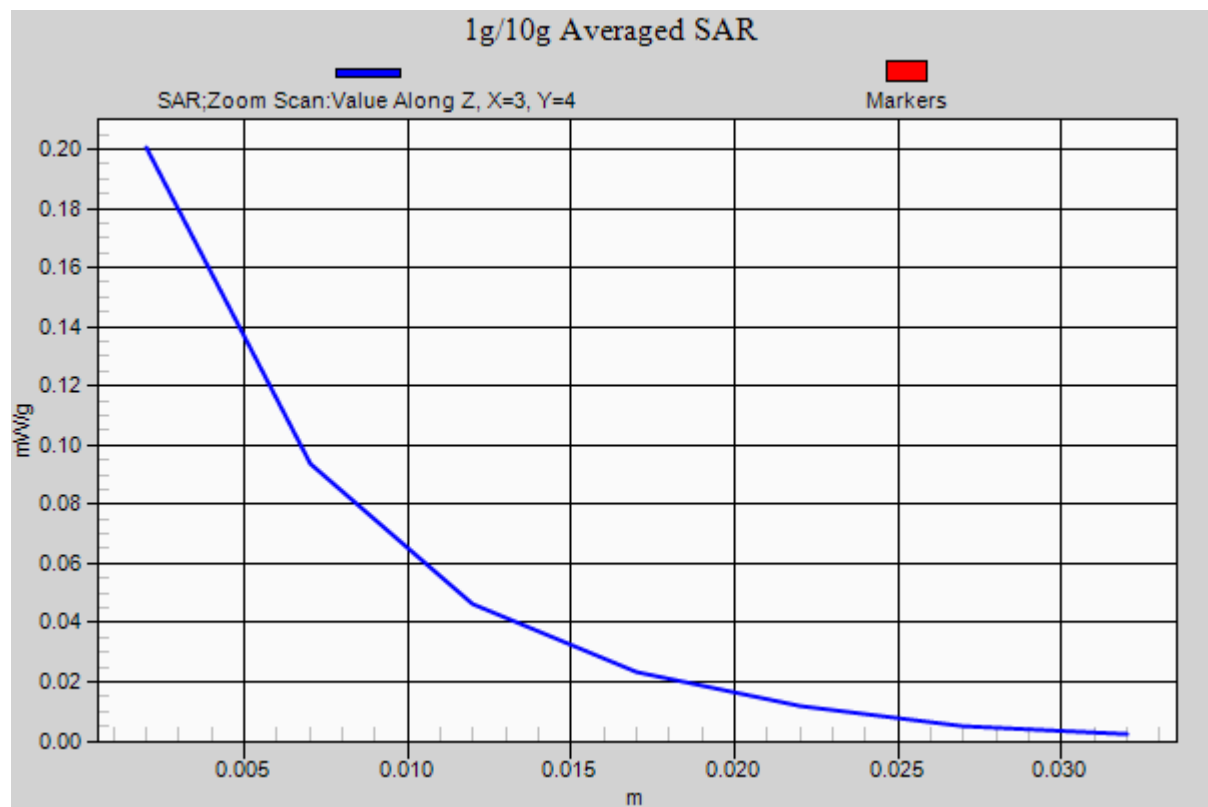



***Appendix F. Product Equality Declaration***