



FCC SAR Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : ZTE V970M/Grand X(M)
FCC ID : Q78-V970M
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003
FCC OET Bulletin 65 Supplement C (Edition 01-01)

The product was completely tested on Oct. 23, 2012. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
2.1 Testing Laboratory	5
2.2 Applicant	5
2.3 Manufacturer	5
2.4 Application Details	5
3. General Information	6
3.1 Description of Equipment Under Test (EUT)	6
3.2 Product Photos	7
3.3 Applied Standard	7
3.4 Device Category and SAR Limits	7
3.5 Test Conditions	7
4. Specific Absorption Rate (SAR)	8
4.1 Introduction	8
4.2 SAR Definition	8
5. SAR Measurement System	9
5.1 E-Field Probe	10
5.2 Data Acquisition Electronics (DAE)	11
5.3 Robot	11
5.4 Measurement Server	11
5.5 Phantom	12
5.6 Device Holder	12
5.7 Data Storage and Evaluation	13
5.8 Test Equipment List	15
6. Tissue Simulating Liquids	16
7. SAR Measurement Evaluation	17
7.1 Purpose of System Performance check	17
7.2 System Setup	17
7.3 Validation Results	18
8. EUT Testing Position	19
8.1 Define two imaginary lines on the handset	19
8.2 Cheek Position	20
8.3 Tilted Position	20
8.4 Body Worn Position	21
9. Measurement Procedures	22
9.1 Spatial Peak SAR Evaluation	22
9.2 Area & Zoom Scan Procedures	22
9.3 Volume Scan Procedures	23
9.4 SAR Averaged Methods	23
9.5 Power Drift Monitoring	23
10. SAR Test Configurations	24
10.1 Exposure Positions Consideration	24
10.2 Conducted RF Output Power (Unit: dBm)	26
11. SAR Test Results	30
11.1 Test Records for Head SAR Test	30
11.2 Test Records for Hotspot SAR Test	31
11.3 Test Records for Body-worn SAR Test	33
11.4 Simultaneous Multi-band Transmission Analysis	34
12. Uncertainty Assessment	37
13. References	39
Appendix A. Plots of System Performance Check	
Appendix B. Plots of SAR Measurement	
Appendix C. DASYS Calibration Certificate	
Appendix D. Product Photos	
Appendix E. Test Setup Photos	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA2O1701	Rev. 01	Initial issue of report	Nov. 09, 2012

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **ZTE CORPORATION DUT: WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone; Brand Name: ZTE; Model Name: ZTE V970M/Grand X(M)** are as follows.

<Standalone SAR>

Band	Position	SAR_{1g} (W/kg)	Scaled SAR_{1g} (W/kg)
GSM850	Head	0.431	0.495
GSM1900	Head	0.205	0.240
WCDMA Band V	Head	0.395	0.416
WCDMA Band II	Head	0.346	0.402
WLAN 2.4G	Head	0.244	0.280
GSM850	Hotspot (1 cm Gap)	1.240	1.379
GSM1900	Hotspot (1 cm Gap)	0.590	0.685
WCDMA Band V	Hotspot (1 cm Gap)	0.666	0.701
WCDMA Band II	Hotspot (1 cm Gap)	0.603	0.700
WLAN 2.4G	Hotspot (1 cm Gap)	0.121	0.139
GSM850	Body-worn (1 cm Gap)	1.240	1.379
GSM1900	Body-worn (1 cm Gap)	0.590	0.685
WCDMA Band V	Body-worn (1 cm Gap)	0.666	0.701
WCDMA Band II	Body-worn (1 cm Gap)	0.603	0.700
WLAN 2.4G	Body-worn (1 cm Gap)	0.145	0.166

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC OET Bulletin 65 Supplement C (Edition 01-01).



2. Administration Data

2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958

2.2 Applicant

Company Name	ZTE CORPORATION
Address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

2.3 Manufacturer

Company Name	ZTE CORPORATION
Address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

2.4 Application Details

Date of Start during the Test	Oct. 18, 2012
Date of End during the Test	Oct. 23, 2012

3. General Information

3.1 Description of Equipment Under Test (EUT)

Product Feature & Specification	
EUT	WCDMA/GSM (GPRS) Dual-Mode Digital Mobile Phone
Brand Name	ZTE
Model Name	ZTE V970M/Grand X(M)
FCC ID	Q78-V970M
IMEI Code	866082010005156
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WLAN2.4G: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz WLAN2.4G: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Maximum Average Output Power to Antenna	GSM850: 32.40 dBm GSM1900: 29.32 dBm WCDMA Band V: 22.78 dBm WCDMA Band II: 22.35 dBm 802.11b: 15.40 dBm 802.11g: 11.29 dBm 802.11n-HT20 (2.4GHz) : 10.03 dBm 802.11n-HT40 (2.4GHz) : 8.36 dBm Bluetooth: 0.27 dBm
Antenna Type	WWAN: Monopole Antenna WLAN: Monopole Antenna Bluetooth: Monopole Antenna
HW Version	WMAJ
SW Version	ZTE-CN-QB125D-P175A20V1.0.0
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) 802.11b: DSSS (BPSK / QPSK / CCK) 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth 4.0 : GFSK Bluetooth (1Mbps) : GFSK Bluetooth 2.1 EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth 2.1 EDR (3Mbps) : 8-DPSK Bluetooth 3.0 EDR : GFSK, $\pi/4$ -DQPSK, 8-DPSK



Dual Transfer Mode (DTM) Category	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Production Unit
Remark:	
<ol style="list-style-type: none"> The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description. There are two different types of EUT. They are sample 1 with dual SIM card and sample 2 with single SIM card and different flash. The others are the same including circuit design, PCB board, structure and all components. It is special to declare. After pre-scan the dual SIM card and single SIM card sample, we found test result with dual SIM card were the worse, so we choose the dual SIM card sample to perform all test. 	

3.2 Product Photos

Please refer to Appendix D.

3.3 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC OET Bulletin 65 Supplement C (Edition 01-01)
- FCC KDB 447498 D01 v04
- FCC KDB 648474 D01 v01r05
- FCC KDB 941225 D01 v02
- FCC KDB 941225 D03 v01
- FCC KDB 941225 D06 v01
- FCC KDB 248227 D01 v01r02

3.4 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3.5 Test Conditions

3.5.1 Ambient Condition

Ambient Temperature	20 to 24 °C
Humidity	< 60 %

3.5.2 Test Configuration

The device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during all tests.

For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

The maximum rated power of WWAN and WLAN is listed in "Tune-Up Procedure" exhibit; The scaling factor is calculated according to the difference between measured output power and maximum tolerance power on this device.

4. Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5. SAR Measurement System

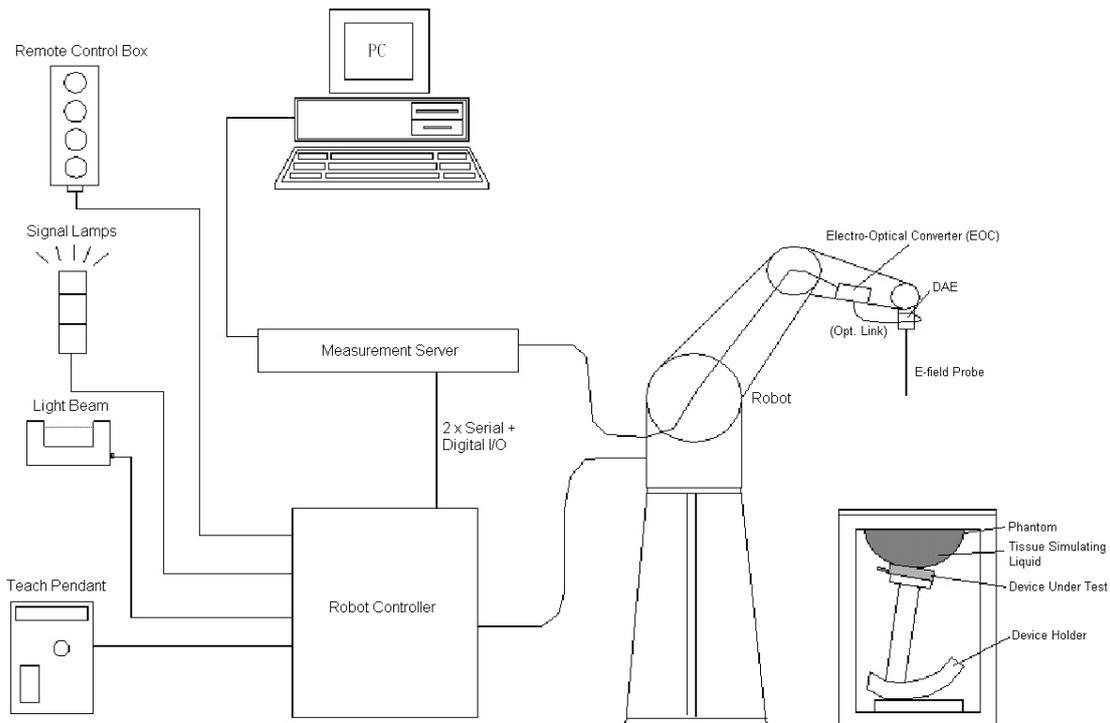


Fig 5.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in in the following sub-sections.

5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

5.1.1 E-Field Probe Specification

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

Fig 5.2 Photo of EX3DV4

5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.3 Photo of DAE

5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.4 Photo of DASY5

5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.5 Photo of Server for DASY5

5.5 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom



Fig 5.6 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

5.6 Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.7 Device Holder

5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 U_i = input signal of channel i, (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



5.8 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d091	Nov. 18, 2011	Nov. 17, 2012
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	Nov. 21, 2011	Nov. 20, 2012
SPEAG	2450MHz System Validation Kit	D2450V2	736	Jul. 25, 2011	Jul. 24, 2014
SPEAG	Data Acquisition Electronics	DAE4	1210	Nov. 18, 2011	Nov. 17, 2012
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	Jun. 20, 2012	Jun. 19, 2013
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1477	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1479	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201074235	Nov. 30, 2011	Nov. 29, 2013
Agilent	Wireless Communication Test Set	E5515C	GB47050646	Aug. 18, 2011	Aug. 17, 2013
Agilent	Wireless Communication Test Set	E5515C	MY48367160	Oct. 26, 2011	Oct. 25, 2013
R&S	Universal Radio Communication Tester	CMU200	116456	Sep. 20, 2011	Sep. 19, 2013
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	Apr. 13, 2012	Apr. 12, 2013
R&S	Signal Generator	SMR40	100455	Dec. 30, 2011	Dec. 29, 2012
Agilent	Power Meter	E4416A	MY45101555	Aug. 23, 2012	Aug. 22, 2013
Agilent	Power Sensor	E9327A	MY44421198	Aug. 23, 2012	Aug. 22, 2013
R&S	Spectrum Analyzer	FSP30	101399	Jun. 01, 2012	May 31, 2013

Table 5.1 Test Equipment List

Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. Referring to KDB 450824 D02, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D2450V2, SN: 736 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.

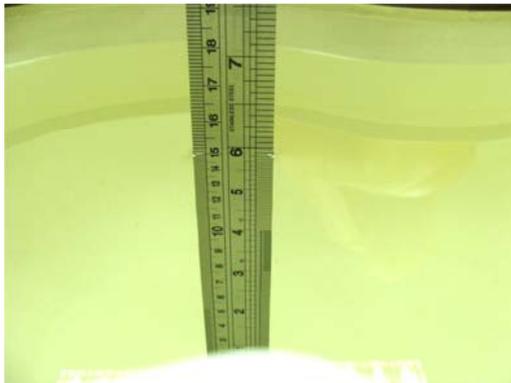


Fig 6.1 Photo of Liquid Height for Head SAR



Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

Table 6.1 Recipes of Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Freq. (MHz)	Liquid Type	Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	Head	21.1	0.925	41.453	0.90	41.5	2.78	-0.11	±5	Oct. 18, 2012
1900	Head	21.3	1.419	40.609	1.40	40.0	1.36	1.52	±5	Oct. 19, 2012
2450	Head	21.3	1.81	37.626	1.80	39.2	0.56	-4.02	±5	Oct. 23, 2012
835	Body	21.6	1.007	57.654	0.97	55.2	3.81	4.45	±5	Oct. 19, 2012
1900	Body	21.2	1.547	53.803	1.52	53.3	1.78	0.94	±5	Oct. 18, 2012
2450	Body	21.2	1.976	54.13	1.95	52.7	1.33	2.71	±5	Oct. 23, 2012

Table 6.2 Measuring Results for Simulating Liquid

7. SAR Measurement Evaluation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

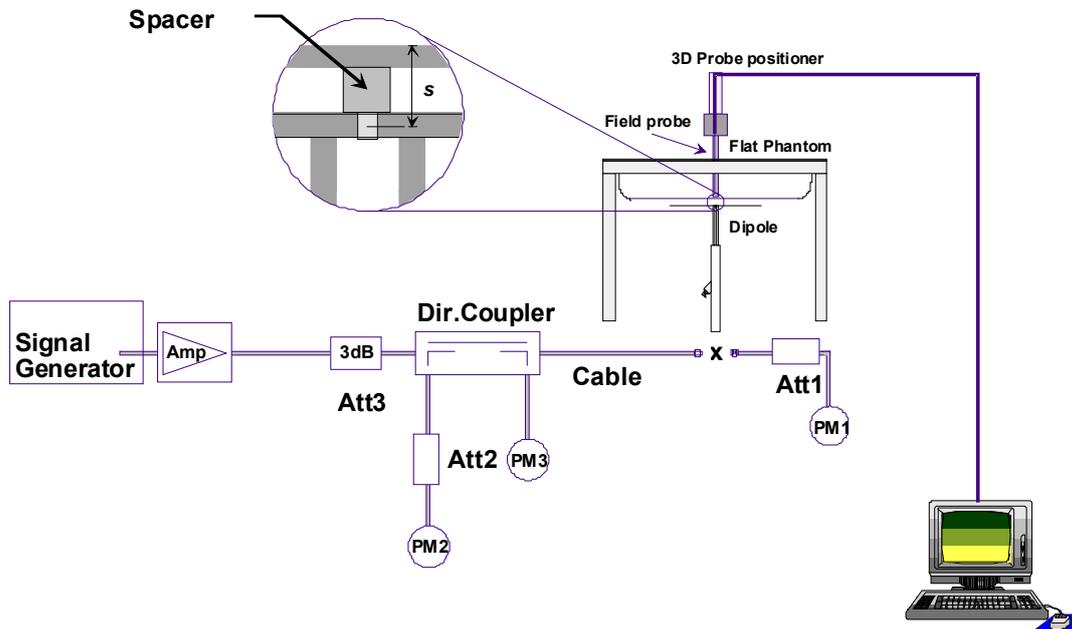


Fig 7.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected.



Fig 7.2 Photo of Dipole Setup

7.3 Validation Results

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Measurement Date	Frequency (MHz)	Liquid Type	Targeted SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	Normalized SAR _{1g} (W/kg)	Deviation (%)
Oct. 18, 2012	835	Head	9.40	2.33	9.32	-0.85
Oct. 19, 2012	1900	Head	40.3	9.77	39.08	-3.03
Oct. 23, 2012	2450	Head	54.8	13.8	55.20	0.73
Oct. 19, 2012	835	Body	9.42	2.51	10.04	6.58
Oct. 18, 2012	1900	Body	41.8	10.2	40.80	-2.39
Oct. 23, 2012	2450	Body	52.3	12.6	50.40	-3.63

Table 7.1 Target and Measurement SAR after Normalized

8. EUT Testing Position

This EUT was tested in ten different positions. They are right cheek, right tilted, left cheek, left tilted, Front of the EUT with phantom 1 cm gap, Back of the EUT with phantom 1 cm gap, Top Side of the EUT with phantom 1 cm gap, Bottom Side of the EUT with phantom 1 cm gap, Right Side of the EUT with phantom 1 cm gap, and Left Side of the EUT with phantom 1 cm gap, as illustrated below:

8.1 Define two imaginary lines on the handset

- The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

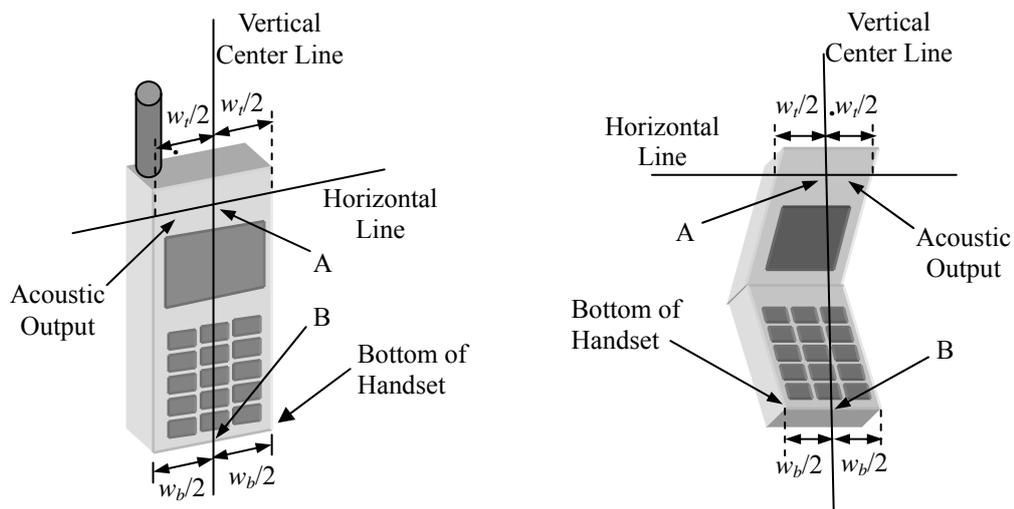


Fig 9.1 Illustration for Handset Vertical and Horizontal Reference Lines

8.2 Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 9.2).

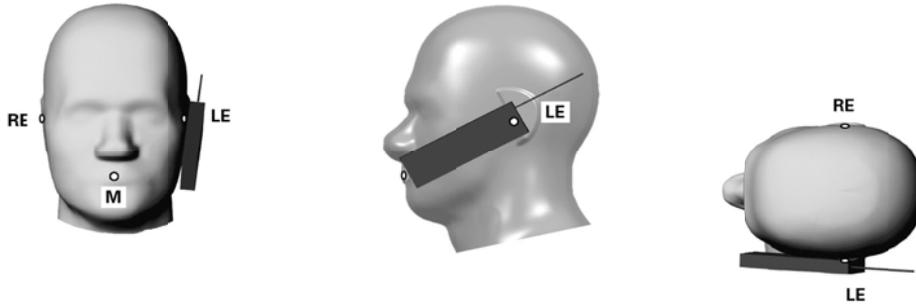


Fig 9.2 Illustration for Cheek Position

8.3 Tilted Position

- (a) To position the device in the “cheek” position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 9.3).

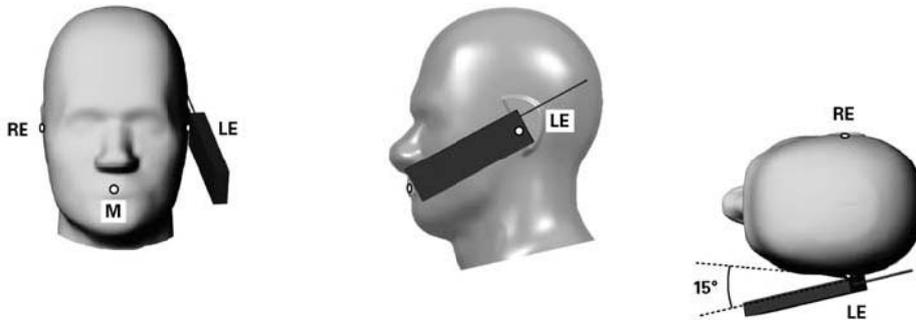


Fig 9.3 Illustration for Tilted Position

8.4 Body Worn Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1 cm.

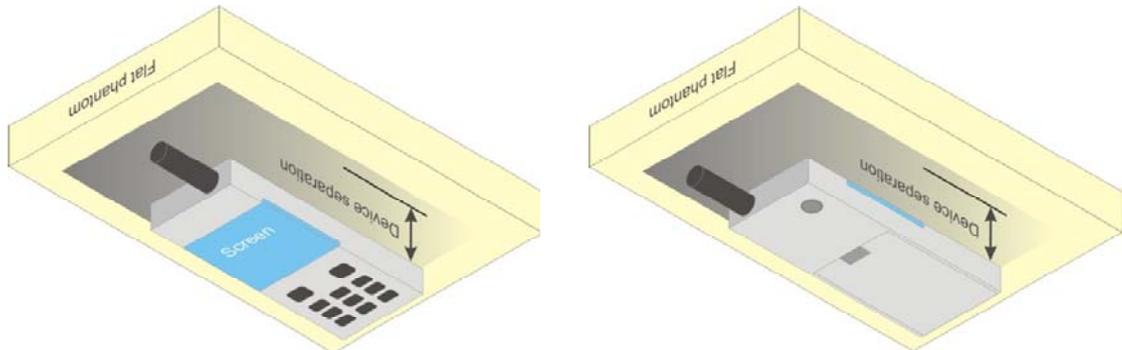


Fig 9.4 Illustration for Body Worn Position

<EUT Setup Photos>

Please refer to Appendix E for the test setup photos.

9. Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% EUTy factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Appendix E demonstrates.
- (e) Set scan area, grid size and other setting on the DASY software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.



9.3 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remains in the same test position for all measurements and all volume scans use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scans are completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculate the multiband SAR.

9.4 SAR Averaged Methods

In DASy, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.


Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

9.5 Power Drift Monitoring

All SAR testing is under the EUT installed full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

10. SAR Test Configurations

10.1 Exposure Positions Consideration

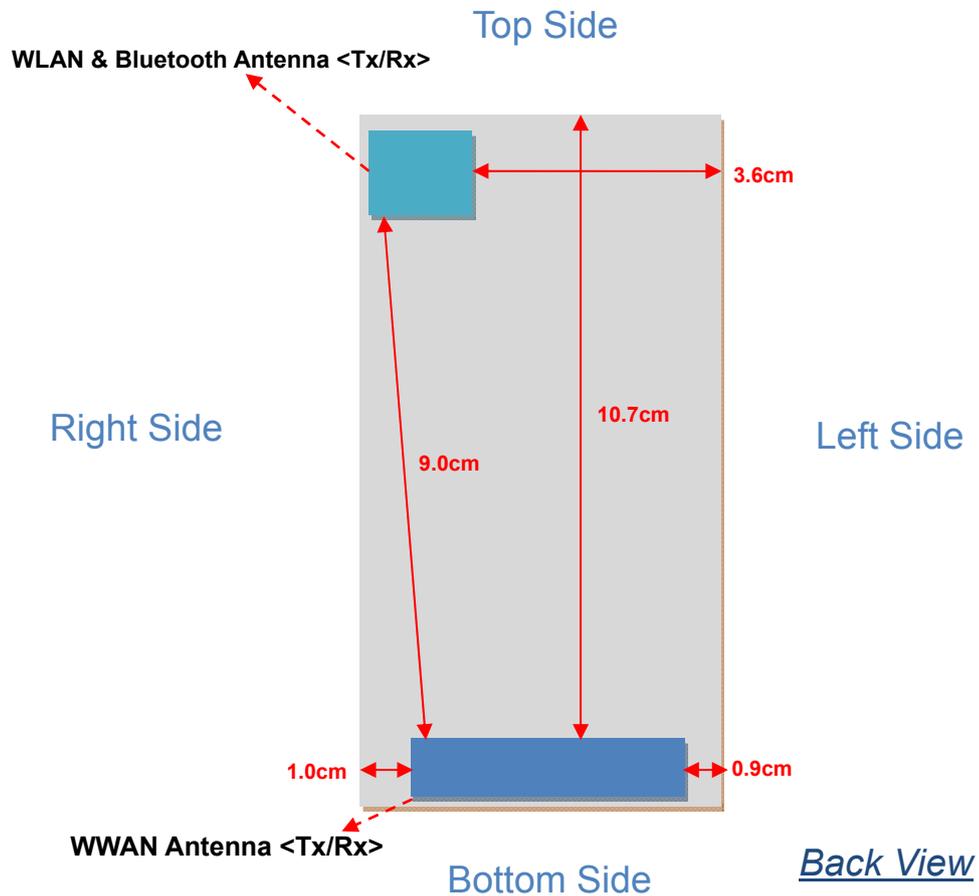

Antennas	Wireless Interface
WWAN Antenna (Tx / Rx)	GSM850/1900 WCDMA Band II/V
WLAN & Bluetooth Antenna (Tx / Rx)	WLAN 2.4GHz Bluetooth



Sides for SAR tests; Hotspot mode						
Test distance: 10 mm						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	YES	YES	NO	YES	YES	YES
WLAN & Bluetooth	YES	YES	YES	NO	YES	NO

Note:

1. Head/Body-worn/Hotspot mode SAR assessments are required.
2. Referring to KDB 941225 D06, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
3. For WWAN antenna, SAR measurement at Top side is not required since the distance between WWAN transmitting antenna and surface or edge $> 25\text{mm}$.
4. For WLAN & Bluetooth antenna, SAR measurements Bottom/Left side are not required since the distance between WLAN & Bluetooth transmitting antenna and surface or edge $> 25\text{mm}$.



10.2 Conducted RF Output Power (Unit: dBm)

<GSM/GPRS/EDGE>

For Card Slot 1

Burst Average Power						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM (GMSK, 1 Tx slot)	32.40	32.39	32.36	29.31	29.32	29.31
GPRS (GMSK, 1 Tx slot) – CS1	32.39	32.34	32.34	29.29	29.31	29.30
GPRS (GMSK, 2 Tx slots) – CS1	31.50	31.45	31.40	28.35	28.37	28.34
GPRS (GMSK, 3 Tx slots) – CS1	29.83	29.75	29.72	26.65	26.63	26.65
GPRS (GMSK, 4 Tx slots) – CS1	29.04	28.98	28.91	25.80	25.85	25.81
EDGE (GMSK, 1 Tx slot) – MCS1	32.39	32.37	32.32	29.28	29.29	29.27
EDGE (GMSK, 2 Tx slots) – MCS1	31.50	31.44	31.40	28.34	28.35	28.33
EDGE (GMSK, 3 Tx slots) – MCS1	29.81	29.77	29.71	26.63	26.64	26.62
EDGE (GMSK, 4 Tx slots) – MCS1	29.03	28.87	28.91	25.81	25.83	25.82
EDGE (8PSK, 1 Tx slot) – MCS5	26.24	26.12	26.07	25.27	25.44	25.47
EDGE (8PSK, 2 Tx slots) – MCS5	25.18	25.12	25.08	24.28	24.47	24.45
EDGE (8PSK, 3 Tx slots) – MCS5	23.01	22.90	23.94	22.22	22.44	22.42
EDGE (8PSK, 4 Tx slots) – MCS5	21.76	21.64	21.68	21.06	21.28	21.24

Source-Based Time-Averaged Power						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM (GMSK, 1 Tx slot)	23.40	23.39	23.36	20.31	20.32	20.31
GPRS (GMSK, 1 Tx slot) – CS1	23.39	23.34	23.34	20.29	20.31	20.30
GPRS (GMSK, 2 Tx slots) – CS1	25.50	25.45	25.40	22.35	22.37	22.34
GPRS (GMSK, 3 Tx slots) – CS1	25.57	25.49	25.46	22.39	22.37	22.39
GPRS (GMSK, 4 Tx slots) – CS1	26.04	25.98	25.91	22.80	22.85	22.81
EDGE (GMSK, 1 Tx slot) – MCS1	23.39	23.37	23.32	20.28	20.29	20.27
EDGE (GMSK, 2 Tx slots) – MCS1	25.50	25.44	25.40	22.34	22.35	22.33
EDGE (GMSK, 3 Tx slots) – MCS1	25.55	25.51	25.45	22.37	22.38	22.36
EDGE (GMSK, 4 Tx slots) – MCS1	26.03	25.87	25.91	22.81	22.83	22.82
EDGE (8PSK, 1 Tx slot) – MCS5	17.24	17.12	17.07	16.27	16.44	16.47
EDGE (8PSK, 2 Tx slots) – MCS5	19.18	19.12	19.08	18.28	18.47	18.45
EDGE (8PSK, 3 Tx slots) – MCS5	18.75	18.64	19.68	17.96	18.18	18.16
EDGE (8PSK, 4 Tx slots) – MCS5	18.76	18.64	18.68	18.06	18.28	18.24

Remark: The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

Source based time averaged power = Maximum burst averaged power (1 Tx slot) - 9 dB

Source based time averaged power = Maximum burst averaged power (2 Tx slots) - 6 dB

Source based time averaged power = Maximum burst averaged power (3 Tx slots) - 4.26 dB

Source based time averaged power = Maximum burst averaged power (4 Tx slots) - 3 dB



For Card Slot 2

Burst Average Power						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM (GMSK, 1 Tx slot)	32.39	32.38	32.32	29.28	29.30	29.27
GPRS (GMSK, 1 Tx slot) – CS1	32.38	32.33	32.32	29.30	29.31	29.27
GPRS (GMSK, 2 Tx slots) – CS1	31.49	31.43	31.40	28.34	28.36	28.32
GPRS (GMSK, 3 Tx slots) – CS1	29.82	29.73	29.70	26.64	26.62	26.61
GPRS (GMSK, 4 Tx slots) – CS1	29.02	28.99	28.91	25.79	25.85	25.80
EDGE (GMSK, 1 Tx slot) – MCS1	32.38	32.33	32.28	29.28	29.29	29.24
EDGE (GMSK, 2 Tx slots) – MCS1	31.50	31.41	31.40	28.36	28.35	28.30
EDGE (GMSK, 3 Tx slots) – MCS1	29.80	29.71	29.70	26.60	26.65	26.65
EDGE (GMSK, 4 Tx slots) – MCS1	29.01	28.80	28.91	25.80	25.83	25.84
EDGE (8PSK, 1 Tx slot) – MCS5	26.23	26.14	26.01	25.29	25.44	25.42
EDGE (8PSK, 2 Tx slots) – MCS5	25.17	25.16	25.06	24.22	24.43	24.45
EDGE (8PSK, 3 Tx slots) – MCS5	23.02	22.92	22.93	22.20	22.44	22.40
EDGE (8PSK, 4 Tx slots) – MCS5	21.66	21.70	21.66	21.01	21.23	21.20

Source-Based Time-Averaged Power						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM (GMSK, 1 Tx slot)	23.39	23.38	23.32	20.28	20.30	20.27
GPRS (GMSK, 1 Tx slot) – CS1	23.38	23.33	23.32	20.30	20.31	20.27
GPRS (GMSK, 2 Tx slots) – CS1	25.49	25.43	25.40	22.34	22.36	22.32
GPRS (GMSK, 3 Tx slots) – CS1	25.56	25.47	25.44	22.38	22.36	22.35
GPRS (GMSK, 4 Tx slots) – CS1	26.02	25.99	25.91	22.79	22.85	22.80
EDGE (GMSK, 1 Tx slot) – MCS1	23.38	23.33	23.28	20.28	20.29	20.24
EDGE (GMSK, 2 Tx slots) – MCS1	25.50	25.41	25.40	22.36	22.35	22.30
EDGE (GMSK, 3 Tx slots) – MCS1	25.54	25.45	25.44	22.34	22.39	22.39
EDGE (GMSK, 4 Tx slots) – MCS1	26.01	25.80	25.91	22.80	22.83	22.84
EDGE (8PSK, 1 Tx slot) – MCS5	17.23	17.14	17.01	16.29	16.44	16.42
EDGE (8PSK, 2 Tx slots) – MCS5	19.17	19.16	19.06	18.22	18.43	18.45
EDGE (8PSK, 3 Tx slots) – MCS5	18.76	18.66	18.67	17.94	18.18	18.14
EDGE (8PSK, 4 Tx slots) – MCS5	18.66	18.70	18.66	18.01	18.23	18.20

Remark: The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:

- Source based time averaged power = Maximum burst averaged power (1 Tx slot) - 9 dB
- Source based time averaged power = Maximum burst averaged power (2 Tx slots) - 6 dB
- Source based time averaged power = Maximum burst averaged power (3 Tx slots) - 4.26 dB
- Source based time averaged power = Maximum burst averaged power (4 Tx slots) - 3 dB

Note:

1. For Head SAR testing, GSM should be evaluated, therefore the EUT was set in GSM for GSM850 and GSM1900 due to its highest source-based time-average power.
2. For Body SAR testing, GPRS and EDGE should be evaluated, therefore the EUT was set in GPRS (4 Tx slots) for GSM850 and GSM1900 due to its highest source-based time-average power.
3. Per KDB 447498, the maximum output power channel is used for SAR testing and for further SAR test reduction.
4. The EUT do not support DTM function.



<WCDMA>

For Card Slot 1

Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency (MHz)	826.4	836.4	846.6	1852.4	1880.0	1907.6
AMR	22.68	22.70	22.37	22.34	22.24	21.57
RMC 12.2K	22.73	22.78	22.47	22.35	22.32	21.70
HSDPA Subtest-1	22.70	22.66	22.35	22.23	22.21	21.50
HSDPA Subtest-2	21.53	21.57	21.27	20.91	20.92	20.40
HSDPA Subtest-3	21.11	21.14	20.87	20.63	20.63	20.11
HSDPA Subtest-4	21.19	21.24	20.94	20.90	20.89	20.40
HSUPA Subtest-1	19.81	20.07	19.94	20.20	20.32	20.08
HSUPA Subtest-2	18.82	19.01	18.93	19.22	19.37	19.08
HSUPA Subtest-3	19.31	19.54	19.40	19.68	19.83	19.55
HSUPA Subtest-4	19.93	20.05	20.00	20.28	20.34	20.09
HSUPA Subtest-5	21.34	21.47	21.37	21.68	21.84	21.53

MPR (dB)							
3GPP MPR	Subtest	WCDMA Band V			WCDMA Band II		
0	HSDPA Subtest-1	0.00	0.00	0.00	0.00	0.00	0.00
0	HSDPA Subtest-2	1.17	1.09	1.08	1.32	1.29	1.10
≤ 0.5	HSDPA Subtest-3	1.59	1.52	1.48	1.60	1.58	1.39
≤ 0.5	HSDPA Subtest-4	1.51	1.42	1.41	1.33	1.32	1.10
0	HSUPA Subtest-1	1.53	1.40	1.43	1.48	1.52	1.45
≤ 2	HSUPA Subtest-2	2.52	2.46	2.44	2.46	2.47	2.45
≤ 1	HSUPA Subtest-3	2.03	1.93	1.97	2.00	2.01	1.98
≤ 2	HSUPA Subtest-4	1.41	1.42	1.37	1.40	1.50	1.44
0	HSUPA Subtest-5	0.00	0.00	0.00	0.00	0.00	0.00

Note:

- For Head SAR, per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 1/4 dB higher than RMC, SAR tests with AMR 12.2kbps can be excluded.
- For Body SAR, per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA subset-1 and HSUPA subset-5 output power is < 1/4 dB higher than RMC, and SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA and HSUPA SAR evaluation can be excluded.
- EUT is designed to follow the MPR of 3GPP Table 5.2B.1 specification. In production units, MPR result deviation from 3GPP is expected; the implementation and expected deviation is detailed in tune-up procedure exhibit.

<WLAN 2.4GHz>

Mode	Channel	Frequency (MHz)	Average power (dBm)			
			Data Rate (bps)			
			1M	2M	5.5M	11M
802.11b	CH 01	2412	14.61	14.54	14.77	14.83
	CH 06	2437	14.75	14.61	14.78	14.84
	CH 11	2462	15.40	15.10	15.34	15.39

Mode	Channel	Frequency (MHz)	Average power (dBm)							
			Data Rate (bps)							
			6M	9M	12M	18M	24M	36M	48M	54M
802.11g	CH 01	2412	10.26	10.64	10.19	11.09	10.74	11.02	11.09	11.10
	CH 06	2437	9.22	10.73	10.78	11.19	11.05	11.28	11.28	11.18
	CH 11	2462	11.29	10.88	10.95	11.28	11.17	11.28	11.25	11.20

Mode	Channel	Frequency (MHz)	Average power (dBm)							
			Data Rate (bps)							
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n HT20	CH 01	2412	8.41	8.39	8.99	9.08	9.21	8.81	9.50	9.68
	CH 06	2437	9.17	8.81	9.50	9.54	9.20	9.71	9.87	9.38
	CH 11	2462	8.91	9.46	9.10	9.14	9.31	9.38	9.53	10.03

Mode	Channel	Frequency (MHz)	Average power (dBm)							
			Data Rate (bps)							
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n HT40	CH 03	2422	7.45	7.71	7.51	7.65	7.83	7.85	8.06	8.06
	CH 06	2437	7.62	8.35	7.79	7.97	8.13	8.09	8.26	8.27
	CH 09	2452	7.74	8.11	7.79	8.06	8.14	8.15	8.29	8.36

Note:

1. Per KDB 248227, choose the highest output power channel to test SAR and determine further SAR exclusion
2. Per KDB 248227, 11g and 11n output power is less than 1/4 dB higher than 11b mode, thus the SAR can be excluded.
3. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4 dB higher than those measured at the lowest data rate.

<Bluetooth>

Mode	Channel	Frequency (MHz)	Average Power (dBm)								
			Data Rate								
			DH1	DH3	DH5	2DH1	2DH3	2DH5	3DH1	3DH3	3DH5
Bluetooth	CH 00	2402	-0.60	-1.23	-0.99	-2.81	-3.49	-3.33	-2.83	-3.70	-3.03
	CH 39	2441	0.27	-1.90	-1.56	-0.82	-2.60	-3.56	-2.43	-2.85	-2.98
	CH 78	2480	-0.02	-1.30	-0.95	-1.50	-2.56	-2.22	-1.64	-2.62	-2.23

Note: Per KDB 648474, 2.4GHz Bluetooth SAR is excluded due to highest output power $\leq 2 \cdot P_{Ref}$, where $2 \cdot P_{Ref} = 24mW = 13.8dBm$.

11. SAR Test Results

11.1 Test Records for Head SAR Test

<GSM>

Plot No.	Band	Mode	Test Position	Ch.	Output Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	SAR _{1g} (W/kg)	Scaled SAR _{1g} (W/kg)
1	GSM850	GSM	Right Cheek	128	32.4	33	1.148	0.431	0.495
2	GSM850	GSM	Right Tilted	128	32.4	33	1.148	0.278	0.319
3	GSM850	GSM	Left Cheek	128	32.4	33	1.148	0.402	0.462
4	GSM850	GSM	Left Tilted	128	32.4	33	1.148	0.285	0.327
5	GSM1900	GSM	Right Cheek	661	29.32	30	1.169	0.199	0.233
6	GSM1900	GSM	Right Tilted	661	29.32	30	1.169	0.068	0.080
7	GSM1900	GSM	Left Cheek	661	29.32	30	1.169	0.205	0.240
8	GSM1900	GSM	Left Tilted	661	29.32	30	1.169	0.066	0.077

Note: Per KDB 447498, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

<WCDMA>

Plot No.	Band	Mode	Test Position	Ch.	Output Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	SAR _{1g} (W/kg)	Scaled SAR _{1g} (W/kg)
9	WCDMA Band V	RMC12.2K	Right Cheek	4182	22.78	23	1.052	0.395	0.416
10	WCDMA Band V	RMC12.2K	Right Tilted	4182	22.78	23	1.052	0.257	0.270
11	WCDMA Band V	RMC12.2K	Left Cheek	4182	22.78	23	1.052	0.362	0.381
12	WCDMA Band V	RMC12.2K	Left Tilted	4182	22.78	23	1.052	0.259	0.272
13	WCDMA Band II	RMC12.2K	Right Cheek	9262	22.35	23	1.161	0.346	0.402
14	WCDMA Band II	RMC12.2K	Right Tilted	9262	22.35	23	1.161	0.122	0.142
15	WCDMA Band II	RMC12.2K	Left Cheek	9262	22.35	23	1.161	0.327	0.380
16	WCDMA Band II	RMC12.2K	Left Tilted	9262	22.35	23	1.161	0.120	0.139

Note: Per KDB 447498, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

<WLAN>

Plot No.	Band	Mode	Test Position	Ch.	Output Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	SAR _{1g} (W/kg)	Scaled SAR _{1g} (W/kg)
17	WLAN 2.4G	802.11b	Right Cheek	11	15.4	16	1.148	0.166	0.191
18	WLAN 2.4G	802.11b	Right Tilted	11	15.4	16	1.148	0.155	0.178
19	WLAN 2.4G	802.11b	Left Cheek	11	15.4	16	1.148	0.244	0.280
20	WLAN 2.4G	802.11b	Left Tilted	11	15.4	16	1.148	0.171	0.196

Note: Per KDB 248227, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.



11.2 Test Records for Hotspot SAR Test

<GSM>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Output Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	SAR _{1g} (W/kg)	Scaled SAR _{1g} (W/kg)
21	GSM850	GPRS (4 Tx slots)	Front	1	128	29.04	29.5	1.112	0.931	1.035
22	GSM850	GPRS (4 Tx slots)	Back	1	128	29.04	29.5	1.112	1.240	1.379
23	GSM850	GPRS (4 Tx slots)	Left Side	1	128	29.04	29.5	1.112	0.913	1.015
24	GSM850	GPRS (4 Tx slots)	Right Side	1	128	29.04	29.5	1.112	0.950	1.056
25	GSM850	GPRS (4 Tx slots)	Bottom Side	1	128	29.04	29.5	1.112	0.131	0.146
26	GSM850	GPRS (4 Tx slots)	Front	1	189	28.98	29.5	1.127	0.921	1.038
45	GSM850	GPRS (4 Tx slots)	Front	1	251	28.91	29.5	1.146	0.867	0.993
46	GSM850	GPRS (4 Tx slots)	Back	1	189	28.98	29.5	1.127	1.210	1.364
47	GSM850	GPRS (4 Tx slots)	Back	1	251	28.91	29.5	1.146	1.140	1.306
48	GSM850	GPRS (4 Tx slots)	Left Side	1	189	28.98	29.5	1.127	0.907	1.022
49	GSM850	GPRS (4 Tx slots)	Left Side	1	251	28.91	29.5	1.146	0.845	0.968
50	GSM850	GPRS (4 Tx slots)	Right Side	1	189	28.98	29.5	1.127	0.963	1.085
51	GSM850	GPRS (4 Tx slots)	Right Side	1	251	28.91	29.5	1.146	0.922	1.056
27	GSM1900	GPRS (4 Tx slots)	Front	1	661	25.85	26.5	1.161	0.419	0.487
28	GSM1900	GPRS (4 Tx slots)	Back	1	661	25.85	26.5	1.161	0.590	0.685
29	GSM1900	GPRS (4 Tx slots)	Left Side	1	661	25.85	26.5	1.161	0.122	0.142
30	GSM1900	GPRS (4 Tx slots)	Right Side	1	661	25.85	26.5	1.161	0.100	0.116
31	GSM1900	GPRS (4 Tx slots)	Bottom Side	1	661	25.85	26.5	1.161	0.561	0.652

Note:

- 1. Per KDB 941225 D06, for EUT dimension ≥ 9cm*5cm, the test distance is 1cm. SAR must be measured for all surfaces and sides with a transmitting antenna located within 2.5cm from that surface or edge.
- 2. As in (1), SAR for Front/Back/Bottom Side/Left Side/Right Side is necessary.
- 3. Per KDB 447498 if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.



<WCDMA>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Output Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	SAR _{1g} (W/kg)	Scaled SAR _{1g} (W/kg)
33	WCDMA Band V	RMC12.2K	Front	1	4182	22.78	23	1.052	0.388	0.408
34	WCDMA Band V	RMC12.2K	Back	1	4182	22.78	23	1.052	0.666	0.701
35	WCDMA Band V	RMC12.2K	Left Side	1	4182	22.78	23	1.052	0.473	0.498
36	WCDMA Band V	RMC12.2K	Right Side	1	4182	22.78	23	1.052	0.502	0.528
37	WCDMA Band V	RMC12.2K	Bottom Side	1	4182	22.78	23	1.052	0.069	0.073
39	WCDMA Band II	RMC12.2K	Front	1	9262	22.35	23	1.161	0.453	0.526
40	WCDMA Band II	RMC12.2K	Back	1	9262	22.35	23	1.161	0.603	0.700
41	WCDMA Band II	RMC12.2K	Left Side	1	9262	22.35	23	1.161	0.116	0.135
42	WCDMA Band II	RMC12.2K	Right Side	1	9262	22.35	23	1.161	0.106	0.123
43	WCDMA Band II	RMC12.2K	Bottom Side	1	9262	22.35	23	1.161	0.582	0.676

Note:

1. Per KDB 941225 D06, for EUT dimension ≥ 9cm*5cm, the test distance is 1cm. SAR must be measured for all surfaces and sides with a transmitting antenna located within 2.5cm from that surface or edge.
2. As in (1), SAR for Front/Back/Bottom Side/Left Side/Right Side is necessary.
3. Per KDB 447498, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

<WLAN>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Output Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	SAR _{1g} (W/kg)	Scaled SAR _{1g} (W/kg)
53	WLAN 2.4G	802.11b	Front	1	11	15.4	16	1.148	0.054	0.062
54	WLAN 2.4G	802.11b	Back	1	11	15.4	16	1.148	0.111	0.127
55	WLAN 2.4G	802.11b	Right Side	1	11	15.4	16	1.148	0.121	0.139
56	WLAN 2.4G	802.11b	Top Side	1	11	15.4	16	1.148	0.086	0.099

Note:

1. Per KDB 941225 D06, for EUT dimension ≥ 9cm*5cm, the test distance is 1cm. SAR must be measured for all surfaces and sides with a transmitting antenna located within 2.5cm from that surface or edge.
2. As in (1), SAR for Front / Back/Top Side/Right Side is necessary.
3. Per KDB 248227, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.

11.3 Test Records for Body-worn SAR Test

<GSM>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Output Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Headset	SAR _{1g} (W/kg)	Scaled SAR _{1g} (W/kg)
21	GSM850	GPRS (4 Tx slots)	Front	1	128	29.04	29.5	1.112	-	0.931	1.035
22	GSM850	GPRS (4 Tx slots)	Back	1	128	29.04	29.5	1.112	-	1.240	1.379
26	GSM850	GPRS (4 Tx slots)	Front	1	189	28.98	29.5	1.127	-	0.921	1.038
45	GSM850	GPRS (4 Tx slots)	Front	1	251	28.91	29.5	1.146	-	0.867	0.993
46	GSM850	GPRS (4 Tx slots)	Back	1	189	28.98	29.5	1.127	-	1.210	1.364
47	GSM850	GPRS (4 Tx slots)	Back	1	251	28.91	29.5	1.146	-	1.140	1.306
52	GSM850	GSM	Back	1	128	32.4	33	1.148	w/ headset	0.519	0.596
27	GSM1900	GPRS (4 Tx slots)	Front	1	661	25.85	26.5	1.161	-	0.419	0.487
28	GSM1900	GPRS (4 Tx slots)	Back	1	661	25.85	26.5	1.161	-	0.590	0.685
32	GSM1900	GSM	Back	1	661	29.32	30	1.169	w/ headset	0.359	0.420

Note:

- Per KDB 447498, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.
- “w/ headset” in the headset column means the earphone is plugged during SAR testing.

<WCDMA>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Output Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Headset	SAR _{1g} (W/kg)	Scaled SAR _{1g} (W/kg)
33	WCDMA Band V	RMC12.2K	Front	1	4182	22.78	23	1.052	-	0.388	0.408
34	WCDMA Band V	RMC12.2K	Back	1	4182	22.78	23	1.052	-	0.666	0.701
38	WCDMA Band V	RMC12.2K	Back	1	4182	22.78	23	1.052	w/ headset	0.567	0.596
39	WCDMA Band II	RMC12.2K	Front	1	9262	22.35	23	1.161	-	0.453	0.526
40	WCDMA Band II	RMC12.2K	Back	1	9262	22.35	23	1.161	-	0.603	0.700
44	WCDMA Band II	RMC12.2K	Back	1	9262	22.35	23	1.161	w/ headset	0.601	0.698

Note:

- Per KDB 447498, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.
- “w/ headset” in the headset column means the earphone is plugged during SAR testing.

<WLAN>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Output Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Headset	SAR _{1g} (W/kg)	Scaled SAR _{1g} (W/kg)
53	WLAN 2.4G	802.11b	Front	1	11	15.4	16	1.148	-	0.054	0.062
54	WLAN 2.4G	802.11b	Back	1	11	15.4	16	1.148	-	0.111	0.127
58	WLAN 2.4G	802.11b	Back	1	11	15.4	16	1.148	w/ headset	0.145	0.166

Note:

- Per KDB 248227, if the highest output channel SAR for each exposure position ≤ 0.8 W/kg other channels SAR tests are not necessary.
- “w/ headset” in the headset column means the earphone is plugged during SAR testing.

11.4 Simultaneous Multi-band Transmission Analysis

No.	Applicable Simultaneous Transmission Combination
1	GSM + Bluetooth
2	WCDMA + Bluetooth
3	GSM + WLAN 2.4G
4	WCDMA + WLAN 2.4G

Note:

1. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. GSM and WCDMA share the same antenna, and cannot transmit simultaneously.
3. Per KDB KDB 648474 D01, Bluetooth (0.27 dBm) output power $\leq 2 \cdot P_{Ref}$ and the distance to WWAN transmitting antenna $\geq 5\text{cm}$, therefore, stand-alone SAR is not required; the simultaneous transmission SAR for WWAN and Bluetooth was not required, because Bluetooth standalone SAR is not required and the maximum WWAN scaled SAR (1.379 W/kg), so the SAR summation is less than 1.6 W/kg.
4. Per KDB 648474 D01, the simultaneous transmission SAR for WWAN and WLAN was not required, because the maximum scaled SAR summation (Head: 0.74 W/kg; Body: 1.51 W/kg) is less than 1.6 W/kg.

<Head SAR>

Position	WWAN			WLAN		Max. SAR Sum	Scaled WWAN (W/kg)	Scaled WLAN (W/kg)	Scaled WWAN + Scaled WLAN
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN SAR (W/kg)				
Right Cheek	GSM850	#01	0.431	#17	0.166	0.60	0.495	0.191	0.69
	GSM1900	#05	0.199	#17	0.166	0.37	0.233	0.191	0.42
	WCDMA V	#09	0.395	#17	0.166	0.56	0.416	0.191	0.61
	WCDMA II	#13	0.346	#17	0.166	0.51	0.402	0.191	0.59
Right Tilted	GSM850	#02	0.278	#18	0.155	0.43	0.319	0.178	0.50
	GSM1900	#06	0.068	#18	0.155	0.22	0.080	0.178	0.26
	WCDMA V	#10	0.257	#18	0.155	0.41	0.270	0.178	0.45
	WCDMA II	#14	0.122	#18	0.155	0.28	0.142	0.178	0.32
Left Cheek	GSM850	#03	0.402	#19	0.244	0.65	0.462	0.280	0.74
	GSM1900	#07	0.205	#19	0.244	0.45	0.240	0.280	0.52
	WCDMA V	#11	0.362	#19	0.244	0.61	0.381	0.280	0.66
	WCDMA II	#15	0.327	#19	0.244	0.57	0.380	0.280	0.66
Left Tilted	GSM850	#04	0.285	#20	0.171	0.46	0.327	0.196	0.52
	GSM1900	#08	0.066	#20	0.171	0.24	0.077	0.196	0.27
	WCDMA V	#12	0.259	#20	0.171	0.43	0.272	0.196	0.47
	WCDMA II	#16	0.120	#20	0.171	0.29	0.139	0.196	0.34

Note:

1. The maximum SAR summation is calculated based on the same configuration and test position.
2. When stand-alone 1-g SAR is not required for a transmitter or antenna, its SAR is considered zero in the 1-g SAR summing process to determine simultaneous transmission SAR evaluation requirements
3. If 1g-SAR scalar summation < 1.6W/kg, simultaneous SAR measurement is not necessary.
4. If 1g-SAR summation > 1.6W/kg, SPLSR calculation is necessary.



<Hotspot SAR>

Position	WWAN			WLAN		Max. SAR Sum	Scaled WWAN (W/kg)	Scaled WLAN (W/kg)	Scaled WWAN + Scaled WLAN
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN SAR (W/kg)				
Front	GSM850	#21	0.931	#53	0.054	0.99	1.035	0.062	1.10
	GSM1900	#27	0.419	#53	0.054	0.47	0.487	0.062	0.55
	WCDMA V	#33	0.388	#53	0.054	0.44	0.408	0.062	0.47
	WCDMA II	#39	0.453	#53	0.054	0.51	0.526	0.062	0.59
Back	GSM850	#22	1.240	#54	0.111	1.35	1.379	0.127	1.51
	GSM1900	#28	0.590	#54	0.111	0.70	0.685	0.127	0.81
	WCDMA V	#34	0.666	#54	0.111	0.78	0.701	0.127	0.83
	WCDMA II	#40	0.603	#54	0.111	0.71	0.700	0.127	0.83
Left Side	GSM850	#23	0.913			0.91	1.015		1.02
	GSM1900	#29	0.122			0.12	0.142		0.14
	WCDMA V	#35	0.473			0.47	0.498		0.50
	WCDMA II	#41	0.116			0.12	0.135		0.14
Right Side	GSM850	#50	0.963	#55	0.121	1.08	1.085	0.139	1.22
	GSM1900	#30	0.100	#55	0.121	0.22	0.116	0.139	0.26
	WCDMA V	#36	0.502	#55	0.121	0.62	0.528	0.139	0.67
	WCDMA II	#42	0.106	#55	0.121	0.23	0.123	0.139	0.26
Top Side	GSM850			#56	0.086	0.09		0.099	0.10
	GSM1900			#56	0.086	0.09		0.099	0.10
	WCDMA V			#56	0.086	0.09		0.099	0.10
	WCDMA II			#56	0.086	0.09		0.099	0.10
Bottom Side	GSM850	#25	0.131			0.13	0.146		0.15
	GSM1900	#31	0.561			0.56	0.652		0.65
	WCDMA V	#37	0.069			0.07	0.073		0.07
	WCDMA II	#43	0.582			0.58	0.676		0.68

Note:

1. The maximum SAR summation is calculated based on the same configuration and test position.
2. When stand-alone 1-g SAR is not required for a transmitter or antenna, its SAR is considered zero in the 1-g SAR summing process to determine simultaneous transmission SAR evaluation requirements
3. If 1g-SAR scalar summation < 1.6W/kg, simultaneous SAR measurement is not necessary.
4. If 1g-SAR summation > 1.6W/kg, SPLSR calculation is necessary.



<Body-worn SAR>

Position	WWAN			WLAN		Max. SAR Sum	Scaled WWAN (W/kg)	Scaled WLAN (W/kg)	Scaled WWAN + Scaled WLAN
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN SAR (W/kg)				
Front	GSM850	#21	0.931	#53	0.054	0.99	1.035	0.062	1.10
	GSM1900	#27	0.419	#53	0.054	0.47	0.487	0.062	0.55
	WCDMA V	#33	0.388	#53	0.054	0.44	0.408	0.062	0.47
	WCDMA II	#39	0.453	#53	0.054	0.51	0.526	0.062	0.59
Back	GSM850	#22	1.240	#54	0.111	1.35	1.379	0.127	1.51
	GSM1900	#28	0.59	#54	0.111	0.70	0.685	0.127	0.81
	WCDMA V	#34	0.666	#54	0.111	0.78	0.701	0.127	0.83
	WCDMA II	#40	0.603	#54	0.111	0.71	0.700	0.127	0.83
Back (w/ headset)	GSM850	#52	0.519	#58	0.145	0.66	0.596	0.166	0.76
	GSM1900	#32	0.359	#58	0.145	0.50	0.420	0.166	0.59
	WCDMA V	#38	0.567	#58	0.145	0.71	0.596	0.166	0.76
	WCDMA II	#44	0.601	#58	0.145	0.75	0.698	0.166	0.86

Note:

1. The maximum SAR summation is calculated based on the same configuration and test position.
2. When stand-alone 1-g SAR is not required for a transmitter or antenna, its SAR is considered zero in the 1-g SAR summing process to determine simultaneous transmission SAR evaluation requirements
3. If 1g-SAR scalar summation < 1.6W/kg, simultaneous SAR measurement is not necessary.
4. If 1g-SAR summation > 1.6W/kg, SPLSR calculation is necessary.

Test Engineer : Fulu Hu

12. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observations is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 12.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 12.1 Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.



Error Description	Uncertainty	Probability	Divisor	Ci	Ci	Standard	Standard
	Value (±%)	Distribution		(1g)	(10g)	Uncertainty (1g)	Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 12.2 Uncertainty Budget of DASY for frequency range 300 MHz to 3 GHz

13. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", June 2001
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [7] FCC KDB 447498 D01 v04, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", November 2009
- [8] FCC KDB 648474 D01 v01r05, "SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas", September 2008
- [9] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [10] FCC KDB 941225 D02 v02 "3GPP R6 HSPA and R7 HSPA+ SAR Guidance", December 2009.
- [11] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [12] FCC KDB 941225 D04 v01, "Evaluating SAR for GSM/(E)GPRS Dual Transfer Mode", January 27 2010
- [13] FCC KDB 941225 D06 v01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", April 2011
- [14] FCC KDB 388624 D02, "Permit But Ask List", December 2011.



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_835MHz_121018

DUT: D835V2 - SN:4d091

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835_121018 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.925 \text{ mho/m}$; $\epsilon_r = 41.453$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $21.1 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.513 mW/g


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.786 V/m ; Power Drift = -0.00046 dB

Peak SAR (extrapolated) = 3.337 W/kg

SAR(1 g) = 2.33 mW/g ; SAR(10 g) = 1.55 mW/g

Maximum value of SAR (measured) = 2.520 mW/g

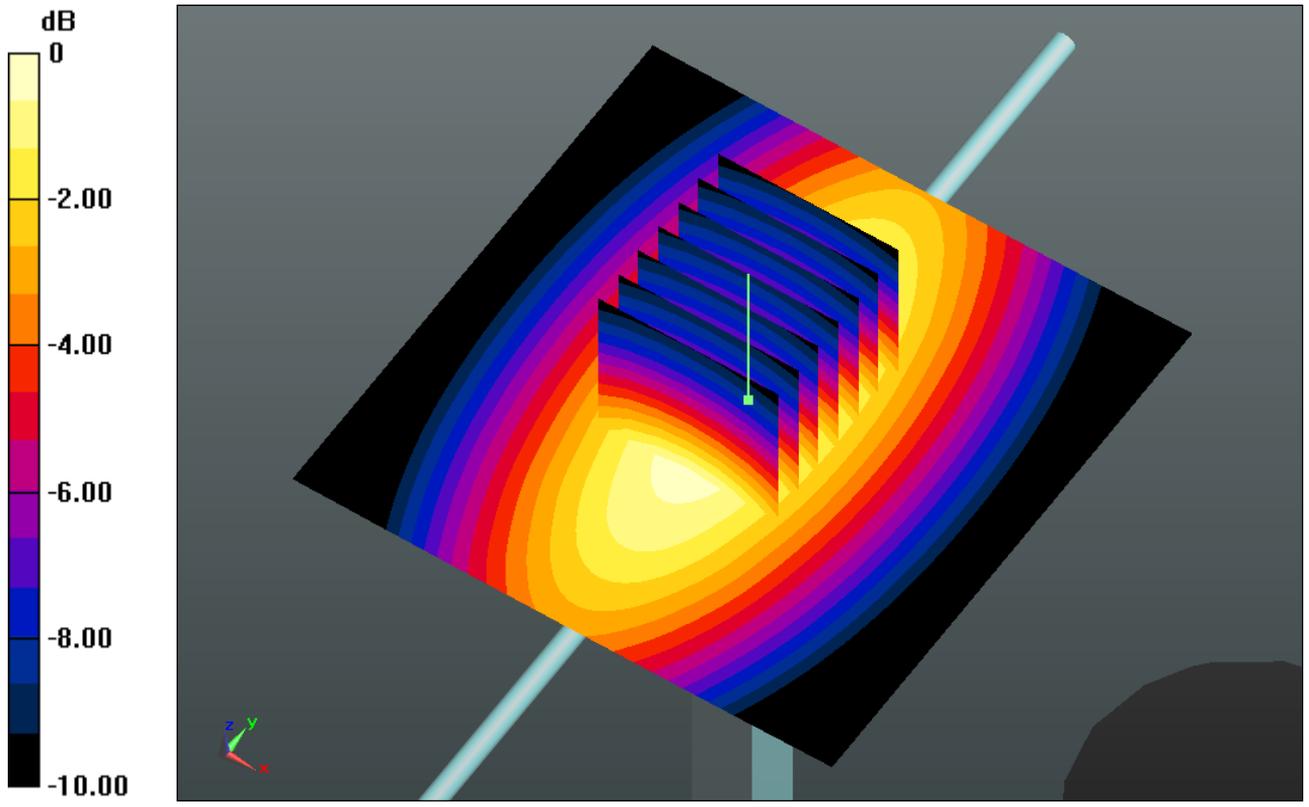

0 dB = 2.520mW/g

System Check_Head_1900MHz_121019

DUT: D1900V2 - SN:5d118

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900_121019 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.419$ mho/m; $\epsilon_r =$

40.609 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (91x91x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.079 mW/g


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.319 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 18.511 W/kg

SAR(1 g) = 9.77 mW/g; SAR(10 g) = 5.07 mW/g

Maximum value of SAR (measured) = 10.958 mW/g

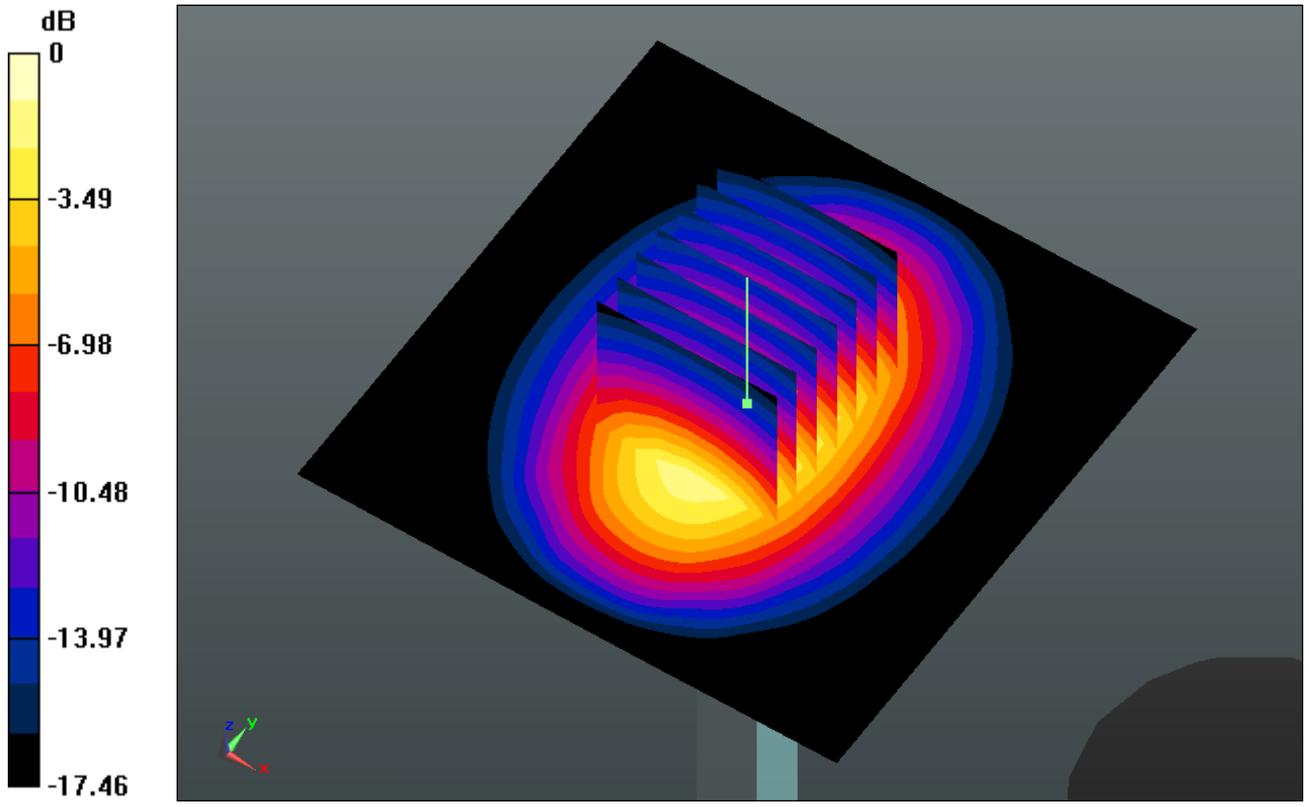

0 dB = 10.960mW/g

System Check_Head_2450MHz_121023

DUT: D2450V2 - SN:736

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450_121023 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ mho/m; $\epsilon_r =$

37.626 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.87, 6.87, 6.87); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 15.606 mW/g



Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 92.167 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 30.213 W/kg

SAR(1 g) = 13.8 mW/g; SAR(10 g) = 6.28 mW/g

Maximum value of SAR (measured) = 15.680 mW/g

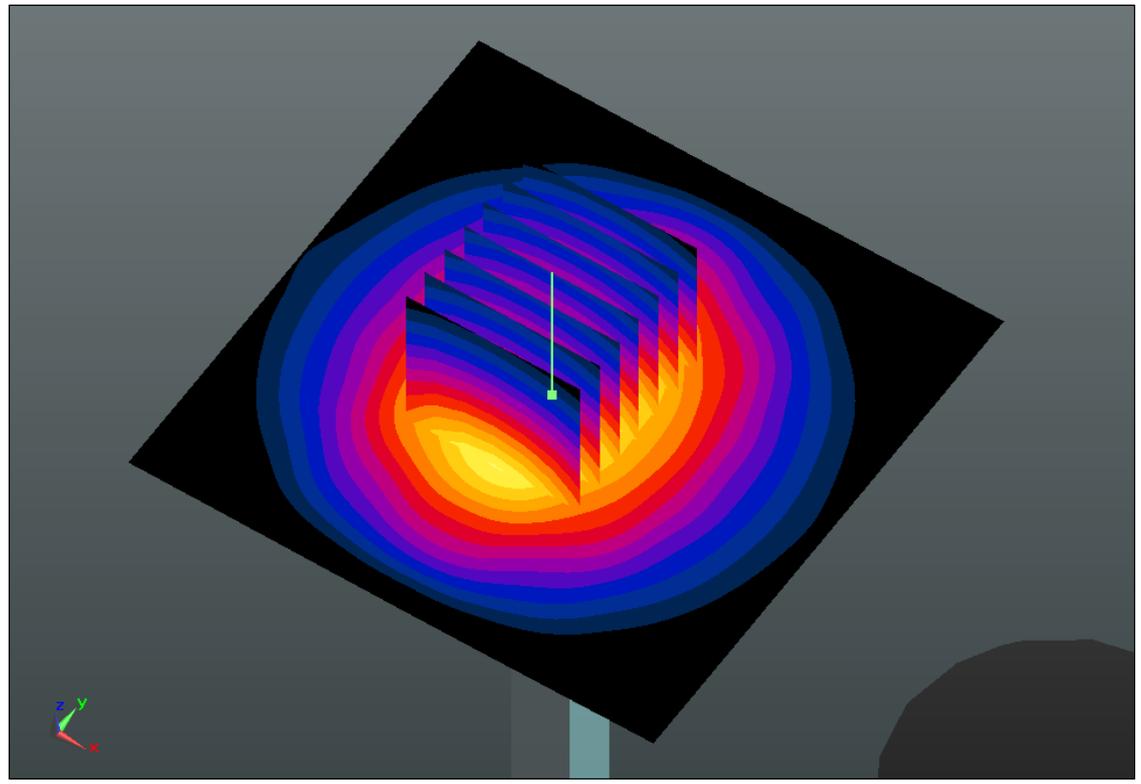

0 dB = 15.680mW/g

System Check_Body_835MHz_121019

DUT: D835V2 - SN:4d091

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_835_121019 Medium parameters used: $f = 835$ MHz; $\sigma = 1.007$ mho/m; $\epsilon_r = 57.654$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.747 mW/g


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.438 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 3.736 W/kg

SAR(1 g) = 2.51 mW/g; SAR(10 g) = 1.71 mW/g

Maximum value of SAR (measured) = 2.780 mW/g

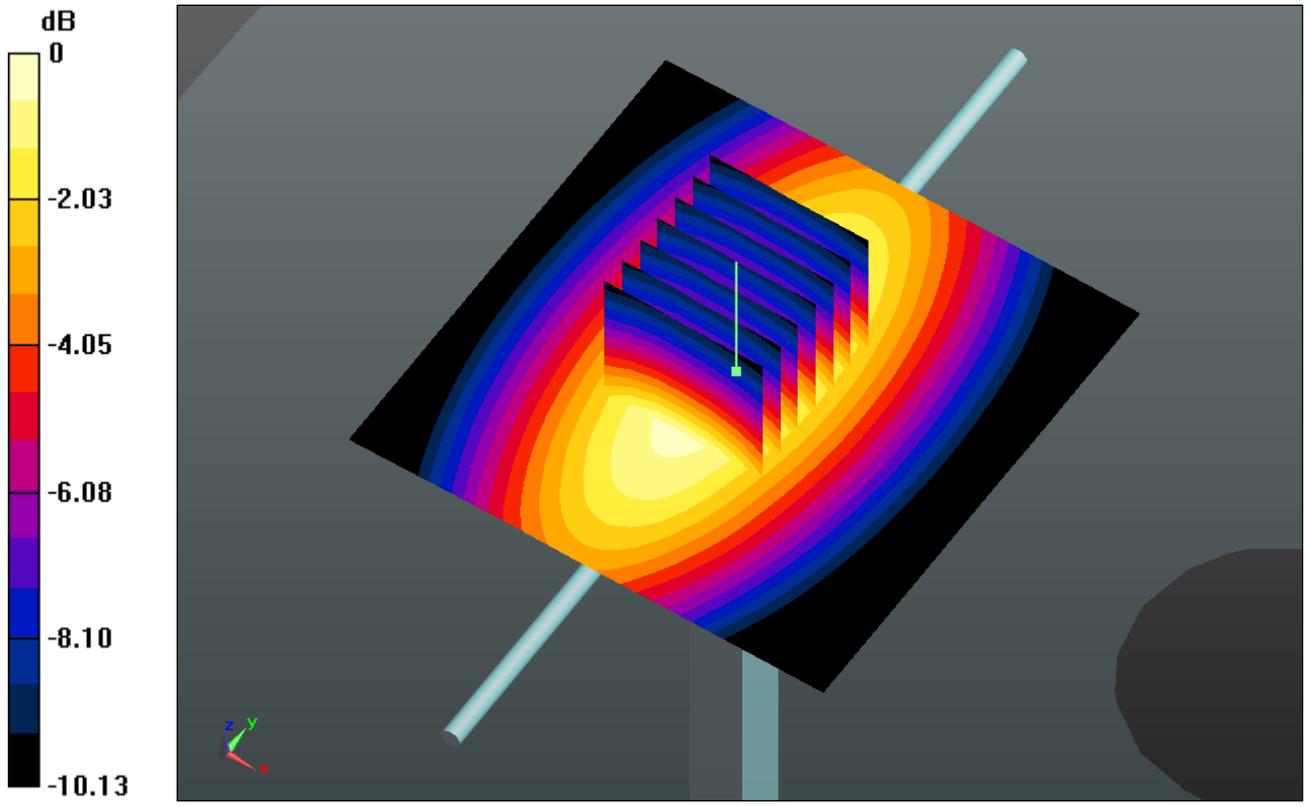

0 dB = 2.780mW/g

System Check_Body_1900MHz_121018

DUT: D1900V2 - SN:5d118

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121018 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.547$ mho/m; $\epsilon_r =$

53.803 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.699 mW/g



Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.604 V/m; Power Drift = 0.0052 dB

Peak SAR (extrapolated) = 18.800 W/kg

SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.26 mW/g

Maximum value of SAR (measured) = 11.531 mW/g

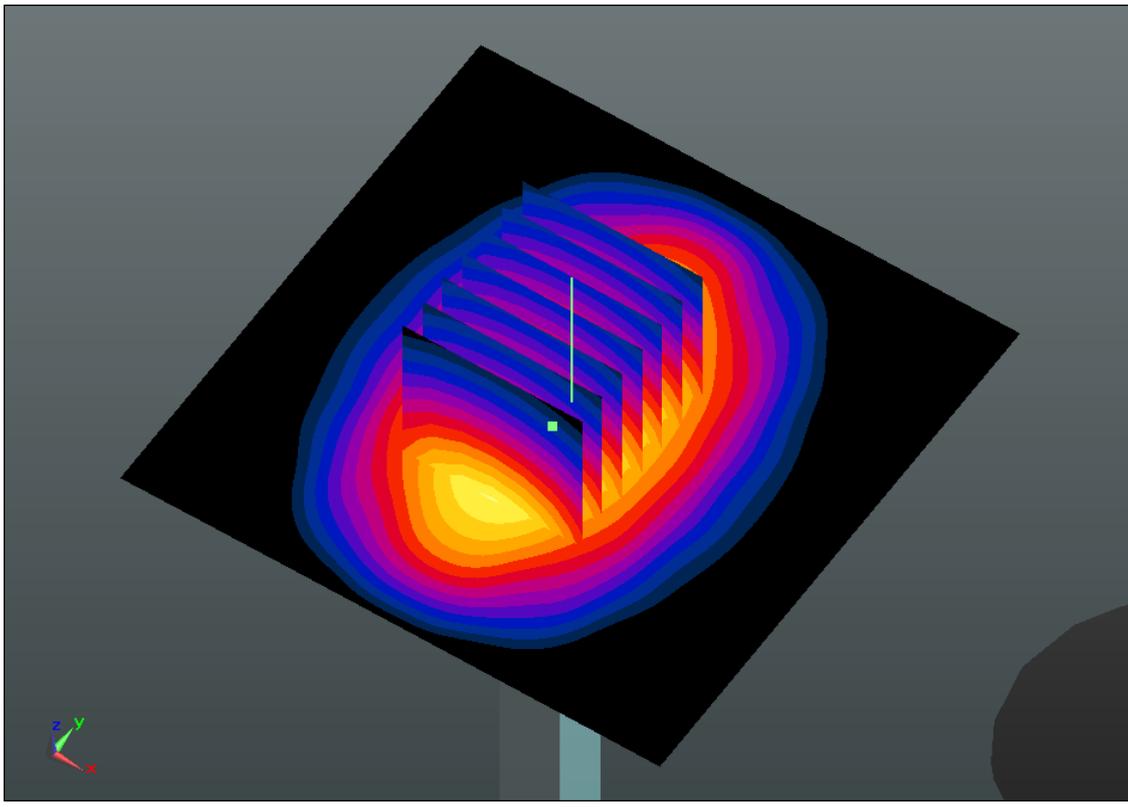

0 dB = 11.530mW/g

System Check_Body_2450MHz_121023

DUT: D2450V2 - SN:736

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121023 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.976$ mho/m; $\epsilon_r =$

54.13; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 14.497 mW/g


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.909 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 26.638 W/kg

SAR(1 g) = 12.6 mW/g; SAR(10 g) = 5.75 mW/g

Maximum value of SAR (measured) = 14.431 mW/g

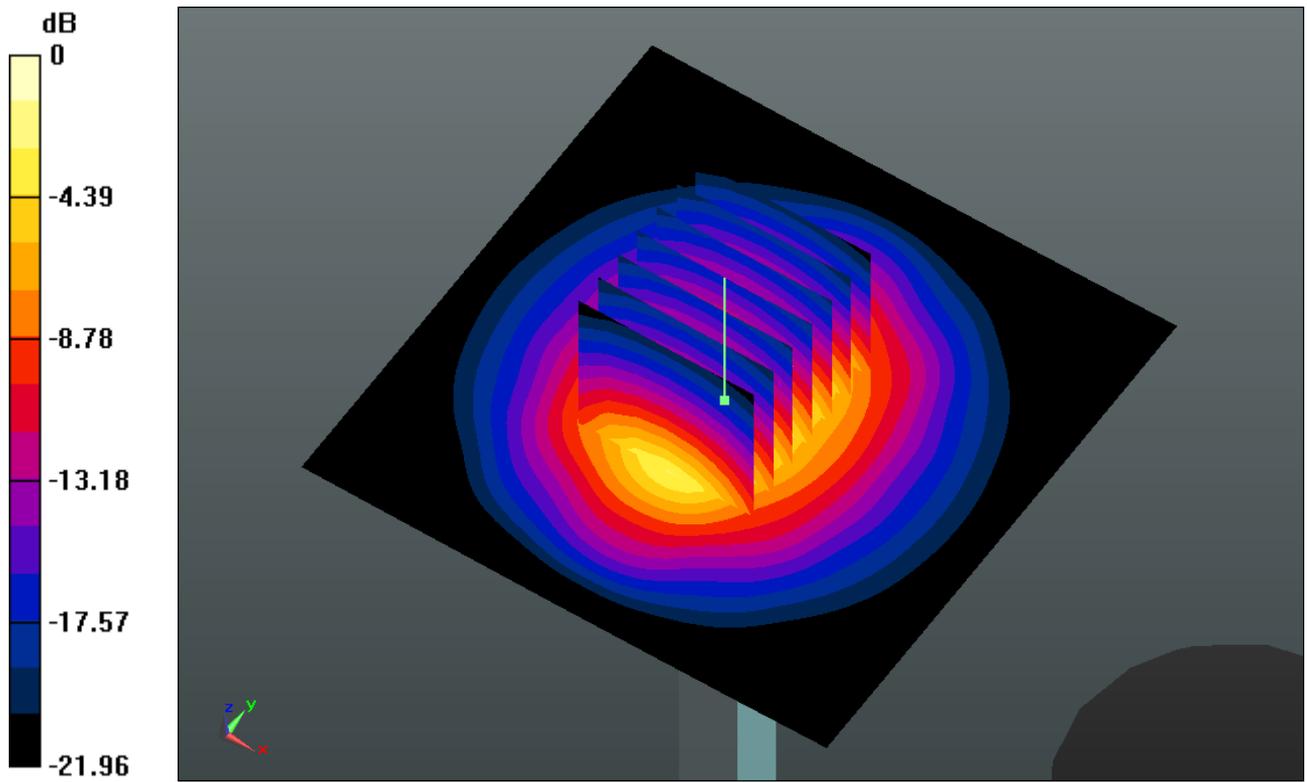

0 dB = 14.430mW/g



Appendix B. Plots of SAR Measurement

The plots are shown as follows.

#01 GSM850_GSM_Right Cheek_Ch128

DUT: 2O1701

Communication System: General GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_121018 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r =$

41.576; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.449 mW/g



Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.978 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.431 mW/g; SAR(10 g) = 0.325 mW/g

Maximum value of SAR (measured) = 0.449 mW/g

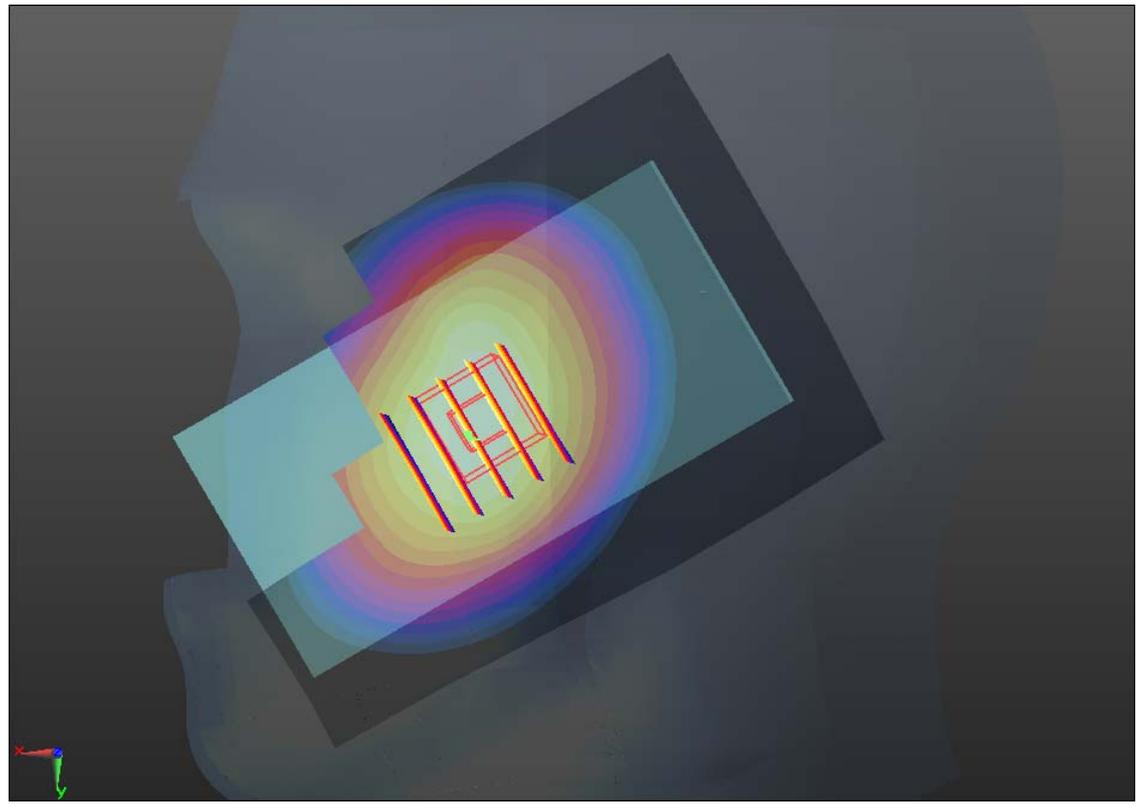

0 dB = 0.450mW/g

#01 GSM850_GSM_Right Cheek_Ch128_2D

DUT: 2O1701

Communication System: General GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_121018 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r =$

41.576; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.449 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 5.978 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.431 mW/g; SAR(10 g) = 0.325 mW/g

Maximum value of SAR (measured) = 0.449 mW/g

1g/10g Averaged SAR

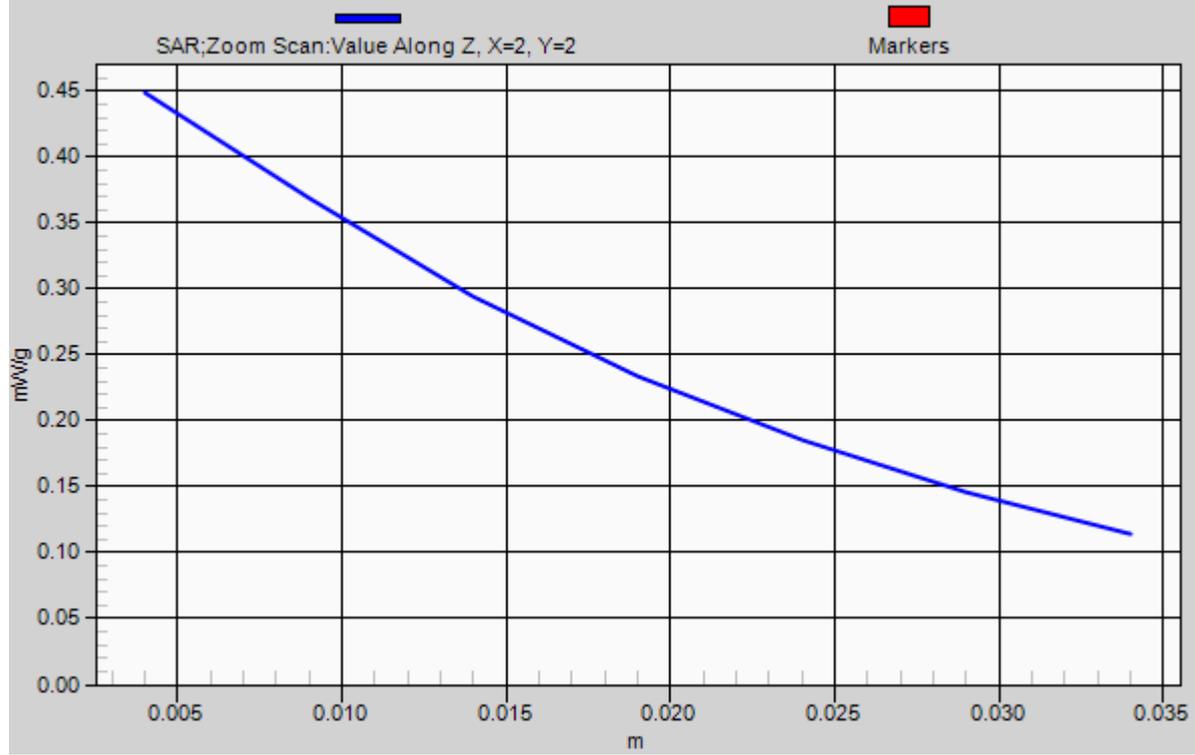

#02 GSM850_GSM_Right Tilted_Ch128

DUT: 2O1701

Communication System: General GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_121018 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r =$

41.576; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.294 mW/g



Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.942 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.332 W/kg

SAR(1 g) = 0.278 mW/g; SAR(10 g) = 0.217 mW/g

Maximum value of SAR (measured) = 0.290 mW/g

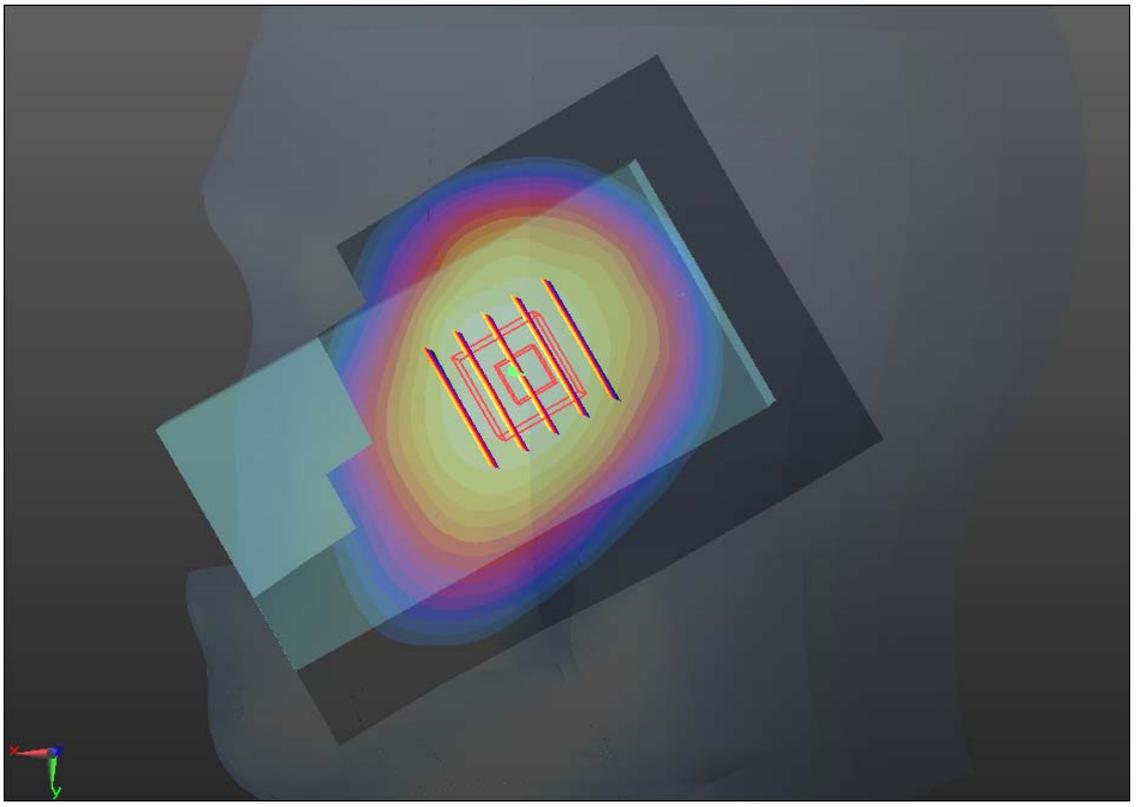

0 dB = 0.290mW/g

#03 GSM850_GSM_Left Cheek_Ch128

DUT: 2O1701

Communication System: General GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_121018 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r =$

41.576; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.425 mW/g



Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.051 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.487 W/kg

SAR(1 g) = 0.402 mW/g; SAR(10 g) = 0.303 mW/g

Maximum value of SAR (measured) = 0.424 mW/g

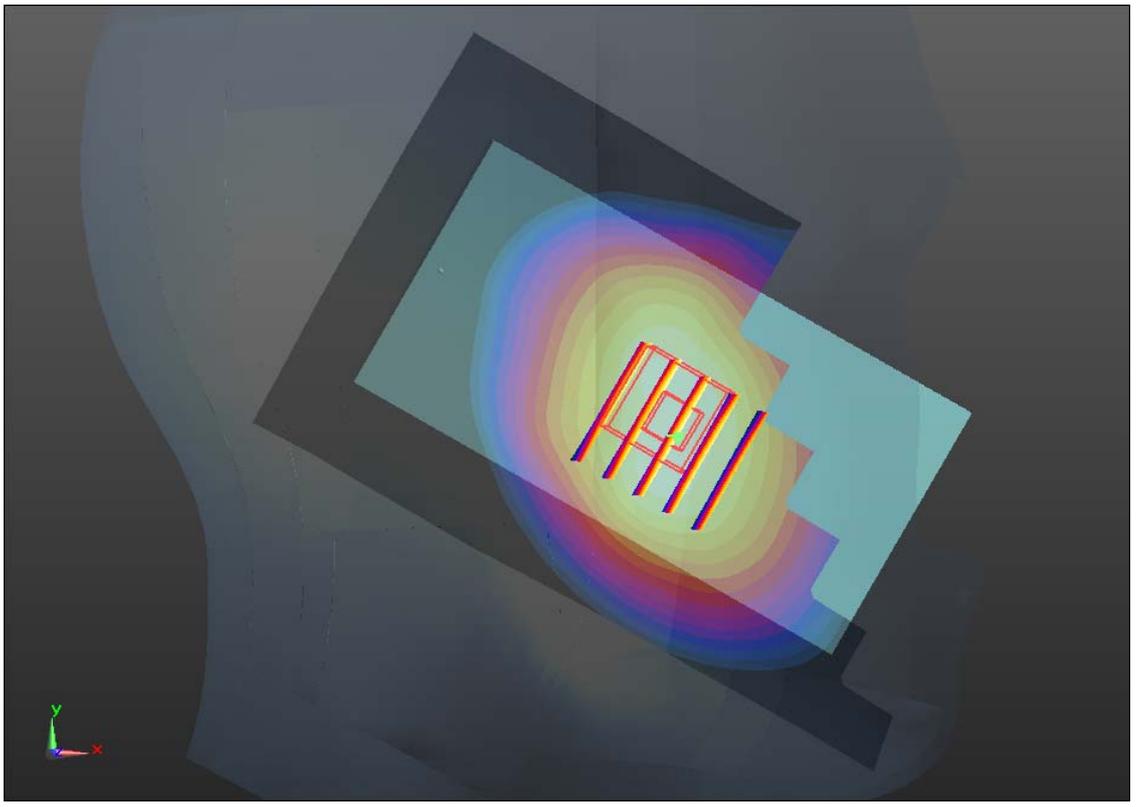

0 dB = 0.420mW/g

#04 GSM850_GSM_Left Tilted_Ch128

DUT: 2O1701



Communication System: General GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
Medium: HSL_835_121018 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 41.576$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.305 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.154 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.337 W/kg
SAR(1 g) = 0.285 mW/g; SAR(10 g) = 0.222 mW/g
Maximum value of SAR (measured) = 0.295 mW/g

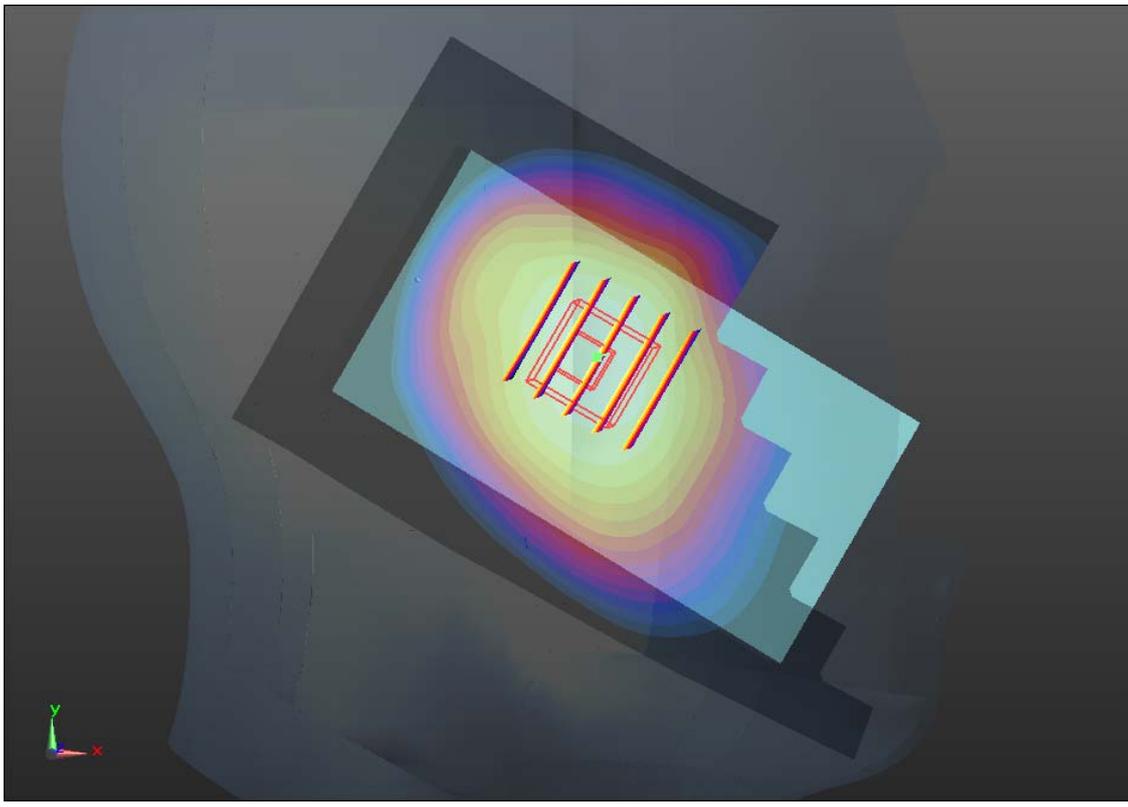

0 dB = 0.300mW/g

#05 GSM1900_GSM_Right Cheek_Ch661

DUT: 2O1701

Communication System: General GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_121019 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ mho/m; $\epsilon_r =$

40.745 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.206 mW/g



Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.988 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.309 W/kg

SAR(1 g) = 0.199 mW/g; SAR(10 g) = 0.117 mW/g

Maximum value of SAR (measured) = 0.219 mW/g

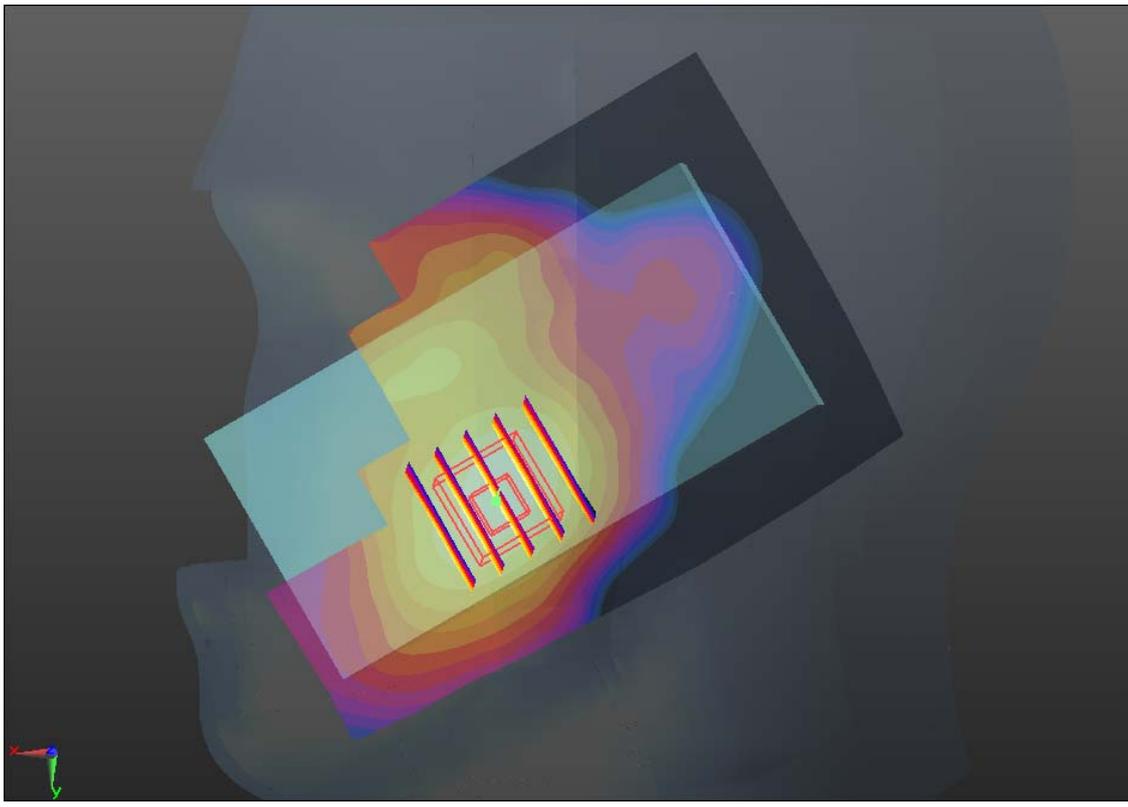

0 dB = 0.220mW/g

#06 GSM1900_GSM_Right Tilted_Ch661

DUT: 2O1701

Communication System: General GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_121019 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ mho/m; $\epsilon_r =$

40.745 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.088 mW/g



Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.934 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.068 mW/g; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.073 mW/g

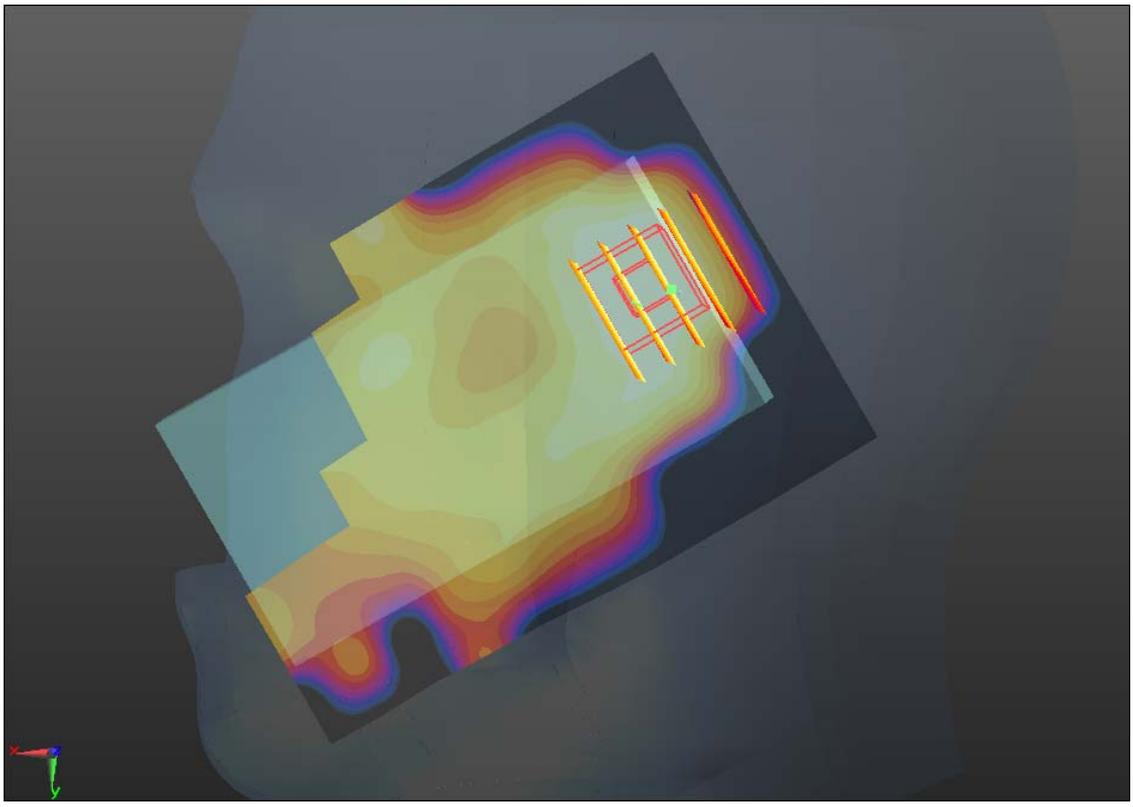

0 dB = 0.070mW/g

#07 GSM1900_GSM_Left Cheek_Ch661

DUT: 2O1701

Communication System: General GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_121019 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ mho/m; $\epsilon_r =$

40.745; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.235 mW/g



Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.514 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.205 mW/g; SAR(10 g) = 0.119 mW/g

Maximum value of SAR (measured) = 0.225 mW/g

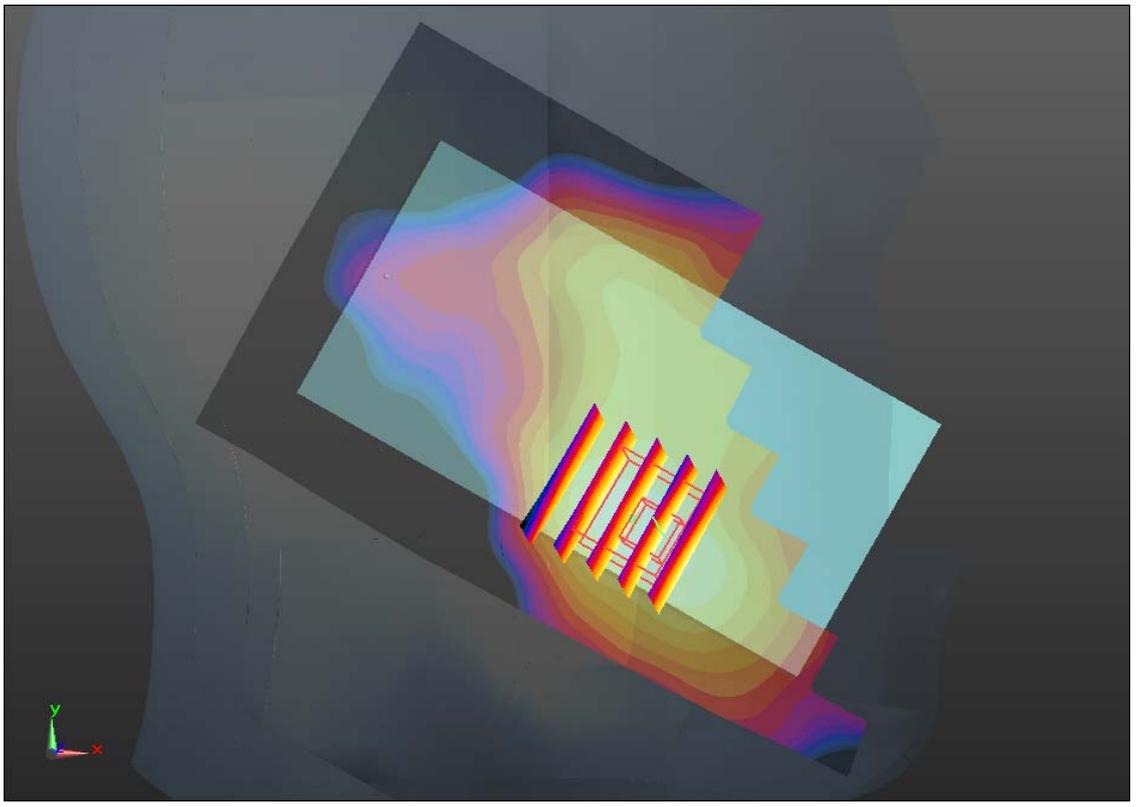

0 dB = 0.230mW/g

#07 GSM1900_GSM_Left Cheek_Ch661_2D

DUT: 2O1701

Communication System: General GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_121019 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ mho/m; $\epsilon_r =$

40.745; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.235 mW/g

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 3.514 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.205 mW/g; SAR(10 g) = 0.119 mW/g

Maximum value of SAR (measured) = 0.225 mW/g

1g/10g Averaged SAR

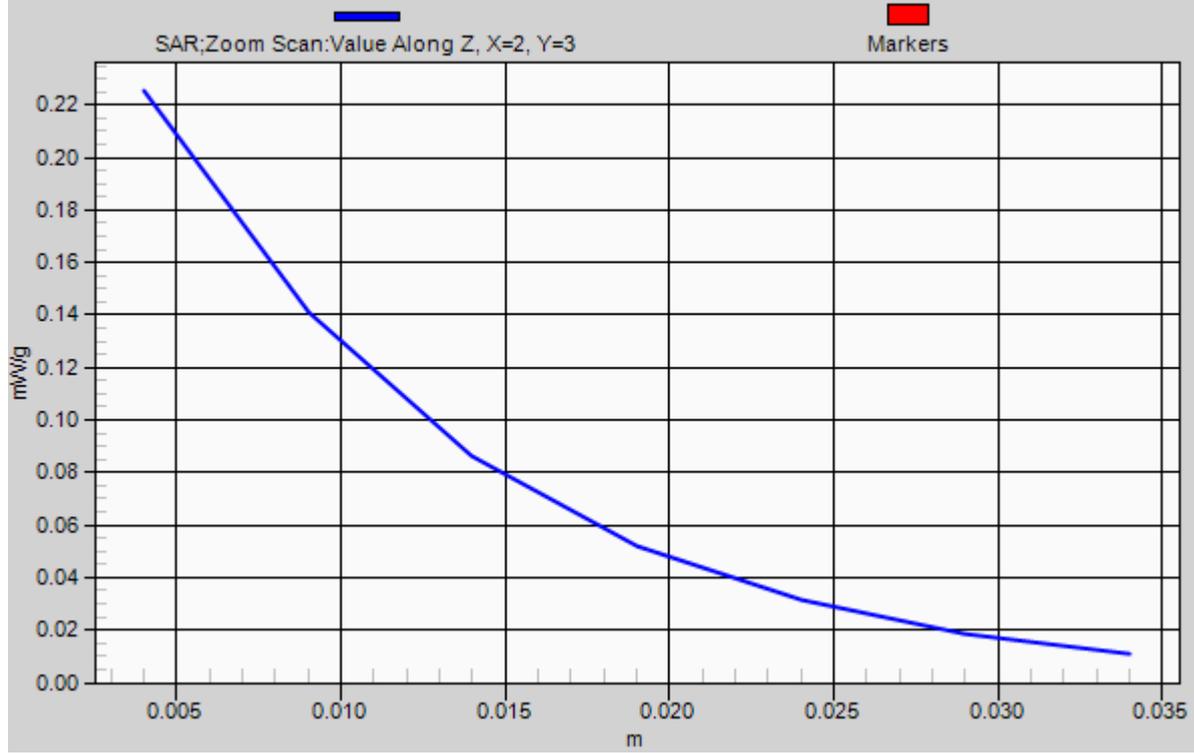

#08 GSM1900_GSM_Left Tilted_Ch661

DUT: 2O1701

Communication System: General GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_121019 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.399$ mho/m; $\epsilon_r =$

40.745 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.079 mW/g



Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.466 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.066 mW/g; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.072 mW/g

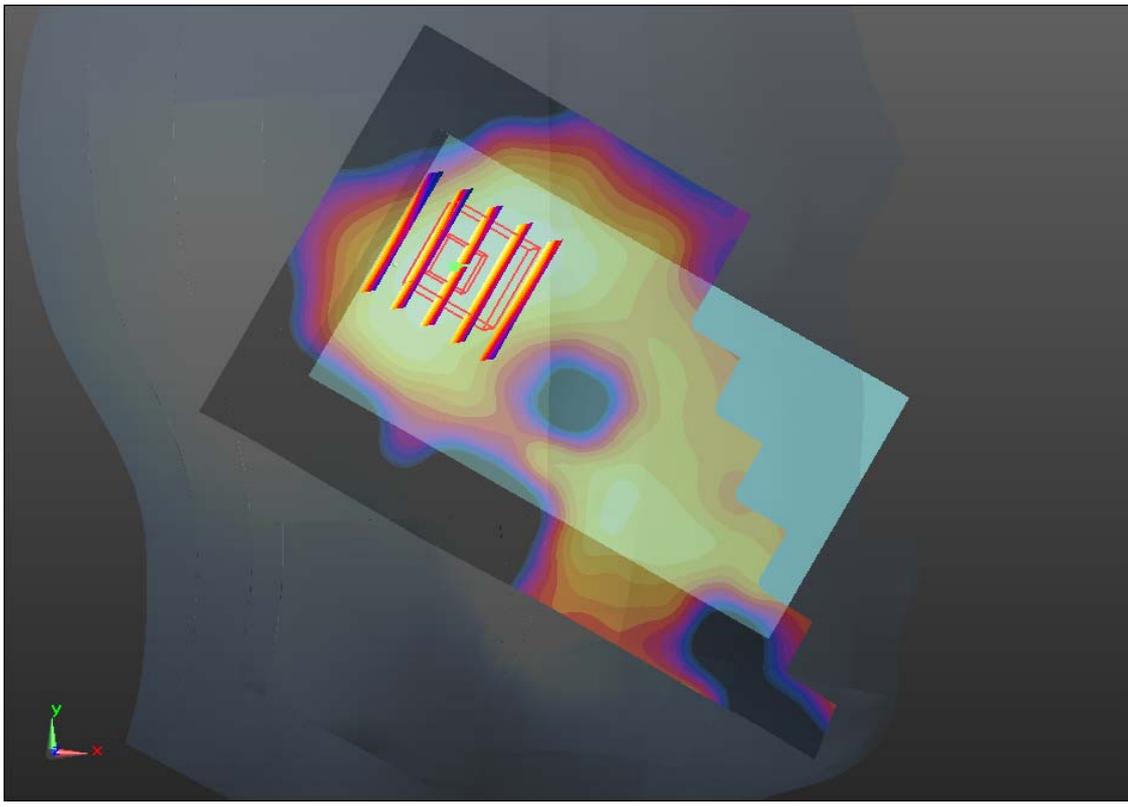

0 dB = 0.070mW/g

#09 WCDMA Band V_RMC12.2K_Right Cheek_Ch4182

DUT: 2O1701

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_121018 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.927$ mho/m; $\epsilon_r =$

41.438; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18

- Phantom: SAM1; Type: SAM; Serial: TP-1479

- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.412 mW/g



Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.205 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.395 mW/g; SAR(10 g) = 0.296 mW/g

Maximum value of SAR (measured) = 0.409 mW/g

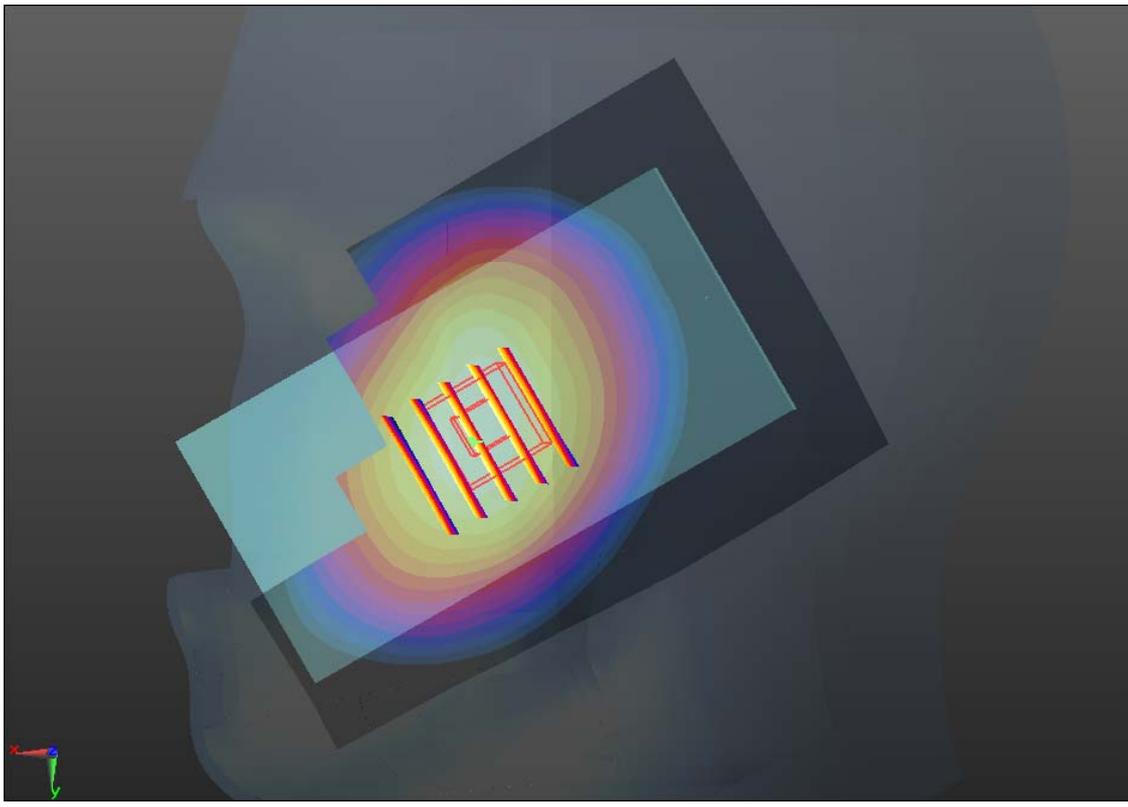

0 dB = 0.410mW/g

#09 WCDMA Band V_RMC12.2K_Right Cheek_Ch4182_2D

DUT: 2O1701

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_121018 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.927$ mho/m; $\epsilon_r =$

41.438; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.412 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 6.205 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.395 mW/g; SAR(10 g) = 0.296 mW/g

Maximum value of SAR (measured) = 0.409 mW/g

1g/10g Averaged SAR

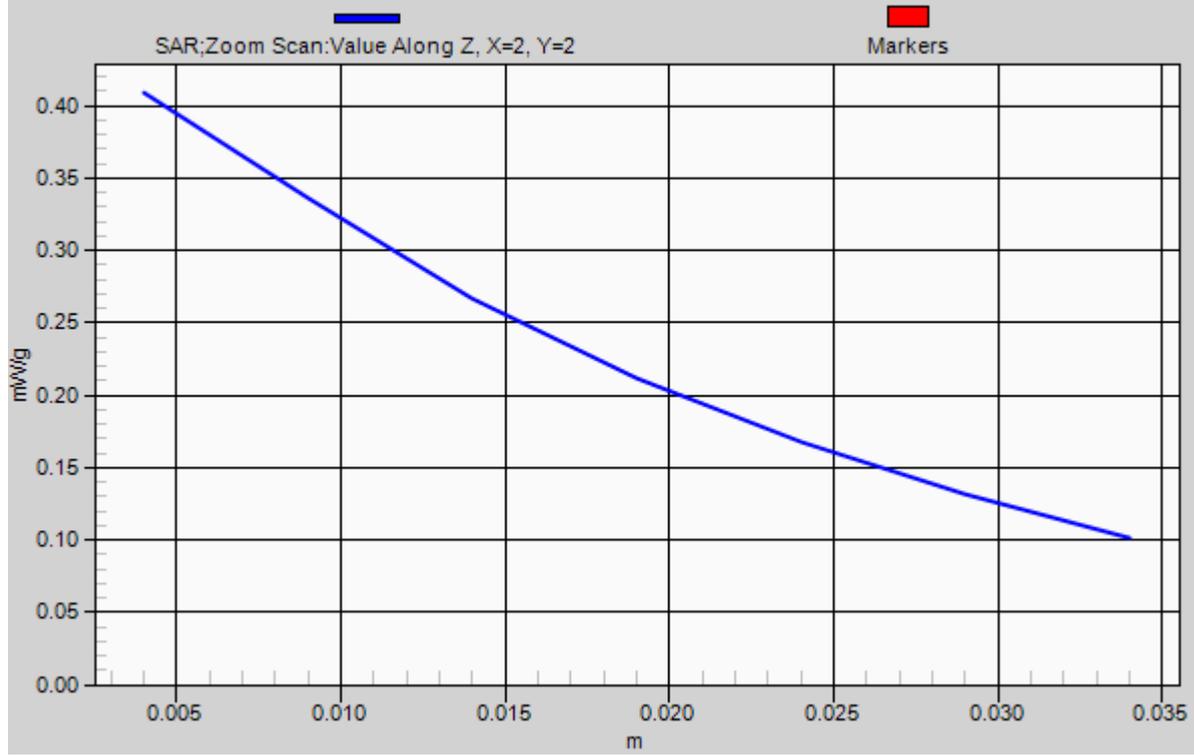

#10 WCDMA Band V_RMC12.2K_Right Tilted_Ch4182

DUT: 2O1701

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_121018 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.927$ mho/m; $\epsilon_r =$

41.438; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.271 mW/g



Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.728 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.304 W/kg

SAR(1 g) = 0.257 mW/g; SAR(10 g) = 0.199 mW/g

Maximum value of SAR (measured) = 0.269 mW/g

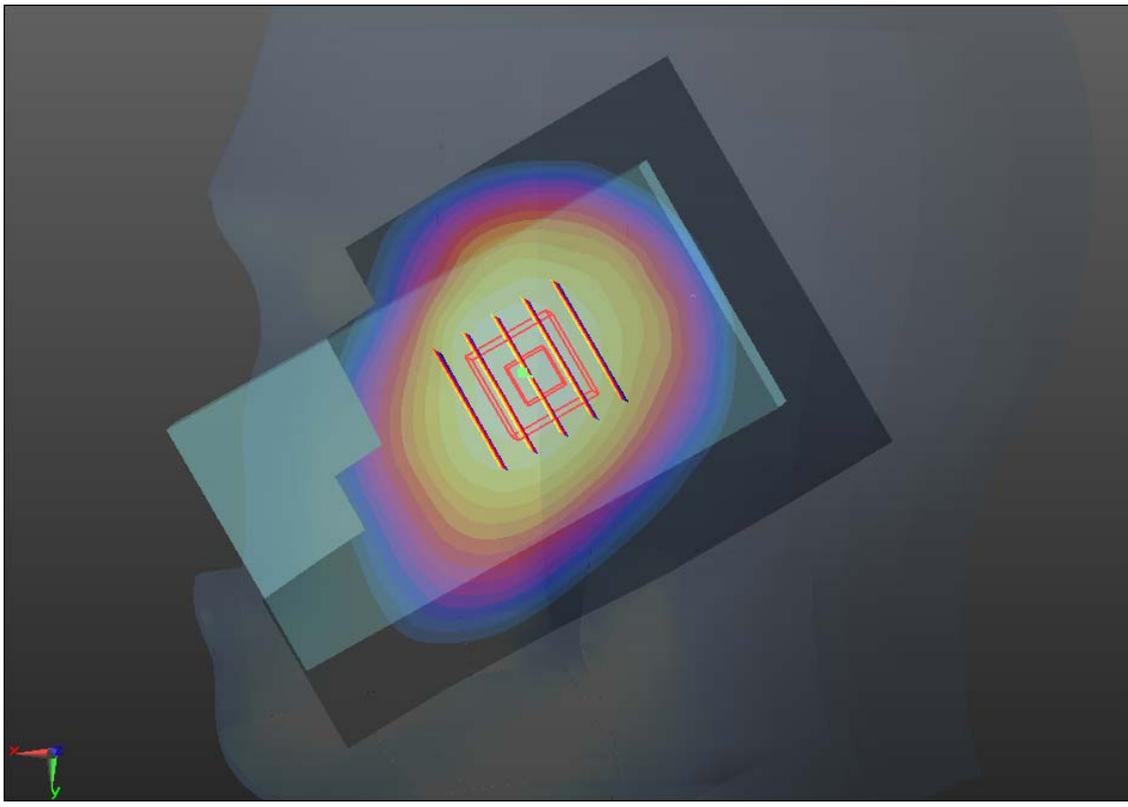

0 dB = 0.270mW/g

#11 WCDMA Band V_RMC12.2K_Left Cheek_Ch4182

DUT: 2O1701

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_121018 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.927$ mho/m; $\epsilon_r =$

41.438; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.377 mW/g



Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.631 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.436 W/kg

SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.271 mW/g

Maximum value of SAR (measured) = 0.382 mW/g

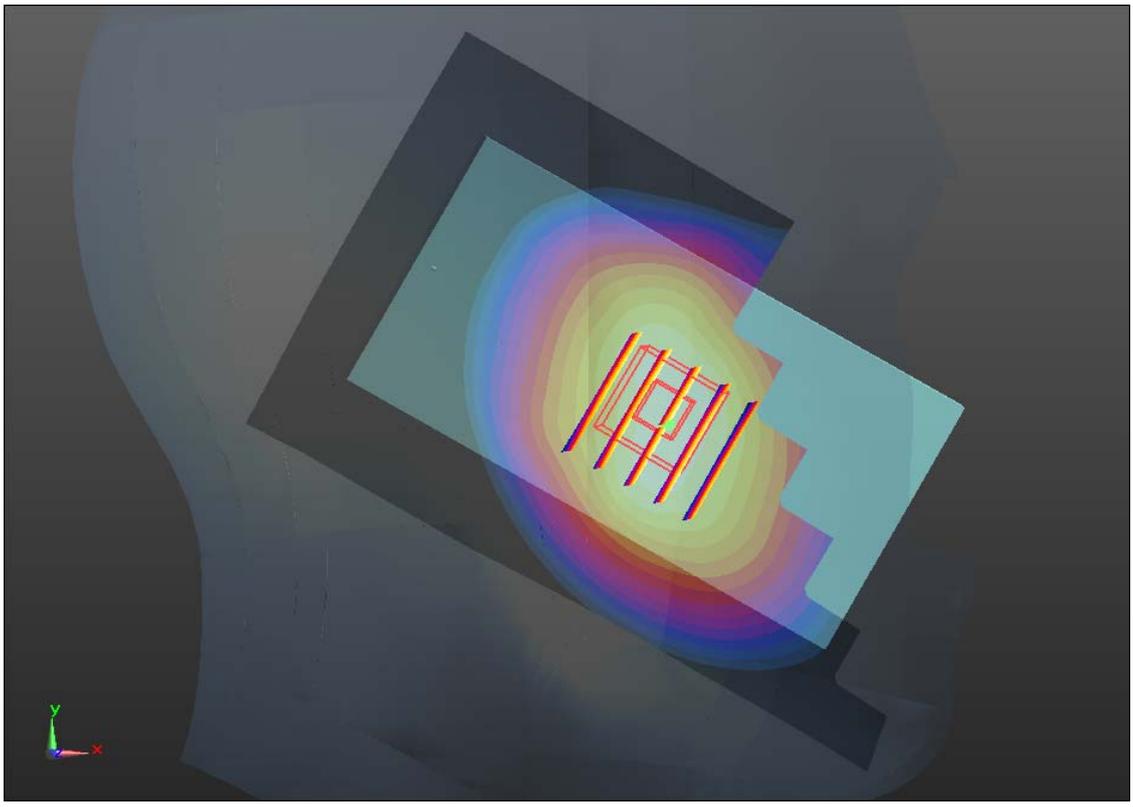

0 dB = 0.380mW/g

#12 WCDMA Band V_RMC12.2K_Left Tilted_Ch4182

DUT: 2O1701

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_121018 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.927$ mho/m; $\epsilon_r =$

41.438; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.274 mW/g



Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.823 V/m; Power Drift = 0.0018 dB

Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.259 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.270 mW/g

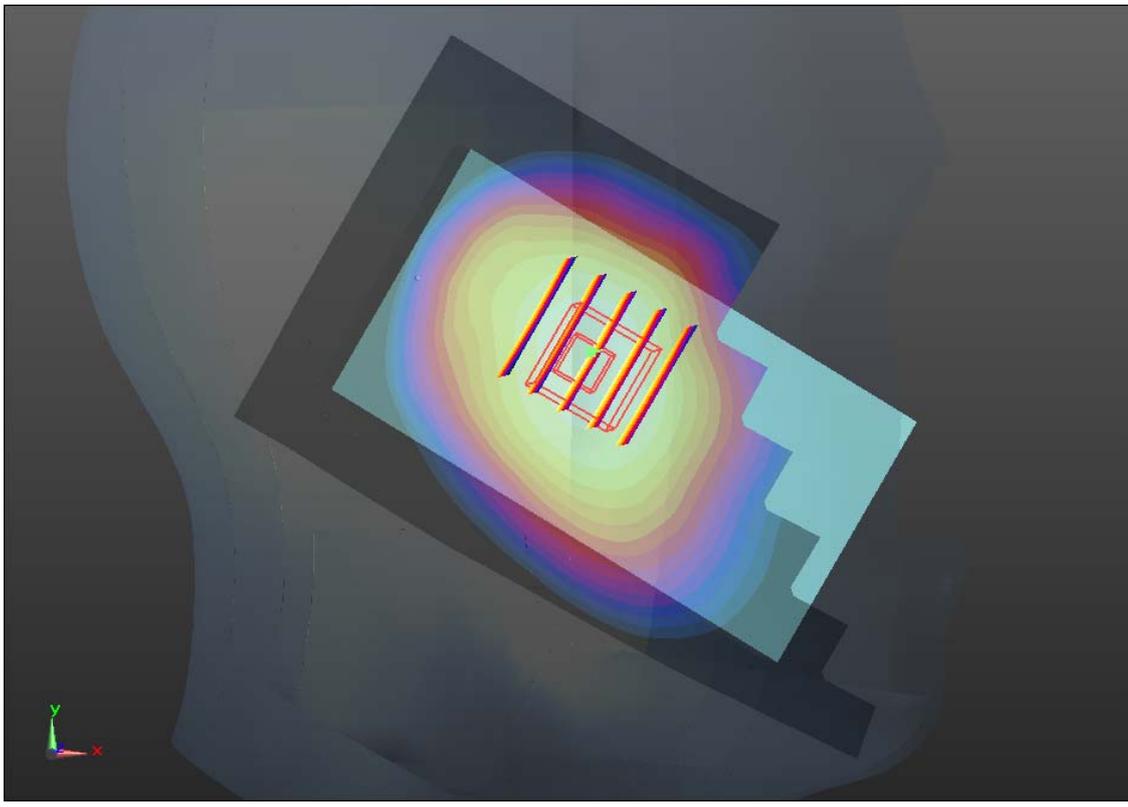

0 dB = 0.270mW/g

#13 WCDMA Band II_RMC12.2K_Right Cheek_Ch9262

DUT: 2O1701

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_121019 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.364$ mho/m; $\epsilon_r =$

40.803 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.361 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.239 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.346 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.377 mW/g

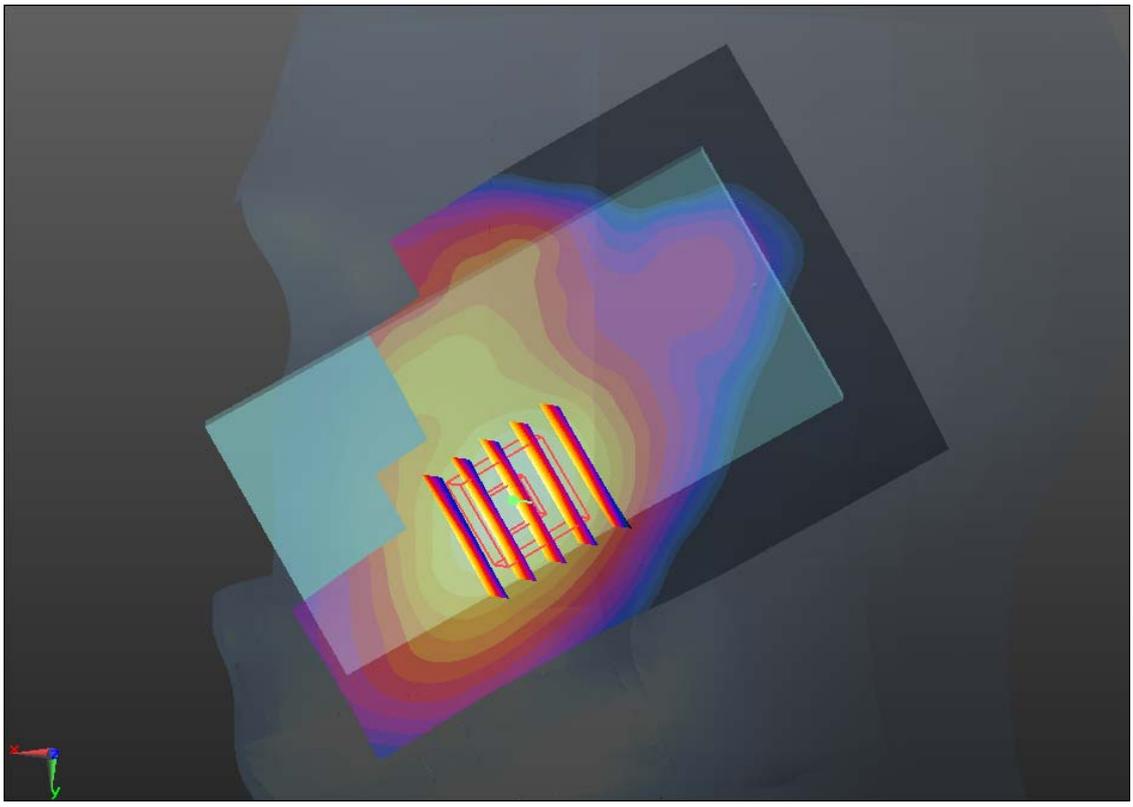

0 dB = 0.380mW/g

#13 WCDMA Band II_RMC12.2K_Right Cheek_Ch9262_2D

DUT: 2O1701

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_121019 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.364$ mho/m; $\epsilon_r =$

40.803 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.361 mW/g

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 5.239 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.538 W/kg

SAR(1 g) = 0.346 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.377 mW/g

1g/10g Averaged SAR

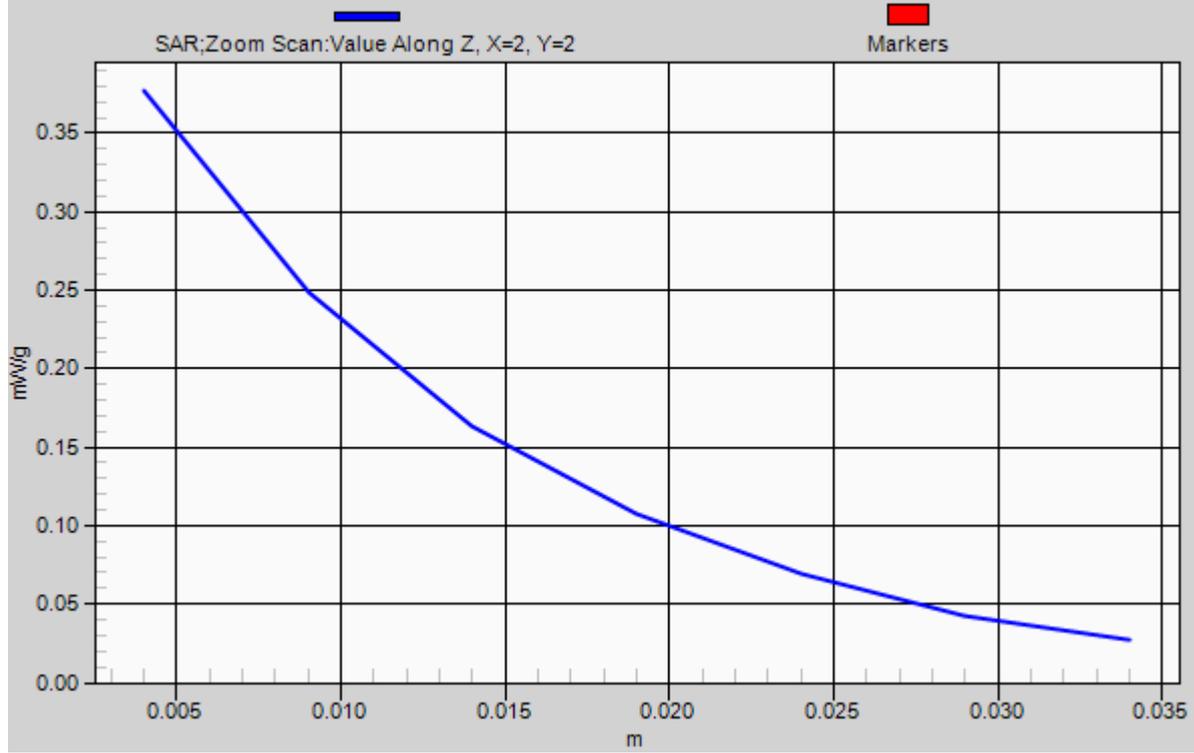

#14 WCDMA Band II_RMC12.2K_Right Tilted_Ch9262

DUT: 2O1701

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_121019 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.364$ mho/m; $\epsilon_r =$

40.803 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.136 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.431 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.071 mW/g

Maximum value of SAR (measured) = 0.130 mW/g

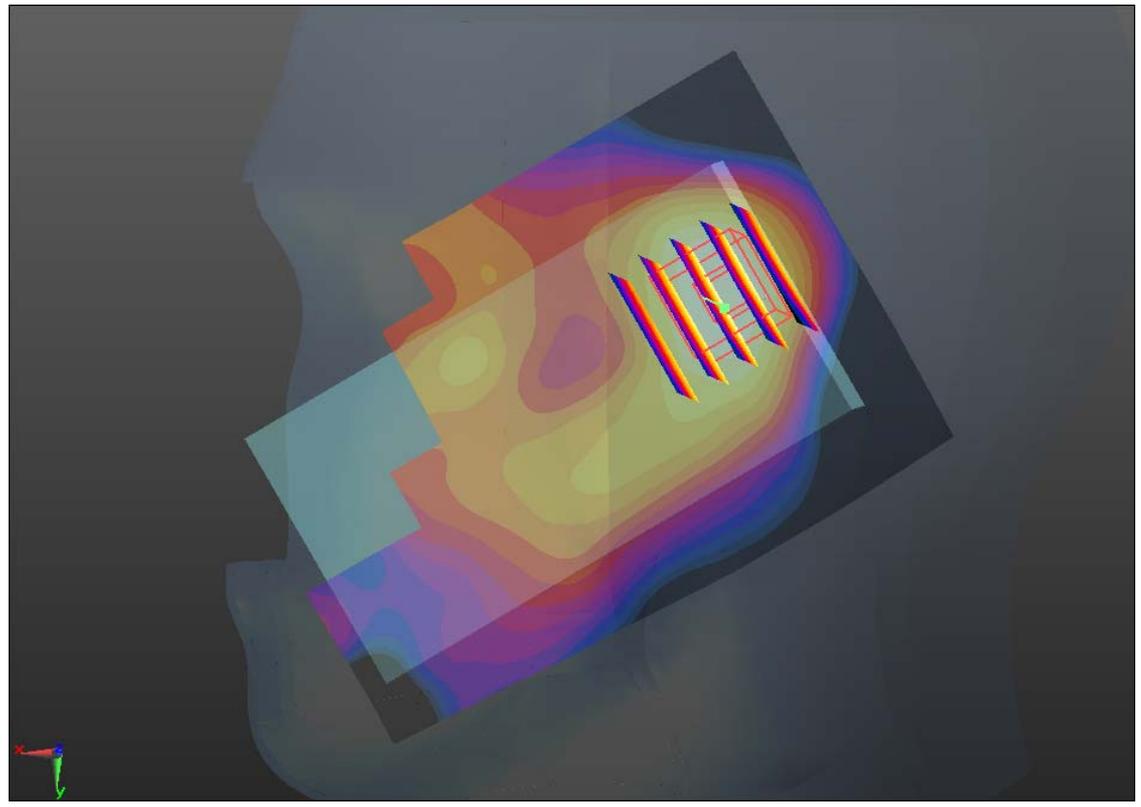

0 dB = 0.130mW/g

#15 WCDMA Band II_RMC12.2K_Left Cheek_Ch9262

DUT: 2O1701

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_121019 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.364$ mho/m; $\epsilon_r =$

40.803 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.365 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.757 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.521 W/kg

SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.191 mW/g

Maximum value of SAR (measured) = 0.364 mW/g

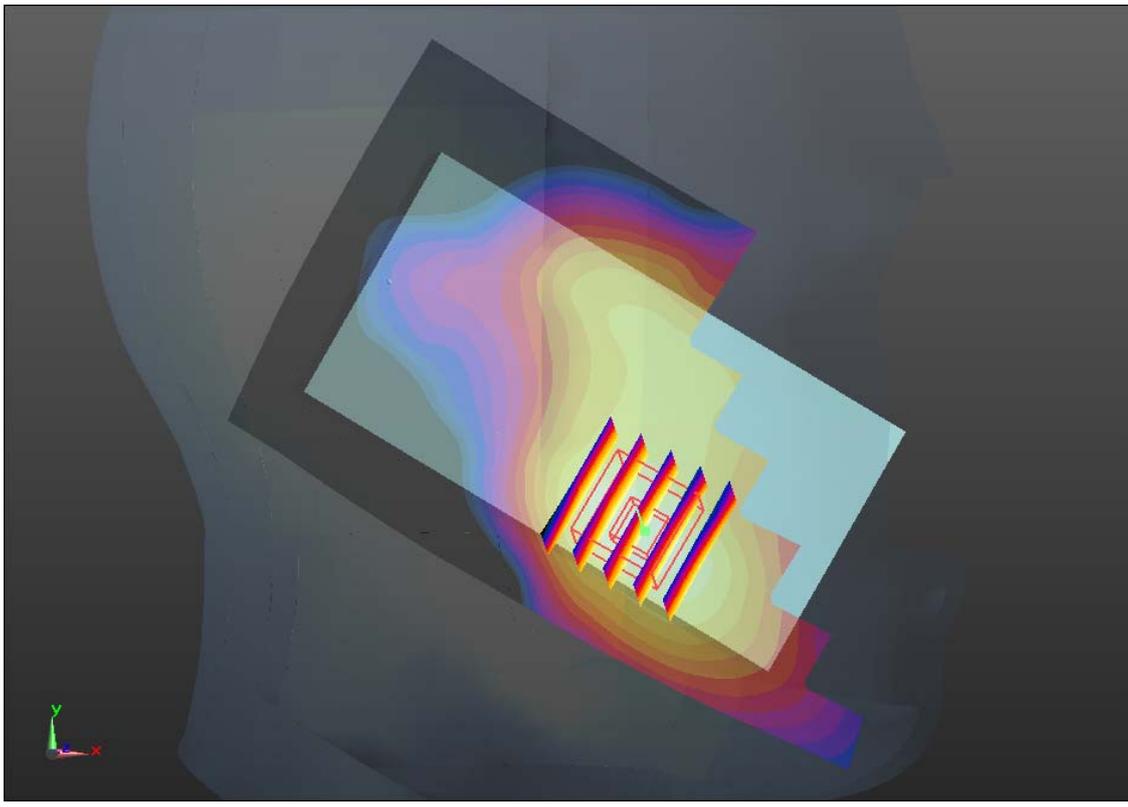

0 dB = 0.360mW/g

#16 WCDMA Band II_RMC12.2K_Left Tilted_Ch9262

DUT: 2O1701

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_121019 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.364$ mho/m; $\epsilon_r =$

40.803 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.84, 7.84, 7.84); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.143 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.027 V/m; Power Drift = 0.0047 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.072 mW/g

Maximum value of SAR (measured) = 0.130 mW/g

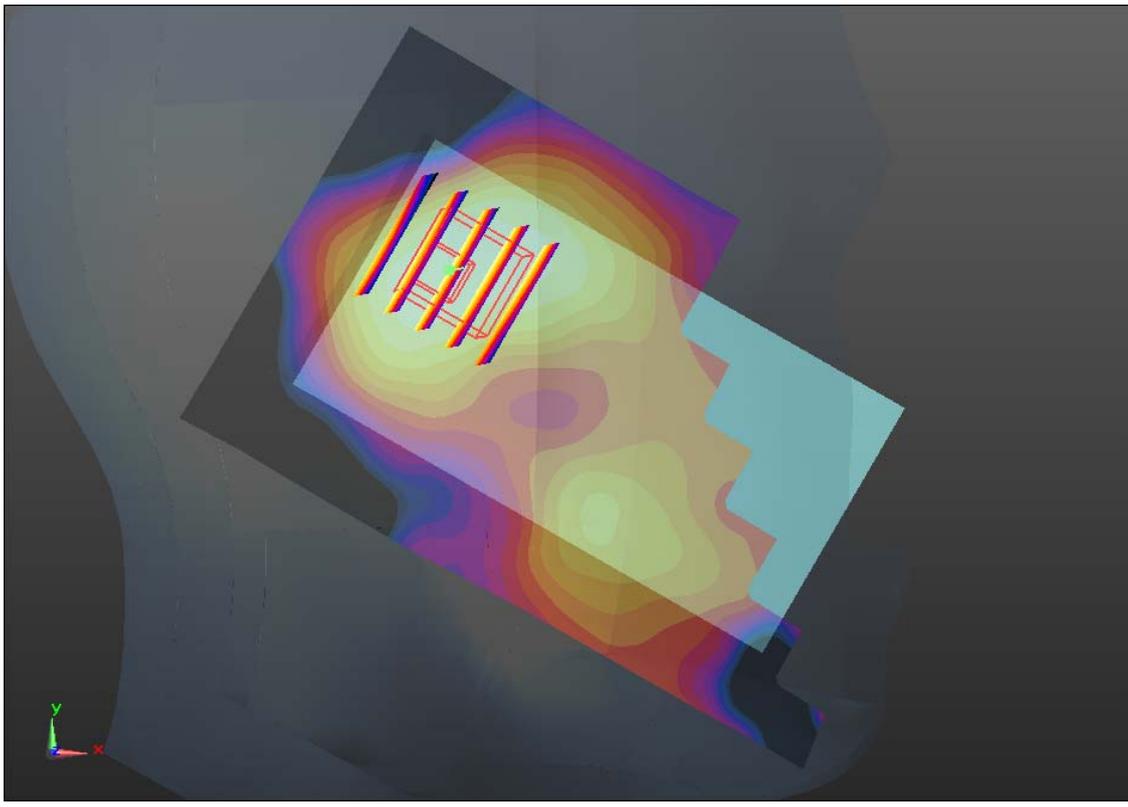

0 dB = 0.130mW/g

#17 802.11b_Right Cheek_1M_Ch11

DUT: 2O1701

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_121023 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.824$ mho/m; $\epsilon_r =$

37.585 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.87, 6.87, 6.87); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.200 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.708 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.305 W/kg

SAR(1 g) = 0.166 mW/g; SAR(10 g) = 0.088 mW/g

Maximum value of SAR (measured) = 0.183 mW/g

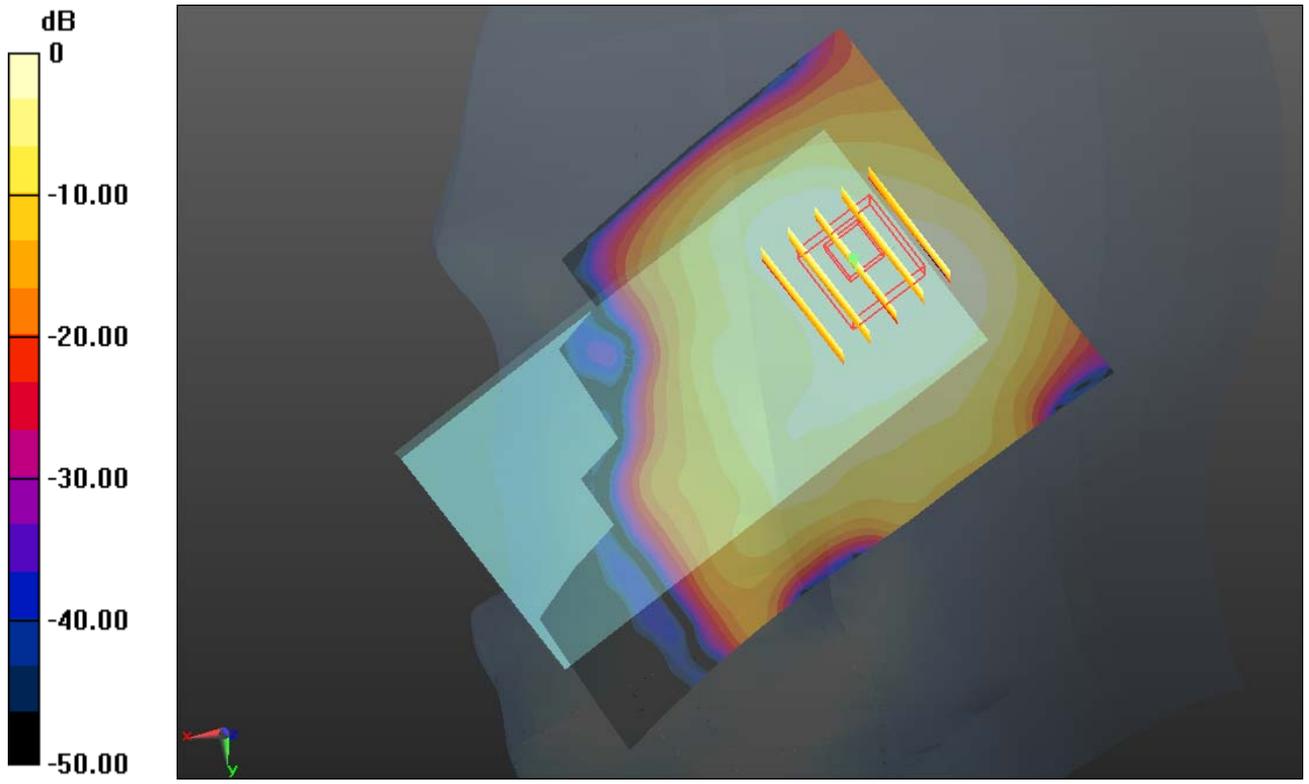

0 dB = 0.180mW/g

#18 802.11b_Right Tilted_1M_Ch11

DUT: 2O1701

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_121023 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.824$ mho/m; $\epsilon_r =$

37.585 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.87, 6.87, 6.87); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.174 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.507 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.288 W/kg

SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.079 mW/g

Maximum value of SAR (measured) = 0.174 mW/g

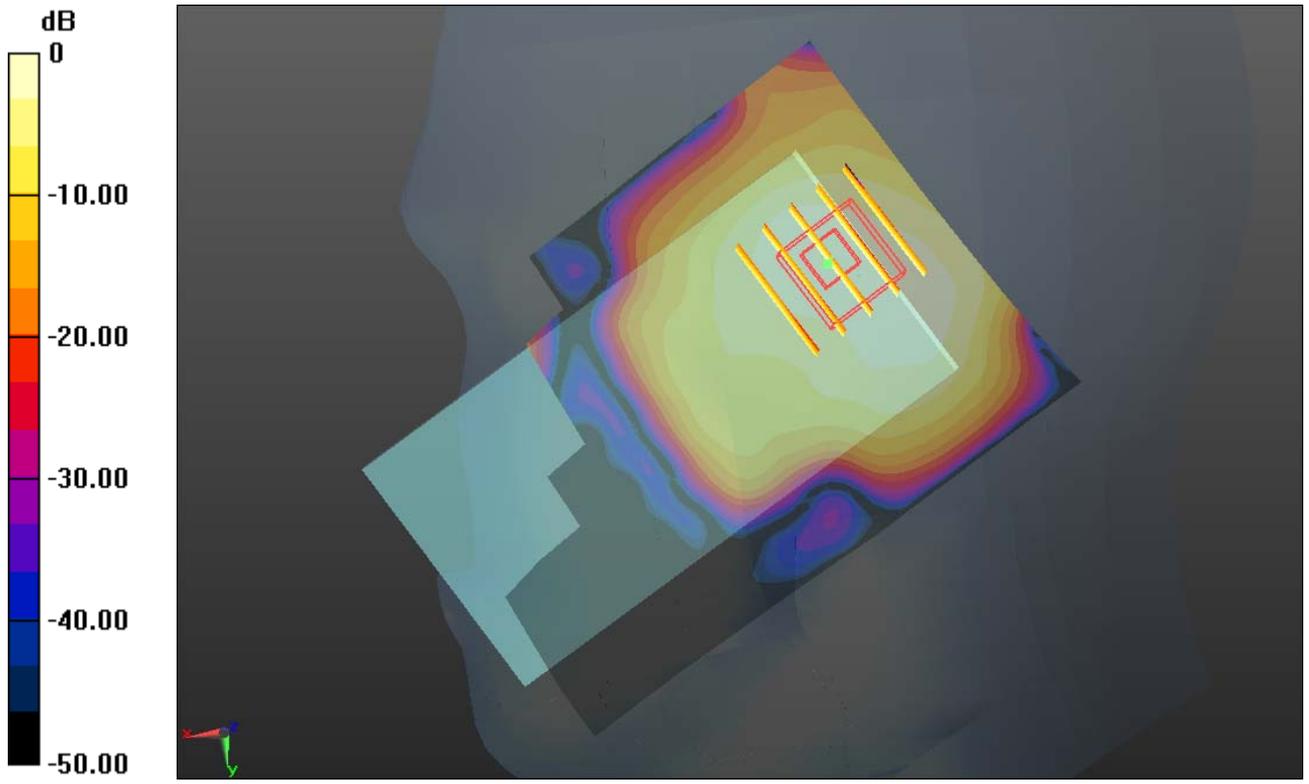

0 dB = 0.170mW/g

#19 802.11b_Left Cheek_1M_Ch11

DUT: 2O1701

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_121023 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.824$ mho/m; $\epsilon_r =$

37.585 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.87, 6.87, 6.87); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.241 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.284 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.577 W/kg

SAR(1 g) = 0.244 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.279 mW/g

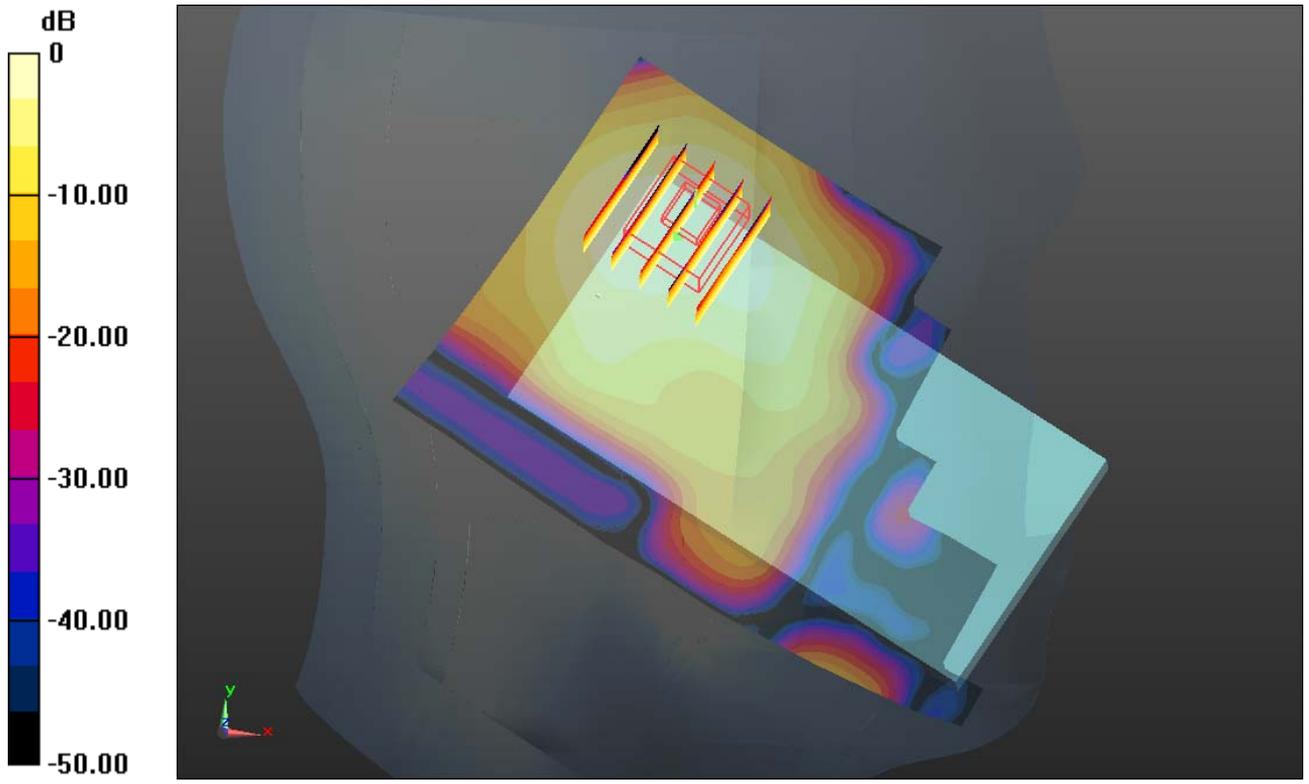

0 dB = 0.280mW/g

#19 802.11b_Left Cheek_1M_Ch11_2D

DUT: 2O1701

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_121023 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.824$ mho/m; $\epsilon_r =$

37.585 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.87, 6.87, 6.87); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.241 mW/g

Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.284 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.577 W/kg

SAR(1 g) = 0.244 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.279 mW/g

1g/10g Averaged SAR

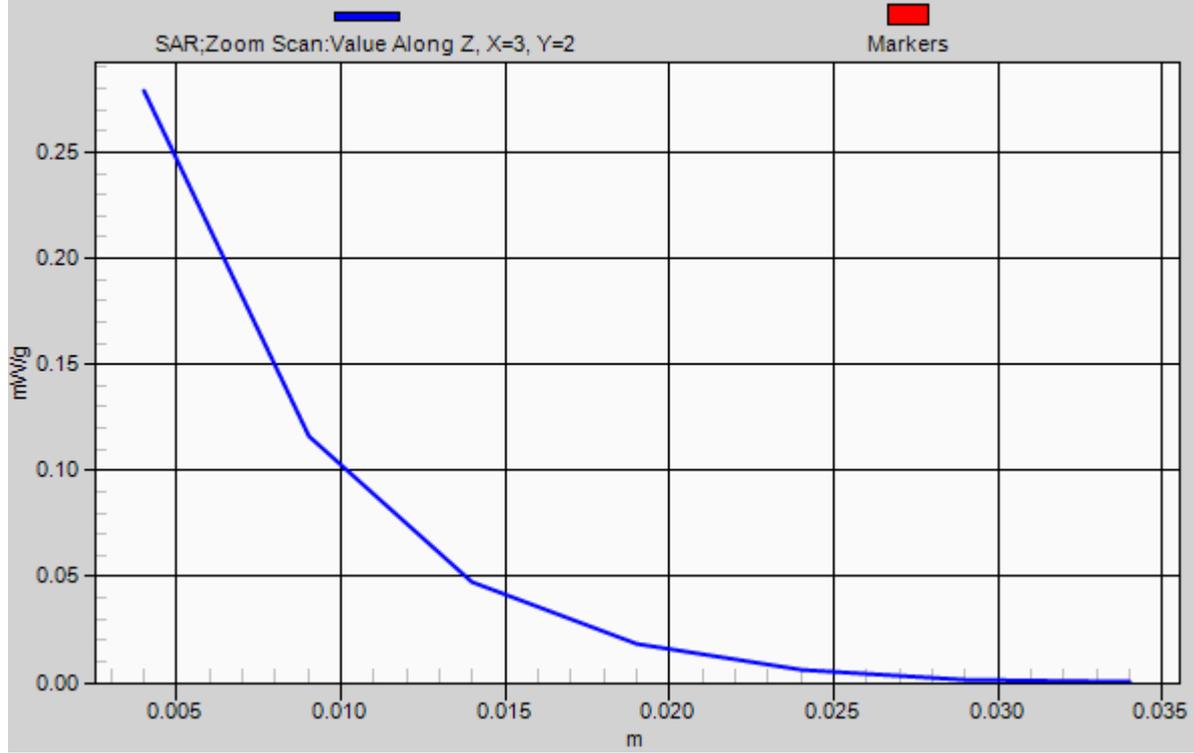

#20 802.11b_Left Tilted_1M_Ch11

DUT: 2O1701

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_121023 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.824$ mho/m; $\epsilon_r =$

37.585 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.87, 6.87, 6.87); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.201 mW/g



Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.208 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.385 W/kg

SAR(1 g) = 0.171 mW/g; SAR(10 g) = 0.083 mW/g

Maximum value of SAR (measured) = 0.185 mW/g

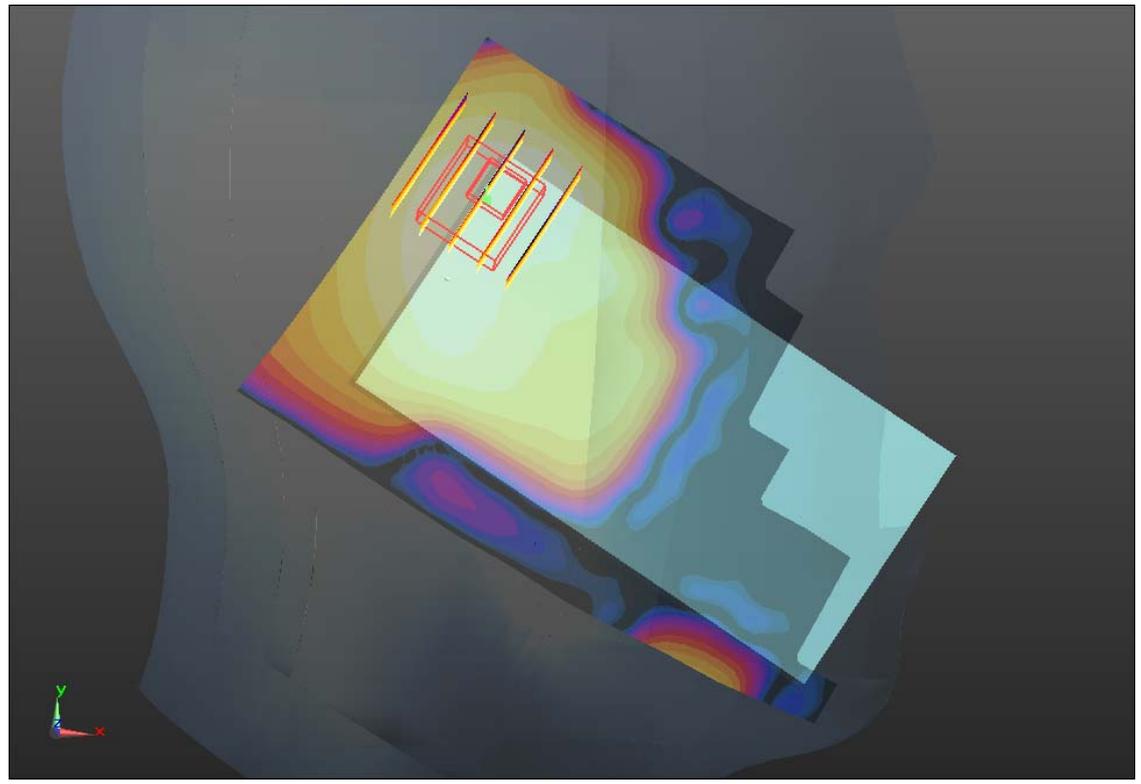

0 dB = 0.180mW/g

#21 GSM850_GPRS (4 Tx slots)_Front_1cm_Ch128

DUT: 2O1701



Communication System: GPRS/EDGE (4 Tx slots); Frequency: 824.2 MHz; Duty Cycle: 1:2
Medium: MSL_835_121019 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 57.735$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.979 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 30.728 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.137 W/kg
SAR(1 g) = 0.931 mW/g; SAR(10 g) = 0.719 mW/g
Maximum value of SAR (measured) = 0.975 mW/g

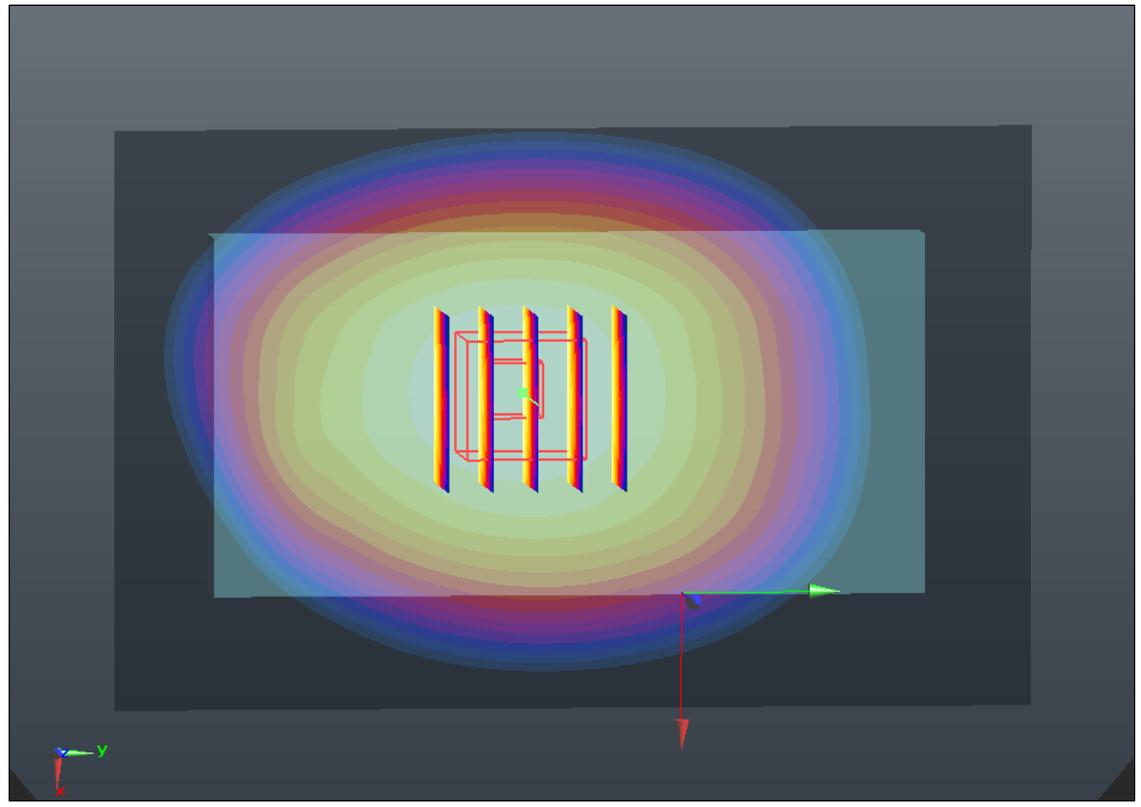

0 dB = 0.970mW/g

#22 GSM850_GPRS (4 Tx slots)_Back_1cm_Ch128

DUT: 2O1701

Communication System: GPRS/EDGE (4 Tx slots); Frequency: 824.2 MHz; Duty Cycle: 1:2
Medium: MSL_835_121019 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 57.735$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.6 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.306 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 35.756 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.520 W/kg
SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.942 mW/g
Maximum value of SAR (measured) = 1.301 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 35.756 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.324 W/kg
SAR(1 g) = 0.971 mW/g; SAR(10 g) = 0.674 mW/g
Maximum value of SAR (measured) = 1.109 mW/g

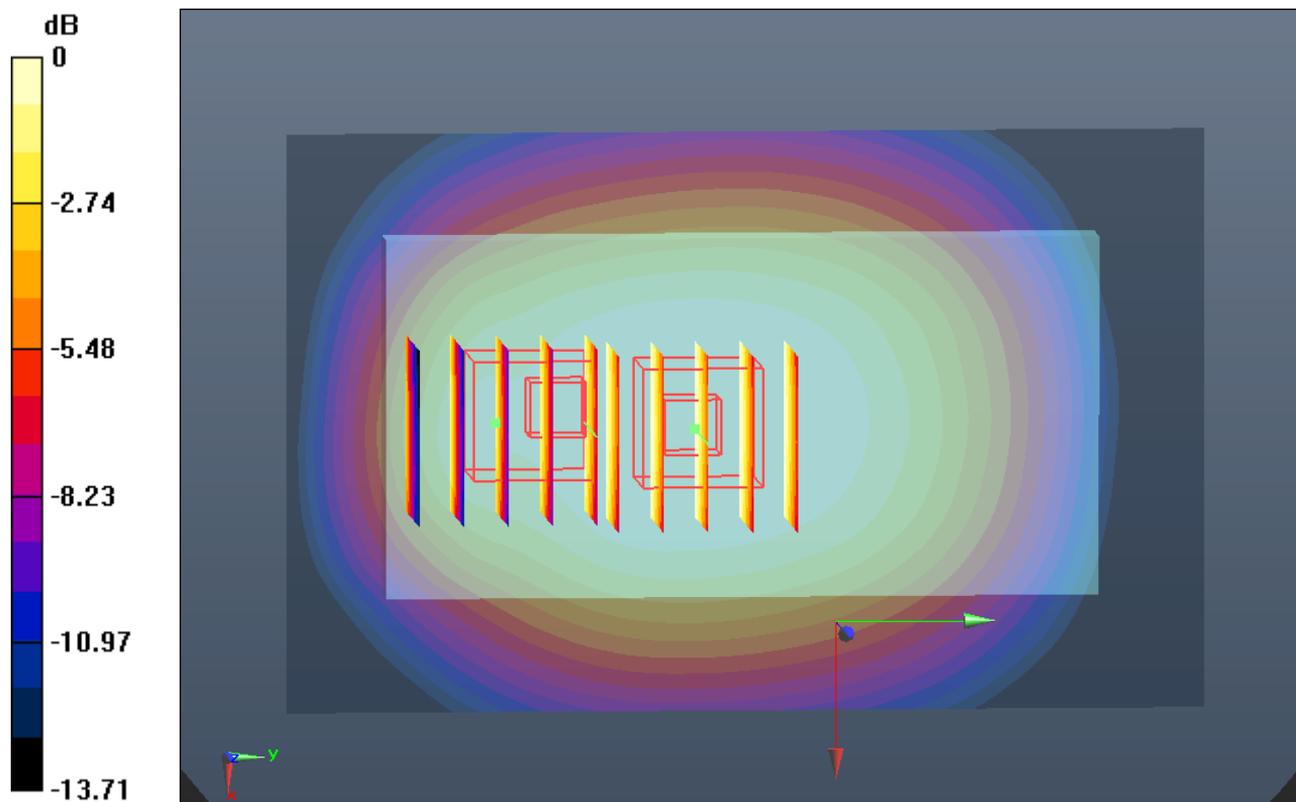

0 dB = 1.110mW/g

#22 GSM850_GPRS (4 Tx slots)_Back_1cm_Ch128_2D

DUT: 2O1701

Communication System: GPRS/EDGE (4 Tx slots); Frequency: 824.2 MHz; Duty Cycle: 1:2
Medium: MSL_835_121019 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 57.735$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:


- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.306 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 35.756 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.520 W/kg
SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.942 mW/g
Maximum value of SAR (measured) = 1.301 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 35.756 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.324 W/kg
SAR(1 g) = 0.971 mW/g; SAR(10 g) = 0.674 mW/g
Maximum value of SAR (measured) = 1.109 mW/g

1g/10g Averaged SAR

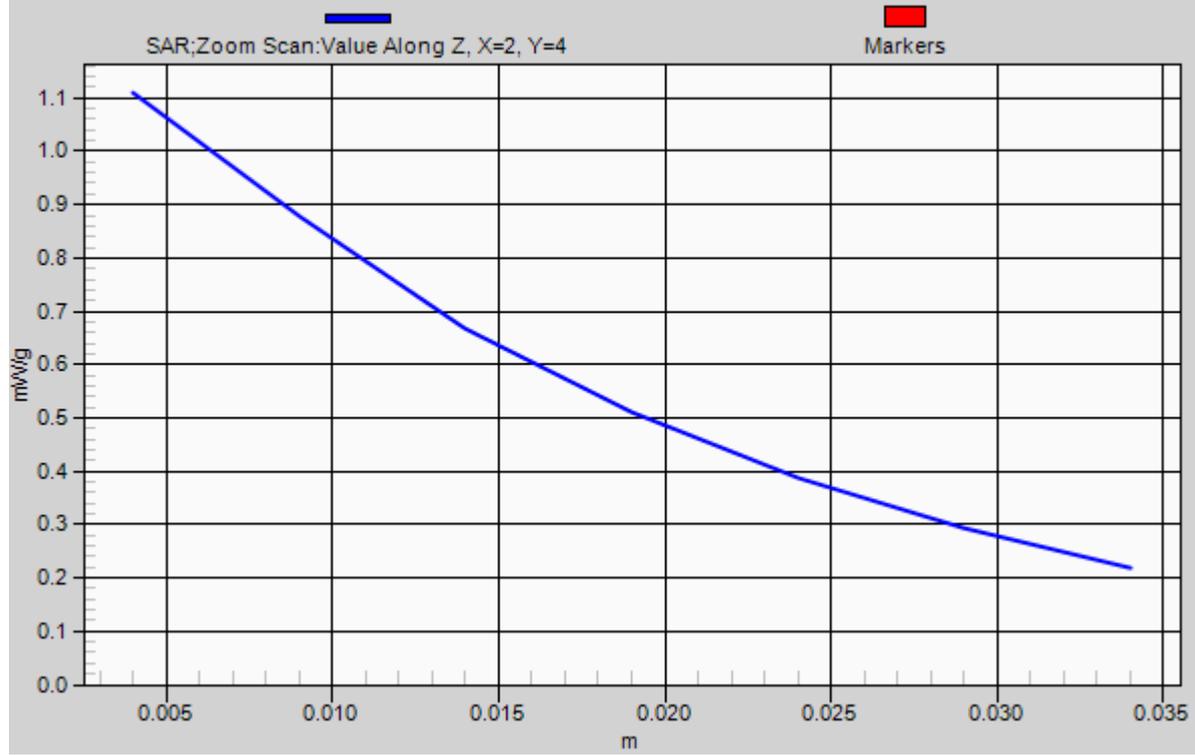

#23 GSM850_GPRS (4 Tx slots)_Left Side_1cm_Ch128

DUT: 2O1701


Communication System: GPRS/EDGE (4 Tx slots); Frequency: 824.2 MHz; Duty Cycle: 1:2
Medium: MSL_835_121019 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 57.735$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.975 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 31.560 V/m; Power Drift = -0.0068 dB
Peak SAR (extrapolated) = 1.256 W/kg
SAR(1 g) = 0.913 mW/g; SAR(10 g) = 0.634 mW/g
Maximum value of SAR (measured) = 0.977 mW/g

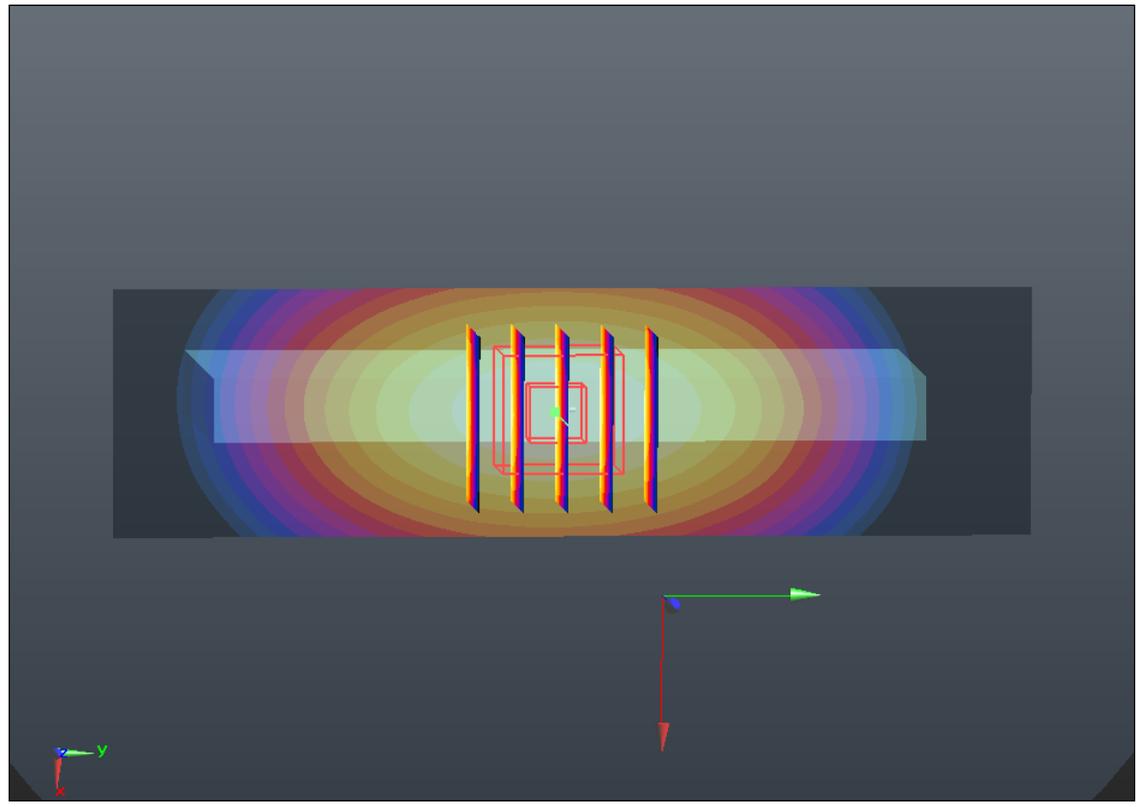

0 dB = 0.980mW/g

#24 GSM850_GPRS (4 Tx slots)_Right Side_1cm_Ch128

DUT: 2O1701



Communication System: GPRS/EDGE (4 Tx slots); Frequency: 824.2 MHz; Duty Cycle: 1:2
Medium: MSL_835_121019 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 57.735$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.006 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 31.897 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.305 W/kg
SAR(1 g) = 0.950 mW/g; SAR(10 g) = 0.663 mW/g
Maximum value of SAR (measured) = 1.020 mW/g

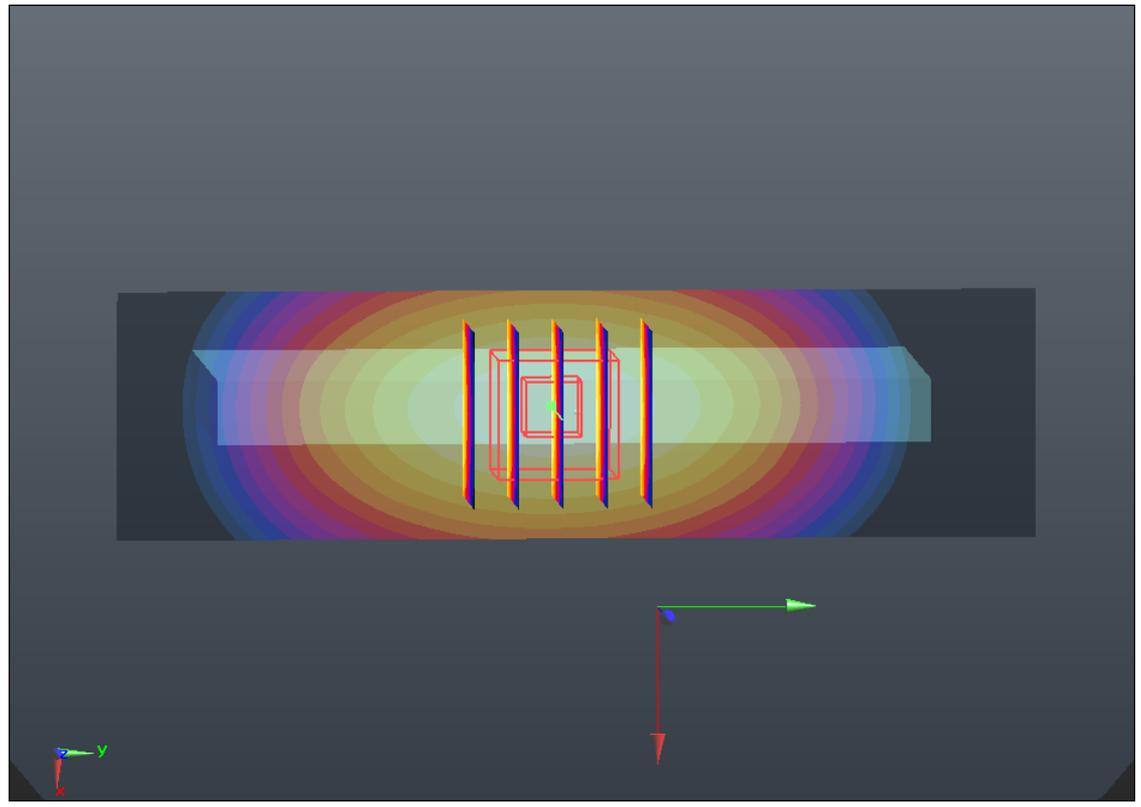

0 dB = 1.020mW/g

#25 GSM850_GPRS (4 Tx slots)_Bottom Side_1cm_Ch128

DUT: 2O1701


Communication System: GPRS/EDGE (4 Tx slots); Frequency: 824.2 MHz; Duty Cycle: 1:2
Medium: MSL_835_121019 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 57.735$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (31x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.147 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.684 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 0.212 W/kg
SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.080 mW/g
Maximum value of SAR (measured) = 0.144 mW/g

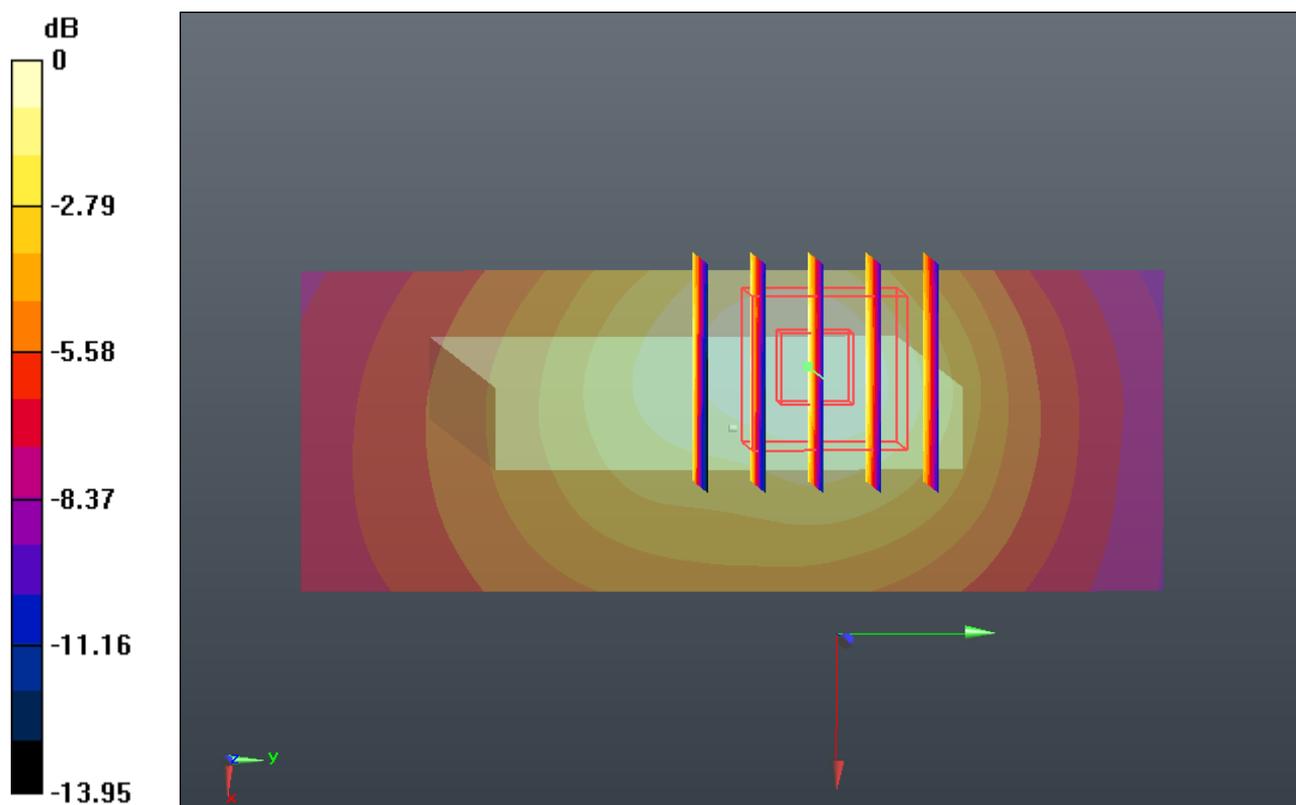

0 dB = 0.140mW/g

#26 GSM850_GPRS (4 Tx slots)_Front_1cm_Ch189

DUT: 2O1701



Communication System: GPRS/EDGE (4 Tx slots); Frequency: 836.4 MHz; Duty Cycle: 1:2
Medium: MSL_835_121019 Medium parameters used: $f = 836.4$ MHz; $\sigma = 1.008$ mho/m; $\epsilon_r = 57.638$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch189/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.958 mW/g

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 30.758 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.127 W/kg
SAR(1 g) = 0.921 mW/g; SAR(10 g) = 0.711 mW/g
Maximum value of SAR (measured) = 0.962 mW/g

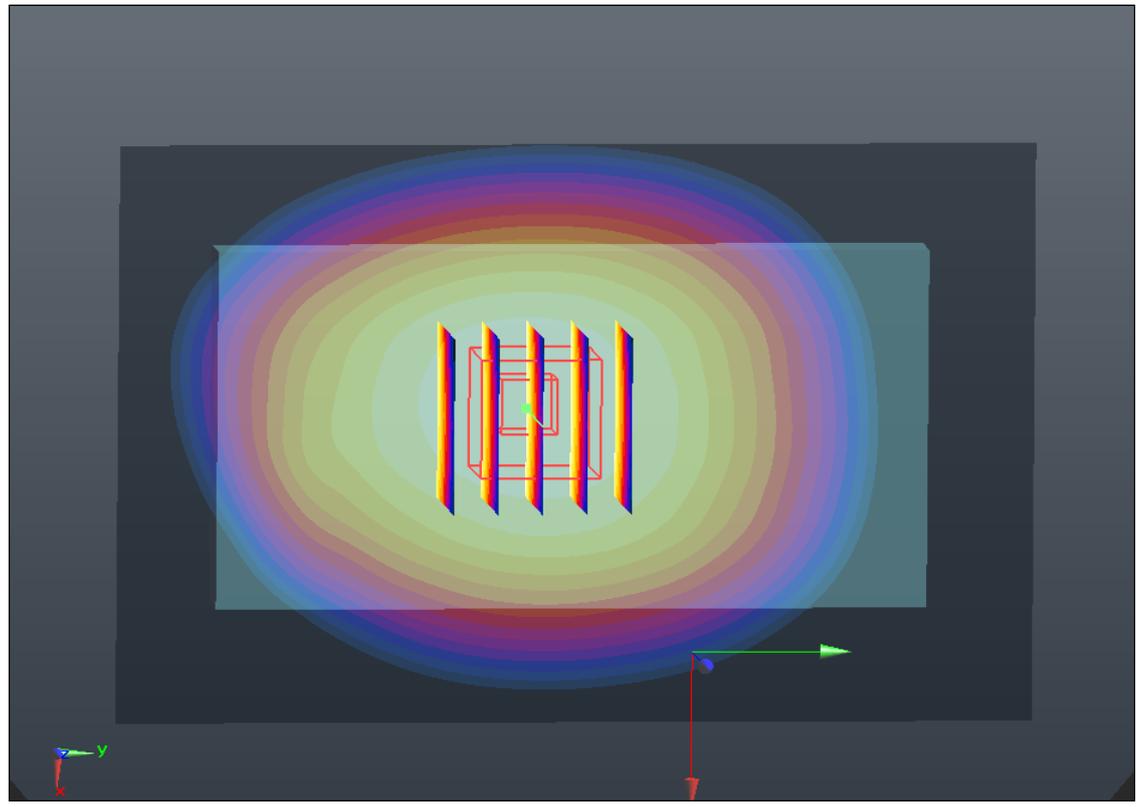

0 dB = 0.960mW/g

#45 GSM850_GPRS (4 Tx slots)_Front_1cm_Ch251

DUT: 2O1701



Communication System: GPRS/EDGE (4 Tx slots); Frequency: 848.8 MHz; Duty Cycle: 1:2
Medium: MSL_835_121019 Medium parameters used: $f = 849$ MHz; $\sigma = 1.019$ mho/m; $\epsilon_r = 57.516$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch251/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.918 mW/g

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 30.054 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.057 W/kg
SAR(1 g) = 0.867 mW/g; SAR(10 g) = 0.667 mW/g
Maximum value of SAR (measured) = 0.909 mW/g

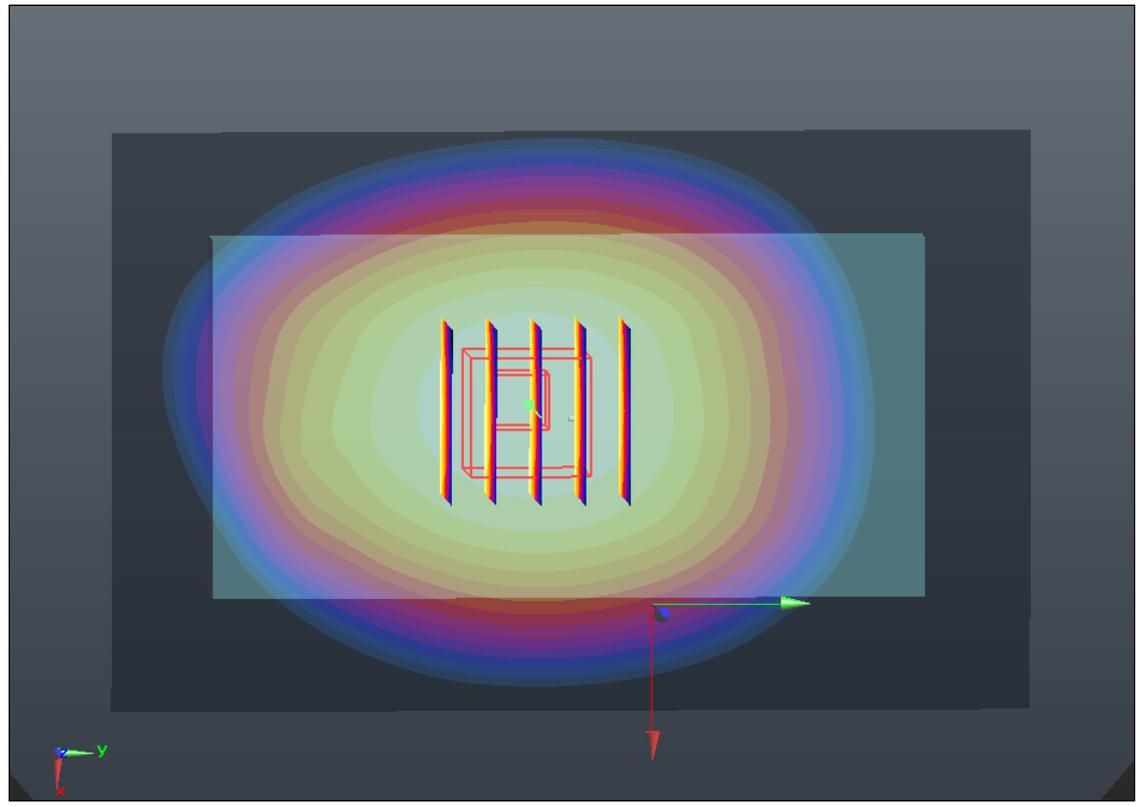

0 dB = 0.910mW/g

#46 GSM850_GPRS (4 Tx slots)_Back_1cm_Ch189

DUT: 2O1701



Communication System: GPRS/EDGE (4 Tx slots); Frequency: 836.4 MHz; Duty Cycle: 1:2
Medium: MSL_835_121019 Medium parameters used: $f = 836.4$ MHz; $\sigma = 1.008$ mho/m; $\epsilon_r = 57.638$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch189/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.278 mW/g

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 35.845 V/m; Power Drift = -0.0083 dB
Peak SAR (extrapolated) = 1.496 W/kg
SAR(1 g) = 1.21 mW/g; SAR(10 g) = 0.918 mW/g
Maximum value of SAR (measured) = 1.273 mW/g

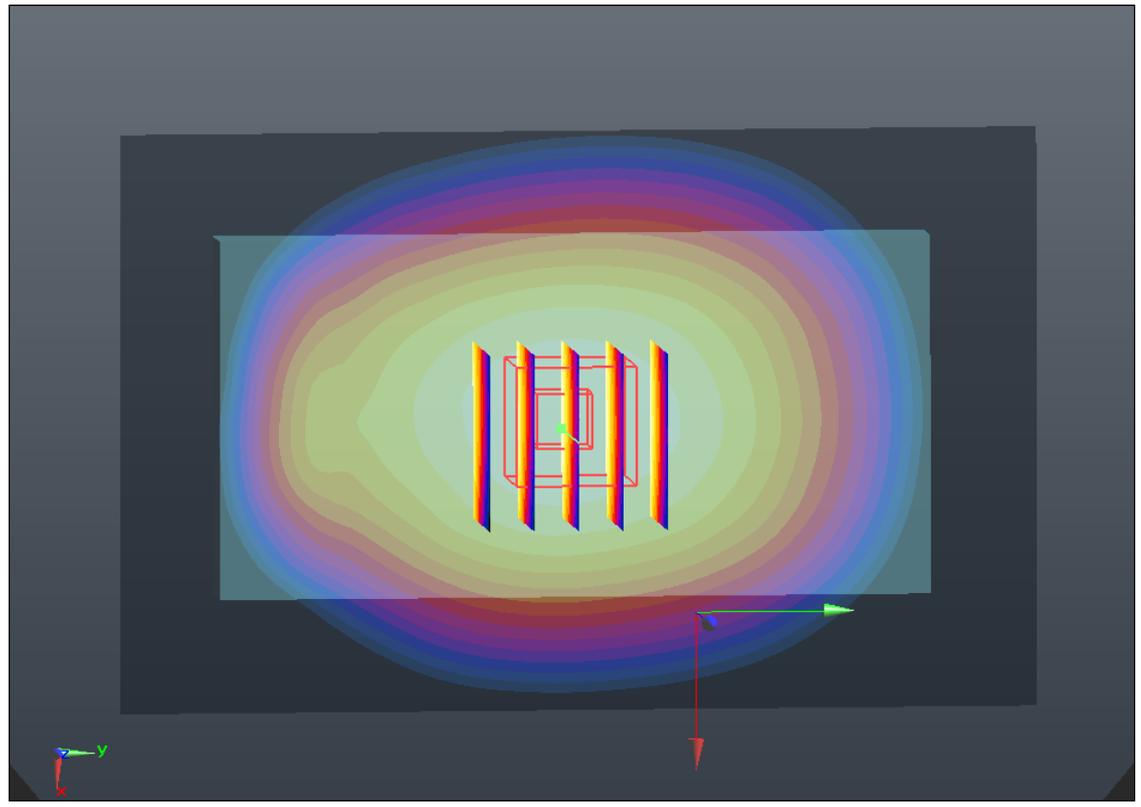

0 dB = 1.270mW/g

#47 GSM850_GPRS (4 Tx slots)_Back_1cm_Ch251

DUT: 2O1701



Communication System: GPRS/EDGE (4 Tx slots); Frequency: 848.8 MHz; Duty Cycle: 1:2
Medium: MSL_835_121019 Medium parameters used: $f = 849$ MHz; $\sigma = 1.019$ mho/m; $\epsilon_r = 57.516$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch251/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.209 mW/g

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 34.553 V/m; Power Drift = 0.0085 dB
Peak SAR (extrapolated) = 1.414 W/kg
SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.864 mW/g
Maximum value of SAR (measured) = 1.195 mW/g

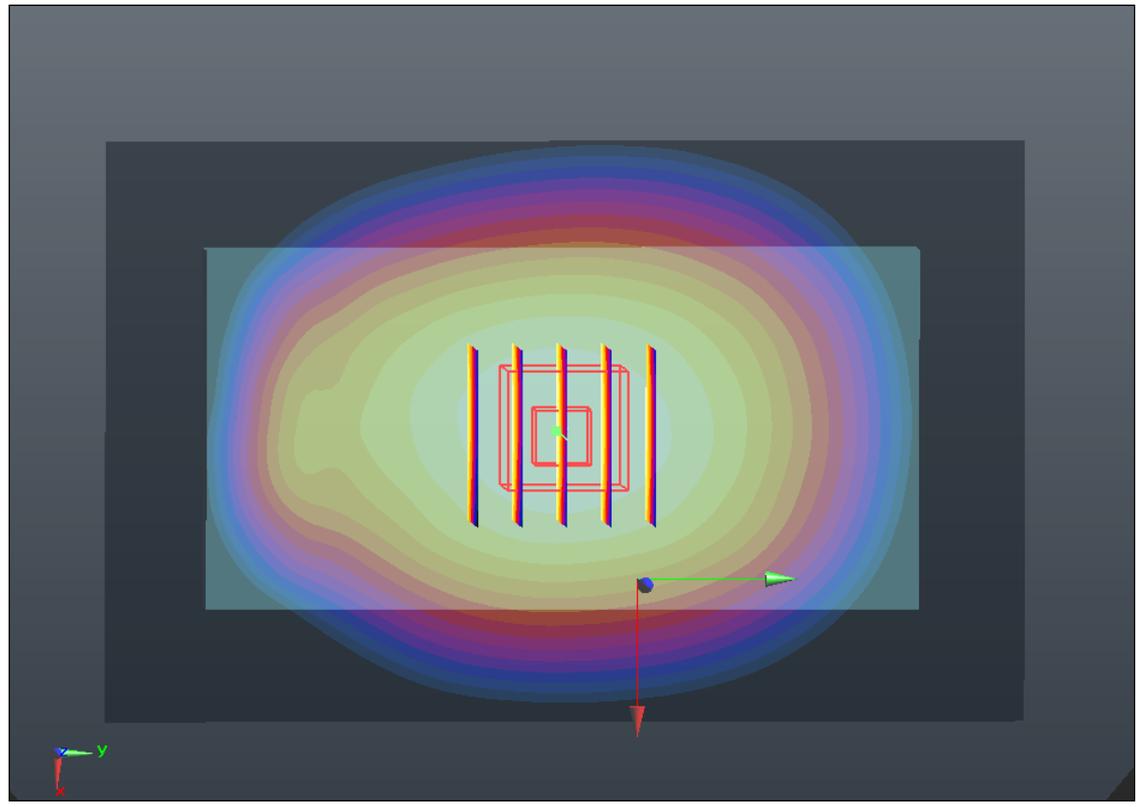

0 dB = 1.200mW/g

#48 GSM850_GPRS (4 Tx slots)_Left Side_1cm_Ch189

DUT: 2O1701



Communication System: GPRS/EDGE (4 Tx slots); Frequency: 836.4 MHz; Duty Cycle: 1:2
Medium: MSL_835_121019 Medium parameters used: $f = 836.4$ MHz; $\sigma = 1.008$ mho/m; $\epsilon_r = 57.638$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch189/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.961 mW/g

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 31.323 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.254 W/kg
SAR(1 g) = 0.907 mW/g; SAR(10 g) = 0.628 mW/g
Maximum value of SAR (measured) = 0.975 mW/g

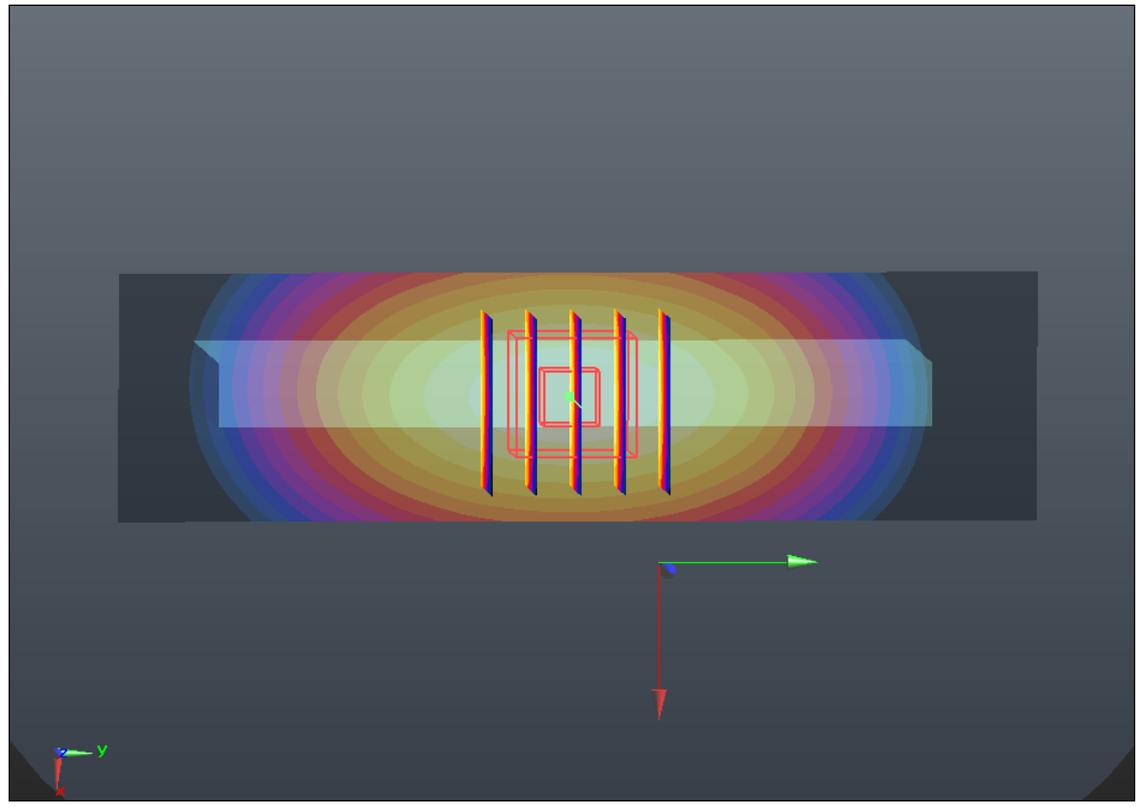

0 dB = 0.980mW/g

#49 GSM850_GPRS (4 Tx slots)_Left Side_1cm_Ch251

DUT: 2O1701



Communication System: GPRS/EDGE (4 Tx slots); Frequency: 848.8 MHz; Duty Cycle: 1:2
Medium: MSL_835_121019 Medium parameters used: $f = 849$ MHz; $\sigma = 1.019$ mho/m; $\epsilon_r = 57.516$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch251/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.893 mW/g

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 30.159 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.165 W/kg
SAR(1 g) = 0.845 mW/g; SAR(10 g) = 0.583 mW/g
Maximum value of SAR (measured) = 0.908 mW/g

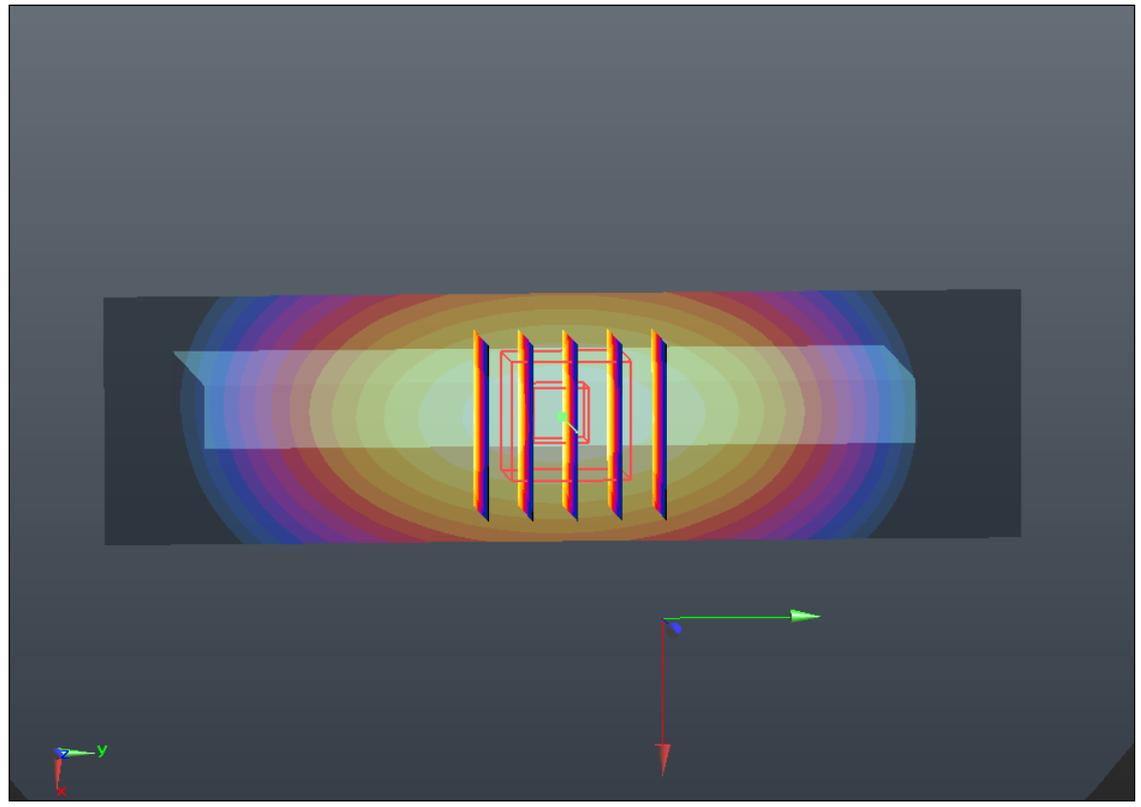

0 dB = 0.910mW/g

#50 GSM850_GPRS (4 Tx slots)_Right Side_1cm_Ch189

DUT: 2O1701



Communication System: GPRS/EDGE (4 Tx slots); Frequency: 836.4 MHz; Duty Cycle: 1:2
Medium: MSL_835_121019 Medium parameters used: $f = 836.4$ MHz; $\sigma = 1.008$ mho/m; $\epsilon_r = 57.638$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch189/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.026 mW/g

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 32.072 V/m; Power Drift = 0.0088 dB
Peak SAR (extrapolated) = 1.319 W/kg
SAR(1 g) = 0.963 mW/g; SAR(10 g) = 0.671 mW/g
Maximum value of SAR (measured) = 1.033 mW/g

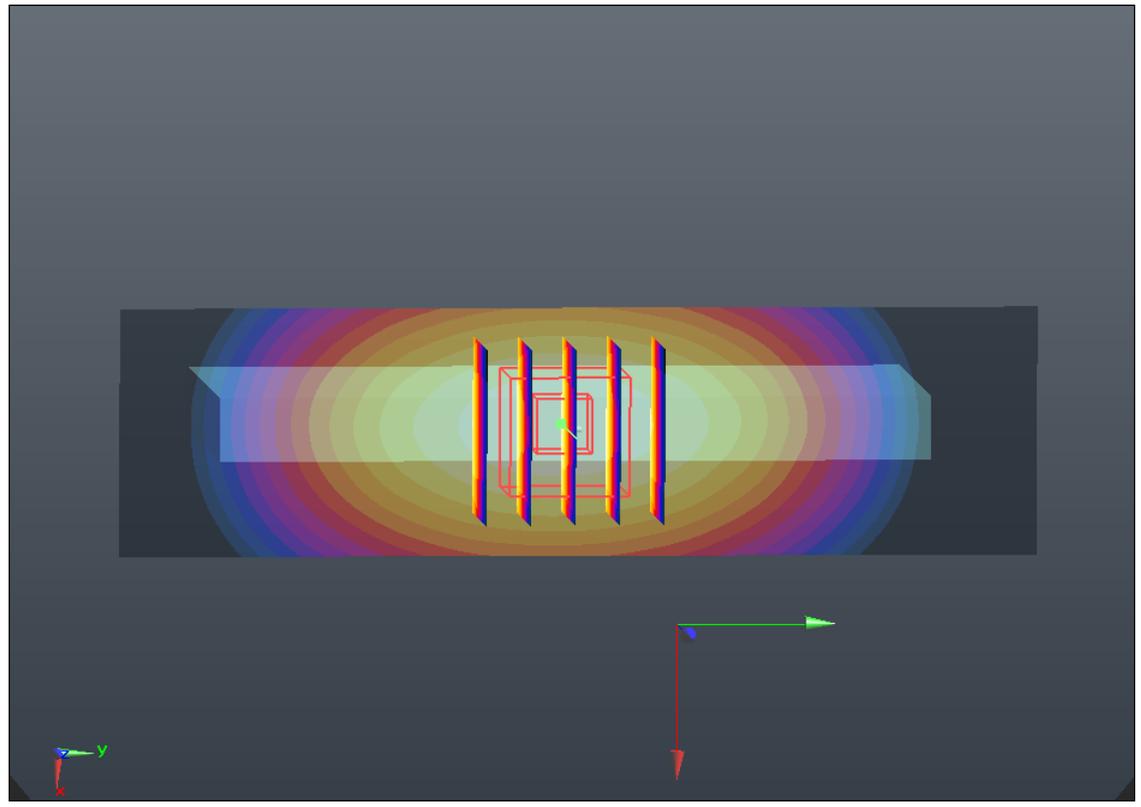

0 dB = 1.030mW/g

#51 GSM850_GPRS (4 Tx slots)_Right Side_1cm_Ch251

DUT: 2O1701

Communication System: GPRS/EDGE (4 Tx slots); Frequency: 848.8 MHz; Duty Cycle: 1:2
Medium: MSL_835_121019 Medium parameters used: $f = 849$ MHz; $\sigma = 1.019$ mho/m; $\epsilon_r = 57.516$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch251/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.988 mW/g



Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.345 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.257 W/kg

SAR(1 g) = 0.922 mW/g; SAR(10 g) = 0.641 mW/g

Maximum value of SAR (measured) = 0.987 mW/g

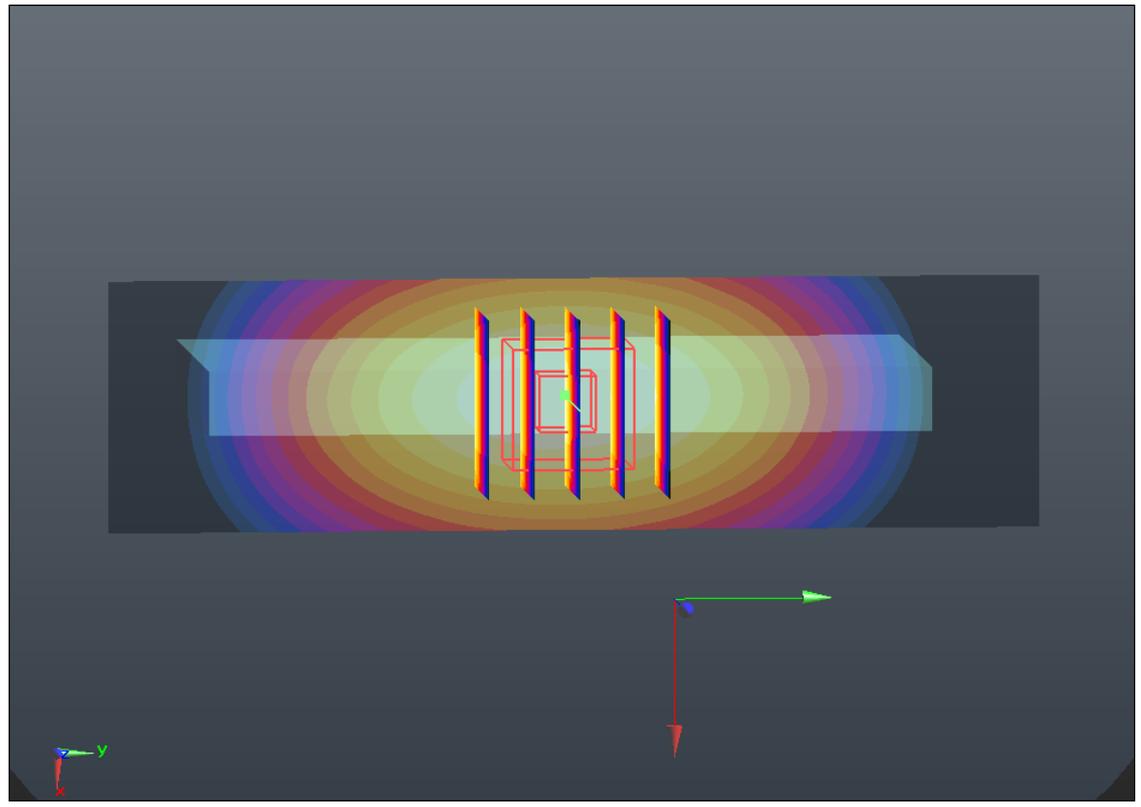

0 dB = 0.990mW/g

#52 GSM850_GSM_Back_1cm_Ch128_Headset

DUT: 2O1701

Communication System: General GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
Medium: MSL_835_121019 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.997$ mho/m; $\epsilon_r = 57.735$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.6 °C



DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch128/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.548 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 23.118 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.631 W/kg
SAR(1 g) = 0.519 mW/g; SAR(10 g) = 0.395 mW/g
Maximum value of SAR (measured) = 0.545 mW/g

Ch128/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 23.118 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.590 W/kg
SAR(1 g) = 0.397 mW/g; SAR(10 g) = 0.282 mW/g
Maximum value of SAR (measured) = 0.443 mW/g

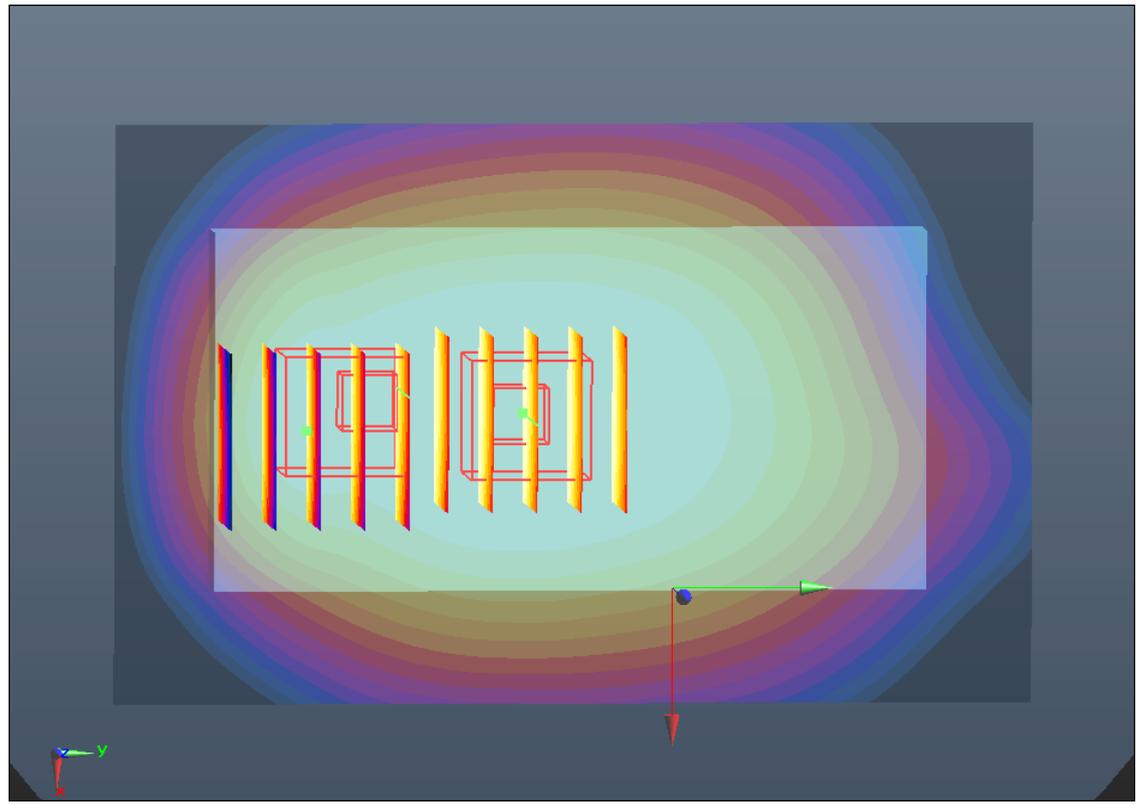

0 dB = 0.440mW/g

#27 GSM1900_GPRS (4 Tx slots)_Front_1cm_Ch661

DUT: 2O1701


Communication System: GPRS/EDGE (4 Tx slots); Frequency: 1880 MHz; Duty Cycle: 1:2
Medium: MSL_1900_121018 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.525$ mho/m; $\epsilon_r = 53.834$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.467 mW/g

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.628 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.681 W/kg
SAR(1 g) = 0.419 mW/g; SAR(10 g) = 0.254 mW/g
Maximum value of SAR (measured) = 0.453 mW/g

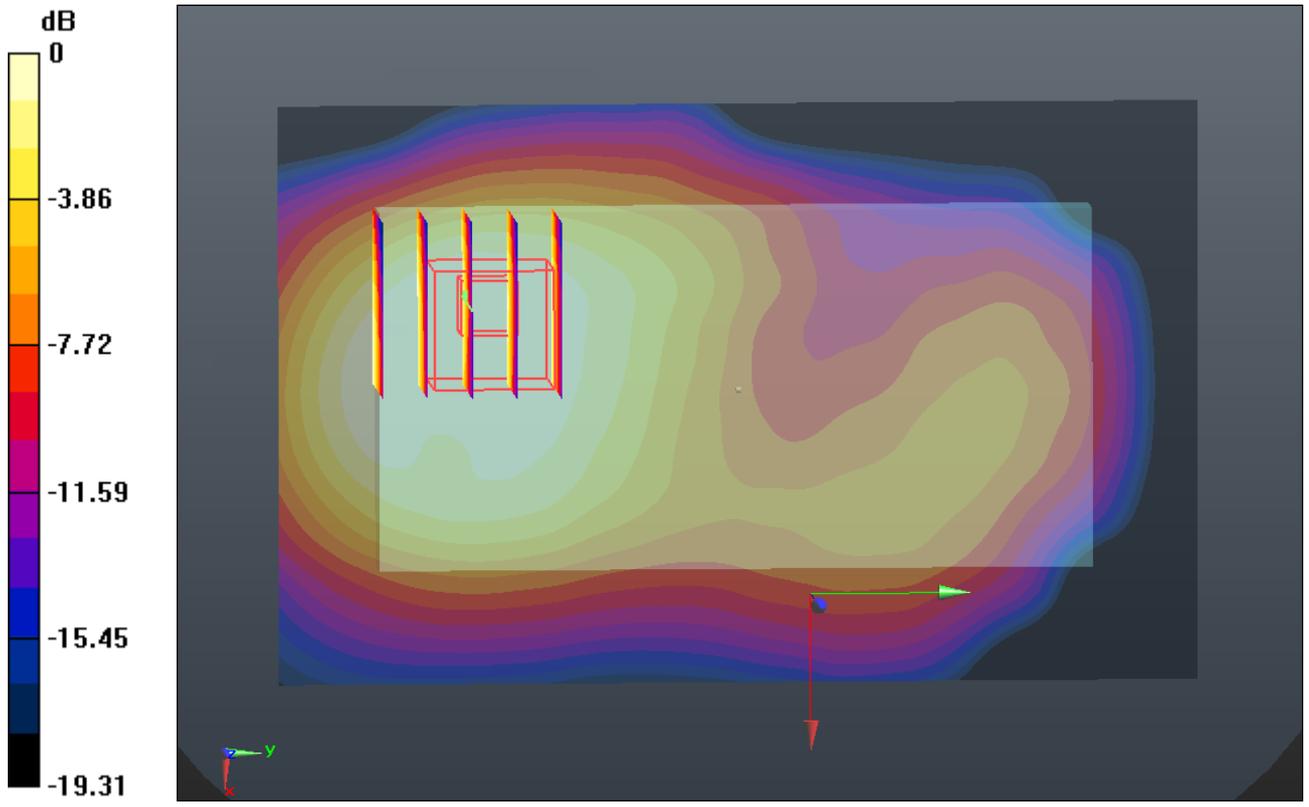

0 dB = 0.450mW/g

#28 GSM1900_GPRS (4 Tx slots)_Back_1cm_Ch661

DUT: 2O1701



Communication System: GPRS/EDGE (4 Tx slots); Frequency: 1880 MHz; Duty Cycle: 1:2
Medium: MSL_1900_121018 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.525$ mho/m; $\epsilon_r = 53.834$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.650 mW/g

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.048 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.954 W/kg
SAR(1 g) = 0.590 mW/g; SAR(10 g) = 0.353 mW/g
Maximum value of SAR (measured) = 0.632 mW/g

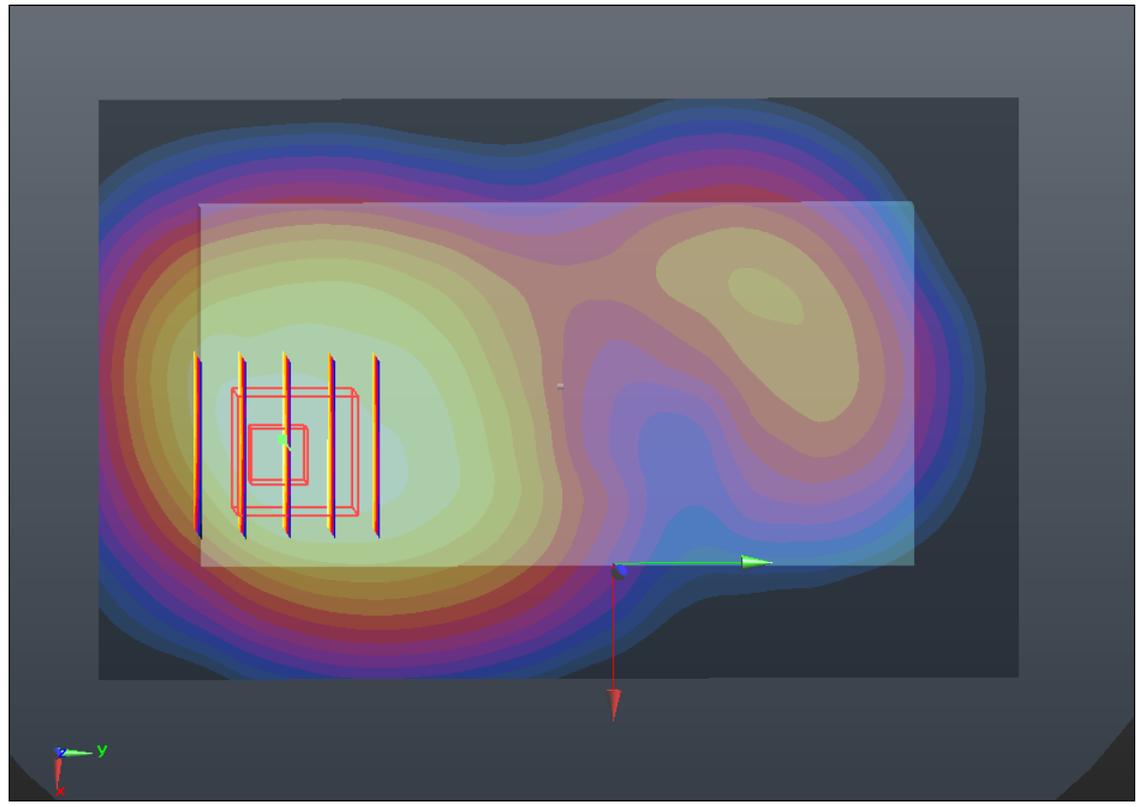

0 dB = 0.630mW/g

#28 GSM1900_GPRS (4 Tx slots)_Back_1cm_Ch661_2D

DUT: 2O1701

Communication System: GPRS/EDGE (4 Tx slots); Frequency: 1880 MHz; Duty Cycle: 1:2
Medium: MSL_1900_121018 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.525$ mho/m; $\epsilon_r = 53.834$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 21.2 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.650 mW/g

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.048 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.954 W/kg
SAR(1 g) = 0.590 mW/g; SAR(10 g) = 0.353 mW/g
Maximum value of SAR (measured) = 0.632 mW/g

1g/10g Averaged SAR

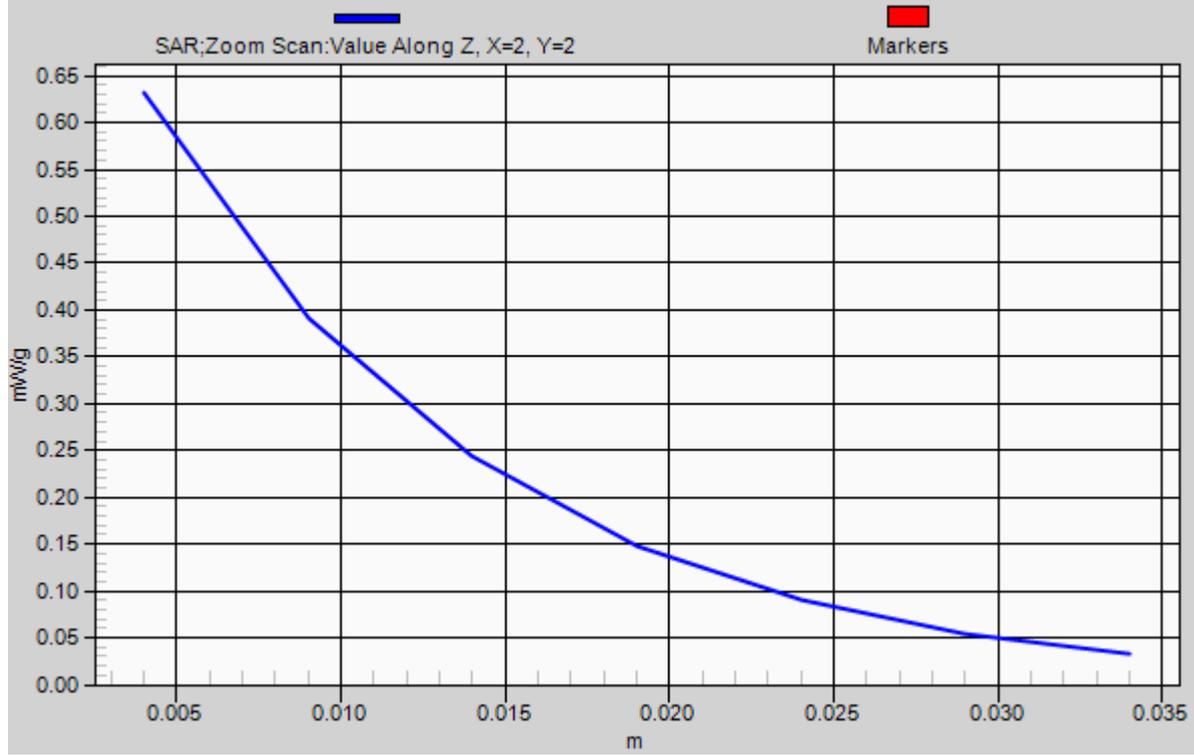

#29 GSM1900_GPRS (4 Tx slots)_Left Side_1cm_Ch661

DUT: 2O1701

Communication System: GPRS/EDGE (4 Tx slots); Frequency: 1880 MHz; Duty Cycle: 1:2
Medium: MSL_1900_121018 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.525$ mho/m; $\epsilon_r = 53.834$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.130 mW/g

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.030 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.205 W/kg
SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.069 mW/g
Maximum value of SAR (measured) = 0.135 mW/g

Ch661/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.030 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.140 W/kg
SAR(1 g) = 0.085 mW/g; SAR(10 g) = 0.051 mW/g
Maximum value of SAR (measured) = 0.095 mW/g

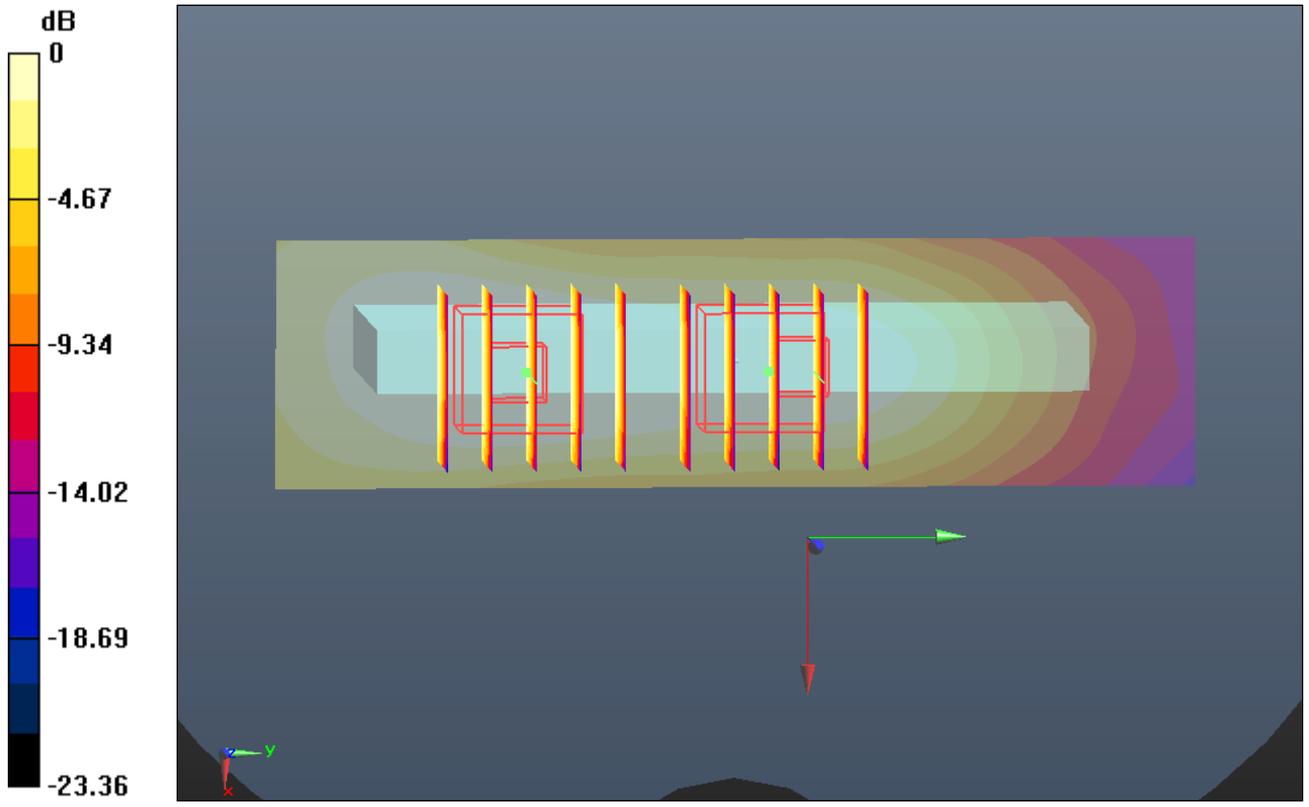

0 dB = 0.090mW/g

#30 GSM1900_GPRS (4 Tx slots)_Right Side_1cm_Ch661

DUT: 2O1701

Communication System: GPRS/EDGE (4 Tx slots); Frequency: 1880 MHz; Duty Cycle: 1:2
Medium: MSL_1900_121018 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.525$ mho/m; $\epsilon_r = 53.834$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.123 mW/g

Ch661/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.228 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 0.165 W/kg
SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.060 mW/g
Maximum value of SAR (measured) = 0.111 mW/g

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.228 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 0.153 W/kg
SAR(1 g) = 0.097 mW/g; SAR(10 g) = 0.056 mW/g
Maximum value of SAR (measured) = 0.106 mW/g

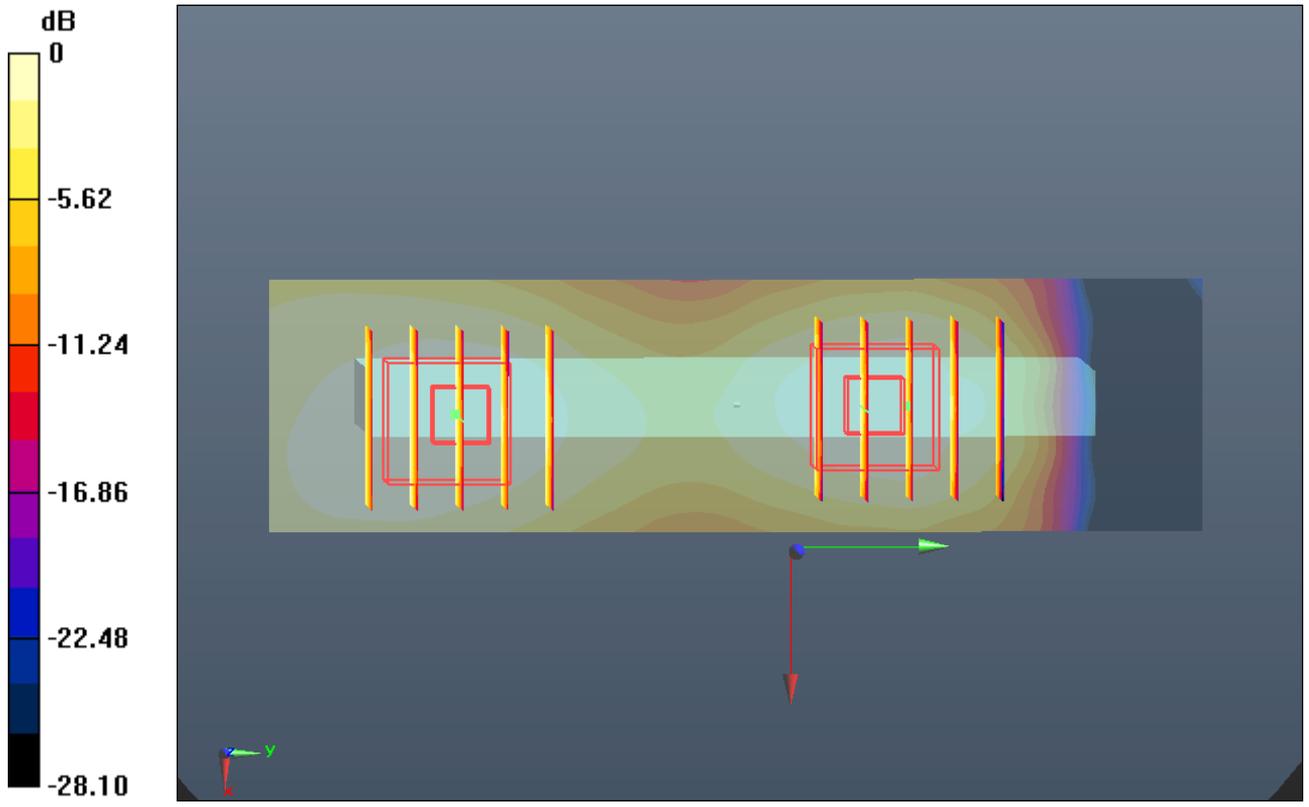

0 dB = 0.110mW/g

#31 GSM1900_GPRS (4 Tx slots)_Bottom Side_1cm_Ch661

DUT: 2O1701


Communication System: GPRS/EDGE (4 Tx slots); Frequency: 1880 MHz; Duty Cycle: 1:2
Medium: MSL_1900_121018 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.525$ mho/m; $\epsilon_r = 53.834$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (31x71x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.605 mW/g

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.444 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.942 W/kg
SAR(1 g) = 0.561 mW/g; SAR(10 g) = 0.310 mW/g
Maximum value of SAR (measured) = 0.627 mW/g

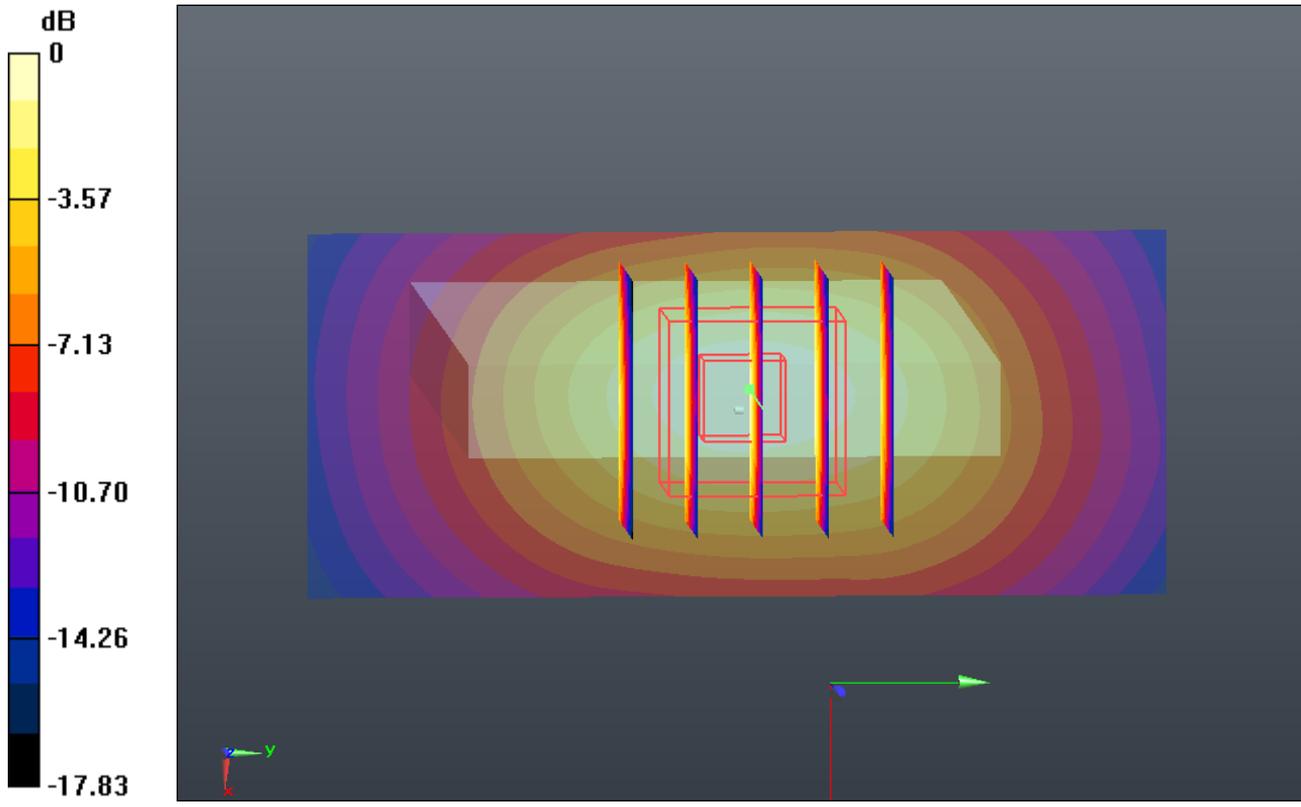

0 dB = 0.630mW/g

#32 GSM1900_GSM_Back_1cm_Ch661_Headset

DUT: 2O1701

Communication System: General GSM; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_121018 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.525$ mho/m; $\epsilon_r =$

53.834; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch661/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.400 mW/g


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.855 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.579 W/kg

SAR(1 g) = 0.359 mW/g; SAR(10 g) = 0.213 mW/g

Maximum value of SAR (measured) = 0.385 mW/g

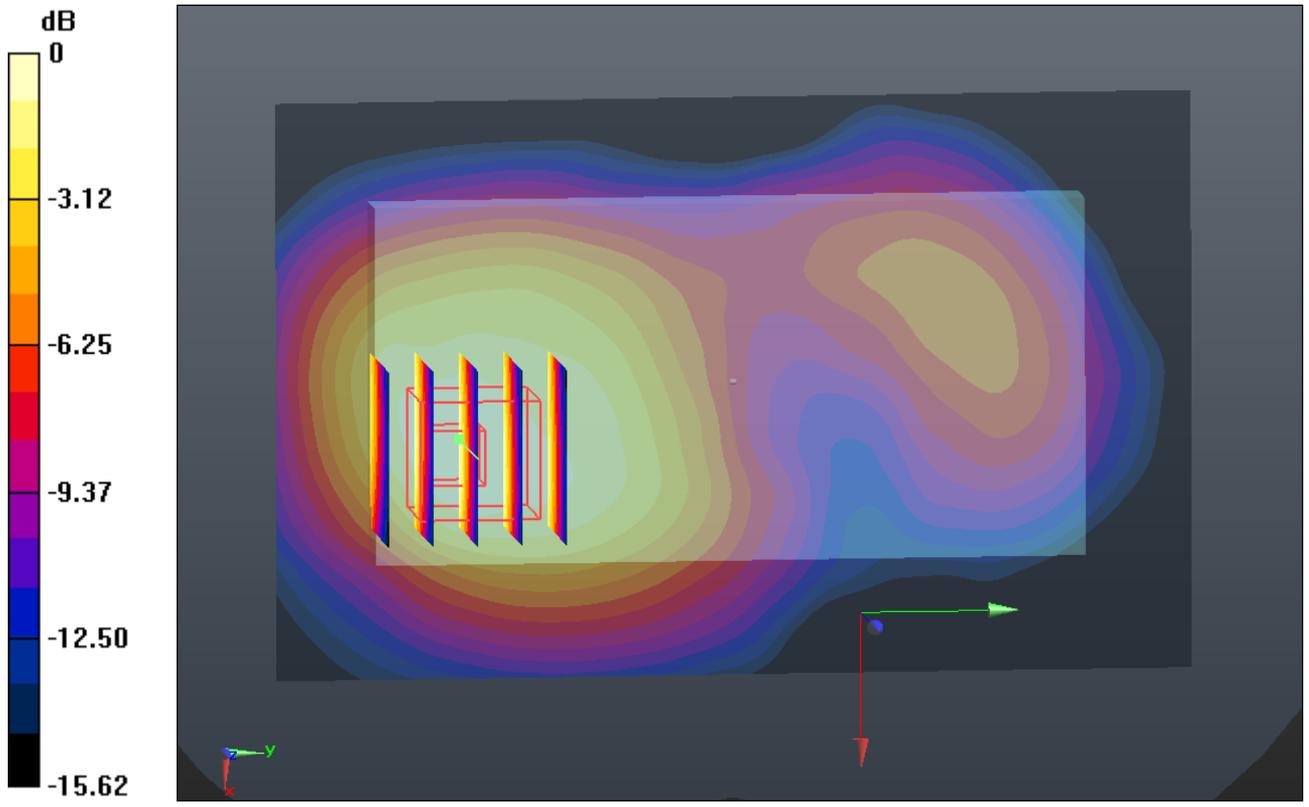

0 dB = 0.390mW/g

#33 WCDMA Band V_RMC12.2K_Front_1cm_Ch4182

DUT: 2O1701

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_121019 Medium parameters used: $f = 836.4$ MHz; $\sigma = 1.008$ mho/m; $\epsilon_r =$

57.638 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.405 mW/g



Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.533 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.470 W/kg

SAR(1 g) = 0.388 mW/g; SAR(10 g) = 0.299 mW/g

Maximum value of SAR (measured) = 0.406 mW/g

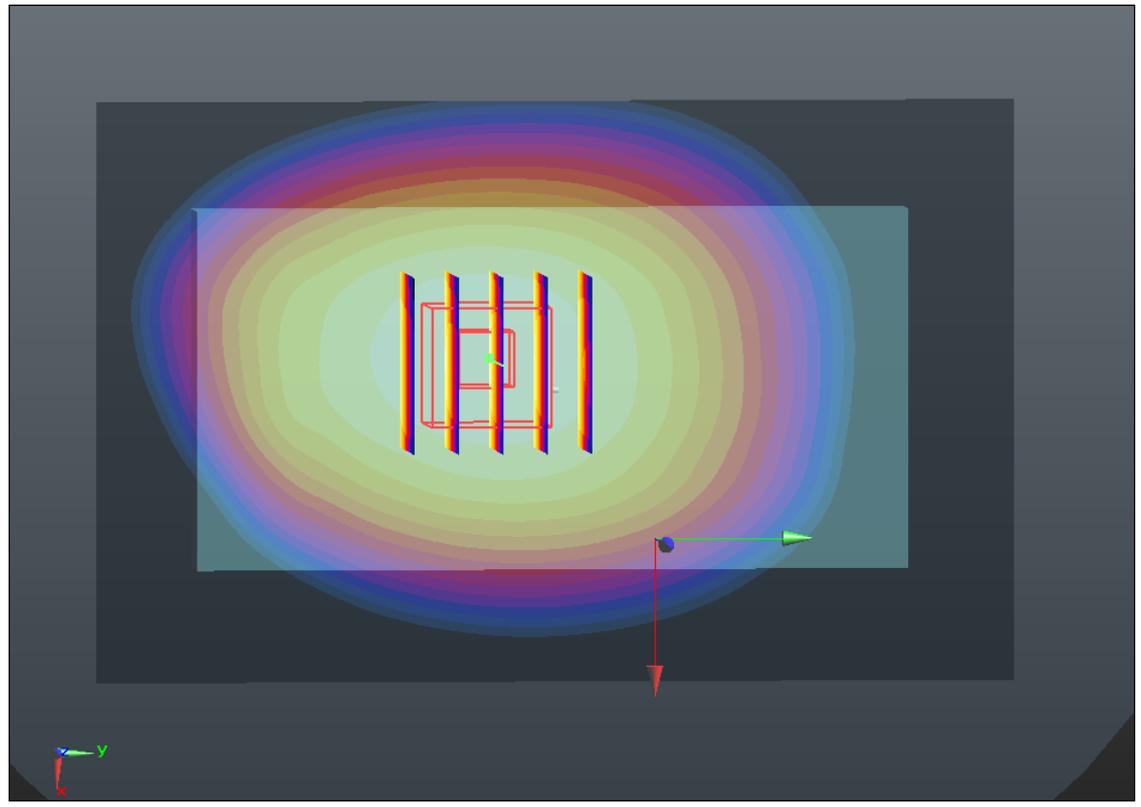

0 dB = 0.410mW/g

#34 WCDMA Band V_RMC12.2K_Back_1cm_Ch4182

DUT: 2O1701

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_121019 Medium parameters used: $f = 836.4$ MHz; $\sigma = 1.008$ mho/m; $\epsilon_r =$

57.638 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.702 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.282 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.817 W/kg

SAR(1 g) = 0.666 mW/g; SAR(10 g) = 0.507 mW/g

Maximum value of SAR (measured) = 0.699 mW/g



Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.282 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.672 W/kg

SAR(1 g) = 0.492 mW/g; SAR(10 g) = 0.339 mW/g

Maximum value of SAR (measured) = 0.566 mW/g

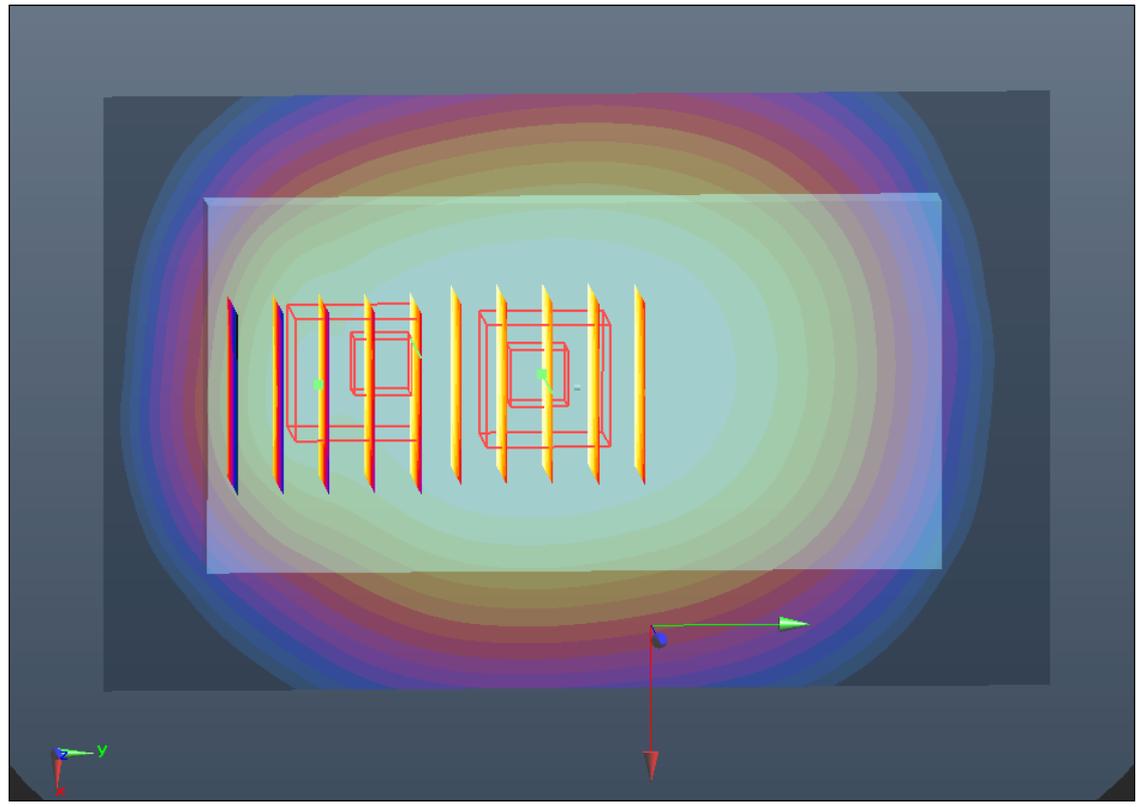

0 dB = 0.570mW/g

#34 WCDMA Band V_RMC12.2K_Back_1cm_Ch4182_2D

DUT: 2O1701

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_121019 Medium parameters used: $f = 836.4$ MHz; $\sigma = 1.008$ mho/m; $\epsilon_r =$

57.638 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.702 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.282 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.817 W/kg

SAR(1 g) = 0.666 mW/g; SAR(10 g) = 0.507 mW/g

Maximum value of SAR (measured) = 0.699 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.282 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.672 W/kg

SAR(1 g) = 0.492 mW/g; SAR(10 g) = 0.339 mW/g

Maximum value of SAR (measured) = 0.566 mW/g

1g/10g Averaged SAR

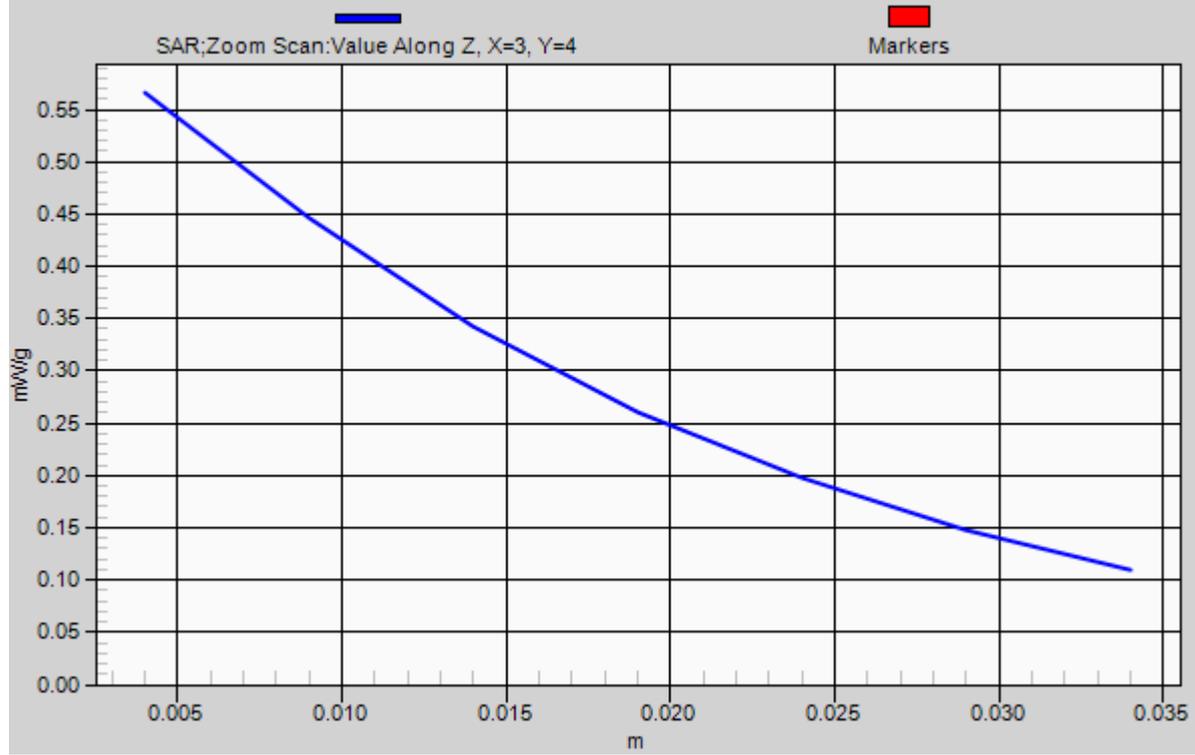

#35 WCDMA Band V_RMC12.2K_Left Side_1cm_Ch4182

DUT: 2O1701

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_121019 Medium parameters used: $f = 836.4$ MHz; $\sigma = 1.008$ mho/m; $\epsilon_r =$

57.638 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.503 mW/g



Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.474 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.648 W/kg

SAR(1 g) = 0.473 mW/g; SAR(10 g) = 0.328 mW/g

Maximum value of SAR (measured) = 0.506 mW/g

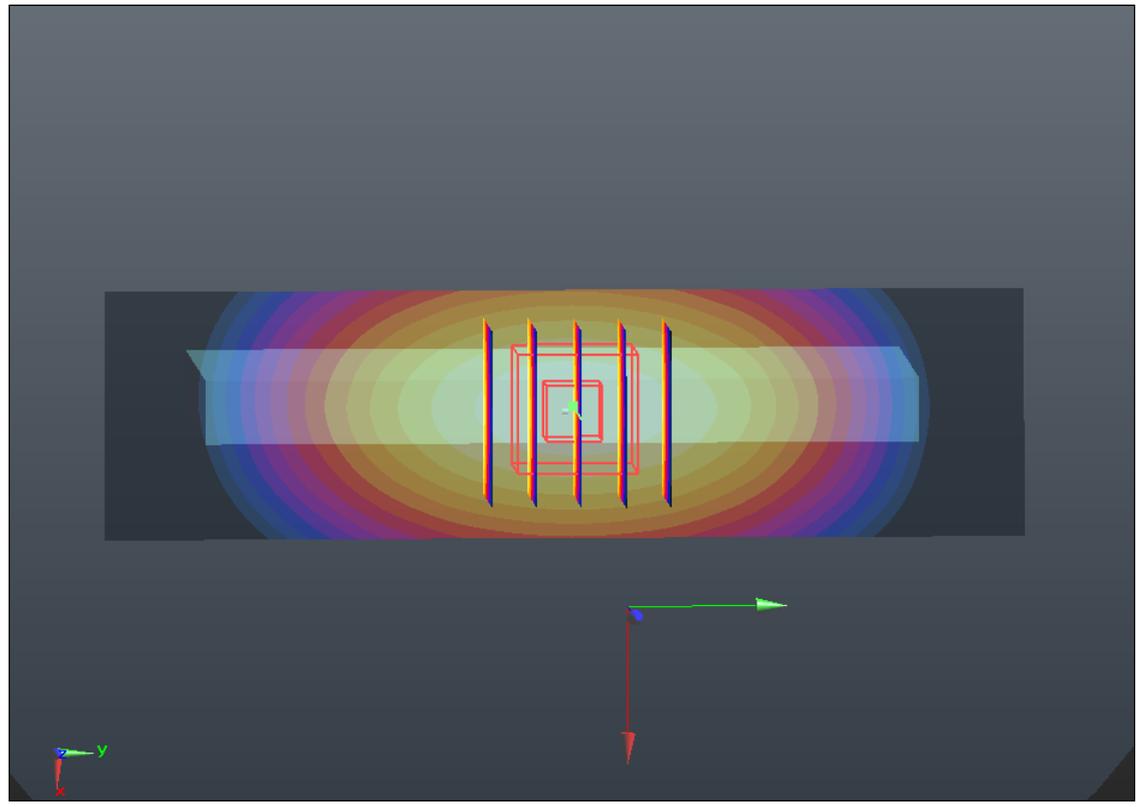

0 dB = 0.510mW/g

#36 WCDMA Band V_RMC12.2K_Right Side_1cm_Ch4182

DUT: 2O1701

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_121019 Medium parameters used: $f = 836.4$ MHz; $\sigma = 1.008$ mho/m; $\epsilon_r =$

57.638 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.534 mW/g



Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.128 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.685 W/kg

SAR(1 g) = 0.502 mW/g; SAR(10 g) = 0.350 mW/g

Maximum value of SAR (measured) = 0.537 mW/g

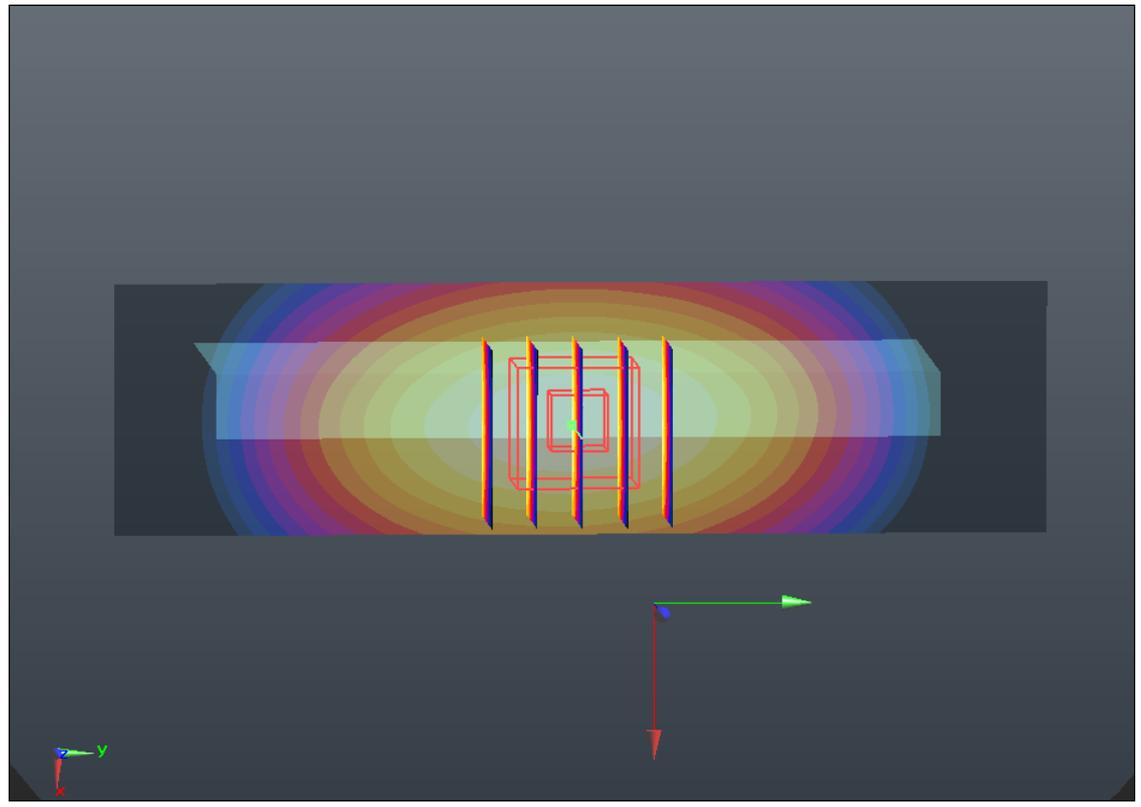

0 dB = 0.540mW/g

#37 WCDMA Band V_RMC12.2K_Bottom Side_1cm_Ch4182

DUT: 2O1701

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_121019 Medium parameters used: $f = 836.4$ MHz; $\sigma = 1.008$ mho/m; $\epsilon_r =$

57.638 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (31x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.077 mW/g



Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.392 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.069 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.076 mW/g

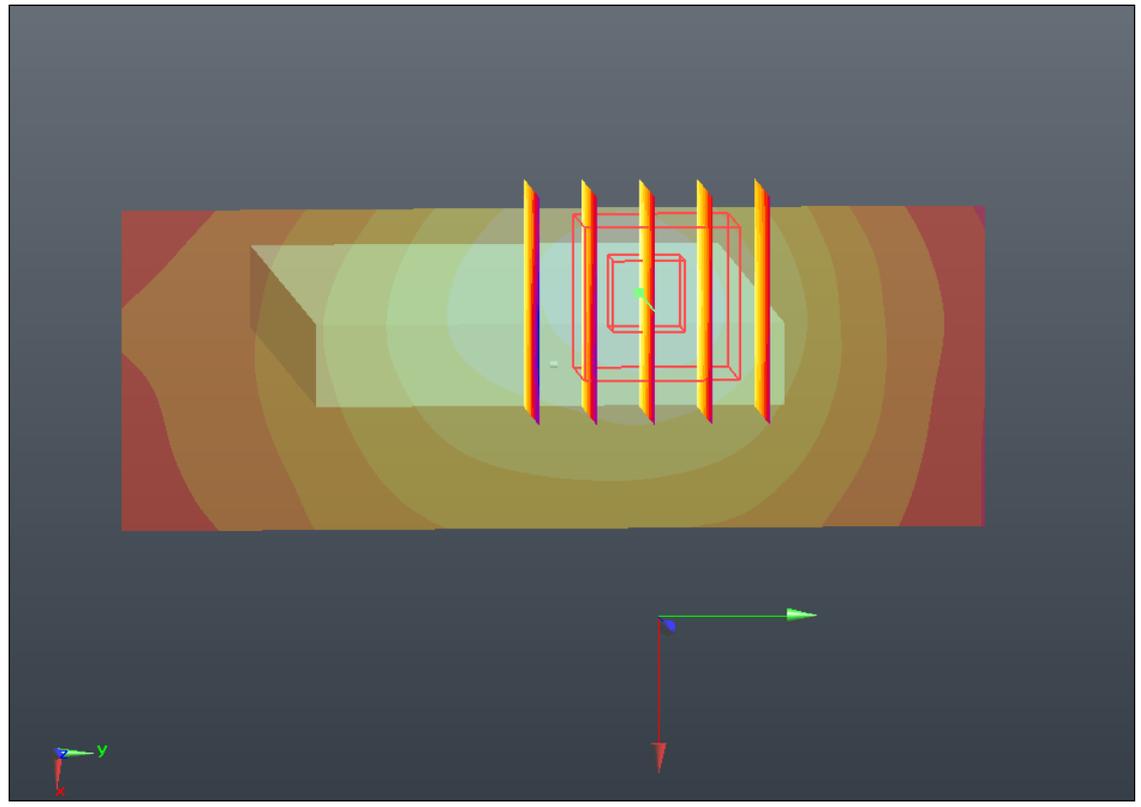

0 dB = 0.080mW/g

#38 WCDMA Band V_RMC12.2K_Back_1cm_Ch4182_Headset

DUT: 2O1701

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_121019 Medium parameters used: $f = 836.4$ MHz; $\sigma = 1.008$ mho/m; $\epsilon_r =$

57.638 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.98, 8.98, 8.98); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.596 mW/g

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.053 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.697 W/kg

SAR(1 g) = 0.567 mW/g; SAR(10 g) = 0.429 mW/g

Maximum value of SAR (measured) = 0.595 mW/g



Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.053 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.603 W/kg

SAR(1 g) = 0.426 mW/g; SAR(10 g) = 0.298 mW/g

Maximum value of SAR (measured) = 0.484 mW/g

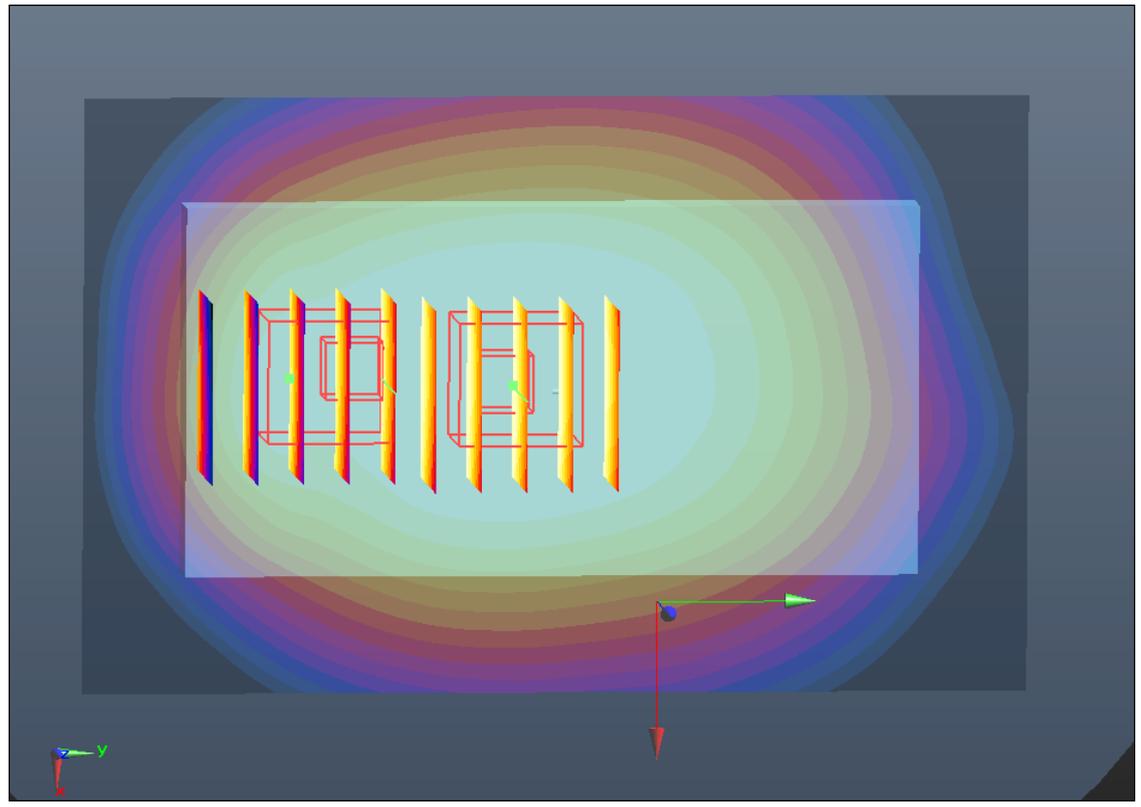

0 dB = 0.480mW/g

#39 WCDMA Band II_RMC12.2K_Front_1cm_Ch9262

DUT: 2O1701

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121018 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.492$ mho/m; $\epsilon_r =$

53.874 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.501 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.703 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.736 W/kg

SAR(1 g) = 0.453 mW/g; SAR(10 g) = 0.273 mW/g

Maximum value of SAR (measured) = 0.489 mW/g

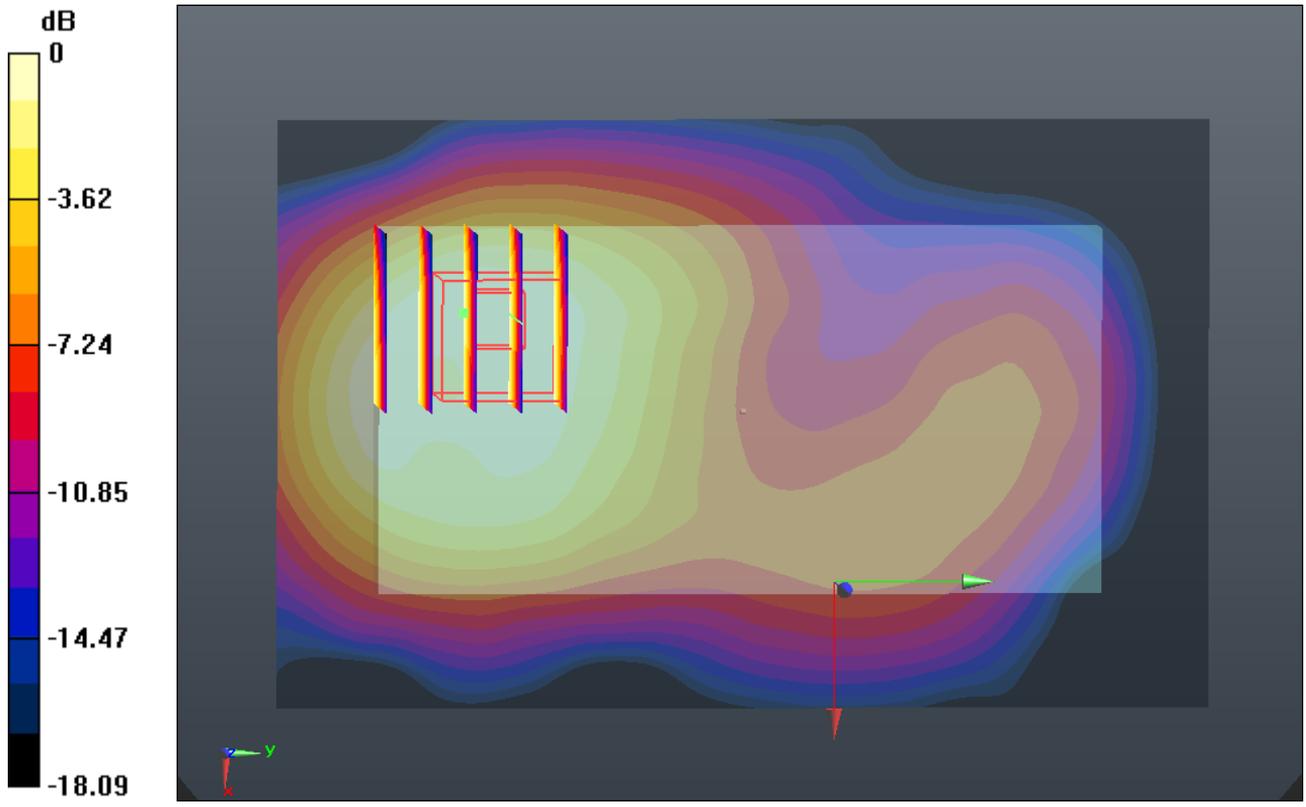

0 dB = 0.490mW/g

#40 WCDMA Band II_RMC12.2K_Back_1cm_Ch9262

DUT: 2O1701

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121018 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.492$ mho/m; $\epsilon_r =$

53.874 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.671 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.744 V/m; Power Drift = 0.0035 dB

Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.603 mW/g; SAR(10 g) = 0.367 mW/g

Maximum value of SAR (measured) = 0.653 mW/g

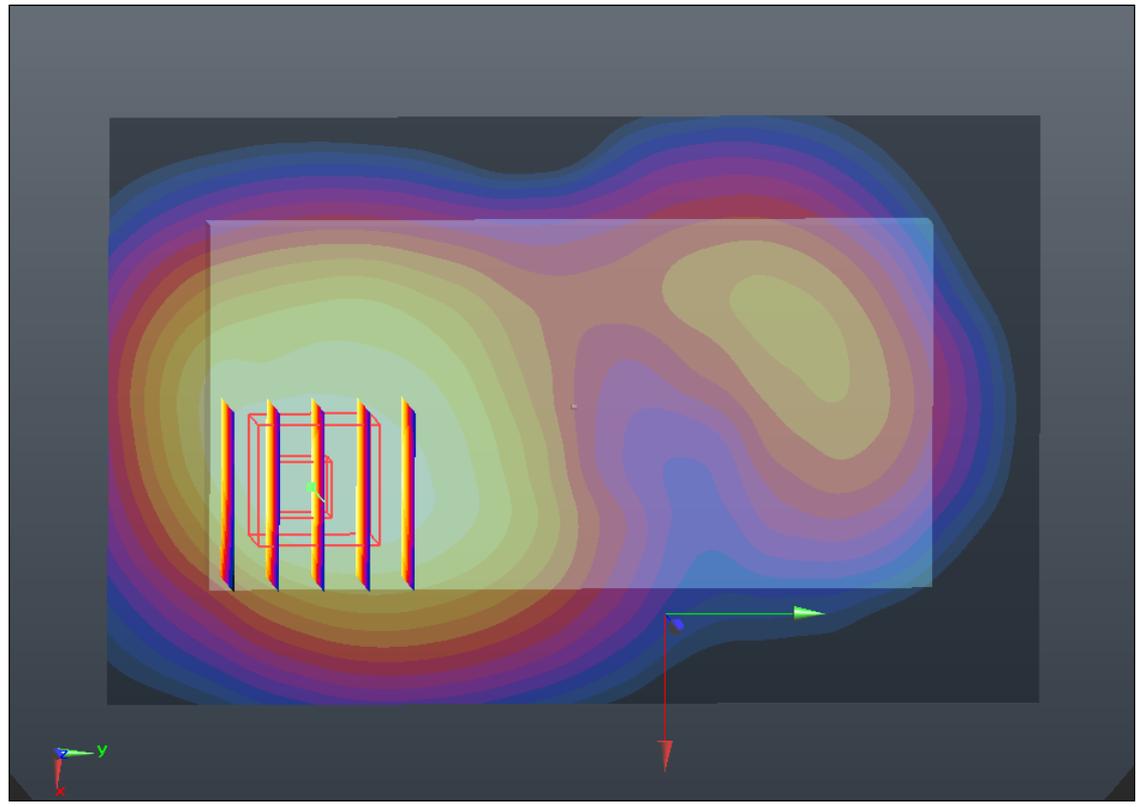

0 dB = 0.650mW/g

#40 WCDMA Band II_RMC12.2K_Back_1cm_Ch9262_2D

DUT: 2O1701

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121018 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.492$ mho/m; $\epsilon_r =$

53.874 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.671 mW/g

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.744 V/m; Power Drift = 0.0035 dB

Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.603 mW/g; SAR(10 g) = 0.367 mW/g

Maximum value of SAR (measured) = 0.653 mW/g

1g/10g Averaged SAR

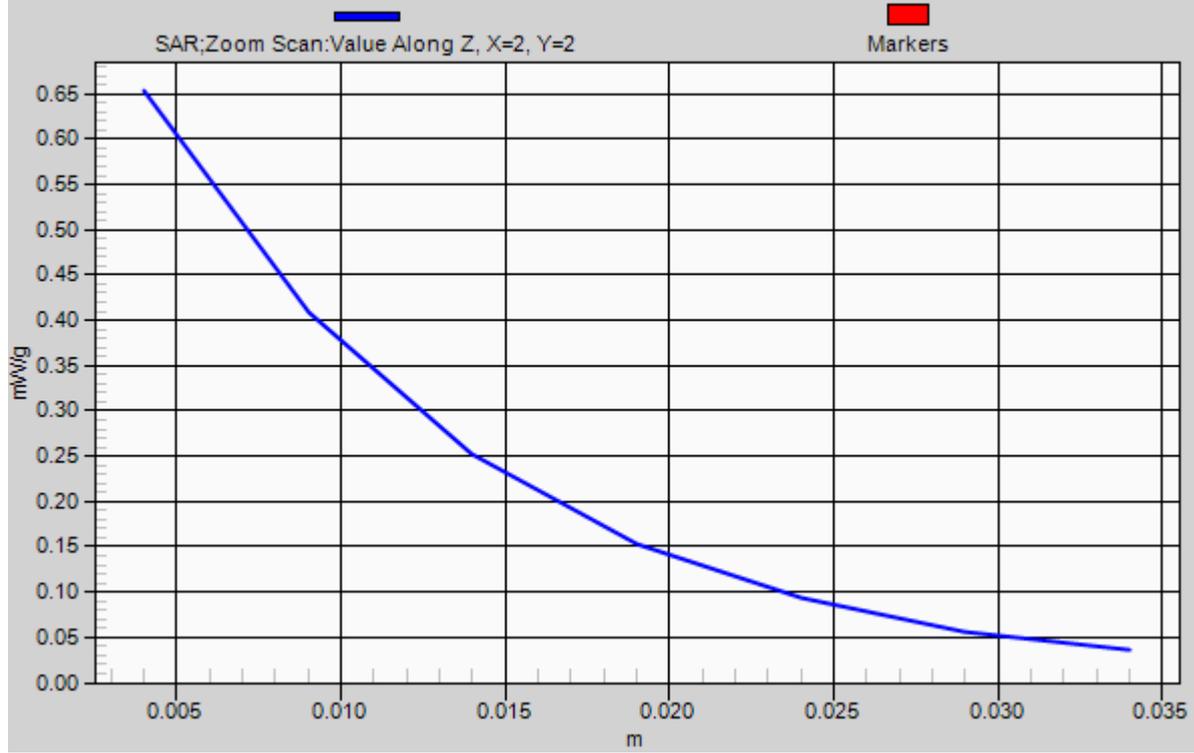

#41 WCDMA Band II_RMC12.2K_Left Side_1cm_Ch9262

DUT: 2O1701

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121018 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.492$ mho/m; $\epsilon_r =$

53.874 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.125 mW/g

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.047 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.066 mW/g

Maximum value of SAR (measured) = 0.128 mW/g


Ch9262/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.047 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.086 mW/g; SAR(10 g) = 0.051 mW/g

Maximum value of SAR (measured) = 0.095 mW/g

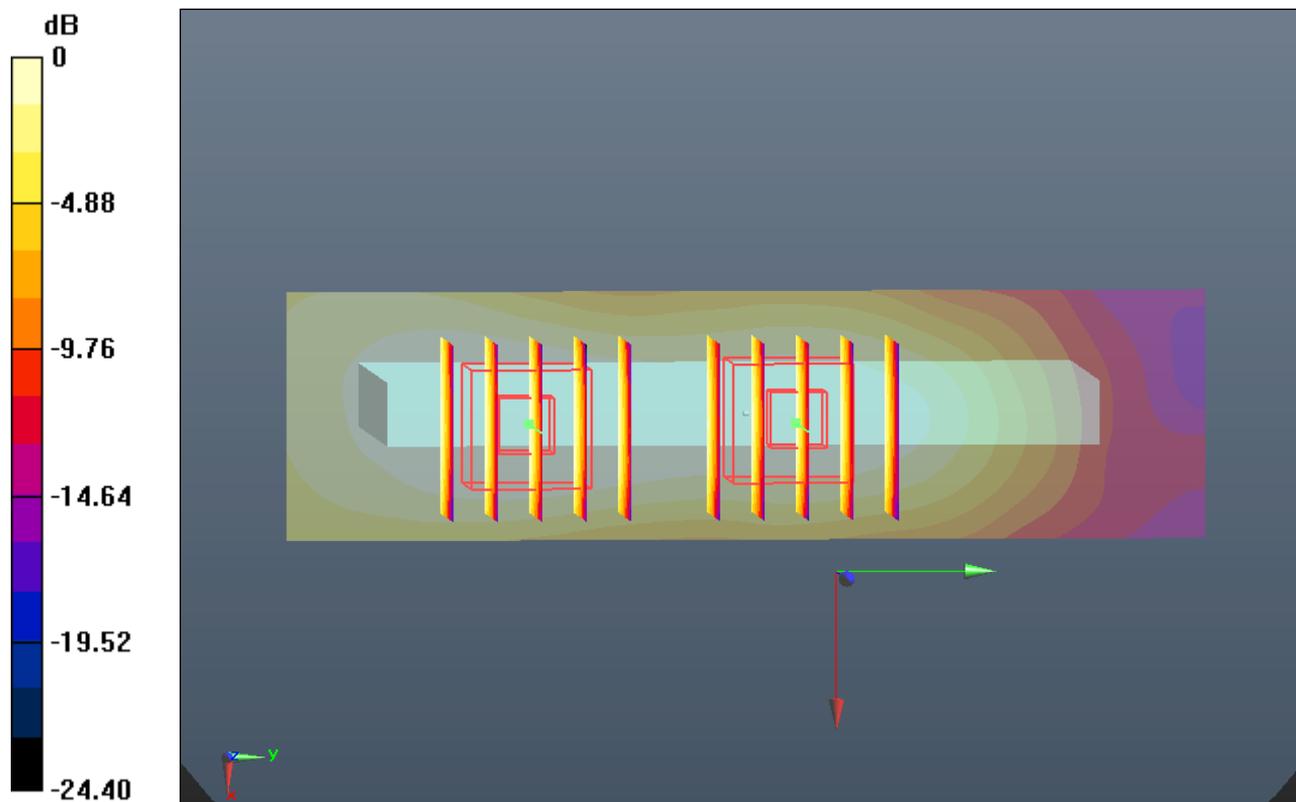

0 dB = 0.090mW/g

#42 WCDMA Band II_RMC12.2K_Right Side_1cm_Ch9262

DUT: 2O1701

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121018 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.492$ mho/m; $\epsilon_r =$

53.874; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (31x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.123 mW/g

Ch9262/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.605 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.106 mW/g; SAR(10 g) = 0.063 mW/g

Maximum value of SAR (measured) = 0.115 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.605 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.167 W/kg

SAR(1 g) = 0.103 mW/g; SAR(10 g) = 0.060 mW/g

Maximum value of SAR (measured) = 0.112 mW/g

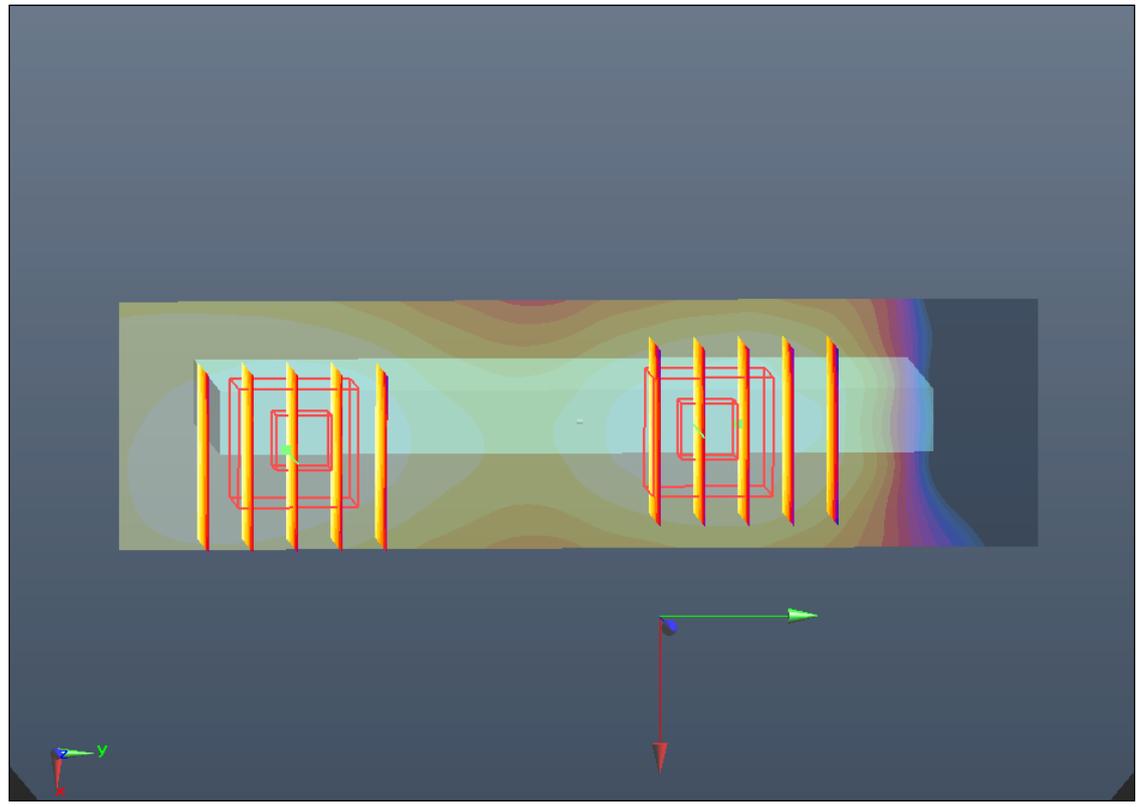

0 dB = 0.110mW/g

#43 WCDMA Band II_RMC12.2K_Bottom Side_1cm_Ch9262

DUT: 2O1701

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121018 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.492$ mho/m; $\epsilon_r =$

53.874 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (31x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.629 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.089 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.947 W/kg

SAR(1 g) = 0.582 mW/g; SAR(10 g) = 0.323 mW/g

Maximum value of SAR (measured) = 0.656 mW/g

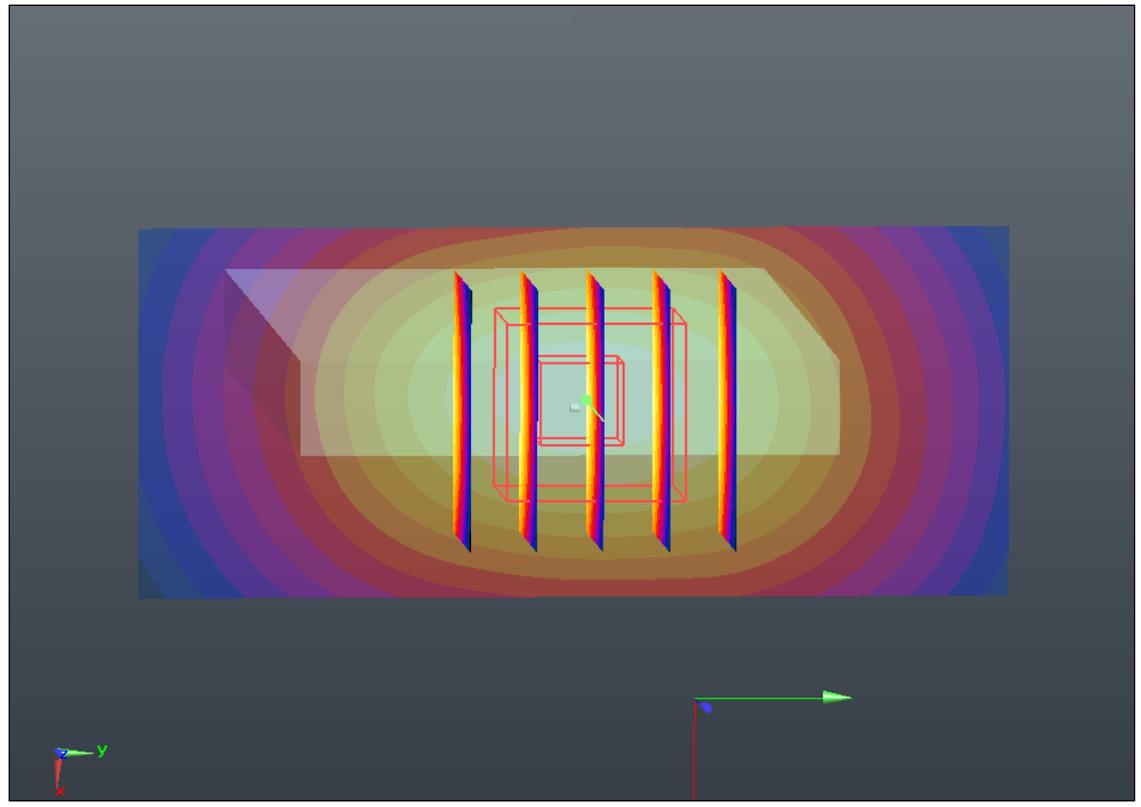

0 dB = 0.660mW/g

#44 WCDMA Band II_RMC12.2K_Back_1cm_Ch9262_Headset

DUT: 2O1701

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_121018 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.492$ mho/m; $\epsilon_r =$

53.874 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.35, 7.35, 7.35); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch9262/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.668 mW/g



Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.858 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.949 W/kg

SAR(1 g) = 0.601 mW/g; SAR(10 g) = 0.364 mW/g

Maximum value of SAR (measured) = 0.657 mW/g

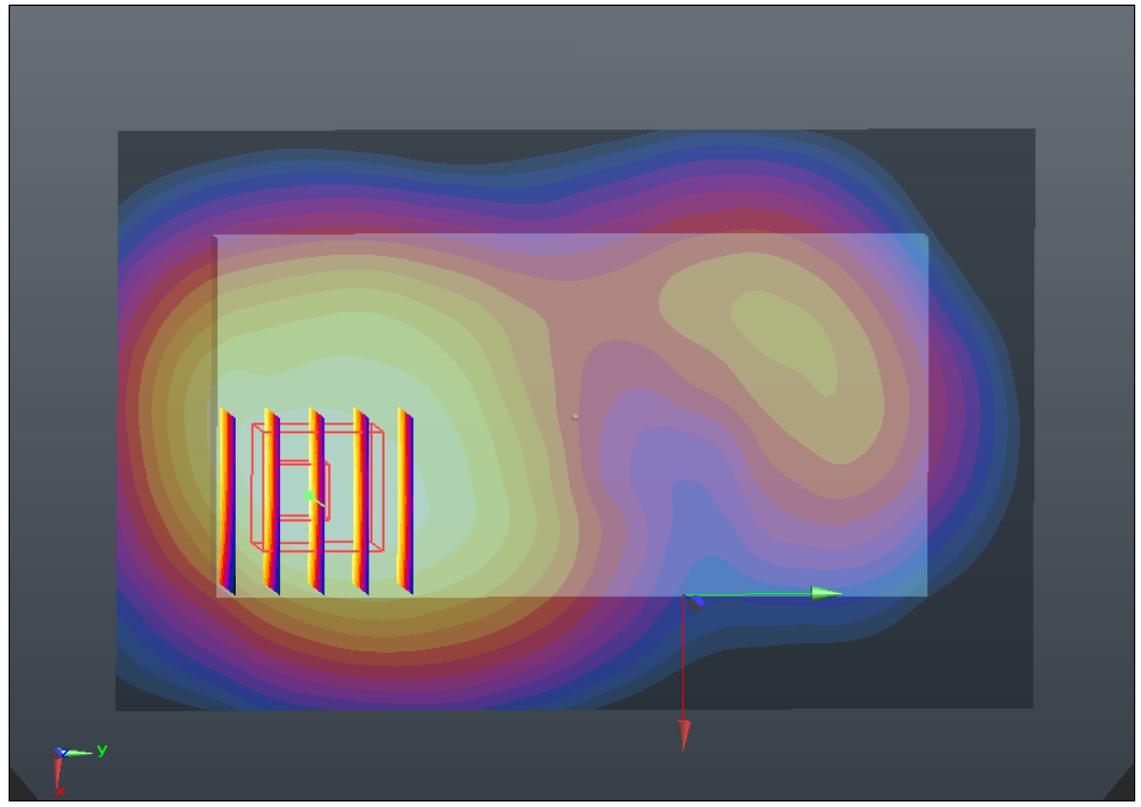

0 dB = 0.660mW/g

#53 802.11b_Front_1cm_1M_Ch11

DUT: 201701

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121023 Medium parameters used: $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 54.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.061 mW/g

Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.391 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.030 mW/g


Maximum value of SAR (measured) = 0.058 mW/g

Ch11/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.391 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.096 W/kg

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.026 mW/g

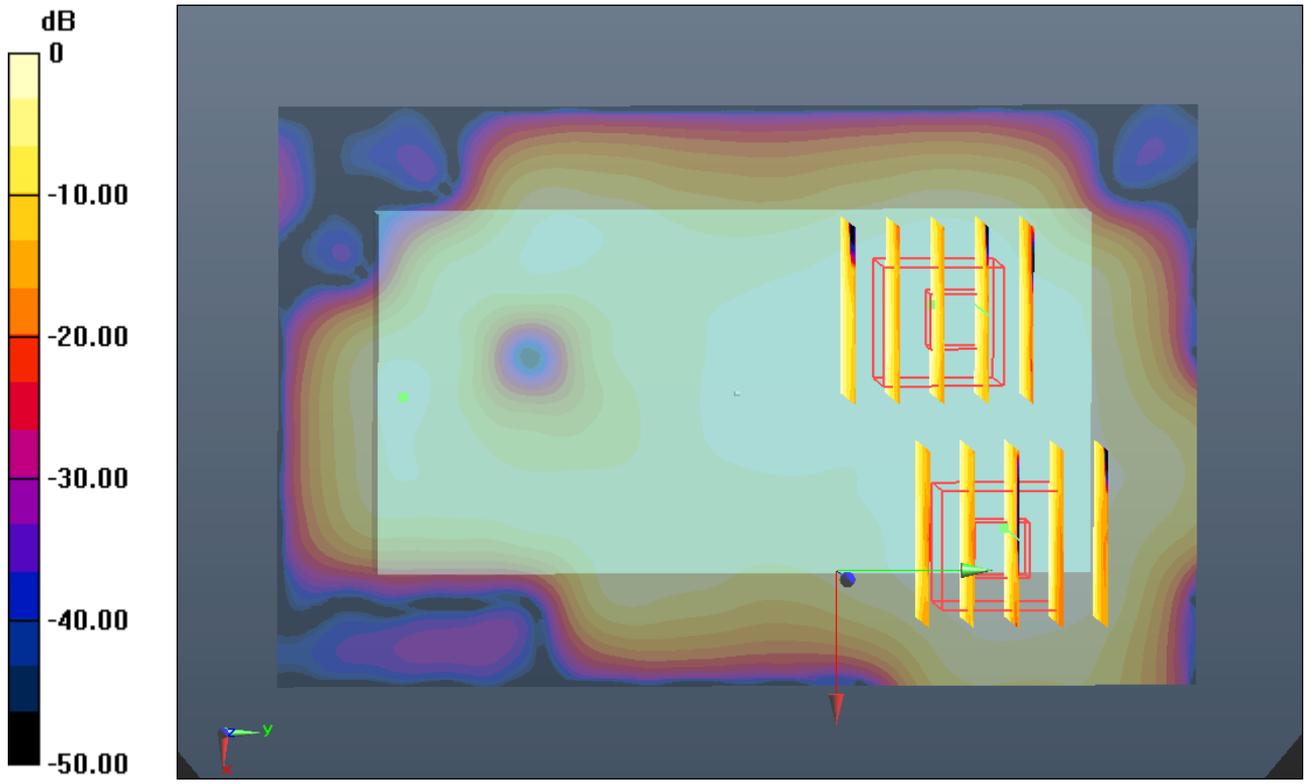

0 dB = 0.060mW/g

#54 802.11b_Back_1cm_1M_Ch11

DUT: 201701

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121023 Medium parameters used: $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 54.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.123 mW/g

Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.369 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.208 W/kg

SAR(1 g) = 0.111 mW/g; SAR(10 g) = 0.061 mW/g

Maximum value of SAR (measured) = 0.122 mW/g



Ch11/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.369 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.143 W/kg

SAR(1 g) = 0.086 mW/g; SAR(10 g) = 0.049 mW/g

Maximum value of SAR (measured) = 0.095 mW/g

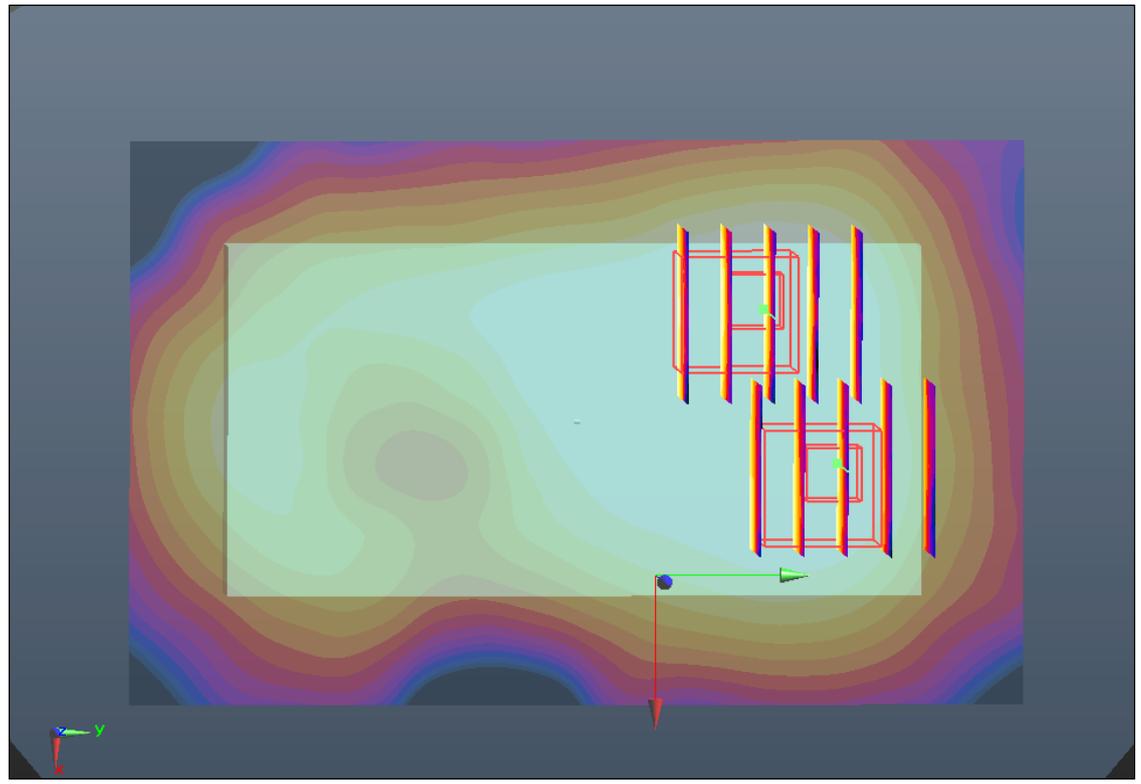

0 dB = 0.090mW/g

#55 802.11b_Right Side_1cm_1M_Ch11

DUT: 201701

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121023 Medium parameters used: $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 54.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (31x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.139 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.722 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.216 W/kg

SAR(1 g) = 0.121 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.134 mW/g

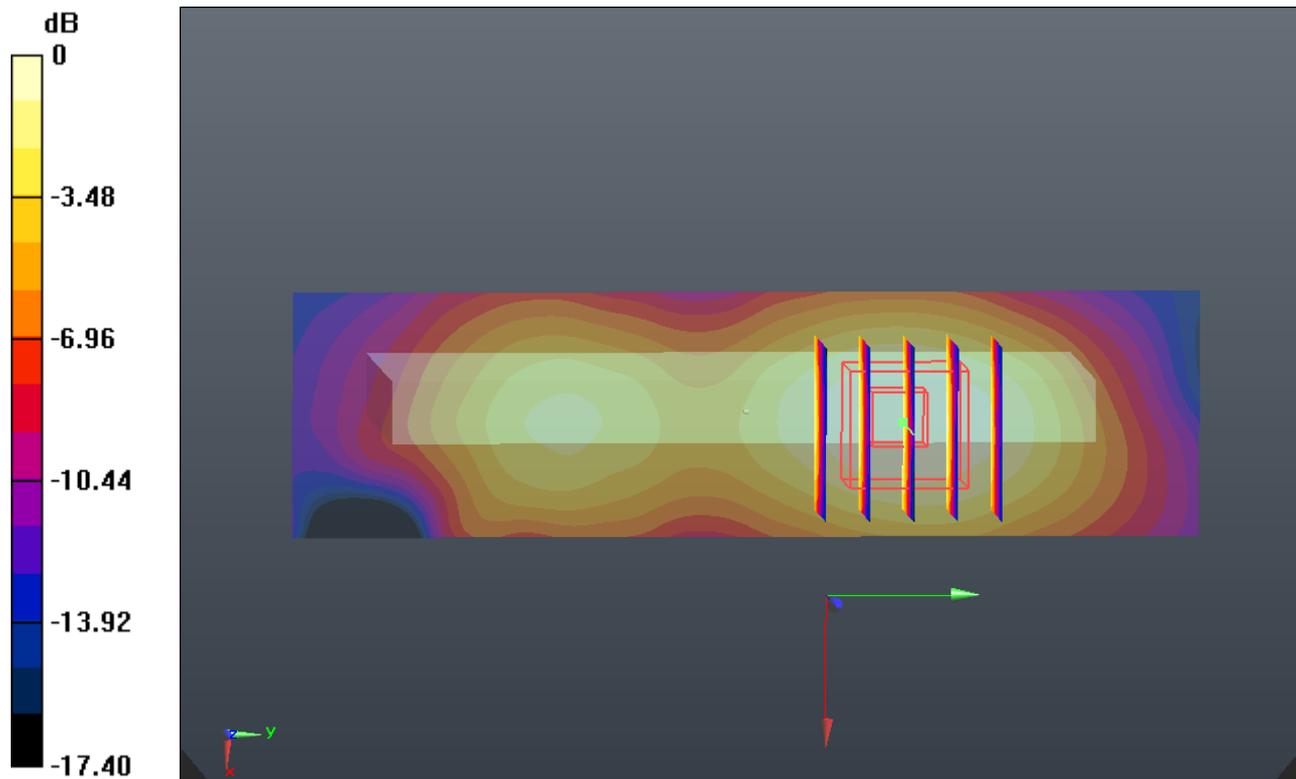

0 dB = 0.130mW/g

#56 802.11b_Top Side_1cm_1M_Ch11

DUT: 201701

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121023 Medium parameters used: $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 54.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (31x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.093 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.744 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.086 mW/g; SAR(10 g) = 0.047 mW/g

Maximum value of SAR (measured) = 0.093 mW/g

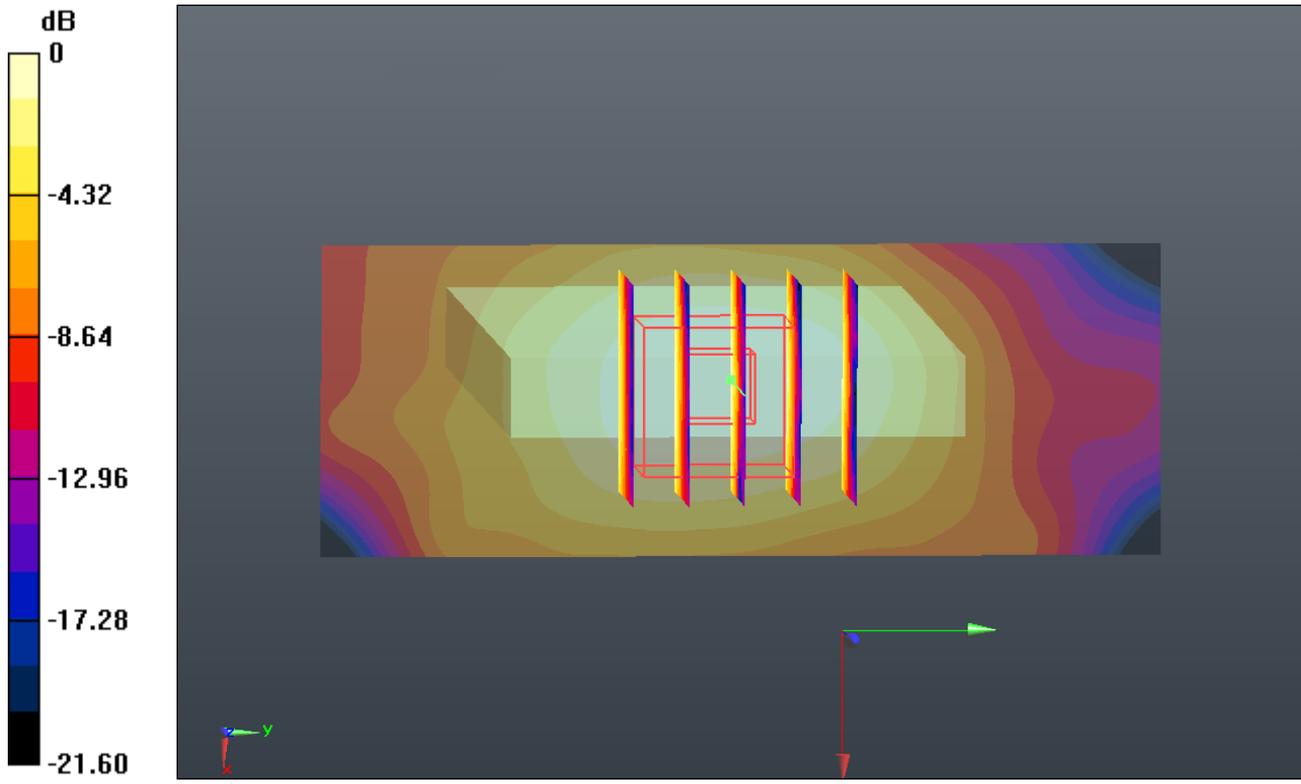

#58 802.11b_Back_1cm_1M_Ch11_Headset

DUT: 201701

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121023 Medium parameters used: $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 54.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.156 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.869 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.257 W/kg

SAR(1 g) = 0.145 mW/g; SAR(10 g) = 0.082 mW/g

Maximum value of SAR (measured) = 0.159 mW/g

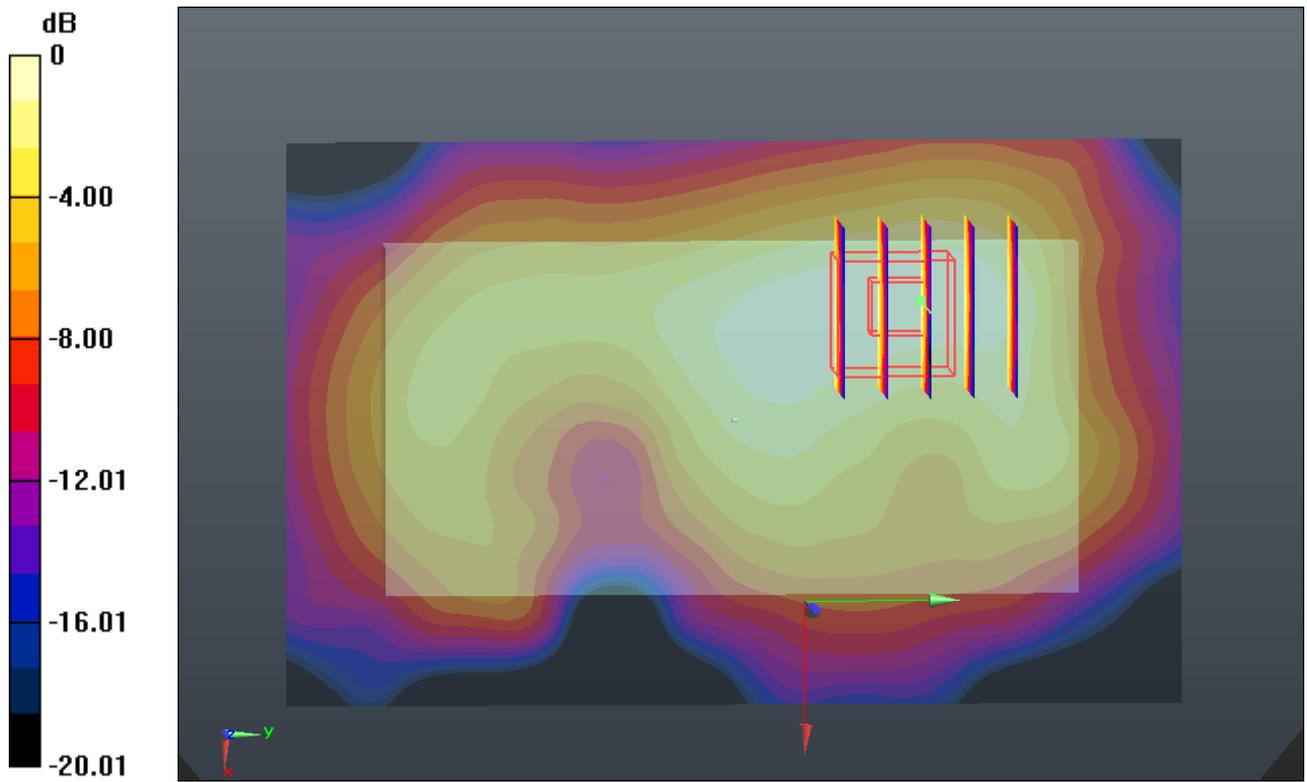

0 dB = 0.160mW/g

#58 802.11b_Back_1cm_1M_Ch11_Headset_2D

DUT: 201701

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_121023 Medium parameters used: $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 54.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.94, 6.94, 6.94); Calibrated: 2012-6-20
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2011-11-18
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.156 mW/g

Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.869 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.257 W/kg

SAR(1 g) = 0.145 mW/g; SAR(10 g) = 0.082 mW/g

Maximum value of SAR (measured) = 0.159 mW/g

1g/10g Averaged SAR

