



# FCC RF Test Report

APPLICANT : ZTE CORPORATION  
EQUIPMENT : V9A and Light Tab 2  
BRAND NAME : ZTE  
MODEL NAME : V9A  
FCC ID : Q78-V9A  
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)  
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Mar. 21, 2012 and completely tested on Apr. 02, 2012. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
**No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant..... 5

    1.2 Manufacturer ..... 5

    1.3 Feature of Equipment Under Test..... 5

    1.4 Emission Designator and Maximum ERP/EIRP Power ..... 6

    1.5 Testing Site ..... 6

    1.6 Applied Standards ..... 6

    1.7 Ancillary Equipment List..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Test Mode..... 8

    2.2 Connection Diagram of Test System ..... 9

**3 TEST RESULT ..... 10**

    3.1 Conducted Output Power Measurement..... 10

    3.2 Peak-to-Average Ratio ..... 12

    3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement ..... 26

    3.4 Occupied Bandwidth Measurement ..... 32

    3.5 Band Edge Measurement..... 52

    3.6 Conducted Emission Measurement ..... 65

    3.7 Field Strength of Spurious Radiation Measurement ..... 81

    3.8 Frequency Stability Measurement..... 95

**4 LIST OF MEASURING EQUIPMENT ..... 102**

**5 UNCERTAINTY OF EVALUATION ..... 103**

**APPENDIX A. PHOTOGRAPHS OF EUT**

**APPENDIX B. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	N/A	PASS	-
3.2	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.3	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
3.3	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.4	§2.1049 §22.917(a) §24.238(a)	Occupied Bandwidth	N/A	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	Band Edge Measurement	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a)	Conducted Emission	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 27.65 dB at 3760.000 MHz
3.8	§2.1055 §22.355 §24.235	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-

# 1 General Description

## 1.1 Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.2 Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	V9A and Light Tab 2
Brand Name	ZTE
Model Name	V9A
FCC ID	Q78-V9A
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz
Maximum Output Power to Antenna	GSM850 : 33.21 dBm GSM1900 : 29.89 dBm WCDMA Band V : 23.33 dBm WCDMA Band II : 22.50 dBm
Antenna Type	PIFA Antenna
HW Version	d55A
SW Version	GB_CLARO_V9AV1.0.0B02
Type of Modulation	GSM / GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink)
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Emission Designator and Maximum ERP/EIRP Power

FCC Rule	System	Type of Modulation	Emission Designator	Maximum ERP/EIRP
Part 22	GSM850 GPRS 8	GMSK	248KGXW	0.1633 W
Part 22	GSM850 EDGE 8	8PSK	248KG7W	0.0473 W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	4M16F9W	0.0375 W
Part 24	GSM1900 GSM	GMSK	248KGXW	0.1832 W
Part 24	GSM1900 EDGE 8	8PSK	248KG7W	0.1426 W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	4M16F9W	0.1138 W

## 1.5 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.		
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC/IC Registration No.</b>
	TH01-KS	03CH01-KS	149928/4086E-1

## 1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- ♦ FCC 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v01

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 1.7 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GWINSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 19000 MHz for GSM1900 and WCDMA Band II.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	<ul style="list-style-type: none"> <li>■ GPRS 8 Link</li> <li>■ EDGE 8 Link</li> </ul>	<ul style="list-style-type: none"> <li>■ GPRS 8 Link</li> <li>■ EDGE 8 Link</li> </ul>
GSM 1900	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE 8 Link</li> </ul>	<ul style="list-style-type: none"> <li>■ GSM Link</li> <li>■ EDGE 8 Link</li> </ul>
WCDMA Band V	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>
WCDMA Band II	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>	<ul style="list-style-type: none"> <li>■ RMC 12.2Kbps Link</li> </ul>

**Note:**


1. The maximum power levels are GPRS multi-slot class 8 mode for GSM850 GMSK link, GSM mode for GSM1900 GMSK link, EDGE multi-slot class 8 mode for 8PSK link, RMC 12.2Kbps mode for WCDMA band V, and RMC 12.2Kbps mode for WCDMA band II, only these modes were used for all tests.
2. Because there are individual antennas for each WWAN, and the Bluetooth and WLAN share a common antenna but can't transmit simultaneously, the co-location test modes are not required.

The conducted power tables are as follows:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	33.18	33.15	32.96	29.66	29.89	29.53
GPRS 8	33.21	33.14	32.96	29.68	29.83	29.43
GPRS 10	30.60	30.76	30.83	27.01	26.85	26.90
GPRS 12	27.84	27.61	27.75	24.71	24.42	24.46
EGPRS 8	26.93	26.81	26.75	25.19	26.15	25.73
EGPRS 10	24.25	24.13	24.16	22.72	23.49	23.13
EGPRS 12	21.53	21.76	21.78	20.90	21.71	21.39

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880.0	1907.6
RMC 12.2K	23.14	23.33	23.26	22.19	22.50	22.37
HSDPA Subtest-1	21.04	21.27	21.07	21.02	21.32	21.19
HSDPA Subtest-2	21.03	21.23	21.62	21.55	21.31	21.25
HSDPA Subtest-3	21.04	21.24	21.01	21.01	21.34	21.22
HSDPA Subtest-4	21.02	21.28	21.58	21.46	21.27	21.26
HSUPA Subtest-1	21.58	21.27	21.50	21.22	21.62	21.24
HSUPA Subtest-2	21.25	21.57	21.34	21.58	21.33	21.40
HSUPA Subtest-3	21.50	21.32	21.52	21.21	21.58	21.26
HSUPA Subtest-4	21.24	21.51	21.50	21.17	21.55	21.83
HSUPA Subtest-5	21.63	21.41	21.49	21.28	21.62	21.56

## 2.2 Connection Diagram of Test System

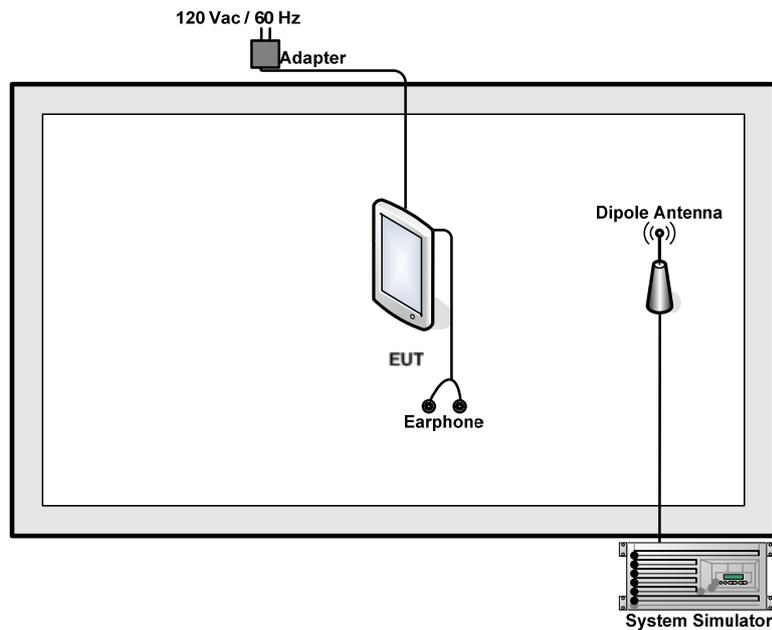

### 3 Test Result

#### 3.1 Conducted Output Power Measurement

##### 3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

##### 3.1.4 Test Setup

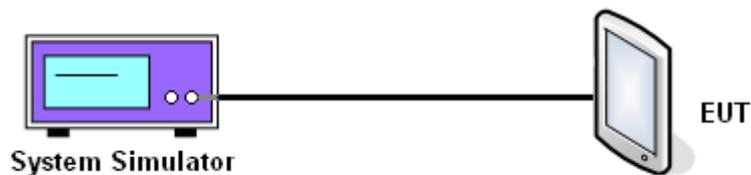

### 3.1.5 Test Result of Conducted Output Power

Cellular Band									
Modes	GSM850 (GPRS 8)			GSM850 (EDGE 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	33.21	33.14	32.96	26.93	26.81	26.75	23.14	23.33	23.26
Conducted Power (Watts)	2.09	2.06	1.98	0.49	0.48	0.47	0.21	0.22	0.21

PCS Band									
Modes	GSM1900 (GSM)			GSM1900 (EDGE 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	29.66	29.89	29.53	25.19	26.15	25.73	22.19	22.50	22.37
Conducted Power (Watts)	0.92	0.97	0.90	0.33	0.41	0.37	0.17	0.18	0.17

## 3.2 Peak-to-Average Ratio

### 3.2.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. The following guidelines are offered for performing a CCDF measurement.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The CCDF (Complementary Cumulative Distribution Function) of the middle channel for the highest RF powers were measured.

### 3.2.4 Test Setup

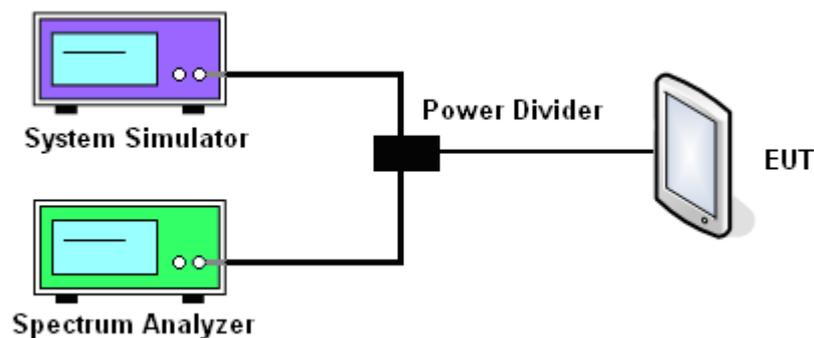

3.2.5 Test Result of Peak-to-Average Ratio

Cellular Band									
Modes	GSM850 (GPRS 8)			GSM850 (EDGE 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Peak-to-Average Ratio (dB)	0.01	0.01	0.01	0.06	0.08	0.05	3.04	2.96	3.00


PCS Band									
Modes	GSM1900 (GSM)			GSM1900 (EDGE 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.03	0.02	0.01	0.09	0.06	0.09	2.92	3.28	3.12



3.2.6 Test Result (Plots) of Peak-to-Average Ratio


Band :	GSM 850	Test Mode :	GPRS 8 Link
--------	---------	-------------	-------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

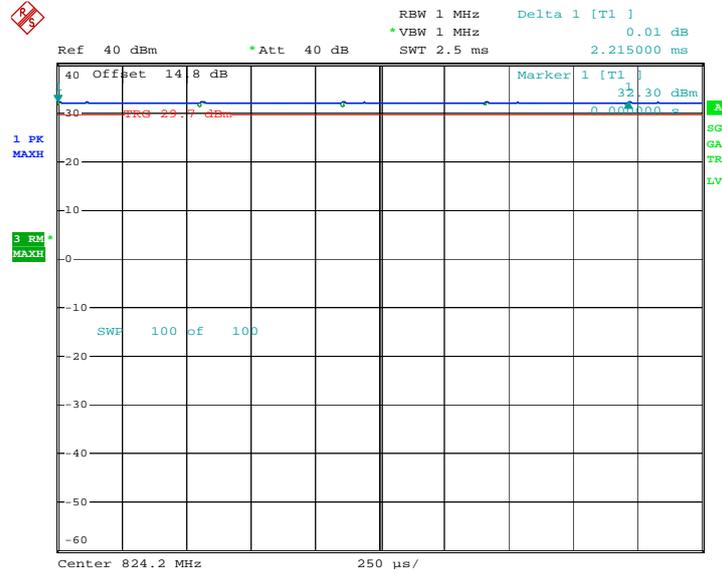

Date: 27.MAR.2012 23:25:42


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

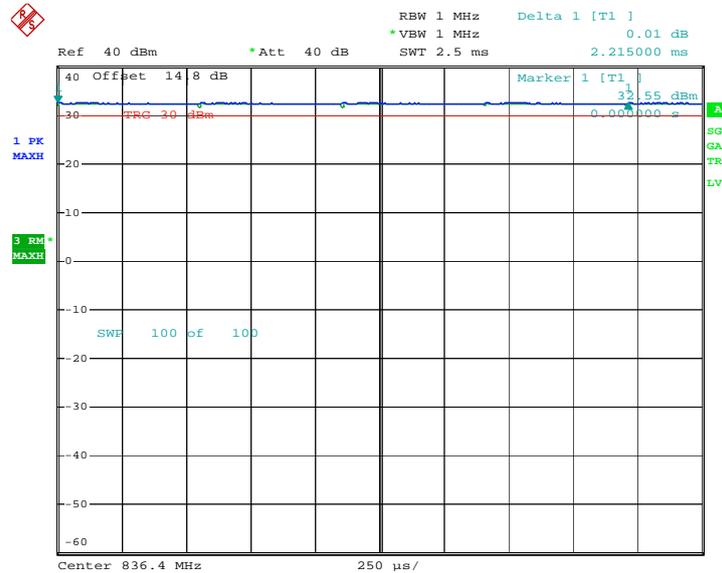

Date: 27.MAR.2012 23:22:56



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

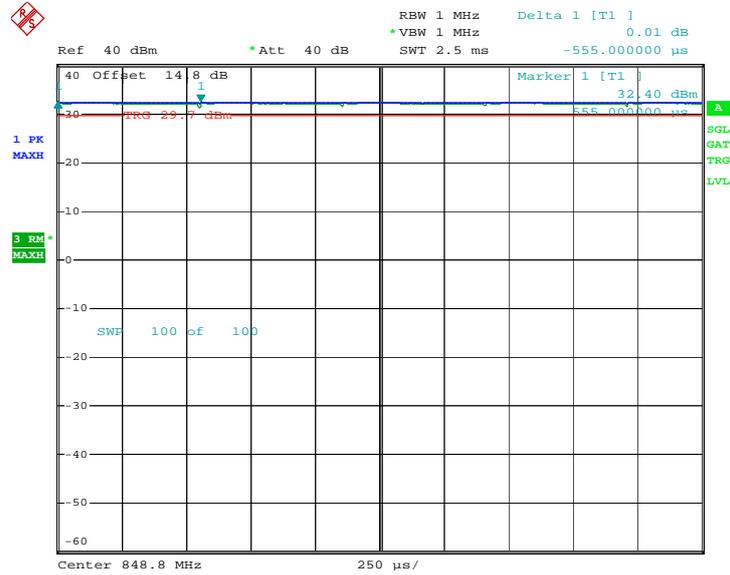


Date: 27.MAR.2012 23:24:23




Band :	GSM 850	Test Mode :	EDGE 8 Link
--------	---------	-------------	-------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

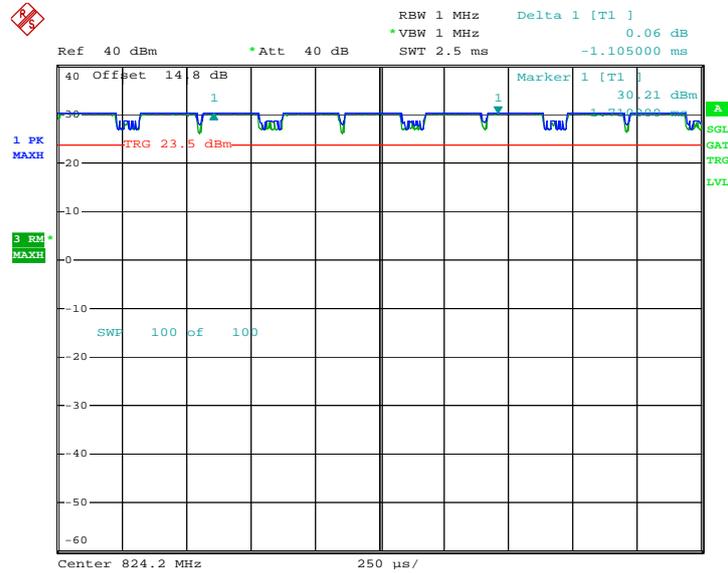

Date: 27.MAR.2012 23:55:50


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

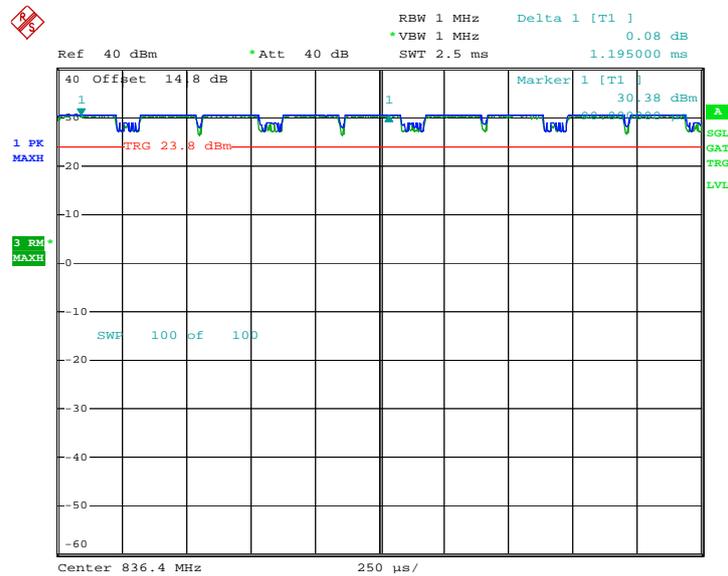

Date: 27.MAR.2012 23:53:11



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

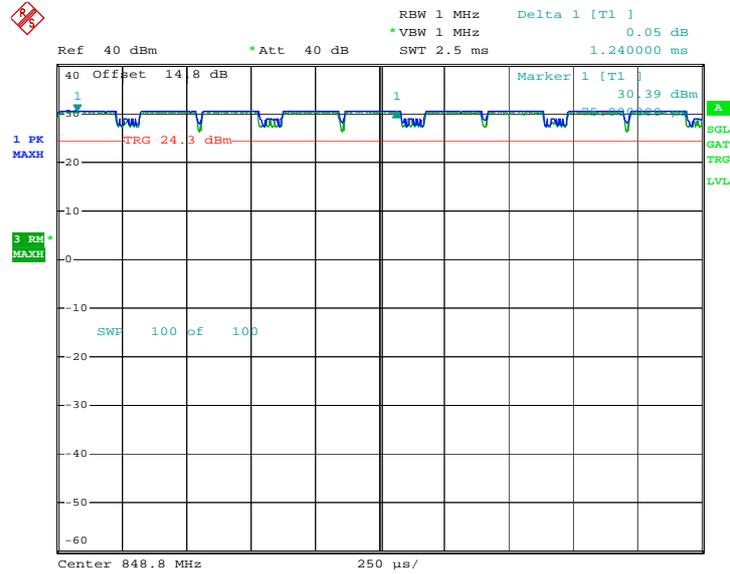


Date: 27.MAR.2012 23:57:37




Band :	GSM 1900	Test Mode :	GSM Link
--------	----------	-------------	----------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

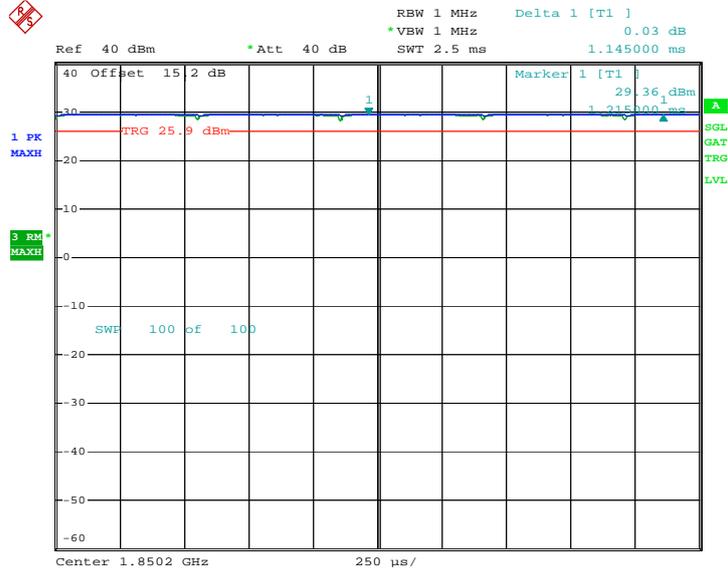

Date: 27.MAR.2012 23:07:37


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

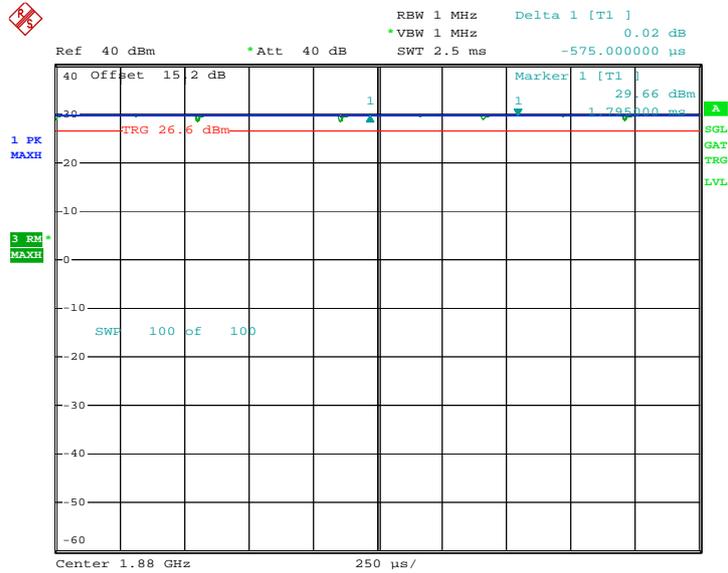

Date: 27.MAR.2012 23:06:06



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

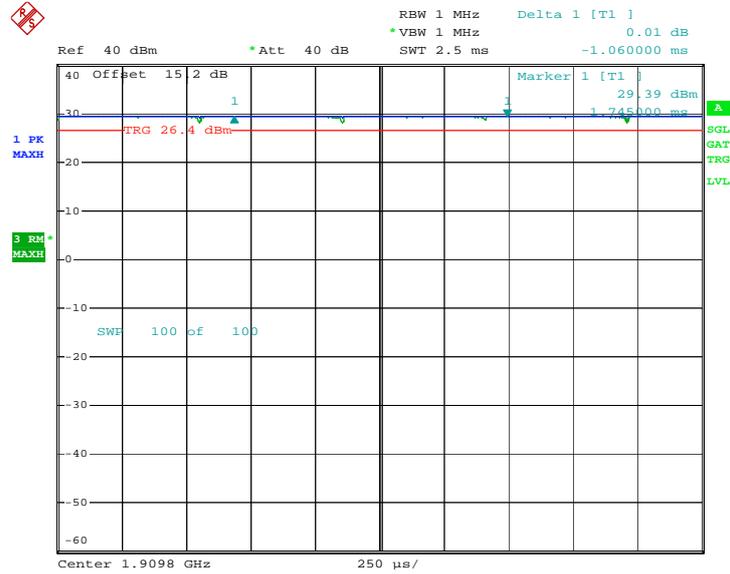


Date: 27.MAR.2012 23:09:57




Band :	GSM 1900	Test Mode :	EDGE 8 Link
--------	----------	-------------	-------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

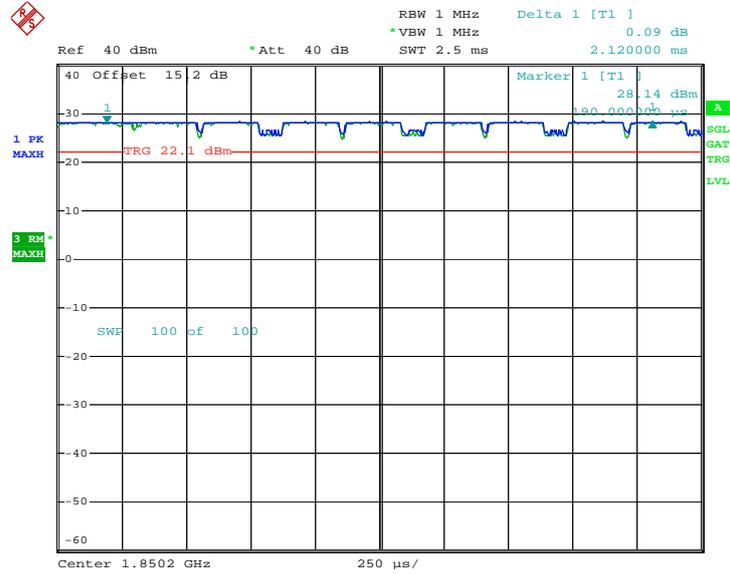

Date: 28.MAR.2012 00:04:10


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

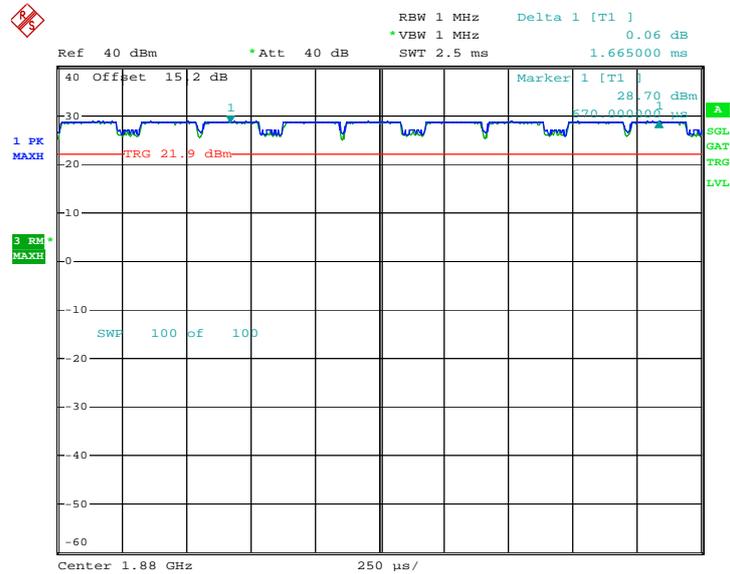

Date: 28.MAR.2012 00:01:03



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

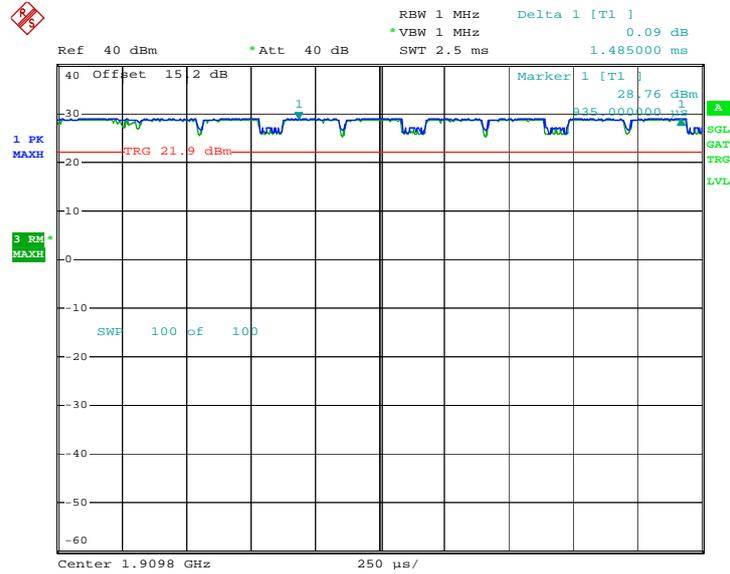


Date: 28.MAR.2012 00:02:48



<b>Band :</b>	WCDMA Band V	<b>Test Mode :</b>	RMC 12.2Kbps Link
---------------	--------------	--------------------	-------------------


Peak-to-Average Ratio on Channel 4132 (826.4 MHz)

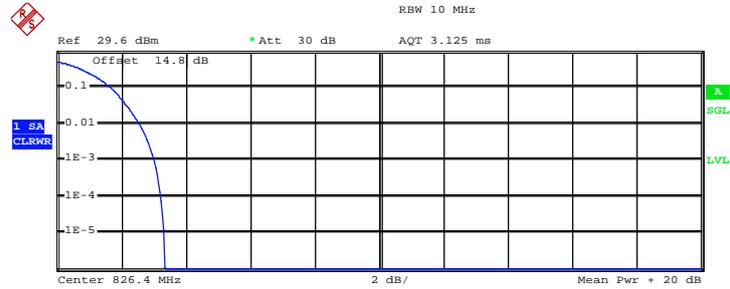

Complementary Cumulative Distribution Function (100000 samples)  
 Trace 1  
 Mean 23.21 dBm  
 Peak 26.57 dBm  
 Crest 3.36 dB  
 10 % 1.68 dB  
 1 % 2.56 dB  
 .1 % 3.04 dB  
 .01 % 3.24 dB

Date: 28.MAR.2012 00:39:31

Peak-to-Average Ratio on Channel 4182 (836.4 MHz)

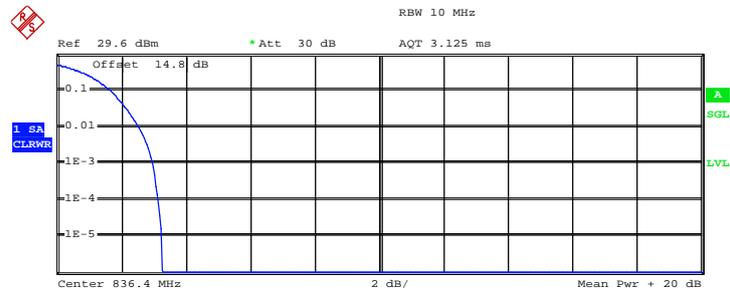


Complementary Cumulative Distribution Function (100000 samples)  
 Trace 1  
 Mean 23.58 dBm  
 Peak 26.85 dBm  
 Crest 3.27 dB  
 10 % 1.68 dB  
 1 % 2.56 dB  
 .1 % 2.96 dB  
 .01 % 3.16 dB

Date: 28.MAR.2012 00:38:56



Peak-to-Average Ratio on Channel 4233 (846.6 MHz)

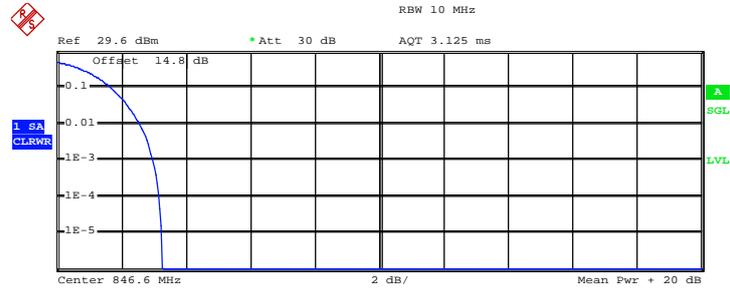

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean    23.58 dBm  
 Peak    26.85 dBm  
 Crest    3.27 dB


10 %    1.68 dB  
 1 %    2.56 dB  
 .1 %    3.00 dB  
 .01 %    3.16 dB

Date: 28.MAR.2012 00:40:04




<b>Band :</b>	WCDMA Band II	<b>Test Mode :</b>	RMC 12.2Kbps Link
---------------	---------------	--------------------	-------------------

**Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)**

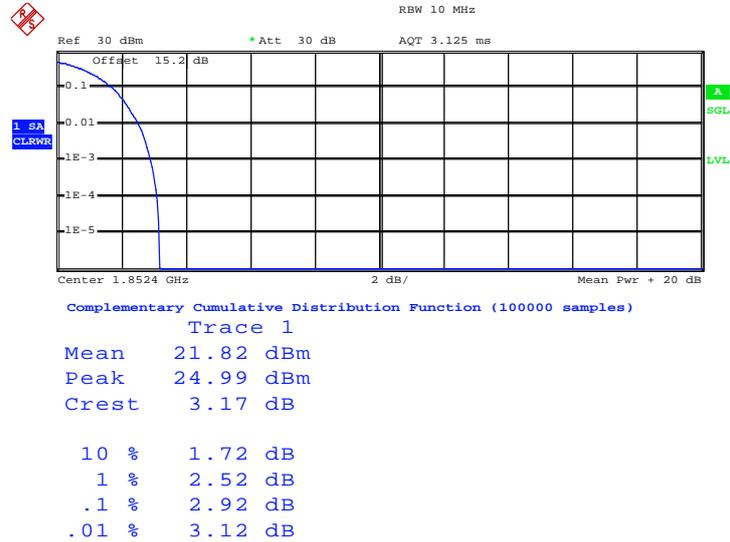

Date: 28.MAR.2012 00:37:47


**Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)**

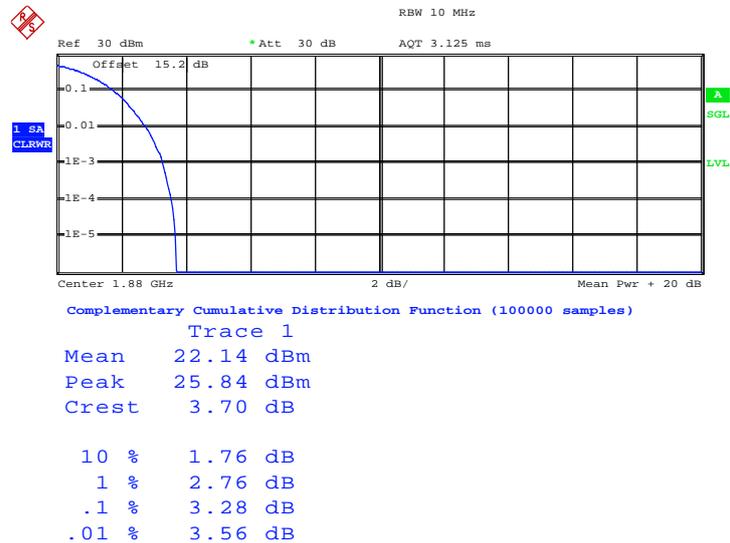

Date: 28.MAR.2012 00:37:15



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

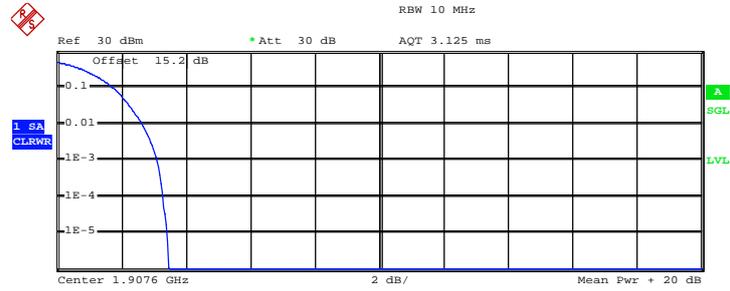

Complementary Cumulative Distribution Function (100000 samples)

Trace 1

Mean	21.96 dBm
Peak	25.42 dBm
Crest	3.45 dB
10 %	1.76 dB
1 %	2.64 dB
.1 %	3.12 dB
.01 %	3.28 dB

Date: 28.MAR.2012 00:36:46

### 3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

#### 3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v01. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.

#### 3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.3.3 Test Procedures

1. The EUT was placed on a turntable with 1.0 meter height in a fully anechoic chamber.
2. The EUT was set at 1.2 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiated power.
4. The height of the receiving antenna is adjusted to look for the maximum ERP/EIRP.
5. Taking the record of maximum ERP/EIRP.
6. A dipole antenna was substituted in place of the EUT and was driven by a signal generator.
7. The conducted power at the terminal of the dipole antenna is measured.
8. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
9.  $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

$P_s$  (dBm) : Input power to substitution antenna.

$G_s$  (dBi or dBd) : Substitution antenna Gain.

$E_t = R_t + AF$


$E_s = R_s + AF$

$AF$  (dB/m) : Receive antenna factor

$R_t$  : The highest received signal in spectrum analyzer for EUT.

$R_s$  : The highest received signal in spectrum analyzer for substitution antenna.

### 3.3.4 Test Setup

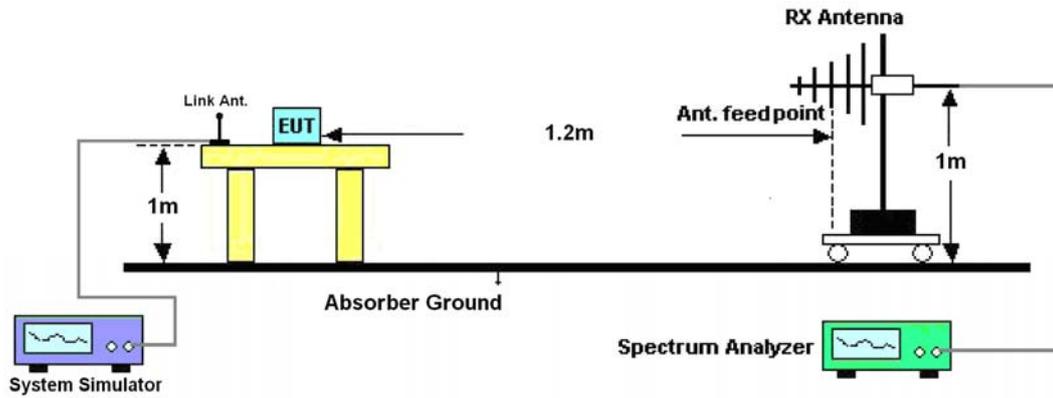

3.3.5 Test Result of ERP

GSM850 (GPRS 8) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-25.45	-48.12	0.00	-1.08	21.59	0.1442
836.40	-25.34	-48.28	0.00	-0.93	22.01	0.1589
848.80	-25.46	-48.35	0.00	-0.76	22.13	0.1633
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-31.21	-47.97	0.00	-1.08	15.68	0.0370
836.40	-31.43	-48.01	0.00	-0.93	15.65	0.0367
848.80	-31.88	-48.05	0.00	-0.76	15.41	0.0348

GSM850 (EDGE 8) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-30.29	-48.12	0.00	-1.08	16.75	0.0473
836.40	-30.67	-48.28	0.00	-0.93	16.68	0.0466
848.80	-31.18	-48.35	0.00	-0.76	16.41	0.0438
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
824.20	-35.37	-47.97	0.00	-1.08	11.52	0.0142
836.40	-36.08	-48.01	0.00	-0.93	11.00	0.0126
848.80	-36.53	-48.05	0.00	-0.76	10.76	0.0119



WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-31.80	-48.12	0.00	-1.08	15.24	0.0334
836.40	-34.25	-48.28	0.00	-0.93	13.10	0.0204
846.60	-31.85	-48.35	0.00	-0.76	15.74	0.0375
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBd)	ERP (dBm)	ERP (W)
826.40	-37.19	-47.97	0.00	-1.08	9.70	0.0093
836.40	-39.76	-48.01	0.00	-0.93	7.32	0.0054
846.60	-37.48	-48.05	0.00	-0.76	9.81	0.0096

3.3.6 Test Result of EIRP

GSM1900 (GSM) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-31.70	-51.88	0.00	1.96	22.14	0.1637
1880.00	-32.56	-52.99	0.00	2.00	22.43	0.1750
1909.80	-33.63	-54.28	0.00	1.98	22.63	0.1832
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-32.33	-52.13	0.00	1.96	21.76	0.1500
1880.00	-33.12	-53.17	0.00	2.00	22.05	0.1603
1909.80	-33.72	-54.13	0.00	1.98	22.39	0.1734

GSM1900 (EDGE 8) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-32.45	-51.88	0.00	1.96	21.39	0.1377
1880.00	-33.45	-52.99	0.00	2.00	21.54	0.1426
1909.80	-34.81	-54.28	0.00	1.98	21.45	0.1396
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1850.20	-32.77	-52.13	0.00	1.96	21.32	0.1355
1880.00	-34.15	-53.17	0.00	2.00	21.02	0.1265
1909.80	-35.15	-54.13	0.00	1.98	20.96	0.1247



WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP						
Horizontal Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-33.65	-51.88	0.00	1.96	20.19	0.1045
1880.00	-35.90	-52.99	0.00	2.00	19.09	0.0811
1907.60	-36.64	-54.28	0.00	1.98	19.62	0.0916
Vertical Polarization						
Frequency (MHz)	Rt (dBm)	Rs (dBm)	Ps (dBm)	Gs (dBi)	EIRP (dBm)	EIRP (W)
1852.40	-33.53	-52.13	0.00	1.96	20.56	0.1138
1880.00	-36.27	-53.17	0.00	2.00	18.90	0.0776
1907.60	-36.92	-54.13	0.00	1.98	19.19	0.0830

## 3.4 Occupied Bandwidth Measurement

### 3.4.1 Description of Occupied Bandwidth Measurement

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.4.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% occupied bandwidth and 26 dB bandwidth of the middle channel for the highest RF powers were measured.

### 3.4.4 Test Setup

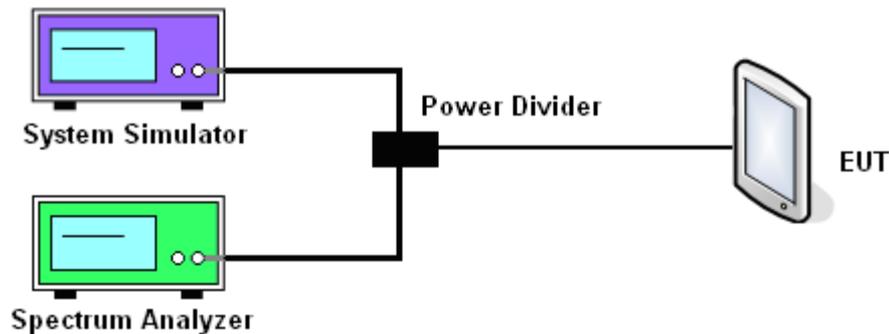

3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band						
Modes	GSM850 (GPRS 8)			GSM850 (EDGE 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
99% OBW (KHz)	248.00	244.00	248.00	248.00	244.00	242.00
26dB BW (KHz)	312.00	300.00	310.00	310.00	308.00	312.00

PCS Band						
Modes	GSM1900 (GSM)			GSM1900 (EDGE 8)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
99% OBW (KHz)	248.00	244.00	246.00	246.00	248.00	244.00
26dB BW (KHz)	312.00	312.00	310.00	314.00	300.00	310.00

Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
99% OBW (MHz)	4.16	4.16	4.12
26dB BW (MHz)	4.68	4.68	4.68


PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1852.4	1880	1907.6
99% OBW (MHz)	4.14	4.16	4.16
26dB BW (MHz)	4.68	4.68	4.68



3.4.6 Test Result (Plots) of Occupied Bandwidth


Band :	GSM 850	Test Mode :	GPRS 8 Link
--------	---------	-------------	-------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

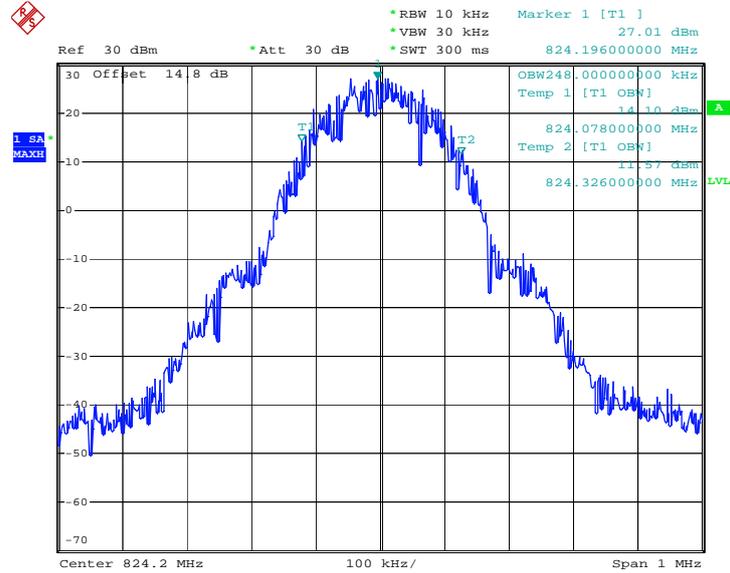

Date: 27.MAR.2012 23:13:33


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

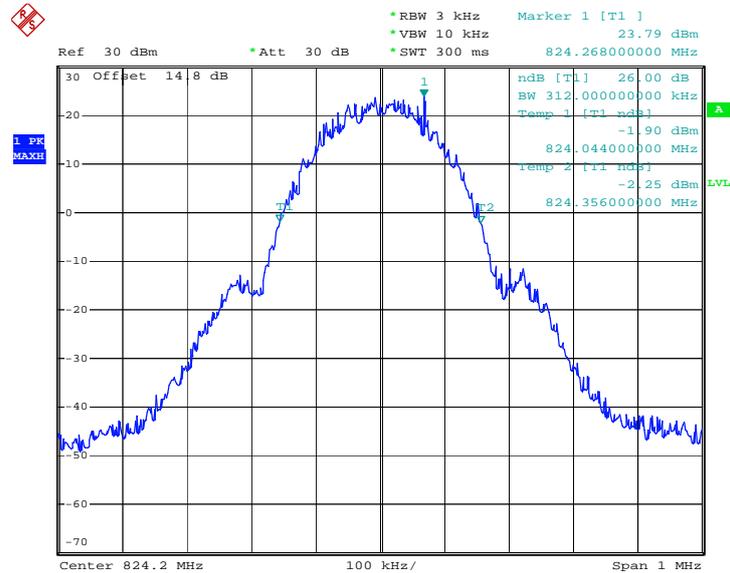

Date: 27.MAR.2012 23:12:13




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

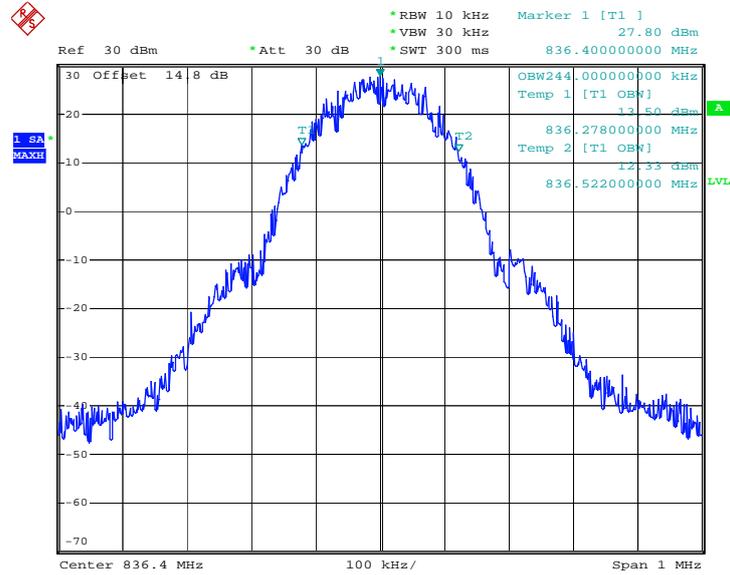

Date: 27.MAR.2012 23:14:01


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

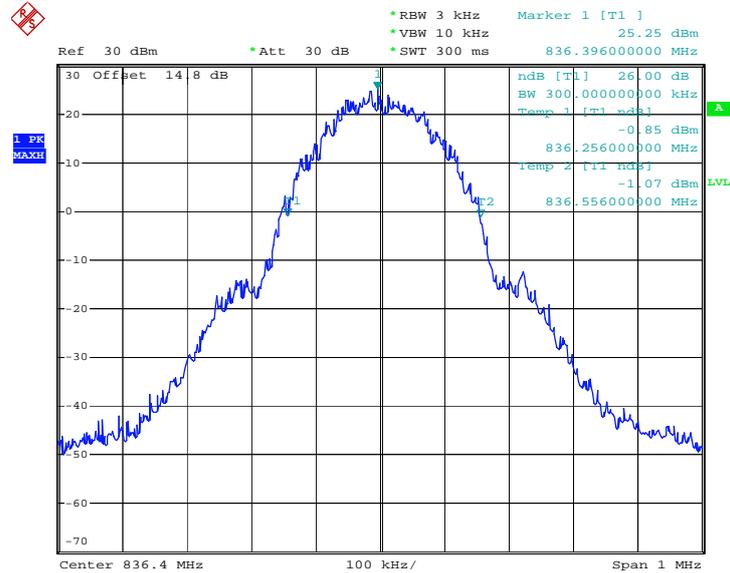

Date: 27.MAR.2012 23:12:40




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

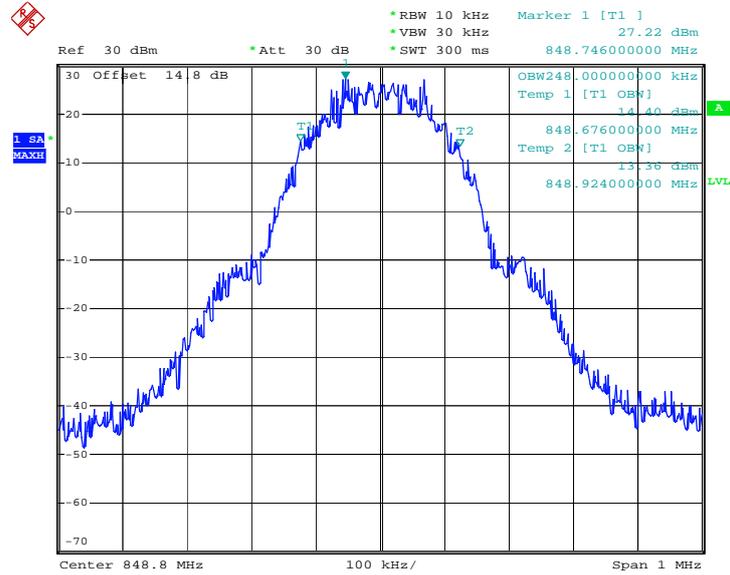

Date: 27.MAR.2012 23:14:26

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

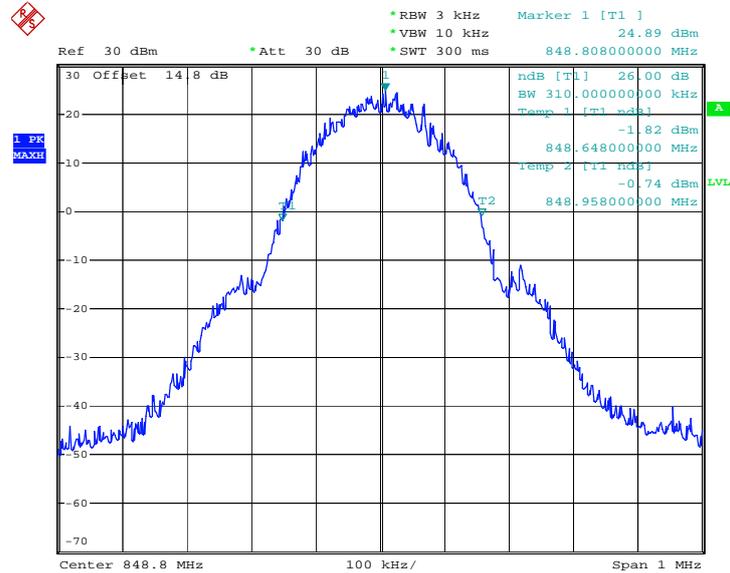


Date: 27.MAR.2012 23:13:06




Band :	GSM 850	Test Mode :	EDGE 8 Link
--------	---------	-------------	-------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

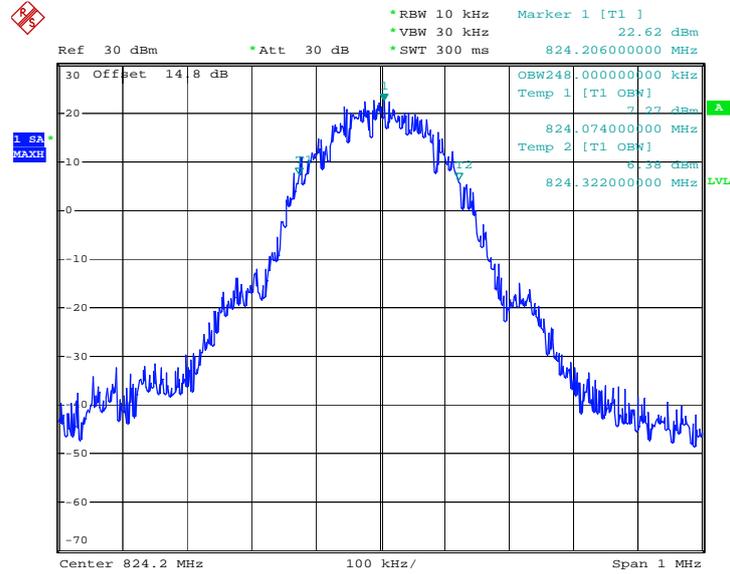

Date: 28.MAR.2012 00:13:48


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

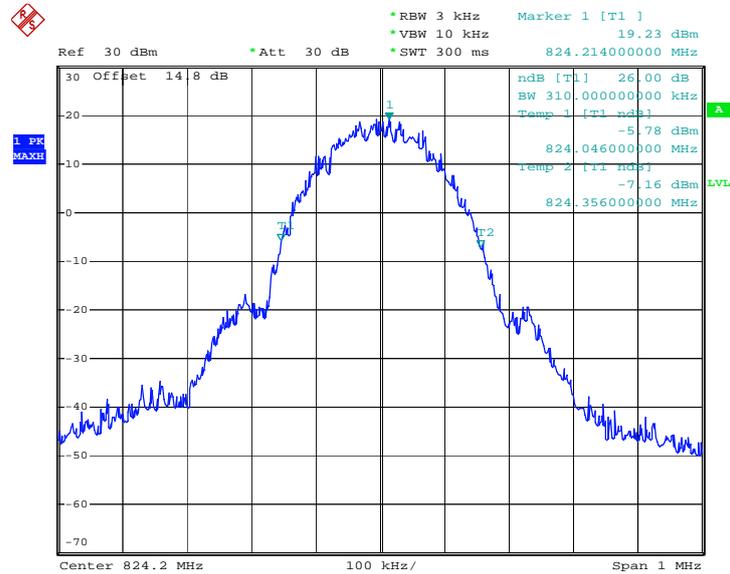

Date: 28.MAR.2012 00:12:28




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

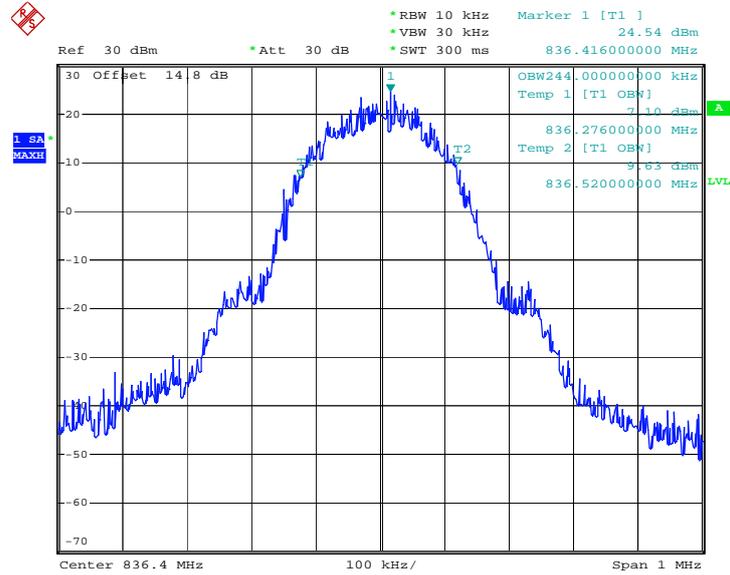

Date: 28.MAR.2012 00:14:14


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

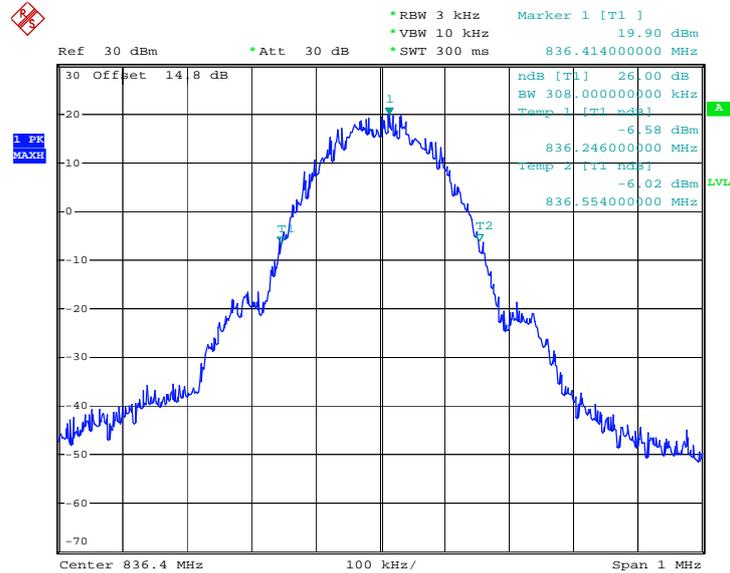

Date: 28.MAR.2012 00:12:56




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

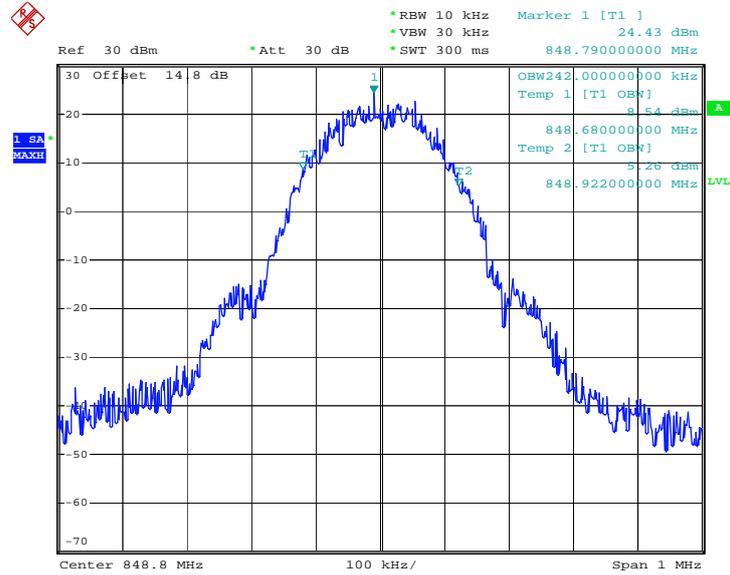

Date: 28.MAR.2012 00:14:40

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

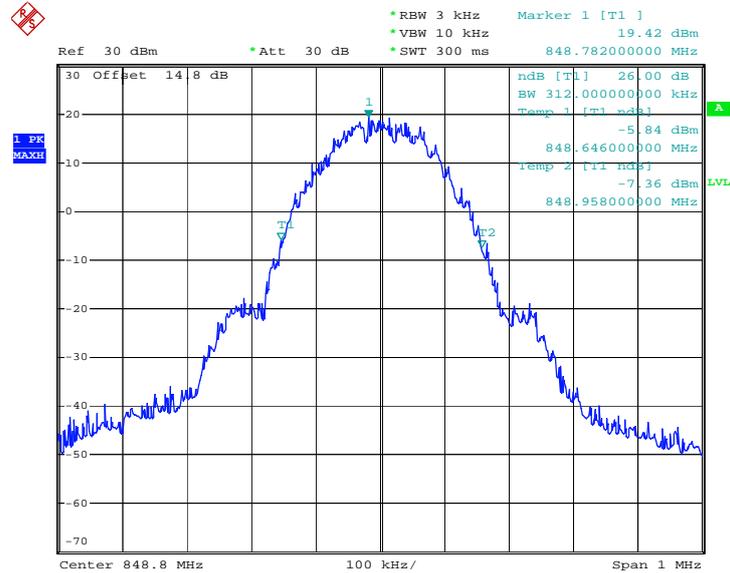


Date: 28.MAR.2012 00:13:22




Band :	GSM 1900	Test Mode :	GSM Link
--------	----------	-------------	----------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

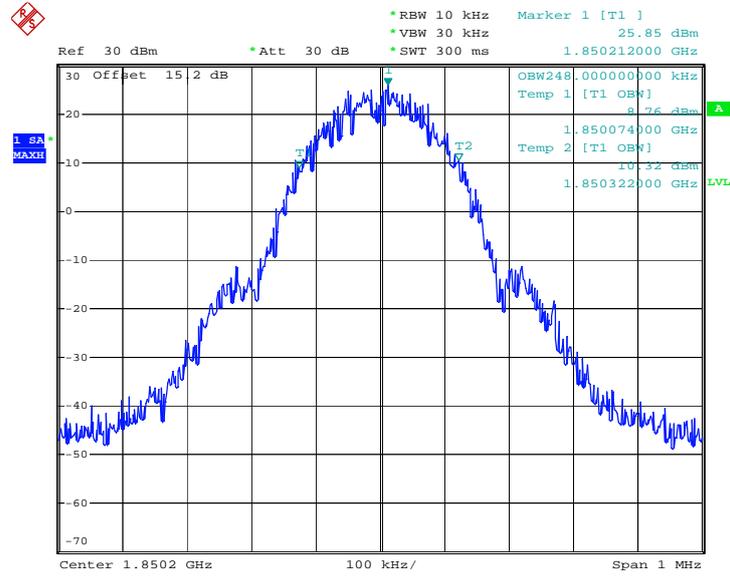

Date: 27.MAR.2012 22:55:33


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

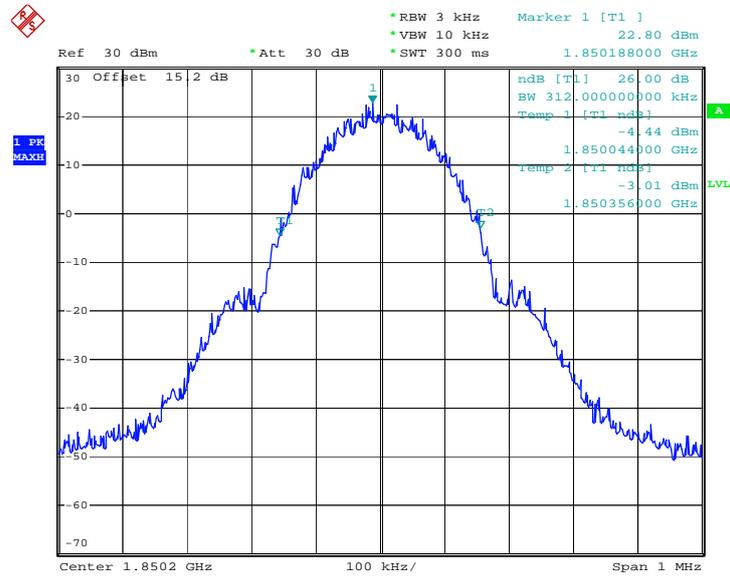

Date: 27.MAR.2012 22:54:07




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

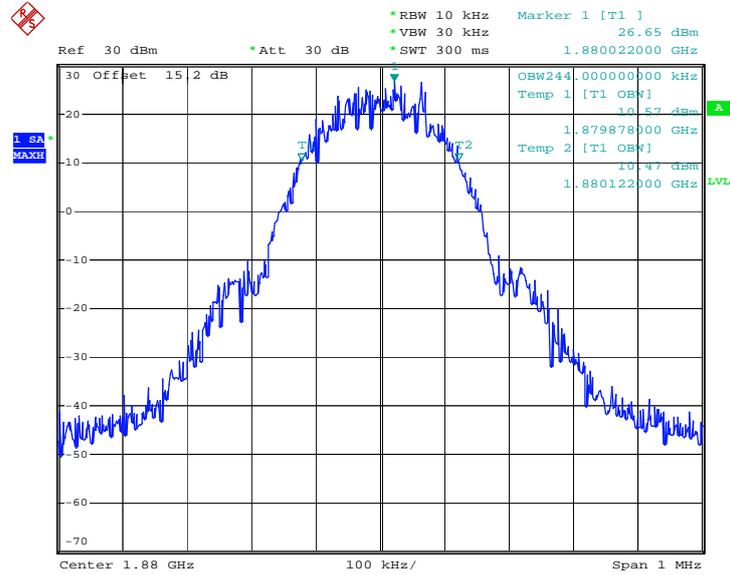

Date: 27.MAR.2012 22:55:59


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

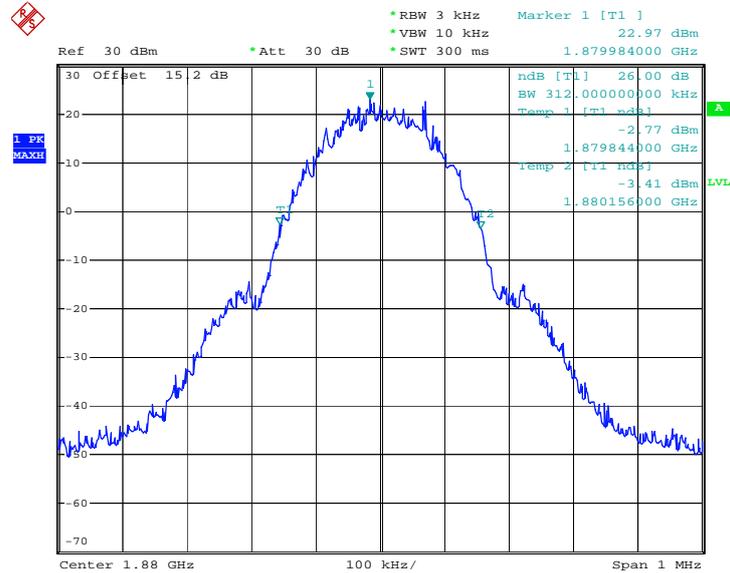

Date: 27.MAR.2012 22:54:37




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

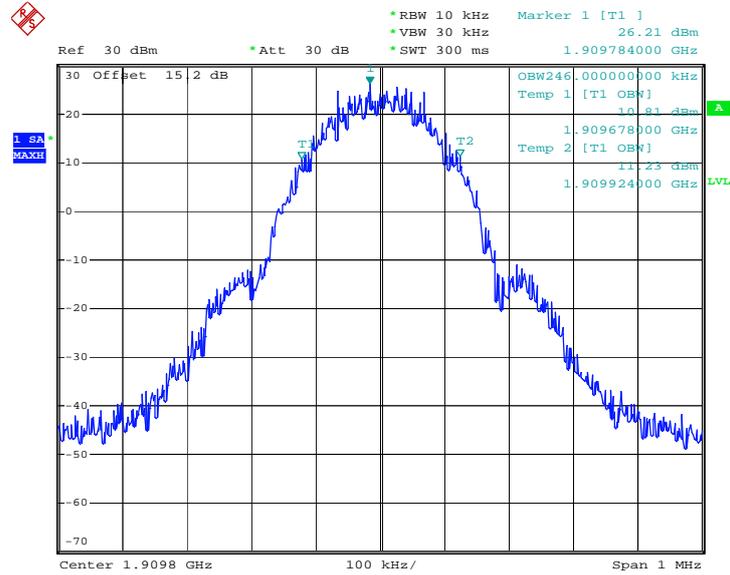

Date: 27.MAR.2012 22:56:25

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

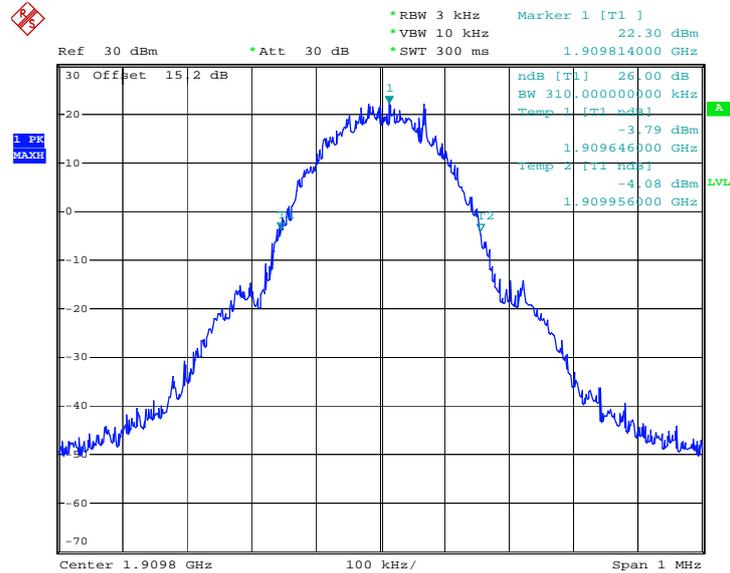


Date: 27.MAR.2012 22:55:06




Band :	GSM 1900	Test Mode :	EDGE 8 Link
--------	----------	-------------	-------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

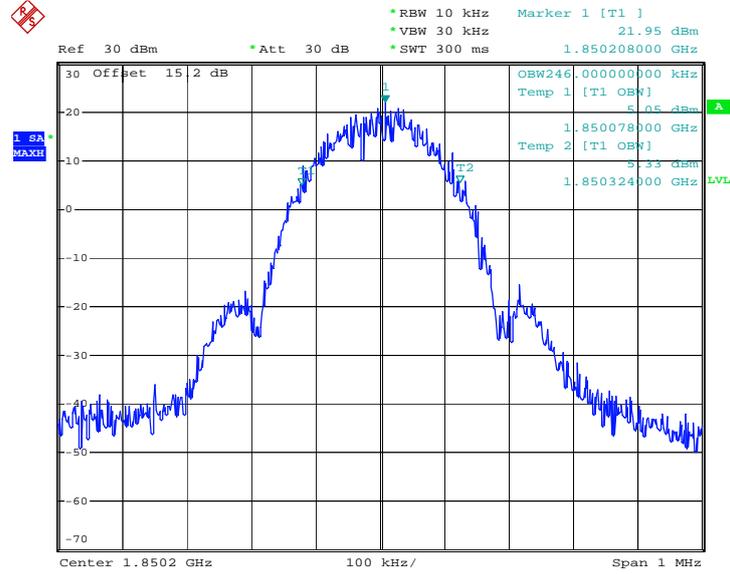

Date: 28.MAR.2012 00:06:59


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

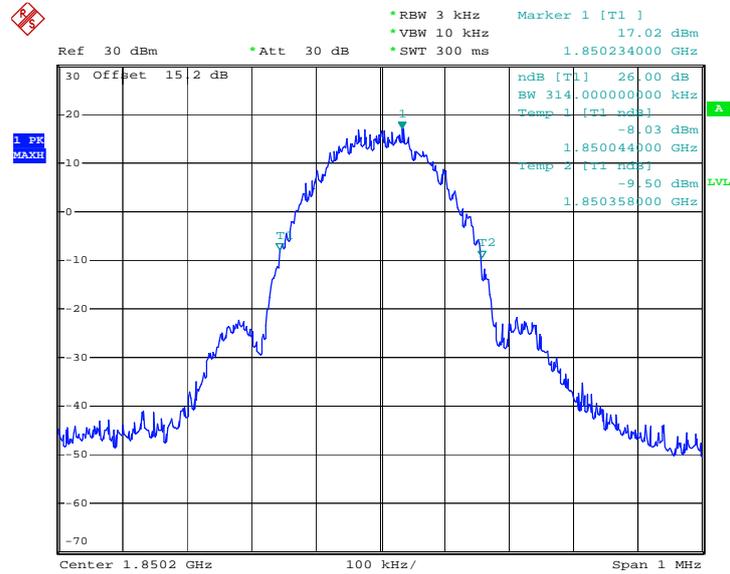

Date: 28.MAR.2012 00:05:40




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

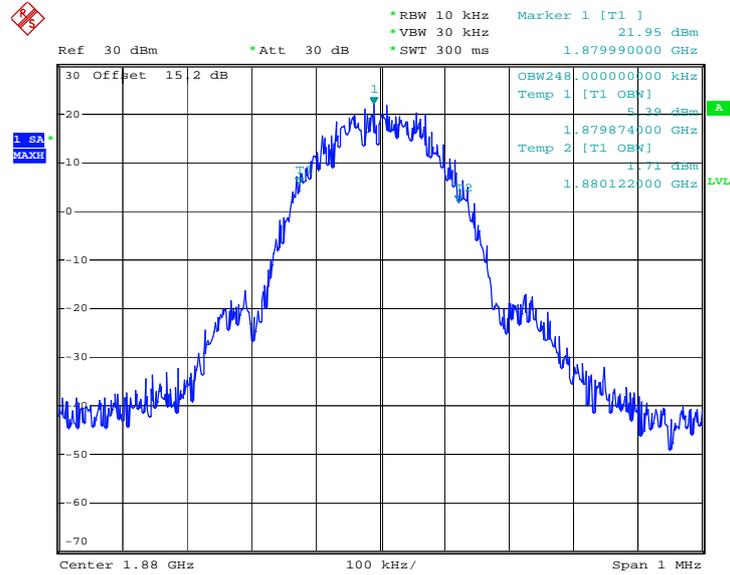

Date: 28.MAR.2012 00:07:25


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

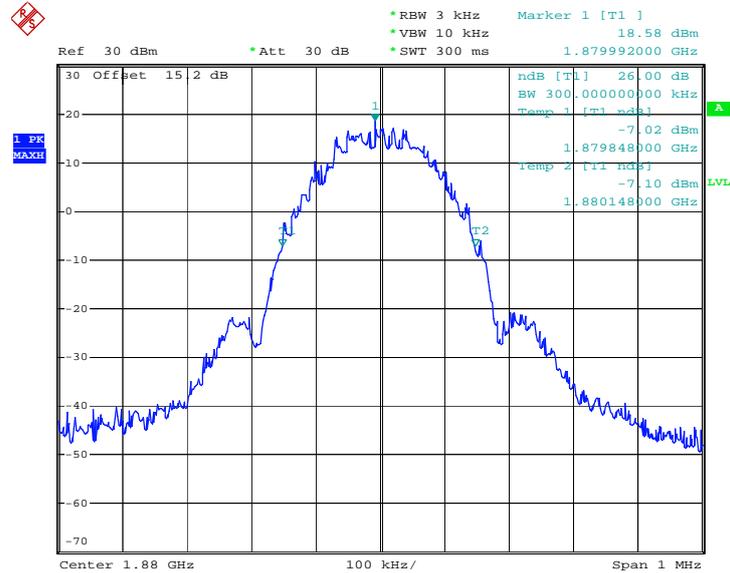

Date: 28.MAR.2012 00:06:07




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

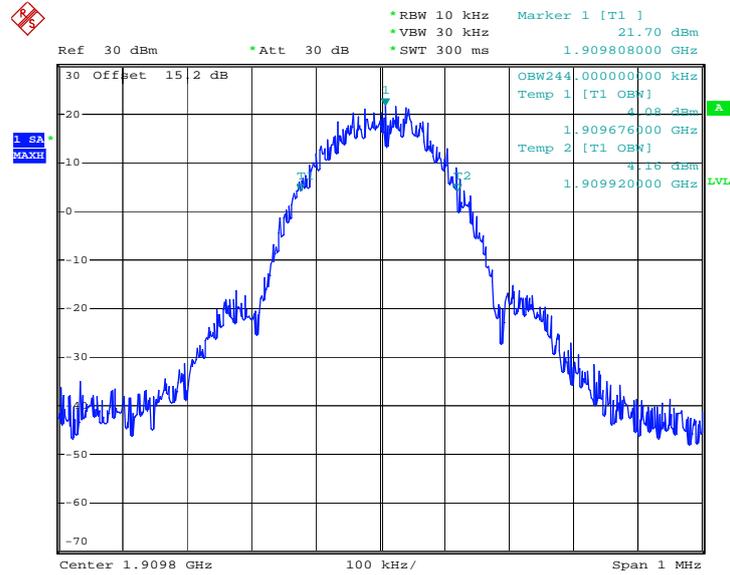

Date: 28.MAR.2012 00:07:50

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

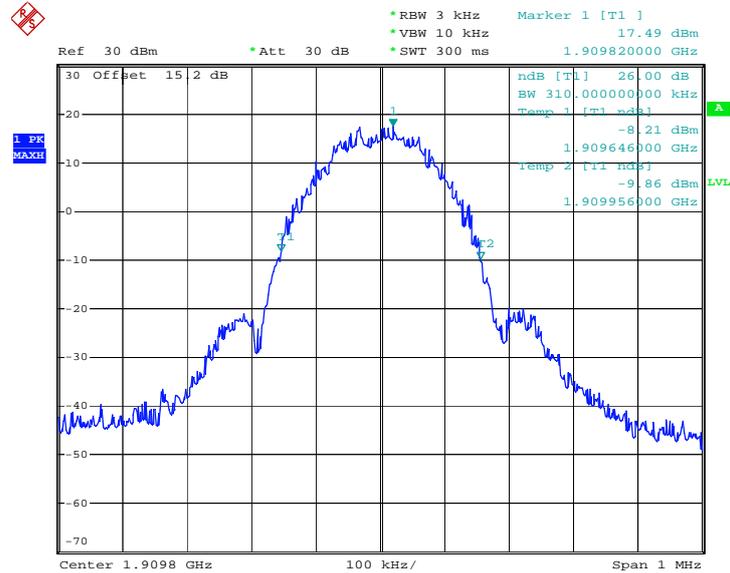


Date: 28.MAR.2012 00:06:33




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link
--------	--------------	-------------	-------------------

99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

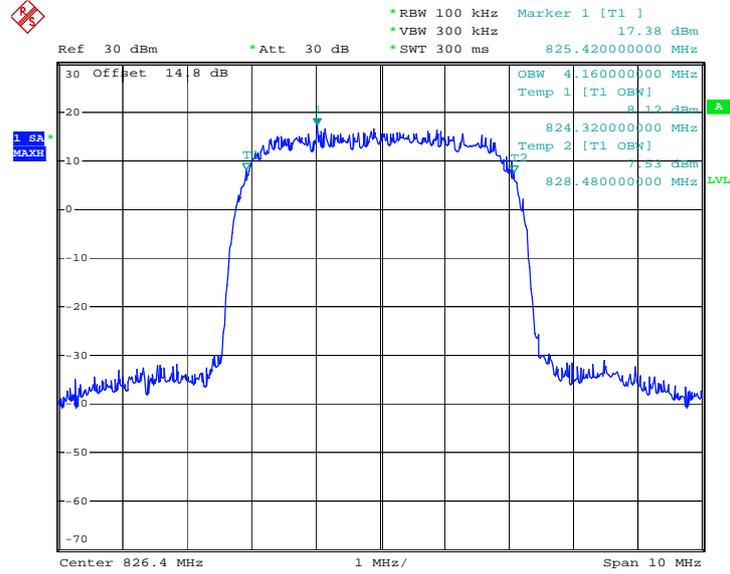

Date: 28.MAR.2012 00:42:06


26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

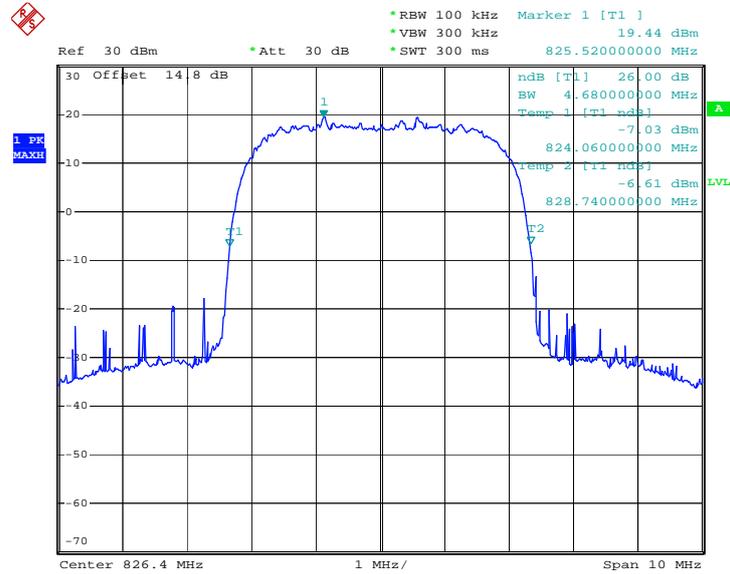

Date: 28.MAR.2012 00:40:46




99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

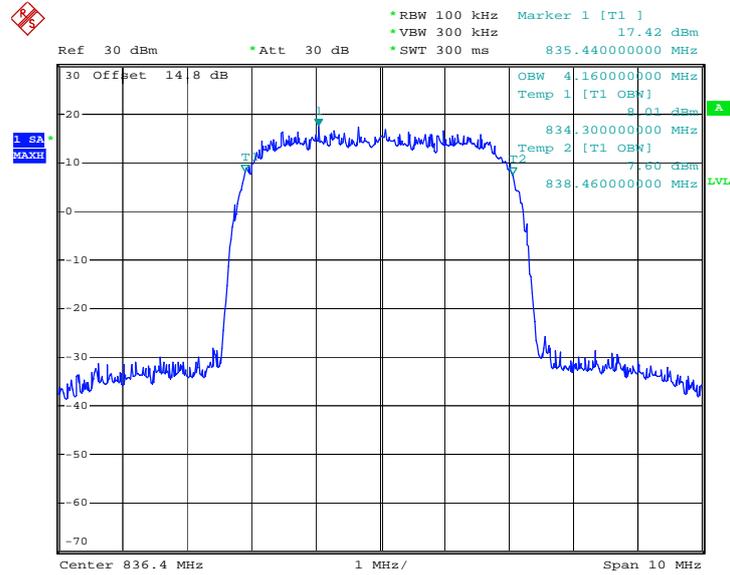

Date: 28.MAR.2012 00:42:32


26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

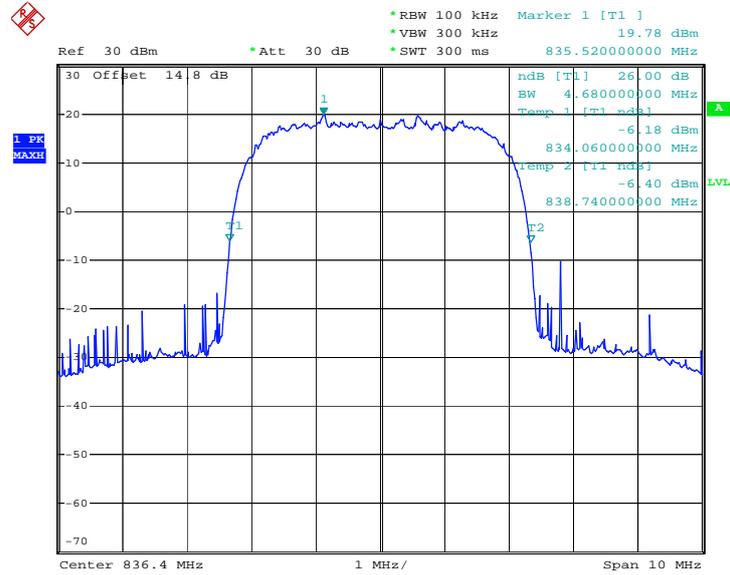

Date: 28.MAR.2012 00:41:12




99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

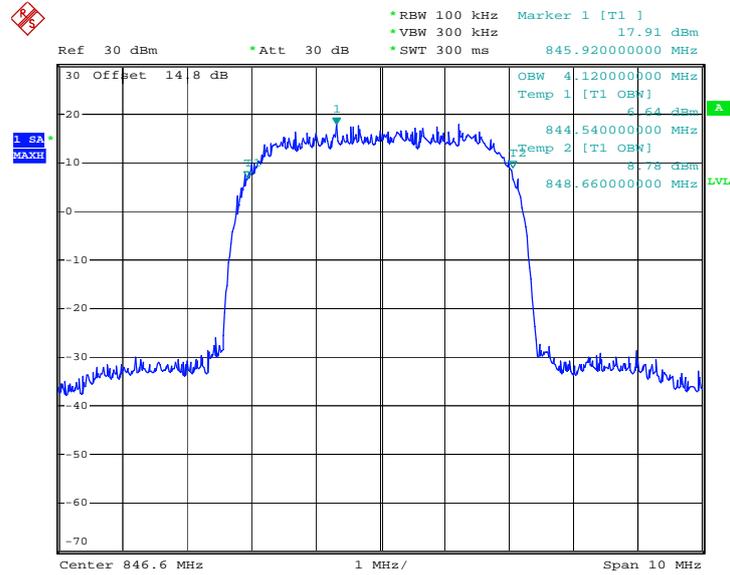

Date: 28.MAR.2012 00:42:59

26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

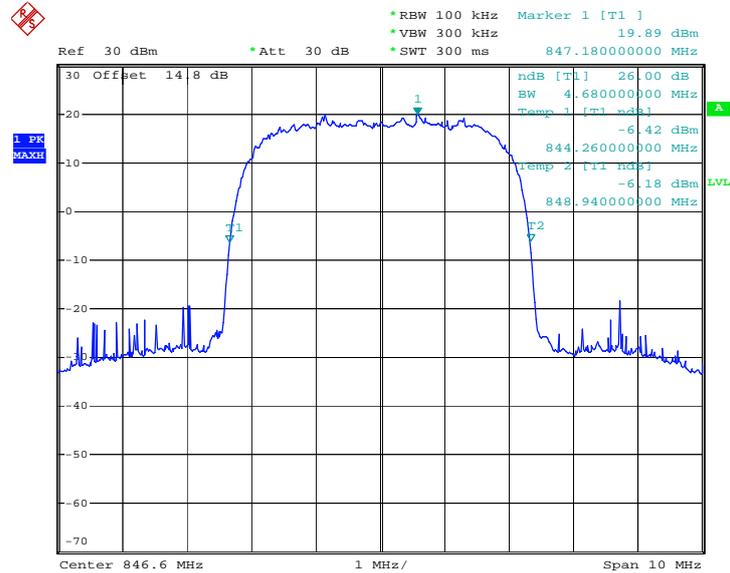


Date: 28.MAR.2012 00:41:39




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link
--------	---------------	-------------	-------------------

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

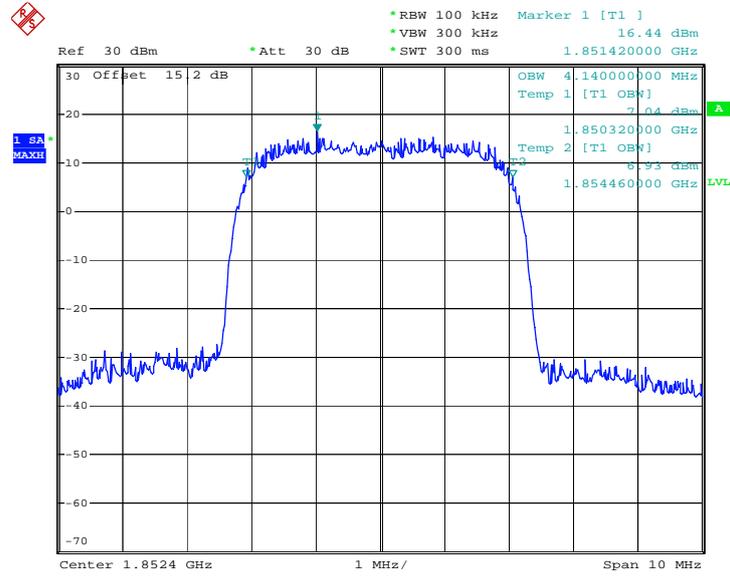

Date: 28.MAR.2012 00:31:39


26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

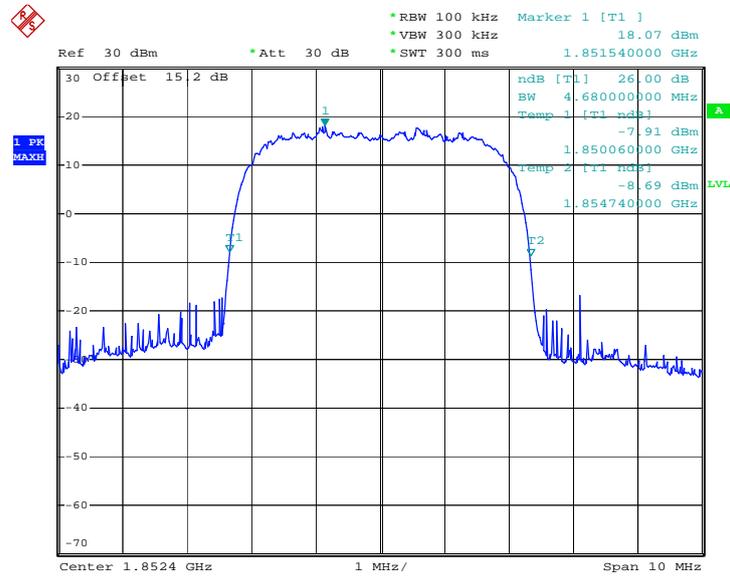

Date: 28.MAR.2012 00:30:20




99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

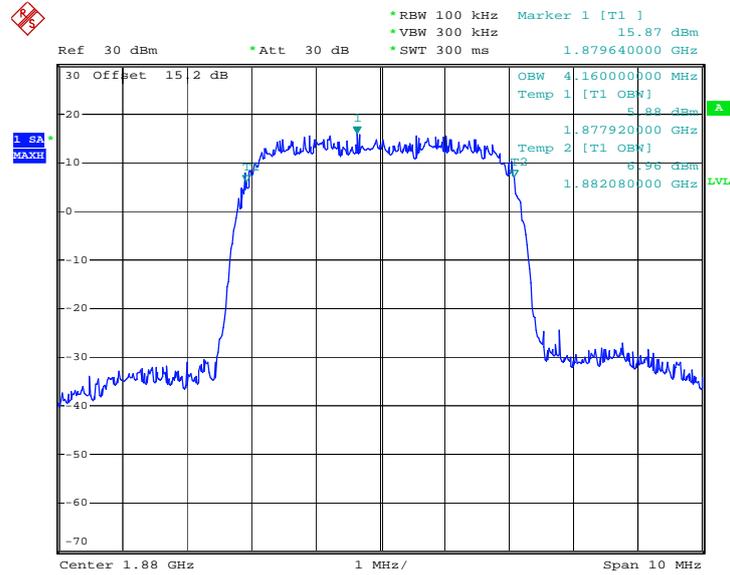

Date: 28.MAR.2012 00:32:05


26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

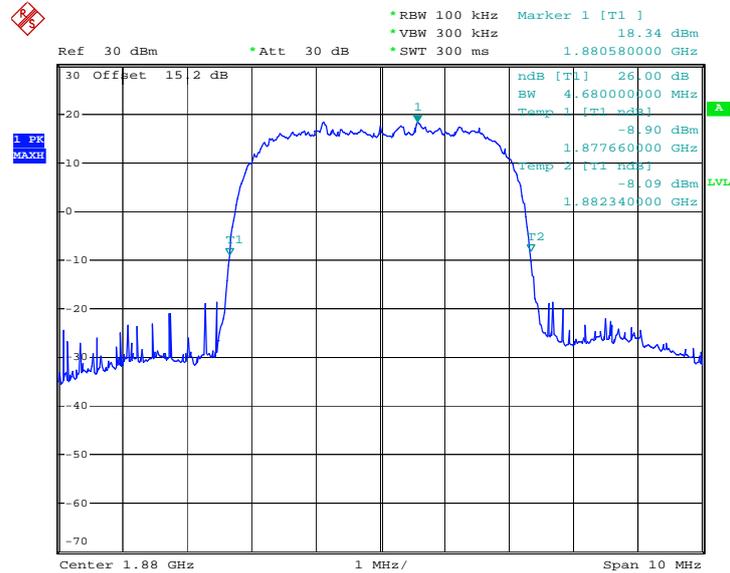

Date: 28.MAR.2012 00:30:47




99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

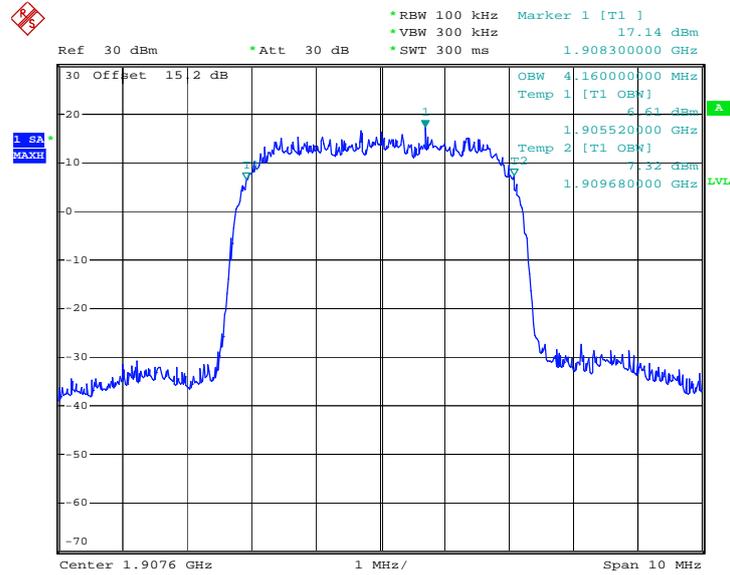

Date : 28.MAR.2012 00:32:31

26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

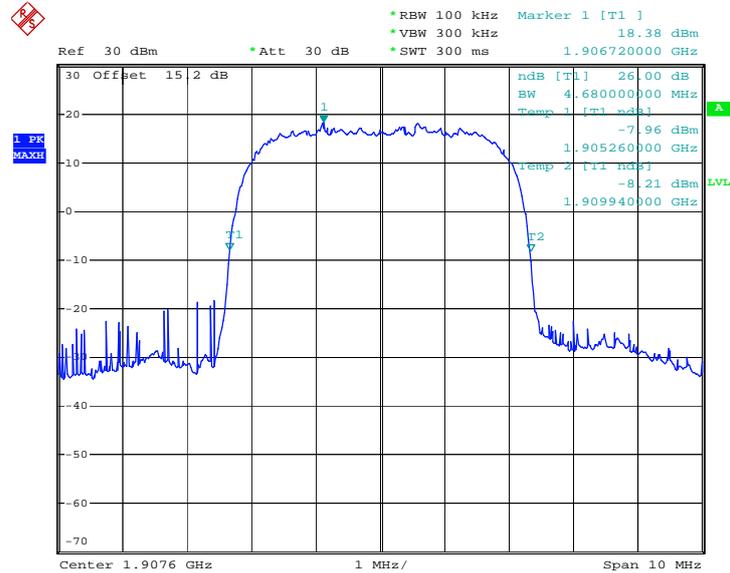

Date : 28.MAR.2012 00:31:13

### 3.5 Band Edge Measurement

#### 3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.


#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly  $BW/100$ .


#### 3.5.4 Test Setup

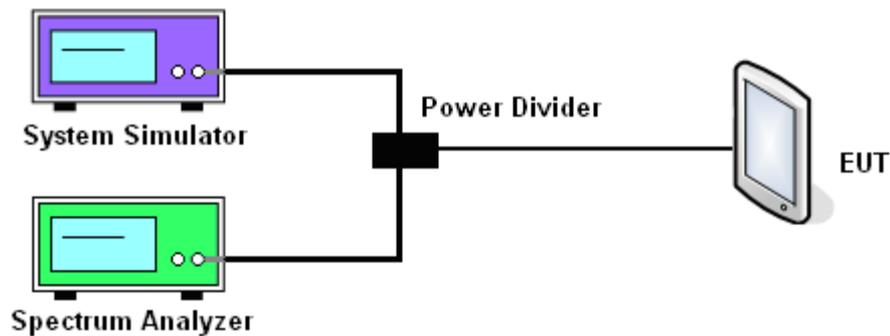

### 3.5.5 Test Result (Plots) of Conducted Band Edge

Band :	GSM850	Test Mode :	GPRS 8 Link
Correction Factor:	0.17dB	Maximum 26dB Bandwidth:	0.312MHz
Band Edge:	-18.99dBm	Measurement Value:	-19.16dBm

Lower Band Edge Plot on Channel 128 (824.2 MHz)

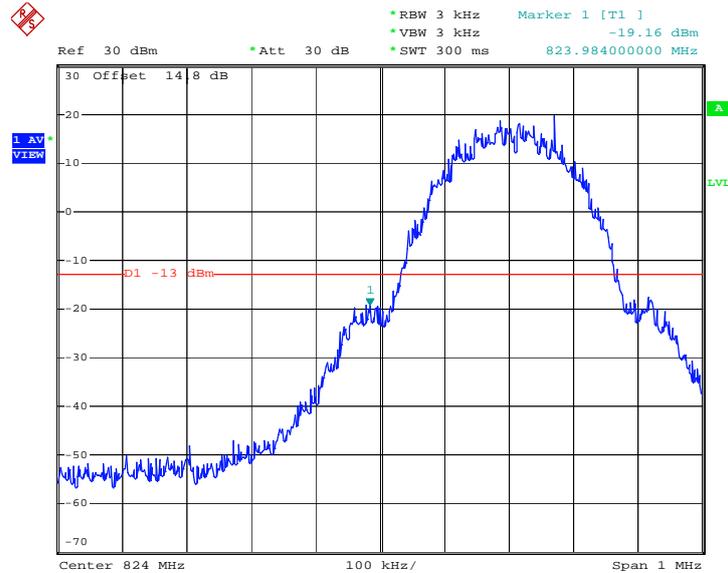


Date: 27.MAR.2012 23:15:51

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM850	Test Mode :	GPRS 8 Link
Correction Factor:	0.17dB	Maximum 26dB Bandwidth:	0.312MHz
Band Edge:	-17.14dBm	Measurement Value:	-17.31dBm

Higher Band Edge Plot on Channel 251 (848.8 MHz)

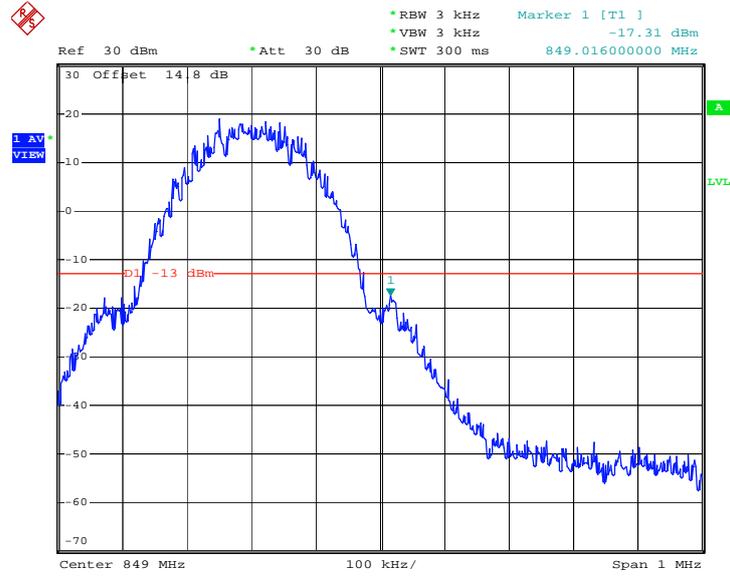


Date: 27.MAR.2012 23:16:17

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM850	Test Mode :	EDGE 8 Link
Correction Factor:	0.17dB	Maximum 26dB Bandwidth:	0.312MHz
Band Edge:	-22.30dBm	Measurement Value:	-22.47dBm

Lower Band Edge Plot on Channel 128 (824.2 MHz)

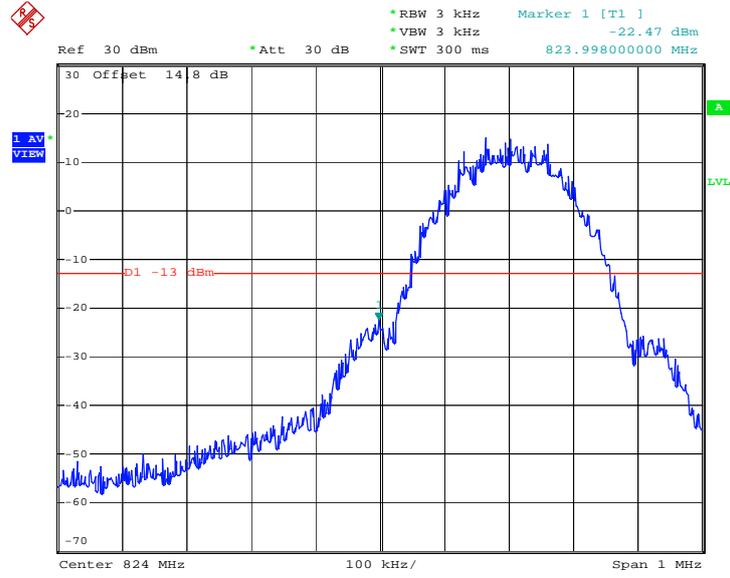


Date: 28.MAR.2012 00:16:05

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM850	Test Mode :	EDGE 8 Link
Correction Factor:	0.17dB	Maximum 26dB Bandwidth:	0.312MHz
Band Edge:	-23.90dBm	Measurement Value:	-24.07dBm

Higher Band Edge Plot on Channel 251 (848.8 MHz)

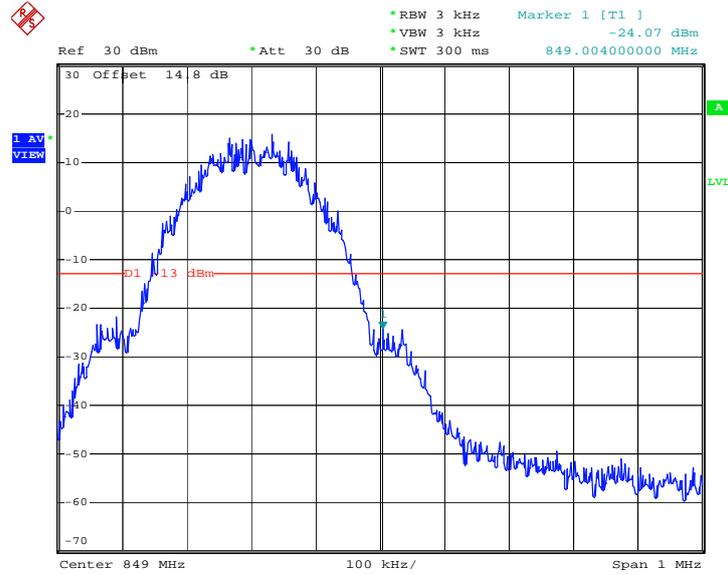


Date: 28.MAR.2012 00:16:31

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM1900	Test Mode :	GSM Link
Correction Factor:	0.17dB	Maximum 26dB Bandwidth:	0.312MHz
Band Edge:	-18.87dBm	Measurement Value:	-19.04dBm

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

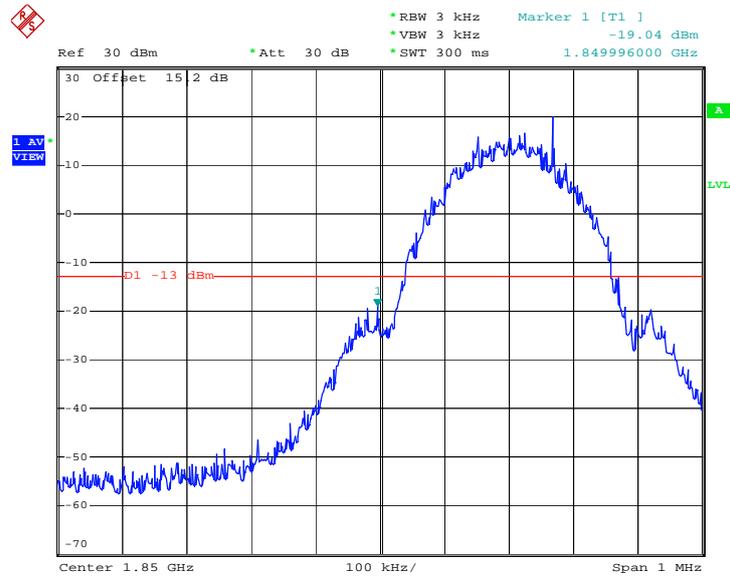


Date: 27.MAR.2012 22:57:50

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM1900	Test Mode :	GSM Link
Correction Factor:	0.17dB	Maximum 26dB Bandwidth:	0.312MHz
Band Edge:	-18.81dBm	Measurement Value:	-18.98dBm

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

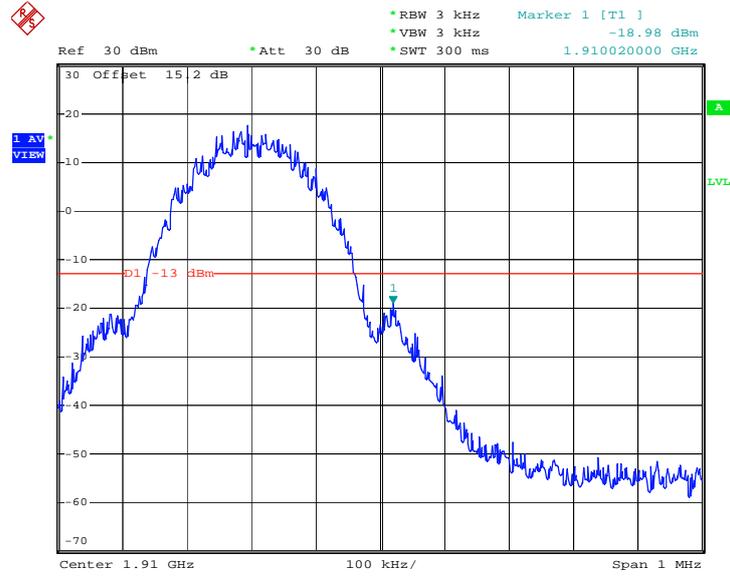


Date: 27.MAR.2012 22:58:16

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM1900	Test Mode :	EDGE 8 Link
Correction Factor:	0.20dB	Maximum 26dB Bandwidth:	0.314MHz
Band Edge:	-26.23dBm	Measurement Value:	-26.43dBm

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

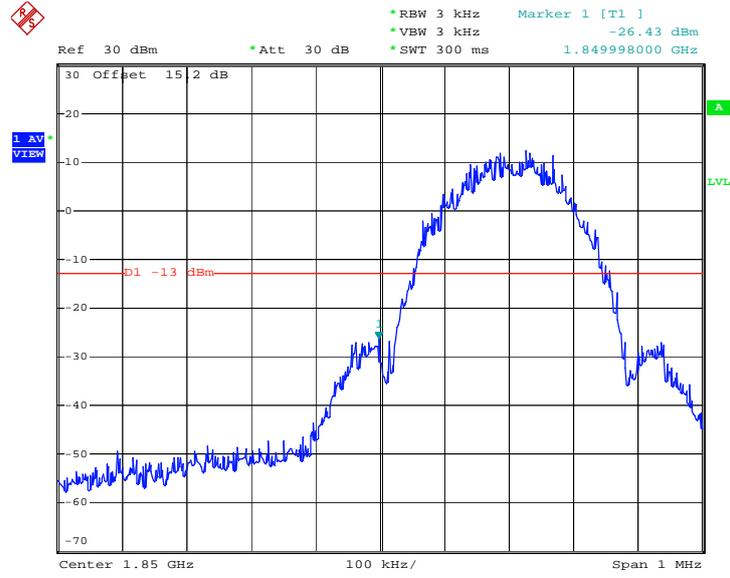


Date: 28.MAR.2012 00:09:16

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	GSM1900	Test Mode :	EDGE 8 Link
Correction Factor:	0.20dB	Maximum 26dB Bandwidth:	0.314MHz
Band Edge:	-25.10dBm	Measurement Value:	-25.30dBm

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

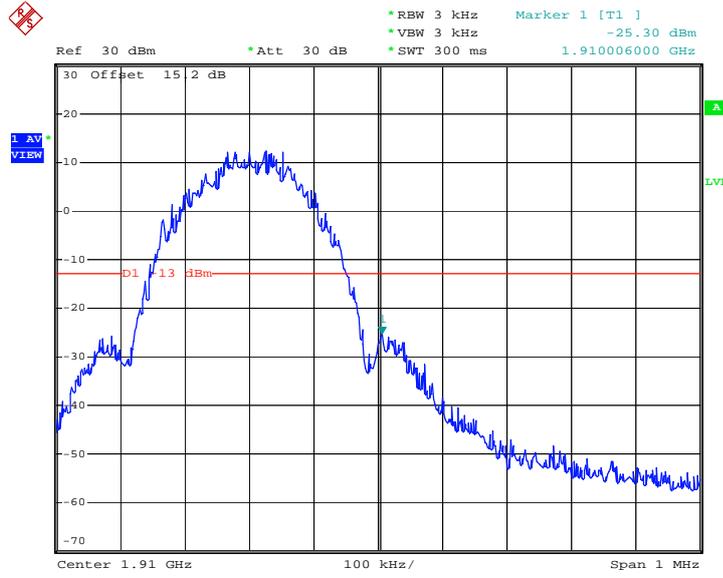


Date: 28.MAR.2012 00:09:43

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link
Correction Factor:	-3.30dB	Maximum 26dB Bandwidth:	4.68MHz
Band Edge:	-31.26dBm	Measurement Value:	-27.96dBm

Lower Band Edge Plot on Channel 4132 (826.4 MHz)

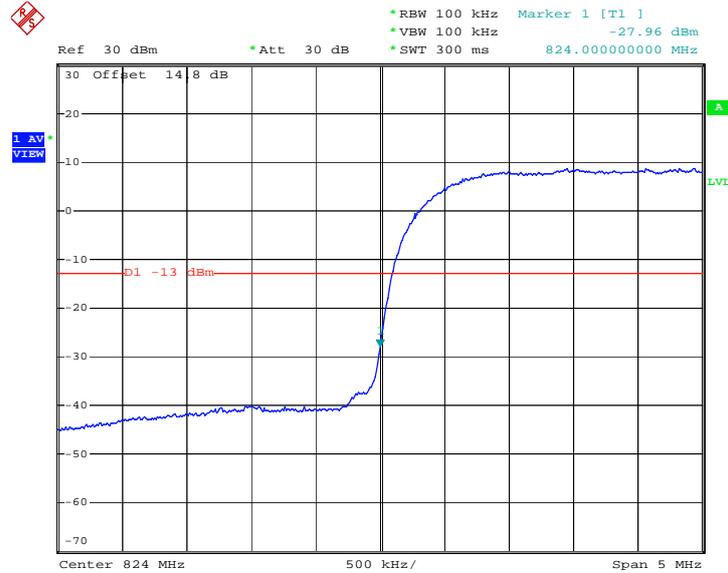


Date: 28.MAR.2012 00:44:25

1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)



<b>Band :</b>	WCDMA Band V	<b>Test Mode :</b>	RMC 12.2Kbps Link
<b>Correction Factor:</b>	-3.30dB	<b>Maximum 26dB Bandwidth:</b>	4.68MHz
<b>Band Edge:</b>	-29.81dBm	<b>Measurement Value:</b>	-26.51dBm

Higher Band Edge Plot on Channel 4233 (846.6 MHz)

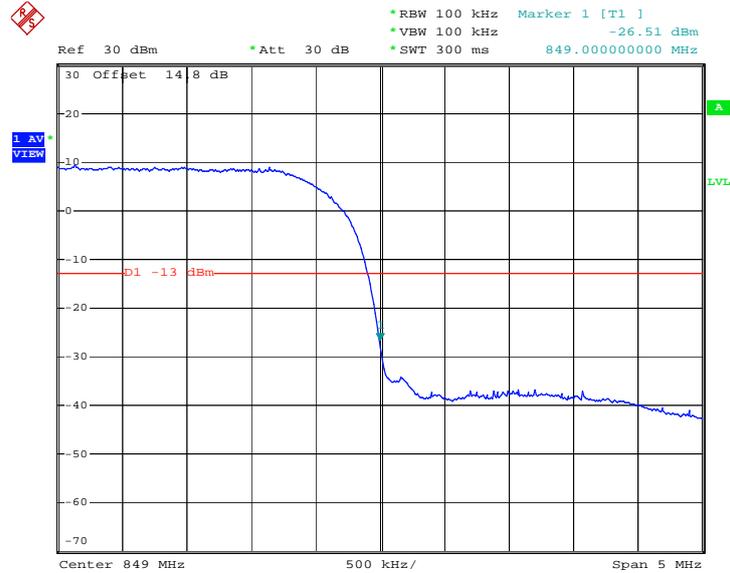


Date: 28.MAR.2012 00:44:51

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



<b>Band :</b>	WCDMA Band II	<b>Test Mode :</b>	RMC 12.2Kbps Link
<b>Correction Factor:</b>	-3.30dB	<b>Maximum 26dB Bandwidth:</b>	4.68MHz
<b>Band Edge:</b>	-30.96dBm	<b>Measurement Value:</b>	-27.66dBm

Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

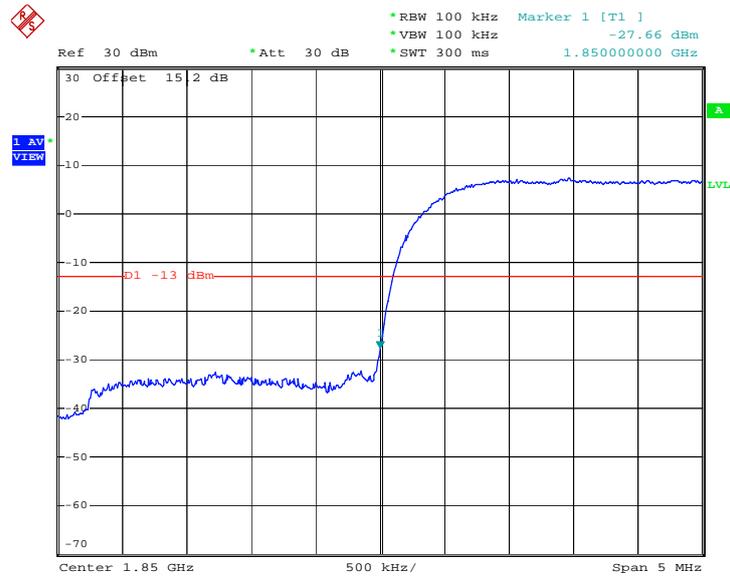


Date: 28.MAR.2012 00:33:58

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)



<b>Band :</b>	WCDMA Band II	<b>Test Mode :</b>	RMC 12.2Kbps Link
<b>Correction Factor:</b>	-3.30dB	<b>Maximum 26dB Bandwidth:</b>	4.68MHz
<b>Band Edge:</b>	-31.42dBm	<b>Measurement Value:</b>	-28.12dBm

Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

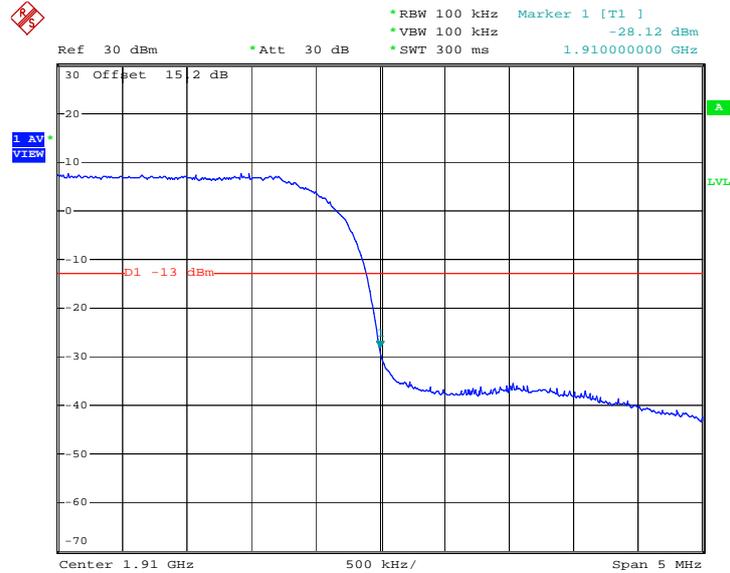

Date: 28.MAR.2012 00:34:24

1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)

## 3.6 Conducted Emission Measurement

### 3.6.1 Description of Conducted Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.6.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.


### 3.6.4 Test Setup

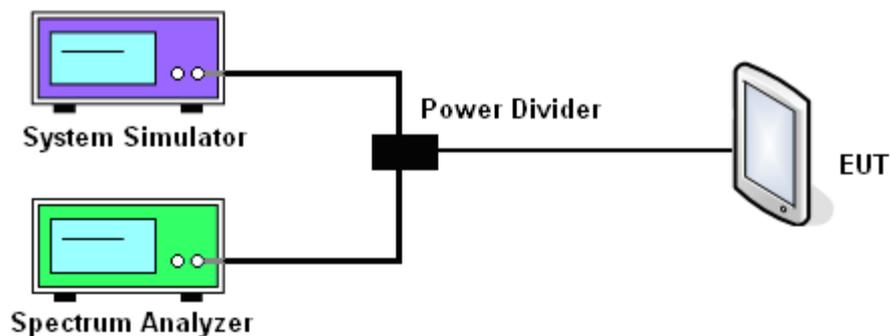

### 3.6.5 Test Result (Plots) of Conducted Emission


Band :	GSM850	Channel :	CH189
Test Mode :	GPRS 8 Link	Frequency :	836.4 MHz

Conducted Emission Plot between 30MHz ~ 1GHz

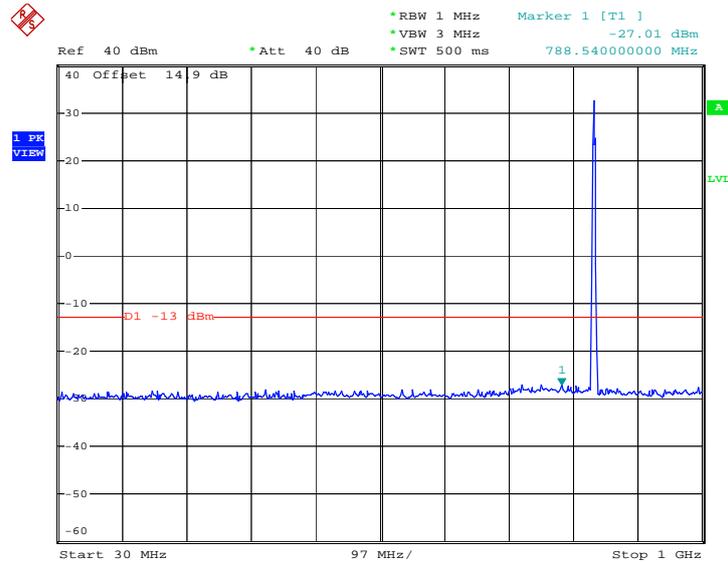

Date: 27.MAR.2012 23:27:39


Conducted Emission Plot between 1GHz ~ 3GHz

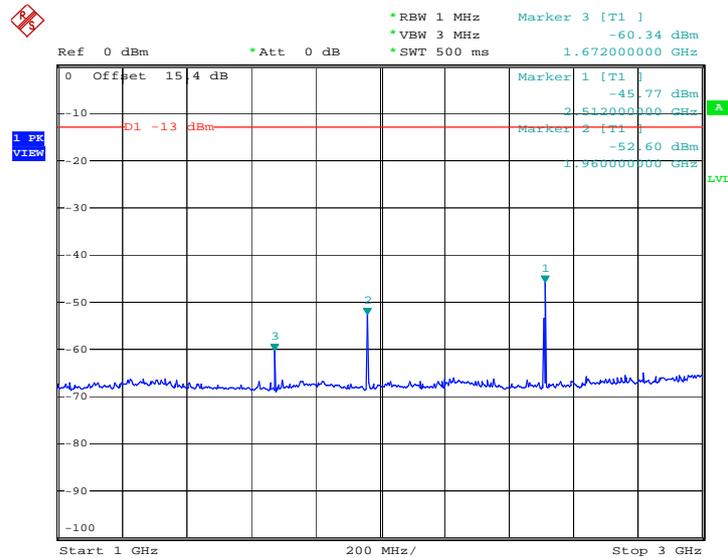

Date: 27.MAR.2012 23:28:51




### Conducted Emission Plot between 3GHz ~ 7GHz

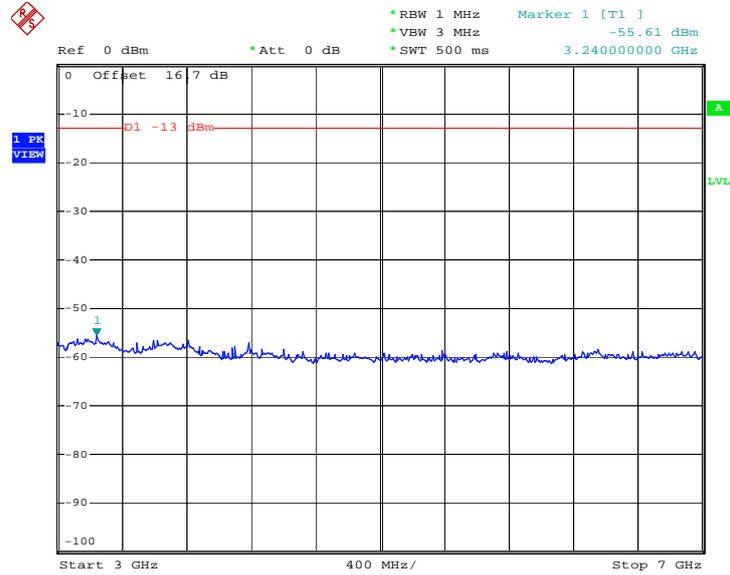

Date: 27.MAR.2012 23:29:25

### Conducted Emission Plot between 7GHz ~ 9GHz

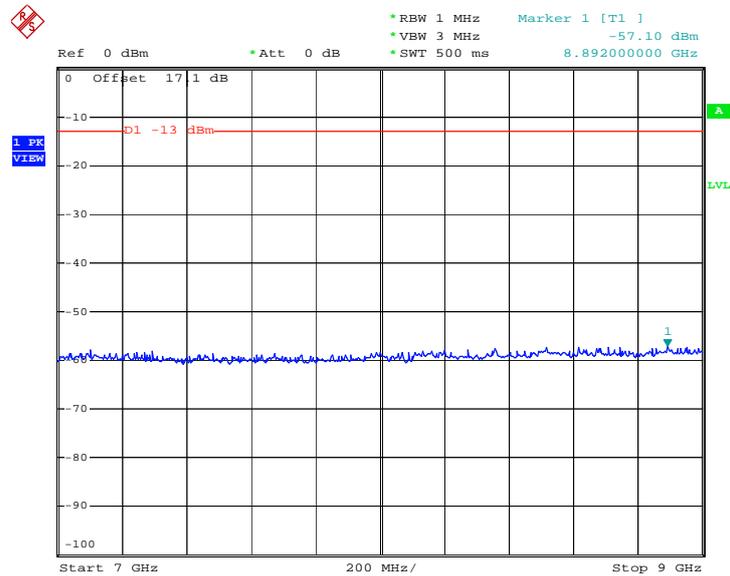


Date: 27.MAR.2012 23:30:01




Band :	GSM850	Channel :	CH189
Test Mode :	EDGE 8 Link	Frequency :	836.4 MHz

Conducted Emission Plot between 30MHz ~ 1GHz

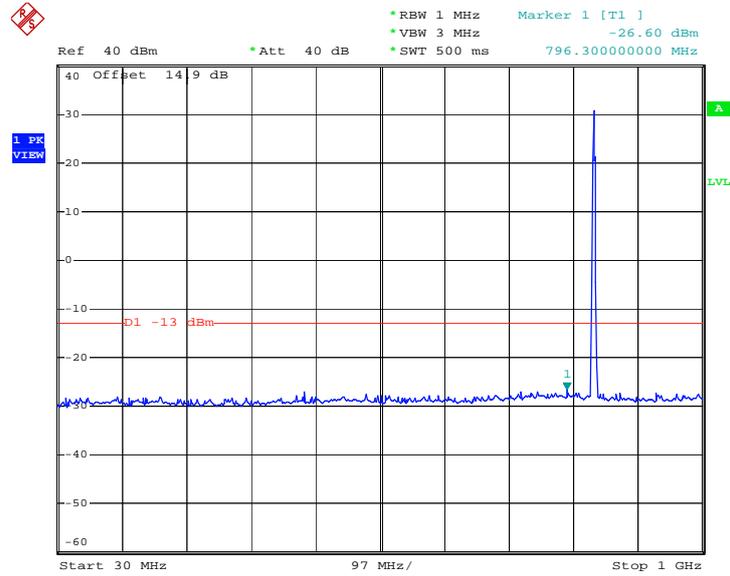

Date: 27.MAR.2012 23:46:51


Conducted Emission Plot between 1GHz ~ 3GHz

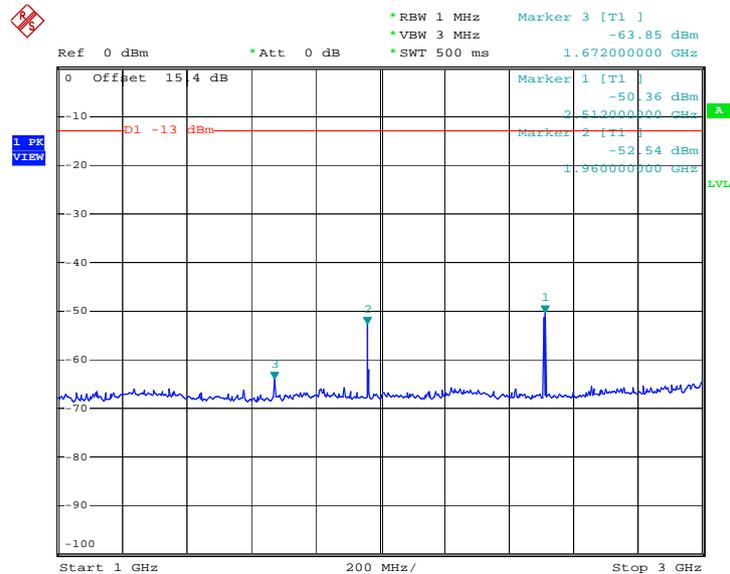

Date: 27.MAR.2012 23:48:06




### Conducted Emission Plot between 3GHz ~ 7GHz

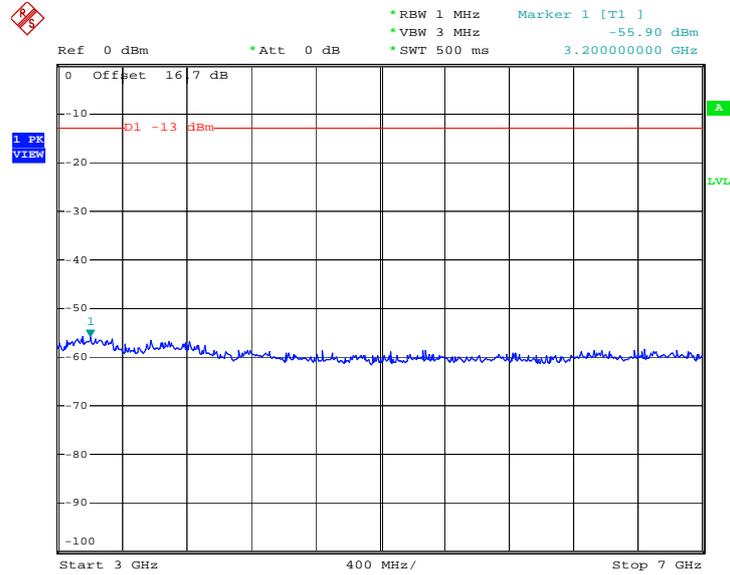

Date: 27.MAR.2012 23:48:41

### Conducted Emission Plot between 7GHz ~ 9GHz

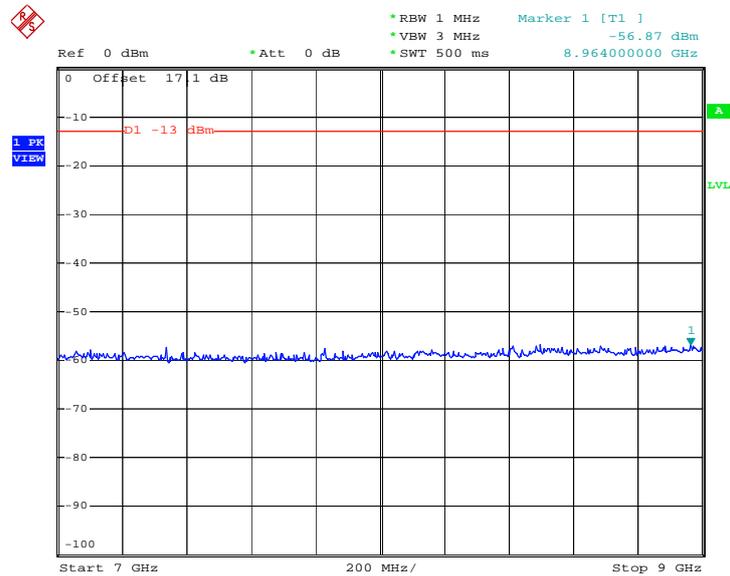


Date: 27.MAR.2012 23:49:31




Band :	GSM1900	Channel :	CH661
Test Mode :	GSM Link	Frequency :	1880.0 MHz

Conducted Emission Plot between 30MHz ~ 1GHz

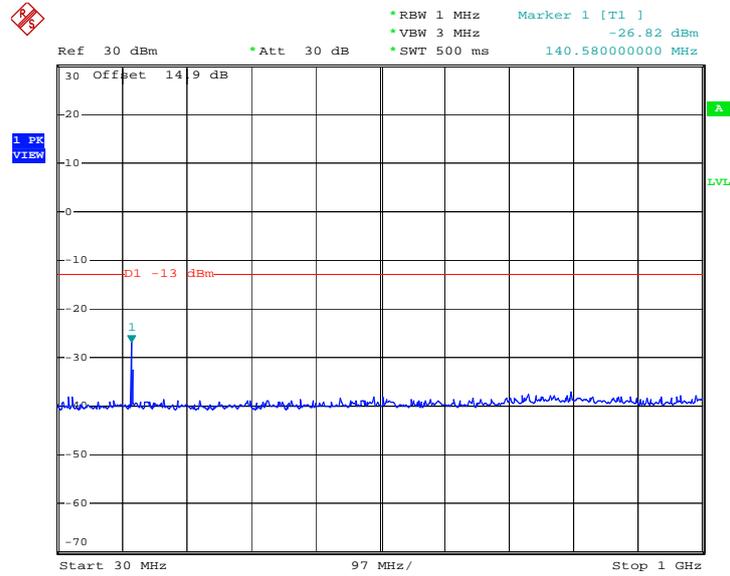

Date: 27.MAR.2012 23:33:27


Conducted Emission Plot between 1GHz ~ 3GHz

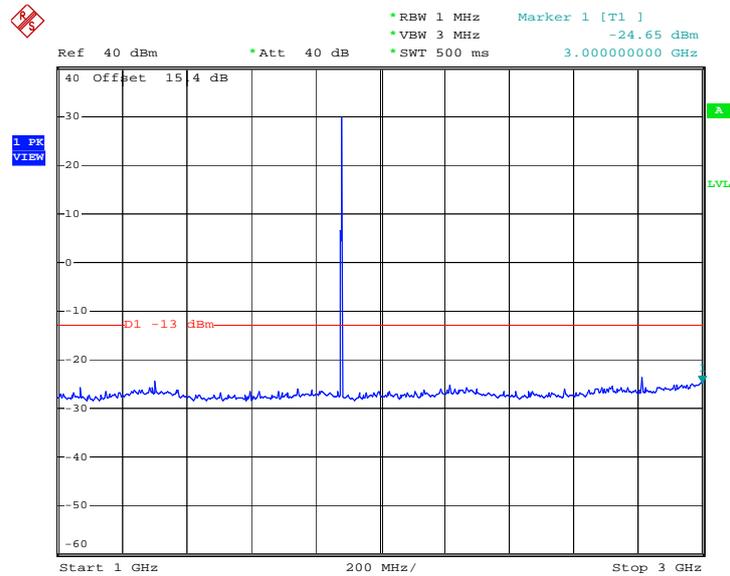

Date: 27.MAR.2012 23:34:27




### Conducted Emission Plot between 3GHz ~ 7GHz

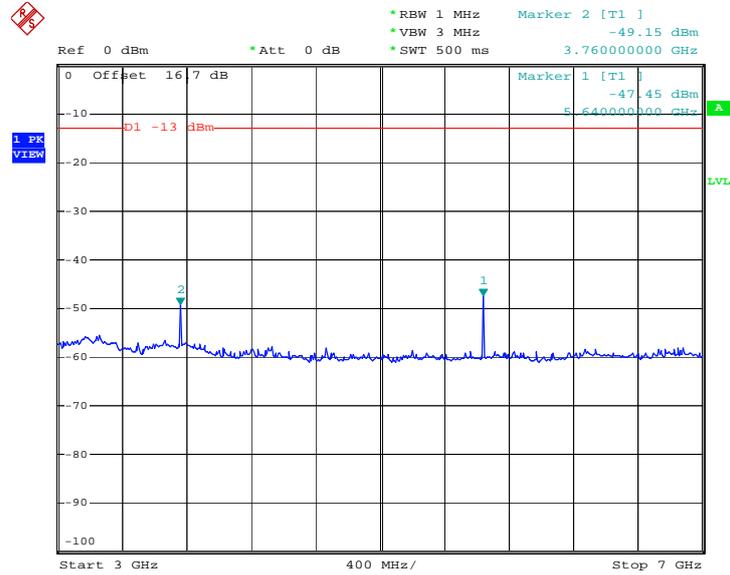

Date: 27.MAR.2012 23:35:38


### Conducted Emission Plot between 7GHz ~ 13.6GHz

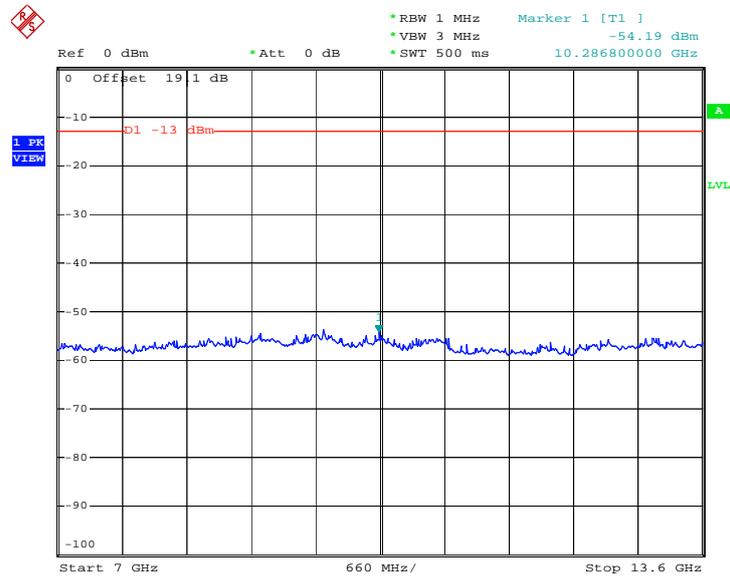

Date: 27.MAR.2012 23:36:26



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

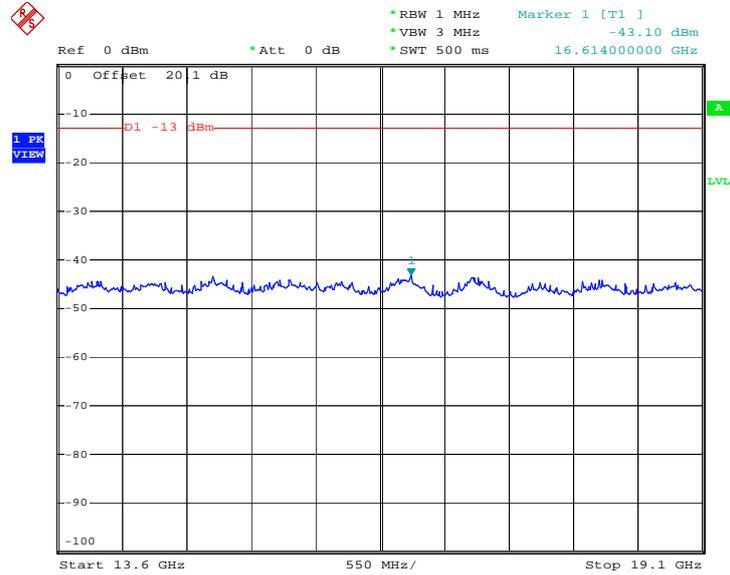


Date: 27.MAR.2012 23:37:09




Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE 8 Link	Frequency :	1880.0 MHz

Conducted Emission Plot between 30MHz ~ 1GHz

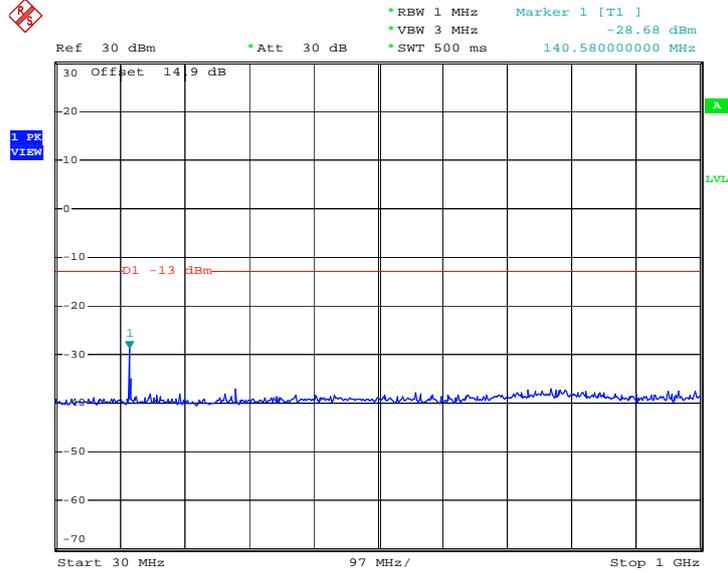

Date: 27.MAR.2012 23:44:15


Conducted Emission Plot between 1GHz ~ 3GHz

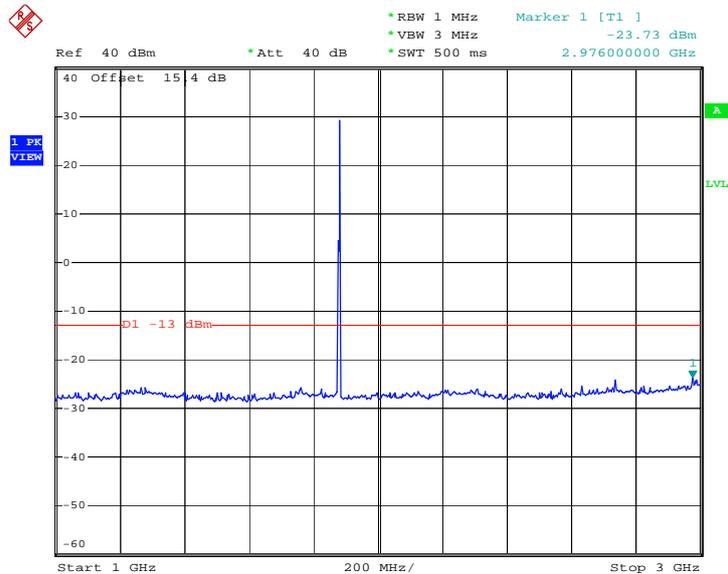

Date: 27.MAR.2012 23:43:31




Conducted Emission Plot between 3GHz ~ 7GHz

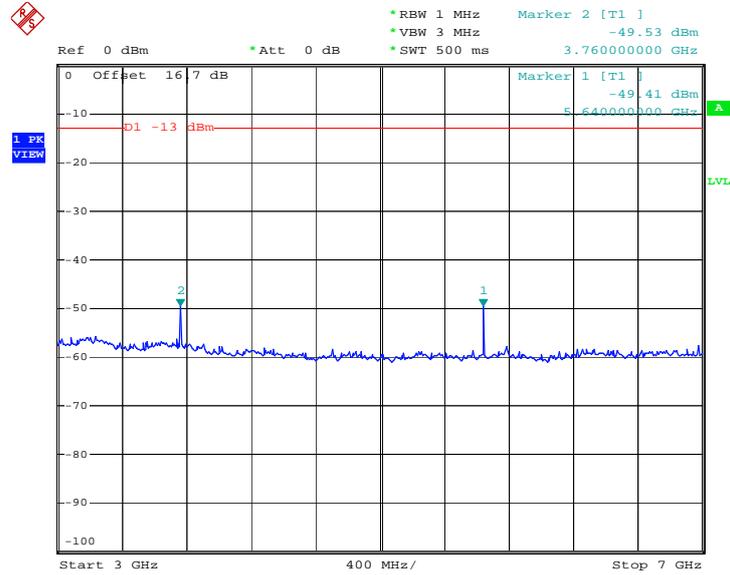

Date: 27.MAR.2012 23:42:09


Conducted Emission Plot between 7GHz ~ 13.6GHz

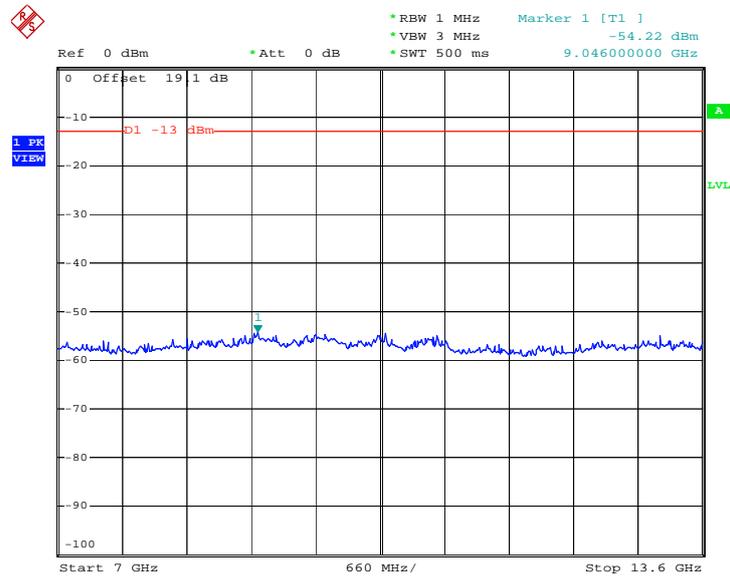

Date: 27.MAR.2012 23:41:06



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

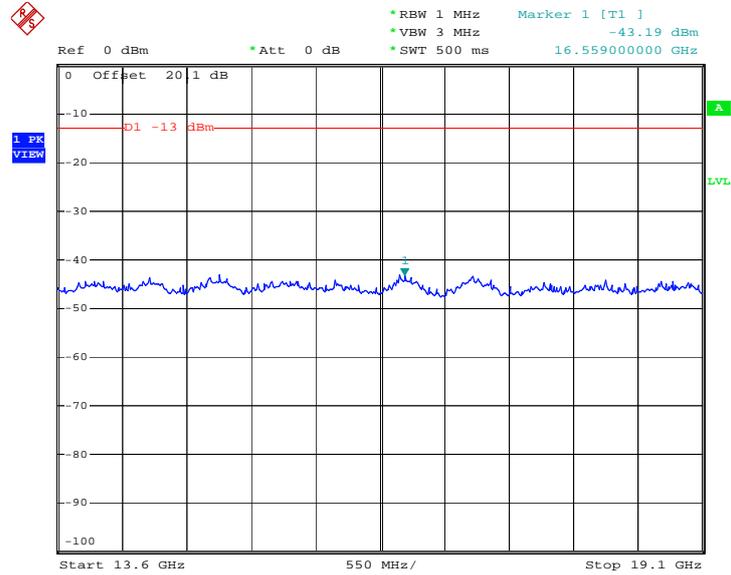


Date: 27.MAR.2012 23:40:20




Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link	Frequency :	836.4 MHz

Conducted Emission Plot between 30MHz ~ 1GHz

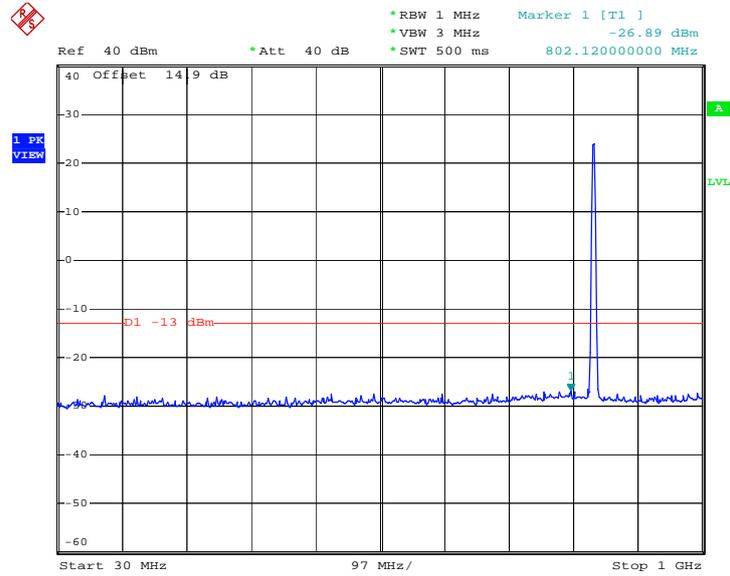

Date: 28.MAR.2012 00:48:51


Conducted Emission Plot between 1GHz ~ 3GHz

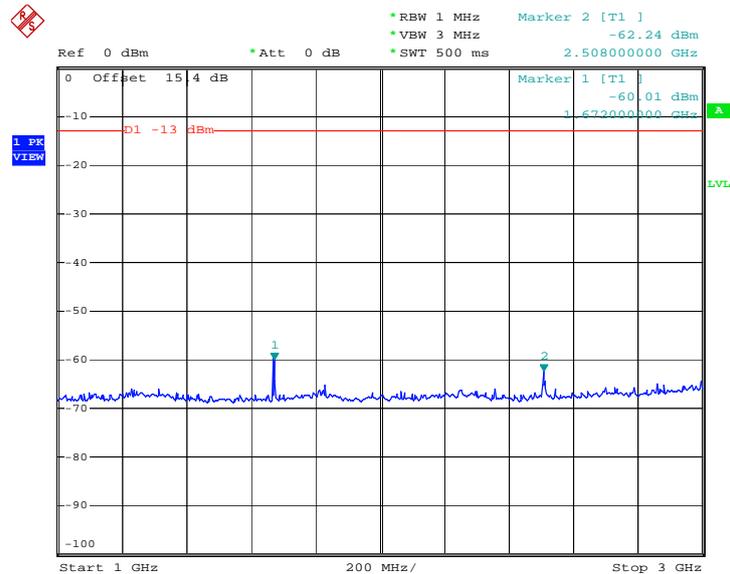

Date: 28.MAR.2012 00:49:57




### Conducted Emission Plot between 3GHz ~ 7GHz

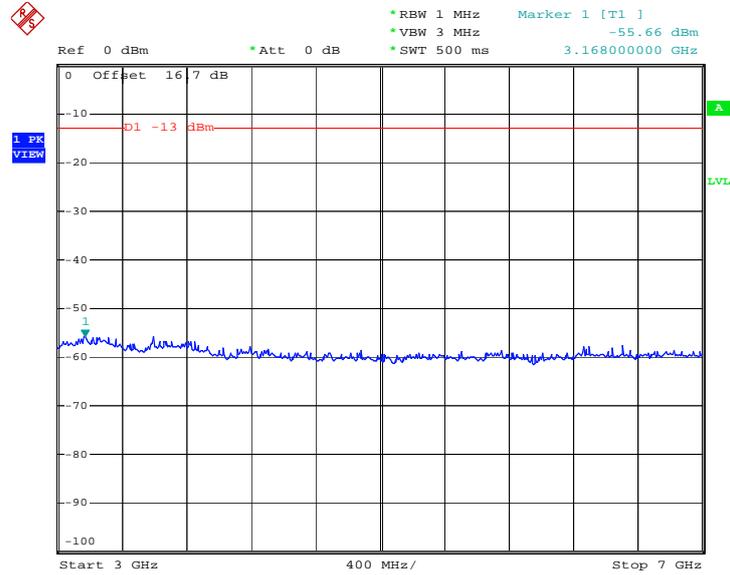

Date: 28.MAR.2012 00:50:39

### Conducted Emission Plot between 7GHz ~ 9GHz

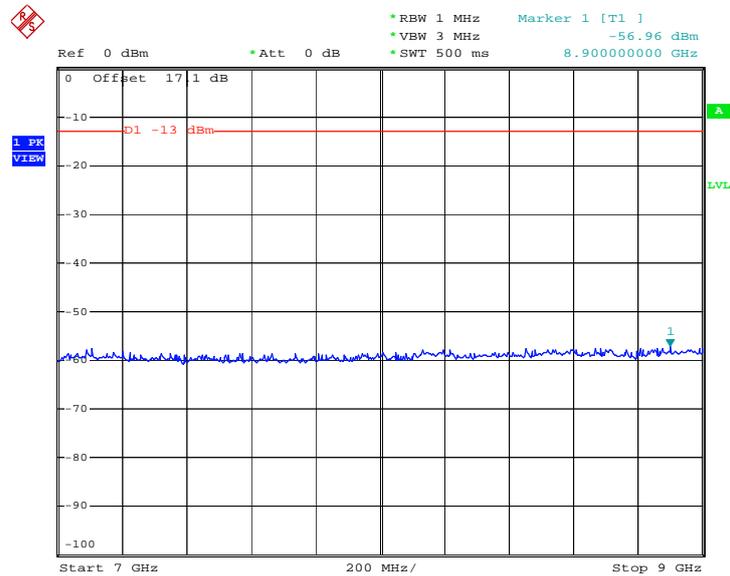


Date: 28.MAR.2012 00:51:22




Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link	Frequency :	1880.0 MHz

Conducted Emission Plot between 30MHz ~ 1GHz

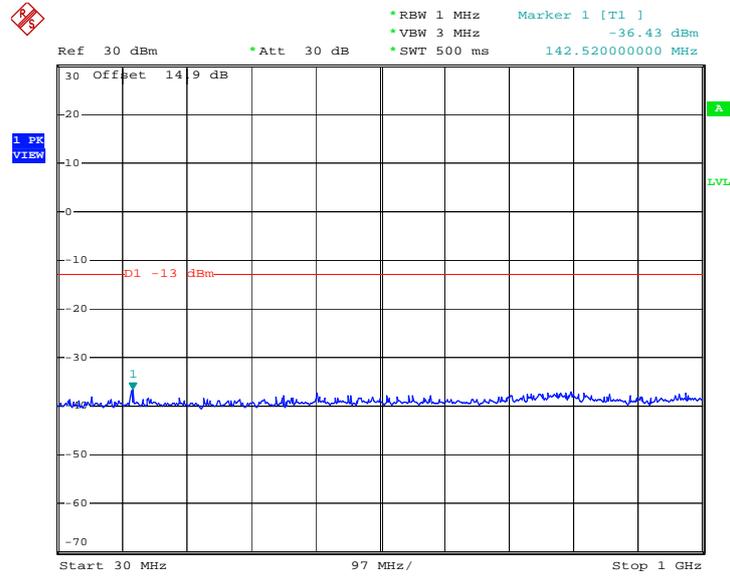

Date: 28.MAR.2012 00:56:33


Conducted Emission Plot between 1GHz ~ 3GHz

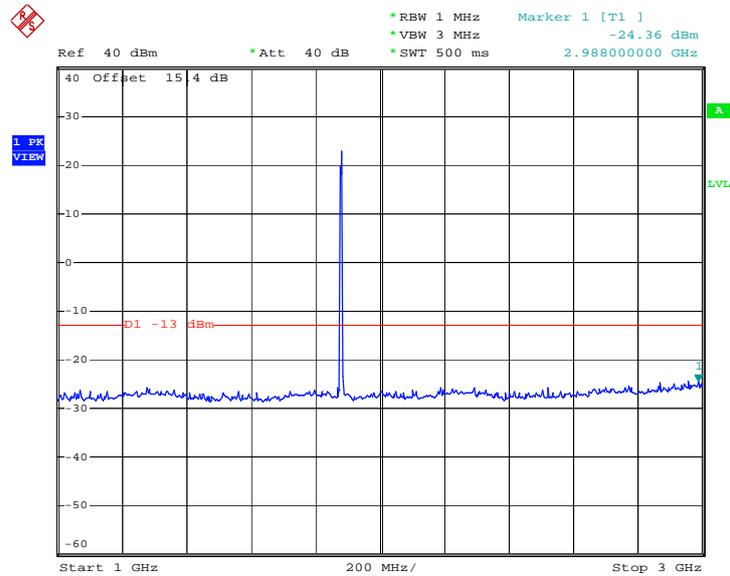

Date: 28.MAR.2012 00:57:22




### Conducted Emission Plot between 3GHz ~ 7GHz

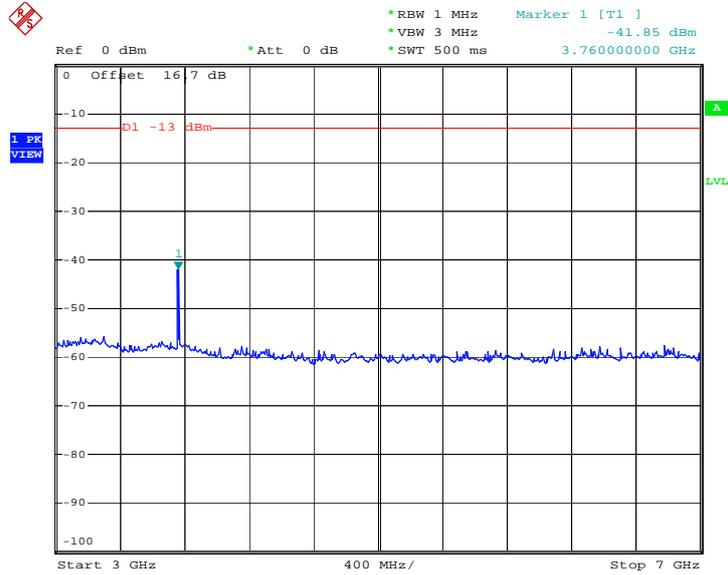

Date: 28.MAR.2012 00:55:31


### Conducted Emission Plot between 7GHz ~ 13.6GHz

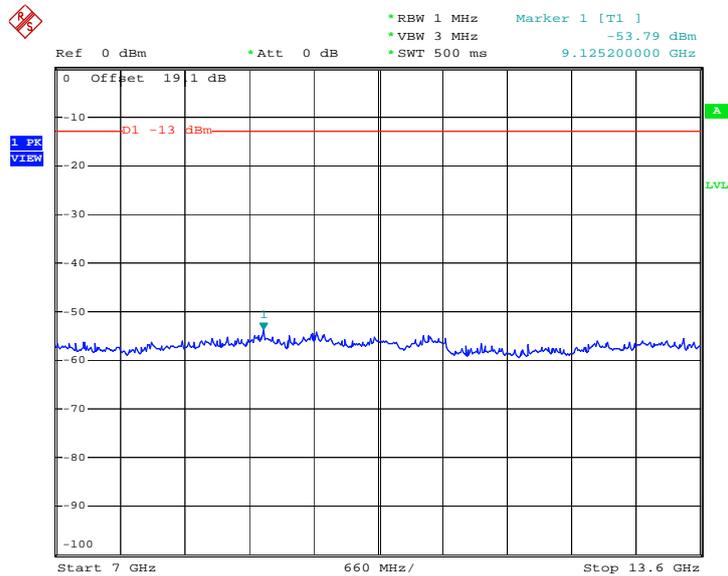

Date: 28.MAR.2012 00:53:51



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

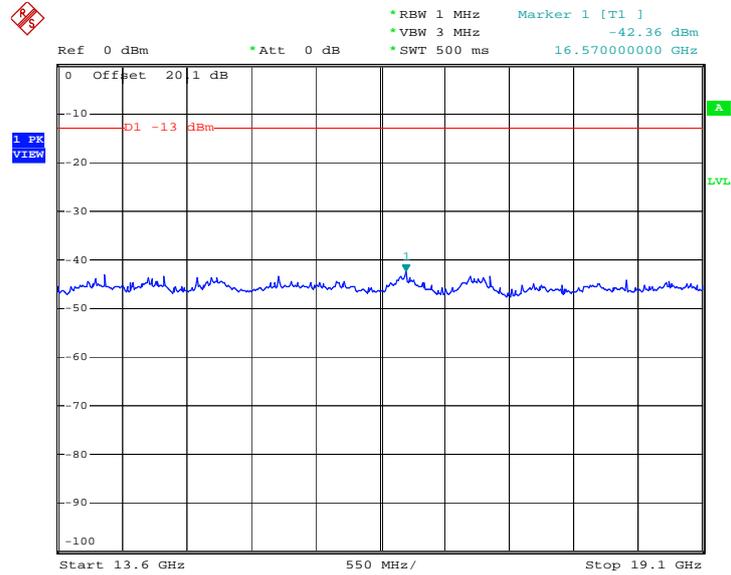

Date: 28.MAR.2012 00:54:49

## 3.7 Field Strength of Spurious Radiation Measurement

### 3.7.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 3.7.2 Measuring Instruments


See list of measuring instruments of this test report.

### 3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$

### 3.7.4 Test Setup

For radiated emissions below 30MHz

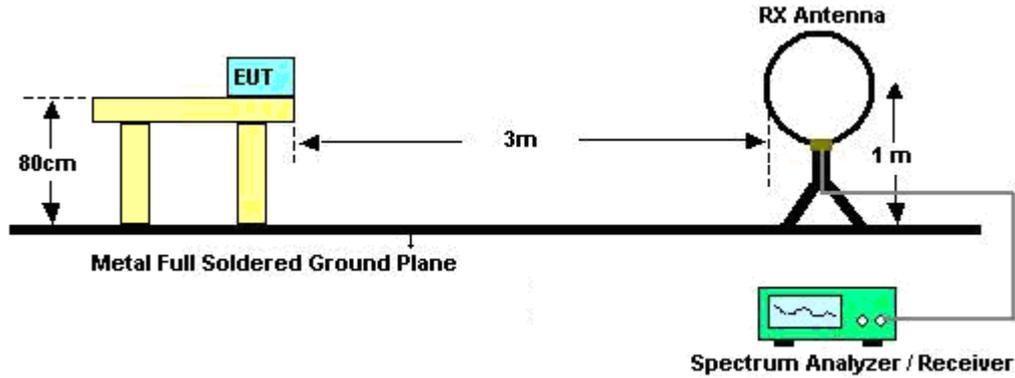

For radiated emissions above 30MHz

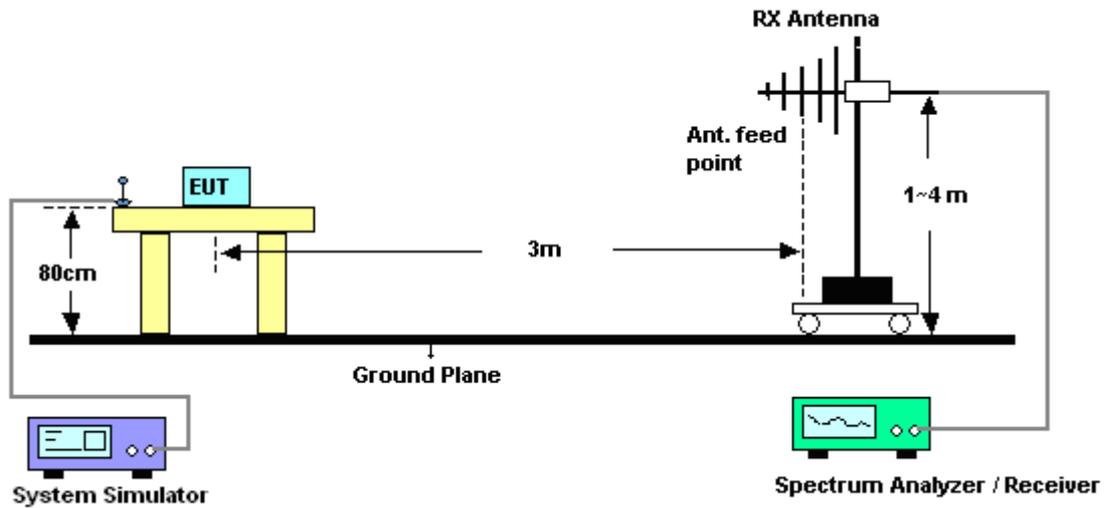


### 3.7.5 Test Results of Radiated Emissions (9 KHz ~ 30 MHz)

The low frequency, which started from 9 KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.7.6 Test Result of Field Strength of Spurious Radiated

Band :	GSM850	Temperature :	21~22°C
Test Mode :	GPRS 8 Link	Relative Humidity :	42~43%
Test Engineer :	Jack Li	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

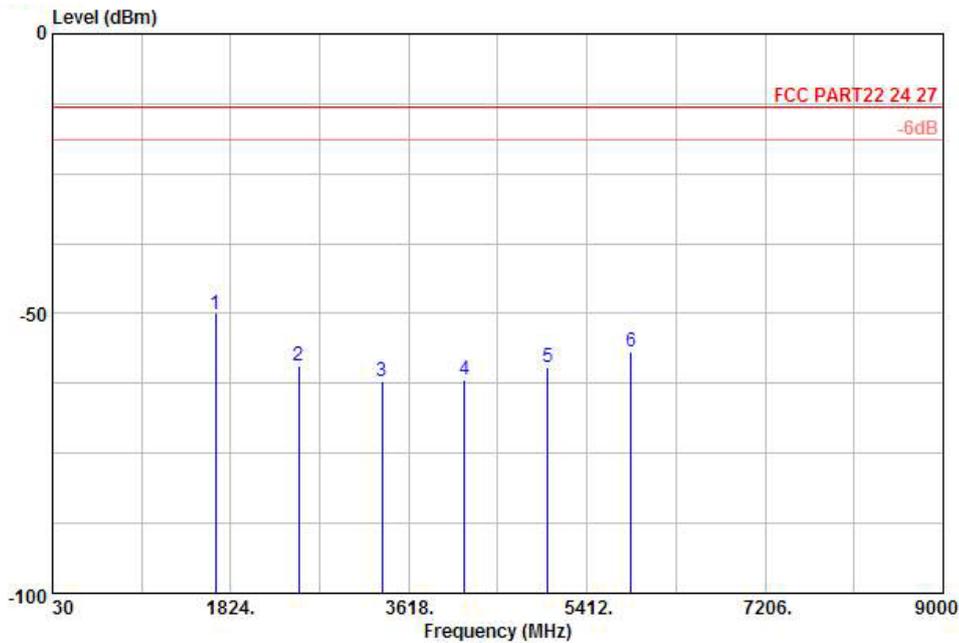


Site : 03CH01-KS  
 Condition: FCC PART22 24 27 HF EIRP FACTOR-09020 HORIZONTAL  
 Project : (FG) 232102  
 plan : E2

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-50.00	-13	-37.00	-48.31	-50.65	0.57	3.37	H	Pass
2510	-59.27	-13	-46.27	-61.52	-61.50	0.78	5.16	H	Pass
3345	-62.21	-13	-49.21	-64.15	-65.85	0.87	6.66	H	Pass
4182	-61.94	-13	-48.94	-64.68	-66.53	0.97	7.71	H	Pass
5018	-59.56	-13	-46.56	-65.76	-65.23	1.09	8.91	H	Pass
5854	-56.93	-13	-43.93	-65.64	-63.37	1.22	9.81	H	Pass



Band :	GSM850	Temperature :	21~22°C
Test Mode :	GPRS 8 Link	Relative Humidity :	42~43%
Test Engineer :	Jack Li	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

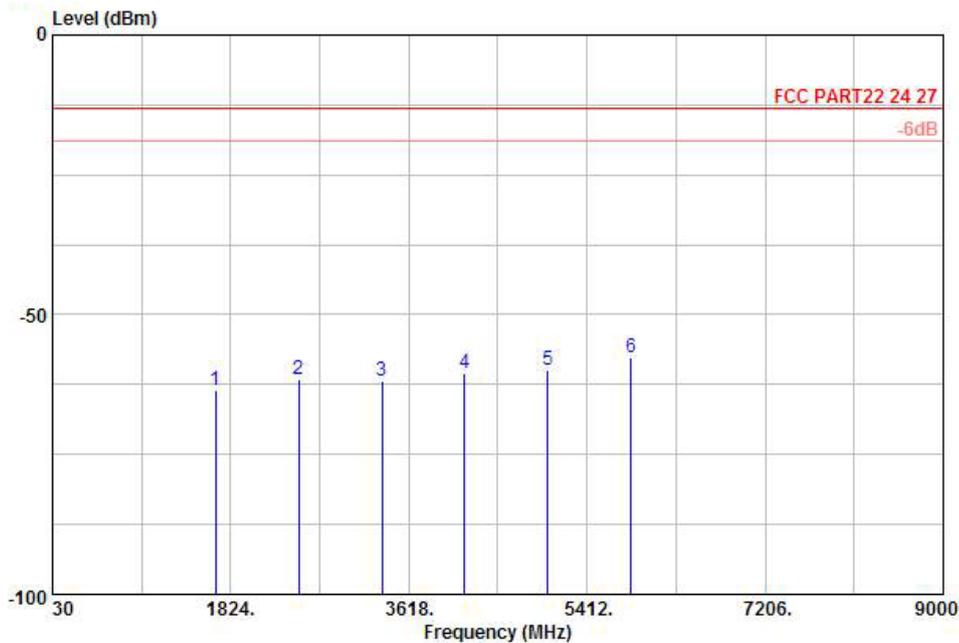


Site : 03CH01-KS  
 Condition: FCC PART22 24 27 HF EIRP FACTOR-09020 VERTICAL  
 Project : (FG) 232102  
 plan : E2

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-63.52	-13	-50.52	-59.17	-64.17	0.57	3.37	V	Pass
2510	-61.50	-13	-48.50	-64.61	-63.73	0.78	5.16	V	Pass
3345	-61.87	-13	-48.87	-63.85	-65.51	0.87	6.66	V	Pass
4182	-60.43	-13	-47.43	-64.27	-65.02	0.97	7.71	V	Pass
5018	-59.83	-13	-46.83	-64.77	-65.50	1.09	8.91	V	Pass
5854	-57.65	-13	-44.65	-65.64	-64.09	1.22	9.81	V	Pass



Band :	GSM850	Temperature :	21~22°C
Test Mode :	EDGE 8 Link	Relative Humidity :	42~43%
Test Engineer :	Jack Li	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

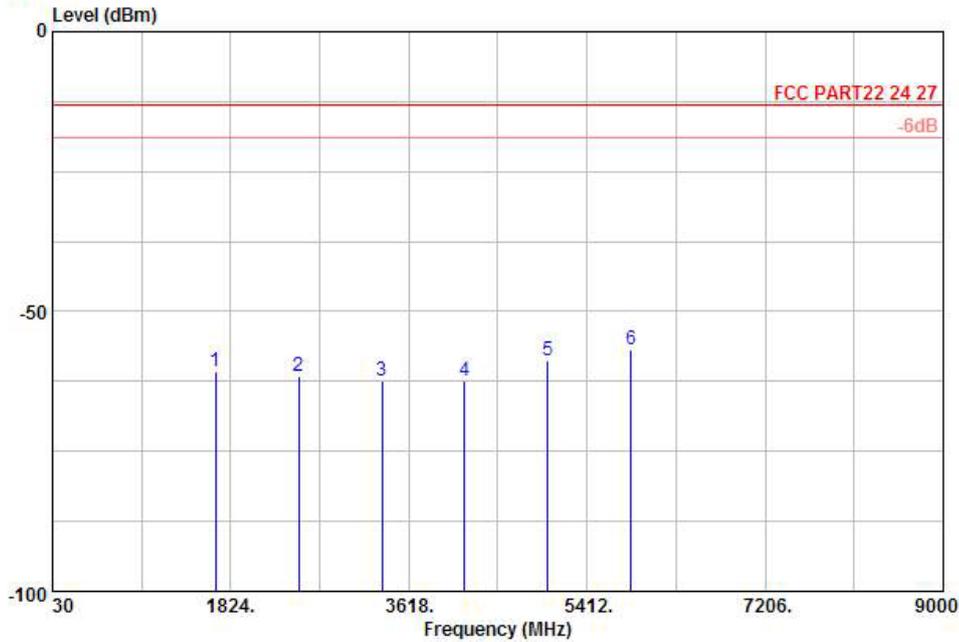


Site : 03CH01-KS  
 Condition: FCC PART22 24 27 HF EIRP FACTOR-09020 HORIZONTAL  
 Project : (FG) 232102  
 plan : E2

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-60.65	-13	-47.65	-56.43	-61.30	0.57	3.37	H	Pass
2510	-61.68	-13	-48.68	-63.93	-63.91	0.78	5.16	H	Pass
3345	-62.28	-13	-49.28	-64.22	-65.92	0.87	6.66	H	Pass
4182	-62.35	-13	-49.35	-65.09	-66.94	0.97	7.71	H	Pass
5018	-58.74	-13	-45.74	-64.94	-64.41	1.09	8.91	H	Pass
5854	-56.69	-13	-43.69	-65.40	-63.13	1.22	9.81	H	Pass



<b>Band :</b>	GSM850	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	EDGE 8 Link	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Jack Li	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

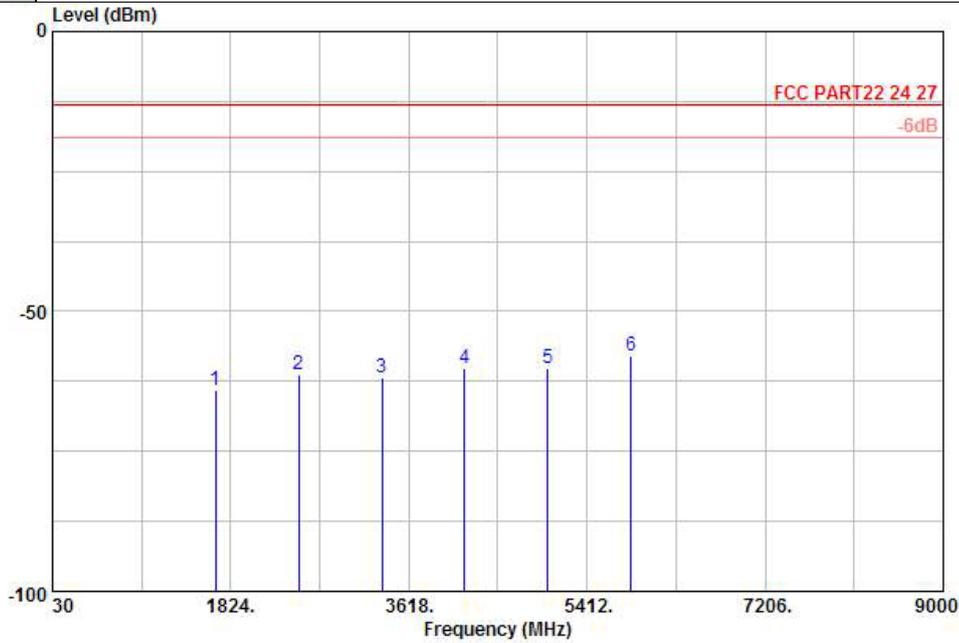


Site : 03CH01-KS  
 Condition: FCC PART22 24 27 HF EIRP FACTOR-09020 VERTICAL  
 Project : (FG) 232102  
 plan : E2

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-64.01	-13	-51.01	-59.66	-64.66	0.57	3.37	V	Pass
2510	-61.42	-13	-48.42	-64.53	-63.65	0.78	5.16	V	Pass
3345	-61.95	-13	-48.95	-63.93	-65.59	0.87	6.66	V	Pass
4182	-60.10	-13	-47.10	-63.94	-64.69	0.97	7.71	V	Pass
5018	-60.08	-13	-47.08	-65.02	-65.75	1.09	8.91	V	Pass
5854	-57.89	-13	-44.89	-65.88	-64.33	1.22	9.81	V	Pass



Band :	GSM1900	Temperature :	21~22°C
Test Mode :	GSM Link	Relative Humidity :	42~43%
Test Engineer :	Jack Li	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

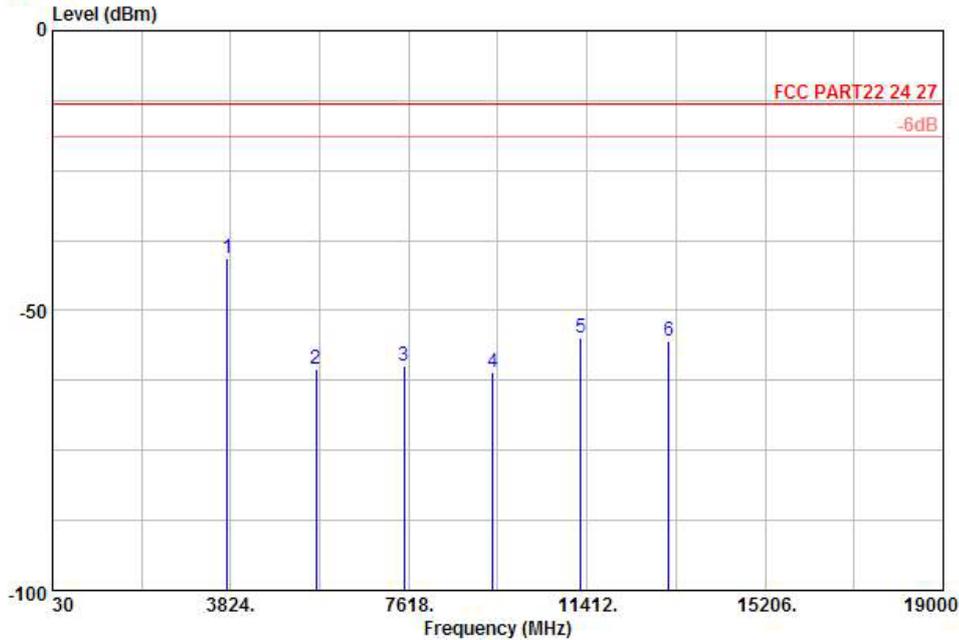


Site : 03CH01-KS  
 Condition: FCC PART22 24 27 HF EIRP FACTOR-09020 HORIZONTAL  
 Project : (FG) 232102  
 plan : E2

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-40.65	-13	-27.65	-47.05	-47.03	0.78	7.16	H	Pass
5640	-60.39	-13	-47.39	-64.57	-68.93	1.04	9.58	H	Pass
7520	-59.81	-13	-46.81	-64.94	-69.92	1.35	11.46	H	Pass
9400	-61.03	-13	-48.03	-64.29	-72.09	1.75	12.81	H	Pass
11280	-54.93	-13	-41.93	-66.42	-66.02	2	13.09	H	Pass
13160	-55.45	-13	-42.45	-66.75	-67.16	2.04	13.75	H	Pass



<b>Band :</b>	GSM1900	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	GSM Link	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Jack Li	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

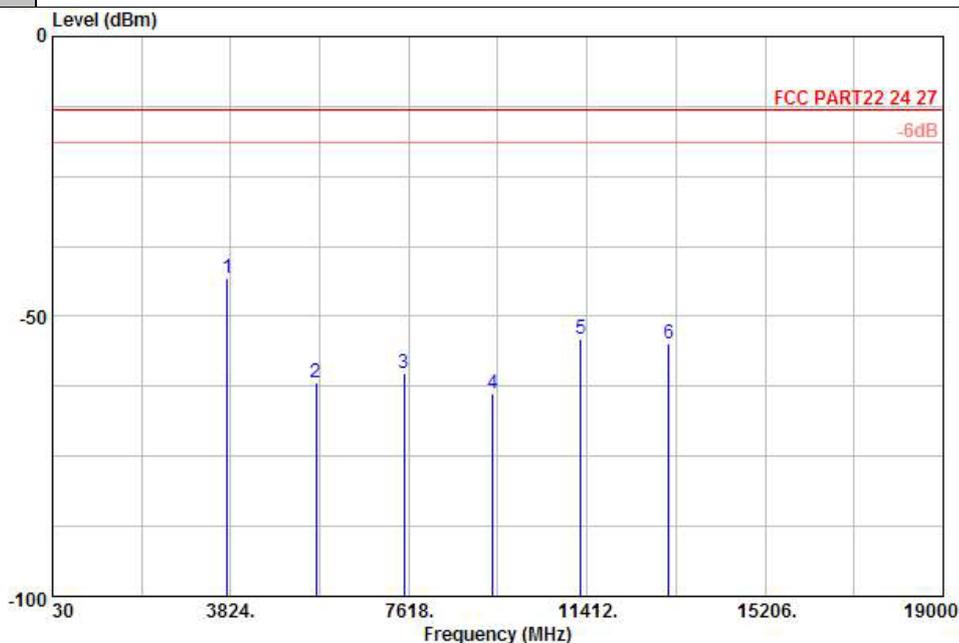


Site : 03CH01-KS  
 Condition: FCC PART22 24 27 HF EIRP FACTOR-09020 VERTICAL  
 Project : (FG) 232102

plan : E2

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-43.27	-13	-30.27	-50.93	-49.65	0.78	7.16	V	Pass
5640	-61.77	-13	-48.77	-64.99	-70.31	1.04	9.58	V	Pass
7520	-60.29	-13	-47.29	-64.78	-70.40	1.35	11.46	V	Pass
9400	-63.87	-13	-50.87	-65.09	-74.93	1.75	12.81	V	Pass
11280	-53.91	-13	-40.91	-65.15	-65.00	2	13.09	V	Pass
13160	-54.80	-13	-41.80	-65.99	-66.51	2.04	13.75	V	Pass



Band :	GSM1900	Temperature :	21~22°C
Test Mode :	EDGE 8 Link	Relative Humidity :	42~43%
Test Engineer :	Jack Li	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

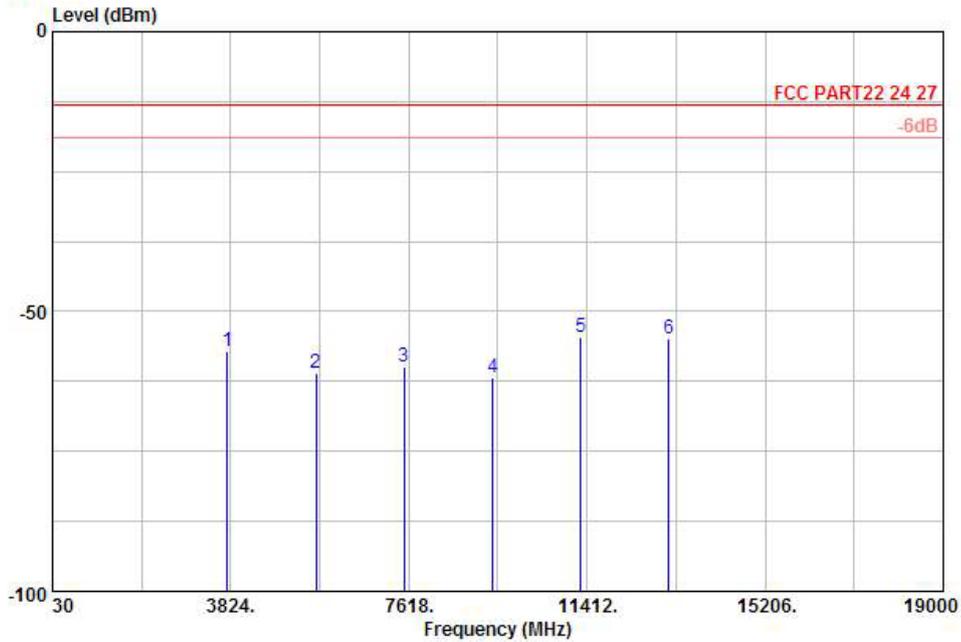


Site : 03CH01-KS  
 Condition: FCC PART22 24 27 HF EIRP FACTOR-09020 HORIZONTAL  
 Project : (FG) 232102  
 plan : E2

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-57.14	-13	-44.14	-58.11	-63.52	0.78	7.16	H	Pass
5640	-61.12	-13	-48.12	-65.30	-69.66	1.04	9.58	H	Pass
7520	-59.93	-13	-46.93	-65.06	-70.04	1.35	11.46	H	Pass
9400	-61.95	-13	-48.95	-65.21	-73.01	1.75	12.81	H	Pass
11280	-54.55	-13	-41.55	-66.04	-65.64	2	13.09	H	Pass
13160	-54.92	-13	-41.92	-66.22	-66.63	2.04	13.75	H	Pass



Band :	GSM1900	Temperature :	21~22°C
Test Mode :	EDGE 8 Link	Relative Humidity :	42~43%
Test Engineer :	Jack Li	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

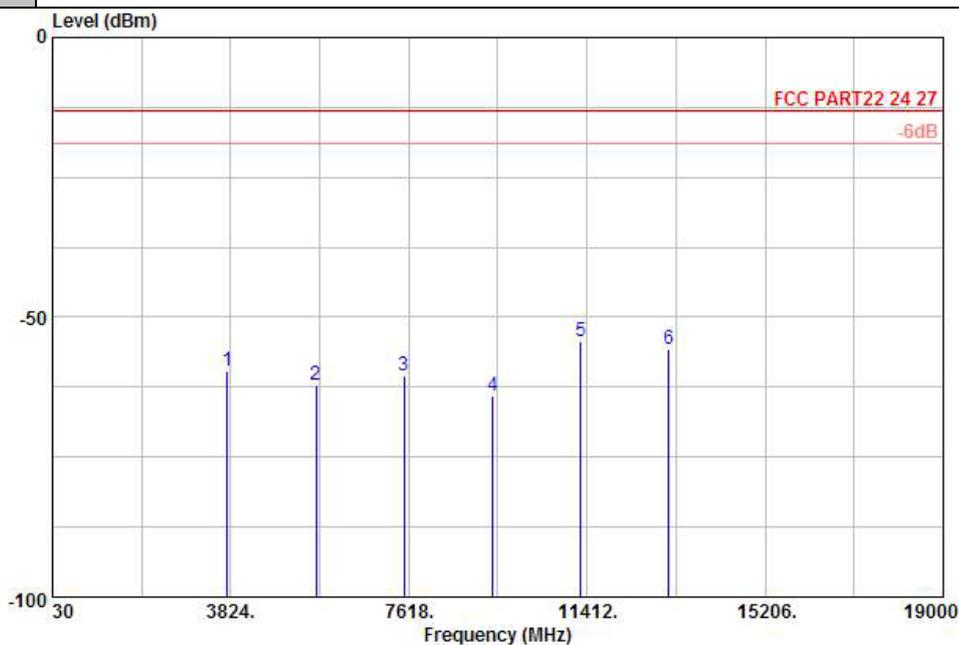


Site : 03CH01-KS  
 Condition: FCC PART22 24 27 HF EIRP FACTOR-09020 VERTICAL  
 Project : (FG) 232102

plan : E2

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-59.69	-13	-46.69	-61.06	-66.07	0.78	7.16	V	Pass
5640	-62.22	-13	-49.22	-65.44	-70.76	1.04	9.58	V	Pass
7520	-60.52	-13	-47.52	-65.01	-70.63	1.35	11.46	V	Pass
9400	-64.01	-13	-51.01	-65.23	-75.07	1.75	12.81	V	Pass
11280	-54.43	-13	-41.43	-65.67	-65.52	2	13.09	V	Pass
13160	-55.65	-13	-42.65	-66.84	-67.36	2.04	13.75	V	Pass



<b>Band :</b>	WCDMA Band V	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	RMC 12.2Kbps Link	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Jack Li	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

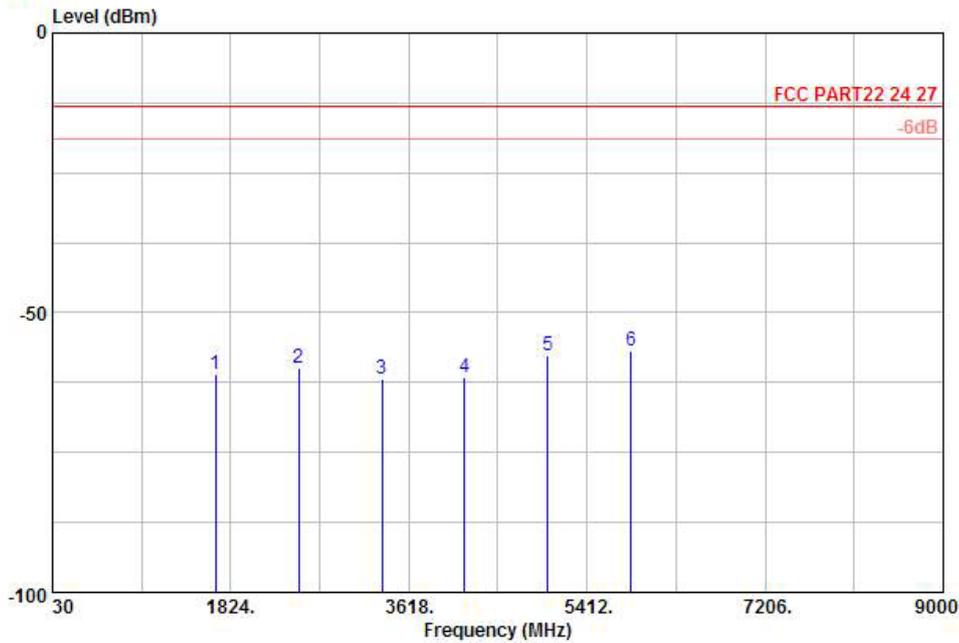


Site : 03CH01-KS  
 Condition: FCC PART22 24 27 HF EIRP FACTOR-09020 HORIZONTAL  
 Project : (FG) 232102  
 plan : E2

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-60.91	-13	-47.91	-56.69	-61.56	0.57	3.37	H	Pass
2510	-59.92	-13	-46.92	-62.17	-62.15	0.78	5.16	H	Pass
3345	-61.95	-13	-48.95	-63.89	-65.59	0.87	6.66	H	Pass
4182	-61.51	-13	-48.51	-64.25	-66.10	0.97	7.71	H	Pass
5018	-57.54	-13	-44.54	-63.74	-63.21	1.09	8.91	H	Pass
5854	-56.70	-13	-43.70	-65.41	-63.14	1.22	9.81	H	Pass



<b>Band :</b>	WCDMA Band V	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	RMC 12.2Kbps Link	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Jack Li	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

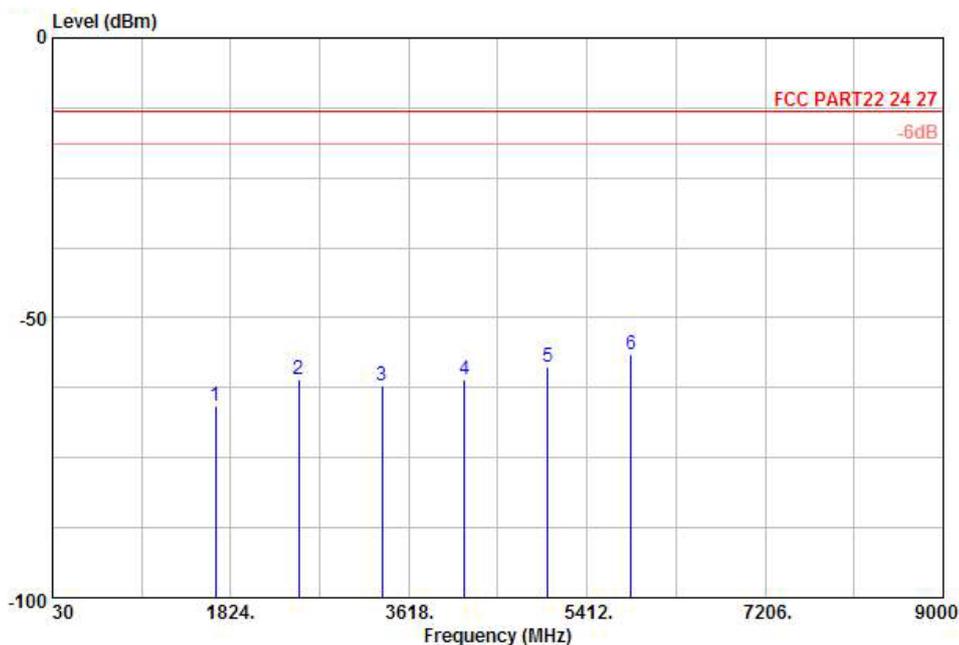


Site : 03CH01-KS  
 Condition: FCC PART22 24 27 HF EIRP FACTOR-09020 VERTICAL  
 Project : (FG) 232102  
 plan : E2

Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
1672	-65.61	-13	-52.61	-61.26	-66.26	0.57	3.37	V	Pass
2510	-60.94	-13	-47.94	-64.05	-63.17	0.78	5.16	V	Pass
3345	-62.25	-13	-49.25	-64.23	-65.89	0.87	6.66	V	Pass
4182	-61.07	-13	-48.07	-64.91	-65.66	0.97	7.71	V	Pass
5018	-58.83	-13	-45.83	-63.77	-64.50	1.09	8.91	V	Pass
5854	-56.48	-13	-43.48	-64.47	-62.92	1.22	9.81	V	Pass



<b>Band :</b>	WCDMA Band II	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	RMC 12.2Kbps Link	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Jack Li	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

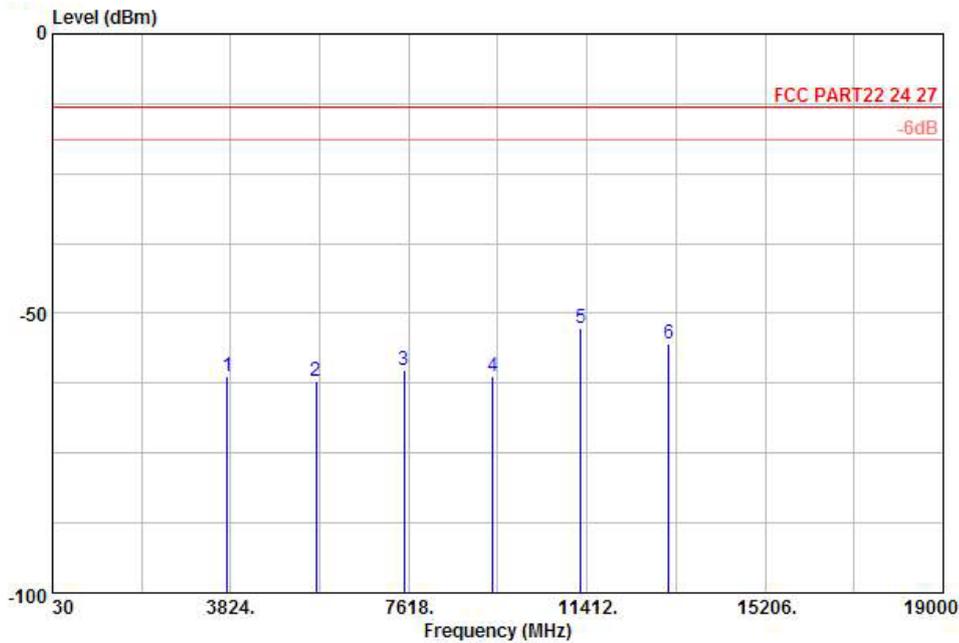


Site : 03CH01-KS  
 Condition: FCC PART22 24 27 HF EIRP FACTOR-09020 HORIZONTAL  
 Project : (FG) 232102  
 plan : E2

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-61.21	-13	-48.21	-62.18	-67.59	0.78	7.16	H	Pass
5640	-62.05	-13	-49.05	-66.23	-70.59	1.04	9.58	H	Pass
7520	-60.08	-13	-47.08	-65.21	-70.19	1.35	11.46	H	Pass
9400	-61.30	-13	-48.30	-64.56	-72.36	1.75	12.81	H	Pass
11280	-52.65	-13	-39.65	-64.14	-63.74	2	13.09	H	Pass
13160	-55.38	-13	-42.38	-66.68	-67.09	2.04	13.75	H	Pass



<b>Band :</b>	WCDMA Band II	<b>Temperature :</b>	21~22°C
<b>Test Mode :</b>	RMC 12.2Kbps Link	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Jack Li	<b>Polarization :</b>	Vertical
<b>Remark :</b>	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

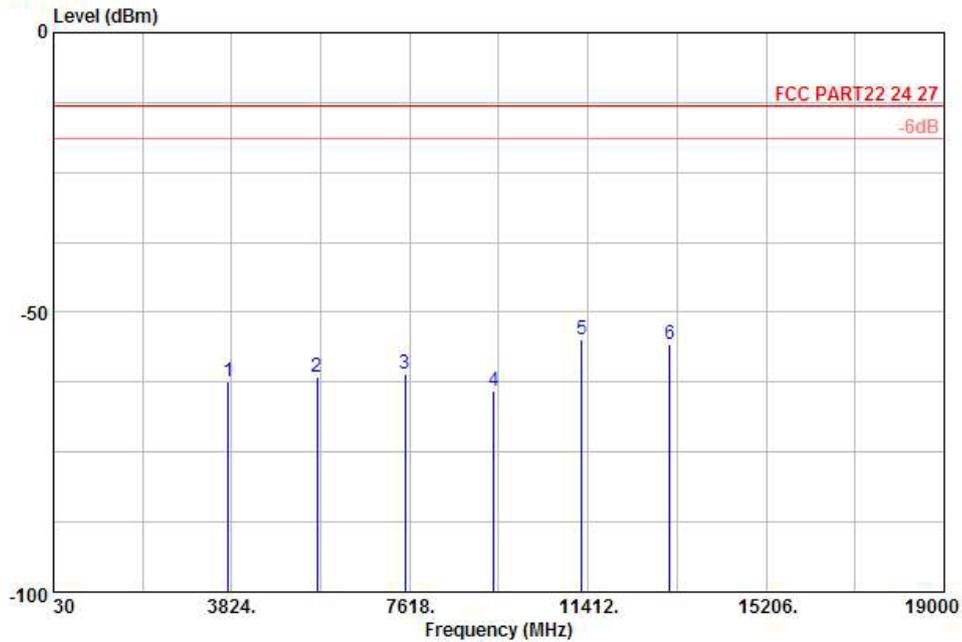

Site : 03CH01-KS  
 Condition: FCC PART22 24 27 HF EIRP FACTOR-09020 VERTICAL  
 Project : (FG) 232102  
 plan : E2

Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading ( dBm )	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain ( dBi )	Polarization ( H/V )	Result
3760	-62.47	-13	-49.47	-63.84	-68.85	0.78	7.16	V	Pass
5640	-61.55	-13	-48.55	-64.77	-70.09	1.04	9.58	V	Pass
7520	-61.09	-13	-48.09	-65.58	-71.20	1.35	11.46	V	Pass
9400	-64.06	-13	-51.06	-65.28	-75.12	1.75	12.81	V	Pass
11280	-54.76	-13	-41.76	-66	-65.85	2	13.09	V	Pass
13160	-55.69	-13	-42.69	-66.88	-67.40	2.04	13.75	V	Pass

## 3.8 Frequency Stability Measurement

### 3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.8.2 Measuring Instruments

See list of measuring instruments of this test report.


### 3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT cannot be turned on at  $-30^{\circ}\text{C}$ , the testing lowest temperature will be raised in  $10^{\circ}\text{C}$  step until the EUT can be turned on.

### 3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

### 3.8.5 Test Setup

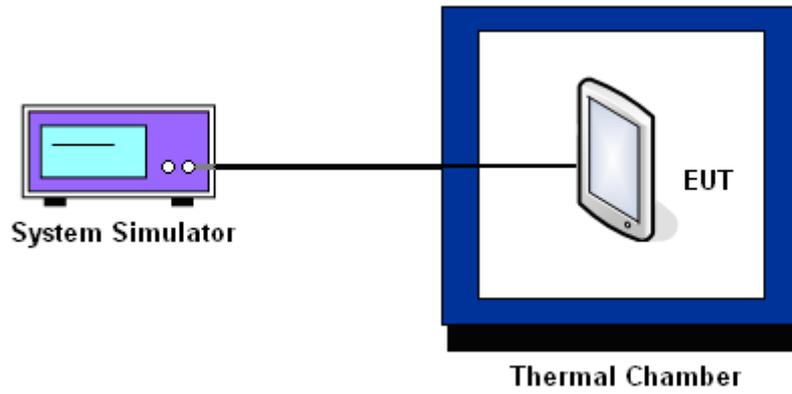

3.8.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5		

Temperature (°C)	GPRS 8		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	NA	NA	NA	NA	PASS
-20	NA	NA	NA	NA	
-10	24	0.03	51	0.06	
0	16	0.02	42	0.05	
10	18	0.02	48	0.06	
20	21	0.02	49	0.06	
30	24	0.03	41	0.05	
40	-10	-0.01	-48	-0.06	
50	14	0.02	46	0.05	
55	-23	-0.03	-49	-0.06	

Note:

1. The EUT stops transmitting at temperatures -20°C and -30°C.
2. The manufacturer declared that the EUT could work properly between temperatures -10°C~55°C.



Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5		

Temperature (°C)	GSM		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	NA	NA	NA	NA	PASS
-20	NA	NA	NA	NA	
-10	42	0.02	32	0.02	
0	45	0.02	37	0.02	
10	37	0.02	-34	-0.02	
20	31	0.02	28	0.01	
30	29	0.02	-26	-0.01	
40	16	0.01	-34	-0.02	
50	-12	-0.01	-35	-0.02	
55	-25	-0.01	-33	-0.02	

**Note:**

1. The EUT stops transmitting at temperatures -20°C and -30°C.
2. The manufacturer declared that the EUT could work properly between temperatures -10°C~55°C.



Band :	WCDMA Band V	Channel :	4182
Limit (ppm) :	2.5		

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	NA	NA	PASS
-20	NA	NA	
-10	-14	-0.02	
0	-16	-0.02	
10	-14	-0.02	
20	-21	-0.02	
30	-16	-0.02	
40	-23	-0.03	
50	-15	-0.02	
55	-18	-0.02	

**Note:**

1. The EUT stops transmitting at temperatures -20°C and -30°C.
2. The manufacturer declared that the EUT could work properly between temperatures -10°C~55°C.



Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	2.5		

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	NA	NA	PASS
-20	NA	NA	
-10	-31	-0.02	
0	-34	-0.02	
10	-32	-0.02	
20	26	0.01	
30	-32	-0.02	
40	34	0.02	
50	33	0.02	
55	32	0.02	

**Note:**

1. The EUT stops transmitting at temperatures -20°C and -30°C.
2. The manufacturer declared that the EUT could work properly between temperatures -10°C~55°C.

3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS 8	3.7	16	0.02	2.5	PASS
		BEP	21	0.02		
		4.2	17	0.02		
	EDGE 8	3.7	24	0.03		
		BEP	22	0.03		
		4.2	15	0.02		
GSM 1900 CH661	GSM	3.7	15	0.01		
		BEP	-21	-0.01		
		4.2	-14	-0.01		
	EDGE 8	3.7	-33	-0.02		
		BEP	29	0.02		
		4.2	-18	-0.01		
WCDMA Band V CH4182	RMC 12.2Kbps	3.7	-18	-0.02		
		BEP	-18	-0.02		
		4.2	-15	-0.02		
WCDMA Band II CH9400	RMC 12.2Kbps	3.7	30	0.02		
		BEP	29	0.02		
		4.2	-28	-0.01		

Note:

1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.5 V.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Mar. 27, 2012~ Mar. 28, 2012	Dec. 29, 2012	Conducted (TH01-KS)
System Simulator	R&S	CMU200	837587/066	2G Full-Band	Dec. 30, 2011	Mar. 27, 2012~ Mar. 28, 2012	Dec. 29, 2012	Conducted (TH01-KS)
DC Power Supply	GWINSTEK	GPS-3030D	E1884515	N/A	Aug. 23, 2011	Mar. 27, 2012~ Mar. 28, 2012	Aug. 22, 2012	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	N/A	Dec. 30, 2011	Mar. 27, 2012~ Mar. 28, 2012	Dec. 29, 2012	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Nov. 09, 2011	Apr. 02, 2012	Nov. 08, 2012	Radiation (03CH01-KS)
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Dec. 30, 2011	Apr. 02, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Bilog Antenna	SCHAFFNER	CBL6112D	23182	25MHz~2GHz	Dec. 08, 2011	Apr. 02, 2012	Dec. 07, 2012	Radiation (03CH01-KS)
Double Ridge Horn Antenna	EMCO	3117	00075959	1GHz~18GHz	Jan. 06, 2012	Apr. 02, 2012	Jan. 05, 2013	Radiation (03CH01-KS)
Amplifier	Wireless	FPA-6592G	060007	30MHz~2GHz	Dec. 30, 2011	Apr. 02, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Dec. 30, 2011	Apr. 02, 2012	Dec. 29, 2012	Radiation (03CH01-KS)
SHE-EHF Horn	Schwarzbeck	BBHA9170	BBHA170249	15GHz-40GHz	Oct. 11, 2011	Apr. 02, 2012	Oct. 10, 2012	Radiation (03CH01-KS)
Loop Antenna	R&S	HFH2-Z2	860004/00	9kHz~30 MHz	Jul. 28, 2011	Apr. 02, 2012	Jul. 27, 2012	Radiation (03CH01-KS)
System Simulator	R&S	CMU200	116456	Full-Band	Sep. 20, 2011	Apr. 02, 2012	Sep. 19, 2012	Radiation (03CH01-KS)

## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.27</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.54</b>		

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$	$C_i$	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	$\pm 0.10$	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	$\pm 1.70$	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	$\pm 0.50$	Normal (k=2)	0.25	1	0.25
Receiver Correction	$\pm 2.00$	Rectangular	1.15	1	1.15
Antenna Factor Directional	$\pm 1.50$	Rectangular	0.87	1	0.87
Site Imperfection	$\pm 2.80$	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>4.72</b>				



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP232102 as below.