

# TEST REPORT

**REPORT NUMBER: I08GE7032-FCC-EMC**

**ON**

**Type of Equipment:** Windows Mobile Smart Phone  
**Type of Designation:** Vodafone 1231  
**Manufacturer:** ZTE CORPORATION

**ACCORDING TO**

**FCC CFR Part 2, FREQUENCY ALLOCATIONS AND RADIO  
TREATY MATTERS; GENERAL RULES AND REGULATIONS;  
e-CFR, March 23, 2006**

**PART 22, PUBLIC MOBILE SERVICES (Oct 1, 02 Edition)**


**PART 24, PERSONAL COMMUNICATIONS SERVICES (Oct 1, 97  
Edition)**

**China Telecommunication Technology Labs.**

*Month date, year*

*Nov,21, 2008*

*Signature*



He Guili  
**Director**

**FCC ID:** Q78-VDF1231

**Report Date:** 2008-11-20

**Test Firm Name:** China Telecommunication Technology Labs

**Registration Number:** 840587

#### Statement

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported tests were carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Parts 2, 22, and 24. The sample tested was found to comply with the requirements defined in the applied rules.

## CONTENTS

<b>1 GENERAL INFORMATION .....</b>	<b>4</b>
1.1 NOTES .....	4
1.2 TESTERS .....	5
1.3 TESTING LABORATORY INFORMATION .....	6
1.4 DETAILS OF APPLICANT OR MANUFACTURER .....	7
<b>2 TEST ITEM .....</b>	<b>8</b>
2.1 GENERAL INFORMATION .....	8
2.2 OUTLINE OF EUT .....	8
2.3 MODIFICATIONS INCORPORATED IN EUT .....	8
2.4 EQUIPMENT CONFIGURATION .....	8
2.5 OTHER INFORMATION .....	9
<b>3 SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>4 TEST RESULTS OF MODE .....</b>	<b>12</b>
4.1 RADIATED SPURIOUS EMISSION .....	12
4.2 RADIATED RF POWER OUTPUT AND ERP .....	20
4.3 OCCUPIED BANDWIDTH .....	23
4.4 FREQUENCY STABILITY OVER TEMPERATURE VARIATION .....	30
4.5 FREQUENCY STABILITY OVER VOLTAGE VARIATION .....	33
4.6 CONDUCTED RF POWER OUTPUT .....	35
4.7 CONDUCTED SPURIOUS EMISSION .....	38
4.8 BAND EDGE .....	43
<b>ANNEX A EXTERNAL PHOTOS .....</b>	<b>48</b>
<b>ANNEX B INTERNAL PHOTOS.....</b>	<b>51</b>
<b>ANNEX C DEVIATIONS FROM PRESCRIBED TEST METHODS.....</b>	<b>53</b>

## 1 General Information

### 1.1 Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Parts 2, 22 and 24.


The test results of this test report relate exclusively to the item(s) tested as specified in section 2.

The following deviation from, additions to, or exclusions from the test specifications have been made. See Annex C.

China Telecommunication Technology Labs.(CTTL) authorizes the applicant or manufacturer (see section 1.4) to reproduce this report provided, and the test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTTL Mr. He Guili.


Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. CTTL accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

## 1.2 Testers


Name: Yuan Yuan  
Position: Engineer  
Department: Department of EMC test  
Signature: 

Name: Li Dongjin  
Position: Engineer  
Department: Department of EMC test  
Signature: 

Editor of this test report:

Name: Yuan Yuan  
Position: Engineer  
Department: Department of EMC test  
Date: 2008-11-20  
Signature: 

Technical responsibility for area of testing:

Name: Zou Dongyi  
Position: Manager  
Department: Department of EMC test  
Date: 2008-11-20  
Signature: 

### 1.3 Testing Laboratory information

#### 1.3.1 Location

Name: China Telecommunication Technology Labs.  
Address: No. 11, Yue Tan Nan Jie, Xi Cheng District  
BEIJING  
P. R. CHINA, 100083  
Tel: +86 10 68094053  
Fax: +86 10 68011404  
Email: [emc@chinattl.com](mailto:emc@chinattl.com)

#### 1.3.2 Details of accreditation status

Accredited by: China National Accreditation Service for Conformity  
Assessment (CNAS)  
Registration number: CNAS Registration No. CNAS L0570  
Standard: ISO/IEC 17025:2005

#### 1.3.3 Test location, where different from section 1.3.1

Name: -----  
Street: -----  
City: -----  
Country: -----  
Telephone: -----  
Fax: -----  
Postcode: -----

## 1.4 Details of applicant or manufacturer

### 1.4.1 Applicant

Name: ZTE CORPORATION  
Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial  
Park, Nanshan District, Shenzhen, Guangdong,  
518057, P.R.China  
Country: China  
Telephone: +86-021-68897541  
Fax: +86-21-50701080  
Contact: Zhangmin  
Telephone: 021-68897541  
Email: [Zhang.min13@zte.com.cn](mailto:Zhang.min13@zte.com.cn)

### 1.4.2 Manufacturer (if different from applicant in section 1.4.1)

Name: --  
Address: --

### 1.4.3 Manufactory (if different from applicant in section 1.4.1)

Name: --  
Address: --

## 2 Test Item

### 2.1 General Information

Manufacturer: ZTE CORPORATION  
 Name: Windows Mobile Smart Phone  
 Model Number: Vodafone 1231  
 Serial Number: --  
 Production Status: Production  
 Receipt date of test item: 2008-11-14

### 2.2 Outline of EUT

E.U.T. is a Windows Mobile Smart Phone.

### 2.3 Modifications Incorporated in EUT

The EUT has not been modified from what is described by the brand name and unique type identification stated above.

### 2.4 Equipment Configuration

Equipment configuration list:

Item	Generic Description	Manufacturer	Type	Serial No.	Remarks
A	handset	ZTE CORPORATION	Vodafone 1231	--	None
B	adapter	ZTE CORPORATION, RD, Dokocom	STC-A22O50U5- A	--	None
C	battery	ZTE CORPORATION, RD, SCUD	Li3711T42P3h51 3857	--	None
D	Earphone	Merry Electronics Ltd Full-Sound Electrical Products.Ltd	HMZ3-C4-OMTP	--	None

Cables:

Item	Cable Type	Manufacturer	Length	Shield	Quantity	Remarks
1	DC cable on Adapter	Unknown	1.0 m	No	1	None

## 2.5 Other Information

(a) Modulation is GFSK.

(b) Emission Designator is 276KGXW.

(c) Version of hardware and software

HW Version: g5hC

SW Version: P180A1V1.0.3

(d) Adaptor information:

Input: 100-240VAC 50/60Hz 200mA

Output: 5.0VDC 700mA

(e) Battery information:

3.7VDC 1100mAh

CITL Test Report

### 3 Summary of Test Results

A brief summary of the tests carried out is shown as following.

<b>GSM mode:</b>		
Specification Clause	Name of Test	Result
2.1051, 24.238, 2.1053,22.917	Radiated Spurious Emission	Pass
2.1046,24.232	Radiated RF Power Output	Pass
22.913(a)	Effective Radiated Power (ERP)	Pass
2.1049,22.917(b), 24.238(b)	Occupied Bandwidth	*Note 1
2.1055,22.355, 24.235	Frequency Stability over Temperature Variation	Pass
2.1055,22.355, 24.235	Frequency Stability over Voltage Variation	Pass
2.1046,22.913(a), 24.232(c)	Conducted RF Power Output	Pass
2.1051,22.917,24. 238	Conducted spurious emissions	Pass
Note 1: No applicable performance criteria.		

<b>GPRS mode:</b>		
2.1051, 24.238, 2.1053,22.917	Radiated Spurious Emission	Pass
2.1046,24.232	Radiated RF Power Output	Pass
22.913(a)	Effective Radiated Power (ERP)	Pass
2.1049,22.917(b), 24.238(b)	Occupied Bandwidth	*Note 2
2.1055,22.355, 24.235	Frequency Stability over Temperature Variation	Pass
2.1055,22.355, 24.235	Frequency Stability over Voltage Variation	Pass
2.1046,22.913(a), 24.232(c)	Conducted RF Power Output	Pass
2.1051,22.917,24. 238	Conducted spurious emissions	Pass
Note 2: No applicable performance criteria.		

<b>EGPRS mode:</b>		
2.1051, 24.238, 2.1053,22.917	Radiated Spurious Emission	Pass
2.1046,24.232	Radiated RF Power Output	Pass
22.913(a)	Effective Radiated Power (ERP)	Pass
2.1049,22.917(b), 24.238(b)	Occupied Bandwidth	*Note 2
2.1055,22.355, 24.235	Frequency Stability over Temperature Variation	Pass
2.1055,22.355, 24.235	Frequency Stability over Voltage Variation	Pass
2.1046,22.913(a), 24.232(c)	Conducted RF Power Output	Pass
2.1051,22.917,24. 238	Conducted spurious emissions	Pass
Note 3: No applicable performance criteria.		

TTL Test Report

## 4 Test Results of mode

### 4.1 Radiated Spurious Emission

<b>Specifications:</b>	2.1051, 24.238, 2.1053, 22.917					
<b>Date of Tests</b>	2008-11-14, 2008-11-18					
<b>Test conditions:</b>	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
<b>Operation Mode</b>	TX on, channel 190 and 661 for GSM and GPRS mode					
<b>Test Results:</b>	Pass					
<b>Test equipment Used:</b>						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-03	Normal
7330	Ultra Broadband Antenna	SCHWARZBECK	VULB 9160	--	2010-10-26	Normal
7330	Double-Ridged Horn Antenna	R/S	HF906	100037	2009-01-14	Normal
713	Fully-Anechoic Chamber	ETS	11.8m×6.5m×6.3m	--	2010-11-17	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

#### Limit Level Construction:

According to Part 24.238 (a), i.e., Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB, so the limit level is:  
 $P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13\text{dBm}$

#### Limits for Radiated spurious emissions(UE)

Frequency range	Limit Level /Resolution Bandwidth
30 MHz to 20000 MHz	-13dBm/1MHz

#### Test Setup:

The EUT was placed in an anechoic chamber, see figure SP. The Wireless Communications Test Set was used to set the TX channel and power level and modulate the TX signal with different bit patterns. The test was done using an automated test system, where all test equipments were controlled by a computer.



Figure SP

**Test Method:**


The measurement was performed accordance with section 2.2.12 of ANSI/TIA-603-B-2002: *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*.

- 1 The maximum spurious emissions were searched by turning the azimuth of the turntable, shifting the polarization of the measuring antenna and changing the pose of the EUT.
- 2 Levels of EUT's transmitter harmonics and suspicious signals were recorded.
- 3 The recorded levels were corrected in the automated test system with the correction factors given by a substitution calibration made before the measurement. The calibration was made separately for vertical and horizontal polarization and the system uses different correction factors depending on the measuring antenna polarization.
- 4 The corrected values of radiated spurious emissions indicated as EIRP are reported.


**Note:**

- 1 The investigated ARFCNs are 190 (836.6 MHz) and 661 (1880.0 MHz).
- 2 The investigated frequency range is 30 MHz ~ 18 GHz.


**Test Results for GSM mode:**

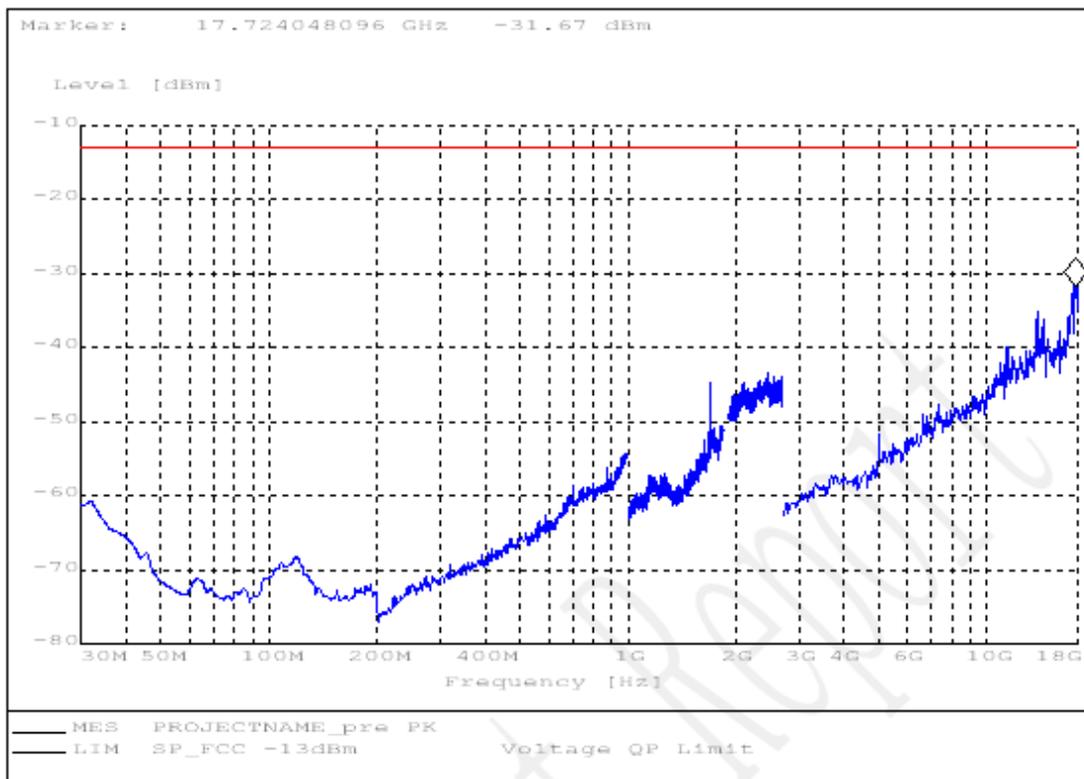


**S661VF for GSM mode**

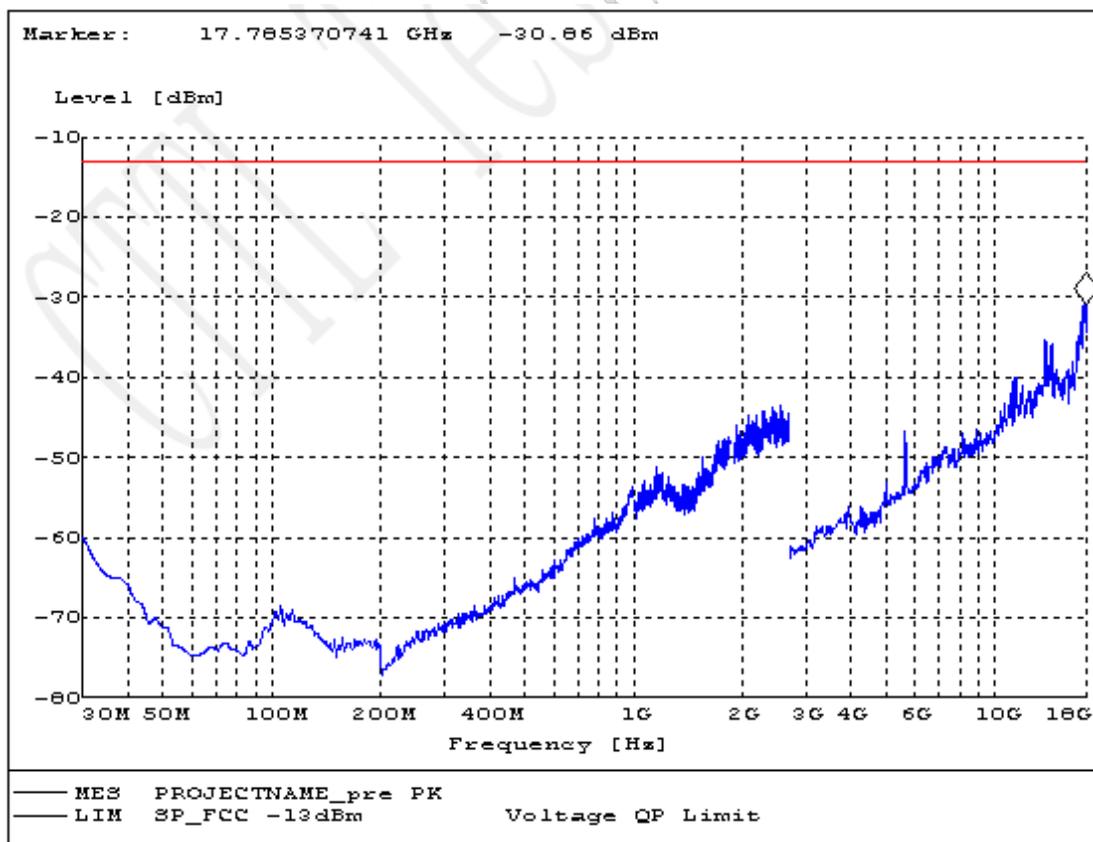

**S661HF for GSM mode**

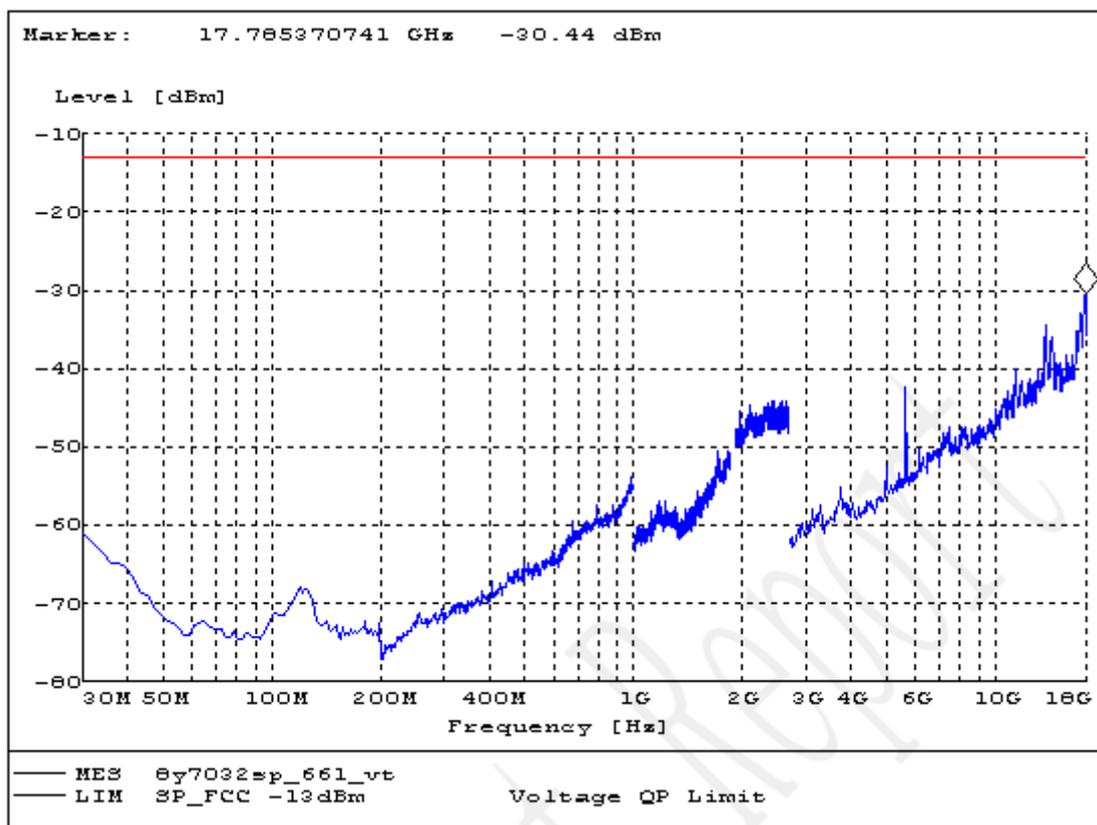


S661VT for GSM mode

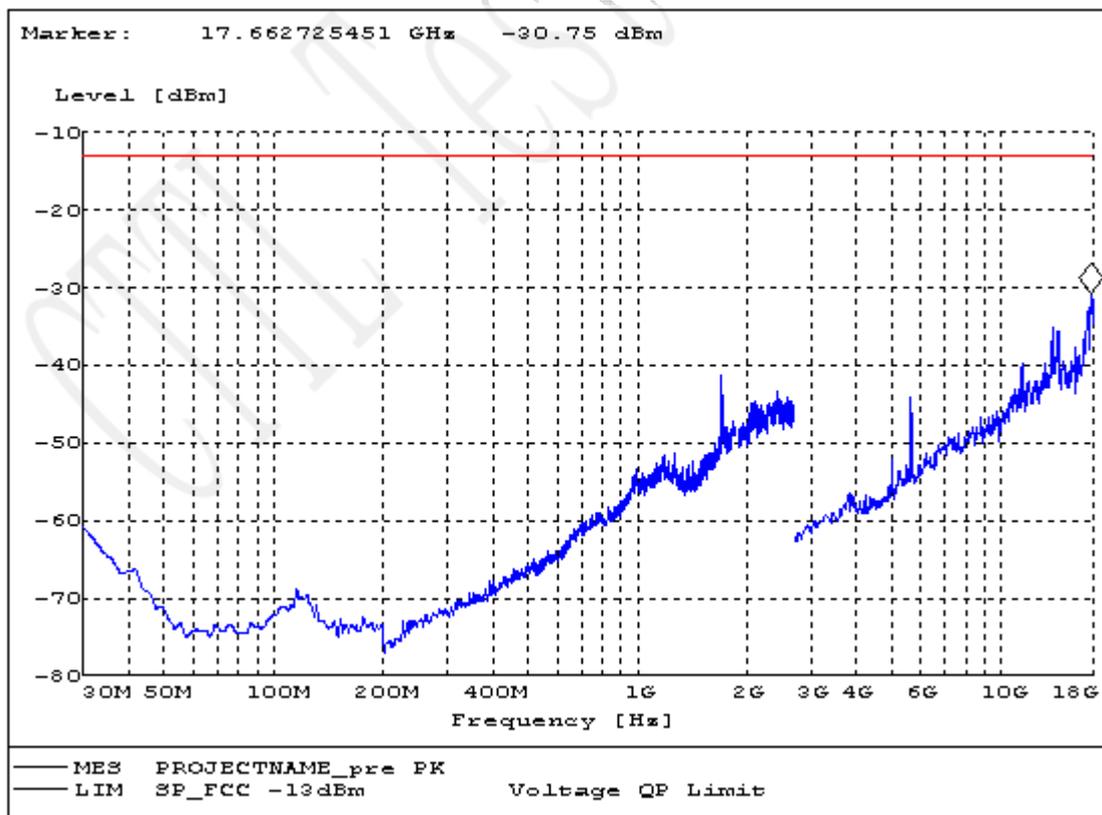


S661HT for GSM mode


Test Results for GPRS mode:

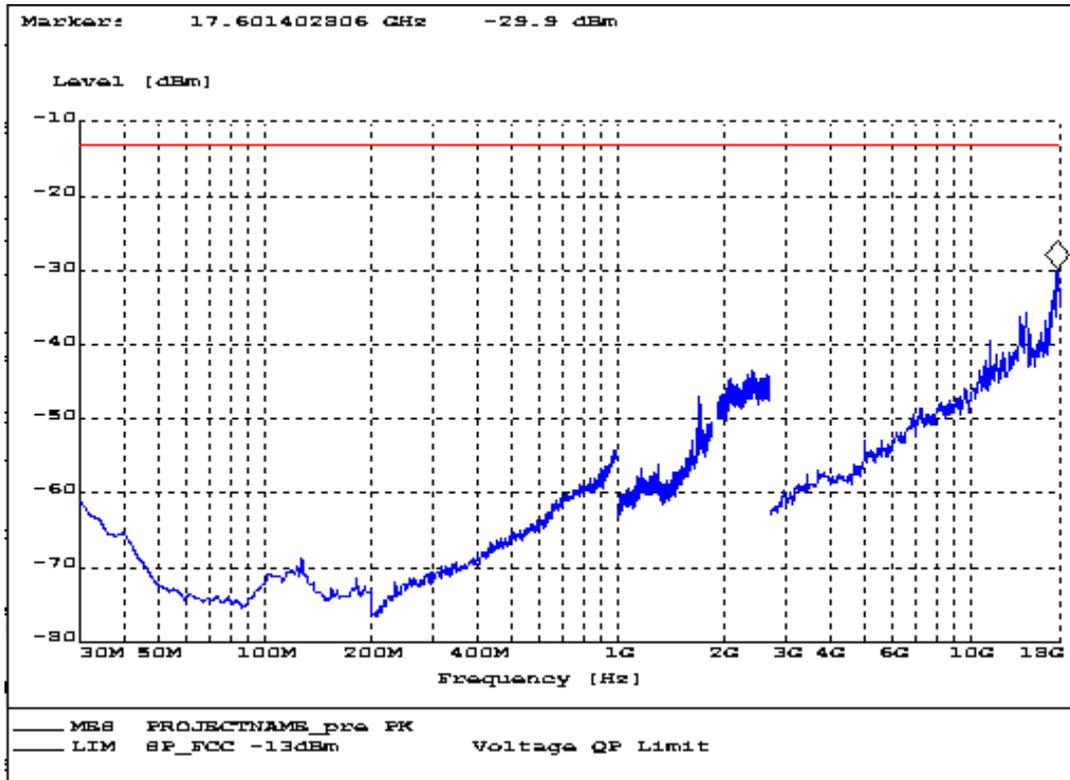


S661VF for GPRS mode

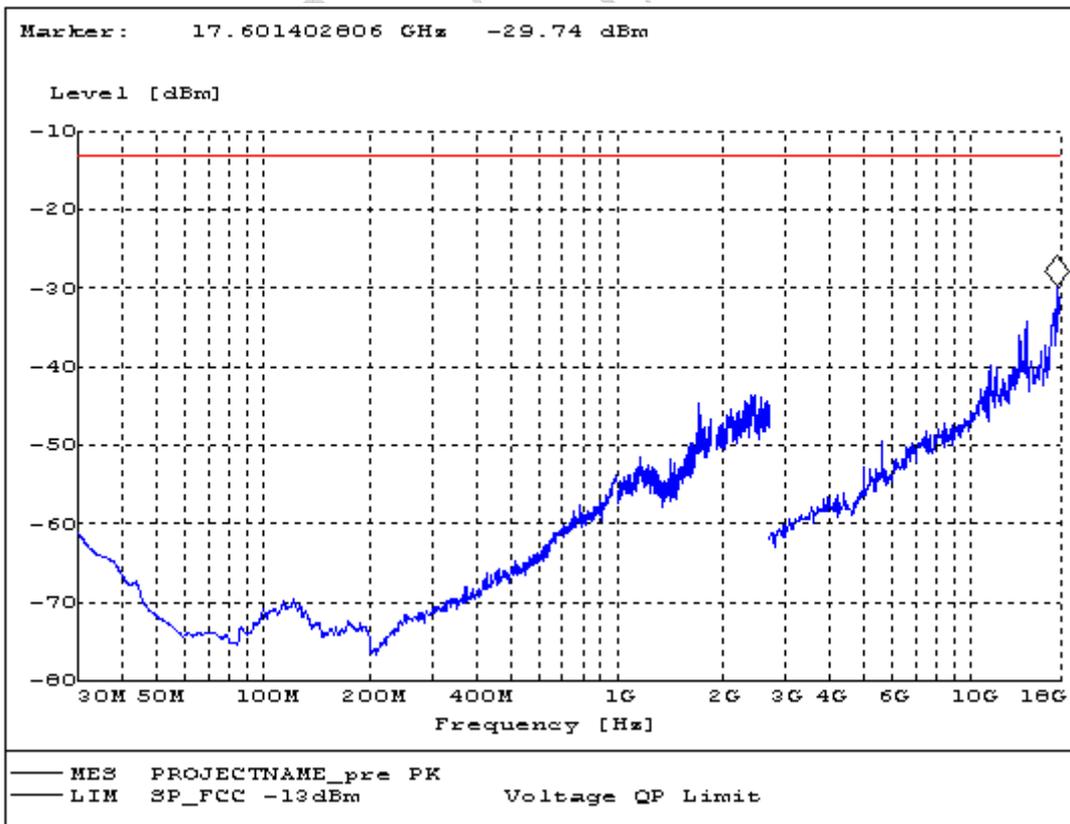

S661HF for GPRS mode

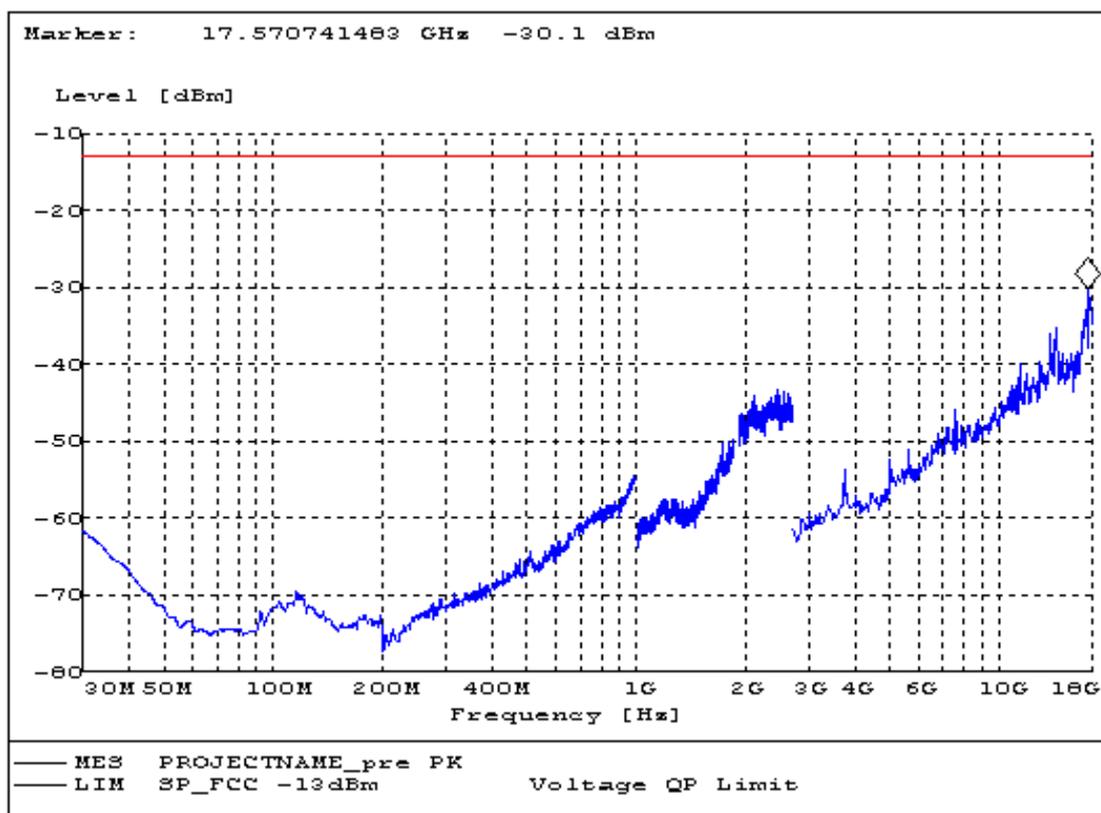


S661VT for GPRS mode

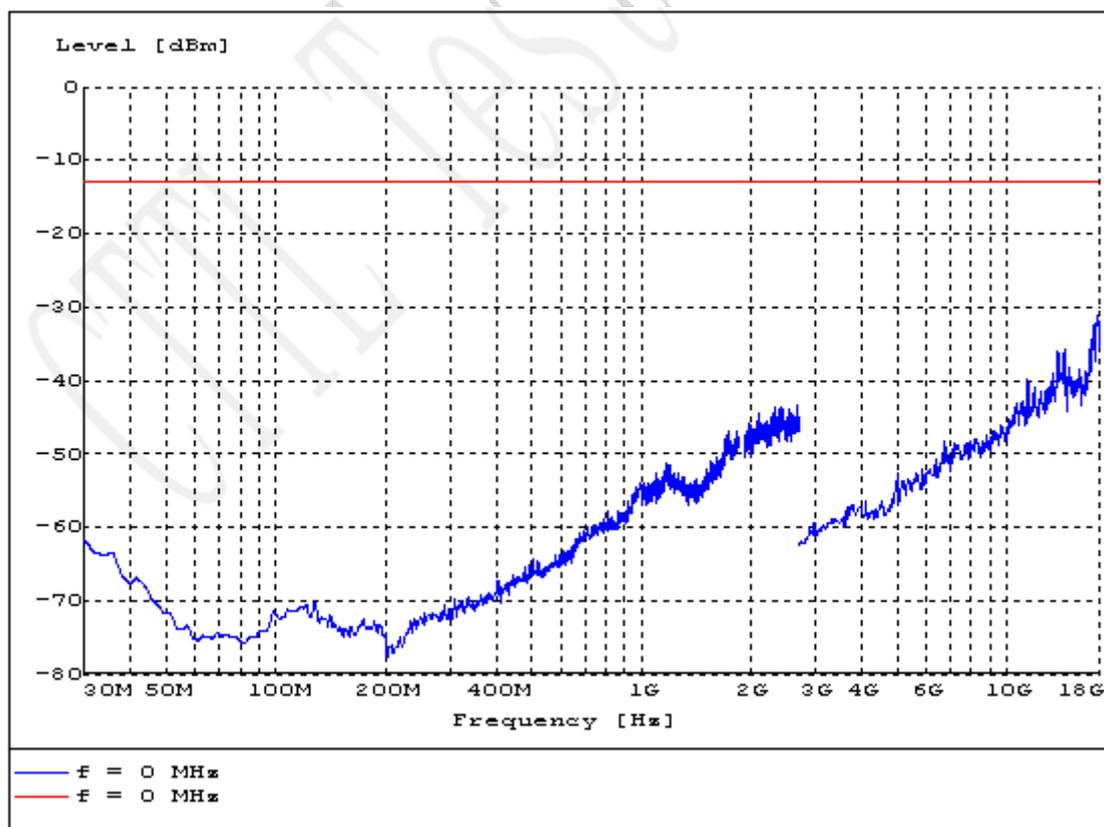


S661HT for GPRS mode


**Test Results for EGPRS mode:**

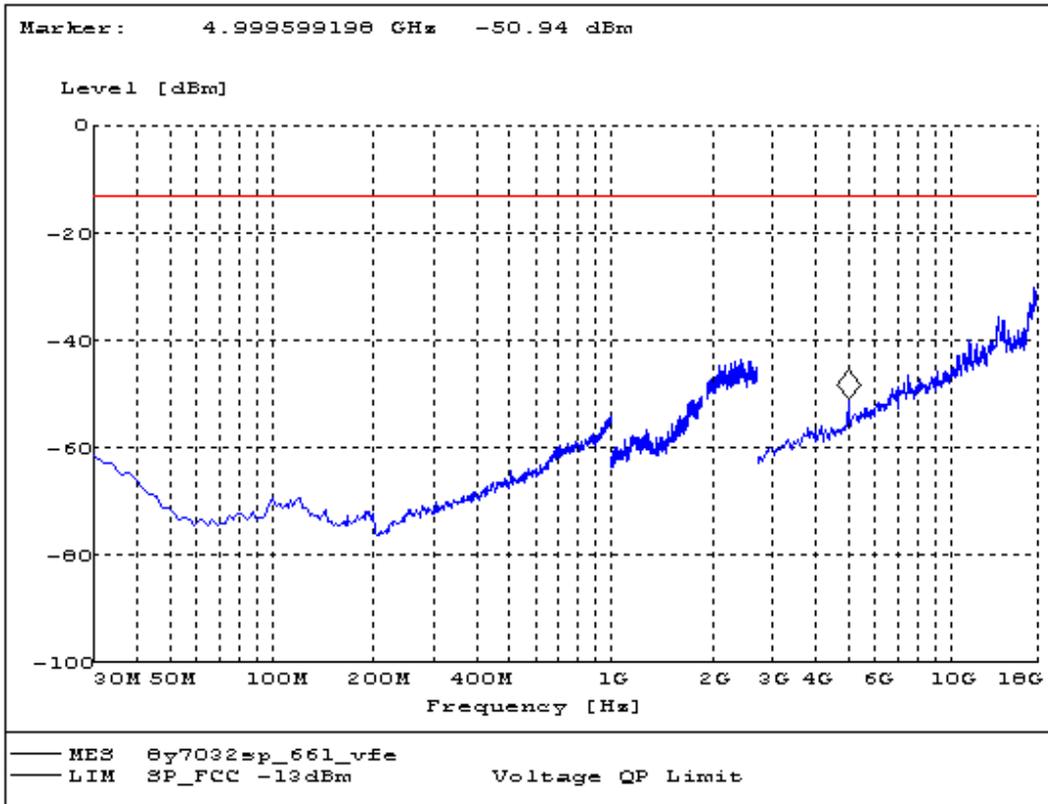


**S661VF for EGPRS mode**

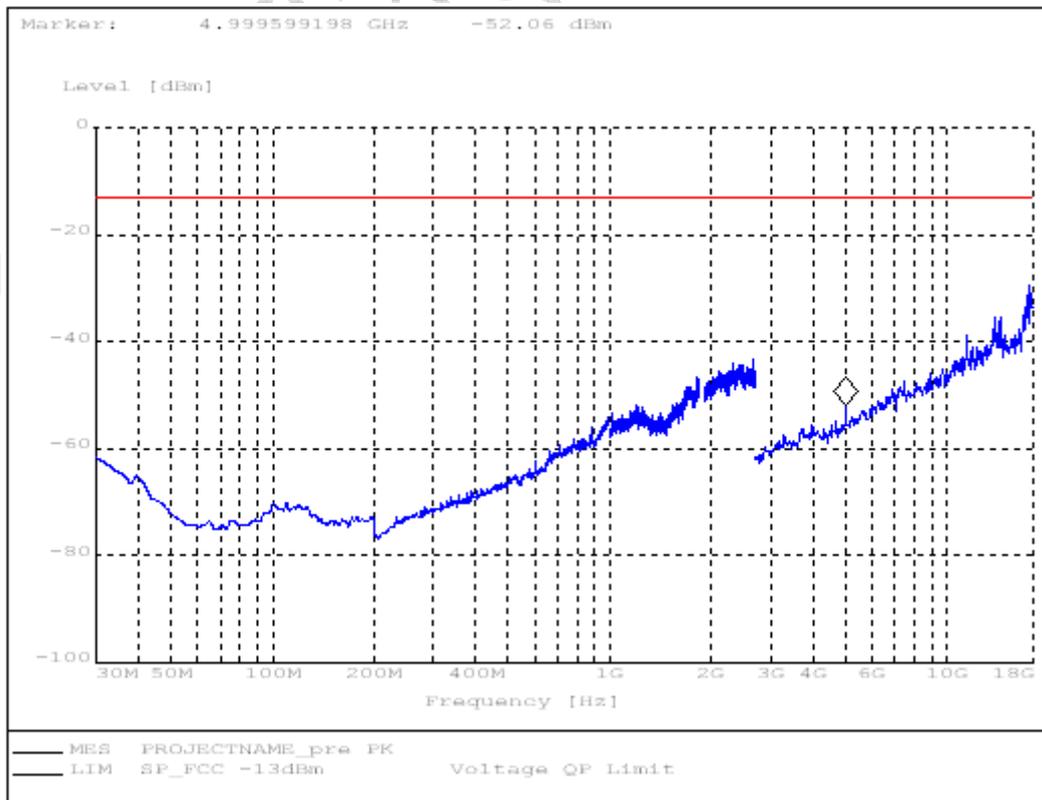

**S661HF for EGPRS mode**

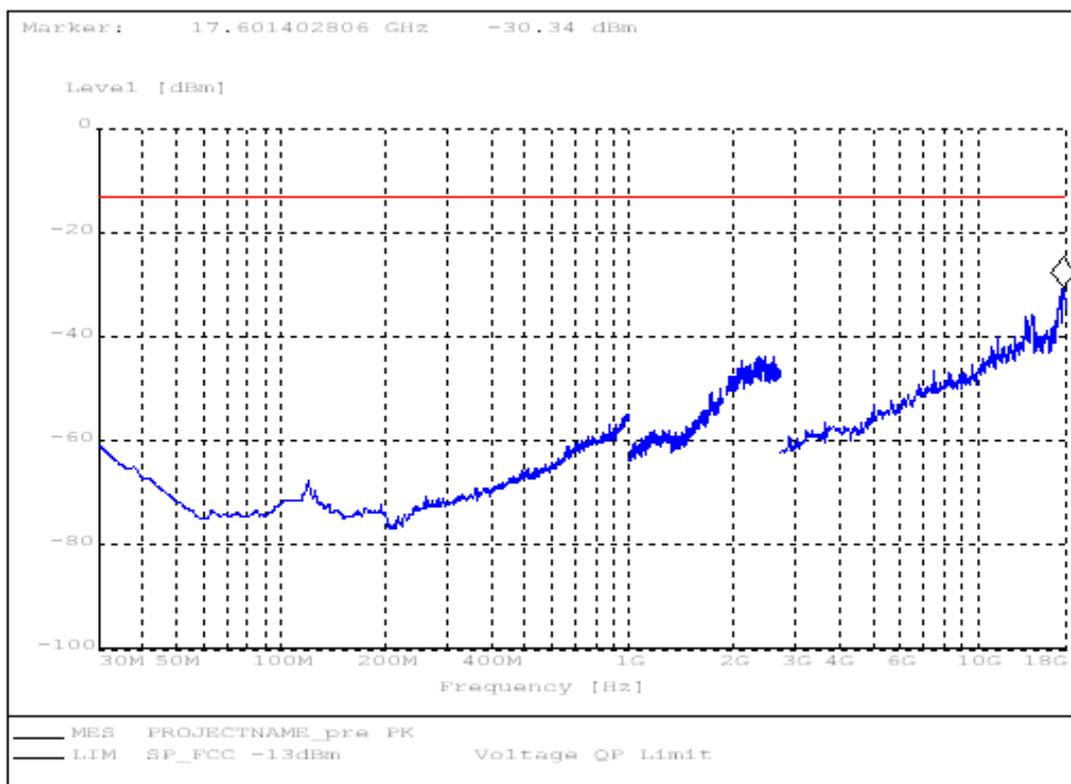

S661VT for EGPRS mode

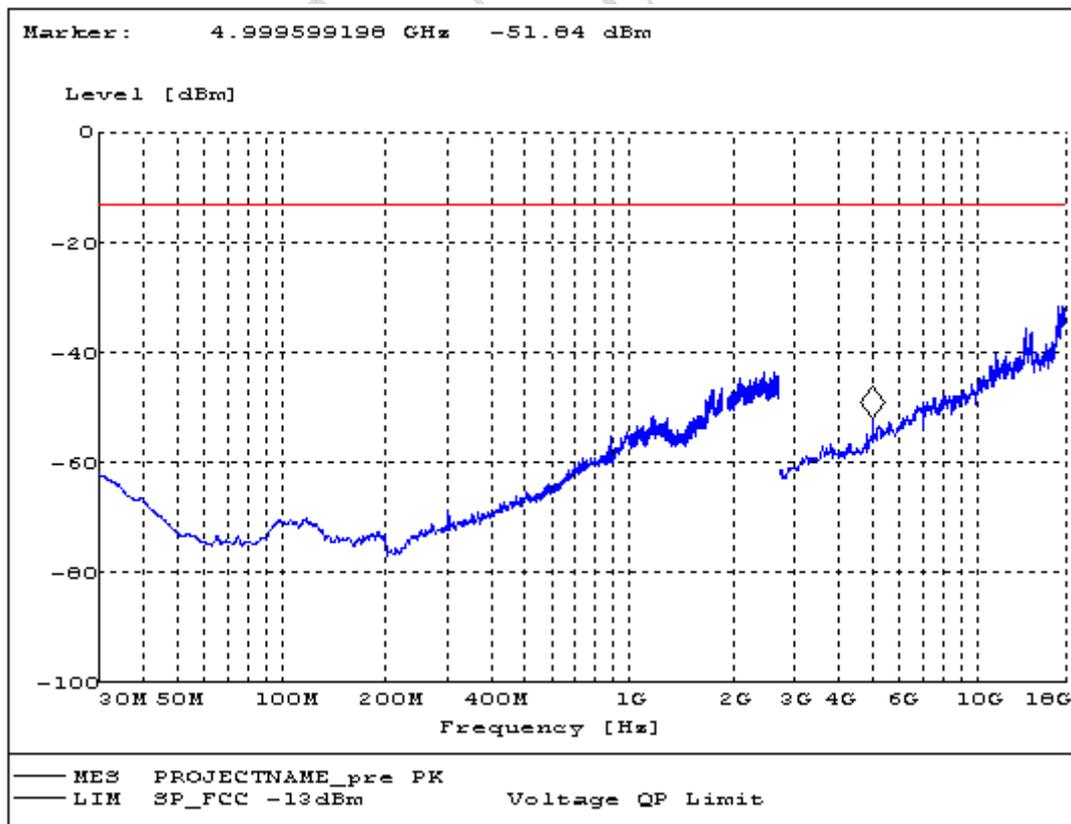

S661HT for EGPRS mode

### 4.2 Radiated RF Power Output and ERP

<b>Specifications:</b>	2.1046,24.232,22.913(a)					
<b>Date of Tests</b>	2008-11-14,2008-11-18					
<b>Test conditions:</b>	Ambient Temperature: 15°C -35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
<b>Operation Mode</b>	TX on, channel 128, 190, 251, 512, 661 and 810					
<b>Test Results:</b>	Pass					
<b>Test equipment Used:</b>						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-04	Normal
7330	Ultra Broadband Antenna	SCHWARZBECK	VULB 9160	--	2010-10-26	Normal
7330	Double-Ridged Horn Antenna	R/S	HF906	100037	2009-01-14	Normal
713	Fully-Anechoic Chamber	ETS	11.8m×6.5m×6.3m	--	2010-11-17	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

**Limit Level Construction:**

(a) Radiated RF Power Output

According to Part 24.232(b), i.e., Mobile/portable stations are limited to 2 watts EIRP peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications, so the limit level is 2 W or 33 dBm.

(b) ERP

According to Part 22.913(a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

**Limits for Radiated RF Power Output**

Frequency range	Limit Level (EIRP)/Resolution Bandwidth
TX channel	33dBm/1MHz

**Limits for ERP**

Frequency range	Limit Level (ERP)
TX channel	7W

## Test Setup:

The EUT was set in an anechoic chamber, which is connected to the Wireless Communications Test Set located outside the chamber over the air. The test was done using an automated test system, where all test equipments were controlled by a computer.

## Test Method

The measurement was performed accordance with section 2.2.17 of ANSI/TIA-603-B-2002: *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*.

1 The maximum power was searched by turning the azimuth of the turntable, shifting the polarization of the measuring antenna and changing the pose of the EUT.

2 The measured levels are EIRP values corrected in the automated test system with the correction factors given by a substitution calibration made before the measurement. The calibration is made separately for vertical and horizontal polarization and the system uses different correction factors depending on the measuring antenna polarization.

3 The corrected maximum levels were reported for EIRP values, and ERP values can be calculated from EIRP values.

### Note:

ERP dBm = EIRP dBm – 2.15dB.

### EIRP Value for GSM 1900 band mode:

ARFCN	Frequency [MHz]	EIRP [dBm]
512	1850.260521	24.30
661	1880.080160	23.43
810	1909.739479	23.68

### EIRP Value for GPRS 1900 band mode:

ARFCN	Frequency [MHz]	EIRP [dBm]
512	1850.100200	24.67
661	1880.080160	24.59
810	1909.739479	25.15

EIRP Value for EGPRS 1900 band mode:

ARFCN	Frequency [MHz]	EIRP [dBm]
512	1850.100200	24.43
661	1880.080160	25.03
810	1909.899800	25.10

CITL Test Report

### 4.3 Occupied bandwidth

<b>Specifications:</b>	2.1049,22.917(b),24.238(b)					
<b>Date of Test</b>	2008-11-17,2008-11-18,2008-11-19					
<b>Test conditions:</b>	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
<b>Operation Mode</b>	TX on, channel 128, 190, 251, 512, 661 and 810					
<b>Test Results:</b>	--					
<b>Test equipment Used:</b>						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-03	Normal
7330	Ultra Broadband Antenna	SCHWARZBECK	VULB 9160	--	2010-10-26	Normal
7330	Double-Ridged Horn Antenna	R/S	HF906	100037	2009-01-14	Normal
713	Fully-Anechoic Chamber	ETS	11.8m×6.5m×6.3m	--	2010-11-17	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

### Test Setup

The situation under which maximum EIRP values were found in the measurement of the radiated RF power output was used to determine the 99% occupied bandwidth. The Wireless Communications Test Set was used to set the TX channel, power level and modulation.

### Test Method


The 99% occupied bandwidth was calculated from the spectrum analyzer. Markers in the spectrum analyzer were then placed between the calculated frequencies to show the calculated 99% power band.

Note: --

Results data of GSM mode:

EUT channel	99% occupied bandwidth [kHz]
512	276
661	276
810	276

Graphical results for GSM mode:

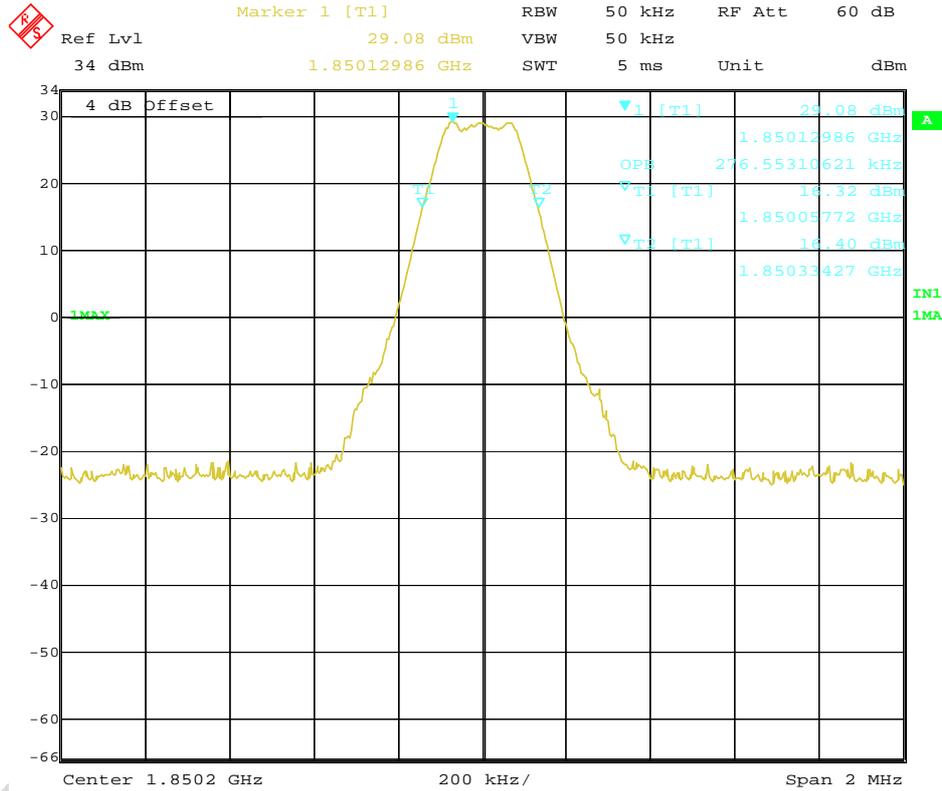


Date: 17.NOV.2008 11:24:40

Channel 512


FCC Parts 2, 22, 24  
Equipment: Vodafone 1231

REPORT NO.: I08GE7032-FCC-EMC

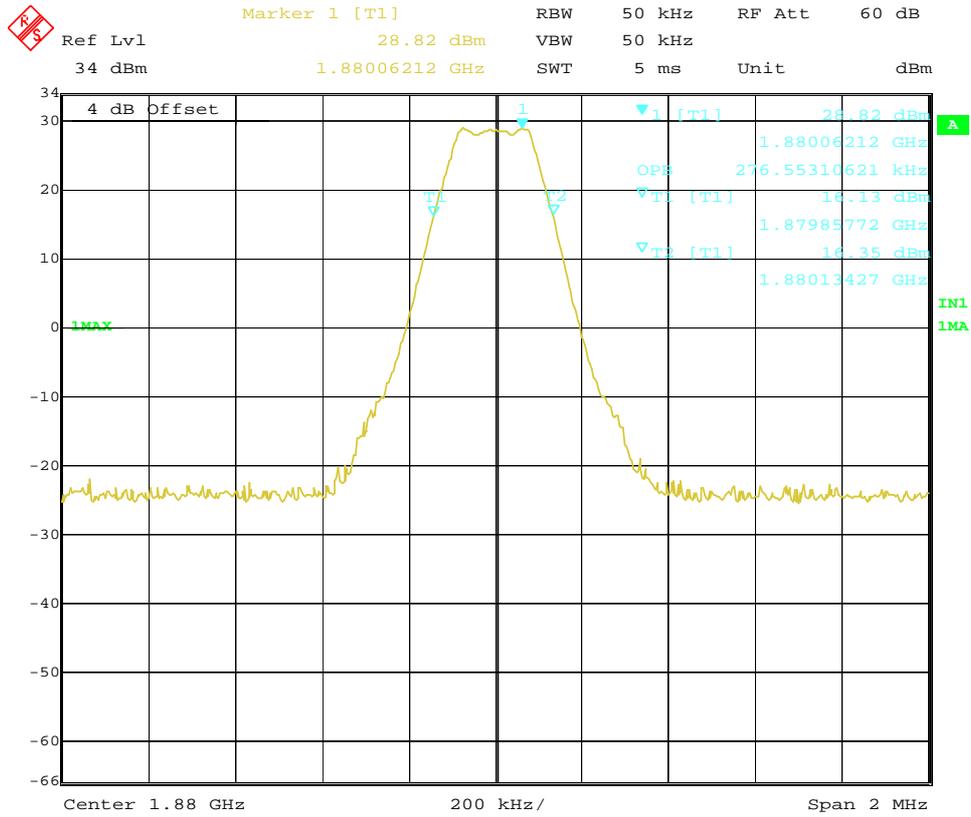

Date: 17.NOV.2008 11:28:25

Channel 661

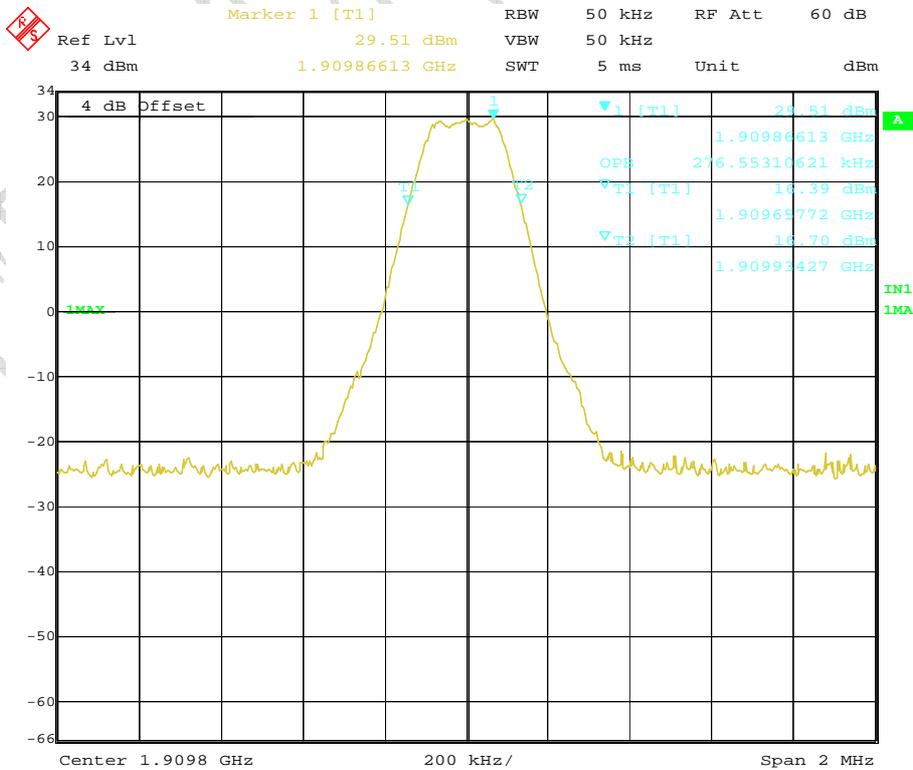


Date: 17.NOV.2008 11:29:55

Channel 810

Results data of GPRS mode:

EUT channel	99% occupied bandwidth [kHz]
512	248
661	244
810	248


Graphical results for GPRS mode:

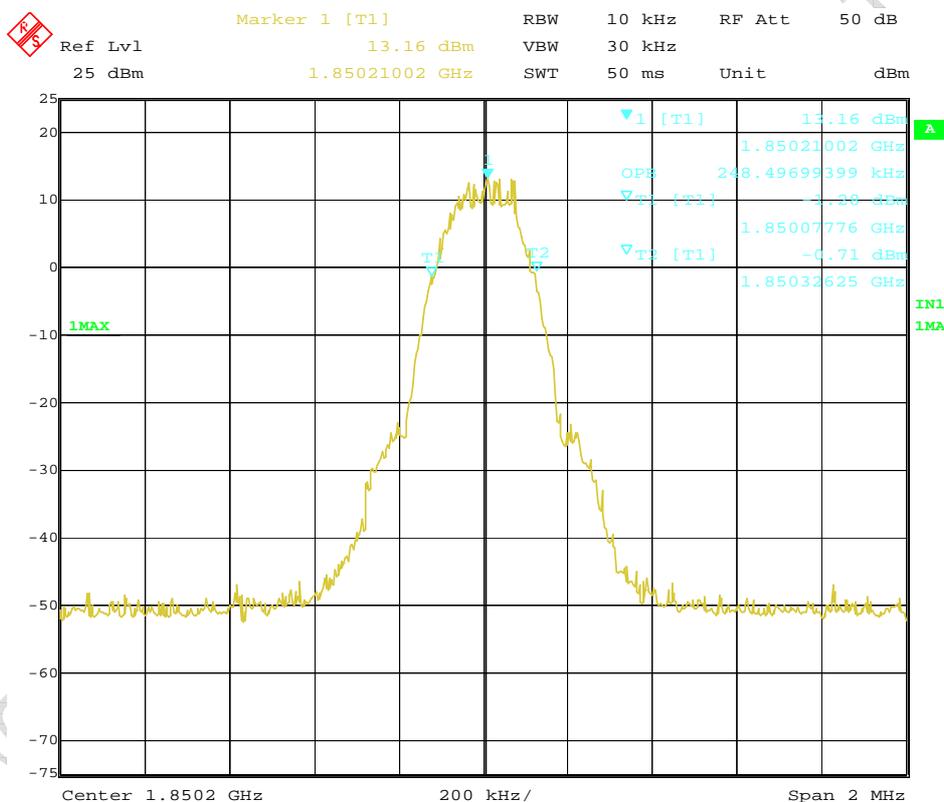

Channel 512


FCC Parts 2, 22, 24  
Equipment: Vodafone 1231

REPORT NO.: I08GE7032-FCC-EMC

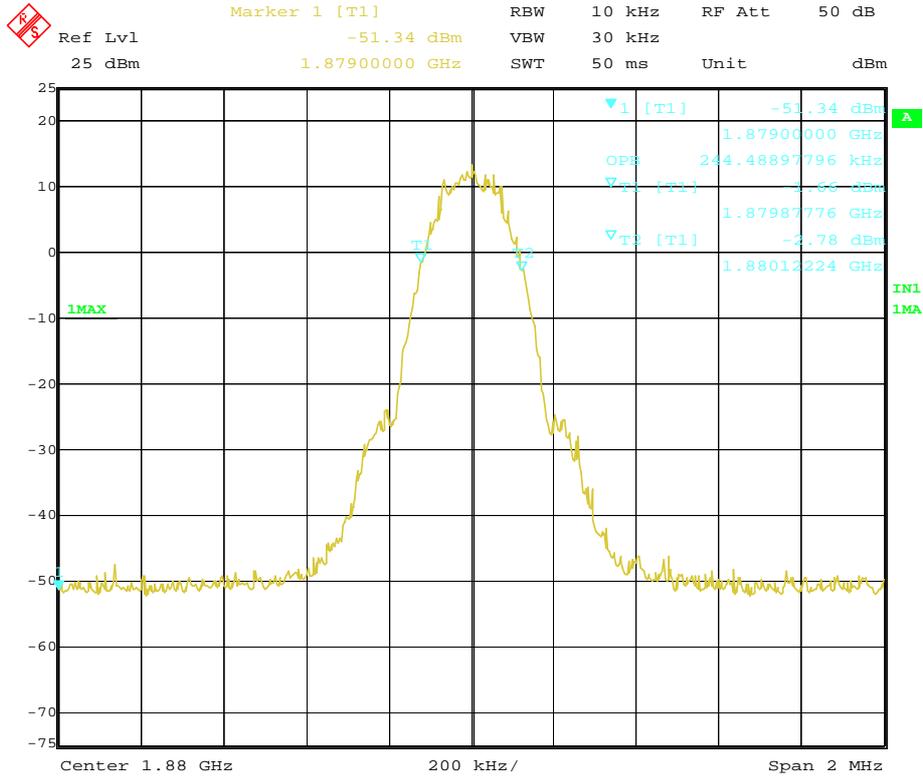

Date: 19.NOV.2008 15:29:07

Channel 661

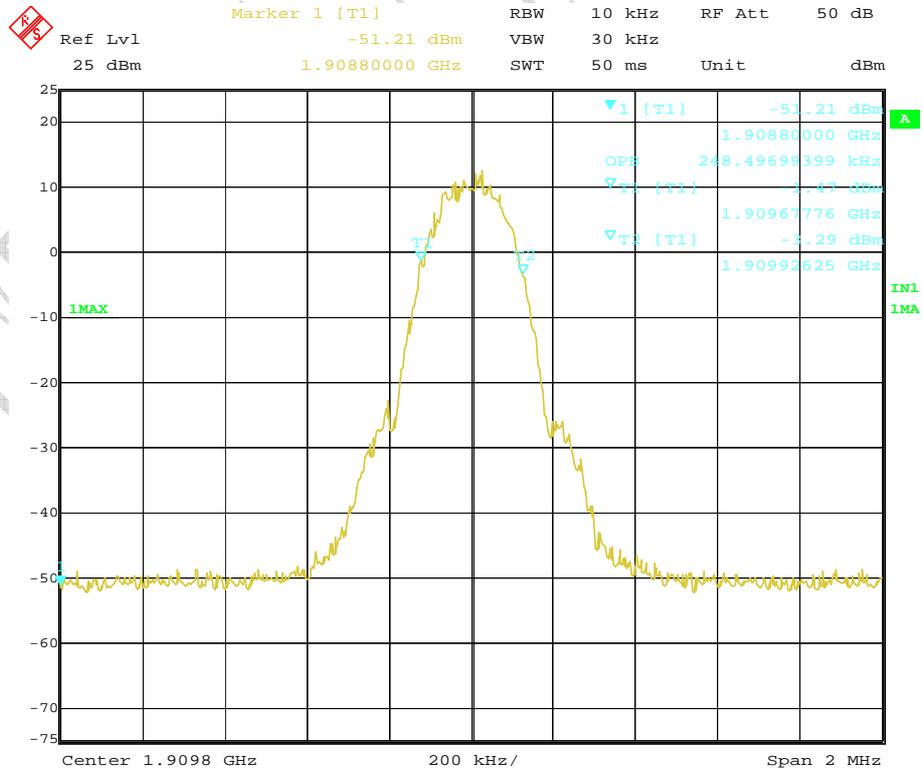


Date: 19.NOV.2008 15:30:41

Channel 810

Results data of EGPRS mode:

EUT channel	99% occupied bandwidth [kHz]
512	244
661	246
810	244


Graphical results for EGPRS mode:

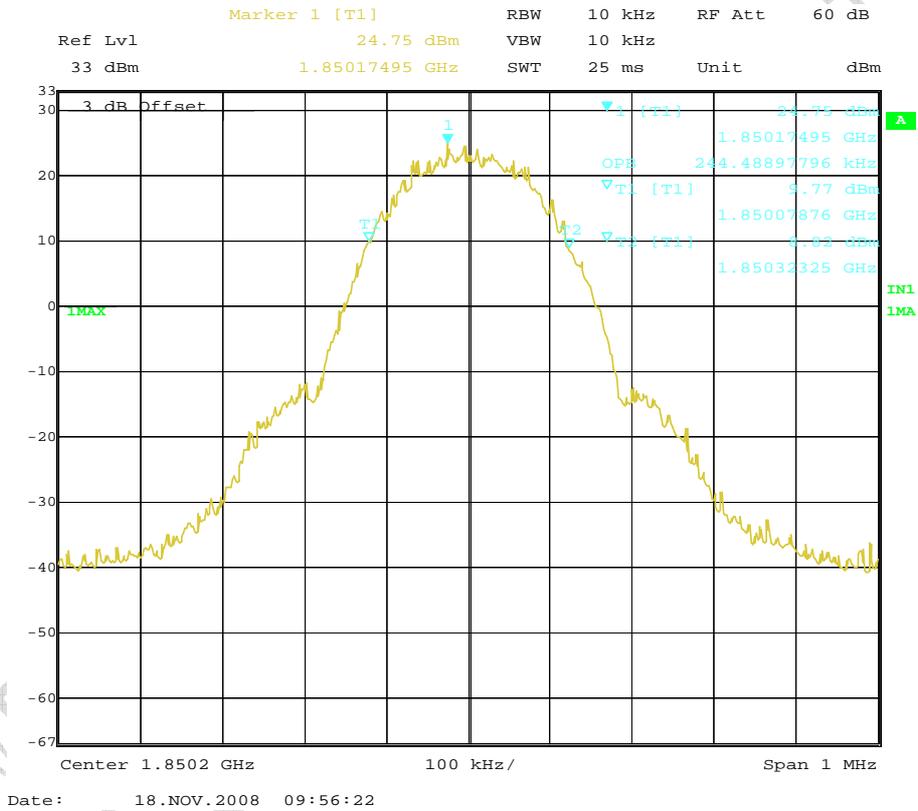


Channel 512

FCC Parts 2, 22, 24  
Equipment: Vodafone 1231

REPORT NO.: I08GE7032-FCC-EMC

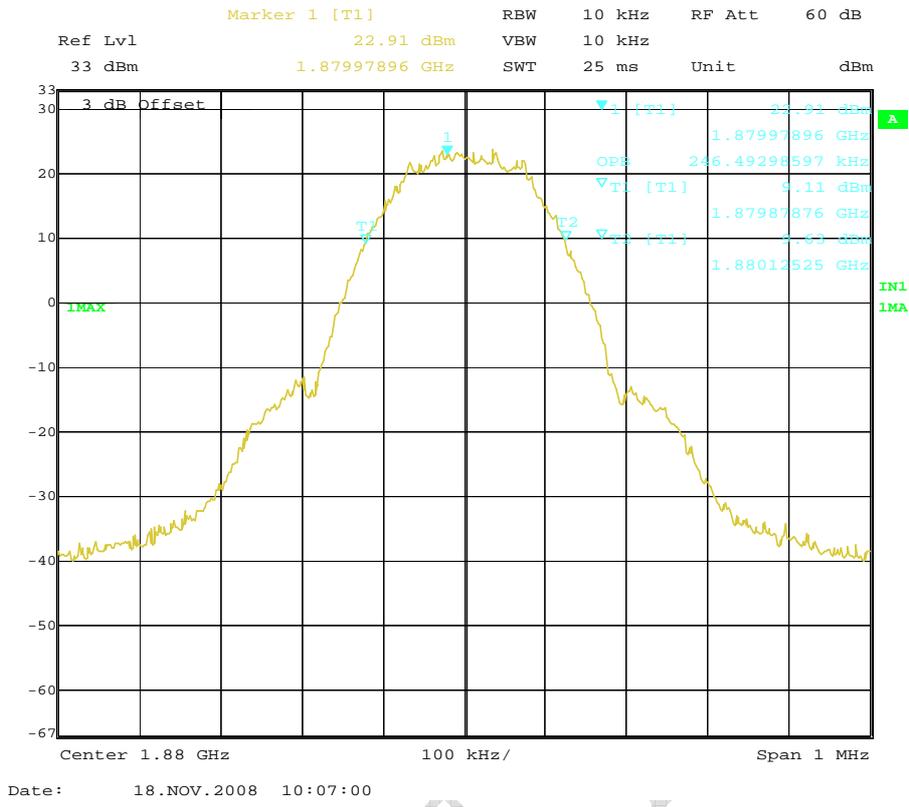

Channel 661

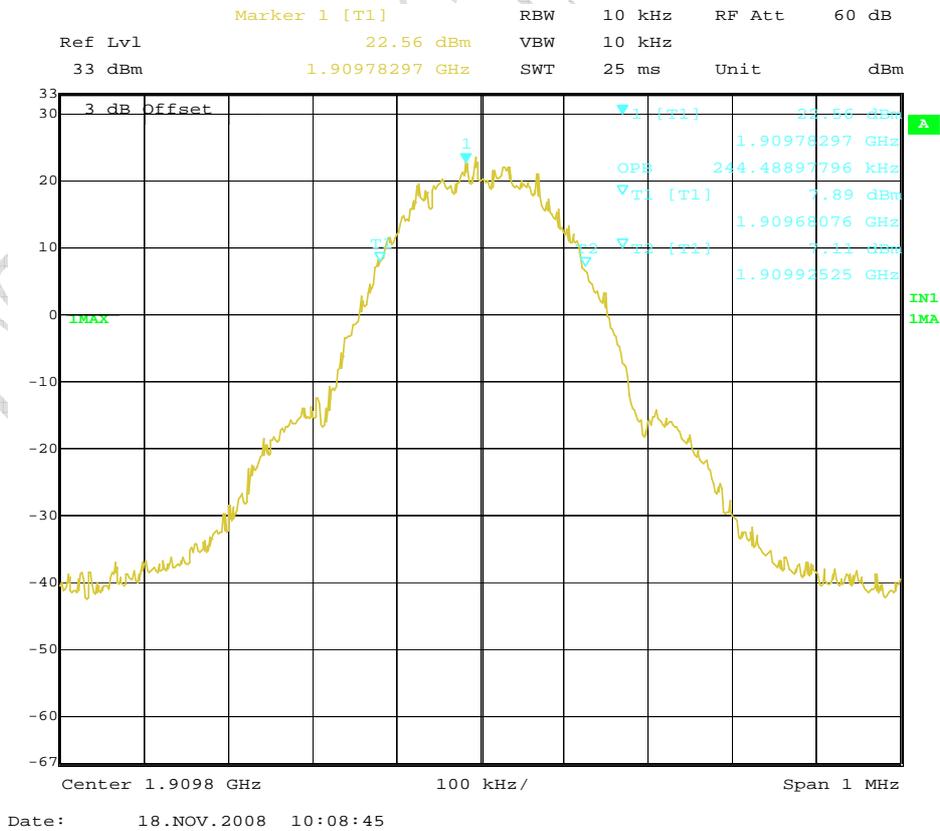

Channel 810

### 4.4 Frequency Stability over Temperature Variation

<b>Specifications:</b>	2.1055,22.355,24.235					
<b>Date of Test</b>	2008-11-19					
<b>Test conditions:</b>	Ambient Temperature: -30°C-50°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
<b>Operation Mode</b>	TX on, channel 190 and 661					
<b>Test Results:</b>	Pass					
<b>Test equipment Used:</b>						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
561	Temperature Chamber	Terchy Environmental Technology LTD.	MHU-800SR	84121202	2009-05-06	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal
<b>Limit</b>						
Frequency deviation [ppm]	±2.5					

### Test Setup

The EUT was placed in a temperature chamber, demonstrated as figure T. The wireless communications test set (test simulator) was used to set the TX channel and power levels, modulate the TX signal with different bit patterns and measure the frequency of TX.

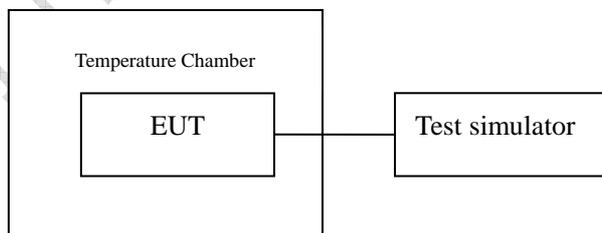


Figure T: setup for measurement of frequency stability over temperature variation

## Test Method

1. The EUT was turned off and placed in the temperature chamber.
2. The temperature of the chamber was set to -30°C and allowed to stabilize.
3. The EUT temperature was allowed to stabilize for 45 minutes.
4. The EUT was turned on and set to transmit with 8960.
5. The maximum transmit frequency deviation during one minute period was measured by Wireless Communications Test Set.
6. The steps 3-5 were repeated for -20°C, -10°C, 0°C, 10°C, 20°C, 30°C, 40°C and 50°C.

## Test results data for GSM mode:

Channel 661:

Temperature[°C]	Deviation[Hz]	Deviation[ppm]	Remarks
-30	23	0.012	Pass
-20	21	0.011	Pass
-10	20	0.011	Pass
0	20	0.011	Pass
10	23	0.012	Pass
20	24	0.013	Pass
30	18	0.010	Pass
40	5	0.003	Pass
50	-7	-0.004	Pass

## Test results data for GPRS mode:

Channel 661:

Temperature[°C]	Deviation[Hz]	Deviation[ppm]	Remarks
-30	29	0.015	Pass
-20	21	0.011	Pass
-10	15	0.008	Pass
0	7	0.004	Pass
10	-3	-0.002	Pass
20	-15	-0.008	Pass
30	-24	-0.013	Pass
40	-27	-0.014	Pass
50	-30	-0.016	Pass

Test results data for EGPRS mode:

Channel 661:

Temperature[°C]	Deviation[Hz]	Deviation[ppm]	Remarks
-30	30	0.016	Pass
-20	28	0.015	Pass
-10	27	0.014	Pass
0	32	0.017	Pass
10	23	0.012	Pass
20	16	0.009	Pass
30	5	0.003	Pass
40	-11	-0.006	Pass
50	-20	-0.011	Pass

TTL Test Report

### 4.5 Frequency Stability over Voltage Variation

<b>Specifications:</b>	2.1055,22.355,24.235					
<b>Date of Test</b>	2008-11-18, 2008-11-19					
<b>Test conditions:</b>	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
<b>Operation Mode</b>	TX on, channel 190 and 661					
<b>Test Results:</b>	Pass					
<b>Test equipment Used:</b>						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal
7982	DC Power Source	4NIC	DH1715A-3	004224	--	Normal
<b>Limit</b>						
Frequency deviation [ppm]	±2.5					

### Test Setup

The EUT was placed in a shielding chamber and powered by the dummy battery which is connected to a DC power source, demonstrated as figure V. The wireless communications test set was used to set the TX channel and power level, modulate the TX signal with different bit patterns and measure the frequency of TX.

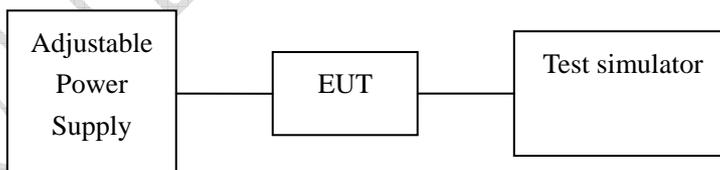


Figure V: test setup for measurement of frequency stability over voltage variation

Test Results data for GSM mode:

Channel 661:

Level	Voltage[V]	Deviation[Hz]	Deviation[ppm]	Remarks
Nominal	3.7	40	0.021	Pass
Cut-off point	3.3	-30	-0.016	Pass

Test Results data for GPRS mode:

Channel 661:

Level	Voltage[V]	Deviation[Hz]	Deviation[ppm]	Remarks
Nominal	3.7	37	0.020	Pass
Cut-off point	3.4	-32	-0.017	Pass

Test Results data for EGPRS mode:

Channel 661:

Level	Voltage[V]	Deviation[Hz]	Deviation[ppm]	Remarks
Nominal	3.7	37	0.020	Pass
Cut-off point	3.3	-32	-0.017	Pass


### 4.6 Conducted RF Power Output

<b>Specifications:</b>	2.1046,22.913(a),24.232(c)					
<b>Date of Tests</b>	2008-11-17,2008-11-19					
<b>Test conditions:</b>	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
<b>Operation Mode</b>	TX on, channel 128, 190, 251, 512, 661 and 810					
<b>Test Results:</b>	Pass					
<b>Test equipment Used:</b>						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-04	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
---	Power splitter	Jie sai	---	1000132	2009-01-04	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

<b>Limits for Radiated RF Power Output</b>	
Frequency range	Limit Level (EIRP)/Resolution Bandwidth
TX channel	33dBm/1MHz
<b>Limits for ERP</b>	
Frequency range	Limit Level (ERP)
TX channel	7W

### Test Setup:

During the process of testing, the EUT was controlled via the Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by Rhode & Schwarz EMI test receiver (ESI26).

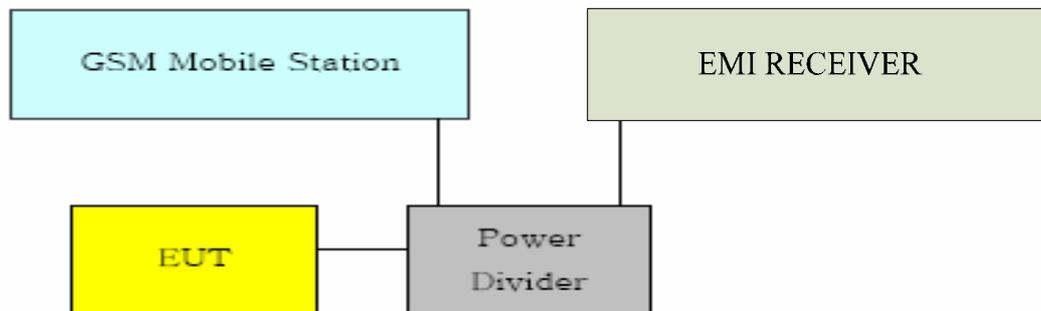

### Test Method

- 1) The EUT was coupled to the EMI test receiver analyzer mode and the base station simulator through a power divider. The radio frequency load attached to the EUT antenna terminal was 50 Ohm. The loss of the cables the test system is calibrated to correct the readings.
- 2) The spectrum analyzer was set to Maxpeak Detector function and Maximum hold mode.
- 3) The resolution bandwidth of the spectrum analyzer was comparable to the emission bandwidth.

Note: --

### Test Results for GSM mode:

EIRP Value for GSM 1900 band:

ARFCN	Peak output power [dBm]
512	28.66
661	28.87
810	29.35

### Test Results for GPRS mode:

EIRP Value for GPRS 1900 band:

ARFCN	Peak output power [dBm]
512	29.53
661	29.32
810	29.53

### Test Results for EGPRS mode:

EIRP Value for EGPRS 1900 band:

ARFCN	Peak output power [dBm]
512	26.31
661	27.35
810	27.38

*China Test Report*

### 4.7 Conducted Spurious Emission

<b>Specifications:</b>	2.1051,22.917,24.238					
<b>Date of Tests</b>	2008-11-17,2008-11-18,2008-11-19					
<b>Test conditions:</b>	Ambient Temperature: 15°C -35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
<b>Operation Mode</b>	TX on, channel 190 and 661					
<b>Test Results:</b>	Pass					
<b>Test equipment Used:</b>						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ES126	100211	2009-01-04	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
---	Power splitter	Jie sai	---	1000132	2009-01-04	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

**Limit Level Construction:**


According to Part 24.238 (a), i.e., Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB, so the limit level is:  
 $P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13\text{dBm}$

**Limits for Radiated spurious emissions(UE)**

Frequency range	Limit Level /Resolution Bandwidth
30 MHz to 20000 MHz	-13dBm/1MHz

**Test Setup:**

During the process of testing, the EUT was controlled via Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by Rhode & Schwarz EMI test receiver (ES126)

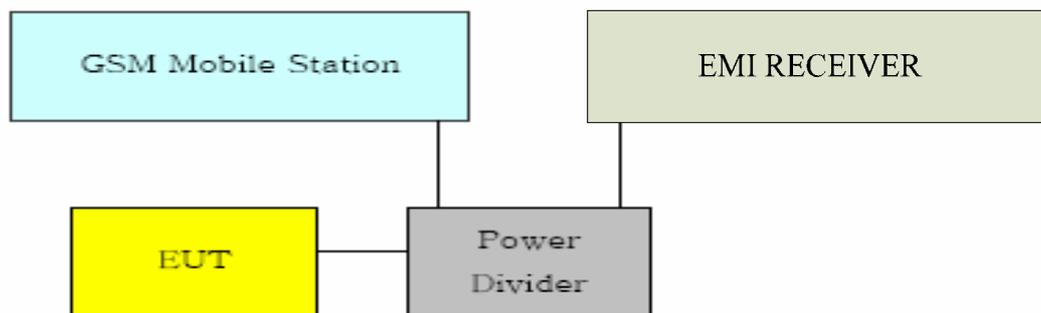

### Test Method

The measurement was performed accordance with section 2.2.13 of ANSI/TIA-603-B-2002: *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*.

The following steps outline the procedure used to measure the conducted emissions from the EUT.


1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment under test, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

Note: --

#### Test Results for GSM mode:

Out of band emission	
Frequency [MHz]	Level (dBm)
--	--

### Graphical results for GSM mode:

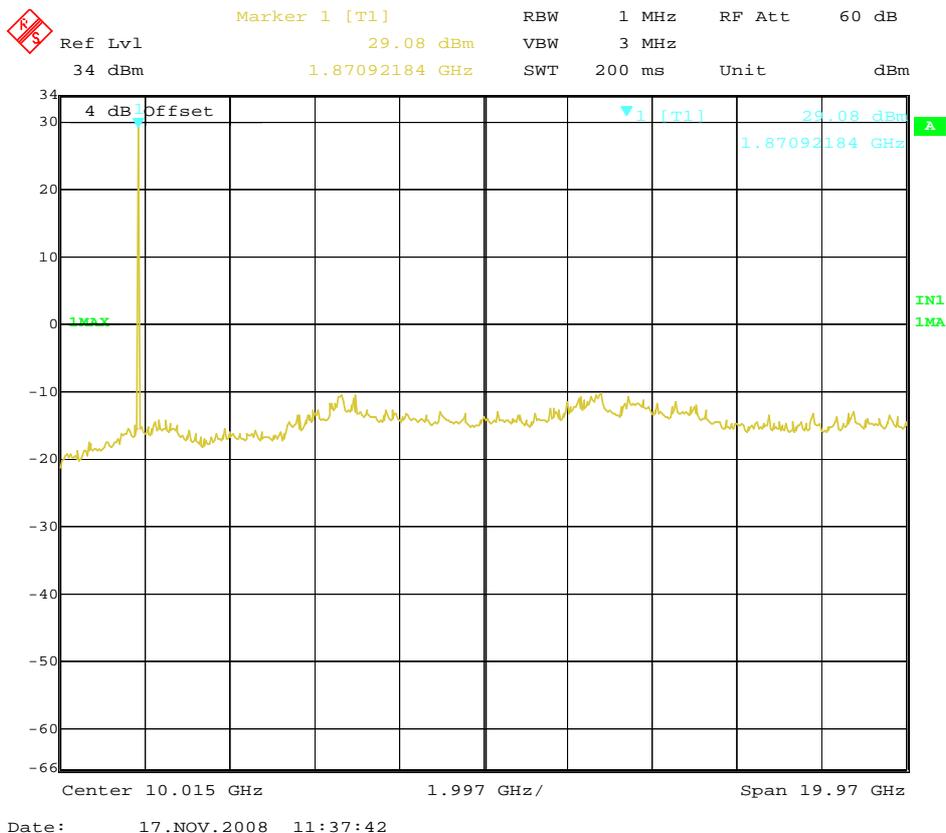


Channel 661

China Telecommunication Technology Labs.

**Test Results for GPRS mode:**

Out of band emission	
Frequency [MHz]	Level (dBm)
--	--

**Graphical results for GPRS mode:**

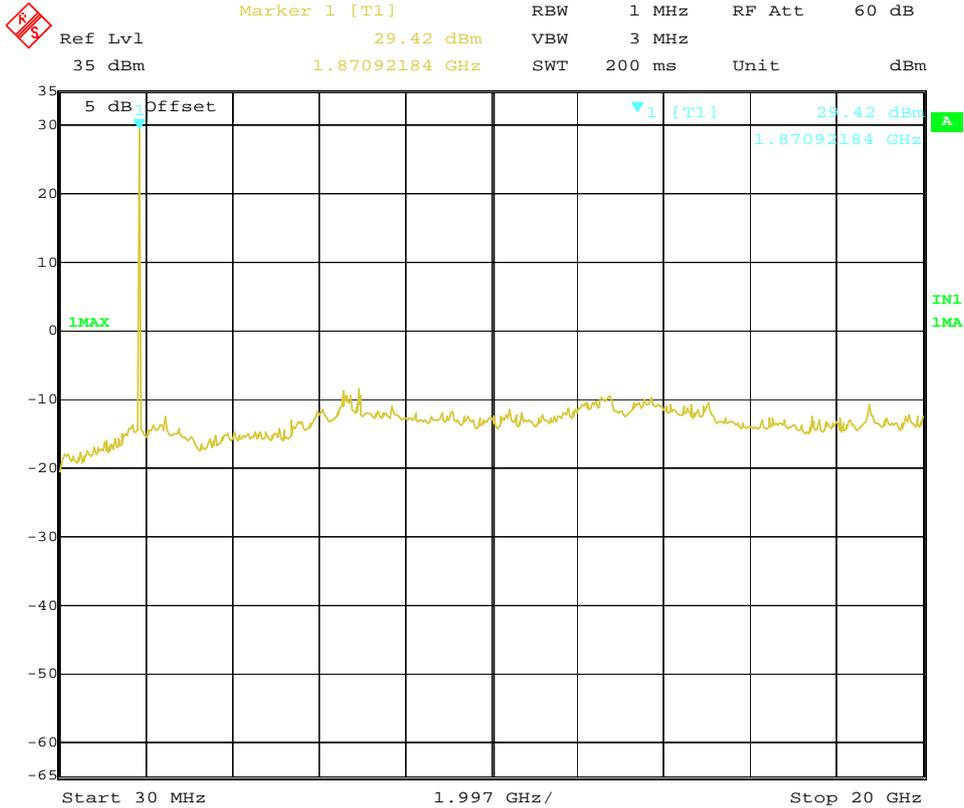


Date: 19.NOV.2008 08:59:25

Channel 661

**Test Results for EGPRS mode:**


Out of band emission	
Frequency [MHz]	Level (dBm)
--	--

**Graphical results for EGPRS mode:**

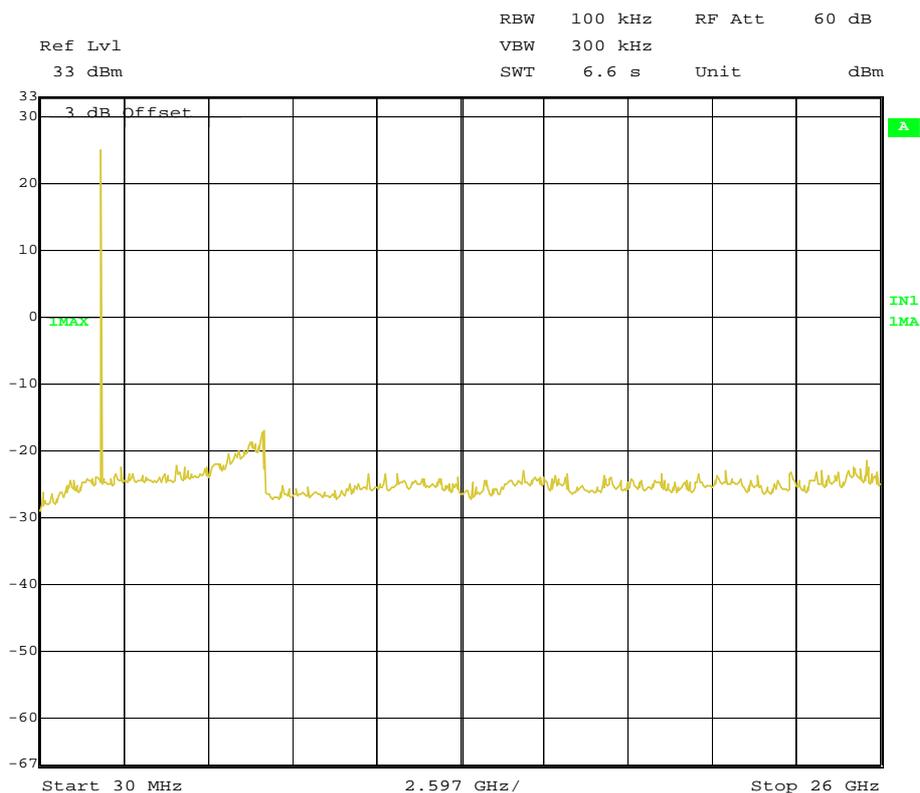

Date: 18.NOV.2008 10:13:40

Channel 661

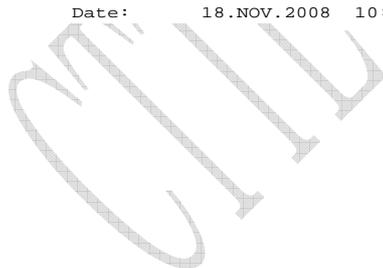

### 4.8 Band Edge

<b>Specifications:</b>	2.1051, 24.238, 2.1053, 22.917					
<b>Date of Tests</b>	2008-11-17,2008-11-19					
<b>Test conditions:</b>	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
<b>Operation Mode</b>	TX on, channel 128, 251, 512 and 810					
<b>Test Results:</b>	Pass					
<b>Test equipment Used:</b>						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-04	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
---	Power splitter	Jie sai	---	1000132	2009-01-04	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

#### Limit Level Construction:

According to Part 24.238 (a), i.e., Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB, so the limit level is:  


$$P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13\text{dBm}$$

#### Limits for Radiated spurious emissions(UE)

Frequency range	Limit Level /Resolution Bandwidth
30 MHz to 20000 MHz	-13dBm/1MHz

#### Test Setup:

During the process of testing, the EUT was controlled via the Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by Rhode & Schwarz EMI test receiver (ESI26).

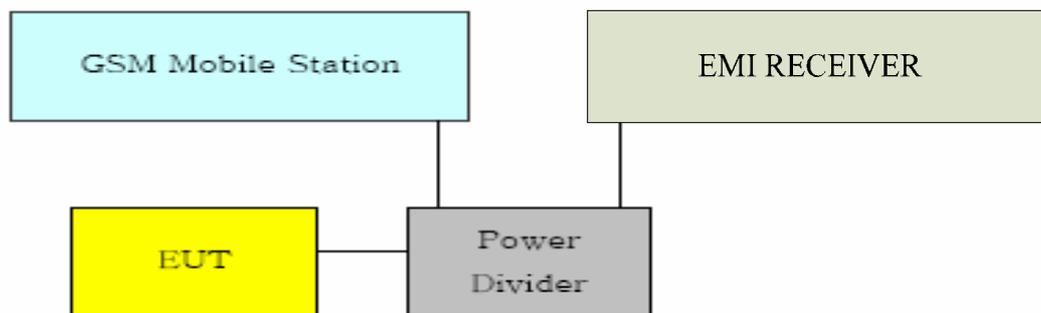

### Test Method

- 1) The EUT was coupled to the EMI test receiver analyzer mode and the base station simulator through a power divider. The radio frequency load attached to the EUT antenna terminal was 50 Ohm. The loss of the cables the test system is calibrated to correct the readings.
- 2) The spectrum analyzer was set to Maxpeak Detector function and Maximum hold mode.
- 3) The resolution bandwidth of the spectrum analyzer was comparable to the emission bandwidth.

Note: --

### Test Results:

#### GSM mode:

Band-edge emission		
EUT Channel	Frequency [MHz]	Level [dBm]
512 Left band edge	1850.001600	-13.66
810 Right band edge	1909.810020	-15.47

#### GPRS mode:


Band-edge emission		
EUT Channel	Frequency [MHz]	Level [dBm]
512 Left band edge	1849.989580	-13.36
810 Right band edge	1910.002400	-16.11

#### EGPRS mode:

Band-edge emission		
EUT Channel	Frequency [MHz]	Level [dBm]
512 Left band edge	1850.001603	-13.77
810 Right band edge	1910.010420	-14.61


FCC Parts 2, 22, 24  
Equipment: Vodafone 1231

REPORT NO.: I08GE7032-FCC-EMC

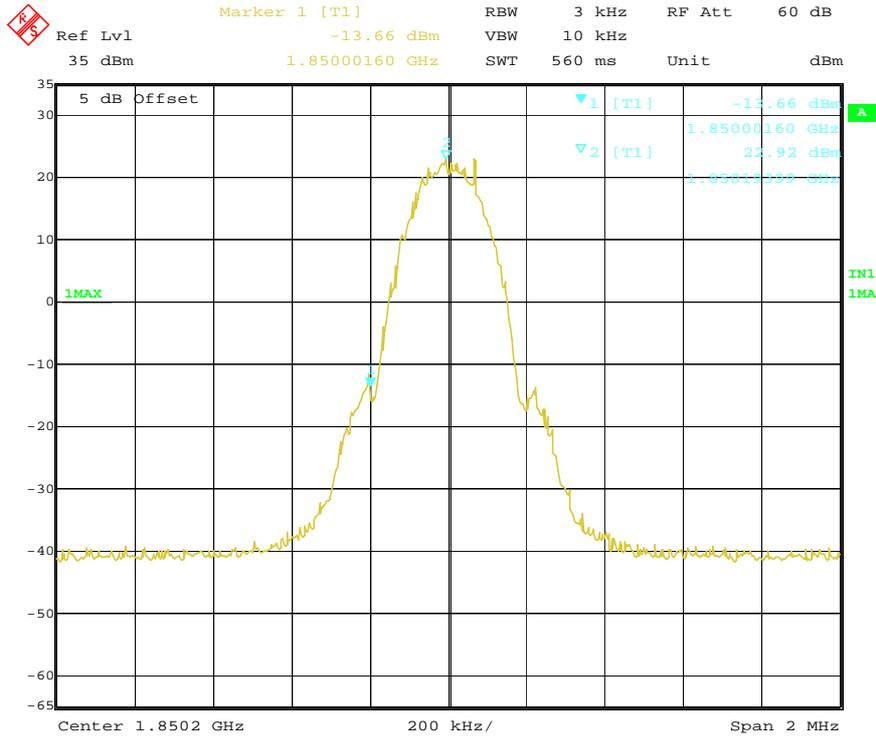

Date: 17.NOV.2008 11:49:20

GSM channel 512 Left band edge

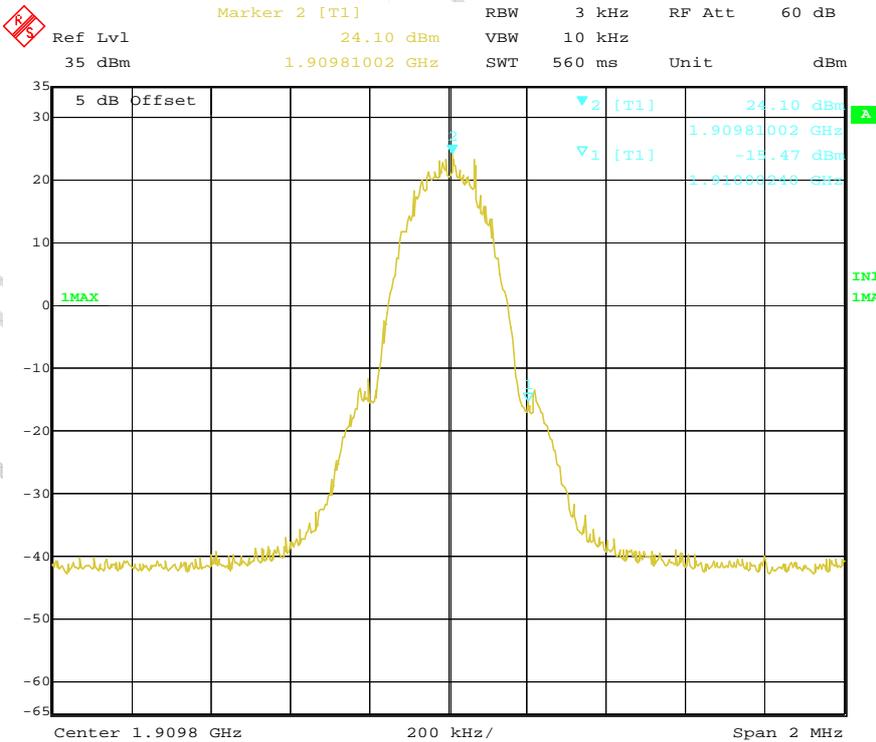


Date: 17.NOV.2008 11:52:56

GSM channel 810 Right band edge


FCC Parts 2, 22, 24  
Equipment: Vodafone 1231

REPORT NO.: I08GE7032-FCC-EMC

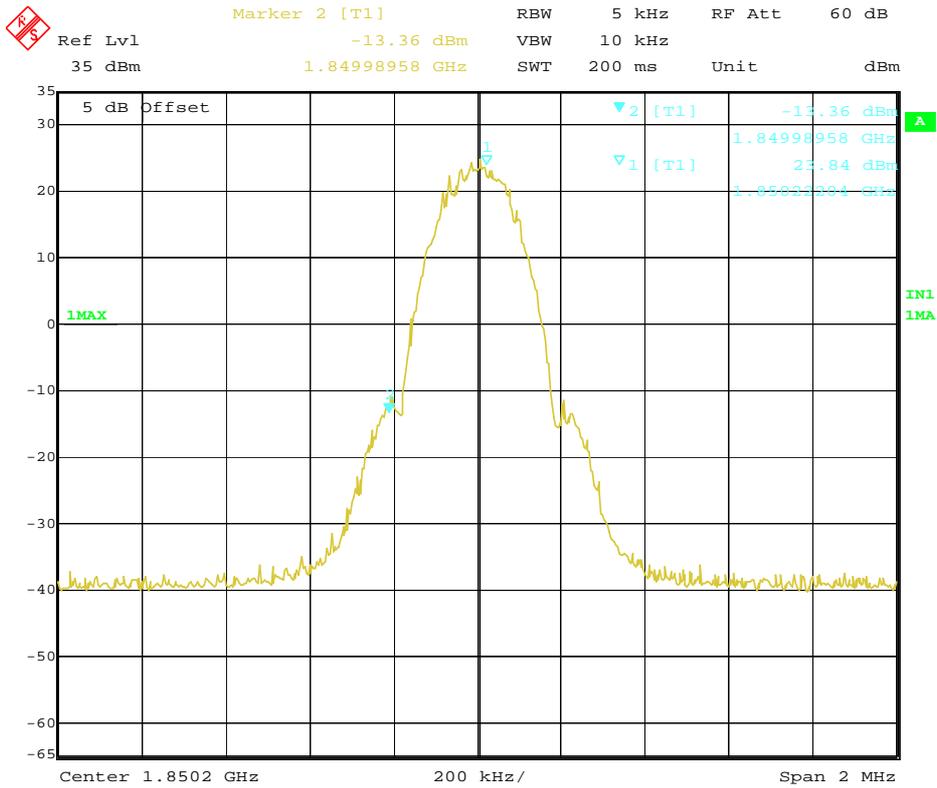

Date: 19.NOV.2008 09:08:49

GPRS channel 512 Left band edge

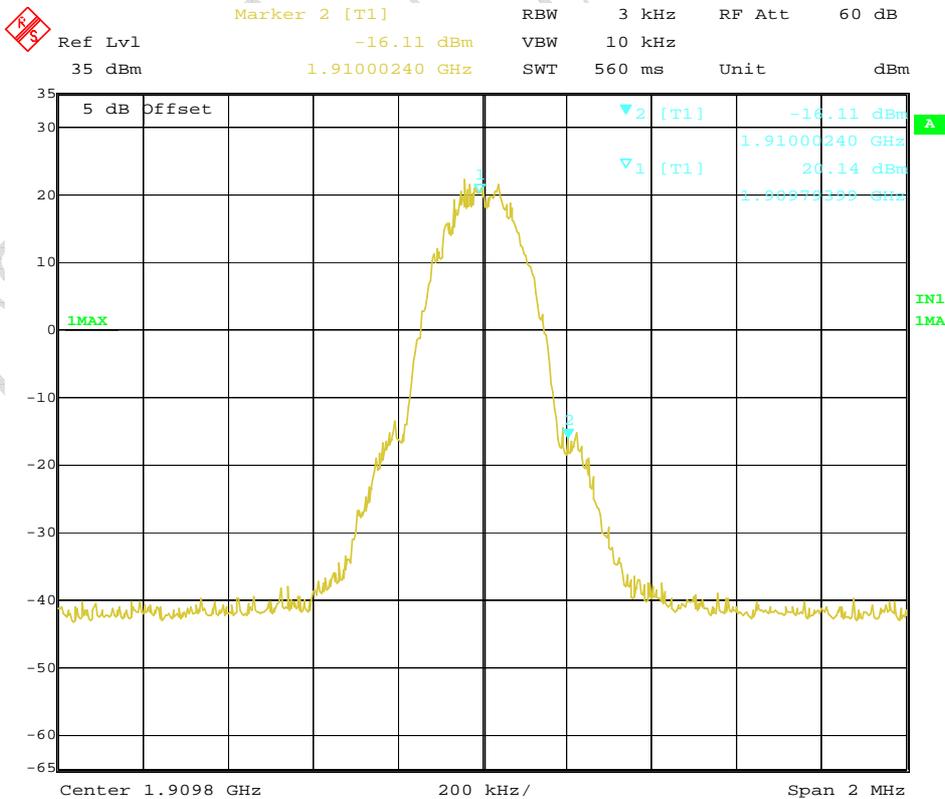


Date: 19.NOV.2008 09:03:04

GPRS channel 810 Right band edge


FCC Parts 2, 22, 24  
Equipment: Vodafone 1231

REPORT NO.: I08GE7032-FCC-EMC

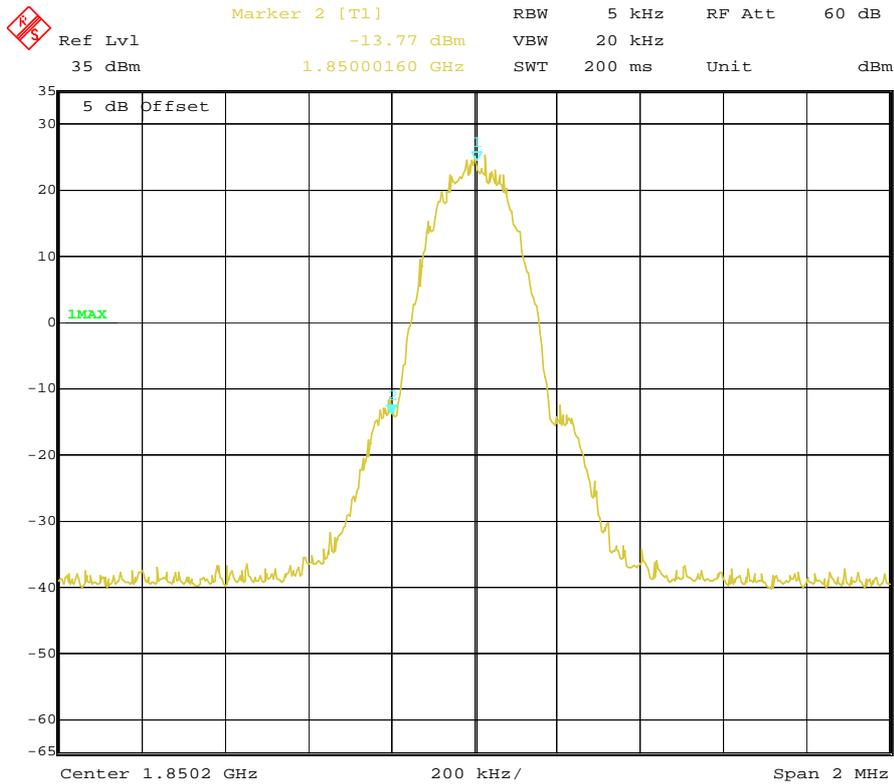

Date: 19.NOV.2008 08:31:17

EGPRS channel 512 Left band edge

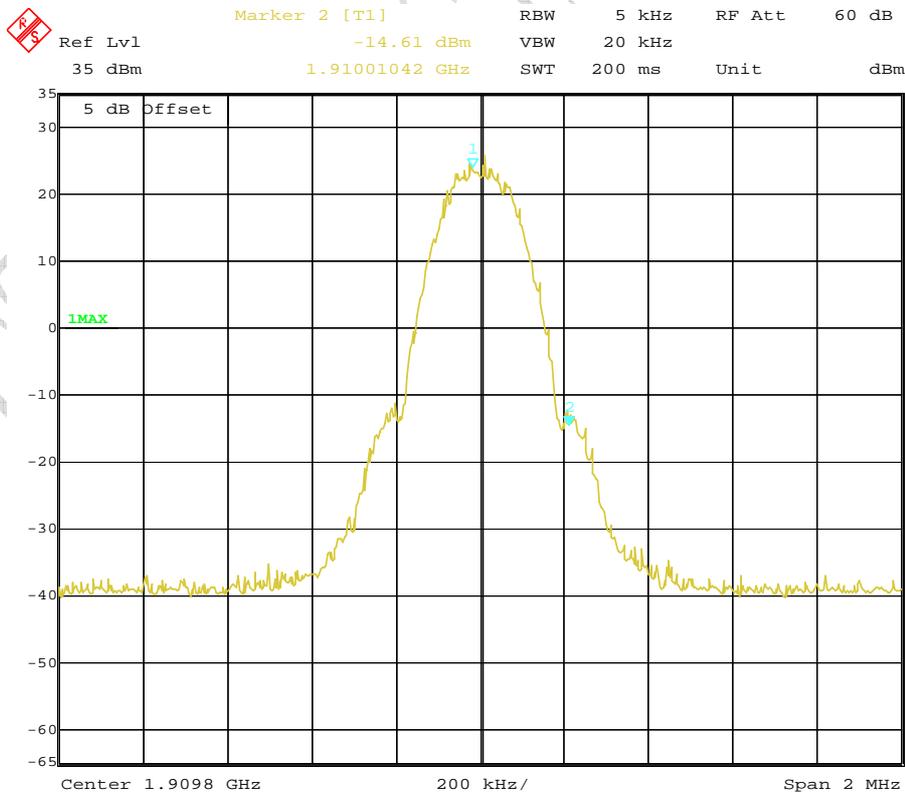

Date: 19.NOV.2008 08:33:41

EGPRS channel 810 Right band edge

## Annex A External Photos



Front view



Back view



Adaptor




Earphone




battery

China Test

## Annex B Internal Photos

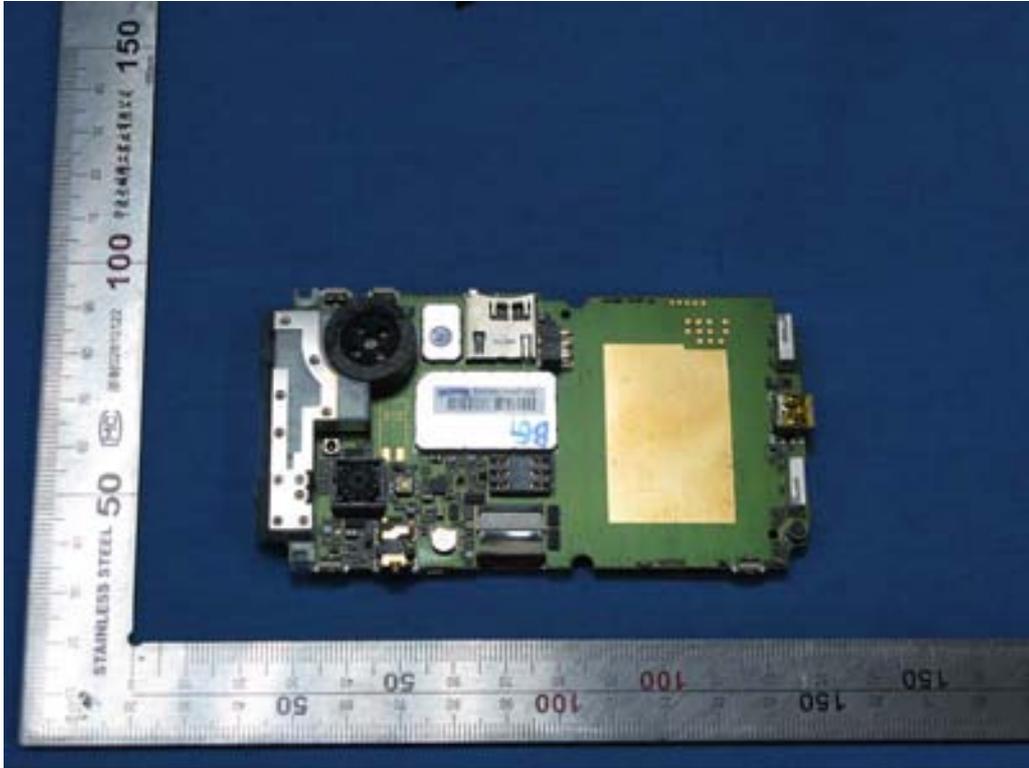


Main board (face)

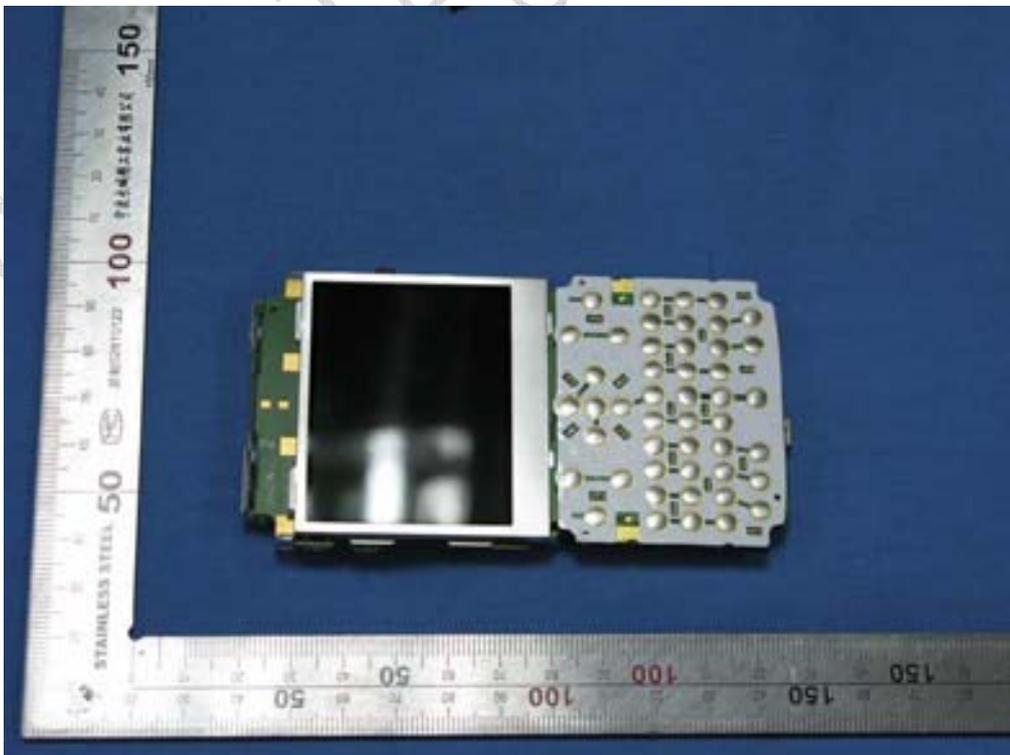

Main board (back)



Adaptor face

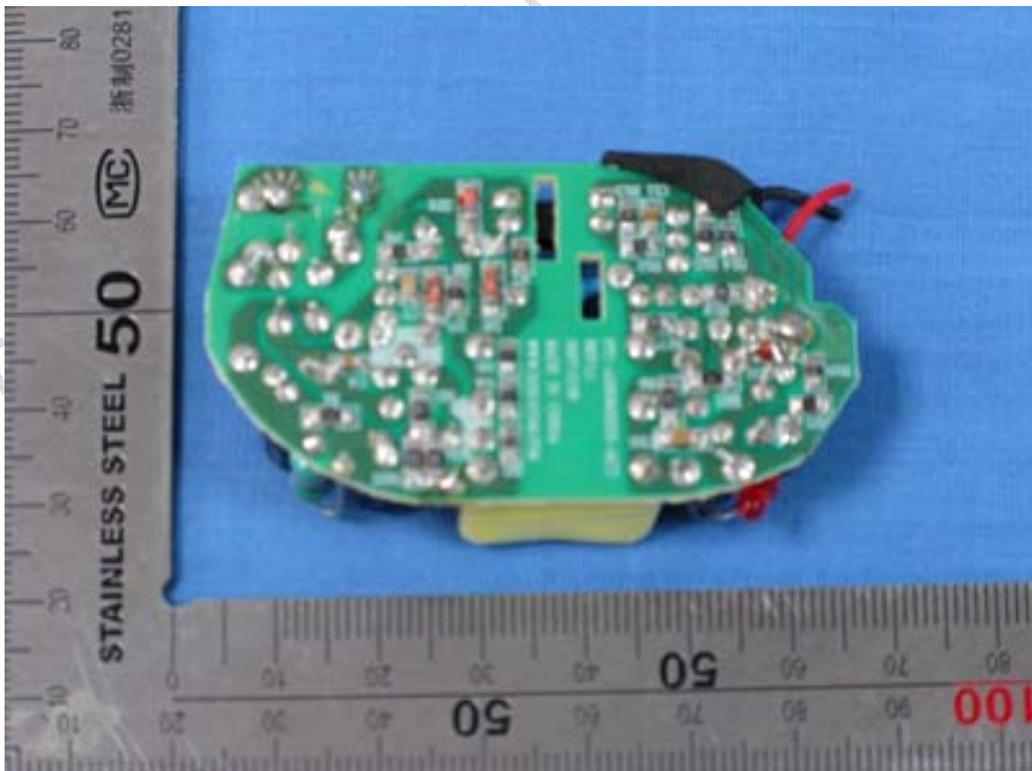

Adaptor back

## ANNEX C Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

————— The End of this Report —————

*ATTN Test Report*