



Report No.: RZA2010-0182FCC



# OET 65

# TEST REPORT

<b>Product Name</b>	GSM Quad_band digital mobile phone
<b>Model</b>	Vodafone 546
<b>FCC ID</b>	Q78-VDF546
<b>Client</b>	ZTE Corporation

**TA Technology (Shanghai) Co., Ltd.**



## GENERAL SUMMARY

<b>Product Name</b>	GSM Quad_band digital mobile phone	<b>Model</b>	Vodafone 546
<b>FCC ID</b>	Q78-VDF546	<b>Report No.</b>	RZA2010-0182FCC
<b>Client</b>	ZTE Corporation		
<b>Manufacturer</b>	ZTE Corporation		
<b>Reference Standard(s)</b>	<p><b>ANSI/IEEE Std C95.1-1999:</b> IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p><b>IEEE 1528-2003:</b> Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Experimental Techniques.</p> <p><b>OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002:</b> Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.</p>		
<b>Conclusion</b>	<p>This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 7 of this test report are below limits specified in the relevant standards.</p> <p>General Judgment: <b>Pass</b></p> <p style="text-align: right;">(Stamp)</p> <p style="text-align: right;"><b>Date of issue: February 25<sup>th</sup>, 2010</b></p> 		
<b>Comment</b>	The test result only responds to the measured sample.		

Approved by 杨伟中  
Yang Weizhong

Revised by 凌敏宝  
Ling Minbao

Performed by 王路  
Wang Lu

## TABLE OF CONTENT

1. General Information .....	5
1.1. Notes of the test report .....	5
1.2. Testing laboratory .....	5
1.3. Applicant Information .....	6
1.4. Manufacturer Information .....	6
1.5. Information of EUT .....	7
1.6. Test Date .....	8
2. Operational Conditions during Test .....	9
2.1. General description of test procedures .....	9
2.2. GSM Test Configuration .....	9
3. SAR Measurements System Configuration .....	10
3.1. SAR Measurement Set-up .....	10
3.2. DASY5 E-field Probe System .....	11
3.2.1. EX3DV4 Probe Specification .....	11
3.2.2. E-field Probe Calibration .....	12
3.3. Other Test Equipment .....	12
3.3.1. Device Holder for Transmitters .....	12
3.3.2. Phantom .....	13
3.4. Scanning procedure .....	13
3.5. Data Storage and Evaluation .....	15
3.5.1. Data Storage .....	15
3.5.2. Data Evaluation by SEMCAD .....	15
3.6. System check .....	18
3.7. Equivalent Tissues .....	19
4. Laboratory Environment .....	20
5. Characteristics of the Test .....	20
5.1. Applicable Limit Regulations .....	20
5.2. Applicable Measurement Standards .....	20
6. Conducted Output Power Measurement .....	21
6.1. Summary .....	21
6.2. Conducted Power Results .....	21
7. Test Results .....	24
7.1. Dielectric Performance .....	24
7.2. System Check Results .....	25
7.3. Test Results .....	26
7.3.1. Summary of Measurement Results (GSM850/GPRS/EGPRS) .....	26
7.3.2. Summary of Measurement Results (GSM1900/GPRS/EGPRS) .....	27
7.3.3. Summary of Measurement Results (Bluetooth function) .....	28
7.4. Conclusion .....	28
8. Measurement Uncertainty .....	29
9. Main Test Instruments .....	30

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RZA2010-0182FCC

Page 4 of 104

---

ANNEX A: Test Layout .....	31
ANNEX B: System Check Results .....	34
ANNEX C: Graph Results .....	38
ANNEX D: Probe Calibration Certificate .....	68
ANNEX E: D835V2 Dipole Calibration Certificate .....	77
ANNEX F: D1900V2 Dipole Calibration Certificate .....	86
ANNEX G: DAE4 Calibration Certificate.....	95
ANNEX H: The EUT Appearances and Test Configuration.....	100

## 1. General Information

### 1.1. Notes of the test report

**TA Technology (Shanghai) Co., Ltd.** guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

**TA Technology (Shanghai) Co., Ltd.** is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

### 1.2. Testing laboratory

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai,China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Yang Weizhong  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [yangweizhong@ta-shanghai.com](mailto:yangweizhong@ta-shanghai.com)

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RZA2010-0182FCC

Page 6 of 104

---

### 1.3. Applicant Information

Company: ZTE Corporation  
Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China  
City: Shenzhen  
Postal Code: 518057  
Country: P.R.China  
Contact: Zhang Min  
Telephone: 021-68897541  
Fax: 021-50801070

### 1.4. Manufacturer Information

Company: ZTE Corporation  
Address: ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China  
City: Shenzhen  
Postal Code: 518057  
Country: P.R.China  
Telephone: 021-68897541  
Fax: 021-50801070

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RZA2010-0182FCC

Page 7 of 104

**1.5. Information of EUT**

**General information**

Device type :	portable device		
Exposure category:	uncontrolled environment / general population		
Product Name:	GSM Quad_band digital mobile phone		
IMEI or SN:	357640030022026		
Device operating configurations :			
Operating mode(s):	GSM850; ( tested ) GSM1900; ( tested )		
Test Modulation:	GMSK		
GPRS multislots class :	12		
EGPRS multislots class:	10		
Operating frequency range(s):	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824.2 ~ 848.8	869.2 ~ 893.8
	GSM 1900	1850.2 ~ 1909.8	1930.2 ~ 1989.8
Power class	GSM 850: 4, tested with power level 5		
	GSM 1900: 1, tested with power level 0		
Test channel (Low –Middle –High)	128 -190 -251 512 - 661-810	(GSM850) (GSM1900)	(tested) (tested)
Hardware version:	g7rC		
Software version:	EFSPA-Z-DE-P160A61(SPA)V1.0.0B01		
Antenna type:	Internal antenna		

**Auxiliary equipment details**

**AE1: Battery**

Model: Li3708T42P3h453756-NTC

Manufacture: ZTE Corporation

IMEI or SN: 40040907232403064

**AE2: Travel Adaptor**

Model: STC-A22O50I700M5-A

Manufacture: ZTE Corporation

IMEI or SN: /

Equipment Under Test (EUT) is a model of GSM Quad\_band digital mobile phone with internal antenna. It consists of mobile phone, battery and adaptor and the detail about these is in chapter 1.5 in this report. SAR is tested for GSM850 and GSM 1900.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

**1.6. Test Date**

The test is performed from February 10, 2010 to February 22, 2010.

## **2. Operational Conditions during Test**

### **2.1. General description of test procedures**

A communication link is set up with a System Simulator (SS) by air link, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 128, 190 and 251 in the case of GSM 850, allocated to 512, 661 and 810 in the case of GSM 1900. The EUT is commanded to operate at maximum transmitting power.

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

### **2.2. GSM Test Configuration**

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using E5515C the power level is set to "5" in head SAR and body SAR of GSM850, set to "0" in head SAR and body SAR of GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of speech transfer function, GPRS function and EGPRS function. Since the GPRS class is 12 for this EUT; it has at most 4 timeslots in uplink. The EGPRS class is 10 for this EUT; it has at most 2 timeslots in uplink.

### 3. SAR Measurements System Configuration

#### 3.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

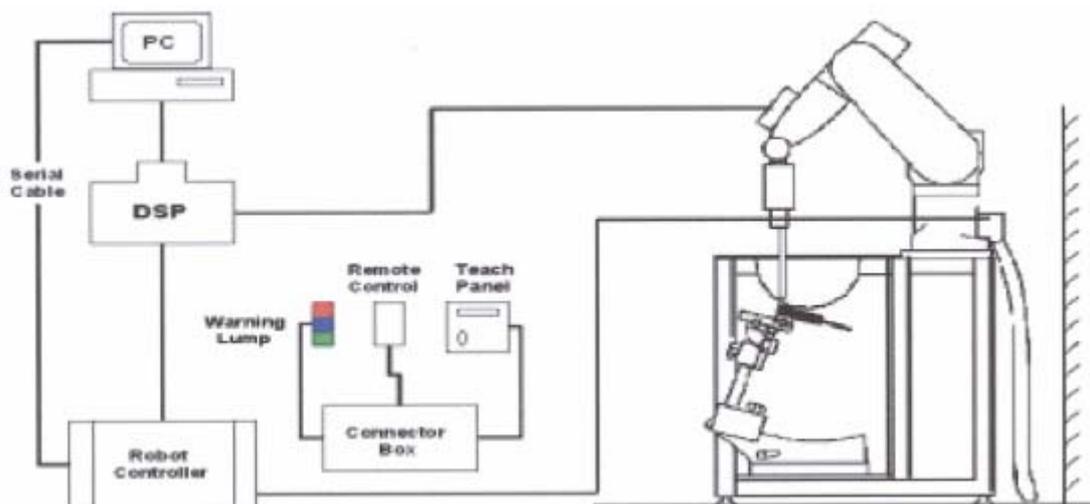


Figure 1 SAR Lab Test Measurement Set-up

### 3.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

#### 3.2.1. EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 900 and HSL 1750 Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



**Figure 2. EX3DV4 E-field Probe**



**Figure 3. EX3DV4 E-field probe**

### 3.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),  
C = Heat capacity of tissue (brain or muscle),  
 $\Delta T$  = Temperature increase due to RF exposure.  
Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:  
 $\sigma$  = Simulated tissue conductivity,  
 $\rho$  = Tissue density (kg/m<sup>3</sup>).

### 3.3. Other Test Equipment

#### 3.3.1. Device Holder for Transmitters

The DASY device holder is designed to cope with the different positions given in the standard.

It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the inference of the clamp on the test results could thus be lowered.



**Figure 4 Device Holder**

### 3.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



**Figure 5 Generic Twin Phantom**

### 3.4. Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. ± 5 %.
- The "surface check" measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within ± 30°.)
- Area Scan  
The Area Scan is used as a fast scan in two dimensions to find the area of high field values

before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- **Zoom Scan**

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

### **3.5. Data Storage and Evaluation**

#### **3.5.1. Data Storage**

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA5". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### **3.5.2. Data Evaluation by SEMCAD**

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	Dcp <sub>i</sub>
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	
	- Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RZA2010-0182FCC

Page 16of 104

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$U_i$  = input signal of channel i (i = x, y, z)

$cf$  = crest factor of exciting field (DASY parameter)

$dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:  $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes:  $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$Norm_i$  = sensor sensitivity of channel i (i = x, y, z)  
[mV/(V/m)<sup>2</sup>] for E-field Probes

$ConvF$  = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$f$  = carrier frequency [GHz]

$E_i$  = electric field strength of channel i in V/m

$H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \rho) / ( \rho \cdot 1000)$$

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RZA2010-0182FCC

Page 17 of 104

---

with **SAR** = local specific absorption rate in mW/g

**$E_{tot}$**  = total field strength in V/m

**$\sigma$**  = conductivity in [mho/m] or [Siemens/m]

**$\rho$**  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with  **$P_{pwe}$**  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

**$E_{tot}$**  = total electric field strength in V/m

**$H_{tot}$**  = total magnetic field strength in A/m

### 3.6. System check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulates were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulates, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the table 7 and table 8.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ( $\pm 10\%$ ).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.



Figure 6 System Check Set-up

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**3.7. Equivalent Tissues**

The liquid is consisted of water, salt, Glycol, Sugar, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 1 and Table 2 show the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the OET 65.

**Table 1: Composition of the Head Tissue Equivalent Matter**

MIXTURE%	FREQUENCY(Brain) 835MHz
Water	41.45
Sugar	56
Salt	1.45
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=41.5$ $\sigma=0.9$

MIXTURE%	FREQUENCY(Brain)1900MHz
Water	55.242
Glycol monobutyl	44.452
Salt	0.306
Dielectric Parameters Target Value	f=1900MHz $\epsilon=40.0$ $\sigma=1.40$

**Table 2: Composition of the Body Tissue Equivalent Matter**

MIXTURE%	FREQUENCY(Body)835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$

MIXTURE%	FREQUENCY (Body) 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

## 4. Laboratory Environment

**Table 3: The Ambient Conditions during Test**

Temperature	Min. = 20°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 $\Omega$
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

## 5. Characteristics of the Test

### 5.1. Applicable Limit Regulations

**ANSI/IEEE Std C95.1-1999:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

### 5.2. Applicable Measurement Standards

**IEEE 1528–2003:** Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Experimental Techniques.

**OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002:** Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.

## 6. Conducted Output Power Measurement

### 6.1. Summary

The DUT is tested using an E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power. Conducted output power was measured using an integrated RF connector and attached RF cable. This result contains conducted output power for the EUT.

### 6.2. Conducted Power Results

**Table 4: Conducted Power Measurement Results**

<b>GSM 850</b>	<b>Conducted Power</b>		
	Channel 128	Channel 190	Channel 251
	(824.2MHz)	(836.6MHz)	(848.8MHz)
Before Test (dBm)	32.20	32.01	31.9
After Test (dBm)	32.21	32.00	31.91
<b>GSM 1900</b>	<b>Conducted Power</b>		
	Channel 512	Channel 661	Channel 810
	(1850.2MHz)	(1880MHz)	(1909.8MHz)
Before Test (dBm)	29.89	30.05	30.07
After Test (dBm)	29.88	30.04	30.06

Average power

<b>GSM850 + GPRS</b>		<b>Conducted Power(dBm)</b>						
		Channel 128	Channel 190	Channel 251		Channel 128	Channel 190	Channel 251
1TXslot	Before Test (dBm)	32.06	31.8	31.76	-9.03dB	23.03	22.77	22.73
	After Test (dBm)	32.05	31.8	31.77	-9.03dB	23.02	22.77	22.74
2TXslots	Before Test (dBm)	29.37	29.1	29.08	-6.02dB	23.35	23.08	23.06
	After Test (dBm)	29.36	29.11	29.08	-6.02dB	23.34	23.09	23.06

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RZA2010-0182FCC

Page 22 of 104

3TXslots	Before Test (dBm)	28.35	28.02	28.05	-4.26dB	<b>24.09</b>	<b>23.76</b>	<b>23.79</b>
	After Test (dBm)	28.34	28.03	28.05	-4.26dB	<b>24.08</b>	<b>23.77</b>	<b>23.79</b>
4TXslots	Before Test (dBm)	26.44	26.18	26.15	-3.01dB	23.43	23.17	23.14
	After Test (dBm)	26.45	26.19	26.15	-3.01dB	23.44	23.18	23.14
<b>GSM850 + EGPRS</b>		<b>Conducted Power(dBm)</b>						
		Channel 128	Channel 190	Channel 251		Channel 128	Channel 190	Channel 251
1TXslot	Before Test (dBm)	31.84	31.72	31.62	-9.03dB	22.81	22.69	22.59
	After Test (dBm)	31.85	31.73	31.63	-9.03dB	22.82	22.70	22.60
2TXslots	Before Test (dBm)	30.15	29.98	29.87	-6.02dB	<b>24.13</b>	<b>23.96</b>	<b>23.85</b>
	After Test (dBm)	30.16	29.99	29.87	-6.02dB	24.14	23.97	23.85
<b>GSM1900 + GPRS</b>		<b>Conducted Power(dBm)</b>						
		Channel 512	Channel 661	Channel 810		Channel 512	Channel 661	Channel 810
1TXslot	Before Test (dBm)	29.86	29.97	30	-9.03dB	20.83	20.94	20.97
	After Test (dBm)	29.85	29.98	30	-9.03dB	20.82	20.95	20.97
2TXslots	Before Test (dBm)	26.81	26.88	27.03	-6.02dB	20.79	20.86	21.01
	After Test (dBm)	26.82	26.88	27.04	-6.02dB	20.80	20.86	21.02
3TXslots	Before Test (dBm)	26.69	26.77	26.92	-4.26dB	22.43	22.51	22.66
	After Test (dBm)	26.70	26.78	26.93	-4.26dB	22.44	22.52	22.67
4TXslots	Before Test (dBm)	25.67	25.84	25.99	-3.01dB	<b>22.66</b>	<b>22.83</b>	<b>22.98</b>
	After Test (dBm)	25.68	25.85	25.99	-3.01dB	22.67	22.84	22.98
<b>GSM1900 + EGPRS</b>		<b>Conducted Power(dBm)</b>						
		Channel 512	Channel 661	Channel 810		Channel 512	Channel 661	Channel 810
1TXslot	Before Test (dBm)	29.74	29.85	29.81	-9.03dB	20.71	20.82	20.78
	After Test (dBm)	29.75	29.86	29.82	-9.03dB	20.72	20.83	20.79

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RZA2010-0182FCC

Page 23 of 104

	(dBm)							
2TXslots	Before Test (dBm)	26.7	26.86	26.94	-6.02dB	<b>20.68</b>	<b>20.84</b>	<b>20.92</b>
	After Test (dBm)	26.71	26.87	26.95	-6.02dB	20.69	20.85	20.93

Note:

1. Division Factor

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots

=>conducted power divided by (8/1) =>-9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots

=>conducted power divided by (8/2) =>-6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots

=>conducted power divided by (8/3) =>-4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots

=>conducted power divided by (8/4) =>-3.01dB

## 7. Test Results

### 7.1. Dielectric Performance

**Table 5: Dielectric Performance of Head Tissue Simulating Liquid**

Frequency	Description	Dielectric Parameters		Temp °C
		$\epsilon_r$	$\sigma$ (s/m)	
<b>835MHz (head)</b>	Target value ± 5% window	41.50 39.43 — 43.58	0.90 0.86 — 0.95	/
	Measurement value 2010-2-22	41.69	0.89	21.8
<b>1900MHz (head)</b>	Target value ±5% window	40.00 38.00 — 42.00	1.40 1.33 — 1.47	/
	Measurement value 2010-2-22	39.98	1.42	21.9

**Table 6: Dielectric Performance of Body Tissue Simulating Liquid**

Frequency	Description	Dielectric Parameters		Temp °C
		$\epsilon_r$	$\sigma$ (s/m)	
<b>835MHz (body)</b>	Target value ±5% window	55.20 52.44 — 57.96	0.97 0.92 — 1.02	/
	Measurement value 2010-2-10	55.05	0.99	21.8
<b>1900MHz (body)</b>	Target value ±5% window	53.30 50.64 — 55.97	1.52 1.44 — 1.60	/
	Measurement value 2010-2-10	52.63	1.52	21.9

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RZA2010-0182FCC

Page 25 of 104

**7.2. System Check Results**

**Table 7: System Check for Head tissue simulation liquid**

Frequency	Description	SAR(W/kg)		Dielectric Parameters		Temp
		10g	1g	$\epsilon_r$	$\sigma$ (s/m)	°C
835MHz	Recommended value ±10% window	1.58 1.42 - 1.74	2.42 2.18 - 2.66	40.5	0.89	/
	Measurement value 2010-2-22	1.62	2.48	41.69	0.89	21.9
1900MHz	Recommended value ±10% window	5.38 4.84 — 5.92	10.3 9.27 — 11.33	41	1.42	/
	Measurement value 2010-2-10	5.46	10.6	39.98	1.42	22.1

Note: 1. the graph results see ANNEX B.

2. Recommended Values used derive from the calibration certificate and 250 mW is used as feeding power to the calibrated dipole.

**Table 8: System Check for Body tissue simulation liquid**

Frequency	Description	SAR(W/kg)		Dielectric Parameters		Temp
		10g	1g	$\epsilon_r$	$\sigma$ (s/m)	°C
835MHz	Recommended value ±10% window	1.68 1.51 - 1.85	2.56 2.30 - 2.82	53	0.99	/
	Measurement value 2010-2-22	1.68	2.56	55.05	0.99	21.9
1900 MHz	Recommended value ±10% window	5.52 4.97—6.07	10.50 9.45 — 11.55	54.00	1.55	/
	Measurement value 2010-2-10	5.17	9.73	52.63	1.52	21.7

Note: 1. The graph results see ANNEX B.

2. Recommended Values used derive from the calibration certificate and 250 mW is used as feeding power to the Calibrated dipole.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RZA2010-0182FCC

Page 26 of 104

### 7.3. Test Results

#### 7.3.1. Summary of Measurement Results (GSM850/GPRS/EGPRS)

**Table 9: SAR Values (GSM850/GPRS/EGPRS)**

Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Head		Measurement Result(W/kg)		Power Drift(dB)	
Different Test Position	Channel	10 g Average	1 g Average	Power Drift(dB)	
<b>Test position of Head</b>					
Left hand, Touch cheek	Middle	0.403	0.568	-0.163	Figure 11
Left hand, Tilt 15 Degree	Middle	0.255	0.342	-0.032	Figure 12
Right hand, Touch cheek	High	0.388	0.540	-0.041	Figure 13
	Middle	0.428	0.594	0.176	Figure 14
	Low	0.383	0.530	-0.163	Figure 15
Right hand, Tilt 15 Degree	Middle	0.258	0.346	-0.180	Figure 16
<b>Test position of Body (Distance 15mm)</b>					
Towards Ground	High	0.480	0.677	0.078	Figure 17
	Middle	0.632	0.889	0.021	Figure 18
	Low	0.678	0.949	-0.087	Figure 19
Towards Phantom	Middle	0.306	0.422	0.045	Figure 20
<b>Worst case position of Body with Earphone (Distance 15mm)</b>					
Towards Ground	Low	0.645	0.904	-0.055	Figure 21
<b>Worst case position of Body with GPRS(3UP) (Distance 15mm)</b>					
Towards Ground	Low	0.792	1.110	-0.071	Figure 22
<b>Worst case position of Body with EGPRS(2UP) (Distance 15mm)</b>					
Towards Ground	Low	0.946	1.330	0.017	Figure 23

Note: 1. The value with blue color is the maximum SAR Value of test case of head and body in each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8W/kg), testing at the high and low channels is optional.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

Report No.: RZA2010-0182FCC

Page 27 of 104

### 7.3.2. Summary of Measurement Results (GSM1900/GPRS/EGPRS)

**Table 10: SAR Values (GSM1900/GPRS/EGPRS)**


Limit of SAR (W/kg)		10 g Average	1 g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Head		Measurement Result(W/kg)		Power Drift(dB)	
Different Test Position	Channel	10 g Average	1 g Average	Power Drift(dB)	
<b>Test position of Head</b>					
Left hand, Touch cheek	High	0.249	0.431	0.097	Figure 24
	Middle	0.312	0.542	-0.006	Figure 25
	Low	0.387	0.661	-0.018	Figure 26
Left hand, Tilt 15 Degree	Middle	0.140	0.220	-0.062	Figure 27
Right hand, Touch cheek	Middle	0.242	0.374	0.001	Figure 28
Right hand, Tilt 15 Degree	Middle	0.170	0.279	-0.101	Figure 29
<b>Test position of Body (Distance 15mm)</b>					
Towards Ground	High	0.117	0.197	-0.009	Figure 30
	Middle	0.155	0.265	-0.045	Figure 31
	Low	0.173(max)	0.294(max)	0.008	Figure 32
Towards Phantom	Middle	0.093(max)	0.158(max)	0.003	Figure 33
<b>Worst case position of Body with Earphone (Distance 15mm)</b>					
Towards Ground	Low	0.183	0.306	-0.041	Figure 34
<b>Worst case position of Body with GPRS(4UP) (Distance 15mm)</b>					
Towards Ground	Low	0.236(max)	0.402(max)	-0.061	Figure 35
<b>Worst case position of Body with EGPRS(2UP) (Distance 15mm)</b>					
Towards Ground	Low	0.155(max)	0.264(max)	-0.112	Figure 36

Note: 1. The value with blue color is the maximum SAR Value of test case of head and body in each test band.

2. Upper and lower frequencies were measured at the worst position.
3. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8W/kg), testing at the high and low channels is optional.
4. The (max) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

**7.3.3. Summary of Measurement Results (Bluetooth function)**

The distance between BT antenna and GSM antenna >5cm. The location of the antennas inside mobile phone is shown below:

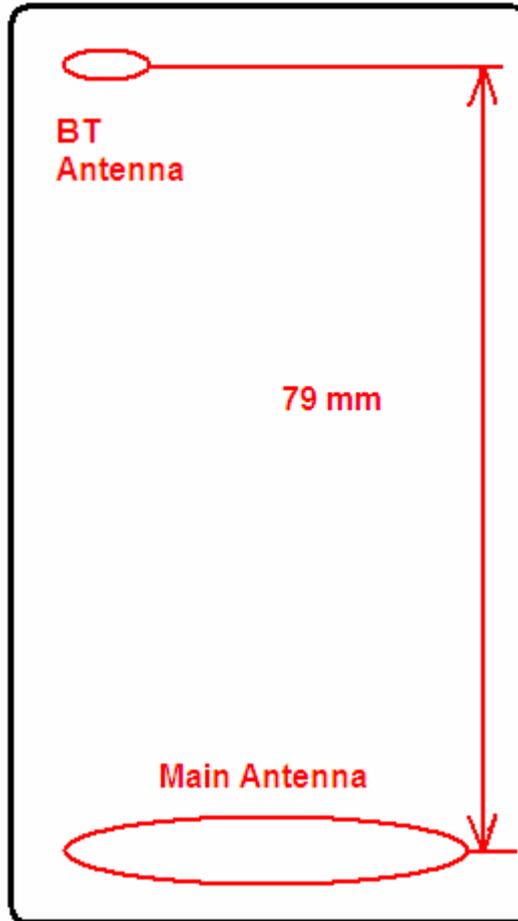

The output power of BT antenna is as following:

Channel	Ch 0 2402 MHz	Ch 39 2441 Mhz	Ch 78 2480 MHz
Peak Conducted Output Power(dBm)	-1.37	0.18	-0.37

According to the output power measurement result and the distance between the two antennas, we can draw the conclusion that: stand-alone SAR is not required for BT transmitter, because the output power of BT transmitter is  $\leq 2P_{Ref}$  and the distance between BT antenna and GSM antenna >5cm. Because of the power and the distance, we didn't perform the standalone BT SAR tests.

**7.4. Conclusion**

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR<sub>1g</sub> are 0.661 W/kg (head) and 1.330 W/kg (body) that are below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RZA2010-0182FCC

Page 29 of 104

## 8. Measurement Uncertainty

No.	source	Type	Uncertainty Value (%)	Probability Distribution	k	$c_i$	Standard uncertainty $u_i$ (%)	Degree of freedom $V_{eff}$ or $v_i$
1	System repetivity	A	0.5	N	1	1	0.5	9
Measurement system								
2	probe calibration	B	5.9	N	1	1	5.9	$\infty$
3	axial isotropy of the probe	B	4.7	R	$\sqrt{3}$	$\sqrt{0.5}$	1.9	$\infty$
4	Hemispherical isotropy of the probe	B	9.4	R	$\sqrt{3}$	$\sqrt{0.5}$	3.9	$\infty$
6	boundary effect	B	1.9	R	$\sqrt{3}$	1	1.1	$\infty$
7	probe linearity	B	4.7	R	$\sqrt{3}$	1	2.7	$\infty$
8	System detection limits	B	1.0	R	$\sqrt{3}$	1	0.6	$\infty$
9	readout Electronics	B	1.0	N	1	1	1.0	$\infty$
10	response time	B	0	R	$\sqrt{3}$	1	0	$\infty$
11	integration time	B	4.32	R	$\sqrt{3}$	1	2.5	$\infty$
12	noise	B	0	R	$\sqrt{3}$	1	0	$\infty$
13	RF Ambient Conditions	B	3	R	$\sqrt{3}$	1	1.73	$\infty$
14	Probe Positioner Mechanical Tolerance	B	0.4	R	$\sqrt{3}$	1	0.2	$\infty$
15	Probe Positioning with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	$\infty$
16	Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	$\infty$
Test sample Related								
17	-Test Sample Positioning	A	2.9	N	1	1	2.9	5
18	-Device Holder Uncertainty	A	4.1	N	1	1	4.1	5
19	-Output Power Variation - SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.9	$\infty$
Physical parameter								

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

Report No.: RZA2010-0182FCC

Page 30 of 104

20	-phantom	B	4.0	R	$\sqrt{3}$	1	2.3	$\infty$	
21	-liquid conductivity (deviation from target)	B	5.0	R	$\sqrt{3}$	$\frac{0.6}{4}$	1.8	$\infty$	
22	-liquid conductivity (measurement uncertainty)	B	5.0	N	1	$\frac{0.6}{4}$	3.2	$\infty$	
23	-liquid permittivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.6	1.7	$\infty$	
24	-liquid permittivity (measurement uncertainty)	B	5.0	N	1	0.6	3.0	$\infty$	
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						12.0	
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		N	k=2		24.0		

## 9. Main Test Instruments

**Table 11: List of Main Instruments**


No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 13, 2009	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 14, 2009	One year
04	Power sensor	Agilent 8481H	MY41091316	March 14, 2009	One year
05	Signal Generator	HP 8341B	2730A00804	September 13, 2009	One year
06	Amplifier	IXA-020	0401	No Calibration Requested	
07	BTS	E5515C	MY48360988	December 4, 2009	One year
08	E-field Probe	EX3DV4	3677	September 23, 2009	One year
09	DAE	DAE4	871	November 11, 2009	One year
10	Validation Kit 835MHz	D835V2	4d082	July 13, 2009	One year
11	Validation Kit 1900MHz	D1900V2	5d018	June 26, 2009	One year

\*\*\*\*\*END OF REPORT BODY\*\*\*\*\*


## ANNEX A: Test Layout




Picture 1: Specific Absorption Rate Test Layout

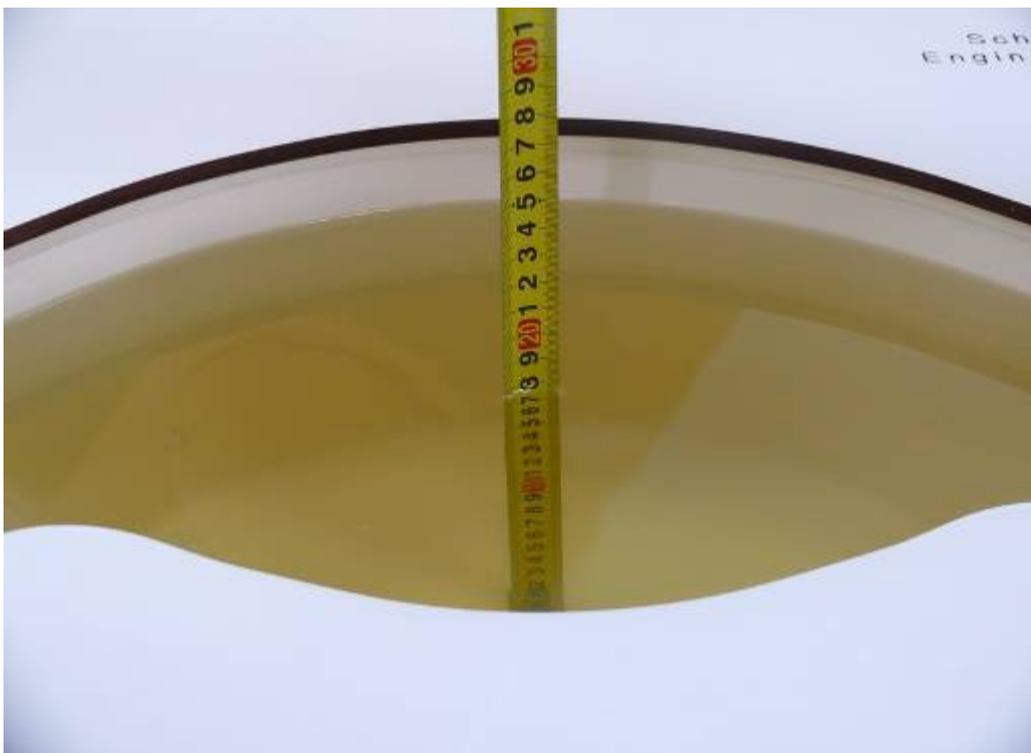

Picture 2: Liquid depth in the flat Phantom (835MHz)

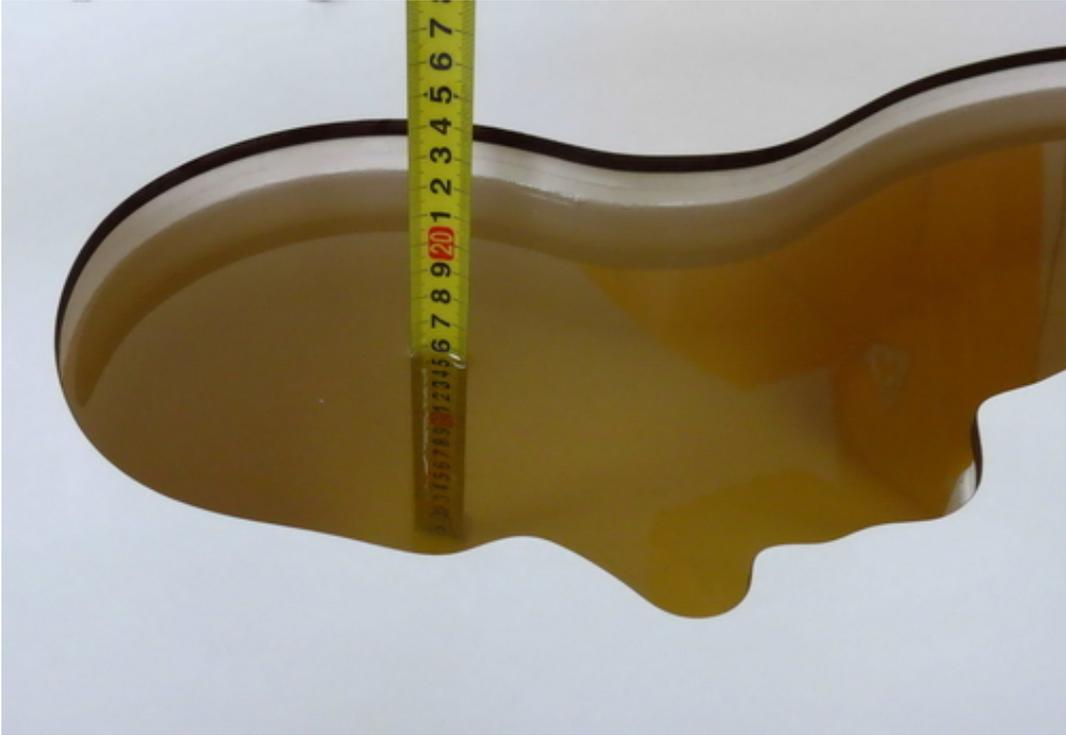

Picture 3: Liquid depth in the head Phantom (835MHz)

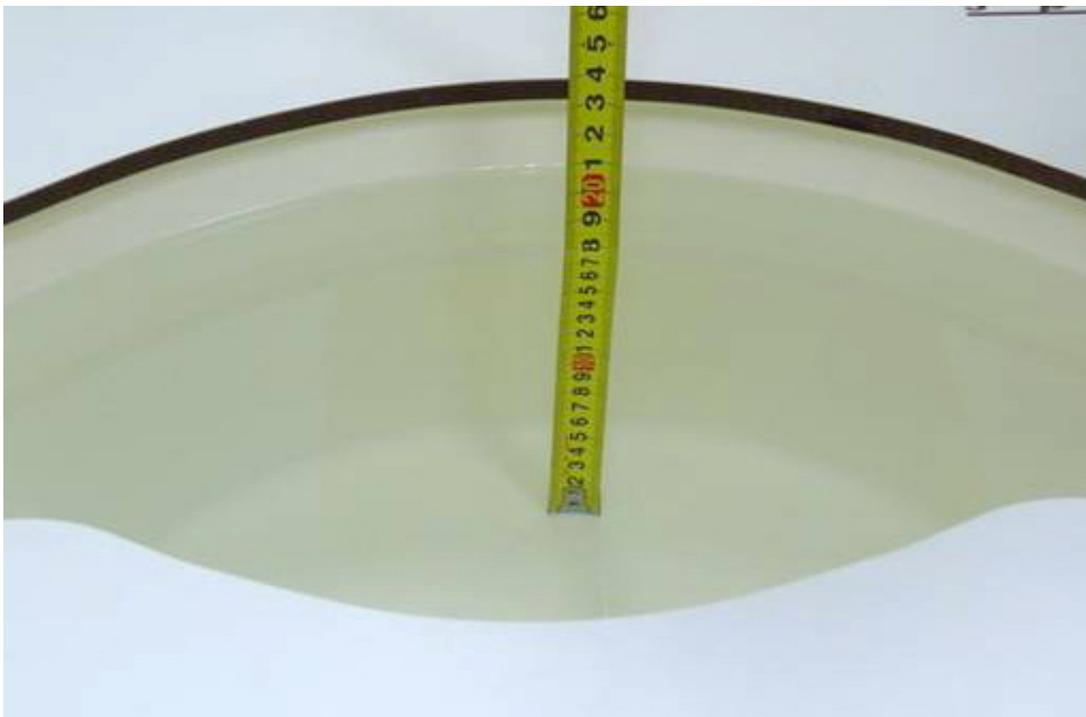

Picture 4: Liquid depth in the flat Phantom (1900 MHz)



Picture 5: Liquid depth in the head Phantom (1900 MHz)

## ANNEX B: System Check Results

### System Performance Check at 835 MHz Head TSL

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d082

Date/Time: 2/22/2010 7:00:02 AM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.89$  mho/m;  $\epsilon_r = 41.69$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.2, 9.2, 9.2); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**d=15mm, Pin=250mW/Area Scan (41x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.71 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.5 V/m; Power Drift = -0.092 dB

Peak SAR (extrapolated) = 3.75 W/kg

**SAR(1 g) = 2.48 mW/g; SAR(10 g) = 1.62 mW/g**

Maximum value of SAR (measured) = 2.67 mW/g

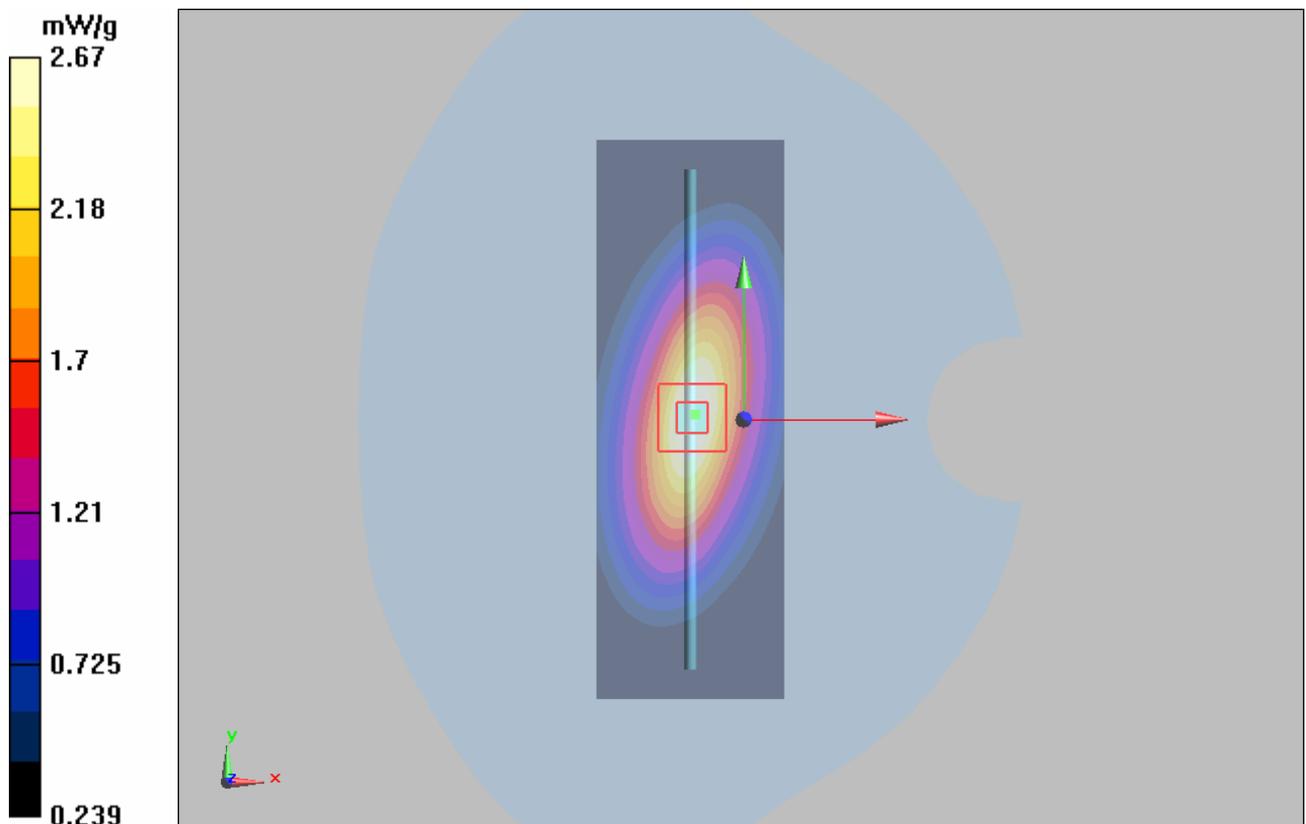


Figure 7 System Performance Check 835MHz 250mW

### System Performance Check at 835 MHz Body TSL

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d082

Date/Time: 2/10/2010 7:30:20 AM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.99 \text{ mho/m}$ ;  $\epsilon_r = 55.05$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $22.3 \text{ }^\circ\text{C}$       Liquid Temperature:  $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**d=15mm, Pin=250mW/Area Scan (61x121x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 2.77 mW/g

**d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.9 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 3.68 W/kg

**SAR(1 g) = 2.56 mW/g; SAR(10 g) = 1.68 mW/g**

Maximum value of SAR (measured) = 2.77 mW/g

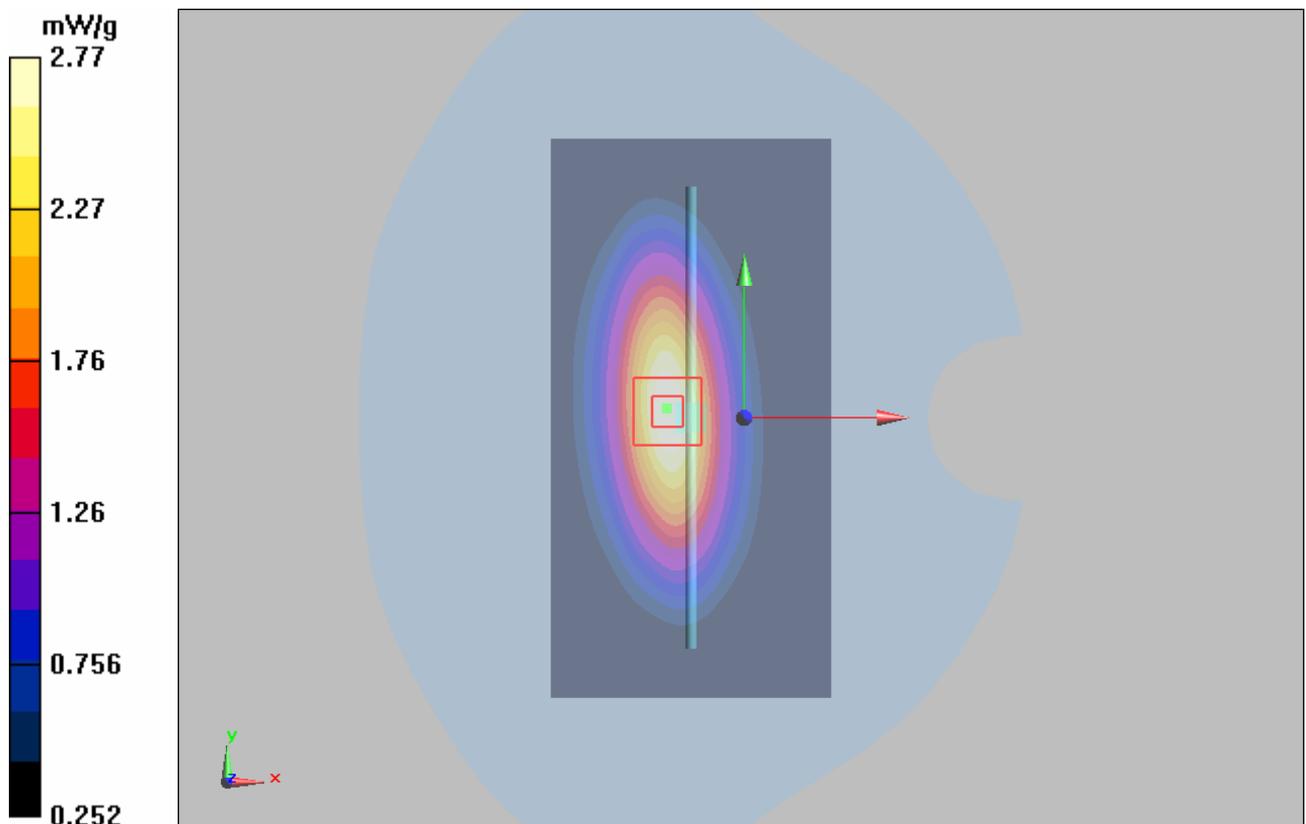


Figure 8 System Performance Check 835MHz 250mW

### System Performance Check at 1900 MHz Head TSL

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018**

Date/Time: 2/22/2010 2:00:04 PM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.42$  mho/m;  $\epsilon_r = 39.98$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.53, 7.53, 7.53); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**d=10mm, Pin=250mW/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.9 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.8 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 20.1 W/kg

**SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.46 mW/g**

Maximum value of SAR (measured) = 11.9 mW/g

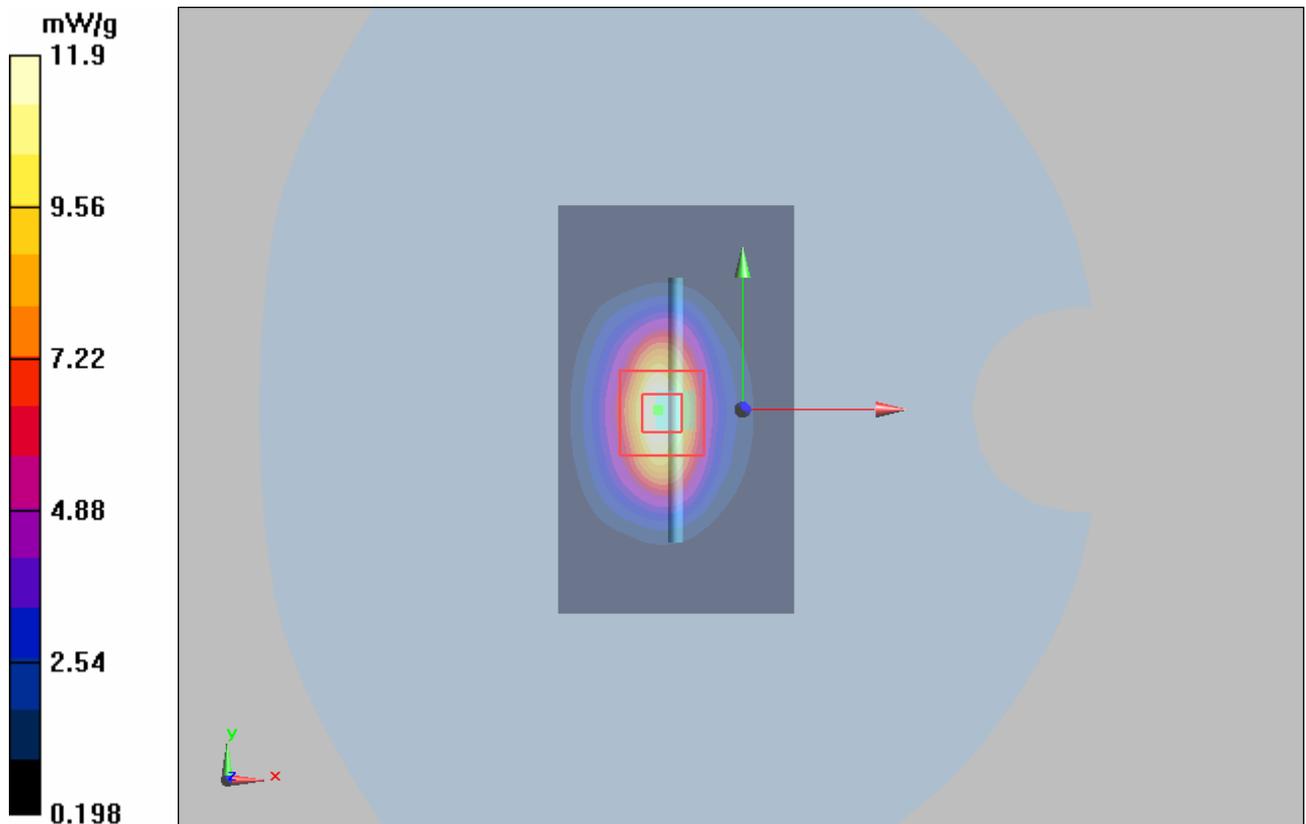


Figure 9 System Performance Check 1900MHz 250mW

**System Performance Check at 1900 MHz Body TSL**

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d018**

Date/Time: 2/10/2010 12:30:19 PM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.52$  mho/m;  $\epsilon_r = 52.63$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(7.62, 7.62, 7.62); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM2; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**d=10mm, Pin=250mW/Area Scan (41x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 12.5 mW/g

**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 75.9 V/m; Power Drift = 0.051 dB

Peak SAR (extrapolated) = 16.8 W/kg

**SAR(1 g) = 9.73 mW/g; SAR(10 g) = 5.17 mW/g**

Maximum value of SAR (measured) = 11 mW/g

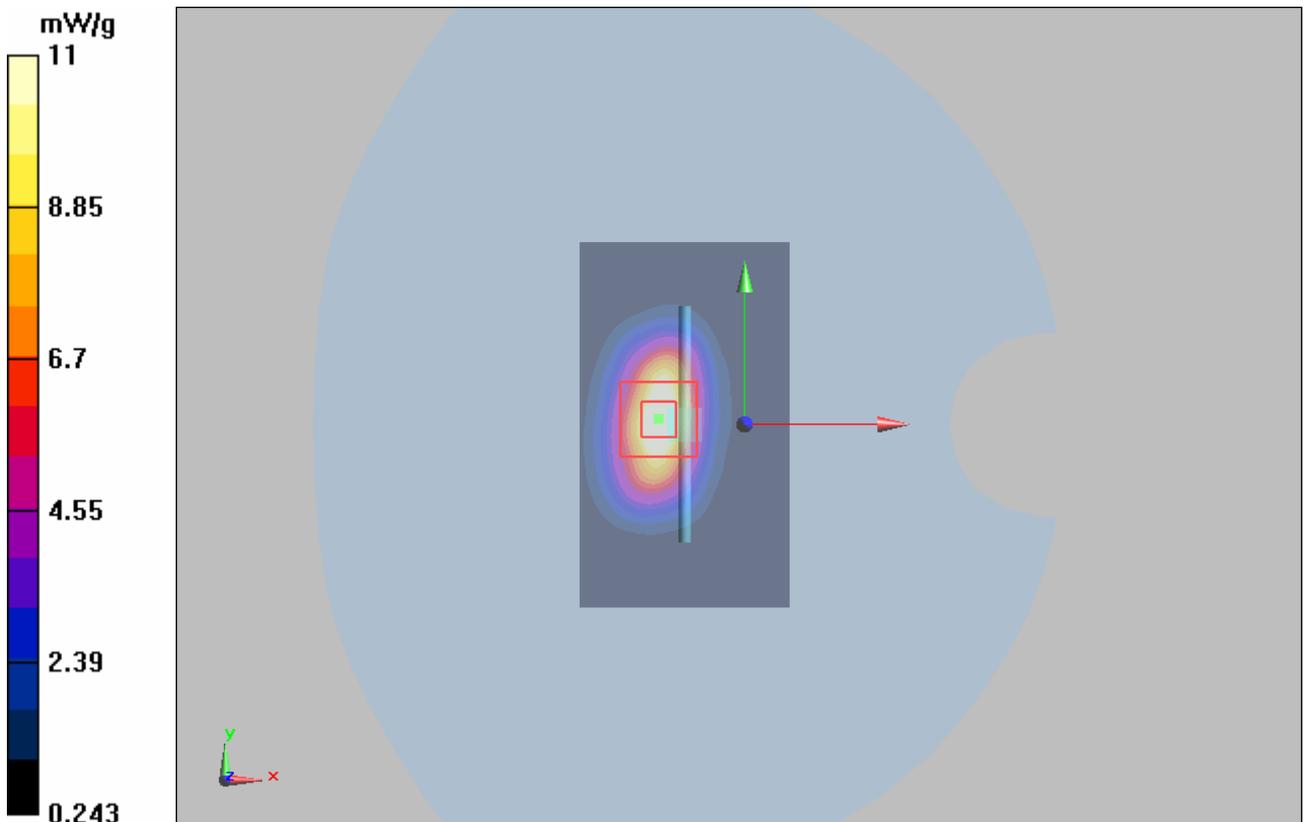


Figure 10 System Performance Check 1900MHz 250mW

## ANNEX C: Graph Results

### GSM 850 Left Cheek Middle

Date/Time: 2/22/2010 9:10:24 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.894$  mho/m;  $\epsilon_r = 41.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.2, 9.2, 9.2); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Cheek Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.590 mW/g

**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.96 V/m; Power Drift = -0.163 dB

Peak SAR (extrapolated) = 0.739 W/kg

**SAR(1 g) = 0.568 mW/g; SAR(10 g) = 0.403 mW/g**

Maximum value of SAR (measured) = 0.616 mW/g

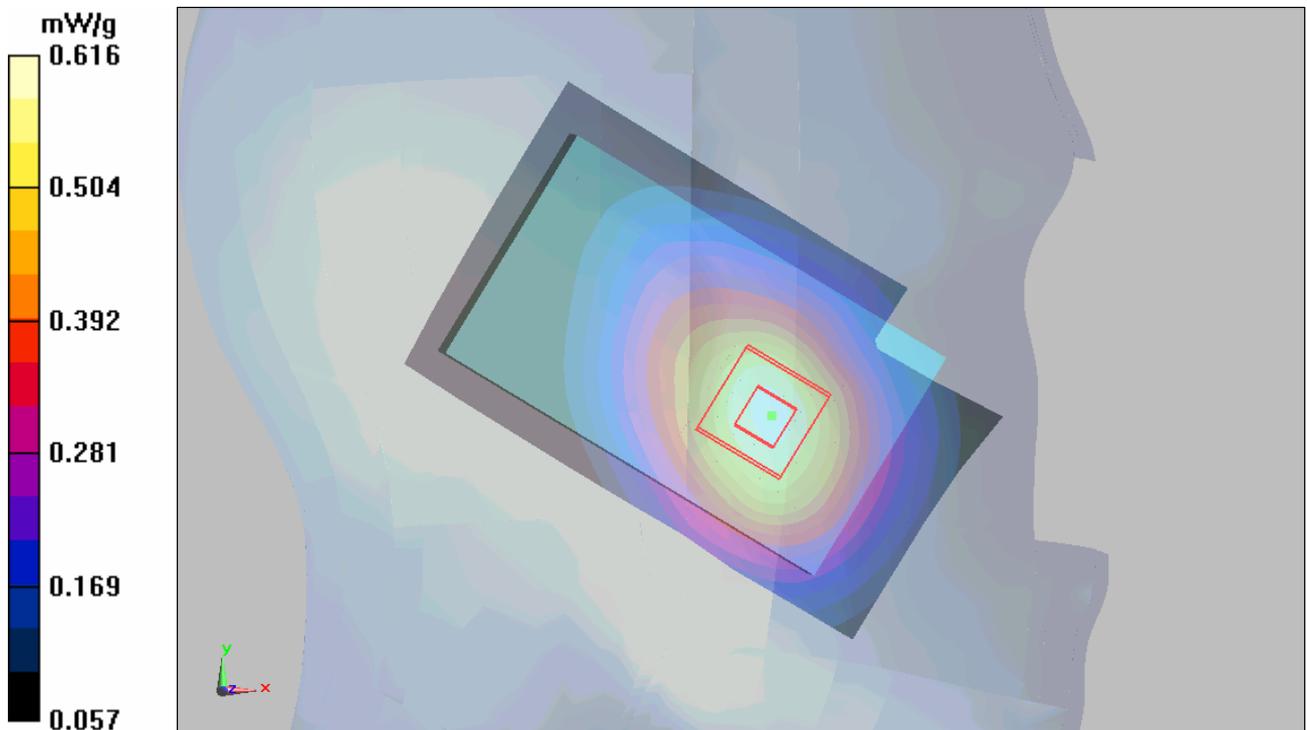


Figure 11 Left Hand Touch Cheek GSM 850 Channel 190

### GSM 850 Left Tilt Middle

Date/Time: 2/22/2010 9:35:39 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.894$  mho/m;  $\epsilon_r = 41.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.2, 9.2, 9.2); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Tilt Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.367 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.427 W/kg

**SAR(1 g) = 0.342 mW/g; SAR(10 g) = 0.255 mW/g**

Maximum value of SAR (measured) = 0.361 mW/g

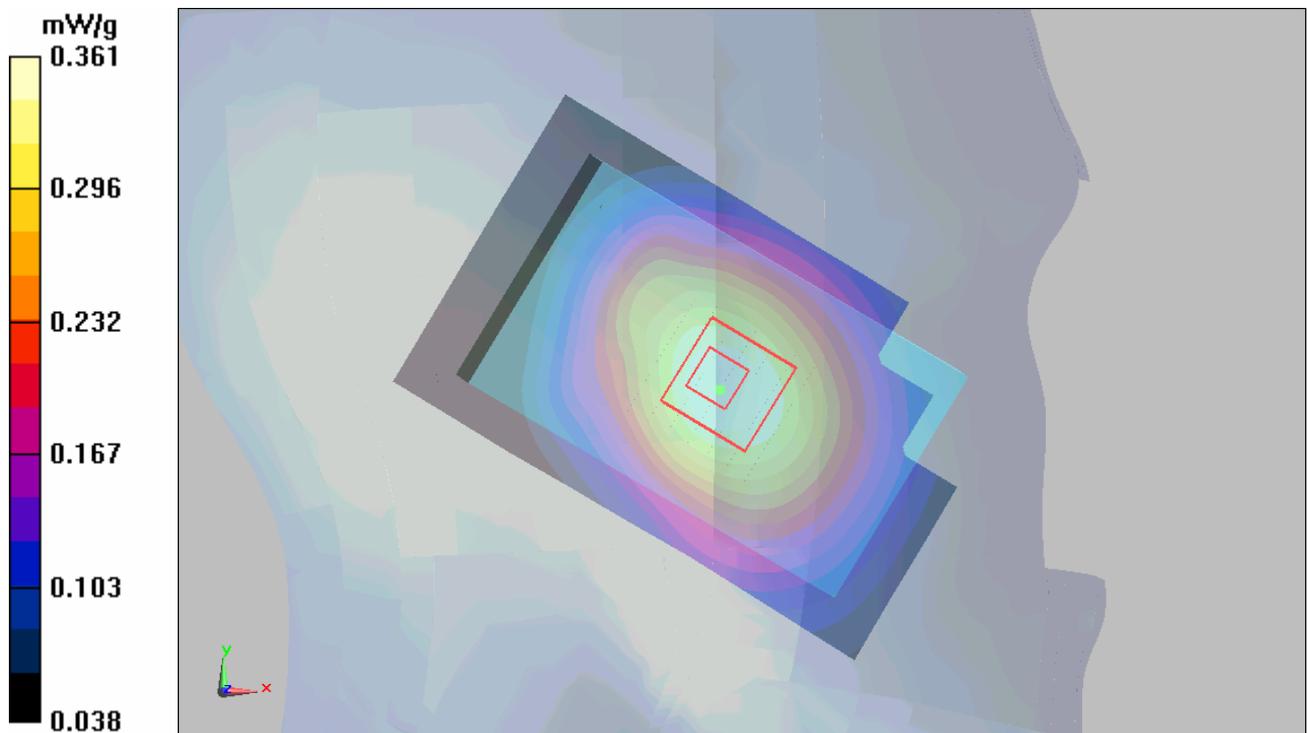


Figure 12 Left Hand Tilt 15° GSM 850 Channel 190

### GSM 850 Right Cheek High

Date/Time: 2/22/2010 10:19:22 AM

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.907$  mho/m;  $\epsilon_r = 41.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.2, 9.2, 9.2); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Cheek High/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.560 mW/g

**Cheek High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.34 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.681 W/kg

**SAR(1 g) = 0.540 mW/g; SAR(10 g) = 0.388 mW/g**

Maximum value of SAR (measured) = 0.579 mW/g

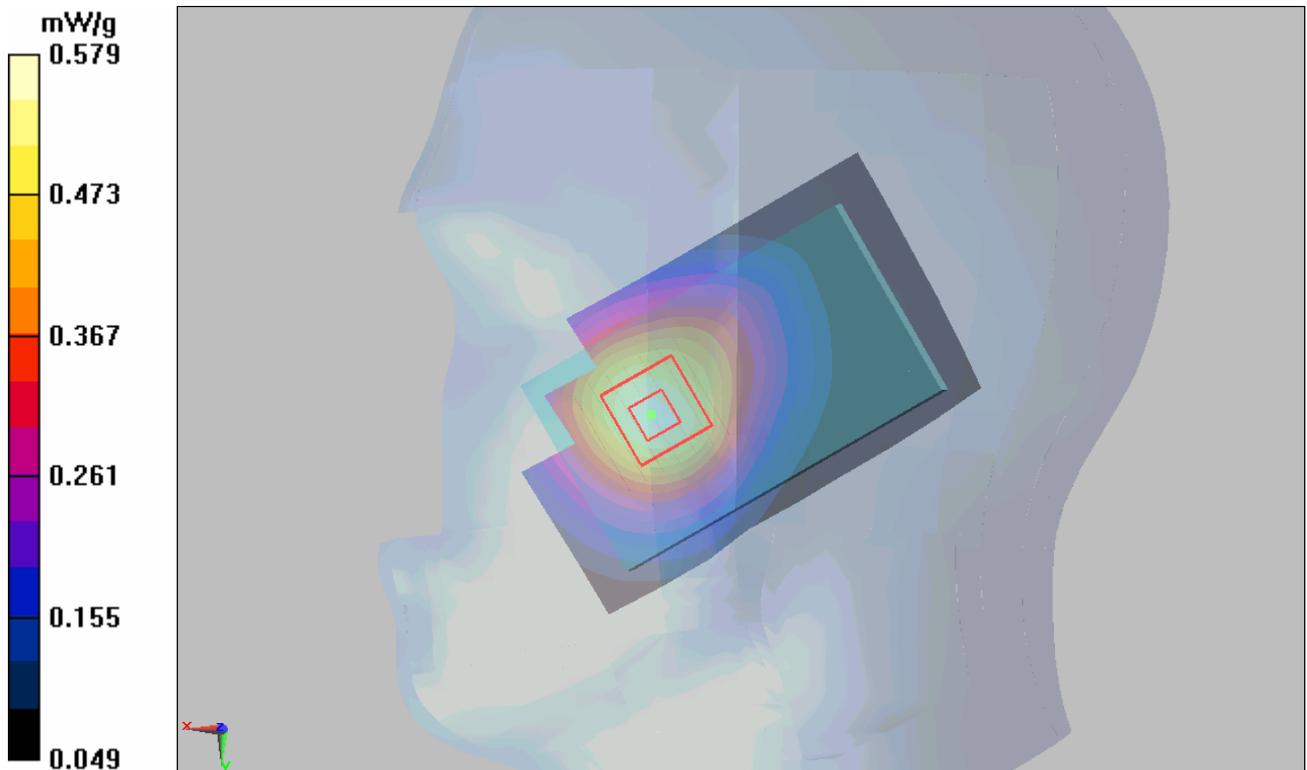


Figure 13 Right Hand Touch Cheek GSM 850 Channel 251

### GSM 850 Right Cheek Middle

Date/Time: 2/22/2010 9:58:38 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.894$  mho/m;  $\epsilon_r = 41.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.2, 9.2, 9.2); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Cheek Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.630 mW/g


**Cheek Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.55 V/m; Power Drift = 0.176 dB

Peak SAR (extrapolated) = 0.741 W/kg

**SAR(1 g) = 0.594 mW/g; SAR(10 g) = 0.428 mW/g**

Maximum value of SAR (measured) = 0.630 mW/g

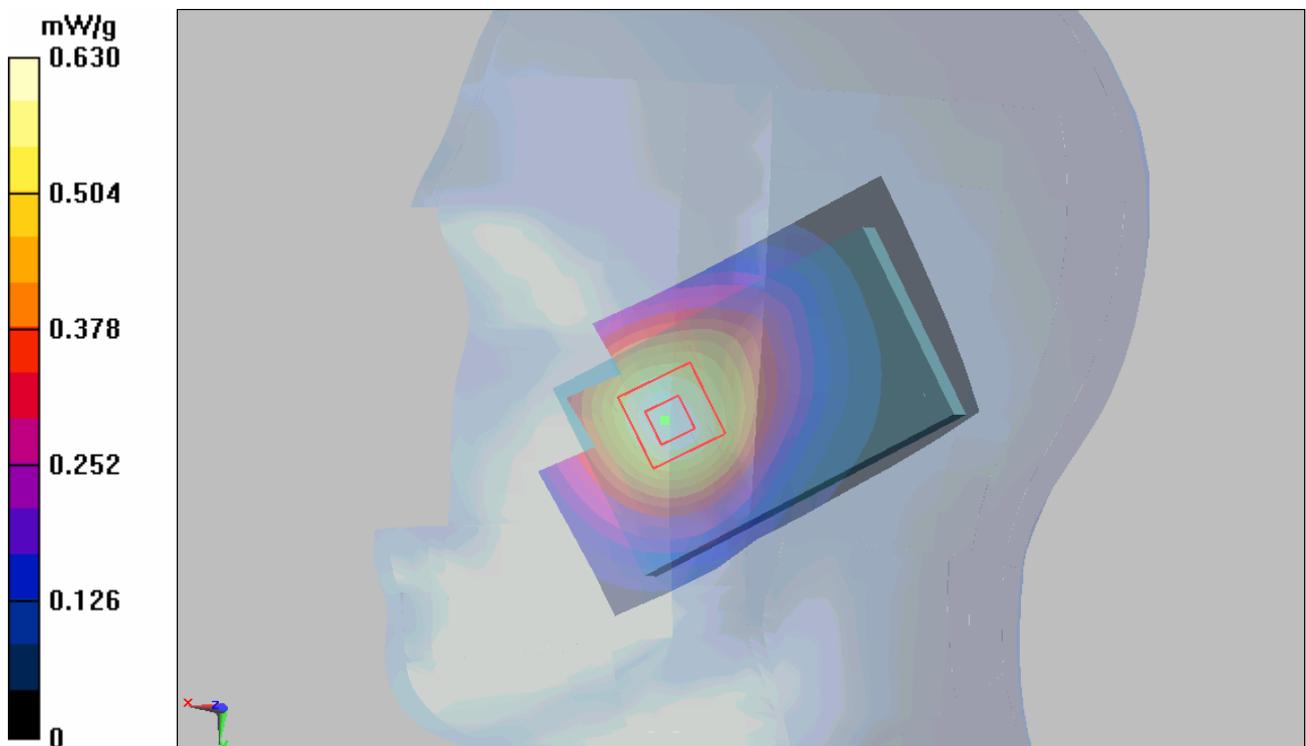

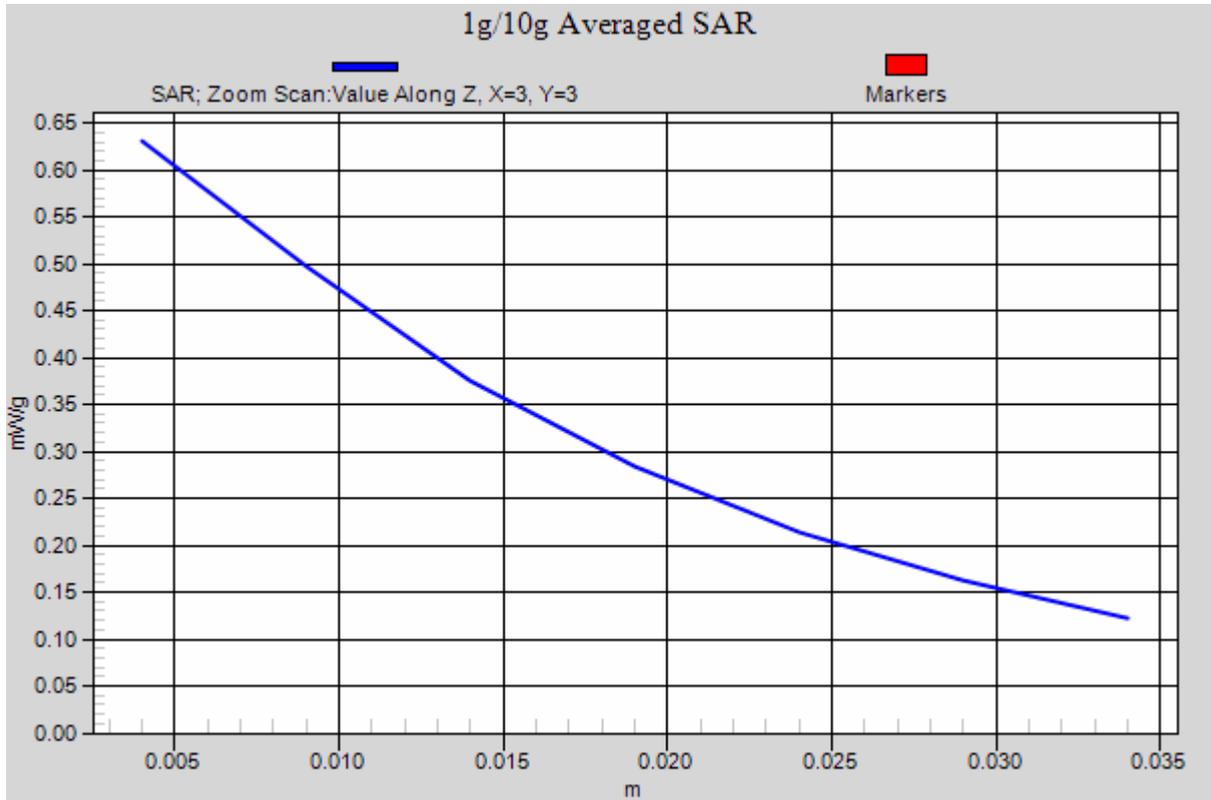


Figure 14 Right Hand Touch Cheek GSM 850 Channel 190

### GSM 850 Right Cheek Low

Date/Time: 2/22/2010 10:40:02 AM

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.883$  mho/m;  $\epsilon_r = 41.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.2, 9.2, 9.2); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Cheek Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.565 mW/g

**Cheek Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.53 V/m; Power Drift = -0.163 dB

Peak SAR (extrapolated) = 0.668 W/kg

**SAR(1 g) = 0.530 mW/g; SAR(10 g) = 0.383 mW/g**

Maximum value of SAR (measured) = 0.560 mW/g

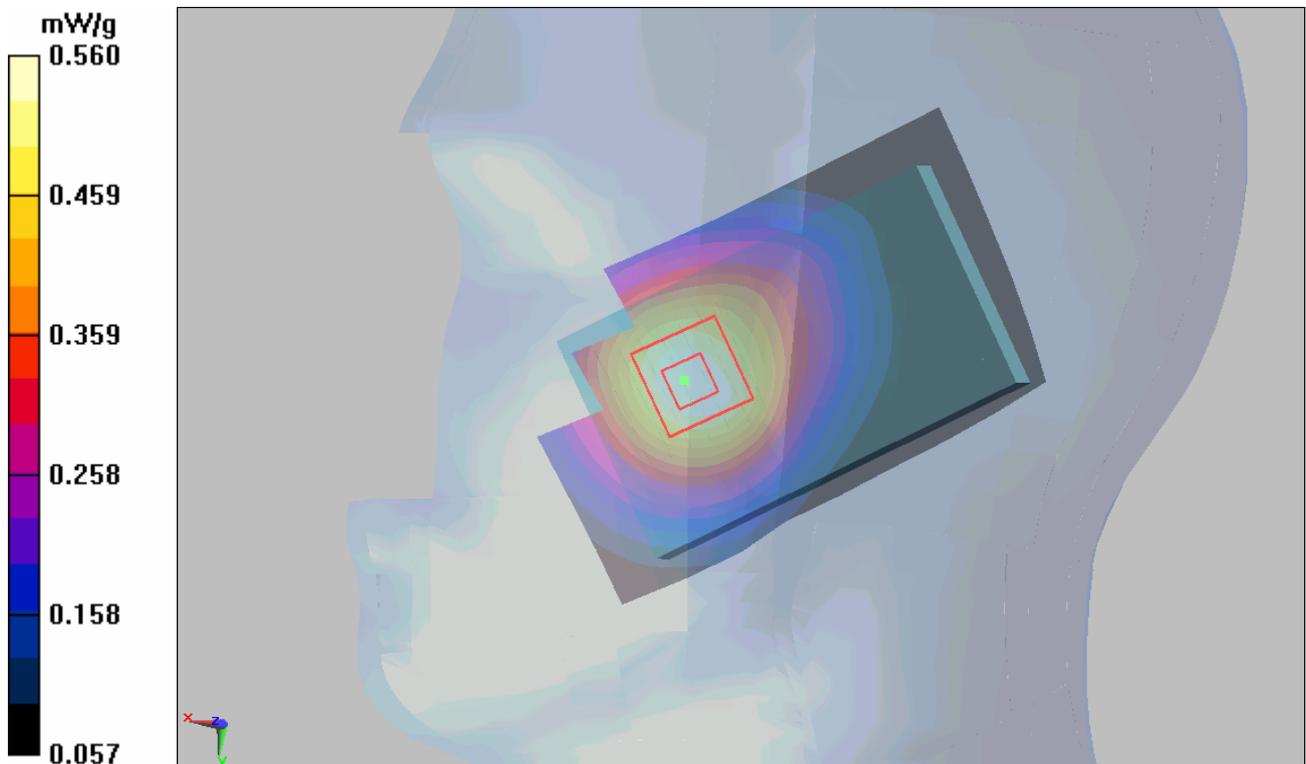


Figure 15 Right Hand Touch Cheek GSM 850 Channel 128

### GSM 850 Right Tilt Middle

Date/Time: 2/22/2010 11:01:18 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.894$  mho/m;  $\epsilon_r = 41.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.2, 9.2, 9.2); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Tilt Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.363 mW/g

**Tilt Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = -0.180 dB

Peak SAR (extrapolated) = 0.428 W/kg

**SAR(1 g) = 0.346 mW/g; SAR(10 g) = 0.258 mW/g**

Maximum value of SAR (measured) = 0.365 mW/g

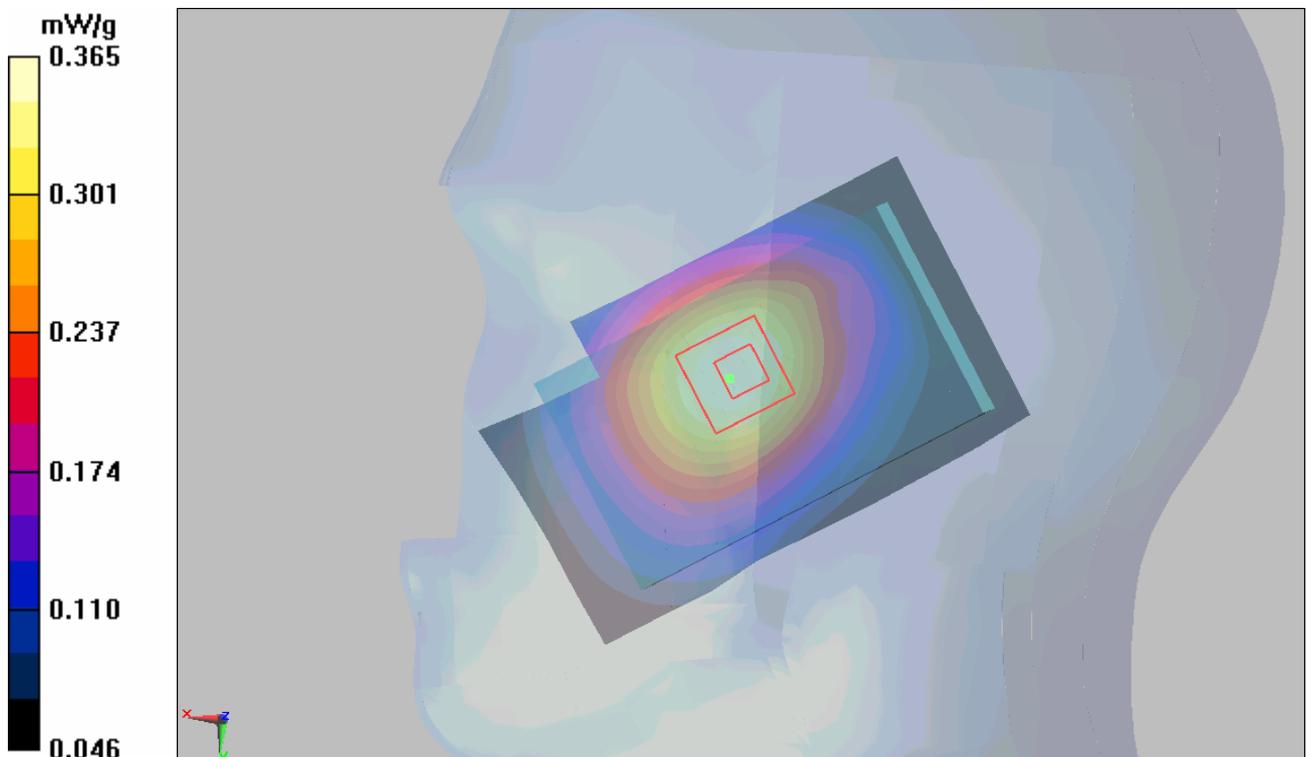


Figure 16 Right Hand Tilt 15° GSM 850 Channel 190

### GSM 850 Towards Ground High

Date/Time: 2/10/2010 10:29:08 AM

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 849$  MHz;  $\sigma = 0.992$  mho/m;  $\epsilon_r = 54.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Towards Ground High/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.714 mW/g

**Towards Ground High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.73 V/m; Power Drift = 0.078 dB

Peak SAR (extrapolated) = 0.906 W/kg

**SAR(1 g) = 0.677 mW/g; SAR(10 g) = 0.480 mW/g**

Maximum value of SAR (measured) = 0.720 mW/g

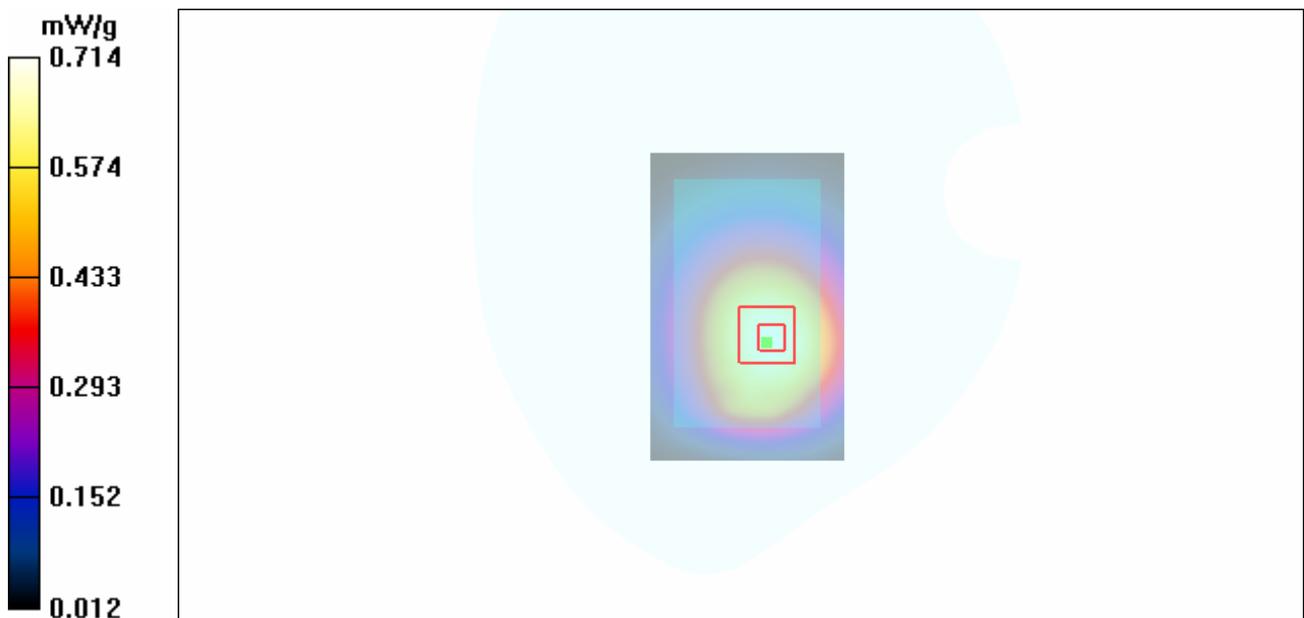


Figure 17 Body, Towards Ground, GSM 850 Channel 251

### GSM 850 Towards Ground Middle

Date/Time: 2/10/2010 10:09:18 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 54.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Towards Ground Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.935 mW/g

**Towards Ground Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 1.18 W/kg

**SAR(1 g) = 0.889 mW/g; SAR(10 g) = 0.632 mW/g**

Maximum value of SAR (measured) = 0.943 mW/g

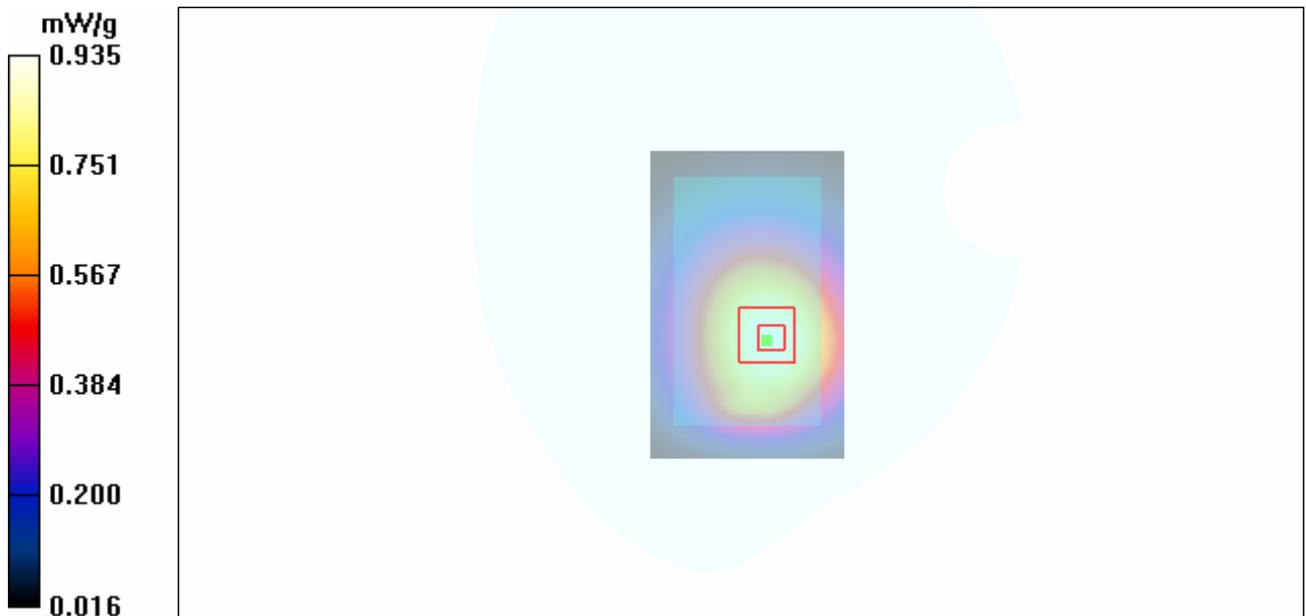


Figure 18 Body, Towards Ground, GSM 850 Channel 190

### GSM 850 Towards Ground Low

Date/Time: 2/10/2010 10:46:14 AM

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.969$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Towards Ground Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.01 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.949 mW/g; SAR(10 g) = 0.678 mW/g**

Maximum value of SAR (measured) = 1.00 mW/g

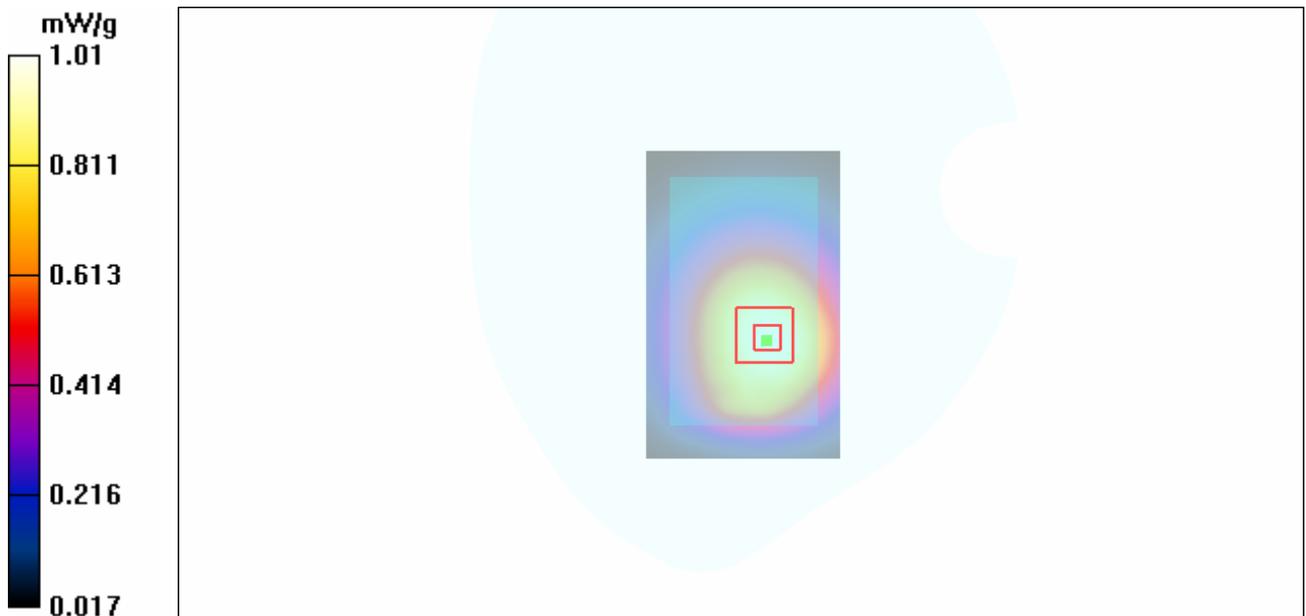


Figure 19 Body, Towards Ground, GSM 850 Channel 128

### GSM 850 Towards Phantom Middle

Date/Time: 2/10/2010 9:52:05 AM

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.979$  mho/m;  $\epsilon_r = 54.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Towards Phantom Middle/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.446 mW/g

**Towards Phantom Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.89 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 0.546 W/kg

**SAR(1 g) = 0.422 mW/g; SAR(10 g) = 0.306 mW/g**

Maximum value of SAR (measured) = 0.446 mW/g

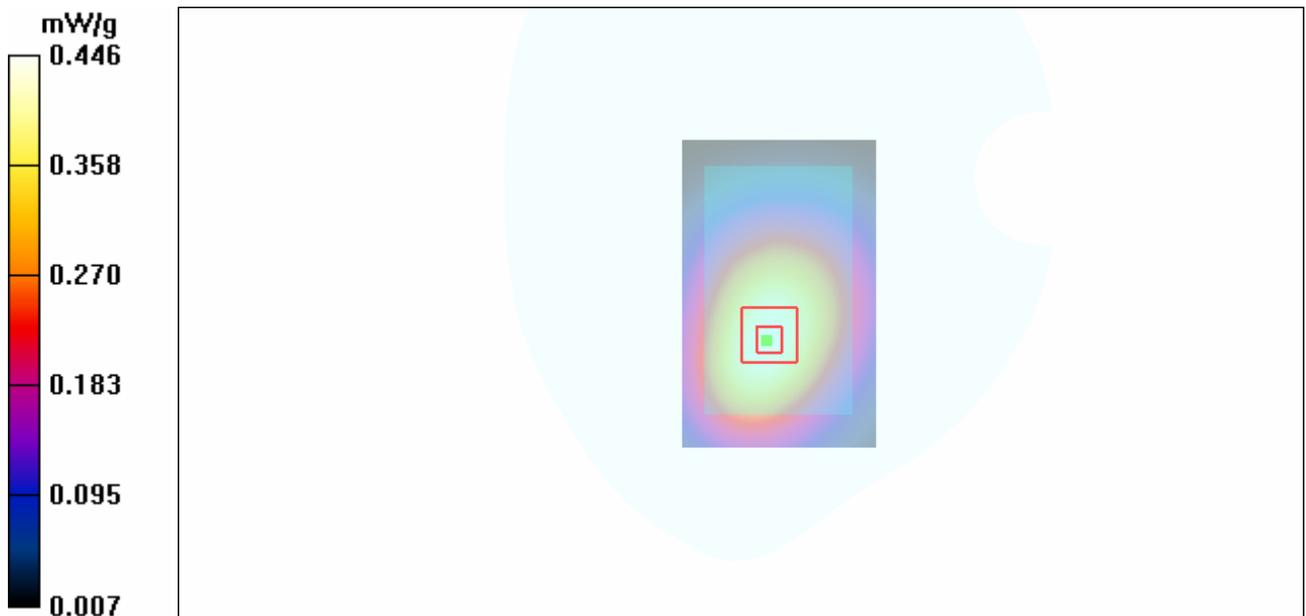


Figure 20 Body, Towards Phantom, GSM 850 Channel 190

### GSM 850 Towards Ground with Earphone Low

Date/Time: 2/10/2010 11:06:47 AM

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.969$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Towards Ground Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.956 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.904 mW/g; SAR(10 g) = 0.645 mW/g**

Maximum value of SAR (measured) = 0.960 mW/g

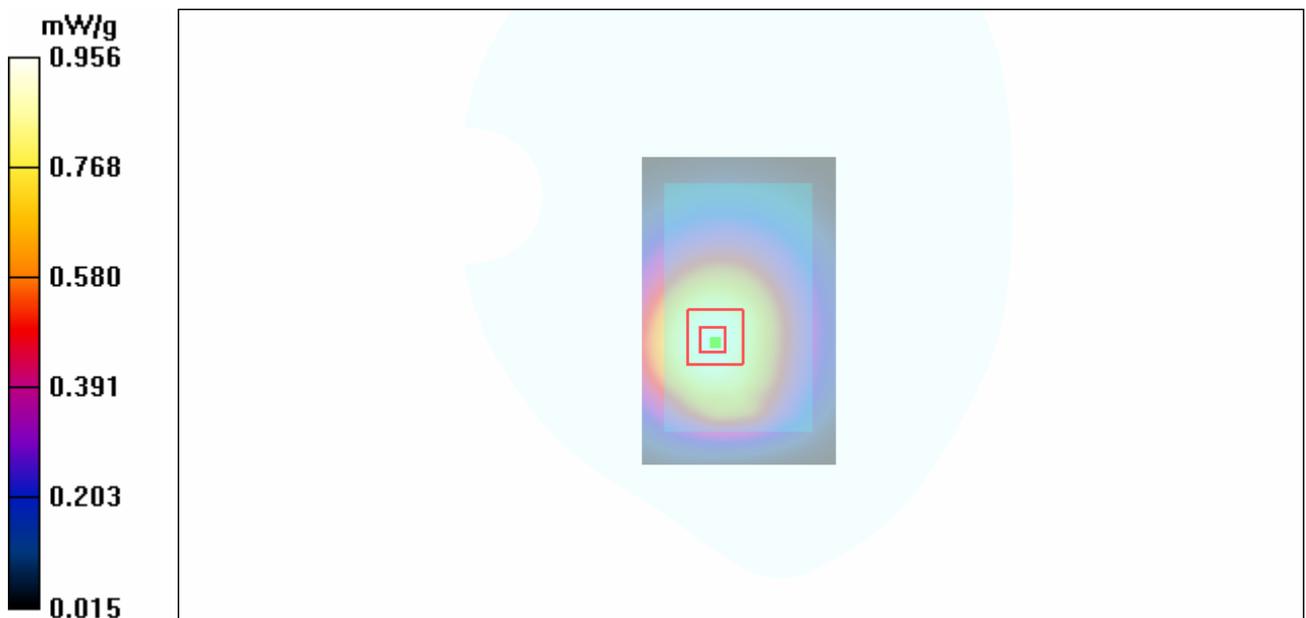


Figure 21 Body with Earphone, Towards Ground, GSM 850 Channel 128

### GSM 850 GPRS (3 timeslots Uplink) Towards Ground Low

Date/Time: 2/10/2010 11:29:30 AM

Communication System: GSM850 + GPRS(3Up); Frequency: 824.2 MHz; Duty Cycle: 1:2.767

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.969$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Towards Ground Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.24 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.6 V/m; Power Drift = -0.071 dB

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.792 mW/g**

Maximum value of SAR (measured) = 1.17 mW/g

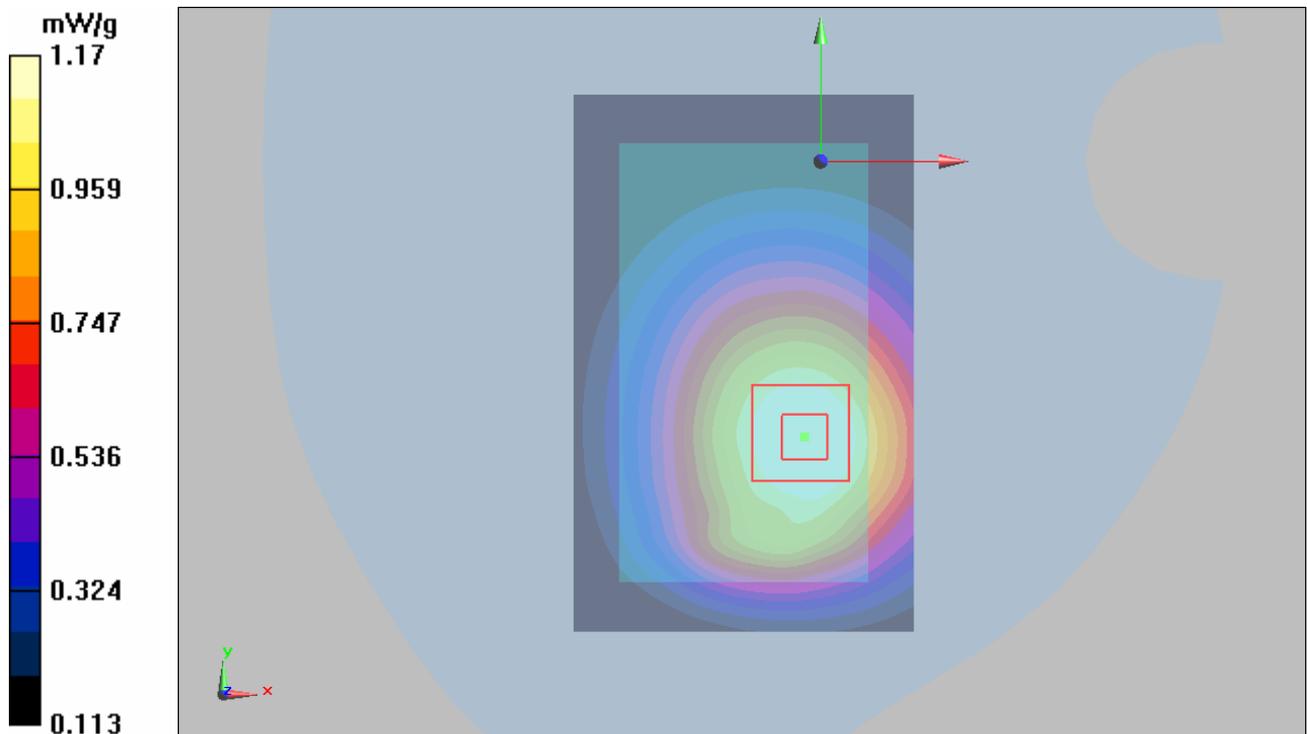


Figure 22 Body, Towards Ground, GSM 850 GPRS (3 timeslots Uplink) Channel 128

### GSM 850 EGPRS (2 timeslots Uplink) Towards Ground Low

Date/Time: 2/10/2010 11:50:28 AM

Communication System: GSM850 +EGPRS(2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.969$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

DASY5 Configuration:

Probe: EX3DV4 - SN3677; ConvF(9.11, 9.11, 9.11); Calibrated: 9/23/2009

Electronics: DAE4 Sn871; Calibrated: 11/11/2009

Phantom: SAM1; Type: SAM;

Measurement SW: DASY5, V5.0 Build 120; SEMCAD X Version 13.4 Build 45

**Towards Ground Low/Area Scan (51x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.45 mW/g

**Towards Ground Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm,


dz=5mm

Reference Value = 9.29 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 1.75 W/kg

**SAR(1 g) = 1.33 mW/g; SAR(10 g) = 0.946 mW/g**

Maximum value of SAR (measured) = 1.42 mW/g

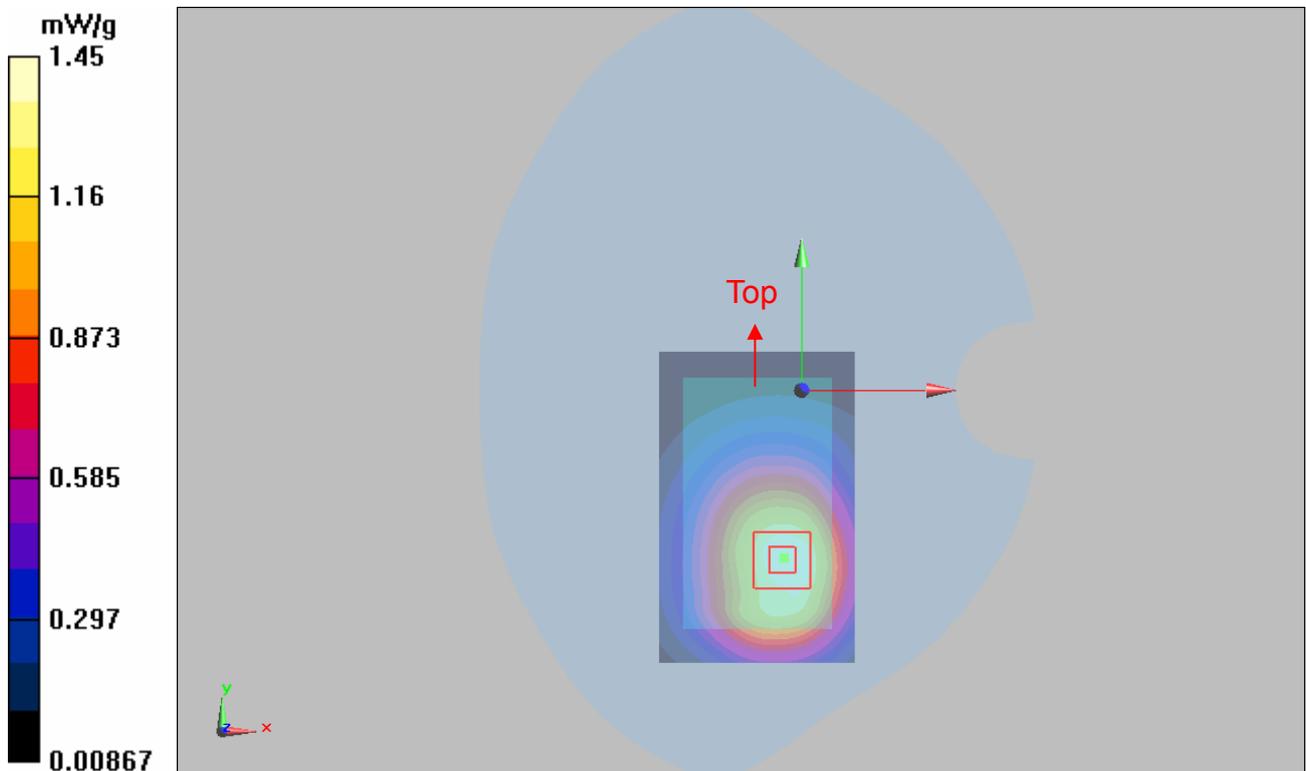

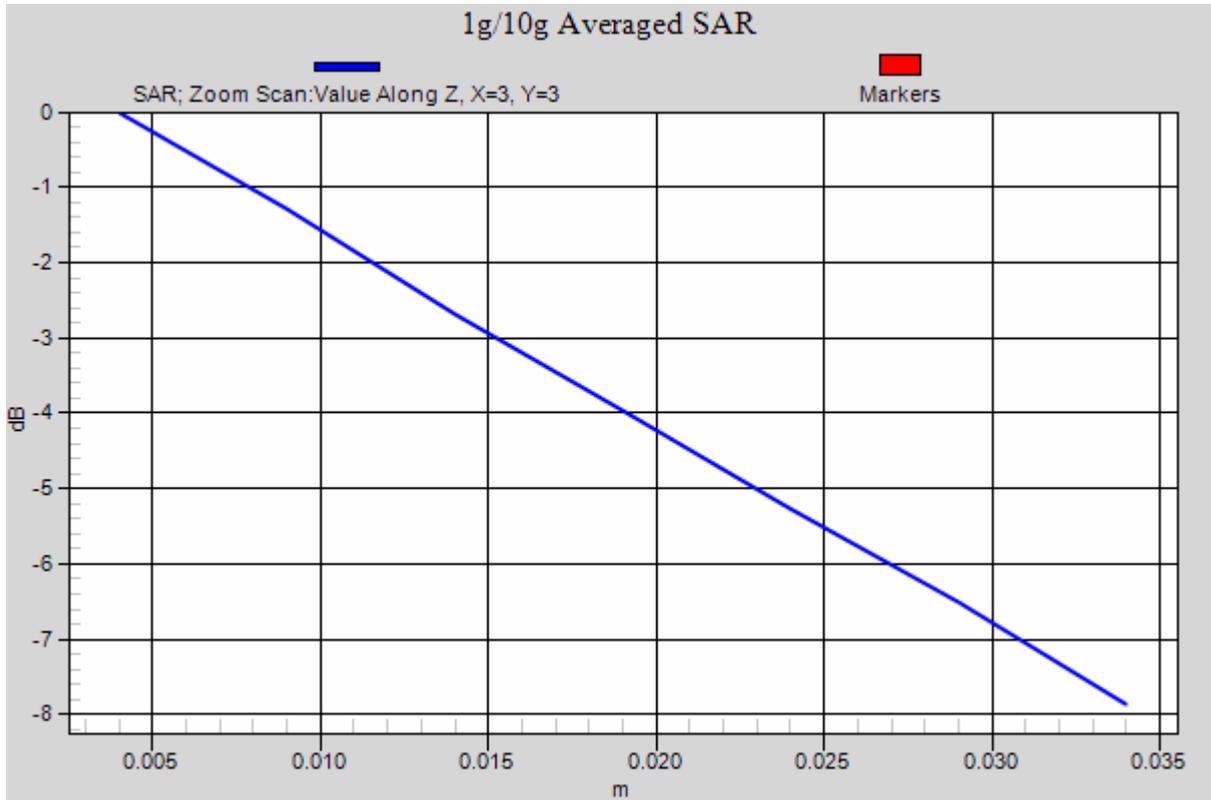


Figure 23 Body, Towards Ground, GSM 850 EGPRS (2 timeslots Uplink) Channel 128