

TEST REPORT

Report No.: SRMC2009-H024-E0010

Product Name: CDMA Digital Mobile Phone

Product Model: ZTE-C C366

ZTE C362+

Manufacture: ZTE Corporation

Specification: FCC Part22, Part 2, Part 15

(October 1, 2008 edition)

FCC ID: Q78-ZTE-CC366

Q78-ZTEC362A

The State Radio Monitoring Center

State Radio Spectrum Monitoring and Testing Center

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-68009202 Fax: 86-10-68009205

CONTENTS

1. General information	3
1.1 Notes of the test report	3
1.2 Information about the testing laboratory.....	3
1.3 Applicant's details	3
1.4 Manufacturer's details.....	3
1.5 Application details	4
1.6 Reference specification.....	4
1.7 Information of EUT	4
1.7.1 General information.....	4
1.7.2 EUT details	5
1.7.3 Auxiliary equipment details.....	5
2. Test information:	6
2.1 Summary of the test results:	6
2.2 Test result.....	7
2.2.1 RF Power Output –FCC Part2.1046.....	7
2.2.2 Effective Radiated Power-FCC Part22.913.....	8
2.2.3 Occupied Bandwidth-FCC Part2.1049	10
2.2.4 Spurious Emissions at antenna terminals-FCC Part2.1051/22.917	13
2.2.5 Band Edges Compliance-FCC Part2.1051/22.917	16
2.2.6 Frequency Stability-FCC Part2.1055/Part22.355	18
2.2.7 Radiated Spurious Emissions-FCC Part2.1053/22.917.....	19
2.2.8 Conducted Emissions-FCC Part15.107	23
2.2.9 Radiated Emissions-FCC Part15.109	25
2.3. List of test equipments	27
Appendix	28

1. General information

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio Monitoring Center.

The test results relate only to individual items of the samples which have been tested.

1.2 Information about the testing laboratory

Company: The State Radio Monitoring Center
State Radio Spectrum Monitoring and Testing Center
Address: No.80 Beilishi Road, Xicheng District, Beijing China
City: Beijing
Country or Region: China
Contacted person: Wang Junfeng
Tel +86 10 68009181 +86 10 68009202
Fax: +86 10 68009195 +86 10 68009205
Email: Wangjf@srrc.org.cn

1.3 Applicant's details

Company: ZTE Corporation
Address: Zhongxing Bldg, High-Tech Park, Nan Shan
City: ShenZhen City, GuangDong
Country or Region: P.R.China
Grantee Code: Q78
Contacted person: Royce Wang
Tel: + (86) 21 68895196
Fax: + (86) 21 50801070
Email: Wang.zhihui@zte.com.cn

1.4 Manufacturer's details

Company: ZTE Corporation
Address: Zhongxing Bldg, High-Tech Park, Nan Shan
City: ShenZhen City, GuangDong
Country or Region: P.R.China
Grantee Code: Q78
Contacted person: Royce Wang
Tel: + (86) 21 68895196
Fax: + (86) 21 50801070
Email: Wang.zhihui@zte.com.cn

1.5 Application details

Date of receipt of application: 21th Mar. 2008

Date of receipt of test sample: 21th Mar. 2008

Date of test: 22th Mar. 2008 to 9th Apr. 2008

1.6 Reference specification

FCC Part22, Part 2, Part 15 (October 1, 2008 edition)

1.7 Information of EUT

1.7.1 General information

Name of EUT	CDMA Digital Mobile Phone
FCC ID	Q78-ZTE-CC366 Q78-ZTECC362A
Frequency range	Tx:824~849MHz Rx:869~894MHz
Rated output power	23.0dBm
Modulation type	OQPSK
Duplex mode	FDD
Duplex spacing:	45MHz
Antenna type	Fixed Internal
Power Supply	Battery or charger
Rated Power Supply Voltage	3.7V
Extreme Temperature	-30°C~+50°C

1.7.2 EUT details

Name	Model	Serial number
CDMA Digital Mobile Phone	ZTE C362+	321180340001

1.7.3 Auxiliary equipment details

Equipment	Charger
Manufacturer	Shenzhen Ruide Electronic Industrial Co. Ltd.
Model Number	STC-A22O50U8-C


Equipment	Battery
Manufacturer	ZTE Corporation
Model Number	Li3706T42P3h553457
Capacity	1000mAh
Rated Voltage	3.7V

2. Test information:

2.1 Summary of the test results:

No.	Test case	FCC reference	Verdict
1	RF Power Output	2.1046	Pass
2	Effective Isotropic Radiated Power	22.913	Pass
3	Occupied Bandwidth,	2.1049	Pass
4	Spurious Emissions at antenna terminals	2.1051/22.917	Pass
5	Band Edges Compliance	2.1051/22.917	Pass
6	Frequency Stability	2.1055/22.355	Pass
7	Radiated Spurious Emissions	2.1053/22.917	Pass
8	Conducted emissions	15.107	Pass
9	Radiated emissions	15.109	Pass

Note: The ZTE-C C366 and ZTE C362+ are all the CDMA Digital Mobile Phones operating in the same frequency bands. These two devices are all the same on every functional aspect. The only difference between these two models of mobile phones is the enclosure color due to the marketing requirements. Therefore, the test results of ZTE C362+ could represent all the features which ZTE-C C366 has.

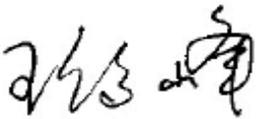This Test Report Is Issued by: 	Checked by: 
Tested by: 	Issued date: 2009.4.28


2.2 Test result

2.2.1 RF Power Output –FCC Part2.1046

Ambient condition:

Temperature	Relative humidity	Pressure
18°C	40%	102.5kPa

Test Setup:

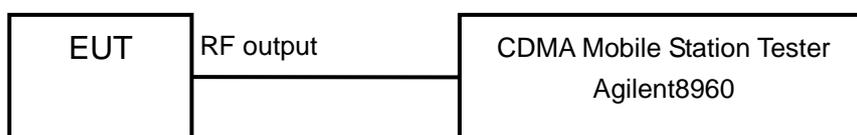

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels No1013, No384 and No777 (Bottom, middle and top channels of CDMA 1X band)

Limits	$\leq 30\text{dBm}$
--------	---------------------

Test result:


Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
824.70	1013	24.9
836.52	384	24.4
848.31	777	24.4

2.2.2 Effective Radiated Power-FCC Part22.913


Ambient condition:

Temperature	Relative humidity	Pressure
18°C	40%	102.5kPa

Test setup

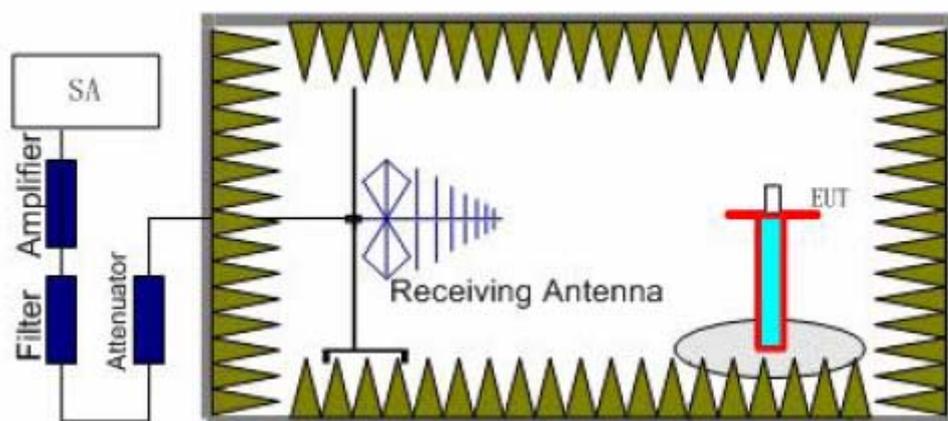

Step 1

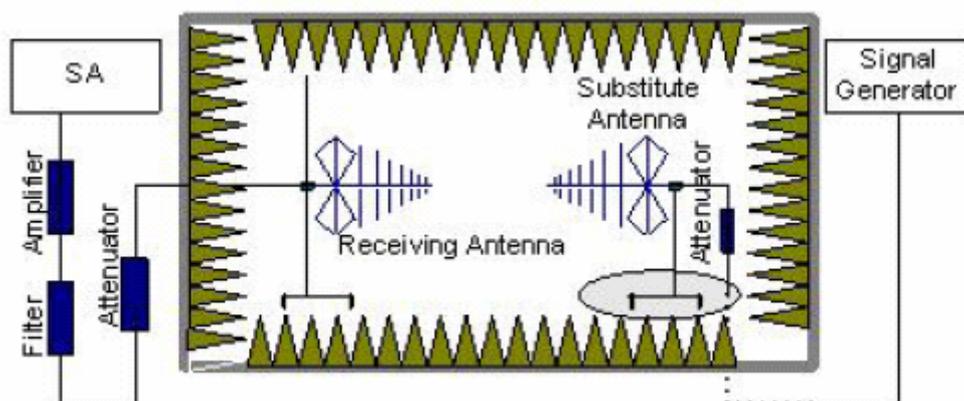

Step 2

Test procedure:

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a

maximum value. A RMS detector is used and RBW is set to 3MHz. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

The measurement will be conducted at three channels No1013, No384 and No777 (Bottom, middle and top channels of CDMA 1X band)

Limits	$\leq 38.5\text{dBm}$
--------	-----------------------

Test result:


Carrier frequency (MHz)	Channel No.	E.R.P. (dBm)
824.70	1013	21.9
836.52	384	22.3
848.31	777	21.8

2.2.3 Occupied Bandwidth-FCC Part2.1049

Ambient condition:

Temperature	Relative humidity	Pressure
18°C	40%	102.5kPa

Test Setup:

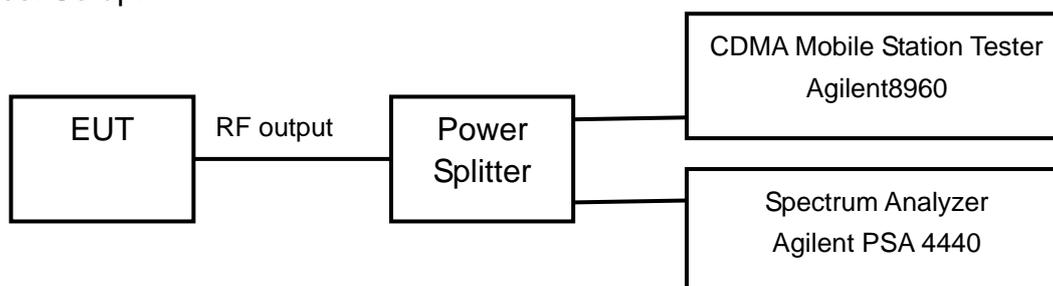


Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer. The measurement will be conducted at three channels No1013, No384 and No777 (Bottom, middle and top channels of CDMA 1X band)


Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:


Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (MHz)
824.70	1013	1.28
836.52	384	1.27
848.31	777	1.27

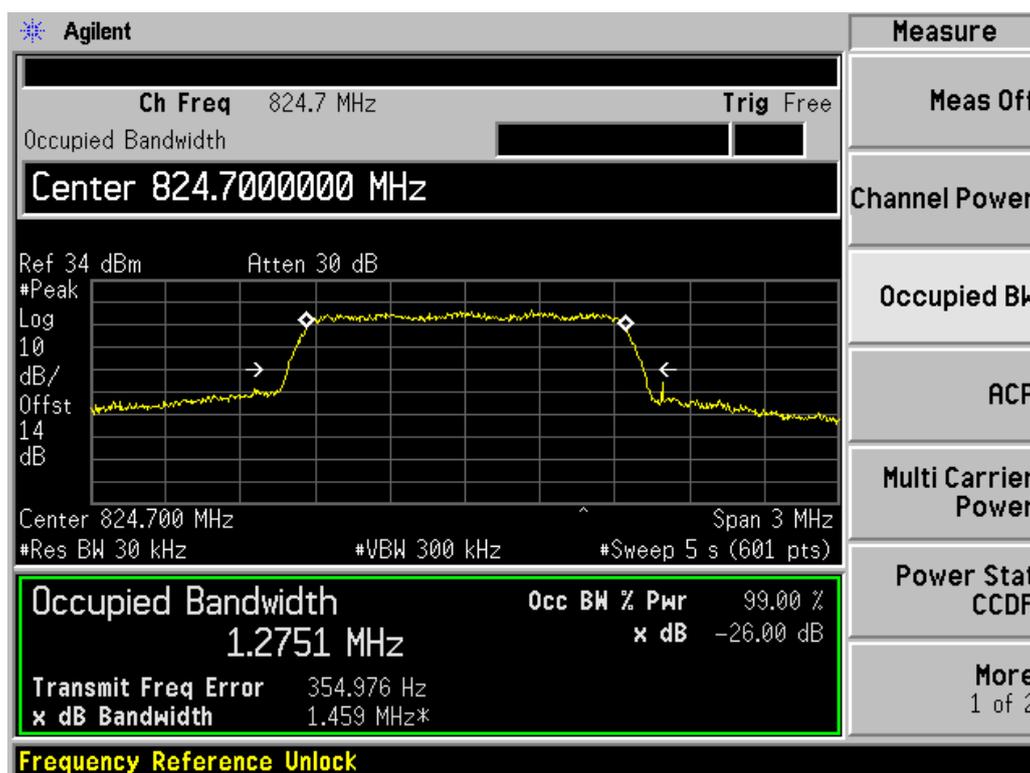

Channel 1013

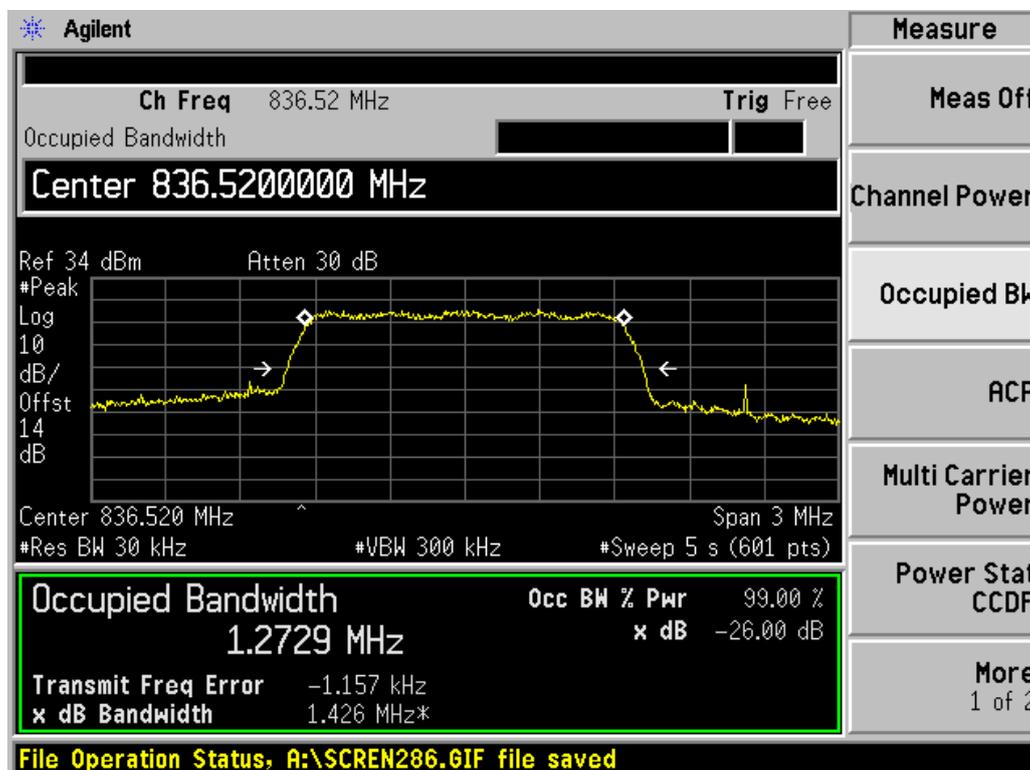

Channel 384

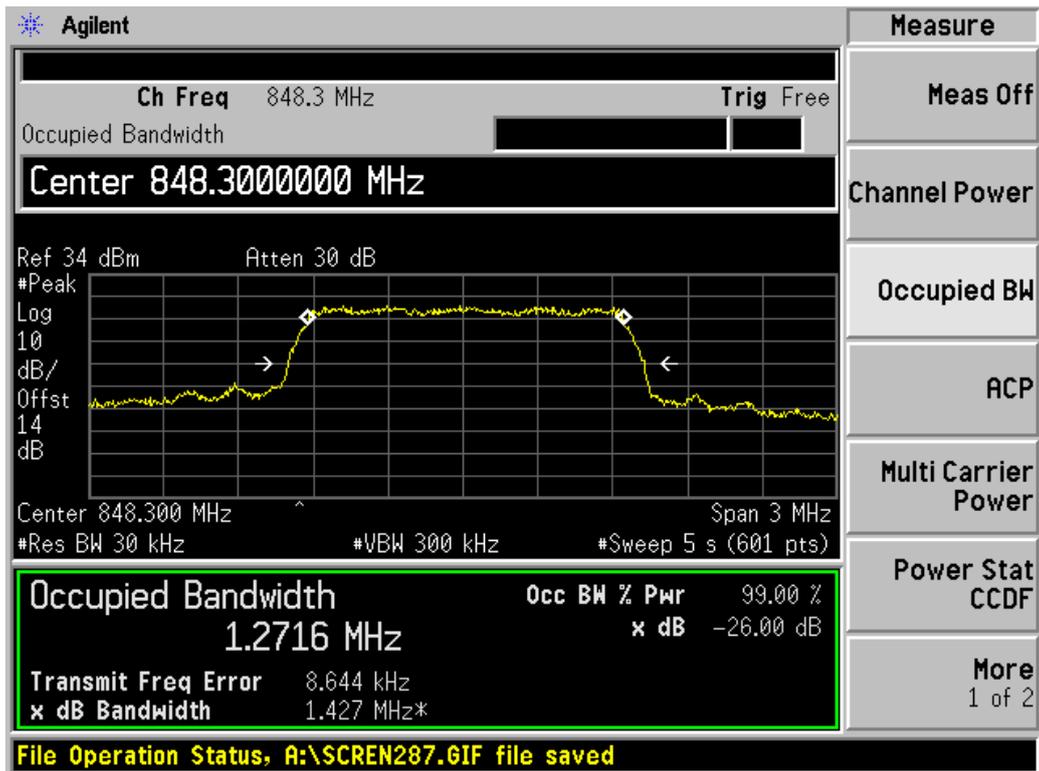

- Measure
- Meas Off
- Channel Power
- Occupied BW
- ACP
- Multi Carrier Power
- Power Stat CCDF
- More 1 of 2


Channel 777

2.2.4 Spurious Emissions at antenna terminals-FCC Part2.1051/22.917

Ambient condition:

Temperature	Relative humidity	Pressure
18°C	40%	102.5kPa

Test Setup:

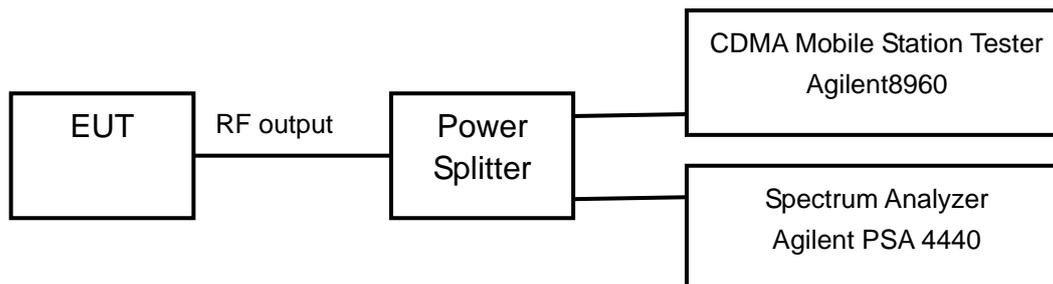

Test procedure:


After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.

The measurement will be conducted at three channels No1013, No384 and No777 (Bottom, middle and top channels of CDMA 1X band)


Limits	≤ -13dBm
--------	----------

Test result:

Refer to the following figures.

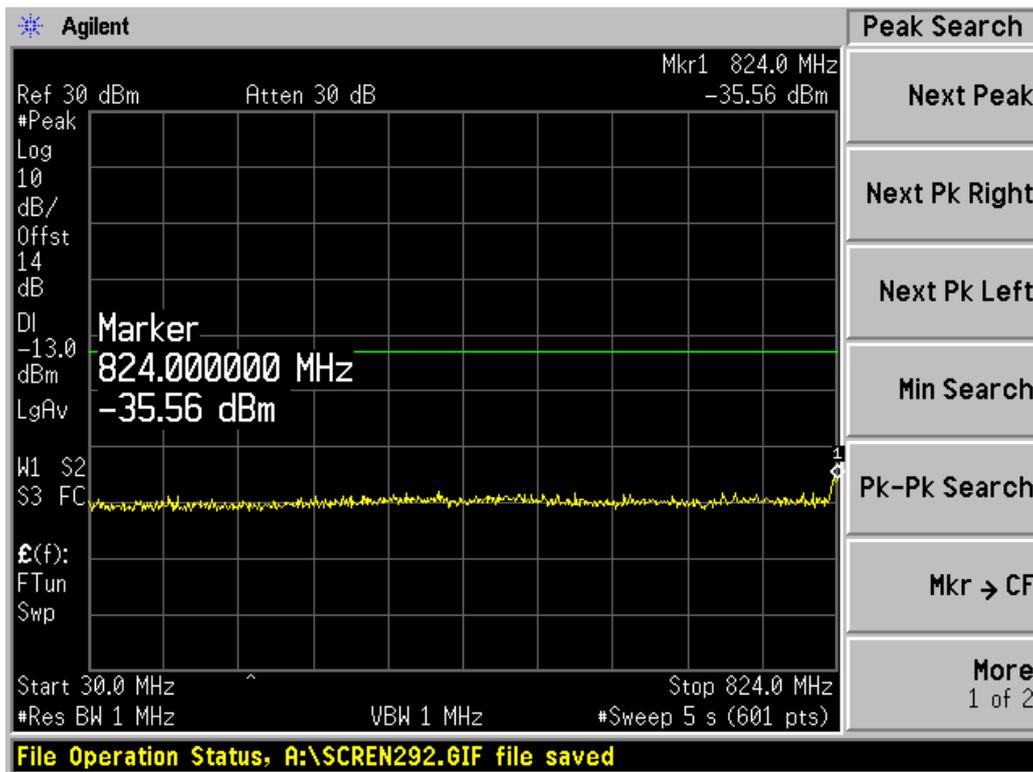


Channel 384, 30MHz~824MHz

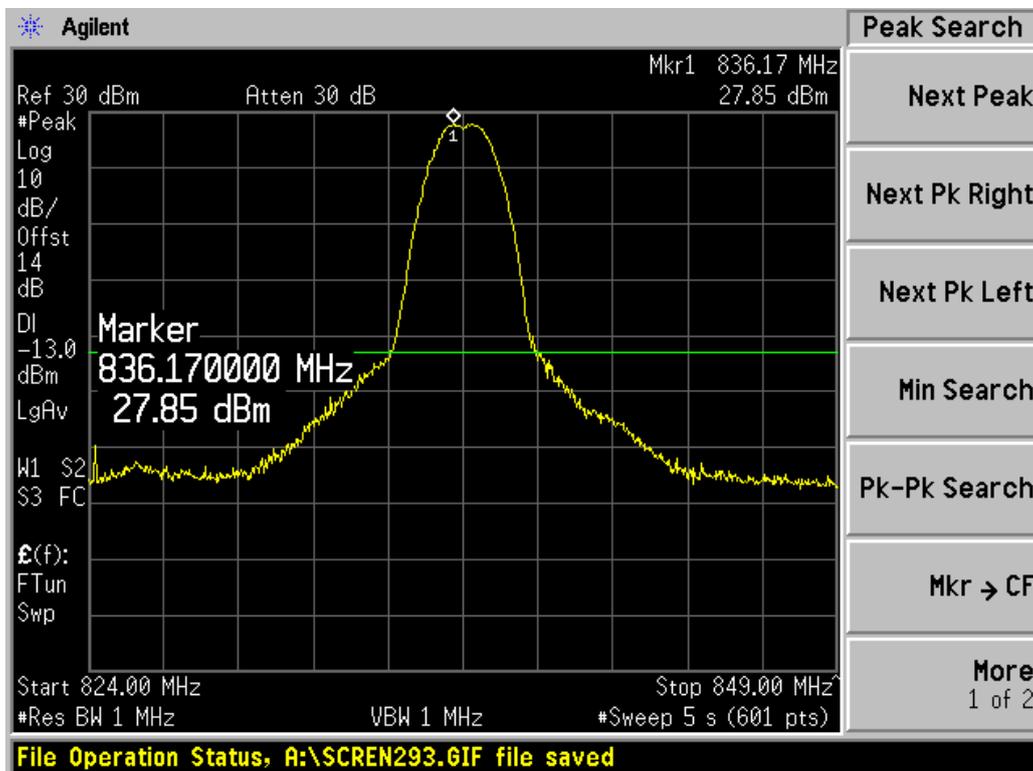


Channel 384, 824MHz~849MHz

Note: The signal beyond the limit is carrier.

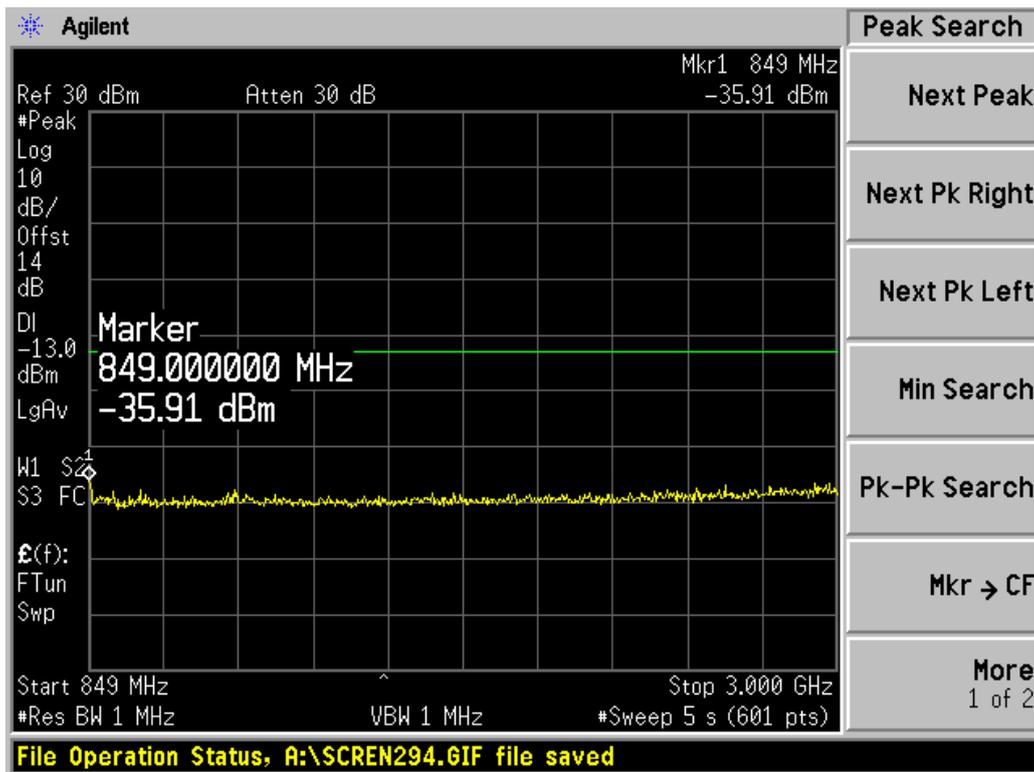

Channel 384, 849MHz~3GHz

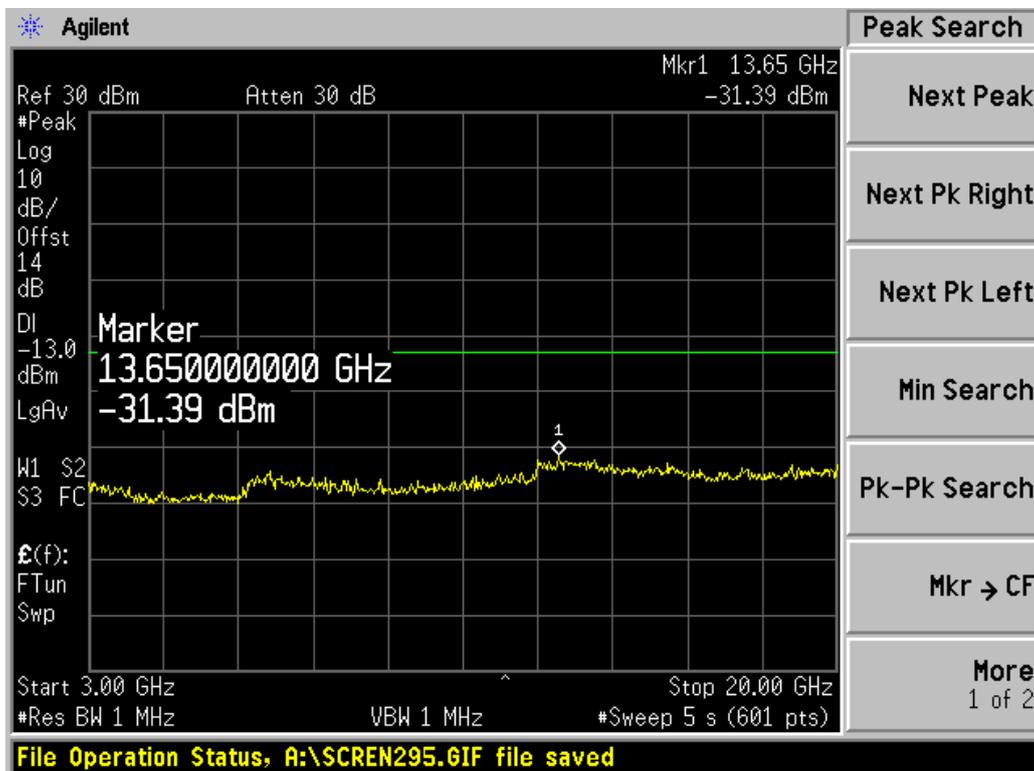


Channel 384, 3GHz~20GHz

2.2.5 Band Edges Compliance-FCC Part2.1051/22.917

Ambient condition:

Temperature	Relative humidity	Pressure
18°C	40%	102.5kPa

Test Setup:

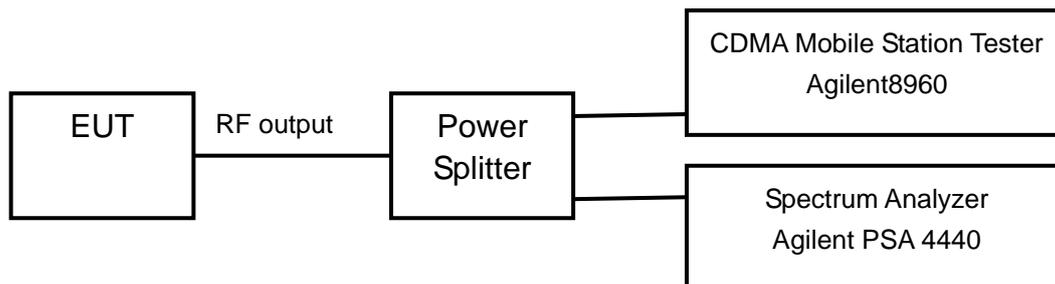

Test procedure:


After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to 3kHz on spectrum analyzer.

The measurement will be conducted at two channels No1013 and No777(Bottom and top channels of CDMA 1X band)


Limits	≤ -13dBm
--------	----------

Test result:

Refer to the following figures.

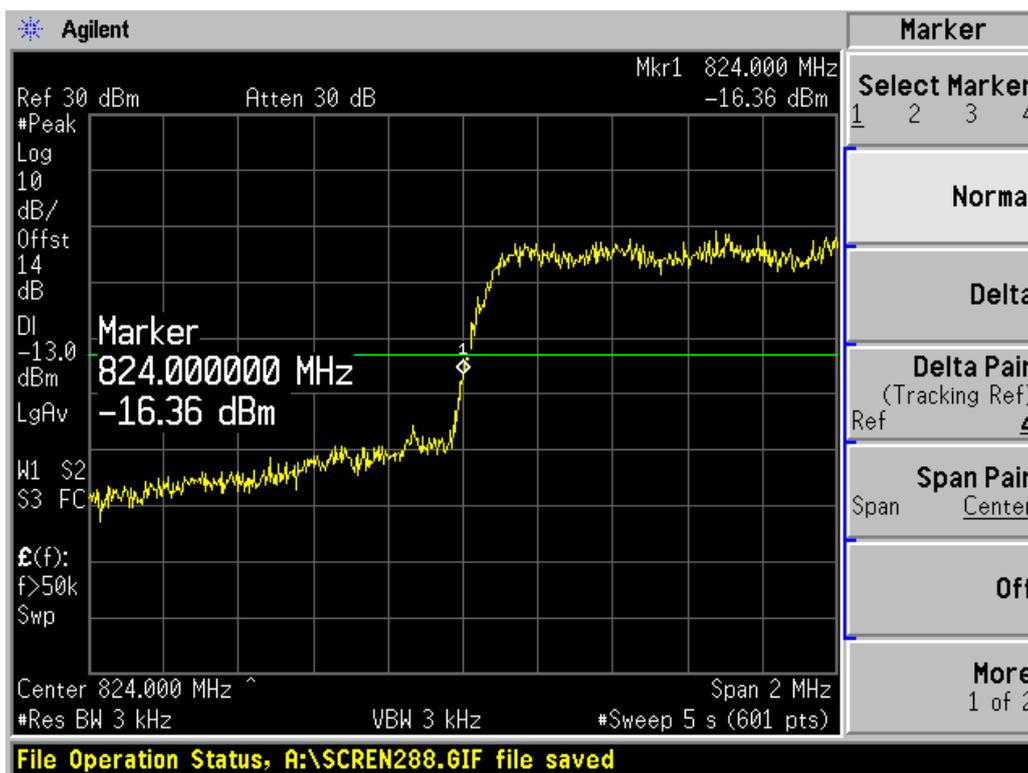

Channel 1013

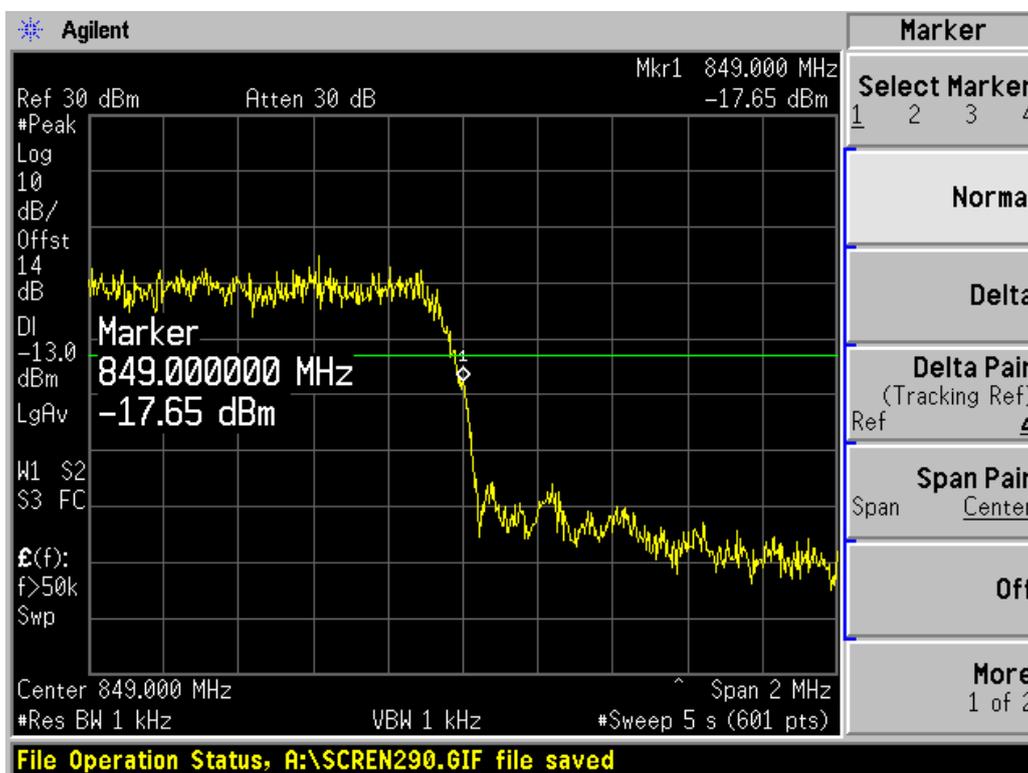


Channel 777

2.2.6 Frequency Stability-FCC Part2.1055/Part22.355

Ambient condition:

Temperature	Relative humidity	Pressure
18°C	40%	102.5kPa

Test setup:

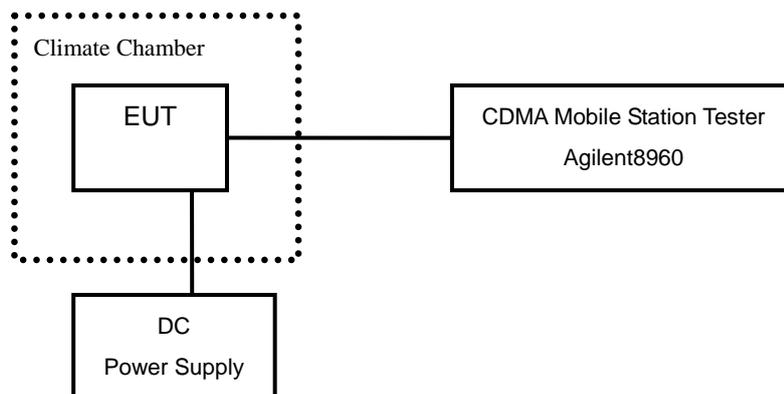

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -30 to +50° C in 10° C step size, and also the DC power supply voltage to the EUT is varied from 3.3 to 4.2 V.

Limits: No specific frequency stability requirements in part 2.1055 and part 22.355

Test Result:

Temperature(° C)	Test Result (ppm)		
	Channel 1013	Channel 384	Channel 777
-30	---	0.002	---
-20	---	0.001	---
-10	---	0.000	---
0	---	0.000	---
+10	---	0.001	---
+20	---	0.002	---
+30	---	0.003	---
+40	---	0.004	---
+50	---	0.003	---


Voltage (V)	Test Result (ppm)		
	Channel 1013	Channel 384	Channel 777
3.4	---	0.003	---
4.2	---	0.002	---

2.2.7 Radiated Spurious Emissions-FCC Part2.1053/22.917


Ambient condition

Temperature	Relative humidity	Pressure
18°C	40%	102.5kPa

Test Setup:

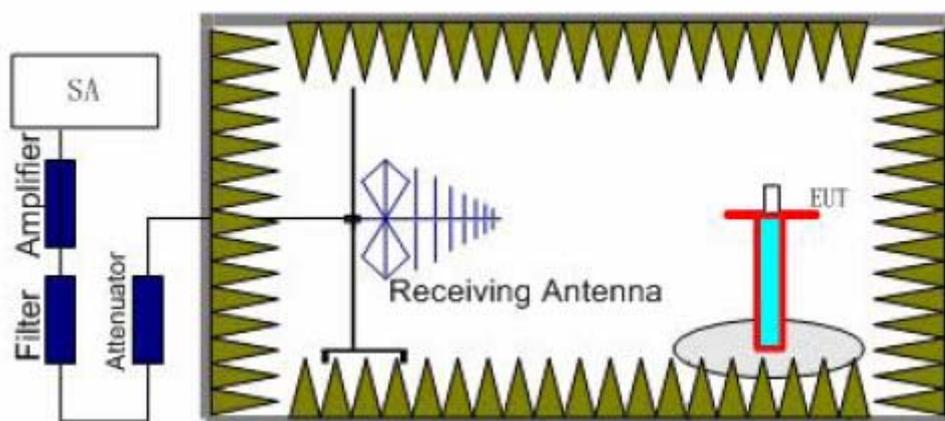

Step 1

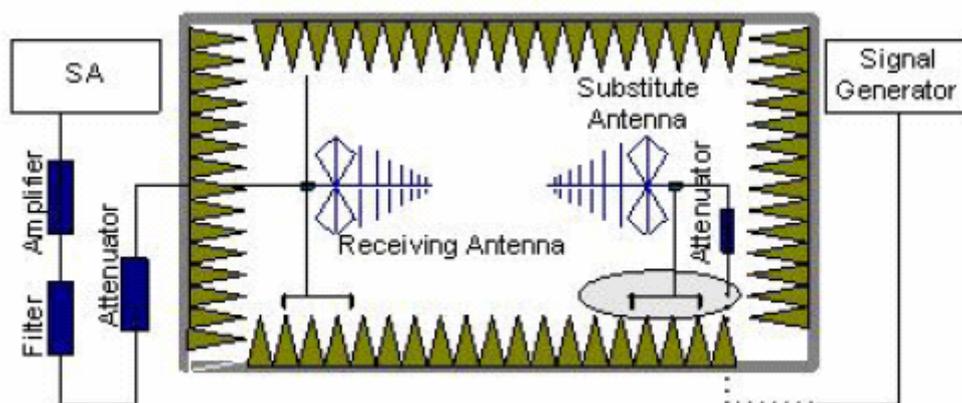

Step 2

Test procedure:

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of

the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

Calculation procedure:

The data of cable loss, antenna gain and air loss has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss, antenna gain and air loss. The basic equation with a sample calculation is as followed:

$$P=P_R+L_C+L_A-G$$

Where

P: Power of the Radiated Spurious Emissions (dBm)

P_R: reading of the receiver (dBm)

L_C: Cable Lose (dB)

L_A: Air loss (dB)

G: Antenna Gain (dBi)

Assumed the reading of the receiver is -60dBm. A cable lose of 10dB, an air lose of 30dB and an antenna gain of 11dBi are added.


$$P=P_R+L_C+L_A-G=-60+10+30-11=-31dBm$$

The measurement will be conducted at one channel No384 (middle channel of CDMA 1X band)

Test result:


Refer to the following figures.

Limits	≤ -13dBm
--------	----------

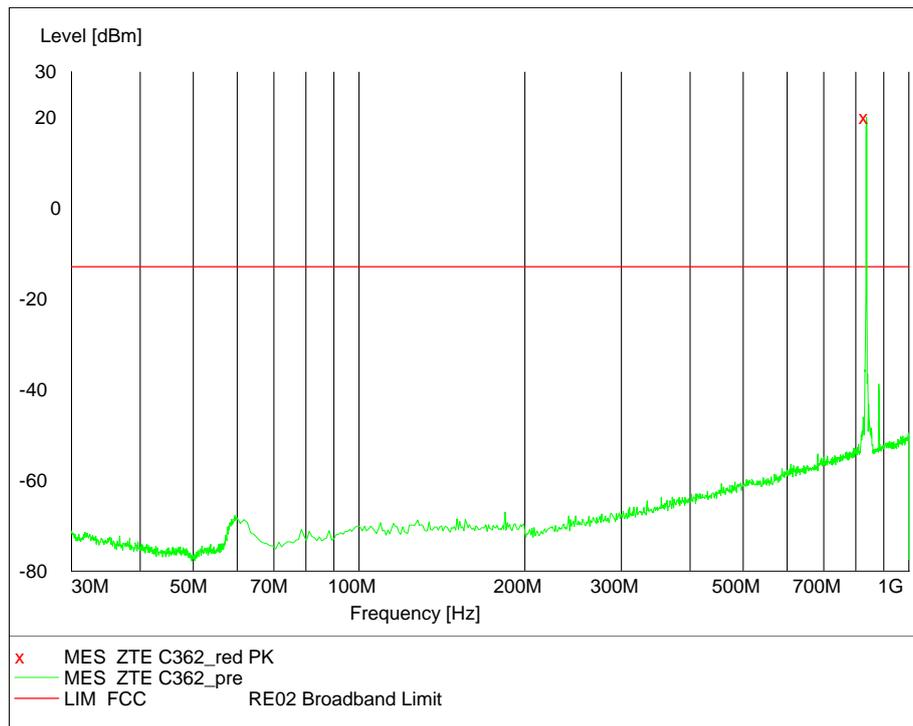


Channel 384, 30MHz~1GHz (Traffic Mode)

Note: The signal beyond the limit is carrier.

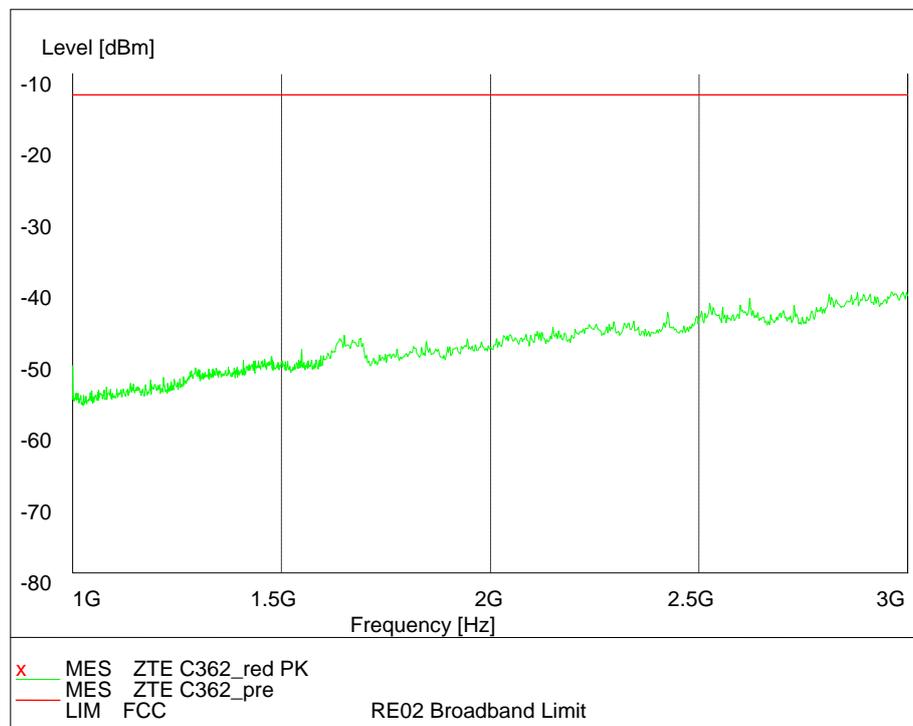

Channel 384, 1GHz~3GHz (Traffic Mode)

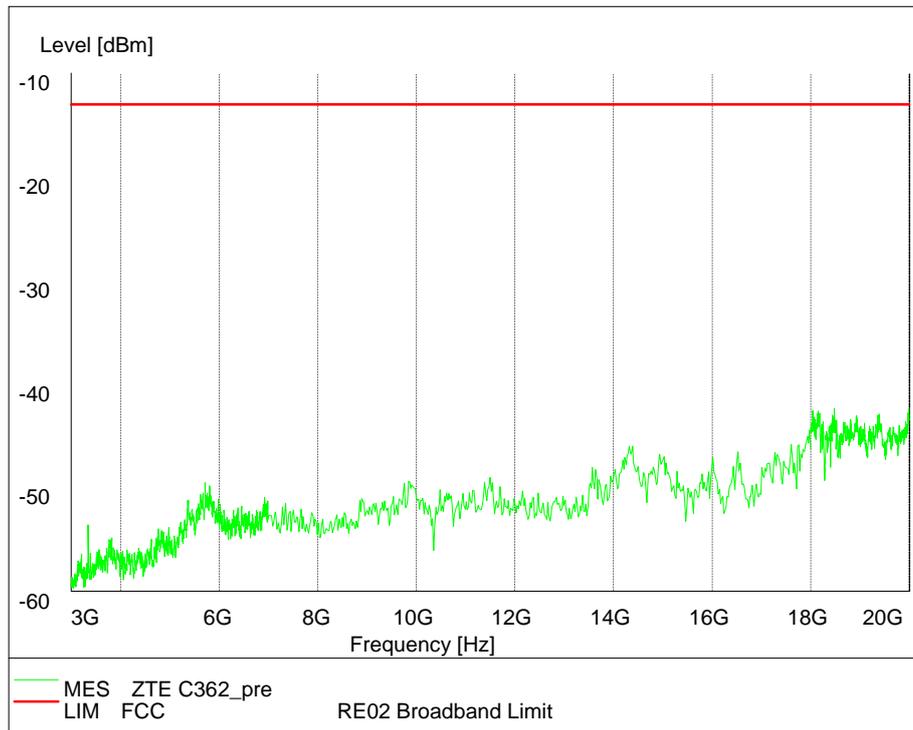


Channel 384, 3GHz~20GHz (Traffic Mode)

2.2.8 Conducted Emissions-FCC Part15.107

Ambient condition:

Temperature	Relative humidity	Pressure
18°C	40%	102.5kPa

Test Setup:

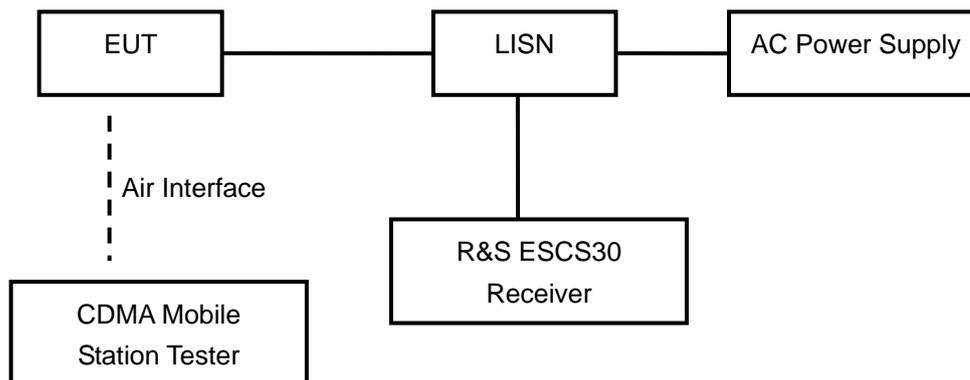

Test Procedure:


The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The EUT is connected to LISN and LISN is connected to the reference ground. All other supplemental devices are connected with EUT through other LISN. The distance between EUT and LISN is 80cm. The measurement should be done both L line and N line. The receiver uses both average detector and quasi-peak detector. The EUT is worked in idle mode. The output power of the EUT is controlled by the tester and driven to maximum value.

Frequency of Emission(MHz)	Limits(dB μ V)	
	Quasi-peak	Average
0.15~0.5	66 to 56*	56 to 46*
0.5~5	56	46
5~30	60	50


Note: * Decreases with the logarithm of the frequency

Test result:

Refer to the following figures.

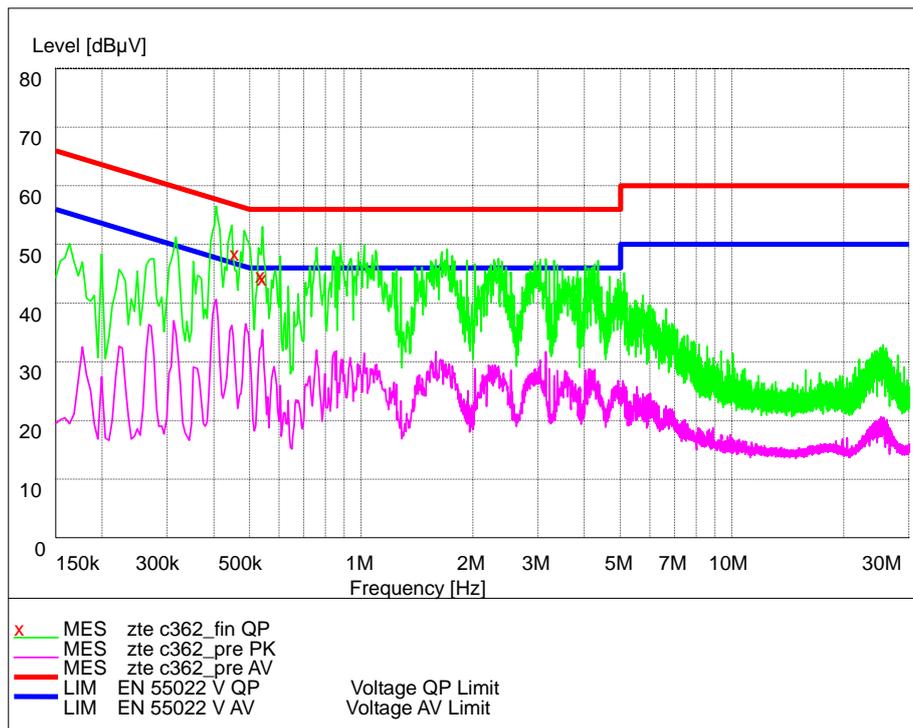

L Line

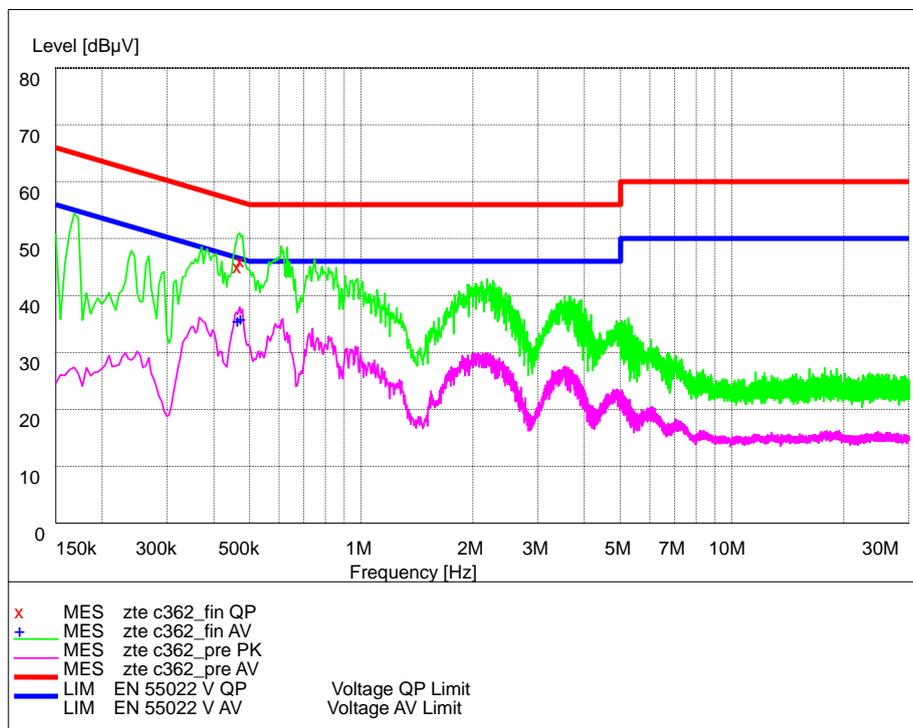


N Line

2.2.9 Radiated Emissions-FCC Part15.109

Ambient condition:

Temperature	Relative humidity	Pressure
18°C	40%	102.5kPa

Test Setup:

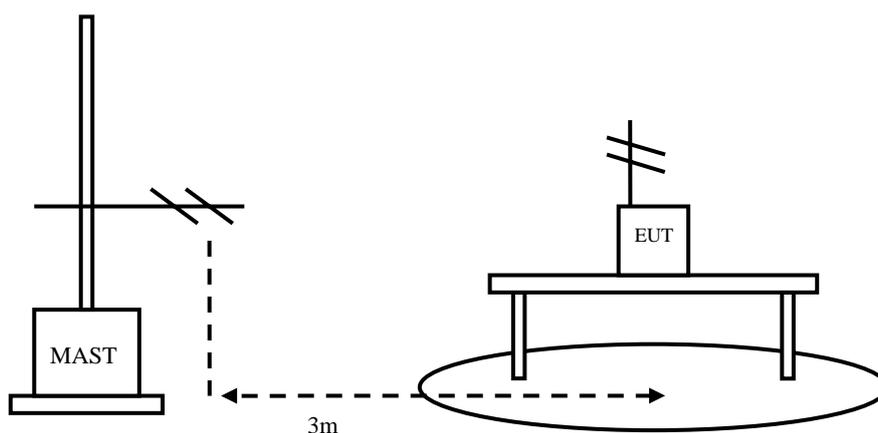

Test Procedure:

The EUT and receive antenna shall be placed to SAC (semi anechoic chamber) upon a non-metallic turn table. The receive antennas shall be moved from 1 to 4 meters. The distance between equipment and receive antenna shall be 3 meters.

Testing shall operate the EUT in idle modes of operation and cable positions in a test set-up which is representative of typical system configurations, as declared by the manufacturer. The output port shall be terminated with 50 ohms.


Then start the test software ES-K1. Sweep the whole frequency band through the range from 30MHz to 1GHz, using receive log period antenna HL562.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Frequency of Emission(MHz)	Limits	
	Unit($\mu\text{V}/\text{m}$)	Average($\text{dB}\mu\text{V}/\text{m}$)
30~88	100	40
88~216	150	43.5
216~960	200	46
960~1000	500	54

Test result:
 Refer to the following figures.

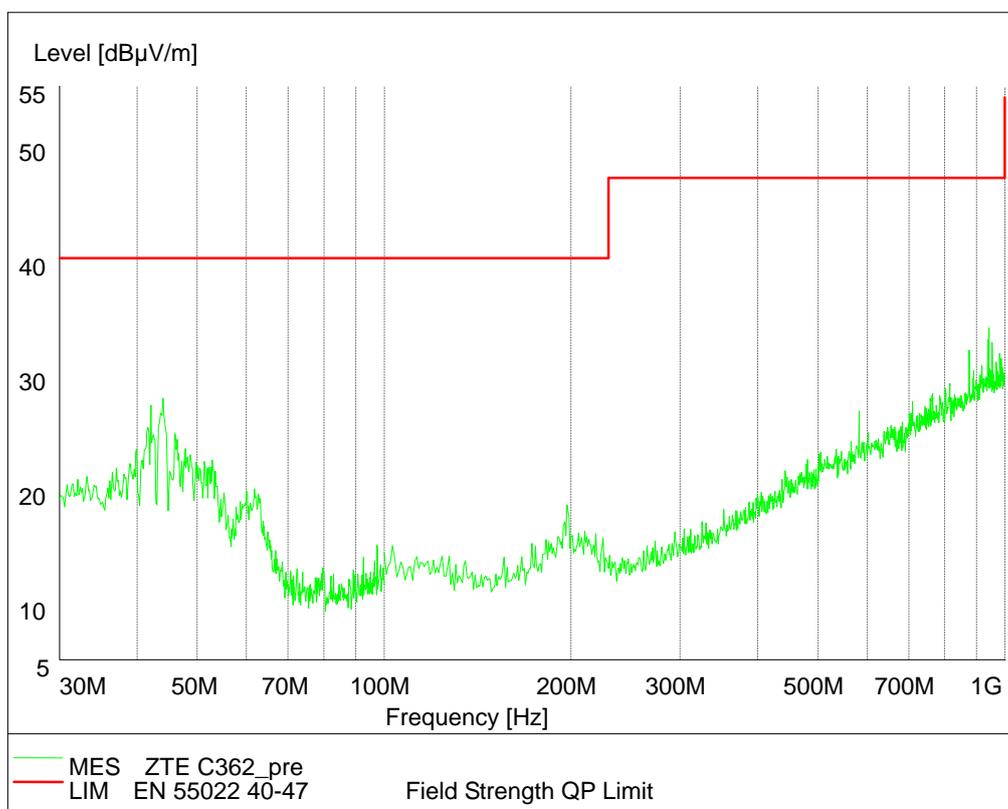

2.3. List of test equipments

No.	Name/Model	Manufacturer	S/N	Calibration Date
1	8960 E5515C Mobile Station Tester	Agilent	GB44050904	Mar. 2009
2	PSA E4440A Spectrum Analyzer	Agilent	MY41000183	Mar. 2009
3	66309B DC Power Supply	Agilent	MY43000461	Aug. 2008
4	1506A Power Splitter	Weinschel	MN154	Aug. 2008
5	9.080m×5.255m×3.525m Shielding room	FRANKONIA	-----	Aug. 2008
6	ESI 40 EMI test receiver	R&S	100015	Aug. 2008
7	SMR 20 Signal generator	R&S	100086	Aug. 2008
8	CMU 200 Radio tester	R&S	100313	Aug. 2008
9	12.65m*8.03m*7.50m Fully-Anechoic Chamber	FRANKONIA	-----	Aug. 2008
10	HL562 Ultra log test antenna	R&S	100016	Aug. 2008
11	ESH3-Z2 Pulse limiter	R&S	10002	Aug. 2008
12	ESH3-Z5 Attenuator	R&S	100020	Aug. 2008
13	ESH2Z11 LISN	R&S	50FH-020-10	Aug. 2008
14	CMU 200 Radio tester	R&S	100313	Aug. 2008
15	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100030	Aug. 2008
16	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100029	Aug. 2008
17	PS2000 Turn Table	FRANKONIA	-----	Aug. 2008
18	MA260 Antenna Master	FRANKONIA	-----	Aug. 2008
19	SH-241 Climatic Chamber	ESPEC	92000389	Aug. 2008
20	E5515C Mobile Station Tester	Agilent	GB45071696	Aug. 2008
21	ES-K1 EMI test software	R&S	-----	Aug. 2008
22	HL562 Receive antenna	R&S	100167	Aug. 2008

Appendix

Appendix1 Test Setup