

**#17 CDMA2000 BC0\_RTAP 153.6\_Rear Face\_10mm\_Ch384\_V2**

**DUT: 000802-01**

Communication System: CDMA2000; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_101013 Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.973$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho =$

$1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C; Liquid Temperature : 21.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3697; ConvF(8.22, 8.22, 8.22); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM2; Type: SAM; Serial: TP-1479
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Ch384/Area Scan (61x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.17 mW/g



**Ch384/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32 V/m; Power Drift = 0.126 dB

Peak SAR (extrapolated) = 2.26 W/kg

**SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.756 mW/g**

Maximum value of SAR (measured) = 1.33 mW/g

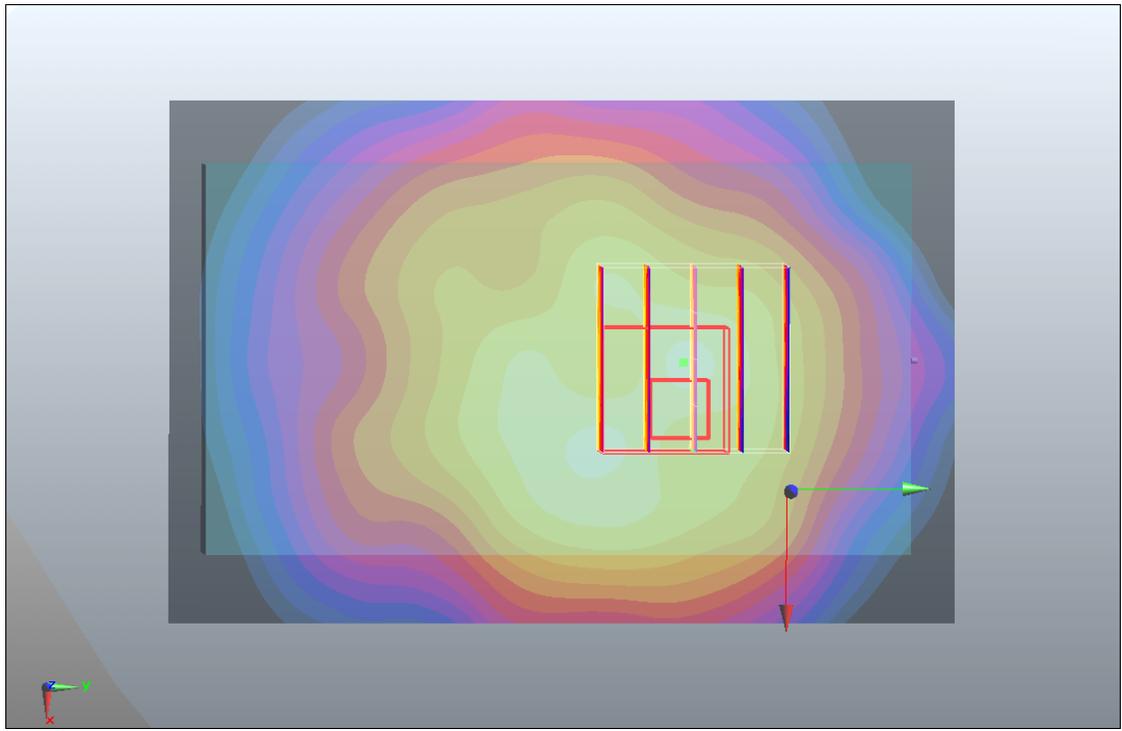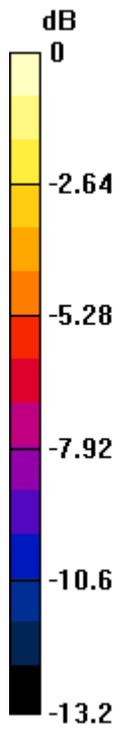

0 dB = 1.33mW/g

**#17 CDMA2000 BC0\_RTAP 153.6\_Rear Face\_10mm\_Ch384\_V2\_2D**

**DUT: 000802-01**

Communication System: CDMA2000; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_101013 Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.973$  mho/m;  $\epsilon_r = 56.3$ ;  $\rho =$

$1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C; Liquid Temperature : 21.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3697; ConvF(8.22, 8.22, 8.22); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM2; Type: SAM; Serial: TP-1479
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Ch384/Area Scan (61x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.17 mW/g

**Ch384/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 32 V/m; Power Drift = 0.126 dB

Peak SAR (extrapolated) = 2.26 W/kg

**SAR(1 g) = 1.22 mW/g; SAR(10 g) = 0.756 mW/g**

Maximum value of SAR (measured) = 1.33 mW/g

# 1g/10g Averaged SAR

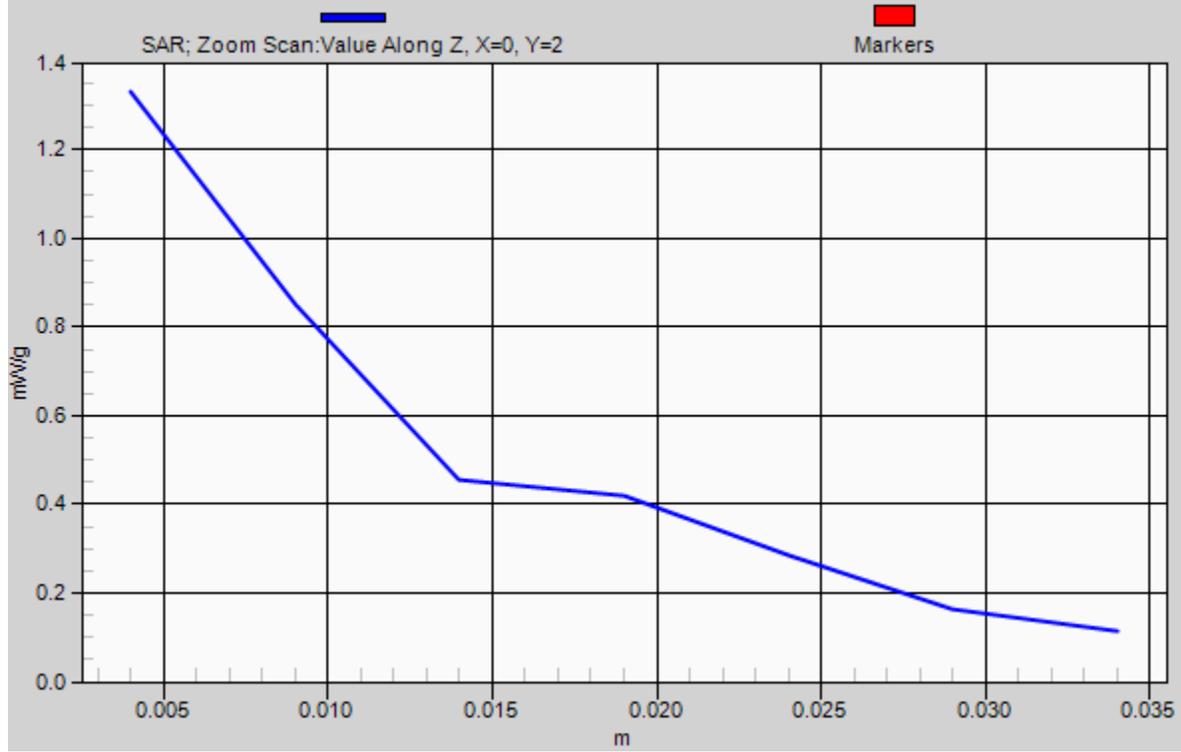

**#12 CDMA2000 BC0\_RTAP 153.6\_Front Face\_10mm\_Ch1013\_V2**

**DUT: 0O0802-01**

Communication System: CDMA2000; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_101013 Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.961$  mho/m;  $\epsilon_r = 56.4$ ;  $\rho =$

$1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C; Liquid Temperature : 21.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3697; ConvF(8.22, 8.22, 8.22); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM2; Type: SAM; Serial: TP-1479
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Ch1013/Area Scan (61x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.292 mW/g



**Ch1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.1 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.364 W/kg

**SAR(1 g) = 0.284 mW/g; SAR(10 g) = 0.220 mW/g**

Maximum value of SAR (measured) = 0.297 mW/g

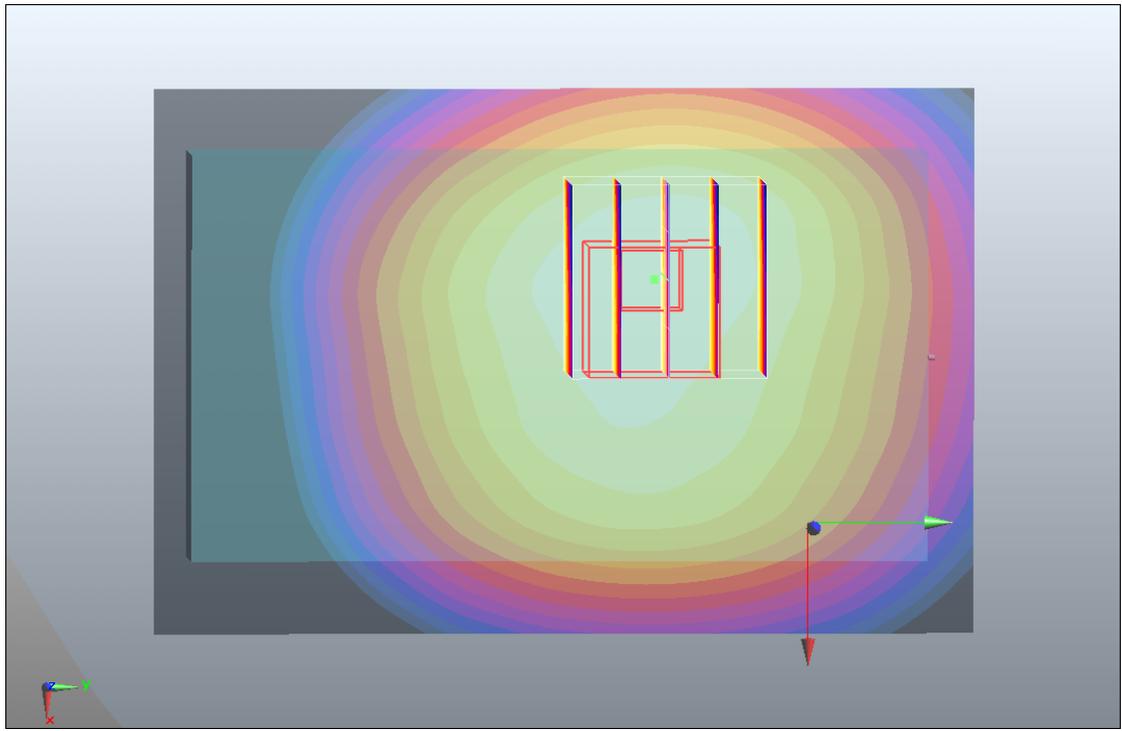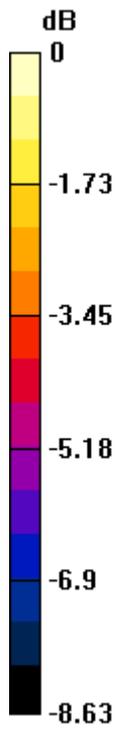

0 dB = 0.297mW/g

**#13 CDMA2000 BC0\_RTAP 153.6\_Left Side\_10mm\_Ch1013\_V2**

**DUT: 000802-01**

Communication System: CDMA2000; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_101013 Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.961$  mho/m;  $\epsilon_r = 56.4$ ;  $\rho =$

$1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C; Liquid Temperature : 21.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3697; ConvF(8.22, 8.22, 8.22); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM2; Type: SAM; Serial: TP-1479
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Ch1013/Area Scan (41x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.450 mW/g



**Ch1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.2 V/m; Power Drift = -0.081 dB

Peak SAR (extrapolated) = 0.562 W/kg

**SAR(1 g) = 0.415 mW/g; SAR(10 g) = 0.294 mW/g**

Maximum value of SAR (measured) = 0.442 mW/g

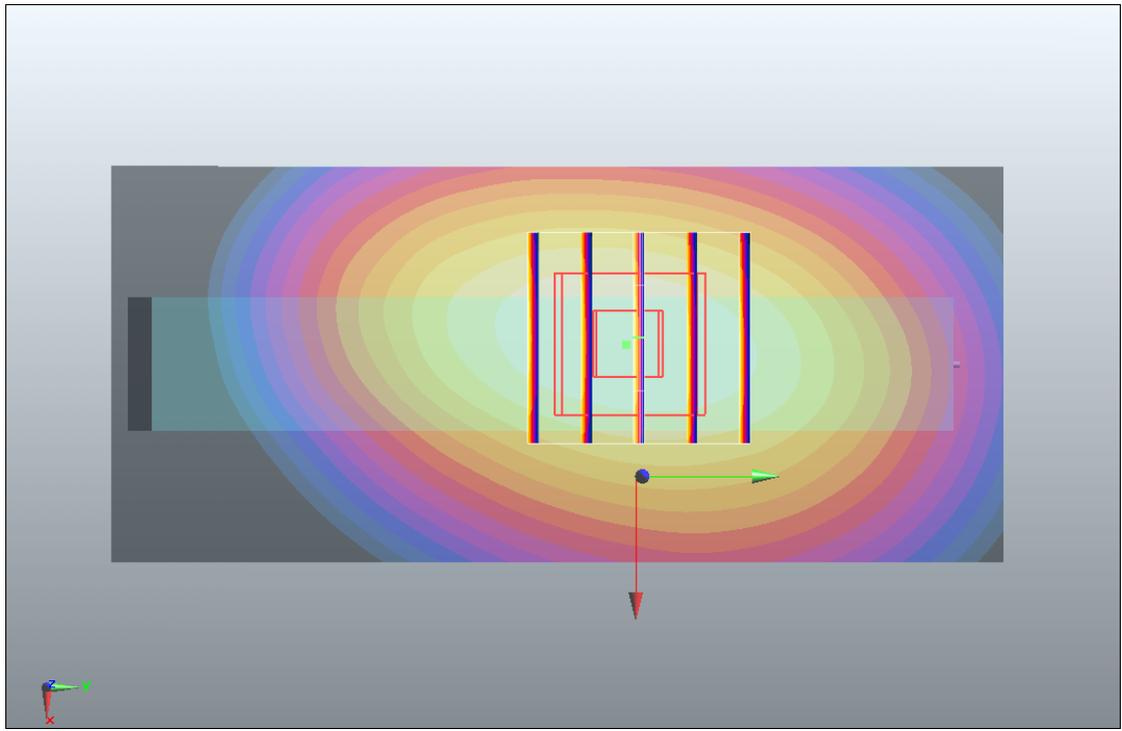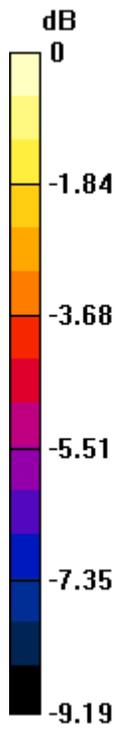

0 dB = 0.442mW/g

**#14 CDMA2000 BC0\_RTAP 153.6\_Right Side\_10mm\_Ch1013\_V2**

**DUT: 0O0802-01**

Communication System: CDMA2000; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_101013 Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.961$  mho/m;  $\epsilon_r = 56.4$ ;  $\rho =$

$1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C; Liquid Temperature : 21.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3697; ConvF(8.22, 8.22, 8.22); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM2; Type: SAM; Serial: TP-1479
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Ch1013/Area Scan (41x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.636 mW/g



**Ch1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.3 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.805 W/kg

**SAR(1 g) = 0.591 mW/g; SAR(10 g) = 0.414 mW/g**

Maximum value of SAR (measured) = 0.629 mW/g

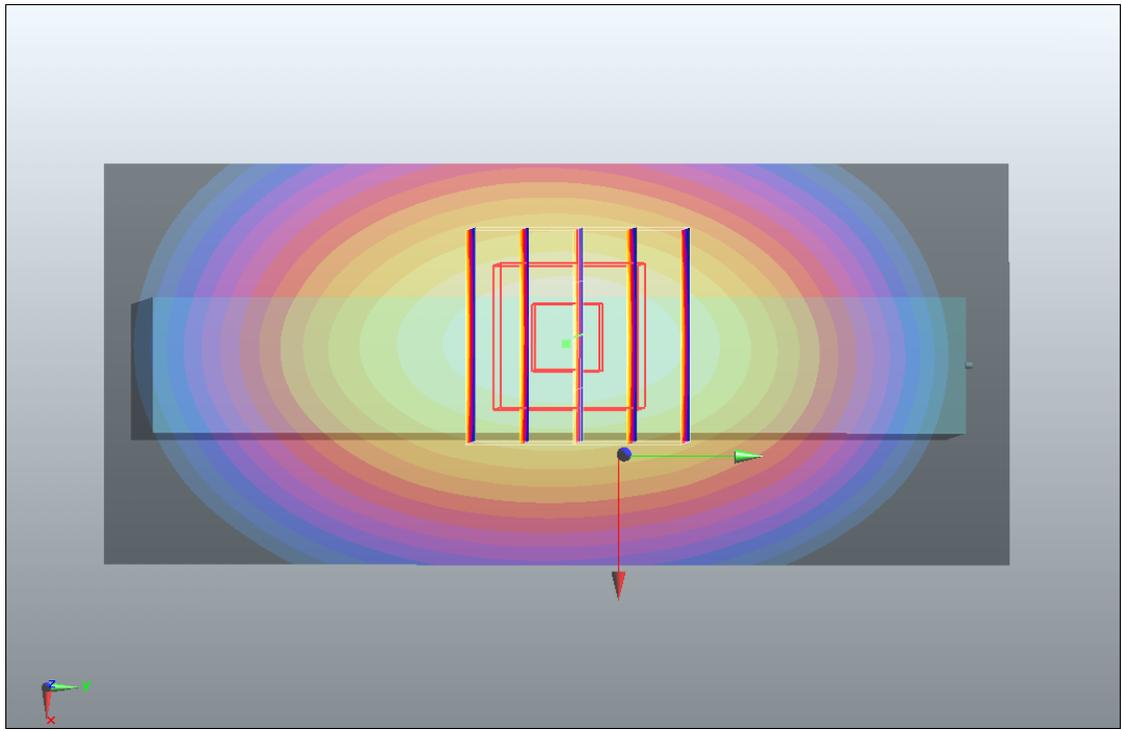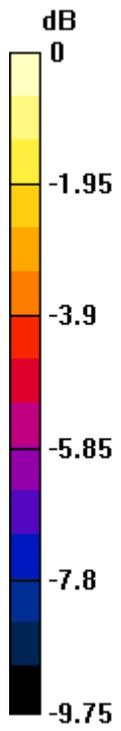

0 dB = 0.629mW/g

**#15 CDMA2000 BC0\_RTAP 153.6\_Top Side\_10mm\_Ch1013\_V2**

**DUT: 000802-01**

Communication System: CDMA2000; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_101013 Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.961$  mho/m;  $\epsilon_r = 56.4$ ;  $\rho =$

$1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C; Liquid Temperature : 21.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3697; ConvF(8.22, 8.22, 8.22); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM2; Type: SAM; Serial: TP-1479
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Ch1013/Area Scan (51x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.095 mW/g



**Ch1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.31 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.115 W/kg

**SAR(1 g) = 0.077 mW/g; SAR(10 g) = 0.049 mW/g**

Maximum value of SAR (measured) = 0.083 mW/g

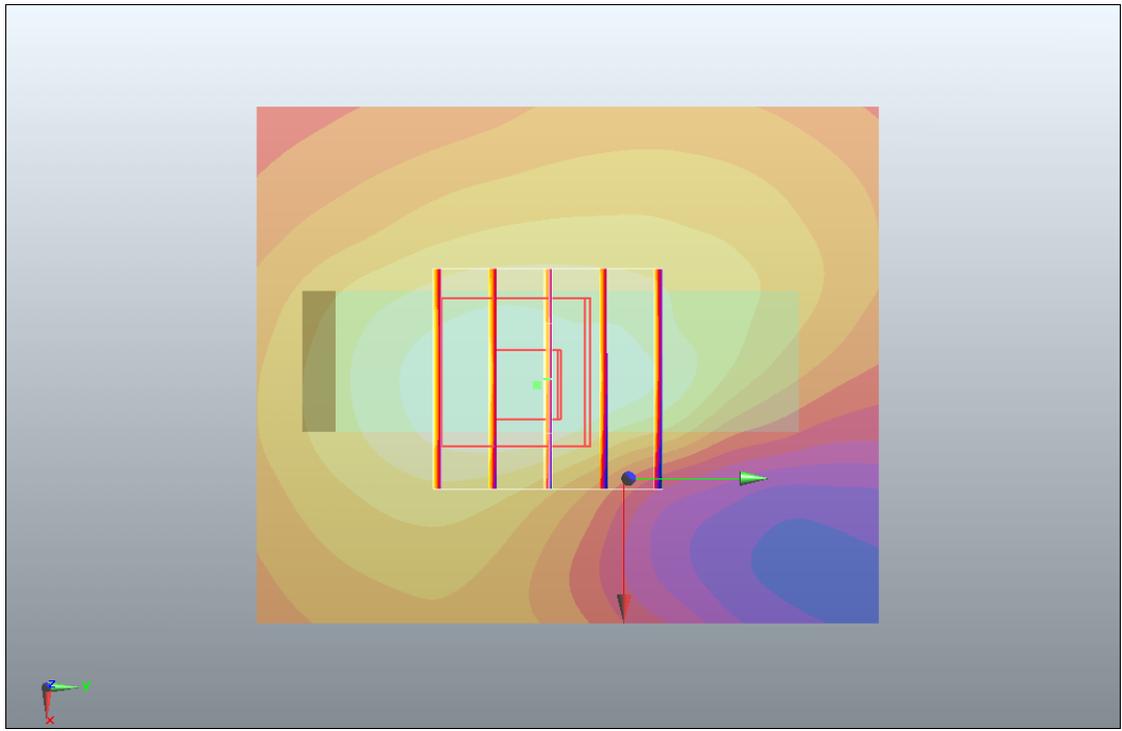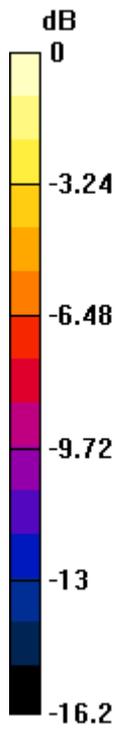

0 dB = 0.083mW/g

**#16 CDMA2000 BC0\_RTAP 153.6\_Bottom Side\_10mm\_Ch1013\_V2**

**DUT: 000802-01**

Communication System: CDMA2000; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium: MSL\_850\_101013 Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.961$  mho/m;  $\epsilon_r = 56.4$ ;  $\rho =$

$1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C; Liquid Temperature : 21.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3697; ConvF(8.22, 8.22, 8.22); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM2; Type: SAM; Serial: TP-1479
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Ch1013/Area Scan (41x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.016 mW/g

**Ch1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.35 V/m; Power Drift = 0.143 dB

Peak SAR (extrapolated) = 0.021 W/kg

**SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.011 mW/g**

Maximum value of SAR (measured) = 0.016 mW/g


**Ch1013/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.35 V/m; Power Drift = 0.143 dB

Peak SAR (extrapolated) = 0.014 W/kg

**SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00782 mW/g**

Maximum value of SAR (measured) = 0.012 mW/g

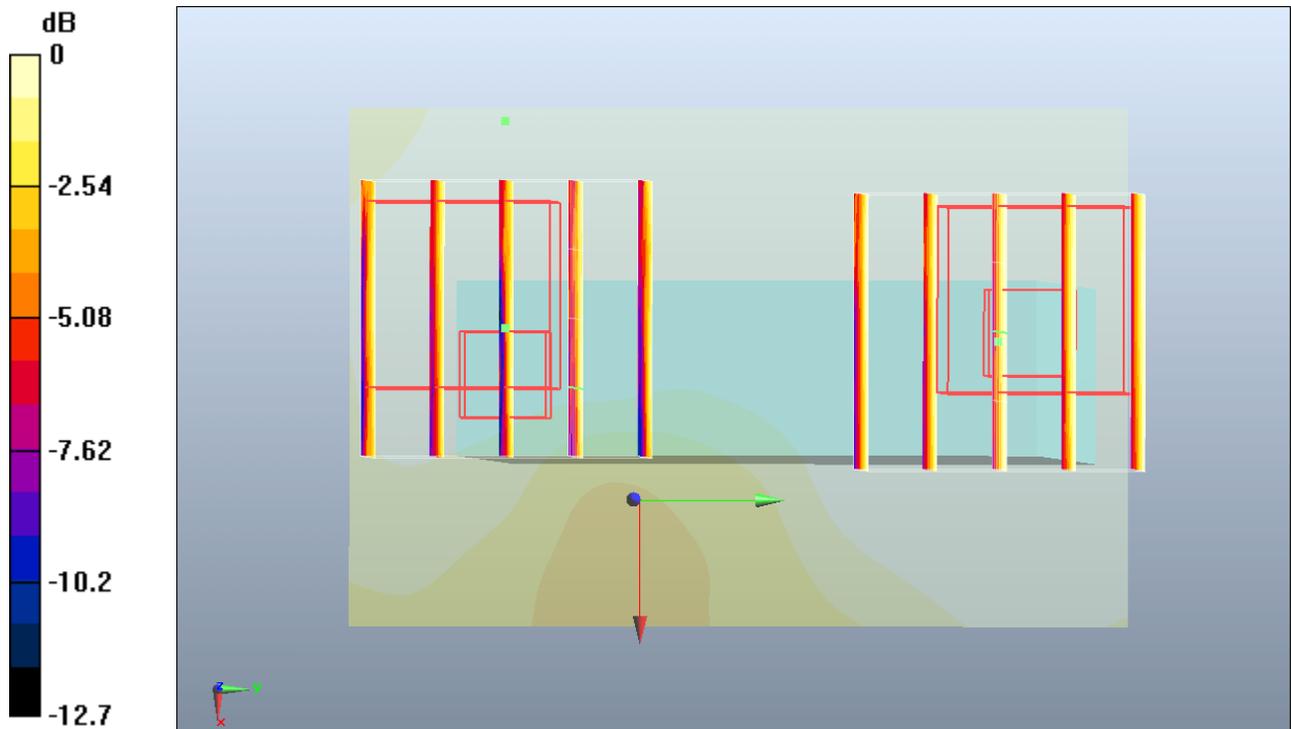

0 dB = 0.012mW/g

**#08 CDMA2000 BC1\_RTAP 153.6\_Rear Face\_10mm\_Ch1175\_V2**

**DUT: 000802-01**

Communication System: CDMA2000; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_101012 Medium parameters used:  $f = 1909$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3697; ConvF(7.04, 7.04, 7.04); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM1; Type: SAM; Serial: TP-1477
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Ch1175/Area Scan (61x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.4 mW/g



**Ch1175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.7 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 2.61 W/kg

**SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.614 mW/g**

Maximum value of SAR (measured) = 1.41 mW/g

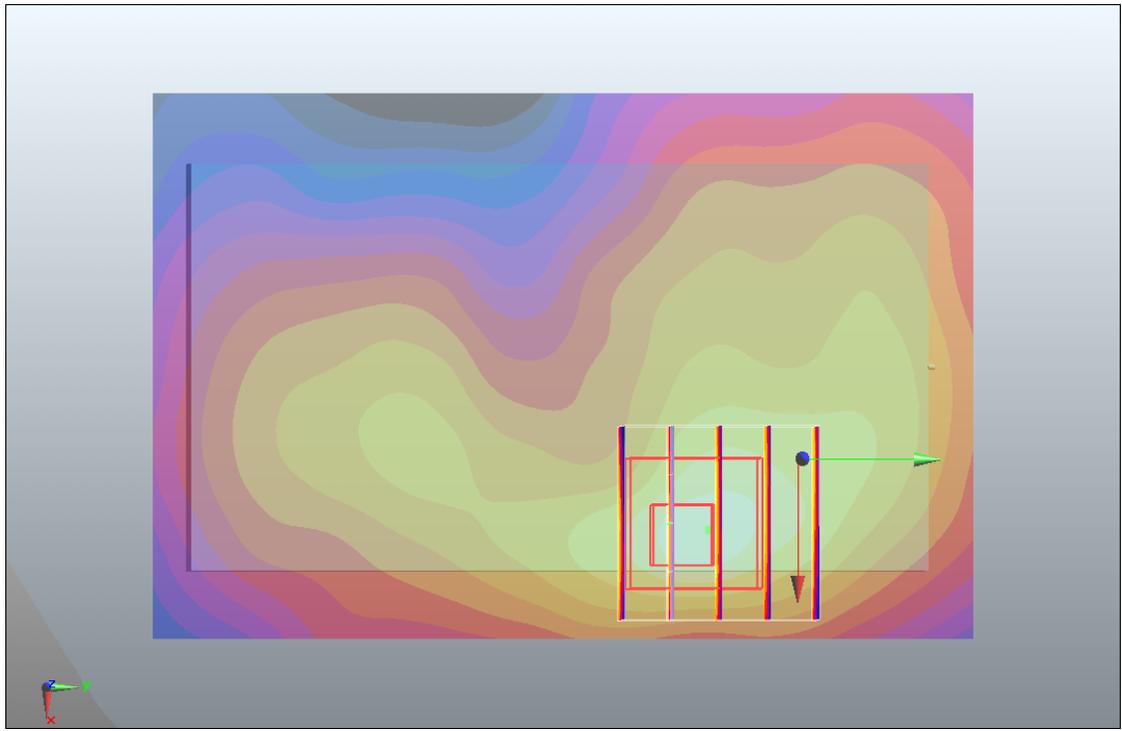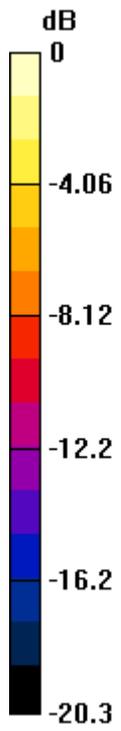

0 dB = 1.41mW/g

**#08 CDMA2000 BC1\_RTAP 153.6\_Rear Face\_10mm\_Ch1175\_V2\_2D**

**DUT: 000802-01**

Communication System: CDMA2000; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_101012 Medium parameters used:  $f = 1909$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3697; ConvF(7.04, 7.04, 7.04); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM1; Type: SAM; Serial: TP-1477
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Ch1175/Area Scan (61x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.4 mW/g

**Ch1175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 16.7 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 2.61 W/kg

**SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.614 mW/g**

Maximum value of SAR (measured) = 1.41 mW/g

# 1g/10g Averaged SAR

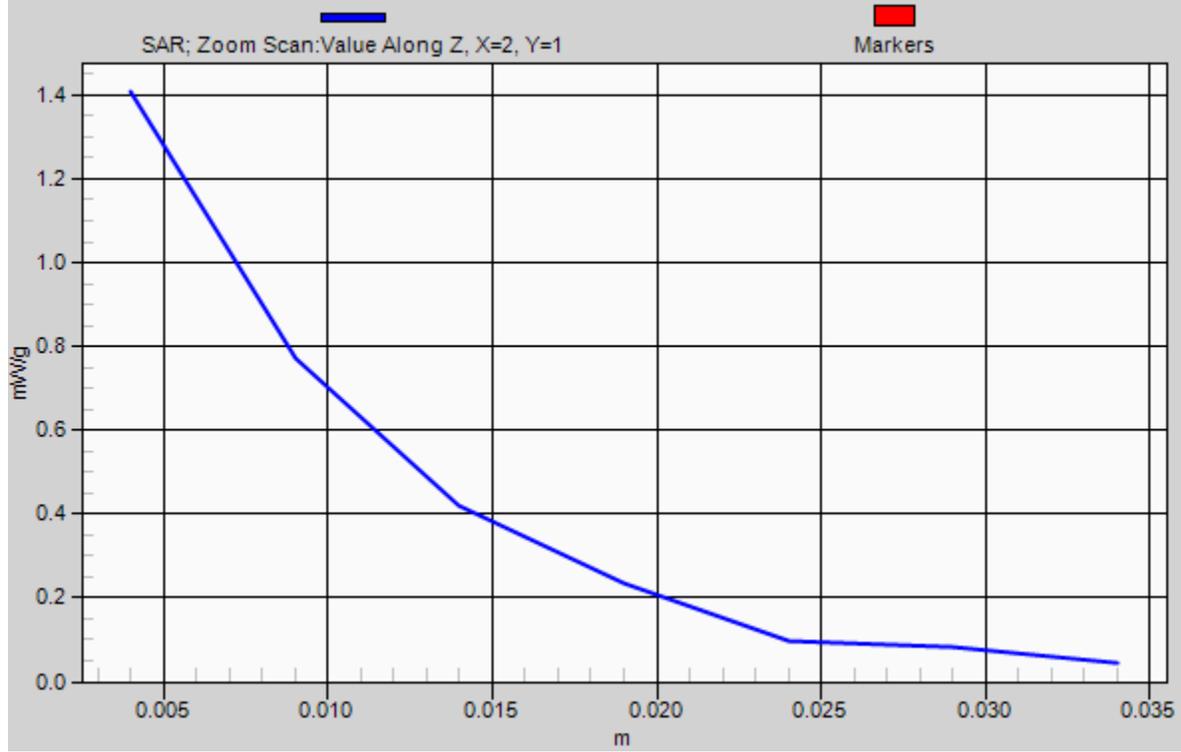

**#02 CDMA2000 BC1\_RTAP 153.6\_Front Face\_10mm\_Ch600\_V2**

**DUT: 000802-01**

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_101012 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3697; ConvF(7.04, 7.04, 7.04); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM1; Type: SAM; Serial: TP-1477
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Ch600/Area Scan (61x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.499 mW/g



**Ch600/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.449 mW/g; SAR(10 g) = 0.255 mW/g**

Maximum value of SAR (measured) = 0.524 mW/g

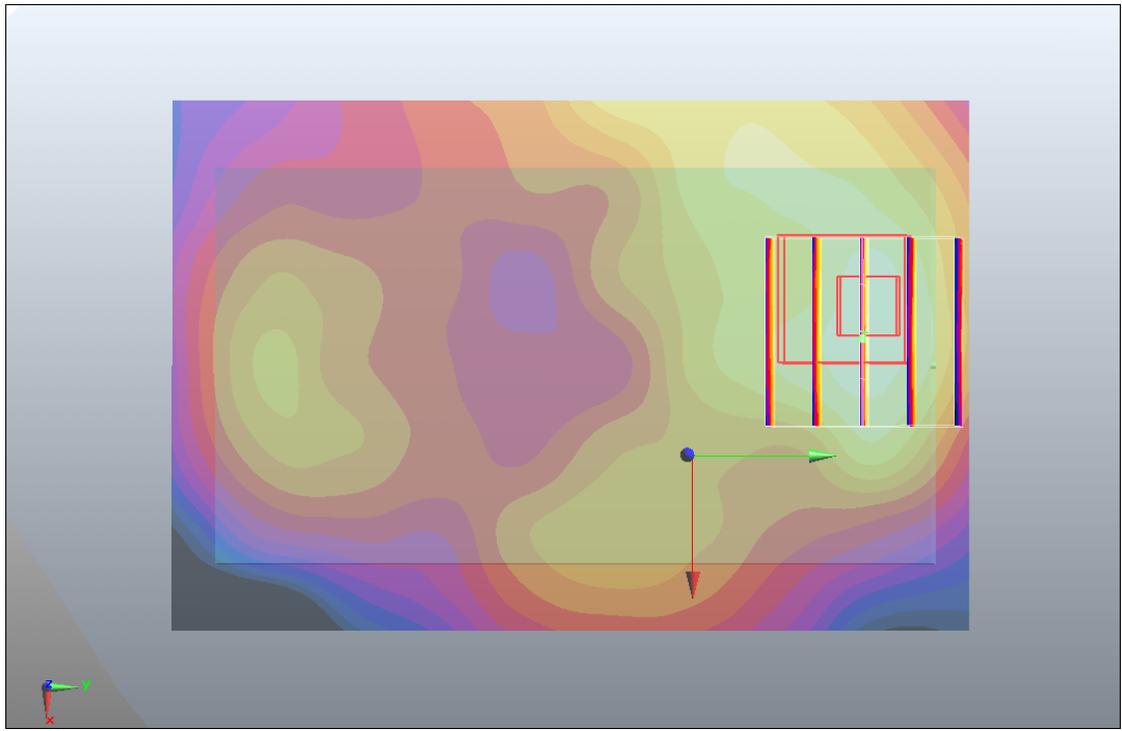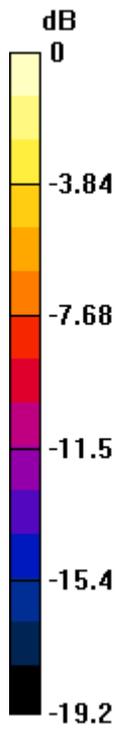

0 dB = 0.524mW/g

**#03 CDMA2000 BC1\_RTAP 153.6\_Left Side\_10mm\_Ch600\_V2**

**DUT: 000802-01**

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_101012 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3697; ConvF(7.04, 7.04, 7.04); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM1; Type: SAM; Serial: TP-1477
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Ch600/Area Scan (41x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.200 mW/g

**Ch600/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.08 V/m; Power Drift = 0.095 dB

Peak SAR (extrapolated) = 0.439 W/kg

**SAR(1 g) = 0.189 mW/g; SAR(10 g) = 0.105 mW/g**

Maximum value of SAR (measured) = 0.214 mW/g


**Ch600/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.08 V/m; Power Drift = 0.095 dB

Peak SAR (extrapolated) = 0.358 W/kg

**SAR(1 g) = 0.177 mW/g; SAR(10 g) = 0.092 mW/g**

Maximum value of SAR (measured) = 0.212 mW/g

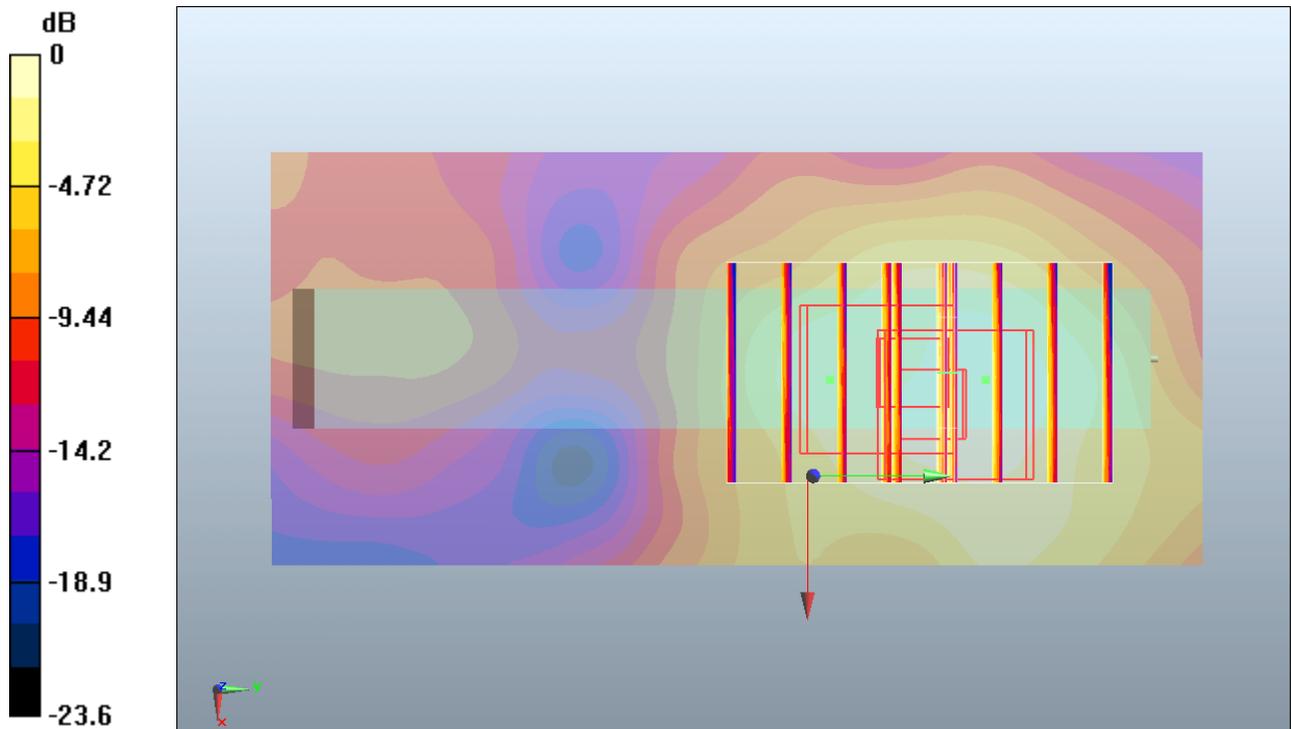

0 dB = 0.212mW/g

**#10 CDMA2000 BC1\_RTAP 153.6\_Right Side\_10mm\_Ch1175\_V2**

**DUT: 000802-01**

Communication System: CDMA2000; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_101012 Medium parameters used:  $f = 1909$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3697; ConvF(7.04, 7.04, 7.04); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM1; Type: SAM; Serial: TP-1477
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Ch1175/Area Scan (41x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.4 mW/g



**Ch1175/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21 V/m; Power Drift = 0.117 dB

Peak SAR (extrapolated) = 2.39 W/kg

**SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.679 mW/g**

Maximum value of SAR (measured) = 1.42 mW/g

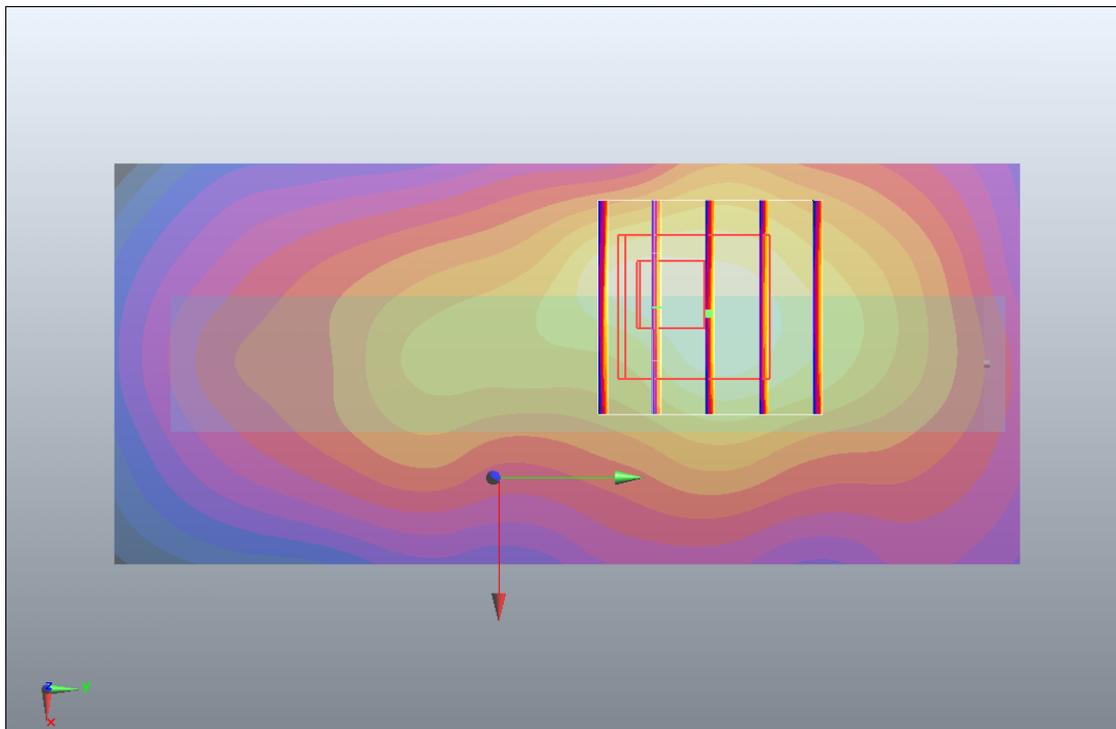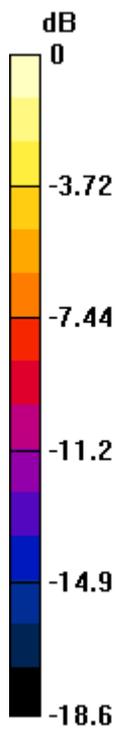

0 dB = 1.42mW/g

**#05 CDMA2000 BC1\_RTAP 153.6\_Top Side\_10mm\_Ch600\_V2**

**DUT: 000802-01**

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_101012 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3697; ConvF(7.04, 7.04, 7.04); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM1; Type: SAM; Serial: TP-1477
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Ch600/Area Scan (51x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.286 mW/g

**Ch600/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.435 W/kg

**SAR(1 g) = 0.230 mW/g; SAR(10 g) = 0.135 mW/g**

Maximum value of SAR (measured) = 0.283 mW/g


**Ch600/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.560 W/kg

**SAR(1 g) = 0.229 mW/g; SAR(10 g) = 0.128 mW/g**

Maximum value of SAR (measured) = 0.267 mW/g

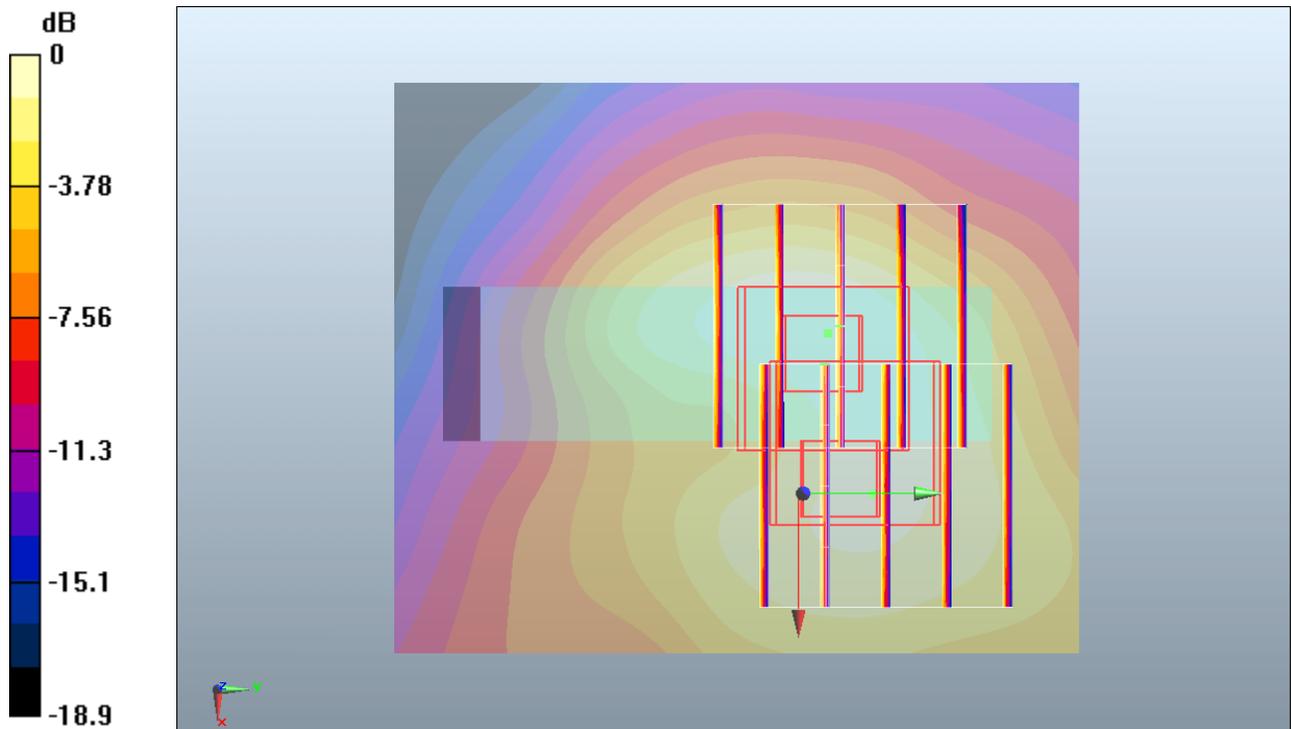

0 dB = 0.267mW/g

**#06 CDMA2000 BC1\_RTAP 153.6\_Bottom Side\_10mm\_Ch600\_V2**

**DUT: 000802-01**

Communication System: CDMA2000; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_101012 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.5$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN3697; ConvF(7.04, 7.04, 7.04); Calibrated: 11/23/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2009/11/16
- Phantom: SAM1; Type: SAM; Serial: TP-1477
- Measurement SW : DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Ch600/Area Scan (51x61x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.156 mW/g

**Ch600/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.22 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 0.086 W/kg

**SAR(1 g) = 0.048 mW/g; SAR(10 g) = 0.026 mW/g**

Maximum value of SAR (measured) = 0.054 mW/g



**Ch600/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.22 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 0.087 W/kg

**SAR(1 g) = 0.041 mW/g; SAR(10 g) = 0.023 mW/g**

Maximum value of SAR (measured) = 0.051 mW/g

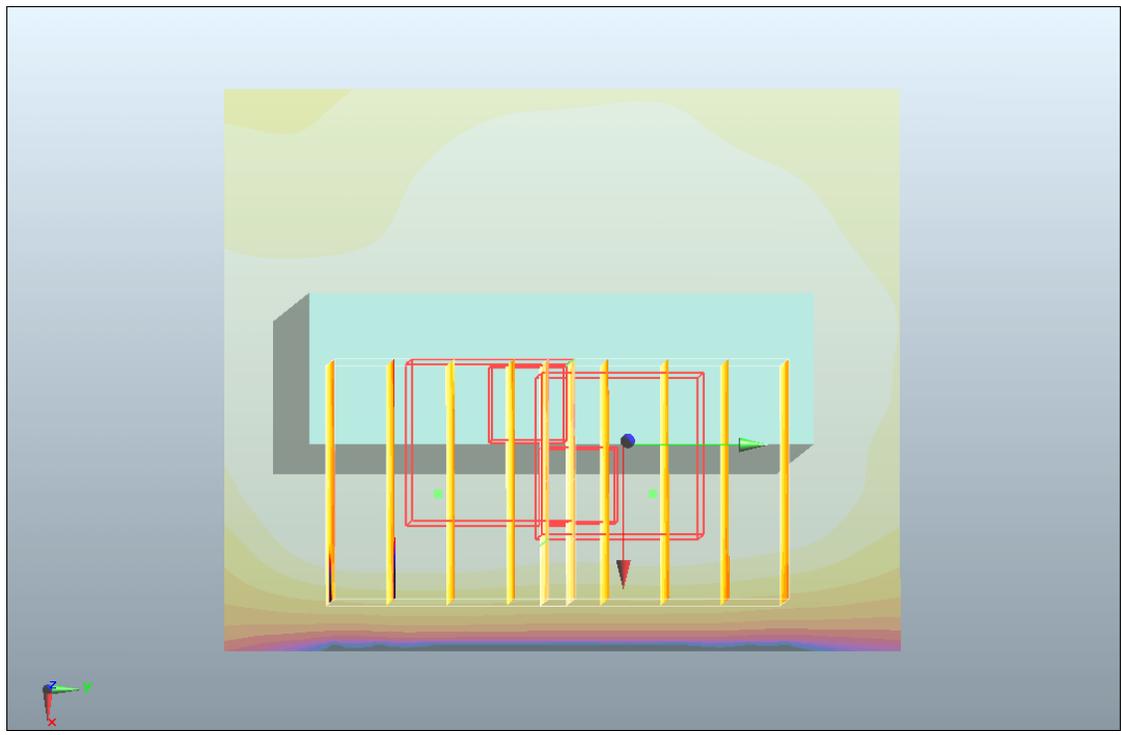

0 dB = 0.051mW/g