



No. DGA-PL-114/01-02

TESTING
CNAS L0442

TEST REPORT

No. 2010WLN0212

Product name AC30 Global Mobile Hotspot

Model AC30

Client ZTE Corporation

Classification of test Type Approval

Telecommunication Metrology Center

of Ministry of Industry and Information Technology

Notice

1. The test report shall be invalid if there is no “specified stamp for the test report” or the stamp of the test organization on it.
2. Copies of the test report shall be invalid if there is no “specified stamp for the test report” or the stamp of the test organization on it.
3. The test report shall be invalid if there are no signatures of the testing person, reviewing person and approving person on it.
4. The test report shall be invalid if it is altered.
5. Any demurral about the test shall be put forward to the testing organization within 15 days after the receiving of the test report.
6. This test report standalone dose not constitute or imply by its own an approval of the product by any Certification Authorities or Competent Bodies.
7. This report is only valid if complete, and test report shall not be reproduced except in full, without written approval of the laboratory.
8. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of Telecommunication Metrology Center of MIIT and the Accreditation Bodies, if it applies.

Address: No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China
(Telecommunication Metrology Center of MIIT)

Post code: 100191

Telephone: +86 10 62302041

Fax: +86 10 62304793

Web site: <http://www.emcite.com>

E-mail: welcome@emcite.com

Product name	AC30 Global Mobile Hotspot	Sample Model	AC30
Client	ZTE Corporation	Type of test	type approval
Factory	ZTE Corporation	Sampling arrival date	2010-04-05
Manufacturer	ZTE Corporation		
Sampling/ Sending sample	Sending sample	Sample sent by	/
Sampling location	/	Sampling person	/
Sample quantity	1	Sample matrix	/
Series number of the Sample	/		
Manufacture date	/	Manufacture location	/
Test basis	FCC Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits; general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz. ANSI C63.4 - 2003 KDB558074 Measurement of Digital Transmission Systems Operating under Section 15.247		
Test conclusion	Pass 6 test cases were done. The test results are shown in the clause 6 and annex B. The sample(s) passed all the tests required by the client. Date of issue: 2010-05-17		
Note	The test results relate only to the items tested of the sample(s).		

Approved by 陆冰松 (Lu Bingsong)
 Reviewed by 高宏 (Gao Hong)
 Tested by 孙震宇 (Sun Zhenyu)

(Lu Bingsong - Deputy Director of the laboratory)

CONTENTS

1. COMPETENCE AND WARRANTIES	7
2. TESTING LABORATORY.....	7
2.1. Testing Location	7
2.2. Testing Environment.....	7
2.3. Testing Period	8
3. APPLICANT INFORMATION	8
3.1. Client information	8
3.2. Manufacturer information	9
4. EQUIPMENT UNDER TEST(EUT) AND ANCILLARY EQUIPMENT(AE).....	9
4.1. About EUT	9
4.2. Internal Identification of EUT used during the test.....	9
4.3. Internal Identification of AE used during the test	9
5. REFERENCE DOCUMENTS.....	10
5.1. Documents supplied by applicant.....	10
5.2. Reference Documents	10
6. TEST RESULTS	10
6.1. Summary of Test Results	10
6.2. Statements	10
7. TEST EQUIPMENTS	11
ANNEX A: MEASUREMENT RESULTS.....	12
A.1. Measurement Method.....	12
A.1.1. Conducted Measurements.....	12
A.1.2. Radiated Emission Measurements	12
A.2. Maximum Peak Output Power	12
A.3. Peak Power Spectral Density	13
A.4. Occupied 6dB Bandwidth	14
A.5. Band Edges Compliance	14
A.6. Transmitter Spurious Emission	15
A.6.1 Transmitter Spurious Emission - Conducted.....	15
A.6.1 Transmitter Spurious Emission - Radiated.....	16
A.7. AC Powerline Conducted Emission	20
ANNEX B: TEST FIGURE LIST.....	21
Fig. 1 Peak Power Spectral Density (802.11b, ch1)	21
Fig. 2 Peak Power Spectral Density (802.11b, ch6).....	21

**Telecommunication Metrology Center
of Ministry of Industry and Information Technology**

No. 2010WLN0212

Page 5 of 50

Fig. 3	Peak Power Spectral Density (802.11b, ch11)	22
Fig. 4	Peak Power Spectral Density (802.11g, ch1)	22
Fig. 5	Peak Power Spectral Density (802.11g, ch6)	23
Fig. 6	Peak Power Spectral Density (802.11g, ch11)	23
Fig. 7	Occupied 6dB Bandwidth (802.11b, Ch 1)	24
Fig. 8	Occupied 6dB Bandwidth (802.11b, Ch 6)	24
Fig. 9	Occupied 6dB Bandwidth (802.11b, Ch 11)	25
Fig. 10	Occupied 6dB Bandwidth (802.11g, Ch 1)	25
Fig. 11	Occupied 6dB Bandwidth (802.11g, Ch 6)	26
Fig. 12	Occupied 6dB Bandwidth (802.11g, Ch 11)	26
Fig. 13	Band Edges (802.11b, Ch 1)	27
Fig. 14	Band Edges (802.11b, Ch 11)	27
Fig. 15	Band Edges (802.11g, Ch 1)	28
Fig. 16	Band Edges (802.11g, Ch 11)	28
Fig. 17	Conducted Spurious Emission (802.11b, Ch1, Center Frequency)	29
Fig. 18	Conducted Spurious Emission (802.11b, Ch1, 30 MHz-1 GHz)	29
Fig. 19	Conducted Spurious Emission (802.11b, Ch1, 1 GHz-26 GHz)	30
Fig. 20	Conducted Spurious Emission (802.11b, Ch6, Center Frequency)	30
Fig. 21	Conducted Spurious Emission (802.11b, Ch6, 30 MHz-1 GHz)	31
Fig. 22	Conducted Spurious Emission (802.11b, Ch6, 1 GHz-26 GHz)	31
Fig. 23	Conducted Spurious Emission (802.11b, Ch11, Center Frequency)	32
Fig. 24	Conducted Spurious Emission (802.11b, Ch11, 30 MHz-1 GHz)	32
Fig. 25	Conducted Spurious Emission (802.11b, Ch11, 1 GHz-26 GHz)	33
Fig. 26	Conducted Spurious Emission (802.11g, Ch1, Center Frequency)	33
Fig. 27	Conducted Spurious Emission (802.11g, Ch1, 30 MHz-1 GHz)	34
Fig. 28	Conducted Spurious Emission (802.11g, Ch1, 1 GHz-26 GHz)	34
Fig. 29	Conducted Spurious Emission (802.11g, Ch6, Center Frequency)	35
Fig. 30	Conducted Spurious Emission (802.11g, Ch6, 30 MHz-1 GHz)	35
Fig. 31	Conducted Spurious Emission (802.11g, Ch6, 1 GHz-26 GHz)	36
Fig. 32	Conducted Spurious Emission (802.11g, Ch11, Center Frequency)	36
Fig. 33	Conducted Spurious Emission (802.11g, Ch11, 30 MHz-1 GHz)	37
Fig. 34	Conducted Spurious Emission (802.11g, Ch11, 1 GHz-26 GHz)	37
Fig. 35	Radiated Spurious Emission (Power): 802.11b, 2.45 GHz - 2.5GHz	38
Fig. 36	Radiated Spurious Emission (802.11b, Ch1, 30 MHz-1 GHz)	38
Fig. 37	Radiated Spurious Emission (802.11b, Ch1, 1 GHz-4 GHz)	39
Fig. 38	Radiated Spurious Emission (802.11b, Ch1, 4 GHz-18 GHz)	39
Fig. 39	Radiated Spurious Emission (802.11b, Ch6, 30 MHz-1 GHz)	40
Fig. 40	Radiated Spurious Emission (802.11b, Ch6, 1 GHz-4 GHz)	40

**Telecommunication Metrology Center
of Ministry of Industry and Information Technology**

No. 2010WLN0212

Page 6 of 50

Fig. 41	Radiated Spurious Emission (802.11b, Ch6, 4 GHz-18 GHz)	41
Fig. 42	Radiated Spurious Emission (802.11b, Ch11, 30 MHz-1 GHz)	41
Fig. 43	Radiated Spurious Emission (802.11b, Ch11, 1 GHz-4 GHz)	42
Fig. 44	Radiated Spurious Emission (802.11b, Ch11, 4 GHz-18 GHz).....	42
Fig. 45	Radiated Spurious Emission (Power): 802.11g, 2.45 GHz - 2.5GHz.....	43
Fig. 46	Radiated Spurious Emission (802.11g, Ch1, 30 MHz-1 GHz)	43
Fig. 47	Radiated Spurious Emission (802.11g, Ch1, 1 GHz-4 GHz)	44
Fig. 48	Radiated Spurious Emission (802.11g, Ch1, 4 GHz-18 GHz)	44
Fig. 49	Radiated Spurious Emission (802.11g, Ch6, 30 MHz-1 GHz)	45
Fig. 50	Radiated Spurious Emission (802.11g, Ch6, 1 GHz-4 GHz)	45
Fig. 51	Radiated Spurious Emission (802.11g, Ch6, 4 GHz-18 GHz)	46
Fig. 52	Radiated Spurious Emission (802.11g, Ch11, 30 MHz-1 GHz)	46
Fig. 53	Radiated Spurious Emission (802.11g, Ch11, 1 GHz-4 GHz)	47
Fig. 54	Radiated Spurious Emission (802.11g, Ch11, 4 GHz-18 GHz).....	47
Fig. 55	Radiated emission: 18 GHz - 26 GHz	48
Fig. 56	AC Powerline Conducted Emission - 802.11b mode	49
Fig. 57	AC Powerline Conducted Emission - 802.11g mode	50

1. COMPETENCE AND WARRANTIES

Telecommunication Metrology Center of Ministry of Industry and Information Technology is a test laboratory accredited by DAR (DGA) - Deutschen Akkreditierungs Rat (Deutsche Gesellschaft für Akkreditierung mbH) for the tests indicated in the Certificate No. **DGA-PL-114/01-02.**

Telecommunication Metrology Center of Ministry of Industry and Information Technology is a test laboratory accredited by CNAS - China national Accreditation Service for Conformity Assessment, for the tests indicated in the Certificate No. **L0442.**

Telecommunication Metrology Center of Ministry of Industry and Information Technology (hereinafter TMC of MIIT) is a test laboratory competent to carry out the tests described in this test report.

TMC of MIIT guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at **TMC of MIIT** at the time of execution of the test.

TMC of MIIT is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test.

2. TESTING LABORATORY

2.1. Testing Location

Name of Company :	Telecommunication Metrology Center of Ministry of Industry and Information Technology
Address:	No 52, Hua Yuanbei Road, Haidian District, Beijing, P.R.China
Postal Code:	100191
Telephone:	+86-10-62302041
Fax:	+86-10-62302504

2.2. Testing Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Ground system resistance	< 0.5
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 k
Ground system resistance	< 0.5

Fully-anechoic chamber1 (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 k
Ground system resistance	< 0.5
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

Fully-anechoic chamber2 (Tapered Section: 8.75 meters×3.66 meters×3.66 meters, Rectangular Section: 7.32 meters×3.97 meters×3.66 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 k
Ground system resistance	< 0.5
Uniformity of field strength	Between 0 and 6 dB, from 30MHz to 40 000 MHz

2.3. Testing Period

The performed test started on 05th April, 2010 and finished on 30th April, 2010.

3. APPLICANT INFORMATION

3.1. Client information

Name of Company:	ZTE Corporation
Address /Post:	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
City:	Shenzhen
Postal Code:	518057
Country:	China
Telephone:	0086 21 68895196
Fax:	0086 21 61460600

3.2. Manufacturer information

Name of Company:	ZTE Corporation
Address /Post:	ZTE Plaza, Keji Road South, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
City:	Shenzhen
Postal Code:	518057
Country:	China
Telephone:	0086 21 68895196
Fax:	0086 21 61460600

4. EQUIPMENT UNDER TEST(EUT) AND ANCILLARY EQUIPMENT(AE)

4.1. About EUT

Product name:	AC30 Global Mobile Hotspot
Model:	AC30
FCC ID:	Q78-ZTEAC30
With WLAN Function:	Yes
EUT operating voltage- Normal:	3.7 VDC
Extreme Low Voltage:	3.5 VDC
Extreme High Voltage:	4.2 VDC
Extreme temperature:	-20°C / + 55°C

Note: please refer to ANNEX A in this test report for Photographs of EUT.

4.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	/	AC30_100101	BD_VERIZONAC30V0.0.1B02

*EUT ID is used to identify the test sample in the lab internally.

4.3. Internal Identification of AE used during the test

AE ID*	Description	Type	SN
AE1	Travel Charger	STC-A22O50I700USBA-A	/
AE2	LITHIUM-ION	Li3715T42P3h654251	/

*AE ID: is used to identify the test sample in the lab internally.

5. REFERENCE DOCUMENTS

5.1. Documents supplied by applicant

EUT feature information is supplied by the client or manufacturer, which is the basis of testing.

5.2. Reference Documents

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902 - 928MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz.	July 10, 2008 Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003
KDB558074	Measurement of Digital Transmission Systems Operating under Section 15.247	March 23, 2005

6. TEST RESULTS

6.1. Summary of Test Results

Abbreviations used in this clause:

P Pass

F Fail

NA not applicable

NM not measured

SUMMARY OF MEASUREMENT RESULTS	Sub-clause	Verdict
Maximum Peak Output Power	15.247 (a)	P
Peak Power Spectral Density	15.247 (d)	P
Occupied 6dB Bandwidth	15.247(d)	P
Band Edges Compliance	15.247 (b)	P
Transmitter Spurious Emission-Conducted	15.247	P
Transmitter Spurious Emission-Radiated	15.247, 15.209, 15.209	P
AC Powerline Conducted Emission	15.107, 15.207	P

Please refer to **ANNEX A** for detail.

The measurement is made according to ANSI C63.4 and KDB558074

6.2. Statements

TMC has evaluated the test cases requested by the client/manufacturer as listed in section 6.1 of this report for the EUT specified in section 4 according to the standards or reference documents listed in section 5.2.

7. TEST EQUIPMENTS

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Vector Signal Analyzer	FSQ26	200136	Rohde & Schwarz	2011-01-15
2	Power Meter	NRVD	101078	Rohde & Schwarz	2010-09-02
3	DIODE Power Sensor	NRV-Z15	100103	Rohde & Schwarz	2010-09-02
4	Test Receiver	ESS	847151/015	Rohde & Schwarz	2010-10-30
5	LISN	ESH2-Z5	829991/012	Rohde & Schwarz	2010-08-13

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date
1	Test Receiver	ESI40	831564/002	Rohde & Schwarz	2011-02-12
2	BiLog Antenna	3142B	9908-1403	EMCO	2011-03-15
3	Dual-Ridge Waveguide Horn Antenna	3115	9906-5827	EMCO	2010-12-25

Anechoic chamber


Fully anechoic chamber by Frankonia German.

ANNEX A: MEASUREMENT RESULTS

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required working mode
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

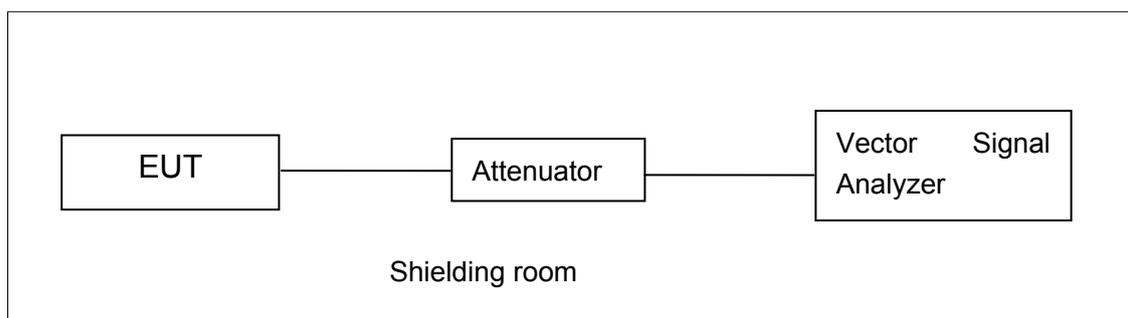


A.1.2. Radiated Emission Measurements

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 10Hz;

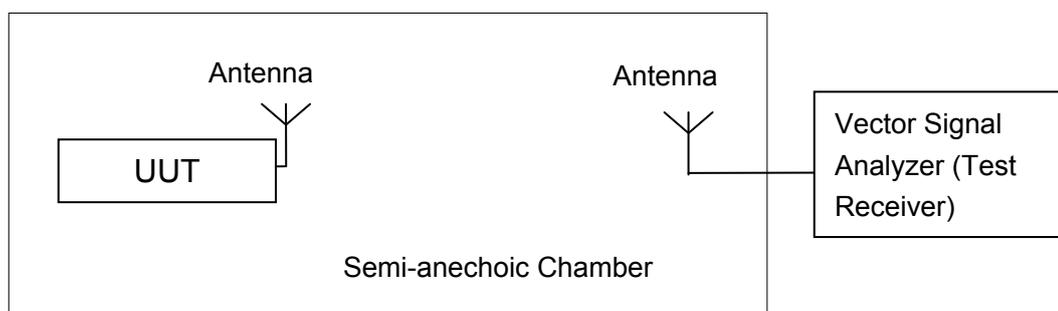

The measurement is made according to ANSI C63.4 and KDB558074

A.2. Maximum Peak Output Power

Measurement Limit and Method:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

The measurement is made according to ANSI C63.4 and KDB558074

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Results:

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	15.33	/	/
	2	15.02	/	/
	5.5	15.45	/	/
	11	15.62	15.60	16.97
802.11g	6	17.05	/	/
	9	17.26	/	/
	12	17.85	/	/
	18	17.30	/	/
	24	17.99	/	/
	36	17.74	/	/
	48	17.82	/	/
	54	17.95	18.75	19.30

The data rate 11Mbps and 54Mbps are selected as worse condition, and the following cases are performed with this condition.

Conclusion: PASS

A.3. Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC CRF Part 15.247(d)	< 8 dBm/3 kHz

The measurement is made according to ANSI C63.4 and KDB558074

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Results:

Mode	Channel	Power Spectral Density (dBm/3 kHz)		Conclusion
802.11b	1	Fig.1	-14.55	P
	6	Fig.2	-14.19	P
	11	Fig.3	-13.31	P
802.11g	1	Fig.4	-16.66	P
	6	Fig.5	-16.16	P
	11	Fig.6	-15.09	P

Conclusion: PASS

A.4. Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

The measurement is made according to ANSI C63.4 and KDB558074

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------

Measurement Result:

Mode	Channel	Occupied 6dB Bandwidth (kHz)		conclusion
802.11b	1	Fig.7	12179.5	P
	6	Fig.8	12099.4	P
	11	Fig.9	12083.3	P
802.11g	1	Fig.10	16666.7	P
	6	Fig.11	16666.7	P
	11	Fig.12	16650.6	P

See annex B for test graphs.

Conclusion: PASS

A.5. Band Edges Compliance

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

The measurement is made according to ANSI C63.4 and KDB558074

Measurement Uncertainty:

Measurement Uncertainty	0.75dB
-------------------------	--------

Measurement Result:

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.13	P
	11	Fig.14	P
802.11g	1	Fig.15	P
	11	Fig.16	P

See annex B for test graphs.

Conclusion: PASS

A.6. Transmitter Spurious Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

The measurement is made according to ANSI C63.4 and KDB558074

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Measurement Uncertainty:

Frequency Range	Uncertainty
$30\text{MHz} \leq f \leq 2\text{GHz}$	0.63
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	0.82
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.55
$8\text{GHz} \leq f \leq 20\text{GHz}$	1.86
$20\text{GHz} \leq f \leq 22\text{GHz}$	1.90
$22\text{GHz} \leq f \leq 26\text{GHz}$	2.20

A.6.1 Transmitter Spurious Emission - Conducted

Measurement Results:

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412 GHz	Fig.17	P
		30 MHz ~ 1 GHz	Fig.18	P
		1 GHz ~ 26 GHz	Fig.19	P
	6	2.437 GHz	Fig.20	P
		30 MHz ~ 1 GHz	Fig.21	P
		1 GHz ~ 26 GHz	Fig.22	P
	11	2.462 GHz	Fig.23	P
		30 MHz ~ 1 GHz	Fig.24	P
		1 GHz ~ 26 GHz	Fig.25	P

**Telecommunication Metrology Center
of Ministry of Industry and Information Technology**

No. 2010WLN0212

Page 16 of 50

802.11g	1	2.412 GHz	Fig.26	P
		30 MHz ~ 1 GHz	Fig.27	P
		1 GHz ~ 26 GHz	Fig.28	P
	6	2.437 GHz	Fig.29	P
		30 MHz ~ 1 GHz	Fig.30	P
		1 GHz ~ 26 GHz	Fig.31	P
	11	2.462 GHz	Fig.32	P
		30 MHz ~ 1 GHz	Fig.33	P
		1 GHz ~ 26 GHz	Fig.34	P

See annex B for test graphs.

Conclusion: PASS

A.6.1 Transmitter Spurious Emission - Radiated

Limit in restricted band:

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Condition

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

Measurement Results:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable los.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}}$$

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power	2.45GHz ~2.5GHz	Fig.35	P
	1	30 MHz ~1 GHz	Fig.36	P
		1 GHz ~ 4 GHz	Fig.37	P
		4 GHz ~ 18 GHz	Fig.38	P
		30 MHz ~1 GHz	Fig.39	P
	6	1 GHz ~ 4 GHz	Fig.40	P
		4 GHz ~ 18 GHz	Fig.41	P
		30 MHz ~1 GHz	Fig.42	P
	11	1 GHz ~ 4 GHz	Fig.43	P
		4 GHz ~ 18 GHz	Fig.44	P
		2.4GHz~2.5GHz	Fig.45	P
	802.11g	Power	2.4GHz~2.5GHz	Fig.45
1		30 MHz ~1 GHz	Fig.46	P
		1 GHz ~ 4 GHz	Fig.47	P
		4 GHz ~ 18 GHz	Fig.48	P
		30 MHz ~1 GHz	Fig.49	P
6		1 GHz ~ 4 GHz	Fig.50	P
		4 GHz ~ 18 GHz	Fig.51	P
		30 MHz ~1 GHz	Fig.52	P
11		1 GHz ~ 4 GHz	Fig.53	P
		4 GHz ~ 18 GHz	Fig.54	P
		18 GHz~ 26 GHz	Fig.55	P
/		All channels	18 GHz~ 26 GHz	Fig.55

See annex B for test graphs.

802.11b

Ch1

Frequency(MHz)	Result(dBuV/m)	A _{Rpl} (dB)	P _{Mea} (dBuV/m)	Polarity
2430.862	52.72	8.6	44.12	HORIZONTAL
3709.419	51.46	14.3	37.16	VERTICAL
3468.938	51.16	11.9	39.26	HORIZONTAL
3983.968	51.04	14.6	36.44	HORIZONTAL
3911.824	51.02	14.3	36.72	VERTICAL
3961.924	51.01	14.4	36.61	VERTICAL

Ch 6

Frequency(MHz)	Result(dBuV/m)	A _{Rpl} (dB)	P _{Mea} (dBuV/m)	Polarity
2454.91	53.96	8.8	45.16	VERTICAL
3925.852	51.02	14.1	36.92	VERTICAL
3895.792	50.91	14.4	36.51	VERTICAL
3631.263	50.88	14.1	36.78	VERTICAL
2458.918	50.82	8.8	42.02	VERTICAL
3697.395	50.73	14.2	36.53	VERTICAL

Ch11

Frequency(MHz)	Result(dBuV/m)	A _{Rpl} (dB)	P _{Mea} (dBuV/m)	Polarity
3476.954	51.39	12.2	39.19	VERTICAL
3563.126	51.3	14.2	37.1	VERTICAL
3963.928	51.2	14.4	36.8	VERTICAL
3513.026	51.11	14.4	36.71	VERTICAL
2482.966	51.04	9.4	41.64	VERTICAL
3529.058	50.68	14.2	36.48	VERTICAL

802.11g

Ch 1

Frequency(MHz)	Result(dBuV/m)	A _{Rpl} (dB)	P _{Mea} (dBuV/m)	Polarity
2386.774	52.49	8.8	43.69	HORIZONTAL
2438.878	52.13	8.6	43.53	HORIZONTAL
3715.431	50.67	14.5	36.17	HORIZONTAL
3551.102	50.31	14.3	36.01	HORIZONTAL
3408.818	50.27	12.1	38.17	HORIZONTAL
3507.014	50.26	14.5	35.76	HORIZONTAL

**Telecommunication Metrology Center
of Ministry of Industry and Information Technology**

No. 2010WLN0212 **Page 19 of 50**

Ch 6

Frequency(MHz)	Result(dBuV/m)	A _{Rpl} (dB)	P _{Mea} (dBuV/m)	Polarity
2466.934	53.28	8.9	44.38	HORIZONTAL
2406.814	51.79	8.8	42.99	HORIZONTAL
3711.423	51.38	14.5	36.88	HORIZONTAL
2470.942	50.82	9.1	41.72	HORIZONTAL
3967.936	50.47	14.4	36.07	HORIZONTAL
3761.523	50.26	14.1	36.16	HORIZONTAL

Ch 11

Frequency(MHz)	Result(dBuV/m)	A _{Rpl} (dB)	P _{Mea} (dBuV/m)	Polarity
3973.948	51.02	14.5	36.52	HORIZONTAL
3591.182	50.8	14.1	36.7	HORIZONTAL
3879.76	50.52	14.4	36.12	HORIZONTAL
3867.735	50.48	14.2	36.28	HORIZONTAL
2430.862	50.44	8.6	41.84	HORIZONTAL
2402.806	50.42	8.8	41.62	HORIZONTAL

Conclusion: PASS

A.7. AC Powerline Conducted Emission

Test Condition

Voltage (V)	Frequency (Hz)
110	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b Mode	802.11g Mode	
0.15 to 0.5	66 to 56	Fig. 56	Fig. 57	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)


Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		802.11b Mode	802.11g Mode	
0.15 to 0.5	56 to 46	Fig. 56	Fig. 57	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

The measurement is made according to ANSI C63.4 and KDB558074


See annex B for test graphs.

Conclusion: PASS

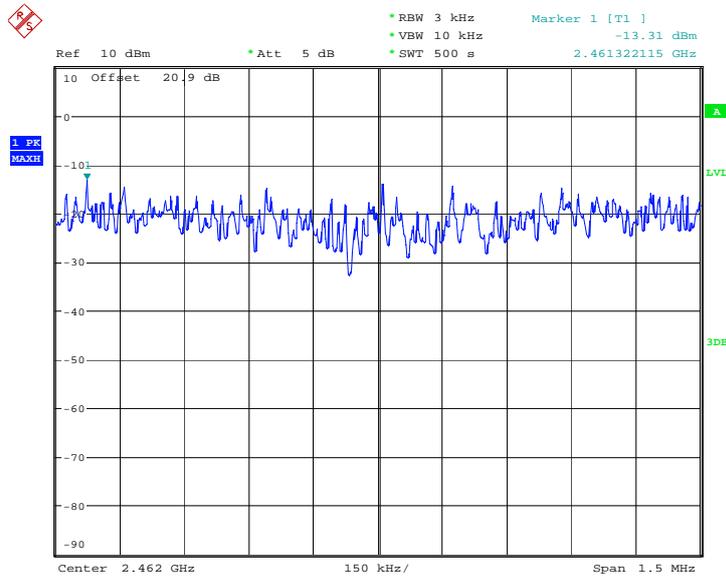


Date: 26.FEB.2010 14:54:47

Fig. 3 Peak Power Spectral Density (802.11b, ch11)

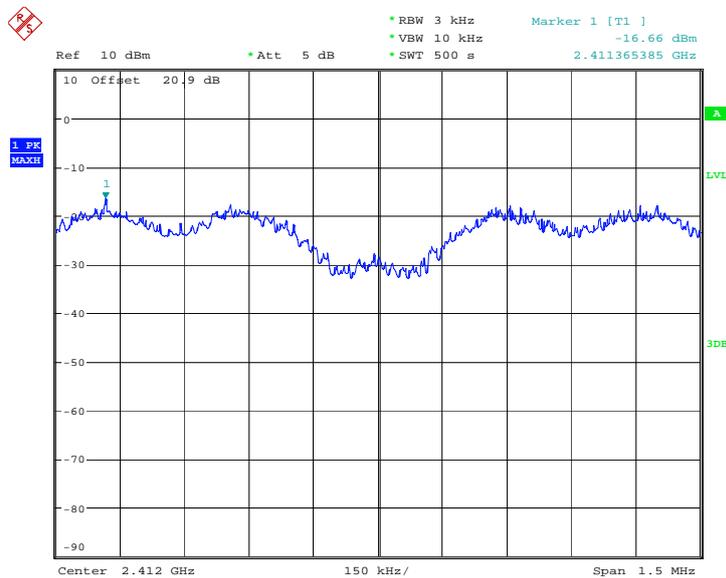


Date: 26.FEB.2010 16:09:23

Fig. 4 Peak Power Spectral Density (802.11g, ch1)

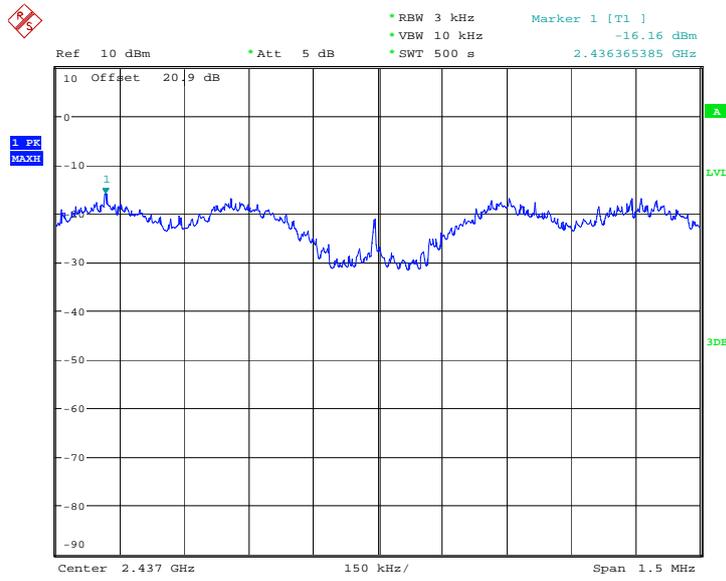


Date: 26.FEB.2010 15:28:23

Fig. 5 Peak Power Spectral Density (802.11g, ch6)

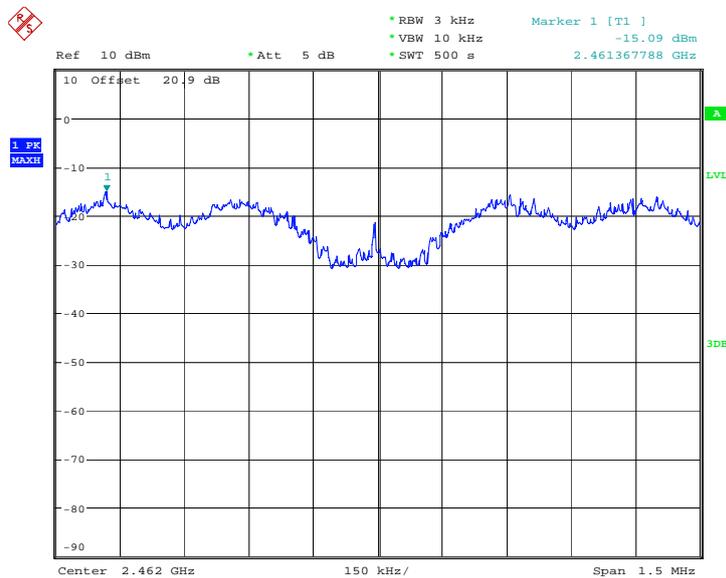


Date: 26.FEB.2010 15:56:15

Fig. 6 Peak Power Spectral Density (802.11g, ch11)

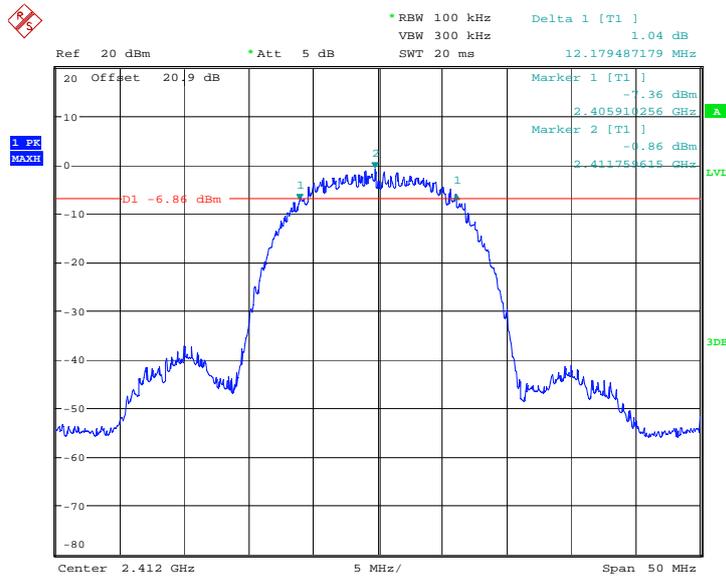


Date: 26.FEB.2010 16:48:41

Fig. 7 Occupied 6dB Bandwidth (802.11b, Ch 1)

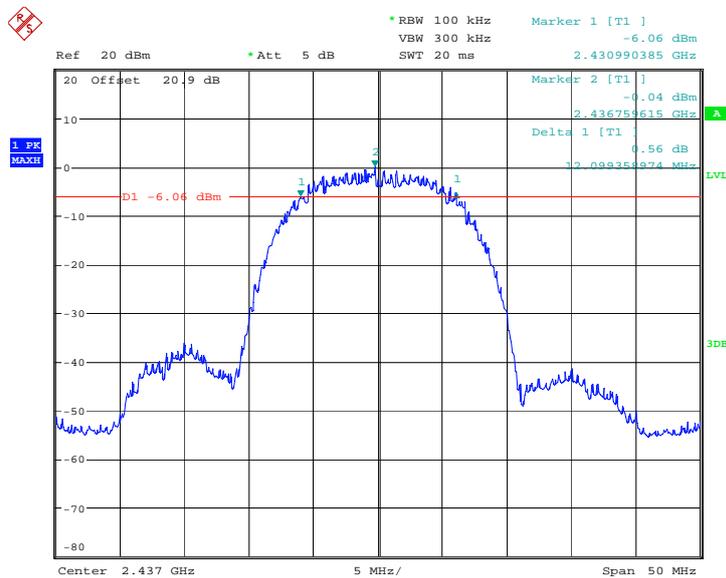


Date: 26.FEB.2010 16:43:33

Fig. 8 Occupied 6dB Bandwidth (802.11b, Ch 6)

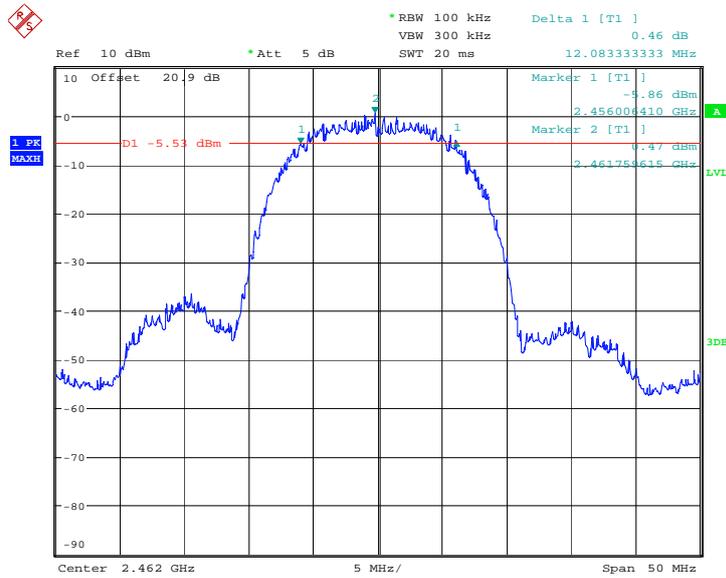


Date: 26.FEB.2010 16:30:58

Fig. 9 Occupied 6dB Bandwidth (802.11b, Ch 11)

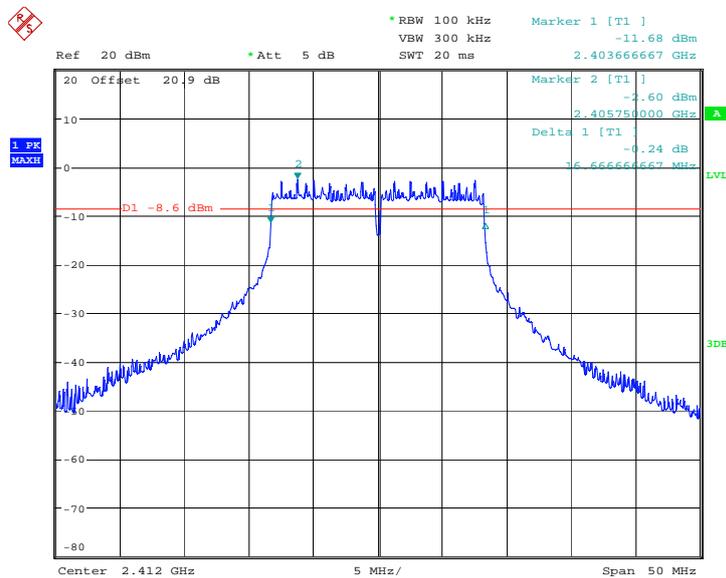


Date: 26.FEB.2010 16:50:31

Fig. 10 Occupied 6dB Bandwidth (802.11g, Ch 1)

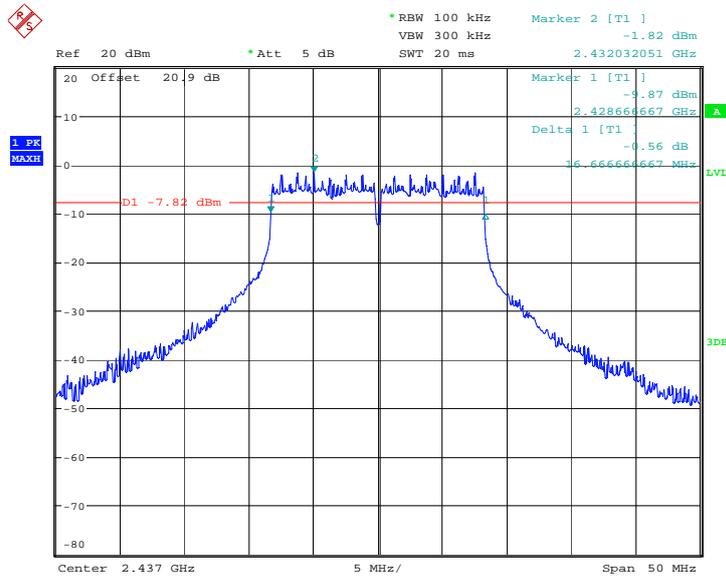


Date: 26.FEB.2010 16:38:28

Fig. 11 Occupied 6dB Bandwidth (802.11g, Ch 6)

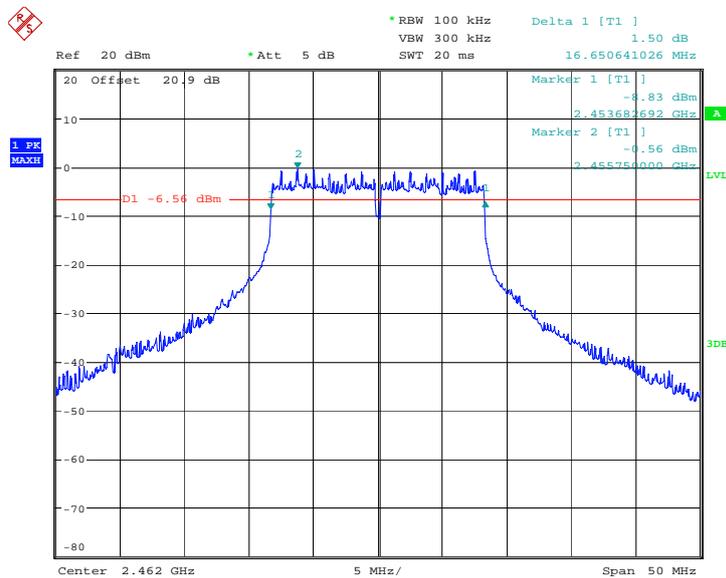


Date: 26.FEB.2010 16:34:51

Fig. 12 Occupied 6dB Bandwidth (802.11g, Ch 11)

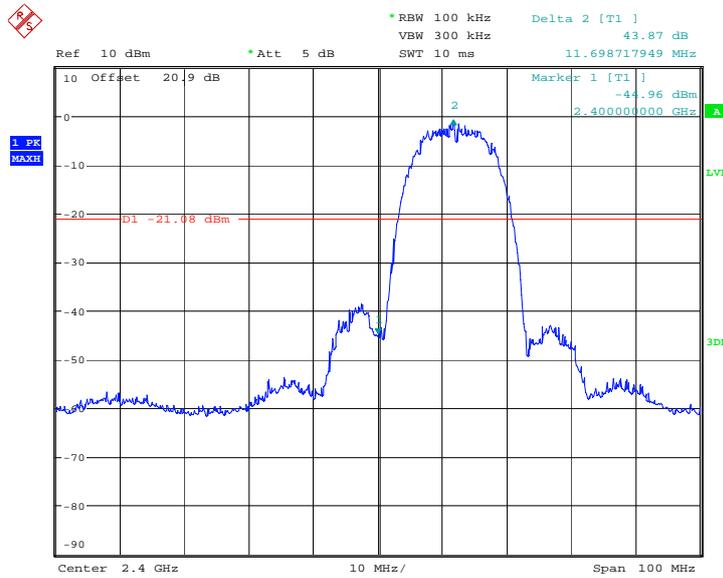


Date: 26.FEB.2010 16:16:43

Fig. 13 Band Edges (802.11b, Ch 1)

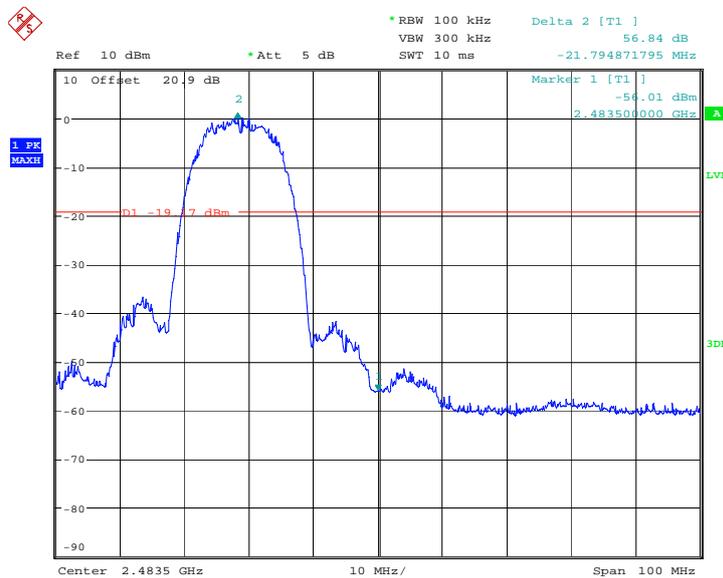


Date: 26.FEB.2010 16:19:01

Fig. 14 Band Edges (802.11b, Ch 11)

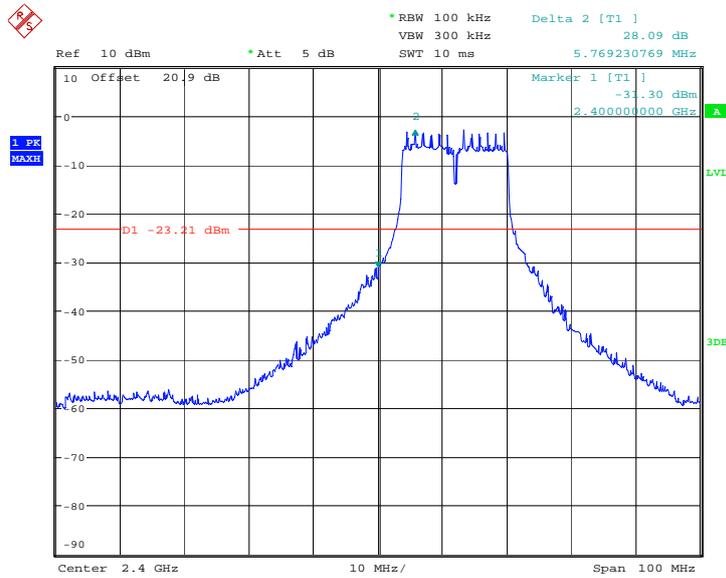


Date: 26.FEB.2010 16:14:18

Fig. 15 Band Edges (802.11g, Ch 1)

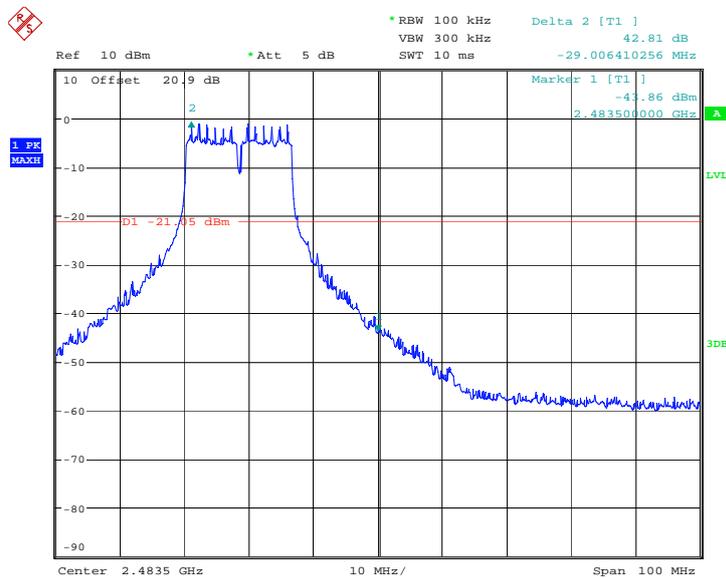


Date: 26.FEB.2010 16:20:34

Fig. 16 Band Edges (802.11g, Ch 11)

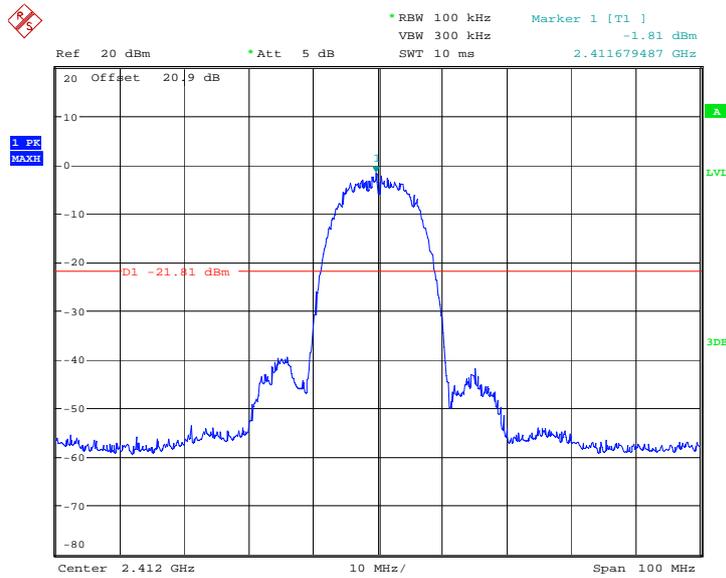


Date: 26.FEB.2010 16:57:57

Fig. 17 Conducted Spurious Emission (802.11b, Ch1, Center Frequency)

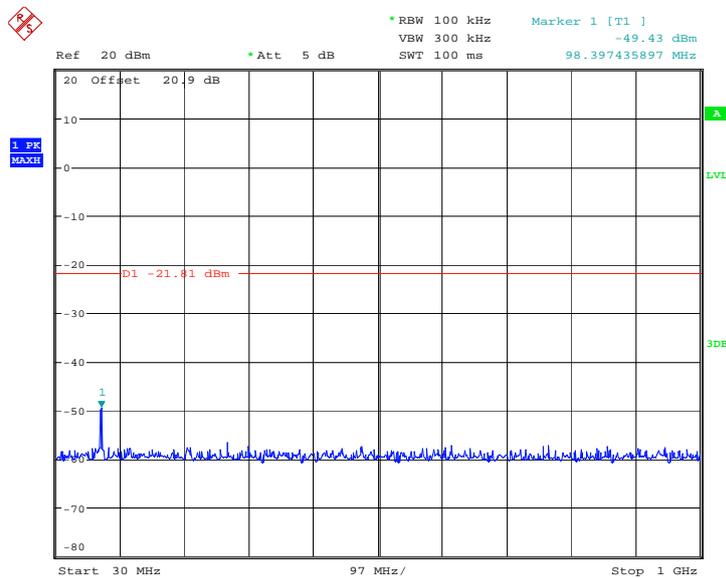


Date: 26.FEB.2010 16:58:08

Fig. 18 Conducted Spurious Emission (802.11b, Ch1, 30 MHz-1 GHz)

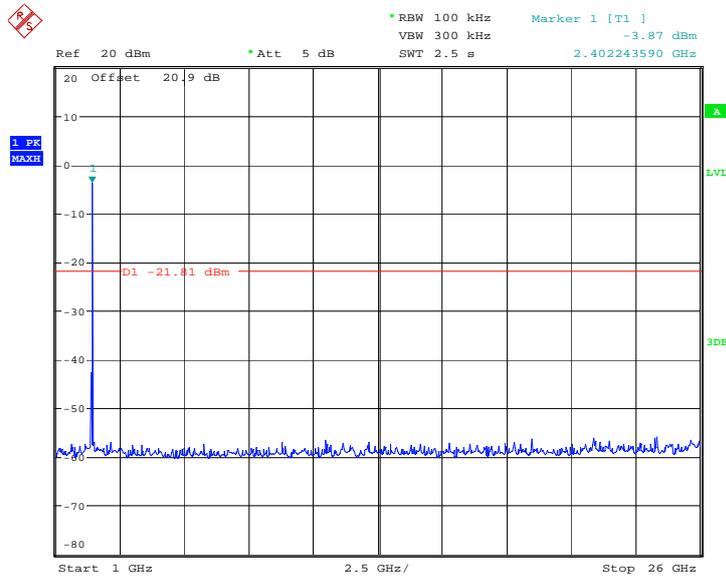


Date: 26.FEB.2010 16:58:23

Fig. 19 Conducted Spurious Emission (802.11b, Ch1, 1 GHz-26 GHz)

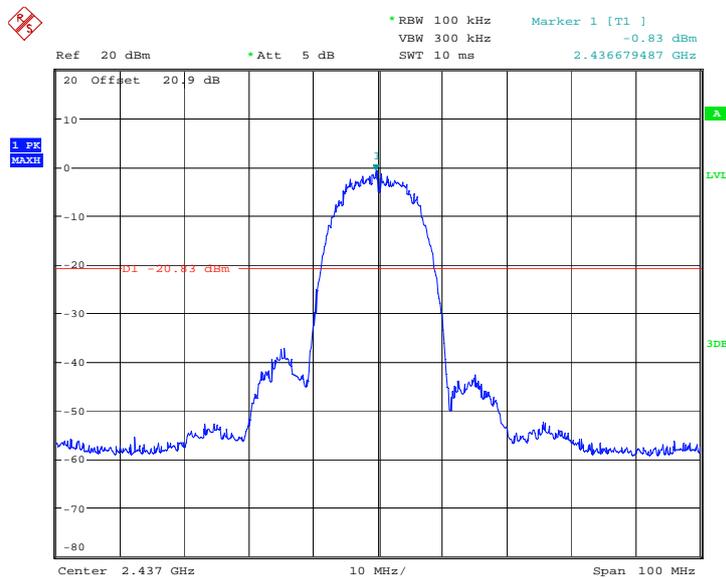


Date: 26.FEB.2010 16:59:15

Fig. 20 Conducted Spurious Emission (802.11b, Ch6, Center Frequency)

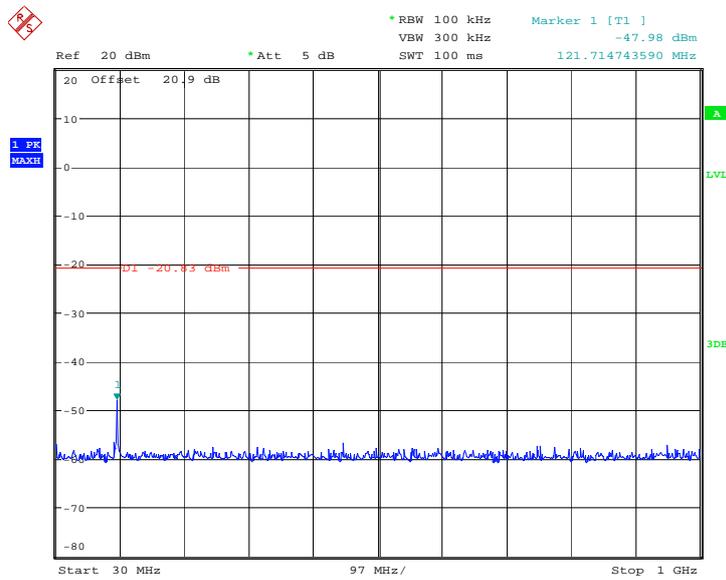


Date: 26.FEB.2010 16:59:28

Fig. 21 Conducted Spurious Emission (802.11b, Ch6, 30 MHz-1 GHz)

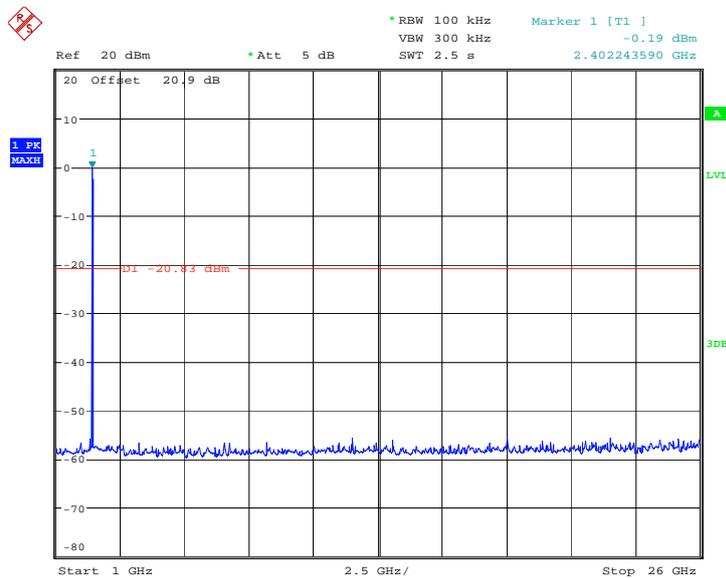


Date: 26.FEB.2010 17:00:15

Fig. 22 Conducted Spurious Emission (802.11b, Ch6, 1 GHz-26 GHz)

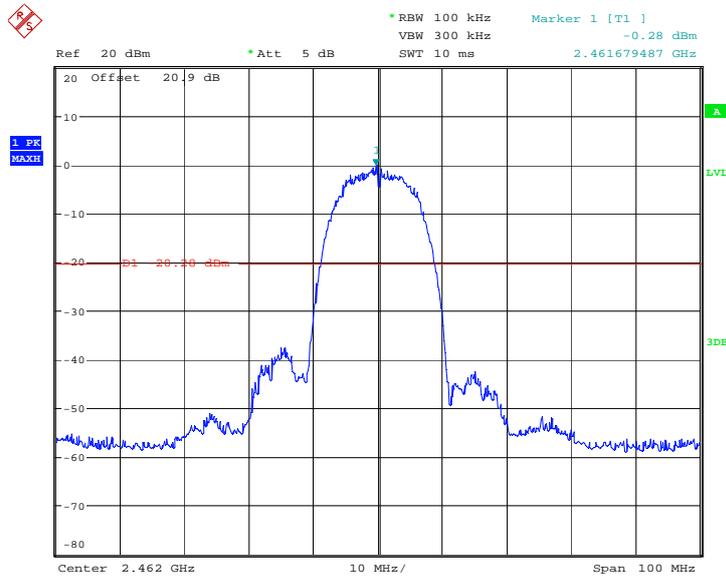


Date: 26.FEB.2010 17:05:39

Fig. 23 Conducted Spurious Emission (802.11b, Ch11, Center Frequency)

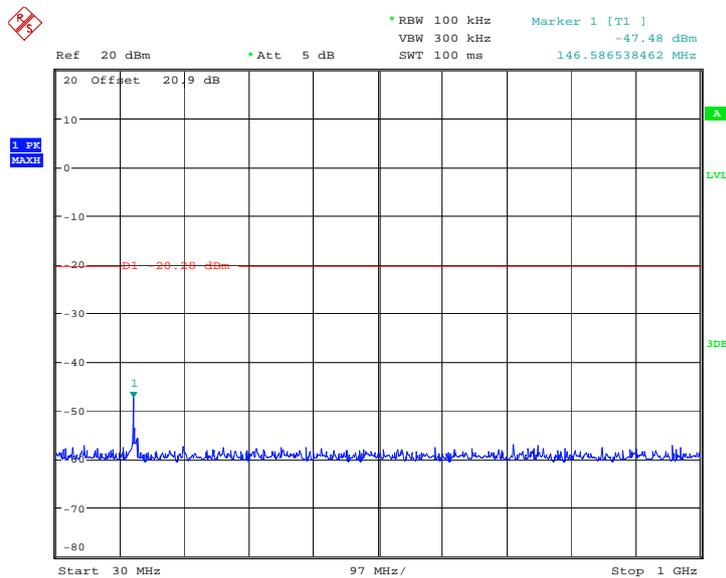


Date: 26.FEB.2010 17:05:52

Fig. 24 Conducted Spurious Emission (802.11b, Ch11, 30 MHz-1 GHz)

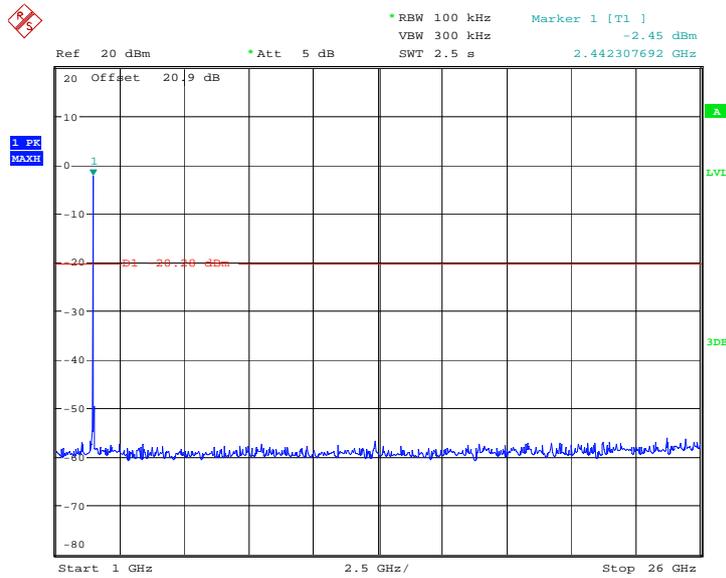


Date: 26.FEB.2010 17:06:04

Fig. 25 Conducted Spurious Emission (802.11b, Ch11, 1 GHz-26 GHz)

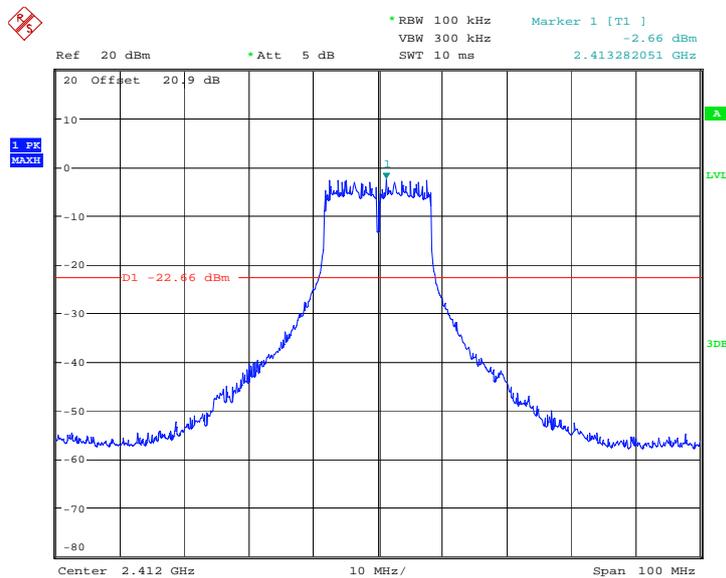


Date: 26.FEB.2010 16:55:43

Fig. 26 Conducted Spurious Emission (802.11g, Ch1, Center Frequency)

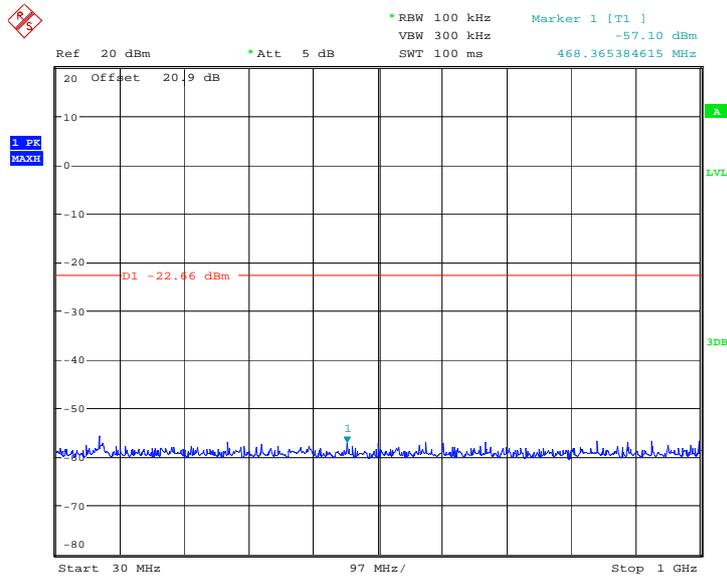


Date: 26.FEB.2010 16:56:04

Fig. 27 Conducted Spurious Emission (802.11g, Ch1, 30 MHz-1 GHz)

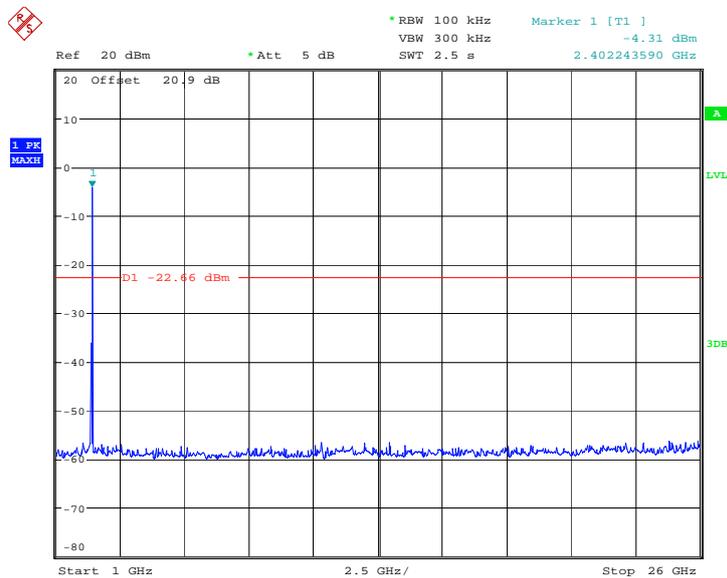


Date: 26.FEB.2010 16:56:25

Fig. 28 Conducted Spurious Emission (802.11g, Ch1, 1 GHz-26 GHz)

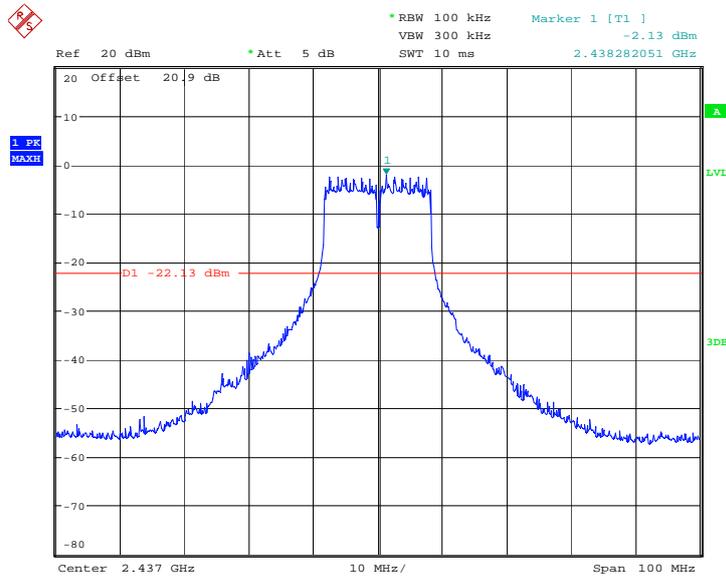


Date: 26.FEB.2010 17:02:26

Fig. 29 Conducted Spurious Emission (802.11g, Ch6, Center Frequency)

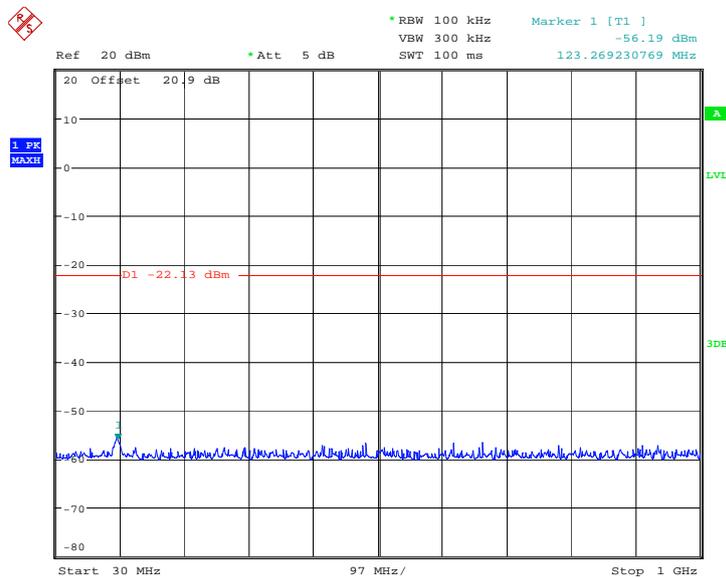


Date: 26.FEB.2010 17:02:42

Fig. 30 Conducted Spurious Emission (802.11g, Ch6, 30 MHz-1 GHz)

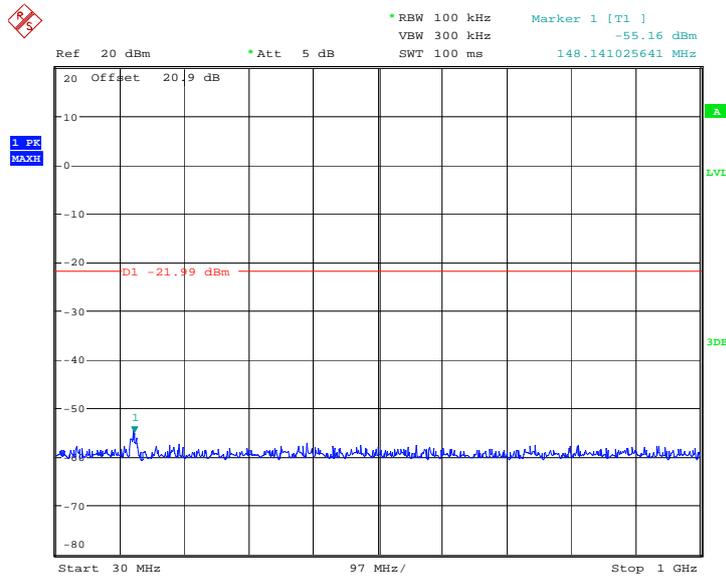

Date: 26.FEB.2010 17:04:14

Fig. 33 Conducted Spurious Emission (802.11g, Ch11, 30 MHz-1 GHz)

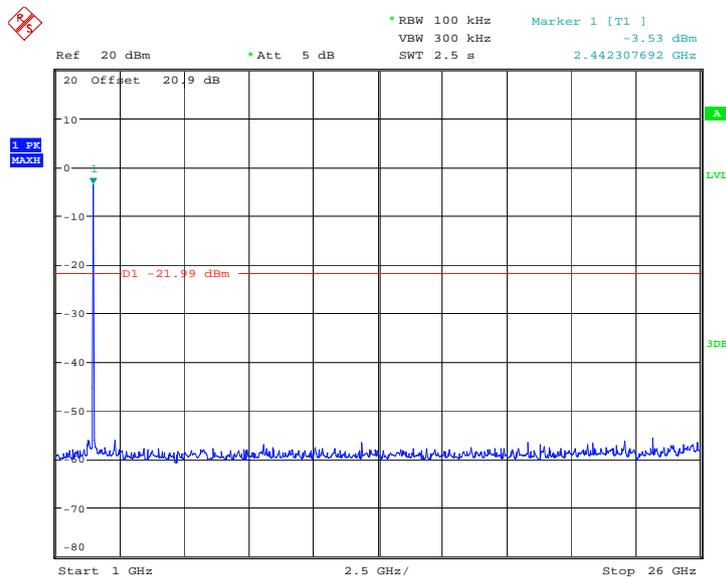

Date: 26.FEB.2010 17:04:28

Fig. 34 Conducted Spurious Emission (802.11g, Ch11, 1 GHz-26 GHz)

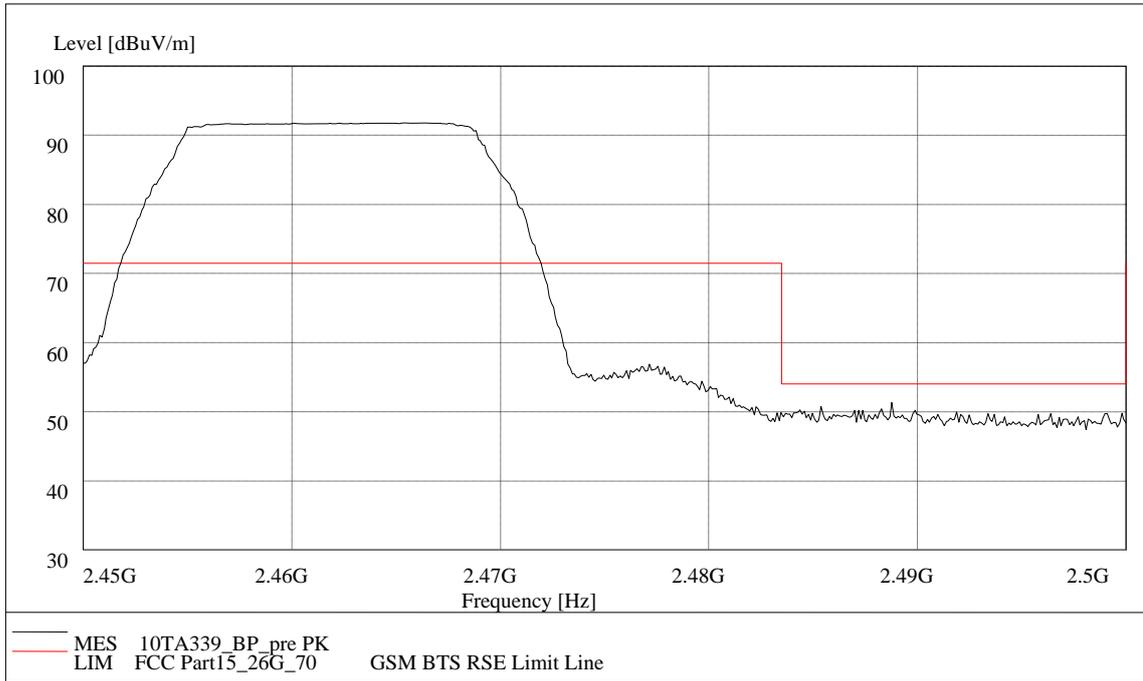


Fig. 35 Radiated Spurious Emission (Power): 802.11b, 2.45 GHz - 2.5GHz

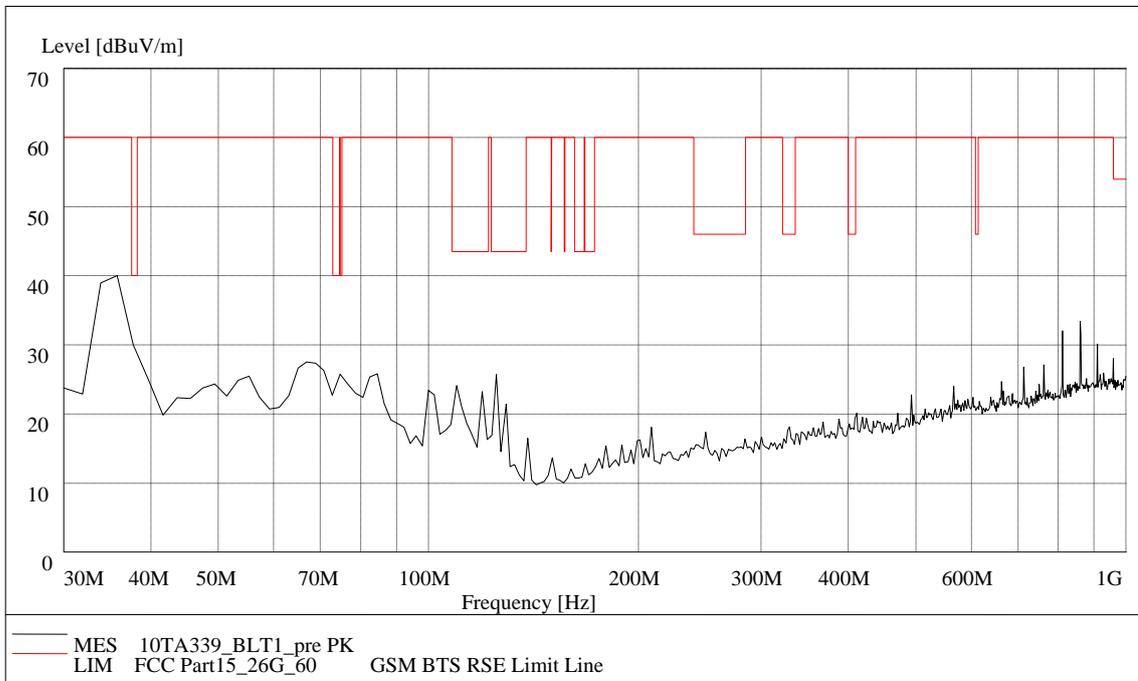


Fig. 36 Radiated Spurious Emission (802.11b, Ch1, 30 MHz-1 GHz)

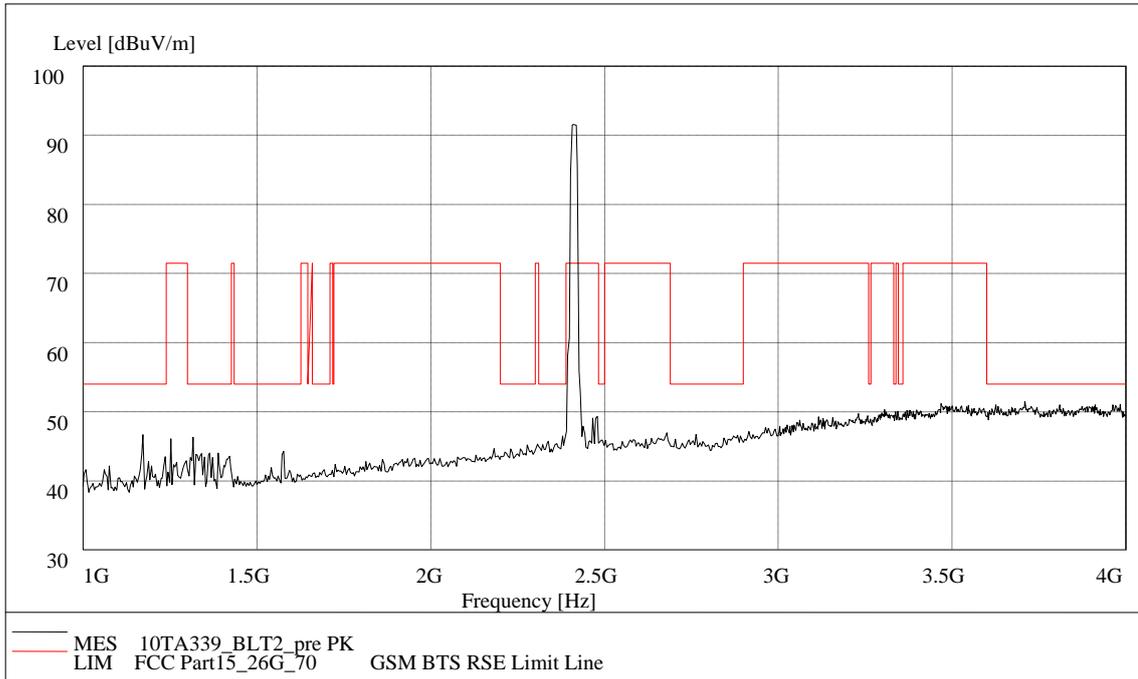


Fig. 37 Radiated Spurious Emission (802.11b, Ch1, 1 GHz-4 GHz)

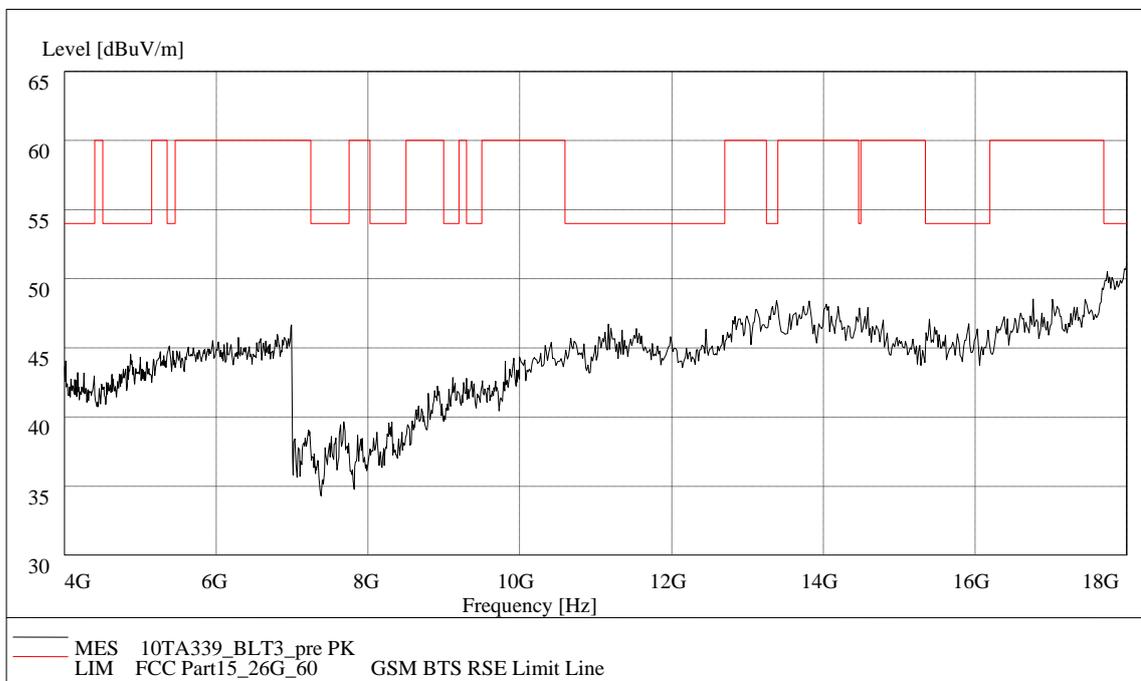


Fig. 38 Radiated Spurious Emission (802.11b, Ch1, 4 GHz-18 GHz)

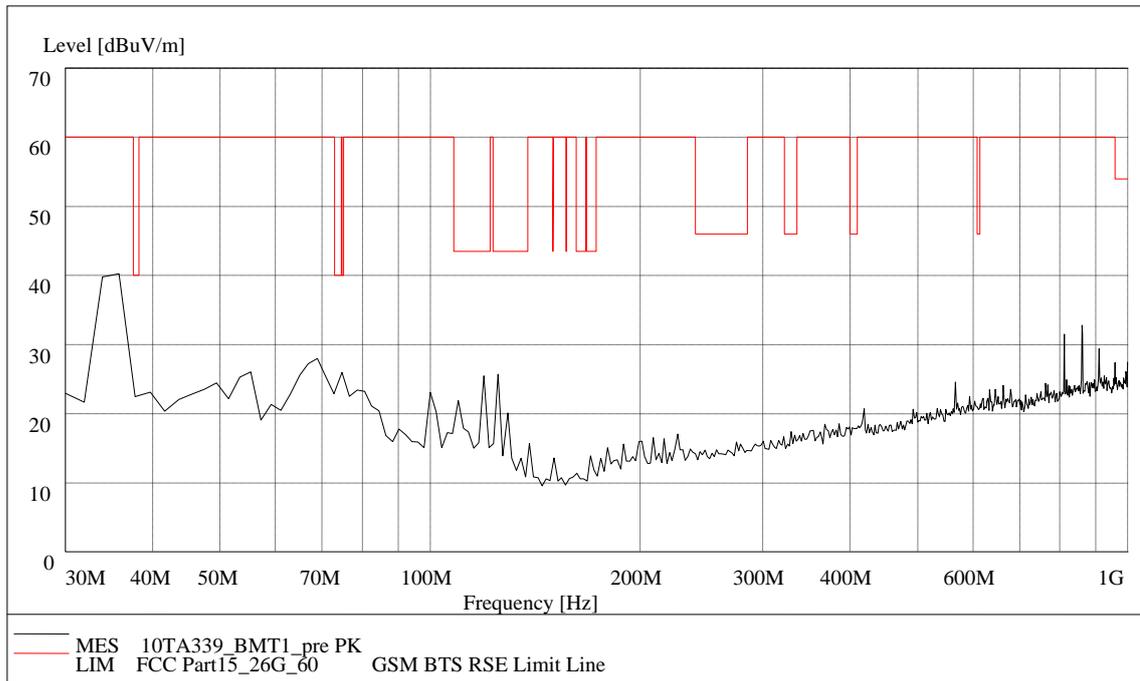


Fig. 39 Radiated Spurious Emission (802.11b, Ch6, 30 MHz-1 GHz)

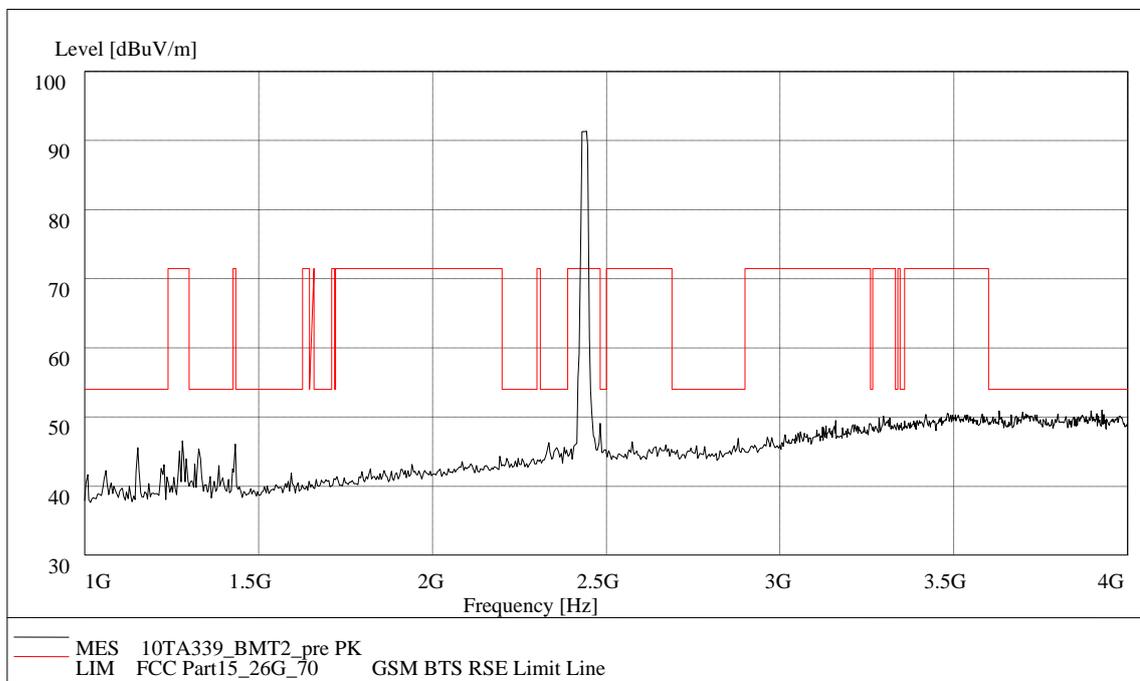


Fig. 40 Radiated Spurious Emission (802.11b, Ch6, 1 GHz-4 GHz)

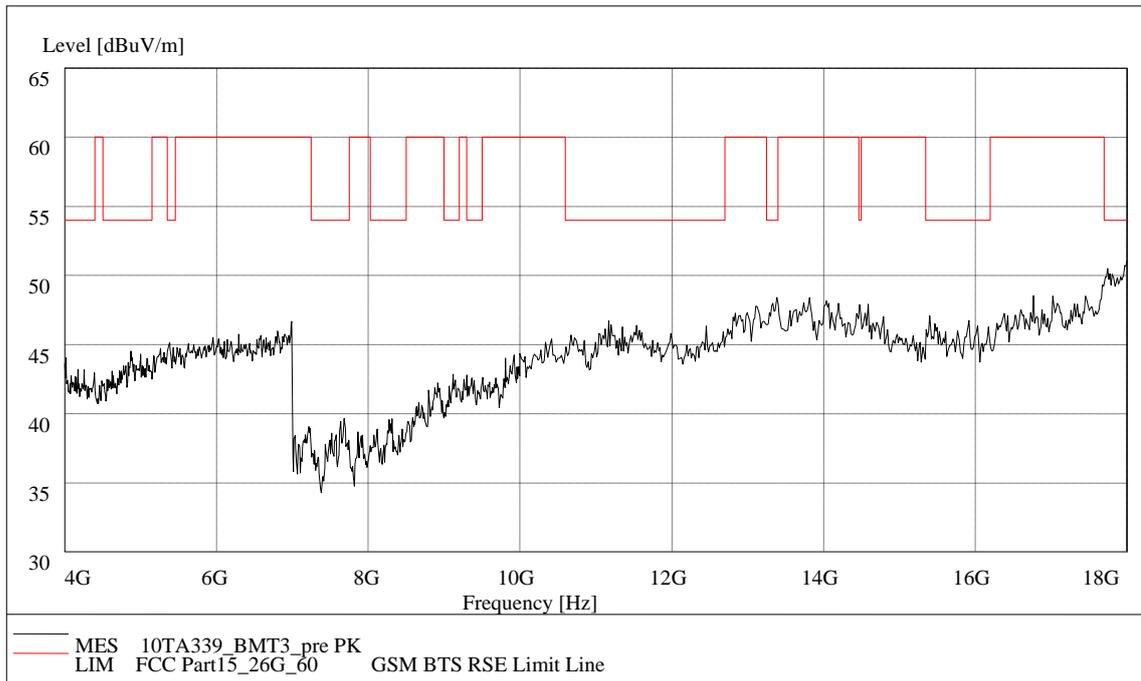


Fig. 41 Radiated Spurious Emission (802.11b, Ch6, 4 GHz-18 GHz)

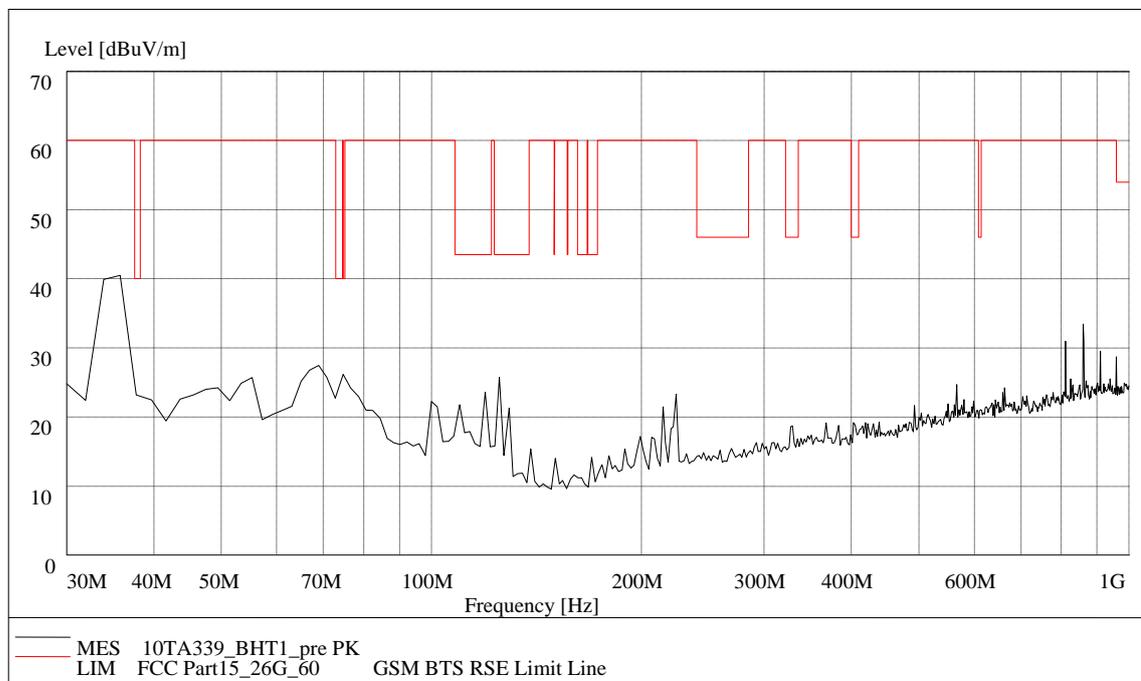


Fig. 42 Radiated Spurious Emission (802.11b, Ch11, 30 MHz-1 GHz)

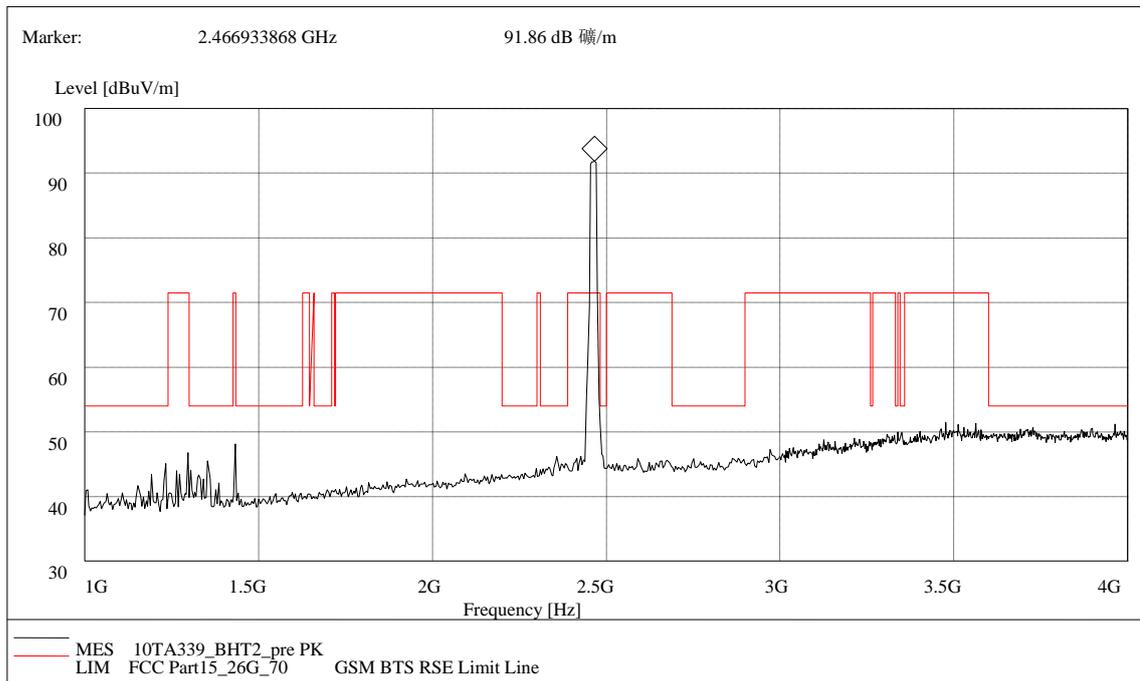


Fig. 43 Radiated Spurious Emission (802.11b, Ch11, 1 GHz-4 GHz)

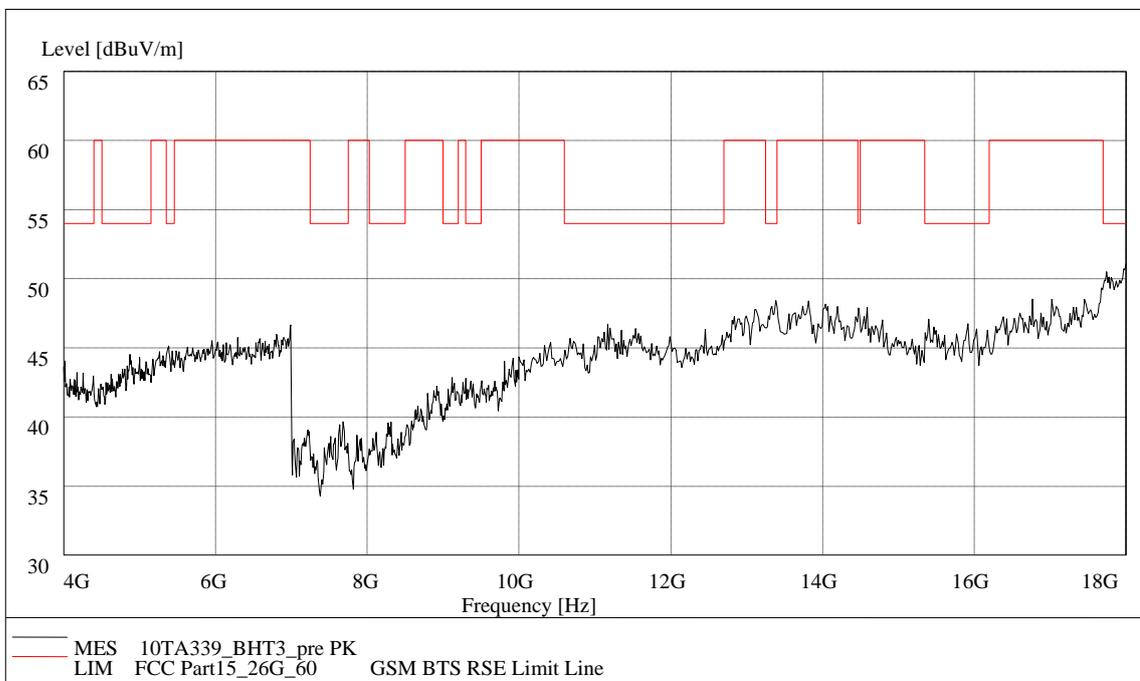


Fig. 44 Radiated Spurious Emission (802.11b, Ch11, 4 GHz-18 GHz)

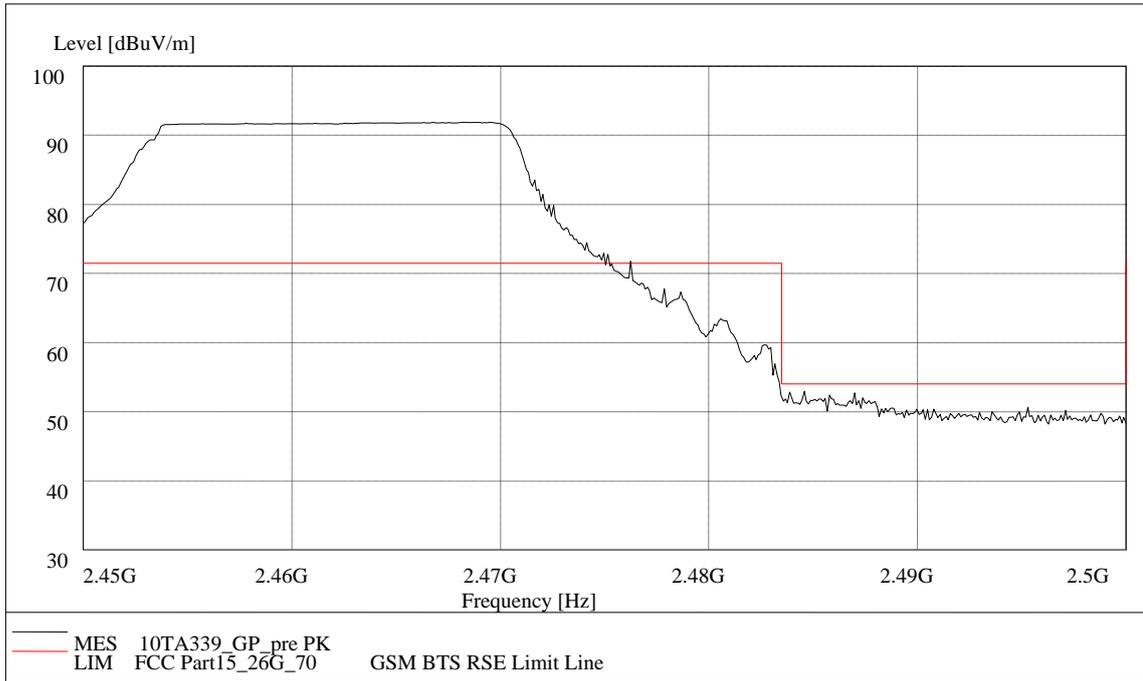


Fig. 45 Radiated Spurious Emission (Power): 802.11g, 2.45 GHz - 2.5GHz

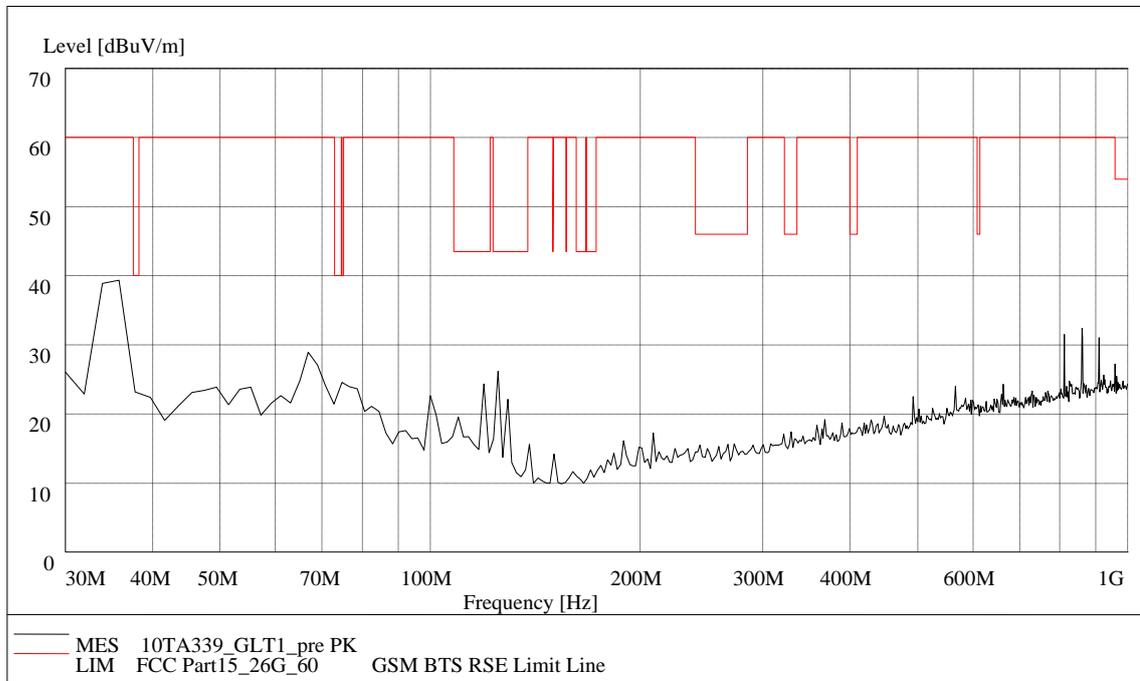


Fig. 46 Radiated Spurious Emission (802.11g, Ch1, 30 MHz-1 GHz)

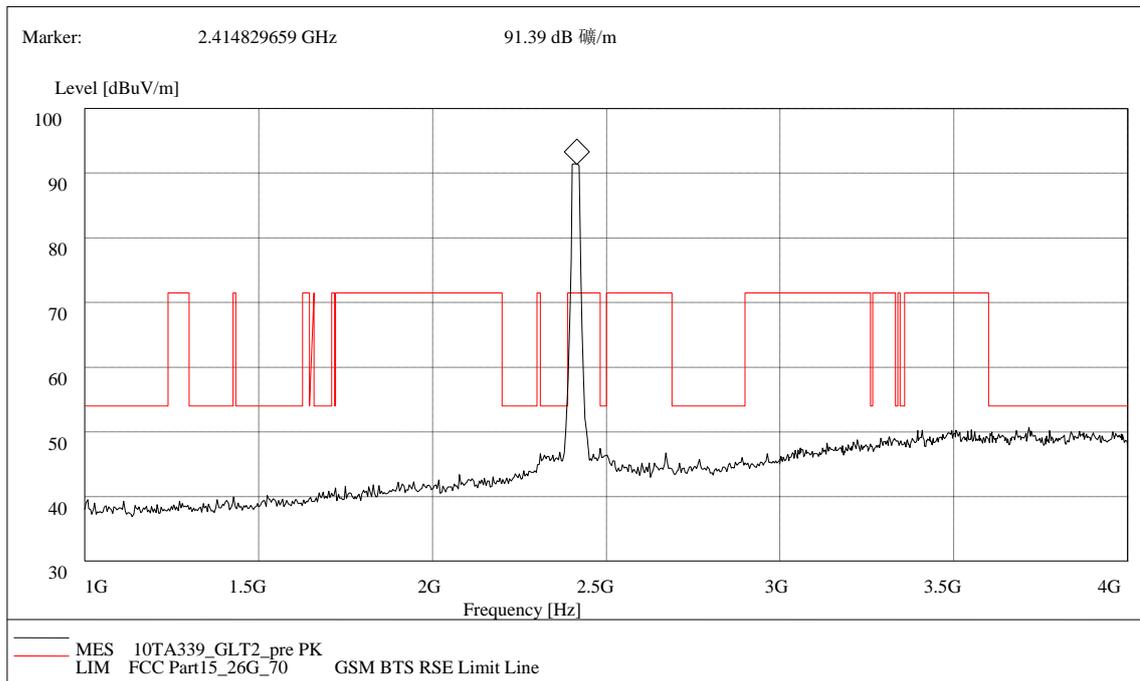


Fig. 47 Radiated Spurious Emission (802.11g, Ch1, 1 GHz-4 GHz)

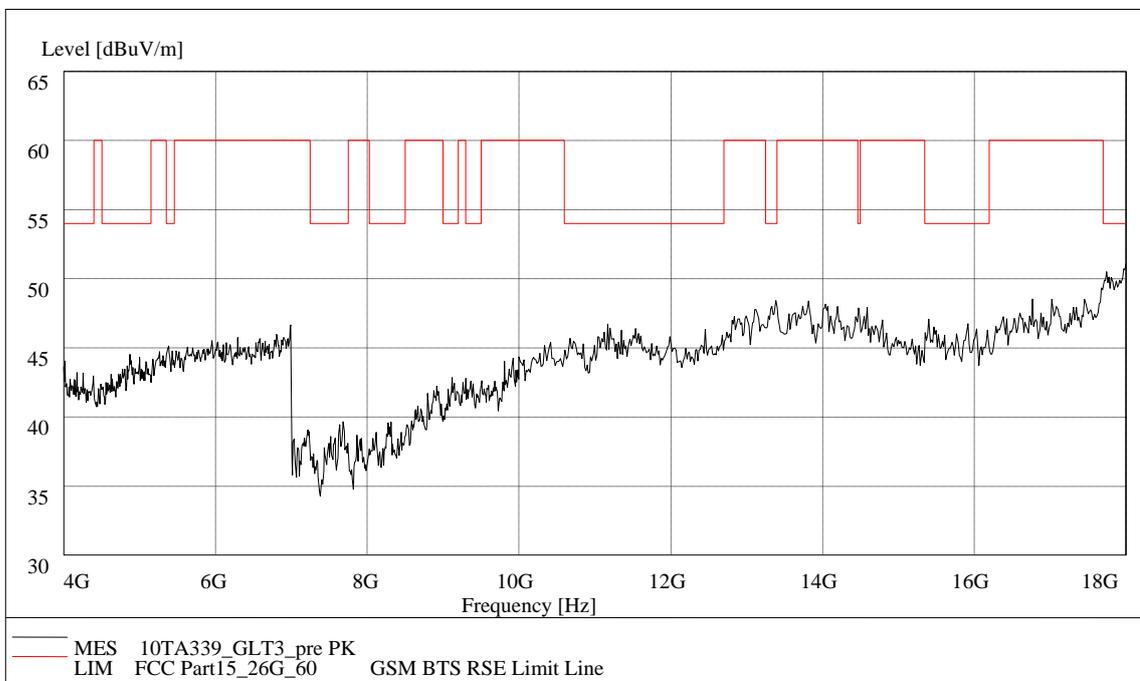


Fig. 48 Radiated Spurious Emission (802.11g, Ch1, 4 GHz-18 GHz)

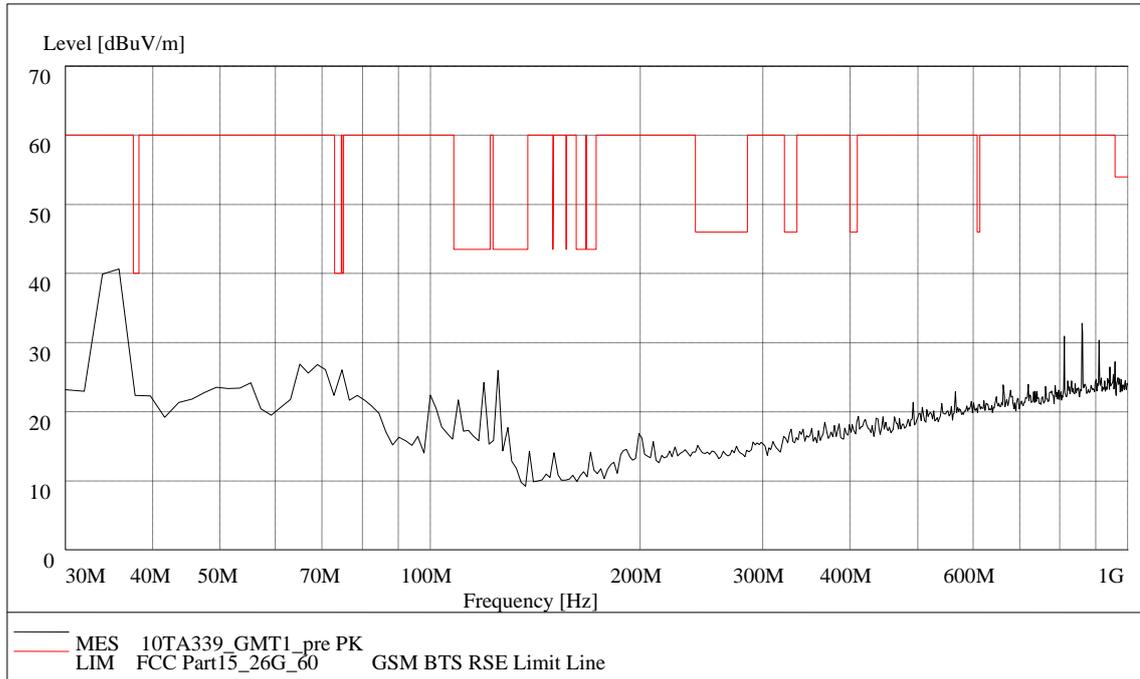


Fig. 49 Radiated Spurious Emission (802.11g, Ch6, 30 MHz-1 GHz)

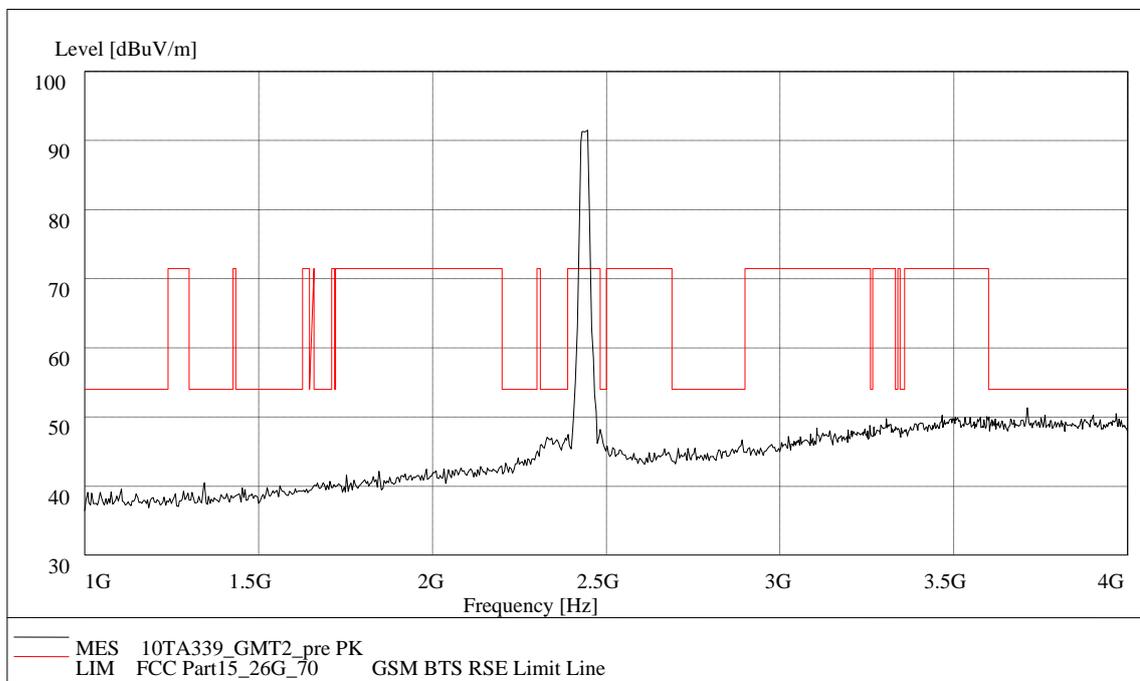


Fig. 50 Radiated Spurious Emission (802.11g, Ch6, 1 GHz-4 GHz)

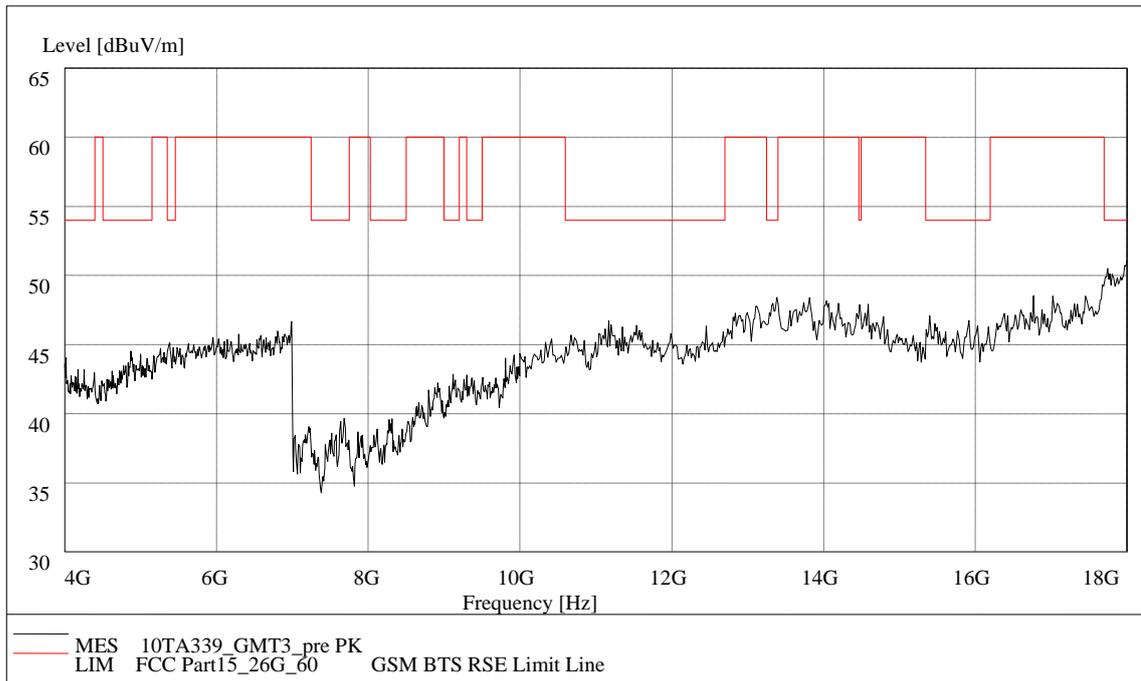


Fig. 51 Radiated Spurious Emission (802.11g, Ch6, 4 GHz-18 GHz)

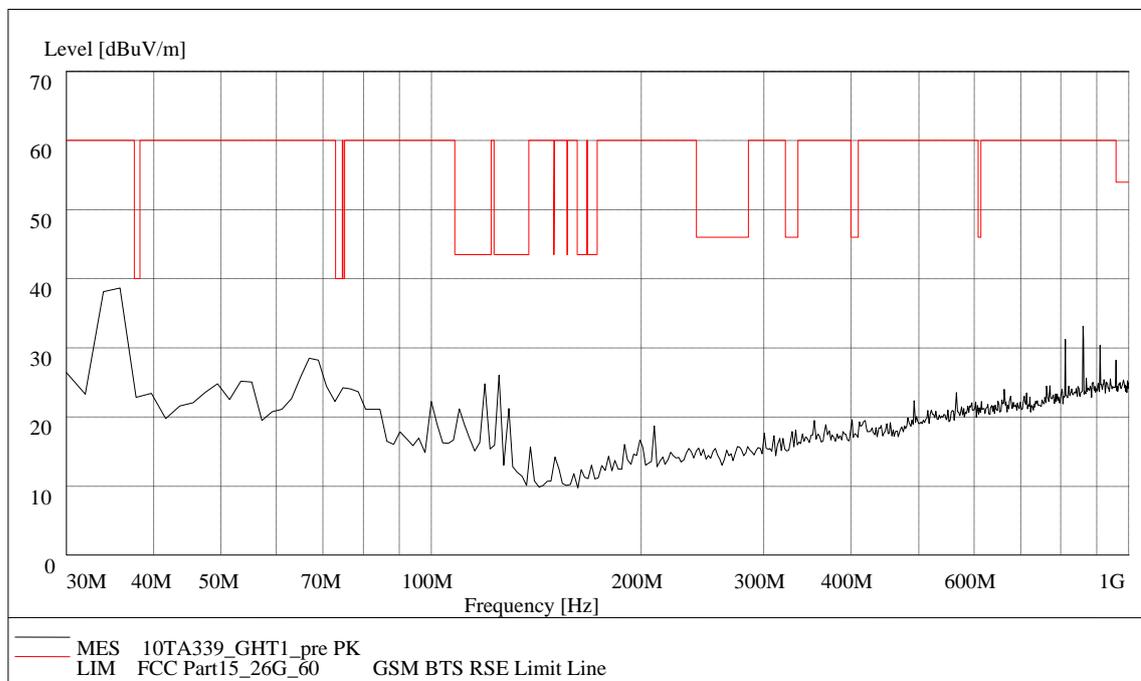


Fig. 52 Radiated Spurious Emission (802.11g, Ch11, 30 MHz-1 GHz)

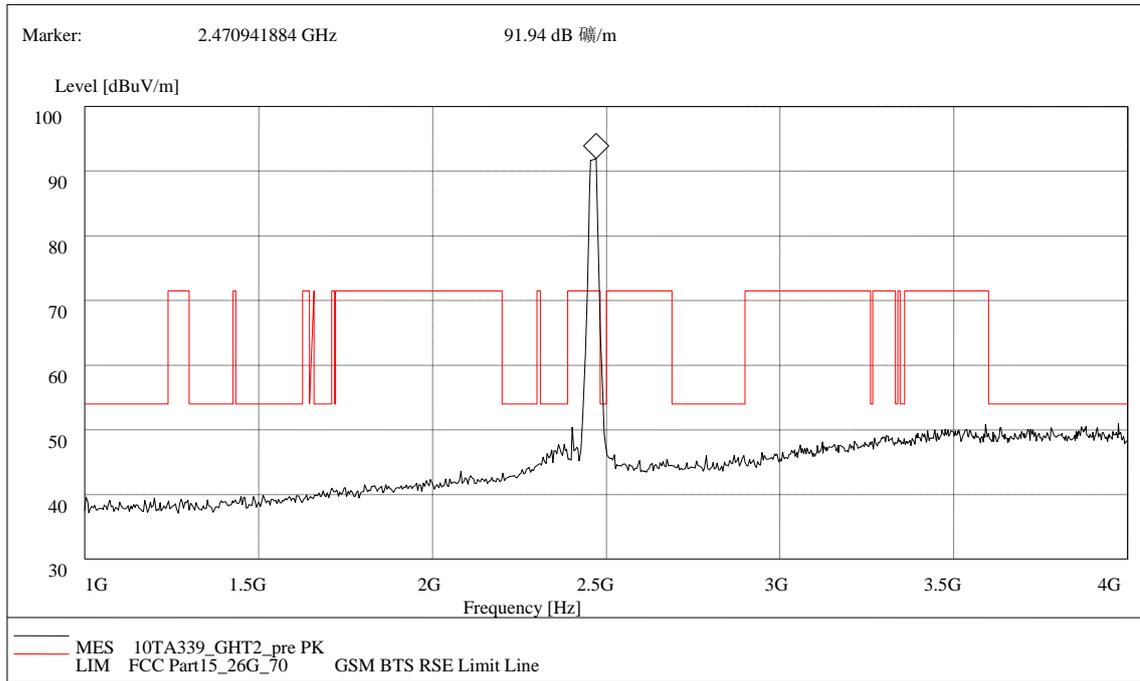


Fig. 53 Radiated Spurious Emission (802.11g, Ch11, 1 GHz-4 GHz)

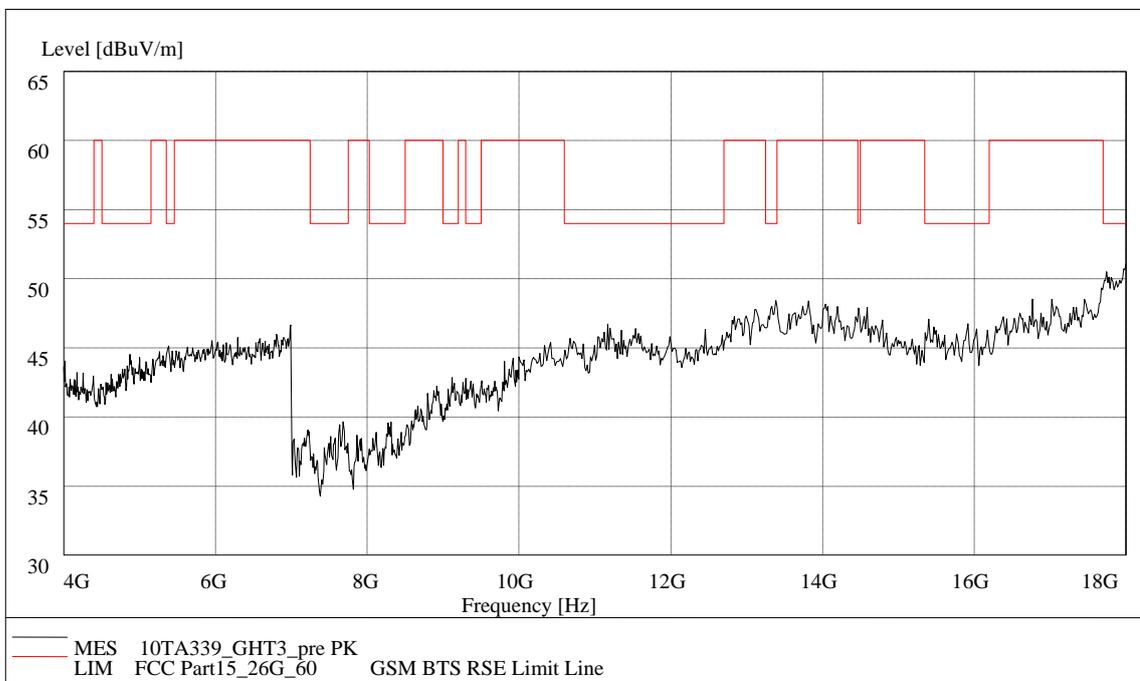


Fig. 54 Radiated Spurious Emission (802.11g, Ch11, 4 GHz-18 GHz)

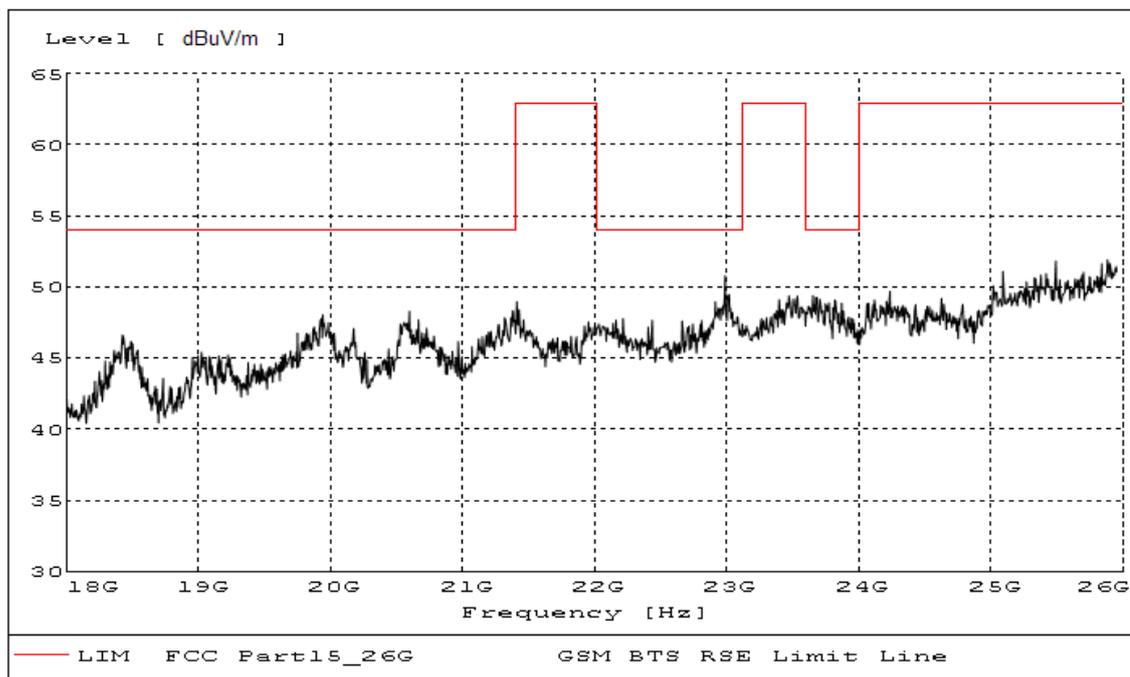


Fig. 55 Radiated emission: 18 GHz - 26 GHz

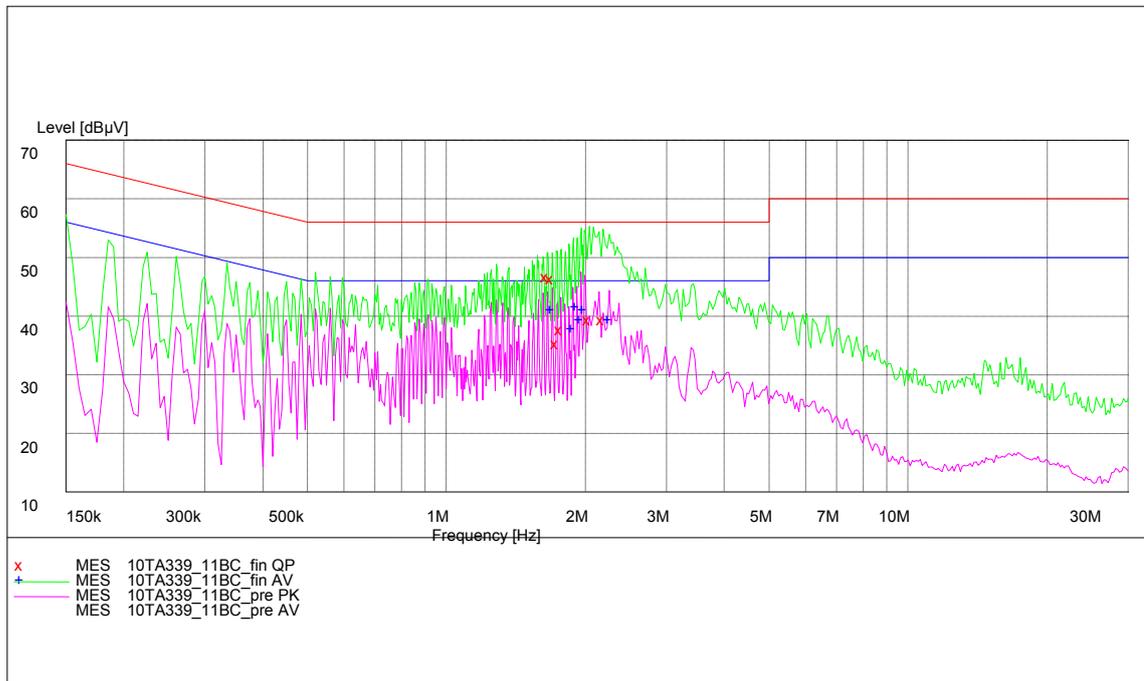


Fig. 56 AC Powerline Conducted Emission - 802.11b mode

Measurement Result: "BC_fin QP"

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
1.655000	48.9	10.1	56	7.1	L1	GND
1.695000	48.5	10.1	56	7.5	L1	GND
1.740000	37.5	10.1	56	18.5	L1	FLO
1.775000	39.9	10.1	56	16.1	L1	GND
2.040200	41.7	10.1	56	14.3	L1	FLO
2.187371	41.7	10.1	56	14.3	L1	GND

Measurement Result: "BC_fin AV"

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
1.695000	43.4	10.1	46	2.6	L1	GND
1.880000	40.1	10.1	46	5.9	L1	GND
1.915000	43.8	10.1	46	2.2	L1	GND
1.955000	41.7	10.1	46	4.3	L1	GND
1.990000	43.3	10.1	46	2.7	L1	GND
2.253650	41.6	10.1	46	4.4	L1	GND

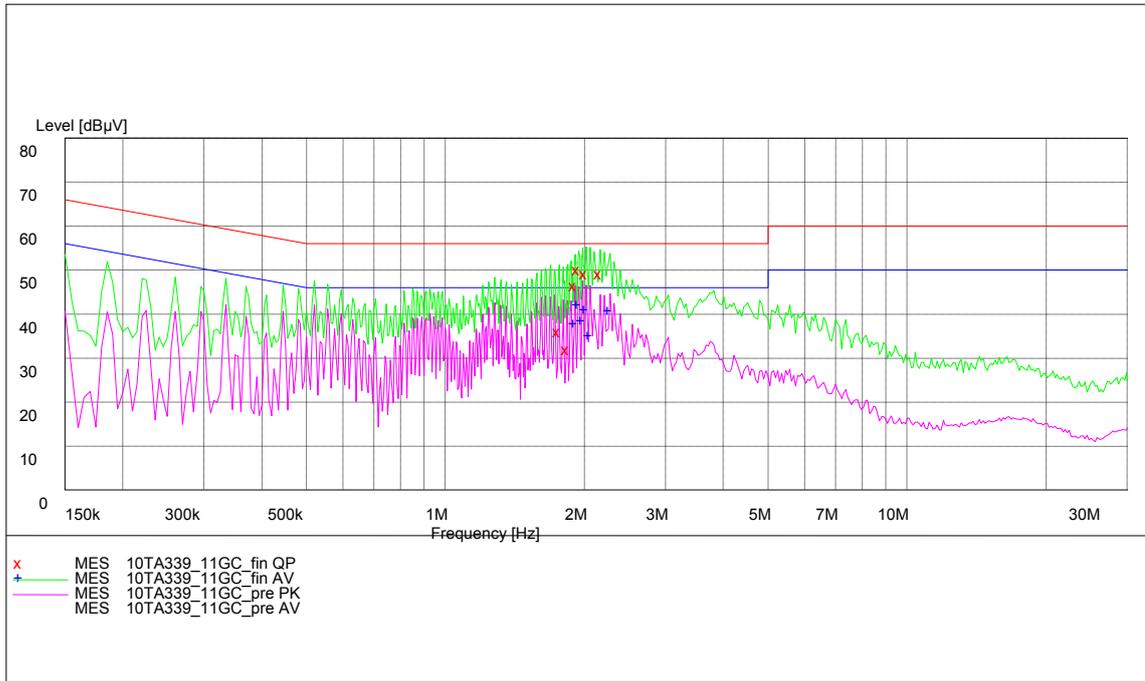


Fig. 57 AC Powerline Conducted Emission - 802.11g mode

Measurement Result: "BC_fin QP"

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
1.765000	39.0	10.1	56	17.0	N	FLO
1.845000	34.9	10.1	56	21.1	N	FLO
1.910000	49.4	10.1	56	6.6	L1	GND
1.945000	53.1	10.1	56	2.9	L1	FLO
2.020000	52.2	10.1	56	3.8	L1	GND
2.165713	52.1	10.1	56	3.9	L1	GND

Measurement Result: "BC_fin AV"

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
1.910000	40.9	10.1	46	5.1	L1	GND
1.945000	45.2	10.1	46	0.8	L1	GND
1.985000	41.4	10.1	46	4.6	L1	GND
2.020000	43.9	10.1	46	2.1	L1	GND
2.060602	38.0	10.1	46	8.0	L1	GND
2.276187	43.7	10.1	46	2.3	L1	GND

*** END OF REPORT BODY ***