



Appendix F - FCC 3G SAR Measurement Procedures


Conducted Output Power:

The EUT was tested according to the requirements of the FCC 3G procedures and the 3.1.2.3.4.

A detailed analysis of the output power verification is provided as the table below:

Function Type	Reverse Traffic Channel	Test Mode	Radio Configuration		Service Option	Data Rates (kbps)	Power Control	Low Ch	Midd Ch	High Ch
			Forward Traffic Channel (Fwd)	Reverse Traffic Channel (Rvs)				1013	384	777
CDMA2000 Cellular	FCH	1	1	1	55	Full	All Up	22.96	22.92	22.78
		3	3	3	55	Full	All Up	22.86	23.02	22.55
	FCH+SCH	3	3	3	32	FCH Full, SCH9.6	All Up	Not Supported		

CDMA2000 Setup Configuration:

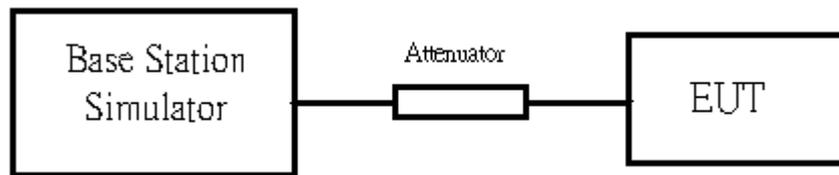

Setup Configuration

- The EUT was connected to Base Station, Agilent 8960. Refer to the drawing of Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting:
 - Set the test mode1 and test mode 3.
 - Set the Power control All Up for (FCH).
- The transmitted maximum output power was recorded.

Call Setup Screen																																
Call Control	Active Cell Operating Mode	Call Parms																														
	<table border="1"> <thead> <tr> <th colspan="2">Mobile Station Information</th> </tr> </thead> <tbody> <tr> <td>ESN (Hex):</td> <td>0x6C32D3AE</td> </tr> <tr> <td>ESN (Dec):</td> <td>108-03330990</td> </tr> <tr> <td>NCC:</td> <td></td> </tr> <tr> <td>MNC:</td> <td></td> </tr> <tr> <td>MSIN:</td> <td>3163712588</td> </tr> <tr> <td>Slot Class:</td> <td>Slotted</td> </tr> <tr> <td>Slot Cycle Index:</td> <td>2</td> </tr> </tbody> </table>	Mobile Station Information		ESN (Hex):	0x6C32D3AE	ESN (Dec):	108-03330990	NCC:		MNC:		MSIN:	3163712588	Slot Class:	Slotted	Slot Cycle Index:	2	<table border="1"> <tbody> <tr> <td>Cell Power</td> <td>-86.00</td> </tr> <tr> <td></td> <td>dBm/1.23 MHz</td> </tr> <tr> <td>Cell Band</td> <td>US PCS</td> </tr> <tr> <td>Channel</td> <td>1175</td> </tr> <tr> <td>Protocol Rev</td> <td>6 (IS-2000)</td> </tr> <tr> <td>Radio Config (Fwd1, Rvs1)</td> <td>S055 (Loopback)</td> </tr> <tr> <td>FCH Service Option Setup</td> <td></td> </tr> </tbody> </table>	Cell Power	-86.00		dBm/1.23 MHz	Cell Band	US PCS	Channel	1175	Protocol Rev	6 (IS-2000)	Radio Config (Fwd1, Rvs1)	S055 (Loopback)	FCH Service Option Setup	
Mobile Station Information																																
ESN (Hex):	0x6C32D3AE																															
ESN (Dec):	108-03330990																															
NCC:																																
MNC:																																
MSIN:	3163712588																															
Slot Class:	Slotted																															
Slot Cycle Index:	2																															
Cell Power	-86.00																															
	dBm/1.23 MHz																															
Cell Band	US PCS																															
Channel	1175																															
Protocol Rev	6 (IS-2000)																															
Radio Config (Fwd1, Rvs1)	S055 (Loopback)																															
FCH Service Option Setup																																
	<table border="1"> <thead> <tr> <th colspan="2">FCH Service Option Setup</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>Service Option for Fwd1, Rvs1</td> <td></td> <td>S055 (Loopback)</td> </tr> <tr> <td>Service Option for Fwd2, Rvs2</td> <td></td> <td>S09 (Loopback)</td> </tr> <tr> <td>Service Option for Fwd3, Rvs3</td> <td></td> <td>S032 (+ SCH)</td> </tr> <tr> <td>Service Option for Fwd4, Rvs3</td> <td></td> <td>S055 (Loopback)</td> </tr> <tr> <td>Service Option for Fwd5, Rvs4</td> <td></td> <td>S055 (Loopback)</td> </tr> </tbody> </table>	FCH Service Option Setup		Value	Service Option for Fwd1, Rvs1		S055 (Loopback)	Service Option for Fwd2, Rvs2		S09 (Loopback)	Service Option for Fwd3, Rvs3		S032 (+ SCH)	Service Option for Fwd4, Rvs3		S055 (Loopback)	Service Option for Fwd5, Rvs4		S055 (Loopback)													
FCH Service Option Setup		Value																														
Service Option for Fwd1, Rvs1		S055 (Loopback)																														
Service Option for Fwd2, Rvs2		S09 (Loopback)																														
Service Option for Fwd3, Rvs3		S032 (+ SCH)																														
Service Option for Fwd4, Rvs3		S055 (Loopback)																														
Service Option for Fwd5, Rvs4		S055 (Loopback)																														
Close Menu																																
	<table border="1"> <tbody> <tr> <td>Background</td> <td>Active Cell Idle</td> <td>Sys Type: IS-2000</td> </tr> <tr> <td></td> <td>IntRef</td> <td>Offset</td> </tr> </tbody> </table>	Background	Active Cell Idle	Sys Type: IS-2000		IntRef	Offset																									
Background	Active Cell Idle	Sys Type: IS-2000																														
	IntRef	Offset																														
			1 of 3																													

Test Mode 1 in Radio Configuration 1 (FCH)



Reference:

- [1] SAR Measurement Procedures for 3G Devices CDMA 2000/Ev-Do/WCDMA/HSDPA, June 2006
Laboratory Division Office of Engineering and Technology Federal Communications Commission
- [2] 3.1.2.3.4 Maximum RF Output Power 3GPP2 C.S0033-0 Version 2.0, Date: 12 December 2003
Recommended Minimum Performance Standards for cdma2000 High Rate Packet Data Access
Terminal